



# TEST REPORT

## FCC PART 15 SUBPART C 15.247

Test report  
On Behalf of  
**QUEST USA CORP**  
For  
**Wireless Speaker**

Model No.: IJRRSP01, IJRRSP02, IJRRSP03, IJSP2393-DG,  
IJSP210231, IJRRSP01-XX, IJRRSP01-XXX, SY113, IJSP2445-FB,  
IJSP2446-FB, IJSP2447-FB, IJSP2448-FB, IJRRSP02-XX,  
IJRRSP02-XXX, IJRRSP03-XX, IJRRSP03-XXX (XX or XXX represents  
different customers, can be any number and letter, and the product is  
the same.)

**FCC ID: 2AJQ7ROAR**

Prepared For : **QUEST USA CORP**  
**495 Flatbush Ave, Brooklyn, NY 11225, USA**

Prepared By : **Shenzhen HUAKE Testing Technology Co., Ltd.**  
**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai**  
**Street, Bao'an District, Shenzhen, Guangdong, China**

**Date of Test:** Apr. 21, 2022 ~ Apr. 28, 2022

**Date of Report:** Apr. 28, 2022

**Report Number:** HK2204201646-E

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**TEST RESULT CERTIFICATION****Applicant's name** ..... QUEST USA CORP

Address..... 495 Flatbush Ave, Brooklyn, NY 11225, USA

**Manufacture's Name**.. QUEST USA CORP (CHINA OFFICE)

Address..... 601-602 Bld 1, Cloud Park, 233 Bulong Road, Longgang, Shenzhen, China

**Product description**

Trade Mark: IJOY

Product name ..... Wireless Speaker

Model and/or type reference ..... IJRRSP01, IJRRSP02, IJRRSP03, IJSP2393-DG, IJSP210231, IJRRSP01-XX, IJRRSP01-XXX, SY113, IJSP2445-FB, IJSP2446-FB, IJSP2447-FB, IJSP2448-FB, IJRRSP02-XX, IJRRSP02-XXX, IJRRSP03-XX, IJRRSP03-XXX  
(XX or XXX represents different customers, can be any number and letter, and the product is the same.)

**Standards**..... **47 CFR FCC Part 15 Subpart C 15.247**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....Date (s) of performance of tests.... **Apr. 21, 2022 ~ Apr. 28, 2022**Date of Issue ..... **Apr. 28, 2022**Test Result ..... **Pass**

Prepared by:

Project Engineer

Reviewed by:

Project Supervisor

Approved by:

Technical Director

**Table of Contents****Page**

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                                  | <b>5</b>  |
| 1.1. TEST STANDARDS.....                                | 5         |
| 1.2. TEST DESCRIPTION.....                              | 5         |
| 1.3. INFORMATION OF THE TEST LABORATORY .....           | 6         |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....     | 6         |
| <b>2. GENERAL INFORMATION.....</b>                      | <b>7</b>  |
| 2.1. ENVIRONMENTAL CONDITIONS.....                      | 7         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                   | 7         |
| 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY ..... | 8         |
| 2.4. EQUIPMENTS USED DURING THE TEST .....              | 9         |
| 2.5. RELATED SUBMITTAL(S) / GRANT (S).....              | 9         |
| 2.6. MODIFICATIONS .....                                | 9         |
| 2.7. DESCRIPTION OF TEST SETUP .....                    | 10        |
| <b>3. TEST CONDITIONS AND RESULTS .....</b>             | <b>11</b> |
| 3.1. CONDUCTED EMISSIONS TEST .....                     | 11        |
| 3.2. RADIATED EMISSIONS AND BAND EDGE .....             | 14        |
| 3.3. MAXIMUM PEAK CONDUCTED OUTPUT POWER.....           | 25        |
| 3.4. 20DB BANDWIDTH .....                               | 26        |
| 3.5. FREQUENCY SEPARATION .....                         | 30        |
| 3.6. NUMBER OF HOPPING FREQUENCY .....                  | 32        |
| 3.7. TIME OF OCCUPANCY (DWEIL TIME) .....               | 34        |
| 3.8. OUT-OF-BAND EMISSIONS.....                         | 38        |
| 3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....      | 48        |
| 3.10. ANTENNA REQUIREMENT.....                          | 49        |
| <b>4. TEST SETUP PHOTOS OF THE EUT .....</b>            | <b>50</b> |
| <b>5. PHOTOS OF THE EUT .....</b>                       | <b>52</b> |



**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Apr. 28, 2022 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |



## 1. SUMMARY

### 1.1. TEST STANDARDS

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**ANSI C63.10:2013:** American National Standard for Testing Unlicensed Wireless Devices.

### 1.2. TEST DESCRIPTION

| FCC PART 15.247            |                                                 |      |
|----------------------------|-------------------------------------------------|------|
| FCC Part 15.207            | AC Power Conducted Emission                     | PASS |
| FCC Part 15.215            | 20dB Bandwidth & 99% Bandwidth                  | PASS |
| FCC Part 15.247(d)         | Spurious RF Conducted Emission                  | PASS |
| FCC Part 15.247(b)         | Maximum Peak Output Power                       | PASS |
| FCC Part 15.247(a)(1)      | Pseudorandom Frequency Hopping Sequence         | PASS |
| FCC Part 15.247(a)(1)(iii) | Number of hopping frequency & Time of Occupancy | PASS |
| FCC Part 15.247(a)(1)      | Frequency Separation                            | PASS |
| FCC Part 15.205/15.209     | Radiated Emissions                              | PASS |
| FCC Part 15.247(d)         | Band Edge Compliance of RF Emission             | PASS |



### 1.3. INFORMATION OF THE TEST LABORATORY

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAKE laboratory is reported:

| Test                                    | Measurement Uncertainty | Notes |
|-----------------------------------------|-------------------------|-------|
| Transmitter power conducted             | $\pm 0.37\text{dB}$     | (1)   |
| Transmitter power Radiated              | $\pm 3.35\text{dB}$     | (1)   |
| Conducted spurious emission 9KHz-40 GHz | $\pm 2.20\text{dB}$     | (1)   |
| Occupied Bandwidth                      | $\pm 3.68\%$            | (1)   |
| Radiated Emission 30~1000MHz            | $\pm 3.90\text{dB}$     | (1)   |
| Radiated Emission Above 1GHz            | $\pm 4.28\text{dB}$     | (1)   |
| Conducted Disturbance 0.15~30MHz        | $\pm 2.71\text{dB}$     | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 2. GENERAL INFORMATION

### 2.1. ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### 2.2. GENERAL DESCRIPTION OF EUT

|                       |                                                                                                                                                                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:         | Wireless Speaker                                                                                                                                                                                                                                                                                  |
| Model/Type reference: | IJRRSP01                                                                                                                                                                                                                                                                                          |
| Series Model:         | IJRRSP02, IJRRSP03, IJSP2393-DG, IJSP210231, IJRRSP01-XX, IJRRSP01-XXX, SY113, IJSP2445-FB, IJSP2446-FB, IJSP2447-FB, IJSP2448-FB, IJRRSP02-XX, IJRRSP02-XXX, IJRRSP03-XX, IJRRSP03-XXX<br>(XX or XXX represents different customers, can be any number and letter, and the product is the same.) |
| Model Difference:     | All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: IJRRSP01.                                                                                                                                           |
| Power supply:         | DC 5V From USB or DC 3.7V From Battery                                                                                                                                                                                                                                                            |
| Version:              | Supported EDR                                                                                                                                                                                                                                                                                     |
| Modulation:           | GFSK, $\pi/4$ DQPSK, 8DPSK                                                                                                                                                                                                                                                                        |
| Operation frequency:  | 2402MHz~2480MHz                                                                                                                                                                                                                                                                                   |
| Channel number:       | 79CH                                                                                                                                                                                                                                                                                              |
| Channel separation:   | 1MHz                                                                                                                                                                                                                                                                                              |
| Antenna type:         | PCB Antenna                                                                                                                                                                                                                                                                                       |
| Antenna gain:         | 0dBi                                                                                                                                                                                                                                                                                              |
| Hardware Version:     | V1.0                                                                                                                                                                                                                                                                                              |
| Software Version:     | V1.0                                                                                                                                                                                                                                                                                              |

Note: For more details, refer to the user's manual of the EUT.



## 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 79 channels provided to the EUT and Channel 00/39/78 was selected for testing.

### Operation Frequency :

| Channel | Frequency (MHz) |
|---------|-----------------|
| 00      | 2402            |
| 01      | 2403            |
| ⋮       | ⋮               |
| 38      | 2440            |
| 39      | 2441            |
| 40      | 2442            |
| ⋮       | ⋮               |
| 77      | 2479            |
| 78      | 2480            |

Note: The line display in grey were the channel selected for testing.

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

| Test Items                       | Worst case                                                                                   |
|----------------------------------|----------------------------------------------------------------------------------------------|
| Conducted Emissions              | DH5 High channel                                                                             |
| Radiated Emissions and Band Edge | DH5 Low channel                                                                              |
| Maximum Conducted Output Power   | DH5/2DH5/3DH5                                                                                |
| 20dB Bandwidth & 99% Bandwidth   | DH5/2DH5/3DH5                                                                                |
| Frequency Separation             | DH5/2DH5/3DH5 Middle channel                                                                 |
| Number of hopping frequency      | DH5/2DH5/3DH5                                                                                |
| Time of Occupancy (Dwell Time)   | DH1/DH3/DH5 Middle channel<br>2DH1/2DH3/2DH5 Middle channel<br>3DH1/3DH3/3DH5 Middle channel |
| Out-of-band Emissions            | DH5/2DH5/3DH5                                                                                |



## 2.4. EQUIPMENTS USED DURING THE TEST

| Item | Equipment                         | Manufacturer    | Model No.        | Serial No. | Last Cal.     | Cal. Interval |
|------|-----------------------------------|-----------------|------------------|------------|---------------|---------------|
| 1.   | L.I.S.N. Artificial Mains Network | R&S             | ENV216           | HKE-002    | Feb. 18, 2022 | 1 Year        |
| 2.   | Receiver                          | R&S             | ESCI 7           | HKE-010    | Feb. 18, 2022 | 1 Year        |
| 3.   | RF automatic control unit         | Tonscend        | JS0806-2         | HKE-060    | Feb. 18, 2022 | 1 Year        |
| 4.   | Spectrum analyzer                 | R&S             | FSP40            | HKE-025    | Feb. 18, 2022 | 1 Year        |
| 5.   | Spectrum analyzer                 | Agilent         | N9020A           | HKE-048    | Feb. 18, 2022 | 1 Year        |
| 6.   | Preamplifier                      | Schwarzbeck     | BBV 9743         | HKE-006    | Feb. 18, 2022 | 1 Year        |
| 7.   | EMI Test Receiver                 | Rohde & Schwarz | ESCI 7           | HKE-010    | Feb. 18, 2022 | 1 Year        |
| 8.   | Bilog Broadband Antenna           | Schwarzbeck     | VULB9163         | HKE-012    | Feb. 18, 2022 | 1 Year        |
| 9.   | Loop Antenna                      | Schwarzbeck     | FMZB 1519 B      | HKE-014    | Feb. 18, 2022 | 1 Year        |
| 10.  | Horn Antenna                      | Schwarzbeck     | 9120D            | HKE-013    | Feb. 18, 2022 | 1 Year        |
| 11.  | Pre-amplifier                     | EMCI            | EMC051845 SE     | HKE-015    | Feb. 18, 2022 | 1 Year        |
| 12.  | Pre-amplifier                     | Agilent         | 83051A           | HKE-016    | Feb. 18, 2022 | 1 Year        |
| 13.  | EMI Test Software EZ-EMC          | Tonscend        | JS1120-B Version | HKE-083    | N/A           | N/A           |
| 14.  | Power Sensor                      | Agilent         | E9300A           | HKE-086    | Feb. 18, 2022 | 1 Year        |
| 15.  | Spectrum analyzer                 | Agilent         | N9020A           | HKE-048    | Feb. 18, 2022 | 1 Year        |
| 16.  | Signal generator                  | Agilent         | N5182A           | HKE-029    | Feb. 18, 2022 | 1 Year        |
| 17.  | Signal Generator                  | Agilent         | 83630A           | HKE-028    | Feb. 18, 2022 | 1 Year        |
| 18.  | Shielded room                     | Shiel Hong      | 4*3*3            | HKE-039    | Dec. 09, 2021 | 3 Year        |
| 19.  | Power meter                       | Agilent         | E4419B           | HKE-085    | Feb. 18, 2022 | 1 Year        |
| 20.  | High gain antenna                 | Schwarzbeck     | LB-180400K F     | HKE-054    | Feb. 18, 2022 | 1 Year        |

The calibration interval was one year.

## 2.5. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.


## 2.6. MODIFICATIONS

No modifications were implemented to meet testing criteria.



## 2.7. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and radiation below 1GHz testing:



Operation of EUT during radiation above 1GHz testing:



### Adapter information

Model: HW-059200CHQ

Input: 100-240V, 50-60Hz, 0.5A

Output: 5VDC, 2A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



### 3. TEST CONDITIONS AND RESULTS

#### 3.1. CONDUCTED EMISSIONS TEST


##### LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207 and RSS Gen 8.8, AC Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus as below:

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

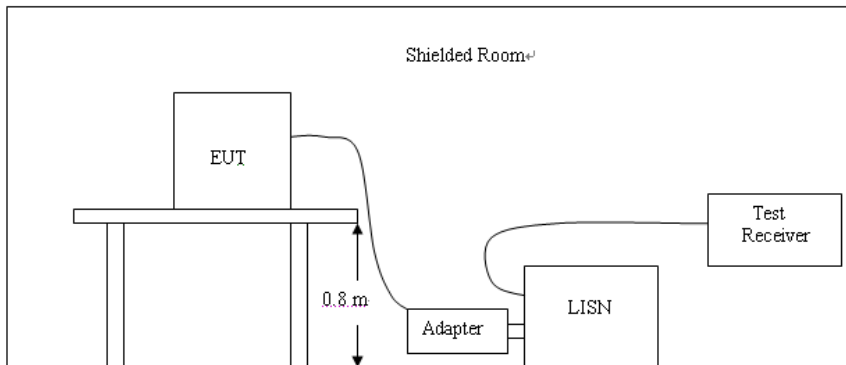


##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

**TEST RESULTS**

Remark: All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK High Channel was reported as below:

Test Specification: Line

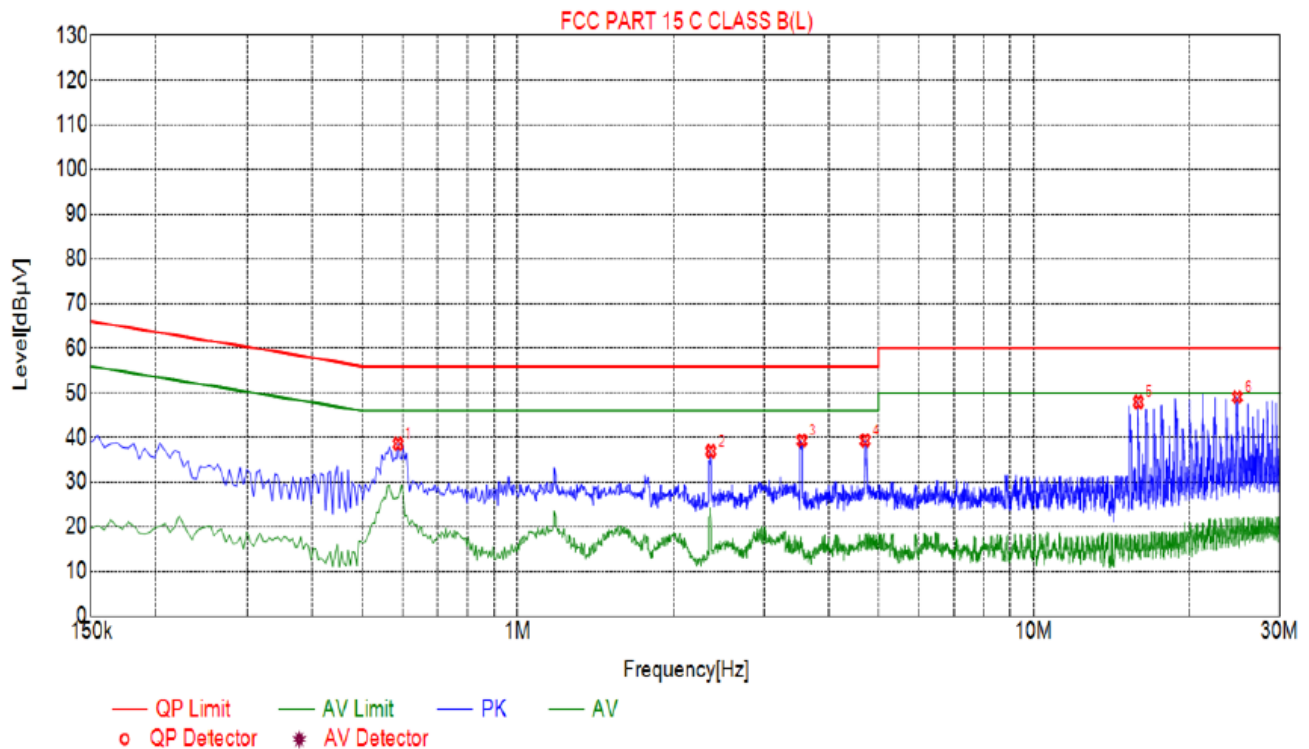**Suspected List**

| NO. | Freq.<br>[MHz] | Level<br>[dBμV] | Factor<br>[dB] | Limit<br>[dBμV] | Margin<br>[dB] | Reading<br>[dBμV] | Detector | Type |
|-----|----------------|-----------------|----------------|-----------------|----------------|-------------------|----------|------|
| 1   | 0.5865         | 38.61           | 20.05          | 56.00           | 17.39          | 18.56             | PK       | L    |
| 2   | 2.3685         | 36.94           | 20.18          | 56.00           | 19.06          | 16.76             | PK       | L    |
| 3   | 3.5520         | 39.33           | 20.25          | 56.00           | 16.67          | 19.08             | PK       | L    |
| 4   | 4.7130         | 39.36           | 20.26          | 56.00           | 16.64          | 19.10             | PK       | L    |
| 5   | 15.9540        | 47.97           | 19.98          | 60.00           | 12.03          | 27.99             | PK       | L    |
| 6   | 24.8190        | 49.10           | 20.24          | 60.00           | 10.90          | 28.86             | PK       | L    |


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

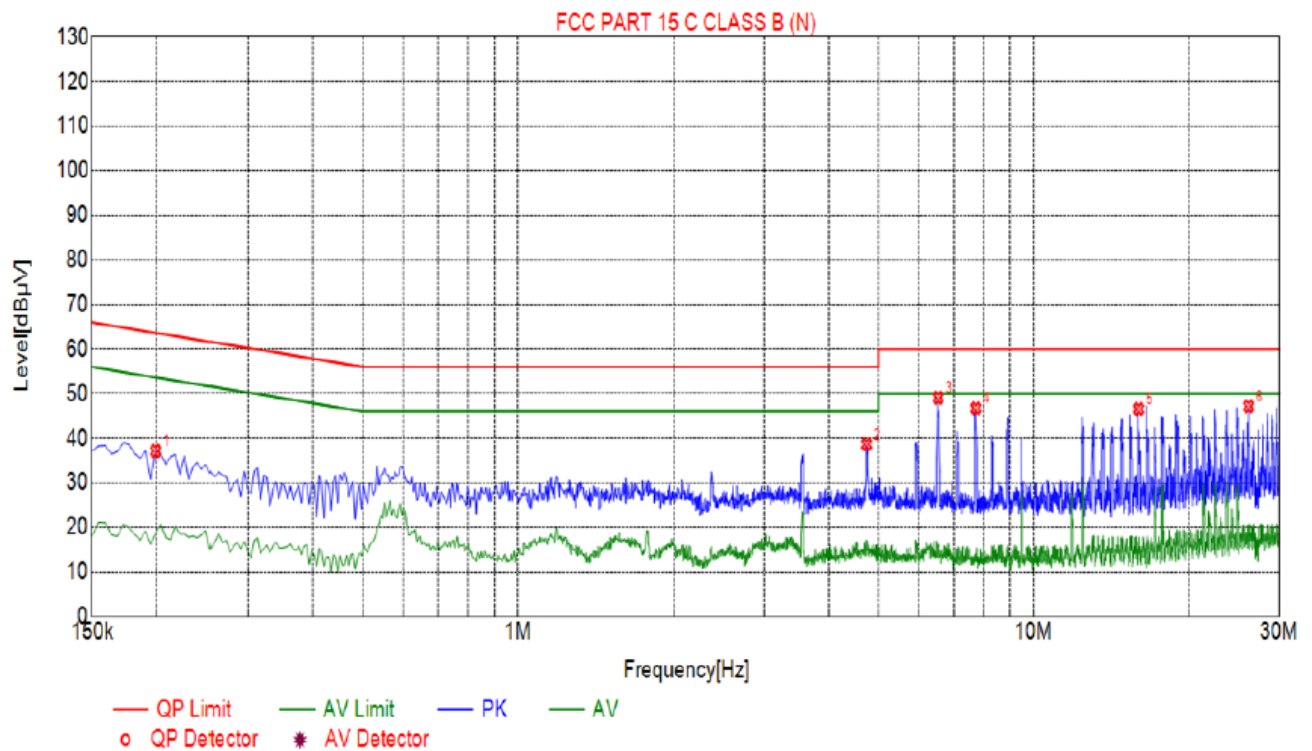

## Suspected List

| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
|-----|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| 1   | 0.1995      | 37.17        | 20.03       | 63.63        | 26.46       | 17.14          | PK       | N    |
| 2   | 4.7400      | 38.65        | 20.26       | 56.00        | 17.35       | 18.39          | PK       | N    |
| 3   | 6.5265      | 49.11        | 20.21       | 60.00        | 10.89       | 28.90          | PK       | N    |
| 4   | 7.7370      | 46.73        | 20.17       | 60.00        | 13.27       | 26.56          | PK       | N    |
| 5   | 15.9990     | 46.57        | 19.98       | 60.00        | 13.43       | 26.59          | PK       | N    |
| 6   | 26.1195     | 47.17        | 20.26       | 60.00        | 12.83       | 26.91          | PK       | N    |

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



### 3.2. RADIATED EMISSIONS AND BAND EDGE

#### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Except when the requirements applicable to a given device state otherwise, emissions from license-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.


Unwanted emissions that fall into restricted bands shall comply with the limits specified in RSS-Gen; and Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Radiated emission limits

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |


#### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

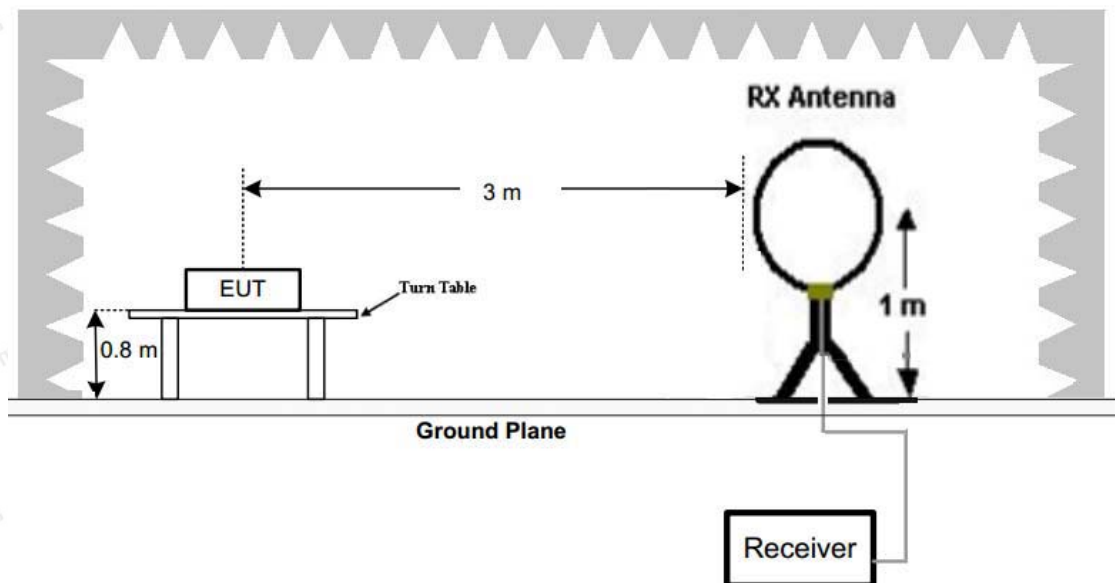




(B) Radiated Emission Test Set-Up, Frequency below 1000MHz.

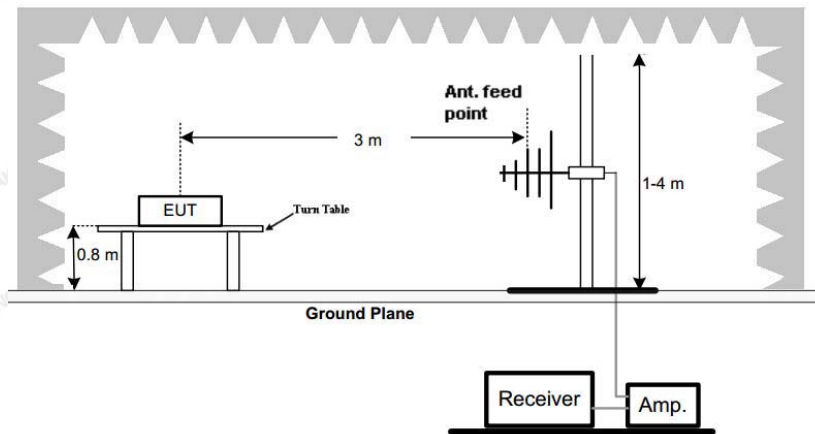

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz.

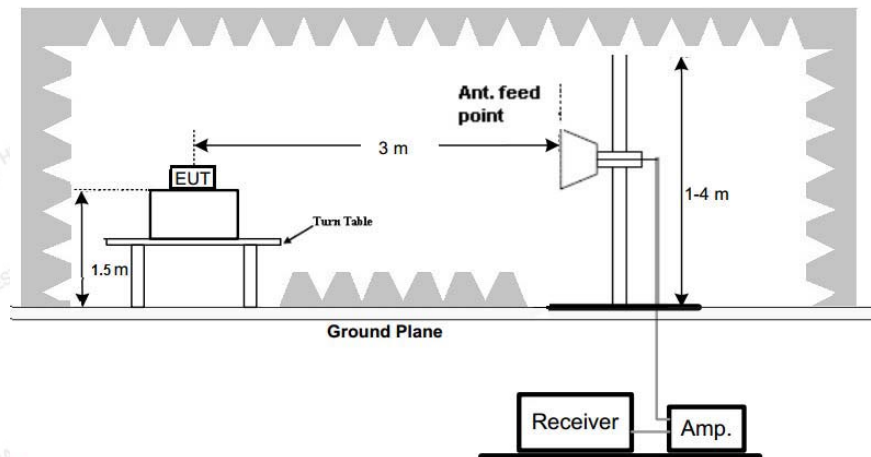

### **Test Procedure**

1. The EUT was placed on turn table which is 0.8m above ground plane for below 1GHz test, and on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

### **TEST RESULTS**


Remark:

1. Radiated Emission measured at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 10th harmonic of fundamental and recorded worst case at GFSK DH5 mode.
2. There is no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.



## Below 1GHz Test Results:

Antenna polarity: H

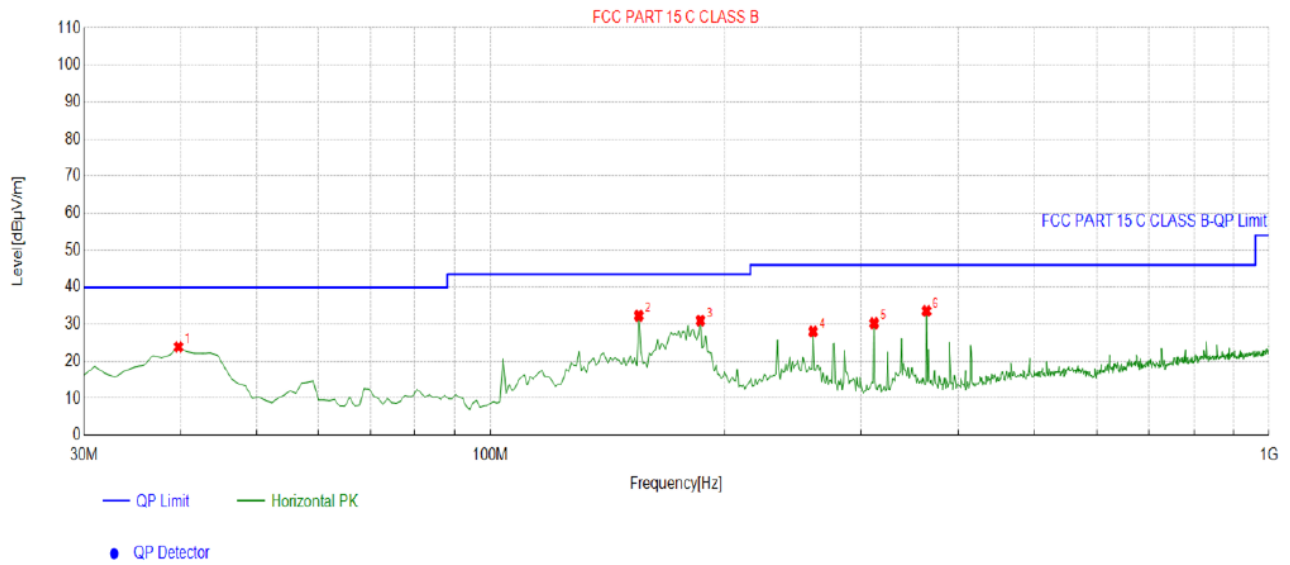


| Suspected List |             |             |                  |                |                |             |             |           |            |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 39.7097     | -12.87      | 36.74            | 23.87          | 40.00          | 16.13       | 100         | 190       | Horizontal |
| 2              | 155.2553    | -12.17      | 44.46            | 32.29          | 43.50          | 11.21       | 100         | 44        | Horizontal |
| 3              | 186.3263    | -14.04      | 45.02            | 30.98          | 43.50          | 12.52       | 100         | 96        | Horizontal |
| 4              | 260.1201    | -14.06      | 42.06            | 28.00          | 46.00          | 18.00       | 100         | 360       | Horizontal |
| 5              | 311.5816    | -12.29      | 42.54            | 30.25          | 46.00          | 15.75       | 100         | 151       | Horizontal |
| 6              | 364.0140    | -11.52      | 45.09            | 33.57          | 46.00          | 12.43       | 100         | 301       | Horizontal |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

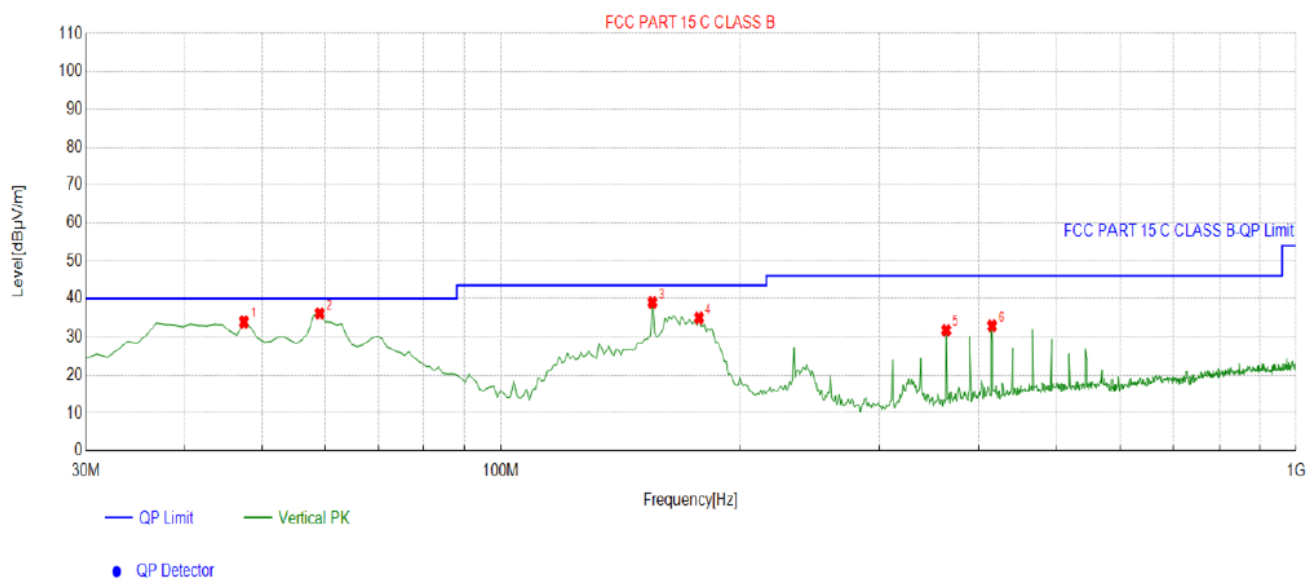

| Suspected List |             |             |                  |                |                |             |             |           |          |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 47.4775     | -17.46      | 51.38            | 33.92          | 40.00          | 6.08        | 100         | 159       | Vertical |
| 2              | 59.1291     | -18.96      | 55.03            | 36.07          | 40.00          | 3.93        | 100         | 238       | Vertical |
| 3              | 155.2553    | -12.17      | 51.14            | 38.97          | 43.50          | 4.53        | 100         | 278       | Vertical |
| 4              | 177.5876    | -13.48      | 48.42            | 34.94          | 43.50          | 8.56        | 100         | 199       | Vertical |
| 5              | 364.0140    | -11.52      | 43.39            | 31.87          | 46.00          | 14.13       | 100         | 147       | Vertical |
| 6              | 415.4755    | -9.89       | 42.83            | 32.94          | 46.00          | 13.06       | 100         | 356       | Vertical |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

## Harmonics and Spurious Emissions

### Frequency Range (9kHz-30MHz)

| Frequency (MHz) | Level@3m (dBμV/m) | Limit@3m (dBμV/m) |
|-----------------|-------------------|-------------------|
| --              | --                | --                |
| --              | --                | --                |
| --              | --                | --                |
| --              | --                | --                |

**Note:** 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**For 1GHz to 25GHz**

CH Low (2402MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.00   | 50.93         | -3.65  | 47.28          | 74.00    | -26.72 | peak          |
| 4804.00   | 41.42         | -3.65  | 37.77          | 54.00    | -16.23 | AVG           |
| 7206.00   | 53.24         | -0.95  | 52.29          | 74.00    | -21.71 | peak          |
| 7206.00   | 37.96         | -0.95  | 37.01          | 54.00    | -16.99 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.00   | 49.27         | -3.65  | 45.62          | 74.00    | -28.38 | peak          |
| 4804.00   | 37.05         | -3.65  | 33.40          | 54.00    | -20.60 | AVG           |
| 7206.00   | 49.67         | -0.95  | 48.72          | 74.00    | -25.28 | peak          |
| 7206.00   | 39.50         | -0.95  | 38.55          | 54.00    | -15.45 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2441MHz)

Horizontal:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.00                                                       | 51.28         | -3.54  | 47.74          | 74.00    | -26.26 | peak          |
| 4882.00                                                       | 35.10         | -3.54  | 31.56          | 54.00    | -22.44 | AVG           |
| 7323.00                                                       | 48.83         | -0.81  | 48.02          | 74.00    | -25.98 | peak          |
| 7323.00                                                       | 38.80         | -0.81  | 37.99          | 54.00    | -16.01 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

Vertical:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.00                                                       | 53.14         | -3.54  | 49.60          | 74.00    | -24.40 | peak          |
| 4882.00                                                       | 40.33         | -3.54  | 36.79          | 54.00    | -17.21 | AVG           |
| 7323.00                                                       | 47.25         | -0.81  | 46.44          | 74.00    | -27.56 | peak          |
| 7323.00                                                       | 36.54         | -0.81  | 35.73          | 54.00    | -18.27 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |



CH High (2480MHz)

Horizontal:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.00                                                       | 52.82         | -3.43  | 49.39          | 74.00    | -24.61 | peak          |
| 4960.00                                                       | 33.92         | -3.44  | 30.48          | 54.00    | -23.52 | AVG           |
| 7440.00                                                       | 46.19         | -0.77  | 45.42          | 74.00    | -28.58 | peak          |
| 7440.00                                                       | 38.81         | -0.77  | 38.04          | 54.00    | -15.96 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

Vertical:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.00                                                       | 54.17         | -3.43  | 50.74          | 74.00    | -23.26 | peak          |
| 4960.00                                                       | 31.38         | -3.44  | 27.94          | 54.00    | -26.06 | AVG           |
| 7440.00                                                       | 44.99         | -0.77  | 44.22          | 74.00    | -29.78 | peak          |
| 7440.00                                                       | 41.51         | -0.77  | 40.74          | 54.00    | -13.26 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

**Radiated Band Edge Test:**

Hopping

Horizontal (Worst case)

| Frequency<br>(MHz)                                            | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310.00                                                       | 56.14                   | -5.81          | 50.33                      | 74                 | -23.67         | peak             |
| 2310.00                                                       | /                       | -5.81          | /                          | 54                 | /              | AVG              |
| 2390.00                                                       | 53.26                   | -5.84          | 47.42                      | 74                 | -26.58         | peak             |
| 2390.00                                                       | /                       | -5.84          | /                          | 54                 | /              | AVG              |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                            | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310.00                                                       | 55.93                   | -5.81          | 50.12                      | 74                 | -23.88         | peak             |
| 2310.00                                                       | /                       | -5.81          | /                          | 54                 | /              | AVG              |
| 2390.00                                                       | 53.27                   | -5.84          | 47.43                      | 74                 | -26.57         | peak             |
| 2390.00                                                       | /                       | -5.84          | /                          | 54                 | /              | AVG              |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |                  |



## Horizontal (Worst case)

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                       | 54.02         | -5.81  | 48.21          | 74       | -25.79 | peak          |
| 2483.50                                                       | /             | -5.81  | /              | 54       | /      | AVG           |
| 2500.00                                                       | 52.11         | -6.06  | 46.05          | 74       | -27.95 | peak          |
| 2500.00                                                       | /             | -6.06  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

## Vertical:

| Frequency                                                                                              | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|--------------------------------------------------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                  | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                                                                | 55.08         | -5.81  | 49.27          | 74       | -24.73 | peak          |
| 2483.50                                                                                                | /             | -5.81  | /              | 54       | /      | AVG           |
| 2500.00                                                                                                | 51.46         | -6.06  | 45.4           | 74       | -28.6  | peak          |
| 2500.00                                                                                                | /             | -6.06  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.                                          |               |        |                |          |        |               |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. |               |        |                |          |        |               |



NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

| Frequency<br>(MHz)                                            | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310.00                                                       | 55.54                   | -5.81          | 49.73                      | 74                 | -24.27         | peak             |
| 2310.00                                                       | /                       | -5.81          | /                          | 54                 | /              | AVG              |
| 2390.00                                                       | 53.21                   | -5.84          | 47.37                      | 74                 | -26.63         | peak             |
| 2390.00                                                       | /                       | -5.84          | /                          | 54                 | /              | AVG              |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                            | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310.00                                                       | 54.36                   | -5.81          | 48.55                      | 74                 | -25.45         | peak             |
| 2310.00                                                       | /                       | -5.81          | /                          | 54                 | /              | AVG              |
| 2390.00                                                       | 51.88                   | -5.84          | 46.04                      | 74                 | -27.96         | peak             |
| 2390.00                                                       | /                       | -5.84          | /                          | 54                 | /              | AVG              |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |                  |



Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                       | 56.18         | -5.81  | 50.37          | 74       | -23.63 | peak          |
| 2483.50                                                       | /             | -5.81  | /              | 54       | /      | AVG           |
| 2500.00                                                       | 54.65         | -6.06  | 48.59          | 74       | -25.41 | peak          |
| 2500.00                                                       | /             | -6.06  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

Vertical:

| Frequency                                                                                              | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|--------------------------------------------------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                  | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                                                                | 56.77         | -5.81  | 50.96          | 74       | -23.04 | peak          |
| 2483.50                                                                                                | /             | -5.81  | /              | 54       | /      | AVG           |
| 2500.00                                                                                                | 55.69         | -6.06  | 49.63          | 74       | -24.37 | peak          |
| 2500.00                                                                                                | /             | -6.06  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.                                          |               |        |                |          |        |               |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. |               |        |                |          |        |               |



### 3.3. MAXIMUM PEAK CONDUCTED OUTPUT POWER

#### Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

| Type          | Channel | Output power (dBm) | Limit (dBm) | Result |
|---------------|---------|--------------------|-------------|--------|
| GFSK          | 00      | 3.19               | 21.00       | Pass   |
|               | 39      | 3.73               |             |        |
|               | 78      | 3.04               |             |        |
| $\pi/4$ DQPSK | 00      | 3.87               | 21.00       | Pass   |
|               | 39      | 3.44               |             |        |
|               | 78      | 3.17               |             |        |
| 8DPSK         | 00      | 3.27               | 21.00       | Pass   |
|               | 39      | 3.83               |             |        |
|               | 78      | 4.02               |             |        |

Note: 1.The test results including the cable lose.



### 3.4. 20DB BANDWIDTH

#### Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

#### Test Configuration



#### Test Results

| Modulation | Channel | 20dB bandwidth (MHz) | Result |
|------------|---------|----------------------|--------|
| GFSK       | CH00    | 1.032                | Pass   |
|            | CH39    | 1.038                |        |
|            | CH78    | 1.046                |        |
| π/4DQPSK   | CH00    | 1.324                |        |
|            | CH39    | 1.344                |        |
|            | CH78    | 1.358                |        |
| 8DPSK      | CH00    | 1.308                |        |
|            | CH39    | 1.300                |        |
|            | CH78    | 1.352                |        |

#### **Test plot as follows:**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



20dB bandwidth

## GFSK Modulation



## CH00



## CH39



## CH78

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

 $\pi/4$ DQPSK Modulation

CH00



CH39



CH78



## 8DPSK Modulation



## CH00



## CH39



## CH78



### 3.5. FREQUENCY SEPARATION

#### LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 KHz RBW and 1000 KHz VBW.

#### TEST CONFIGURATION



#### TEST RESULTS

| Modulation    | Channel        | Channel Separation (MHz) | Limit(MHz) | Result |
|---------------|----------------|--------------------------|------------|--------|
| GFSK          | Middle Channel | 1.000                    | 0.6973     | Pass   |
| $\pi/4$ DQPSK | Middle Channel | 1.000                    | 0.9053     | Pass   |
| 8DPSK         | Middle Channel | 1.000                    | 0.9013     | Pass   |

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle.

#### Test plot as follows: