

Appendix C

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: NVR

Test Model: NVR-81216

Environmental Conditions


Temperature:	25.2° C
Relative Humidity:	53.9%
ATM Pressure:	100.0 kPa
Test Engineer:	Suichao Lai
Supervised by:	Yan Chen

C.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.367	≥ 0.5	Pass
NVNT	a	5785	Ant1	16.342	≥ 0.5	Pass
NVNT	a	5825	Ant1	16.328	≥ 0.5	Pass
NVNT	n20	5745	Ant1	16.374	≥ 0.5	Pass
NVNT	n20	5785	Ant1	16.345	≥ 0.5	Pass
NVNT	n20	5825	Ant1	16.421	≥ 0.5	Pass
NVNT	n40	5755	Ant1	36.271	≥ 0.5	Pass
NVNT	n40	5795	Ant1	36.398	≥ 0.5	Pass
NVNT	ac20	5745	Ant1	17.53	≥ 0.5	Pass
NVNT	ac20	5785	Ant1	17.535	≥ 0.5	Pass
NVNT	ac20	5825	Ant1	17.234	≥ 0.5	Pass
NVNT	ac40	5755	Ant1	36.3	≥ 0.5	Pass
NVNT	ac40	5795	Ant1	36.158	≥ 0.5	Pass
NVNT	ax20	5745	Ant1	17.41	≥ 0.5	Pass
NVNT	ax20	5785	Ant1	17.383	≥ 0.5	Pass
NVNT	ax20	5825	Ant1	17.399	≥ 0.5	Pass
NVNT	ax40	5755	Ant1	36.255	≥ 0.5	Pass
NVNT	ax40	5795	Ant1	36.217	≥ 0.5	Pass

Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

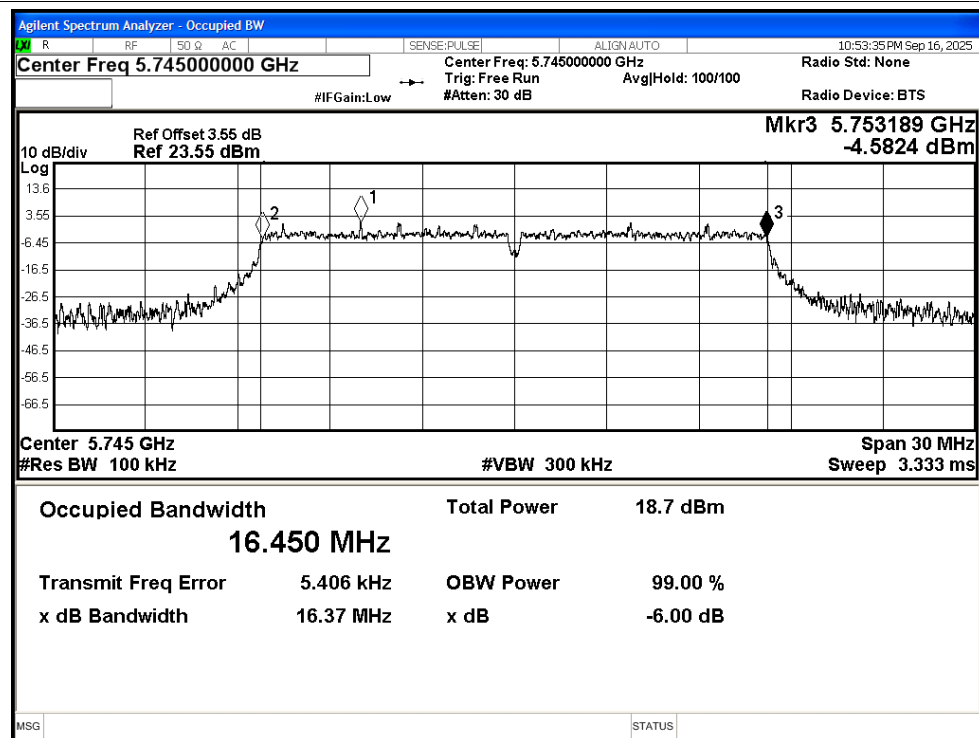


-6dB Bandwidth NVNT a 5785MHz Ant1

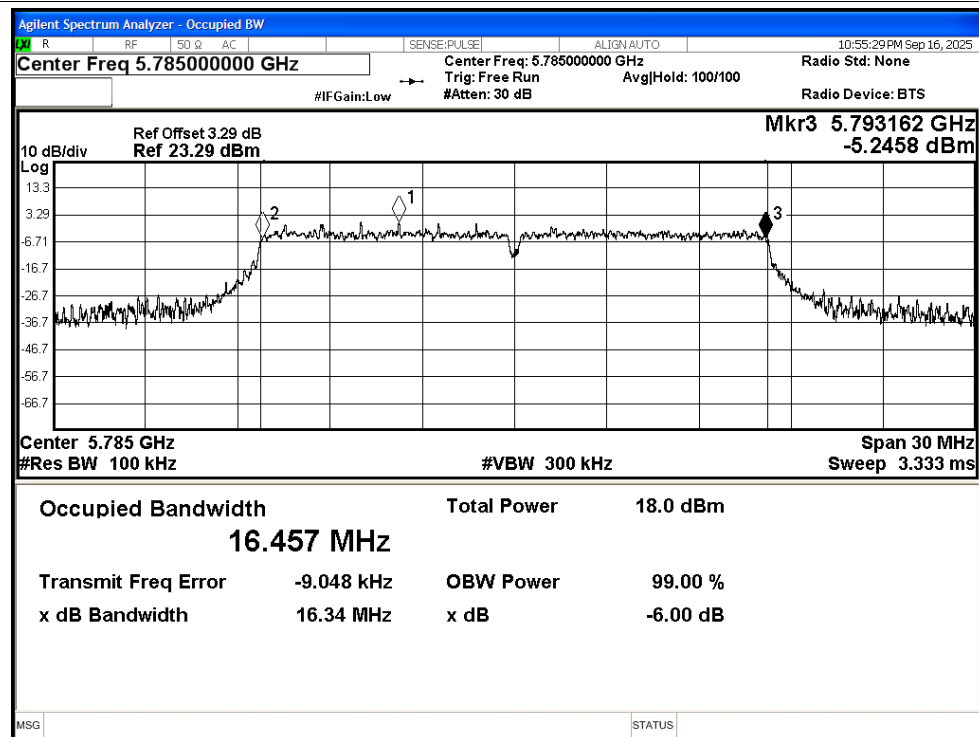


-6dB Bandwidth NVNT a 5825MHz Ant1

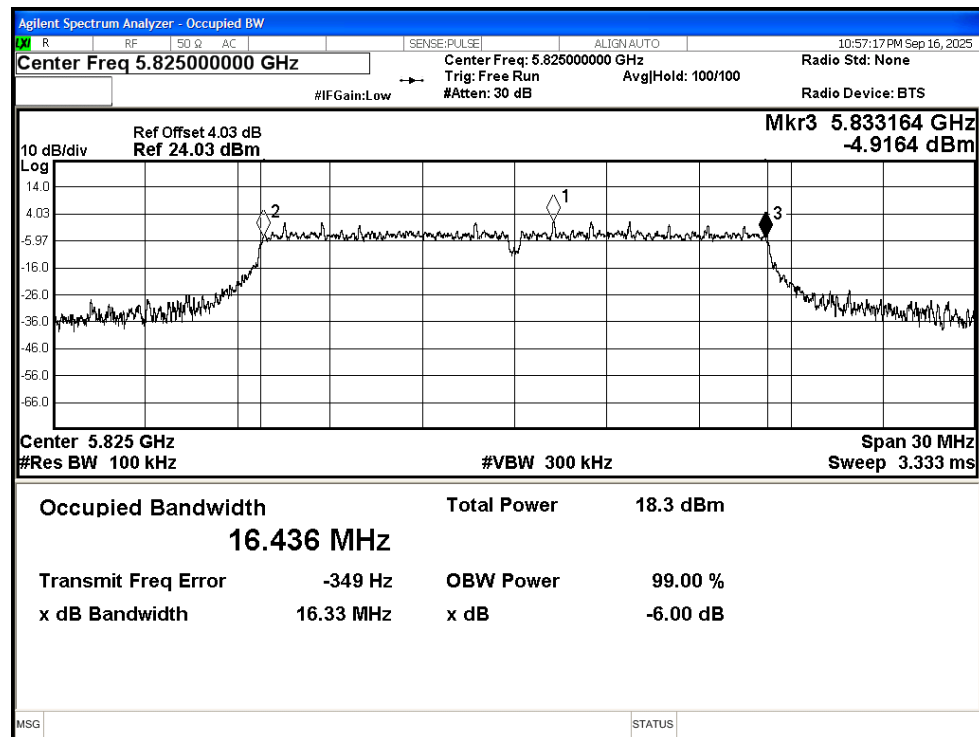


-6dB Bandwidth NVNT n20 5745MHz Ant1

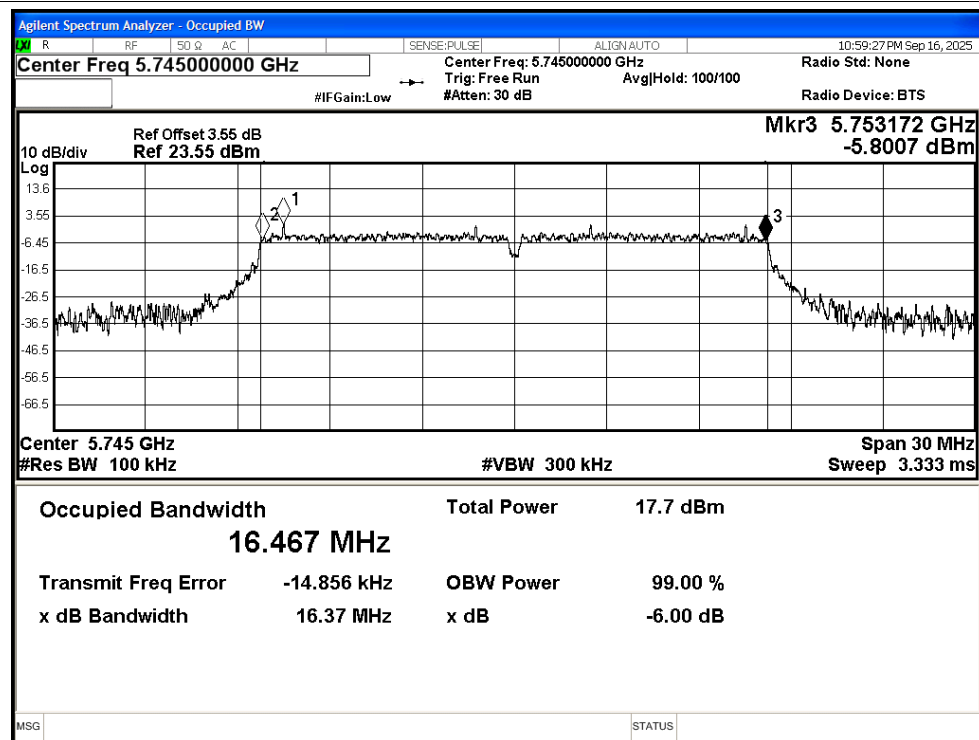


-6dB Bandwidth NVNT n20 5785MHz Ant1

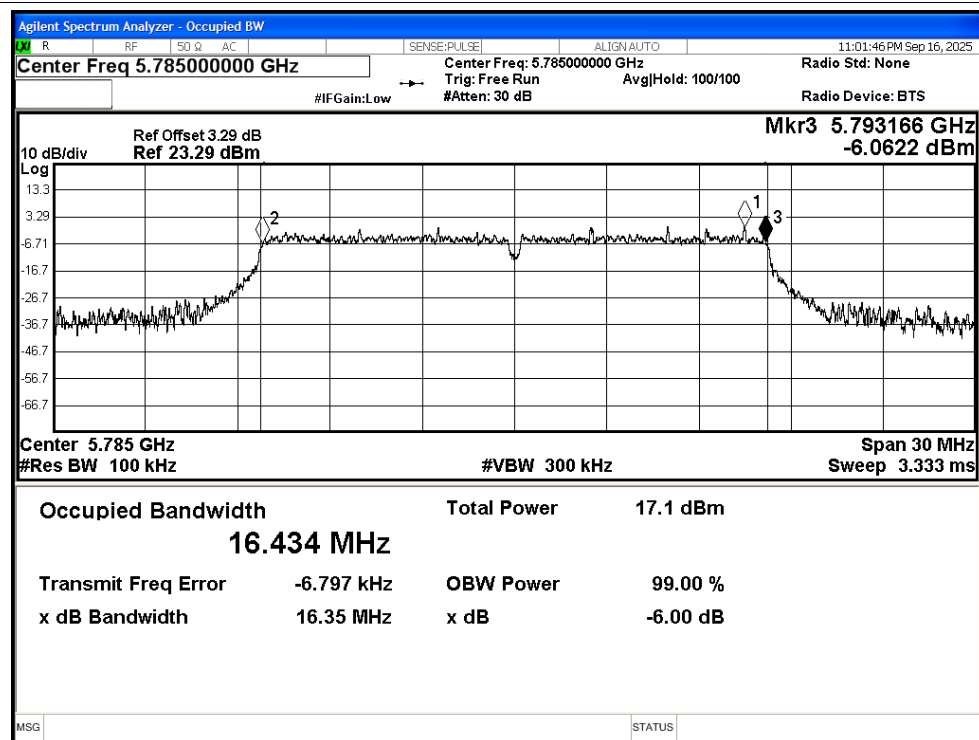


-6dB Bandwidth NVNT n20 5825MHz Ant1

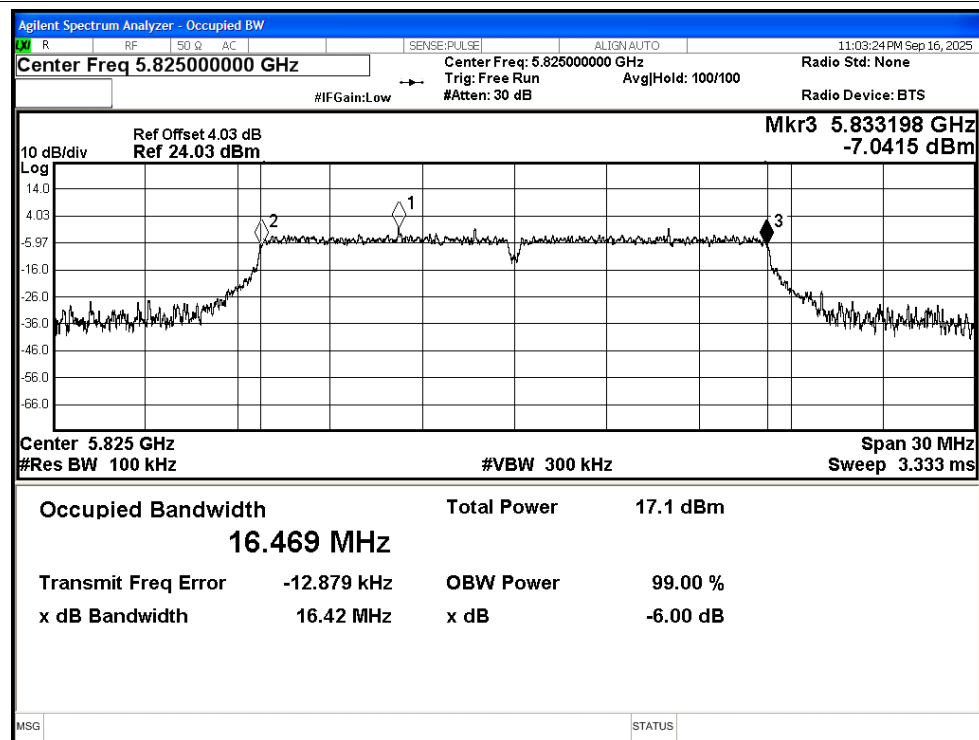


-6dB Bandwidth NVNT n40 5755MHz Ant1

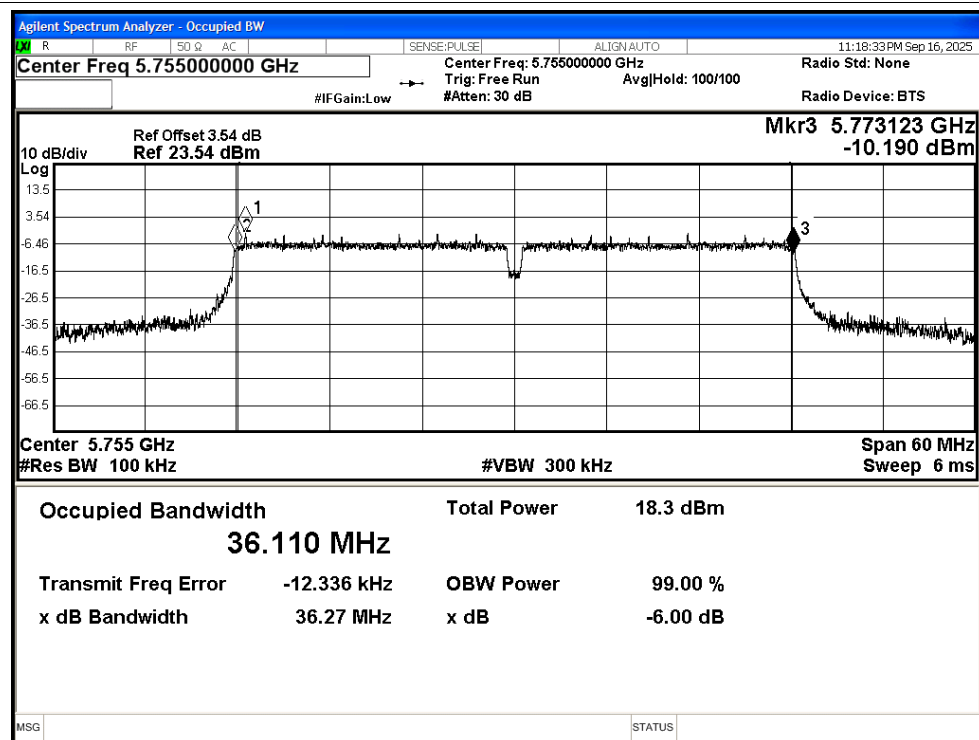


-6dB Bandwidth NVNT n40 5795MHz Ant1

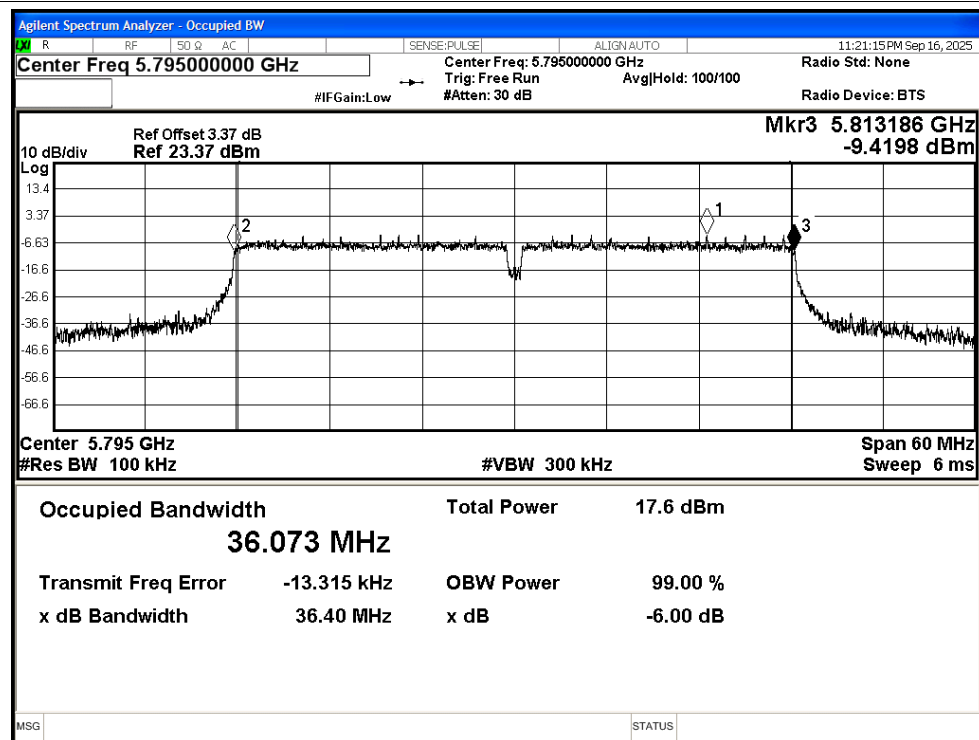


-6dB Bandwidth NVNT ac20 5745MHz Ant1

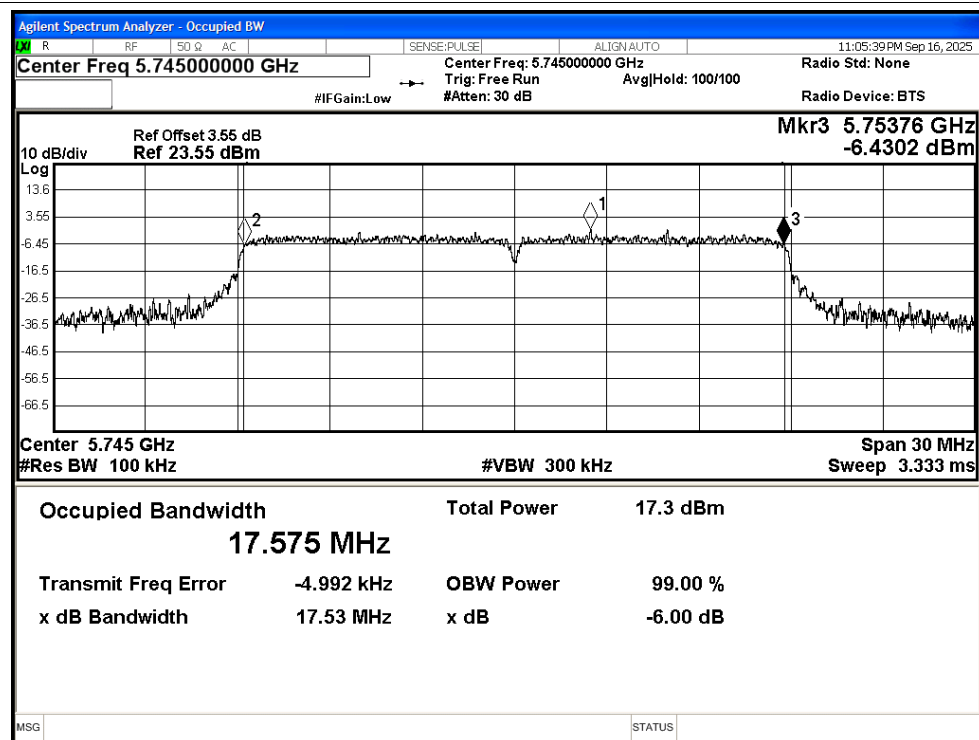


-6dB Bandwidth NVNT ac20 5785MHz Ant1

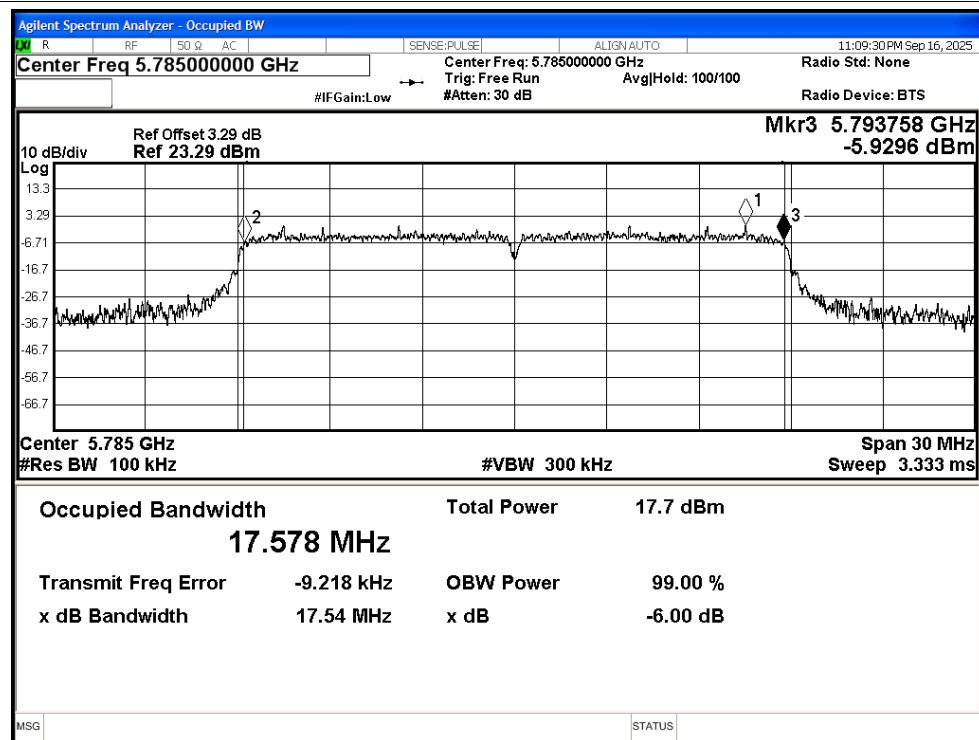


-6dB Bandwidth NVNT ac20 5825MHz Ant1

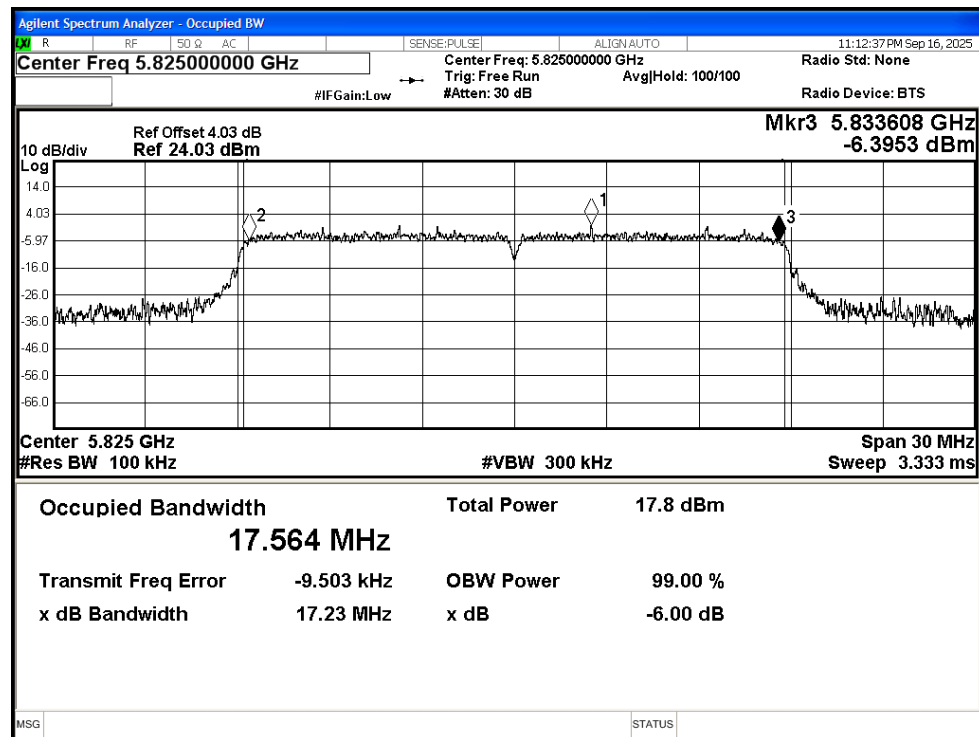


-6dB Bandwidth NVNT ac40 5755MHz Ant1

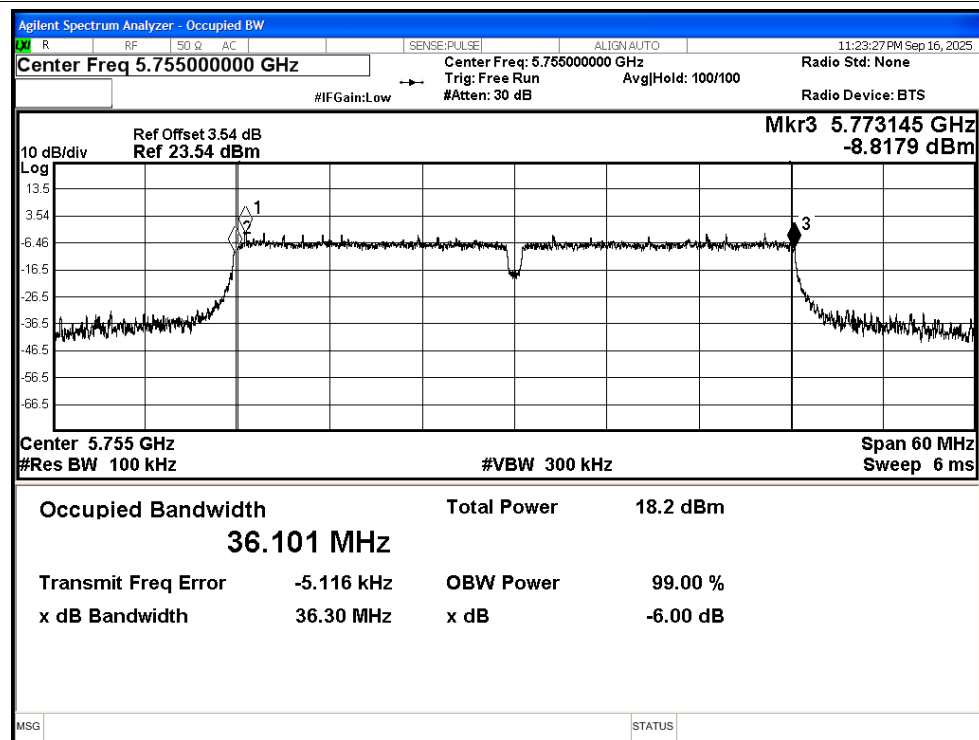


-6dB Bandwidth NVNT ac40 5795MHz Ant1

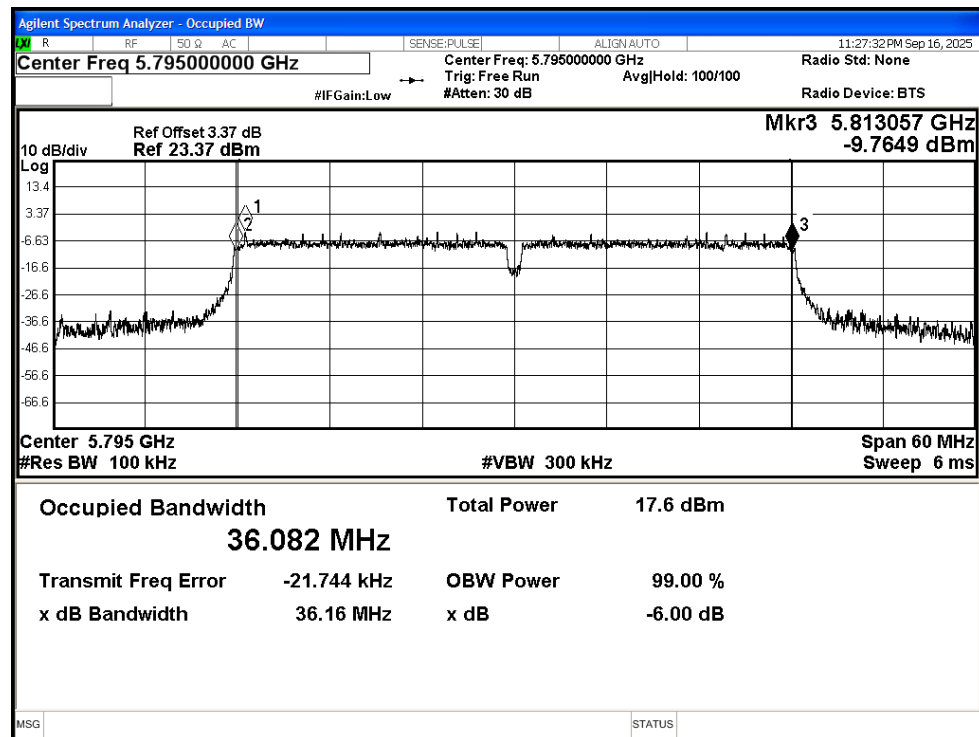


-6dB Bandwidth NVNT ax20 5745MHz Ant1

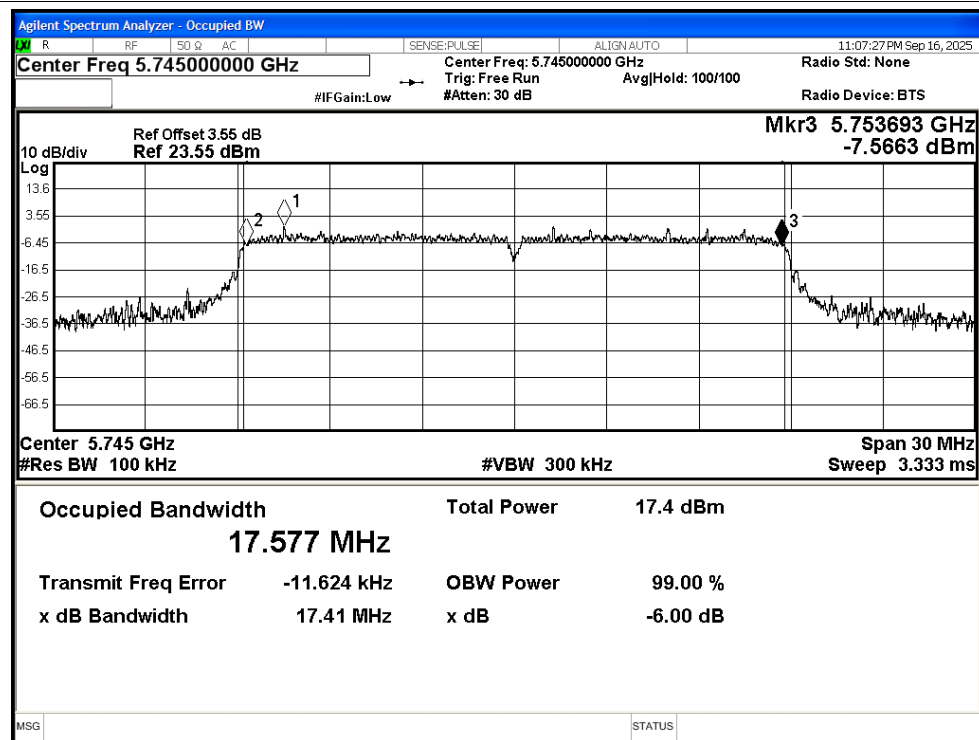


-6dB Bandwidth NVNT ax20 5785MHz Ant1

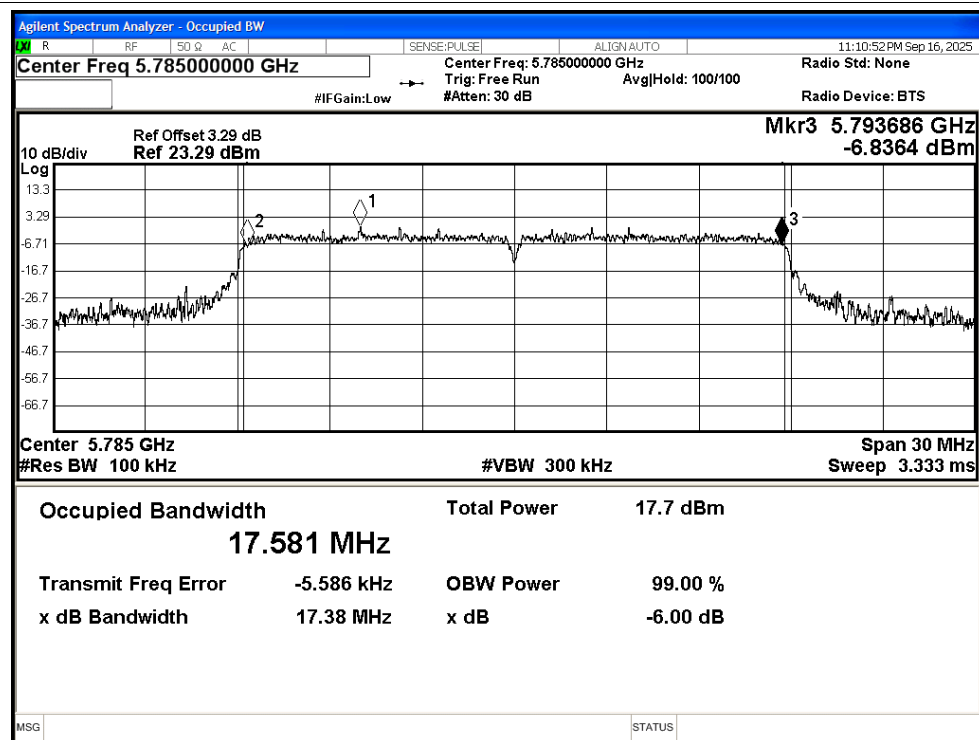


-6dB Bandwidth NVNT ax20 5825MHz Ant1

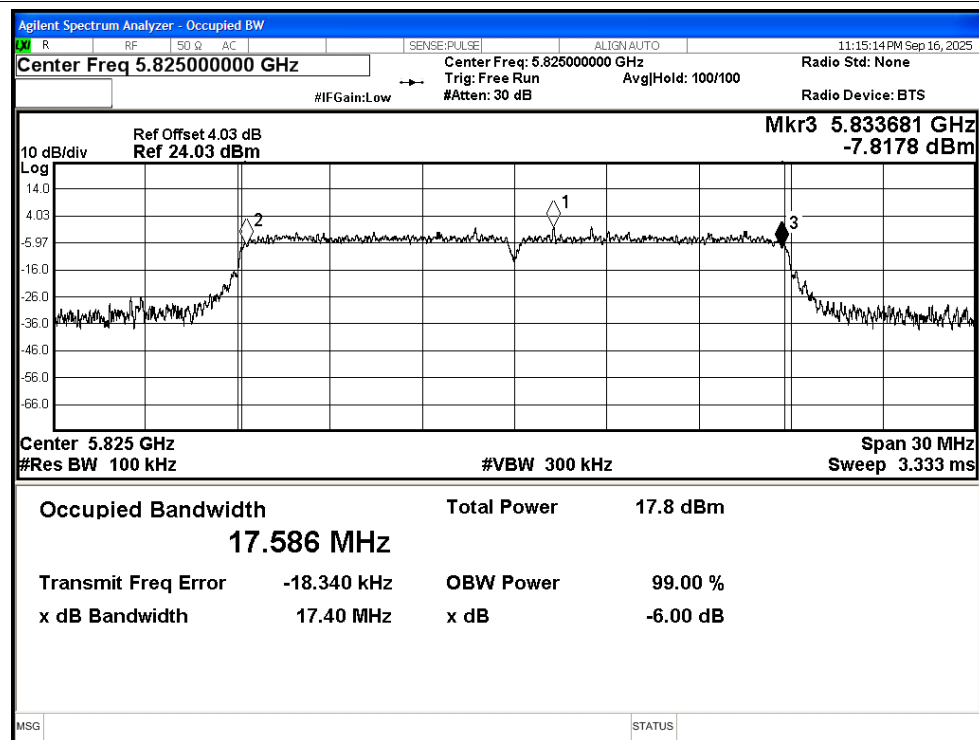

-6dB Bandwidth NVNT ax40 5755MHz Ant1

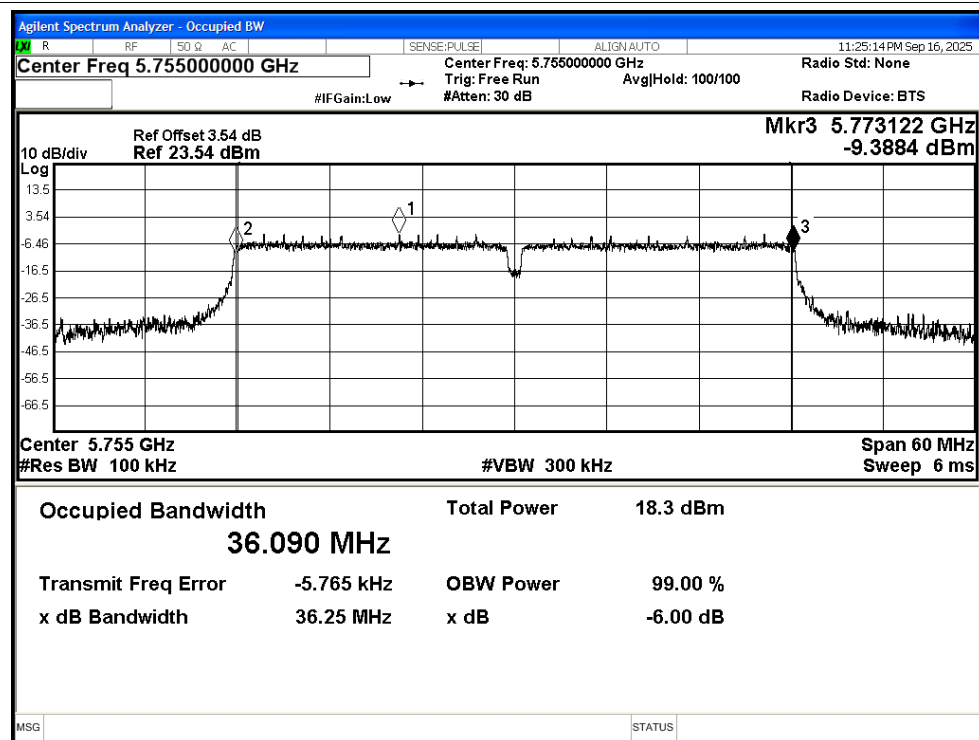


-6dB Bandwidth NVNT ax40 5795MHz Ant1

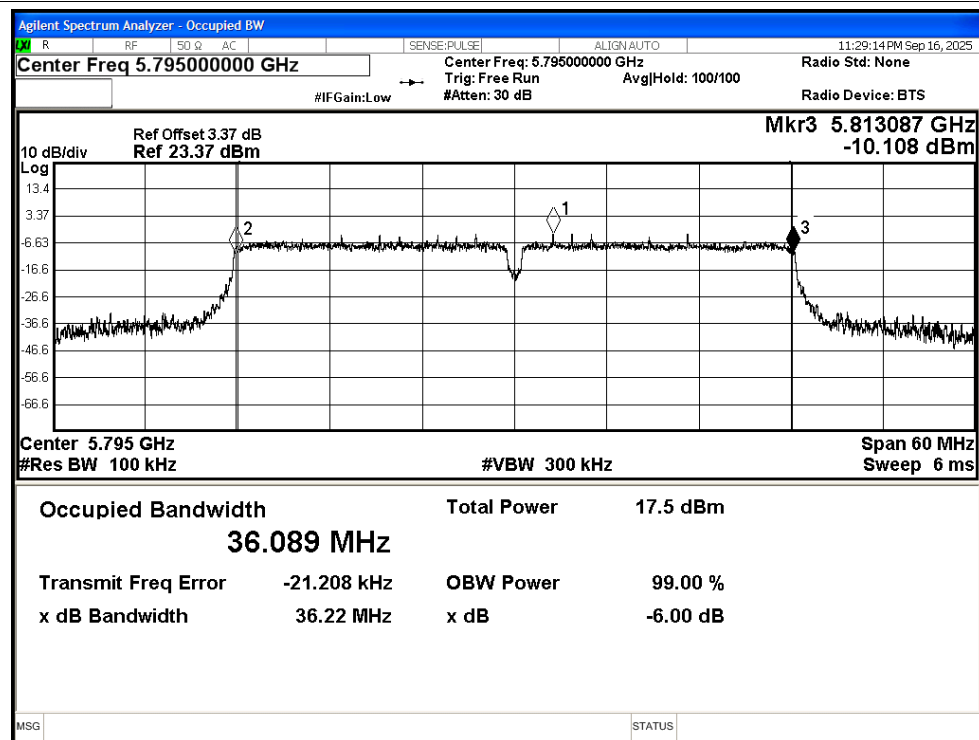


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant2	16.341	>=0.5	Pass
NVNT	a	5785	Ant2	16.336	>=0.5	Pass
NVNT	a	5825	Ant2	16.331	>=0.5	Pass
NVNT	n20	5745	Ant2	17.552	>=0.5	Pass
NVNT	n20	5785	Ant2	17.549	>=0.5	Pass
NVNT	n20	5825	Ant2	17.291	>=0.5	Pass
NVNT	n40	5755	Ant2	36.137	>=0.5	Pass
NVNT	n40	5795	Ant2	36.126	>=0.5	Pass
NVNT	ac20	5745	Ant2	17.403	>=0.5	Pass
NVNT	ac20	5785	Ant2	17.287	>=0.5	Pass
NVNT	ac20	5825	Ant2	17.527	>=0.5	Pass
NVNT	ac40	5755	Ant2	35.927	>=0.5	Pass
NVNT	ac40	5795	Ant2	36.407	>=0.5	Pass
NVNT	ax20	5745	Ant2	17.545	>=0.5	Pass
NVNT	ax20	5785	Ant2	17.495	>=0.5	Pass
NVNT	ax20	5825	Ant2	17.514	>=0.5	Pass
NVNT	ax40	5755	Ant2	36.127	>=0.5	Pass
NVNT	ax40	5795	Ant2	36.27	>=0.5	Pass

Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant2

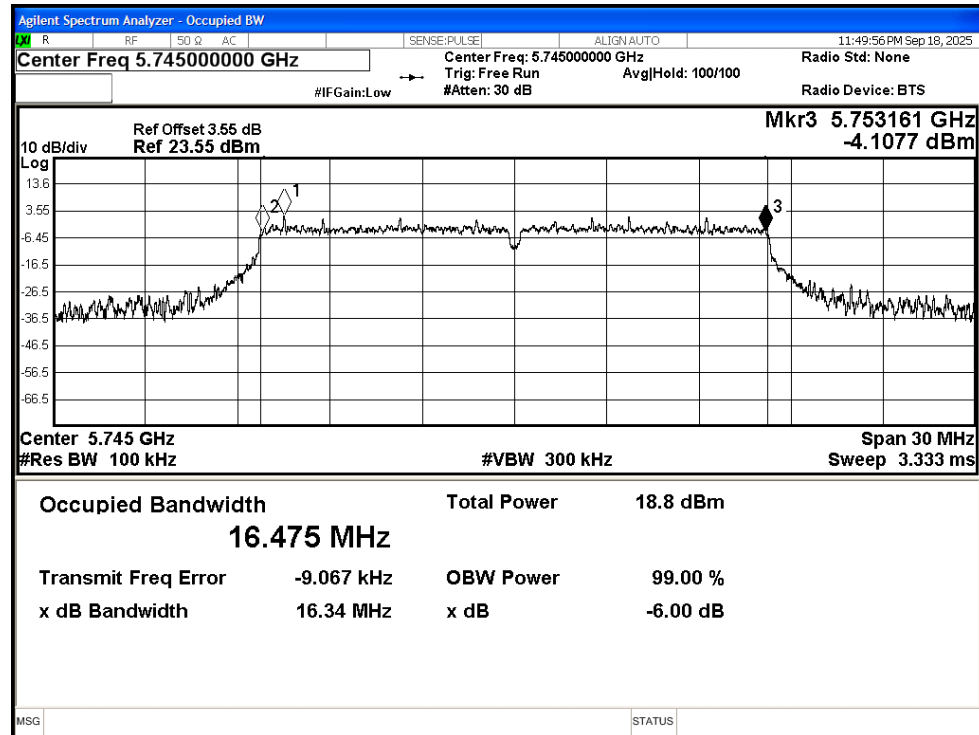


-6dB Bandwidth NVNT a 5785MHz Ant2

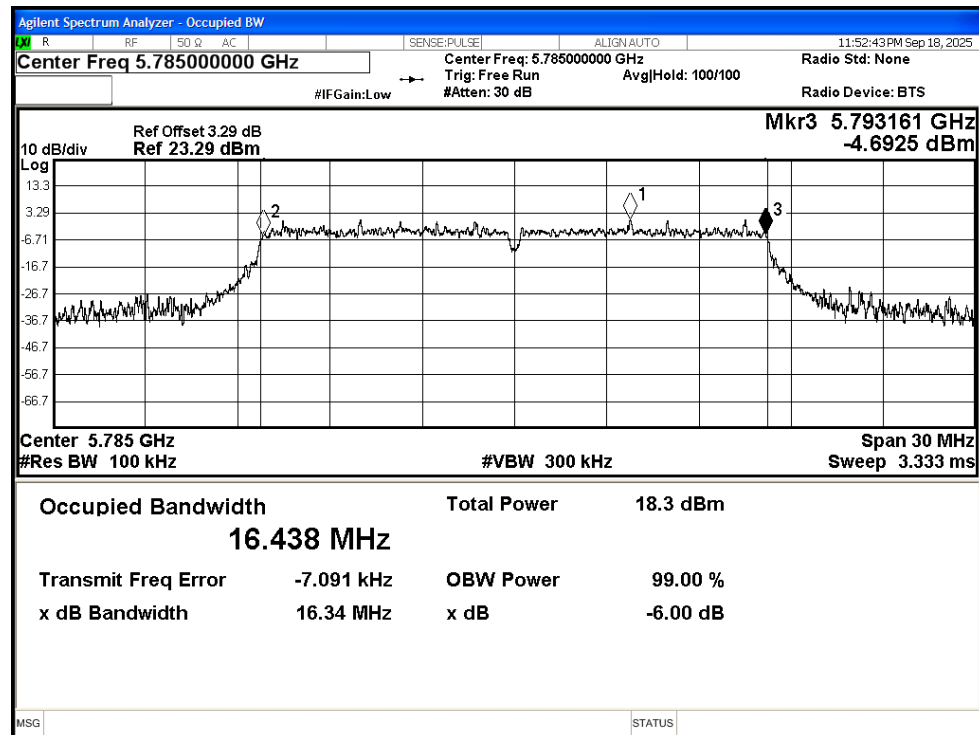


-6dB Bandwidth NVNT a 5825MHz Ant2

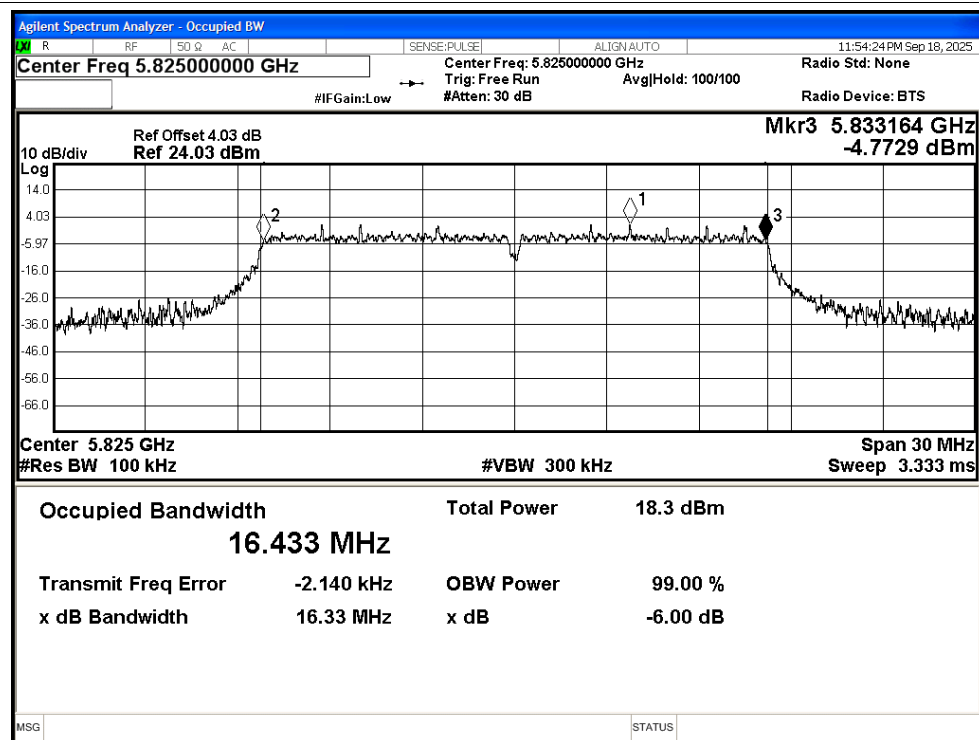


-6dB Bandwidth NVNT n20 5745MHz Ant2

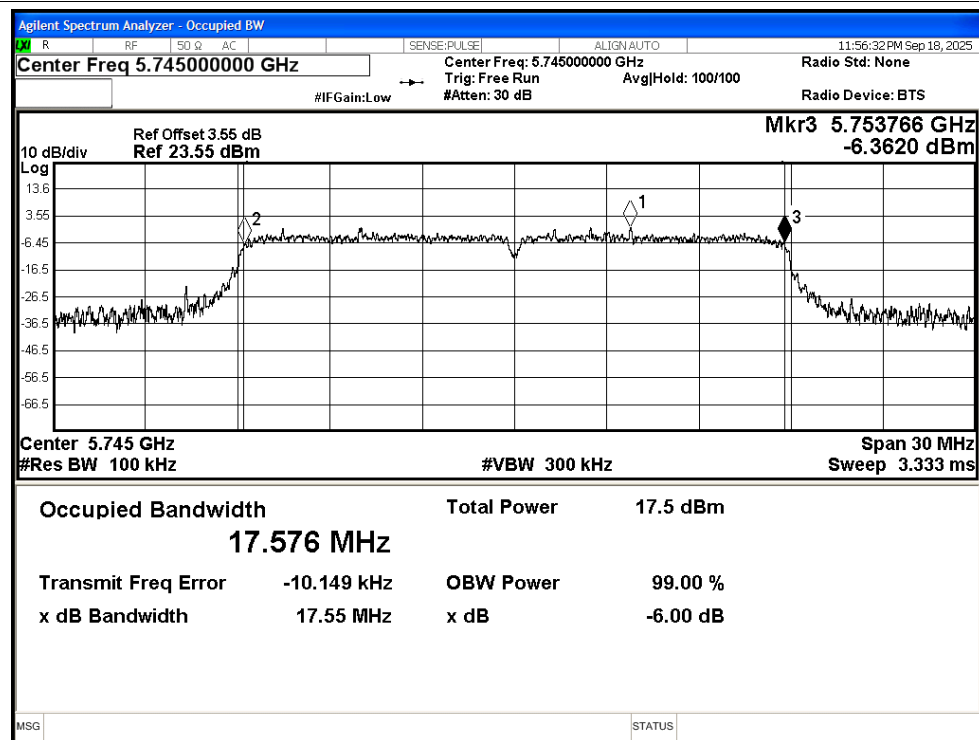


-6dB Bandwidth NVNT n20 5785MHz Ant2

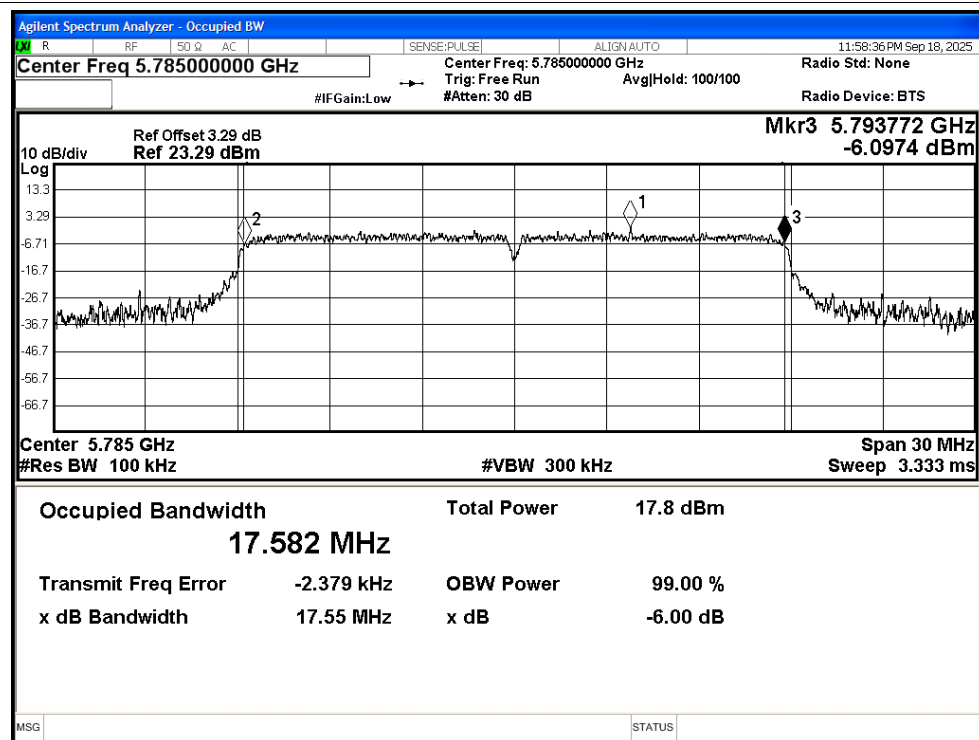


-6dB Bandwidth NVNT n20 5825MHz Ant2

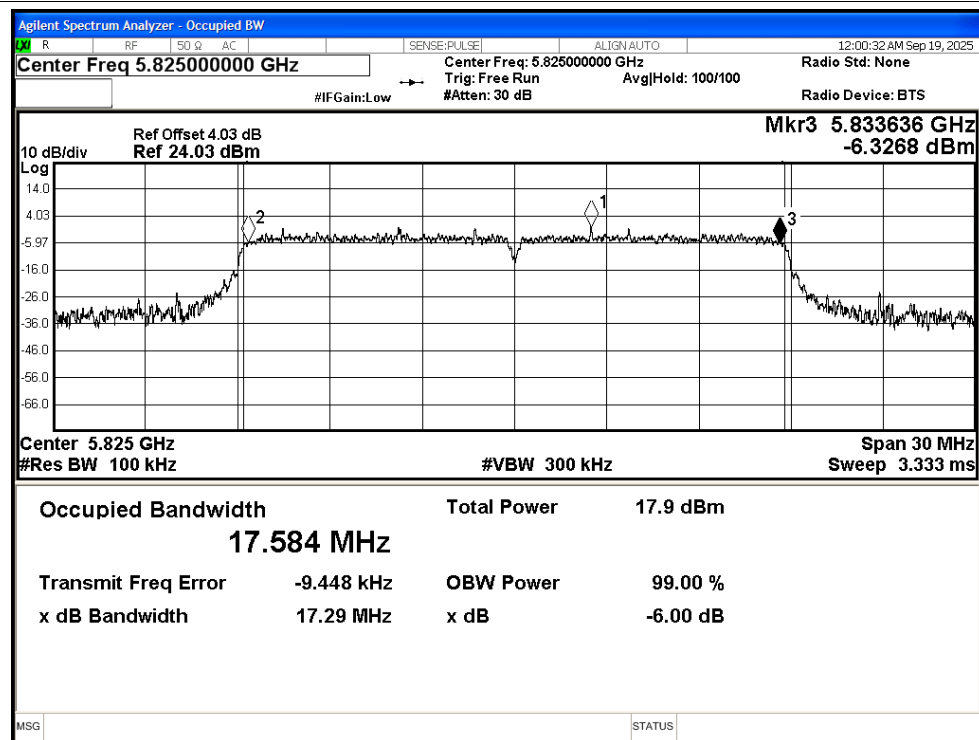


-6dB Bandwidth NVNT n40 5755MHz Ant2

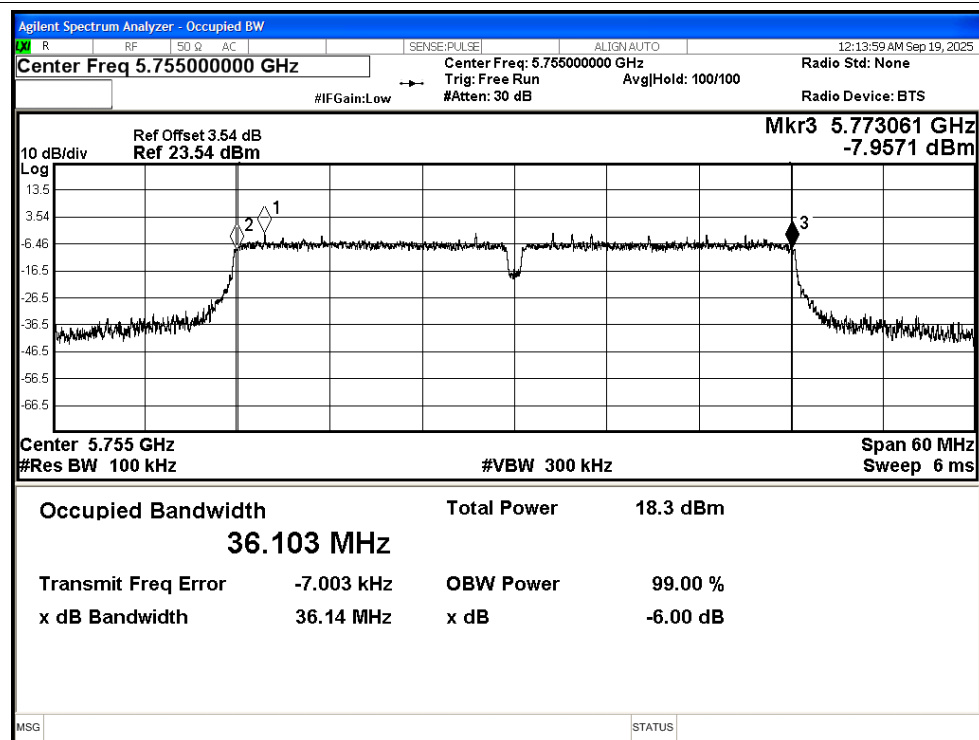


-6dB Bandwidth NVNT n40 5795MHz Ant2

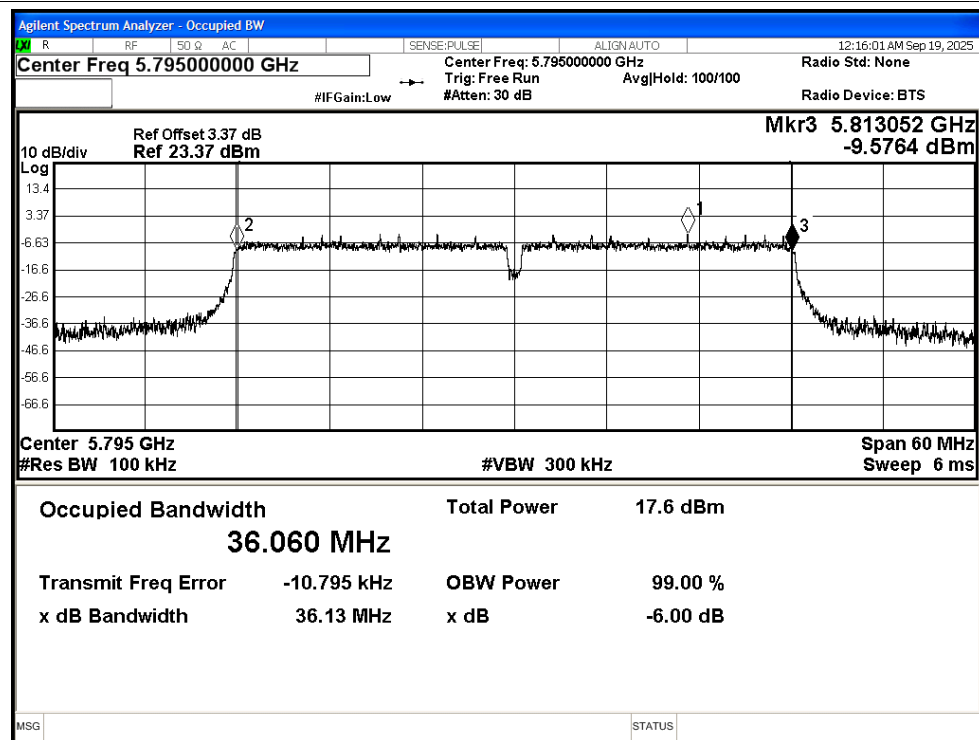


-6dB Bandwidth NVNT ac20 5745MHz Ant2

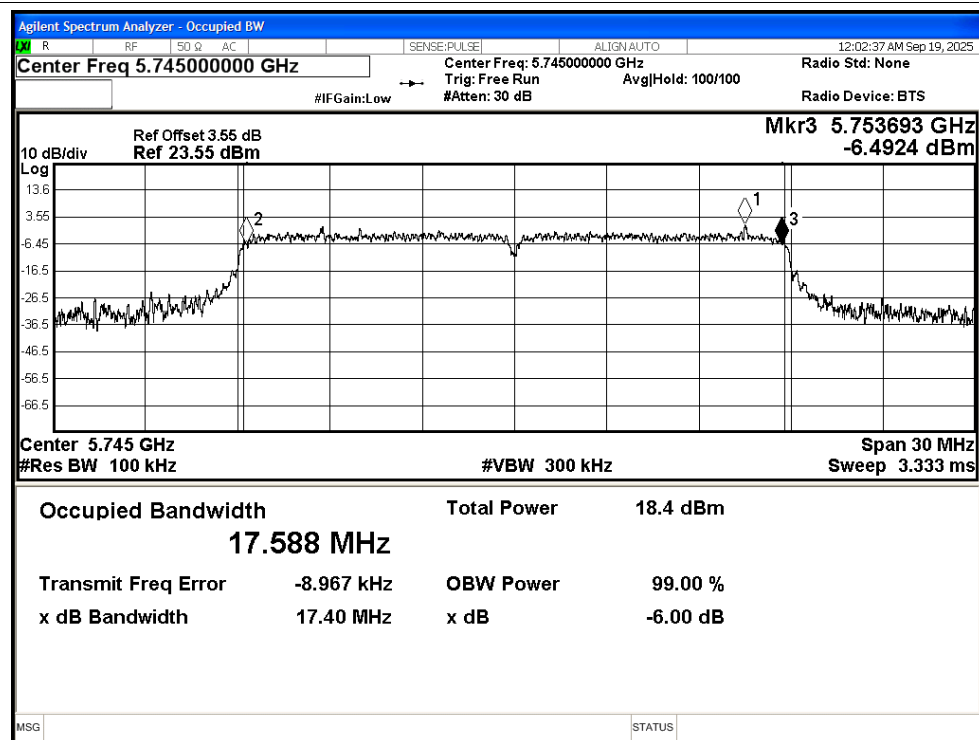


-6dB Bandwidth NVNT ac20 5785MHz Ant2

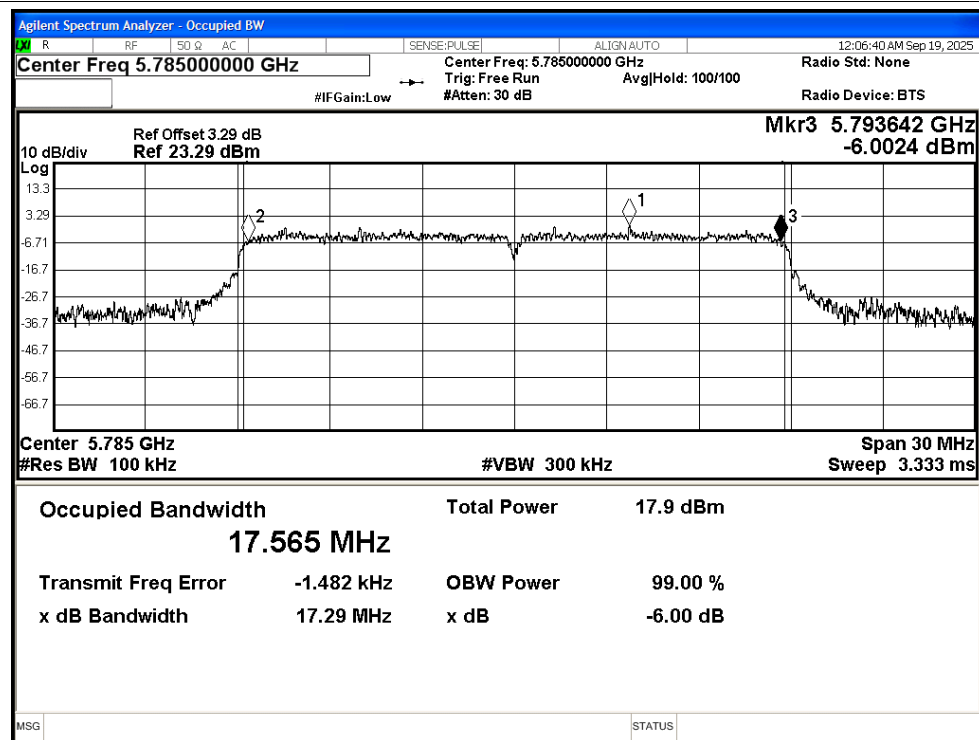


-6dB Bandwidth NVNT ac20 5825MHz Ant2

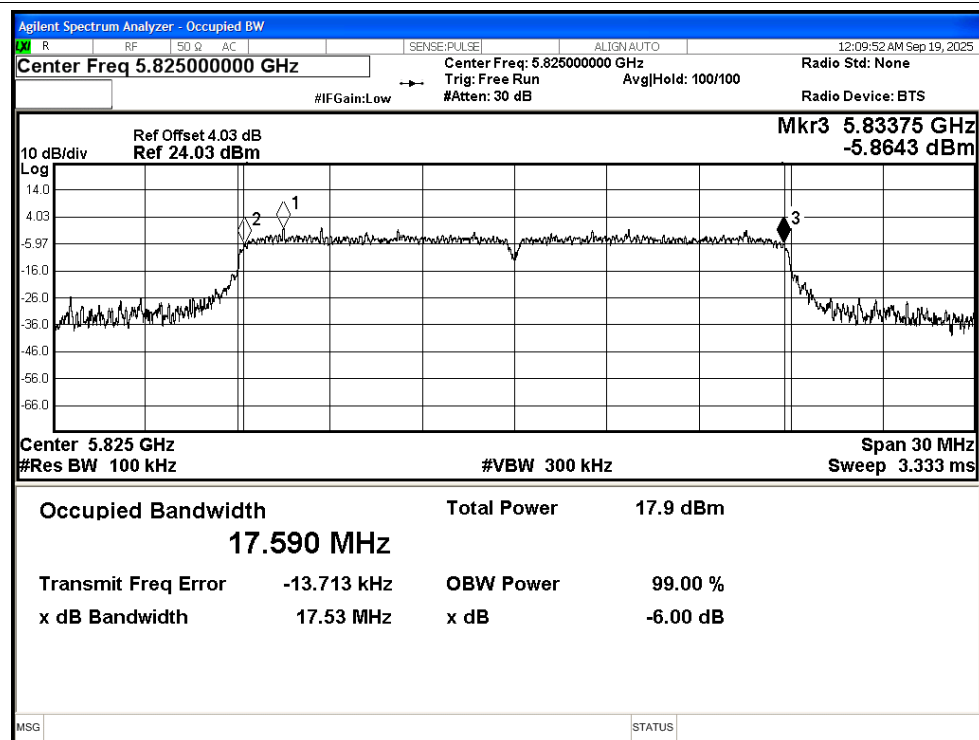


-6dB Bandwidth NVNT ac40 5755MHz Ant2

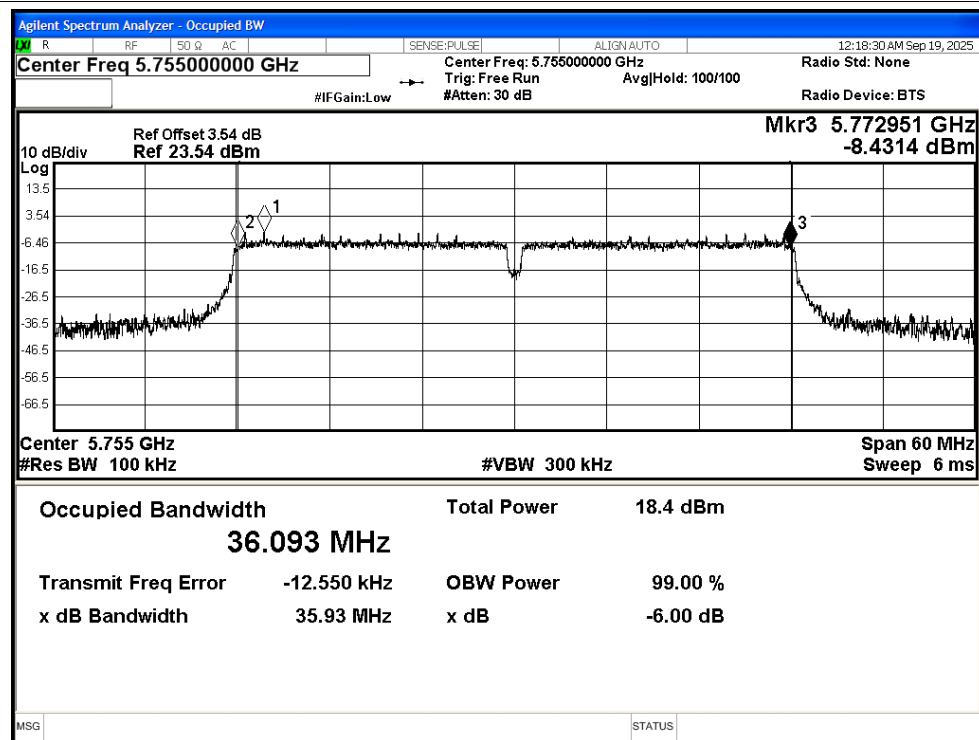


-6dB Bandwidth NVNT ac40 5795MHz Ant2

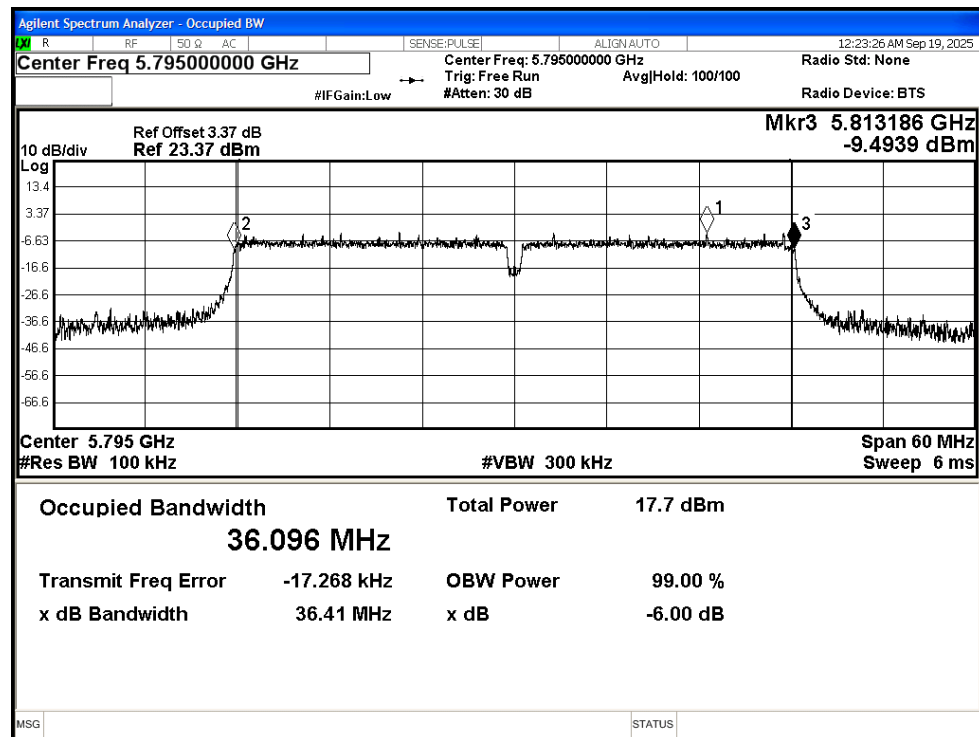


-6dB Bandwidth NVNT ax20 5745MHz Ant2

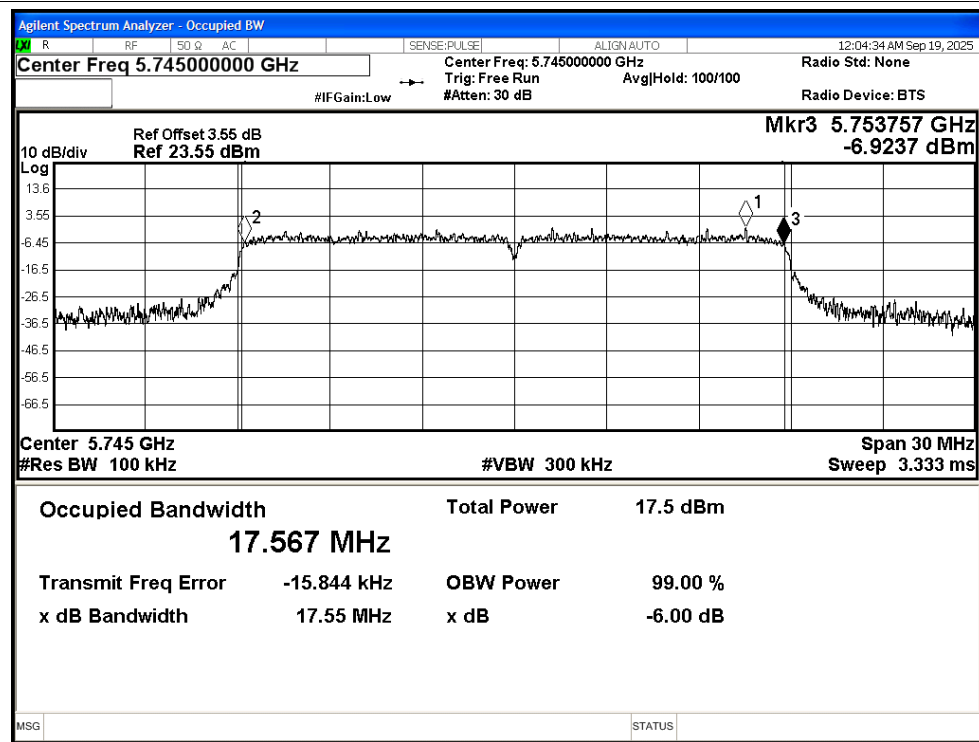


-6dB Bandwidth NVNT ax20 5785MHz Ant2

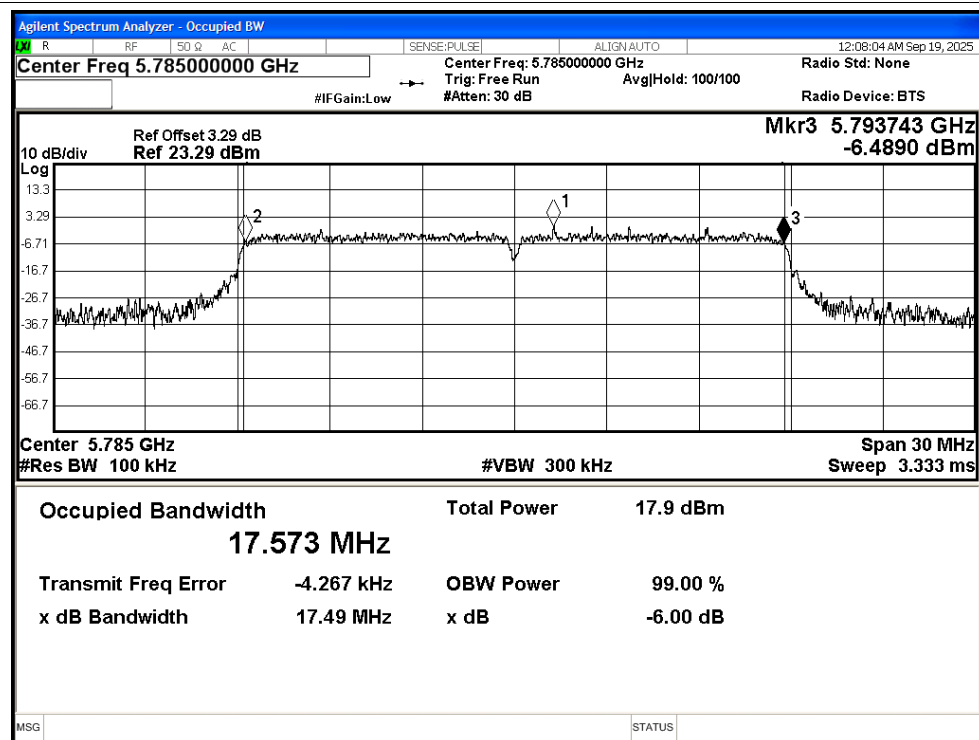


-6dB Bandwidth NVNT ax20 5825MHz Ant2

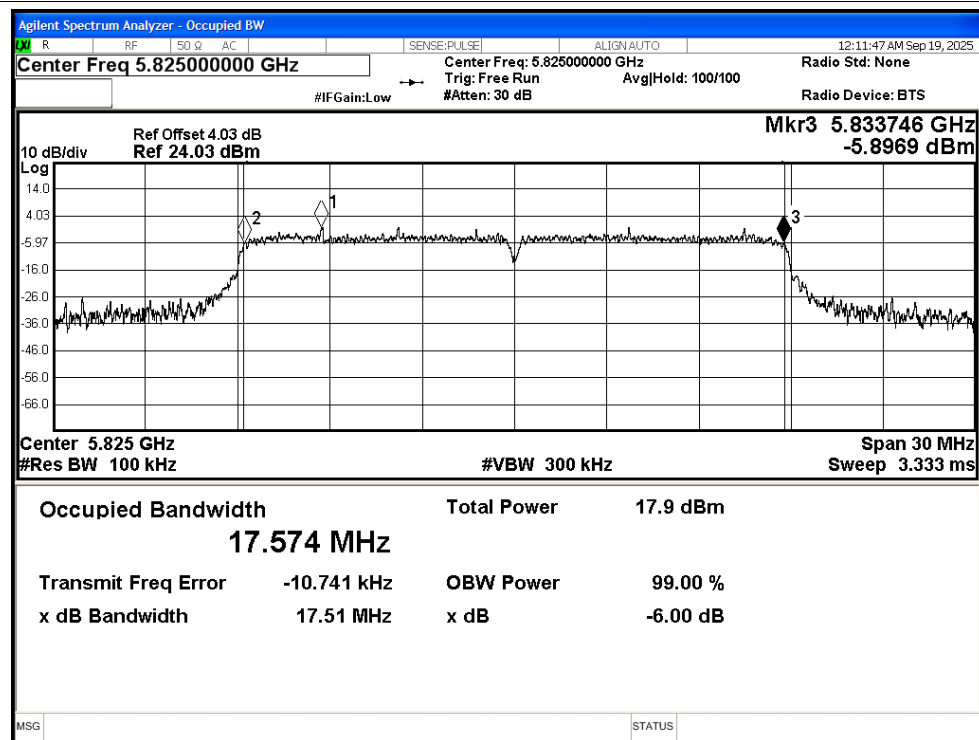

-6dB Bandwidth NVNT ax40 5755MHz Ant2

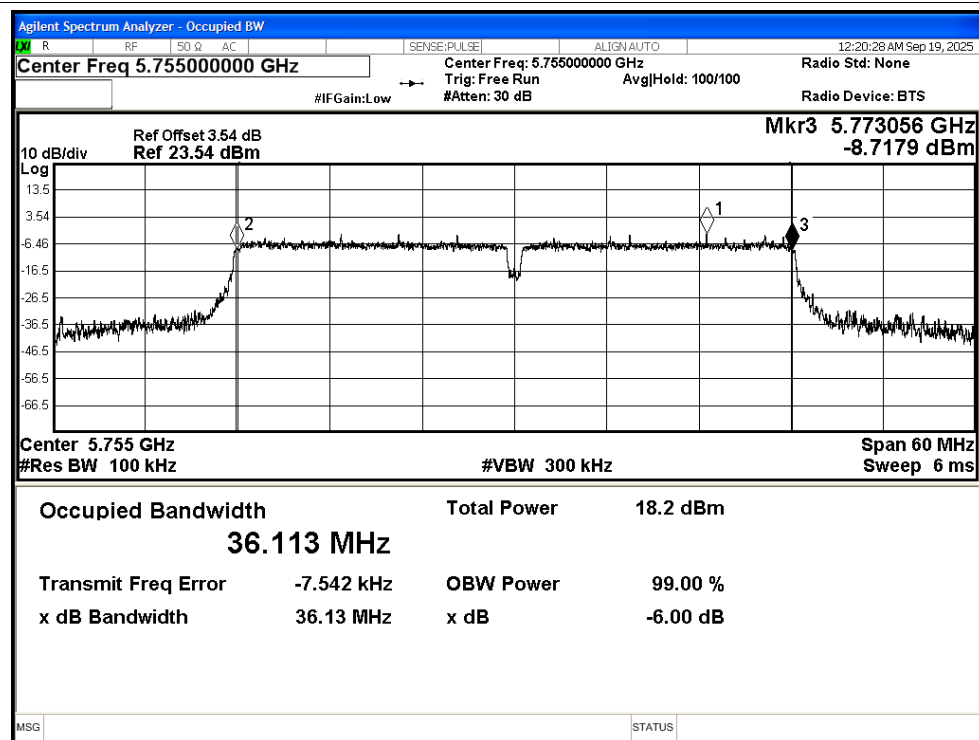

-6dB Bandwidth NVNT ax40 5795MHz Ant2

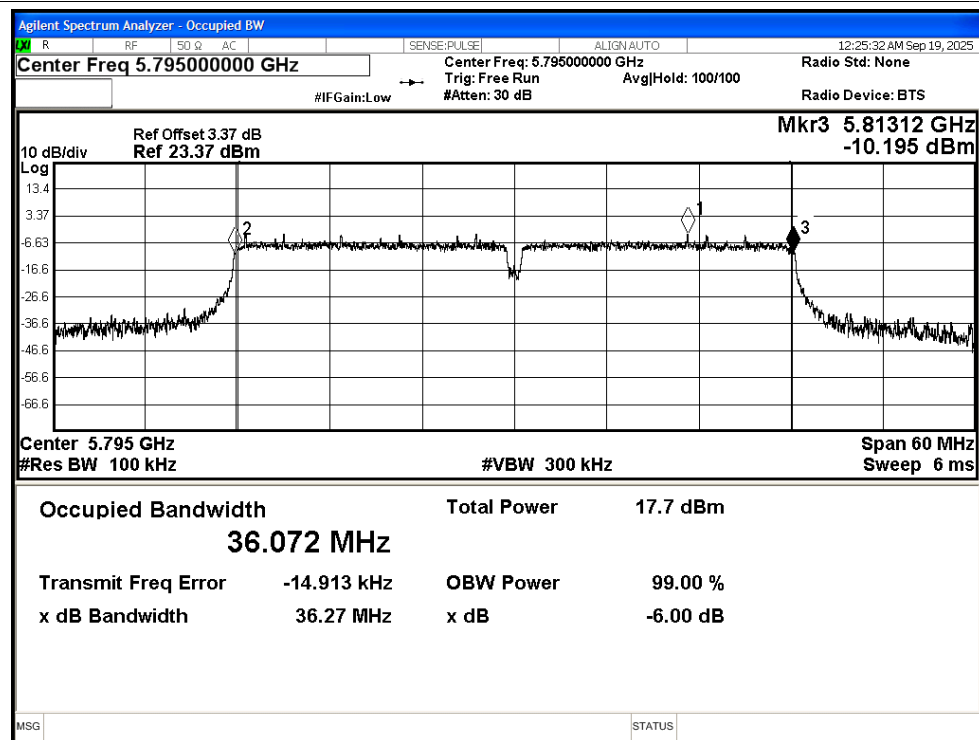

C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.72	0.24	12.96	30	Pass
NVNT	a	5785	Ant1	12.02	0.24	12.26	30	Pass
NVNT	a	5825	Ant1	12.22	0.24	12.46	30	Pass
NVNT	n20	5745	Ant1	11.94	0.1	12.04	30	Pass
NVNT	n20	5785	Ant1	11.24	0.1	11.34	30	Pass
NVNT	n20	5825	Ant1	11.38	0.1	11.48	30	Pass
NVNT	n40	5755	Ant1	11.74	0.24	11.98	30	Pass
NVNT	n40	5795	Ant1	11	0.24	11.24	30	Pass
NVNT	ac20	5745	Ant1	11.19	0.12	11.31	30	Pass
NVNT	ac20	5785	Ant1	11.52	0.12	11.64	30	Pass
NVNT	ac20	5825	Ant1	11.6	0.12	11.72	30	Pass
NVNT	ac40	5755	Ant1	11.7	0.23	11.93	30	Pass
NVNT	ac40	5795	Ant1	11	0.24	11.24	30	Pass
NVNT	ax20	5745	Ant1	11.16	0.12	11.28	30	Pass
NVNT	ax20	5785	Ant1	11.5	0.12	11.62	30	Pass
NVNT	ax20	5825	Ant1	11.63	0.12	11.75	30	Pass
NVNT	ax40	5755	Ant1	11.65	0.24	11.89	30	Pass
NVNT	ax40	5795	Ant1	10.99	0.23	11.22	30	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	12.4	0.24	12.64	30	Pass
NVNT	a	5785	Ant2	12.26	0.24	12.5	30	Pass
NVNT	a	5825	Ant2	12.3	0.24	12.54	30	Pass
NVNT	n20	5745	Ant2	11.4	0.12	11.52	30	Pass
NVNT	n20	5785	Ant2	11.74	0.12	11.86	30	Pass
NVNT	n20	5825	Ant2	11.77	0.12	11.89	30	Pass
NVNT	n40	5755	Ant2	11.85	0.24	12.09	30	Pass
NVNT	n40	5795	Ant2	11.05	0.24	11.29	30	Pass
NVNT	ac20	5745	Ant2	12.26	0.12	12.38	30	Pass
NVNT	ac20	5785	Ant2	11.62	0.12	11.74	30	Pass
NVNT	ac20	5825	Ant2	11.73	0.12	11.85	30	Pass
NVNT	ac40	5755	Ant2	11.79	0.24	12.03	30	Pass
NVNT	ac40	5795	Ant2	11.09	0.24	11.33	30	Pass
NVNT	ax20	5745	Ant2	11.28	0.12	11.4	30	Pass
NVNT	ax20	5785	Ant2	11.63	0.12	11.75	30	Pass
NVNT	ax20	5825	Ant2	11.74	0.12	11.86	30	Pass
NVNT	ax40	5755	Ant2	11.76	0.23	11.99	30	Pass
NVNT	ax40	5795	Ant2	11.13	0.23	11.36	30	Pass

C.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-0.87	0.24	-0.63	30	Pass
NVNT	a	5785	Ant1	-1.48	0.24	-1.24	30	Pass
NVNT	a	5825	Ant1	-1.25	0.24	-1.01	30	Pass
NVNT	n20	5745	Ant1	-1.43	0.1	-1.33	30	Pass
NVNT	n20	5785	Ant1	-2.43	0.1	-2.33	30	Pass
NVNT	n20	5825	Ant1	-2.38	0.1	-2.28	30	Pass
NVNT	n40	5755	Ant1	-5.28	0.24	-5.04	30	Pass
NVNT	n40	5795	Ant1	-5.97	0.24	-5.73	30	Pass
NVNT	ac20	5745	Ant1	-2.36	0.12	-2.24	30	Pass
NVNT	ac20	5785	Ant1	-2.47	0.12	-2.35	30	Pass
NVNT	ac20	5825	Ant1	-2.22	0.12	-2.1	30	Pass
NVNT	ac40	5755	Ant1	-4.77	0.23	-4.54	30	Pass
NVNT	ac40	5795	Ant1	-6.02	0.24	-5.78	30	Pass
NVNT	ax20	5745	Ant1	-2.66	0.12	-2.54	30	Pass
NVNT	ax20	5785	Ant1	-2.31	0.12	-2.19	30	Pass
NVNT	ax20	5825	Ant1	-2.36	0.12	-2.24	30	Pass
NVNT	ax40	5755	Ant1	-4.89	0.24	-4.65	30	Pass
NVNT	ax40	5795	Ant1	-6.01	0.23	-5.78	30	Pass


Test Graphs


PSD NVNT a 5745MHz Ant1

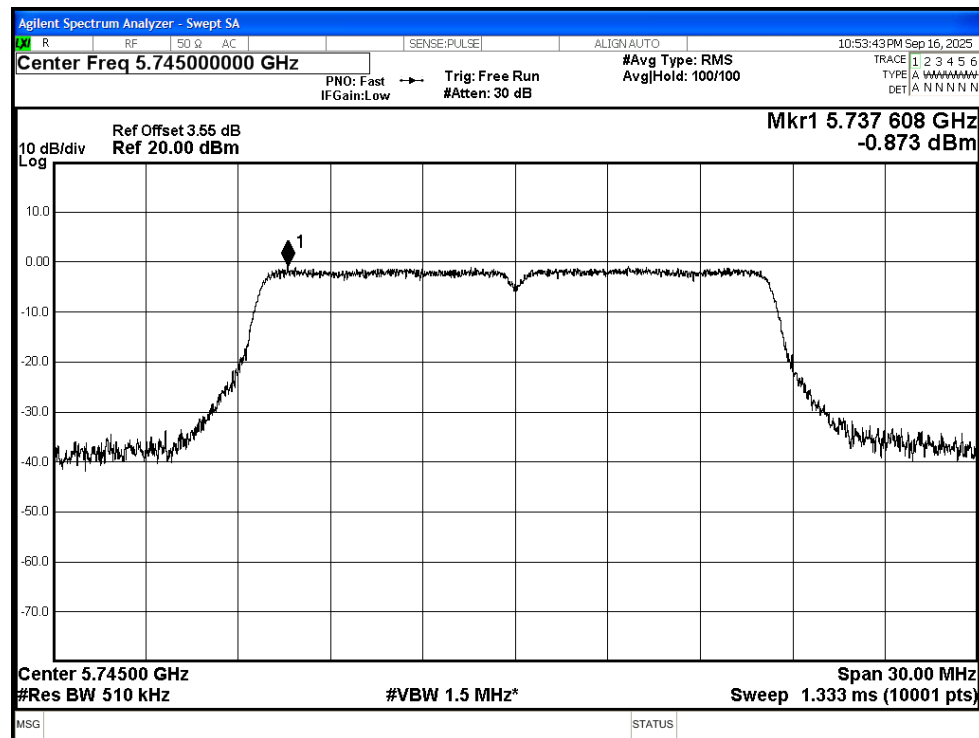



PSD NVNT a 5785MHz Ant1

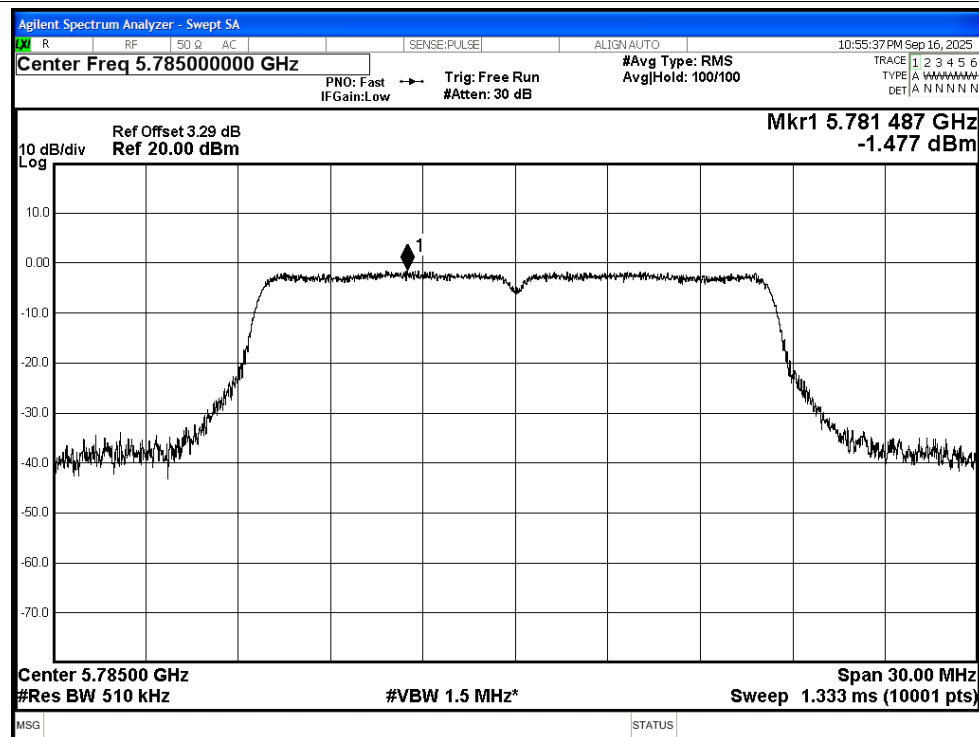


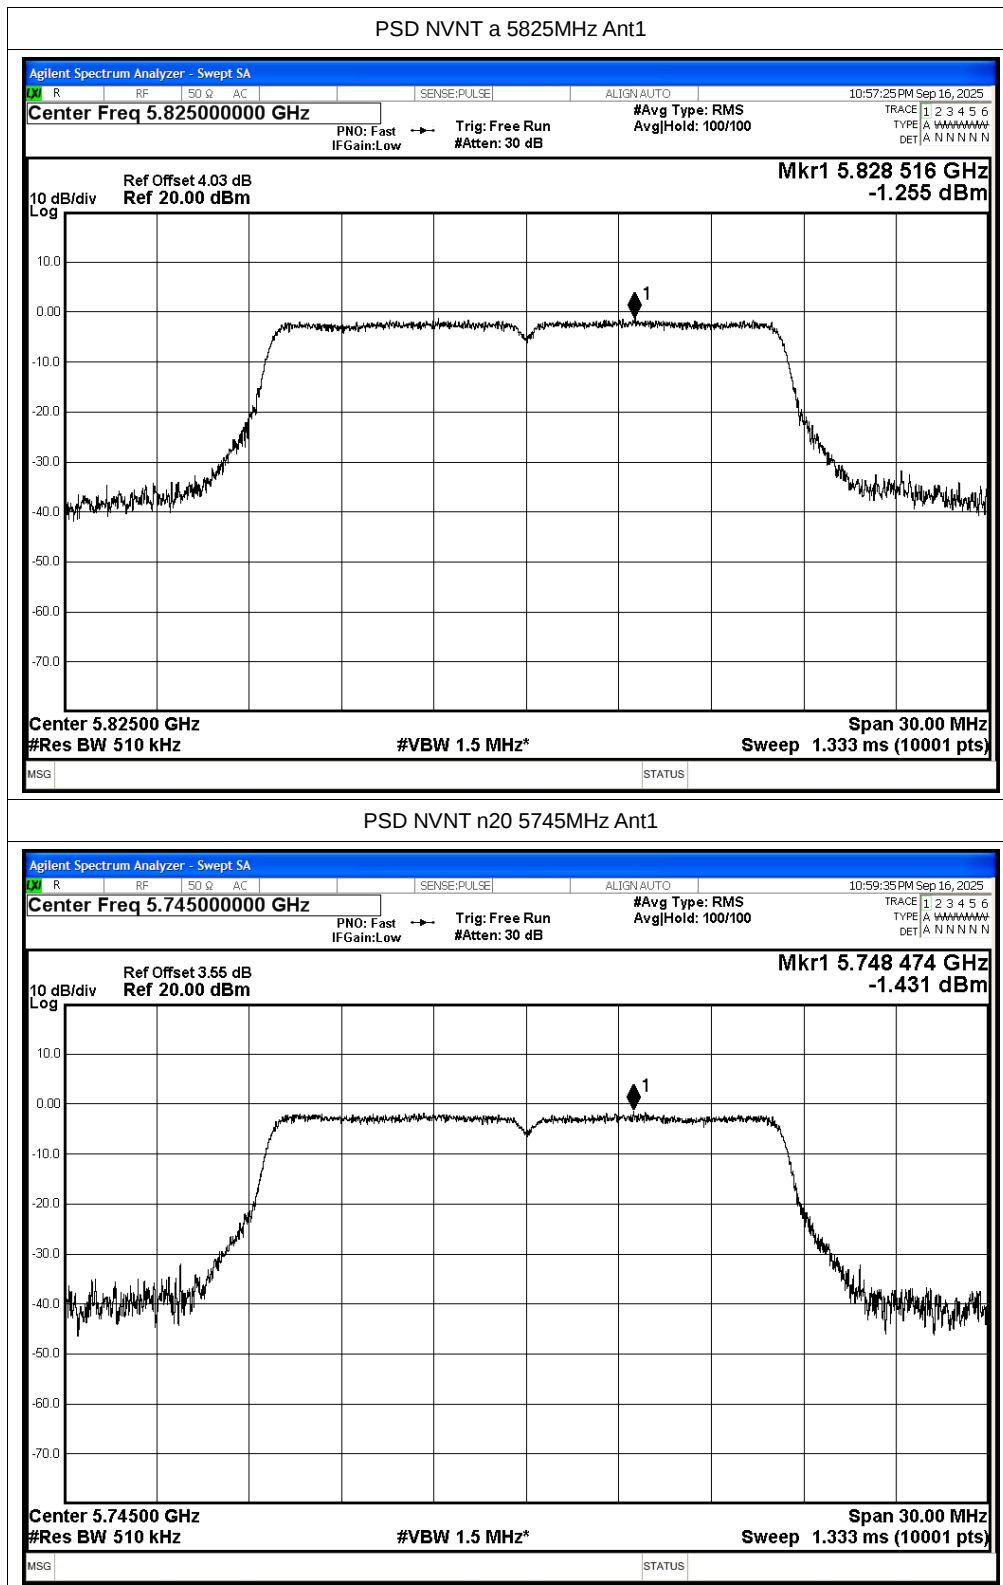

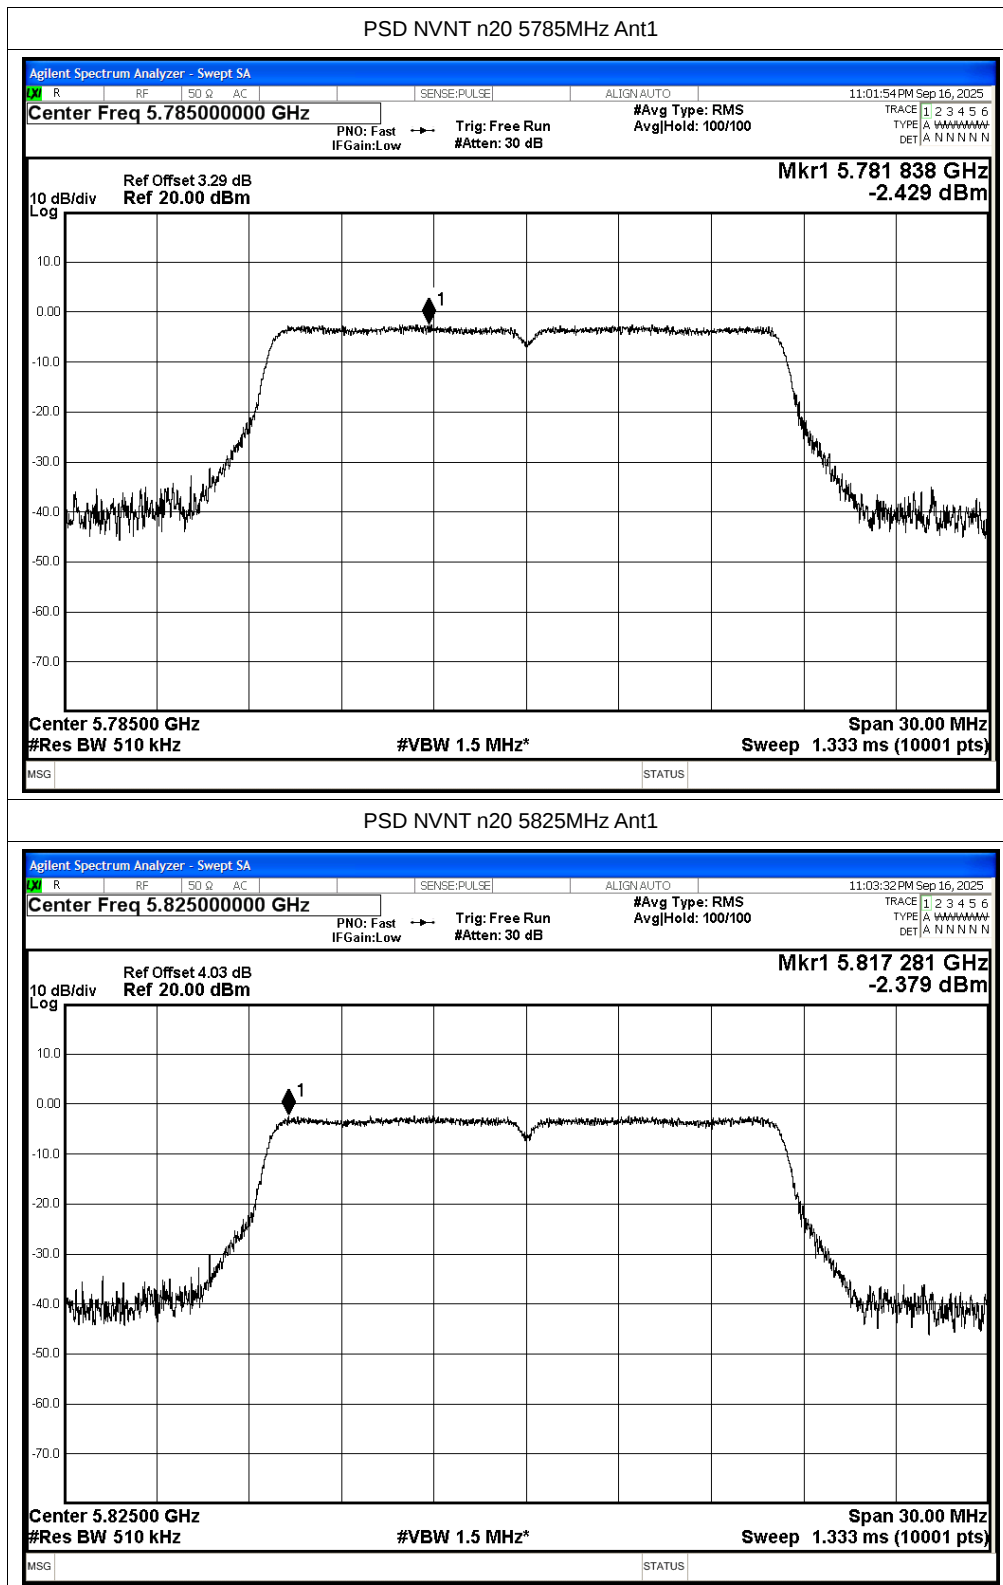


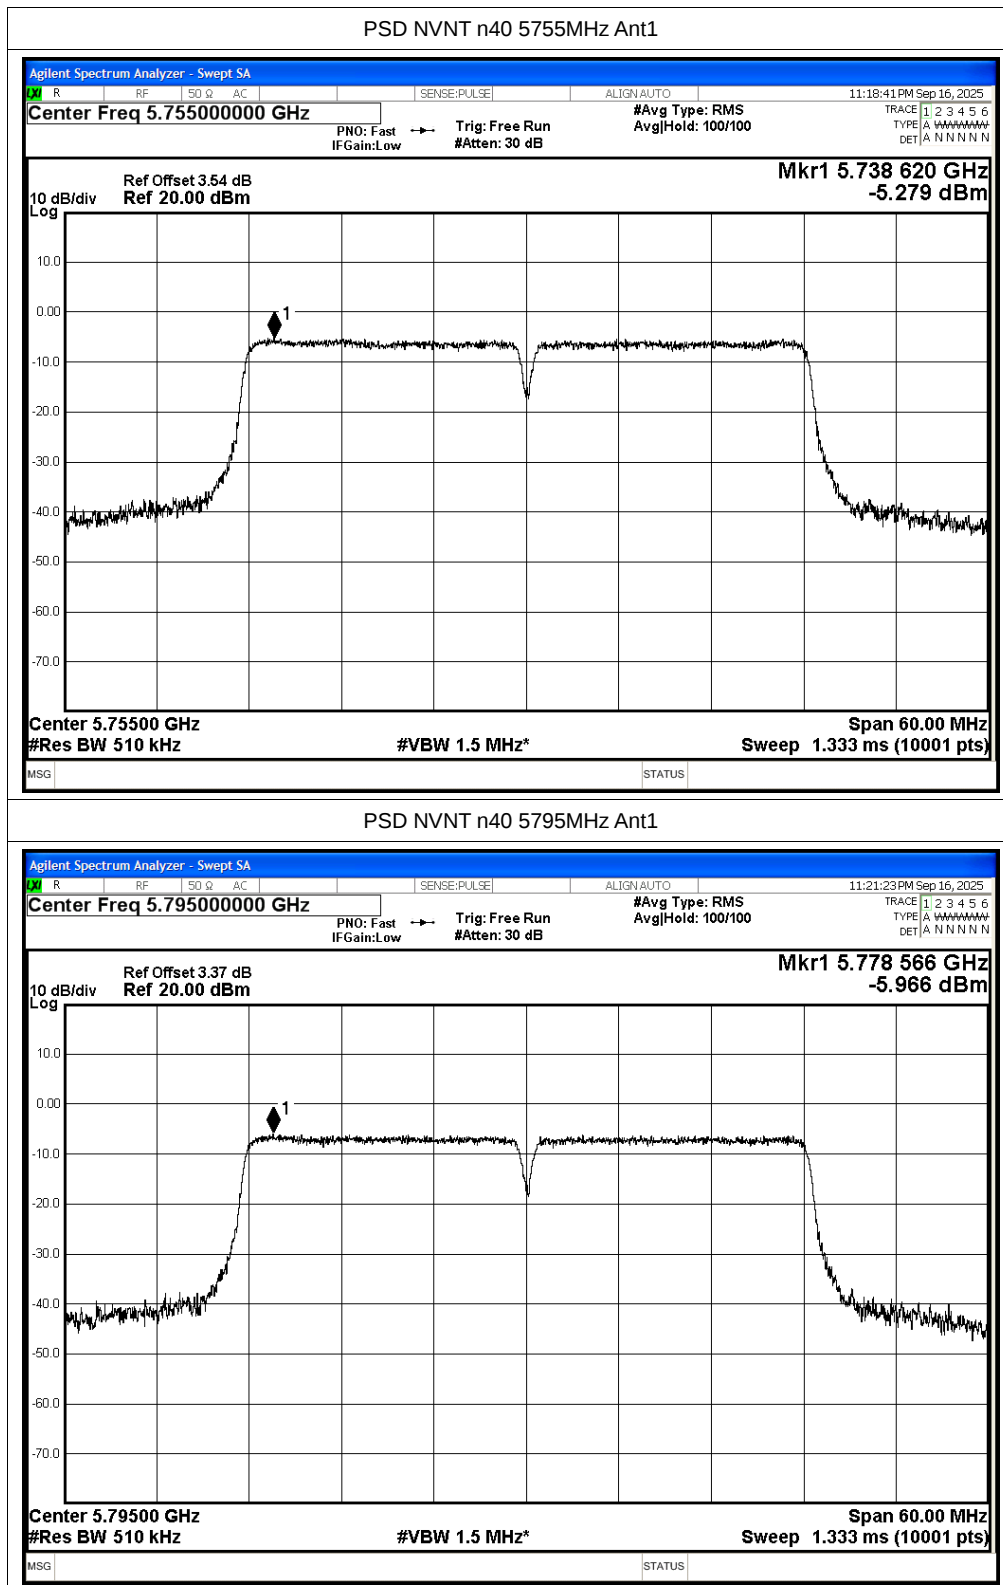

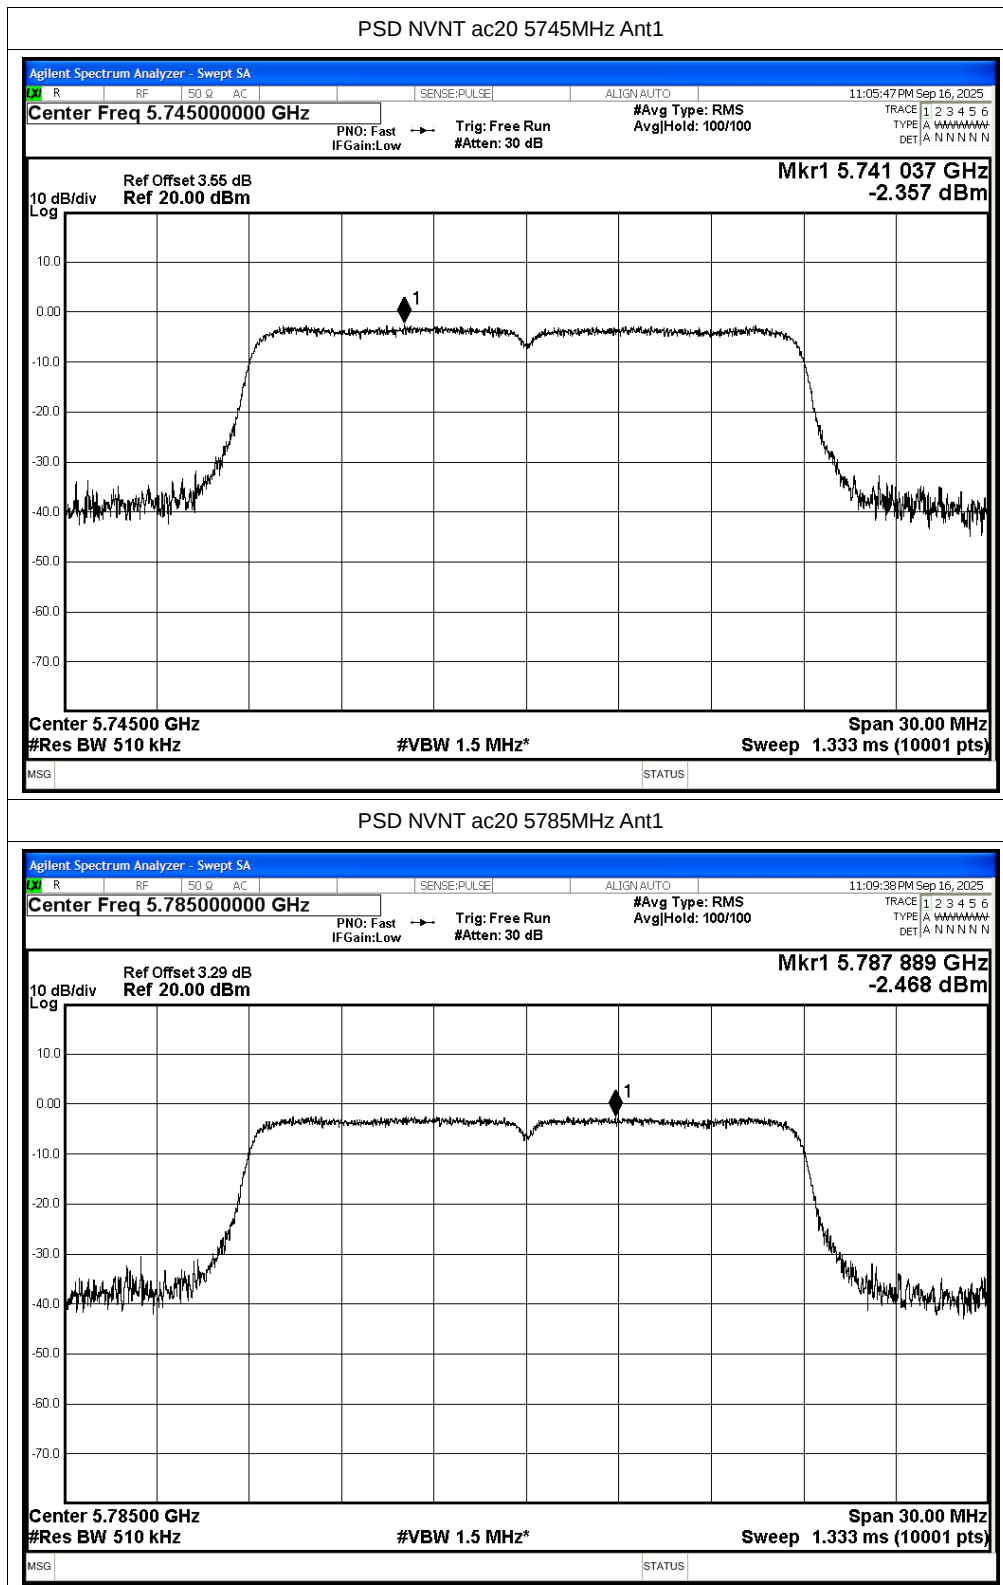



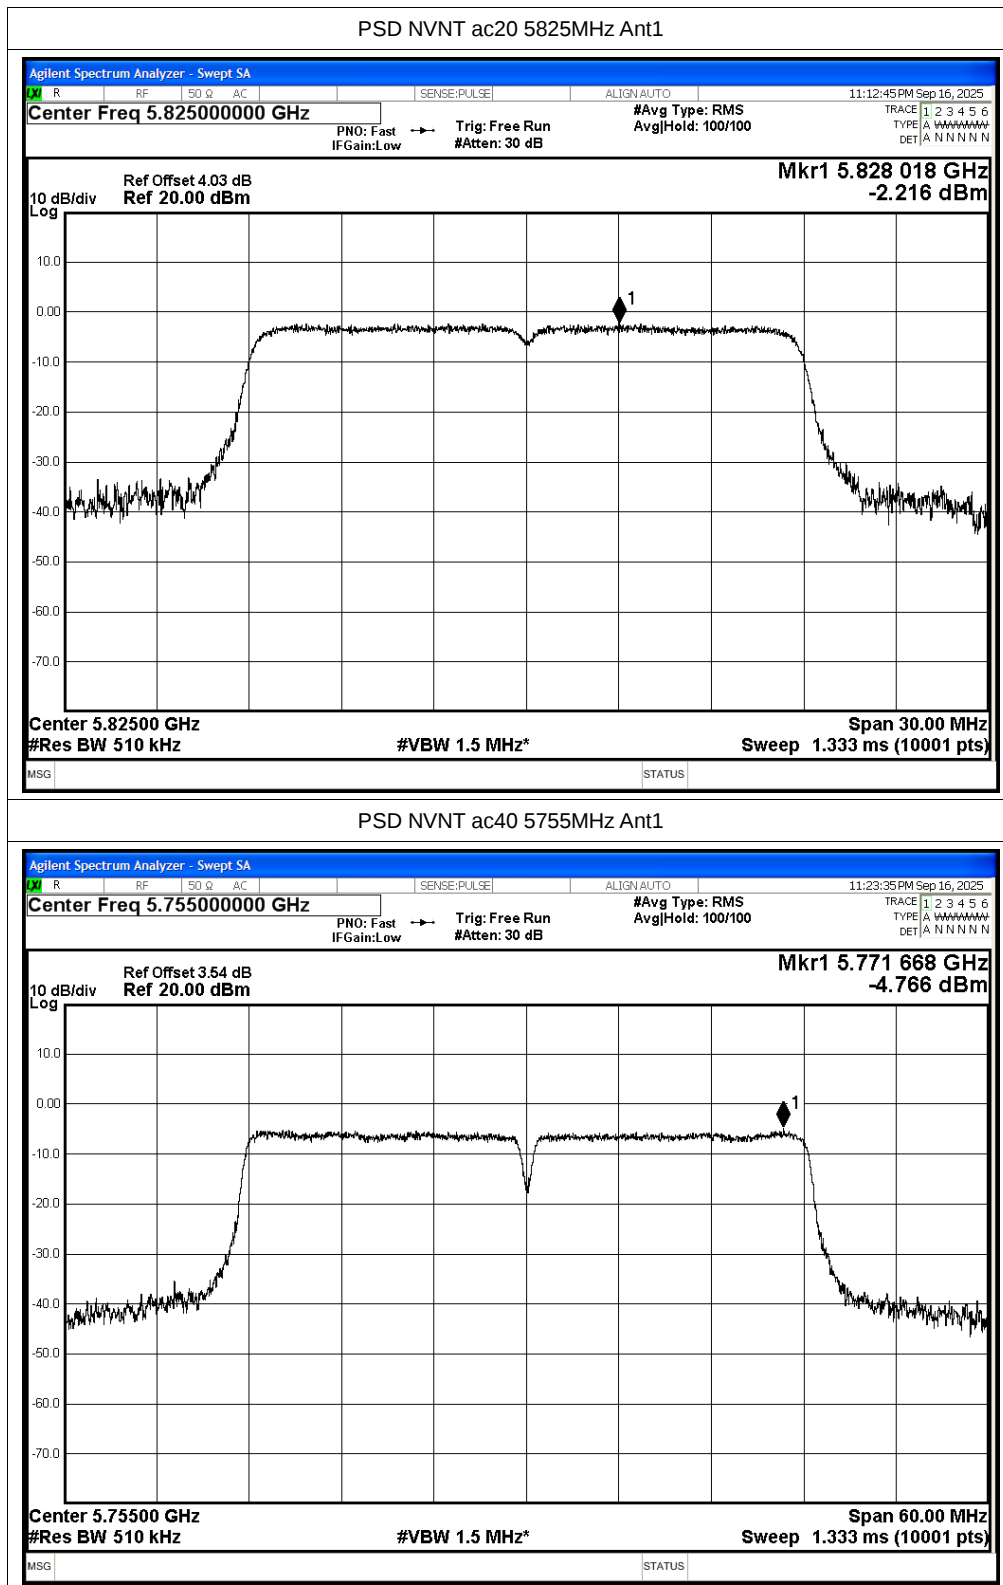




PSD NVNT ac40 5795MHz Ant1

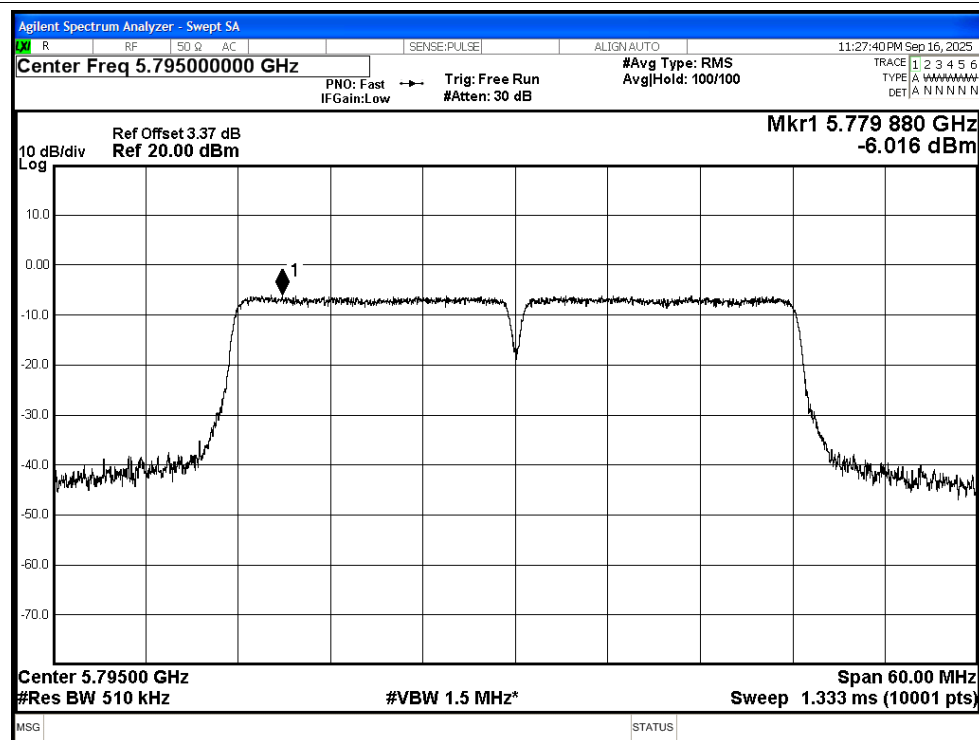

PSD NVNT ax20 5745MHz Ant1

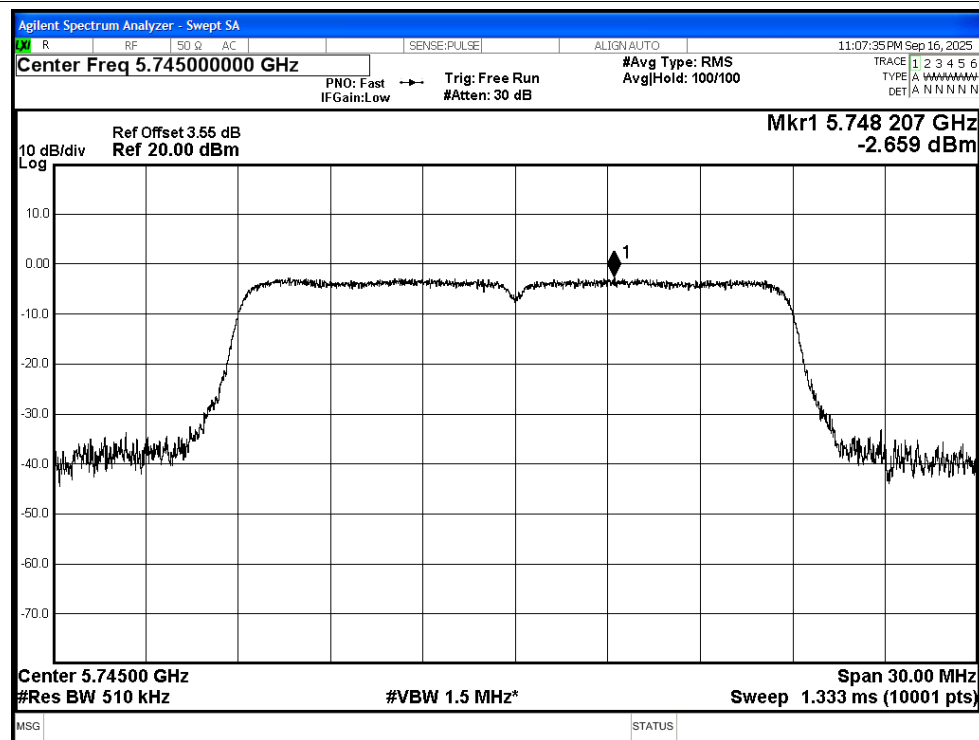

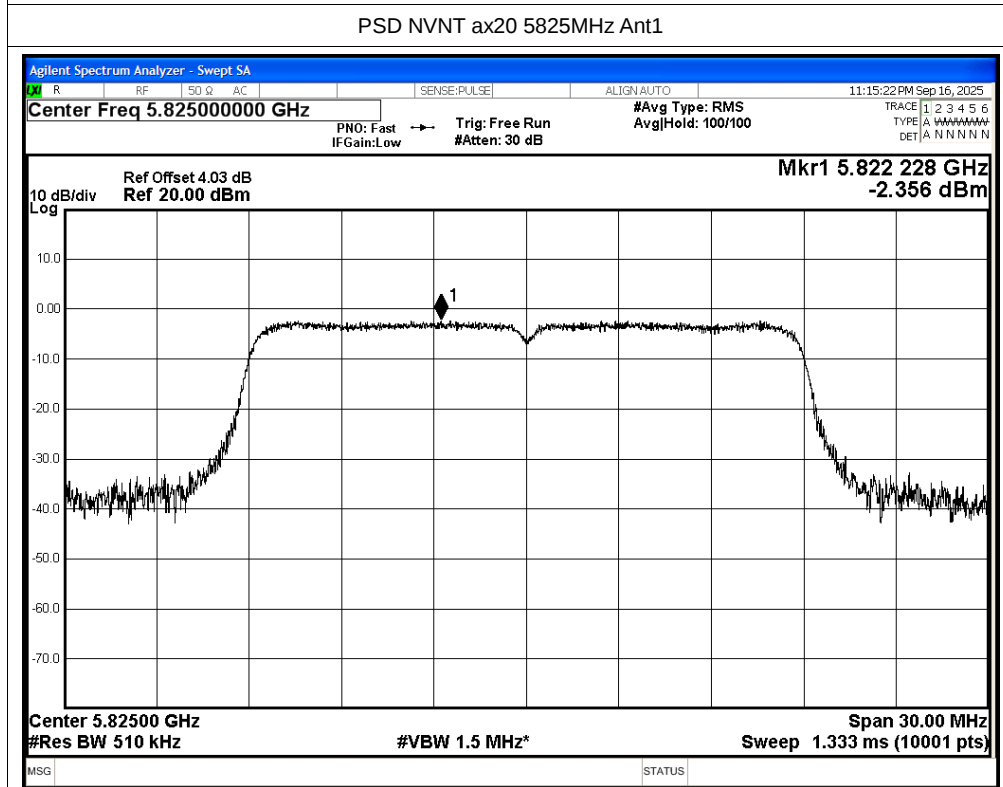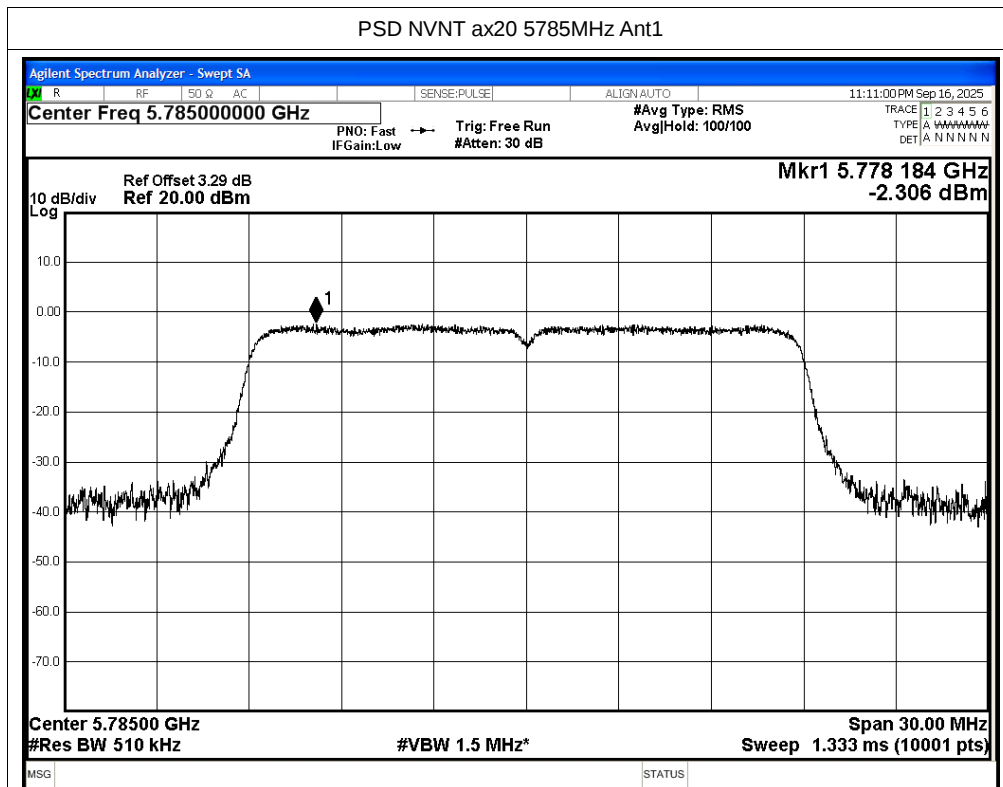


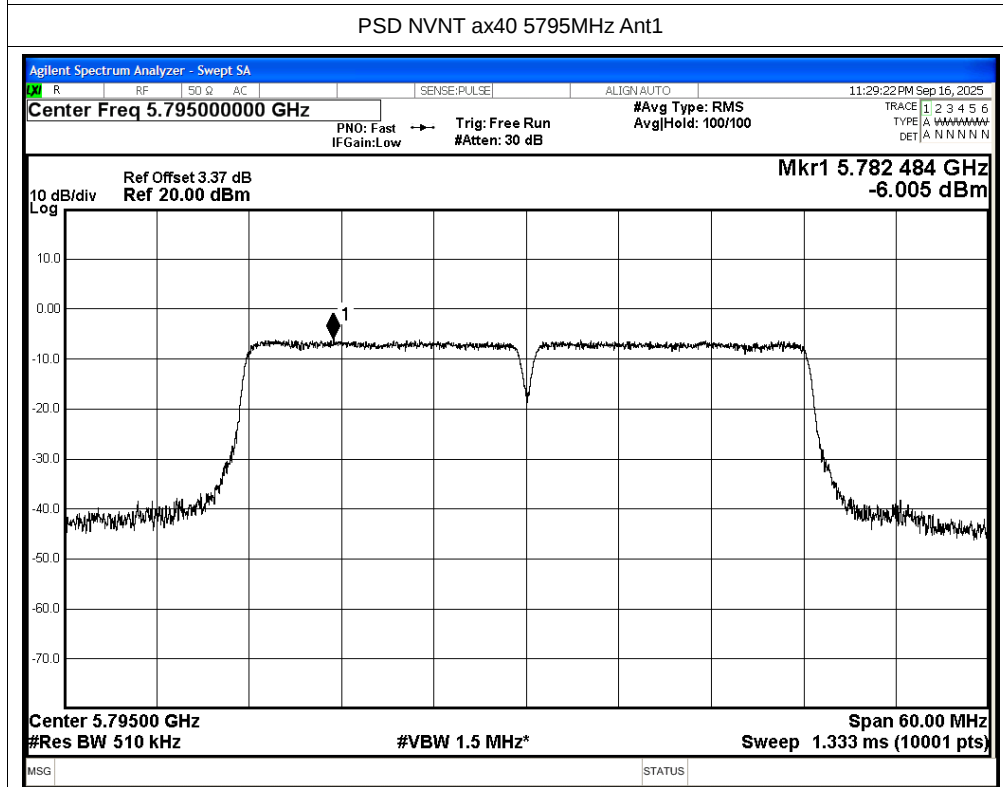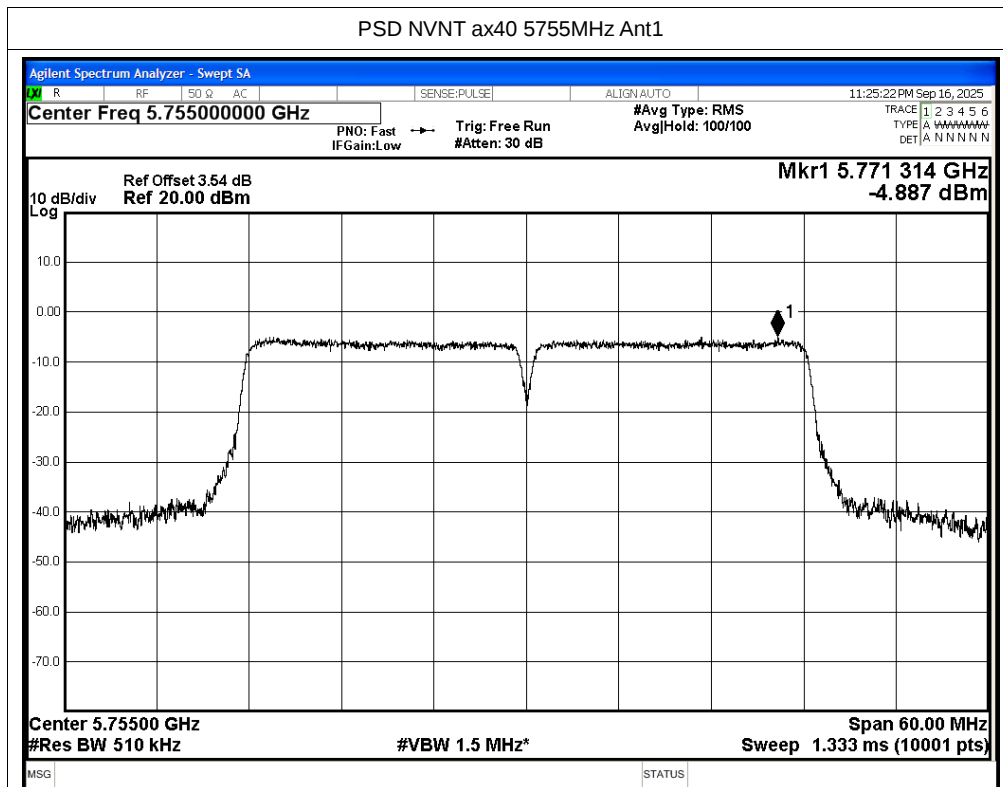


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant2	-0.71	0.24	-0.47	30	Pass
NVNT	a	5785	Ant2	-1.4	0.24	-1.16	30	Pass
NVNT	a	5825	Ant2	-1.32	0.24	-1.08	30	Pass
NVNT	n20	5745	Ant2	-2.38	0.12	-2.26	30	Pass
NVNT	n20	5785	Ant2	-2.36	0.12	-2.24	30	Pass
NVNT	n20	5825	Ant2	-2.12	0.12	-2	30	Pass
NVNT	n40	5755	Ant2	-4.94	0.24	-4.7	30	Pass
NVNT	n40	5795	Ant2	-5.91	0.24	-5.67	30	Pass
NVNT	ac20	5745	Ant2	-1.6	0.12	-1.48	30	Pass
NVNT	ac20	5785	Ant2	-2.23	0.12	-2.11	30	Pass
NVNT	ac20	5825	Ant2	-2.02	0.12	-1.9	30	Pass
NVNT	ac40	5755	Ant2	-4.82	0.24	-4.58	30	Pass
NVNT	ac40	5795	Ant2	-5.89	0.24	-5.65	30	Pass
NVNT	ax20	5745	Ant2	-2.61	0.12	-2.49	30	Pass
NVNT	ax20	5785	Ant2	-2.15	0.12	-2.03	30	Pass
NVNT	ax20	5825	Ant2	-2.22	0.12	-2.1	30	Pass
NVNT	ax40	5755	Ant2	-4.75	0.23	-4.52	30	Pass
NVNT	ax40	5795	Ant2	-5.92	0.23	-5.69	30	Pass


Test Graphs


PSD NVNT a 5745MHz Ant2

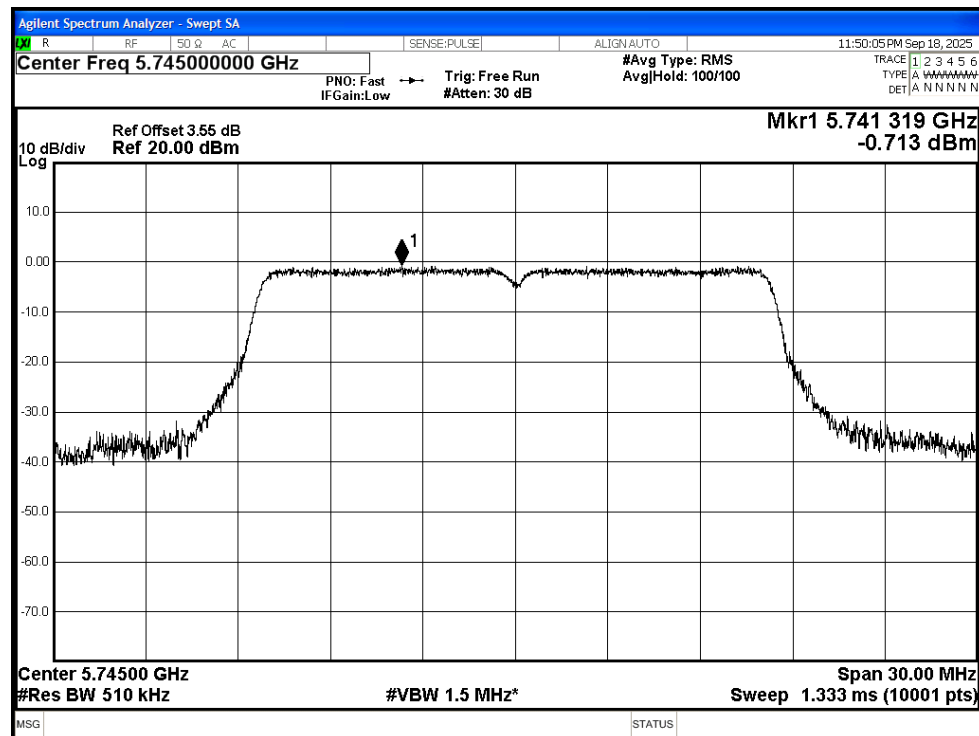


PSD NVNT a 5785MHz Ant2

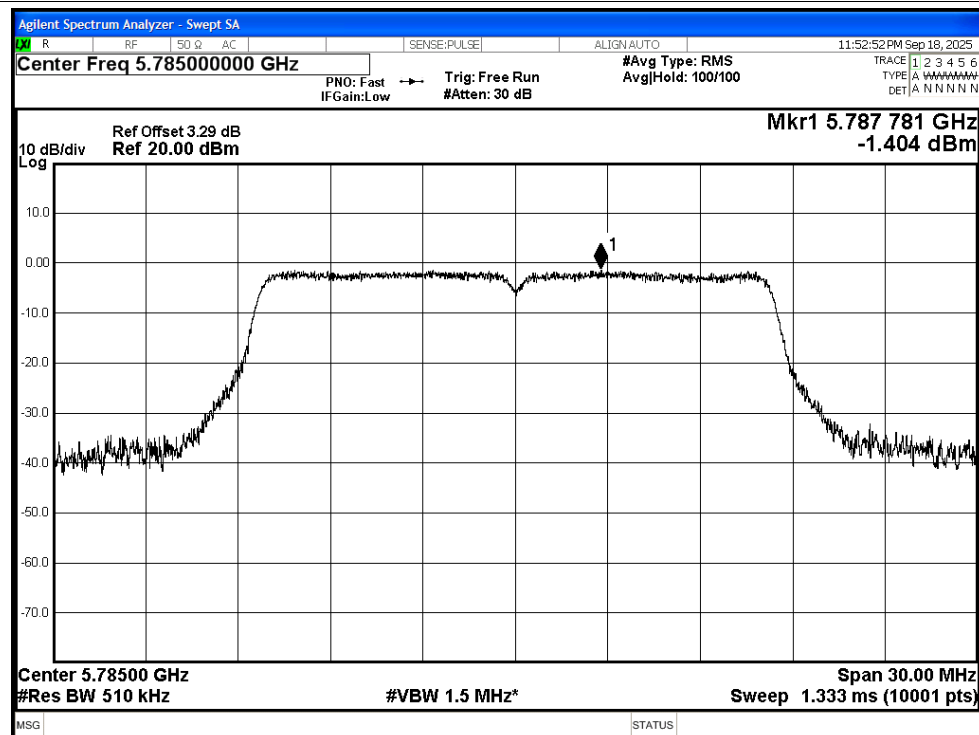


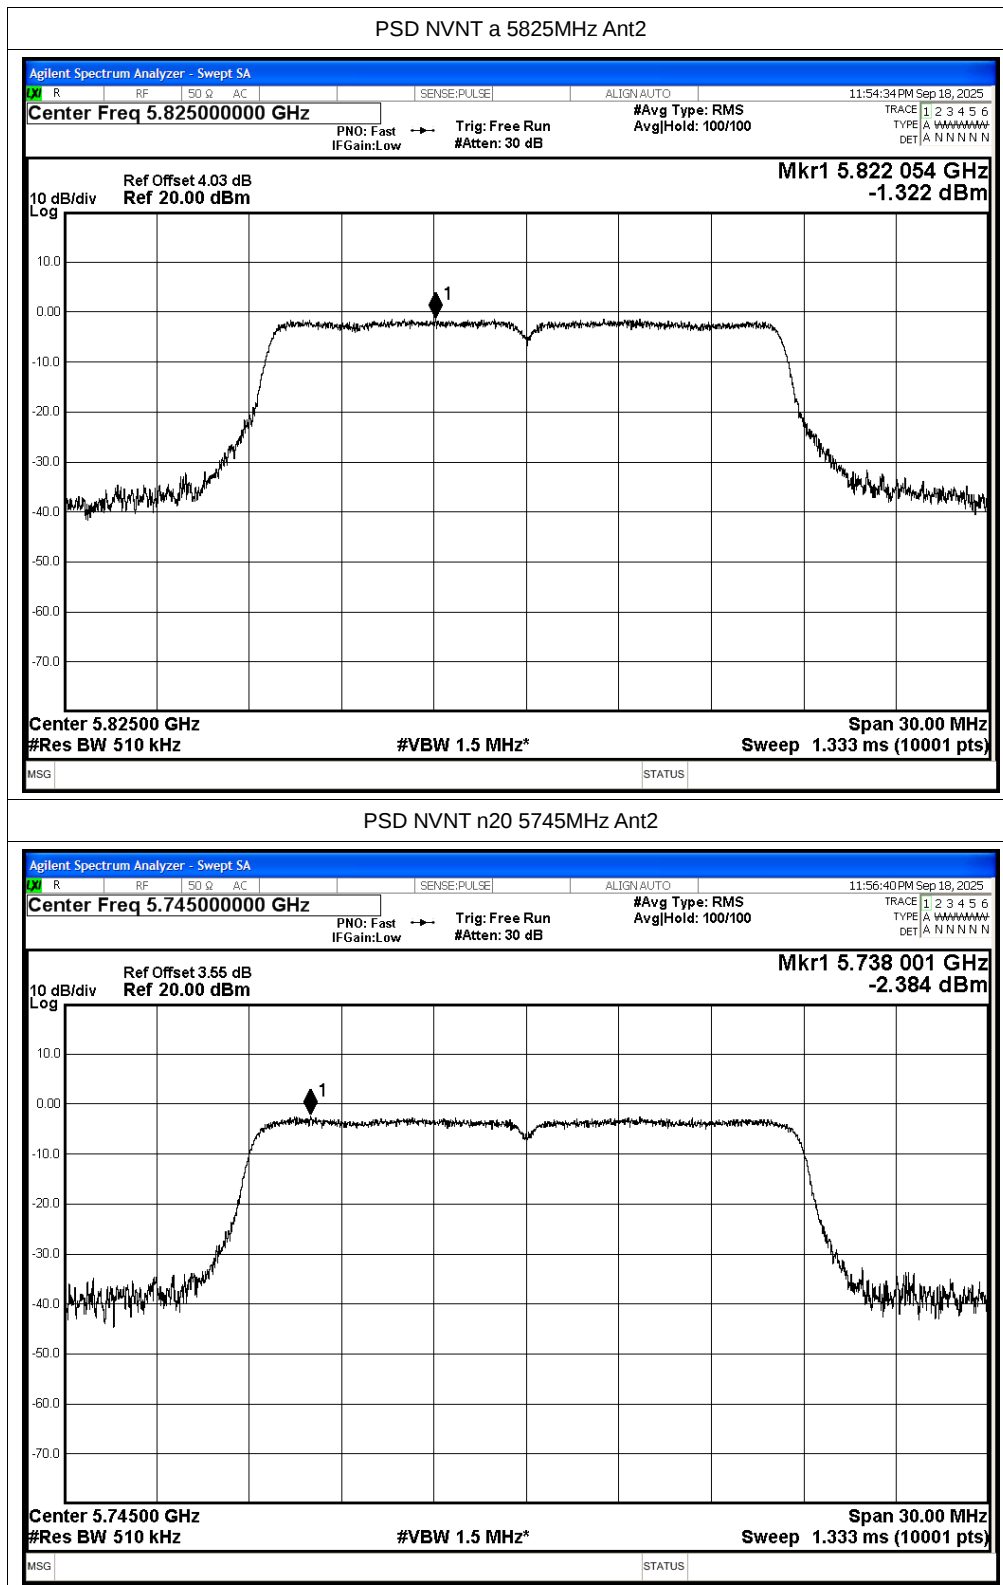

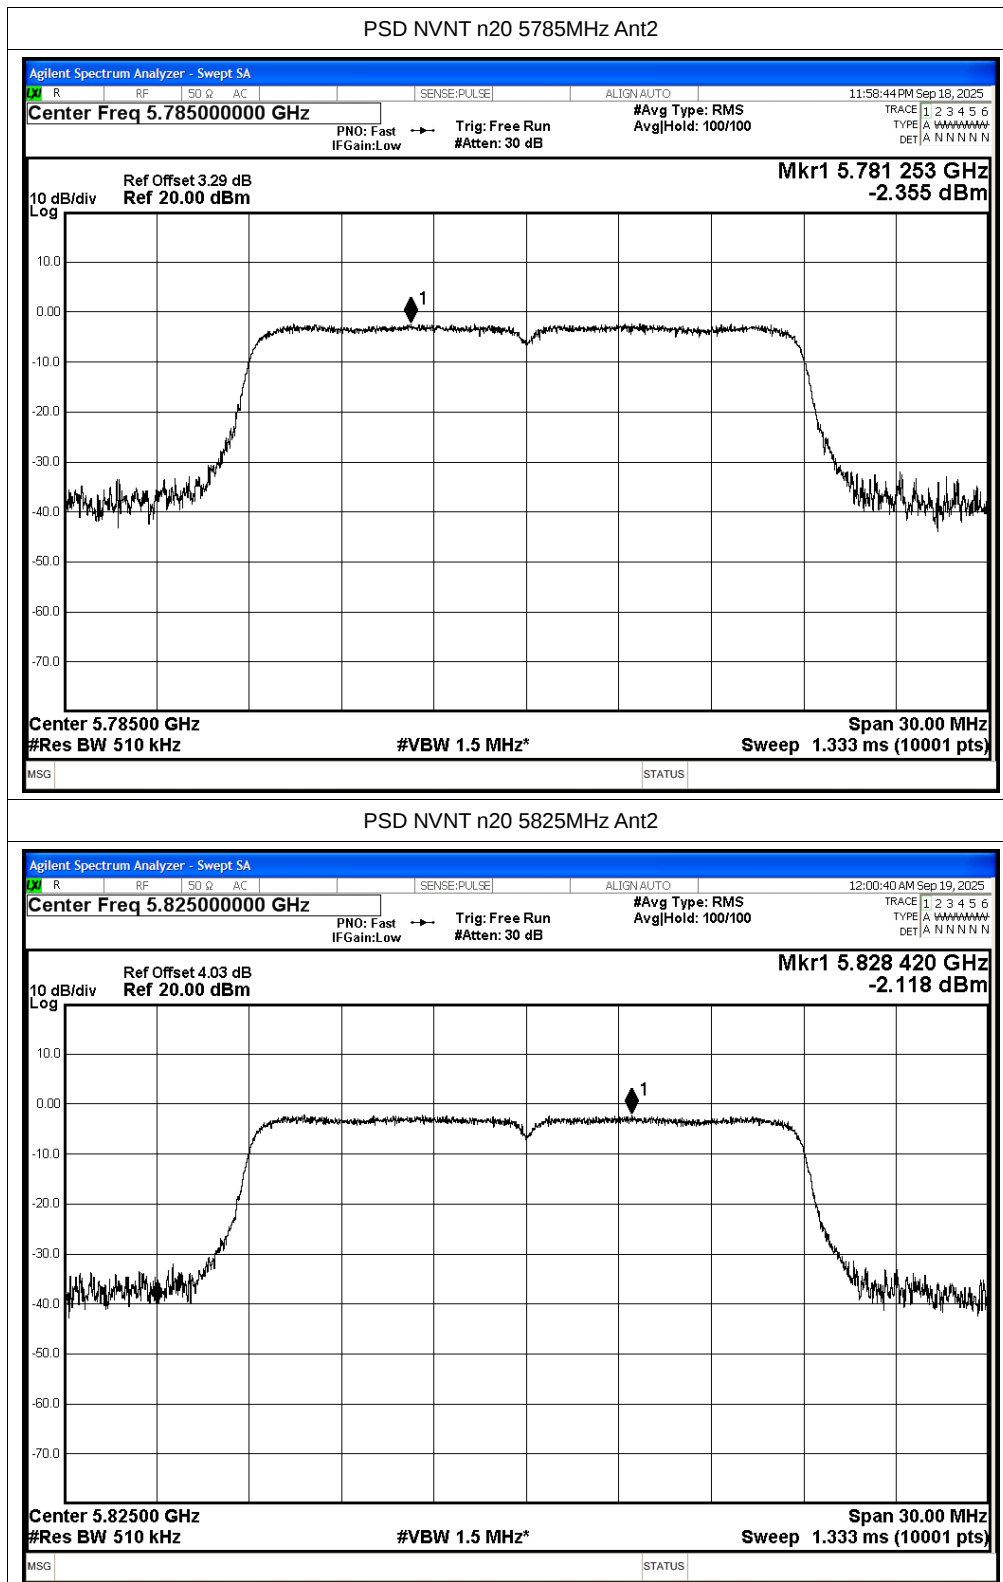


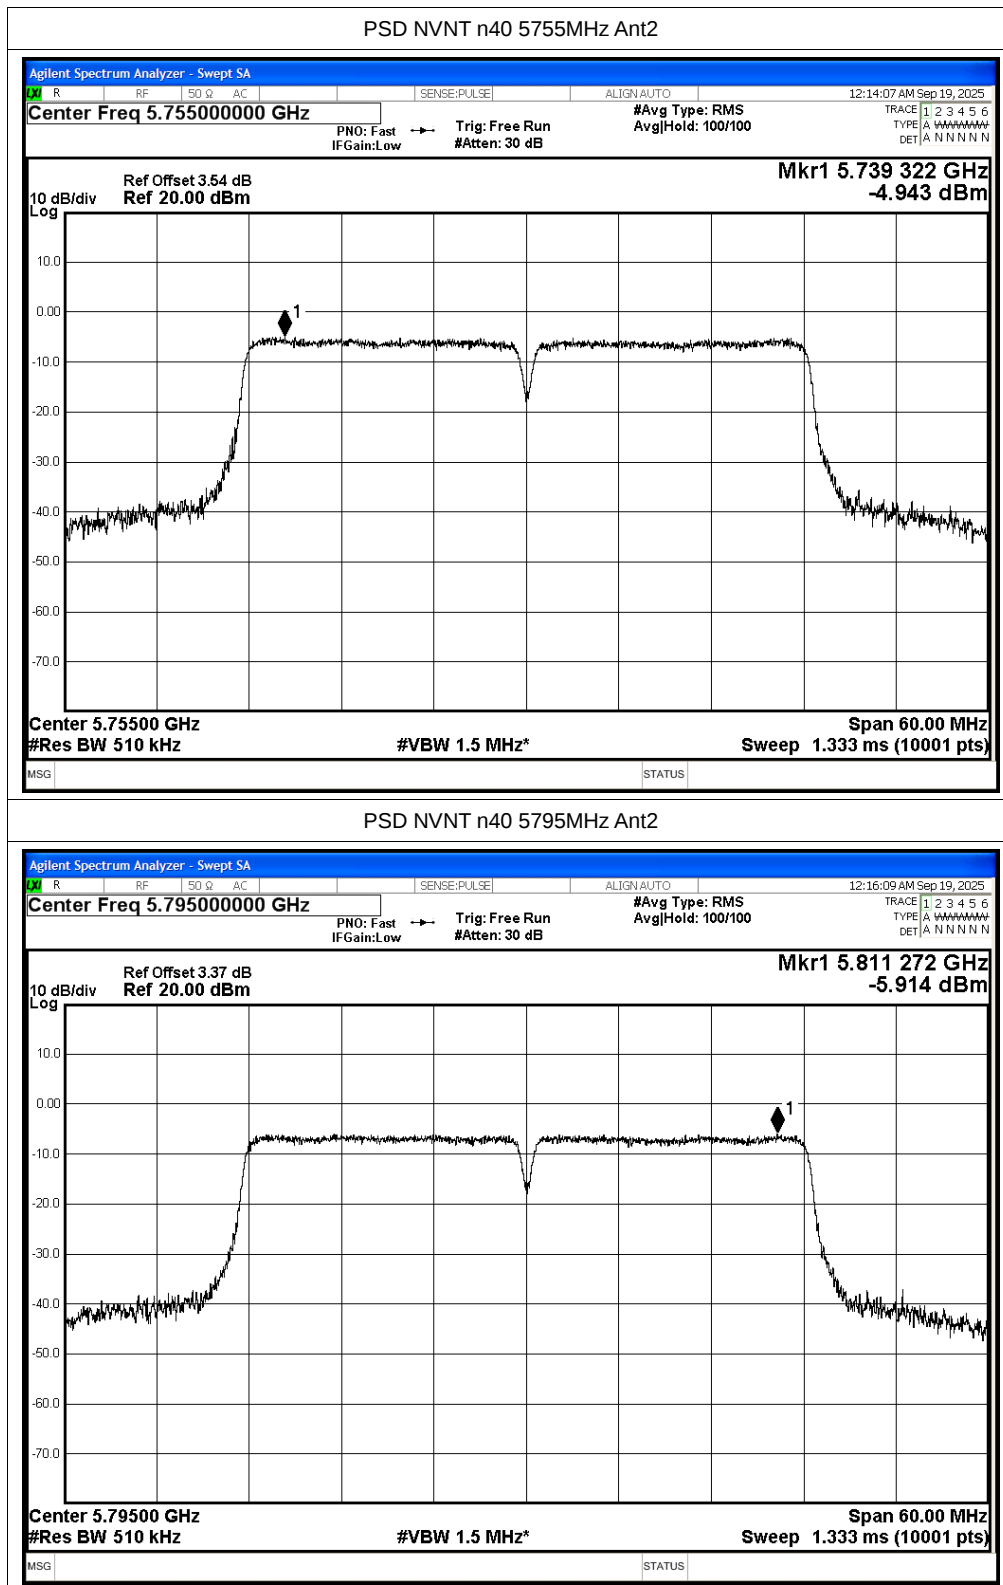



PSD NVNT ac20 5745MHz Ant2

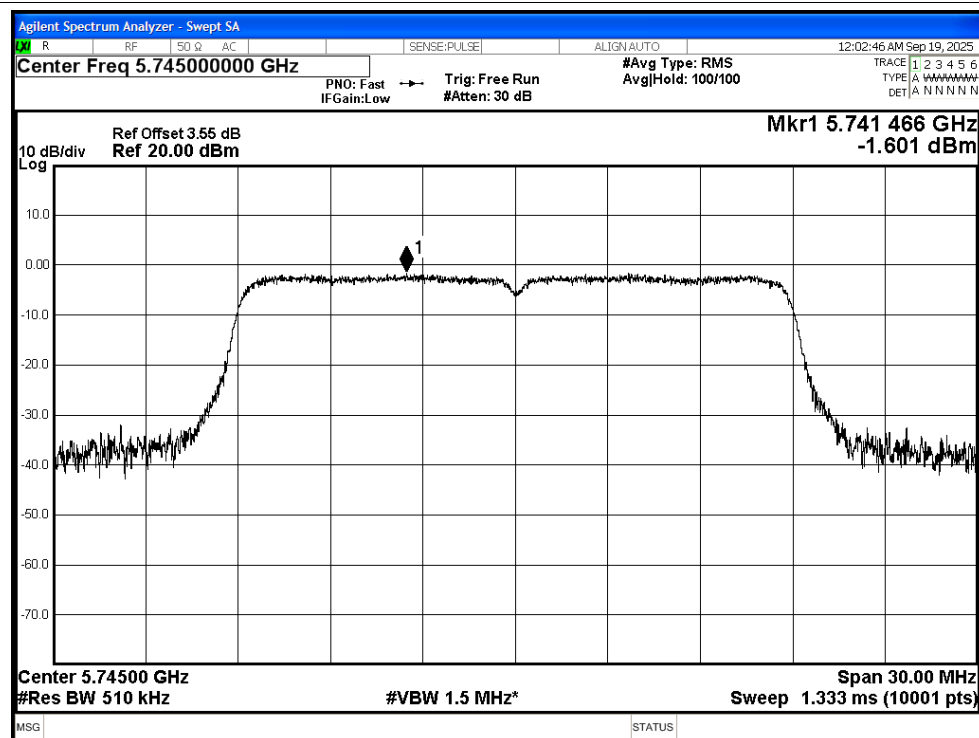


PSD NVNT ac20 5785MHz Ant2

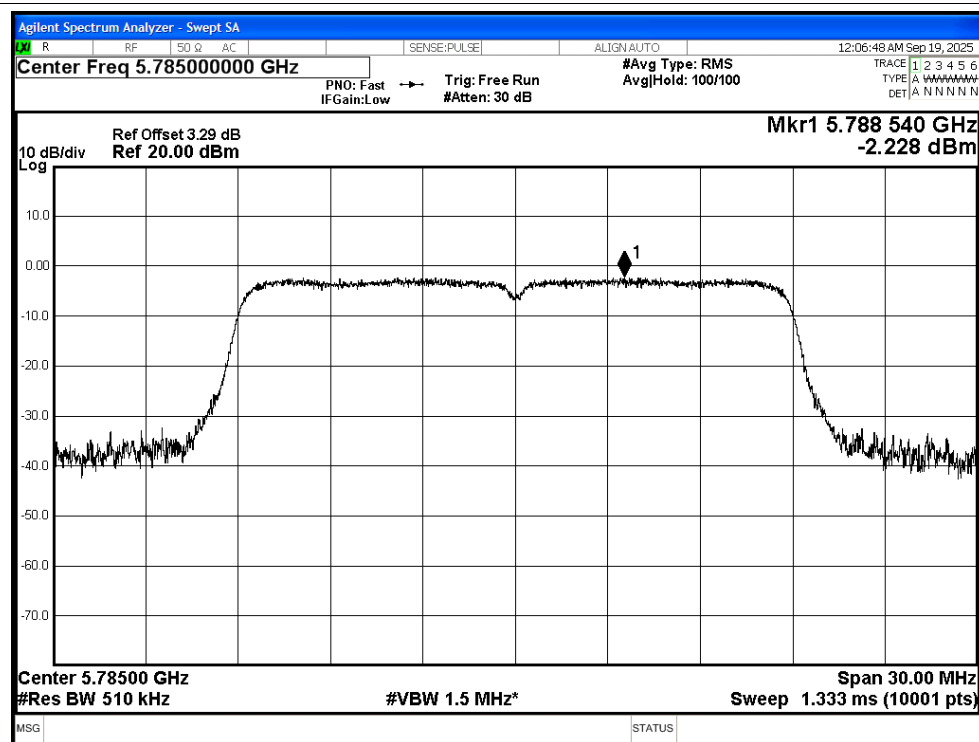


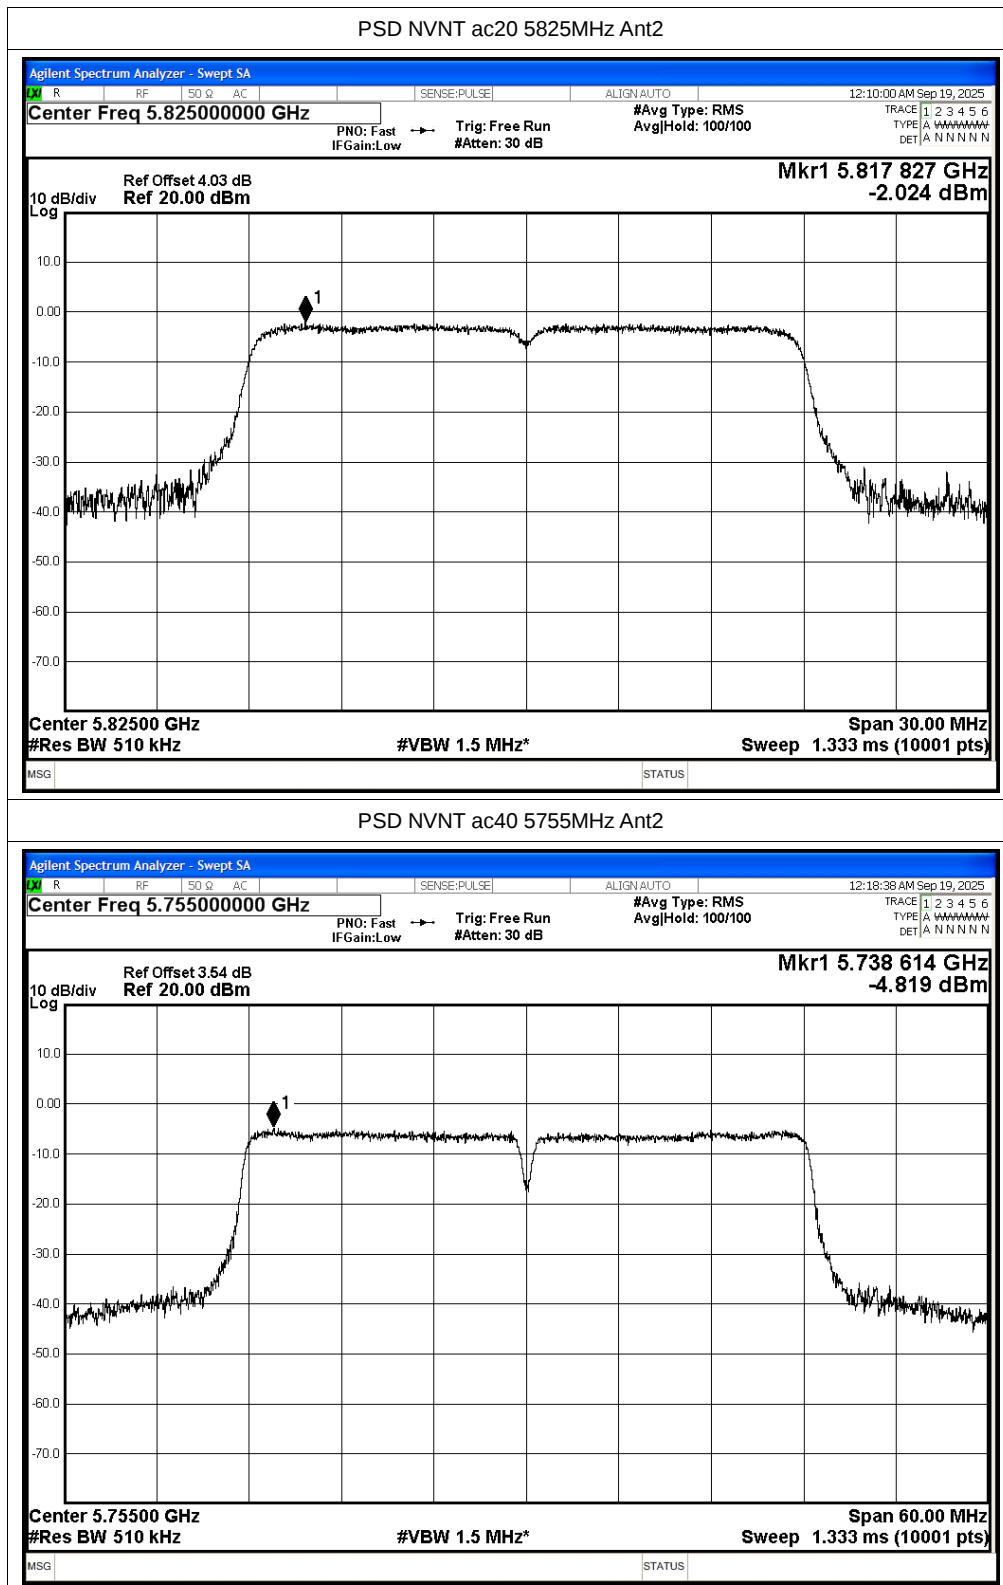

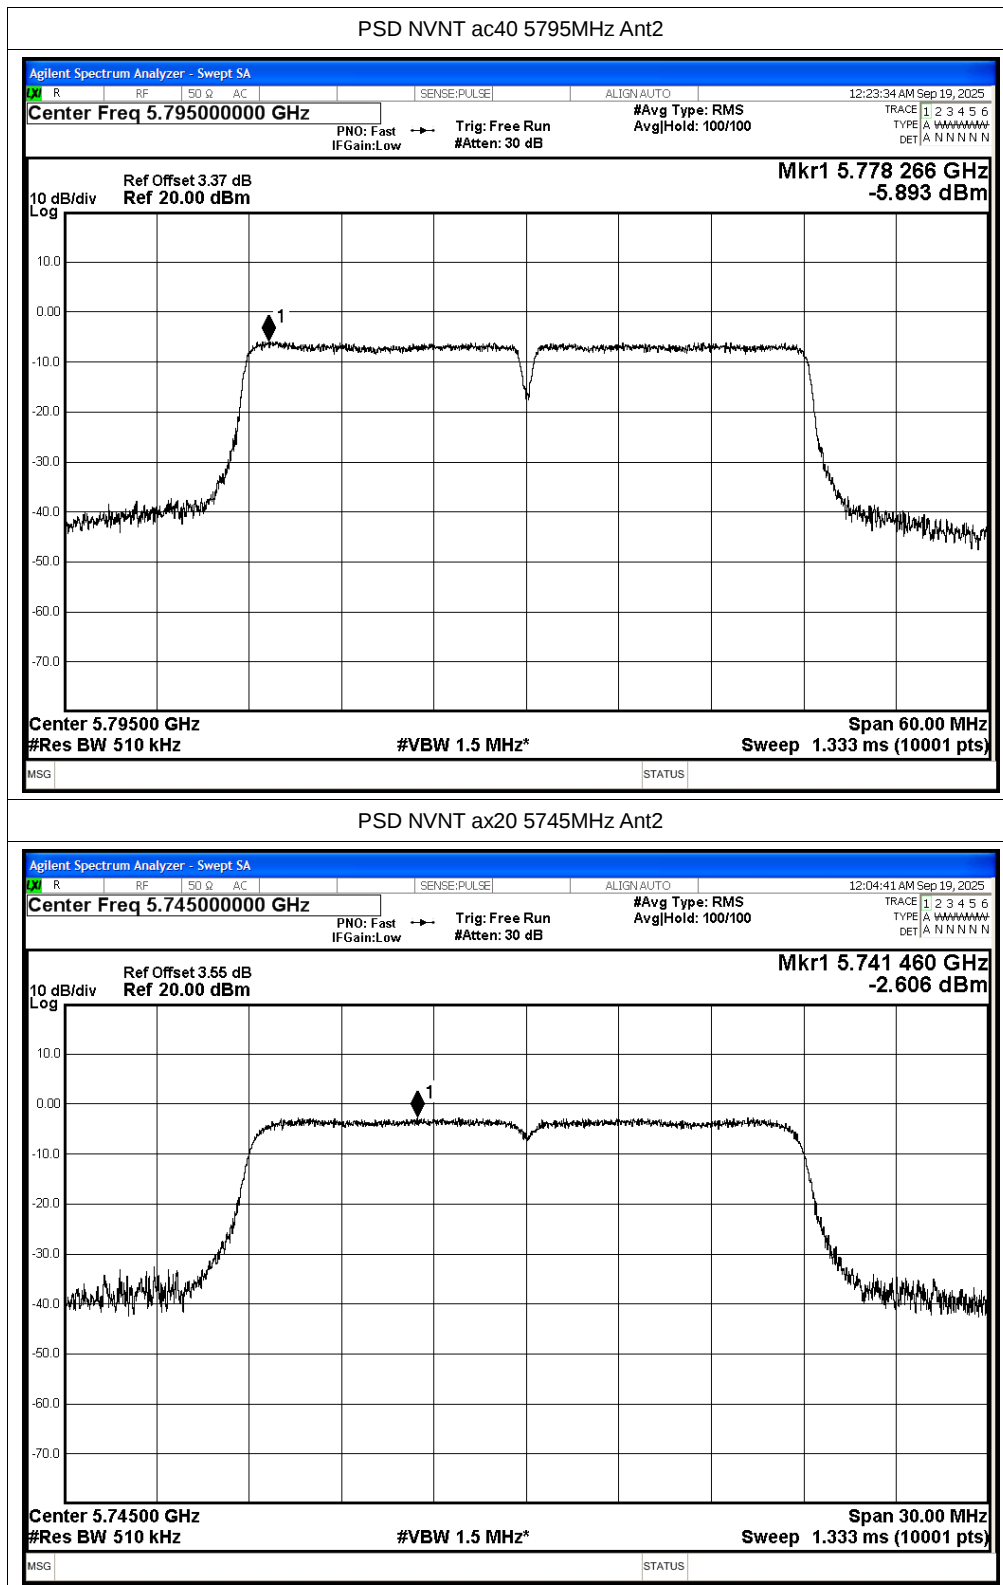


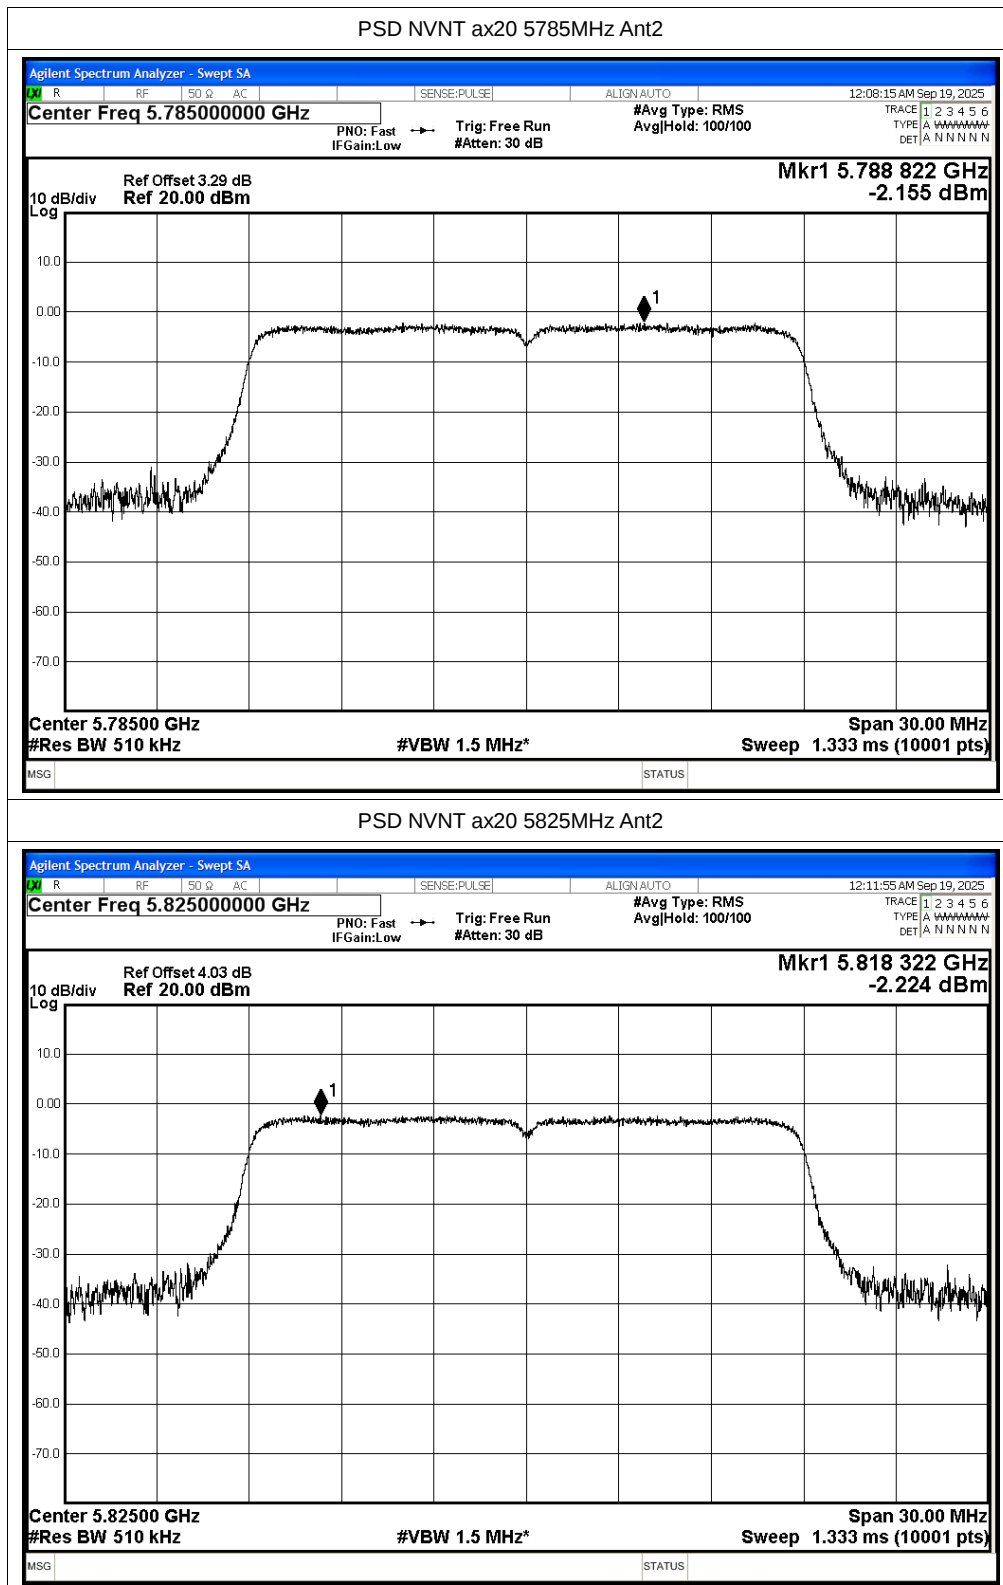

PSD NVNT ax40 5755MHz Ant2

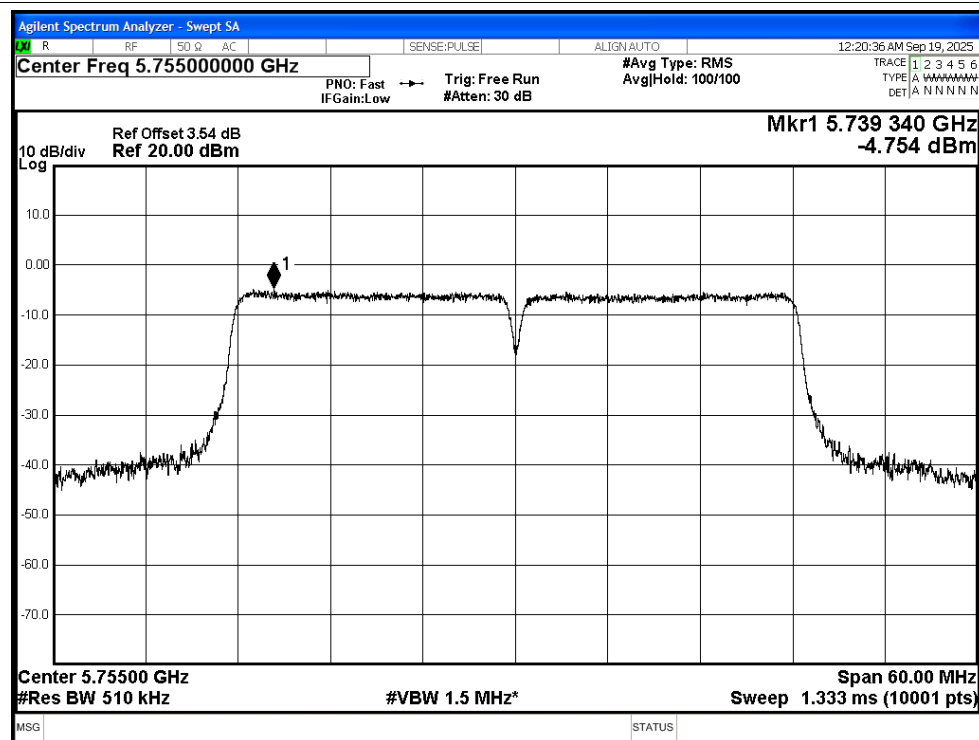

PSD NVNT ax40 5795MHz Ant2

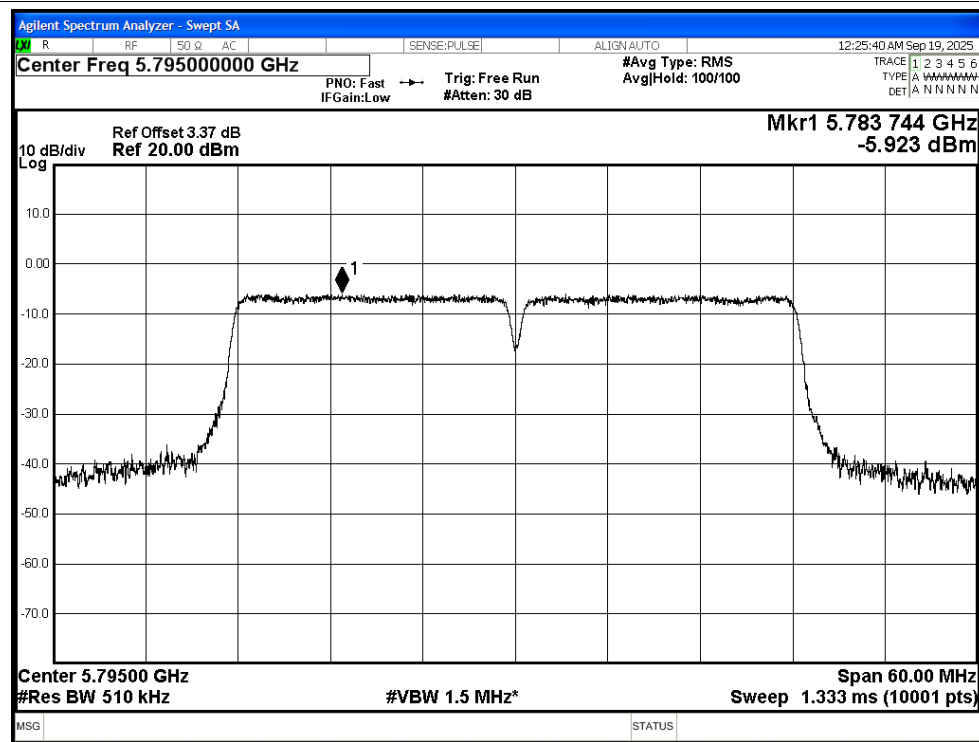

C.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	5650	-48.79	3.86	-	-44.93	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-57.17	3.86	0.24	-53.07	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-46.89	3.86	-	-43.03	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-54.49	3.86	0.24	-50.39	Average	10	Pass
NVNT	a	5745	Ant1	5720	-35.1	3.86	-	-31.24	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-47.52	3.86	0.24	-43.42	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-22.61	3.86	-	-18.75	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-41.45	3.86	0.24	-37.35	Average	27	Pass
NVNT	a	5825	Ant1	5850	-30.89	3.86	-	-27.03	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-48.66	3.86	0.24	-44.56	Average	27	Pass
NVNT	a	5825	Ant1	5855	-41.59	3.86	-	-37.73	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-52.46	3.86	0.24	-48.36	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-45.65	3.86	-	-41.79	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-55.35	3.86	0.24	-51.25	Average	10	Pass
NVNT	a	5825	Ant1	5925	-47.9	3.86	-	-44.04	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-55.52	3.86	0.24	-51.42	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-49.81	3.86	-	-45.95	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-56.97	3.86	0.1	-53.01	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-45.54	3.86	-	-41.68	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-54.57	3.86	0.1	-50.61	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-31.12	3.86	-	-27.26	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-46.26	3.86	0.1	-42.30	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-26.35	3.86	-	-22.49	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-44.55	3.86	0.1	-40.59	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-29.25	3.86	-	-25.39	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-48.88	3.86	0.1	-44.92	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-34.33	3.86	-	-30.47	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-51.9	3.86	0.1	-47.94	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-46.55	3.86	-	-42.69	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-54.95	3.86	0.1	-50.99	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-46.02	3.86	-	-42.16	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-55.53	3.86	0.1	-51.57	Average	-27	Pass
NVNT	n40	5755	Ant1	5650	-49.41	3.86	-	-45.55	Peak	-27	Pass
NVNT	n40	5755	Ant1	5650	-57.24	3.86	0.24	-53.14	Average	-27	Pass
NVNT	n40	5755	Ant1	5700	-43.55	3.86	-	-39.69	Peak	10	Pass
NVNT	n40	5755	Ant1	5700	-52.38	3.86	0.24	-48.28	Average	10	Pass
NVNT	n40	5755	Ant1	5720	-29.59	3.86	-	-25.73	Peak	15.6	Pass
NVNT	n40	5755	Ant1	5720	-42.73	3.86	0.24	-38.63	Average	15.6	Pass

Guangzhou LCS Compliance Testing Laboratory Ltd.

Add: No.44-1,Qianfeng North Road, Shiqi, Panyu District, Guangzhou, City, Guangdong China


Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

NVNT	n40	5755	Ant1	5725	-24.48	3.86	-	-20.62	Peak	27	Pass
NVNT	n40	5755	Ant1	5725	-40.27	3.86	0.24	-36.17	Average	27	Pass
NVNT	n40	5795	Ant1	5850	-47.3	3.86	-	-43.44	Peak	27	Pass
NVNT	n40	5795	Ant1	5850	-55.32	3.86	0.24	-51.22	Average	27	Pass
NVNT	n40	5795	Ant1	5855	-47.96	3.86	-	-44.10	Peak	15.6	Pass
NVNT	n40	5795	Ant1	5855	-55.83	3.86	0.24	-51.73	Average	15.6	Pass
NVNT	n40	5795	Ant1	5875	-49.45	3.86	-	-45.59	Peak	10	Pass
NVNT	n40	5795	Ant1	5875	-57.25	3.86	0.24	-53.15	Average	10	Pass
NVNT	n40	5795	Ant1	5925	-50.56	3.86	-	-46.70	Peak	-27	Pass
NVNT	n40	5795	Ant1	5925	-57.58	3.86	0.24	-53.48	Average	-27	Pass
NVNT	ac20	5745	Ant1	5650	-48.44	3.86	-	-44.58	Peak	-27	Pass
NVNT	ac20	5745	Ant1	5650	-56.9	3.86	0.12	-52.92	Average	-27	Pass
NVNT	ac20	5745	Ant1	5700	-48.52	3.86	-	-44.66	Peak	10	Pass
NVNT	ac20	5745	Ant1	5700	-54.64	3.86	0.12	-50.66	Average	10	Pass
NVNT	ac20	5745	Ant1	5720	-29.17	3.86	-	-25.31	Peak	15.6	Pass
NVNT	ac20	5745	Ant1	5720	-44.05	3.86	0.12	-40.07	Average	15.6	Pass
NVNT	ac20	5745	Ant1	5725	-25.63	3.86	-	-21.77	Peak	27	Pass
NVNT	ac20	5745	Ant1	5725	-39.26	3.86	0.12	-35.28	Average	27	Pass
NVNT	ac20	5825	Ant1	5850	-31.92	3.86	-	-28.06	Peak	27	Pass
NVNT	ac20	5825	Ant1	5850	-46.63	3.86	0.12	-42.65	Average	27	Pass
NVNT	ac20	5825	Ant1	5855	-39.48	3.86	-	-35.62	Peak	15.6	Pass
NVNT	ac20	5825	Ant1	5855	-50.15	3.86	0.12	-46.17	Average	15.6	Pass
NVNT	ac20	5825	Ant1	5875	-46.9	3.86	-	-43.04	Peak	10	Pass
NVNT	ac20	5825	Ant1	5875	-54.87	3.86	0.12	-50.89	Average	10	Pass
NVNT	ac20	5825	Ant1	5925	-48.31	3.86	-	-44.45	Peak	-27	Pass
NVNT	ac20	5825	Ant1	5925	-55.87	3.86	0.12	-51.89	Average	-27	Pass
NVNT	ac40	5755	Ant1	5650	-49.82	3.86	-	-45.96	Peak	-27	Pass
NVNT	ac40	5755	Ant1	5650	-56.86	3.86	0.23	-52.77	Average	-27	Pass
NVNT	ac40	5755	Ant1	5700	-43.63	3.86	-	-39.77	Peak	10	Pass
NVNT	ac40	5755	Ant1	5700	-53.49	3.86	0.23	-49.40	Average	10	Pass
NVNT	ac40	5755	Ant1	5720	-31.41	3.86	-	-27.55	Peak	15.6	Pass
NVNT	ac40	5755	Ant1	5720	-43.02	3.86	0.23	-38.93	Average	15.6	Pass
NVNT	ac40	5755	Ant1	5725	-25.56	3.86	-	-21.70	Peak	27	Pass
NVNT	ac40	5755	Ant1	5725	-39.77	3.86	0.23	-35.68	Average	27	Pass
NVNT	ac40	5795	Ant1	5850	-47.04	3.86	-	-43.18	Peak	27	Pass
NVNT	ac40	5795	Ant1	5850	-54.75	3.86	0.24	-50.65	Average	27	Pass
NVNT	ac40	5795	Ant1	5855	-47.39	3.86	-	-43.53	Peak	15.6	Pass
NVNT	ac40	5795	Ant1	5855	-55.91	3.86	0.24	-51.81	Average	15.6	Pass
NVNT	ac40	5795	Ant1	5875	-49.36	3.86	-	-45.50	Peak	10	Pass
NVNT	ac40	5795	Ant1	5875	-57.2	3.86	0.24	-53.10	Average	10	Pass
NVNT	ac40	5795	Ant1	5925	-48.6	3.86	-	-44.74	Peak	-27	Pass
NVNT	ac40	5795	Ant1	5925	-57.7	3.86	0.24	-53.60	Average	-27	Pass


NVNT	ax20	5745	Ant1	5650	-48.16	3.86	-	-44.30	Peak	-27	Pass
NVNT	ax20	5745	Ant1	5650	-56.65	3.86	0.12	-52.67	Average	-27	Pass
NVNT	ax20	5745	Ant1	5700	-46.06	3.86	-	-42.20	Peak	10	Pass
NVNT	ax20	5745	Ant1	5700	-54.95	3.86	0.12	-50.97	Average	10	Pass
NVNT	ax20	5745	Ant1	5720	-28.94	3.86	-	-25.08	Peak	15.6	Pass
NVNT	ax20	5745	Ant1	5720	-43.26	3.86	0.12	-39.28	Average	15.6	Pass
NVNT	ax20	5745	Ant1	5725	-25.49	3.86	-	-21.63	Peak	27	Pass
NVNT	ax20	5745	Ant1	5725	-40.56	3.86	0.12	-36.58	Average	27	Pass
NVNT	ax20	5825	Ant1	5850	-28.87	3.86	-	-25.01	Peak	27	Pass
NVNT	ax20	5825	Ant1	5850	-46.87	3.86	0.12	-42.89	Average	27	Pass
NVNT	ax20	5825	Ant1	5855	-39.02	3.86	-	-35.16	Peak	15.6	Pass
NVNT	ax20	5825	Ant1	5855	-51.1	3.86	0.12	-47.12	Average	15.6	Pass
NVNT	ax20	5825	Ant1	5875	-47.26	3.86	-	-43.40	Peak	10	Pass
NVNT	ax20	5825	Ant1	5875	-55.36	3.86	0.12	-51.38	Average	10	Pass
NVNT	ax20	5825	Ant1	5925	-48.14	3.86	-	-44.28	Peak	-27	Pass
NVNT	ax20	5825	Ant1	5925	-56.21	3.86	0.12	-52.23	Average	-27	Pass
NVNT	ax40	5755	Ant1	5650	-49.1	3.86	-	-45.24	Peak	-27	Pass
NVNT	ax40	5755	Ant1	5650	-56.88	3.86	0.24	-52.78	Average	-27	Pass
NVNT	ax40	5755	Ant1	5700	-45.1	3.86	-	-41.24	Peak	10	Pass
NVNT	ax40	5755	Ant1	5700	-53.13	3.86	0.24	-49.03	Average	10	Pass
NVNT	ax40	5755	Ant1	5720	-31.35	3.86	-	-27.49	Peak	15.6	Pass
NVNT	ax40	5755	Ant1	5720	-42.42	3.86	0.24	-38.32	Average	15.6	Pass
NVNT	ax40	5755	Ant1	5725	-24.9	3.86	-	-21.04	Peak	27	Pass
NVNT	ax40	5755	Ant1	5725	-41.09	3.86	0.24	-36.99	Average	27	Pass
NVNT	ax40	5795	Ant1	5850	-47.56	3.86	-	-43.70	Peak	27	Pass
NVNT	ax40	5795	Ant1	5850	-55.62	3.86	0.23	-51.53	Average	27	Pass
NVNT	ax40	5795	Ant1	5855	-47.47	3.86	-	-43.61	Peak	15.6	Pass
NVNT	ax40	5795	Ant1	5855	-55.21	3.86	0.23	-51.12	Average	15.6	Pass
NVNT	ax40	5795	Ant1	5875	-49.36	3.86	-	-45.50	Peak	10	Pass
NVNT	ax40	5795	Ant1	5875	-57.4	3.86	0.23	-53.31	Average	10	Pass
NVNT	ax40	5795	Ant1	5925	-47.95	3.86	-	-44.09	Peak	-27	Pass
NVNT	ax40	5795	Ant1	5925	-57.05	3.86	0.23	-52.96	Average	-27	Pass

Test Graphs


Restrict Band NVNT a 5745MHz Ant1 Peak

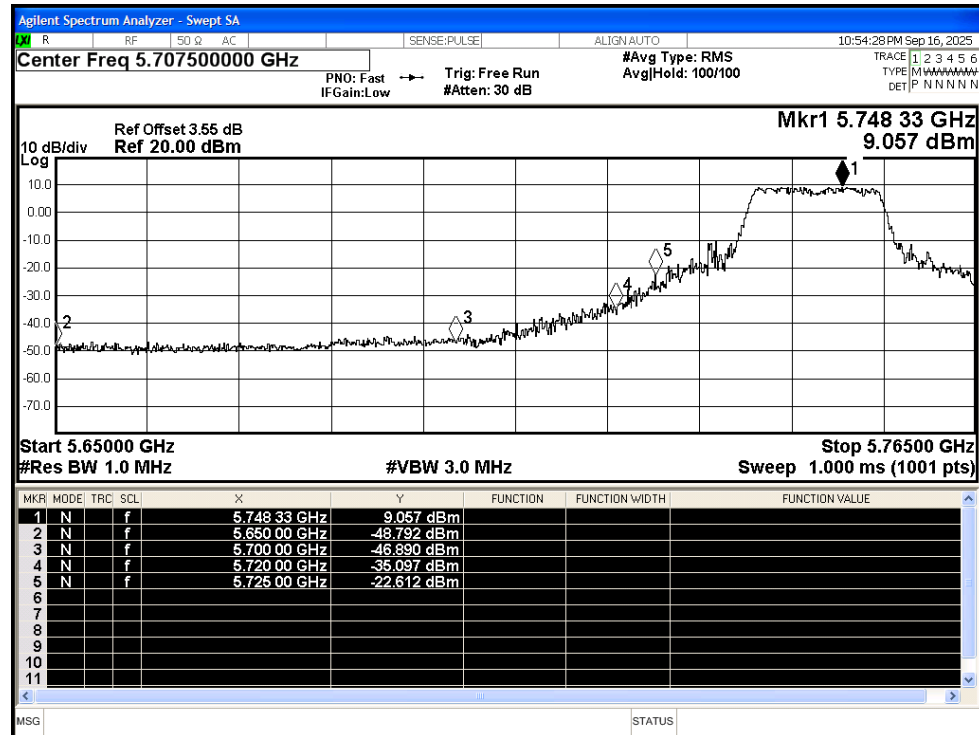


Restrict Band NVNT a 5745MHz Ant1 Average

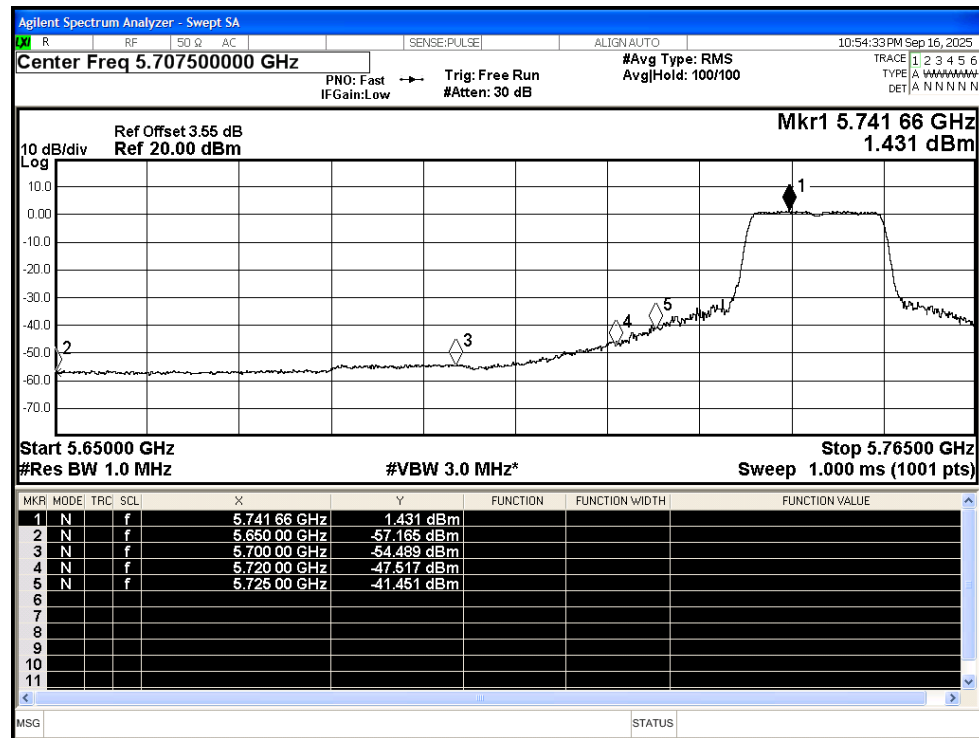

Restrict Band NVNT ac20 5825MHz Ant1 Peak

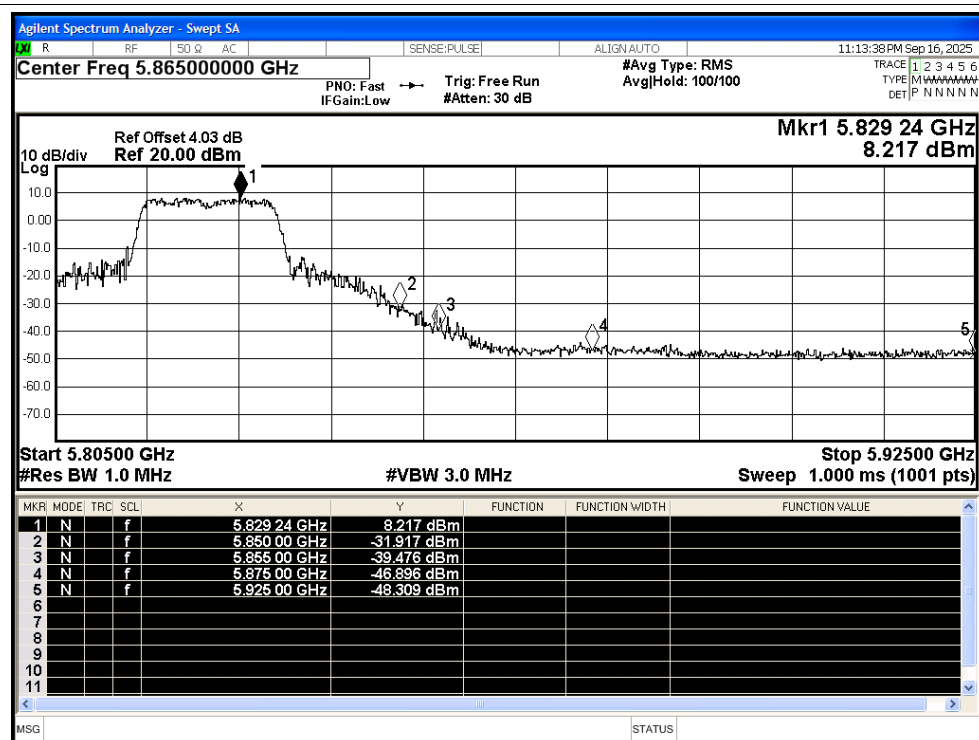

Restrict Band NVNT ac20 5825MHz Ant1 Average

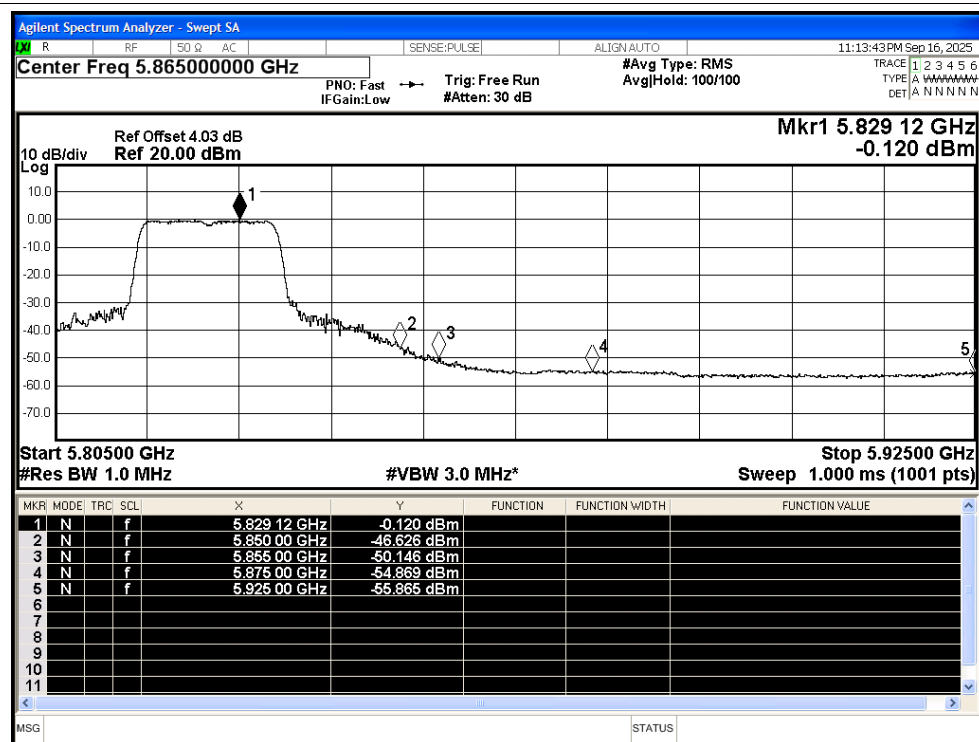


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	5650	-49.63	3.5	-	-46.13	Peak	-27	Pass
NVNT	a	5745	Ant2	5650	-57.26	3.5	0.24	-53.52	Average	-27	Pass
NVNT	a	5745	Ant2	5700	-45.35	3.5	-	-41.85	Peak	10	Pass
NVNT	a	5745	Ant2	5700	-54.59	3.5	0.24	-50.85	Average	10	Pass
NVNT	a	5745	Ant2	5720	-34.1	3.5	-	-30.60	Peak	15.6	Pass
NVNT	a	5745	Ant2	5720	-46.5	3.5	0.24	-42.76	Average	15.6	Pass
NVNT	a	5745	Ant2	5725	-30.1	3.5	-	-26.60	Peak	27	Pass
NVNT	a	5745	Ant2	5725	-40.67	3.5	0.24	-36.93	Average	27	Pass
NVNT	a	5825	Ant2	5850	-35.12	3.5	-	-31.62	Peak	27	Pass
NVNT	a	5825	Ant2	5850	-48.86	3.5	0.24	-45.12	Average	27	Pass
NVNT	a	5825	Ant2	5855	-41.31	3.5	-	-37.81	Peak	15.6	Pass
NVNT	a	5825	Ant2	5855	-51.97	3.5	0.24	-48.23	Average	15.6	Pass
NVNT	a	5825	Ant2	5875	-47.24	3.5	-	-43.74	Peak	10	Pass
NVNT	a	5825	Ant2	5875	-54.72	3.5	0.24	-50.98	Average	10	Pass
NVNT	a	5825	Ant2	5925	-46.9	3.5	-	-43.40	Peak	-27	Pass
NVNT	a	5825	Ant2	5925	-55.58	3.5	0.24	-51.84	Average	-27	Pass
NVNT	n20	5745	Ant2	5650	-48.6	3.5	-	-45.10	Peak	-27	Pass
NVNT	n20	5745	Ant2	5650	-56.99	3.5	0.12	-53.37	Average	-27	Pass
NVNT	n20	5745	Ant2	5700	-46.78	3.5	-	-43.28	Peak	10	Pass
NVNT	n20	5745	Ant2	5700	-55.1	3.5	0.12	-51.48	Average	10	Pass
NVNT	n20	5745	Ant2	5720	-31.63	3.5	-	-28.13	Peak	15.6	Pass
NVNT	n20	5745	Ant2	5720	-45.91	3.5	0.12	-42.29	Average	15.6	Pass
NVNT	n20	5745	Ant2	5725	-20.17	3.5	-	-16.67	Peak	27	Pass
NVNT	n20	5745	Ant2	5725	-40.05	3.5	0.12	-36.43	Average	27	Pass
NVNT	n20	5825	Ant2	5850	-31.01	3.5	-	-27.51	Peak	27	Pass
NVNT	n20	5825	Ant2	5850	-44.61	3.5	0.12	-40.99	Average	27	Pass
NVNT	n20	5825	Ant2	5855	-38.27	3.5	-	-34.77	Peak	15.6	Pass
NVNT	n20	5825	Ant2	5855	-50.71	3.5	0.12	-47.09	Average	15.6	Pass
NVNT	n20	5825	Ant2	5875	-46.81	3.5	-	-43.31	Peak	10	Pass
NVNT	n20	5825	Ant2	5875	-55.24	3.5	0.12	-51.62	Average	10	Pass
NVNT	n20	5825	Ant2	5925	-47.16	3.5	-	-43.66	Peak	-27	Pass
NVNT	n20	5825	Ant2	5925	-55.95	3.5	0.12	-52.33	Average	-27	Pass
NVNT	n40	5755	Ant2	5650	-48.11	3.5	-	-44.61	Peak	-27	Pass
NVNT	n40	5755	Ant2	5650	-56.61	3.5	0.24	-52.87	Average	-27	Pass
NVNT	n40	5755	Ant2	5700	-45.49	3.5	-	-41.99	Peak	10	Pass
NVNT	n40	5755	Ant2	5700	-53.41	3.5	0.24	-49.67	Average	10	Pass
NVNT	n40	5755	Ant2	5720	-30.01	3.5	-	-26.51	Peak	15.6	Pass
NVNT	n40	5755	Ant2	5720	-42.15	3.5	0.24	-38.41	Average	15.6	Pass

NVNT	n40	5755	Ant2	5725	-27.59	3.5	-	-24.09	Peak	27	Pass
NVNT	n40	5755	Ant2	5725	-40.11	3.5	0.24	-36.37	Average	27	Pass
NVNT	n40	5795	Ant2	5850	-48.18	3.5	-	-44.68	Peak	27	Pass
NVNT	n40	5795	Ant2	5850	-54.99	3.5	0.24	-51.25	Average	27	Pass
NVNT	n40	5795	Ant2	5855	-47.48	3.5	-	-43.98	Peak	15.6	Pass
NVNT	n40	5795	Ant2	5855	-55.43	3.5	0.24	-51.69	Average	15.6	Pass
NVNT	n40	5795	Ant2	5875	-49.41	3.5	-	-45.91	Peak	10	Pass
NVNT	n40	5795	Ant2	5875	-57.18	3.5	0.24	-53.44	Average	10	Pass
NVNT	n40	5795	Ant2	5925	-50.29	3.5	-	-46.79	Peak	-27	Pass
NVNT	n40	5795	Ant2	5925	-57.19	3.5	0.24	-53.45	Average	-27	Pass
NVNT	ac20	5745	Ant2	5650	-49.47	3.5	-	-45.97	Peak	-27	Pass
NVNT	ac20	5745	Ant2	5650	-56.19	3.5	0.12	-52.57	Average	-27	Pass
NVNT	ac20	5745	Ant2	5700	-46.75	3.5	-	-43.25	Peak	10	Pass
NVNT	ac20	5745	Ant2	5700	-54.9	3.5	0.12	-51.28	Average	10	Pass
NVNT	ac20	5745	Ant2	5720	-31.3	3.5	-	-27.80	Peak	15.6	Pass
NVNT	ac20	5745	Ant2	5720	-43.32	3.5	0.12	-39.70	Average	15.6	Pass
NVNT	ac20	5745	Ant2	5725	-25.44	3.5	-	-21.94	Peak	27	Pass
NVNT	ac20	5745	Ant2	5725	-35.88	3.5	0.12	-32.26	Average	27	Pass
NVNT	ac20	5825	Ant2	5850	-28.37	3.5	-	-24.87	Peak	27	Pass
NVNT	ac20	5825	Ant2	5850	-45.72	3.5	0.12	-42.10	Average	27	Pass
NVNT	ac20	5825	Ant2	5855	-36.1	3.5	-	-32.60	Peak	15.6	Pass
NVNT	ac20	5825	Ant2	5855	-50.02	3.5	0.12	-46.40	Average	15.6	Pass
NVNT	ac20	5825	Ant2	5875	-47.76	3.5	-	-44.26	Peak	10	Pass
NVNT	ac20	5825	Ant2	5875	-55.25	3.5	0.12	-51.63	Average	10	Pass
NVNT	ac20	5825	Ant2	5925	-46.92	3.5	-	-43.42	Peak	-27	Pass
NVNT	ac20	5825	Ant2	5925	-55.85	3.5	0.12	-52.23	Average	-27	Pass
NVNT	ac40	5755	Ant2	5650	-50.08	3.5	-	-46.58	Peak	-27	Pass
NVNT	ac40	5755	Ant2	5650	-56.43	3.5	0.24	-52.69	Average	-27	Pass
NVNT	ac40	5755	Ant2	5700	-43.11	3.5	-	-39.61	Peak	10	Pass
NVNT	ac40	5755	Ant2	5700	-52.61	3.5	0.24	-48.87	Average	10	Pass
NVNT	ac40	5755	Ant2	5720	-28.88	3.5	-	-25.38	Peak	15.6	Pass
NVNT	ac40	5755	Ant2	5720	-43.9	3.5	0.24	-40.16	Average	15.6	Pass
NVNT	ac40	5755	Ant2	5725	-24.74	3.5	-	-21.24	Peak	27	Pass
NVNT	ac40	5755	Ant2	5725	-39.08	3.5	0.24	-35.34	Average	27	Pass
NVNT	ac40	5795	Ant2	5850	-46.54	3.5	-	-43.04	Peak	27	Pass
NVNT	ac40	5795	Ant2	5850	-55.67	3.5	0.24	-51.93	Average	27	Pass
NVNT	ac40	5795	Ant2	5855	-47.33	3.5	-	-43.83	Peak	15.6	Pass
NVNT	ac40	5795	Ant2	5855	-55.51	3.5	0.24	-51.77	Average	15.6	Pass
NVNT	ac40	5795	Ant2	5875	-48.35	3.5	-	-44.85	Peak	10	Pass
NVNT	ac40	5795	Ant2	5875	-57.08	3.5	0.24	-53.34	Average	10	Pass
NVNT	ac40	5795	Ant2	5925	-49.66	3.5	-	-46.16	Peak	-27	Pass
NVNT	ac40	5795	Ant2	5925	-57.21	3.5	0.24	-53.47	Average	-27	Pass


NVNT	ax20	5745	Ant2	5650	-47.84	3.5	-	-44.34	Peak	-27	Pass
NVNT	ax20	5745	Ant2	5650	-56.76	3.5	0.12	-53.14	Average	-27	Pass
NVNT	ax20	5745	Ant2	5700	-46.65	3.5	-	-43.15	Peak	10	Pass
NVNT	ax20	5745	Ant2	5700	-55.02	3.5	0.12	-51.40	Average	10	Pass
NVNT	ax20	5745	Ant2	5720	-30.72	3.5	-	-27.22	Peak	15.6	Pass
NVNT	ax20	5745	Ant2	5720	-44.91	3.5	0.12	-41.29	Average	15.6	Pass
NVNT	ax20	5745	Ant2	5725	-22.8	3.5	-	-19.30	Peak	27	Pass
NVNT	ax20	5745	Ant2	5725	-40.96	3.5	0.12	-37.34	Average	27	Pass
NVNT	ax20	5825	Ant2	5850	-31.37	3.5	-	-27.87	Peak	27	Pass
NVNT	ax20	5825	Ant2	5850	-45.96	3.5	0.12	-42.34	Average	27	Pass
NVNT	ax20	5825	Ant2	5855	-38.39	3.5	-	-34.89	Peak	15.6	Pass
NVNT	ax20	5825	Ant2	5855	-49.04	3.5	0.12	-45.42	Average	15.6	Pass
NVNT	ax20	5825	Ant2	5875	-48.23	3.5	-	-44.73	Peak	10	Pass
NVNT	ax20	5825	Ant2	5875	-54.82	3.5	0.12	-51.20	Average	10	Pass
NVNT	ax20	5825	Ant2	5925	-47.79	3.5	-	-44.29	Peak	-27	Pass
NVNT	ax20	5825	Ant2	5925	-55.72	3.5	0.12	-52.10	Average	-27	Pass
NVNT	ax40	5755	Ant2	5650	-47.81	3.5	-	-44.31	Peak	-27	Pass
NVNT	ax40	5755	Ant2	5650	-56.87	3.5	0.23	-53.14	Average	-27	Pass
NVNT	ax40	5755	Ant2	5700	-43.74	3.5	-	-40.24	Peak	10	Pass
NVNT	ax40	5755	Ant2	5700	-53.18	3.5	0.23	-49.45	Average	10	Pass
NVNT	ax40	5755	Ant2	5720	-28.94	3.5	-	-25.44	Peak	15.6	Pass
NVNT	ax40	5755	Ant2	5720	-42.1	3.5	0.23	-38.37	Average	15.6	Pass
NVNT	ax40	5755	Ant2	5725	-25.73	3.5	-	-22.23	Peak	27	Pass
NVNT	ax40	5755	Ant2	5725	-37.73	3.5	0.23	-34.00	Average	27	Pass
NVNT	ax40	5795	Ant2	5850	-46.34	3.5	-	-42.84	Peak	27	Pass
NVNT	ax40	5795	Ant2	5850	-55.61	3.5	0.23	-51.88	Average	27	Pass
NVNT	ax40	5795	Ant2	5855	-46.54	3.5	-	-43.04	Peak	15.6	Pass
NVNT	ax40	5795	Ant2	5855	-55.86	3.5	0.23	-52.13	Average	15.6	Pass
NVNT	ax40	5795	Ant2	5875	-48.86	3.5	-	-45.36	Peak	10	Pass
NVNT	ax40	5795	Ant2	5875	-57.04	3.5	0.23	-53.31	Average	10	Pass
NVNT	ax40	5795	Ant2	5925	-49.16	3.5	-	-45.66	Peak	-27	Pass
NVNT	ax40	5795	Ant2	5925	-56.86	3.5	0.23	-53.13	Average	-27	Pass

Test Graphs


Restrict Band NVNT a 5745MHz Ant2 Peak

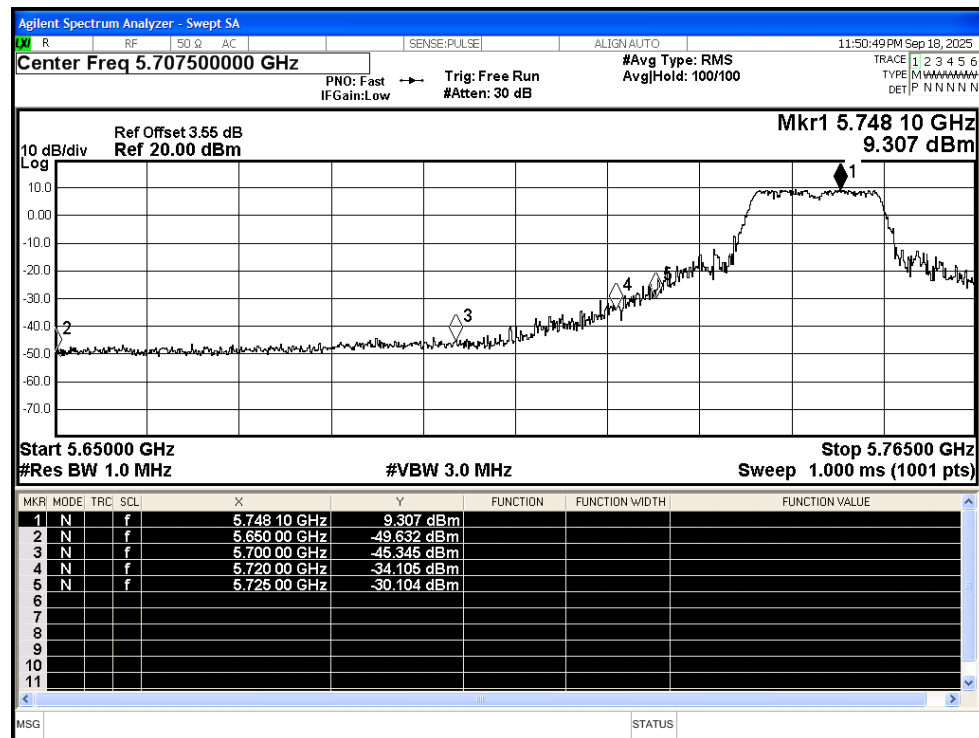


Restrict Band NVNT a 5745MHz Ant2 Average

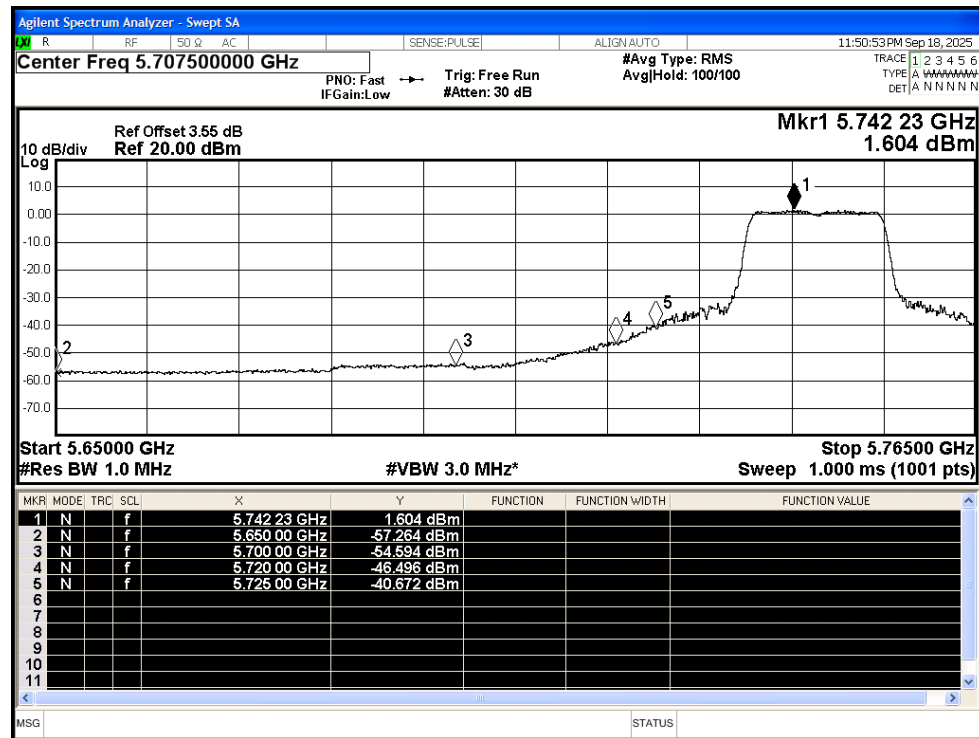


Restrict Band NVNT ac20 5745MHz Ant2 Peak

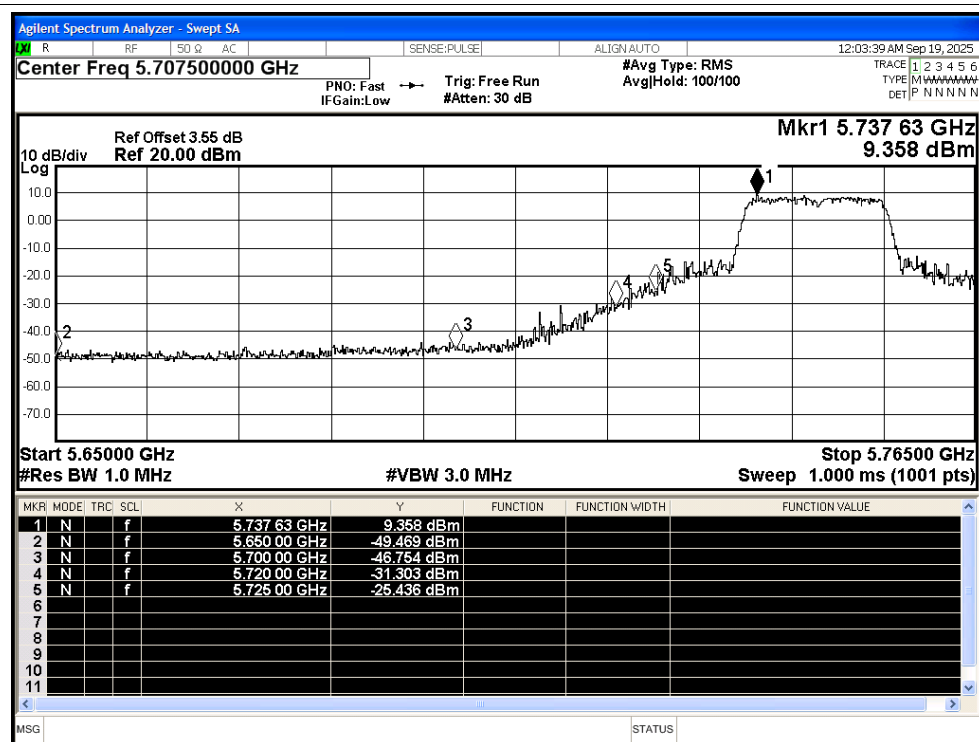


Restrict Band NVNT ac20 5745MHz Ant2 Average

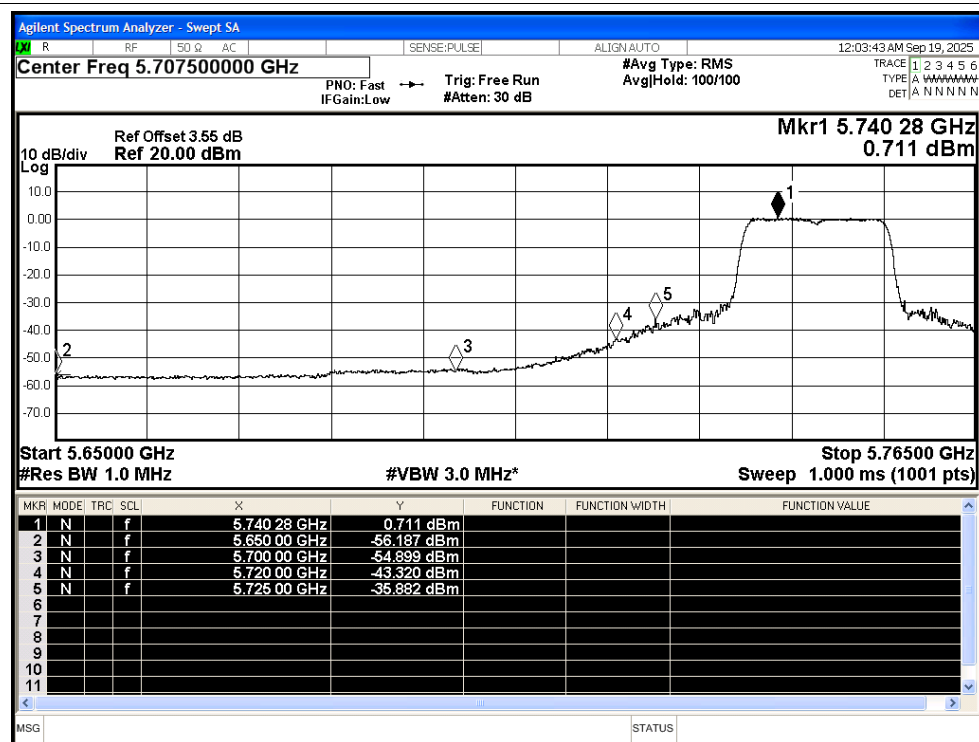


Restrict Band NVNT ac20 5825MHz Ant2 Peak

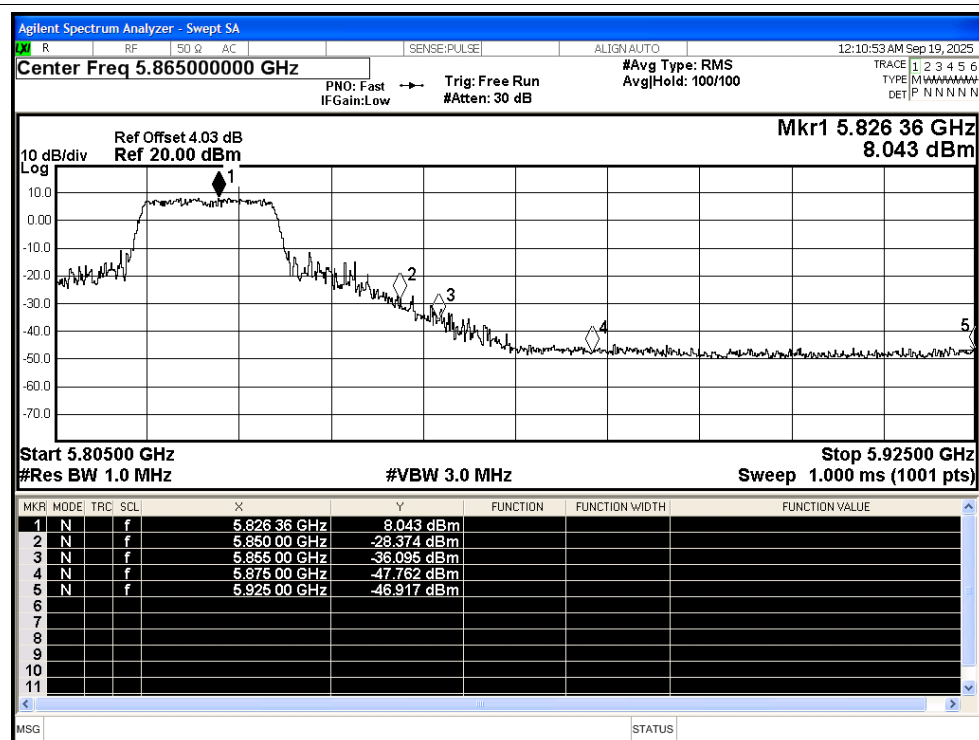


Restrict Band NVNT ac20 5825MHz Ant2 Average

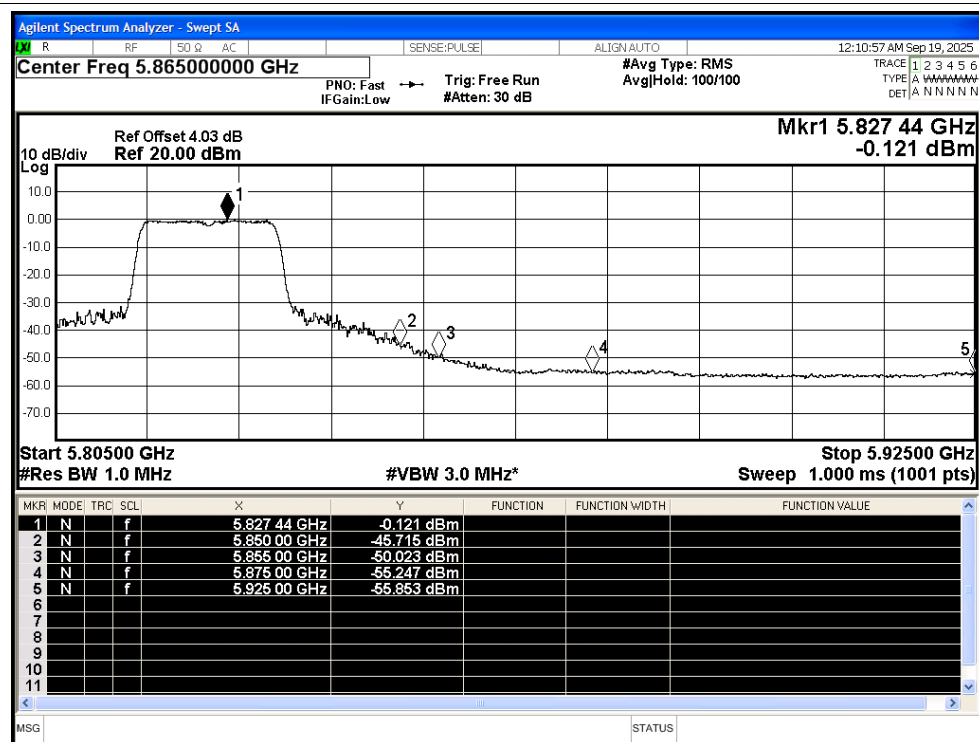

Restrict Band NVNT ax20 5825MHz Ant2 Peak

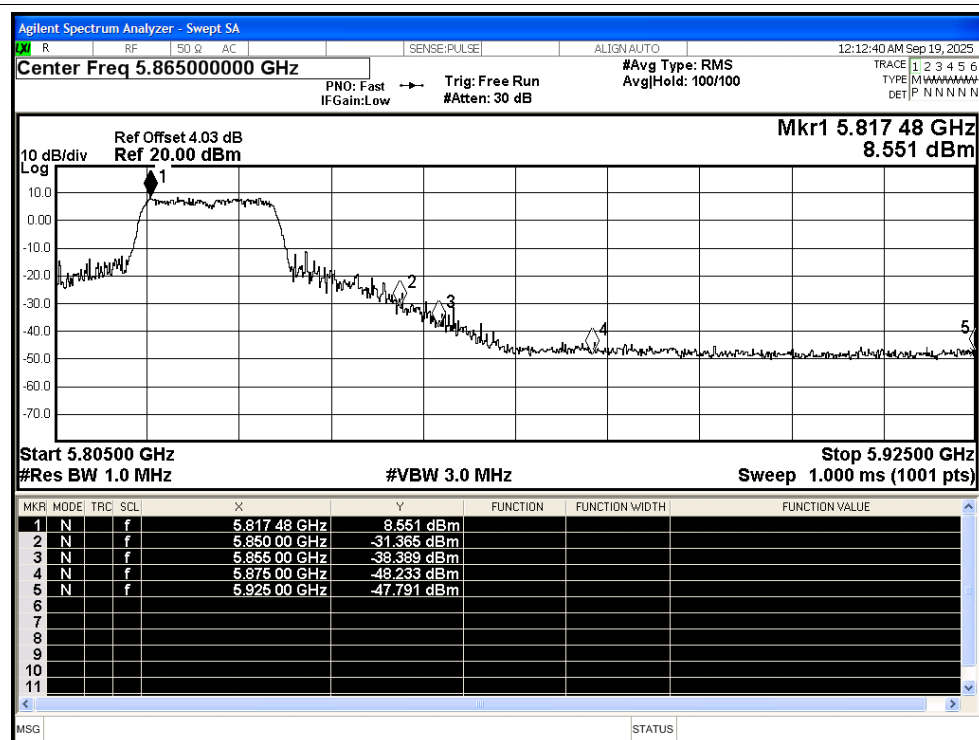

Restrict Band NVNT ax20 5825MHz Ant2 Average

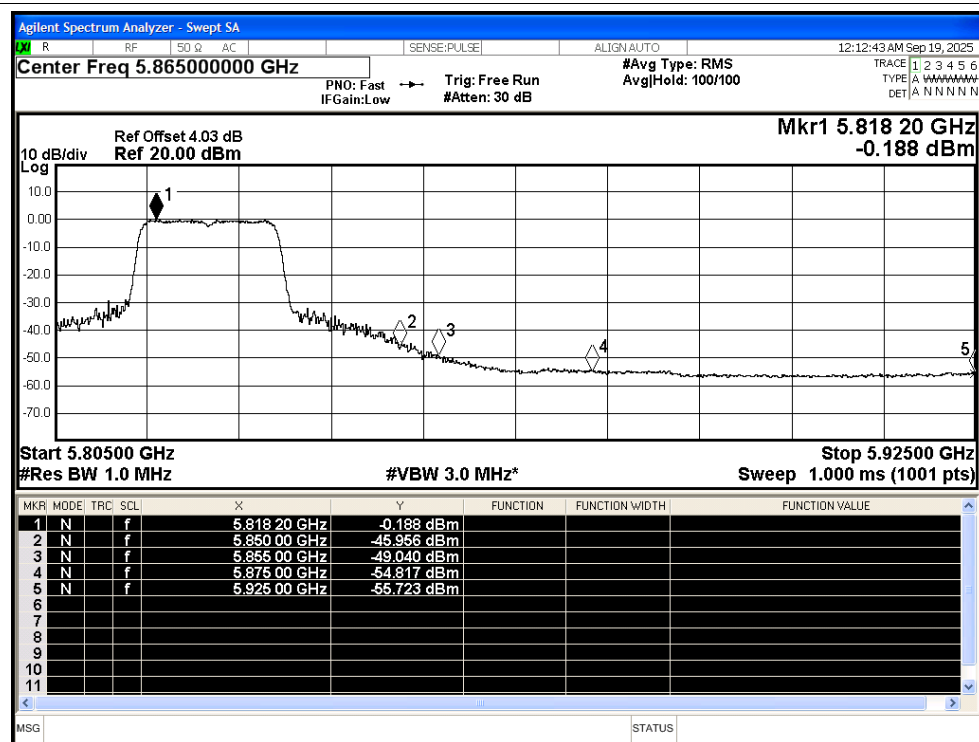


C.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5745	Ant1	5745	0	0	25	Pass
NVNT	a	5785	Ant1	5785	0	0	25	Pass
NVNT	a	5825	Ant1	5824.98	-20000	-3.43	25	Pass
NVNT	n20	5745	Ant1	5745	0	0	25	Pass
NVNT	n20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	n20	5825	Ant1	5824.98	-20000	-3.43	25	Pass
NVNT	n40	5755	Ant1	5755	0	0	25	Pass
NVNT	n40	5795	Ant1	5795	0	0	25	Pass
NVNT	ac20	5745	Ant1	5744.98	-20000	-3.48	25	Pass
NVNT	ac20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	ac20	5825	Ant1	5824.98	-20000	-3.43	25	Pass
NVNT	ac40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	ac40	5795	Ant1	5795	0	0	25	Pass
NVNT	ax20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
NVNT	ax20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	ax20	5825	Ant1	5825	0	0	25	Pass
NVNT	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	ax40	5795	Ant1	5795	0	0	25	Pass

Test Graphs

Freq. Stability NVNT a 5745MHz Ant1

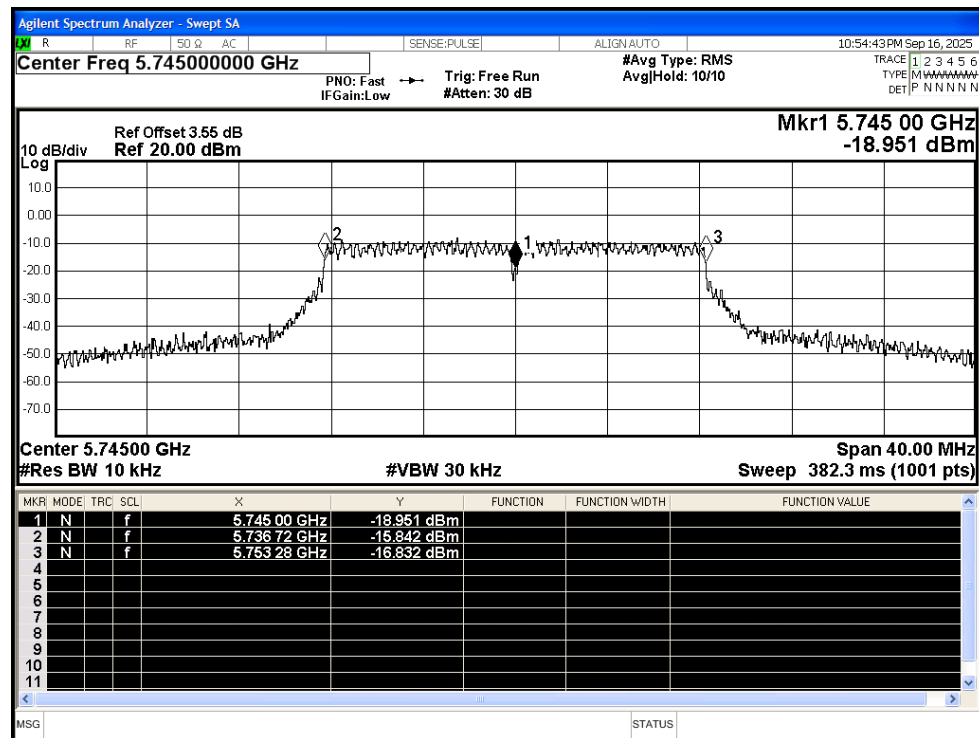


Freq. Stability NVNT a 5785MHz Ant1

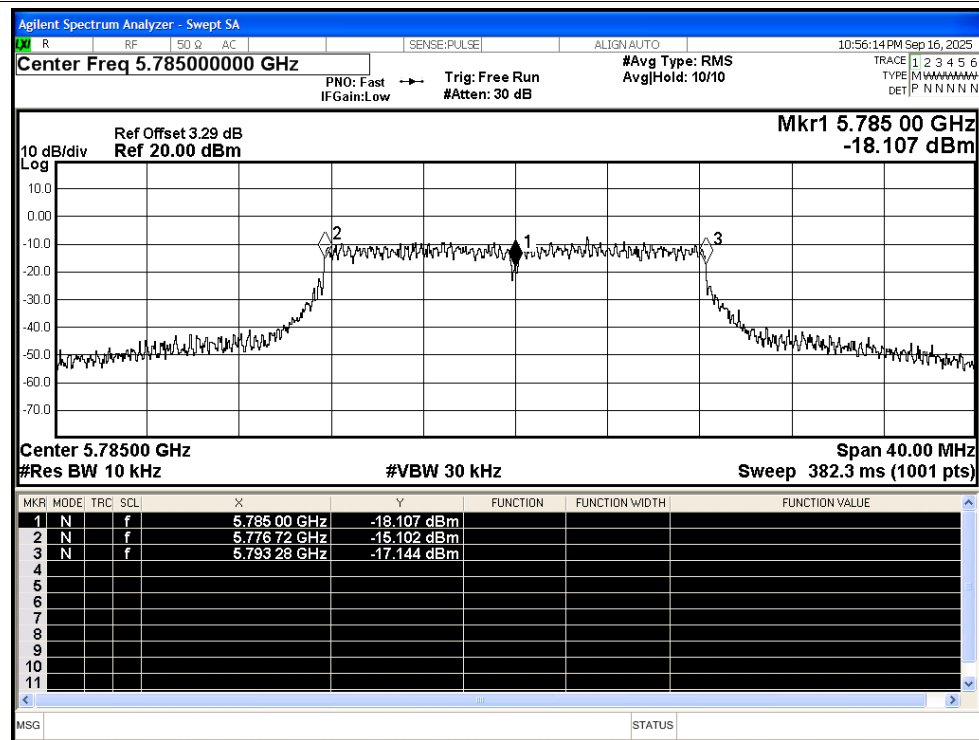


[illegible][illegible]


Freq. Stability NVNT n20 5785MHz Ant1

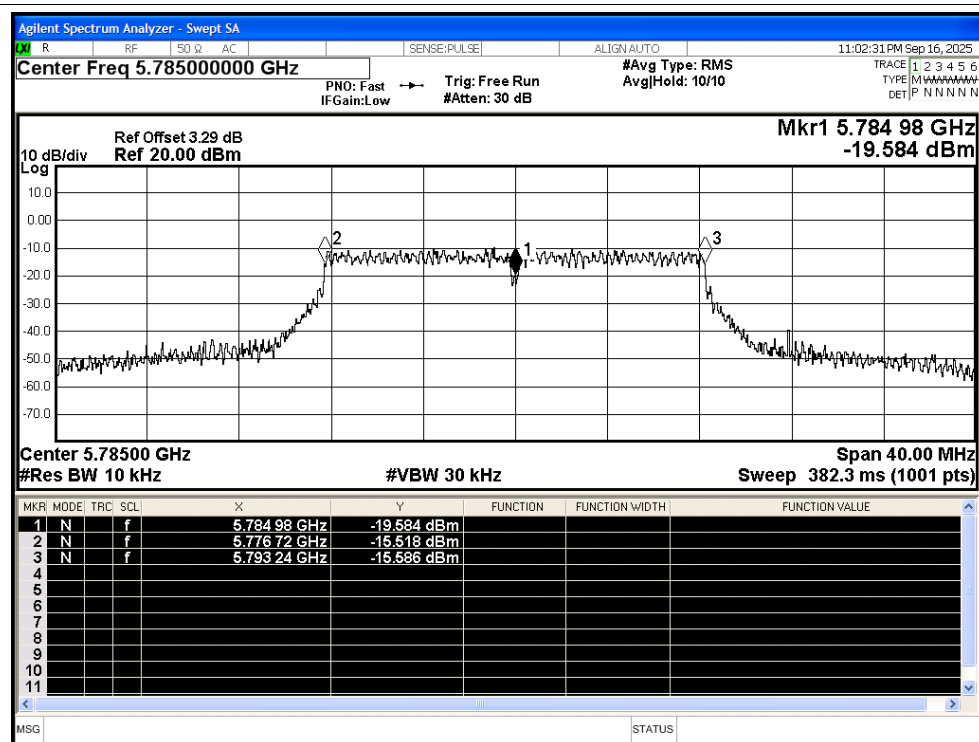


Freq. Stability NVNT n20 5825MHz Ant1

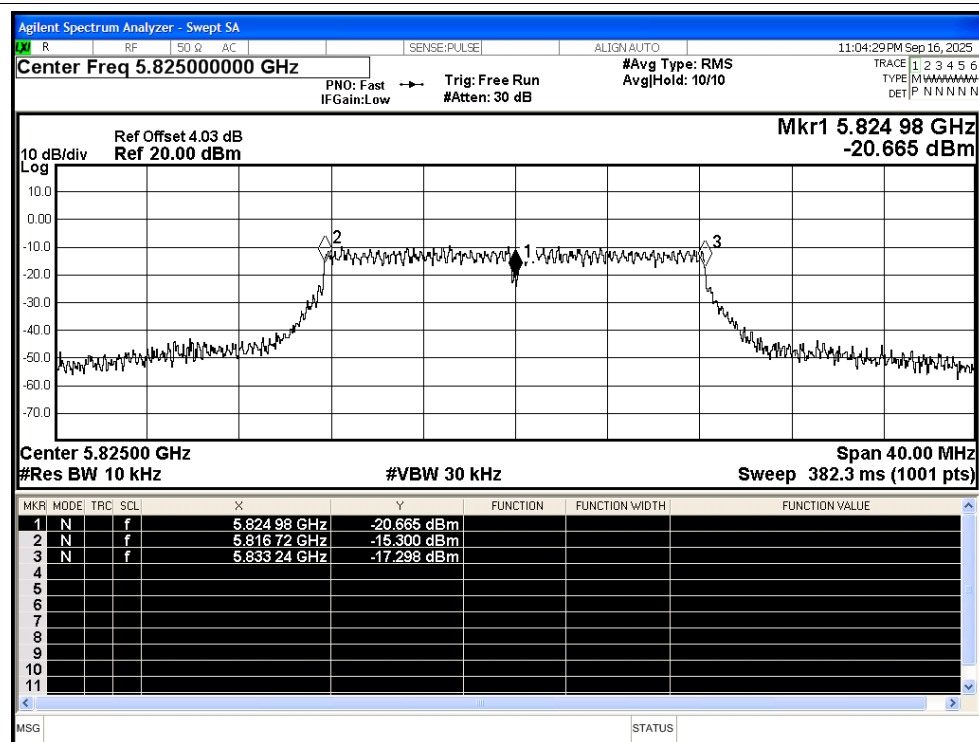


Freq. Stability NVNT n40 5755MHz Ant1

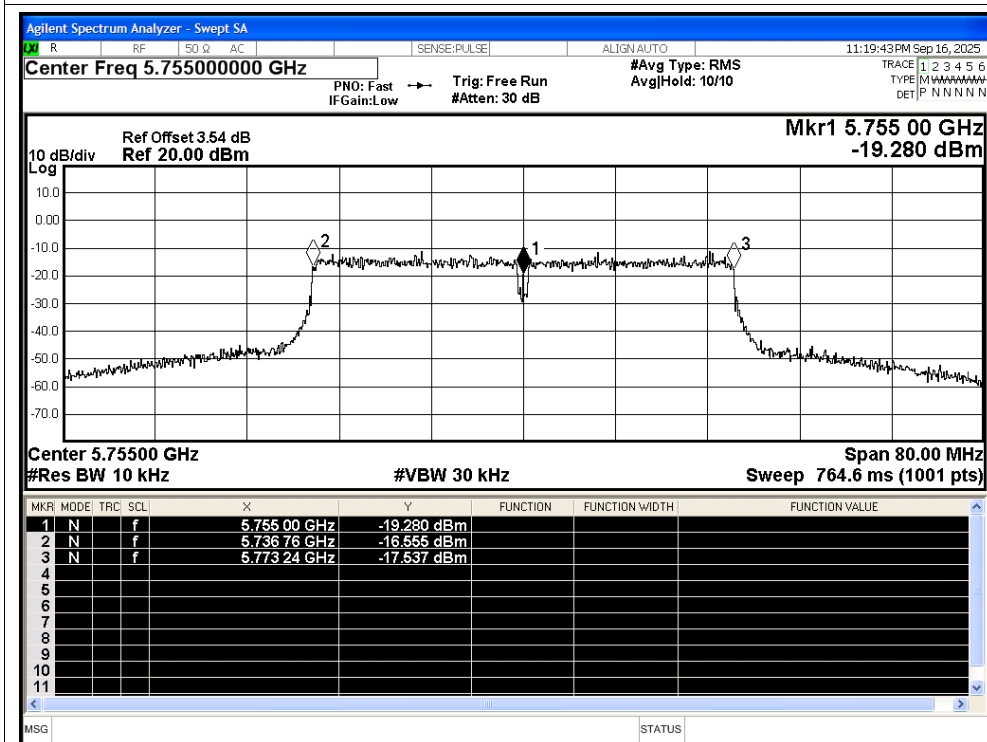


Freq. Stability NVNT n40 5795MHz Ant1

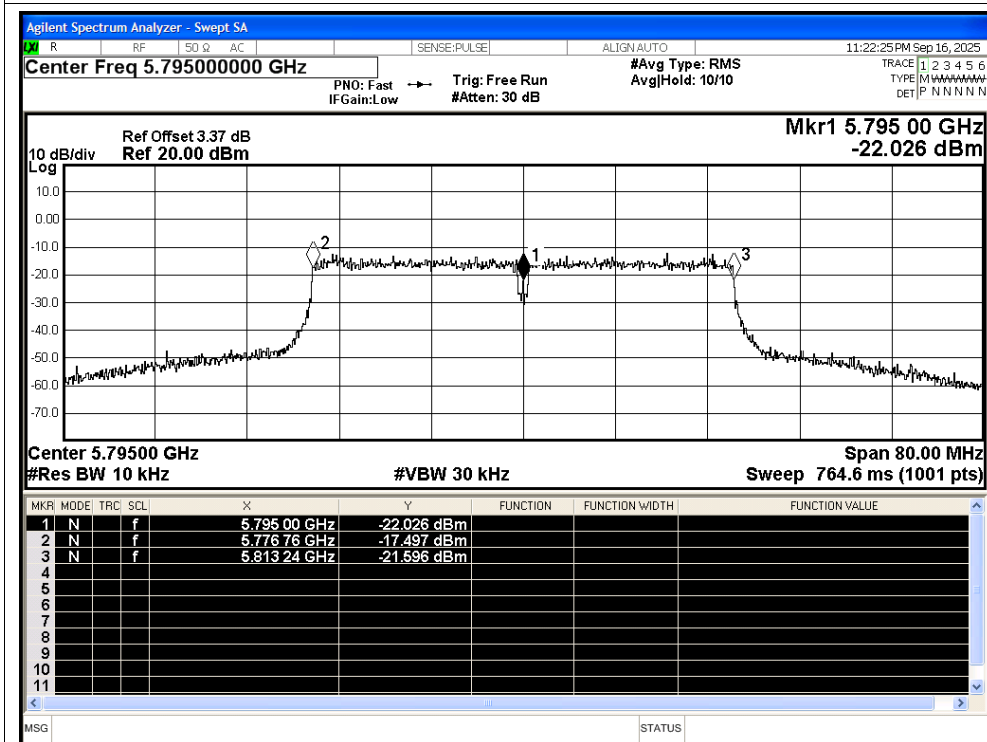

Freq. Stability NVNT ac20 5825MHz Ant1

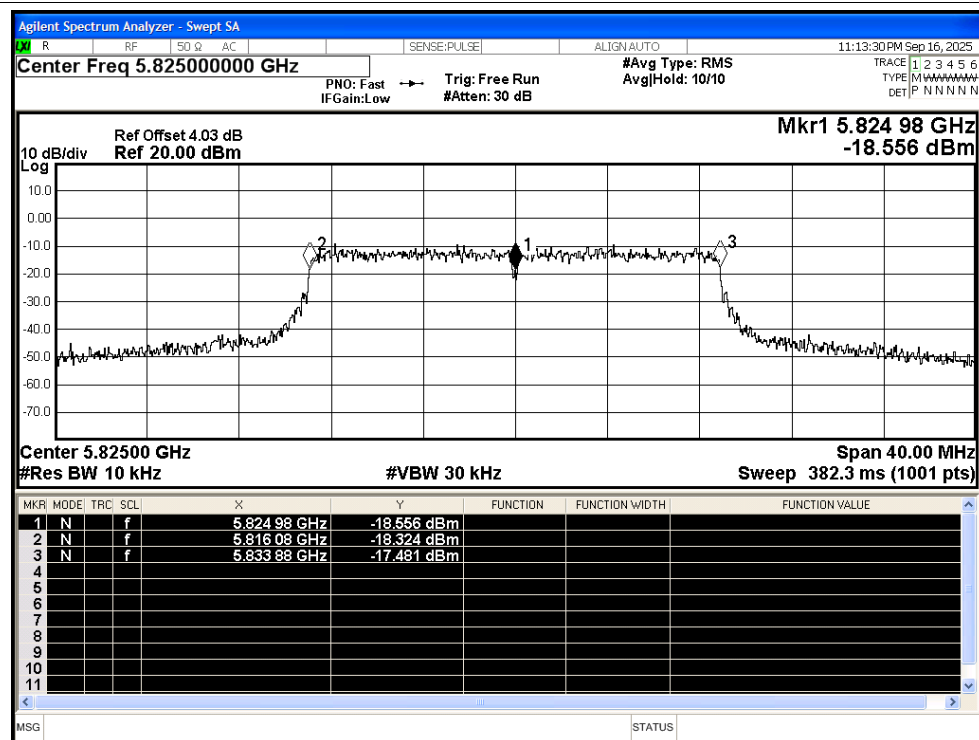

Freq. Stability NVNT ac40 5755MHz Ant1

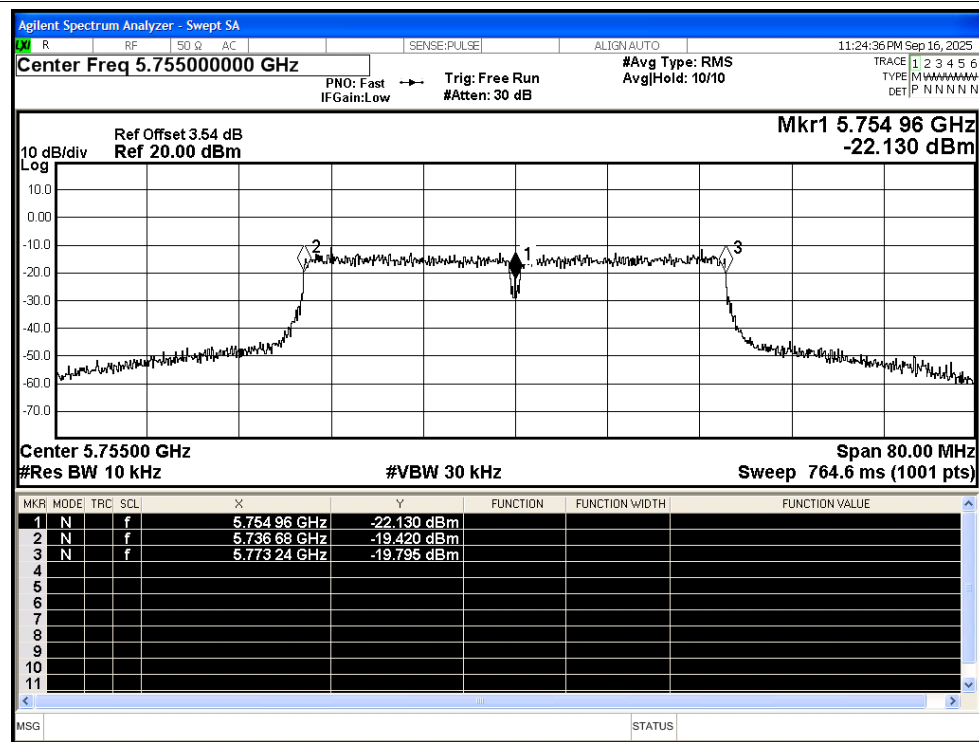

[illegible]

Freq. Stability NVNT ax20 5825MHz Ant1

Agilent Spectrum Analyzer - Swept SA

R RF 50 Ω AC SENSE/PULSE ALIGN AUTO 11:16:20 PM Sep 16, 2025

Center Freq 5.825000000 GHz PNO: Fast IFGain:Low Trig: Free Run #Avg Type: RMS Avg/Hold: 10/10 TRACE 1 2 3 4 5 6 TYPE M N N N N N N DET P N N N N N N

Ref Offset 4.03 dB
Ref 20.00 dBm


Mkr1 5.825 00 GHz
-19.403 dBm

10 dB/div Log


MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		5.825 00 GHz	-19.403 dBm			
2	N	f		5.816 12 GHz	-17.056 dBm			
3	N	f		5.833 98 GHz	-17.317 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

Center 5.82500 GHz Span 40.00 MHz
#Res BW 10 kHz #VBW 30 kHz Sweep 382.3 ms (1001 pts)

Freq. Stability NVNT ax40 5755MHz Ant1

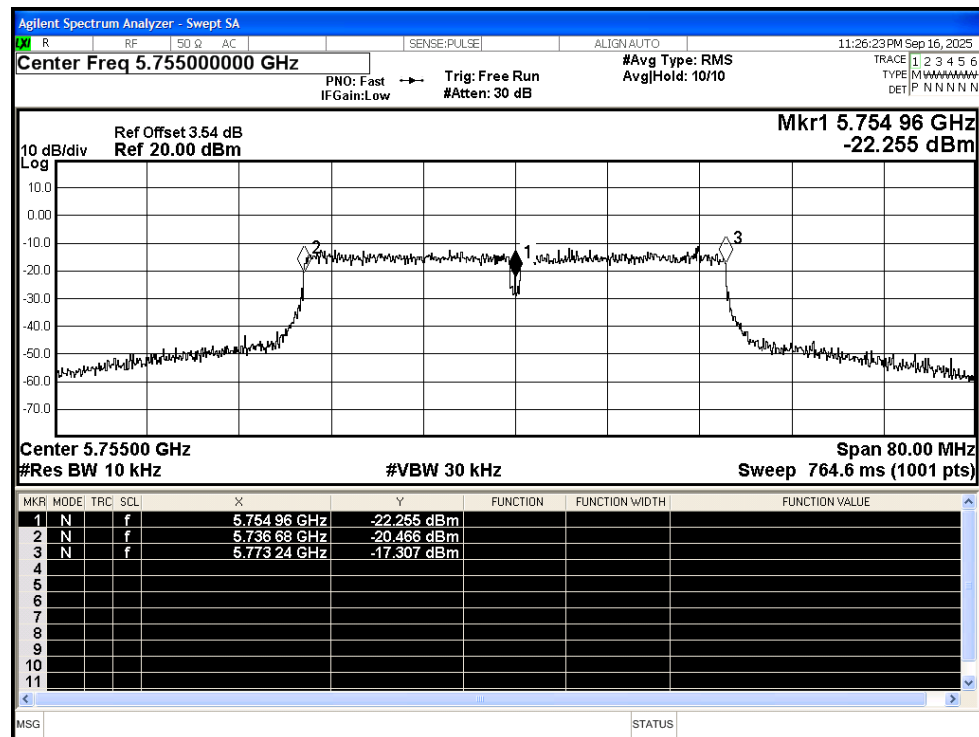


Freq. Stability NVNT ax40 5795MHz Ant1

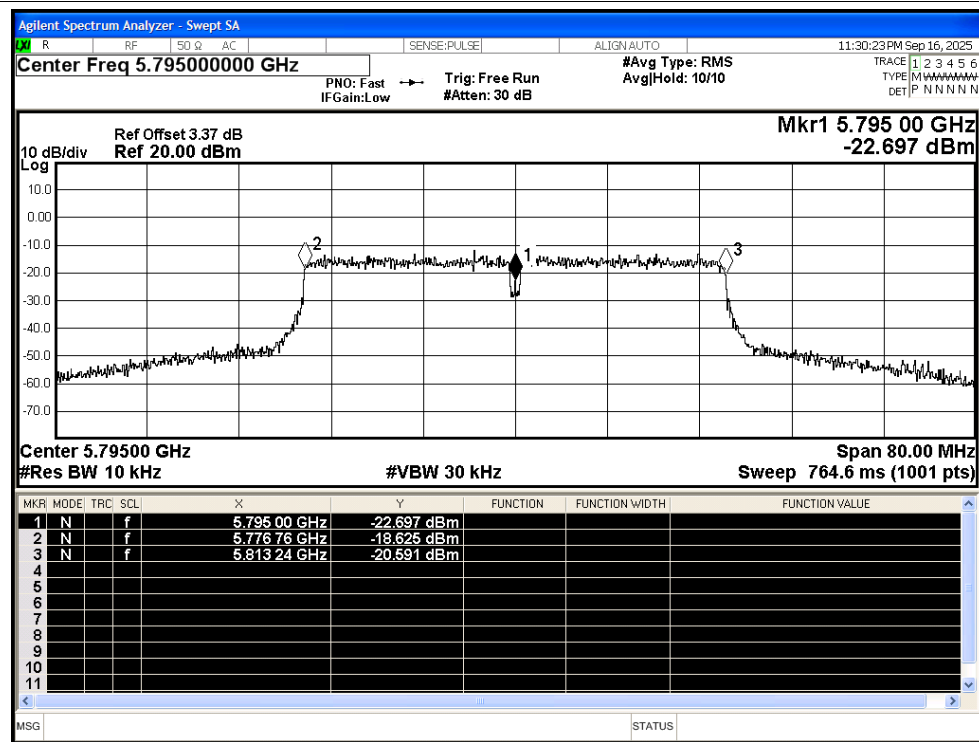

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5745	Ant2	5744.98	-20000	-3.48	25	Pass
NVNT	a	5785	Ant2	5784.98	-20000	-3.46	25	Pass
NVNT	a	5825	Ant2	5824.98	-20000	-3.43	25	Pass
NVNT	n20	5745	Ant2	5744.98	-20000	-3.48	25	Pass
NVNT	n20	5785	Ant2	5784.98	-20000	-3.46	25	Pass
NVNT	n20	5825	Ant2	5824.98	-20000	-3.43	25	Pass
NVNT	n40	5755	Ant2	5754.96	-40000	-6.95	25	Pass
NVNT	n40	5795	Ant2	5795	0	0	25	Pass
NVNT	ac20	5745	Ant2	5744.98	-20000	-3.48	25	Pass
NVNT	ac20	5785	Ant2	5784.98	-20000	-3.46	25	Pass
NVNT	ac20	5825	Ant2	5824.96	-40000	-6.87	25	Pass
NVNT	ac40	5755	Ant2	5755	0	0	25	Pass
NVNT	ac40	5795	Ant2	5794.96	-40000	-6.9	25	Pass
NVNT	ax20	5745	Ant2	5744.98	-20000	-3.48	25	Pass
NVNT	ax20	5785	Ant2	5784.98	-20000	-3.46	25	Pass
NVNT	ax20	5825	Ant2	5824.98	-20000	-3.43	25	Pass
NVNT	ax40	5755	Ant2	5755	0	0	25	Pass
NVNT	ax40	5795	Ant2	5795	0	0	25	Pass

Test Graphs

Freq. Stability NVNT a 5745MHz Ant2

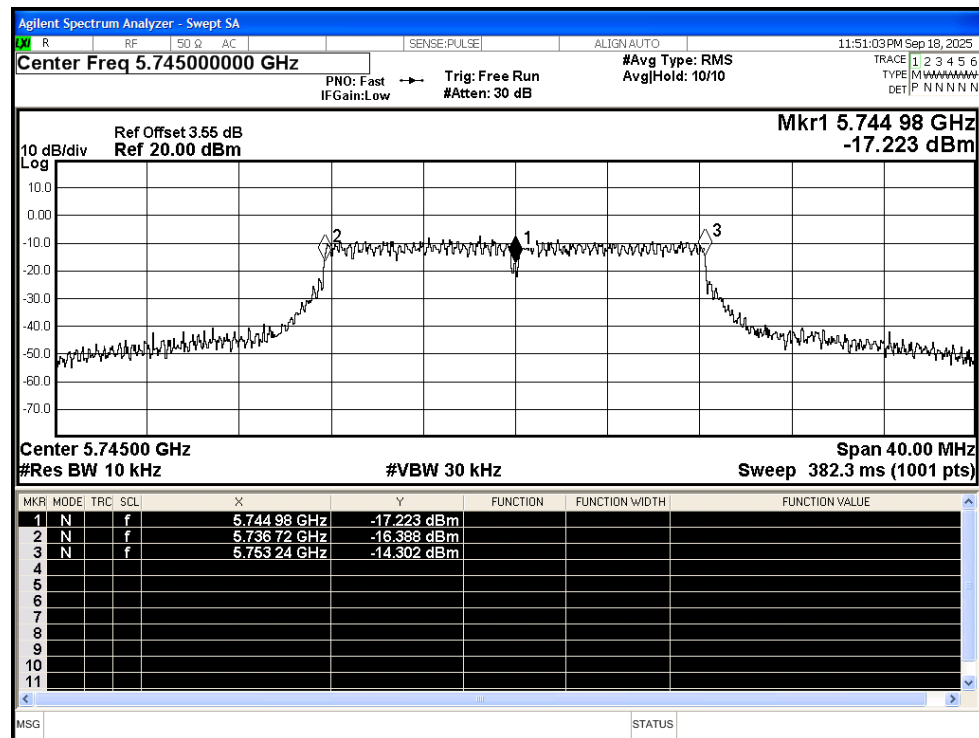

Freq. Stability NVNT a 5785MHz Ant2

