





11AX40SISO-Ant1-2422-PASS

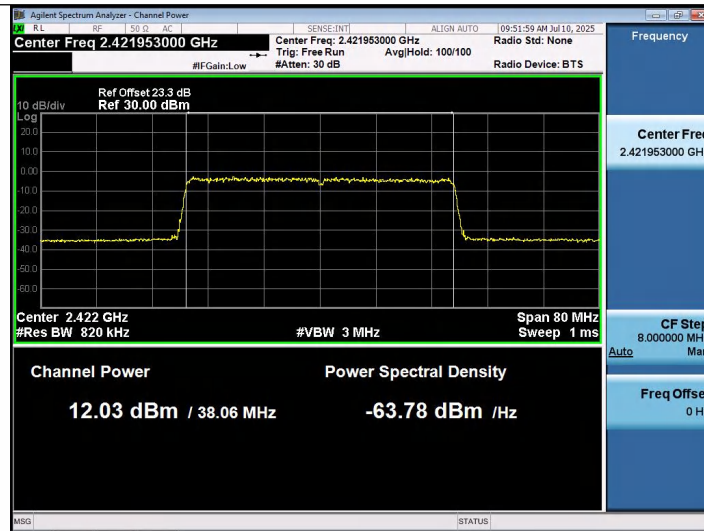

11AX40SISO-Ant1-2437-PASS

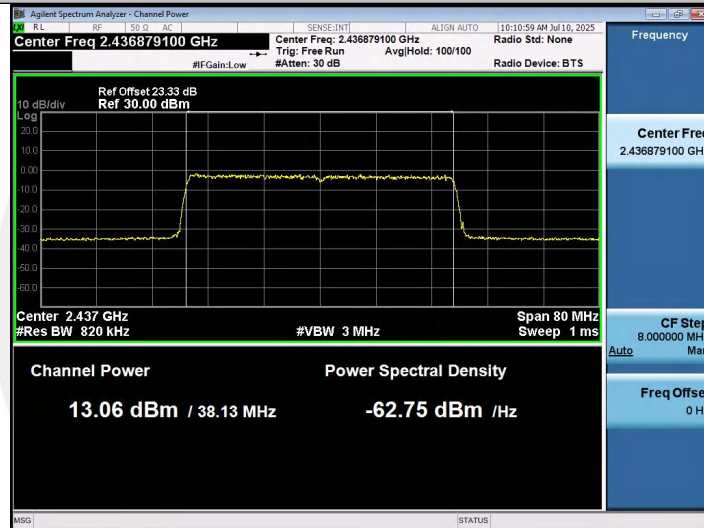

11AX40SISO-Ant1-2452-PASS

7.4 MAXIMUM POWER SPECTRAL DENSITY

7.4.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.4.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

7.4.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

7.4.5 Test Results

Temperature : 25.5°C

Humidity : 53 %

ATM Pressure:: 1011 mbar

Test By: LJM

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-16.23	≤8.00	PASS
11B	Ant1	2437	-16.64	≤8.00	PASS
11B	Ant1	2462	-18.28	≤8.00	PASS
11G	Ant1	2412	-23.39	≤8.00	PASS
11G	Ant1	2437	-19.66	≤8.00	PASS
11G	Ant1	2462	-22.44	≤8.00	PASS
11N20SISO	Ant1	2412	-19.58	≤8.00	PASS
11N20SISO	Ant1	2437	-19.59	≤8.00	PASS
11N20SISO	Ant1	2462	-19.49	≤8.00	PASS
11N40SISO	Ant1	2422	-21.89	≤8.00	PASS
11N40SISO	Ant1	2437	-22.64	≤8.00	PASS
11N40SISO	Ant1	2452	-22.30	≤8.00	PASS
11AX20SISO	Ant1	2412	-20.85	≤8.00	PASS
11AX20SISO	Ant1	2437	-19.70	≤8.00	PASS
11AX20SISO	Ant1	2462	-18.50	≤8.00	PASS
11AX40SISO	Ant1	2422	-21.48	≤8.00	PASS
11AX40SISO	Ant1	2437	-20.69	≤8.00	PASS
11AX40SISO	Ant1	2452	-21.65	≤8.00	PASS




11B-Ant1-2412-PASS




11B-Ant1-2437-PASS




11B-Ant1-2462-PASS

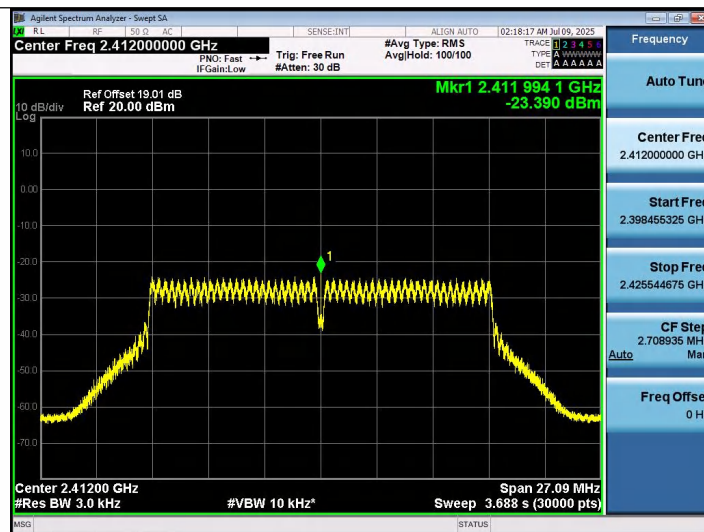


11G-Ant1-2412-PASS

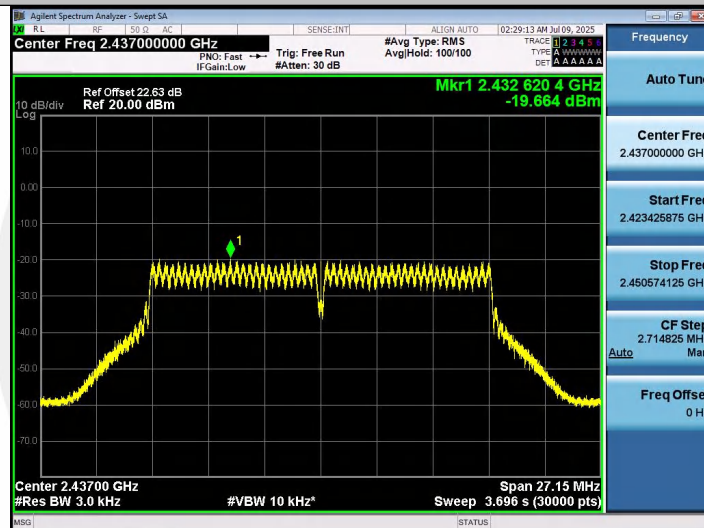


11G-Ant1-2437-PASS

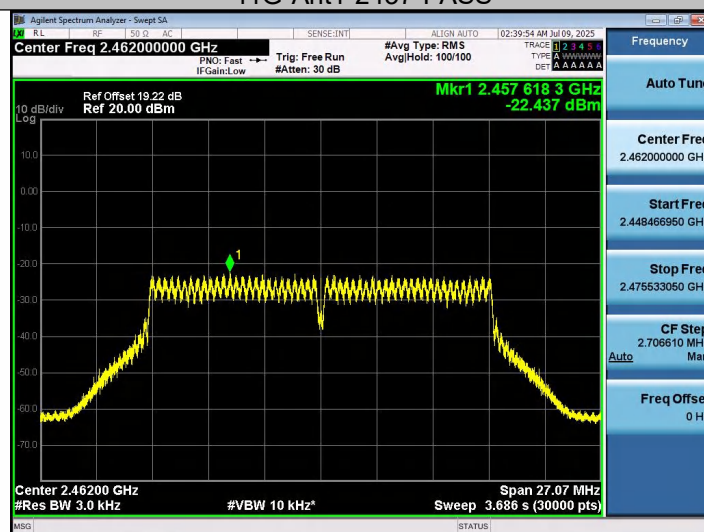


11G-Ant1-2462-PASS

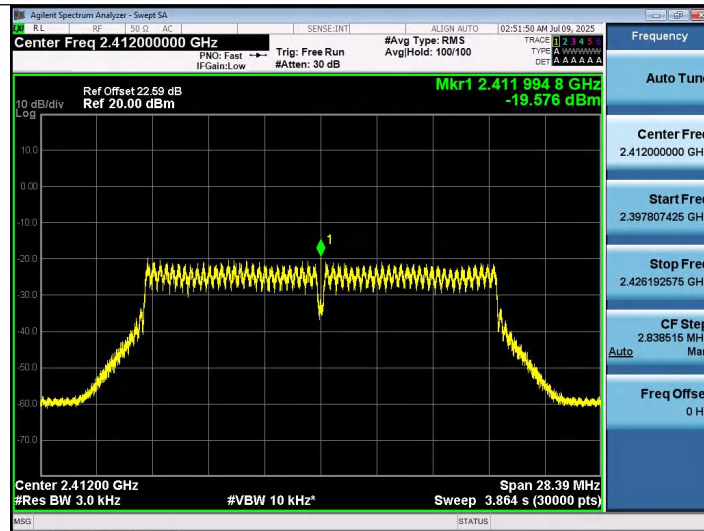


11N20SISO-Ant1-2412-PASS

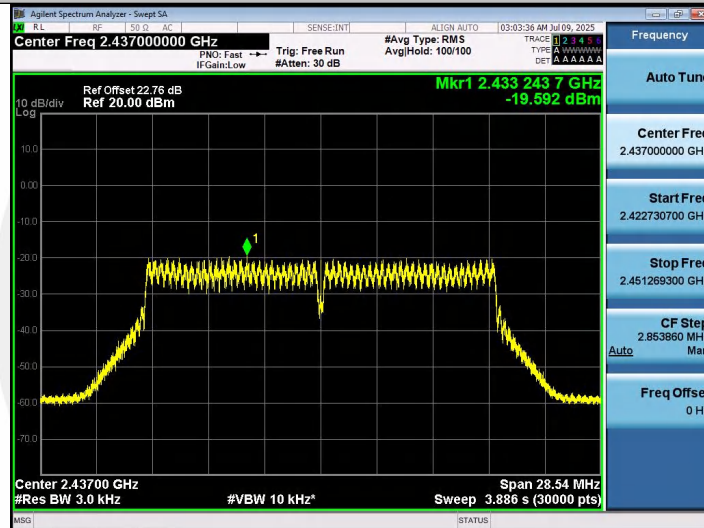


11N20SISO-Ant1-2437-PASS

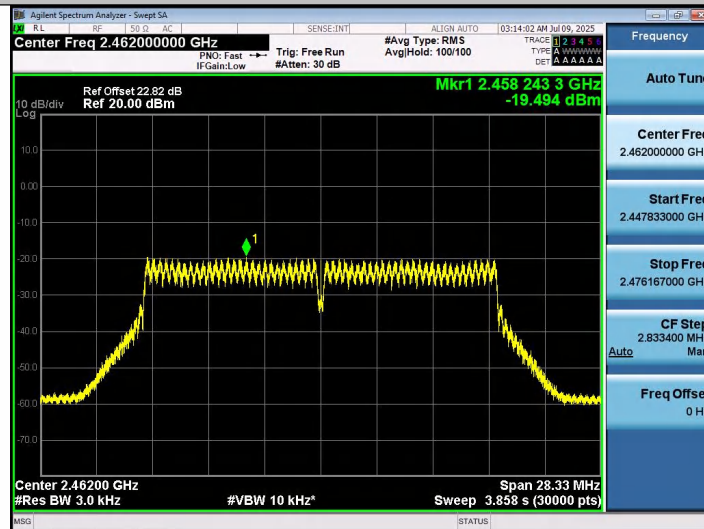


11N20SISO-Ant1-2462-PASS

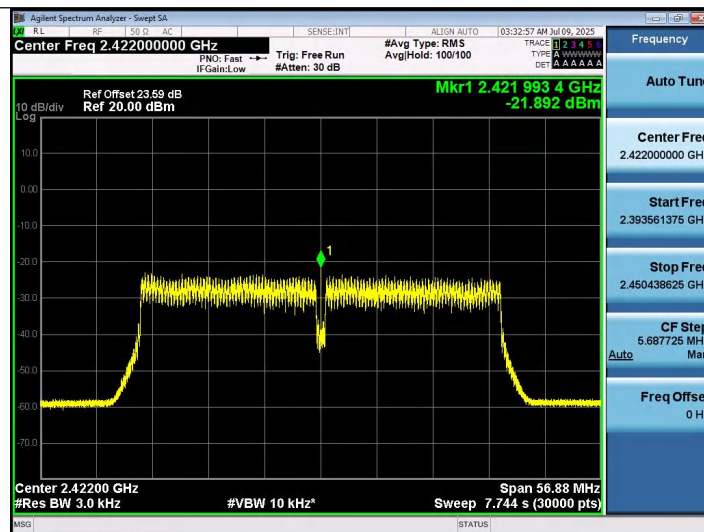


11N40SISO-Ant1-2422-PASS

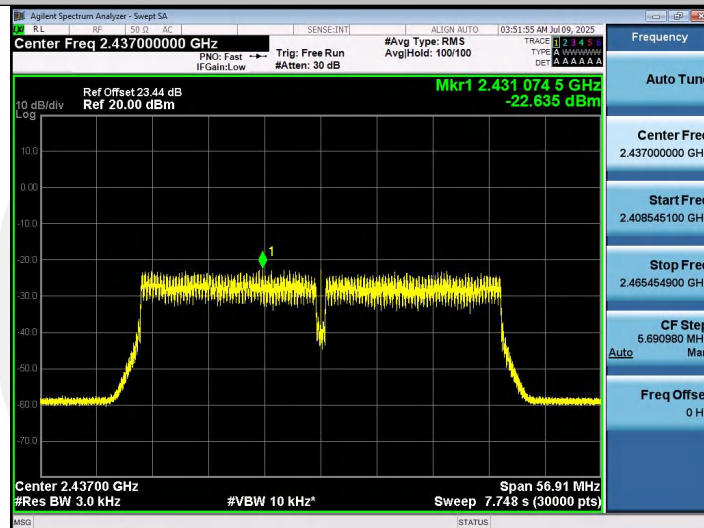


11N40SISO-Ant1-2437-PASS

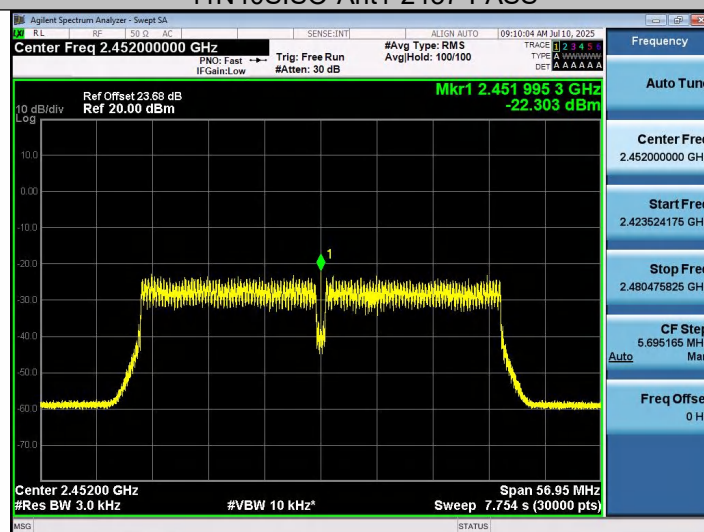


11N40SISO-Ant1-2452-PASS

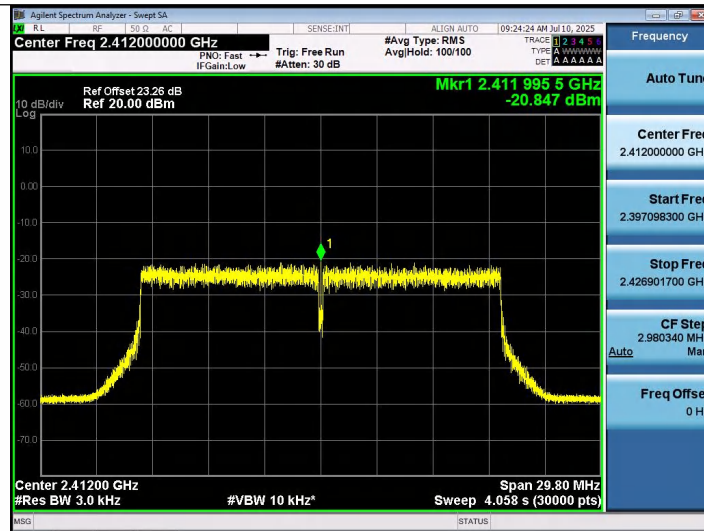


11AX20SISO-Ant1-2412-PASS

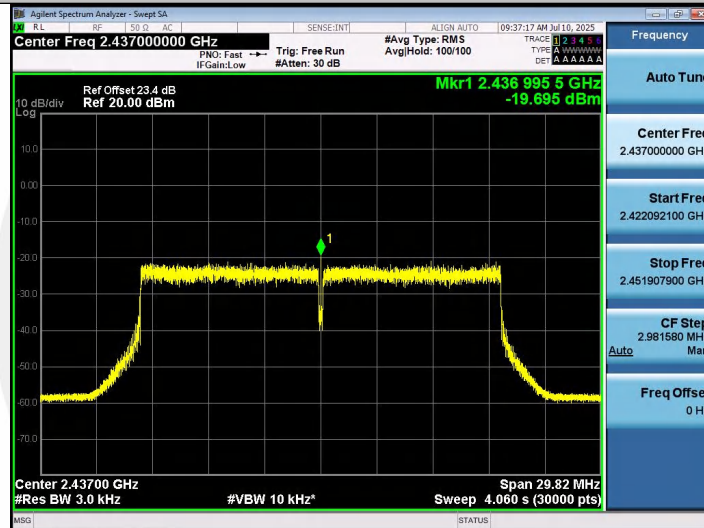


11AX20SISO-Ant1-2437-PASS

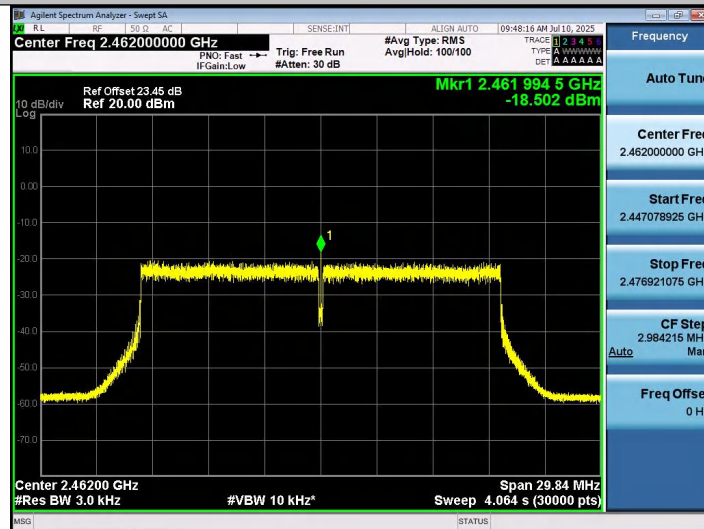


11AX20SISO-Ant1-2462-PASS

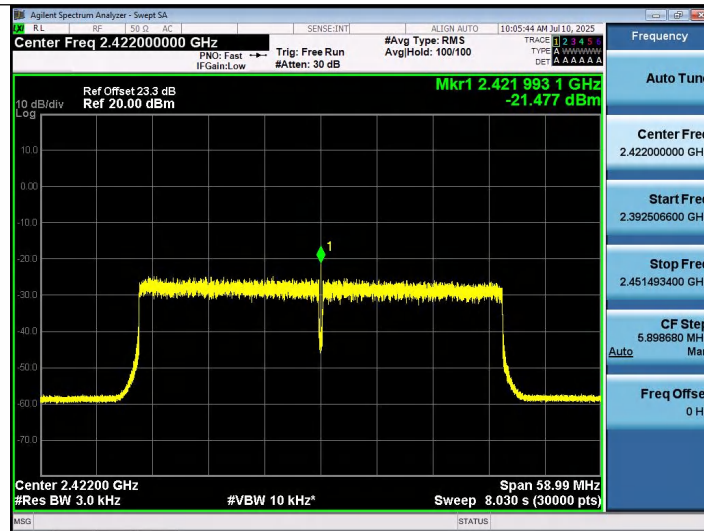

11AX40SISO-Ant1-2422-PASS

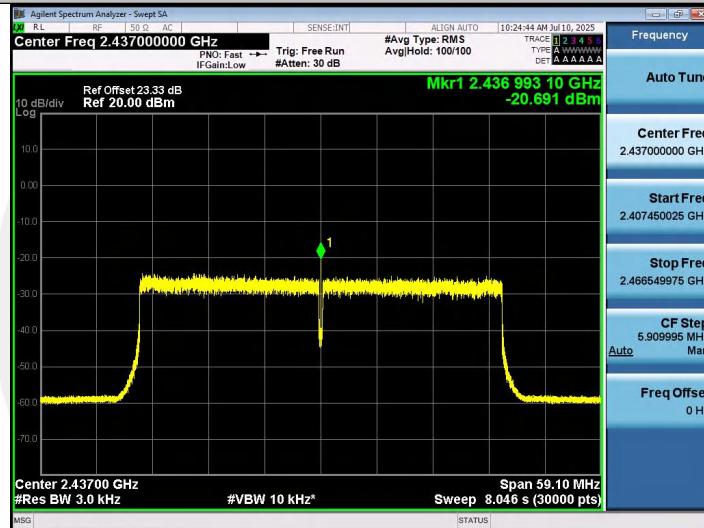

11AX40SISO-Ant1-2437-PASS

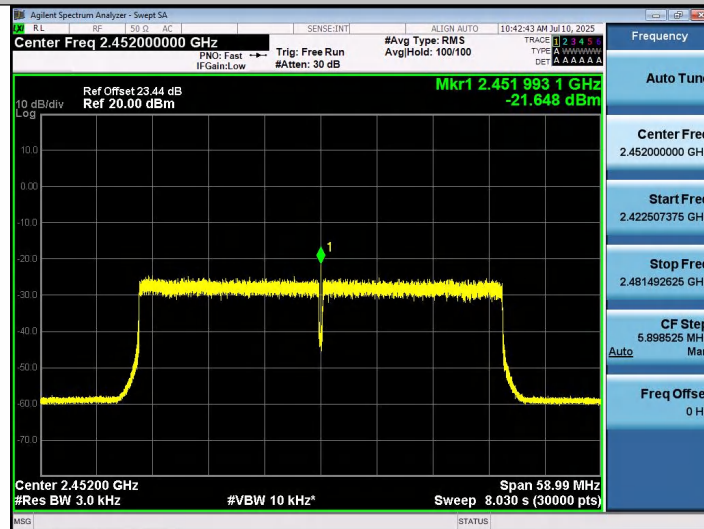

11AX40SISO-Ant1-2452-PASS

7.5 UNWANTED SPURIOUS EMISSIONS

7.5.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.5.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.5.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

7.5.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

7.5.5 Test Results


Temperature :	25.5°C	ATM Pressure::	1011 mbar
Humidity :	53 %	Test By:	LJM


All modes 2.4G 802.11b/g/n/ax have been tested, and the worst result recorded was report as below:

Band edge measurements


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	2.75	-44.95	≤-27.25	PASS
11B	Ant1	High	2462	3.23	-46.54	≤-26.77	PASS
11G	Ant1	Low	2412	-1.59	-39.06	≤-31.59	PASS
11G	Ant1	High	2462	1.60	-46.52	≤-28.4	PASS
11N20SISO	Ant1	Low	2412	-0.08	-40.13	≤-30.08	PASS
11N20SISO	Ant1	High	2462	2.02	-45.66	≤-27.98	PASS
11N40SISO	Ant1	Low	2422	-1.44	-41.58	≤-31.44	PASS
11N40SISO	Ant1	High	2452	-2.13	-44.21	≤-32.13	PASS
11AX20SISO	Ant1	Low	2412	-1.56	-34.46	≤-31.56	PASS
11AX20SISO	Ant1	High	2462	2.30	-43.26	≤-27.7	PASS
11AX40SISO	Ant1	Low	2422	-2.96	-41.33	≤-32.96	PASS
11AX40SISO	Ant1	High	2452	-2.83	-43.68	≤-32.83	PASS

Band edge measurements

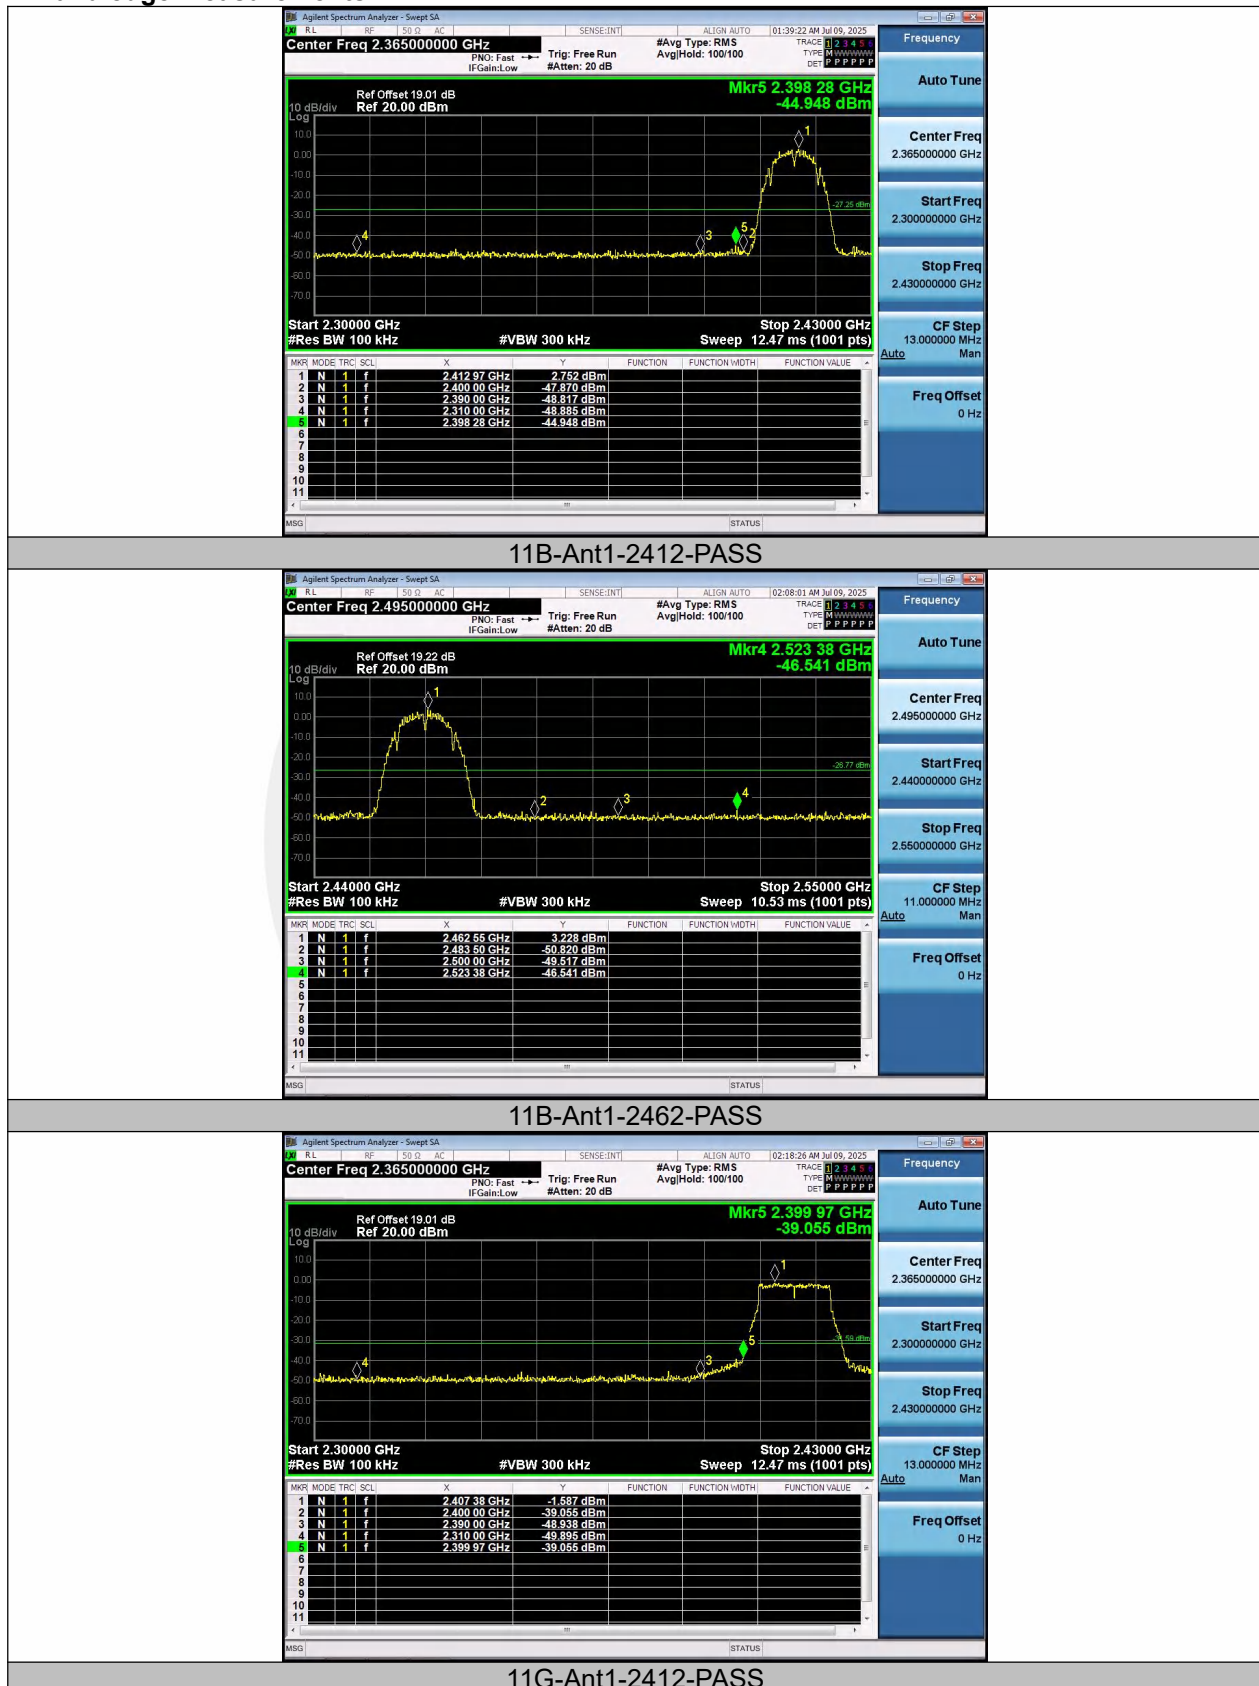


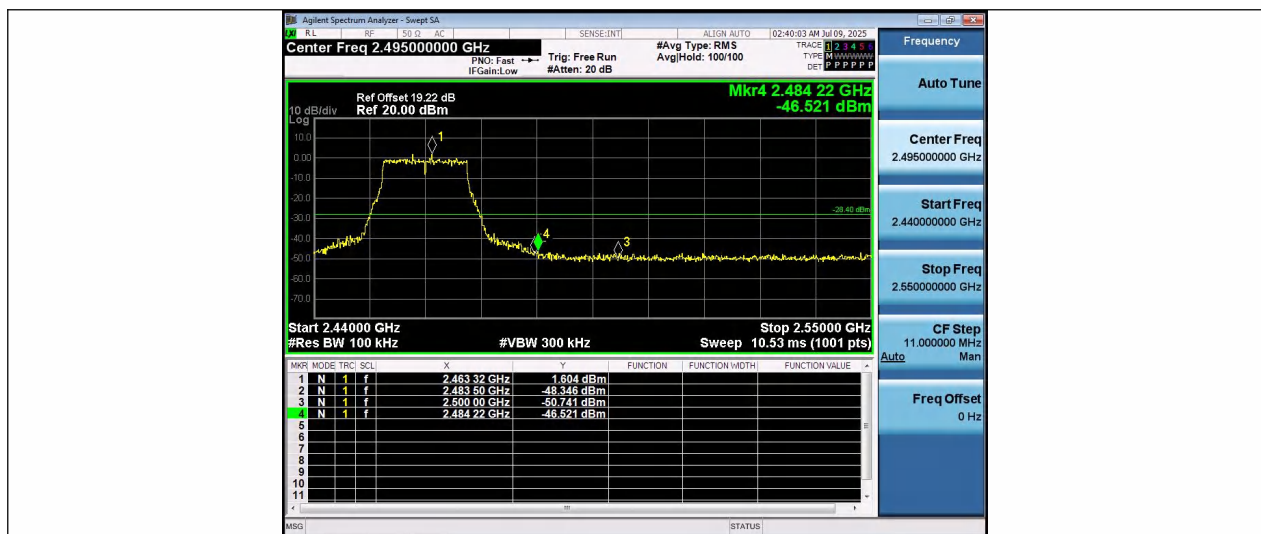


11G-Ant1-2462-PASS

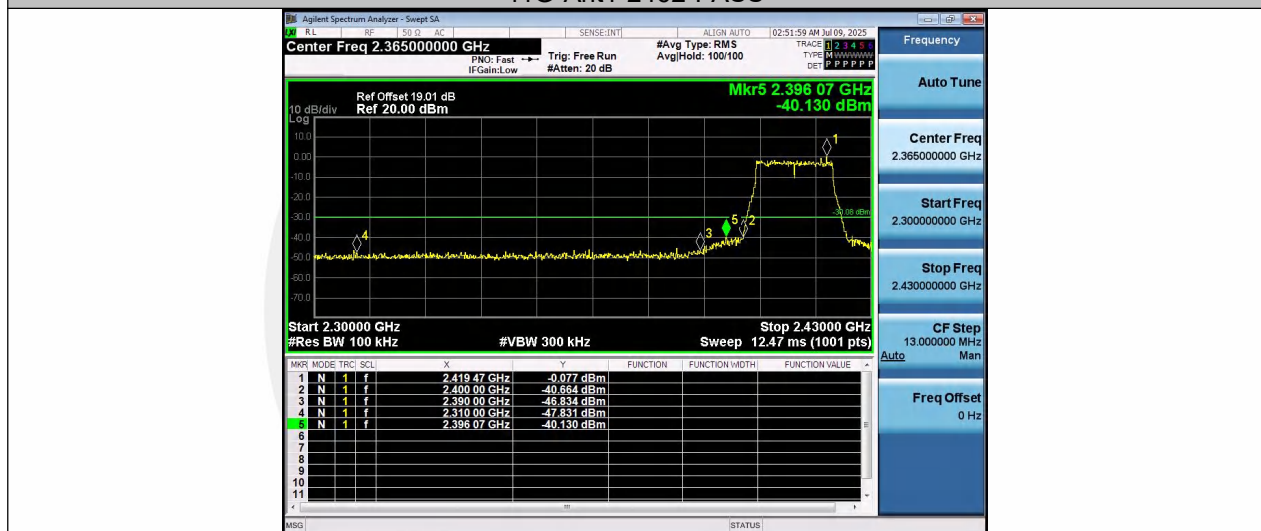


11N20SISO-Ant1-2412-PASS

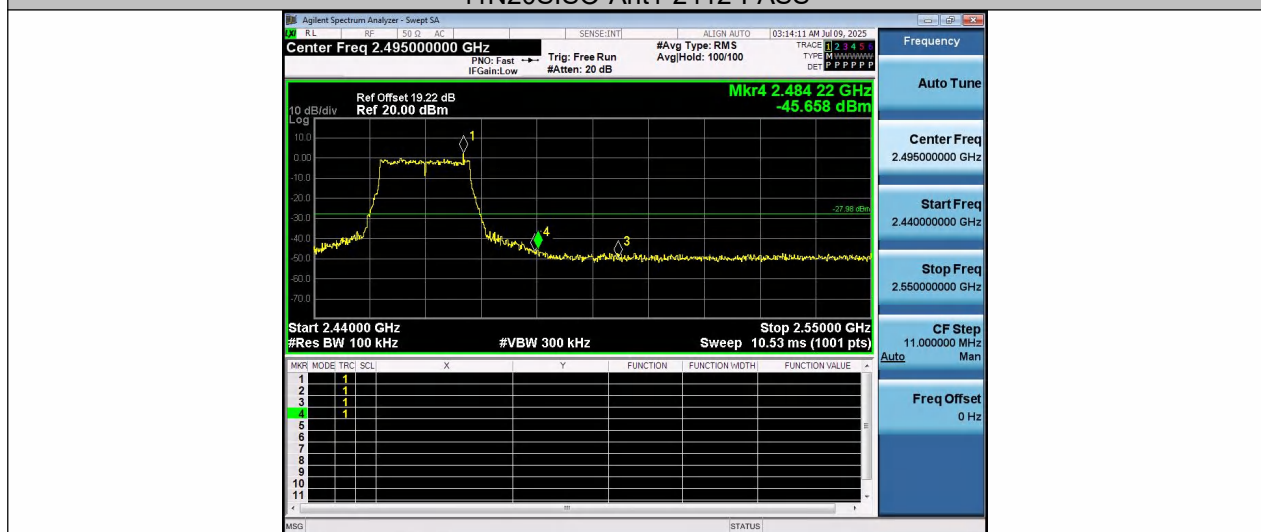


11N20SISO-Ant1-2462-PASS

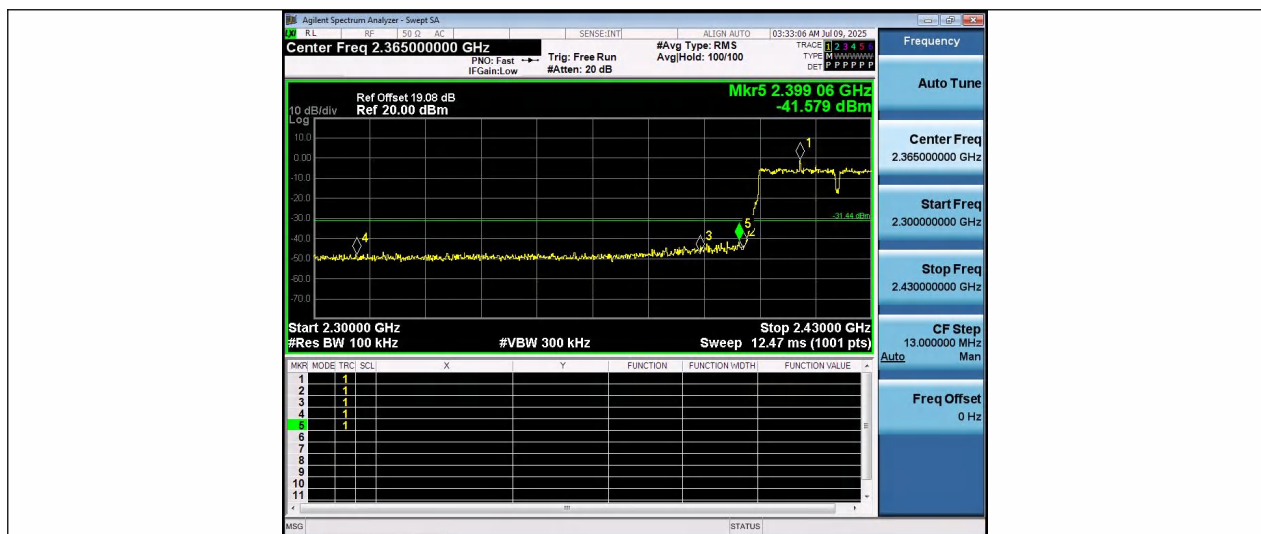


11N40SISO-Ant1-2422-PASS

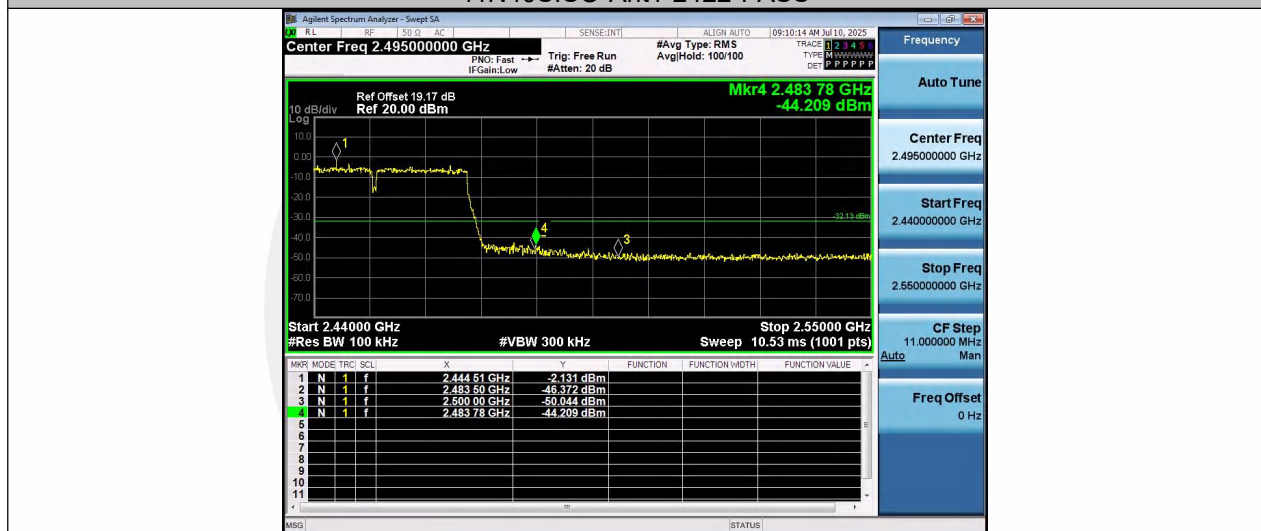


11N40SISO-Ant1-2452-PASS

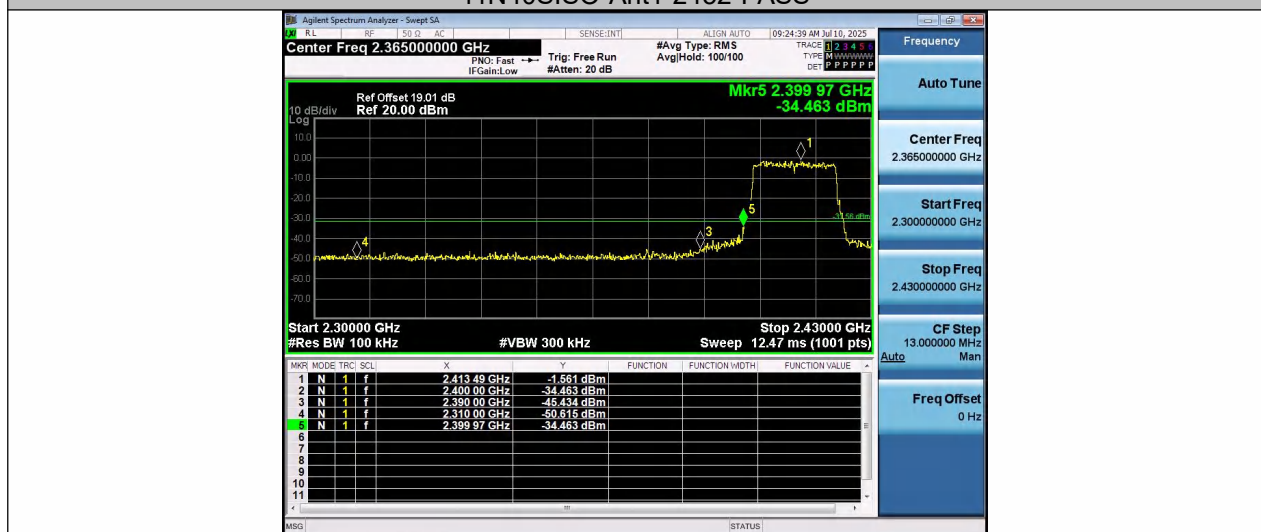


11AX20SISO-Ant1-2412-PASS

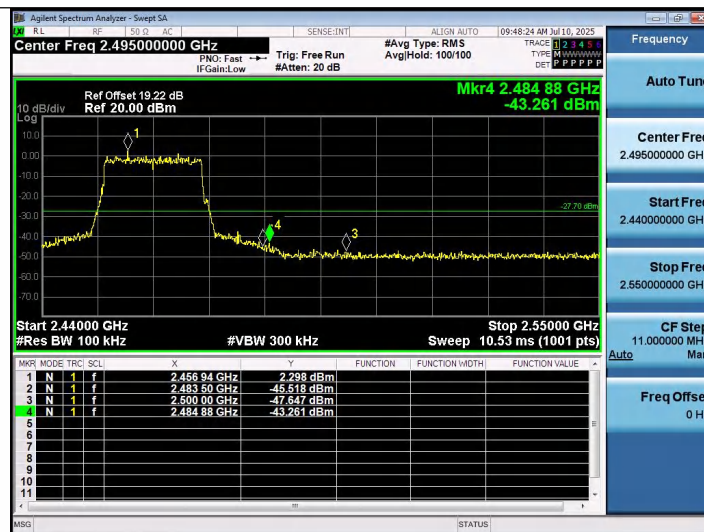

11AX20SISO-Ant1-2462-PASS

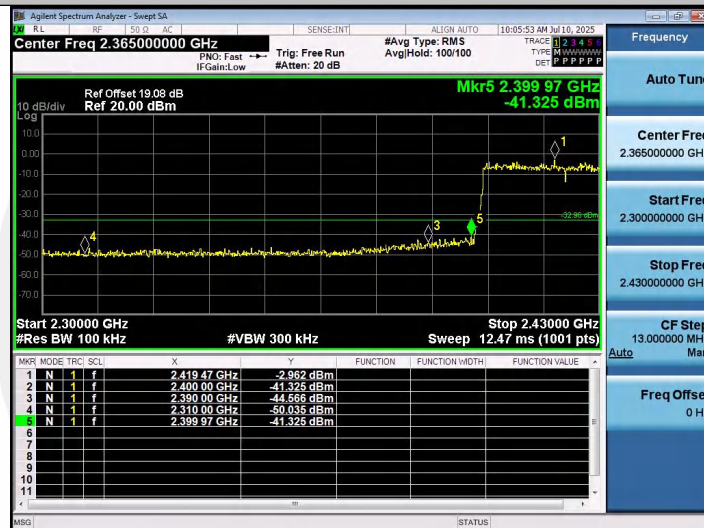

11AX40SISO-Ant1-2422-PASS

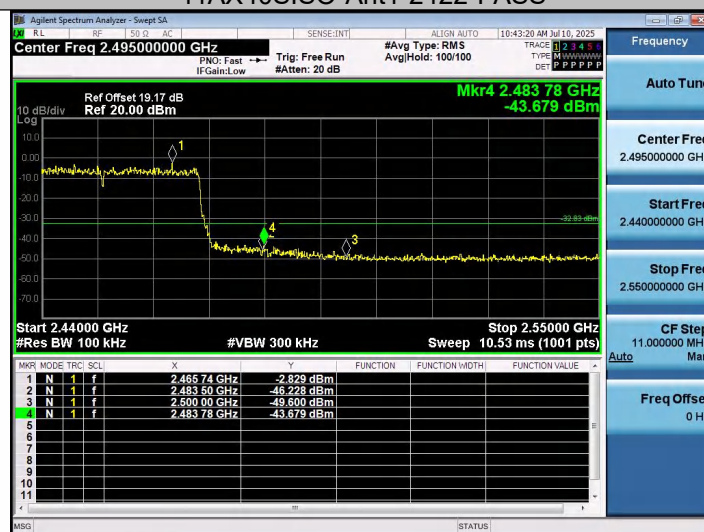

11AX40SISO-Ant1-2452-PASS

Conducted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	2.12	2.12	---	PASS
11B	Ant1	2412	30~1000	2.12	-68.82	≤-27.88	PASS
11B	Ant1	2412	1000~26500	2.12	-39.88	≤-27.88	PASS
11B	Ant1	2437	0~Reference	1.13	1.13	---	PASS
11B	Ant1	2437	30~1000	1.13	-66.64	≤-28.87	PASS
11B	Ant1	2437	1000~26500	1.13	-39.04	≤-28.87	PASS
11B	Ant1	2462	0~Reference	1.98	1.98	---	PASS
11B	Ant1	2462	30~1000	1.98	-68.91	≤-28.02	PASS
11B	Ant1	2462	1000~26500	1.98	-39.55	≤-28.02	PASS
11G	Ant1	2412	0~Reference	0.77	0.77	---	PASS
11G	Ant1	2412	30~1000	0.77	-68.54	≤-29.23	PASS
11G	Ant1	2412	1000~26500	0.77	-39.49	≤-29.23	PASS
11G	Ant1	2437	0~Reference	-1.46	-1.46	---	PASS
11G	Ant1	2437	30~1000	-1.46	-68.79	≤-31.46	PASS
11G	Ant1	2437	1000~26500	-1.46	-39.99	≤-31.46	PASS
11G	Ant1	2462	0~Reference	-1.04	-1.04	---	PASS
11G	Ant1	2462	30~1000	-1.04	-69.04	≤-31.04	PASS
11G	Ant1	2462	1000~26500	-1.04	-39.32	≤-31.04	PASS
11N20SISO	Ant1	2412	0~Reference	0.68	0.68	---	PASS
11N20SISO	Ant1	2412	30~1000	0.68	-68.47	≤-29.32	PASS
11N20SISO	Ant1	2412	1000~26500	0.68	-39.12	≤-29.32	PASS
11N20SISO	Ant1	2437	0~Reference	-2.21	-2.21	---	PASS
11N20SISO	Ant1	2437	30~1000	-2.21	-68.93	≤-32.21	PASS
11N20SISO	Ant1	2437	1000~26500	-2.21	-39.9	≤-32.21	PASS
11N20SISO	Ant1	2462	0~Reference	-1.06	-1.06	---	PASS
11N20SISO	Ant1	2462	30~1000	-1.06	-68.55	≤-31.06	PASS
11N20SISO	Ant1	2462	1000~26500	-1.06	-39.47	≤-31.06	PASS
11N40SISO	Ant1	2422	0~Reference	-2.47	-2.47	---	PASS
11N40SISO	Ant1	2422	30~1000	-2.47	-68.51	≤-32.47	PASS
11N40SISO	Ant1	2422	1000~26500	-2.47	-39.89	≤-32.47	PASS
11N40SISO	Ant1	2437	0~Reference	-4.34	-4.34	---	PASS
11N40SISO	Ant1	2437	30~1000	-4.34	-67.81	≤-34.34	PASS
11N40SISO	Ant1	2437	1000~26500	-4.34	-39.65	≤-34.34	PASS
11N40SISO	Ant1	2452	0~Reference	-5.44	-5.44	---	PASS
11N40SISO	Ant1	2452	30~1000	-5.44	-69.31	≤-35.44	PASS
11N40SISO	Ant1	2452	1000~26500	-5.44	-40.11	≤-35.44	PASS
11AX20SISO	Ant1	2412	0~Reference	-2.53	-2.53	---	PASS
11AX20SISO	Ant1	2412	30~1000	-2.53	-68.27	≤-32.53	PASS
11AX20SISO	Ant1	2412	1000~26500	-2.53	-39.94	≤-32.53	PASS
11AX20SISO	Ant1	2437	0~Reference	-2.45	-2.45	---	PASS
11AX20SISO	Ant1	2437	30~1000	-2.45	-68.99	≤-32.45	PASS
11AX20SISO	Ant1	2437	1000~26500	-2.45	-39.69	≤-32.45	PASS
11AX20SISO	Ant1	2462	0~Reference	-0.91	-0.91	---	PASS
11AX20SISO	Ant1	2462	30~1000	-0.91	-68.63	≤-30.91	PASS
11AX20SISO	Ant1	2462	1000~26500	-0.91	-40	≤-30.91	PASS
11AX40SISO	Ant1	2422	0~Reference	-2.58	-2.58	---	PASS
11AX40SISO	Ant1	2422	30~1000	-2.58	-69.1	≤-32.58	PASS
11AX40SISO	Ant1	2422	1000~26500	-2.58	-40.06	≤-32.58	PASS
11AX40SISO	Ant1	2437	0~Reference	-3.72	-3.72	---	PASS
11AX40SISO	Ant1	2437	30~1000	-3.72	-69.31	≤-33.72	PASS
11AX40SISO	Ant1	2437	1000~26500	-3.72	-40.2	≤-33.72	PASS

11AX40SISO	Ant1	2452	0~Reference	-3.94	-3.94	---	PASS
11AX40SISO	Ant1	2452	30~1000	-3.94	-68.91	≤-33.94	PASS
11AX40SISO	Ant1	2452	1000~26500	-3.94	-40.06	≤-33.94	PASS






11B-Ant1-2412-0~Reference-PASS

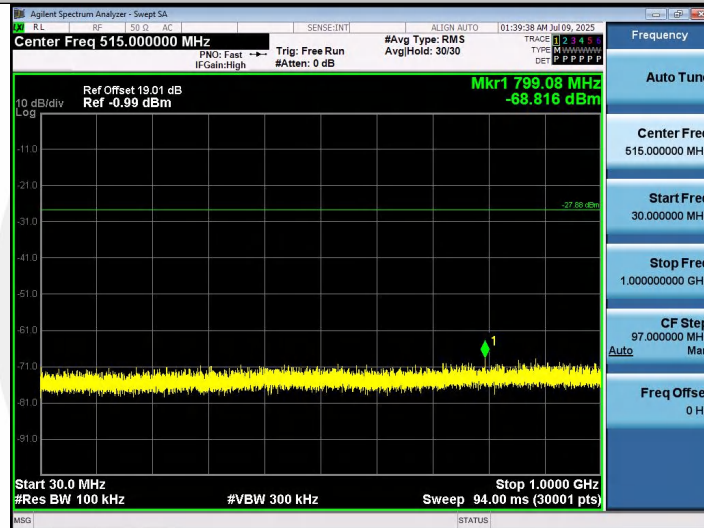


11B-Ant1-2412-30~1000-PASS

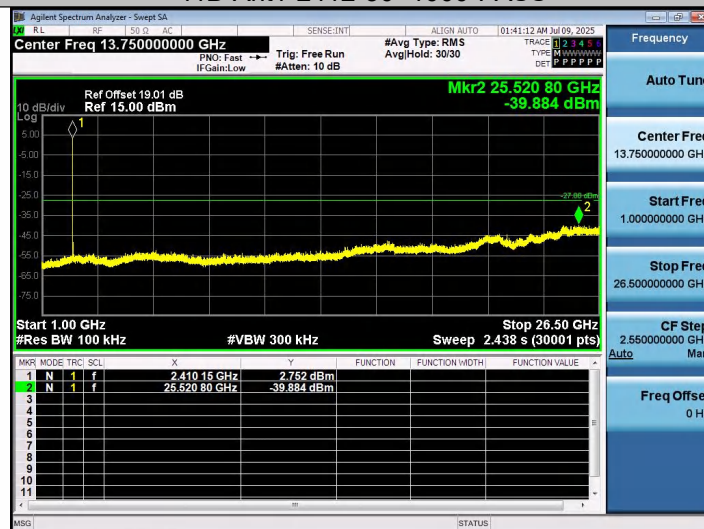


11B-Ant1-2412-1000~26500-PASS




11B-Ant1-2437-0~Reference-PASS

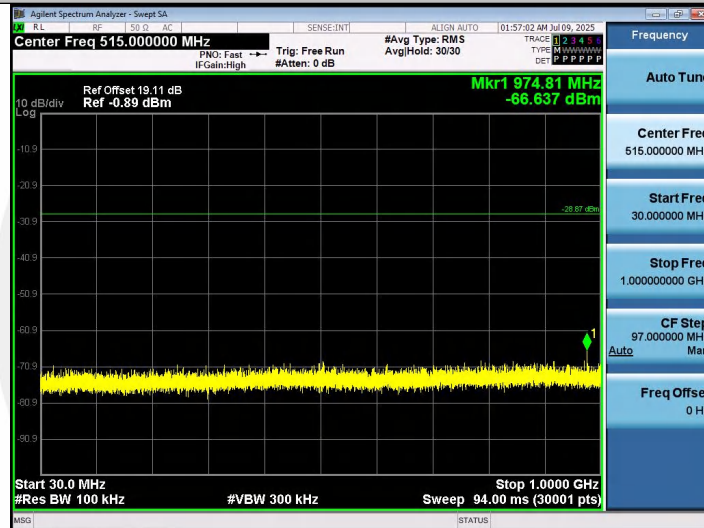


11B-Ant1-2437-30~1000-PASS

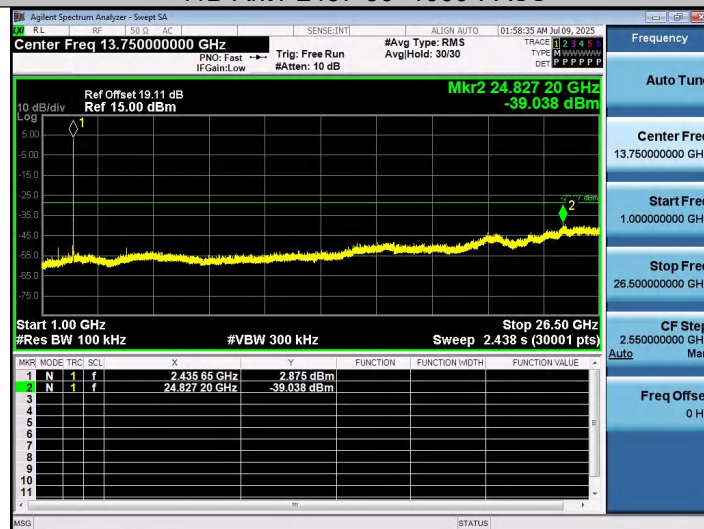

11B-Ant1-2437-1000~26500-PASS

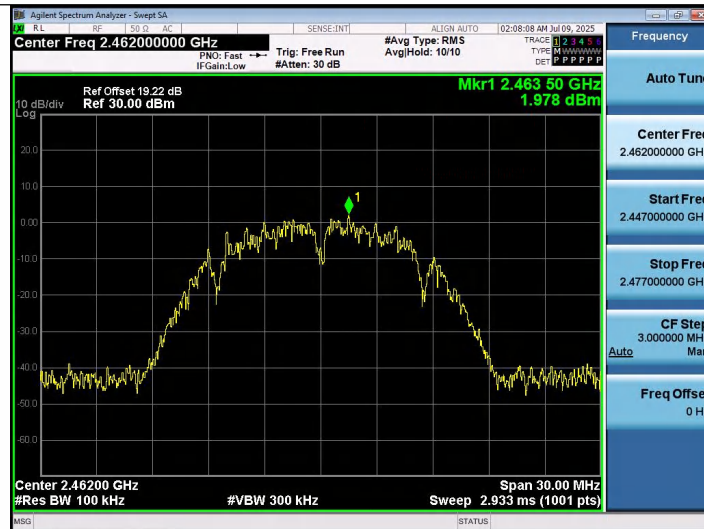


11B-Ant1-2462-0~Reference-PASS

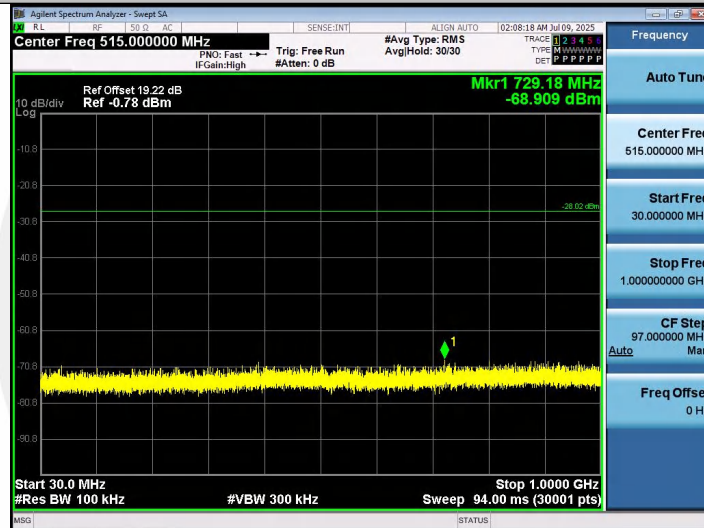


11B-Ant1-2462-30~1000-PASS




11B-Ant1-2462-1000~26500-PASS

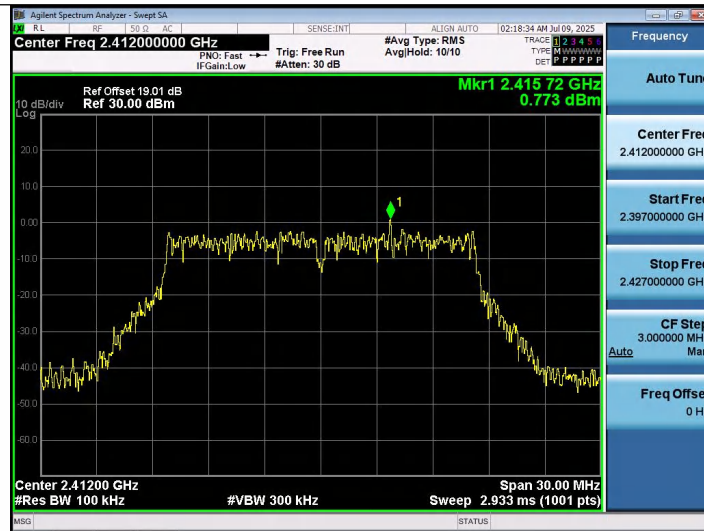


11G-Ant1-2412-0~Reference-PASS

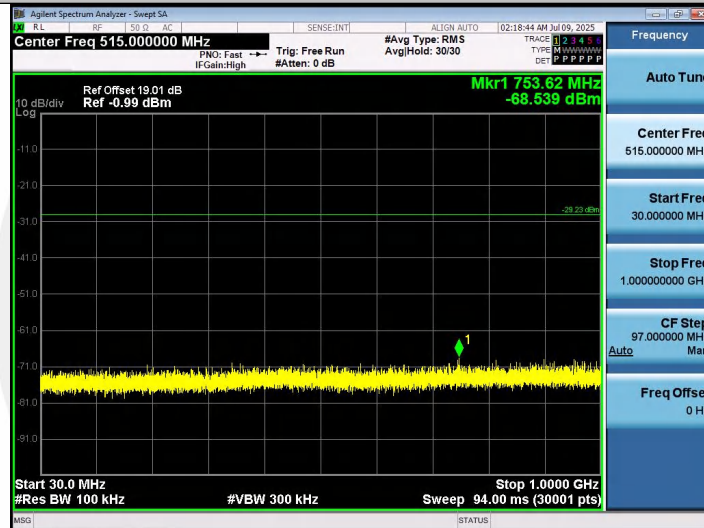


11G-Ant1-2412-30~1000-PASS

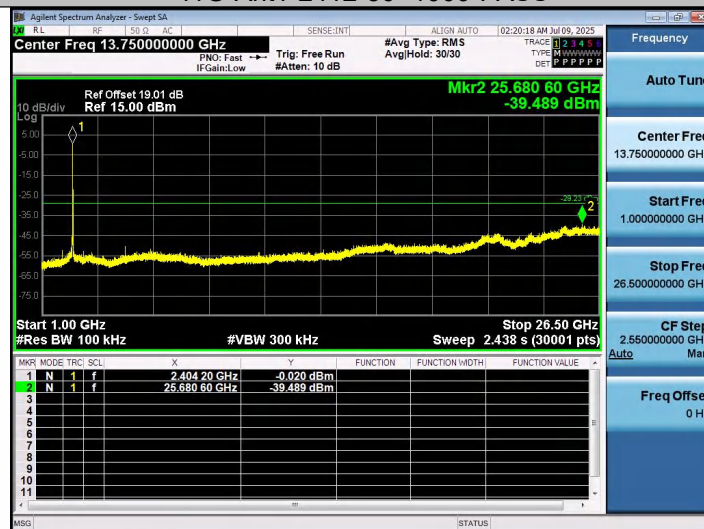


11G-Ant1-2412-1000~26500-PASS

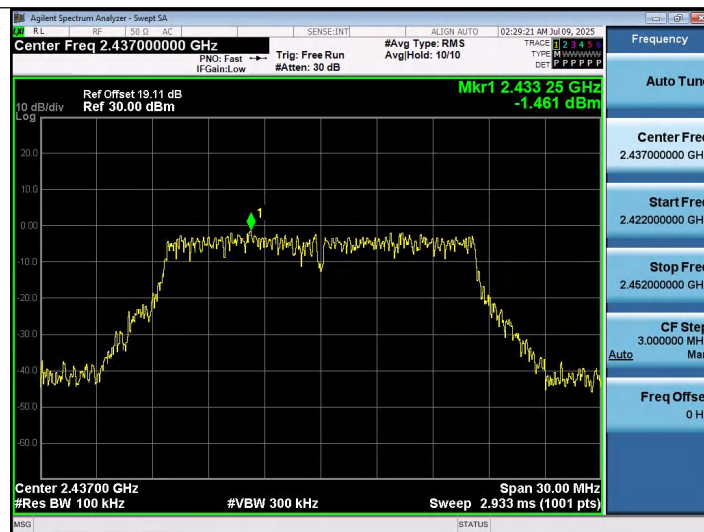

11G-Ant1-2437-0~Reference-PASS

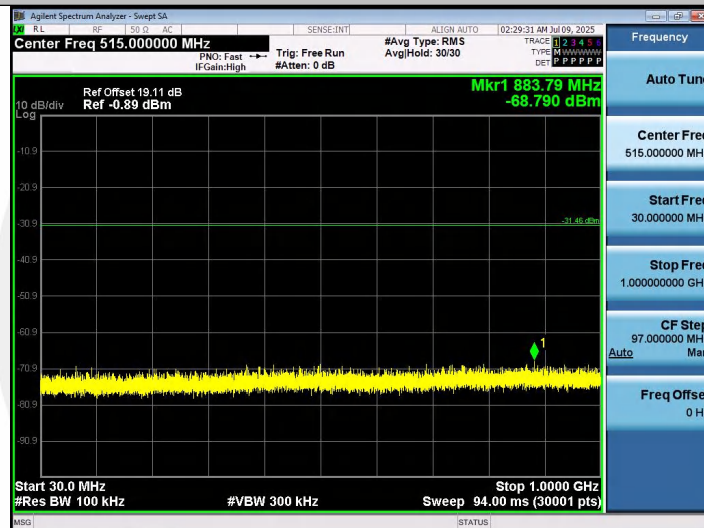

11G-Ant1-2437-30~1000-PASS

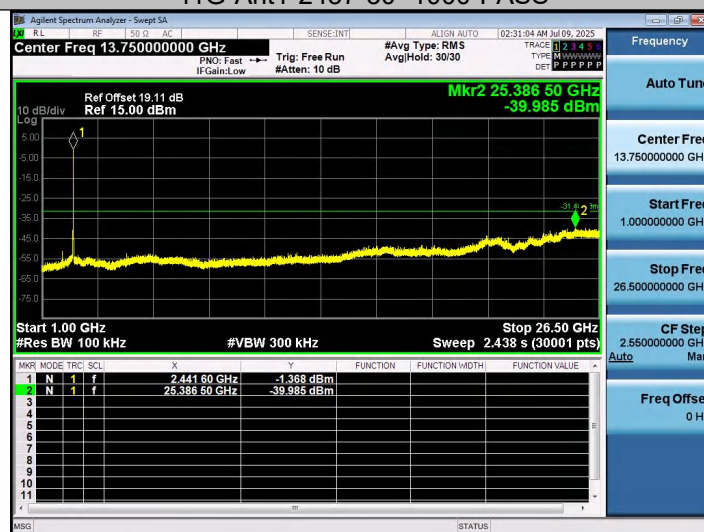

11G-Ant1-2437-1000~26500-PASS