



walzer

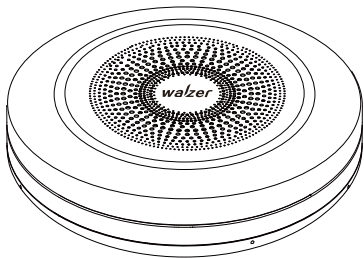

USER GUIDE

M9 CONFERENCE OMNIDIRECTIONAL MIC


Packing list



Conference MIC speaker



Leather bag



Extension cord



Wireless receiver (Dongle)



Type-C power cable



User guide


Power on/off

- Long press power button for 2 seconds to power on. The blue LED will run in a clockwise circle. Long press power button for 2 seconds to power off, the red LED will fade out in a counterclockwise circle.
- When there is no signal input for 15 minutes the power will go off automatically.

Buttons Instruction

	Power on/off
	Bluetooth connection/disconnection
	Mute or activate MIC
	Answer/hang-up a call
	Vol+/Vol-/speaker mute

MIC functions

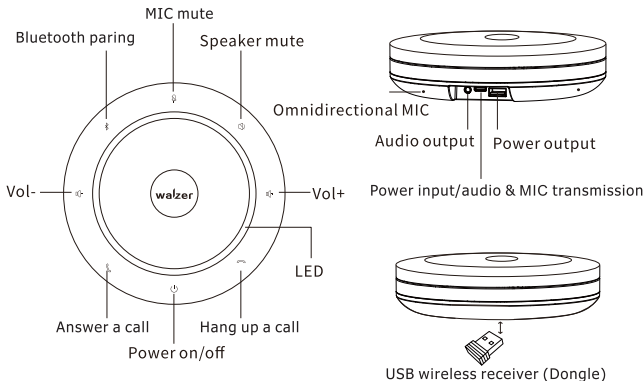

Notes:

📞 buttons are only functional for normal cellphone calls but they are not functional for all calls on conference/media applications. To answer/hang up a conference call please operate on the conference /media application.

The dongle could only be of use for this speaker, it can't be used for wireless connections for other devices.

If the MIC is frozen make a long press on the power button for 15 seconds to reset the MIC.

The noise/echo reduction will only reduce the noise/echo on your side but will not reduce noise/echo on the other side of the conference call. If that occurs it can't be ascribed to this product.

It can't be charged by computers via USB cord, please charge it by an adaptor(not provided).

A) Connecting to the computer with the USB cord

1. Turn the MIC on, connect the MIC and the computer with the Type-C cable.
2. Open any conference APP or media APP then turn on the MIC.
(Make sure the Bluetooth is disconnected)



B) Connecting to other mobile devices with the Bluetooth

1. Turn the MIC on, the blue LED will run slowly when the Bluetooth is paring.
2. Turn on the Bluetooth on your device and search "M9" to connect, when Bluetooth is connected the blue LED will be on. (To disconnect the Bluetooth, press the Bluetooth button on the MIC)



	Press for 2 seconds	Enter Bluetooth paring mode
	When the blue LED is slowly flashing	Bluetooth paring
	When the blue LED is on	Bluetooth connected

C)Connecting to the USB wireless receiver (Dongle)

- 1.Plug the USB wireless receiver into the computer.
- 2.Turn on the MIC. The speaker and the computer will get connected automatically via the Dongle. (Make sure the Bluetooth of the MIC is disconnected with other devices before making this connection)




stable light blue LED	answering a audio/video/phone call (power off prohibited)
green LED on	USB cord connection mode
slow flashing red LED	speaker muted
slow flashing green LED	MIC muted

Charging

A) Charge this device

Flashing red LED indicates low battery, please charge the device, green LED runs when charging, LED goes off when fully charged.


5V 2A
power source



B) Charge other devices


Charge your phone or other devices with its built-in big capacity Li-ion battery, in case your phone or other devices need an emergency charge. When its powered off or charging, it will not charge any other phones or devices.

When the remain battery is less than 30%, it will not charge any other phones or devices .



Audio output

Connect an external speaker to the AUX jack of this MIC with an AUX cord (not provided). The audio will be played through the external speaker.

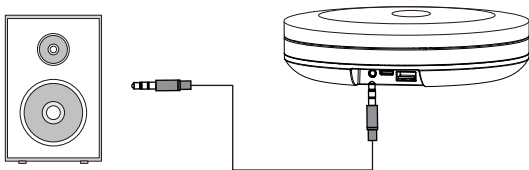



MIC Specifications

There might be some small changes with this product without notifications.

RMS output power:	10W THD1KHz10%
Speaker unit:	2.75-inch 4Ω 10W
Sensitivity:	500mV1KHz THD1%
Frequency:	90Hz-20KHz (1KHz OdB, ±3dB)
SNR:	>70dB
Power input:	DC5V=2A
Input interface:	type-c
Charge Output:	DC5V=2.1A
Earphone output interface:	3.5mm AUX
Built-in battery:	3.7V 5000mA/H
Standby:	300 H
Charging time:	5 H
Playing time	8-12H
MIC	6 omnidirectional MICs
DSP	Suppression of echo and ambient noise
Sound pickup angle	360°
Sound pickup range	max up to 5M/16.4ft (<60dB ambient noise)
Bluetooth Version:	5.0
Bluetooth Range:	max up to 10M/33ft
USB cord supports:	Windows/Linux/Android/iOS
USB wireless receiver supports:	Windows/Linux/Android/iOS

Safety Information

Avoid dropping or hitting the MIC device.

Do not disassemble it.

Do not expose it to high heat such as direct sunlight, fire, or anything similar.

Keep it away from any liquids and moisture.

Clean it with a dry and soft cloth. Do not use any corrosive cleaner or oil.

Warranty

This product has a 2-year warranty limit, the warranty is only related to product quality problems. Any improper use or damage caused by outside forces shall not be covered. Repair/partial refund/full refund will be available depending on the relevant selling channels. For any returns, a proof defect of this item might be requested by the online sales services.

Please feel free to contact us if the product is defective during the warranty period.

For special conditions related to the warranty, please feel free to contact us at any time.

FAQ

It can't be powered on.

Please make a long press on the power button but not slight touch. It's not a touch button device.

Please check if it didn't run out of battery.

It can't be powered on even with the charge cord plugged in.

Unplug the charge cord, make a long press on the power button for 15 seconds, then plug the charge cord. Try to press the power button after 30 minutes. Make sure the power source is DC 5, 2A. It will take a longer time to get fully charged if the current is less than 2A.

It can't be turned off and all the buttons are nonfunctional.

Make a long press on the power button for 15 seconds to reset the speaker, then turn it off and then turn it back on.

It can't be powered off when it's under the meeting microphone state, to avoid an interruption of a meeting. Please end the meeting state firstly and then turn off the speaker.

The blue LED keeps running, and the speaker can't get connected the computer via the Dongle.

Please make sure this Dongle is well plugged into the USB port function.

Please unplug the other Dongles if there is any (Bluetooth wireless receiver) and make a long press on the Bluetooth button to reconnect.

Please make sure there is no interference between the Dongle and the speaker, plug the dongle to the extension cord to get a longer receiver range if needed.

Obvious noises or echo.

Check if there is any other sound being picked up by any other devices with the computer (such as the built-in mic of a laptop), turn off the built-in mic of the computer if there is any.

If there are noises or echo heard from the other side of the conference, the other side might be using a microphone without noise/echo deduction function. The bad communication experiences caused by the other side can't be ascribed to this product.

Off and on during a conference call.

Please make sure there is no interference between the Dongle and the speaker, please shorten the distance between the Dongle and the speaker.


Annoying boom sound when connecting it to computer with USB cord.

Low battery might be the cause. Connect it to the computer via Dongle instead and charge it with the USB cord.

Supplied by NK Electronics Limited

Email:support@walzer.pro

Web:www.walzer.pro



会議マイクスピーカー



レザーバッグ



延長コード



ワイヤレスレシーバー (dongle)



Type-C電源ケーブル




ユーザーガイド

電源のオン/オフ

- 電源ボタンを2秒間長押しして、電源を入れます。青いLEDは時計回りに回転します。電源ボタンを2秒間長押しして電源を切ると、赤いLEDが反時計回りにフェードアウトします。
- 15分間信号が入力されない場合、自動的に電源がオフになります。

ボタンの説明

	電源のオン/オフ
	Bluetooth接続/切断
	MICをミュートまたはアクティブ化する
	電話に出る/電話を切る
	音量+/音量-/スピーカーミュート

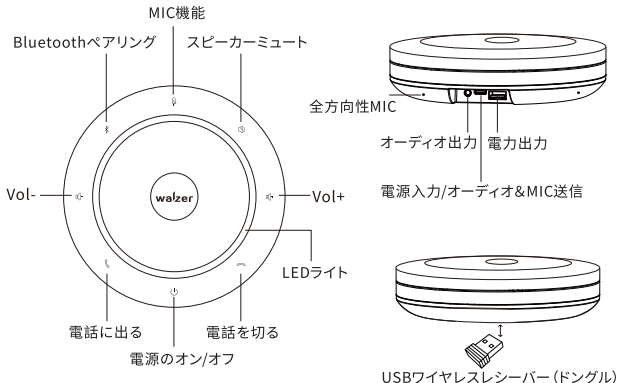

ノート:

📞 ボタンは通常の携帯電話の通話でのみ機能しますが、会議/メディアアプリケーションのすべての通話で機能するわけではありません。電話会議に応答/電話を切るには、会議/メディアアプリケーションを操作してください。

ダングルはこのスピーカーにのみ使用でき、他のデバイスのワイヤレス接続には使用できません。

MICがフリーズしている場合は、電源ボタンを15秒間長押しして、MICをリセットします。

ノイズ/エコーリダクションは、あなたの側のノイズ/エコーを減らすだけで、電話会議の反対側のノイズ/エコーを減らすことはありません。それが発生した場合、それはこの製品に帰することができません。

USBコードを介してコンピューターで充電することはできません。アダプター (付属していません) で充電してください。

A) USBケーブルでコンピューターと接続する

1. MICの電源を入れ、MICとコンピューターをType-Cケーブルで接続します。
2. 会議アプリまたはメディアアプリを開き、マイクで再生します。
(Bluetoothが切断されていることを確認してください)



B) Bluetoothで他のモバイルデバイスと接続する

1. MICをオンにすると、Bluetoothがペアリングされているときに青色のLEDがゆっくりと点灯します。
2. 任意のデバイスでBluetoothをアクティブにし、「M9」を検索して接続します。Bluetoothが接続されると、青色のLEDが安定して点灯します。(MICのBluetoothボタンを押してBluetoothを切断します)



	2秒間押します	Bluetoothペアリングモードに入る
	低速で動作する青色LED	Bluetoothペアリ
	安定した青色LED	Bluetooth接続

C) USBワイヤレスレシーバーで接続する(dongle)

1. USBワイヤレスレシーバーをコンピューターに接続します。
2. マイクをオンにします。スピーカーとコンピューターは dongle 経由で自動的に接続されます。(この接続の前に、MICのBluetoothが他のデバイスから切断されていることを確認してください)




安定した水色のLED	音声/ビデオ/電話に応答する(電源オフは禁止されています)
安定した緑色のLED	USBコード接続モード
ゆっくり点滅する赤色LED	スピーカーがミュートされました
ゆっくり点滅する緑色LED	MICがミュートされました

充電

A) このデバイスを充電する


赤いLEDの点滅は、バッテリー残量が少ないことを示します。デバイスを充電してください。充電中は緑色のLEDが点灯し、完全に充電されるとLEDが消灯します。

5V 2A
power source




B) 他のデバイスを充電する

大容量のリチウムイオン電池を内蔵しているので、緊急時に携帯電話を充電できます。電源を切ったり充電しているときは、充電されません。バッテリー残量が30%未満の場合、充電されません。



オーディオ出力

外部スピーカーをこのMICのAUXジャックにAUXコード(付属していません)で接続します。音声は外部スピーカーから再生されます。

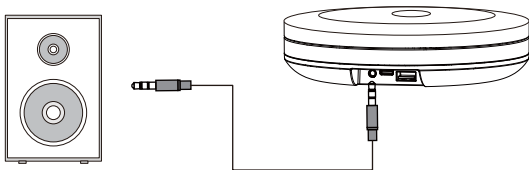

全方向性MIC仕様

全方向性MIC仕様:	10W THD1KHz10%
スピーカーユニット:	2.75 inch 4Ω 10W
感度:	500mV1KHz THD1%
周波数:	90Hz-20KHz(1KHz OdB, ±3dB)
SNR:	>70dB
電源入力:	DC5V=2A
入力インターフェース:	type-c
電荷出力:	DC5V=2.1A
イヤホン出力インターフェース:	3.5mm AUX
内蔵バッテリー:	3.7V 5000mA/H
待機時間:	300 H
充電時間:	5 H
再生時間:	8-12H
MIC:	6 omnidirectional mics 6つの無指向性マイク
DSP:	エコーと周囲ノイズの抑制
吸音角度:	360°
集音範囲:	最大5M / 16.4ft (<60dB周囲ノイズ)
Bluetoothバージョン:	5.0
Bluetooth範囲:	最大10M / 33フィート
USBコードサポート:	Windows / Linux / Android / iOS
USBワイヤレスレシーバーはサポートします:	Windows / Linux / Android / iOS

安全情報

落としたり叩いたりしないでください。

分解しないでください。

直射日光や火などの高熱にさらさないでください。

液や湿気から遠ざけてください。

乾いた柔らかい布で拭いてください。腐食性のクリーナーやオイルは使用しないでください。

保証

この製品の自己品質の問題については、2年間の保証が制限されています。外力によって引き起こされた不適切な使用または損傷は補償されません。

修理/一部返金/全額返金は、関連する販売チャネルによって異なります。このアイテムの返品または欠陥のある証明は、オンライン販売のための上記サービスのリクエストである可能性があります。

保証期間中に不具合が発生した場合は、お気軽にお問い合わせください。

保証に関連する特別な条件については、いつでもお気軽にお問い合わせください。

よくある質問

電源を入れることはできません。

電源ボタンを長押ししますが、軽く触れないでください。タッチボタンデバイスではありません。

電池が切れていないか確認してください。

充電コードを差し込んでも電源が入らない。

充電コードを抜き、電源ボタンを15秒間長押ししてから、充電コードを差し込みます。30分後に電源ボタンを押してみてください。電源がDC5、2Aであることを確認してください。電流が2A未満の場合、完全に充電されるまでに時間がかかります。

オフにすることはできず、すべてのボタンが機能しません。

電源ボタンを15秒間長押ししてスピーカーをリセットし、電源をオフにしてからオンにします。会議のマイクの状態では、会議の中断を熱望するために電源をオフにすることはできません。最初に会議の状態を終了してから、スピーカーをオフにしてください。

青いLEDが点灯し続け、スピーカーをドングル経由でコンピューターに接続できません。ドングルがしっかりと接続され、USBポートが正常に機能していることを確認してください。他のドングル(Bluetoothワイヤレスレシーバー)がある場合はプラグを抜き、Bluetoothボタンを長押しして再接続してください。ドングルとスピーカーの間に干渉がないことを確認してください。必要に応じて、ドングルの延長コードに接続して、受信機の範囲を長くしてください。

明らかなノイズまたはエコー。

コンピューターに他のサウンドピックアップデバイス(ラップトップの内蔵マイクなど)があるかどうかを確認し、ある場合はコンピューターの内蔵マイクをオフにします。会議の反対側からノイズやエコーが聞こえる場合は、反対側がノイズ/エコー推定機能のないマイクを使用している可能性があります。反対側によって引き起こされた悪いコミュニケーション体験は、この製品に帰することはできません。

電話会議中にオフとオンを切り替えます。

ドングルとスピーカーの間に干渉がないことを確認してください。ドングルとスピーカーの間の距離を短くしてください。

USBコードでパソコンに接続するとブーム音がします。

バッテリー残量が少ないことが原因である可能性があります。代わりにドングル経由でコンピューターに接続し、USBコードで充電してください。


Nk株式会社提供

Eメール:support@walzer.pro

Webサイト:www.walzer.pro



PACKLISTE



Konferenz-MIC-Lautsprecher



Ledertasche



Verlängerungskabel



Drahtloser Empfänger (Dongle)



Typ-C-Stromkabel



BENUTZERHANDBUCH


Einschalten / Ausschalten

- Halten Sie die Ein-/Aus-Taste 2 Sekunden lang gedrückt, um das Gerät einzuschalten. Die blaue LED läuft im Uhrzeigersinn. Halten Sie die Einschalttaste 2 Sekunden lang gedrückt, um das Gerät auszuschalten. Die rote LED erlischt im Kreis gegen den Uhrzeigersinn.
- Wenn 15 Minuten lang kein Signal anliegt, wird das Gerät automatisch ausgeschaltet.

	Einschalten / Ausschalten
	Bluetooth-Verbindung/-Trennung
	MIC stummschalten oder aktivieren
	Anruf annehmen/auflegen
	Lautstärke+ / Vol- / Stumm



MIC-Funktionen

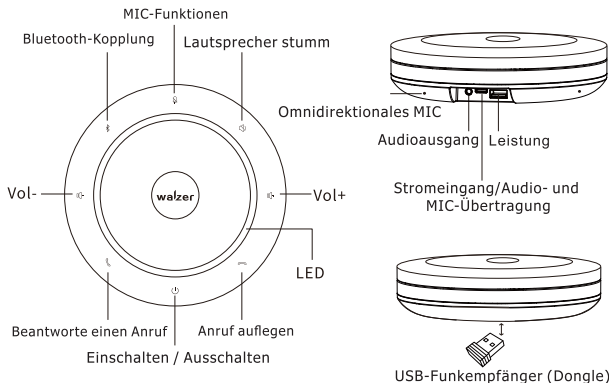

Anmerkungen:

☎-tasten funktionieren nur bei normalen Mobiltelefonanrufen, aber nicht bei allen Anrufen in Konferenz-/Medianwendungen. Um ein Konferenzgespräch anzunehmen/aufzulegen, bedienen Sie sich bitte der Konferenz-/Medianwendung.

Der Dongle kann nur für diesen Lautsprecher verwendet werden, er kann nicht für drahtlose Verbindungen für andere Geräte verwendet werden.

Wenn das MIC eingefroren ist, halten Sie den Netzschalter 15 Sekunden lang gedrückt, um das MIC zurückzusetzen.

Die Rausch-/Echoreduzierung reduziert nur das Rauschen/Echo auf Ihrer Seite, jedoch nicht das Rauschen/Echo auf der anderen Seite des Konferenzgesprächs. Wenn dies auftritt, kann dies nicht diesem Produkt zugeschrieben werden.

Es kann nicht von Computern über ein USB-Kabel aufgeladen werden, bitte laden Sie es mit einem Adapter auf (nicht im Lieferumfang enthalten).

A) Anschließen an den Computer mit dem USB-Kabel

1. Schalten Sie das MIC ein, verbinden Sie das MIC und den Computer mit dem Typ- C-Kabel.
 2. Öffnen Sie eine beliebige Konferenz-APP oder Medien-APP und schalten Sie dann das MIC ein.
- (Stellen Sie sicher, dass die Bluetooth-Verbindung getrennt ist)



B) Verbinden mit anderen Mobilgeräten über Bluetooth

1. Schalten Sie das MIC ein, die blaue LED leuchtet langsam, wenn das Bluetooth gekoppelt wird.
2. Schalten Sie Bluetooth auf Ihrem Gerät ein und suchen Sie nach "M9", um eine Verbindung herzustellen. Wenn Bluetooth verbunden ist, leuchtet die blaue LED. (Um das Bluetooth zu trennen, drücken Sie die Bluetooth-Taste am MIC)



	2 Sekunden lang drücken	Geben Sie den Bluetooth-Pairing-Modus ein
	Wenn die blaue LED langsam blinkt	Bluetooth-Kopplung
	Wenn die blaue LED leuchtet	Bluetooth verbunden