






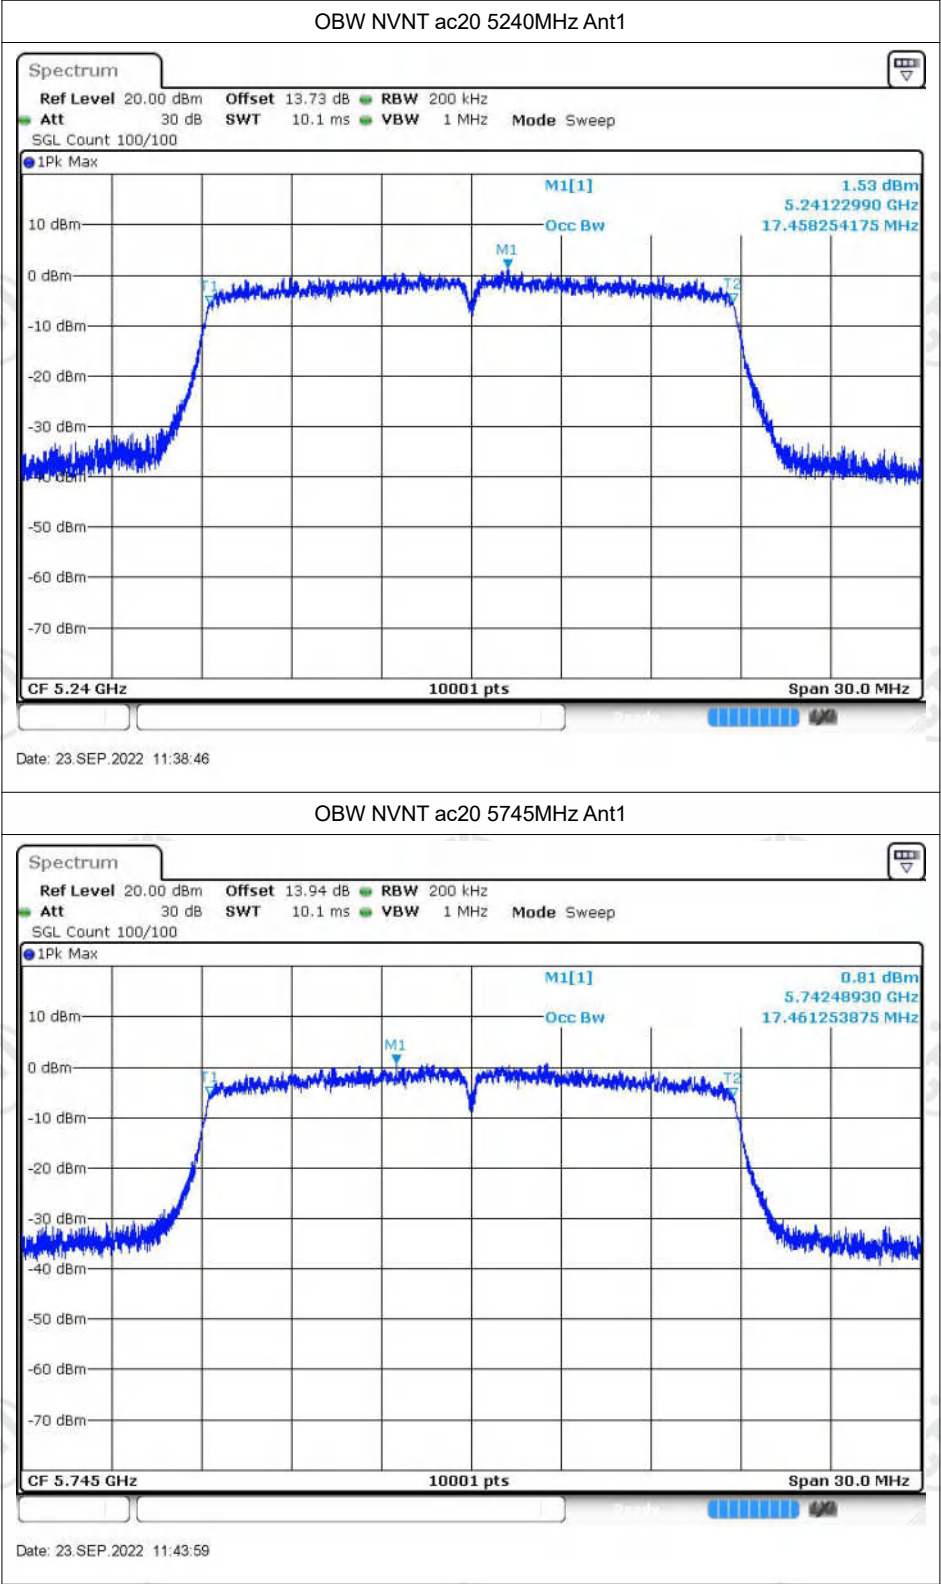


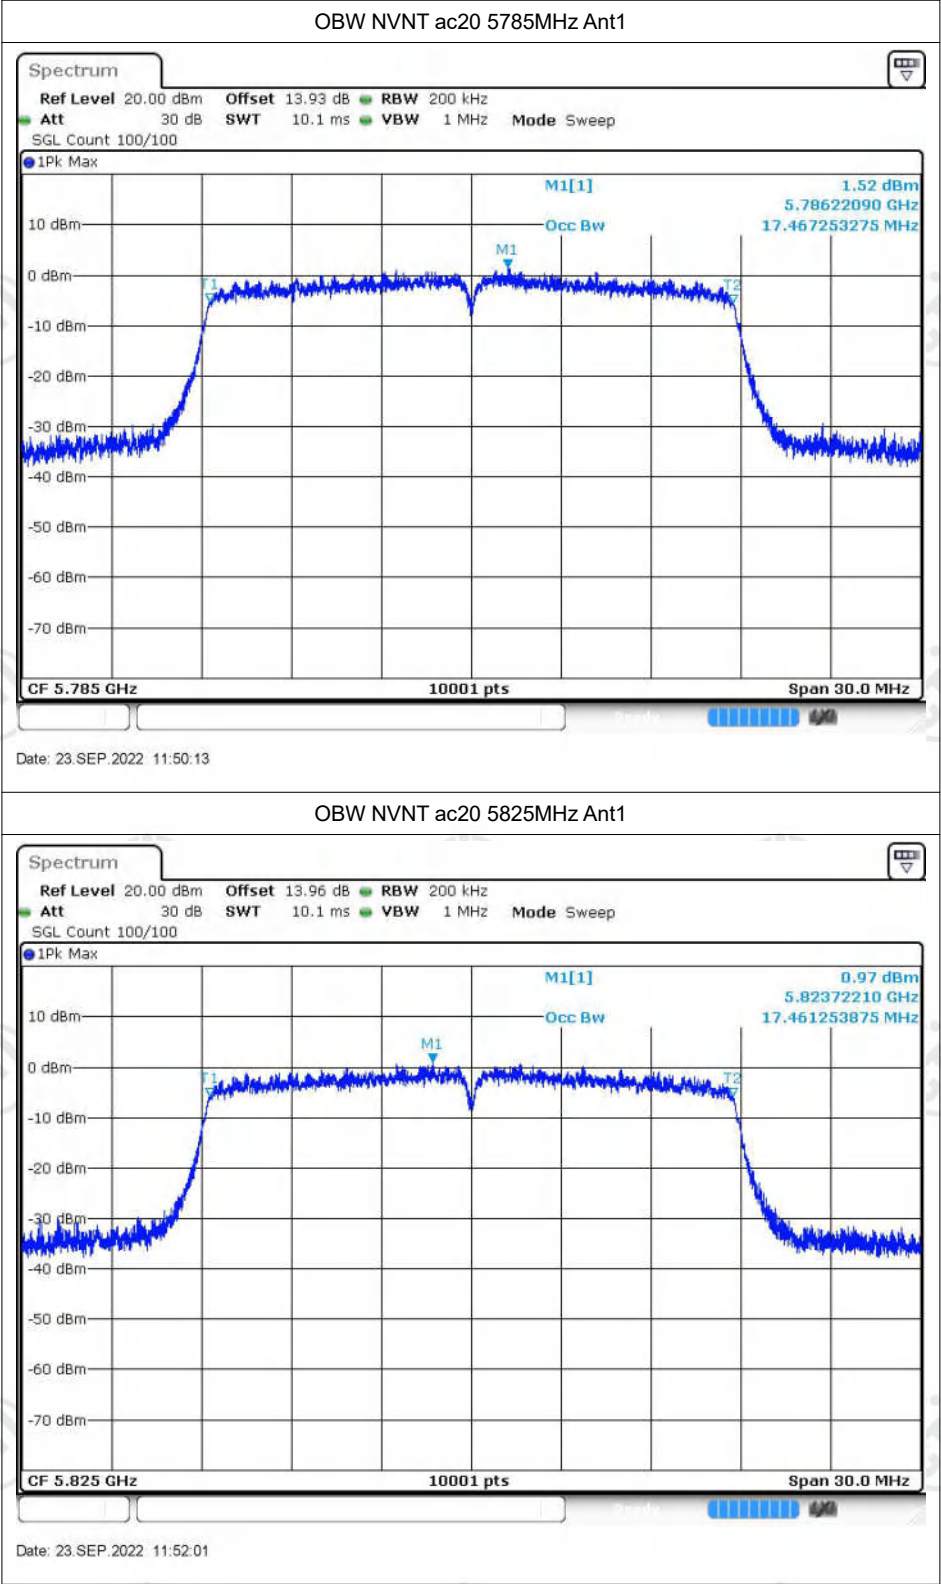


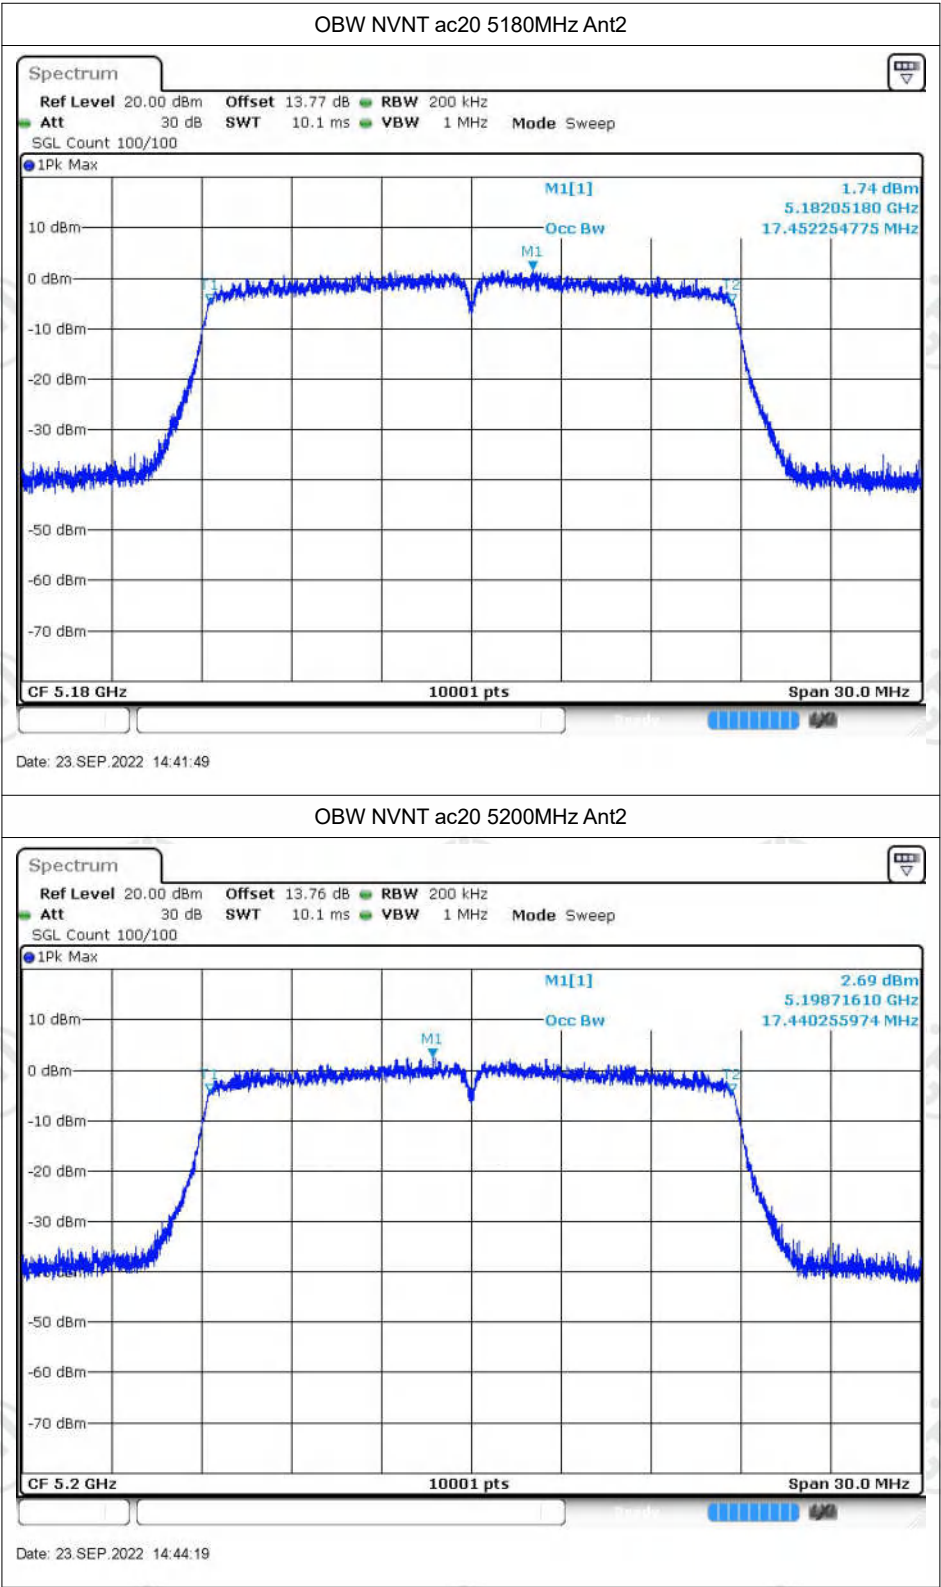



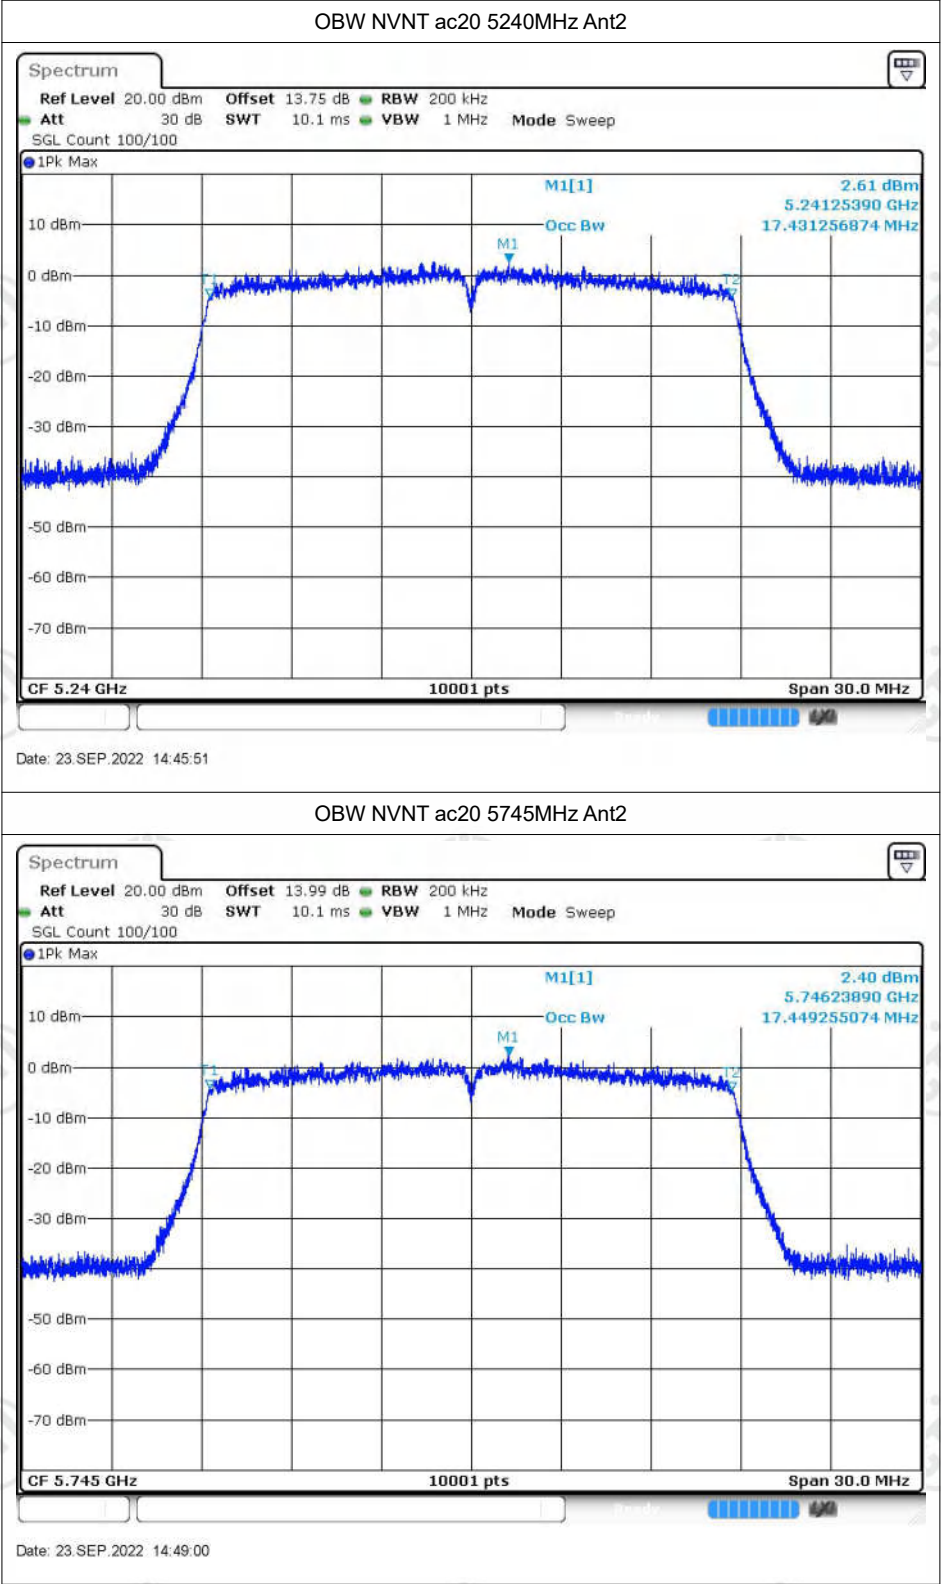


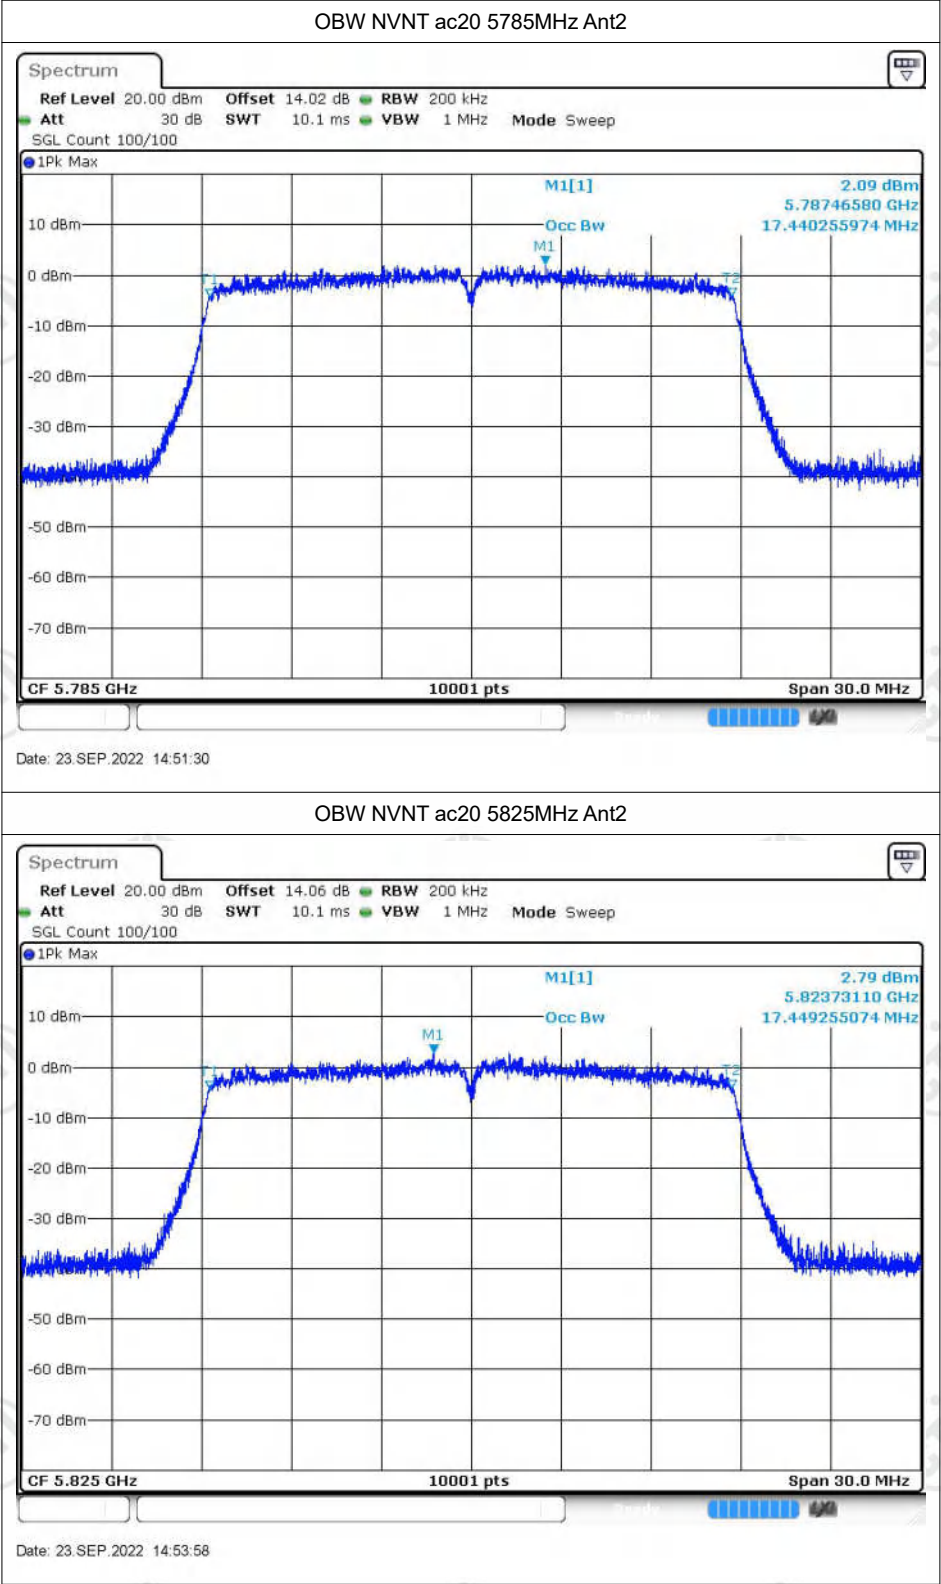


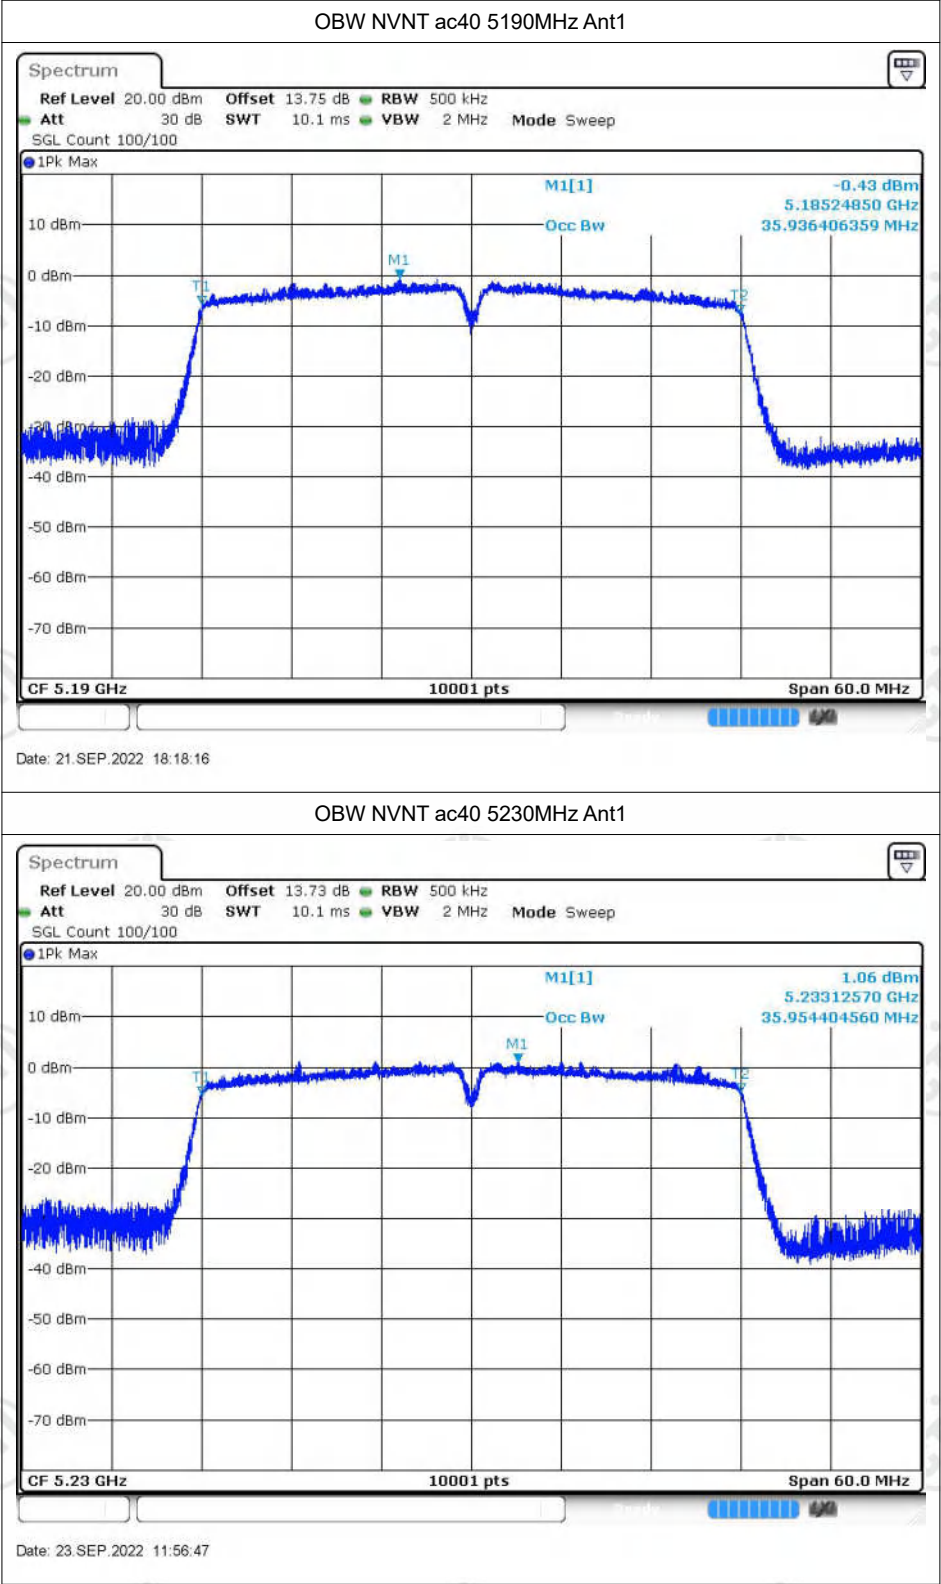


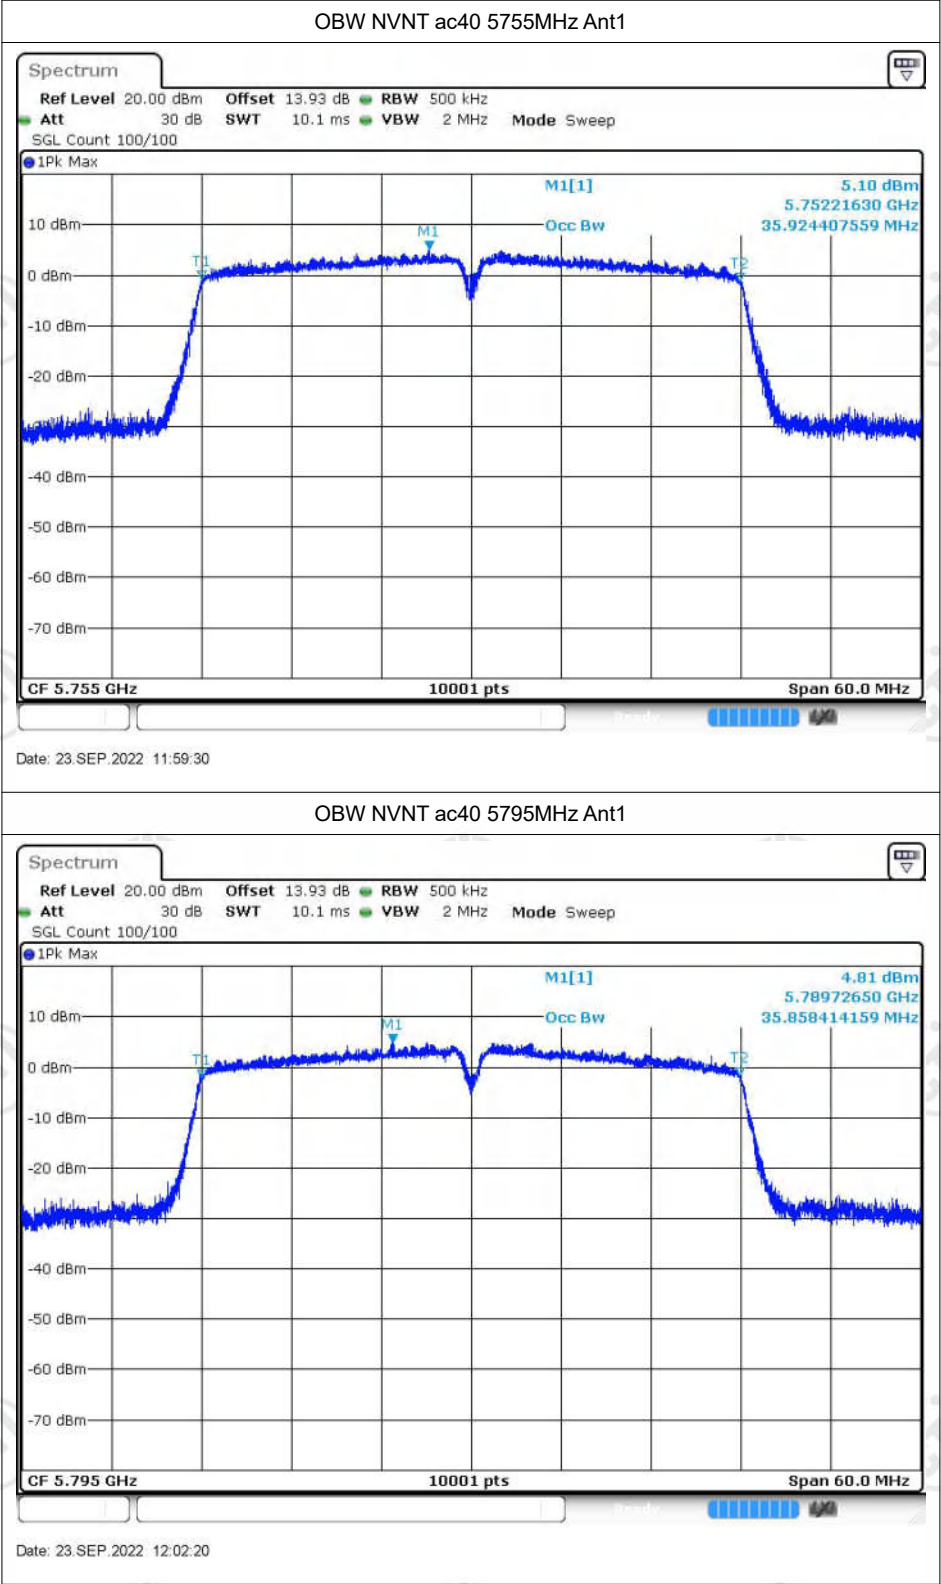

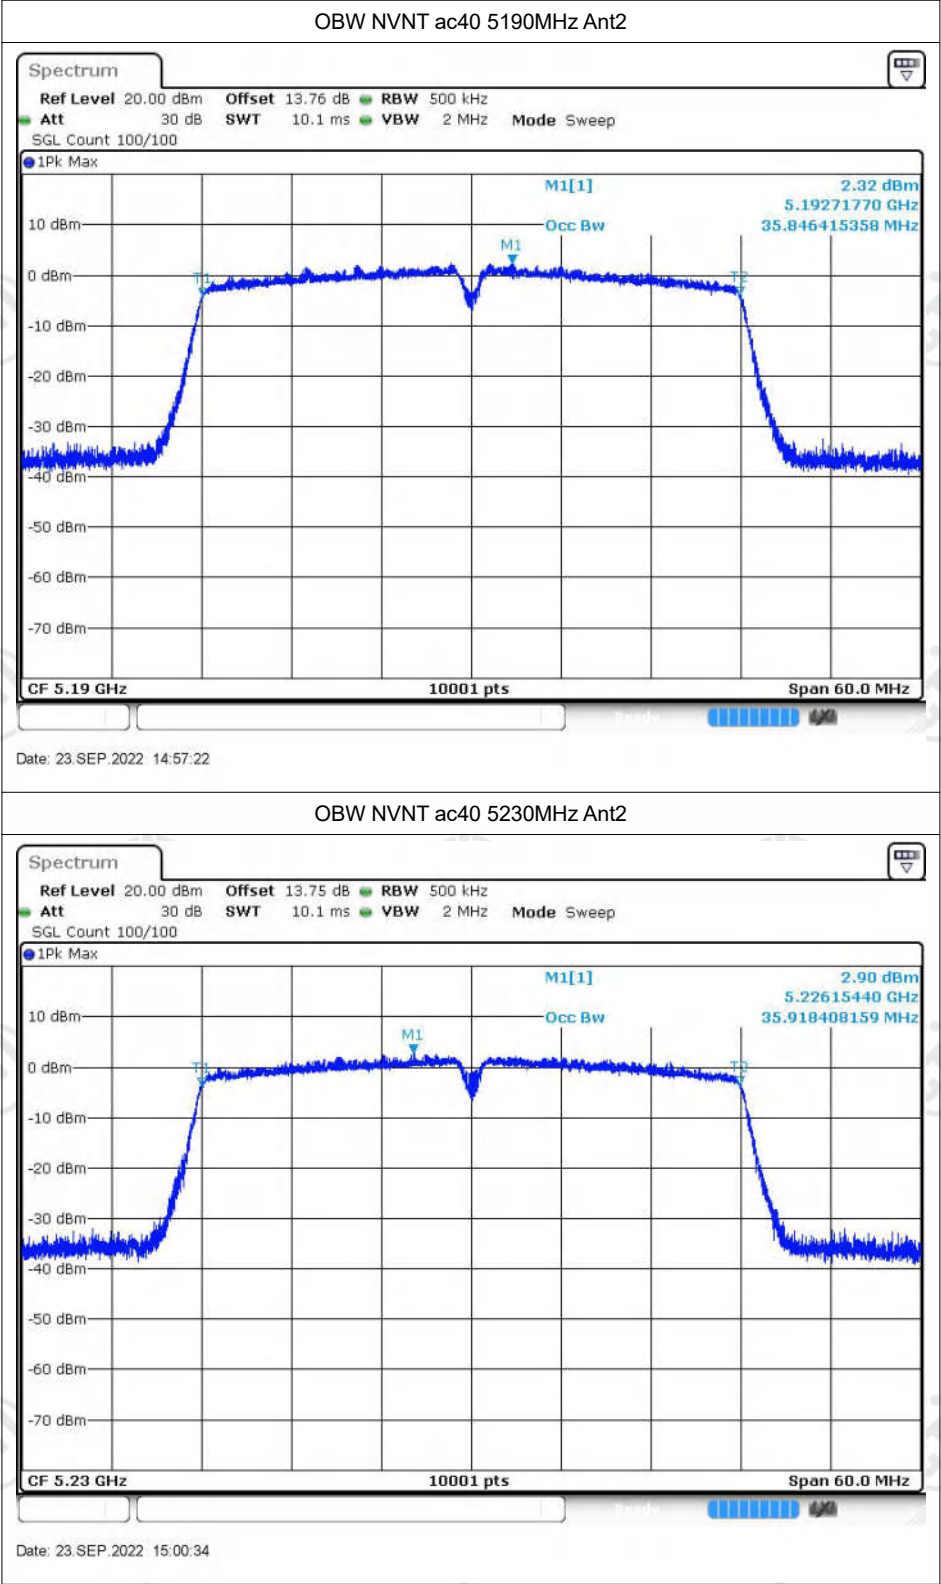

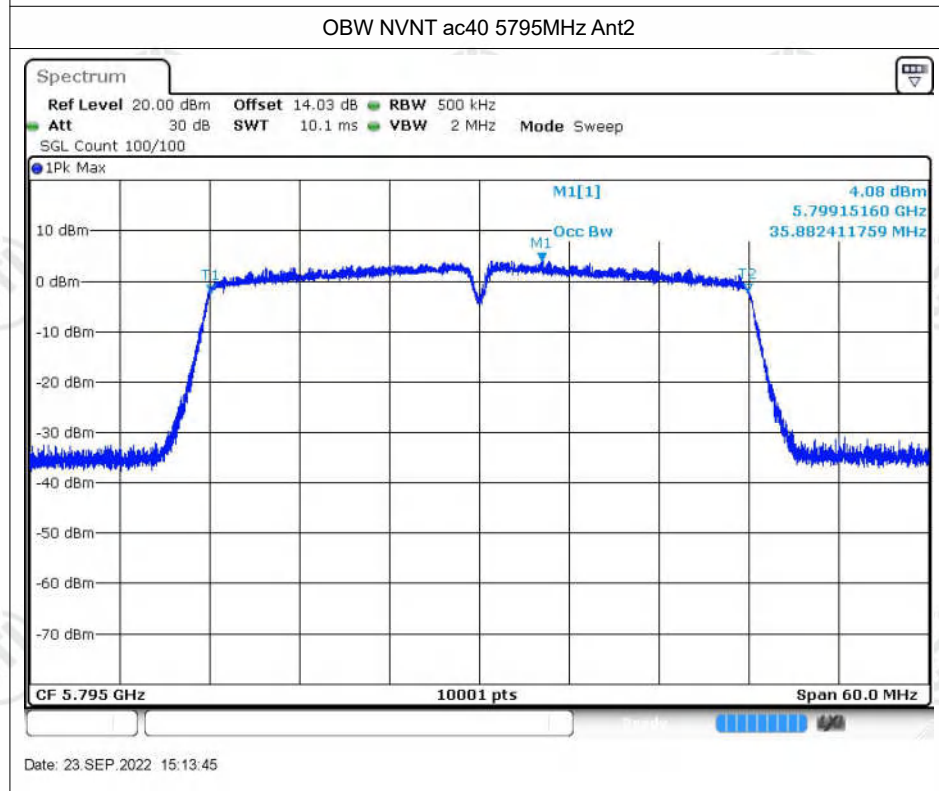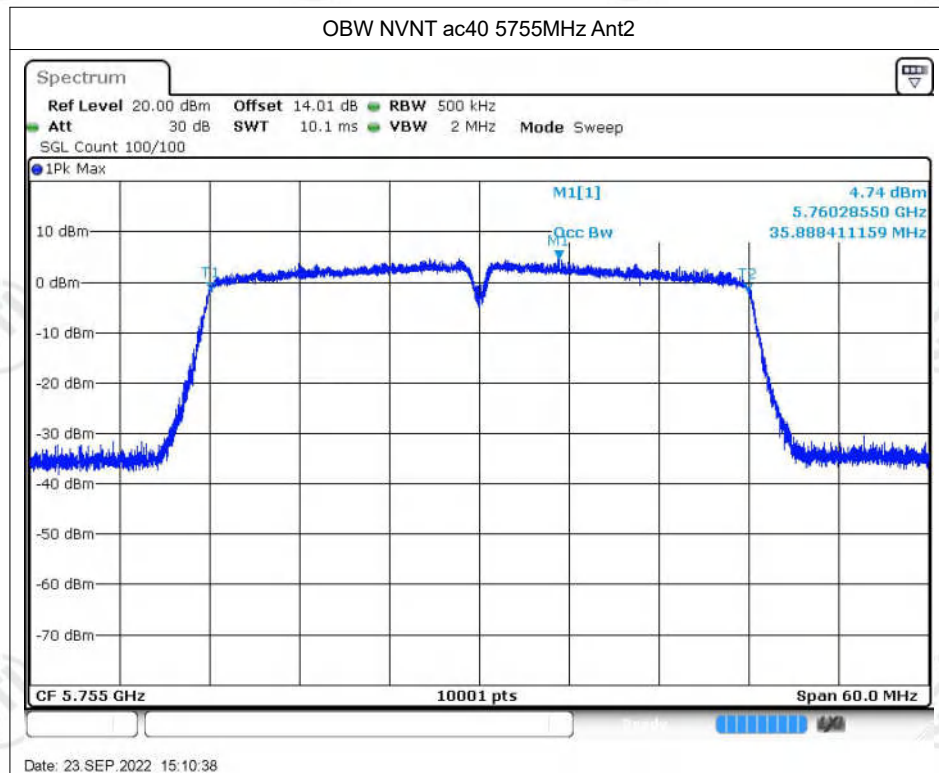

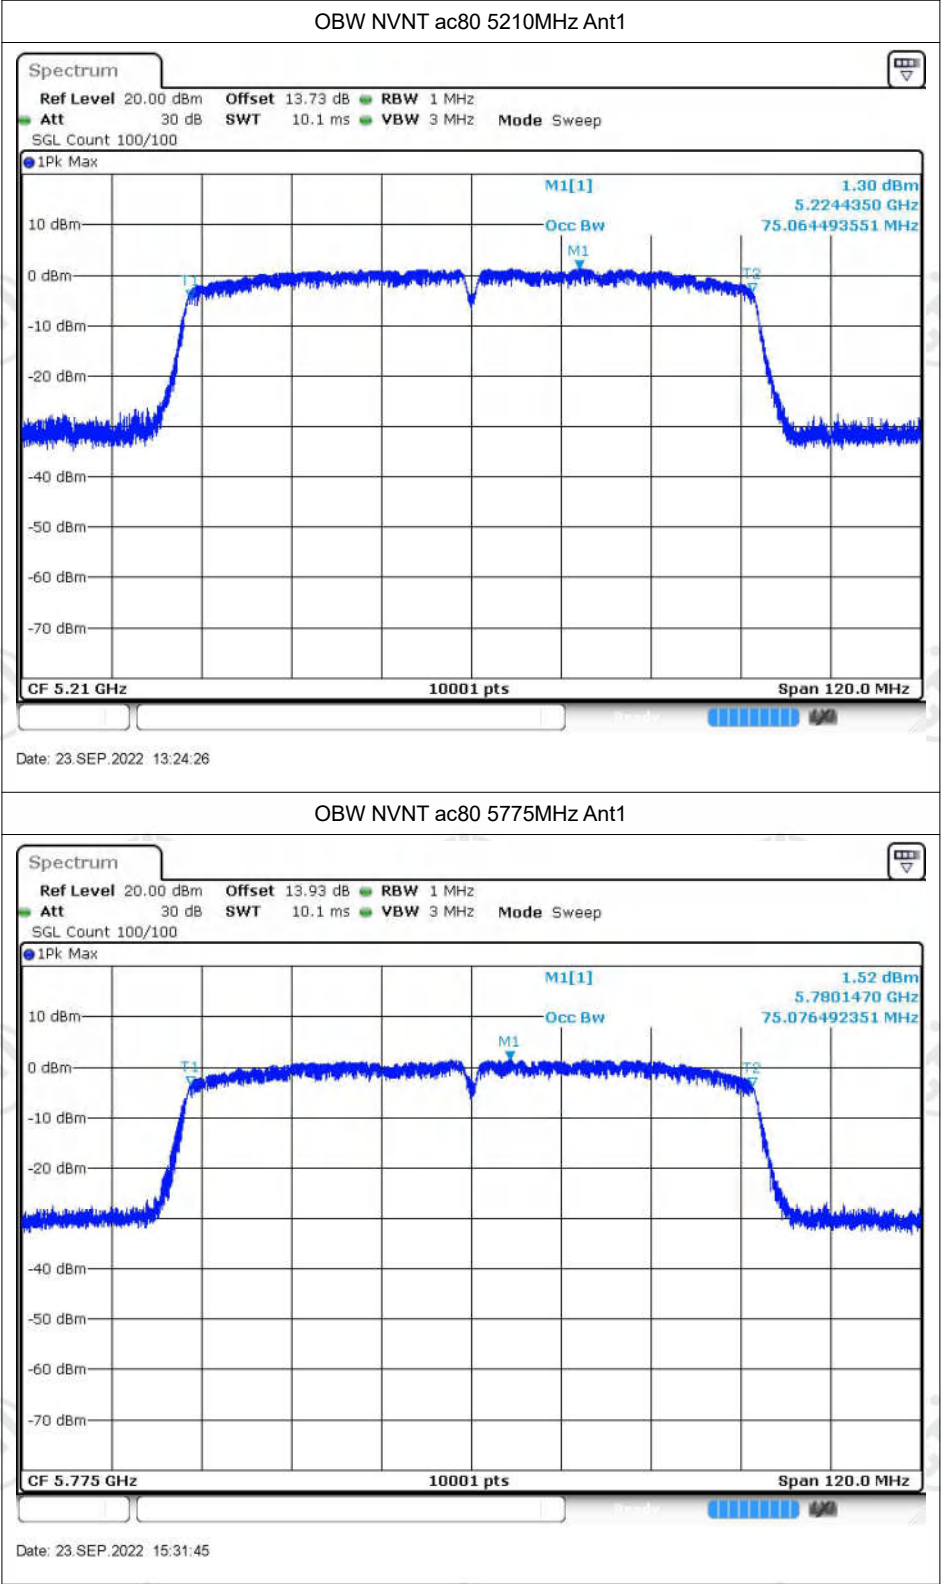

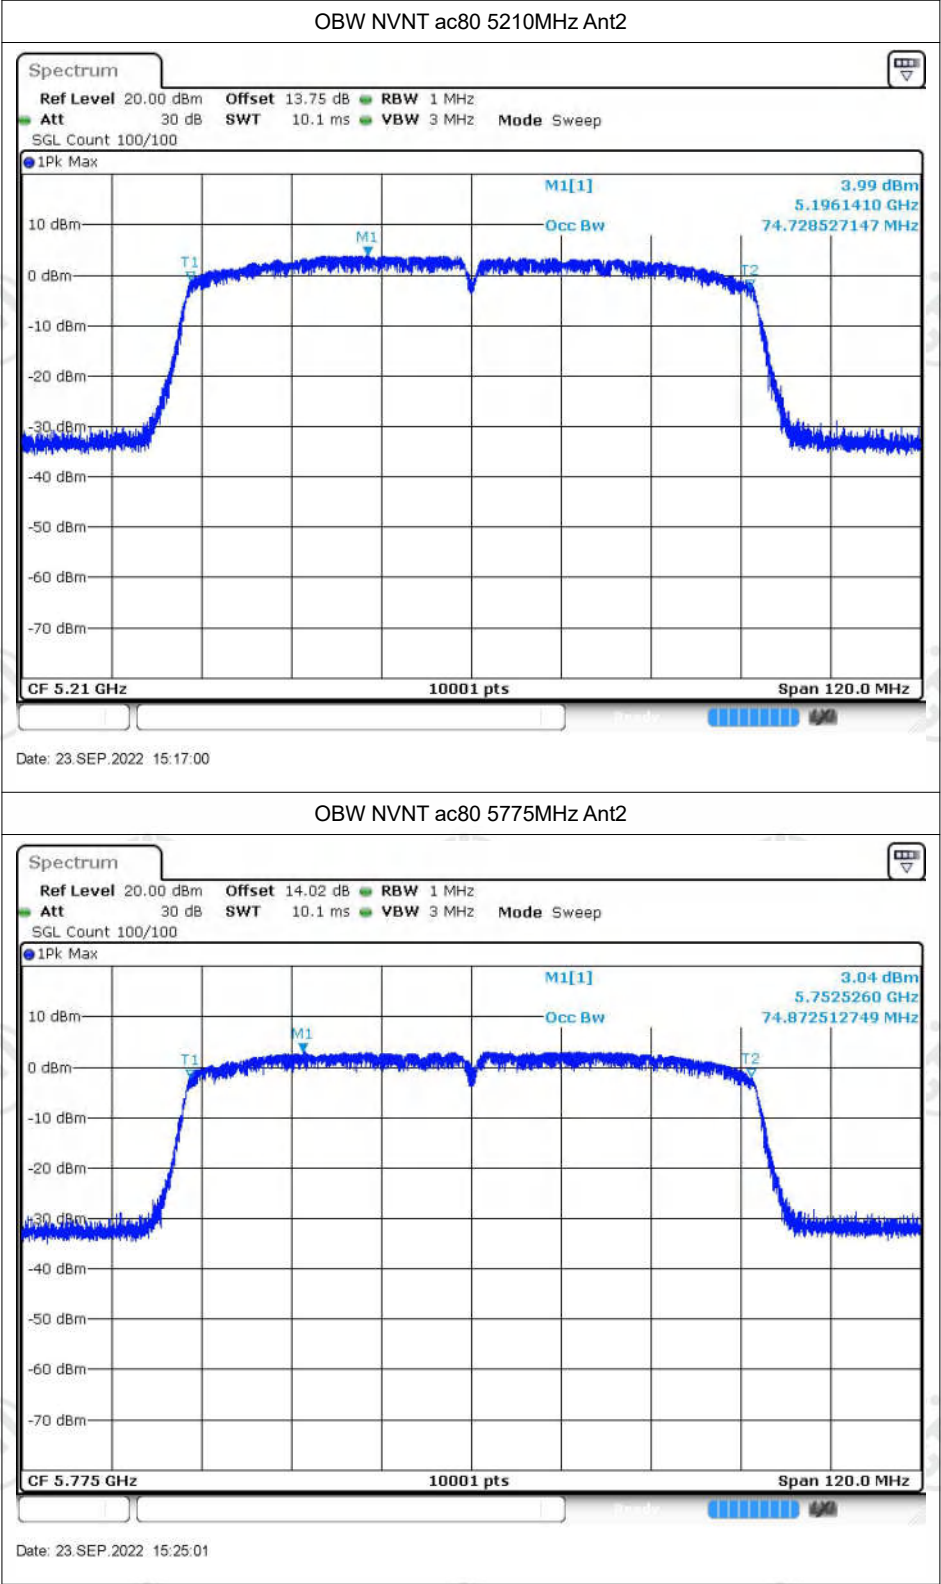


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-3.64	0.39	-3.25	11	Pass
NVNT	a	5200	Ant1	-3.34	0.23	-3.11	11	Pass
NVNT	a	5240	Ant1	-2.16	0.44	-1.72	11	Pass
NVNT	a	5745	Ant1	-2.16	0.46	-1.7	30	Pass
NVNT	a	5785	Ant1	-4.17	0.37	-3.8	30	Pass
NVNT	a	5825	Ant1	-2.96	0.36	-2.6	30	Pass
NVNT	a	5180	Ant2	-1.47	0.29	-1.18	11	Pass
NVNT	a	5200	Ant2	-1.86	0.34	-1.52	11	Pass
NVNT	a	5240	Ant2	-2.26	0.34	-1.92	11	Pass
NVNT	a	5745	Ant2	-2.64	0.46	-2.18	30	Pass
NVNT	a	5785	Ant2	-3.27	0.42	-2.85	30	Pass
NVNT	a	5825	Ant2	-2.22	0.27	-1.95	30	Pass
NVNT	n20	5180	Ant1	-3.05	0.27	-2.78	11	Pass
NVNT	n20	5200	Ant1	-3.24	0.25	-2.99	11	Pass
NVNT	n20	5240	Ant1	-2.5	0.31	-2.19	11	Pass
NVNT	n20	5745	Ant1	-4.16	0.27	-3.89	30	Pass
NVNT	n20	5785	Ant1	-5.06	0.44	-4.62	30	Pass
NVNT	n20	5825	Ant1	-5.21	0.42	-4.79	30	Pass
NVNT	n20	5180	Ant2	-2.14	0.38	-1.76	11	Pass
NVNT	n20	5200	Ant2	-2.99	0.23	-2.76	11	Pass
NVNT	n20	5240	Ant2	-3.26	0.36	-2.9	11	Pass
NVNT	n20	5745	Ant2	-4.48	0.47	-4.01	30	Pass
NVNT	n20	5785	Ant2	-4.3	0.49	-3.81	30	Pass
NVNT	n20	5825	Ant2	-3.91	0.25	-3.66	30	Pass
NVNT	n20	5180	Ant1	-7.75	0	-7.75	11	Pass
NVNT	n20	5180	Ant2	-5.11	0	-5.11	11	Pass
NVNT	n20	5180	Sum	-3.22	0	-3.22	11	Pass
NVNT	n20	5200	Ant1	-8.48	0	-8.48	11	Pass
NVNT	n20	5200	Ant2	-5.13	0	-5.13	11	Pass
NVNT	n20	5200	Sum	-3.48	0	-3.48	11	Pass
NVNT	n20	5240	Ant1	-9.33	0	-9.33	11	Pass
NVNT	n20	5240	Ant2	-4.34	0	-4.34	11	Pass
NVNT	n20	5240	Sum	-3.14	0	-3.14	11	Pass
NVNT	n20	5745	Ant1	-12.01	0	-12.01	30	Pass
NVNT	n20	5745	Ant2	-7.16	0	-7.16	30	Pass


NVNT	n20	5745	Sum	-5.93	0	-5.93	30	Pass
NVNT	n20	5785	Ant1	-12.06	0	-12.06	30	Pass
NVNT	n20	5785	Ant2	-7.06	0	-7.06	30	Pass
NVNT	n20	5785	Sum	-5.87	0	-5.87	30	Pass
NVNT	n20	5825	Ant1	-11.66	0	-11.66	30	Pass
NVNT	n20	5825	Ant2	-7.12	0	-7.12	30	Pass
NVNT	n20	5825	Sum	-5.81	0	-5.81	30	Pass
NVNT	n40	5190	Ant1	-7.22	0.46	-6.76	11	Pass
NVNT	n40	5230	Ant1	-7.12	0.75	-6.37	11	Pass
NVNT	n40	5755	Ant1	-6.91	0.61	-6.3	30	Pass
NVNT	n40	5795	Ant1	-7.3	0.53	-6.77	30	Pass
NVNT	n40	5190	Ant2	-6.2	0.71	-5.49	11	Pass
NVNT	n40	5230	Ant2	-8.07	0.95	-7.12	11	Pass
NVNT	n40	5755	Ant2	-9.14	0.53	-8.61	30	Pass
NVNT	n40	5795	Ant2	-7.25	0.42	-6.83	30	Pass
NVNT	n40	5190	Ant1	-10.43	0	-10.43	11	Pass
NVNT	n40	5190	Ant2	-7.56	0	-7.56	11	Pass
NVNT	n40	5190	Sum	-5.75	0	-5.75	11	Pass
NVNT	n40	5230	Ant1	-10.39	0	-10.39	11	Pass
NVNT	n40	5230	Ant2	-6.5	0	-6.5	11	Pass
NVNT	n40	5230	Sum	-5.01	0	-5.01	11	Pass
NVNT	n40	5755	Ant1	-12.87	0	-12.87	30	Pass
NVNT	n40	5755	Ant2	-10.04	0	-10.04	30	Pass
NVNT	n40	5755	Sum	-8.22	0	-8.22	30	Pass
NVNT	n40	5795	Ant1	-14.13	0	-14.13	30	Pass
NVNT	n40	5795	Ant2	-9.34	0	-9.34	30	Pass
NVNT	n40	5795	Sum	-8.1	0	-8.1	30	Pass
NVNT	ac20	5180	Ant1	-1.43	0.5	-0.93	11	Pass
NVNT	ac20	5200	Ant1	-1.57	0.5	-1.07	11	Pass
NVNT	ac20	5240	Ant1	-2.52	0.34	-2.18	11	Pass
NVNT	ac20	5745	Ant1	-4.8	0.43	-4.37	30	Pass
NVNT	ac20	5785	Ant1	-5.53	0.3	-5.23	30	Pass
NVNT	ac20	5825	Ant1	-5.86	0.54	-5.32	30	Pass
NVNT	ac20	5180	Ant2	-1.3	0.34	-0.96	11	Pass
NVNT	ac20	5200	Ant2	-1.24	0.41	-0.83	11	Pass
NVNT	ac20	5240	Ant2	-0.89	0.45	-0.44	11	Pass
NVNT	ac20	5745	Ant2	-4.77	0.26	-4.51	30	Pass
NVNT	ac20	5785	Ant2	-4.5	0.3	-4.2	30	Pass
NVNT	ac20	5825	Ant2	-4.43	0.32	-4.11	30	Pass


NVNT	ac20	5180	Ant1	-6.38	0	-6.38	11	Pass
NVNT	ac20	5180	Ant2	-3.88	0	-3.88	11	Pass
NVNT	ac20	5180	Sum	-1.94	0	-1.94	11	Pass
NVNT	ac20	5200	Ant1	-6.76	0	-6.76	11	Pass
NVNT	ac20	5200	Ant2	-3.24	0	-3.24	11	Pass
NVNT	ac20	5200	Sum	-1.64	0	-1.64	11	Pass
NVNT	ac20	5240	Ant1	-8.18	0	-8.18	11	Pass
NVNT	ac20	5240	Ant2	-3.88	0	-3.88	11	Pass
NVNT	ac20	5240	Sum	-2.51	0	-2.51	11	Pass
NVNT	ac20	5745	Ant1	-10.49	0	-10.49	30	Pass
NVNT	ac20	5745	Ant2	-7.29	0	-7.29	30	Pass
NVNT	ac20	5745	Sum	-5.59	0	-5.59	30	Pass
NVNT	ac20	5785	Ant1	-10.67	0	-10.67	30	Pass
NVNT	ac20	5785	Ant2	-7.16	0	-7.16	30	Pass
NVNT	ac20	5785	Sum	-5.56	0	-5.56	30	Pass
NVNT	ac20	5825	Ant1	-11.29	0	-11.29	30	Pass
NVNT	ac20	5825	Ant2	-6.48	0	-6.48	30	Pass
NVNT	ac20	5825	Sum	-5.24	0	-5.24	30	Pass
NVNT	ac40	5190	Ant1	-7.6	1.03	-6.57	11	Pass
NVNT	ac40	5230	Ant1	-6.5	0.87	-5.63	11	Pass
NVNT	ac40	5755	Ant1	-7.6	0.66	-6.94	30	Pass
NVNT	ac40	5795	Ant1	-8.03	1.03	-7	30	Pass
NVNT	ac40	5190	Ant2	-6.7	0.87	-5.83	11	Pass
NVNT	ac40	5230	Ant2	-6.16	0.69	-5.47	11	Pass
NVNT	ac40	5755	Ant2	-8.55	0.56	-7.99	30	Pass
NVNT	ac40	5795	Ant2	-7.92	0.83	-7.09	30	Pass
NVNT	ac40	5190	Ant1	-8.76	0	-8.76	11	Pass
NVNT	ac40	5190	Ant2	-7.14	0	-7.14	11	Pass
NVNT	ac40	5190	Sum	-4.86	0	-4.86	11	Pass
NVNT	ac40	5230	Ant1	-8.7	0	-8.7	11	Pass
NVNT	ac40	5230	Ant2	-4.82	0	-4.82	11	Pass
NVNT	ac40	5230	Sum	-3.33	0	-3.33	11	Pass
NVNT	ac40	5755	Ant1	-13.14	0	-13.14	30	Pass
NVNT	ac40	5755	Ant2	-9	0	-9	30	Pass
NVNT	ac40	5755	Sum	-7.58	0	-7.58	30	Pass
NVNT	ac40	5795	Ant1	-14.12	0	-14.12	30	Pass
NVNT	ac40	5795	Ant2	-10.53	0	-10.53	30	Pass
NVNT	ac40	5795	Sum	-8.95	0	-8.95	30	Pass
NVNT	ac80	5210	Ant1	-14.42	1.33	-13.09	11	Pass


NVNT	ac80	5775	Ant1	-16.86	1.64	-15.22	30	Pass
NVNT	ac80	5210	Ant2	-13.33	1.14	-12.19	11	Pass
NVNT	ac80	5775	Ant2	-16.34	1.01	-15.33	30	Pass
NVNT	ac80	5210	Ant1	-15.77	0	-15.77	11	Pass
NVNT	ac80	5210	Ant2	-14.74	0	-14.74	11	Pass
NVNT	ac80	5210	Sum	-12.21	0	-12.21	11	Pass
NVNT	ac80	5775	Ant1	-19.77	0	-19.77	30	Pass
NVNT	ac80	5775	Ant2	-17.11	0	-17.11	30	Pass
NVNT	ac80	5775	Sum	-15.23	0	-15.23	30	Pass

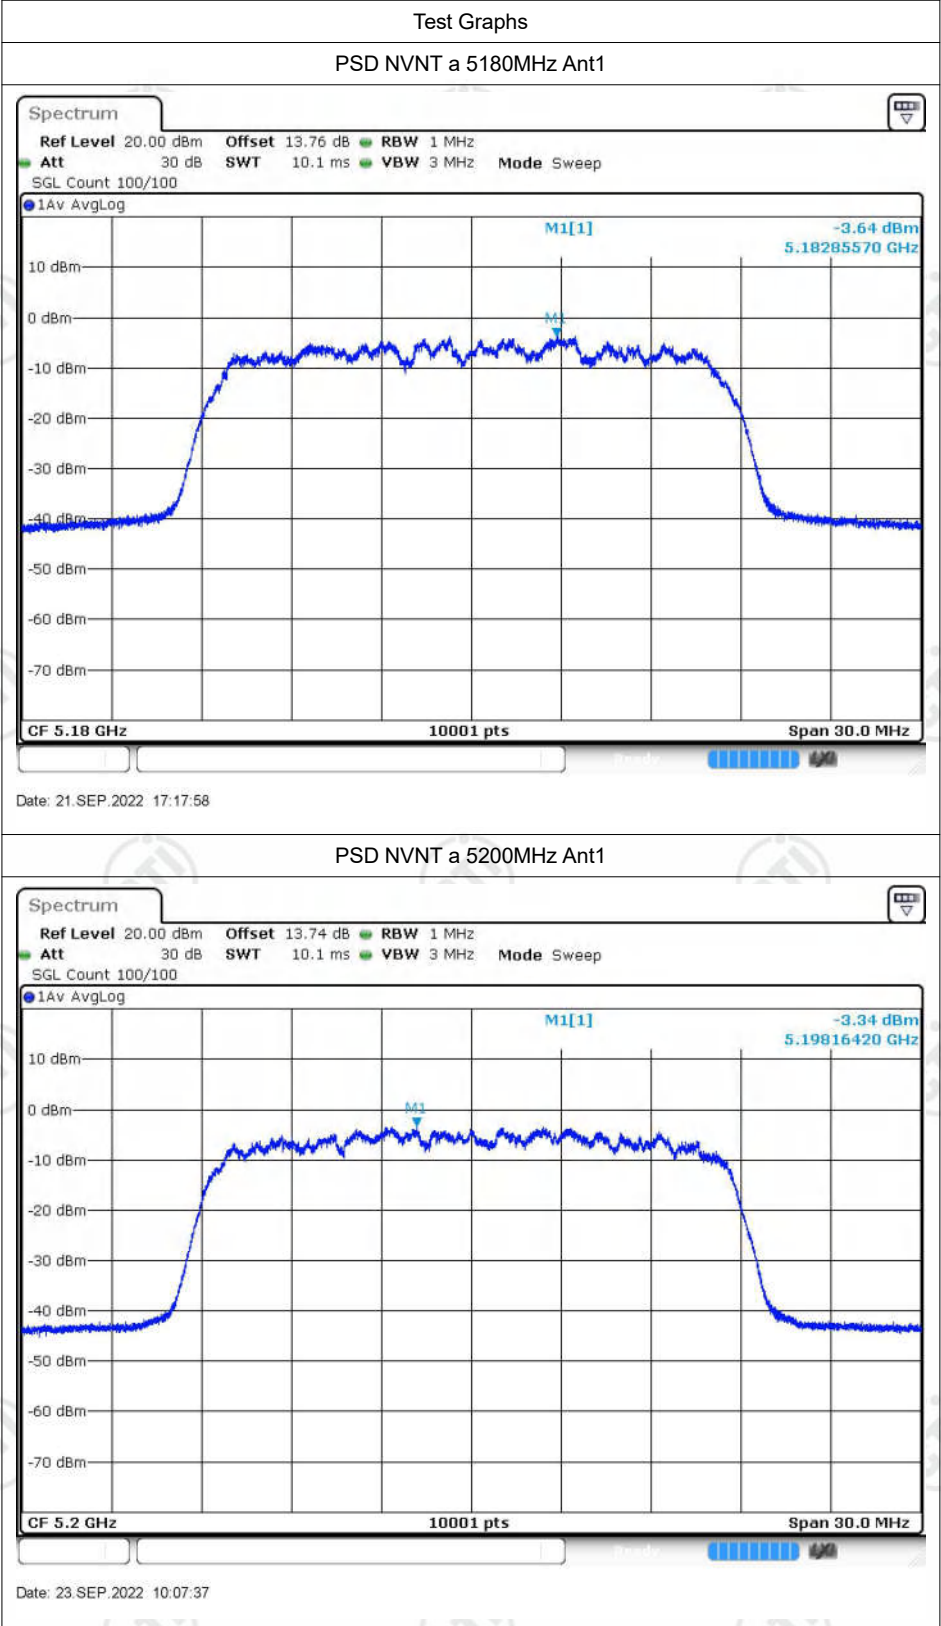


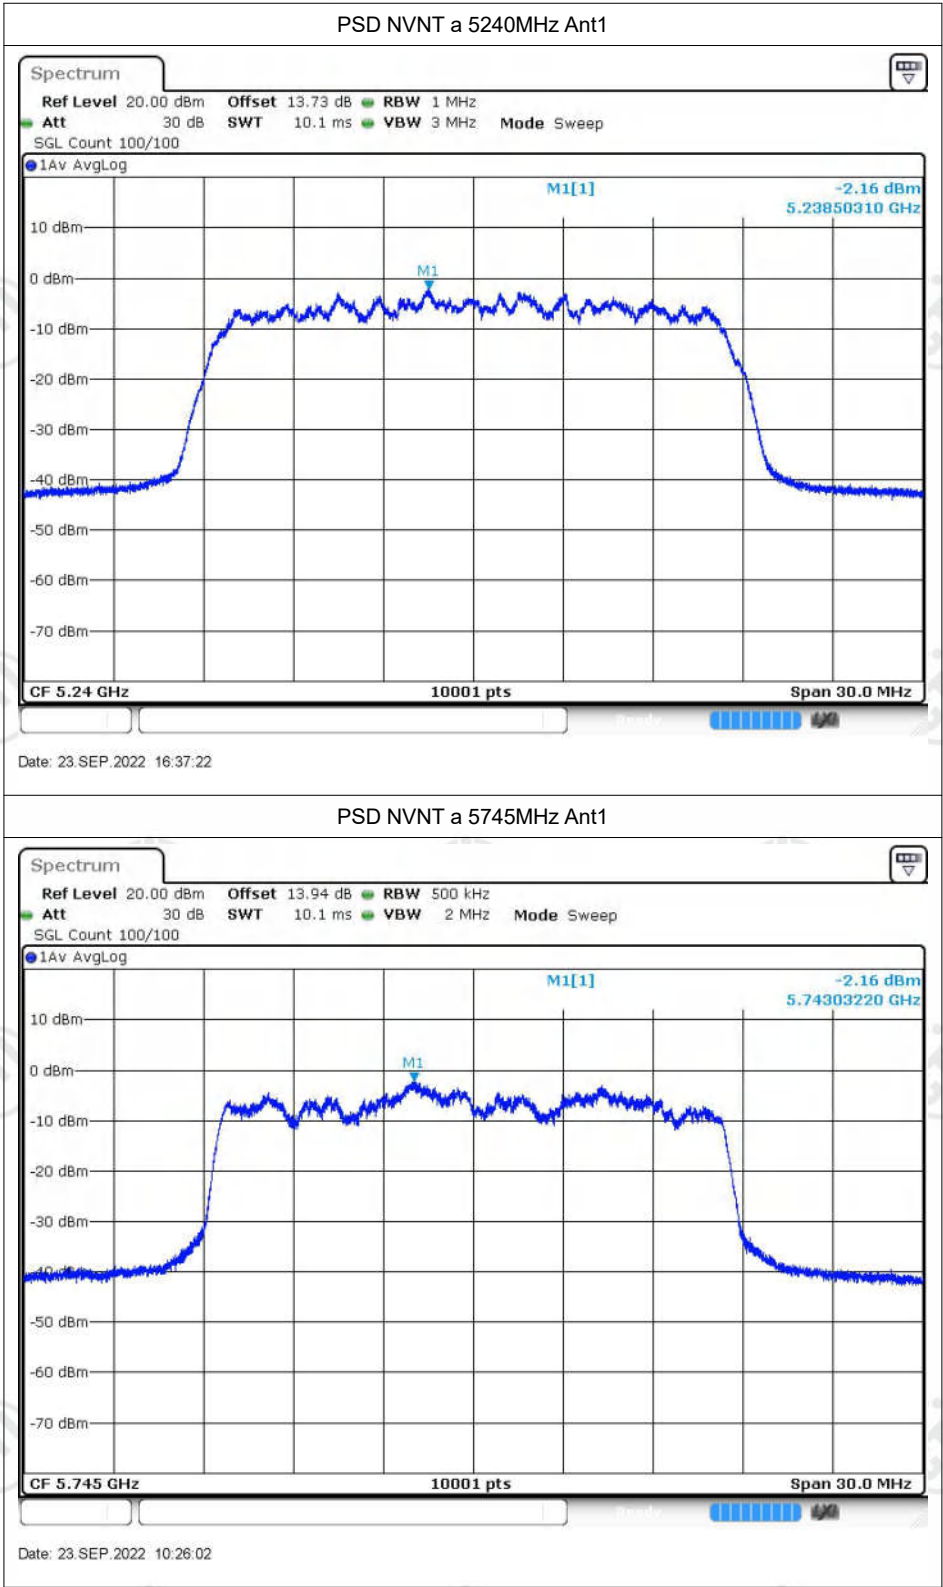


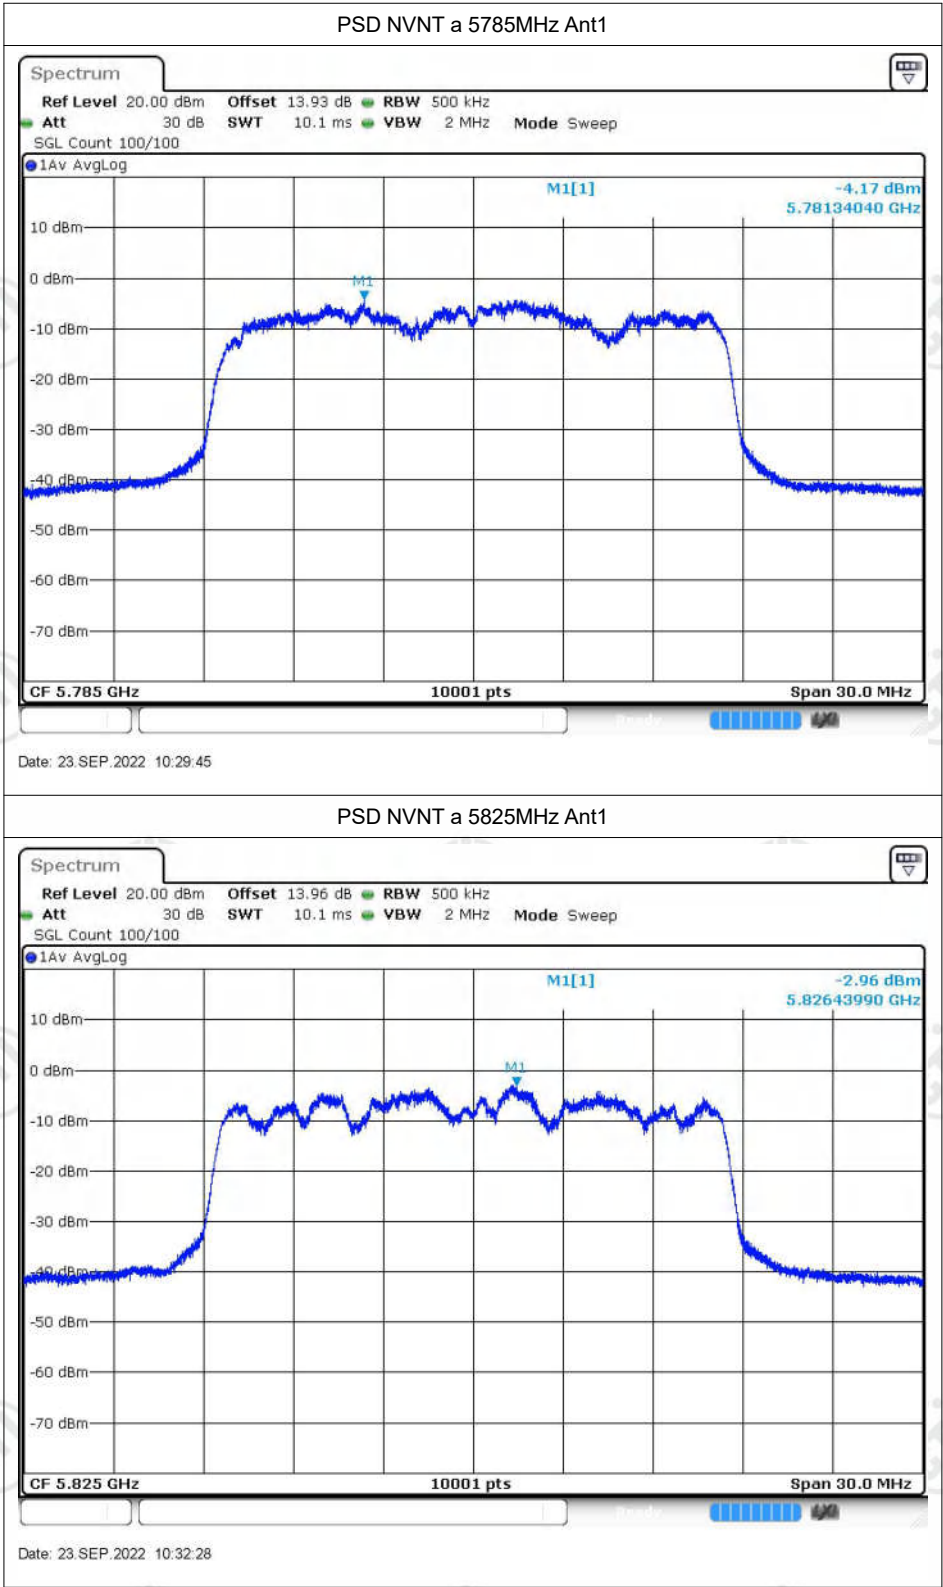


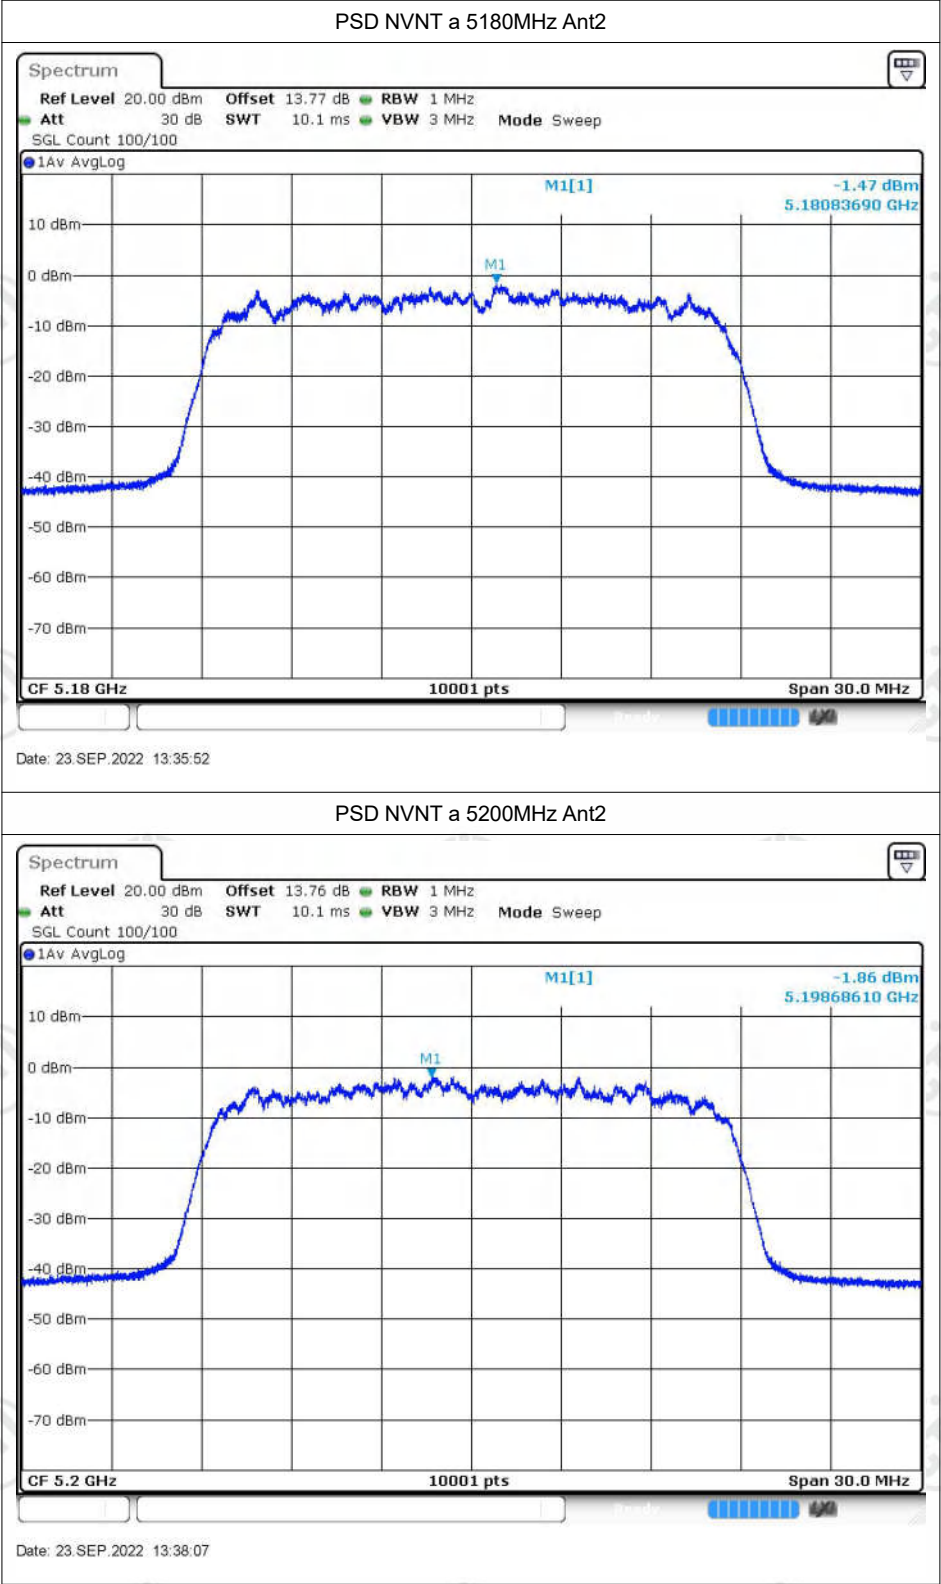


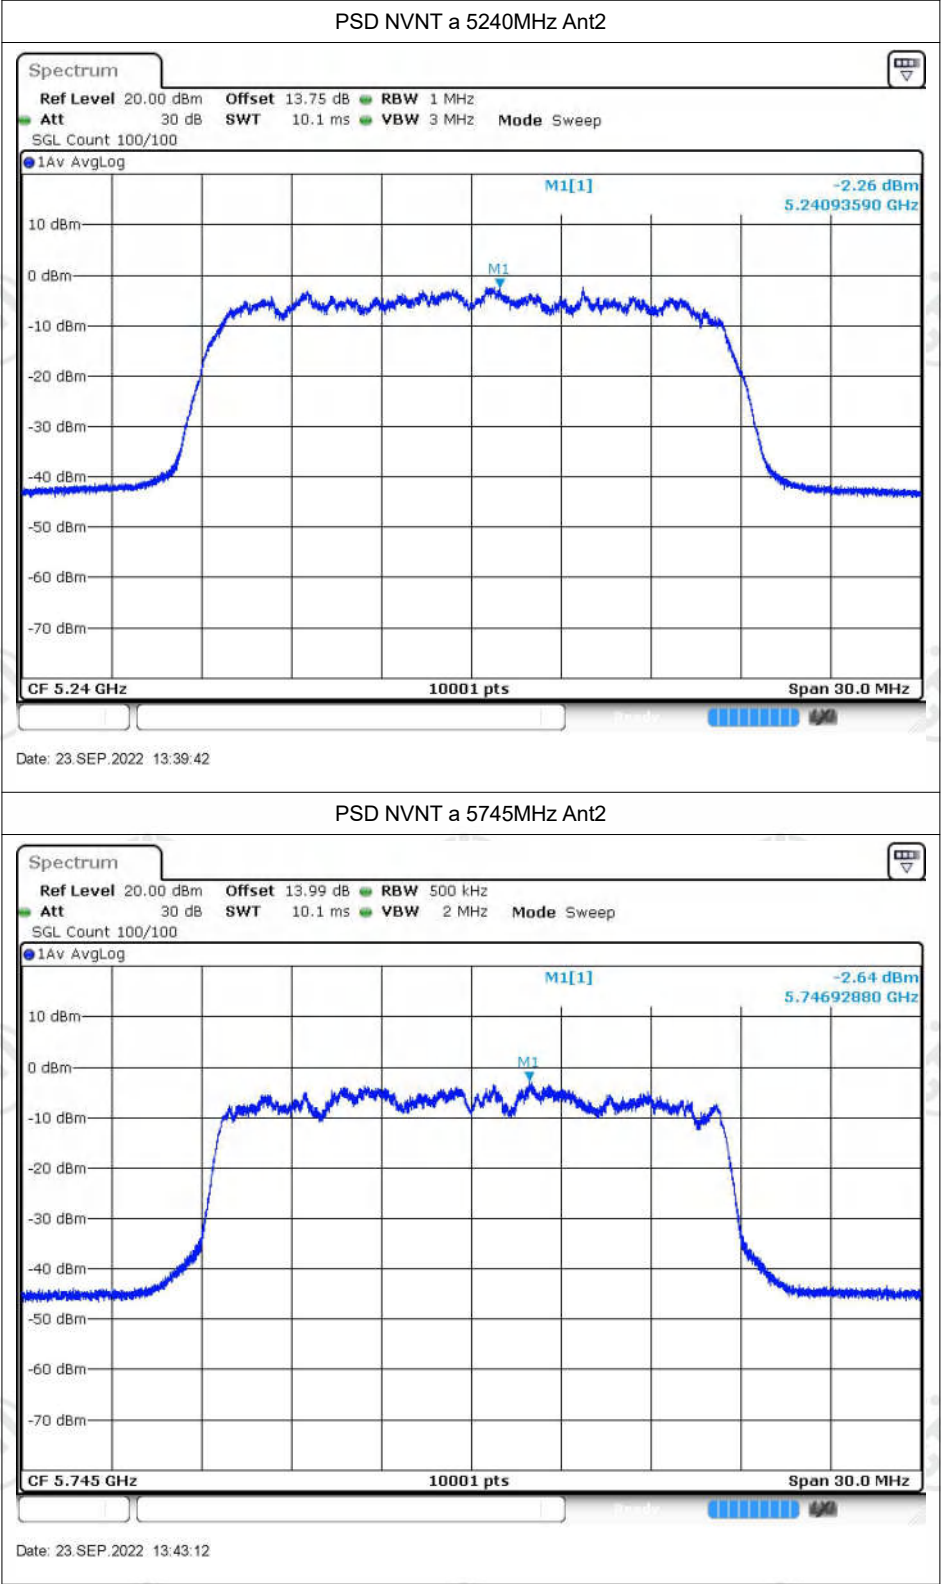


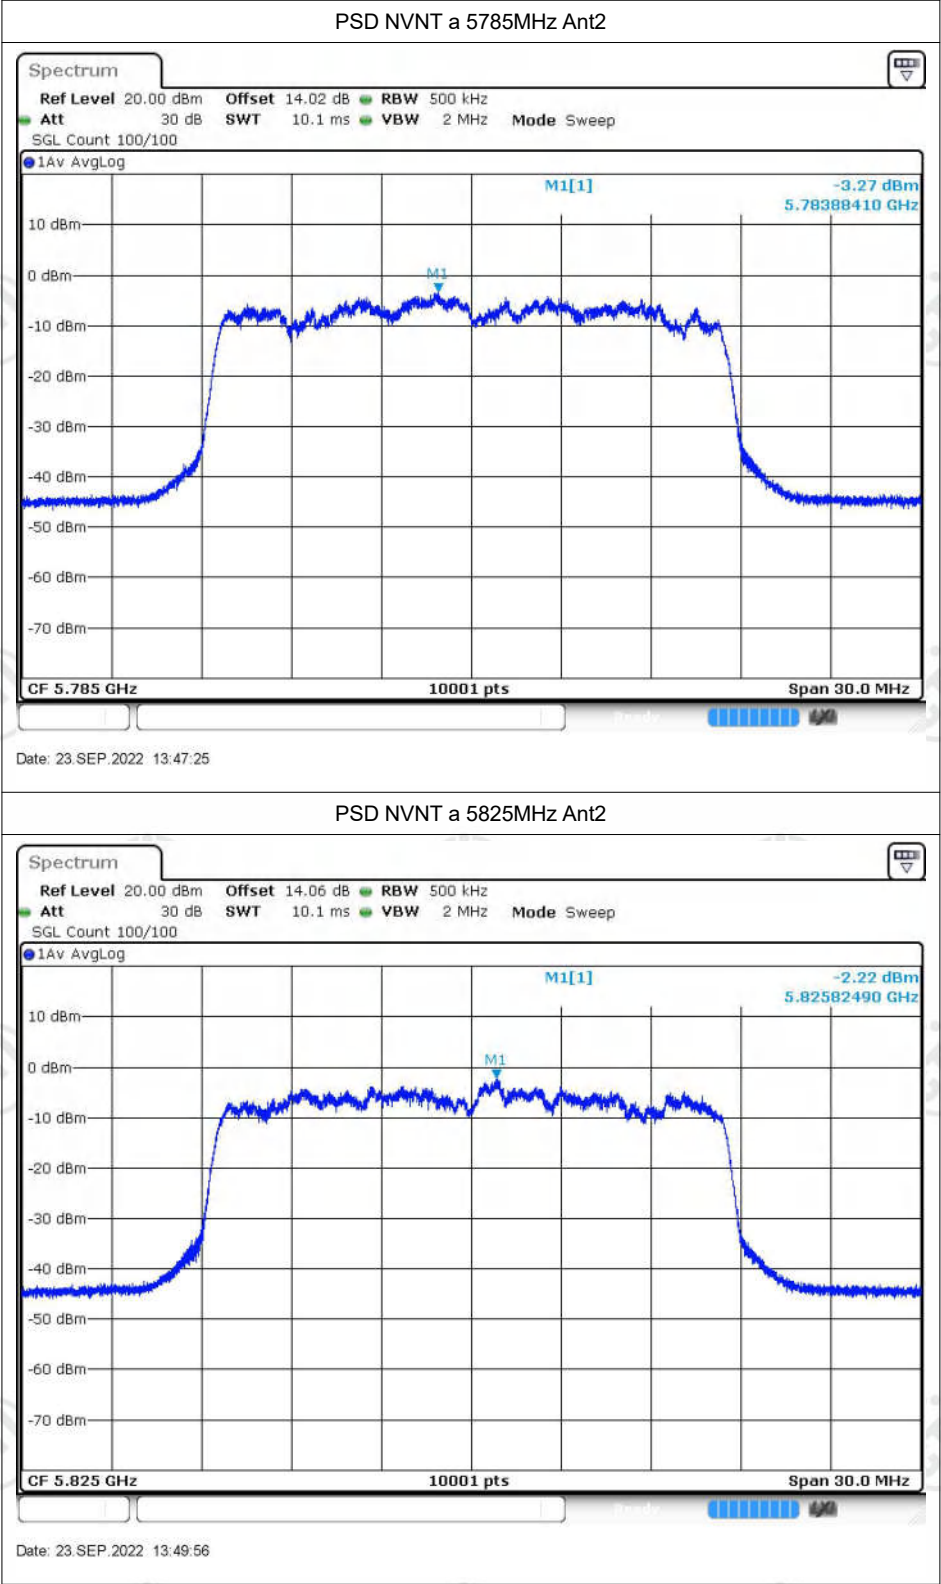


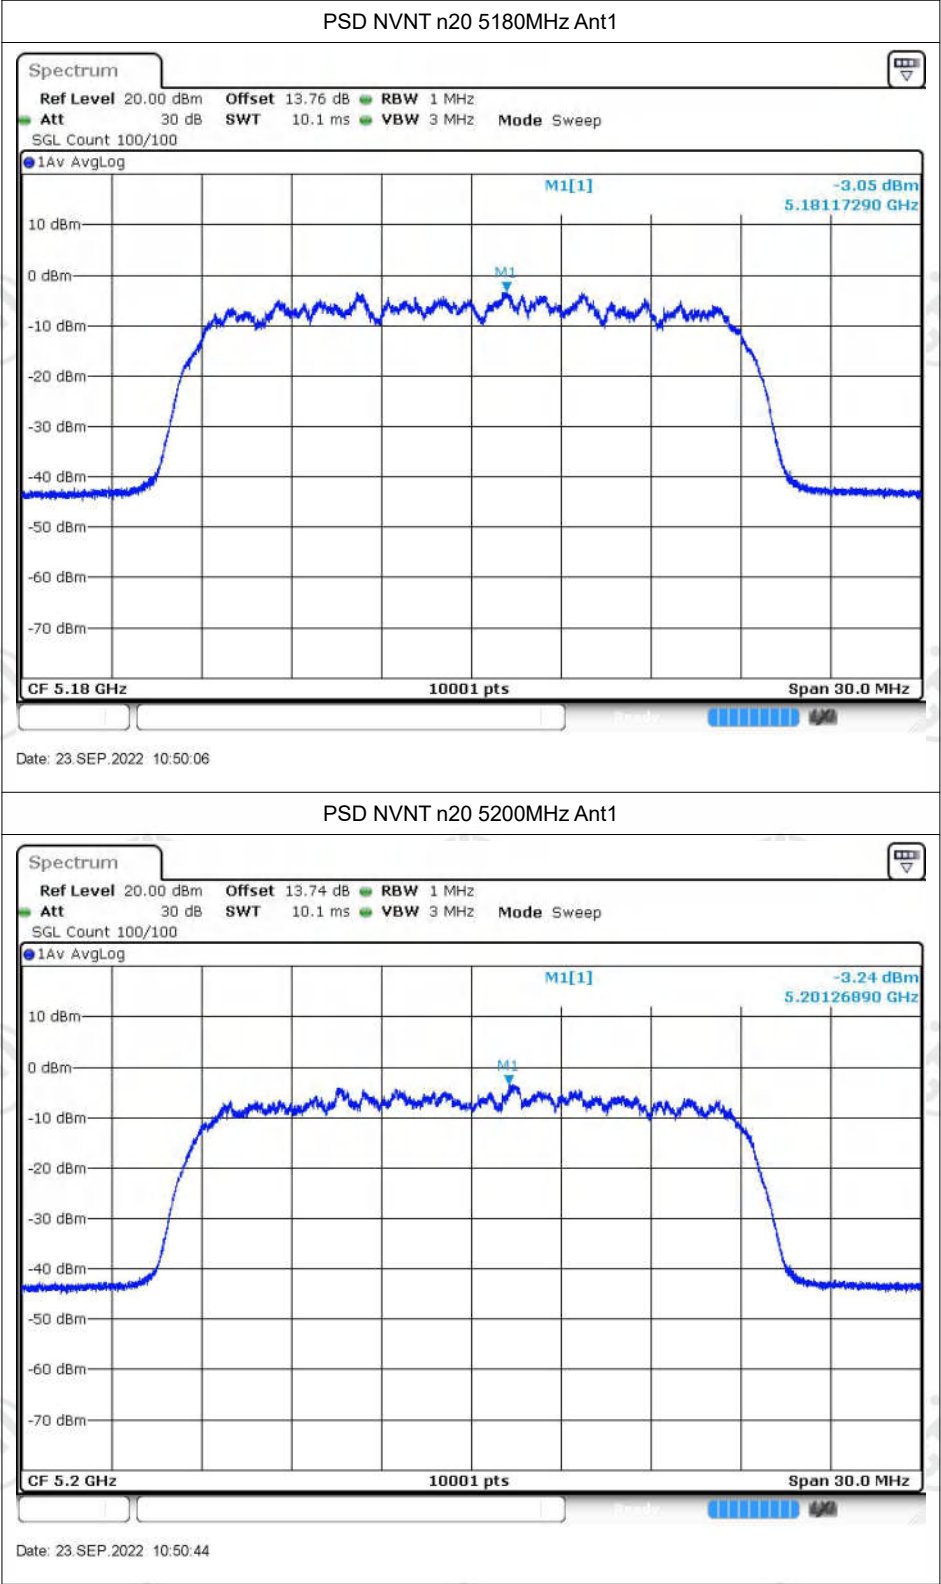


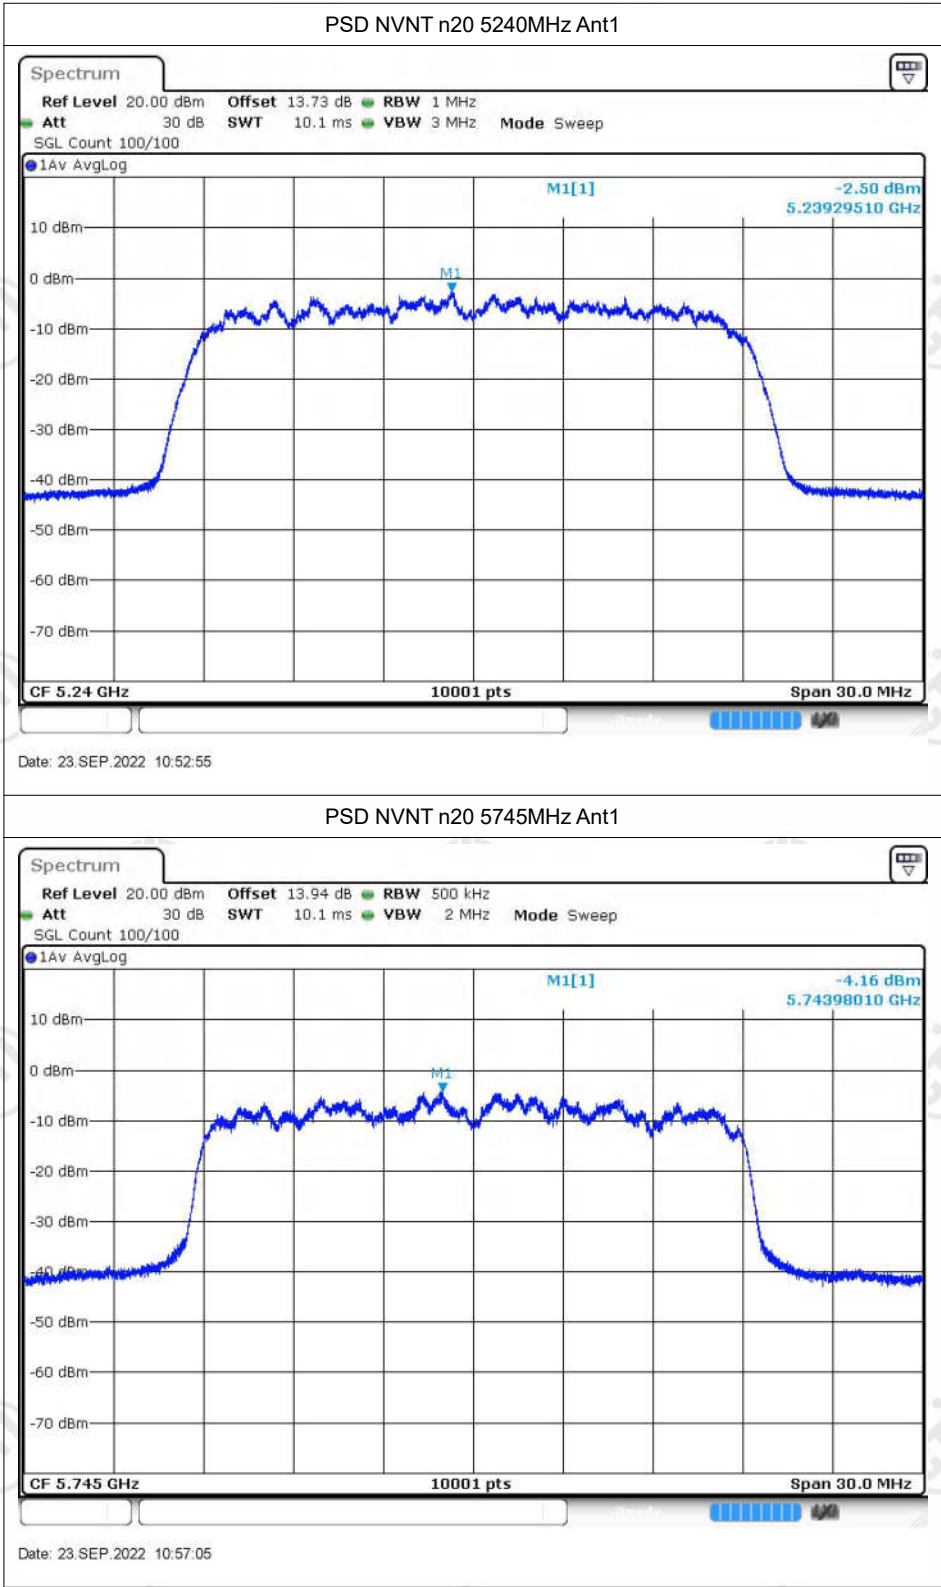


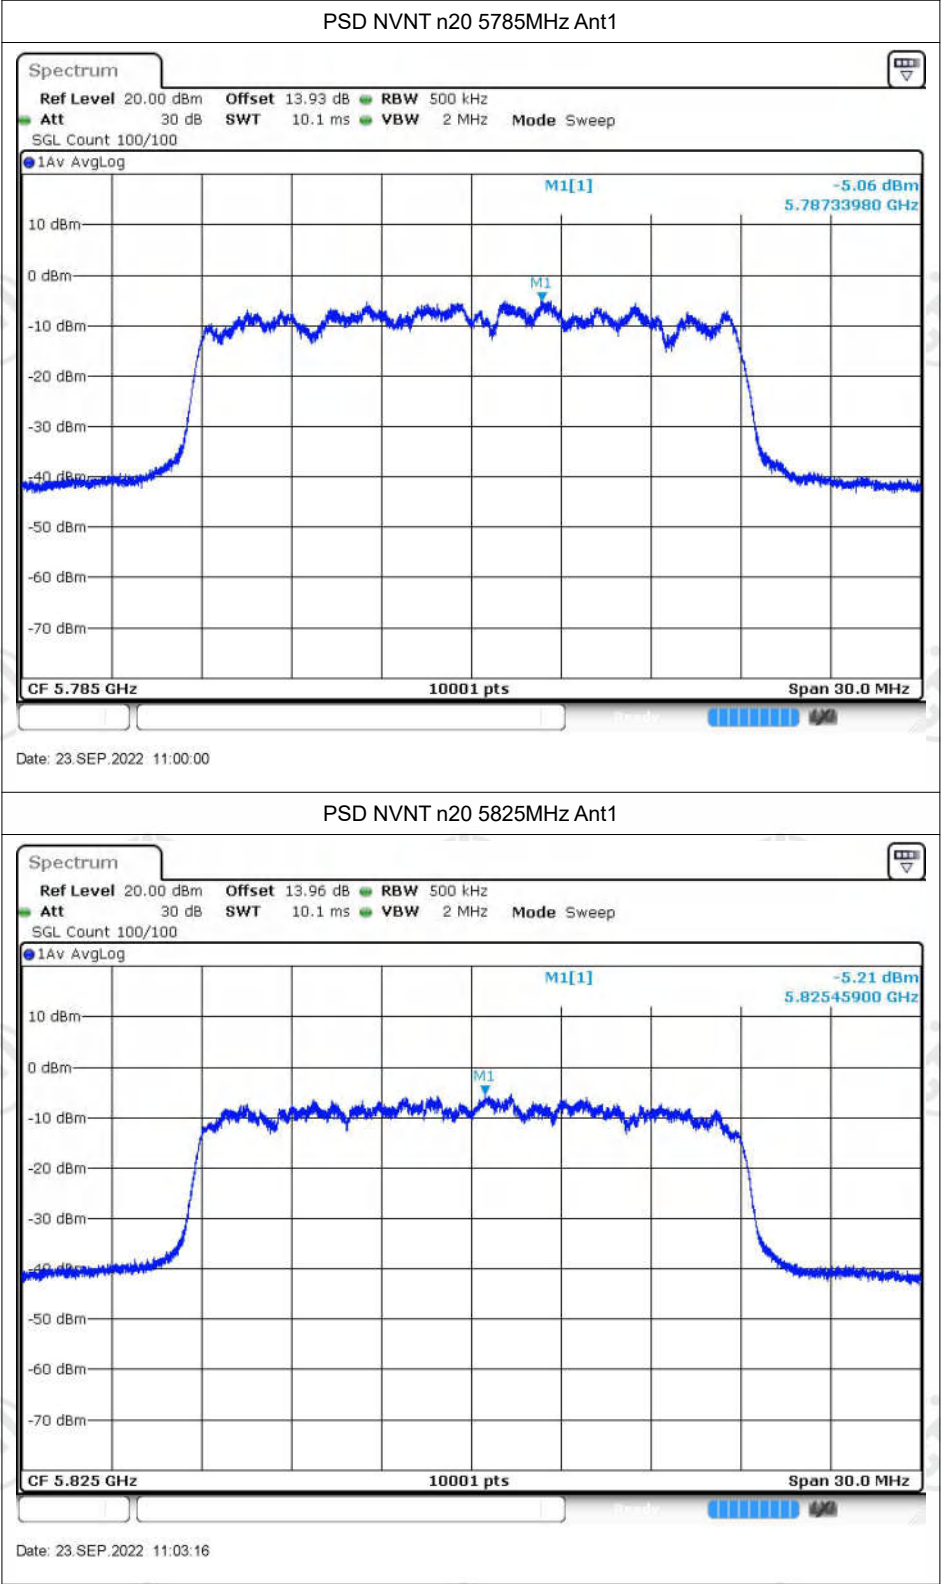


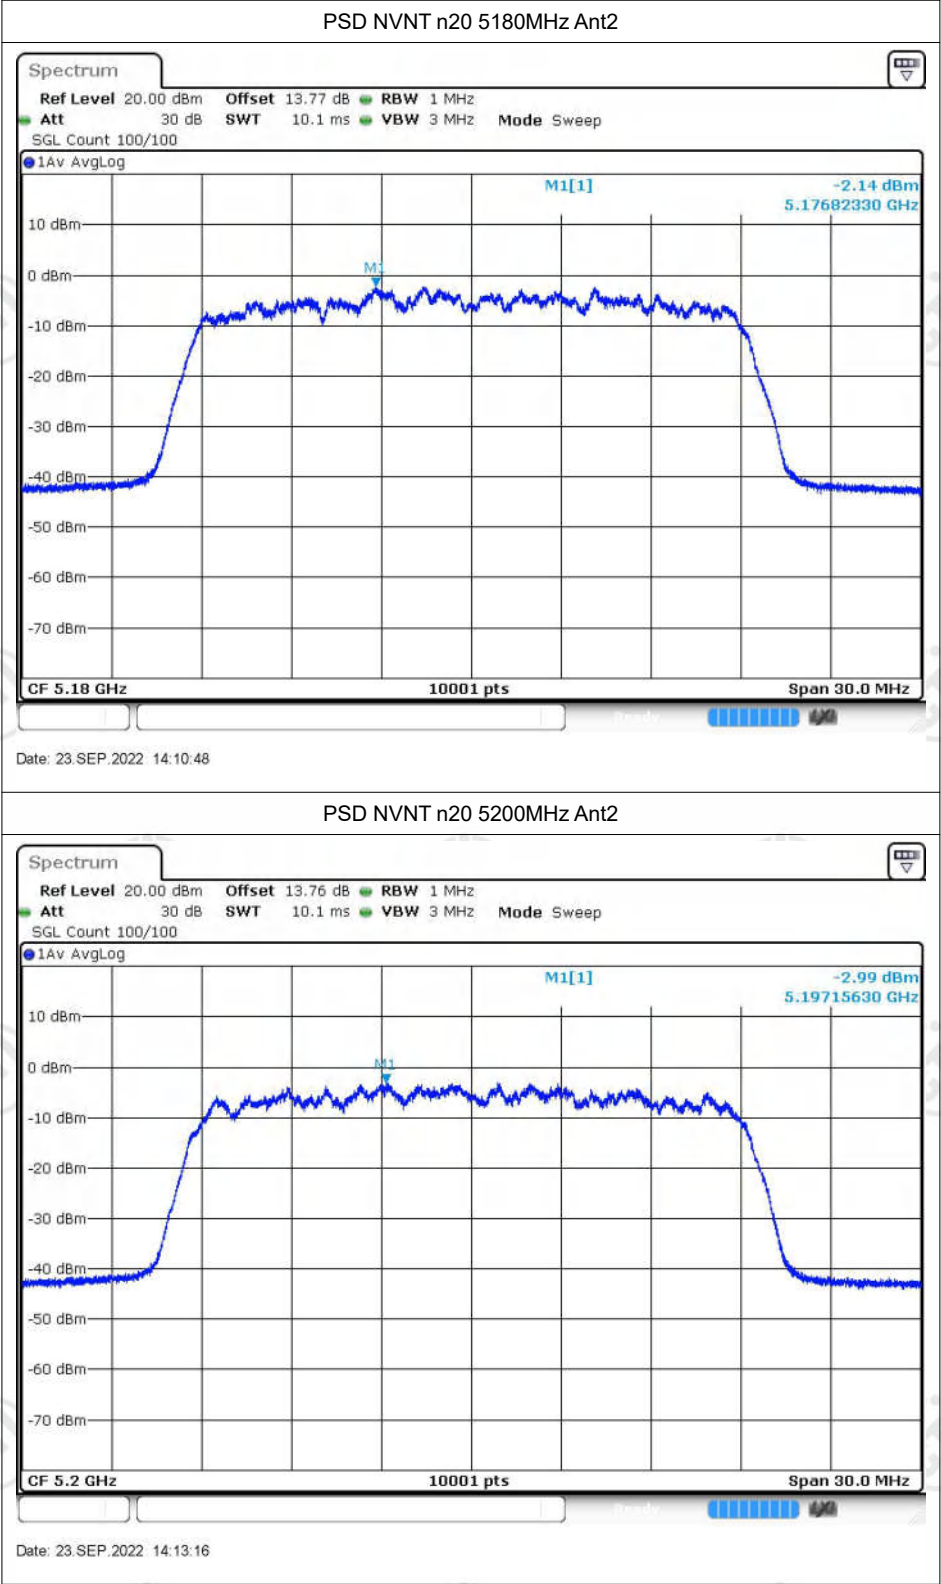

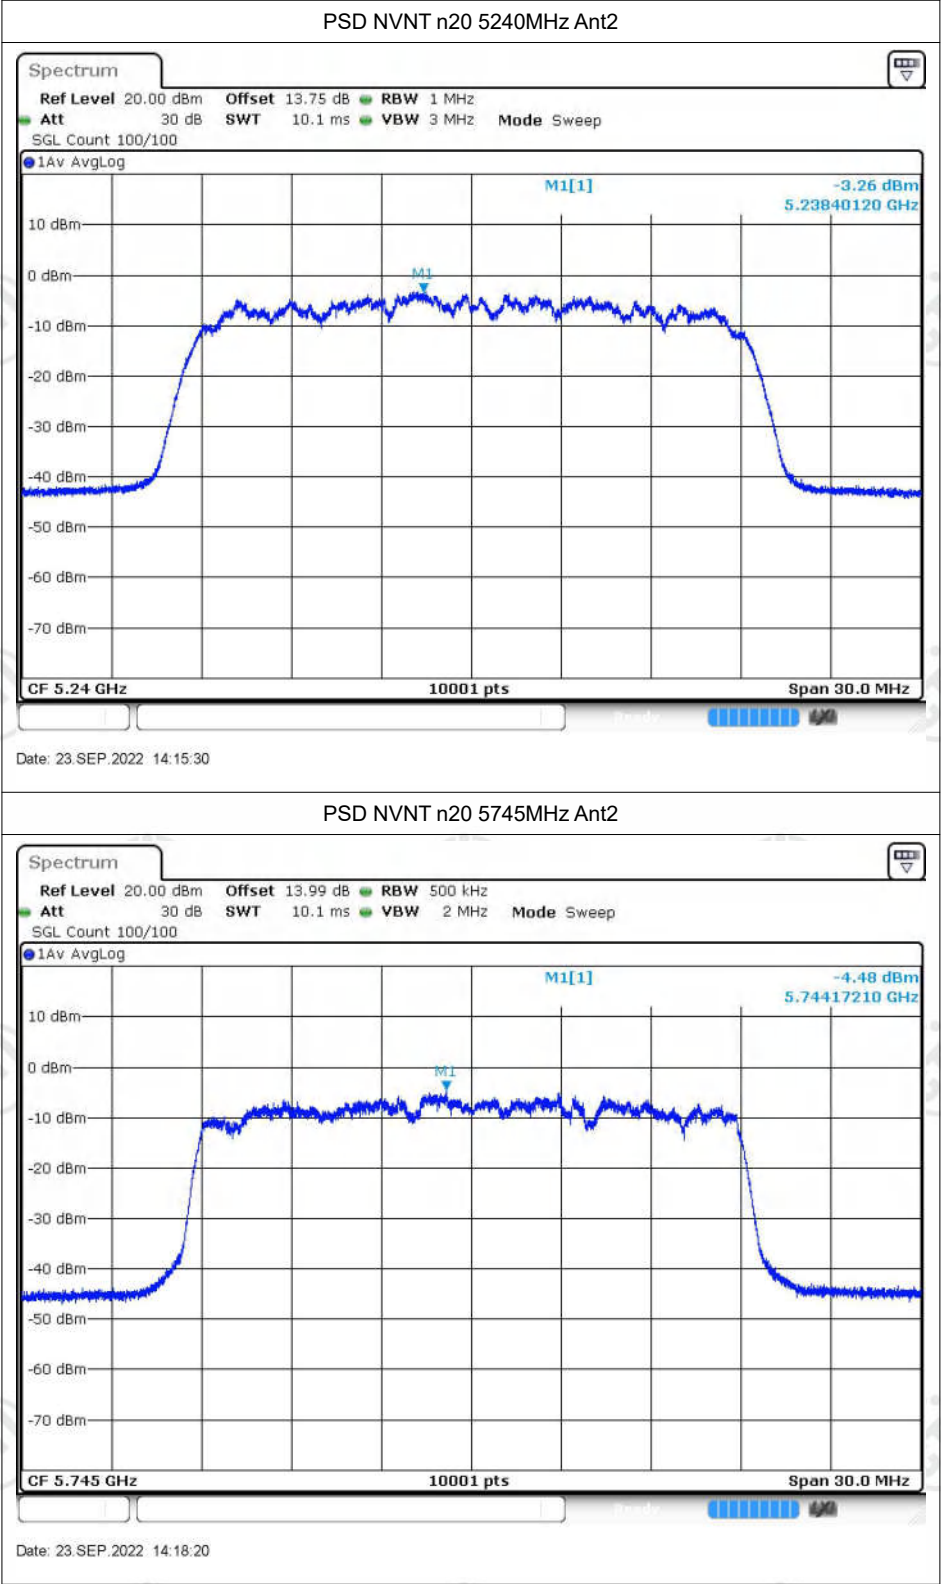


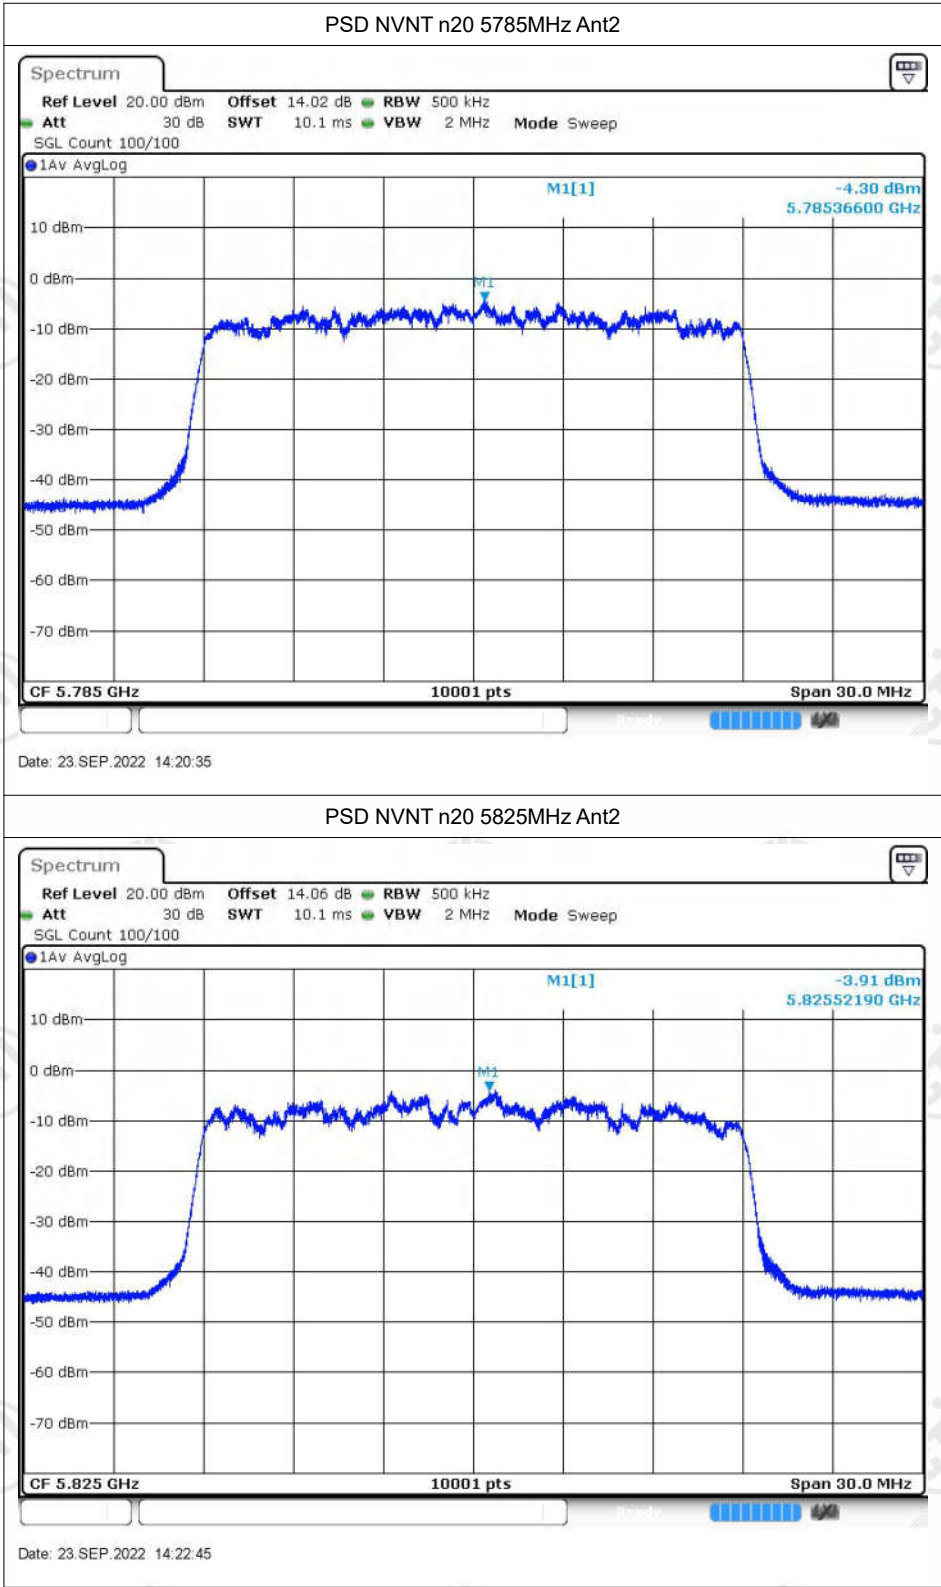

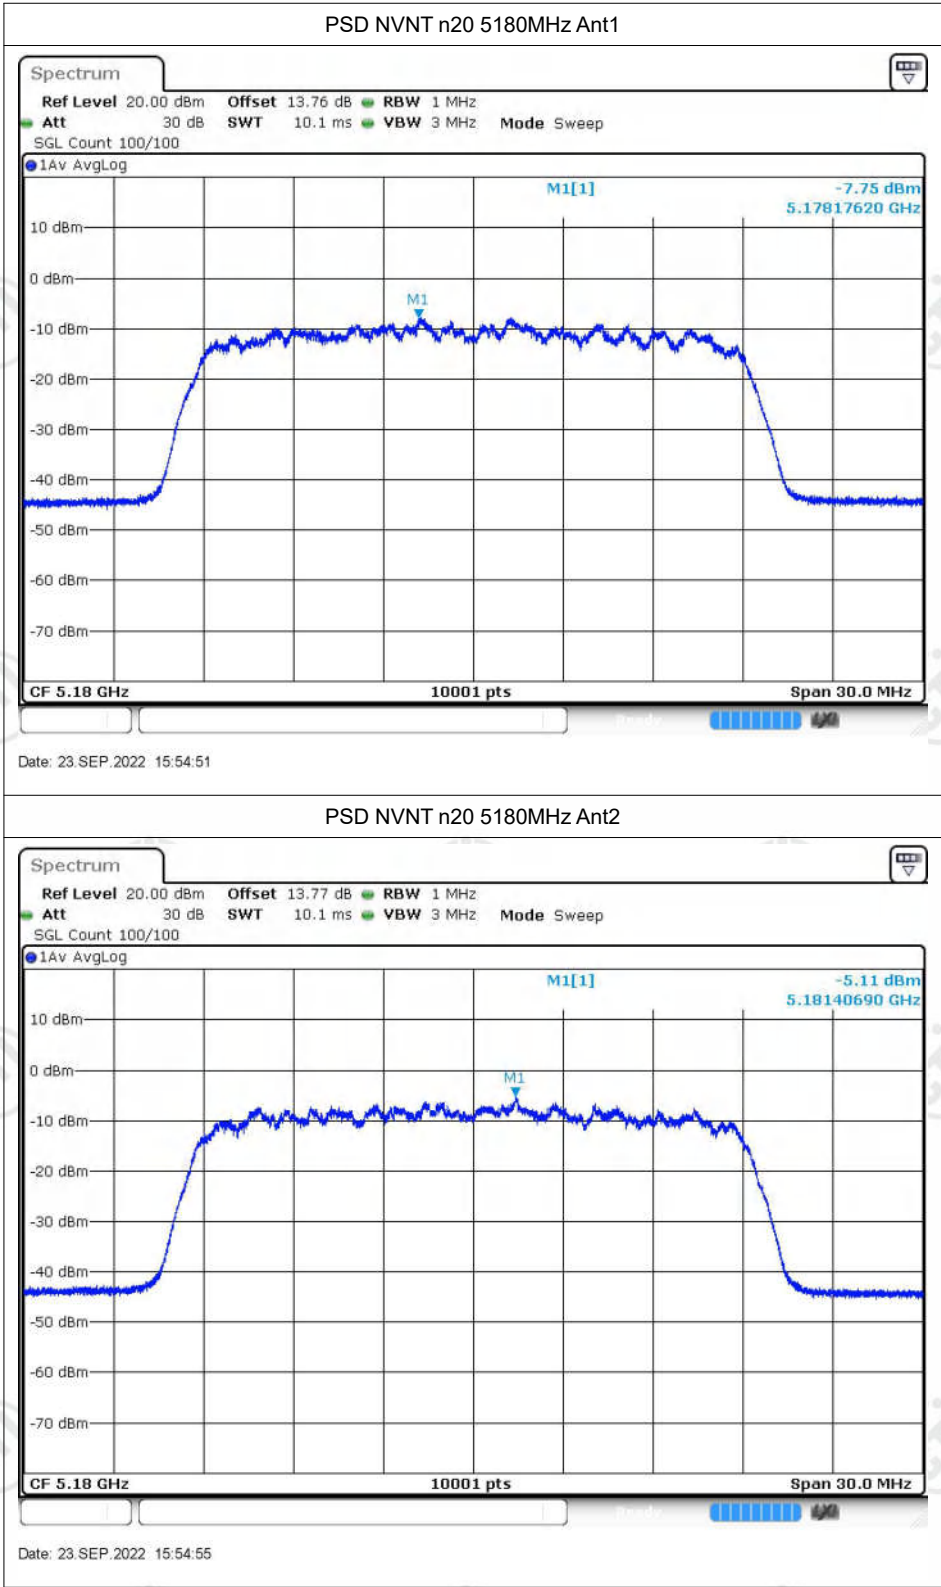


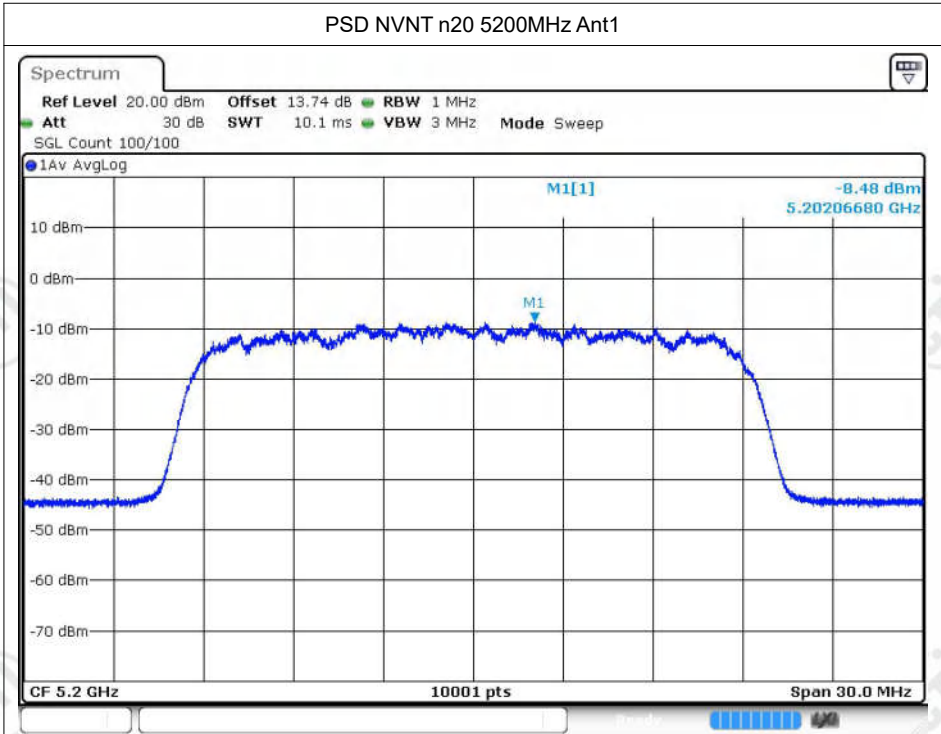



Date: 23.SEP.2022 15:57:41

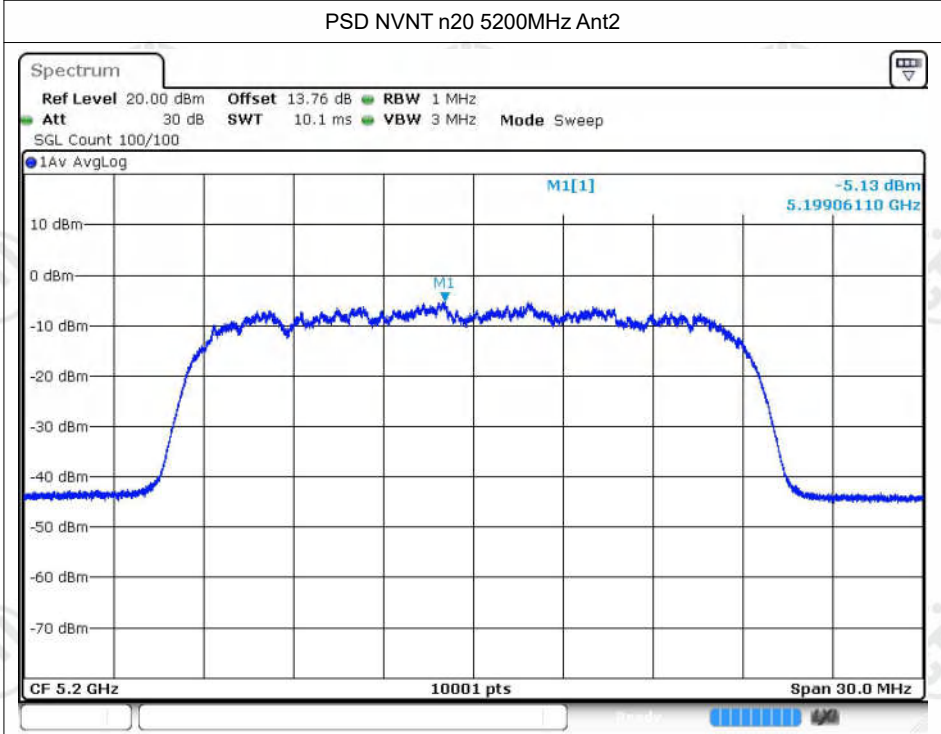



Date: 23.SEP.2022 15:57:44

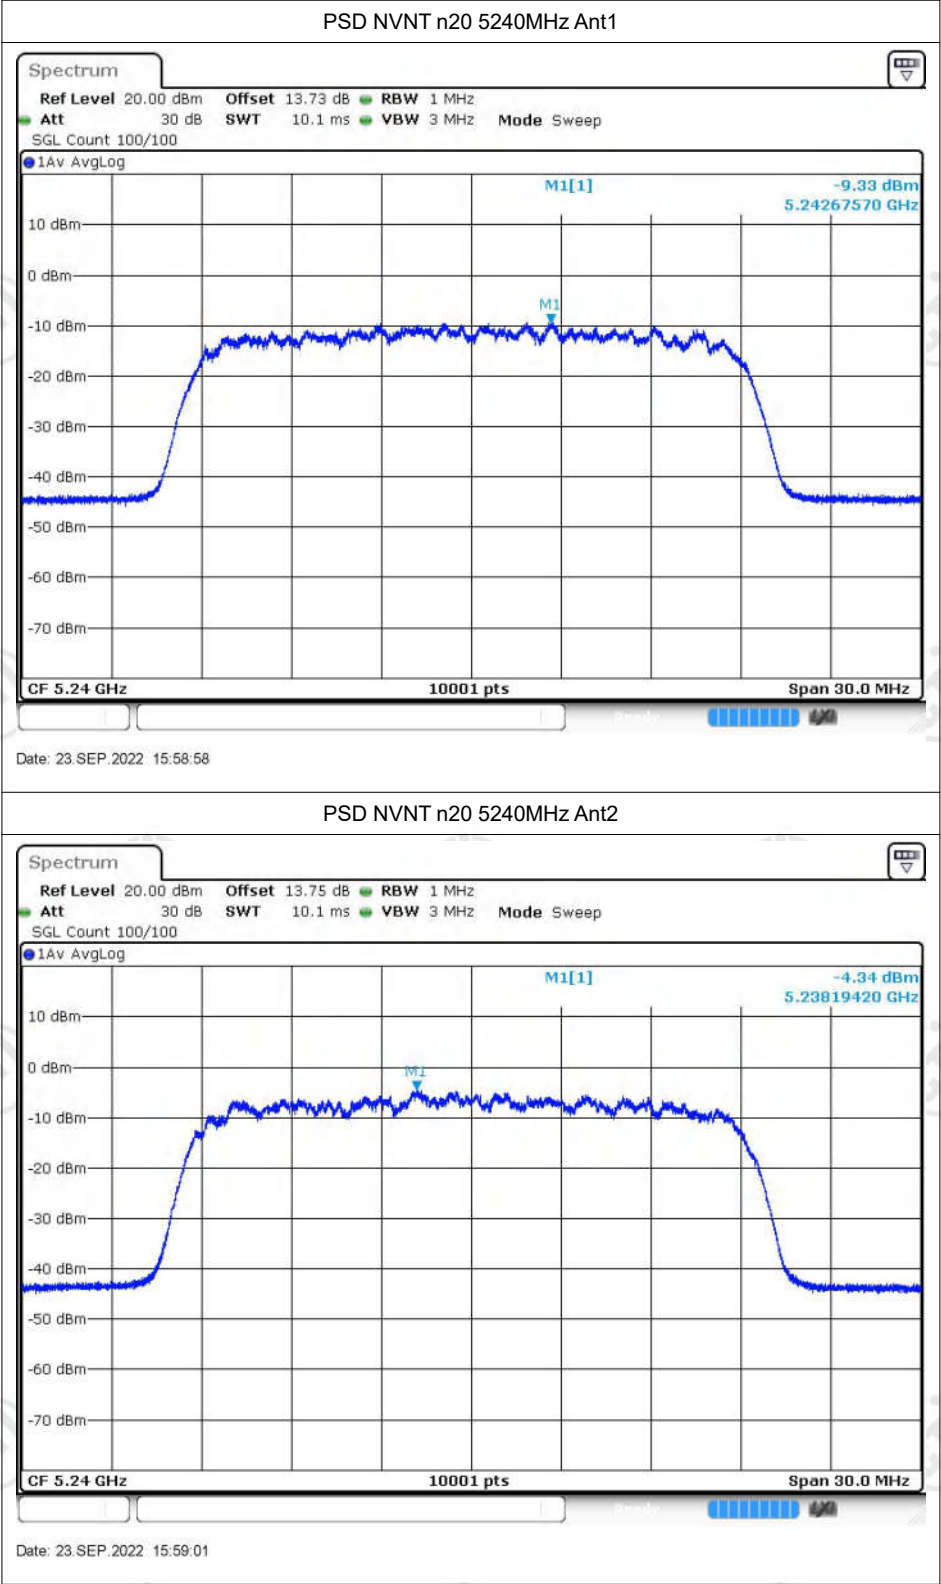


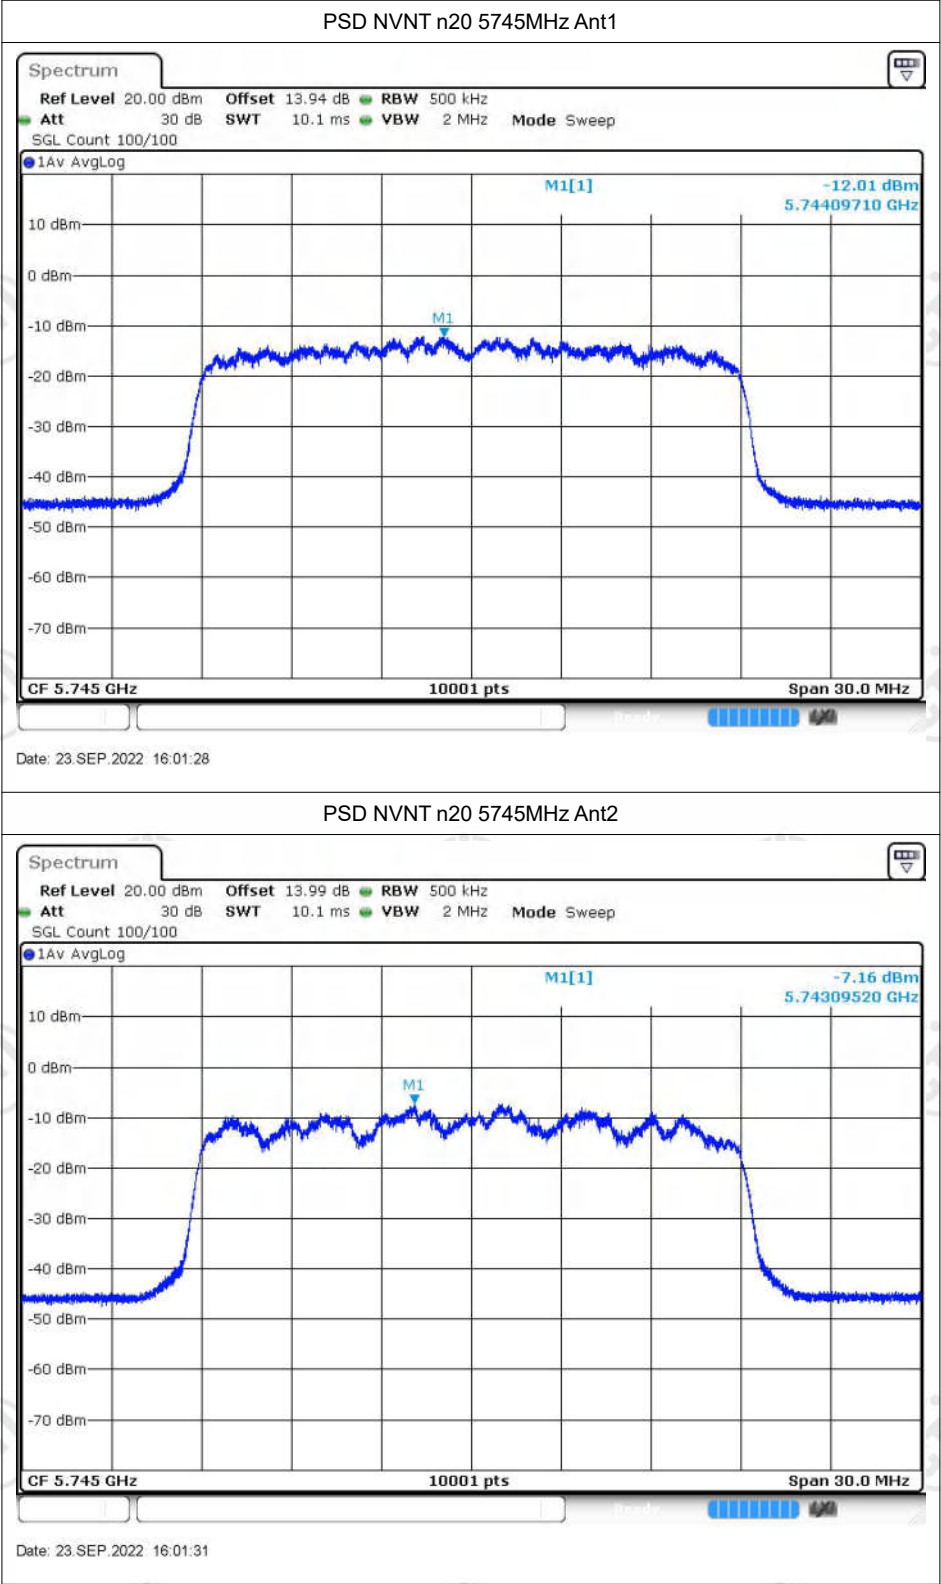


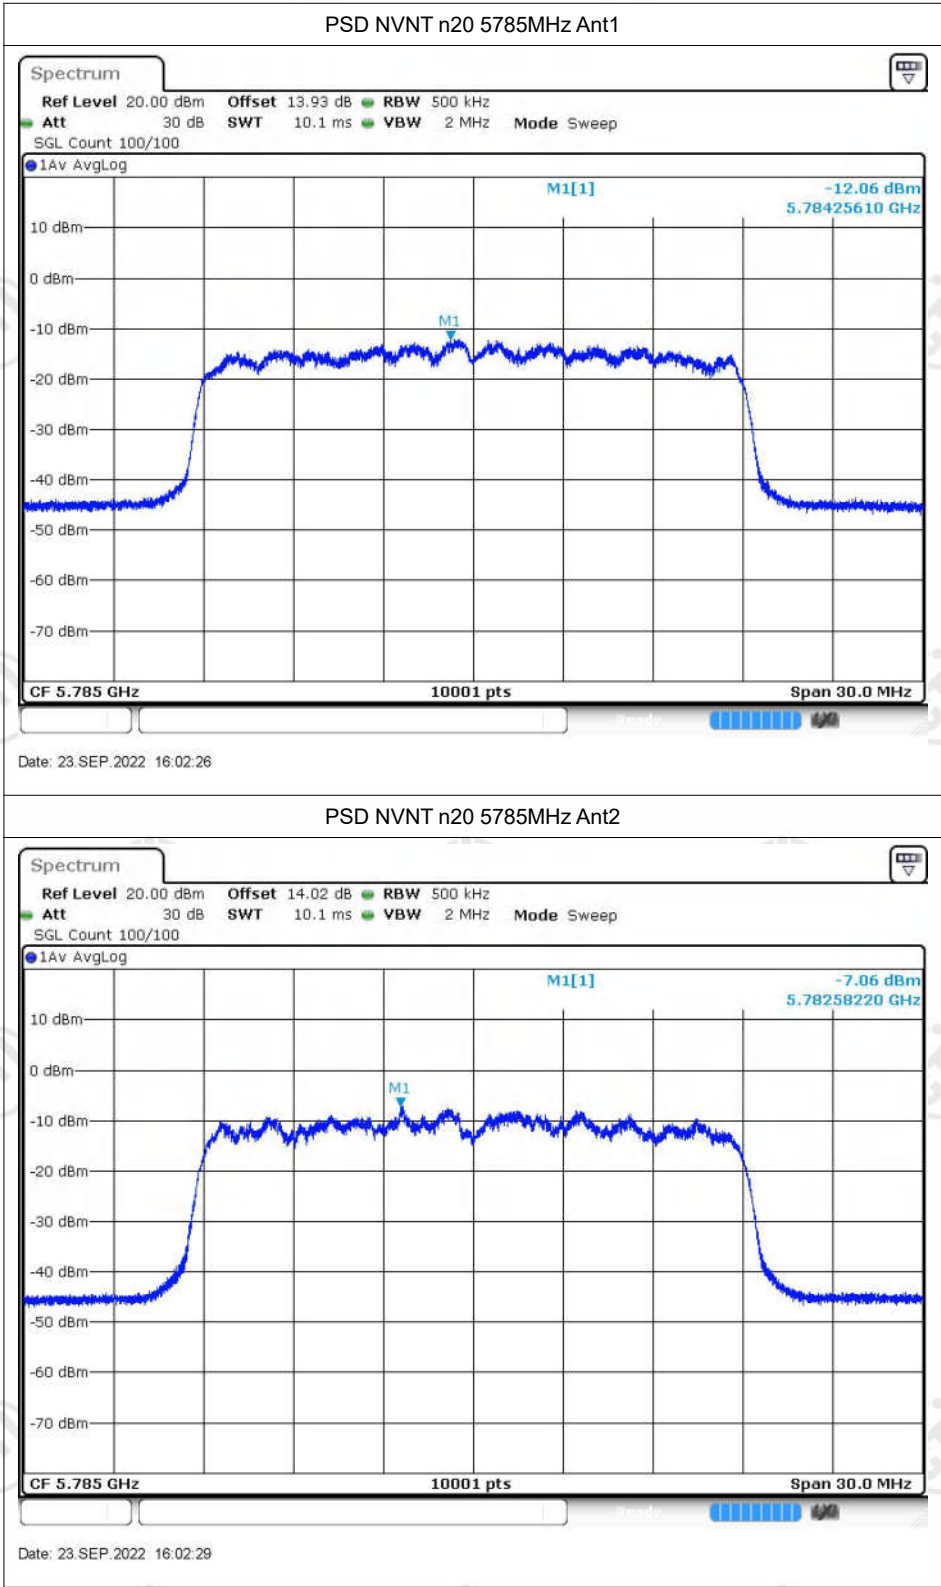


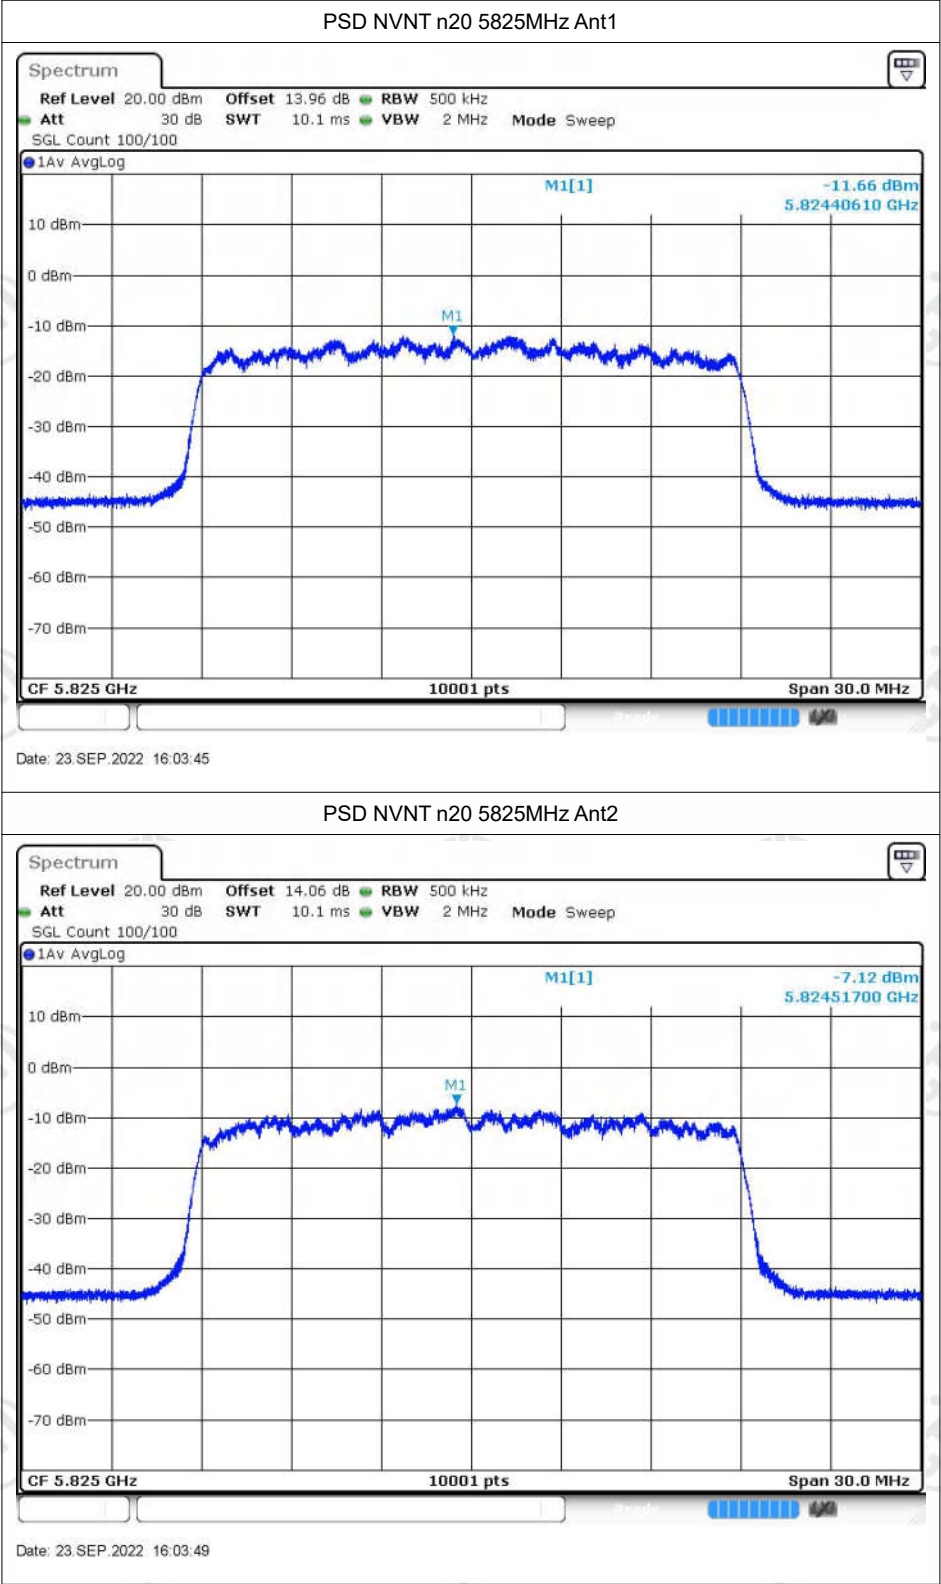



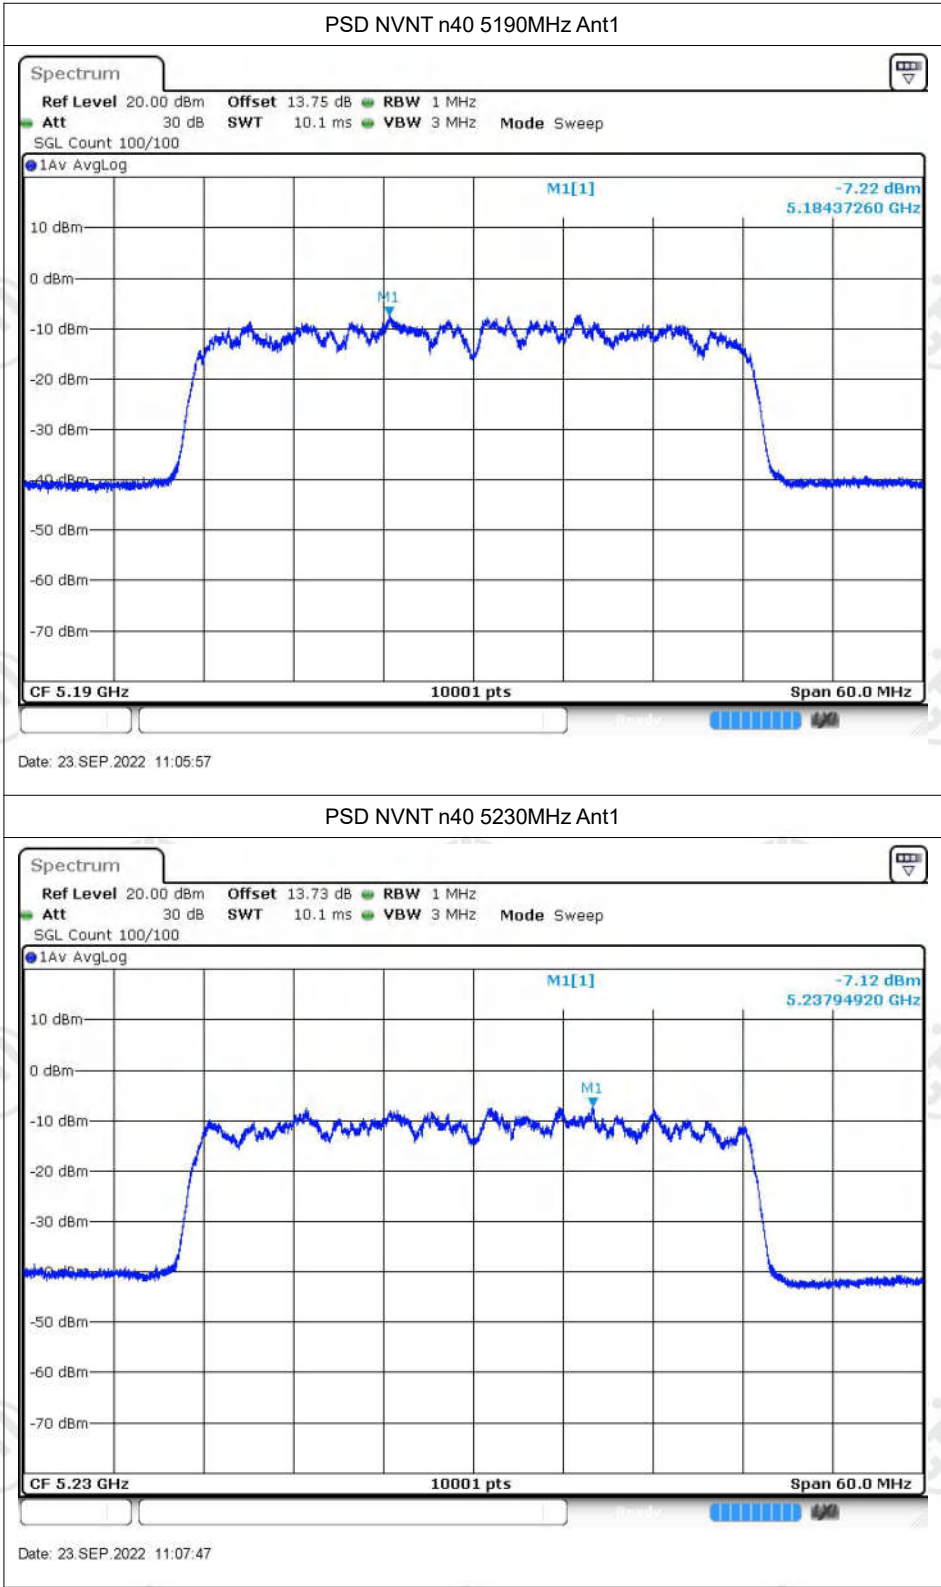


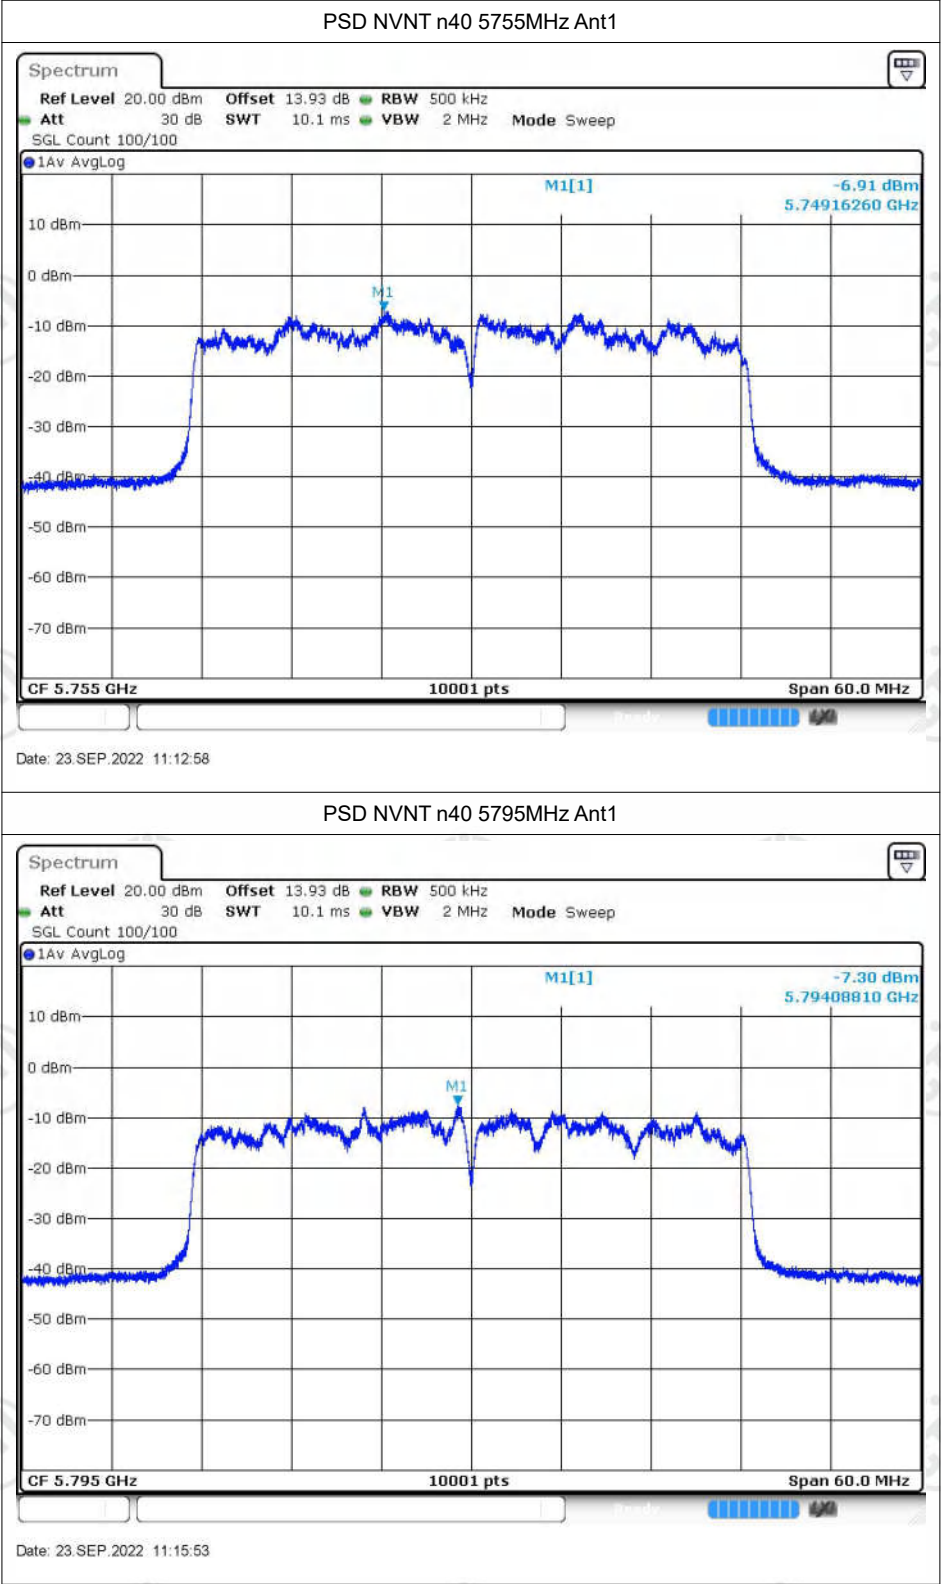


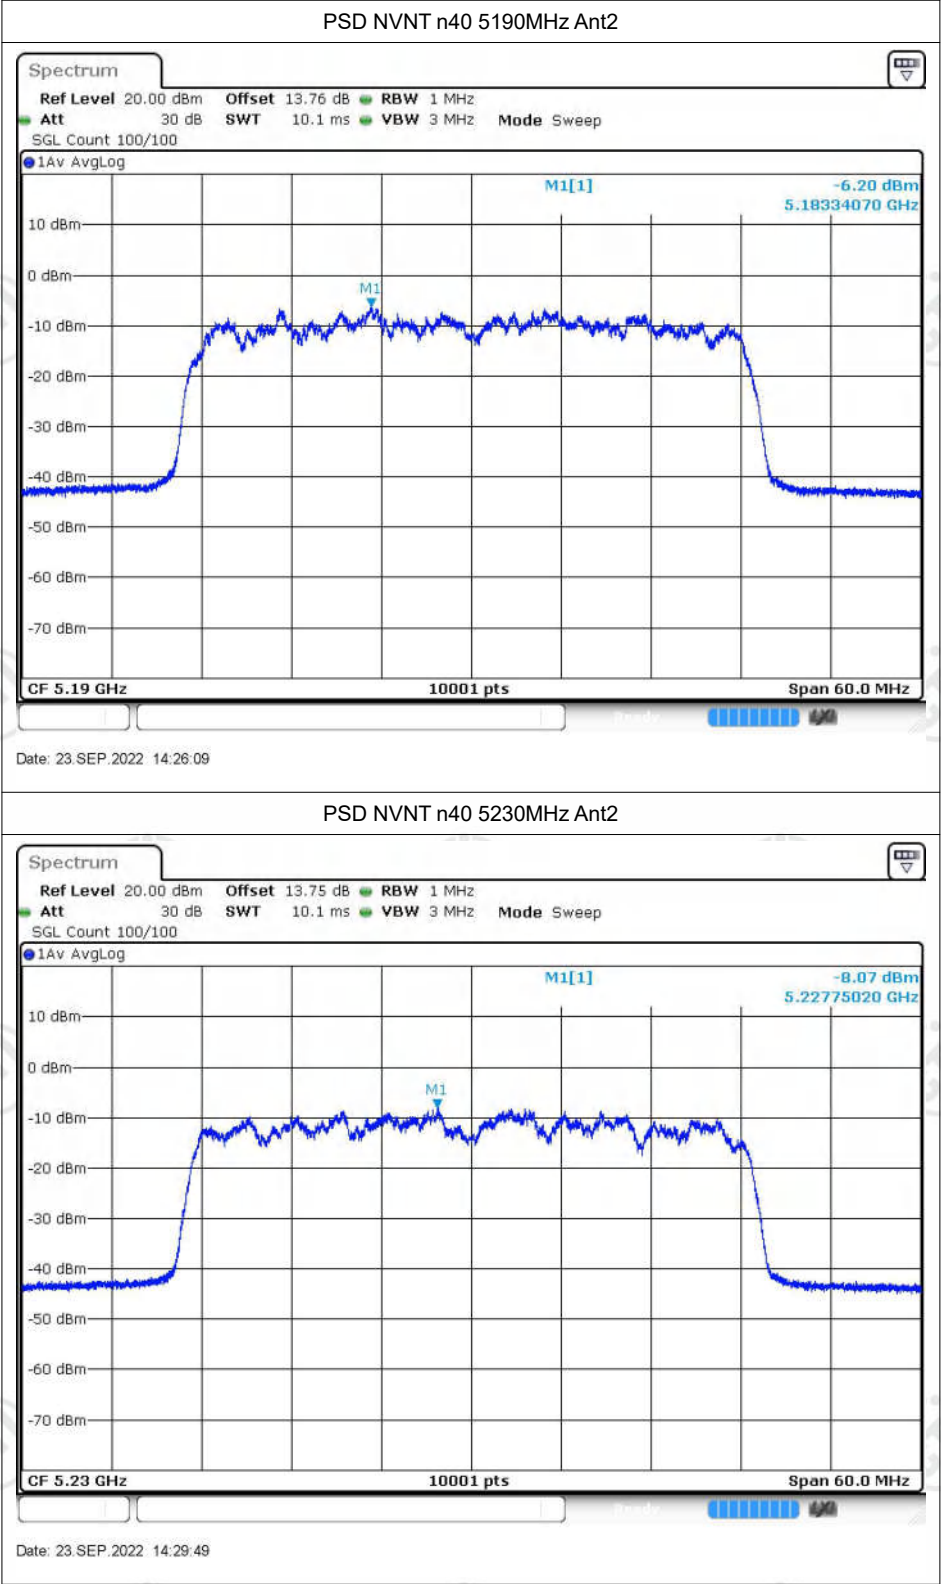


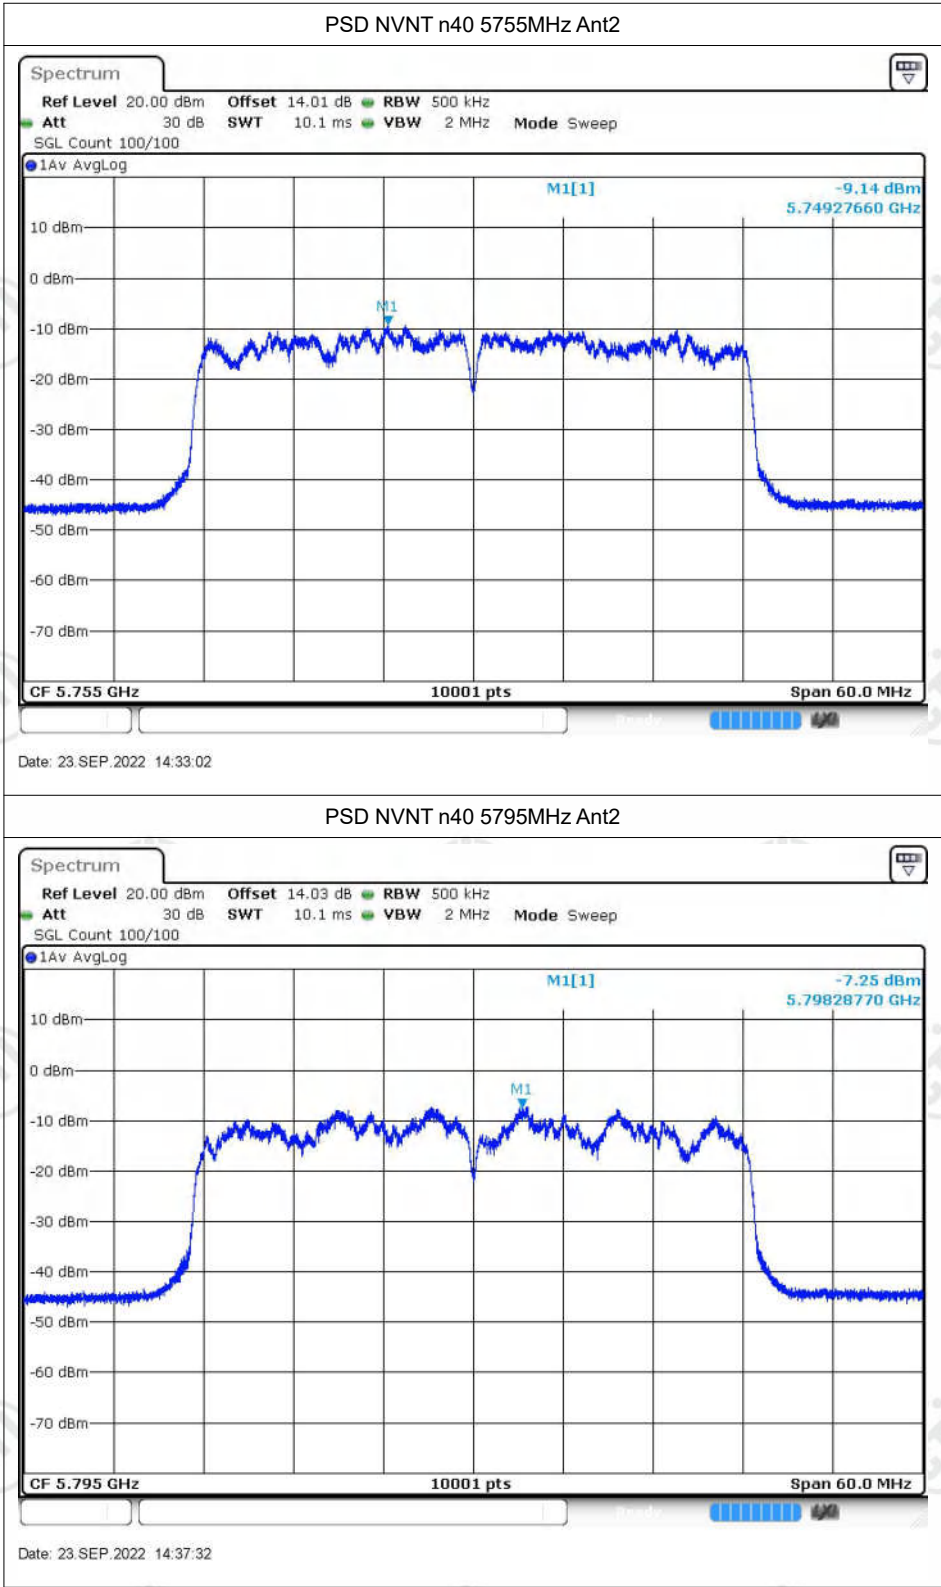


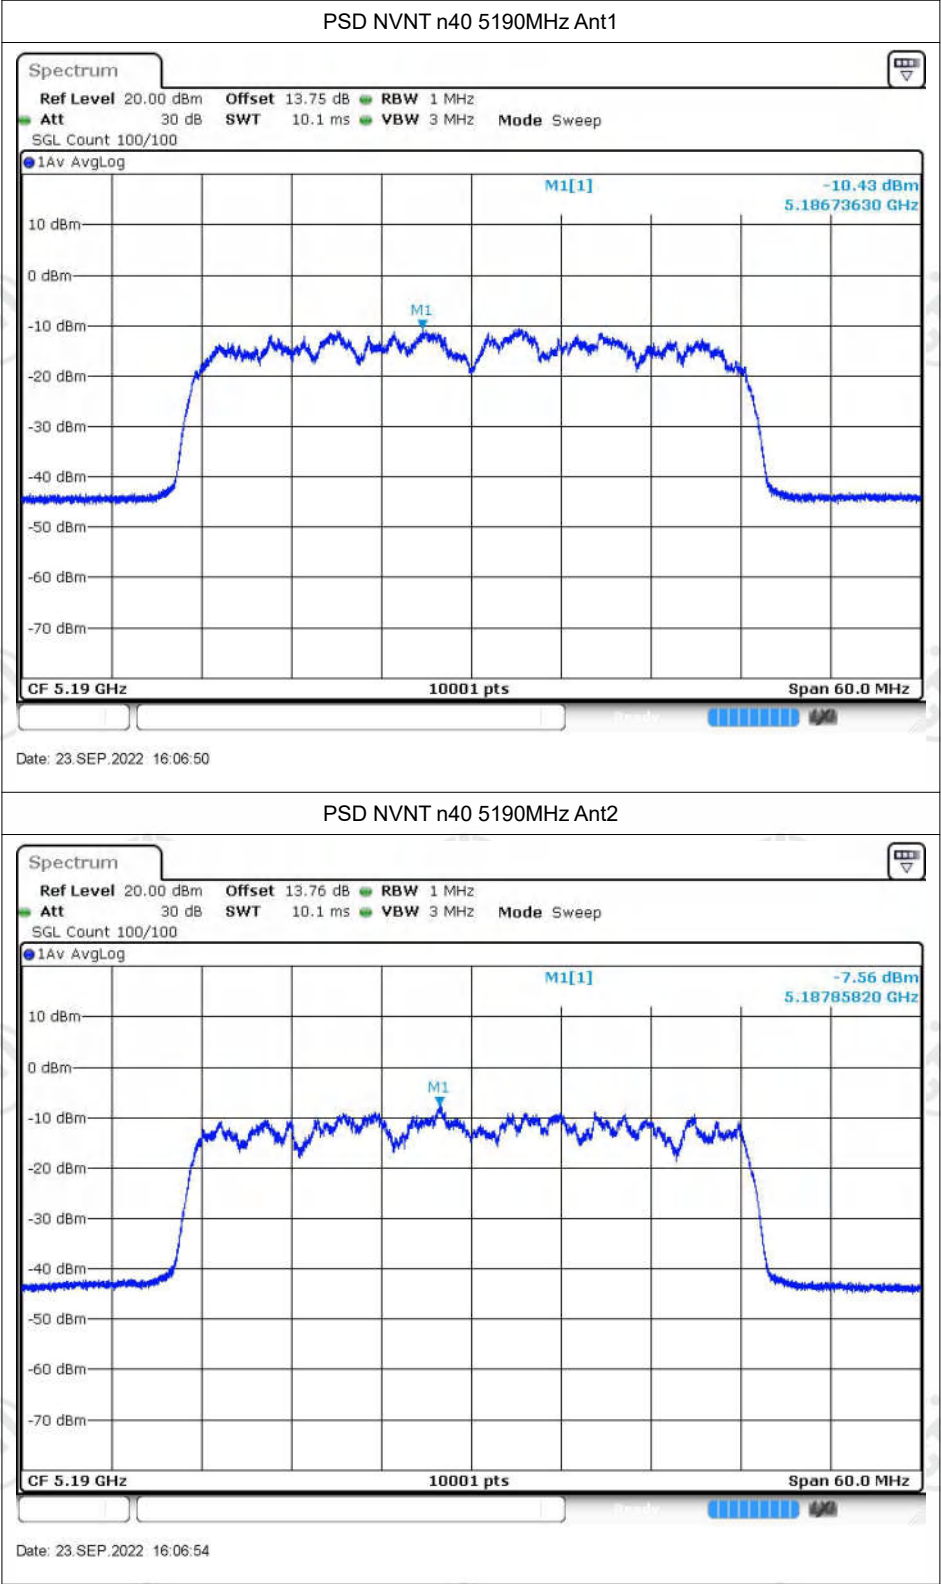


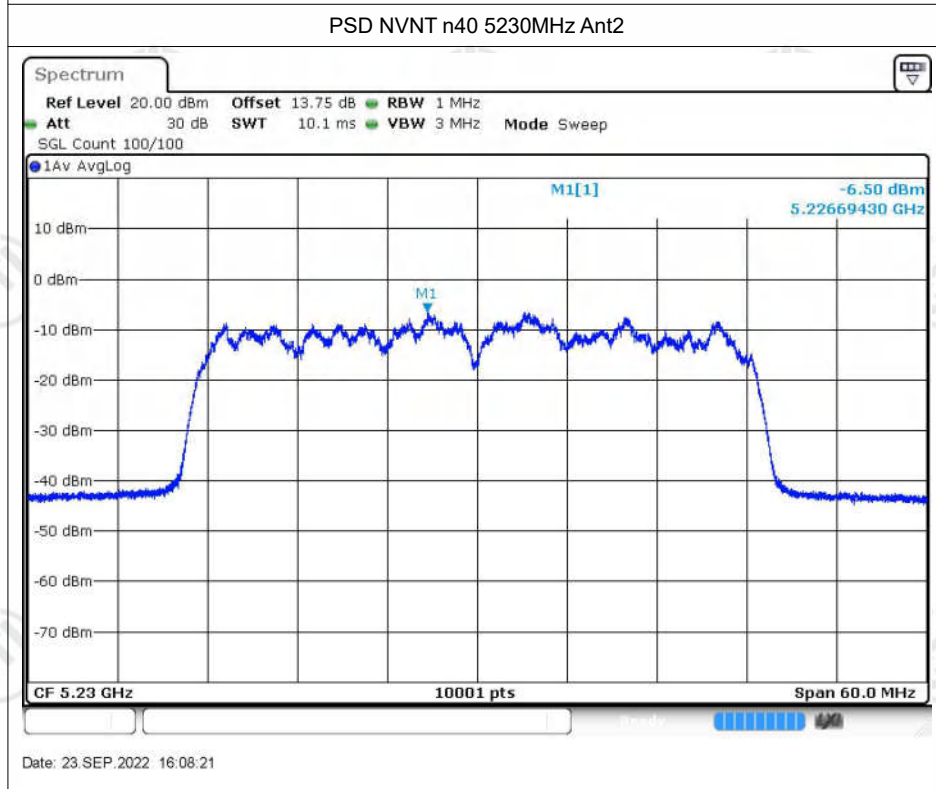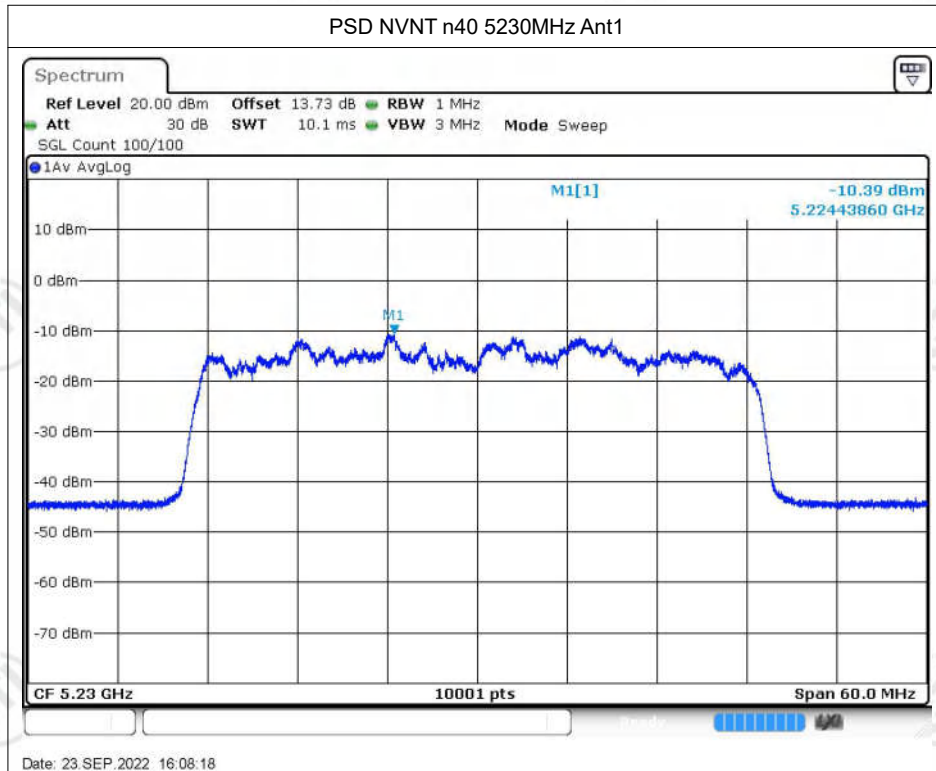


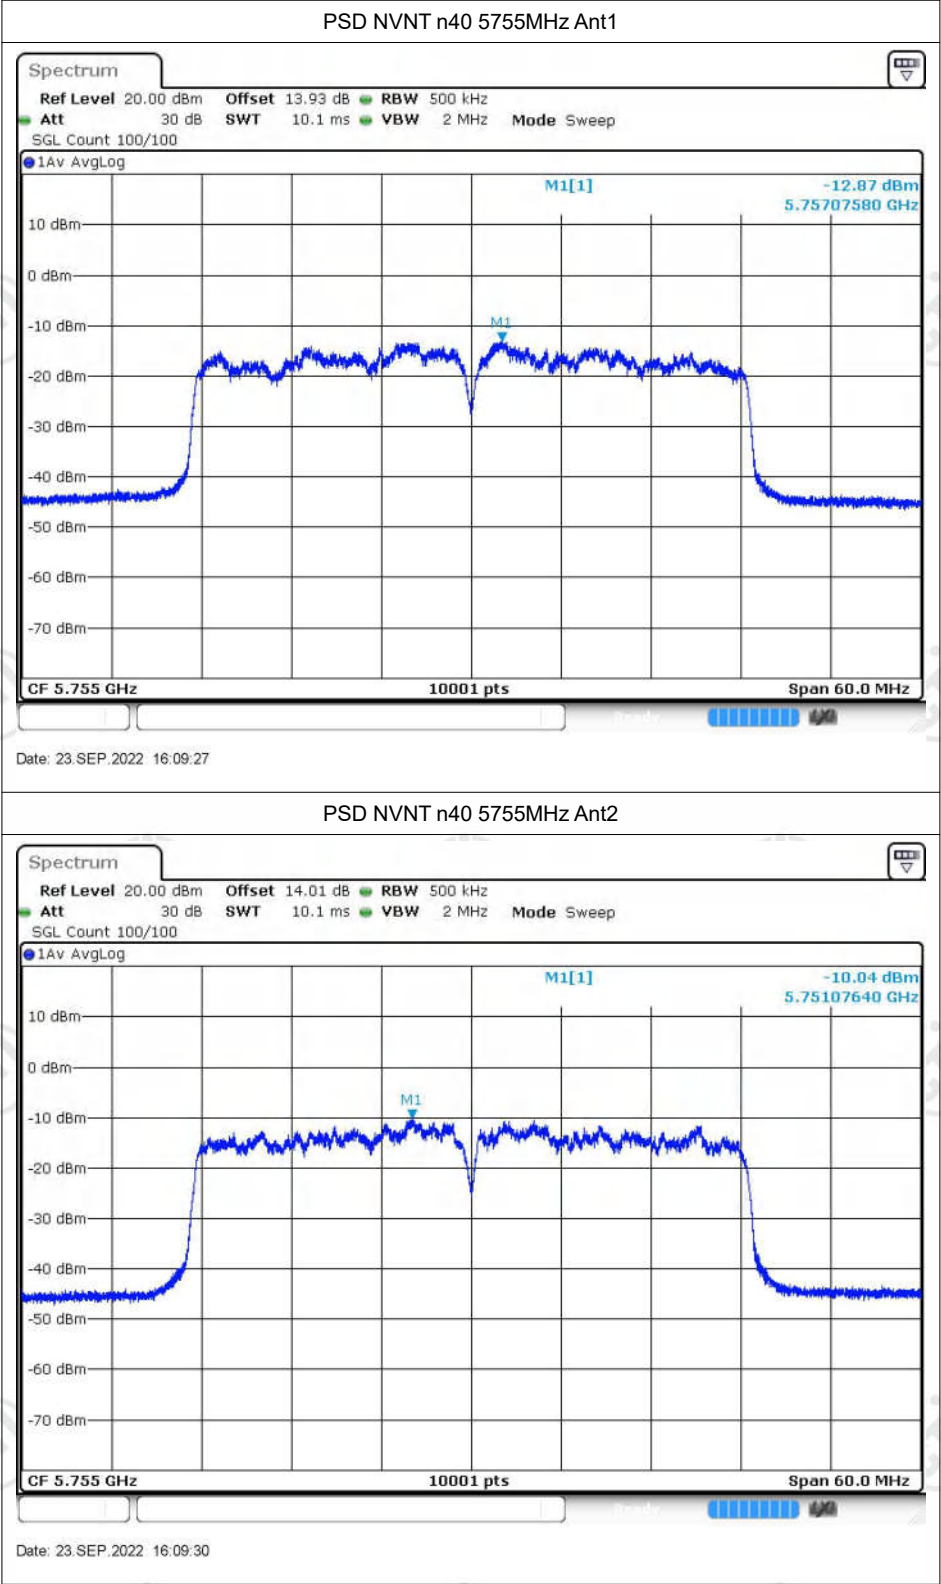


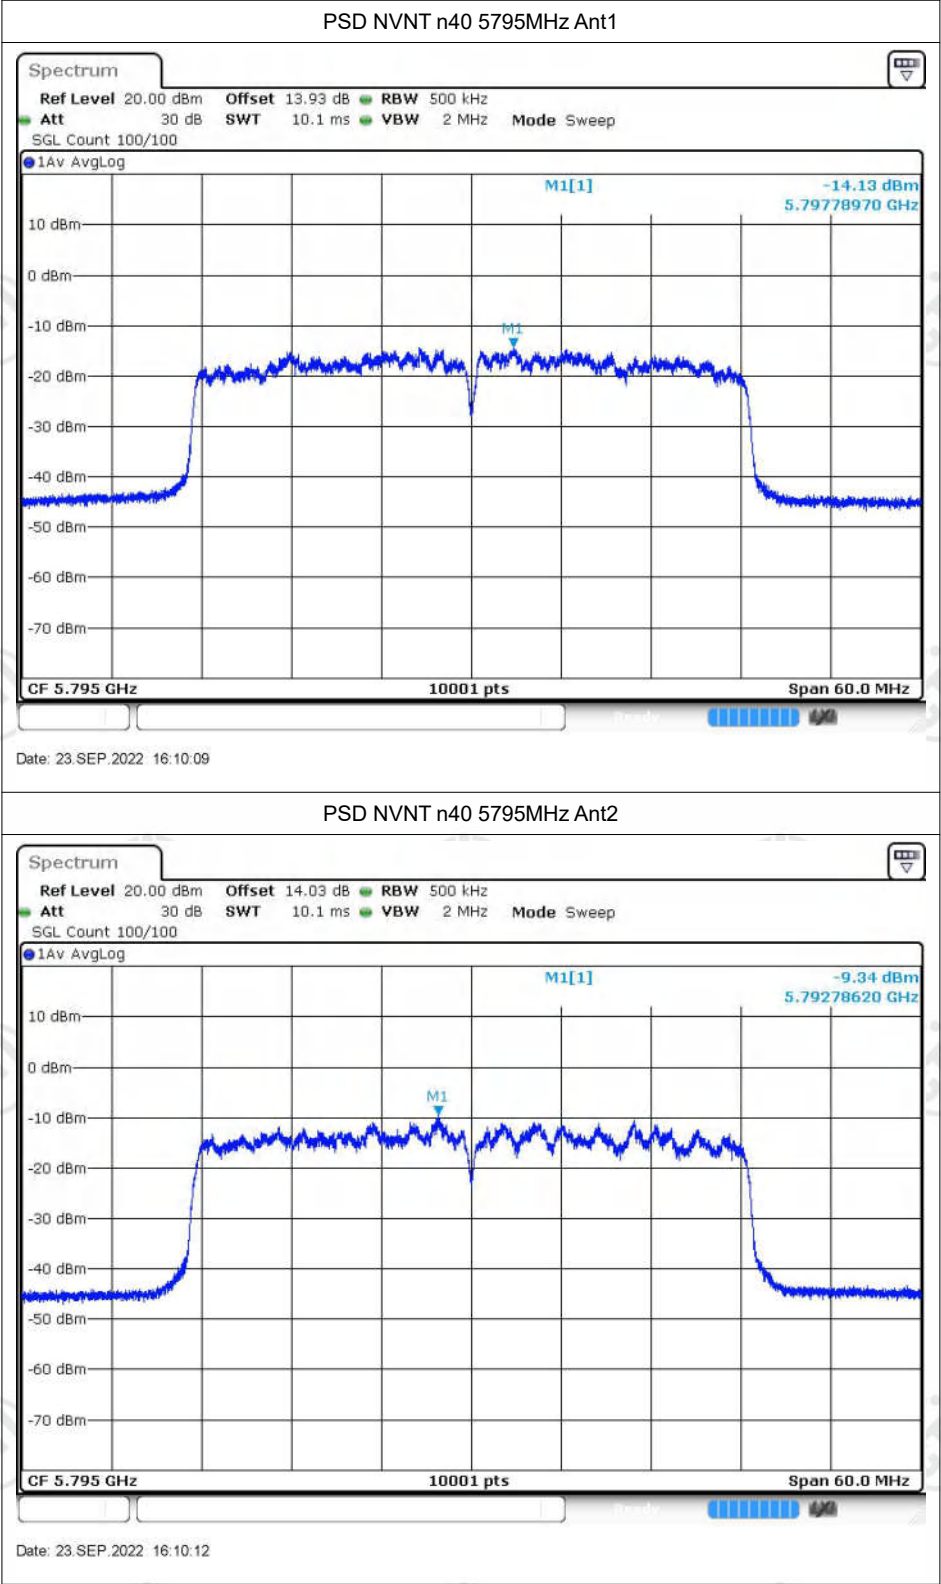


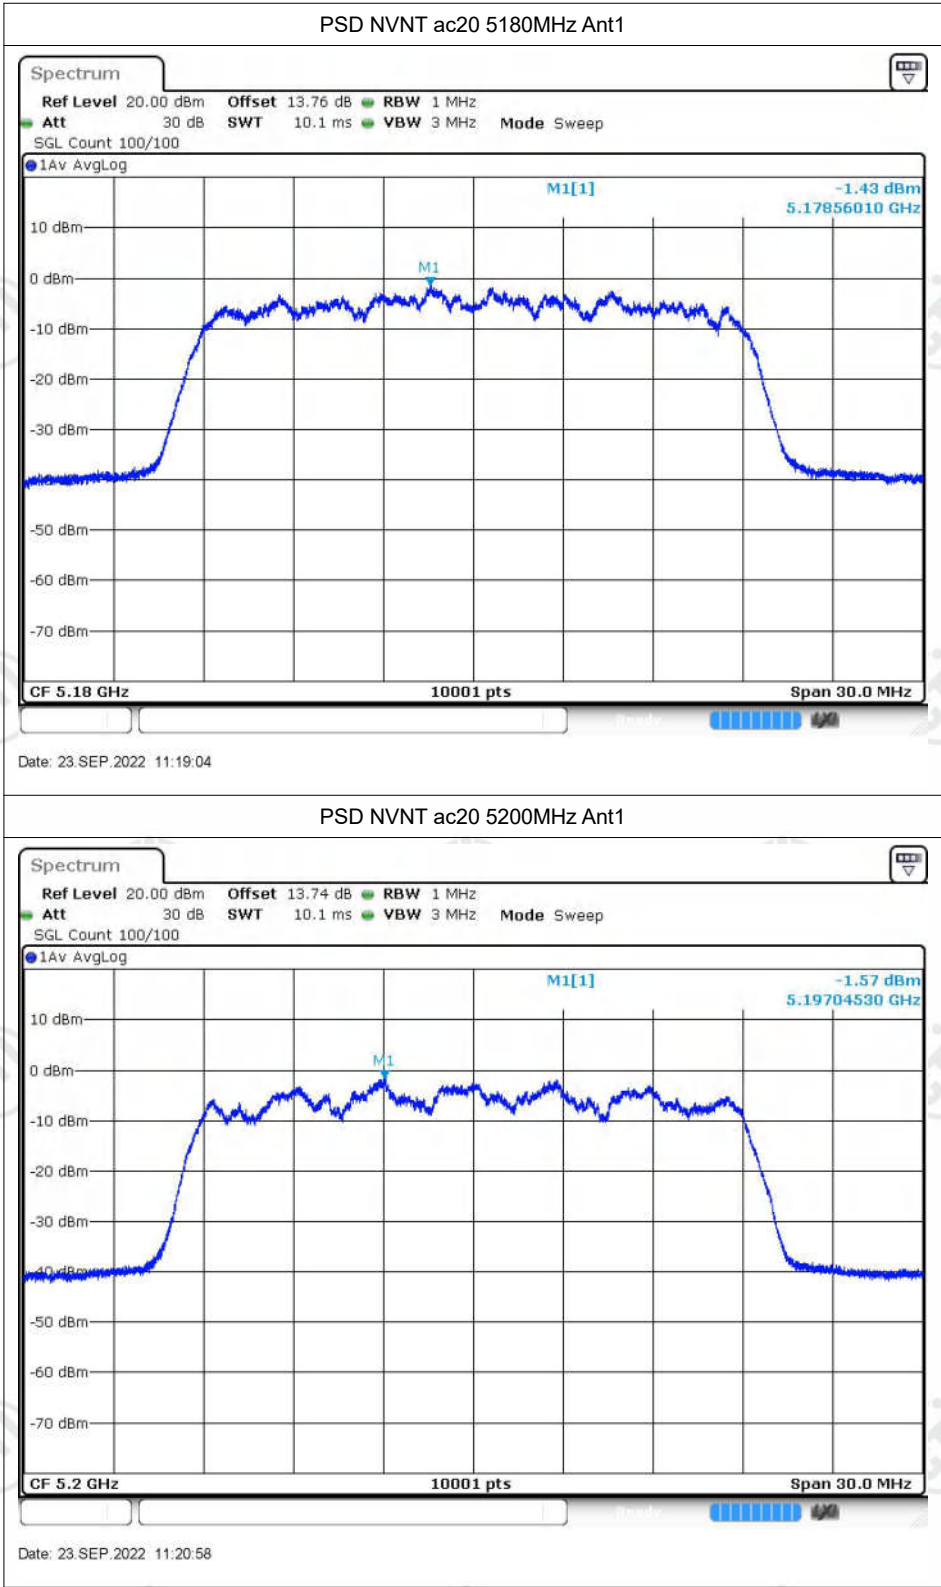


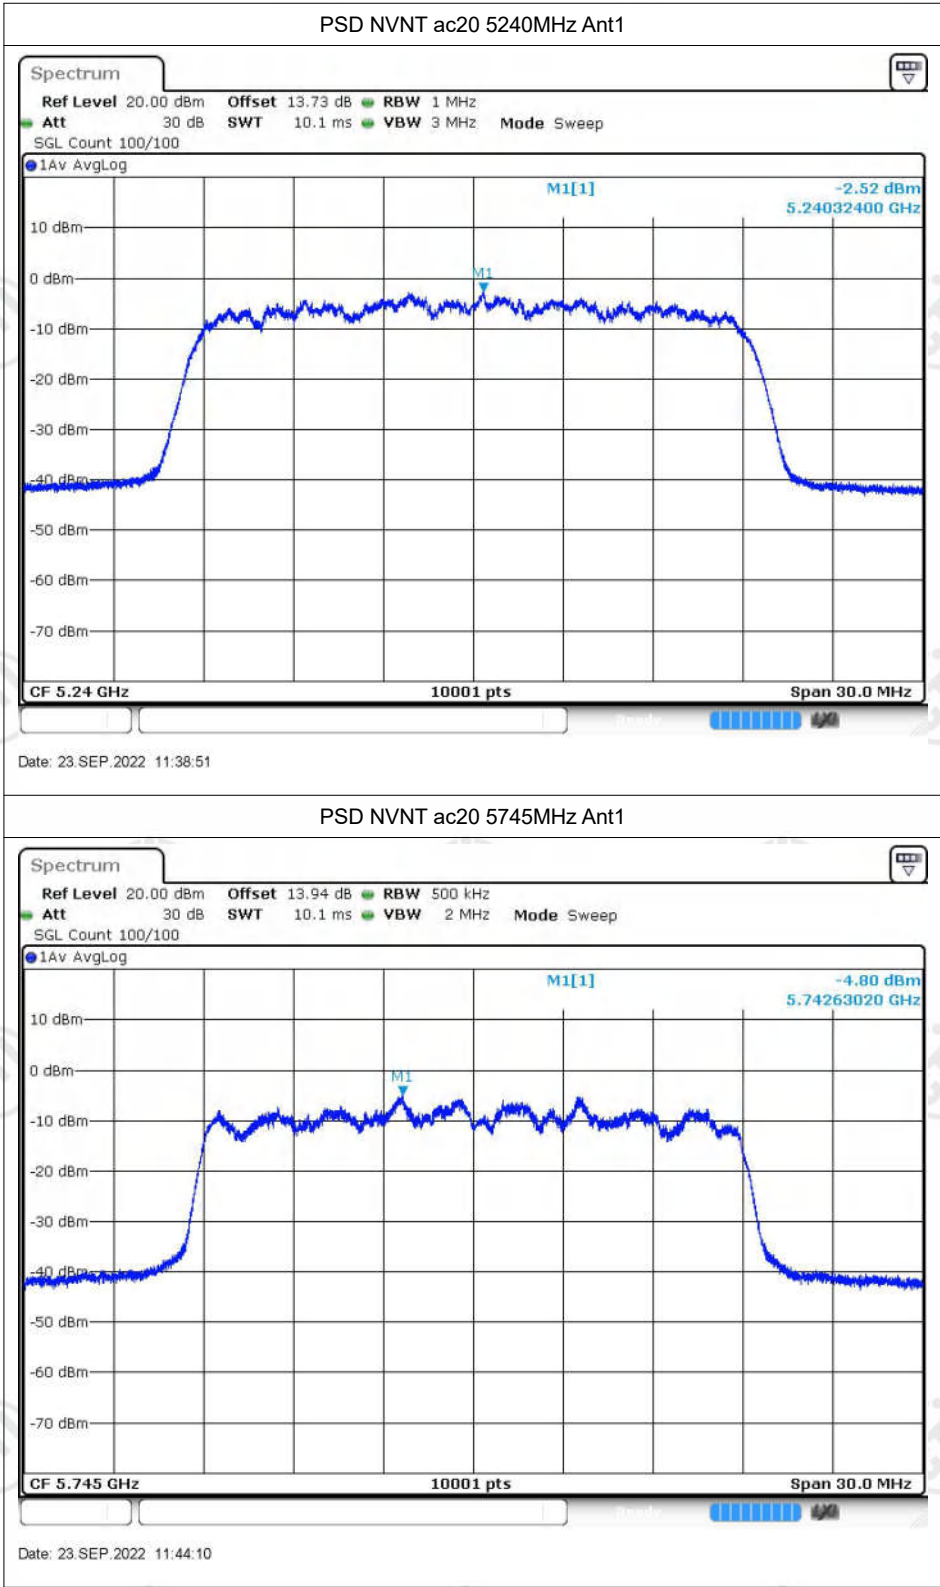



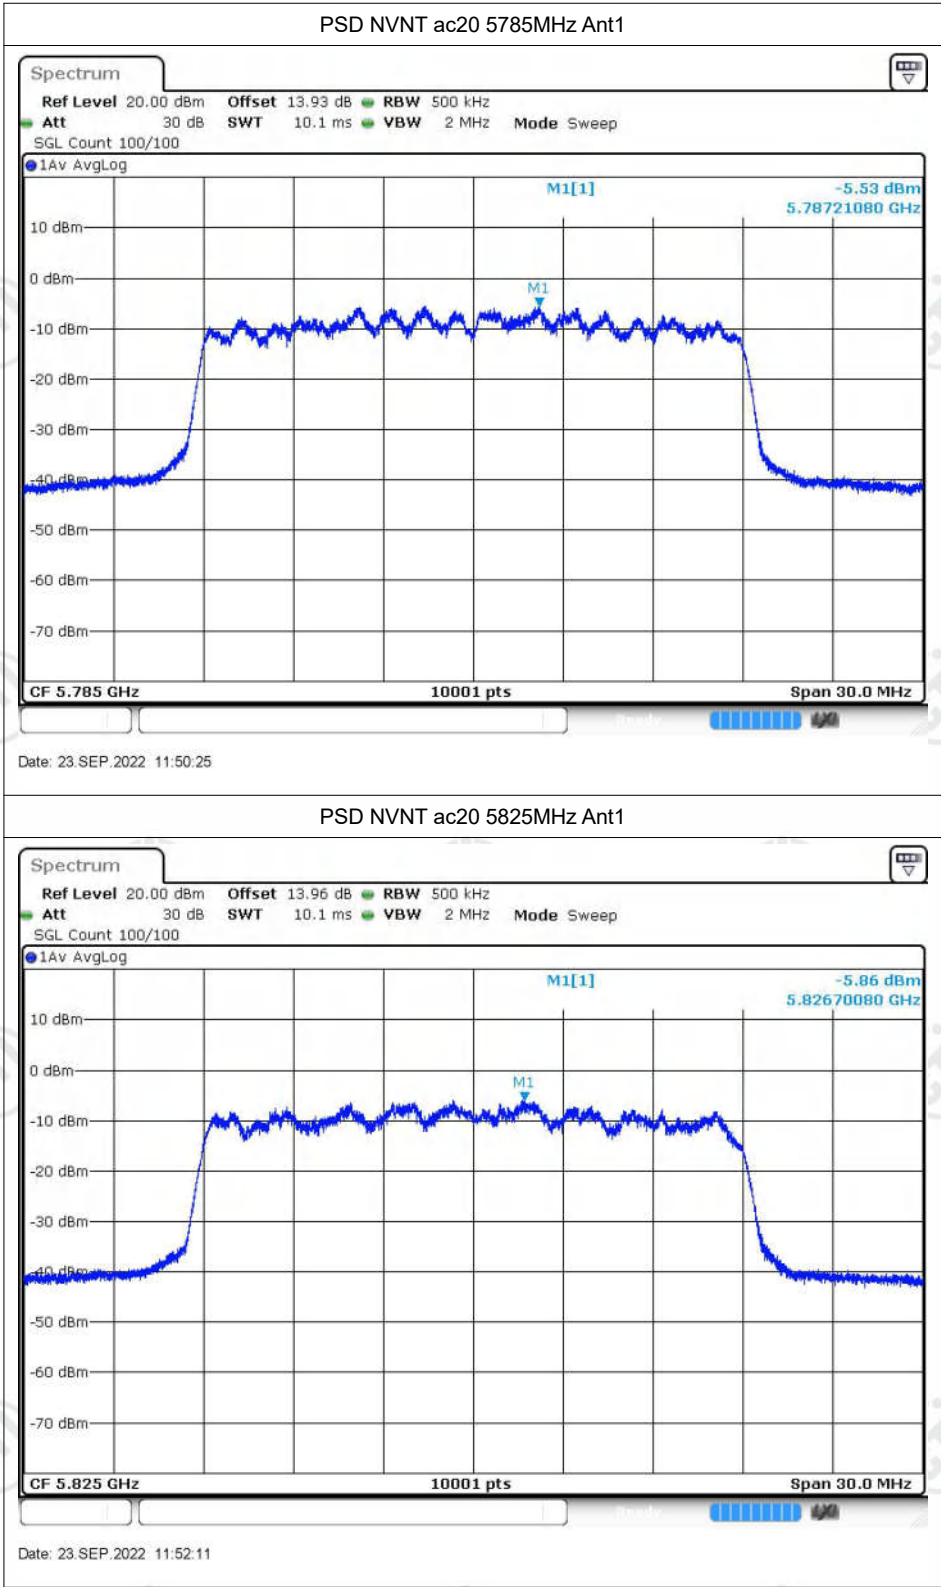



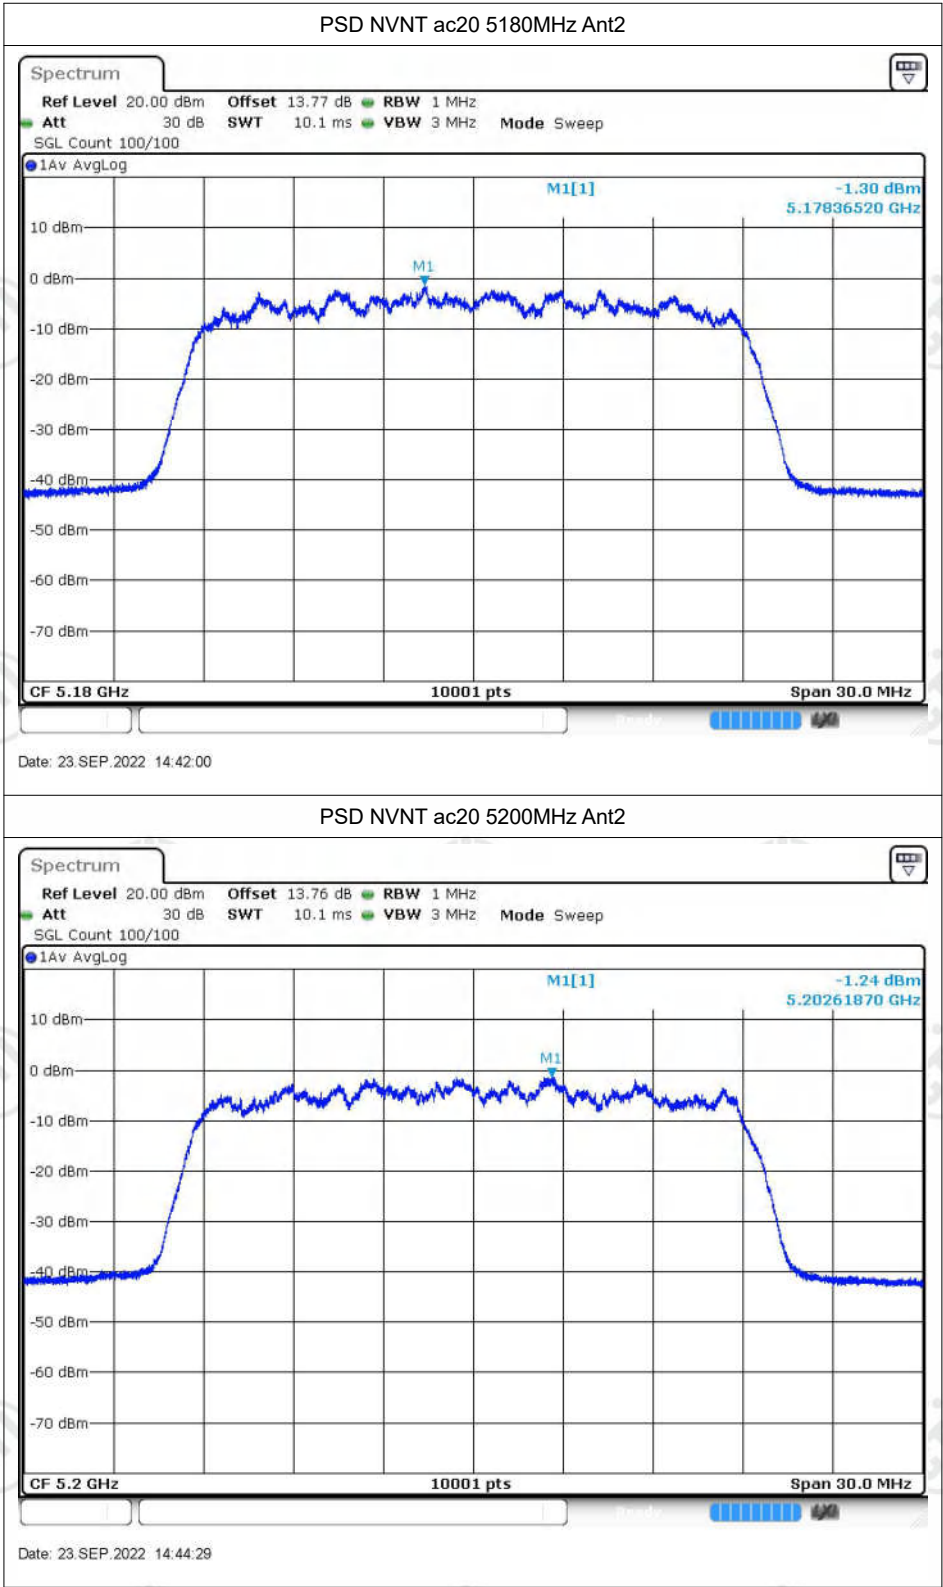


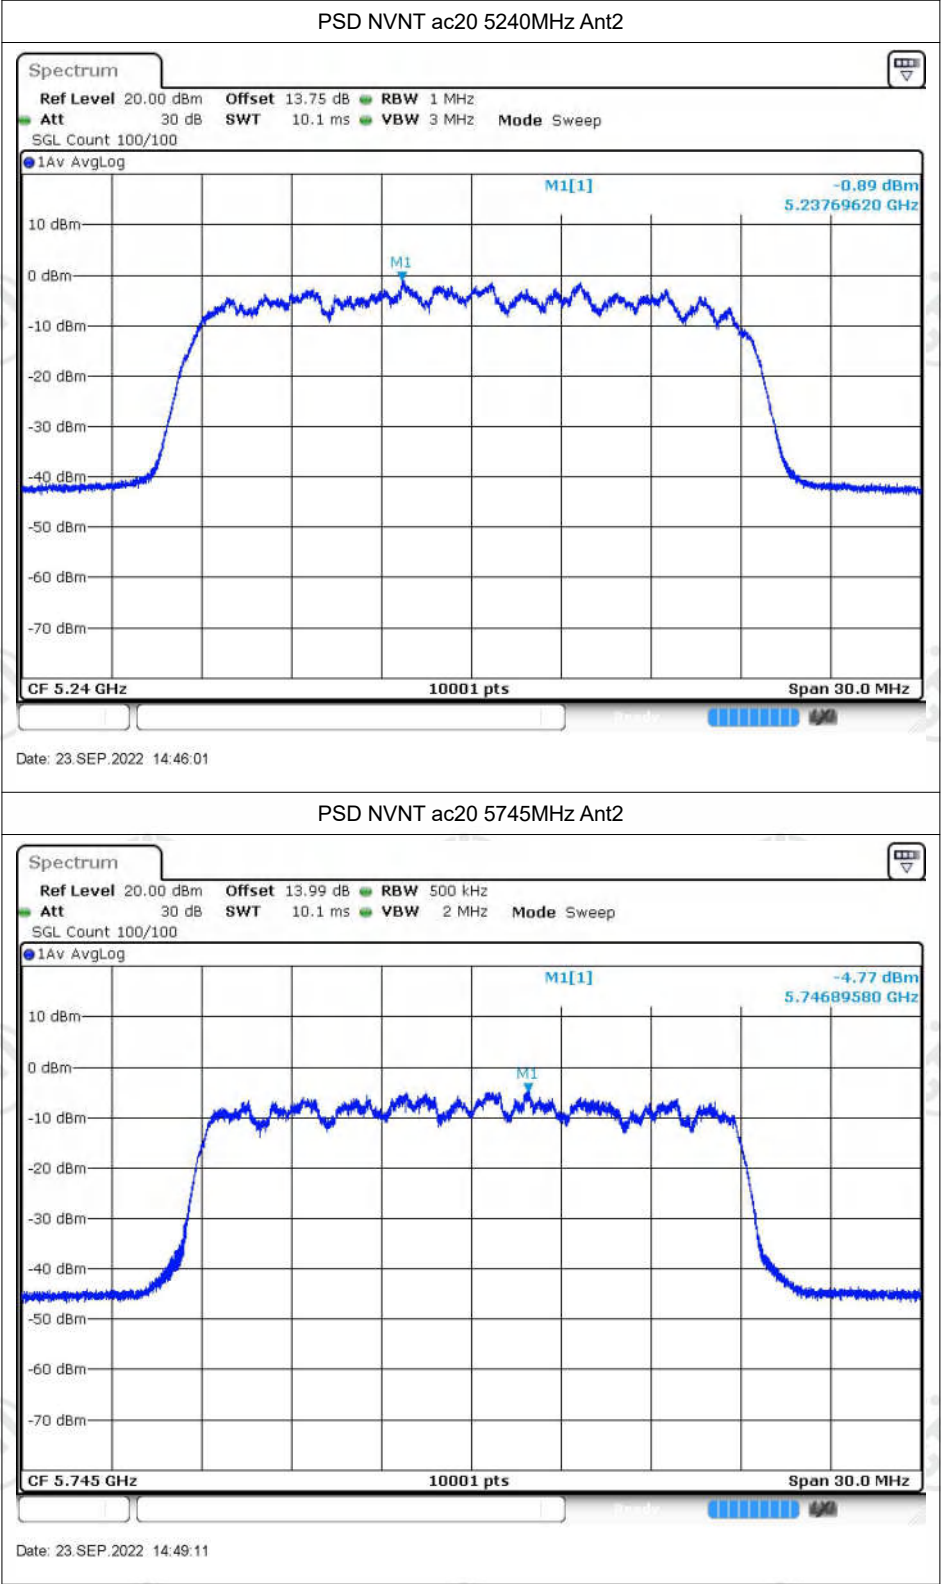



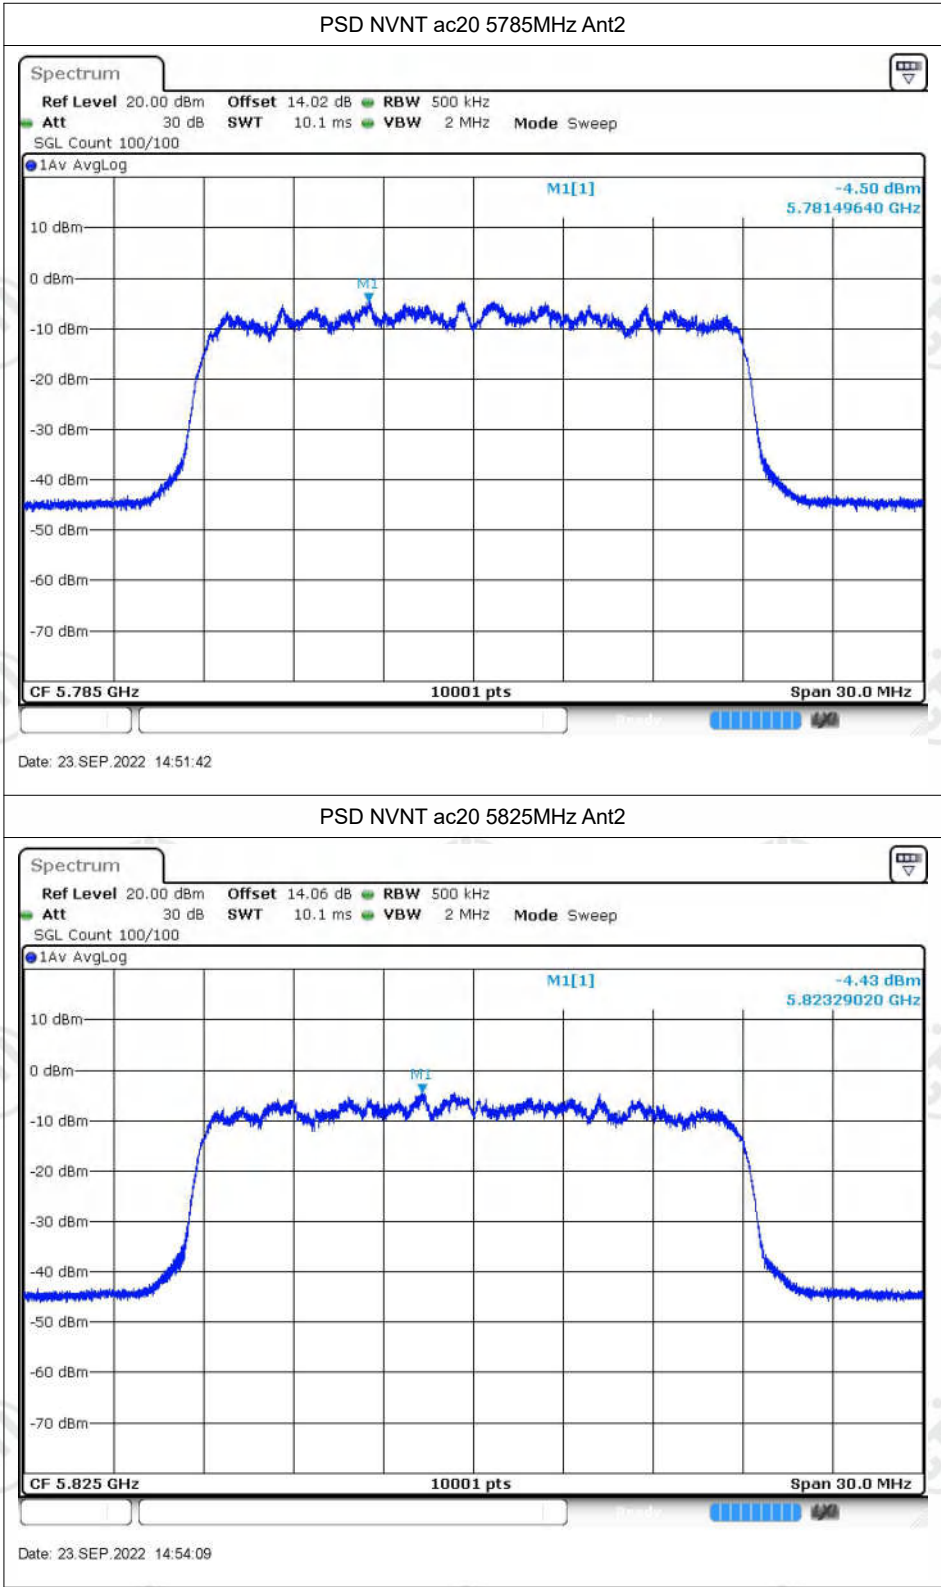


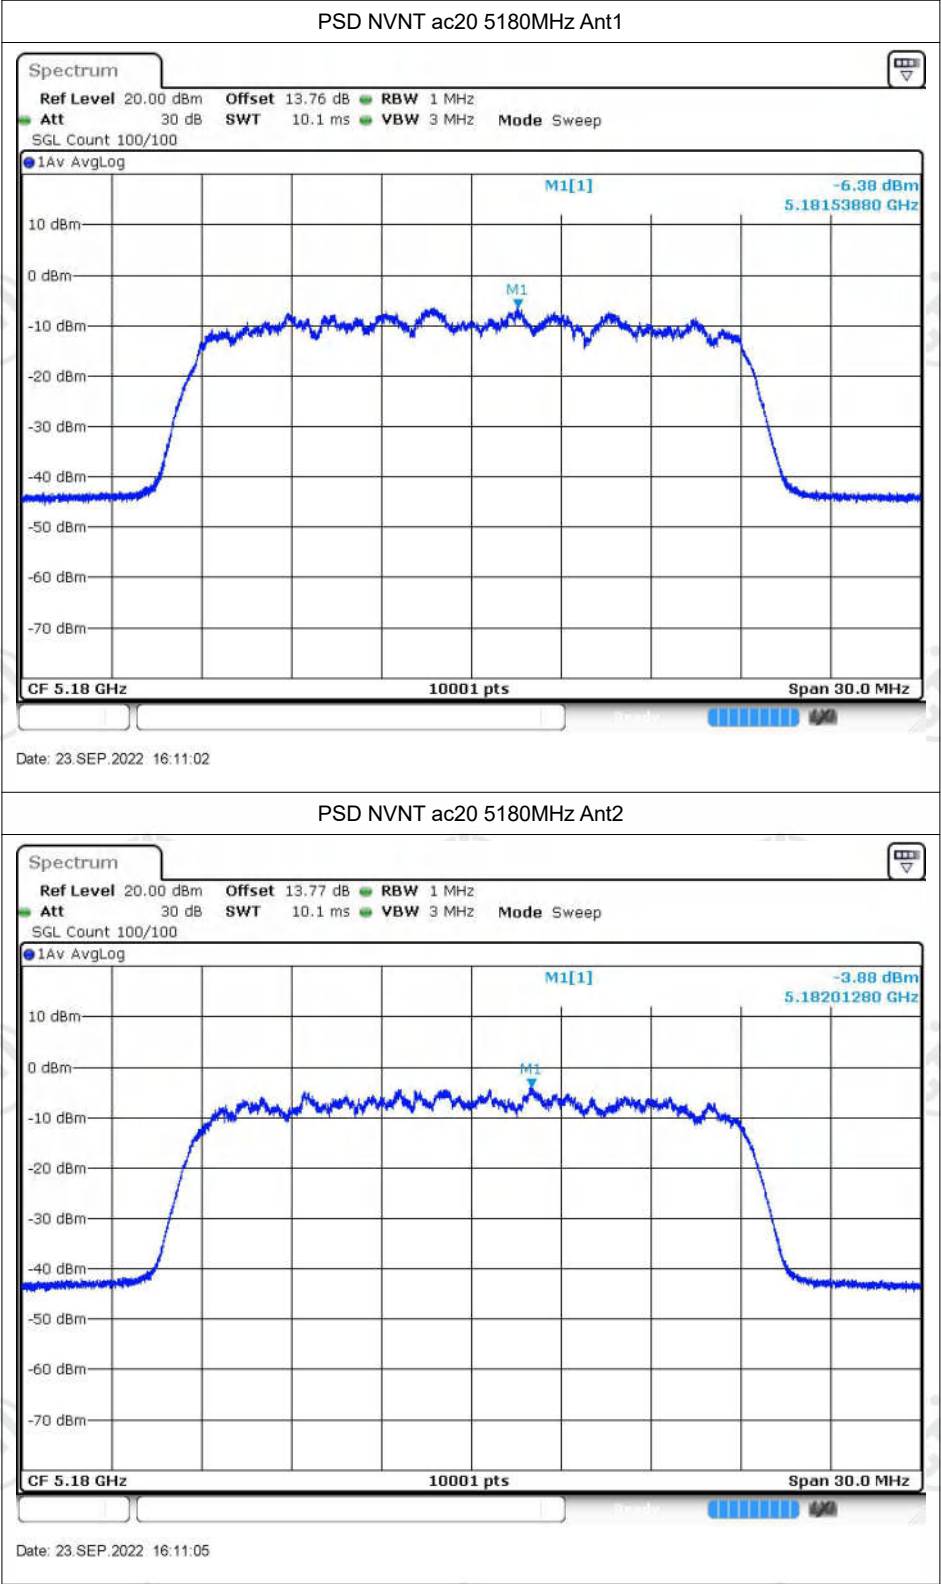


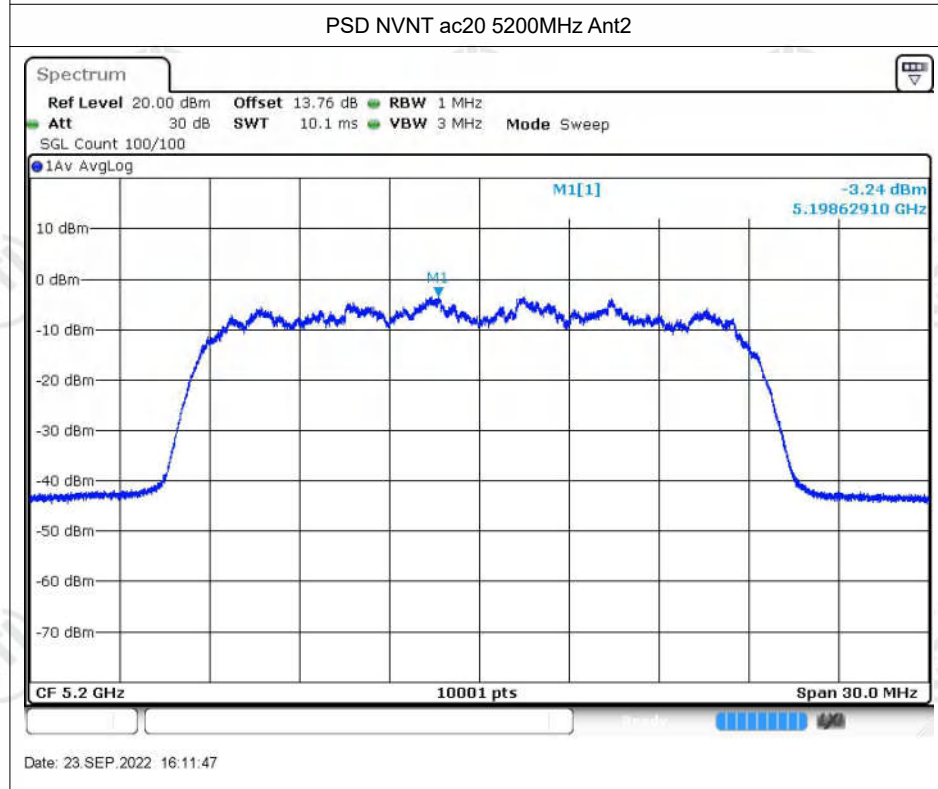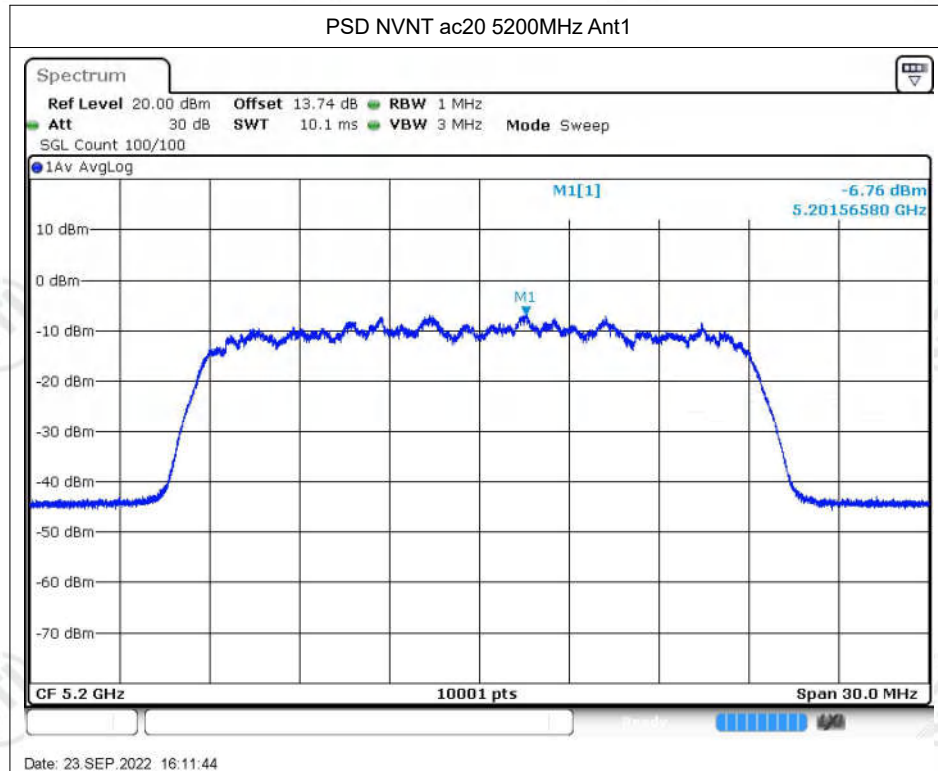

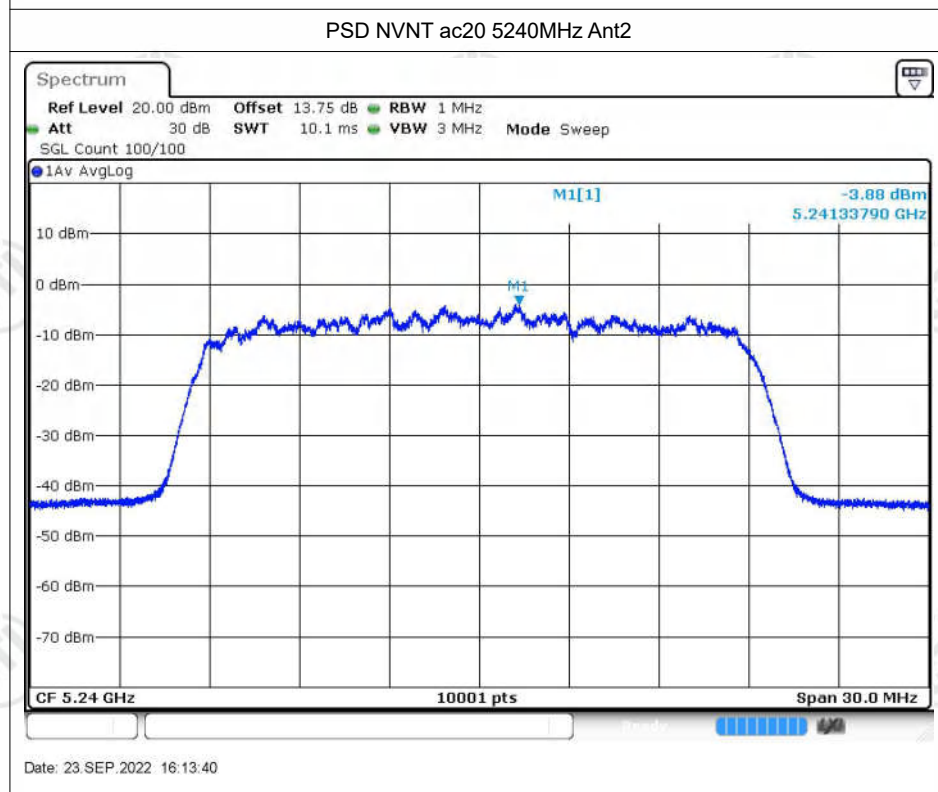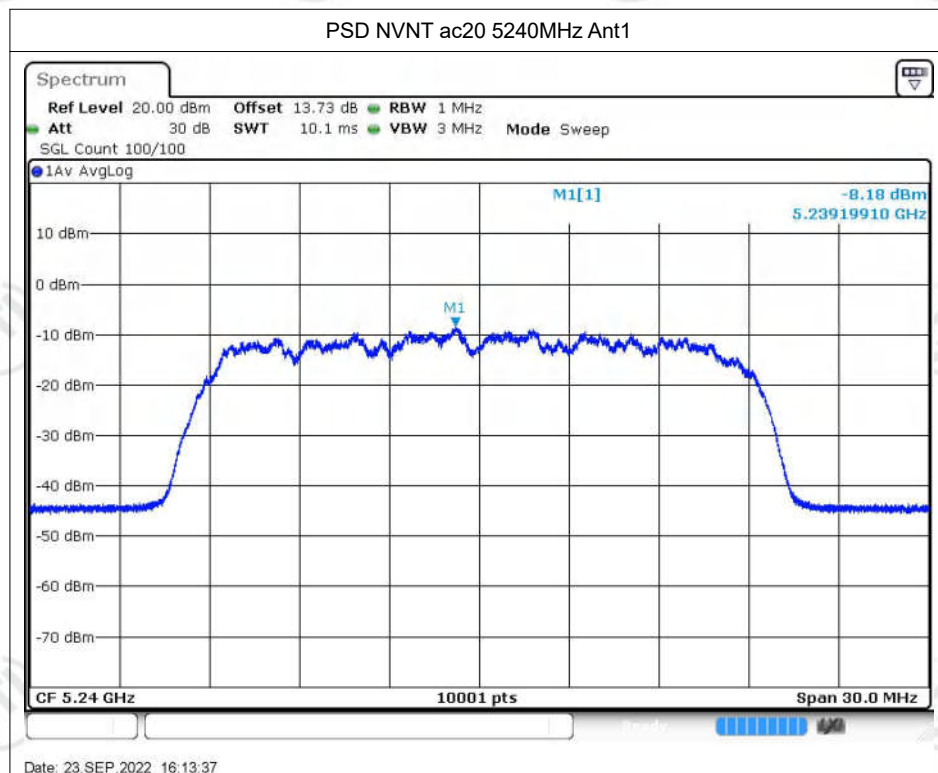


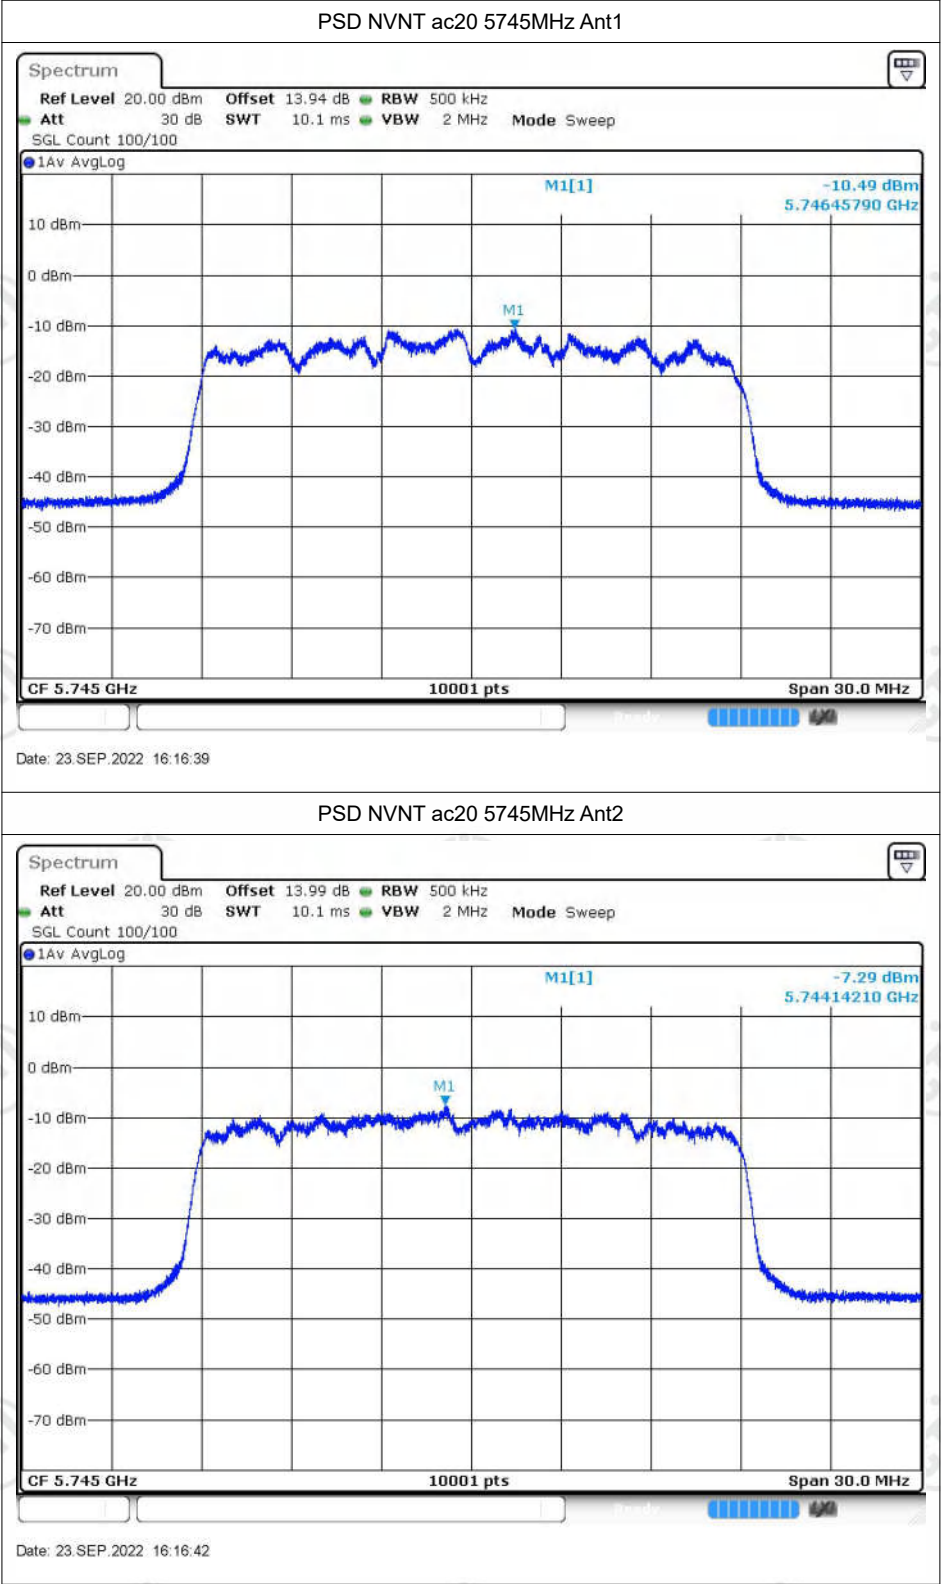

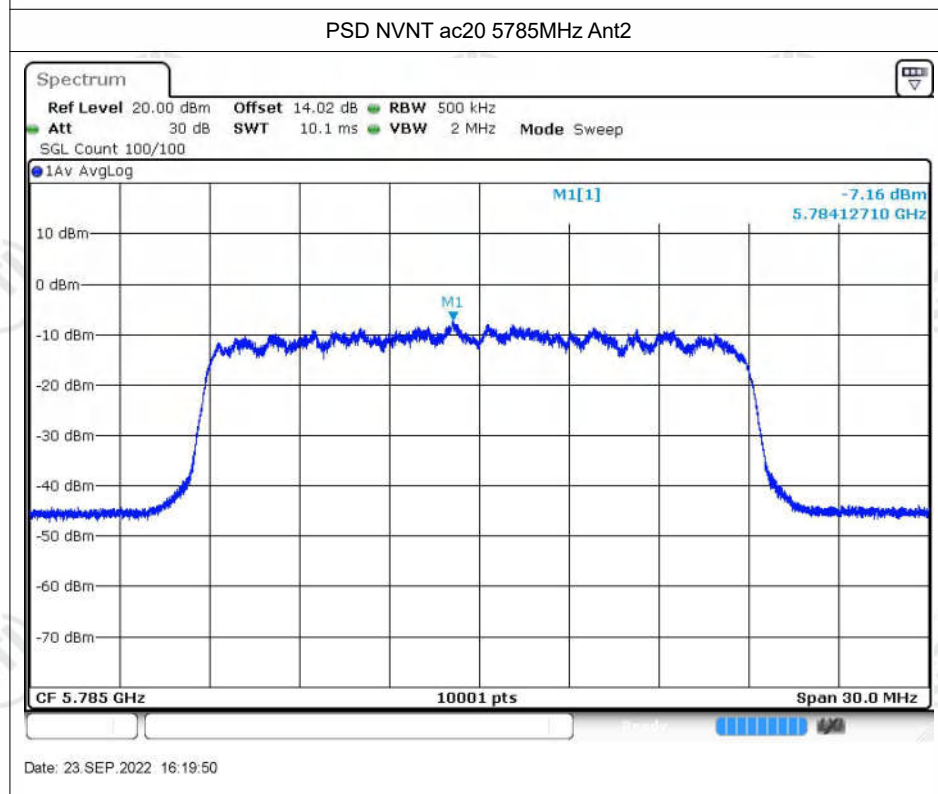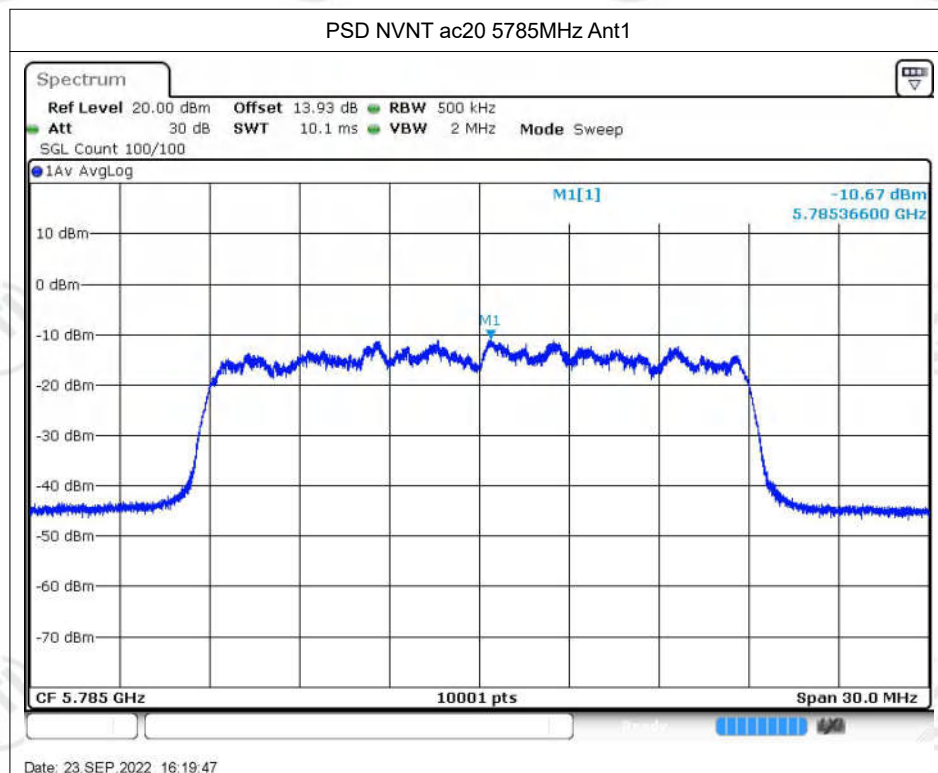


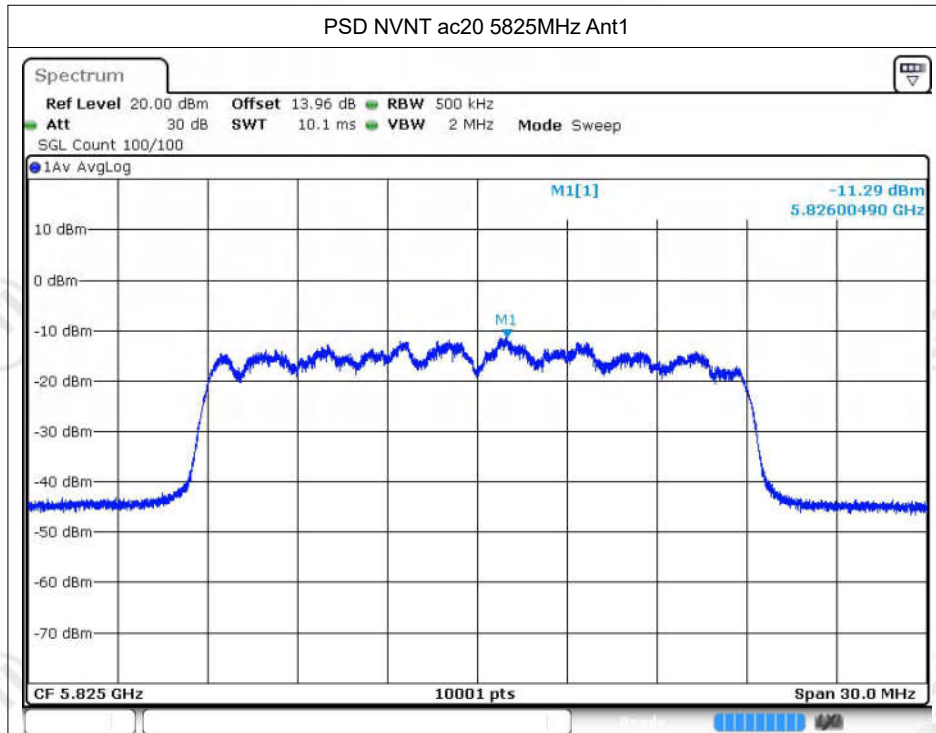



Date: 23.SEP.2022 16:21:11

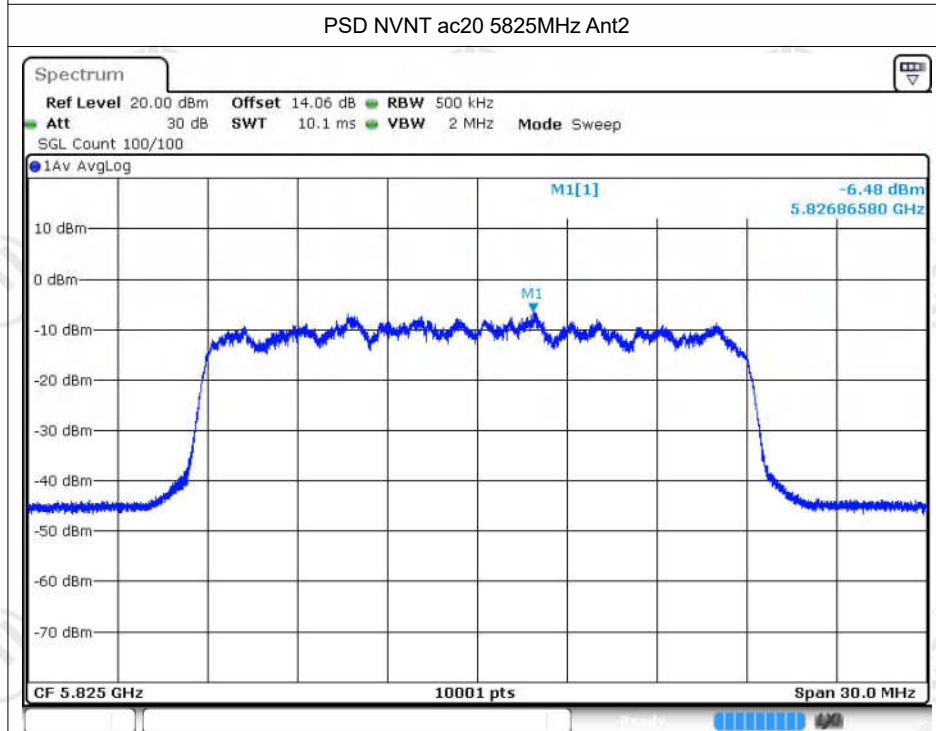


Date: 23.SEP.2022 16:21:14

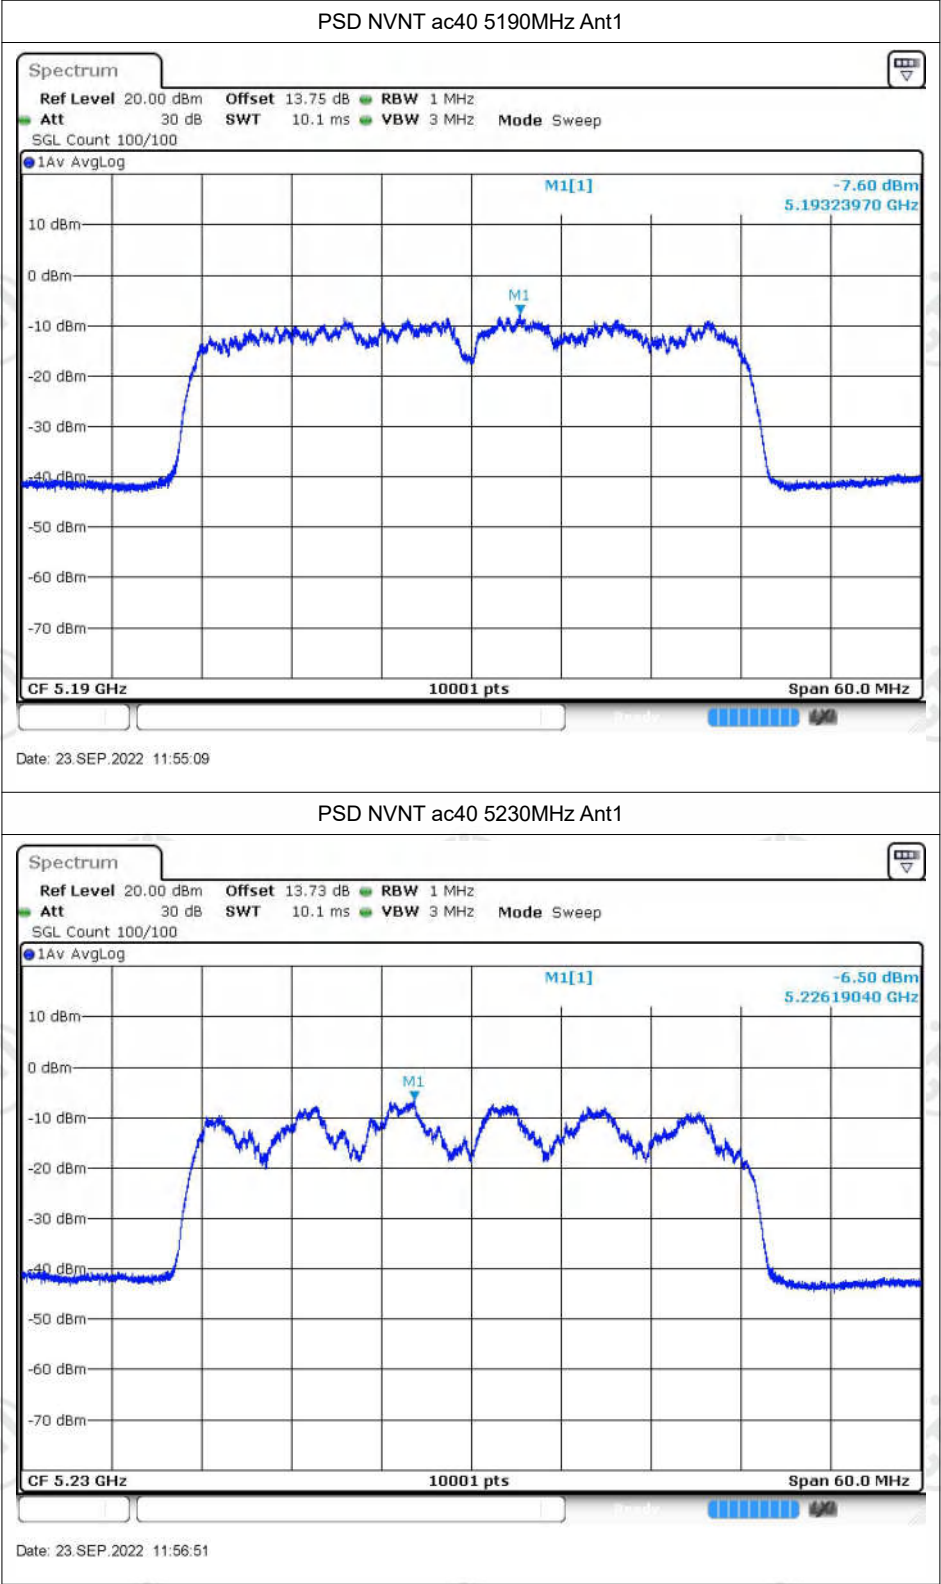


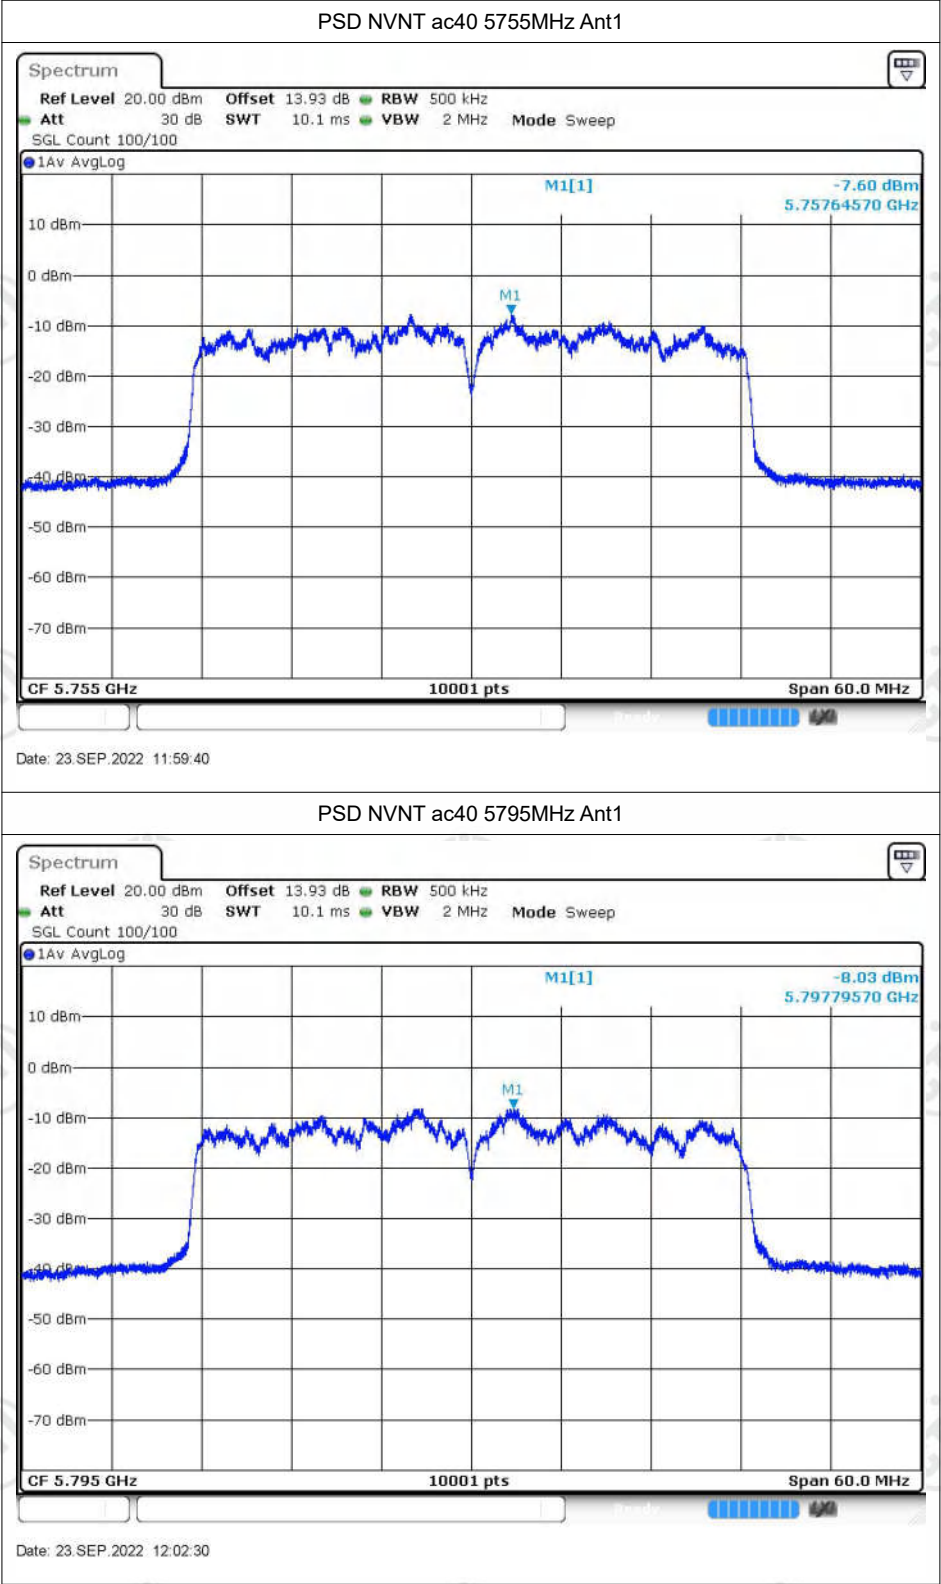

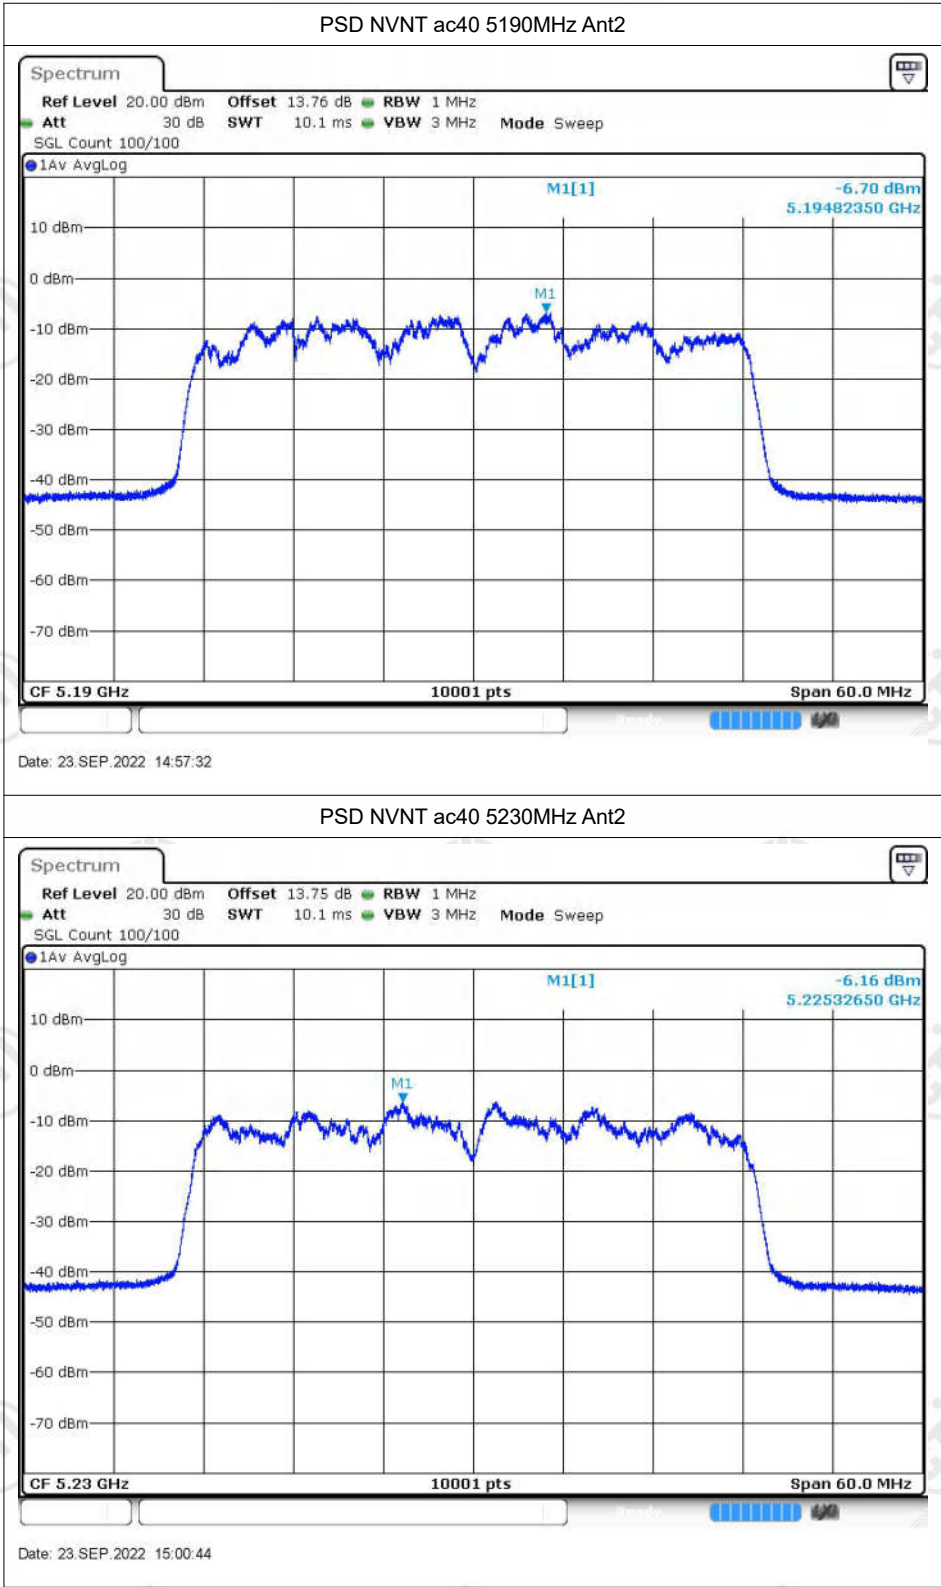

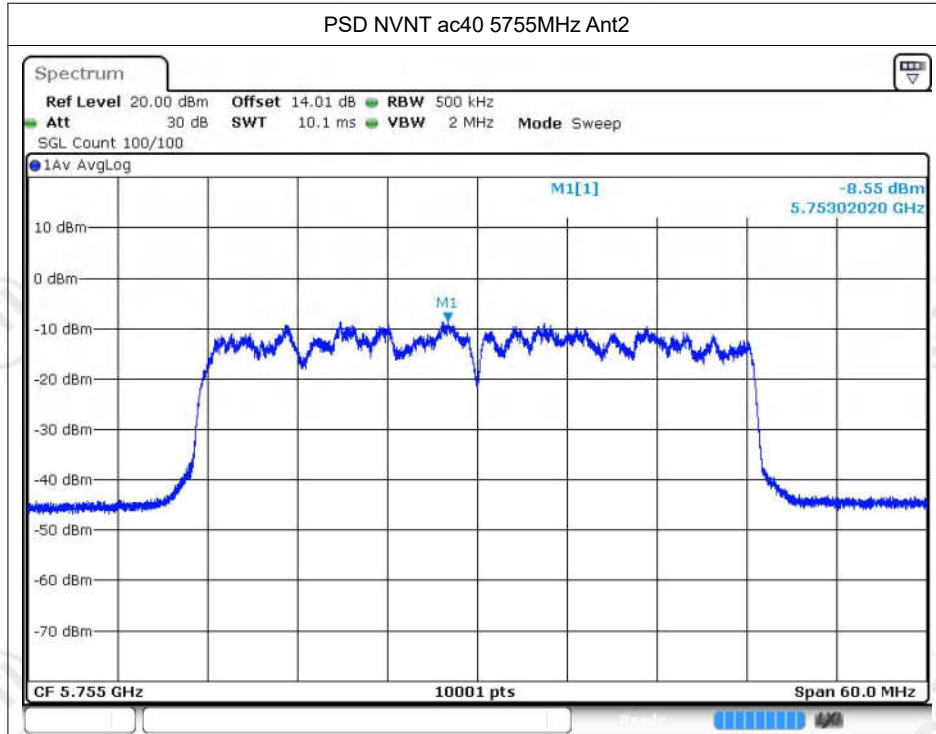

Date: 23.SEP.2022 15:10:48

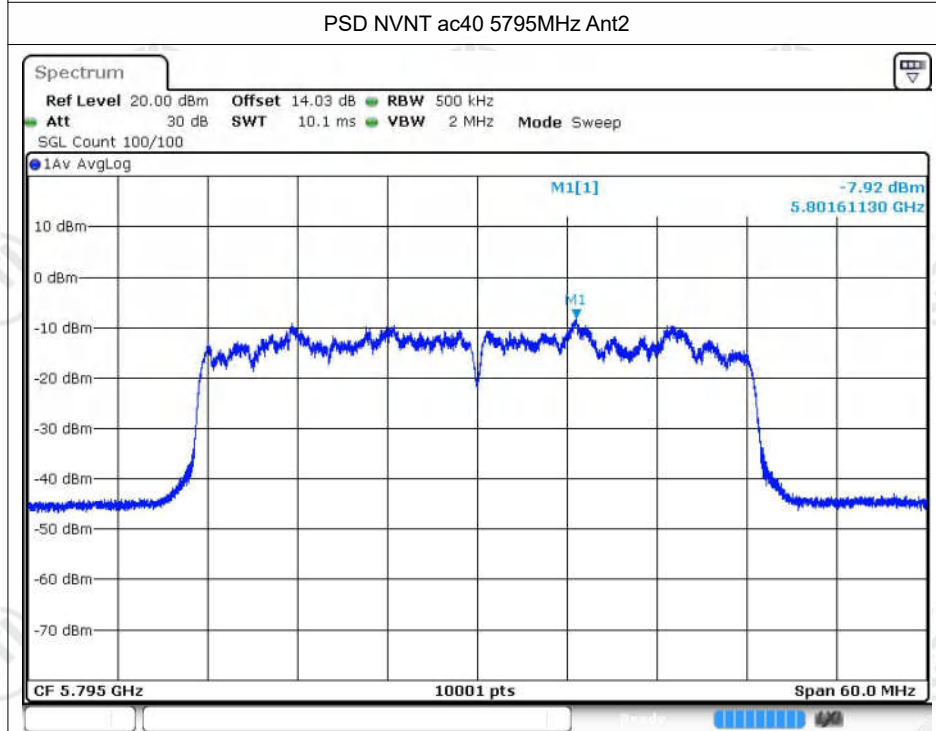

Date: 23.SEP.2022 15:13:56

