


Wireless speakerphone

eMeet Luna / eMeet Luna Lite

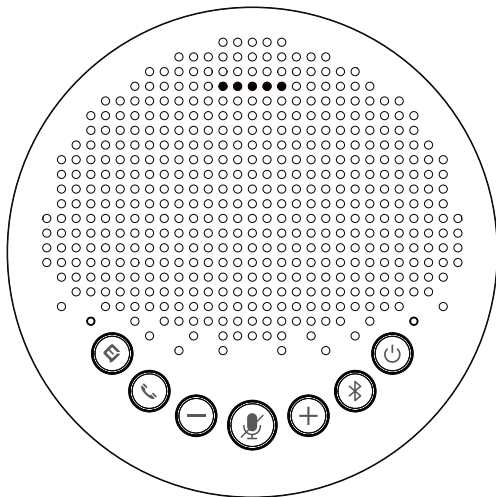


PMN:Luna


User Manual / 使用说明书

English | 日本語 | 简体中文 | Deutsch | Italia | España | Francés

Luna

		
× 1	× 1	× 1
 •Product name: USB Dongle Model: eMeet Adapter A300/eMeet Audio Adapter A200	 × 1	 × 1


Luna Lite

			
× 1	 × 1	 × 1	 × 1

CONTENTS

English.....	01
日本語.....	07
简体中文.....	13
Deutsch.....	19
Italiano.....	25
Español	31
Français.....	37

Buttons

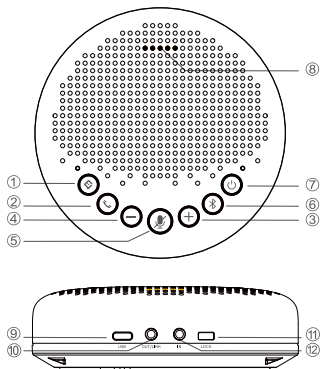

- ① AI noise reduction on/Off
- ② Answer/End phone call
- ③ Volume up
- ④ Volume down
- ⑤ Mic Mute/Unmute
- ⑥ Bluetooth
- ⑦ Power on/Off
- ⑧ LED status indicator
- ⑨ USB port
- ⑩ AUX OUT/LINK port
- ⑪ LOCK port
- ⑫ AUX IN port

Button Controls

	Press	Volume up/down
	Press	AI noise reduction on/off
	Incoming call, press	Answer a call
	Incoming call, press and hold for 2 seconds	Reject a call
	Call going, short/long press	End a call
	Press	Mute/unmute microphone
	Press and hold	Power on/off

LED Status Indicator

Status	Indication	Light
Mic Mute	Turns red	● ● ● ● ●
Incoming call when Bluetooth is connected	Flashes green	☀ ☀ ☀ ☀ ☀
Volume display	Turns cyan	● ● ● ● ●
Battery low display	Flashes red	☀ ☀ ☀ ☀ ☀
USB connection	Turns green	○ ○ ● ○ ○
Audio in connection	Turns yellow green	○ ○ ● ○ ○
Audio out connection	Turns cyan	○ ○ ● ○ ○

Operating Instructions


Power On/Off

Press and hold the power button "⏻" for 2 seconds to power on or off.


•Note : It will automatically power off after 1 hour of inactivity.

Connection

a) After connect the device to a PC via USB, start to use it.



b) After connecting it to the PC through USB Dongle, start to use it.



·Note : Dongle is not included with eMeet Luna Lite

c) After connecting mobile devices such as PCs or mobile phones through Bluetooth pairing, start to use it.



Status	Action/display	LED/Buttons
Enter Bluetooth pairing mode	press and hold 2 seconds	
Bluetooth pairing	flashes blue	
Bluetooth connected	steady blue	
Bluetooth disconnected	press	
Bluetooth closed	steady white	

·The names of Bluetooth/USB in different products models are different:

	Prouct name	Bluetooth/USB name
①	eMeet Luna	eMeet Luna
②	eMeet Luna Lite	eMeet Luna Lite

·Note :


- When turning on the device, it will connect to the last computer/mobile phone via Bluetooth whilst it is active.
- Bluetooth closed means it can not be found.

AI Noise Reduction


Short press “” AI Noise Reduction button to enable/disable AI noise function.

Turning on VoicelA® noise reduction can greatly reduce some noises in the meeting scene, such as from keyboard tapping, air conditioning noise, and general unwanted background noise

·Note : After the noise reduction mode is enabled, in order to maintain good sound pickup effect, please make a call within a sound pickup range of 1.5 m(4.9ft).




VoicelA® OFF



VoicelA® ON


Charge



Charging in power-off state	Yellow-green LED indicator flashing	    
Fully charged in power-off state	Yellow-green LED indicator always on	    


Check Battery Level

In the Power-on state, short press the power button to check the current battery level.

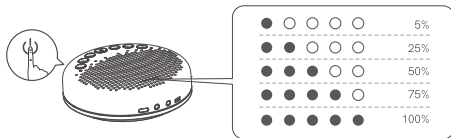

Audio Output


Use the AUX cable to connect the external speaker to the AUX OUT /LINK port of this device, and the audio will be played synchronously with this device through the external speaker.




Daisy Chain

Daisy-Chain can be carried out by connecting the AUX OUT/LINK ports of two products using a daisy chain cable.

Note: Please use the EMEET dedicated Daisy Chain cable to connect the devices. EMEET Daisy Chain cables must be purchased separately.




Daisy-Chain before



Daisy-Chain after

Audio Input

Use the AUX cable to connect the phone to the AUX IN ports of this device. This device will replace the speaker and microphone of the phone.



LOCK port Setting

Lock the product through the LOCK port to prevent theft.

·Note : The LOCK port is of a Kensington computer type which requires the user to buy a lock otherwise.

Product Parameters

·Note : In case of any change in specifications, official website information shall prevail.

Charging input	5V/1A
Rated power	3W
SPK frequency range	20Hz-20KHz
Bluetooth version	4.2
Product size	120*120*36.5mm

Customer Service



support@emeet.com




www.emeet.com



US: + 1 8889595320(EST 9:00am-5:00pm Mon-Fri)

ボタン一覧

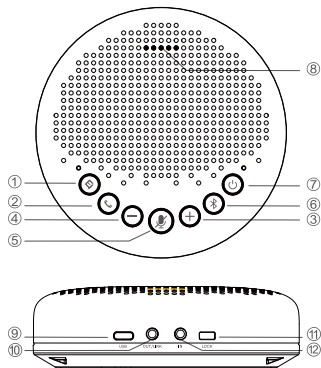

- ① AIノイズリダクションのオン/オフ
- ② 通話開始/通話終了
- ③ ボリュームアップ
- ④ ボリュームダウン
- ⑤ マイクのミュート/ミュート解除
- ⑥ ブルートゥース
- ⑦ 電源
- ⑧ ステータスランプ
- ⑨ USBインターフェース
- ⑩ AUX OUT/LINK
- ⑪ ロック
- ⑫ AUX IN

ボタン制御

① (+) / (-)	短押し	ボリュームアップ/ダウン
② (AIノイズリダクションアイコン)	短押し	AIノイズリダクションのオン/オフ
③ (電話機アイコン)	通話状態、短押し	通話開始
	通話状態、2秒間長押し	着信を拒否する
	通話状態、短/長押し	通話終了
⑤ (マイクミュートアイコン)	短押し	マイクのミュート/ミュート解除
⑦ (電源アイコン)	長押し	電源オン/電源オフ

ステータスランプ

ステータス	表示	ランプ
マイクミュート	赤点灯	● ● ● ● ●
ブルートゥース着信	緑点滅	☀ ☀ ☀ ☀ ☀
ボリューム表示	アイスブルー点灯	● ● ● ● ●
ローバッテリー表示	赤点滅	☀ ☀ ☀ ☀ ☀
USB 接続	緑点灯	○ ○ ● ○ ○
Audio 入力	黄緑点灯	○ ○ ● ○ ○
Audio カスケード	アイスブルー点灯	○ ○ ● ○ ○

取扱説明


オン/オフにする

電源ボタン “” を2秒長押しすると起動またはシャットダウンします。

・備考：1時間以上アイドル状態のままにすると、自動的にシャットダウンします。

接続

a) USBケーブルでコンピューターと接続し、起動して使用します。



b) USB Dongleを使用してコンピューターと接続し、起動して使用します。



・備考: Dongleは eMeet Luna Lite には含まれていません。

c) 起動後、Bluetoothペアリングを通じてコンピューターや携帯電話などのモバイルデバイスに接続します。



ステータス	動作/表示	ランプ
Bluetoothペアリングに進む	2 秒間長押し	ⓑ
Bluetoothペアリング中	青点滅	○ ○ ● ○ ○
Bluetoothに接続しました	青常時点灯	○ ○ ● ○ ○
Bluetoothオフ	短押し	ⓑ
Bluetoothはオフになっています	白常時点灯	○ ○ ● ○ ○

・異なる製品モデルのBluetooth / USBの名前は異なります:

	製品番号	Bluetooth/USB名
①	eMeet Luna	eMeet Luna
②	eMeet Luna Lite	eMeet Luna Lite


・備考:

- 起動するたびに、本製品は前回Bluetoothで接続したデバイスに自動的に接続します (デバイスのBluetoothをオンにしてください)。
- Bluetoothがオフになっていると、ローカルBluetoothが検出できません。


AI ノイズリダクション

“◆” AI ノイズリダクションキーを短押しすると、AI ノイズリダクションをオンまたはオフにできます。VoicelA® ノイズリダクションをオンにすると、タイピング音、エアコンのノイズ、テーブルや椅子の移動音等、会議中に発生するノイズを消去できます。

・備考：ノイズリダクションモードをオンにしたら、良好な集音効果を維持するため、1.5メートルの集音範囲内で通話してください。




VoicelA® OFF



VoicelA® ON


充電



電源オフ状態で充電中	黄緑ブリージングライト点灯	○ ○ ● ○ ○
電源オフ状態で充電完了	緑黄常時点灯	○ ○ ● ○ ○


バッテリー残量チェック

電源オン状態で電源ボタンを短押しすると、現在のバッテリー残量をチェックできます。

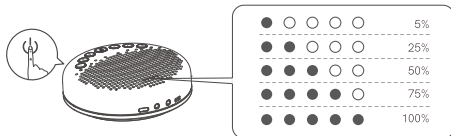

音声出力


AUXケーブルを使って外部スピーカーをAUX OUT/LINKジャックに接続すると、オーディオは外部スピーカーと本機を通じて同時に放送します。



有線カスケード


カスケードケーブルを使用して2つの製品のAUX OUT/LINKジャックに接続すると、有線カスケードを実行できます。

注: デバイスの接続には、EMEET専用のデジチェーンケーブルを使用してください。EMEETデジチェーンケーブルは、別途購入する必要があります。

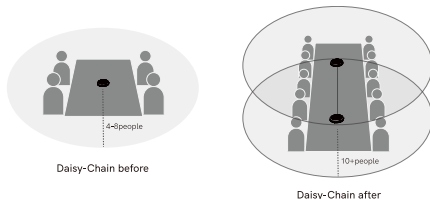

音声入力

AUXケーブルを使用して、携帯電話をこの製品のAUX INジャックに接続した場合、この製品は、携帯電話のスピーカーとマイクに置き換わります。



ロックの設定

ロックによって製品に施錠し、盗難を防ぎます。

・備考: このロックはKensingtonセキュリティスロットを使用しているため、別途固定金具や鍵を購入する必要があります。

製品仕様

・備考: 仕様が変更された場合は、公式ウェブサイトの情報を参考してください。

充電入力	5V/1A
定格電力	3W
SPK周波数範囲	20Hz-20KHz
Bluetoothバージョン	4.2
製品サイズ	120*120*36.5mm

お問い合わせ



support@emeet.com




www.emeet.com



日本: + 81 8008051955(JST 10:00am-6:00pm 月曜日-金曜日)

按键展示

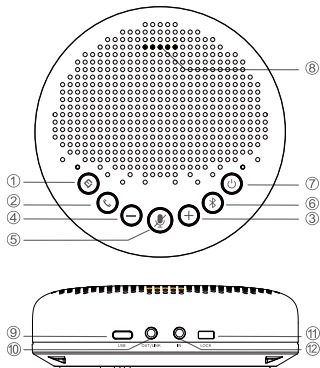

- ① AI降噪开/关键
- ② 接听/挂断电话键
- ③ 音量加大键
- ④ 音量减小键
- ⑤ 麦克风静音/取消静音键
- ⑥ 蓝牙键
- ⑦ 电源键
- ⑧ 状态指示灯
- ⑨ USB充电/数据传输口
- ⑩ AUX OUT/LINK
- ⑪ LOCK 锁孔
- ⑫ AUX IN

按键控制

⊕/⊖	短按	音量升高/降低
⊙	短按	开启/关闭AI降噪
☎	来电状态, 短按	接听
	来电状态, 长按	拒接
	通话状态, 短/长按	挂断电话
🔇	短按	麦克风静音/取消静音
⏻	长按	开机/关机

按键控制

状态	指示	灯光
麦克风静音	亮红色	● ● ● ● ●
蓝牙来电	绿色闪烁	⚡ ⚡ ⚡ ⚡ ⚡
音量显示	亮冰蓝色	● ● ● ● ●
低电量显示	红色闪烁	⚡ ⚡ ⚡ ⚡ ⚡
USB 连接	亮绿色	○ ○ ● ○ ○
Audio In输入源	亮黄绿色	○ ○ ● ○ ○
Audio Out级联	亮冰蓝色	○ ○ ● ○ ○

使用说明


开关机

长按电源键“⏻” 2秒，开机或者关机。


·备注: 若闲置超过1个小时，本产品将会自动关机。

连接

a) 使用USB线连接电脑，开机使用。



b) 使用USB Dongle连接电脑，开机使用。



·备注：eMeet Luna Lite不随附Dongle。

c) 开机后，通过蓝牙配对连接电脑或手机等移动设备。



状态	动作/显示	灯光/按钮
进入蓝牙配对	长按	
蓝牙配对中	闪烁蓝光	
蓝牙已连接	常亮蓝光	
蓝牙关闭	短按	
蓝牙已关闭	常亮白色	

·不同型号的产品蓝牙/USB名称不同：

	产品型号	蓝牙/USB名称
①	eMeet Luna	eMeet Luna
②	eMeet Luna Lite	eMeet Luna Lite

·备注：

a) 每次开机，本产品都会蓝牙自动回连上次成功连接的设备(需设备打开蓝牙)。

b) 蓝牙关闭状态下，将无法搜索到本机蓝牙。