

TEST REPORT

FCC ID: 2ALGRPLX-XW8517

Product: Cell phone signal booster

Model No.: PLX-XW8517

Additional Model No.: PLX-XW85, PLX-XW17

Trade Mark: N/A

Report No.: TCT170321E009

Issued Date: May. 05, 2017

Issued for:

Shenzhen Fuzhixing Electronics Co., Ltd.

**5/F, Block C, Penglongpan Hi-technology Park, Dafu Ind. Zone, Guanlan,
Longhua New Dist., Shenzhen, Guangdong, China**

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary.....	4
3. EUT Description.....	5
4. General Information.....	6
4.1. Test environment.....	6
4.2. Description of Support Units.....	6
5. Facilities and Accreditations.....	7
5.1. Facilities.....	7
5.2. Location.....	7
5.3. Measurement Uncertainty.....	7
6. Test Results and Measurement Data.....	8
6.1. Authorized Frequency Band Verification.....	8
6.2. Maximum Power.....	11
6.3. Intermodulation Product.....	22
6.4. Out of Band Emission.....	28
6.5. Conducted Spurious Emission.....	43
6.6. Noise Limits.....	49
6.7. Uplink Inactivity.....	56
6.8. Variable Booster Gain.....	58
6.9. Occupied Bandwidth.....	62
6.10. Oscillation Detection and Mitigation.....	76
7. Radiation Spurious Emission.....	87
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. Test Certification

Product:	Cell phone signal booster
Model No.:	PLX-XW8517
Additional Model:	PLX-XW85, PLX-XW17
Applicant:	Shenzhen Fuzhixing Electronics Co., Ltd.
Address:	5/F, Block C, Penglongpan Hi-technology Park, Dafu Ind. Zone, Guanlan, Longhua New Dist., Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Fuzhixing Electronics Co., Ltd.
Address:	5/F, Block C, Penglongpan Hi-technology Park, Dafu Ind. Zone, Guanlan, Longhua New Dist., Shenzhen, Guangdong, China
Date of Test:	Apr. 26 – May. 04, 2017
Applicable Standards:	FCC CFR Title 47 Part 20.21

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Jin Wang

Date:

May. 04, 2017

Reviewed By:



Joe Zhou

Date:

May. 05, 2017

Approved By:



Tomsin

Date:

May. 05, 2017

2. Test Result Summary

Requirement	CFR 47 Section	Result
Authorized Frequency Band Verification Test	§20.21(e)(3)	PASS
Maximum Power Measurement Procedure	§2.1046/20.21(e)(8)(i)(D)	PASS
Maximum Booster Gain Computation	§20.21(e)(8)(i)(B)	PASS
Intermodulation Product	§20.21(e)(8)(i)(F)	PASS
Out of Band Emissions	§20.21(e)(8)(i)(E)	PASS
Conducted Spurious Emission	§2.1051/§22(H)/§27	PASS
Noise Limit Procedure Variable Noise Variable Noise Timing	§20.21(e)(8)(i)(A)(2)(i) §20.21(e)(8)(i)(A)(1) §20.21(e)(8)(i)(H)	PASS
Uplink inactivity	§20.21(e)(8)(i)(I)	PASS
Variable Booster Gain Variable Uplink Gain Timing	§20.21(e)(8)(i)(C) (1), (2)(i) §20.21(e)(8)(i)(H)	PASS
Occupied Band Width	§2.1049/§22(H)/§27	PASS
Anti-Oscillation	§20.21(e)(8)(ii)(A)	PASS
Radiated Spurious Emission	§2.1053/§22(H)/§27	PASS
Spectrum Block Filter	N/A	N/A

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Cell phone signal booster
Model :	PLX-XW8517
Additional Model:	PLX-XW85, PLX-XW17
Trade Mark:	N/A
Operation Frequency:	850MHz: 824~849MHz (Uplink), 869~894MHz(Downlink) 1700 MHz: 1710~1755MHz (Uplink), 2110~2155MHz(Downlink)
Emission Designator:	GSM(GXW), EDGE(G7W), CDMA(F9W), HSPA(F9W), WCDMA(F9W), EVDO(F9W), LTE(G7D)
AGC Level:	Uplink:-44.00dBm Downlink:-57.00dBm
Gain:	Uplink:60±2 dB Downlink: 62±2 dB
Conducted Output Power:	850MHz: Uplink:14.79dBm, Downlink:5.32dBm 1700 MHz: Uplink:14.78dBm, Downlink:5.81dBm
Max. Antenna Gain:	850MHz: Uplink:7.9dBi, Downlink:6.6dBi 1700 MHz: Uplink:8.0dBi, Downlink:8.3dBi
EIRP:	850MHz: Uplink:22.69dBm, Downlink:11.92dBm 1700 MHz: Uplink:22.78dBm, Downlink:13.48dBm
FCC Classification:	B2W/Wideband Consumer Booster(CMRS)
Power Supply:	DC 5V from adapter
Remark:	All models above are identical in interior structure, electrical circuits and components, just model names and surface are different for the marketing requirement.

4. Genera Information

4.1. Test environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
AC Adapter	FZX-05-25	/	/	Phonelex

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-27673339

5.3. Measurement Uncertainty


The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Authorized Frequency Band Verification

6.1.1. Test Specification

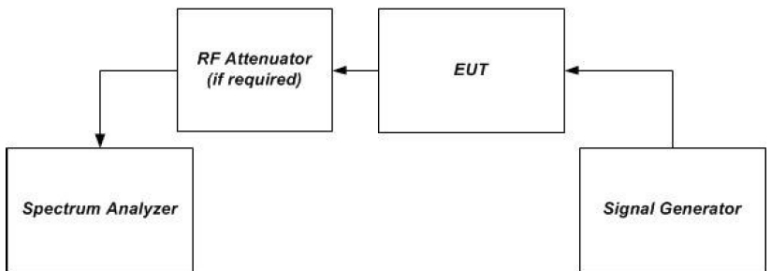Test Requirement:	FCC Part20 Section 20.21(e)(3)
Test Method:	935210 D03 Signal Booster Measurements v04
Limit	850MHz: 824-849MHz (Uplink), 869~894MHz(Downlink) 1700 MHz: 1710-1755MHz (Uplink), 2110~2155MHz(Downlink)
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator
(if required)] RA --> SA[Spectrum Analyzer] </pre>
Test Procedure:	935210 D03 Signal Booster Measurement v02r01 - Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor) port connected to the spectrum analyzer. - Set the spectrum analyzer resolution bandwidth (RBW) for 100 kHz with the video bandwidth (VBW) $\geq 3 \times$ the RBW, using a PEAK detector with the MAX HOLD function. - Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz. - Set the signal generator for CW mode and tune to the center frequency of the operational band under test. - Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer. - Slowly increase the signal generator power level until the output signal reaches the AGC operational level. - Reduce the signal generator power to a level that is 3 dB below the level noted above, then manually reset the EUT (e.g., cycle ac/dc power). - Reset the spectrum analyzer span to $2 \times$ the width of the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep $2 \times$ the width of the CMRS band using the sweep function. The AGC must be deactivated throughout the entire sweep. - Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on). - Capture the spectrum analyzer trace for inclusion in the test report. - Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.
Test Result:	PASS

6.1.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182	MY47070282	Aug. 15, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 15, 2016	Aug. 11, 2017
Attenuation	AF115A-09-34	JFW	907763	Aug. 15, 2016	Aug. 11, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.1.3. Test data

Plot


Uplink (824~849MHz)

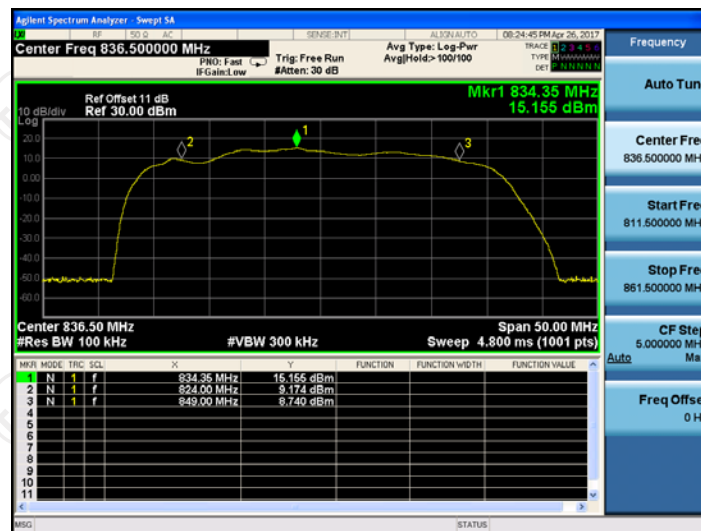


Downlink (869~894MHz)

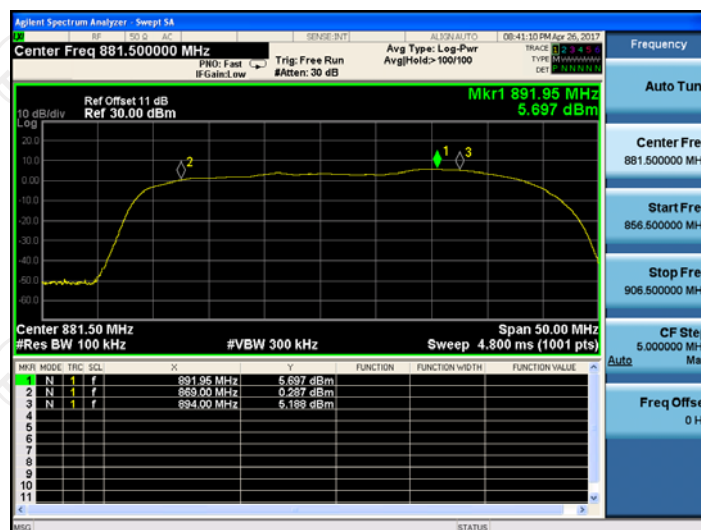

Uplink (1710~1755MHz)

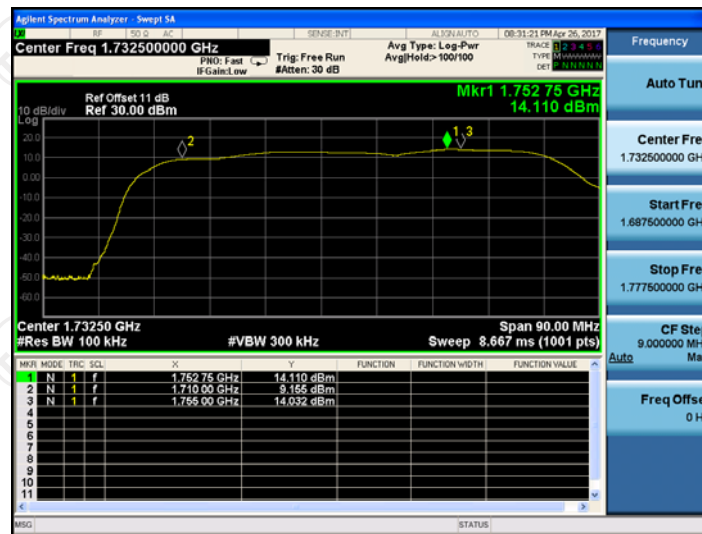


Downlink (2110~2155MHz)

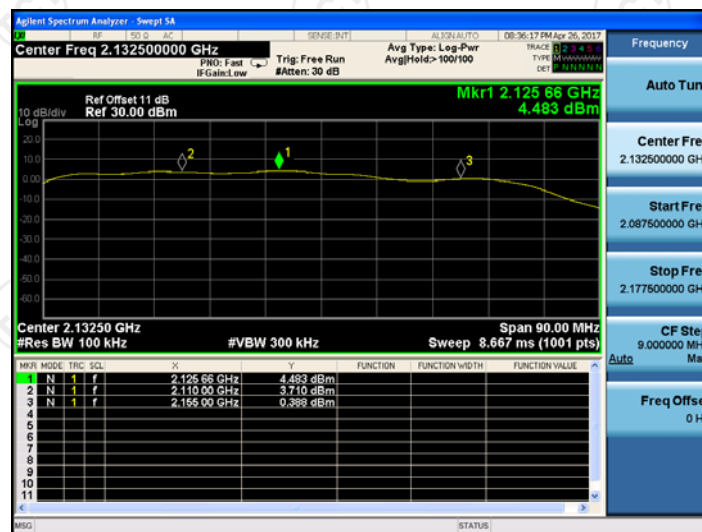

6.2. Maximum Power

6.2.1. Test Specification

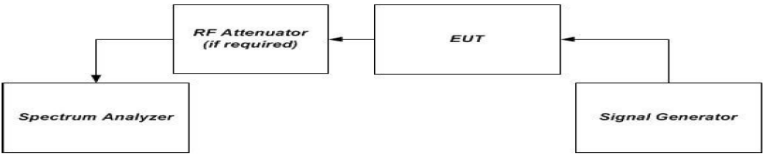Test Requirement:	FCC Part 20.21 (e)(8)(i)(B); FCC Part 20.21 (e)(8)(i)(D)
Test Method:	KDB935210 D03 Signal Booster Measurement v04
Limit:	Uplink: Upper / 1 W (30 dBm), Lower / 50 mW (17 dBm) Downlink: Upper / 50 mW (17 dBm)
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator (if required)] RA --> SA[Spectrum Analyzer] </pre>
Test Procedure:	- Connect the EUT to the test equipment as shown in Set-Up. Begin with the uplink output (donor port) connected to the spectrum analyzer. - Configure the signal generator and spectrum analyzer for operation on the frequency determined in Frequency Band with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz. - Set the initial signal generator power to a level well below that which causes AGC control. - Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; e.g., no further increase in output power as input power is increased). - Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output. - Slowly increase the signal generator power to a level just below (within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as (P_{in}). - Measure the output power (P_{out}) with the spectrum analyzer as follows. - Set RBW = 100 kHz for AWGN signal type and 300 kHz for CW or GSM signal type - Set VBW $\geq 3 \times$ RBW - Select either the BURST POWER or CHANNEL POWER measurement tool, as required for each signal type. The channel power integration bandwidth shall be 99% occupied bandwidth (4.1 MHz). - Select the RMS (power averaging) detector. - Ensure that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$ (Note: This requirement does not apply for BURST power measurement mode). - Set sweep time = auto couple, or as necessary (but no less than auto couple value). - Trace average at least 100 traces in power averaging (i.e., RMS) mode. - Record the measured power level as P_{out} with one set of results for the GSM or CW input stimulus and another set of results for the AWGN input stimulus. - Repeat the procedure for each operational uplink and downlink

	frequency band supported by the booster.
Test Result:	PASS

6.2.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182	MY47070282	Aug. 15, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 15, 2016	Aug. 11, 2017
Attenuation	AF115A-09-34	JFW	907763	Aug. 15, 2016	Aug. 11, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test Data

Pre AGC						
Pulse GSM				4.1MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	*Gain (dB)	Input (dBm)	Output (dBm)	*Gain (dB)
UL 824~849	-44.00	14.71	58.41	-44.00	14.79	58.79
DL 869~894	-57.00	5.24	62.24	-57.00	5.32	62.32
UL 1710~1755	-44.00	14.43	58.43	-44.00	14.78	58.78
UL 2110~2155	-57.00	5.18	62.18	-57.00	5.43	62.43

*Fixed Booster maximum gain shall not exceed $6.5 \text{ dB} + 20 \text{ Log}_{10}(\text{Frequency})$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

Pulse GSM					Conducted and EIRP	
Frequency (MHz)	Output Power (dBm)	Ant Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL 824~849	14.71	10.0	2.1	22.61	17	30
DL 869~894	5.24	7.0	0.4	11.84	N/A	17
UL 1710~1755	14.43	11.0	3.0	22.43	17	30
UL 2110~2155	5.18	9.0	0.7	13.48	N/A	17

4.1MHz AWGN					Conducted and EIRP	
Frequency (MHz)	Output Power (dBm)	Ant Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL 824~849	14.79	10.00	2.10	22.69	17	30
DL 869~894	5.32	7.00	0.40	11.92	N/A	17
UL 1710~1755	14.78	11.0	3.0	22.78	17	30
UL 2110~2155	5.43	9.0	0.7	13.73	N/A	17


Section 5.5 Power						
Pulse GSM				4.1MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	*Gain (dB)	Input (dBm)	Output (dBm)	*Gain (dB)
UL 824~849	-43.00	15.91	58.91	-43.00	15.54	58.54
DL 869~894	-56.00	6.74	62.74	-56.00	6.31	62.31
UL 1710~1755	-43.00	15.64	58.64	-43.00	15.83	58.83
UL 2110~2155	-56.00	6.48	62.48	-56.00	6.93	62.93

Note: The booster went into Transmitter off mode at Max input power of -20dBm (DL). Results presented on the above table are at 1 dB below the Transmit off RF input level. This table it is for reference only.

UL gain vs DL gain	Pulse GSM	4.1MHz GSM	Limit (dB)
850MHz	3.83	3.53	9.0
1700MHz	3.75	3.65	

Plot

AWGN, UL

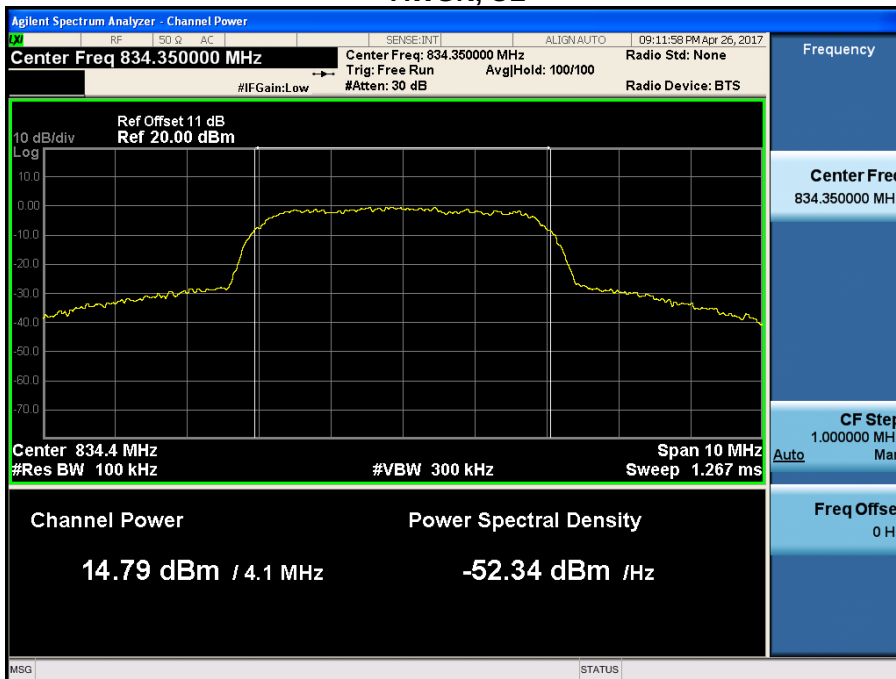


UL_824-849MHz_AWGN




UL_824-849MHz_AWGN_Max

AWGN, DL

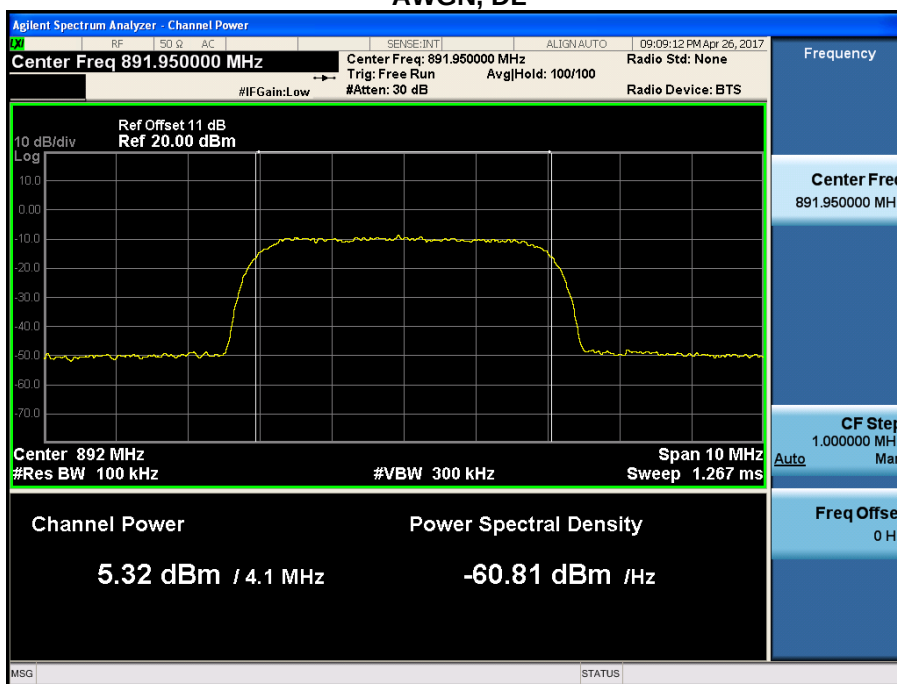


DL_869-894MHz_AWGN

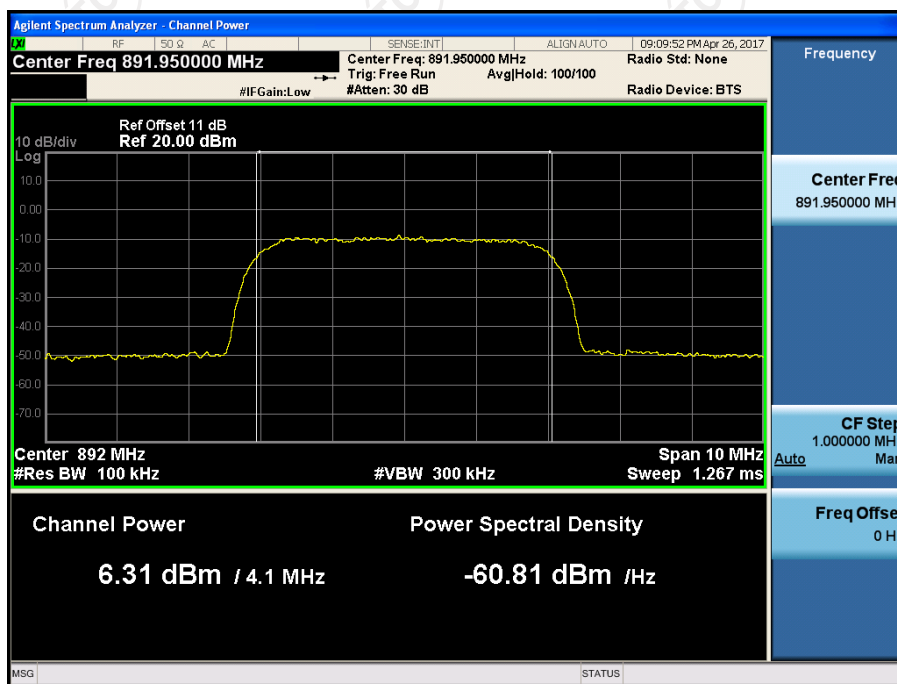


DL_869-894MHz_AWGN_Max

AWGN, UL

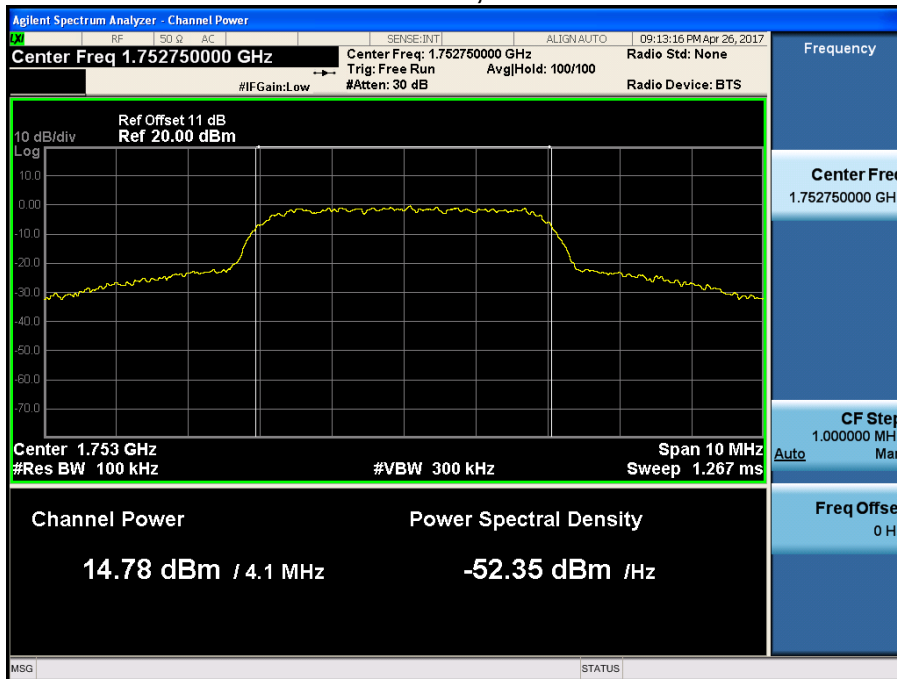


UL_1710-1755MHz_AWGN

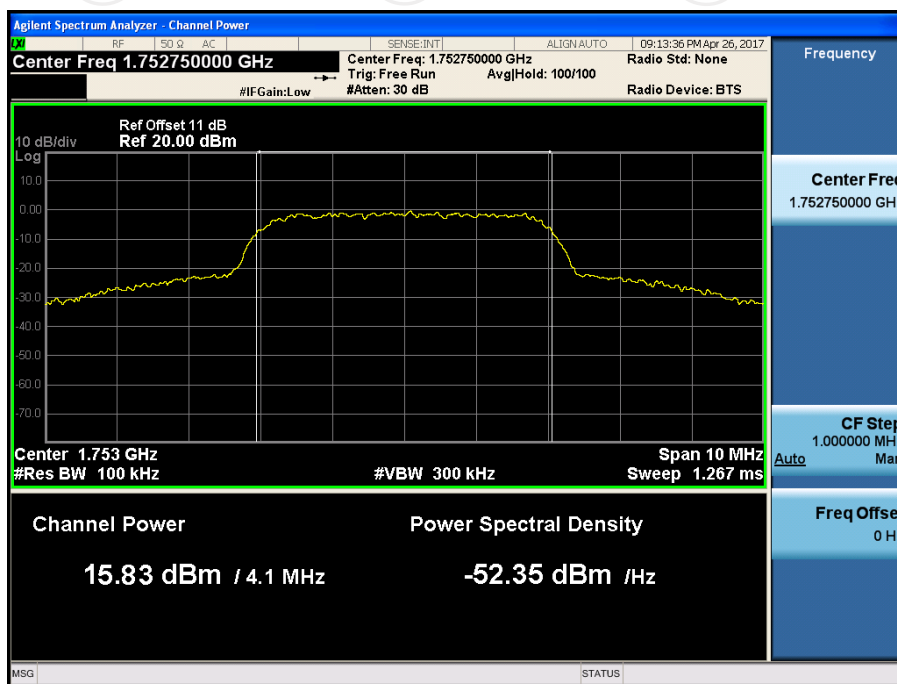


UL_1710-1755MHz_AWGN_Max

AWGN, DL

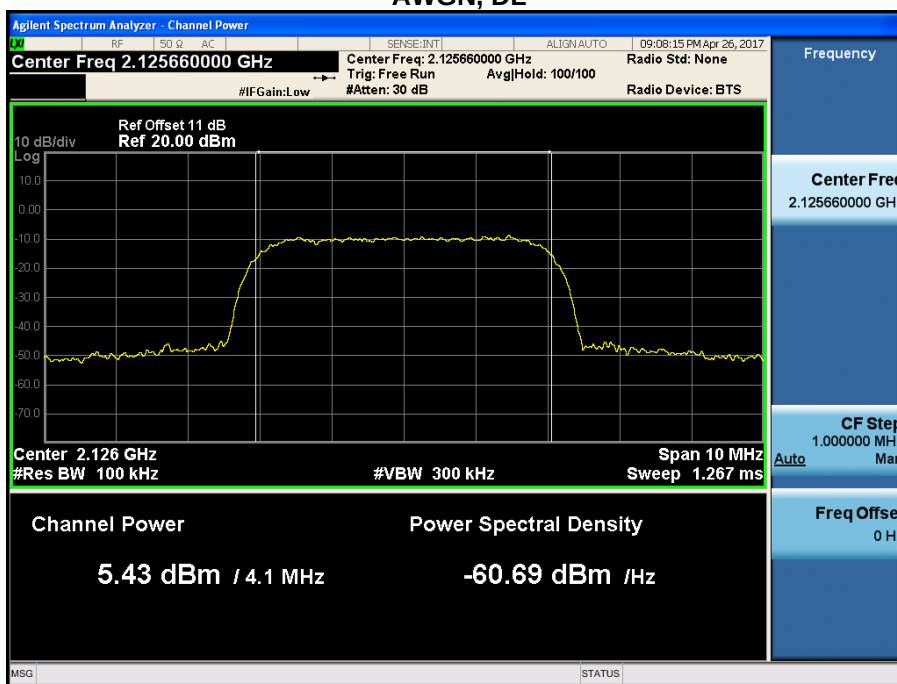


DL_2110-2155MHz_AWGN

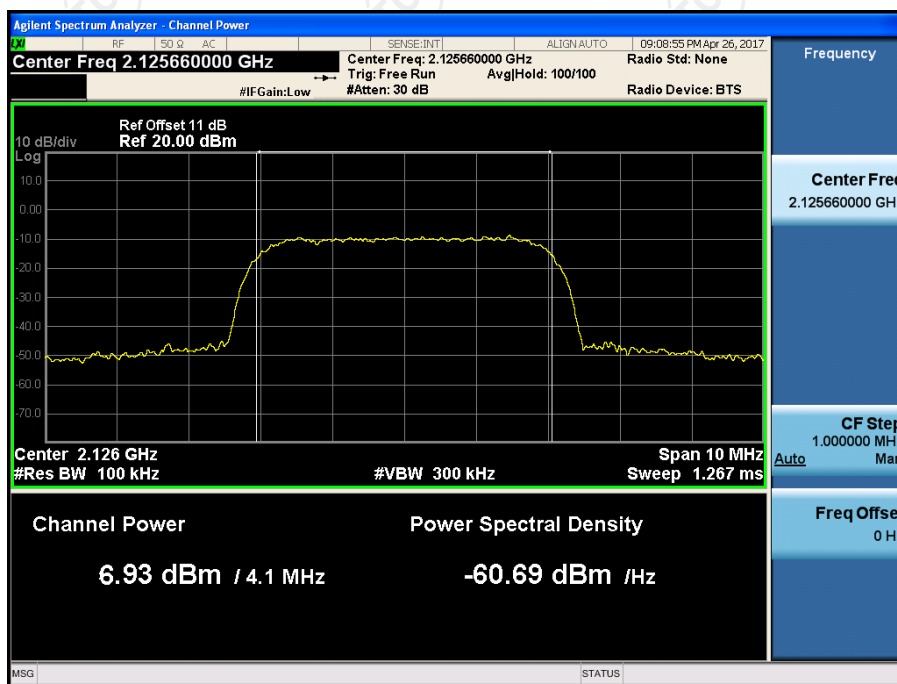


DL_2110-2155MHz_AWGN_Max

GSM, UL

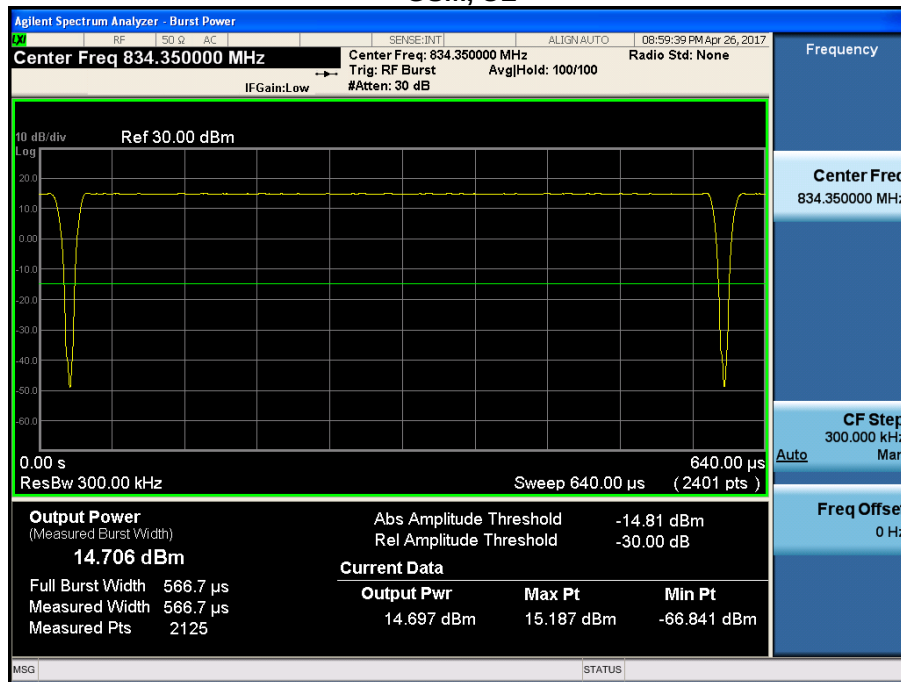


UL_824-849MHz_GSM

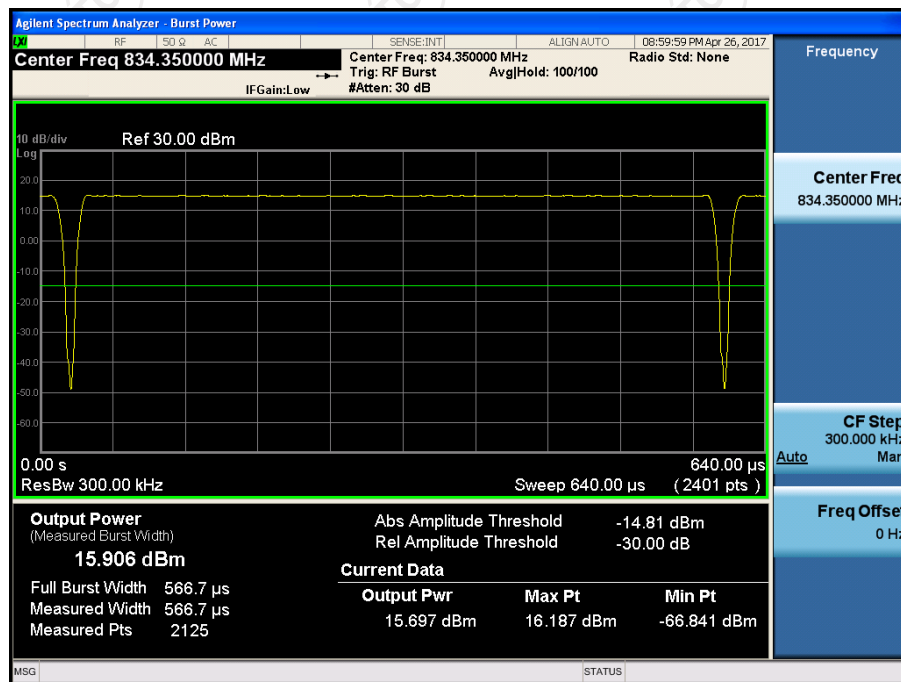


UL_824-849MHz_GSM_Max

GSM, DL

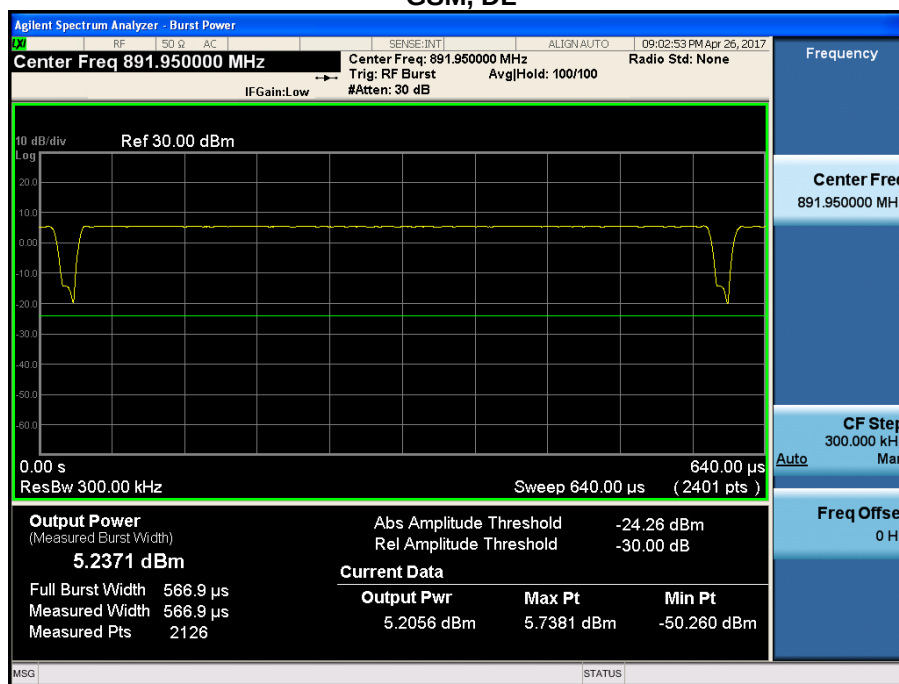


DL_869-894MHz_GSM

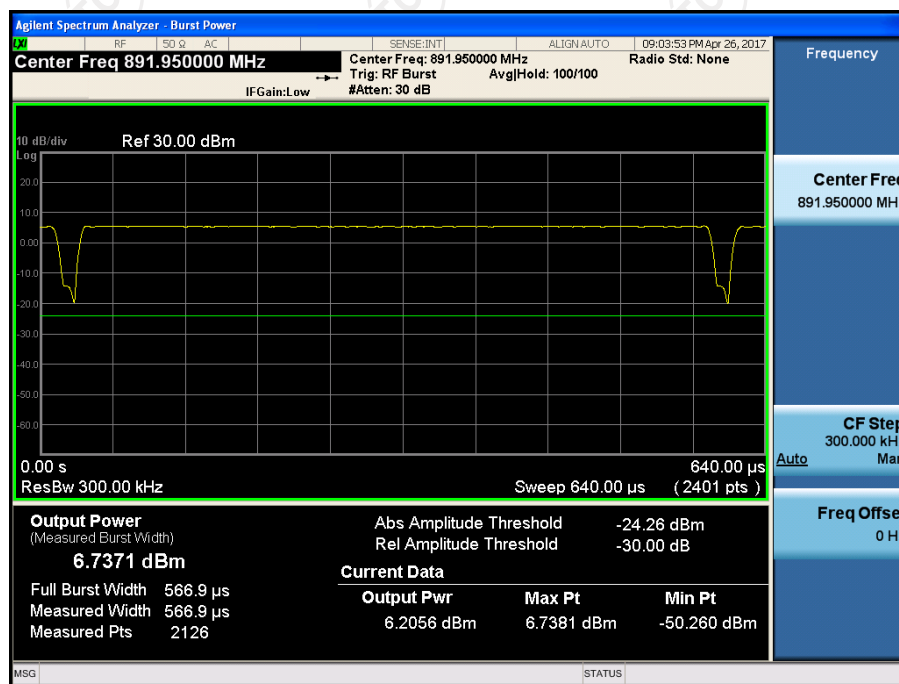


DL_869-894MHz_GSM_Max

GSM, UL

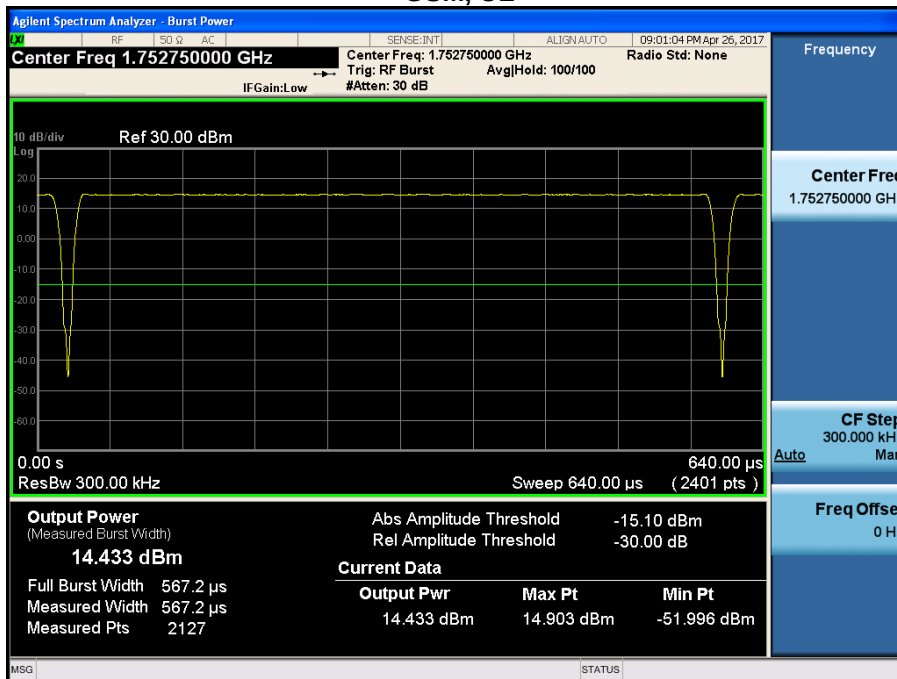


UL_1710-1755MHz_GSM

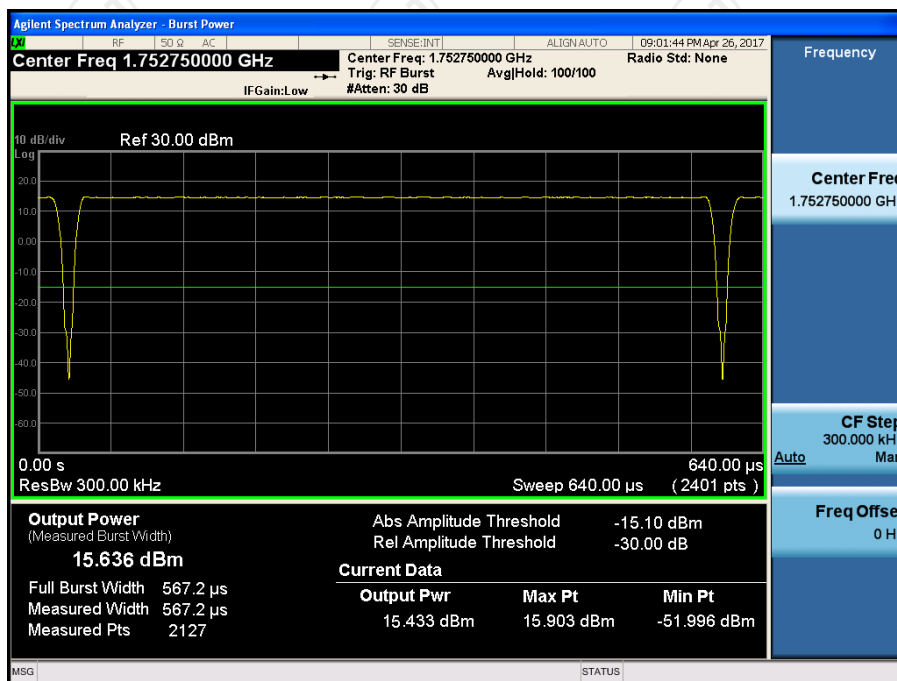


UL_1710-1755MHz_GSM_Max

GSM, DL

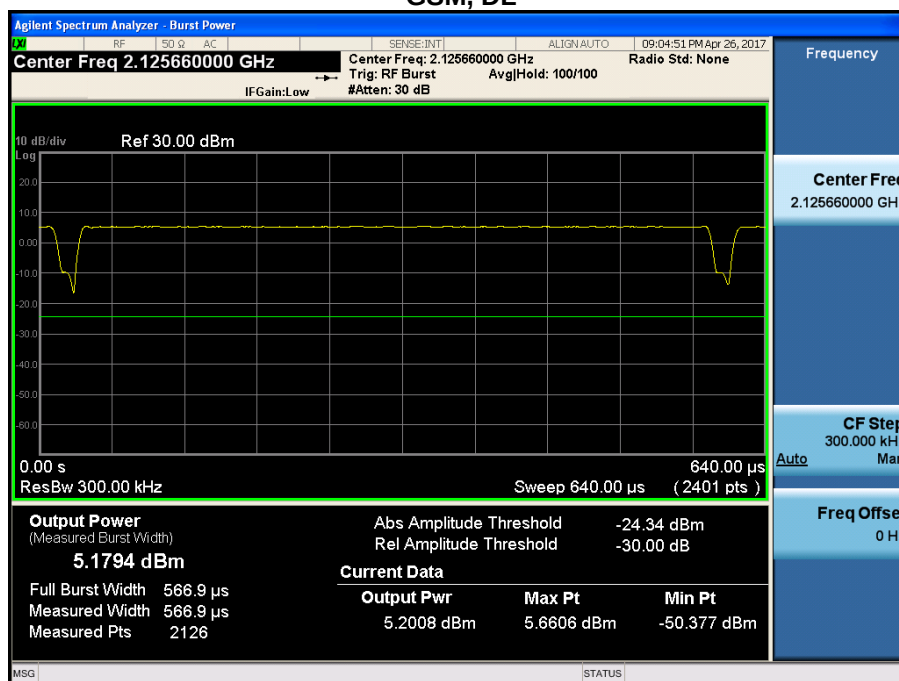


DL_2110-2155MHz_GSM

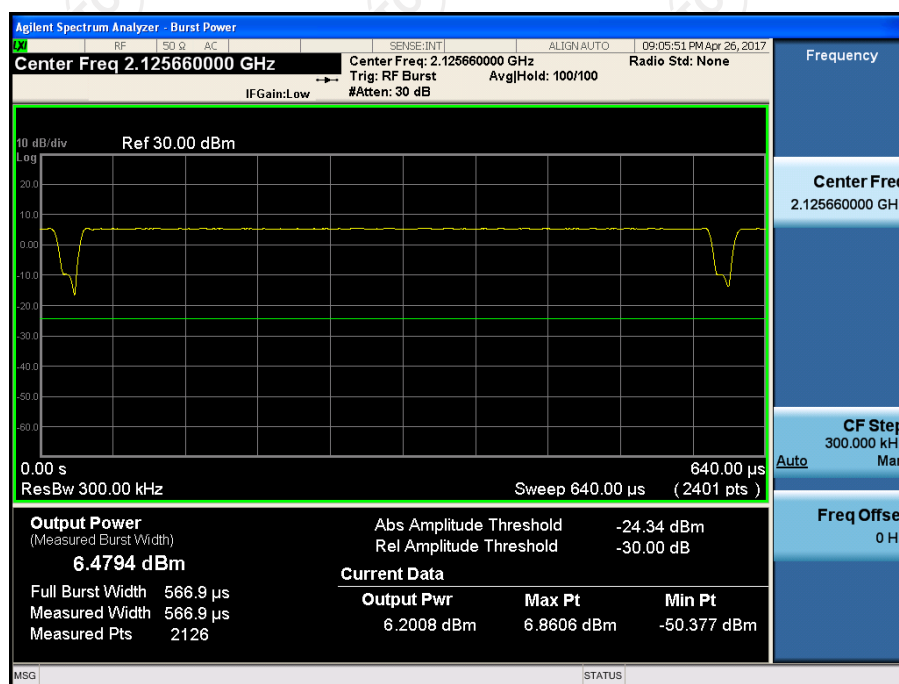

DL_2110-2155MHz_GSM_Max

6.3. Intermodulation Product

6.3.1. Test Specification

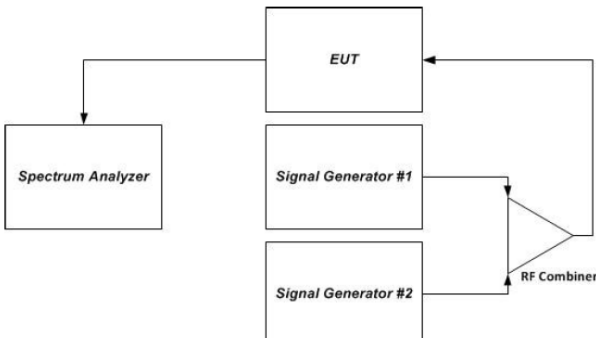Test Requirement:	FCC Part20 Section 20.21(e)(8)(i)(F)
Test Method:	KDB935210 D03 Signal Booster Measurement v04
Limit:	-19dBm
Test Setup:	 Figure 2 – Intermodulation product instrumentation test setup
Test Procedure:	a) Connect the signal booster to the test equipment as shown in Set-Up. Begin with the uplink output connected to the spectrum analyzer. b) Set the spectrum analyzer RBW = 3 kHz. c) Set the VBW $\geq 3 \times$ the RBW. d) Select the RMS detector. e) Set the spectrum analyzer center frequency to the center of the supported operational band under test. f) Set the span to 5 MHz. g) Configure the two signal generators for CW operation with generator 1 tuned 300 kHz below the operational band center frequency and generator 2 tuned 300 kHz above the operational band center frequency. h) Set the signal generator amplitudes so that the power from each into the RF combiner is equivalent and turn on the RF output. i) Increase the signal generators' amplitudes equally until just before the EUT begins AGC and ensure that all intermodulation products (if any exist), are below the specified limit of -19 dBm. j) Utilize the trace averaging function of the spectrum analyzer and wait for the trace to stabilize. Place a marker at the highest amplitude intermodulation product. k) Record the maximum intermodulation product amplitude level that is observed. l) Capture the spectrum analyzer trace for inclusion in the test report. m) Repeat steps e) to l) for all uplink and downlink operational bands. Note: If using a single signal generator with dual outputs, ensure that intermodulation products are not the result of the generator. n) Increase the signal generator amplitude in 2 dB steps to 10 dB above the AGC threshold determined in i) to ensure that the EUT maintains compliance with the intermodulation
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	E4421B	GB39340839	Aug. 15, 2016	Aug. 11, 2017
Signal Generator	Agilent	N5182	MY47070282	Aug. 15, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 15, 2016	Aug. 11, 2017
RF Combiner	SUNVNDN	SUD-CS 0800	16230009	Aug. 15, 2016	Aug. 11, 2017
Attenuation	AF115A-09-34	JFW	907763	Aug. 15, 2016	Aug. 11, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.3.3. Test data

Pre AGC						
Link	Frequency (MHz)	Frequency1 (MHz)	Frequency2 (MHz)	IMD Level [dBm]	IMD Limit [dBm]	Margin (dB)
Uplink	836.5	835.6	837.4	-35.51	-19.00	-16.51
Downlink	881.5	880.6	882.4	-61.08	-19.00	-42.08
Uplink	1732.5	1733.4	1731.6	-37.47	-19.00	-18.47
Downlink	2132.5	2131.6	2133.4	-46.26	-19.00	-27.26


AGC+10dB						
Link	Frequency (MHz)	Frequency1 (MHz)	Frequency2 (MHz)	IMD Level [dBm]	IMD Limit [dBm]	Margin (dB)
Uplink	836.5	835.6	837.4	-21.06	-19.00	-2.05
Downlink	881.5	880.6	882.4	-27.85	-19.00	-8.85
Uplink	1732.5	1733.4	1731.6	-22.32	-19.00	-3.32
Downlink	2132.5	2131.6	2133.4	-23.52	-19.00	-4.52

Plot


Pre AGC, UL_836.5MHz

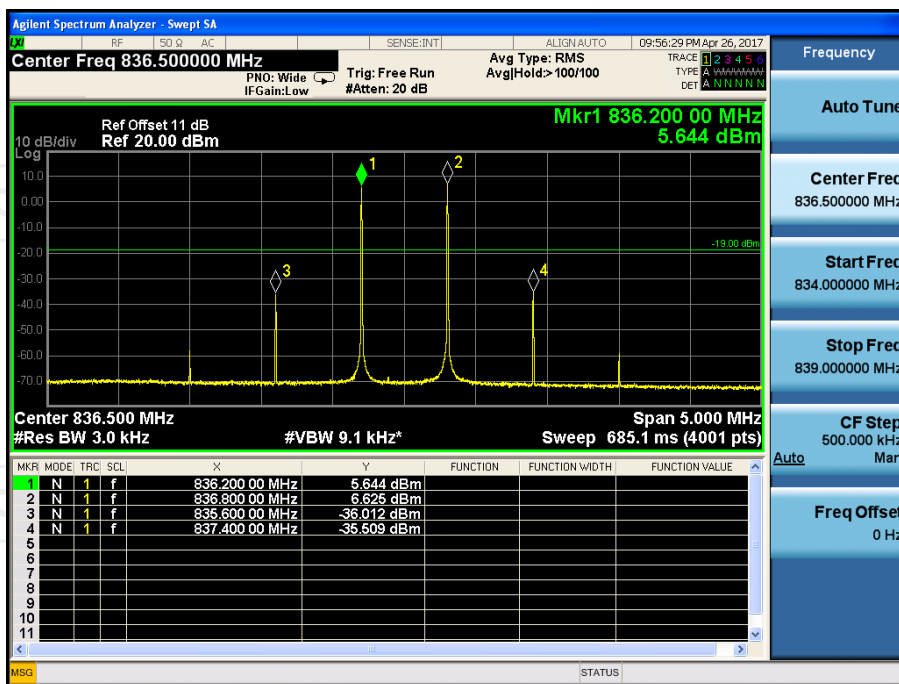


AGC+10dB, UL_836.5MHz

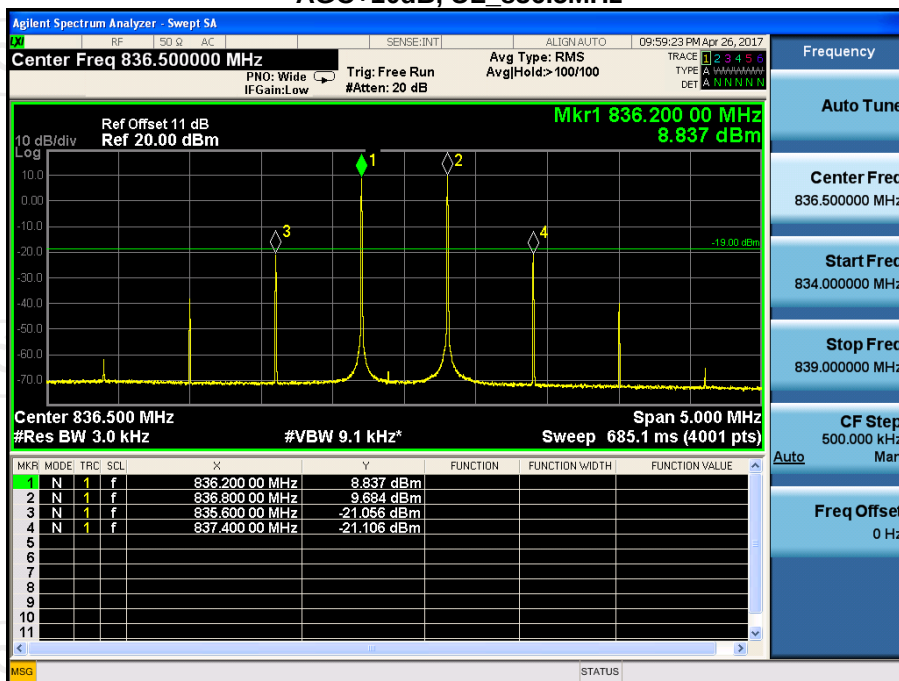


Pre AGC, DL_881.5MHz

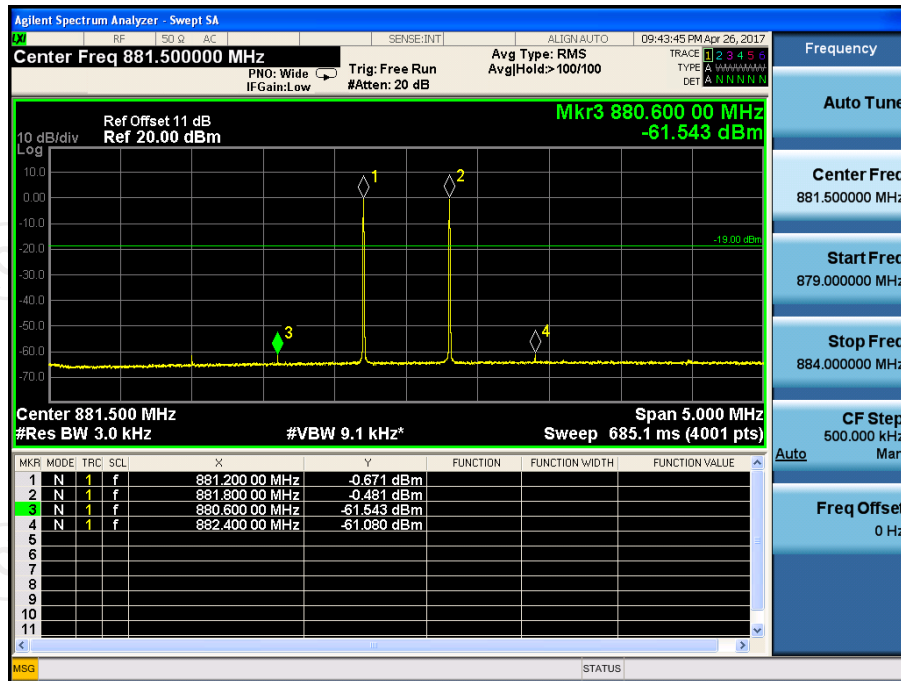


AGC+10dB, DL_881.5MHz

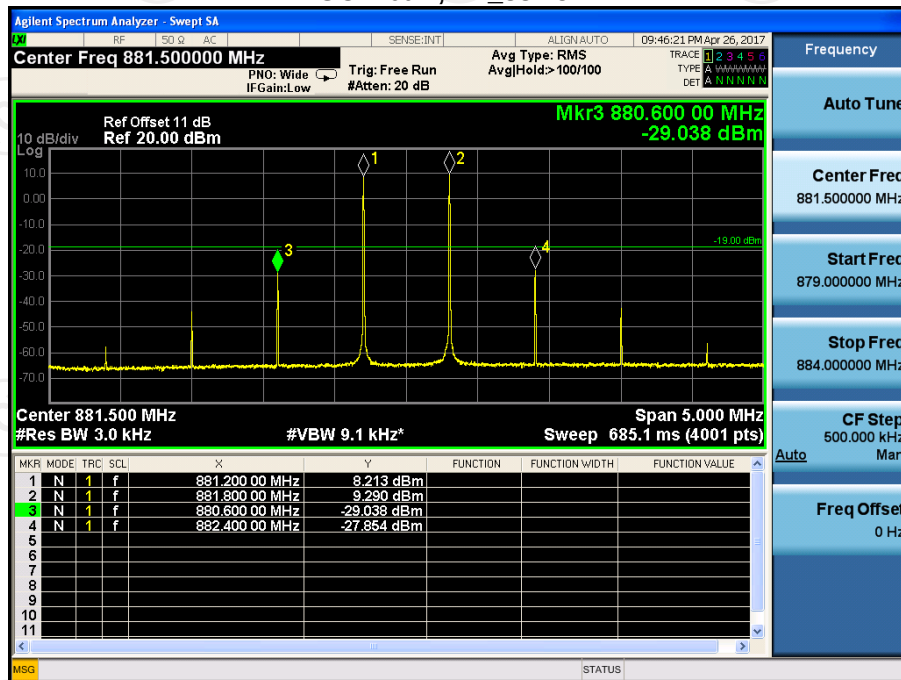


Pre AGC, UL_1732.5MHz

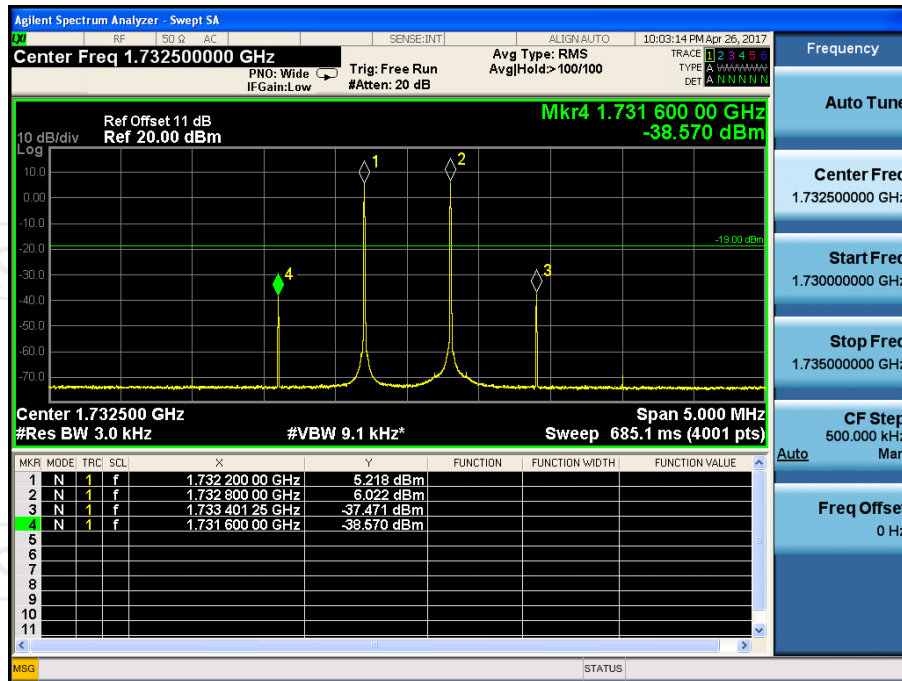


AGC+10dB, UL_1732.5MHz

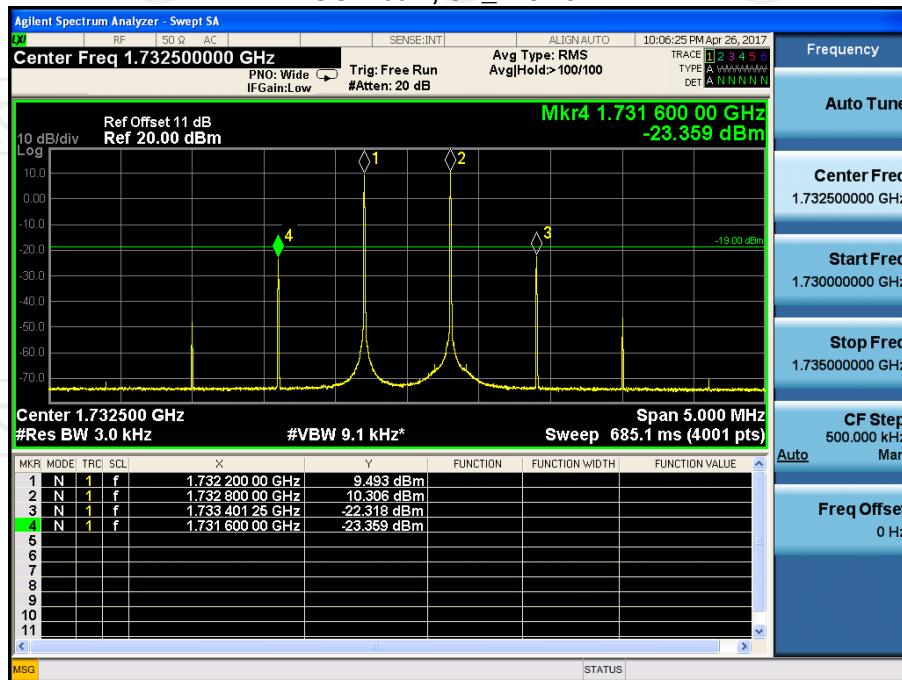

Pre AGC, UL_2132.5MHz

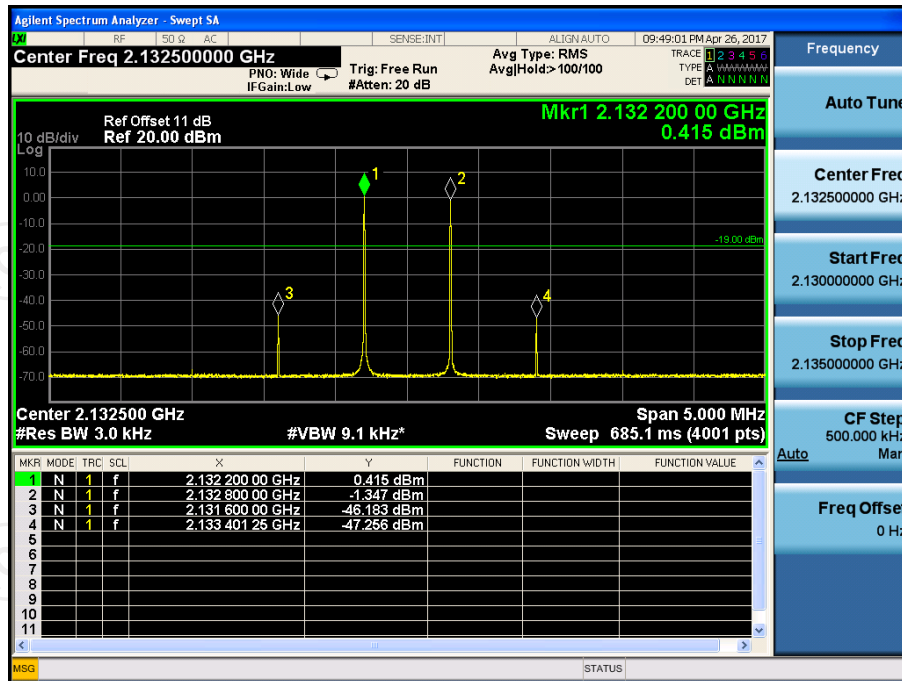


AGC+10dB, UL_2132.5MHz

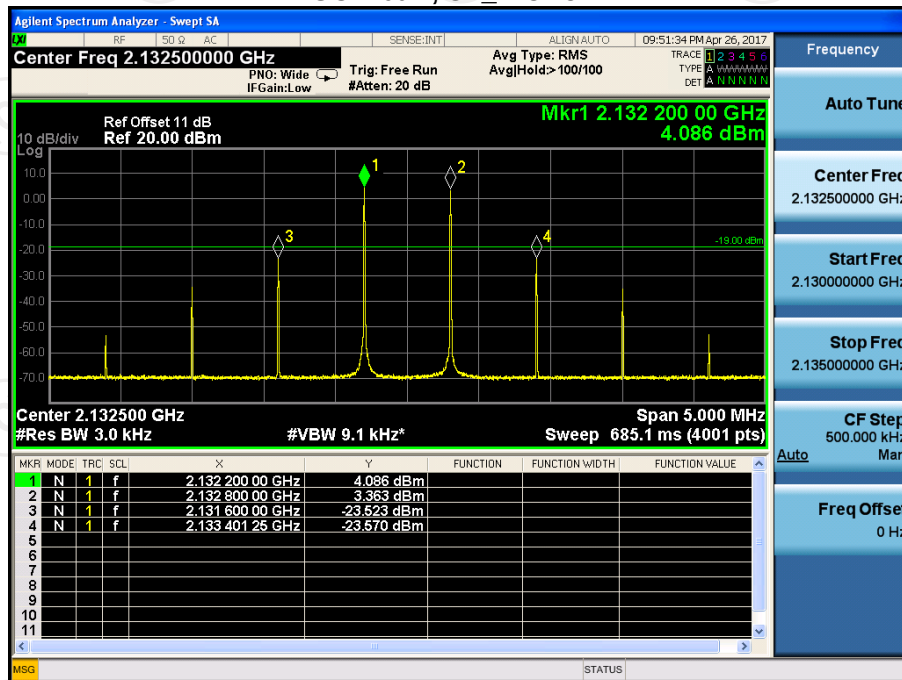

6.4. Out of Band Emission

6.4.1. Test Specification

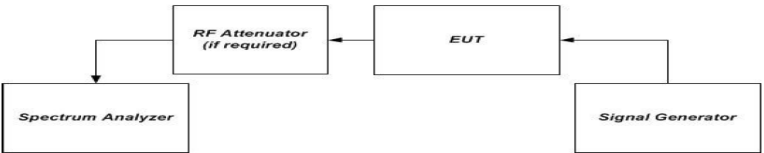Test Requirement:	FCC Part20 Section 20.21(e)(8)(i)(E)
Test Method:	KDB935210 D03 Signal Booster Measurement v04
Limit:	-19dBm
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator (if required)] RA --> SA[Spectrum Analyzer] </pre>
Test Procedure:	a) Connect the EUT to the test equipment as shown in Set-Up. Begin with the uplink output connected to the spectrum analyzer. b) Configure the signal generator for the appropriate operation for all uplink and downlink bands: i) GSM: 0.2 MHz from upper and lower band edge ii) LTE (5 MHz): 2.5 MHz from upper and lower band edge iii) CDMA: 1.25 MHz from upper and lower band edge, except for cellular as follows (only the upper and lower frequencies need to be tested): 824.88 MHz, 845.73 MHz, 836.52 MHz, 848.10 MHz, 869.88 MHz, 890.73 MHz, 881.52 MHz, 893.10 MHz. Note 1: Alternative test modulation types: • CDMA (alternative 1.25 MHz AWGN) • LTE 5 MHz (alternative W-CDMA or 4.1 MHz AWGN) Note 2: For LTE, the signal generator should utilize the uplink and downlink signal types for these modulations in uplink and downlink tests, respectively. LTE shall use 5 MHz signal 25 resource blocks transmitting. Note 3: AWGN is the measured 99% occupied bandwidth. c) Set the signal generator amplitude to the maximum power level prior to AGC similar to the procedures in method of Maximum power d) to f) of power measurement procedure for appropriate modulations. d) Set RBW = measurement bandwidth specified in the applicable rule section for the supported frequency band. e) Set VBW = 3 × RBW. f) Select the RMS (power averaging) detector. g) Sweep time = auto-couple. h) Set the analyzer start frequency to the upper band/block edge frequency and the stop frequency to the upper band/block edge frequency plus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is ≥ 1 GHz). i) Trace average at least 100 traces in power averaging (i.e., RMS) mode. j) Use peak marker function to find the maximum power level. k) Capture the spectrum analyzer trace of the power level for inclusion in the test report. l) Increase the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.4 is reached. Ensure that the EUT maintains compliance with the OOB limits. m) Reset the analyzer start frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as per applicable rule part, and the stop frequency to the lower band/block edge frequency and repeat steps j) to l).

	n) Repeat steps b) through m) for each uplink and downlink operational band.
Test Result:	PASS

6.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182	MY47070282	Aug. 15, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 15, 2016	Aug. 11, 2017
Attenuation	AF115A-09-34	JFW	907763	Aug. 15, 2016	Aug. 11, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data

Pre AGC: 850MHz						
Link	Signal Type	Bandedge	Frequency (MHz)	Emission Level [dBm]	Emission Limit [dBm]	Result
Uplink	GSM	Low	823.98	-47.31	-19	PASS
		Uper	849.02	-49.33		
	CDMA	Low	824.00	-43.31		
		Uper	849.02	-44.57		
	AWGN	Low	824.00	-31.46		
		Uper	849.00	-32.92		
Downlink	GSM	Low	869.98	-57.36		
		Uper	894.02	-51.17		
	CDMA	Low	869.00	-63.75		
		Uper	894.02	-54.14		
	AWGN	Low	869.00	-50.09		
		Uper	894.00	-44.75		

Pre AGC: 1700MHz						
Link	Signal Type	Bandedge	Frequency (MHz)	Emission Level [dBm]	Emission Limit [dBm]	Result
Uplink	GSM	Low	1709.98	-47.42	-19	PASS
		Uper	1755.02	-42.91		
	CDMA	Low	1710.00	-40.01		
		Uper	1755.00	-34.46		
	AWGN	Low	1710.00	-30.68		
		Uper	1755.09	-30.97		
Downlink	GSM	Low	2109.98	-52.92	-19	PASS
		Uper	2155.02	-51.28		
	CDMA	Low	2110.00	-58.19		
		Uper	2155.00	-54.20		
	AWGN	Low	2110.00	-45.92		
		Uper	2155.00	-43.55		

Note: The EUT also maintains compliance with the out-of-band emissions limit at input power indicated in section 5.5.

850MHz

Plot

GSM UL




L-edge




H-edge

Plot

GSM DL

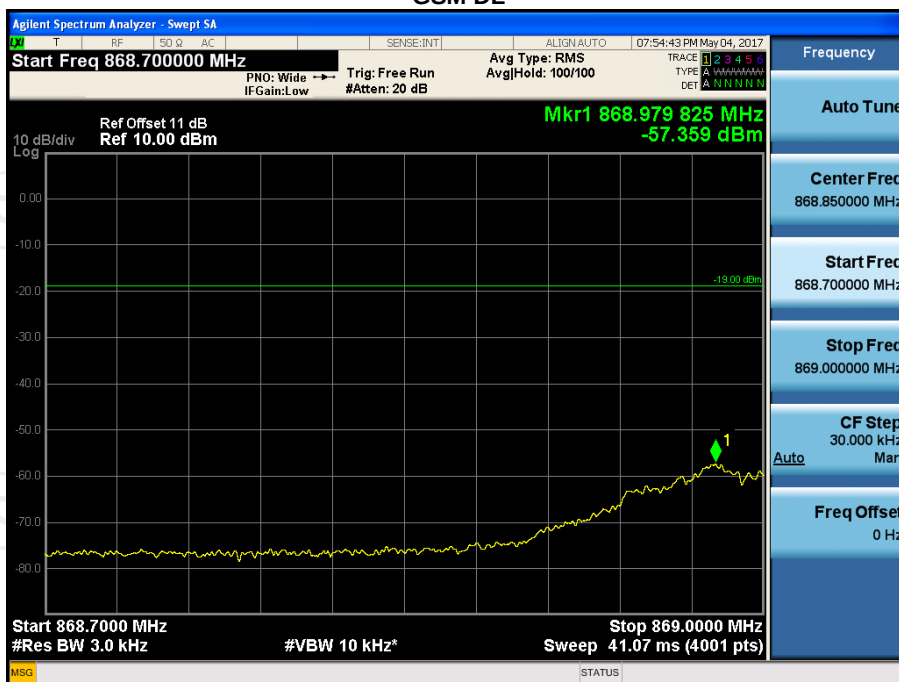


L-edge

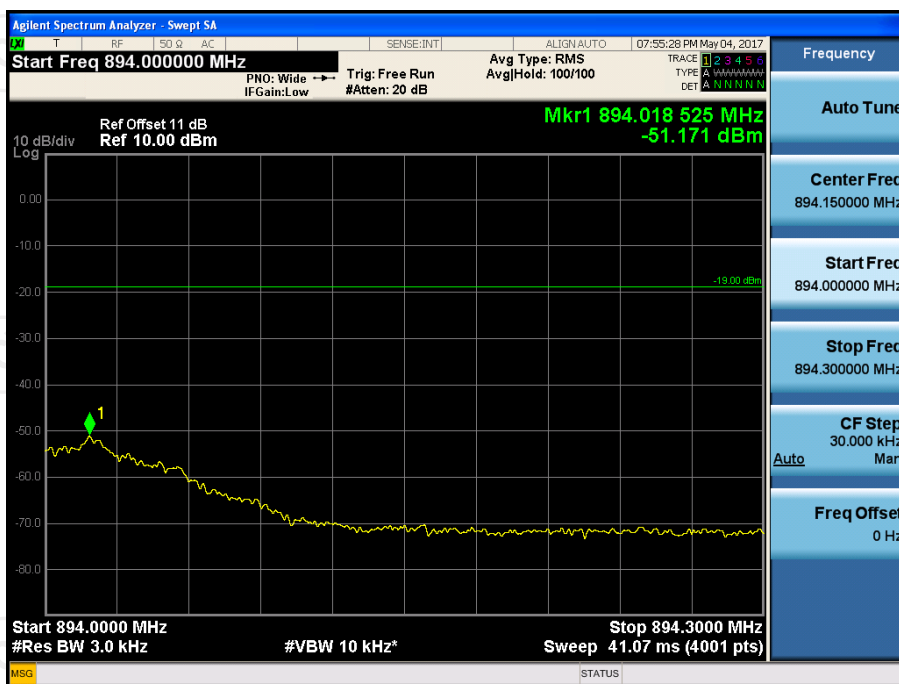


H-edge

Plot

CDMA UL

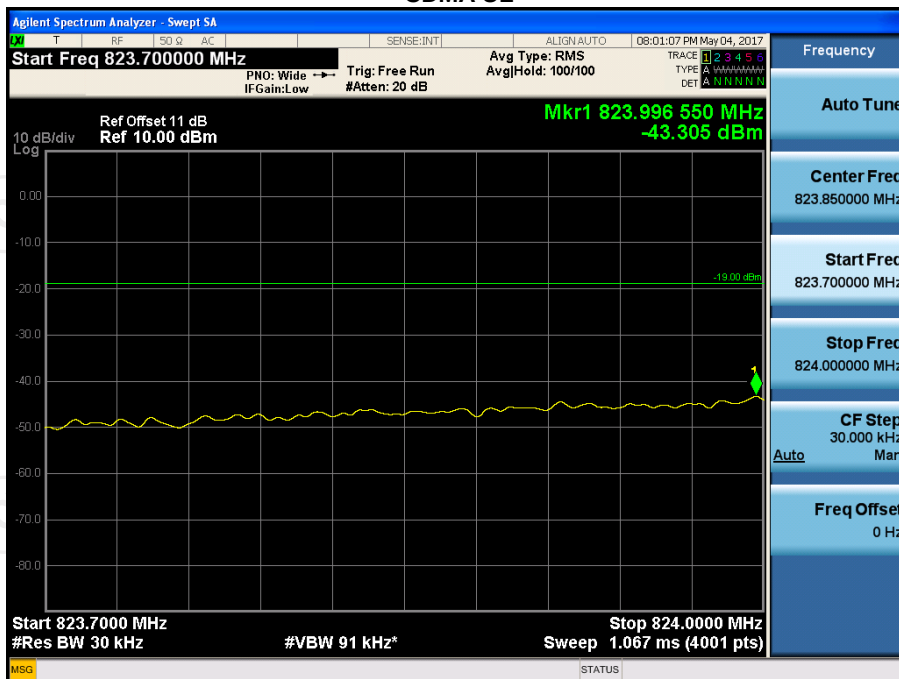


L-edge

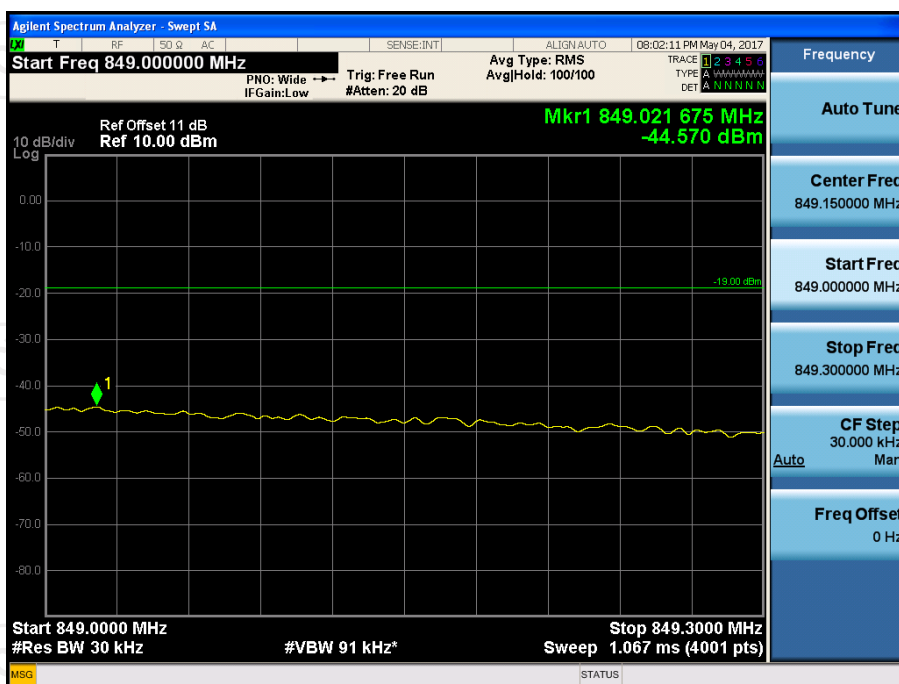


H-edge

Plot

CDMA DL

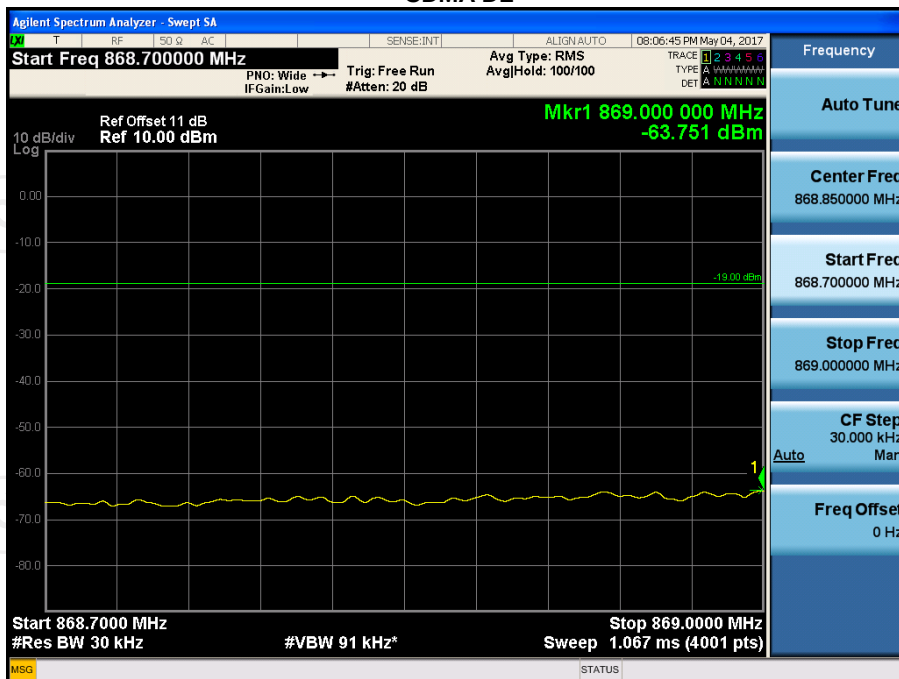


L-edge

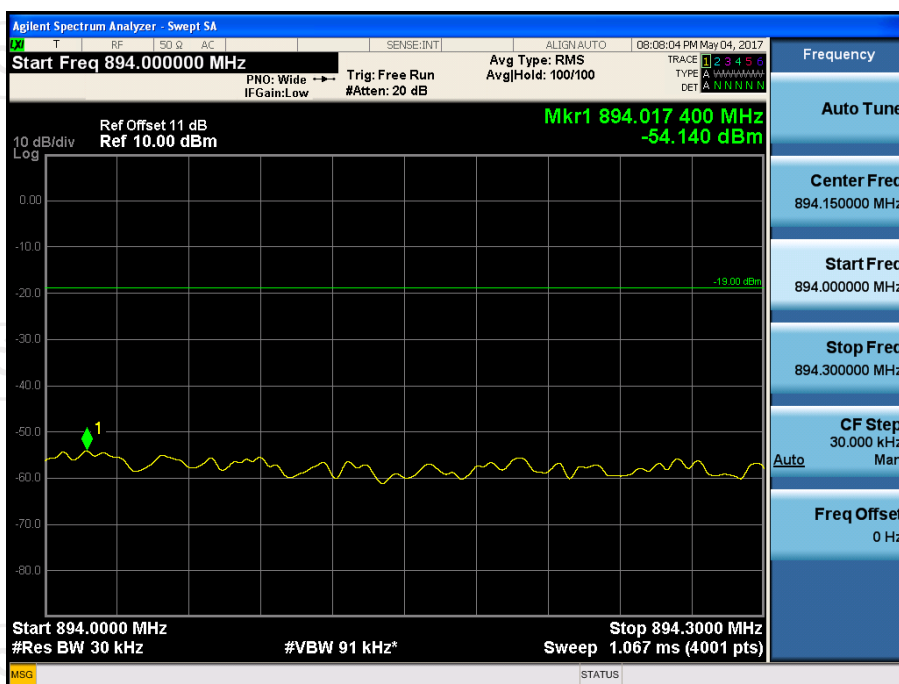


H-edge

Plot

LTE UL

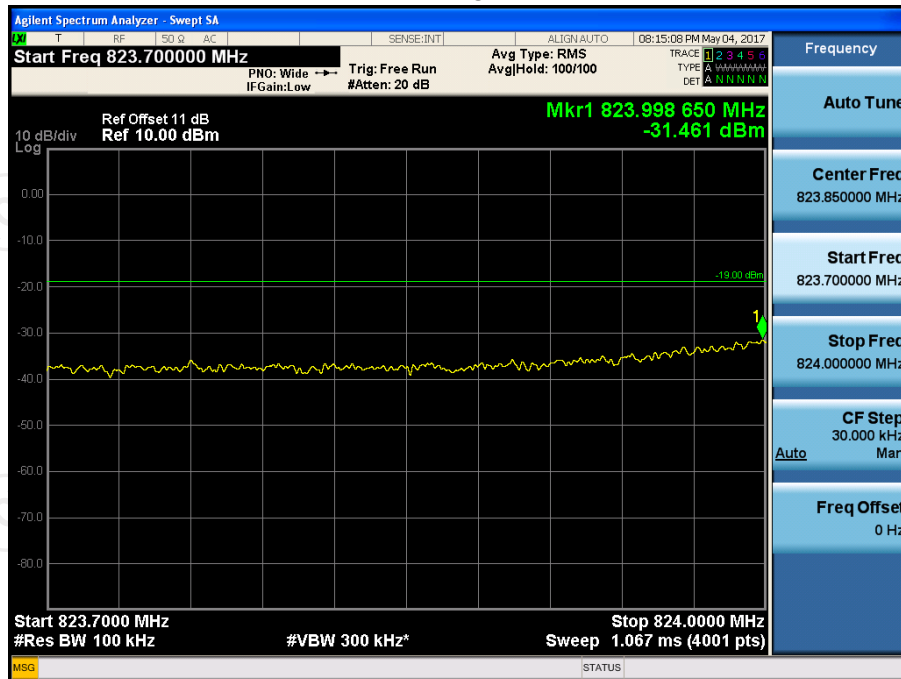


L-edge

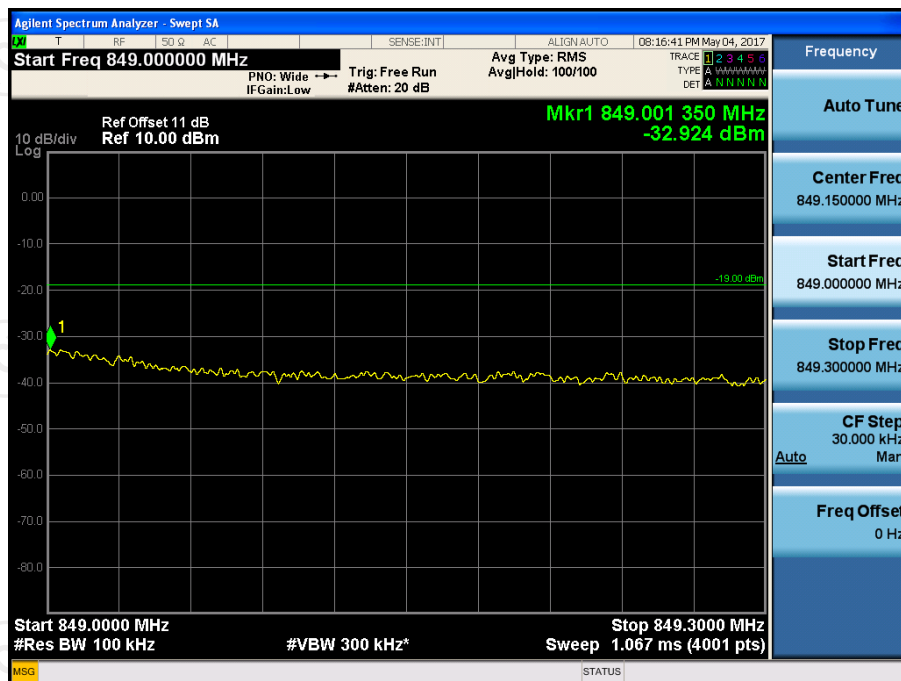


H-edge

Plot

LTE DL

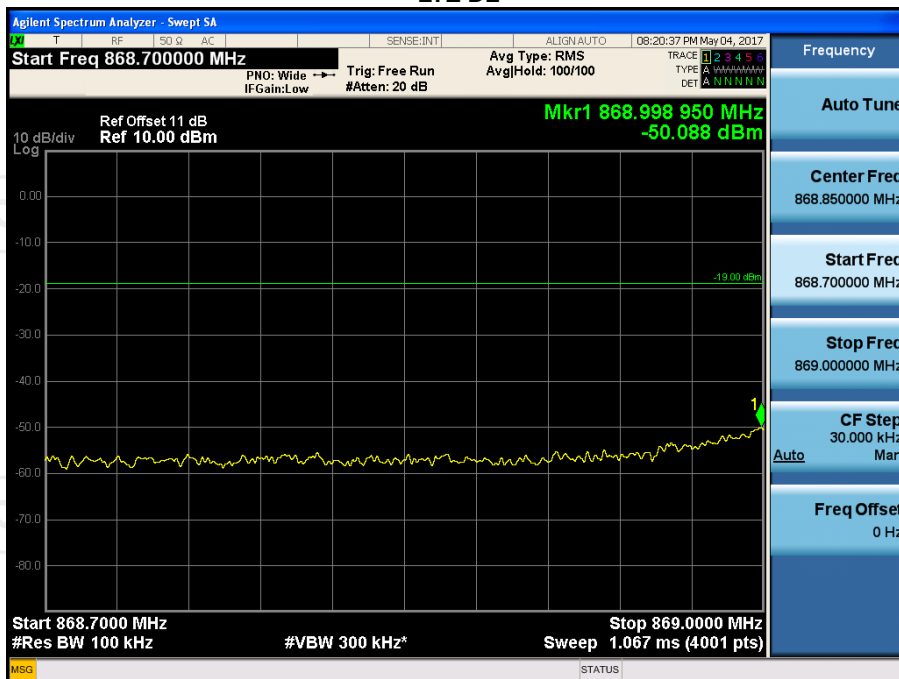

L-edge

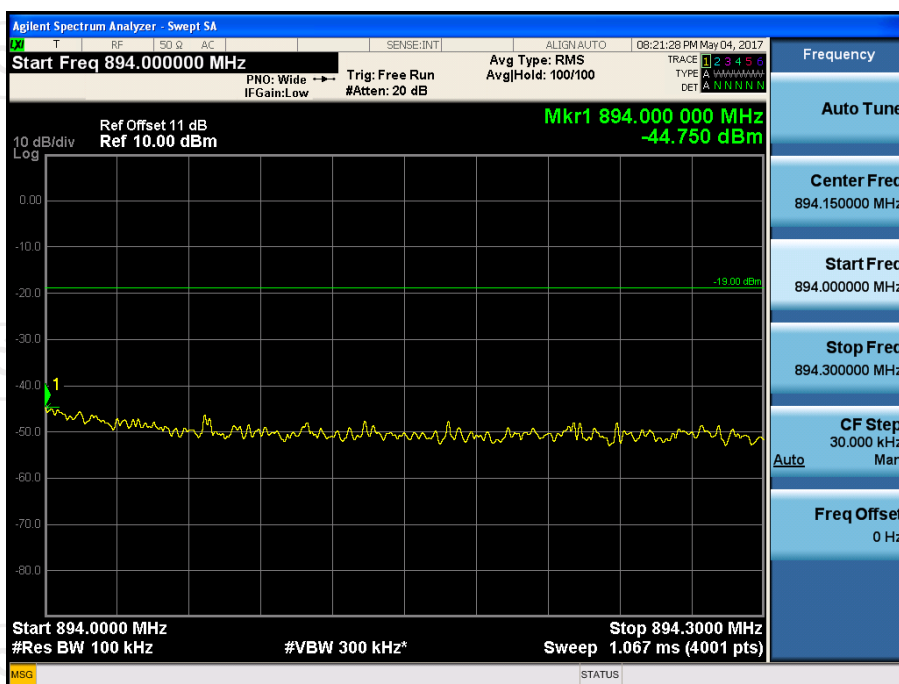


H-edge


1700MHz

Plot

GSM UL

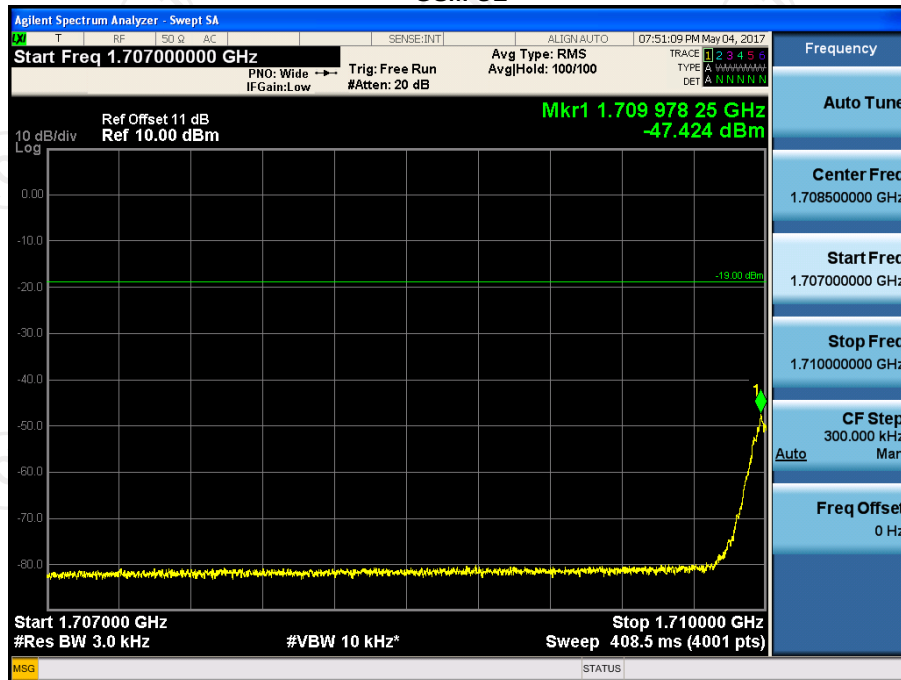


L-edge

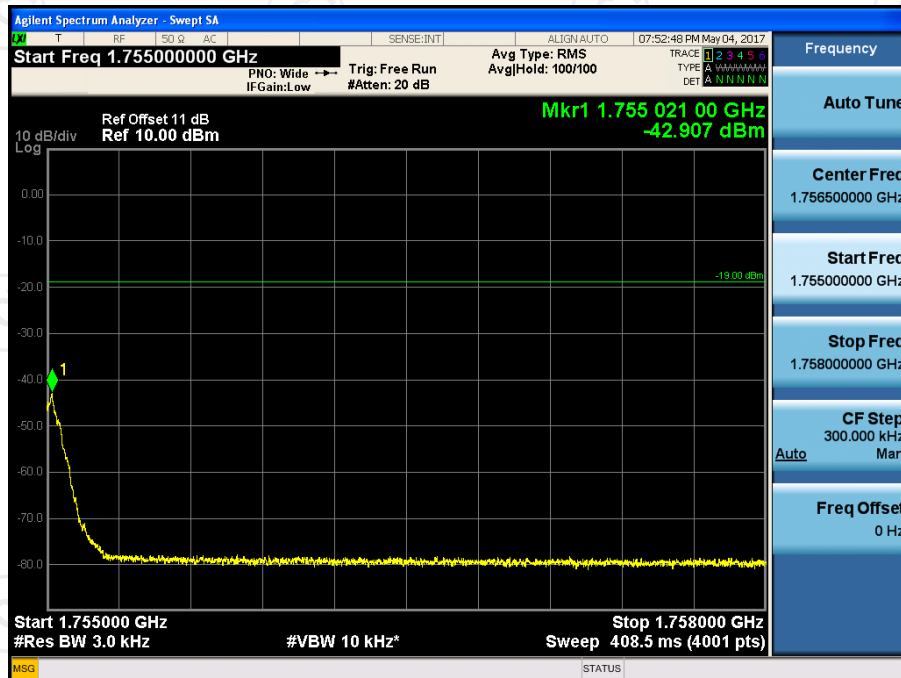


H-edge

Plot

GSM DL

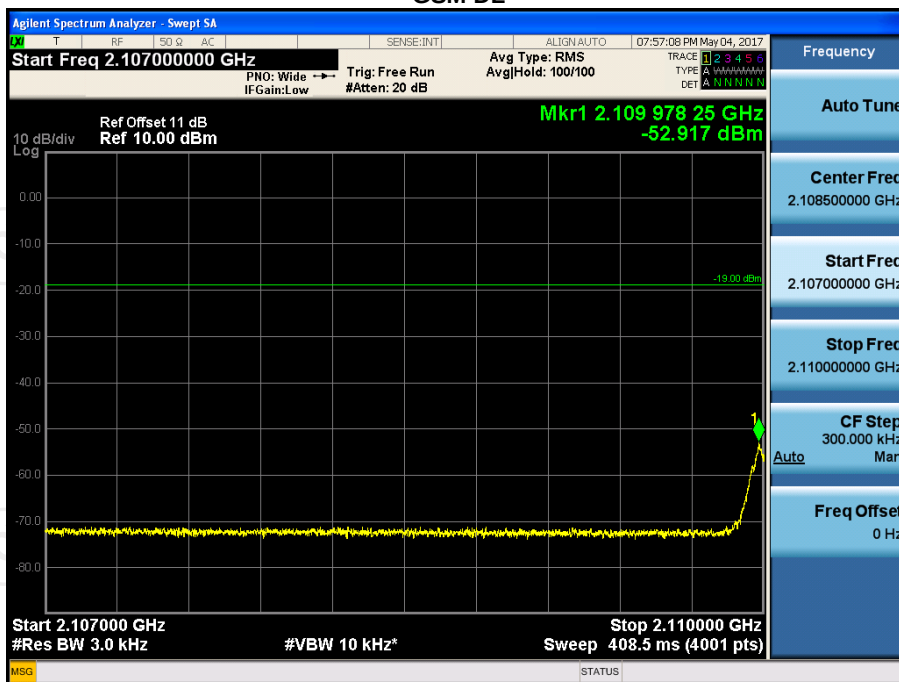


L-edge

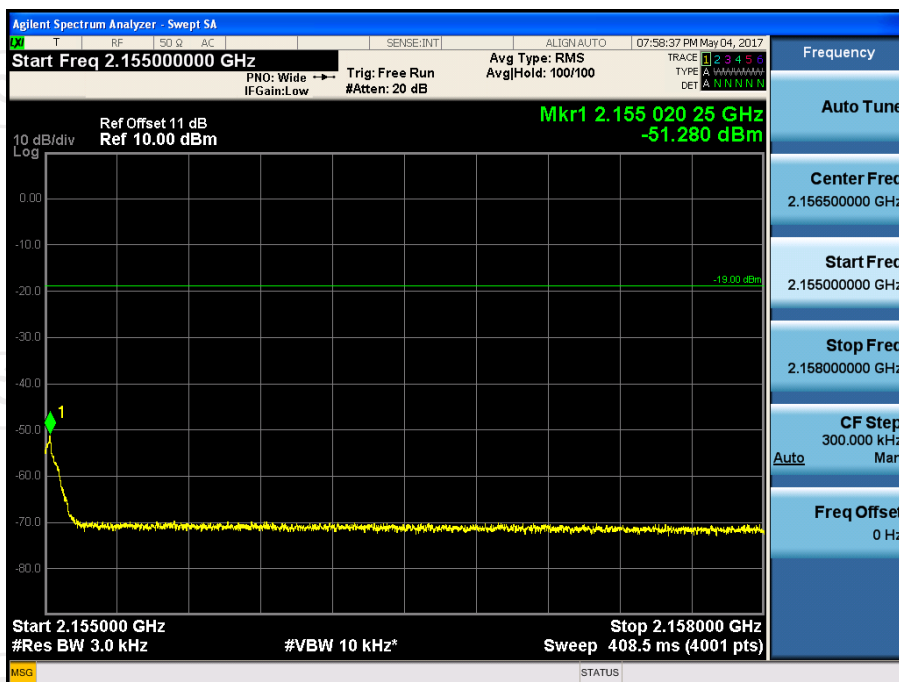


H-edge

Plot

CDMA UL

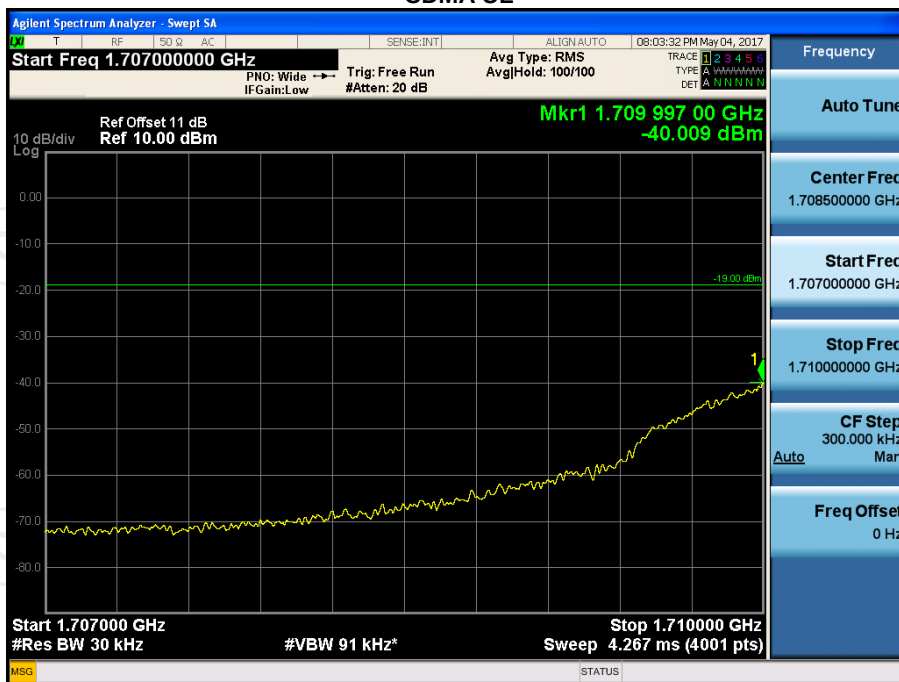


L-edge

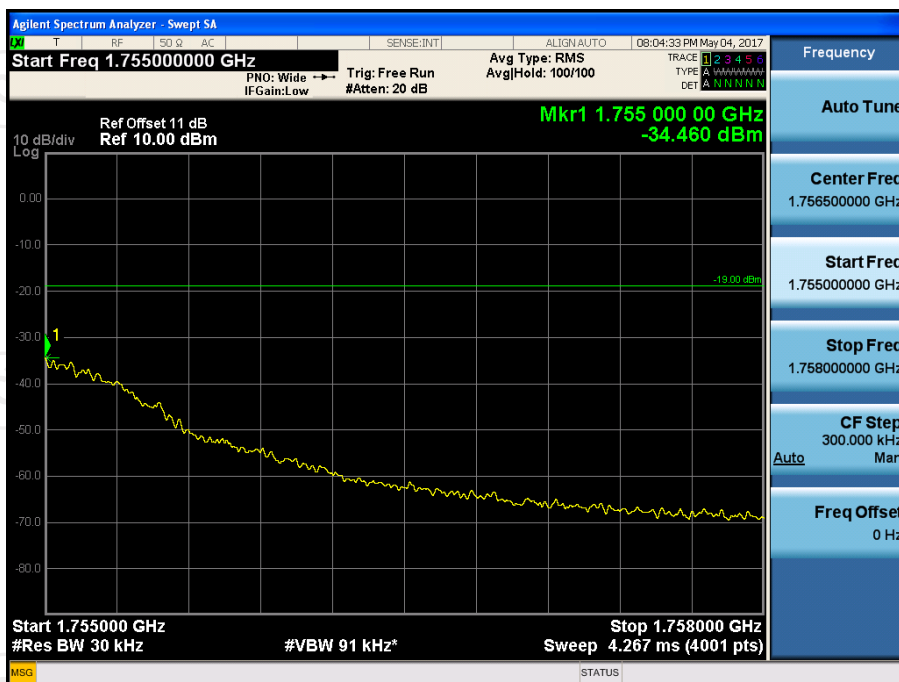


H-edge

Plot

CDMA DL

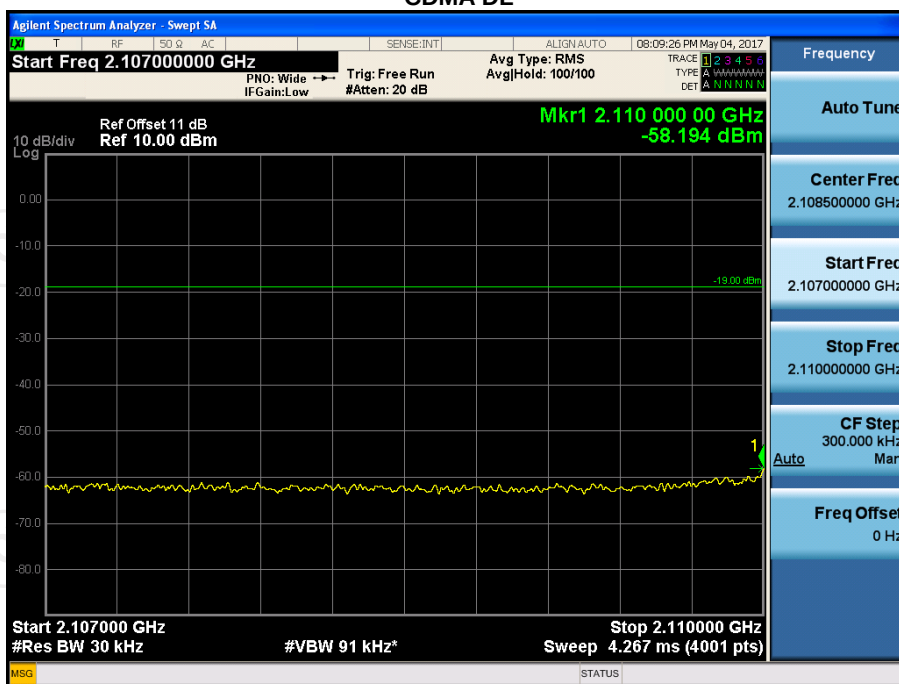


L-edge

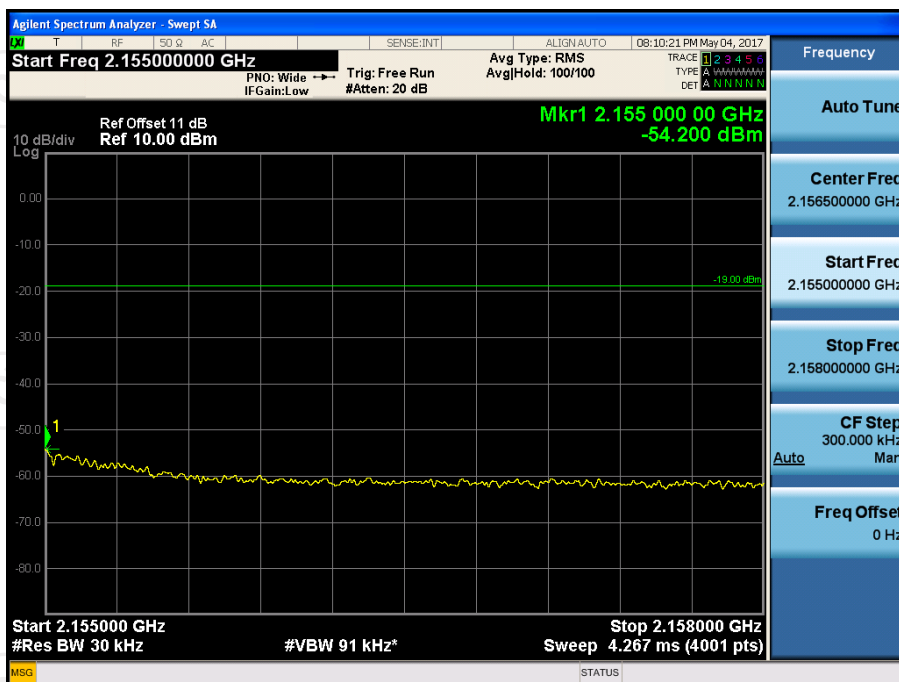

H-edge

Plot

LTE UL

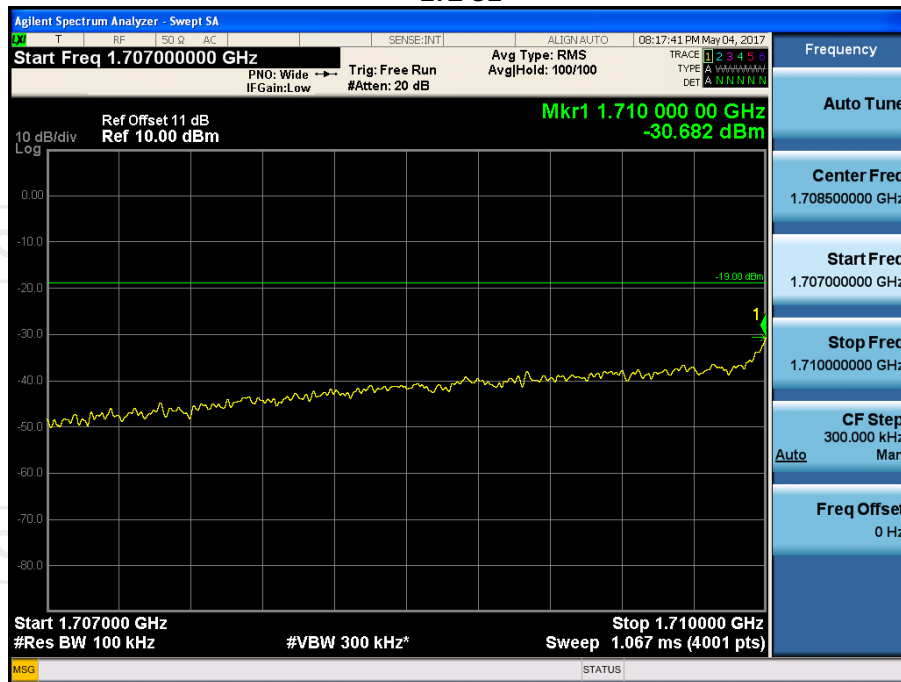


L-edge




H-edge

Plot

LTE DL

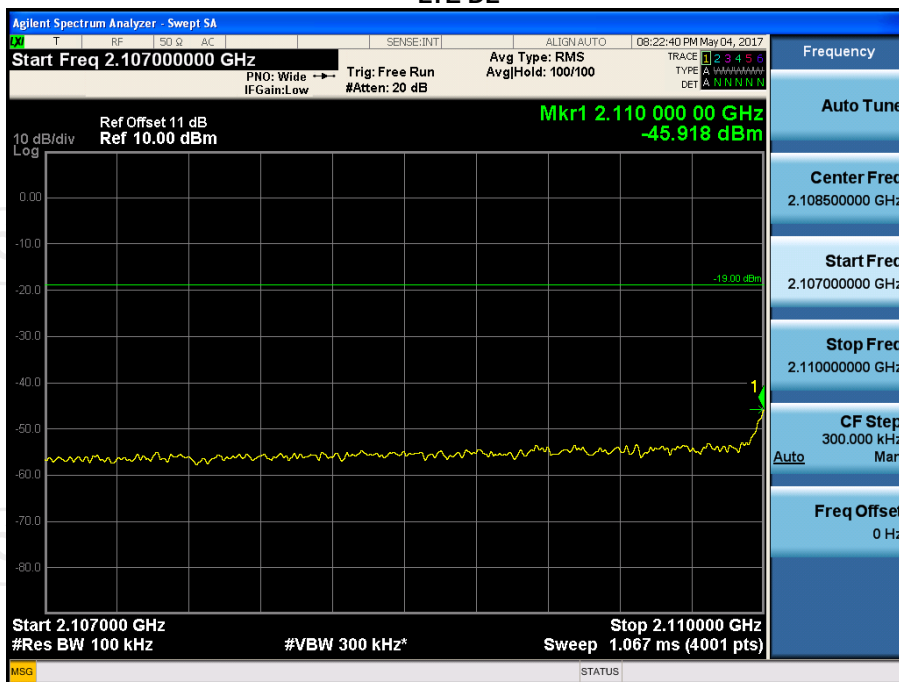


L-edge

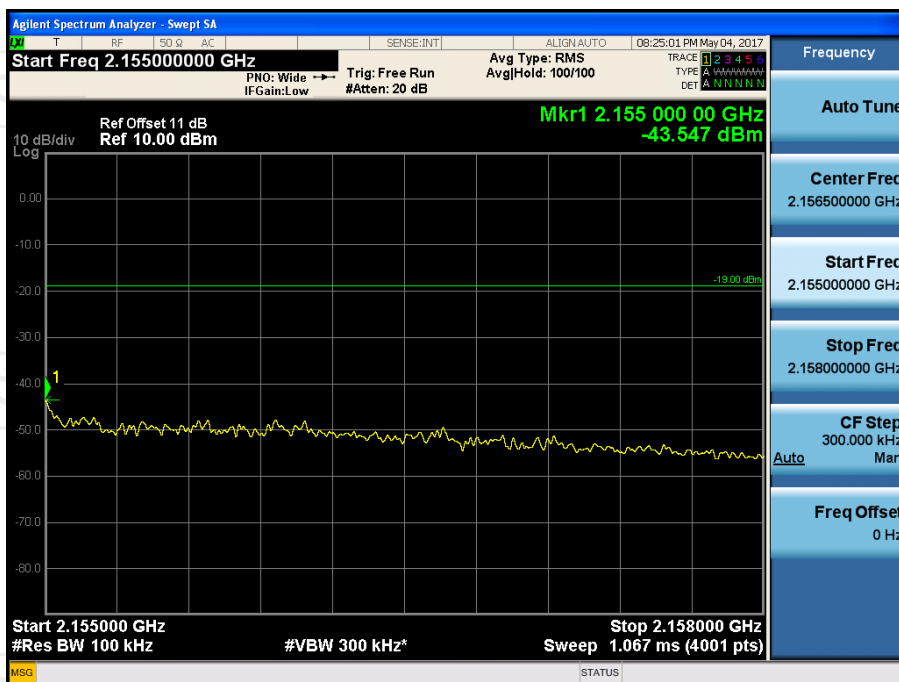

H-edge

6.5. Conducted Spurious Emission

6.5.1. Test Specification

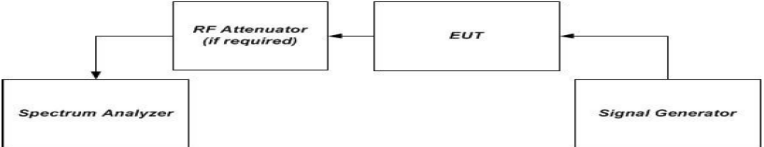Test Requirement:	FCC Part2 Section 1051; FCC Rules Part 22 Subpart H, Section 22.917; FCC Rules Part 27 Subpart C, Section 27.53
Test Method:	KDB 935210 D03 Signal Booster Measurement V04
Limit:	•§2.1053, Conducted emissions limit = $43 + 10 \log (P) = -13 \text{ dBm}$
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator (if required)] RA --> SA[Spectrum Analyzer] </pre>
Test Procedure:	a) Connect the EUT to the test equipment as shown in Set-Up. Begin with the uplink output connected to the spectrum analyzer. b) Configure the signal generator for AWGN with a 99% occupied bandwidth of 4.1 MHz operation with a center frequency corresponding to the center of the CMRS band under test. c) Set the signal generator amplitude to the level determined in the power measurement procedure in Maximum power. d) Turn on the signal generator RF output and measure the spurious emission power levels with an appropriate measurement instrument as follows. e) Set RBW = measurement bandwidth specified in the applicable rule section for the operational frequency band under consideration (see Annex A for relevant cross-references). Note that many of the individual rule sections permit the use of a narrower RBW (typically $\geq 1\%$ of the emission bandwidth) to enhance measurement accuracy, but the result must then be integrated over the specified measurement bandwidth. f) Set VBW = $3 \times \text{RBW}$. g) Select the power averaging (RMS) detector. (See above note regarding the use of a peak detector for preliminary measurements.) h) Sweep time = auto-couple. i) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. Trace average at least 10 traces in power averaging (i.e., RMS) mode. j) Use the peak marker function to identify the highest amplitude level over each measured frequency range Record the frequency and amplitude and capture a plot for inclusion in the test report. k) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to 10 times the highest frequency of the fundamental emission. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the

	available number of measurement points provided by the spectrum analyzer. l) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report. m) Repeat steps b) through l) for each supported frequency band of operation.
Test Result:	PASS

6.5.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182	MY47070282	Aug. 15, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 15, 2016	Aug. 11, 2017
Attenuation	AF115A-09-34	JFW	907763	Aug. 15, 2016	Aug. 11, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test data



Spurious:850MHz					
Link	Operation Frequency (MHz)	Frequency range of spurious emission (MHz)	Measured Frequency (MHz)	Emission Level (dBm)	Limit (dBm)
Uplink	836.5	10~823.9	822.72	-64.48	-13
		849.1~10000	1752.75	-51.08	
Downlink	881.5	10~868.9	868.73	-59.68	
		849.1~10000	2106.1	-43.14	

Spurious:1700MHz					
Link	Operation Frequency (MHz)	Frequency range of spurious emission (MHz)	Measured Frequency (MHz)	Emission Level (dBm)	Limit (dBm)
Uplink	1732.5	10~1709	833.34	-58.50	-13
		1756~25000	21899.8	-49.59	
Downlink	2132.5	10~868.9	894.62	-52.83	
		849.1~25000	2156.6	-44.00	

Note: The spurious level below 10MHz is too low, so not show in this report.



Plot

Uplink_836.5MHz

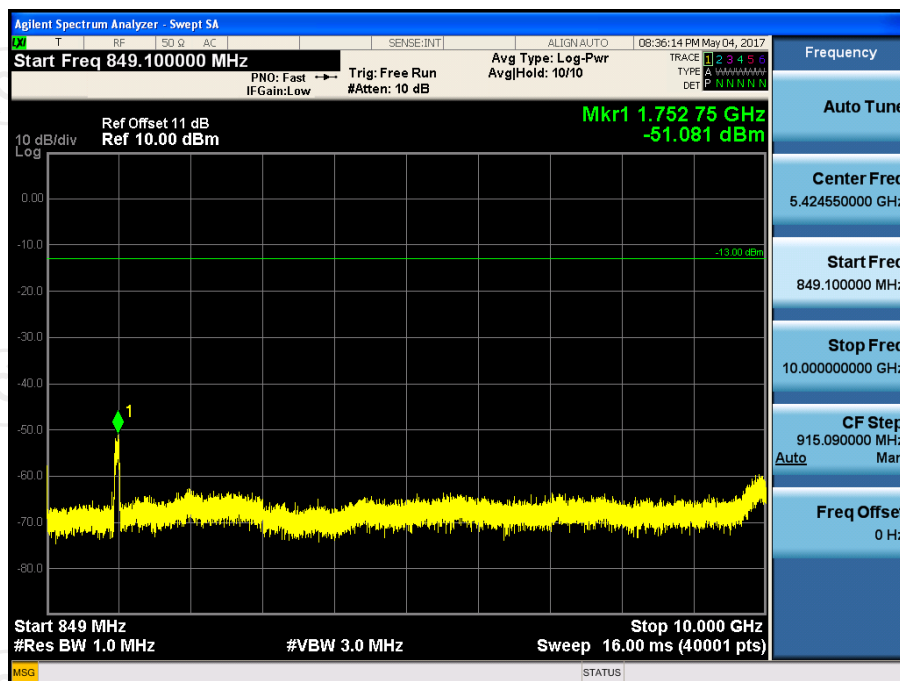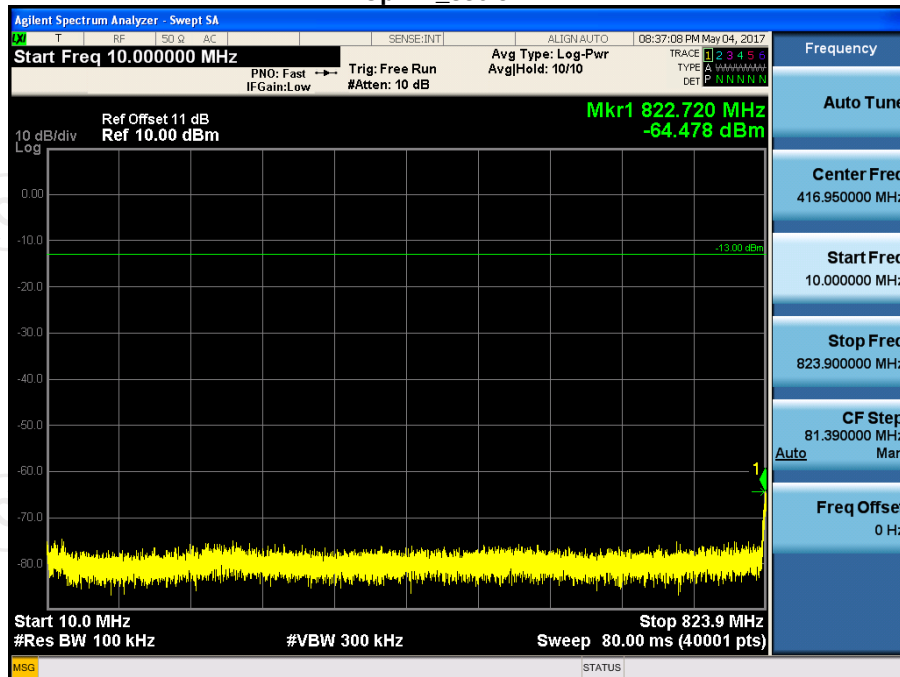



Plot

Downlink 881.5MHz

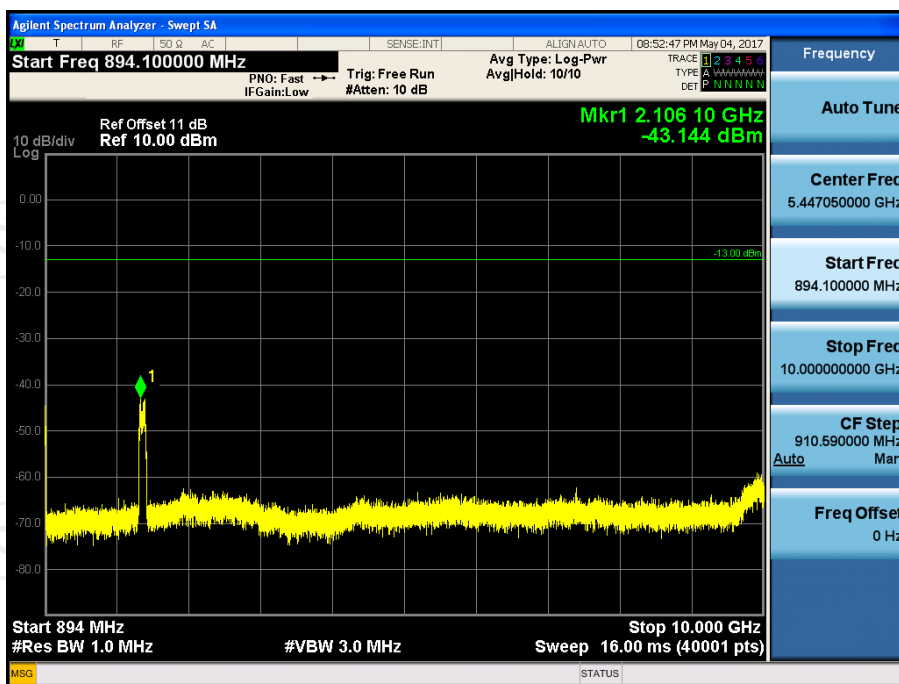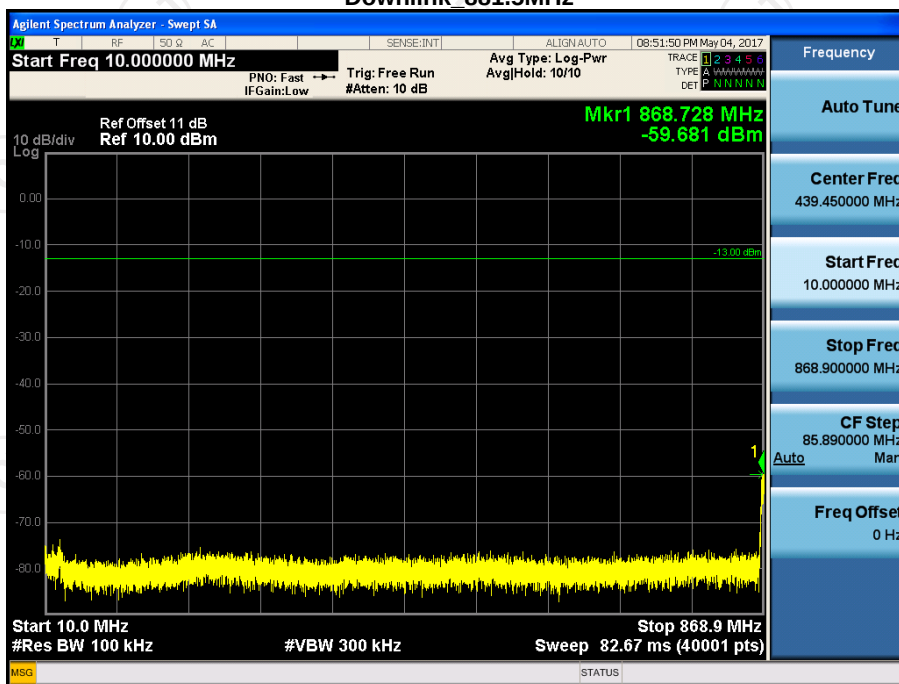

Plot

Uplink_1732.5MHz

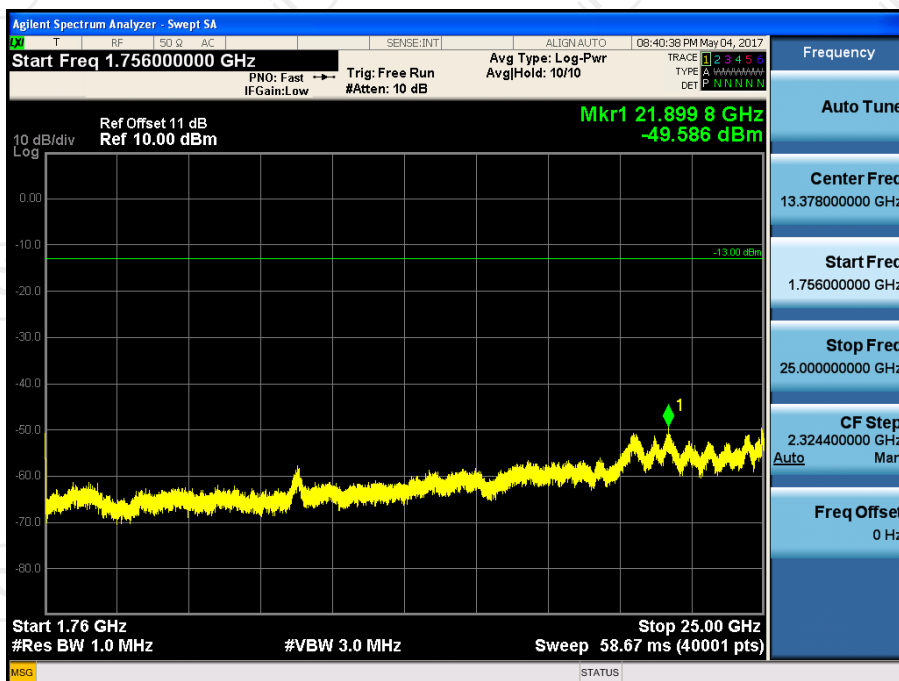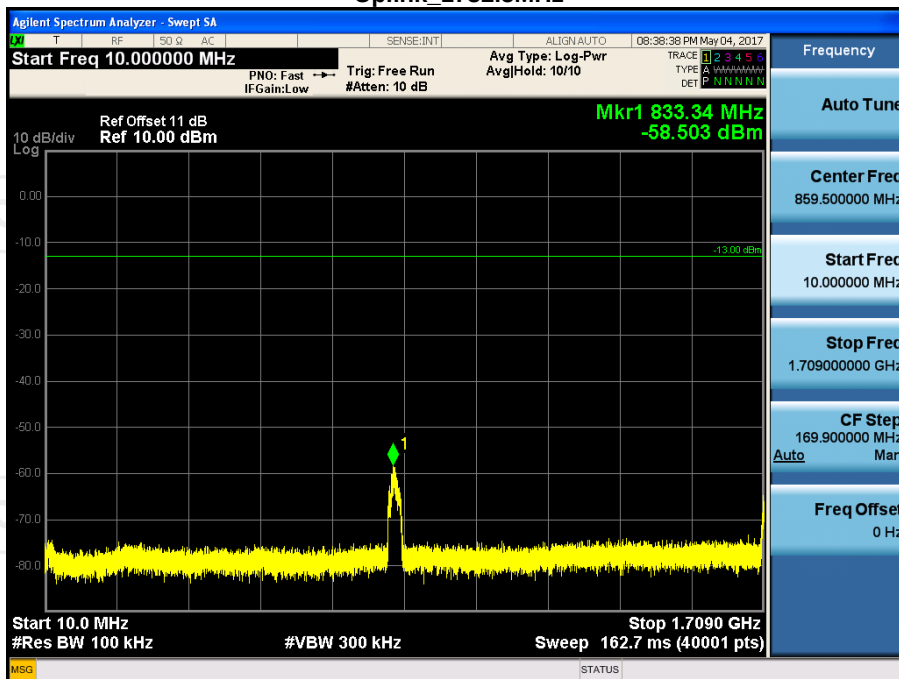

Plot

Downlink_2132.5MHz

