

# Module W708

## Product Specification

Version	Issue date	Changes	Remark
0.1	2015/9/04	Initial Version	
0.2	2015/10/22	Update GPIO sharing scheme	
0.3	2015/11/30	Update package information. Correct PERST_N	
0.4	2015/12/1	Update industrial and commercial grade information	
0.5	2016/10/15	GPIO : Link2 change to UART_TXD2	
0.6	2017/5/18	Update FCC approval information, Correct GPIO 27, 28, 29	

### IMPORTANT

This document contains important Information and therefore should not be disclosed to third parties without prior written consent of amazipoint technology Ltd.

**Address :** 2F, No. 113, Zhongyang Rd., Xindian Dist., New Taipei City, Taiwan(R.O.C)  
[www.amazipoint.com](http://www.amazipoint.com)


Signature:

Author:	Reviewed by:	Approved by:	Remarks:
Martin Ho			

## 1. Introduction

W708 module is designed for easy-design-in low cost Wifi application. It has WAN, LAN, UART, I2C, SPI, I2S, SDXC and GPIO interfaces. Support 1T1R 150N operation. 3.3V single power supply.

There are industrial grade and commercial grade two different configuration. For industrial grade, we use industrial grade DDR2 memory component. For commercial grade, we use commercial grade DDR2 memory component.

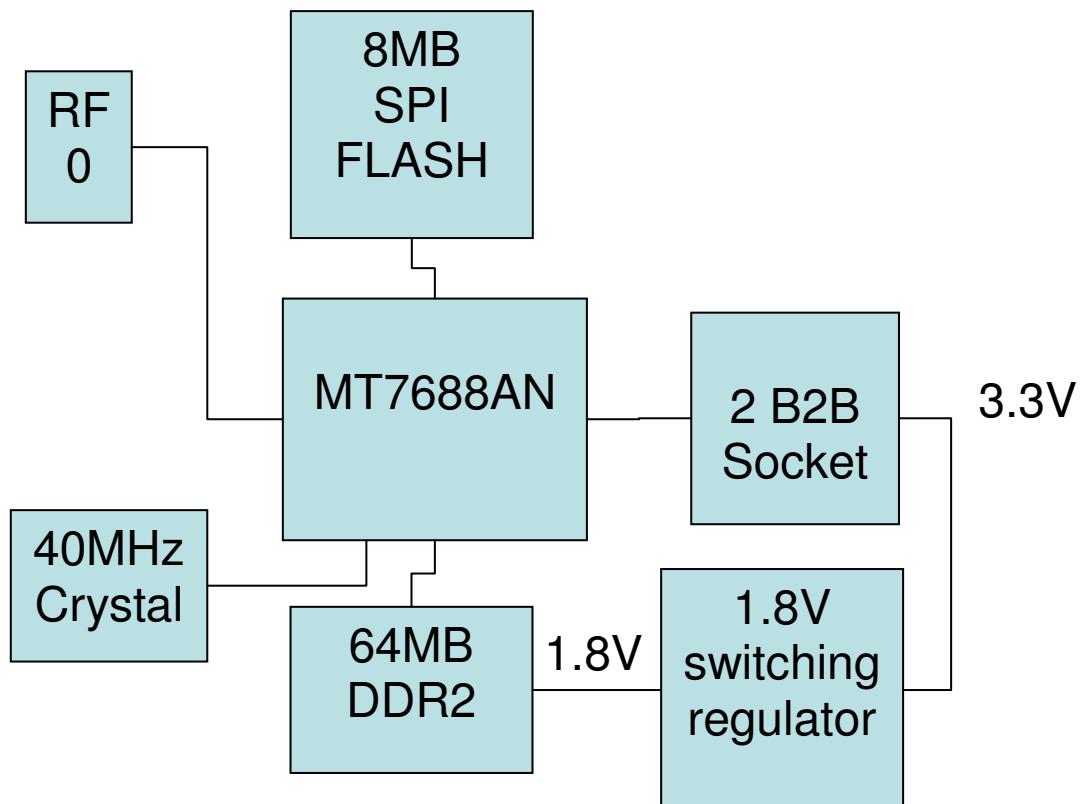

## 2. Technical specification

### a. Channel Plan

country code	region	channel
0	North America	CH1 ~ 11
1	Others	CH1 ~ 13
5	Japan	CH1 ~ 14
6		CH3 ~ 9
7		CH5 ~ 13

Note : The country code is configured before shipping and can not be changed by user.

## b. Specification Table

Items		Specification				
Supported Standard and Protocol		IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, IEEE 802.3, IEEE 802.3u, CSMA/CA, CSMA/CD, TCP/IP, DHCP, ICMP, NAT, PPPoE				
Dimension		35*25 mm				
Power consumption		< 250mA, 180mA typical				
Operating Temperature Range		-30 ~ 80 deg. C ( for commercial grade ) -40 ~ +85 deg. C ( for industrial grade )				
Storage Temperature Range		-40 ~ 90 deg. C				
Humidity		< 90%				
	WAN Port	one 10/100M adaptive RJ45 port				
	LAN Port	one 10/100M adaptive RJ45 port				
RF Parameters	Frequency Range	2.412~2.4835GHz, depends on country code, maybe 2.412~2462 or 2.412~2.472GHz				
Baud Rate		1T1R :				
		MCS index	Data rate (Mbit/s)			
			20 MHz channel		40 MHz channel	
		800ns	400ns	800ns	400ns	
		0	6.5	7.2	13.5	15
		1	13	14.4	27	30
		2	19.5	21.7	40.5	45
		3	26	28.9	54	60
		4	39	43.3	81	90
		5	52	57.8	108	120
		6	58.5	65	121.5	135
		7	65	72.2	135	150
		IEEE 802.11g : 54/48/36/24/18/12/9/6(adaptive )				
		IEEE 802.11b : 11/5.5/2/1M(adaptive )				

	Number of Channel	Support channel 1 ~14, actual channel numbers depends on setting of country code
	Modulation Scheme	DBPSK、DQPSK、CCK and OFDM(BPSK/QPSK/16-QAM/64-QAM)
	Sensitivity @ PER	150M : -68dBm@10% PER ; 130M : -68dBm@10% PER ;  108M : -68dBm@10% PER ; 54M : -72dBm@10% PER  11M : -85dBm@8% PER ; 6M : -88dBm@10% PER  1M : -90dBm@8% PER ;
	Output Power	802.11b: 16 dBm $\pm$ 1.5dBm@11Mbps (1T1R total power) 802.11g: 14.5 dBm $\pm$ 1.5dBm@54Mbps 802.11n HT20: 14.5 dBm $\pm$ 1.5dBm @MCS7 802.11n HT40: 14.5 dBm $\pm$ 1.5dBm @MCS7
	Antenna	One IPEX I connectors for one external antenna( 1T1R)
WIFI Operation Mode		Client/AP
System Service		Virtual Server : Internal web server for browser to access
Device Management		Area setting  Restore to default factory setting  Software upgrade  Reboot  Change password
<b>WLAN Security Mode</b>		OPENWEP  SHAREDWEP  WEPAUTO  WPA  WPA-PSK  WPA2  WPA2-PSK  WPAPSKWPA2PSK  WPA1WPA2(WPA and WPA2 hybrid mode)

802.1x


### 3. Software features


- Support WPS
- Support AP ( Access point ) 、 Client ( Wifi Station) mode
- **AP mode**
  - Default operation mode. In this mode, the module work as an Access Point, don't need any configuration.
  - User can use PC via RJ45 or smart phone via Wifi to login AP mode and change the default configuration ( through browser).
- **Client mode**
  - In this mode, module is a Wifi station.

### 4. Development tool :

We provide development tool for easy connection of power, RS-232, LAN, WAN, and USB port.

### 5. Module Dimension : 35\*25 mm

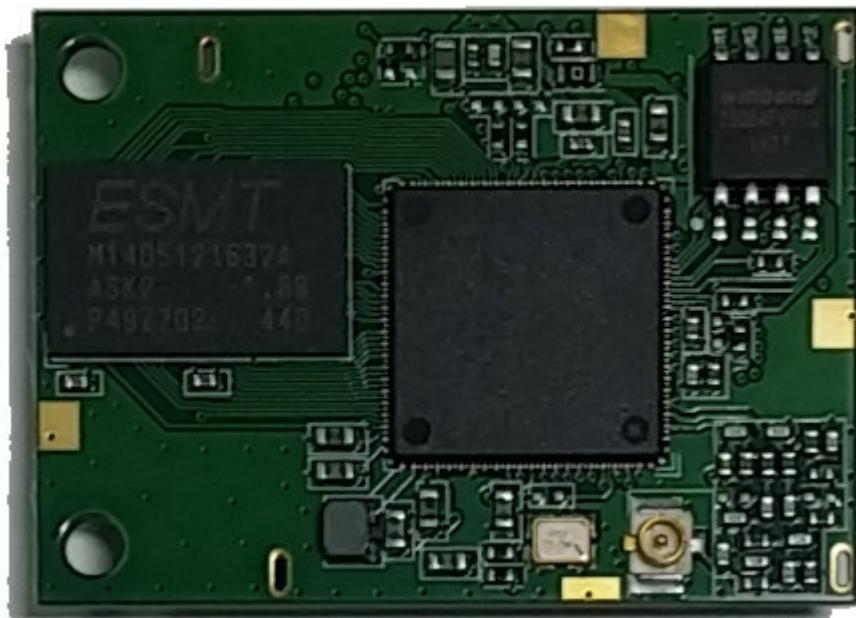


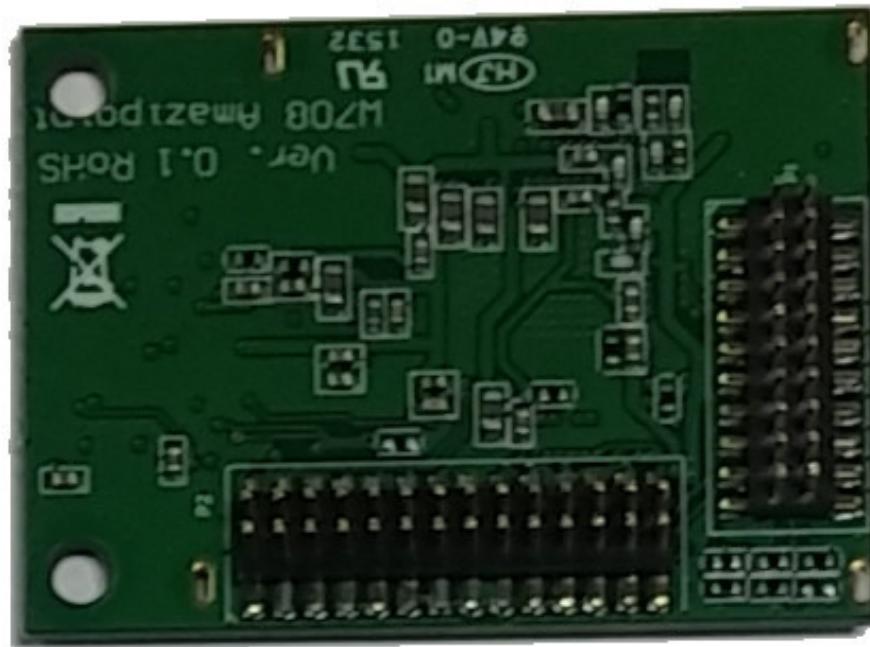

There are two 1.27mm pitch header on the bottom side of module P1 and P2.

## 6. Pin Assignment

Bottom view for showing P1, P2 and pin 1/pin 2 position on bottom side of W708 module :

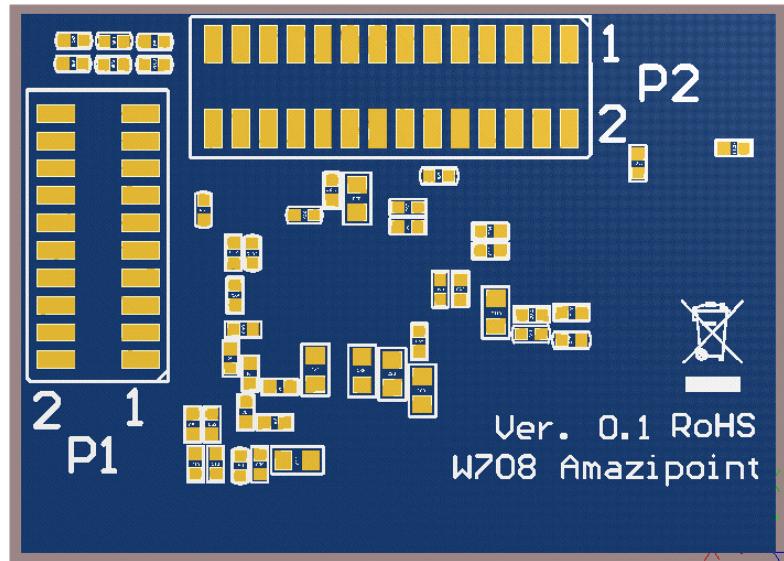

P1 :

Multi 1	Multi 2	GPIO	Main	Main	GPIO	Multi 2	Multi 1
		GPIO23	SD_CDT	1	2	SD_CMD	GPIO27
		GPIO25	SD_D0	3	4	SD_D3	GPIO28
		GPIO24	SD_D1	5	6	SD_D2	GPIO29
		GPIO22	SD_WP	7	8	SD_CLK	GPIO26
		GPIO37	REF_CLKO	9	10	POR	
		GPIO39	LINK4	11	12	GPIO0	GPIO11
		GPIO40	LINK3	13	14	SPI_MISO	GPIO9
		GPIO6	SPI_CS1	15	16	TXD0	GPIO12
		GPIO7	SPI_CLK	17	18	RXD0	GPIO13
		GPIO20	URAT_RXD2	19	20	SPI_MOSI	GPIO8

P2 :

Multi 1	Multi 2	GPIO	Main	Main	GPIO	Multi 2	Multi 1
		GPIO4	I2C_SCLK	1	2	I2C_SD	GPIO5
			TXO1_P	3	4	RXI0_P	
			TXO1_N	5	6	RXI0_N	
		GPIO2	I2S_WS	7	8	LINK0	GPIO43
		GPIO36	PERST_N	9	10	GND	
PWM_CH1	GPIO46		RXD1	11	12	USB_P	
		GPIO38	WDT_RST_N	13	14	USB_N	
			3.3VD	15	16	GND	
			3.3VD	17	18	TXO0_P	
		GPIO1	I2S_DO	19	20	TXO0_N	
PWM_CH0	GPIO45		TXD1	21	22	RXI1_N	
		GPIO0	I2S_DI	23	24	RXI1_P	
		GPIO42	LINK1	25	26	I2S_CLK	GPIO3
		GPIO44	WLAN_LED	27	28	UART_RXD2	GPIO21

P1 :

Pin #	Function	Direction	Description
1	SD_CDT	In	SDXC Card Detect
2	SD_CMD	Out	SDXC Command
3	SD_D0	In/Out	SDXC Data0
4	SD_D3	In/Out	SDXC Data3

5	SD_D1	In/Out	SDXC Data1
6	SD_D2	In/Out	SDXC Data2
7	SD_WP	In	SDXC Write Protect
8	SD_CLK	Out	SDXC Clock
9	REF_CLKO	Out	Reference clock output
10	POR	In	Power on reset input, low active
11	LINK4	Out	Link LED for port 4
12	GPIO0	Out	GPIO0 or WPS push button
13	LINK3	In/Out	Link LED for port 3
14	SPI_MISO	In	SPI MISO signal
15	SPI_CS1	Out	SPI chip select signal 1
16	TXD0	A	Console UART TXD signal
17	SPI_CLK	Out	SPI clock output
18	RXD0	A	Console UART RXD signal
19	LINK2	Out	Link LED for port 2
20	SPI_MOSI	Out	SPI MOSI signal

P2 :

Pin #	Function	Direction	Description
1	I2C_SCLK	In/Out	I2C Clock signal
2	I2C_SD	In/Out	I2C Data signal
3	TXO1_P	A	Tx positive for port 1
4	RXI0_P	A	Rx positive for port 0
5	TXO1_N	A	Tx negative for port 1
6	RXI0_N	A	Rx negative for port 0
7	I2S_WS		I2S word select
8	LINK0	Out	Link LED for port 0
9	PERST_N		PCIe device reset
10	GND		Power ground
11	RXD1		UART1 RXD signal
12	USB_P	In/Out	USB signal positive
13	WDT_RST_N	Out	Watchdog reset
14	USB_N	In/Out	USB signal negative
15	3.3VD	Power In	3.3V input
16	GND		Power ground

17	3.3VD	Power In	3.3V input
18	TXO0_P	A	Tx positive for port 0
19	I2S_DO	out	I2S data out
20	TXO0_N	A	Tx negative for port 0
21	TXD1	Out	UART1 TXD
22	RXI1_N	A	Rx negative for port 1
23	I2S_DI	In	I2S data in
24	RXI1_P	A	Rx positive for port 1
25	LINK1	Out	Link LED for port 1
26	I2S_CLK	out	I2S clock signal
27	WLAN_LED	Out	WLAN LED output, active low
28	UART_RXD2	In	UART2 RXD

## 7. Memory configuration


Depending on customer's request, the module can be shipped with following configuration :

Flash size : 2MB, 4MB, 8MB, 16MB, 32MB, 64MB


DDR2 size : 64MB, 128MB

## 8. Mechanical Application Notes

1. CON0 is IPEX1 connectors on top side
2. P1 is 2\*10 pins 1.27mm male header on bottom side for signals
3. P2 is 2\*14 pins 1.27mm male header on bottom side for signals
4. Footprint of P1, P2 is as following :

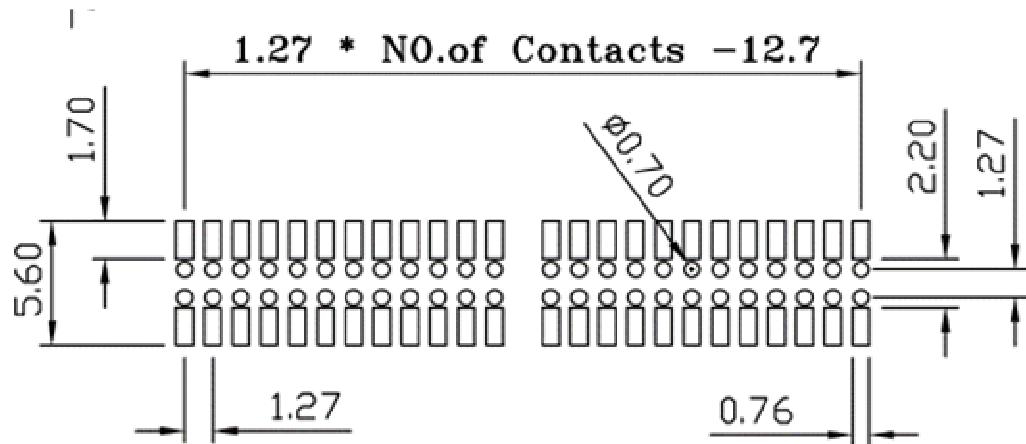

5. There are four slot holes used for installing metal shielding cover if needed
6. There are two diameter 2.1mm holes for screw fixing
7. The mechanical drawing in .dxf format is available under request.
8. Bottom view 2D drawing is as following :

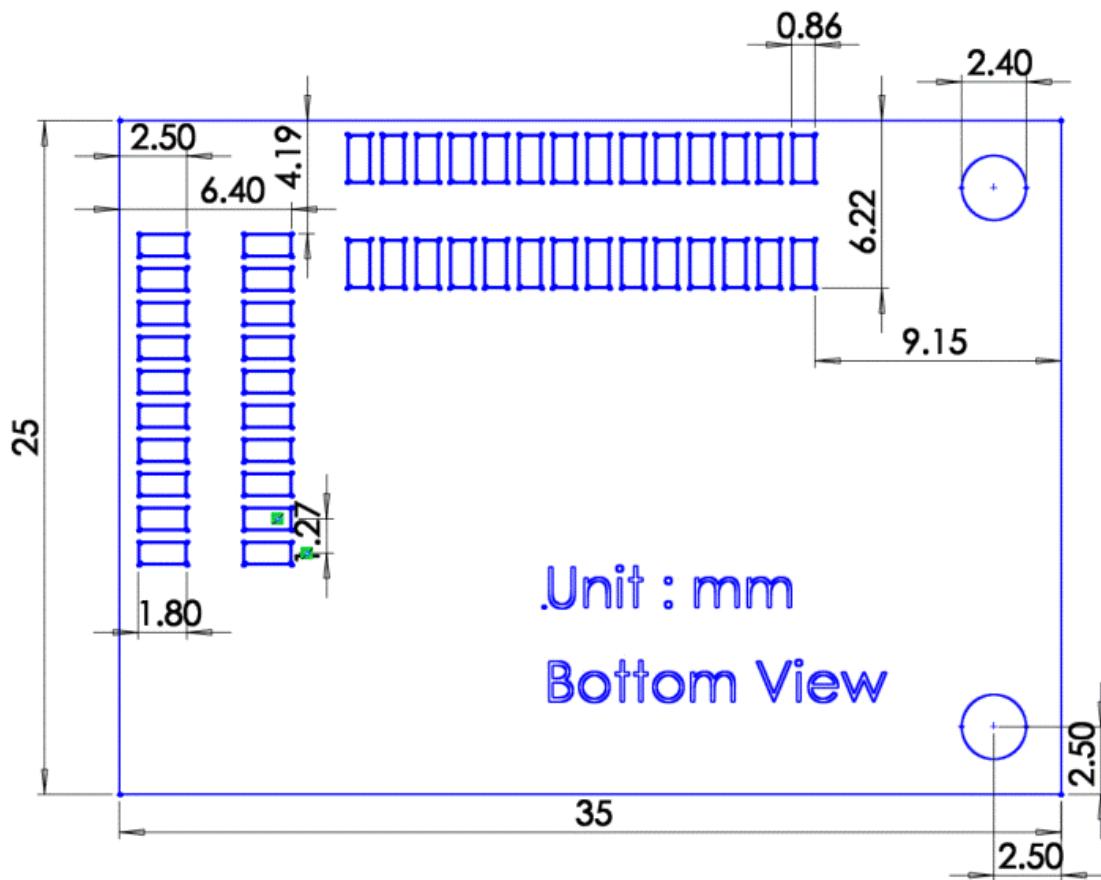

## 9. Shipping & package information

W708 is packaged with stacked PS tray :

- Tray size : for each element, the size is 45\*35\*12 mm, there are 8\*8 elements for each tray. There are 25 trays in each carton. So, total 1600 pieces maximum for each carton.



- Carton size : 500 x 400 x 300 mm
- Carton Label ( packing list ) :

#### Amazipoint Tech. Ltd.

2F, No. 113, Zhongyang Rd., Xindian Dist.,  
New Taipei City, Taiwan(R.O.C)  
Phone: +886-2-82191011  
Fax: +886-2-82191011

#### Packing List

DATE: 2015/11/30  
Q.O. # SO-2015-11001

Customer  
XXXXXXXXXXXXXX  
YYYYYY  
ZZZZZ

PO # : XXXXXXXX

REQUISITIONER	SHIP VIA	F.O.B.	SHIPPING TERMS		
W708-8-64	MT7688 module with 8MB flash, 64MB DDR2		QTY	UNIT PRICE(USD)	TOTAL

## 10. Ordering Information

The part number for placing order is W708-MM-NN-G.

- MM is bytes of SPI flash and NN is bytes for DDR2.
- G : C for commercial grade or I for industrial grade.
- For example with the standard memory configuration 8MB Flash, 64MB DDR2 and commercial grade, the part number is W708-8-64-I.

# 11. FCC Warning Statement

## FEDERAL COMMUNICATIONS COMMISSION REGULATIONS

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### CAUTION:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### FCC RF Radiation Exposure Statement

This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20 cm** between the radiator & your body.

### Important Note

In the event that these conditions can not be example certain laptop configurations or collocation with another transmitter, then the FCC authorization is no longer considered valid the FCC ID can not be used on the final product. In these circumstances, OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

### End Product Labeling

This transmitter module is authorized only for use in device where antenna may be installed such that 2.5 cm may be maintained between antenna and users (for example access points, routers, wireless ADSL and similar equipment). The final end product must be labeled in a area with the following: " Contains FCC ID: 2ALWN-W708".

### Manual Information for End Users

The end user must not have manual instructions to remove or install device. The user manual for end users must include the following information in a prominent

location:

“IMPORTANT NOTE: To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located operating in conjunction with any other antenna or transmitter.” as a result of e-mail transmission.”