


Bluetooth headset User Manual

Model: F1

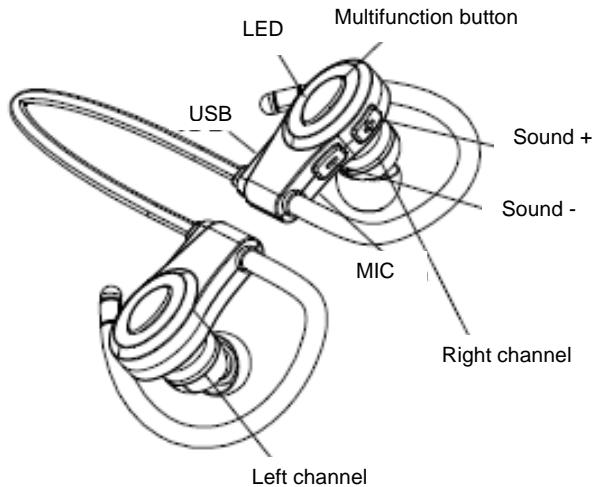

Function	operation	Voice prompt
Power on	pressing long the multifunction button for 3 seconds	power on
Power off	pressing long the multifunction button for 3.5 seconds	power off
Enter into the matching mode	pressing long the multifunction button for 6.5 seconds	Enter into the matching mode
Answering calls	pressing short the multifunction button once	read The phone number
End calls	pressing short the multifunction button once	End calls
Decline calls	pressing long the multifunction button once	Decline calls
the end of the number redial	Double-click the multifunction button once	Replay the end of the code
interrupt dial the phone	pressing short the multifunction button once	
Voice dialing	pressing long the multifunction button for 1 seconds	
Voice switch	In the condition of matching double-click the multifunction button once	Chinese mode/ English mode
Pause, Play	pressing short the multifunction button	
The volume size/last song/nest song	pressing long the button of + - adjust the volume (pressed short adjust last song/next song)	

The micro USB charging port

1.Fully charged need 1 to 2 hours ,when in charge, please open black skin, which located in the right channel's cabinet on the left side of the metal edge ,can see the Micro USB port, insert the line of charging later, the red light flashing show in charging ,after filled with electric, the blue lights flashing

2.After fully charged, the headset has the best performance in used

The volume button

1.When in the call ,pressed short the button of volume + key ,the headset volume will increase the level, pressed long can increase the volume ,when added to the maximum, there will be "drops" prompt.

2. When listening to music, short press the volume + once times will jump to a song automatically, long press the volume + key, after hearing "du" sound, loosen yours finger the level of volume will increase, if long press the volume will increase continuous, when added to the maximum, there would be "drops" prompt.

3. When in call, pressed short the button of volume once , the headphones tends to decrease the volume level ,long press the volume decreased, when reduced to the minimum, there will be a "drops" prompt.

4. When listening to music, short press the volume - once times will jump to next song automatically, long press the volume - key, after hearing "du" sound, loosen yours finger the level of volume will reduce, if long press the volume will reduce continuous, when reduce to a minimum, there would be "drops" prompt.

The mode of LED

1. In charging , the red light bright long; After a full charge, the blue light on long

2. When the electric of battery is low, the red light flashing and has a voice prompt: "low battery"

3. In the state of pairing, The lights of red and blue alternating flashing.

4. When headphones in standby, the blue lights flashing slowly

The steps of Bluetooth headset connected to the phone

1. In the state of the headset turned off, pressed long the multifunction button for 6.5 seconds, The lights of red and blue alternating flashing .enter into a state of matching by search.

2. Open cell phone's Bluetooth , click search until mobile search to the headset models.

3. Click the headphone model to Connect ,when headphone connect is successful, the headset indicator light will show the interval for the blue light flashes lights, and has a voice prompt: "Bluetooth is connected".

Note: In pairs, in order to ensure successful matches .please try to keep the headset and mobile phone between in the range of 1 m ,

4. most mobile phones don't need enter password and can complete matching automatically, if want to enter the password ,please write 0000(original password is 0000)

here congratulations to you ,the connection is successful ,can listening to music and call now

The steps of mobile phone's one drag two connection

1. in the situation of Bluetooth headset turn off, pressing the multifunction button long about 6.5 seconds. when headset indicator light appear the red light alternates with blue light flashing, enter into the search status.

2. Opening number one mobile phone's Bluetooth and searching Bluetooth device to seek the name of headset model, click on the matching complete connection.

3. Pressing the multifunction button long about 3.5 seconds ,until the red light flash there time quickly, shut down the headset and turn off the Bluetooth of number one mobile phone.

4. Pressing the multifunction button long about 6.5 seconds once again until headset indicator light appear the red light alternates with blue light flashing, enter into the search status.

5. Opening number two mobile phone's Bluetooth and searching Bluetooth device to seek the name of headset model, click on the matching complete connection

6. Opening number one mobile phone's Bluetooth and connect the headset which had connected before, click to connect can be complete one drag two.

keeping use around the mobile phone. Bluetooth working the range of line without blocking between your mobile phone and headset as far as 10 meters . if exceed this range ,the tone quality may be decline or disconnect.

Learning how to reconnect :

1. For example when listening voice prompt Bluetooth disconnect ,please put the headset close to mobile phone on time ,your headset can try to connect automatically in a minute

2. If the headset did not try to reconnect, please press lightly the multifunction button once or through the menu of mobile phone's Bluetooth device to manually reconnect.

the function of voice prompt switch settings

This Bluetooth headset support Chinese or English voice prompt function, when need to switch the voice prompt , in the matching condition ,Double-click and press the multifunction button can be switch voice prompt.

note :two kinds of voice switch cycles

FCC Warnings:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This modular complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.