



TEST REPORT

APPLICANT : WIKO SAS

PRODUCT NAME : Smart phone

MODEL NAME : VHEM-E04

BRAND NAME : WIKO

FCC ID : 2AM86VHEM-E04

STANDARD(S) : FCC 47 CFR Part 2(2.1093)
IEEE 1528-2013

RECEIPT DATE : 2022-05-17

TEST DATE : 2022-05-18 to 2022-06-05

ISSUE DATE : 2022-06-16

Edited by :

Xie Yiyun

Xie Yiyun (Rapporteur)

Approved by :

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.cn](http://www.morlab.cn) E-mail: service@morlab.cn





DIRECTORY

1. SAR Results Summary	5
2. Technical Information	6
2.1. Applicant and Manufacturer Information	6
2.2. Equipment under Test (EUT) Description	6
2.3. Accessories Information	7
2.4. Environment of Test Site/Conditions	8
3. Specific Absorption Rate (SAR)	9
3.1. Introduction	9
3.2. SAR Definition	9
4. RF Exposure Limits	10
4.1. Uncontrolled Environment	10
4.2. Controlled Environment	10
5. Applied Reference Documents	11
6. SAR Measurement System	12
6.1. E-Field Probe	13
6.2. Data Acquisition Electronics (DAE)	14
6.3. Robot	14
6.4. Measurement Server	15
6.5. Light Beam Unit	15
6.6. Phantom	15
6.7. Device Holder	16
6.8. Data Storage and Evaluation	17
6.9. Test Equipment List	19
7. Tissue Simulating Liquids	21
8. SAR System Verification	23
8.1. Purpose of System Performance check	23



8.2. System Setup	23
8.3. Validation Results	24
9. EUT Testing Position	27
9.1. Handset Reference Points	27
9.2. Positioning for Cheek / Touch	28
9.3. Positioning for Ear / 15° Tilt	28
9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom	29
9.5. Body-worn Configurations	29
9.6. Hotspot Mode Exposure Position Conditions	30
10. Measurement Procedures	31
10.1. Spatial Peak SAR Evaluation	31
10.2. Power Reference Measurement	32
10.3. Area Scan Procedures	32
10.4. Zoom Scan Procedures	32
10.5. SAR Averaged Methods	33
10.6. Power Drift Monitoring	33
11. SAR Test Procedure	34
11.1. General Scan Requirements	34
11.2. Test Procedure	35
11.3. Description of Interpolation/Extrapolation Scheme	35
11.4. Wireless Router	35
12. SAR Test Configuration	37
13. Conducted Power List	48
14. Hotspot Mode Evaluation Procedure	48
15. Block Diagram of the Tests to be Performed	50
15.1. Head	50
15.2. Body	51
16. Test Results List	52



16.1. Test Guidance	52
16.2. Head SAR Data	55
16.3. Body SAR Data	62
16.4. Extremity SAR Assessment	70
17. Simultaneous Transmission Evaluation	71
17.1. Simultaneous Transmission Consideration	71
17.2. Simultaneous Transmission Analysis	72
18. Uncertainty Assessment	78
Annex A General Information	79
Annex B Test Setup Photos	
Annex C Plots of System Performance Check	
Annex D Plots of Maximum SAR Test Results	
Annex E Conducted Power	
Annex F DASY Calibration Certificate	

Changed History		
Version	Date	Reason for Change
1.0	2022-06-16	First edition

1. SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported SAR Summary>

Frequency Band		Highest SAR Summary			
		Head (Gap 0mm)	Body-worn (Gap 10mm)	Hotspot (Gap 10mm)	Extremity (Gap 0mm)
		1g SAR (W/kg)			10g SAR (W/kg)
GSM	GSM850	0.500	0.356	0.356	N/A
	GSM1900	0.604	0.553	0.553	N/A
WCDMA	WCDMA II	0.790	0.752	0.794	N/A
	WCDMA IV	0.611	0.605	0.609	N/A
	WCDMA V	0.740	0.504	0.504	N/A
LTE	LTE Band 2	0.763	0.681	0.686	N/A
	LTE Band 4	0.738	0.662	0.711	N/A
	LTE Band 5	0.659	0.386	0.386	N/A
	LTE Band 7	0.708	0.547	0.708	N/A
	LTE Band 13	0.379	0.294	0.294	N/A
	LTE Band 26	0.573	0.392	0.392	N/A
	LTE Band 38	0.694	0.286	0.425	N/A
WLAN	LTE Band 66	0.721	0.704	0.758	N/A
	2.4GHz WLAN	0.542	0.590	0.590	N/A
	5GHz WLAN	0.743	0.769	0.769	0.788
2.4GHz Band	Bluetooth	N/A	0.052	0.052	N/A

Highest Simultaneous Transmission SAR _{1g} (W/Kg):	1.258 W/kg	Limit(W/kg): 1.6 W/kg
---	------------	-----------------------

Note:

1. This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR part 1 (1.1310) and IEEE C95.1-1991), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.
2. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	WIKO SAS
Applicant Address:	132 Boulevard Michelet 13008 Marseille - France
Manufacturer:	WIKO SAS
Manufacturer Address:	132 Boulevard Michelet 13008 Marseille - France

2.2. Equipment under Test (EUT) Description

Product Name:	Smart phone
EUT IMEI:	352624710000655
Hardware Version:	V0.4
Software Version:	VHEM-V01.04-12.0-STS
Frequency Bands:	GSM 850: 824 MHz ~ 849 MHz GSM 1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz: 2412 MHz ~ 2462 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.3GHz: 5260 MHz ~ 5320 MHz WLAN 5.5GHz: 5500 MHz ~ 5720 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Modulation Mode:	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM



	LTE: QPSK, 16QAM, 64QAM 802.11b: DSSS 802.11a/g/n-HT20/HT40/ac-VHT20/40/80: OFDM BR+EDR: GFSK(1Mbps), π/4-DQPSK(2Mbps), 8-DPSK(3Mbps) Bluetooth LE: GFSK
Multi-slot Class:	GPRS: Multi-slot Class12 EDGE: Multi-slot Class 12
Operation Class:	Class B
Hotspot Mode:	Support
Transmit Type:	WWAN: 2Tx/2Rx WLAN: 1Tx/1Rx
Antenna Type:	WWAN: Fixed Internal Antenna WLAN: Monopole Antenna & IFA Antenna Bluetooth: IFA Antenna
SIM Cards Description:	SIM 1
	GSM+WCDMA+LTE
	SIM 2
	GSM+WCDMA+LTE

2.3. Accessories Information

Battery Type:	Manufacturer:	SCUD (Fujian) Electronics Co., Ltd.
	Brand Name:	N/A
	Model:	HB496590EFW-F
	Capacity:	4900 mAh
	Rated Voltage:	3.87 V

Note: For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



2.4. Environment of Test Site/Conditions

Normal Temperature (NT):	20-25 °C
Relative Humidity:	30-75 %
Air Pressure:	980-1020 hPa

Test Frequency:	GSM 850MHz/1900MHz WCDMA Band II/IV/V FDD-LTE Band 2/4/5/7/13/26/66 TDD-LTE Band 38 WLAN 2.4GHz WLAN 5GHz Bluetooth
Operation Mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) GSM 1900MHz Maximum output power(level 0) WCDMA Band II/IV/V (All Up Bits) FDD-LTE Band 2/4/5/7/13/26/66 (Maximum output power) TDD-LTE Band 38 (Maximum output power) WLAN 2.4GHz WLAN 5GHz Bluetooth

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. RF Exposure Limits

4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6 W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.0 W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08 W/kg

Note:

1. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
2. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Method Determination /Remark
FCC 47CFR Part 2(2.1093)	Radio Frequency Radiation Exposure Evaluation: Portable Devices	No deviation
IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	No deviation
KDB 447498 D01v06	General RF Exposure Guidance	No deviation
KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters	No deviation
KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz	No deviation
KDB 865664 D02v01r02	RF Exposure Reporting	No deviation
KDB 648474 D04v01r03	Handset SAR	No deviation
KDB 941225 D01v03r01	3G SAR MEAUREMENT PROCEDURES	No deviation
KDB 941225 D05v02r05	SAR Evaluation Consideration for LTE Devices	No deviation
KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities	No deviation

Note 1: The test item is not applicable.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

6. SAR Measurement System

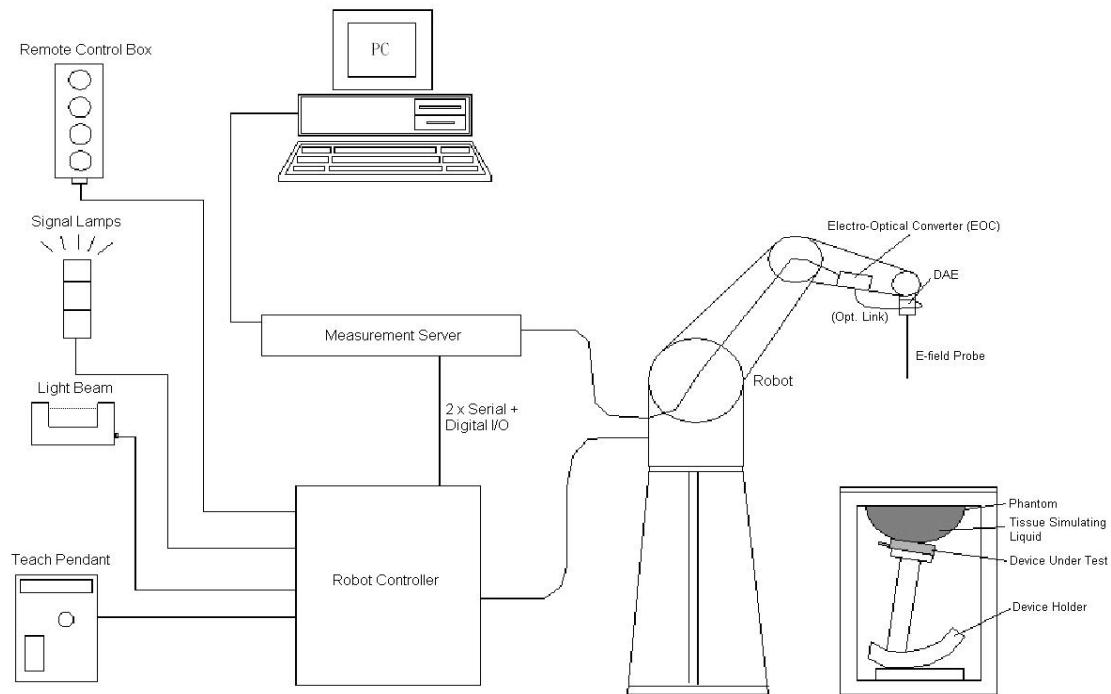


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.
- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

6.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<ES3DV3 Probe>

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

Fig 6.2 Photo of ES3DV3

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 6.3 Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics(DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability ± 0.035 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

6.6. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Head, Right Head, Flat Phantom	

Fig. 6.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

6.7. Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder

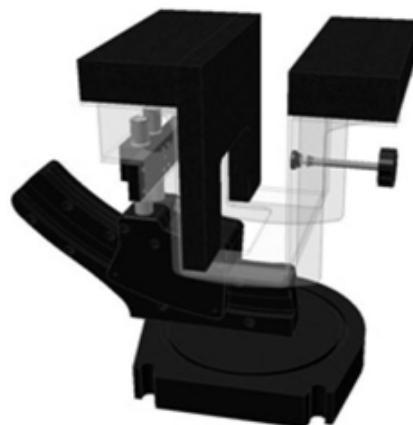


Fig 6.10 Laptop Extension Kit

6.8. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the



exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcpi}$$

With
 V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 $dcpi$ = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2}f^2}{f}$$

With
 V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field
 Probes ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [$\text{Siemens}/\text{m}$]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



6.9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial No./ SW Version	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V2	1173	2021.06.21	2024.06.20
SPEAG	900MHz System Validation Kit	D900V2	1d064	2021.12.17	2024.12.16
SPEAG	1800MHz System Validation Kit	D1800V2	2d158	2021.12.17	2024.12.16
SPEAG	2000MHz System Validation Kit	D2000V2	1050	2021.12.18	2024.12.17
SPEAG	2300MHz System Validation Kit	D2300V2	1107	2020.06.03	2023.06.02
SPEAG	2450MHz System Validation Kit	D2450V2	805	2021.12.17	2024.12.16
SPEAG	2600MHz System Validation Kit	D2600V2	1139	2021.06.25	2024.06.24
SPEAG	5000MHz System Validation Kit	D5GHzV2	1176	2021.12.19	2024.12.18
SPEAG	DOSIMETRIC ASSESSMENT SYSTEM	DASY52	52.10.4.1527	NCR	NCR
SPEAG	Dosimetric E-Field Probe	EX3DV4	3753	2021.07.26	2022.07.25
SPEAG	Dosimetric E-Field Probe	EX3DV4	7608	2022.01.12	2023.01.11
SPEAG	Data Acquisition Electronics	DAE4	480	2021.06.22	2022.06.21
SPEAG	Twin-SAM	QD000P40Ax	2020	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	165755	2022.02.14	2023.02.13
Anritsu	Network Emulator	MT8820C	6200985414	2021.10.21	2022.10.20
Agilent	Network Analyzer	E5071B	MY42404762	2022.03.01	2023.02.28
Speag	Dielectric Assessment KIT	DAK-3.5	1279	2021.10.18	2022.10.17
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2022.01.07	2023.01.06
Agilent	Power Senor	N8482A	MY41091706	2021.10.21	2022.10.20
Agilent	Power Meter	E4416A	MY45102093	2021.10.21	2022.10.20
Anritsu	Power Sensor	MA2411B	N/A	2021.10.21	2022.10.20
R&S	Power Meter	NRVD	101066	2021.10.21	2022.10.20
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation 1	351-218-010	N/A	NA	NA
R&S	Spectrum Analyzer	N9030A	MY54170556	2021.10.20	2022.10.19
KTJ	Thermo meter	TA298	N/A	2021.12.21	2022.12.20
SPEAG	Tissue Simulating Liquids		HBBL600-10000V6		24H



Note:

1. The calibration certificate of DASY can be referred to appendix F of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm, which is shown in Fig. 7.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.



Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG.

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



Note: Please refer to the validation results for dielectric parameters of each frequency band.

The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a SPEAG Dielectric Assessment KIT and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Frequency (MHz)	Tissue Type	Liquid Temp.(°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)	Date
750	HSL	22.1	0.911	0.89	2.36	± 5	2022.05.18
900	HSL	22.1	1.012	0.97	4.33	± 5	2022.05.20
1800	HSL	22.3	1.381	1.40	-1.36	± 5	2022.05.22
2000	HSL	22.3	1.428	1.40	2.00	± 5	2022.05.23
2300	HSL	22.2	1.640	1.67	-1.80	± 5	2022.05.25
2450	HSL	22.2	1.817	1.80	0.94	± 5	2022.05.27
2600	HSL	22.5	2.020	1.96	3.06	± 5	2022.05.29
5250	HSL	22.4	4.612	4.71	-2.08	± 5	2022.06.01
5600	HSL	22.4	5.120	5.07	0.99	± 5	2022.06.03
5750	HSL	22.4	5.360	5.22	2.68	± 5	2022.06.05

Frequency (MHz)	Tissue Type	Liquid Temp.(°C)	Permittivity (ϵ_r)	Permittivity Target (ϵ_r)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.1	41.879	41.90	-0.05	± 5	2022.05.18
900	HSL	22.1	42.606	41.50	2.67	± 5	2022.05.20
1800	HSL	22.3	40.584	40.00	1.46	± 5	2022.05.22
2000	HSL	22.3	39.953	40.00	-0.12	± 5	2022.05.23
2300	HSL	22.2	39.251	39.50	-0.63	± 5	2022.05.25
2450	HSL	22.2	38.801	39.20	-1.02	± 5	2022.05.27
2600	HSL	22.5	39.194	39.00	0.50	± 5	2022.05.29
5250	HSL	22.4	37.045	35.95	3.05	± 5	2022.06.01
5600	HSL	22.4	35.435	35.50	-0.18	± 5	2022.06.03
5750	HSL	22.4	36.158	37.00	-2.28	± 5	2022.06.05

8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1. Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2. System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 8.1 Photo of Dipole Setup

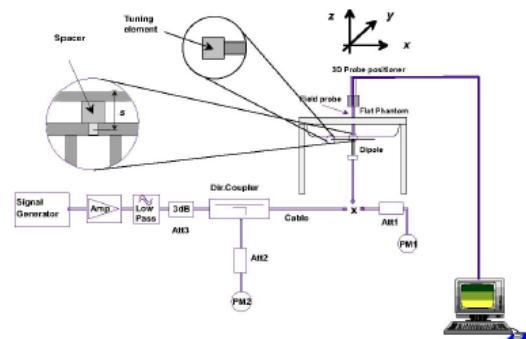


Fig 8.2 System Setup for System Evaluation



8.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10%.

<Validation Setup>

Frequency (MHz)	Tissue Type	Input Power(mW)	Dipole S/N	Probe S/N	DAE S/N
750	HSL	250	D750V3-1173	7608	480
900	HSL	250	D900V2-1d064	7608	480
1800	HSL	250	D1800V2-2d158	7608	480
2000	HSL	250	D2000V2-1050	7608	480
2300	HSL	250	D2300V2-1107	7608	480
2450	HSL	250	D2450V2-805	7608	480
2600	HSL	250	D2600V2-1139	7608	480
5250	HSL	100	D5GHzV2-1176-5250	7608	480
5600	HSL	100	D5GHzV2-1176-5600	7608	480
5750	HSL	100	D5GHzV2-1176-5750	3753	480

<System Validation>

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	CW Signal Validation		
				Sensitivity	Probe Linearity	Probe Isotropy
750	HSL	0.851	42.43	PASS	PASS	PASS
835	HSL	0.898	41.88	PASS	PASS	PASS
1750	HSL	1.386	39.91	PASS	PASS	PASS
1800	HSL	1.449	41.26	PASS	PASS	PASS
1900	HSL	1.435	39.65	PASS	PASS	PASS
2000	HSL	1.451	39.42	PASS	PASS	PASS
2300	HSL	1.764	38.99	PASS	PASS	PASS
2450	HSL	1.863	38.85	PASS	PASS	PASS
2600	HSL	1.973	38.58	PASS	PASS	PASS
3400	HSL	2.88	38.10	PASS	PASS	PASS
3500	HSL	2.91	37.90	PASS	PASS	PASS
3700	HSL	3.05	37.70	PASS	PASS	PASS
3900	HSL	3.15	37.50	PASS	PASS	PASS
4100	HSL	3.25	37.20	PASS	PASS	PASS
4200	HSL	3.34	37.00	PASS	PASS	PASS



4400	HSL	3.58	36.70	PASS	PASS	PASS
4600	HSL	3.70	36.60	PASS	PASS	PASS
4800	HSL	3.82	36.40	PASS	PASS	PASS
4900	HSL	3.96	36.20	PASS	PASS	PASS
5250	HSL	4.528	35.32	PASS	PASS	PASS
5600	HSL	4.905	34.89	PASS	PASS	PASS
5750	HSL	5.077	34.28	PASS	PASS	PASS

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	Modulation Signal Validation		
				Mod. Type	Duty Factor	PAR
750	HSL	0.851	42.43	N/A	N/A	N/A
835	HSL	0.898	41.88	GMSK	PASS	N/A
1750	HSL	1.386	39.91	N/A	N/A	N/A
1800	HSL	1.449	41.26	N/A	N/A	N/A
1900	HSL	1.435	39.65	GMSK	PASS	N/A
2000	HSL	1.451	39.42	GMSK	PASS	N/A
2300	HSL	1.764	38.99	OFDM	PASS	PASS
2450	HSL	1.863	38.85	OFDM	PASS	PASS
2600	HSL	1.973	38.58	TDD	PASS	N/A
3400	HSL	2.88	38.10	OFDM	PASS	PASS
3500	HSL	2.91	37.90	OFDM	PASS	PASS
3700	HSL	3.05	37.70	OFDM	PASS	PASS
3900	HSL	3.15	37.50	OFDM	PASS	PASS
4100	HSL	3.25	37.20	OFDM	PASS	PASS
4200	HSL	3.34	37.00	OFDM	PASS	PASS
4400	HSL	3.58	36.70	OFDM	PASS	PASS
4600	HSL	3.70	36.60	OFDM	PASS	PASS
4800	HSL	3.82	36.40	OFDM	PASS	PASS
4900	HSL	3.96	36.20	OFDM	PASS	PASS
5250	HSL	4.528	35.32	OFDM	N/A	PASS
5600	HSL	4.905	34.89	OFDM	N/A	PASS
5750	HSL	5.077	34.28	OFDM	N/A	PASS

**<Validation Results>**

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2022.05.18	750	HSL	250	2.13	8.26	8.52	3.15
2022.05.20	900	HSL	250	2.81	11.20	11.24	0.36
2022.05.22	1800	HSL	250	9.38	39.20	37.52	-4.29
2022.05.23	2000	HSL	250	10.42	41.60	41.68	0.19
2022.05.25	2300	HSL	250	11.70	48.40	46.8	-3.31
2022.05.27	2450	HSL	250	13.00	52.30	52	-0.57
2022.05.29	2600	HSL	250	14.09	54.00	56.36	4.37
2022.06.01	5250	HSL	100	7.89	76.70	78.9	2.87
2022.06.03	5600	HSL	100	8.31	80.80	83.1	2.85
2022.06.05	5750	HSL	100	8.24	78.70	82.4	4.70

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2022.05.18	750	HSL	250	1.38	5.45	5.52	1.28
2022.05.20	900	HSL	250	1.79	7.19	7.16	-0.42
2022.05.22	1800	HSL	250	4.75	20.10	19	-5.47
2022.05.23	2000	HSL	250	5.29	20.70	21.16	2.22
2022.05.25	2300	HSL	250	5.67	23.00	22.68	-1.39
2022.05.27	2450	HSL	250	6.11	23.90	24.44	2.26
2022.05.29	2600	HSL	250	6.24	24.50	24.96	1.88
2022.06.01	5250	HSL	100	2.23	22.10	22.3	0.90
2022.06.03	5600	HSL	100	2.43	23.30	24.3	4.29
2022.06.05	5750	HSL	100	2.31	22.50	23.1	2.67

Note: System checks the specific test data please see Annex C.

9. EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

9.1. Handset Reference Points

The vertical centre line passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

The horizontal line is perpendicular to the vertical centre line and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centre line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 9.1 Illustration for Cheek Position

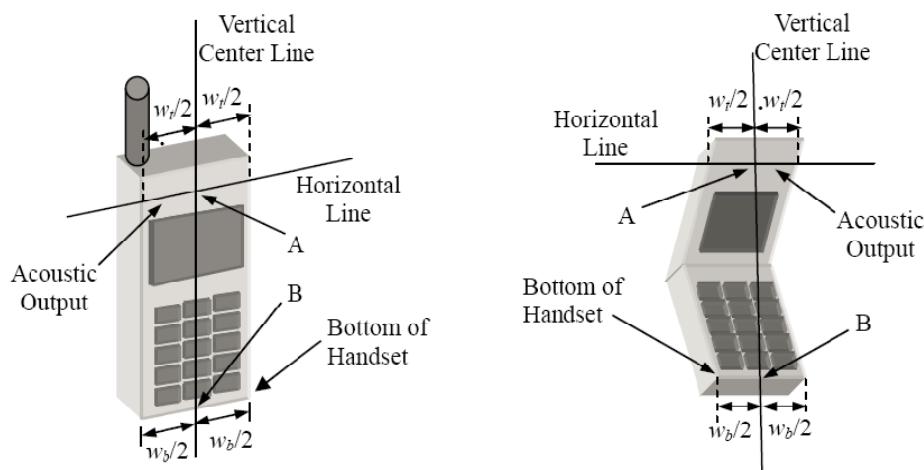


Fig. 9.2 Illustration for Handset Vertical and Horizontal Reference Lines

9.2. Positioning for Cheek / Touch

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

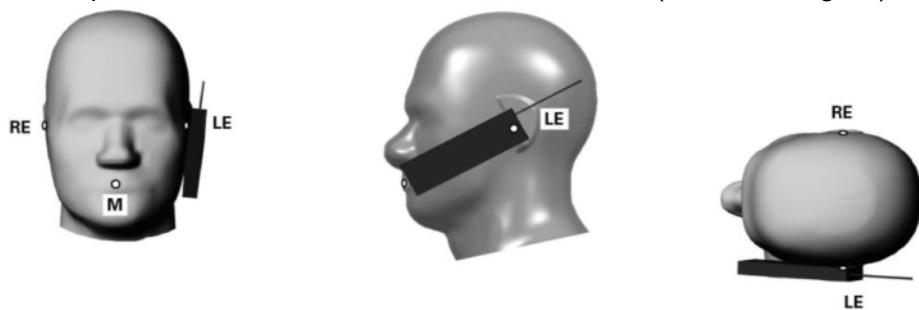


Fig 9.3 Illustration for Cheek Position

9.3. Positioning for Ear / 15° Tilt

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).

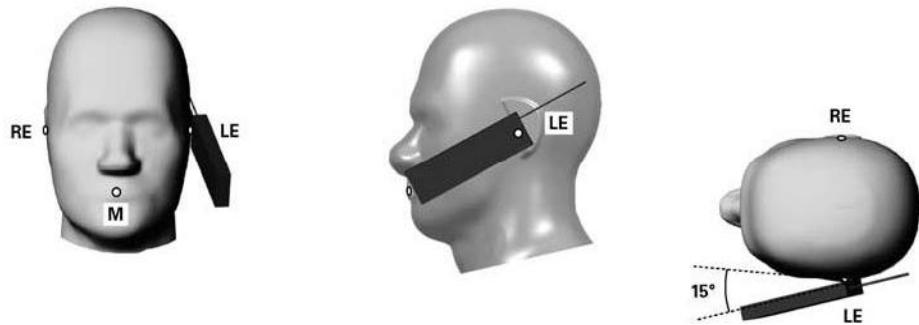


Fig 9.4 Illustration for Tilted Position

9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

9.5. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

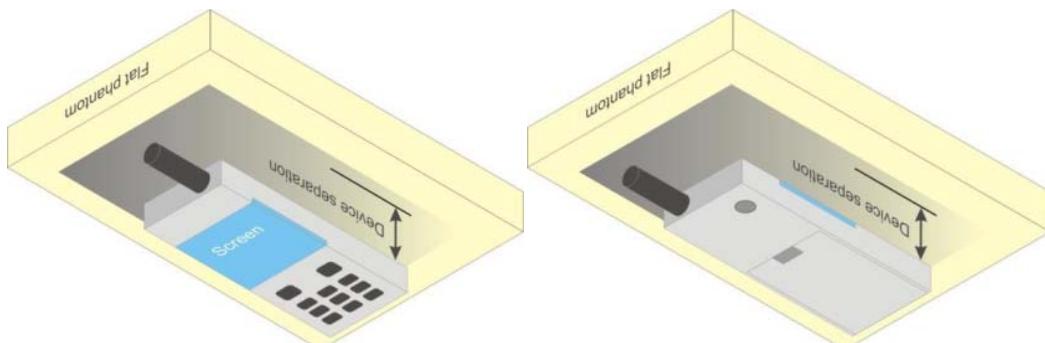


Fig 9.5 Illustration for Body Worn Position

9.6. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

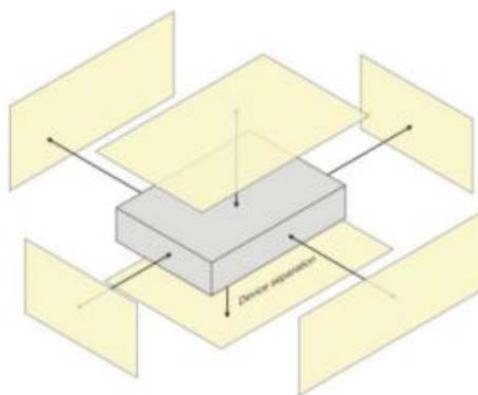


Fig 9.6 Illustration for Hotspot Position

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.

10.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1g and 10g.

10.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3. Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm^2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003.

10.4. Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side



length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

10.5. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.6. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. SAR Test Procedure

11.1. General Scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{ between } 1^{\text{st}} \text{ two points closest to phantom surface}$ $\Delta z_{\text{Zoom}}(n > 1): \text{ between subsequent points}$	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

11.2. Test Procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

11.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges,



REPORT No.: SZ22050016S01

determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.cn](http://www.morlab.cn) E-mail: service@morlab.cn



12. SAR Test Configuration

<GSM Mode>

A summary of these settings are illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5).

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

Timeslot consignations:

Remark:

1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

The duty cycle "x" of different time slots as below:

1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8

Based on the calculation formula:

Frame-averaged power = Burst averaged power + 10 log (x)

So,

Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot) - 9.03

Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots) - 6.02

Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots) - 4.26

Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) - 3.01

2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

No. of Slots:	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation:	1Up 4Down	2Up 3Down	3Up 2Down	4Up 1Down
Duty Cycle:	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor:	-9.03dB	-6.02dB	-4.26dB	-3.01dB

**<WCDMA Mode>**

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the power reduction triggered.

HSDPA Setup Configuration

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

**HSUPA Setup Configuration**

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:**Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM**

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.



DC-HSDPA Setup Configuration

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Inf. Bit Payload	120		
CRC Addition	120	24	CRC
Code Block Segmentation	144		
Turbo-Encoding (R=1/3)	432		12 Tail Bits
1st Rate Matching	432		
RV Selection	960		
Physical Channel Segmentation	960		

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

**<LTE Mode>****LTE Target MPR level**

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR Target	3GPP MPR (dB)
	1.4	3.0	5	10	15	20		
	MHz	MHz	MHz	MHz	MHz	MHz		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Note: The measurement result showed some difference from the target MPR level, due to expected 0.5dB measurement tolerance

LTE Bands

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4	3.0	5	10	15	20
	MHz	MHz	MHz	MHz	MHz	MHz
2	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	N/A	N/A
7	N/A	N/A	√	√	√	√
13	N/A	N/A	√	√	N/A	N/A
26	√	√	√	√	√	N/A
38	N/A	N/A	√	√	√	√
66	√	√	√	√	√	√

Note:

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation



are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 2 / 12 SAR test was covered by Band 25 / 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >>constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAMsignal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor



- e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used to perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- 11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$: $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz : $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$
- 12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/kg}$.
- 13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is $\leq 1.2 \text{ W/kg}$, SAR testing with a headset connected to the handset is not required.

<WLAN 2.4GHz>

- 1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - b. When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that position using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.
- 2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is $> 1.2 \text{ W/kg}$. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test configuration Procedures should be followed.
- 3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.
- 4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output



power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.

5. A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.
6. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.

<WLAN 5GHz>

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
2. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
3. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50.
4. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is $> 1.2 \text{ W/kg}$, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

B) U-NII-2C and U-NII-3 Bands



The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures. When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

1. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
2. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
3. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is



determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

5. The channel closest to mid-band frequency is selected for SAR measurement.
6. For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

D) SAR Test Requirements for OFDM configurations


When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction V applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

13. Conducted Power List

Remark: The output power of WWAN/WLAN/BT was recorded in the annex E of this report.

14. Hotspot Mode Evaluation Procedure

➤ EUT Antenna Location

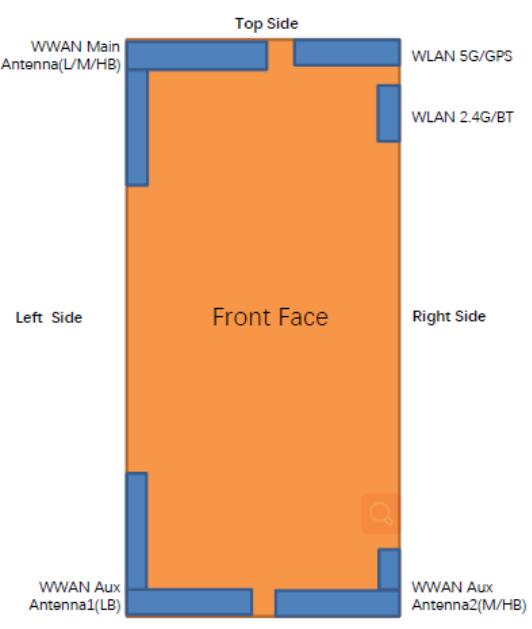	WWAN Main Antenna(L/M/HB): TX/RX GSM 850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/7/13/26/38/66
	WWAN Aux Antenna1(LB): TX/RX GSM 850, WCDMA Band V, LTE Band 5/13/26
	WWAN Aux Antenna 2(M/HB): TX/RX GSM 1900, WCDMA Band II/IV, LTE Band 2/4/7/38/66
	WLAN 5G+GPS Antenna: TX/RX WLAN 5GHz
	WLAN 2.4G/BT Antenna: TX/RX WLAN 2.4GHz/Bluetooth

➤ EUT Antenna Distance

Antenna Location	Front	Back	Left	Right	Top	Bottom
WWAN Main Antenna	<5mm	<5mm	<5mm	>25mm	<25mm	>25mm
WWAN Aux Antenna1	<5mm	<5mm	<5mm	>25mm	>25mm	<25mm
WWAN Aux Antenna 2	<5mm	<5mm	>25mm	<5mm	>25mm	<25mm
WLAN 5G+GPS Antenna	<5mm	<5mm	>25mm	<5mm	<25mm	>25mm
WLAN 2.4G/BT Antenna	<5mm	<5mm	>25mm	<5mm	<25mm	>25mm

**➤ Hotspot Evaluation**


Assessment		Hotspot side for SAR Test distance: 10mm					
Antennas		Front	Back	Left	Right	Top	Bottom
WWAN Main Antenna	Yes	Yes	Yes	No	Yes	No	
WWAN Aux Antenna1	Yes	Yes	Yes	No	No	Yes	
WWAN Aux Antenna 2	Yes	Yes	No	Yes	No	Yes	
WLAN 5G+GPS Antenna	Yes	Yes	No	Yes	Yes	No	
WLAN 2.4G/BT Antenna	Yes	Yes	No	Yes	Yes	No	

Note :

1. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
2. Head/Body-worn/Hotspot mode SAR assessments are required.
3. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. Block Diagram of the Tests to be Performed

15.1. Head

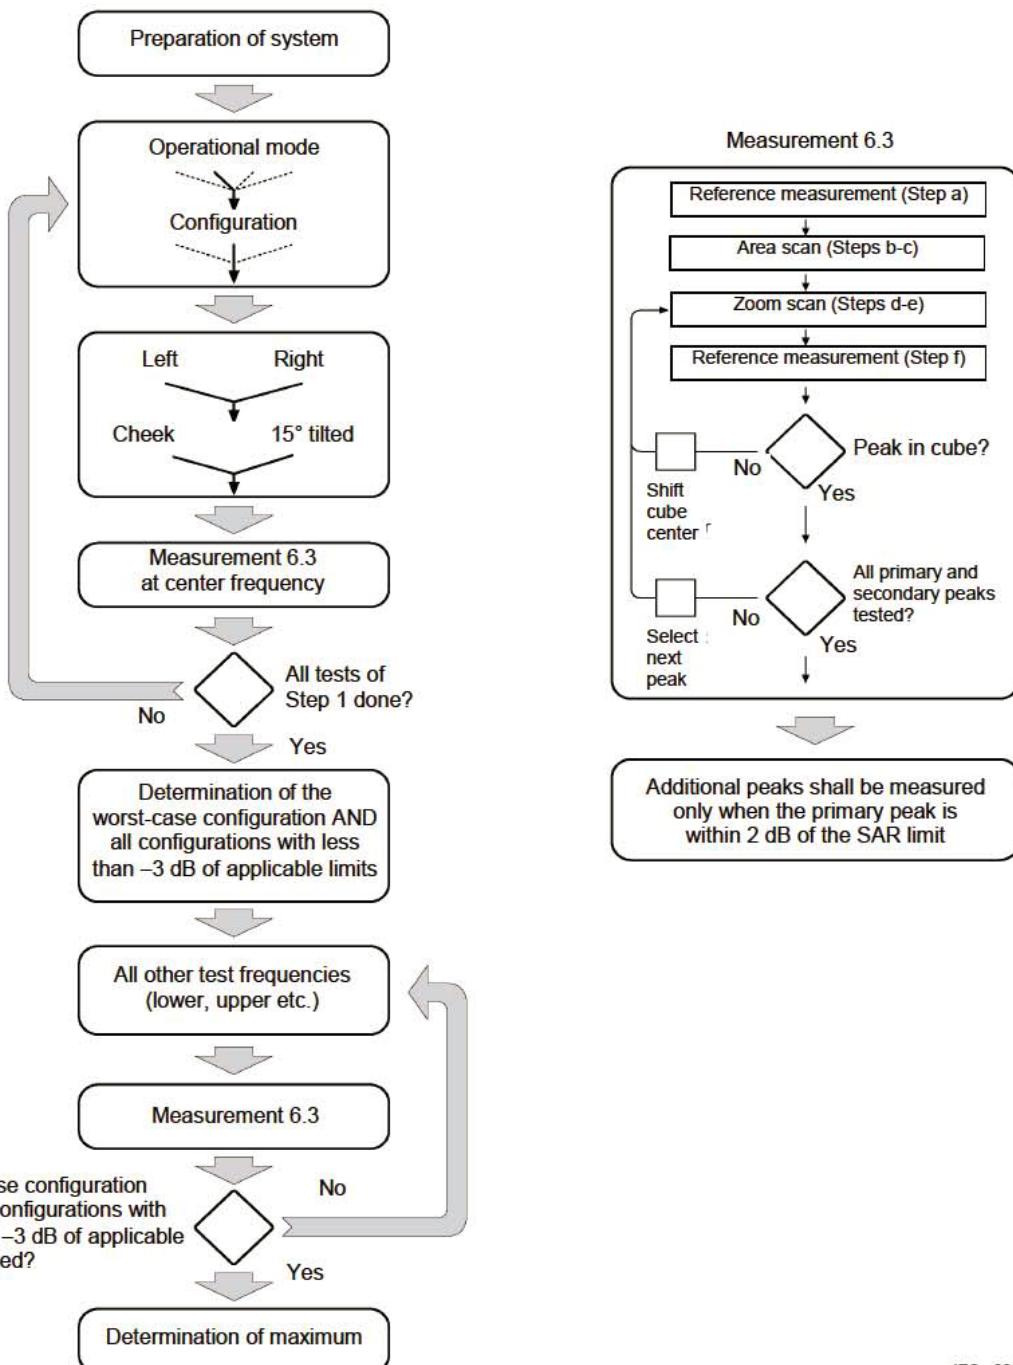

IEC 228/05

15.2. Body

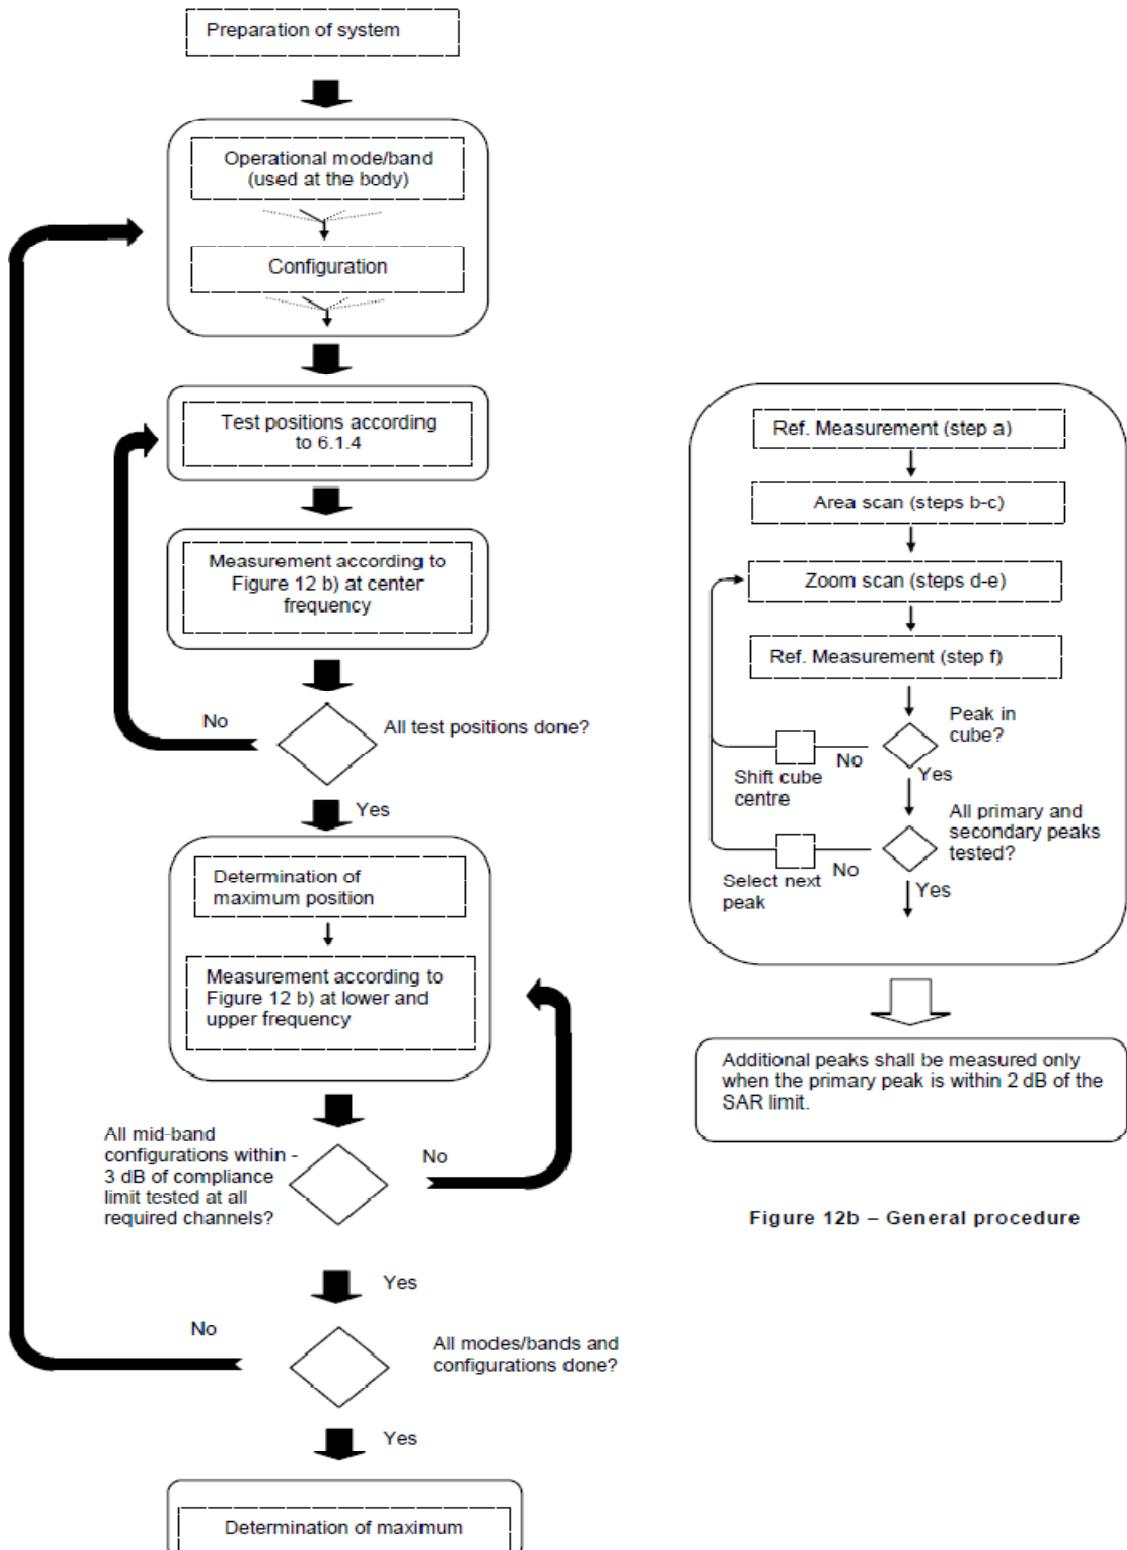


Figure 12b – General procedure



16. Test Results List

16.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor.
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - a. $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$
 - b. $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c. $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/kg}$.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is $\leq 1.2 \text{ W/kg}$, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic



transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.

7. For this device, different conducted power level will be applied automatically according to the user conditions.
8. The power level applied as below:

Transmission Condition	Wireless System	Antenna	Head	Body
Standalone	GSM850	Main ANT	Reduced Power Level 1	Full Power
		Aux ANT 1	Full Power	Full Power
	GSM1900	Main ANT	Reduced Power Level 1	Full Power
		Aux ANT 2	Full Power	Full Power
	WCDMA II	Main ANT	Reduced Power Level 1	Reduced Power Level 2
		Aux ANT 2	Full Power	Full Power
	WCDMA IV	Main ANT	Reduced Power Level 1	Reduced Power Level 2
		Aux ANT 2	Full Power	Full Power
	WCDMA V	Main ANT	Reduced Power Level 1	Full Power
		Aux ANT 1	Full Power	Full Power
	LTE Band 2	Main ANT	Reduced Power Level 1	Reduced Power Level 2
		Aux ANT 2	Full Power	Full Power
	LTE Band 4	Main ANT	Reduced Power Level 1	Reduced Power Level 2
		Aux ANT 2	Full Power	Full Power
	LTE Band 5	Main ANT	Reduced Power Level 1	Full Power
		Aux ANT 1	Full Power	Full Power
	LTE Band 7	Main ANT	Reduced Power Level 1	Reduced Power Level 2
		Aux ANT 2	Full Power	Full Power
	LTE Band 13	Main ANT	Reduced Power Level 1	Full Power
		Aux ANT 1	Full Power	Full Power
	LTE Band	Main ANT	Reduced Power Level 1	Full Power



	26	Aux ANT 1	Full Power	Full Power
LTE Band 38	Main ANT	Reduced Power Level 1	Full Power	Full Power
	Aux ANT 2	Full Power	Full Power	Full Power
LTE Band 66	Main ANT	Reduced Power Level 1	Reduced Power Level 2	Reduced Power Level 2
	Aux ANT 2	Full Power	Full Power	Full Power
WLAN2.4G	WLAN 2.4G/BT ANT	Reduced Power Level 1	Reduced Power Level 2	Reduced Power Level 2
WLAN5.2G	WLAN 5G ANT	Reduced Power Level 1	Reduced Power Level 2	Reduced Power Level 2
WLAN5.3G	WLAN 5G ANT	Reduced Power Level 1	Reduced Power Level 2	Reduced Power Level 2
WLAN5.5G	WLAN 5G ANT	Reduced Power Level 1	Reduced Power Level 2	Reduced Power Level 2
WLAN5.8G	WLAN 5G ANT	Reduced Power Level 1	Reduced Power Level 2	Reduced Power Level 2
Bluetooth	WLAN 2.4G/BT ANT	N/A		Full Power

Transmission Condition	Wireless System	Antenna	Head	Body
Simultaneous	WLAN2.4G	WLAN 2.4G/BT ANT	Reduced Power Level 3	Reduced Power Level 4
	WLAN5.2G	WLAN 5G ANT	Reduced Power Level 3	Reduced Power Level 4
	WLAN5.3G	WLAN 5G ANT	Reduced Power Level 3	Reduced Power Level 4
	WLAN5.5G	WLAN 5G ANT	Reduced Power Level 3	Reduced Power Level 4
	WLAN5.8G	WLAN 5G ANT	Reduced Power Level 3	Reduced Power Level 4



16.2. Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 for Main ANT								
1#	GPRS 850(2 TX slots)	Right Cheek	189	28.69	30.00	1.352	0.370	0.500
	GPRS 850(2 TX slots)	Right Tilt	189	28.69	30.00	1.352	0.280	0.379
	GPRS 850(2 TX slots)	Left Cheek	189	28.69	30.00	1.352	0.225	0.304
	GPRS 850(2 TX slots)	Left Tilt	189	28.69	30.00	1.352	0.187	0.253
Full Power for Aux ANT 1								
	GPRS 850(2 TX slots)	Right Cheek	189	30.74	32.00	1.337	0.060	0.080
	GPRS 850(2 TX slots)	Right Tilt	189	30.74	32.00	1.337	0.015	0.020
	GPRS 850(2 TX slots)	Left Cheek	189	30.74	32.00	1.337	0.022	0.029
	GPRS 850(2 TX slots)	Left Tilt	189	30.74	32.00	1.337	0.012	0.016
Reduced Power Level 1 for Main ANT								
2#	GPRS 1900(2 TX slots)	Right Cheek	661	24.09	25.00	1.233	0.490	0.604
	GPRS 1900(2 TX slots)	Right Tilt	661	24.09	25.00	1.233	0.320	0.395
	GPRS 1900(2 TX slots)	Left Cheek	661	24.09	25.00	1.233	0.270	0.333
	GPRS 1900(2 TX slots)	Left Tilt	661	24.09	25.00	1.233	0.305	0.376
Full Power for Aux ANT 2								
	GPRS 1900(2 TX slots)	Right Cheek	661	28.07	29.00	1.239	0.058	0.072
	GPRS 1900(2 TX slots)	Right Tilt	661	28.07	29.00	1.239	0.023	0.028
	GPRS 1900(2 TX slots)	Left Cheek	661	28.07	29.00	1.239	0.015	0.019
	GPRS 1900(2 TX slots)	Left Tilt	661	28.07	29.00	1.239	0.013	0.016

➤ WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 for Main ANT								
3#	Band II/RMC 12.2Kbps	Right Cheek	9400	17.31	18.00	1.172	0.674	0.790
	Band II/RMC 12.2Kbps	Right Tilt	9400	17.31	18.00	1.172	0.640	0.750
	Band II/RMC 12.2Kbps	Left Cheek	9400	17.31	18.00	1.172	0.372	0.436
	Band II/RMC 12.2Kbps	Left Tilt	9400	17.31	18.00	1.172	0.457	0.536
Full Power for Aux ANT 2								
	Band II/RMC 12.2Kbps	Right Cheek	9400	23.28	24.00	1.180	0.101	0.119
	Band II/RMC 12.2Kbps	Right Tilt	9400	23.28	24.00	1.180	0.093	0.110



	Band II/RMC 12.2Kbps	Left Cheek	9400	23.28	24.00	1.180	0.056	0.066
	Band II/RMC 12.2Kbps	Left Tilt	9400	23.28	24.00	1.180	0.076	0.090
Reduced Power Level 1 for Main ANT								
4#	Band IV/RMC 12.2Kbps	Right Cheek	1413	17.03	18.00	1.250	0.489	0.611
	Band IV/RMC 12.2Kbps	Right Tilt	1413	17.03	18.00	1.250	0.447	0.559
	Band IV/RMC 12.2Kbps	Left Cheek	1413	17.03	18.00	1.250	0.294	0.368
	Band IV/RMC 12.2Kbps	Left Tilt	1413	17.03	18.00	1.250	0.375	0.469
Full Power for Aux ANT 2								
	Band IV/RMC 12.2Kbps	Right Cheek	1413	23.04	24.00	1.247	0.108	0.135
	Band IV/RMC 12.2Kbps	Right Tilt	1413	23.04	24.00	1.247	0.086	0.107
	Band IV/RMC 12.2Kbps	Left Cheek	1413	23.04	24.00	1.247	0.145	0.181
	Band IV/RMC 12.2Kbps	Left Tilt	1413	23.04	24.00	1.247	0.040	0.050
Reduced Power Level 1 for Main ANT								
5#	Band V/RMC 12.2Kbps	Right Cheek	4182	21.21	22.00	1.199	0.617	0.740
	Band V/RMC 12.2Kbps	Right Tilt	4182	21.21	22.00	1.199	0.461	0.553
	Band V/RMC 12.2Kbps	Left Cheek	4182	21.21	22.00	1.199	0.380	0.456
	Band V/RMC 12.2Kbps	Left Tilt	4182	21.21	22.00	1.199	0.341	0.409
Full Power for Aux ANT 1								
	Band V/RMC 12.2Kbps	Right Cheek	4182	23.17	24.00	1.211	0.097	0.117
	Band V/RMC 12.2Kbps	Right Tilt	4182	23.17	24.00	1.211	0.051	0.062
	Band V/RMC 12.2Kbps	Left Cheek	4182	23.17	24.00	1.211	0.076	0.092
	Band V/RMC 12.2Kbps	Left Tilt	4182	23.17	24.00	1.211	0.038	0.046

➤ LTE QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 for Main ANT								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	17.42	18.50	1.282	0.576	0.739
6#	LTE Band 2/1RB#0 20M	Right Tilt	18900	17.42	18.50	1.282	0.595	0.763
	LTE Band 2/1RB#0 20M	Left Cheek	18900	17.42	18.50	1.282	0.334	0.428
	LTE Band 2/1RB#0 20M	Left Tilt	18900	17.42	18.50	1.282	0.429	0.550
	LTE Band 2/50RB#0 20M	Right Cheek	18900	16.54	17.50	1.247	0.438	0.546
	LTE Band 2/50RB#0 20M	Right Tilt	18900	16.54	17.50	1.247	0.452	0.564
	LTE Band 2/50RB#0 20M	Left Cheek	18900	16.54	17.50	1.247	0.254	0.317
	LTE Band 2/50RB#0 20M	Left Tilt	18900	16.54	17.50	1.247	0.326	0.407
Full Power for Aux ANT 2								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	22.93	24.00	1.279	0.086	0.110
	LTE Band 2/1RB#0 20M	Right Tilt	18900	22.93	24.00	1.279	0.070	0.090



	LTE Band 2/1RB#0 20M	Left Cheek	18900	22.93	24.00	1.279	0.044	0.056
	LTE Band 2/1RB#0 20M	Left Tilt	18900	22.93	24.00	1.279	0.066	0.084
	LTE Band 2/50RB#0 20M	Right Cheek	18900	22.08	23.00	1.236	0.073	0.090
	LTE Band 2/50RB#0 20M	Right Tilt	18900	22.08	23.00	1.236	0.066	0.082
	LTE Band 2/50RB#0 20M	Left Cheek	18900	22.08	23.00	1.236	0.037	0.046
	LTE Band 2/50RB#0 20M	Left Tilt	18900	22.08	23.00	1.236	0.057	0.070

Reduced Power Level 1 for Main ANT

	LTE Band 4/1RB#0 20M	Right Cheek	20175	18.35	19.50	1.303	0.529	0.689
7#	LTE Band 4/1RB#0 20M	Right Tilt	20175	18.35	19.50	1.303	0.566	0.738
	LTE Band 4/1RB#0 20M	Left Cheek	20175	18.35	19.50	1.303	0.319	0.416
	LTE Band 4/1RB#0 20M	Left Tilt	20175	18.35	19.50	1.303	0.415	0.541
	LTE Band 4/50RB#0 20M	Right Cheek	20175	17.29	18.50	1.321	0.413	0.545
	LTE Band 4/50RB#0 20M	Right Tilt	20175	17.29	18.50	1.321	0.441	0.583
	LTE Band 4/50RB#0 20M	Left Cheek	20175	17.29	18.50	1.321	0.249	0.329
	LTE Band 4/50RB#0 20M	Left Tilt	20175	17.29	18.50	1.321	0.324	0.428

Full Power for Aux ANT 2

	LTE Band 4/1RB#0 20M	Right Cheek	20175	22.88	24.00	1.294	0.083	0.108
	LTE Band 4/1RB#0 20M	Right Tilt	20175	22.88	24.00	1.294	0.069	0.089
	LTE Band 4/1RB#0 20M	Left Cheek	20175	22.88	24.00	1.294	0.071	0.092
	LTE Band 4/1RB#0 20M	Left Tilt	20175	22.88	24.00	1.294	0.035	0.045
	LTE Band 4/50RB#0 20M	Right Cheek	20175	21.85	23.00	1.303	0.071	0.093
	LTE Band 4/50RB#0 20M	Right Tilt	20175	21.85	23.00	1.303	0.060	0.078
	LTE Band 4/50RB#0 20M	Left Cheek	20175	21.85	23.00	1.303	0.105	0.137
	LTE Band 4/50RB#0 20M	Left Tilt	20175	21.85	23.00	1.303	0.032	0.042

Reduced Power Level 1 for Main ANT

8#	LTE Band 5/1RB#0 10M	Right Cheek	20525	20.88	22.00	1.294	0.509	0.659
	LTE Band 5/1RB#0 10M	Right Tilt	20525	20.88	22.00	1.294	0.401	0.519
	LTE Band 5/1RB#0 10M	Left Cheek	20525	20.88	22.00	1.294	0.319	0.412
	LTE Band 5/1RB#0 10M	Left Tilt	20525	20.88	22.00	1.294	0.237	0.306
	LTE Band 5/25RB#0 10M	Right Cheek	20525	19.96	21.00	1.271	0.417	0.530
	LTE Band 5/25RB#0 10M	Right Tilt	20525	19.96	21.00	1.271	0.329	0.418
	LTE Band 5/25RB#0 10M	Left Cheek	20525	19.96	21.00	1.271	0.261	0.332
	LTE Band 5/25RB#0 10M	Left Tilt	20525	19.96	21.00	1.271	0.194	0.246

Full Power for Aux ANT 1

	LTE Band 5/1RB#0 10M	Right Cheek	20525	22.91	24.00	1.285	0.081	0.103
	LTE Band 5/1RB#0 10M	Right Tilt	20525	22.91	24.00	1.285	0.039	0.050
	LTE Band 5/1RB#0 10M	Left Cheek	20525	22.91	24.00	1.285	0.066	0.085
	LTE Band 5/1RB#0 10M	Left Tilt	20525	22.91	24.00	1.285	0.032	0.041



	LTE Band 5/25RB#0 10M	Right Cheek	20525	21.99	23.00	1.262	0.067	0.085
	LTE Band 5/25RB#0 10M	Right Tilt	20525	21.99	23.00	1.262	0.034	0.043
	LTE Band 5/25RB#0 10M	Left Cheek	20525	21.99	23.00	1.262	0.055	0.069
	LTE Band 5/25RB#0 10M	Left Tilt	20525	21.99	23.00	1.262	0.026	0.033
Reduced Power Level 1 for Main ANT								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	18.89	20.00	1.291	0.419	0.541
	LTE Band 7/1RB#0 20M	Right Tilt	21100	18.89	20.00	1.291	0.430	0.555
	LTE Band 7/1RB#0 20M	Left Cheek	21100	18.89	20.00	1.291	0.419	0.541
9#	LTE Band 7/1RB#0 20M	Left Tilt	21100	18.89	20.00	1.291	0.548	0.708
	LTE Band 7/50RB#0 20M	Right Cheek	21100	17.87	19.00	1.297	0.306	0.397
	LTE Band 7/50RB#0 20M	Right Tilt	21100	17.87	19.00	1.297	0.314	0.407
	LTE Band 7/50RB#0 20M	Left Cheek	21100	17.87	19.00	1.297	0.306	0.397
	LTE Band 7/50RB#0 20M	Left Tilt	21100	17.87	19.00	1.297	0.400	0.519
Full Power for Aux ANT 2								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	22.89	24.00	1.291	0.152	0.196
	LTE Band 7/1RB#0 20M	Right Tilt	21100	22.89	24.00	1.291	0.120	0.155
	LTE Band 7/1RB#0 20M	Left Cheek	21100	22.89	24.00	1.291	0.104	0.134
	LTE Band 7/1RB#0 20M	Left Tilt	21100	22.89	24.00	1.291	0.101	0.130
	LTE Band 7/50RB#0 20M	Right Cheek	21100	21.85	23.00	1.303	0.134	0.175
	LTE Band 7/50RB#0 20M	Right Tilt	21100	21.85	23.00	1.303	0.102	0.133
	LTE Band 7/50RB#0 20M	Left Cheek	21100	21.85	23.00	1.303	0.085	0.111
	LTE Band 7/50RB#0 20M	Left Tilt	21100	21.85	23.00	1.303	0.083	0.108
Reduced Power Level 1 for Main ANT								
10#	LTE Band 13/1RB#0 10M	Right Cheek	23230	21.48	22.50	1.265	0.300	0.379
	LTE Band 13/1RB#0 10M	Right Tilt	23230	21.48	22.50	1.265	0.263	0.333
	LTE Band 13/1RB#0 10M	Left Cheek	23230	21.48	22.50	1.265	0.255	0.323
	LTE Band 13/1RB#0 10M	Left Tilt	23230	21.48	22.50	1.265	0.170	0.215
	LTE Band 13/25RB#0 10M	Right Cheek	23230	20.44	21.50	1.276	0.228	0.291
	LTE Band 13/25RB#0 10M	Right Tilt	23230	20.44	21.50	1.276	0.228	0.291
	LTE Band 13/25RB#0 10M	Left Cheek	23230	20.44	21.50	1.276	0.194	0.247
	LTE Band 13/25RB#0 10M	Left Tilt	23230	20.44	21.50	1.276	0.129	0.165
Full Power for Aux ANT 1								
	LTE Band 13/1RB#0 10M	Right Cheek	23230	22.92	24.00	1.282	0.098	0.126
	LTE Band 13/1RB#0 10M	Right Tilt	23230	22.92	24.00	1.282	0.066	0.085
	LTE Band 13/1RB#0 10M	Left Cheek	23230	22.92	24.00	1.282	0.078	0.100
	LTE Band 13/1RB#0 10M	Left Tilt	23230	22.92	24.00	1.282	0.043	0.055
	LTE Band 13/25RB#0 10M	Right Cheek	23230	21.88	23.00	1.294	0.075	0.097
	LTE Band 13/25RB#0 10M	Right Tilt	23230	21.88	23.00	1.294	0.053	0.069



	LTE Band 13/25RB#0 10M	Left Cheek	23230	21.88	23.00	1.294	0.063	0.082
	LTE Band 13/25RB#0 10M	Left Tilt	23230	21.88	23.00	1.294	0.035	0.045
Reduced Power Level 1 for Main ANT								
11#	LTE Band 26/1RB#0 15M	Right Cheek	26865	20.96	22.00	1.271	0.451	0.573
	LTE Band 26/1RB#0 15M	Right Tilt	26865	20.96	22.00	1.271	0.383	0.487
	LTE Band 26/1RB#0 15M	Left Cheek	26865	20.96	22.00	1.271	0.311	0.395
	LTE Band 26/1RB#0 15M	Left Tilt	26865	20.96	22.00	1.271	0.235	0.298
	LTE Band 26/36RB#0 15M	Right Cheek	26865	20.00	21.00	1.259	0.350	0.441
	LTE Band 26/36RB#0 15M	Right Tilt	26865	20.00	21.00	1.259	0.292	0.368
	LTE Band 26/36RB#0 15M	Left Cheek	26865	20.00	21.00	1.259	0.248	0.312
	LTE Band 26/36RB#0 15M	Left Tilt	26865	20.00	21.00	1.259	0.188	0.237
Full Power for Aux ANT 1								
	LTE Band 26/1RB#0 15M	Right Cheek	26865	22.97	24.00	1.268	0.064	0.081
	LTE Band 26/1RB#0 15M	Right Tilt	26865	22.97	24.00	1.268	0.032	0.041
	LTE Band 26/1RB#0 15M	Left Cheek	26865	22.97	24.00	1.268	0.049	0.062
	LTE Band 26/1RB#0 15M	Left Tilt	26865	22.97	24.00	1.268	0.025	0.032
	LTE Band 26/36RB#0 15M	Right Cheek	26865	22.02	23.00	1.253	0.052	0.065
	LTE Band 26/36RB#0 15M	Right Tilt	26865	22.02	23.00	1.253	0.029	0.036
	LTE Band 26/36RB#0 15M	Left Cheek	26865	22.02	23.00	1.253	0.047	0.059
	LTE Band 26/36RB#0 15M	Left Tilt	26865	22.02	23.00	1.253	0.023	0.029
Reduced Power Level 1 for Main ANT								
	LTE Band 38/1RB#0 20M	Right Cheek	38000	21.35	22.50	1.303	0.359	0.471
	LTE Band 38/1RB#0 20M	Right Tilt	38000	21.35	22.50	1.303	0.395	0.518
	LTE Band 38/1RB#0 20M	Left Cheek	38000	21.35	22.50	1.303	0.427	0.560
12#	LTE Band 38/1RB#0 20M	Left Tilt	38000	21.35	22.50	1.303	0.529	0.694
	LTE Band 38/50RB#0 20M	Right Cheek	38000	20.31	21.50	1.315	0.255	0.337
	LTE Band 38/50RB#0 20M	Right Tilt	38000	20.31	21.50	1.315	0.280	0.371
	LTE Band 38/50RB#0 20M	Left Cheek	38000	20.31	21.50	1.315	0.303	0.401
	LTE Band 38/50RB#0 20M	Left Tilt	38000	20.31	21.50	1.315	0.376	0.497
Full Power for Aux ANT 2								
	LTE Band 38/1RB#0 20M	Right Cheek	38000	22.37	23.50	1.297	0.044	0.058
	LTE Band 38/1RB#0 20M	Right Tilt	38000	22.37	23.50	1.297	0.033	0.044
	LTE Band 38/1RB#0 20M	Left Cheek	38000	22.37	23.50	1.297	0.035	0.046
	LTE Band 38/1RB#0 20M	Left Tilt	38000	22.37	23.50	1.297	0.027	0.035
	LTE Band 38/50RB#0 20M	Right Cheek	38000	21.28	22.50	1.324	0.033	0.044
	LTE Band 38/50RB#0 20M	Right Tilt	38000	21.28	22.50	1.324	0.025	0.033
	LTE Band 38/50RB#0 20M	Left Cheek	38000	21.28	22.50	1.324	0.028	0.037
	LTE Band 38/50RB#0 20M	Left Tilt	38000	21.28	22.50	1.324	0.020	0.027



Reduced Power Level 1 for Main ANT								
Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
13#	LTE Band 66/1RB#0 20M	Right Cheek	132322	17.95	19.00	1.274	0.566	0.721
	LTE Band 66/1RB#0 20M	Right Tilt	132322	17.95	19.00	1.274	0.527	0.671
	LTE Band 66/1RB#0 20M	Left Cheek	132322	17.95	19.00	1.274	0.332	0.423
	LTE Band 66/1RB#0 20M	Left Tilt	132322	17.95	19.00	1.274	0.389	0.495
	LTE Band 66/50RB#0 20M	Right Cheek	132322	16.96	18.00	1.271	0.413	0.525
	LTE Band 66/50RB#0 20M	Right Tilt	132322	16.96	18.00	1.271	0.385	0.489
	LTE Band 66/50RB#0 20M	Left Cheek	132322	16.96	18.00	1.271	0.242	0.308
	LTE Band 66/50RB#0 20M	Left Tilt	132322	16.96	18.00	1.271	0.284	0.361
Full Power for Aux ANT 2								
	LTE Band 66/1RB#0 20M	Right Cheek	132322	22.96	24.00	1.271	0.087	0.110
	LTE Band 66/1RB#0 20M	Right Tilt	132322	22.96	24.00	1.271	0.059	0.075
	LTE Band 66/1RB#0 20M	Left Cheek	132322	22.96	24.00	1.271	0.068	0.086
	LTE Band 66/1RB#0 20M	Left Tilt	132322	22.96	24.00	1.271	0.039	0.050
	LTE Band 66/50RB#0 20M	Right Cheek	132322	21.98	23.00	1.265	0.320	0.405
	LTE Band 66/50RB#0 20M	Right Tilt	132322	21.98	23.00	1.265	0.059	0.075
	LTE Band 66/50RB#0 20M	Left Cheek	132322	21.98	23.00	1.265	0.104	0.132
	LTE Band 66/50RB#0 20M	Left Tilt	132322	21.98	23.00	1.265	0.032	0.040

➤ WLAN Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 for WLAN 2.4G/BT ANT								
	WLAN2.4GHz/802.11b	Right Cheek	1	15.66	17.00	1.361	0.144	0.197
	WLAN2.4GHz/802.11b	Right Tilt	1	15.66	17.00	1.361	0.100	0.137
14#	WLAN2.4GHz/802.11b	Left Cheek	1	15.66	17.00	1.361	0.396	0.542
	WLAN2.4GHz/802.11b	Left Tilt	1	15.66	17.00	1.361	0.236	0.322
Reduced Power Level 3 for Simultaneous Transmission								
	WLAN2.4GHz/802.11b	Right Cheek	1	13.07	14.50	1.390	0.071	0.099
	WLAN2.4GHz/802.11b	Right Tilt	1	13.07	14.50	1.390	0.054	0.075
	WLAN2.4GHz/802.11b	Left Cheek	1	13.07	14.50	1.390	0.206	0.288
	WLAN2.4GHz/802.11b	Left Tilt	1	13.07	14.50	1.390	0.123	0.171
Reduced Power Level 1 for WLAN 5G ANT								
	WLAN5.2GHz/802.11a	Right Cheek	44	9.62	11.00	1.374	0.248	0.351
	WLAN5.2GHz/802.11a	Right Tilt	44	9.62	11.00	1.374	0.355	0.503
	WLAN5.2GHz/802.11a	Left Cheek	44	9.62	11.00	1.374	0.386	0.548
15#	WLAN5.2GHz/802.11a	Left Tilt	44	9.62	11.00	1.374	0.466	0.661
Reduced Power Level 3 for Simultaneous Transmission								



	WLAN5.2GHz/802.11a	Right Cheek	44	7.69	9.00	1.352	0.207	0.289
	WLAN5.2GHz/802.11a	Right Tilt	44	7.69	9.00	1.352	0.301	0.420
	WLAN5.2GHz/802.11a	Left Cheek	44	7.69	9.00	1.352	0.291	0.406
	WLAN5.2GHz/802.11a	Left Tilt	44	7.69	9.00	1.352	0.360	0.502
Reduced Power Level 1 for WLAN 5G ANT								
	WLAN5.3GHz/802.11a	Right Cheek	52	9.13	10.50	1.371	0.225	0.318
	WLAN5.3GHz/802.11a	Right Tilt	52	9.13	10.50	1.371	0.301	0.426
	WLAN5.3GHz/802.11a	Left Cheek	52	9.13	10.50	1.371	0.322	0.456
17#	WLAN5.3GHz/802.11a	Left Tilt	52	9.13	10.50	1.371	0.525	0.743
Reduced Power Level 3 for Simultaneous Transmission								
	WLAN5.3GHz/802.11a	Right Cheek	52	6.83	8.50	1.469	0.127	0.193
	WLAN5.3GHz/802.11a	Right Tilt	52	6.83	8.50	1.469	0.177	0.268
	WLAN5.3GHz/802.11a	Left Cheek	52	6.83	8.50	1.469	0.168	0.255
	WLAN5.3GHz/802.11a	Left Tilt	52	6.83	8.50	1.469	0.295	0.447
Reduced Power Level 1 for WLAN 5G ANT								
	WLAN5.5GHz/802.11a	Right Cheek	100	7.62	9.00	1.374	0.275	0.390
	WLAN5.5GHz/802.11a	Right Tilt	100	7.62	9.00	1.374	0.210	0.298
	WLAN5.5GHz/802.11a	Left Cheek	100	7.62	9.00	1.374	0.349	0.495
18#	WLAN5.5GHz/802.11a	Left Tilt	100	7.62	9.00	1.374	0.476	0.675
Reduced Power Level 3 for Simultaneous Transmission								
	WLAN5.5GHz/802.11a	Right Cheek	100	6.37	8.00	1.455	0.152	0.229
	WLAN5.5GHz/802.11a	Right Tilt	100	6.37	8.00	1.455	0.116	0.175
	WLAN5.5GHz/802.11a	Left Cheek	100	6.37	8.00	1.455	0.193	0.290
	WLAN5.5GHz/802.11a	Left Tilt	100	6.37	8.00	1.455	0.264	0.397
Reduced Power Level 1 for WLAN 5G ANT								
	WLAN5.8GHz/802.11a	Right Cheek	149	5.87	7.50	1.455	0.218	0.328
	WLAN5.8GHz/802.11a	Right Tilt	149	5.87	7.50	1.455	0.282	0.423
	WLAN5.8GHz/802.11a	Left Cheek	149	5.87	7.50	1.455	0.356	0.535
19#	WLAN5.8GHz/802.11a	Left Tilt	149	5.87	7.50	1.455	0.461	0.692
Reduced Power Level 3 for Simultaneous Transmission								
	WLAN5.8GHz/802.11a	Right Cheek	149	5.01	6.50	1.409	0.144	0.210
	WLAN5.8GHz/802.11a	Right Tilt	149	5.01	6.50	1.409	0.186	0.271
	WLAN5.8GHz/802.11a	Left Cheek	149	5.01	6.50	1.409	0.235	0.342
	WLAN5.8GHz/802.11a	Left Tilt	149	5.01	6.50	1.409	0.302	0.439

Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required



when the measured SAR is $\geq 0.8 \text{ W/kg}$.

3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8 \text{ W/kg}$.
4. Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
7. For TDD-LTE, the reported SAR should be scaled with the duty cycle scaling factor 1.006.
8. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.005, 5G WLAN 802.11a with 1.032.

16.3. Body SAR Data

➤ GSM Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power for Main ANT								
	GPRS 850(2 TX slots)	Front Side	189	30.74	32.00	1.337	0.090	0.120
20#	GPRS 850(2 TX slots)	Back Side	189	30.74	32.00	1.337	0.266	0.356
	GPRS 850(2 TX slots)	Left Side	189	30.74	32.00	1.337	0.093	0.125
	GPRS 850(2 TX slots)	Top Side	189	30.74	32.00	1.337	0.159	0.213
Full Power for Aux ANT 1								
	GPRS 850(2 TX slots)	Front Side	189	30.74	32.00	1.337	0.080	0.107
	GPRS 850(2 TX slots)	Back Side	189	30.74	32.00	1.337	0.149	0.199
	GPRS 850(2 TX slots)	Left Side	189	30.74	32.00	1.337	0.124	0.166
	GPRS 850(2 TX slots)	Bottom Side	189	30.74	32.00	1.337	0.099	0.132
Full Power for Main ANT								
	GPRS 1900(2 TX slots)	Front Side	661	28.07	29.00	1.239	0.330	0.409
21#	GPRS 1900(2 TX slots)	Back Side	661	28.07	29.00	1.239	0.446	0.553
	GPRS 1900(2 TX slots)	Left Side	661	28.07	29.00	1.239	0.174	0.216
	GPRS 1900(2 TX slots)	Top Side	661	28.07	29.00	1.239	0.400	0.496
Full Power for Aux ANT 2								
	GPRS 1900(2 TX slots)	Front Side	661	28.07	29.00	1.239	0.145	0.180
	GPRS 1900(2 TX slots)	Back Side	661	28.07	29.00	1.239	0.261	0.323



	GPRS 1900(2 TX slots)	Right Side	661	28.07	29.00	1.239	0.096	0.119
	GPRS 1900(2 TX slots)	Bottom Side	661	28.07	29.00	1.239	0.176	0.218

➤ WCDMA Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 2 for Main ANT								
	Band II/RMC 12.2Kbps	Front Side	9400	21.18	22.00	1.208	0.465	0.562
22#	Band II/RMC 12.2Kbps	Back Side	9400	21.18	22.00	1.208	0.623	0.752
	Band II/RMC 12.2Kbps	Left Side	9400	21.18	22.00	1.208	0.022	0.027
23#	Band II/RMC 12.2Kbps	Top Side	9400	21.18	22.00	1.208	0.657	0.794
Full Power for Aux ANT 2								
	Band II/RMC 12.2Kbps	Front Side	9400	23.28	24.00	1.180	0.237	0.280
	Band II/RMC 12.2Kbps	Back Side	9400	23.28	24.00	1.180	0.419	0.495
	Band II/RMC 12.2Kbps	Right Side	9400	23.28	24.00	1.180	0.165	0.195
	Band II/RMC 12.2Kbps	Bottom Side	9400	23.28	24.00	1.180	0.506	0.597
Reduced Power Level 2 for Main ANT								
	Band IV/RMC 12.2Kbps	Front Side	1413	20.95	22.00	1.274	0.329	0.419
24#	Band IV/RMC 12.2Kbps	Back Side	1413	20.95	22.00	1.274	0.475	0.605
	Band IV/RMC 12.2Kbps	Left Side	1413	20.95	22.00	1.274	0.023	0.029
25#	Band IV/RMC 12.2Kbps	Top Side	1413	20.95	22.00	1.274	0.478	0.609
Full Power for Aux ANT 2								
	Band IV/RMC 12.2Kbps	Front Side	1413	23.04	24.00	1.247	0.226	0.282
	Band IV/RMC 12.2Kbps	Back Side	1413	23.04	24.00	1.247	0.416	0.519
	Band IV/RMC 12.2Kbps	Right Side	1413	23.04	24.00	1.247	0.218	0.272
	Band IV/RMC 12.2Kbps	Bottom Side	1413	23.04	24.00	1.247	0.352	0.439
Full Power for Main ANT								
	Band V/RMC 12.2Kbps	Front Side	4182	23.17	24.00	1.211	0.233	0.282
26#	Band V/RMC 12.2Kbps	Back Side	4182	23.17	24.00	1.211	0.416	0.504
	Band V/RMC 12.2Kbps	Left Side	4182	23.17	24.00	1.211	0.121	0.146
	Band V/RMC 12.2Kbps	Top Side	4182	23.17	24.00	1.211	0.157	0.190
Full Power for Aux ANT 1								
	Band V/RMC 12.2Kbps	Front Side	4182	23.17	24.00	1.211	0.116	0.140
	Band V/RMC 12.2Kbps	Back Side	4182	23.17	24.00	1.211	0.251	0.304
	Band V/RMC 12.2Kbps	Left Side	4182	23.17	24.00	1.211	0.113	0.137
	Band V/RMC 12.2Kbps	Bottom Side	4182	23.17	24.00	1.211	0.161	0.195



➤ LTE QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 2 for Main ANT								
	LTE Band 2/1RB#0 20M	Front Side	18900	20.92	22.00	1.282	0.406	0.521
27#	LTE Band 2/1RB#0 20M	Back Side	18900	20.92	22.00	1.282	0.531	0.681
	LTE Band 2/1RB#0 20M	Left Side	18900	20.92	22.00	1.282	0.203	0.260
28#	LTE Band 2/1RB#0 20M	Top Side	18900	20.92	22.00	1.282	0.535	0.686
	LTE Band 2/50RB#0 20M	Front Side	18900	20.06	21.00	1.242	0.300	0.372
	LTE Band 2/50RB#0 20M	Back Side	18900	20.06	21.00	1.242	0.385	0.478
	LTE Band 2/50RB#0 20M	Left Side	18900	20.06	21.00	1.242	0.148	0.184
	LTE Band 2/50RB#0 20M	Top Side	18900	20.06	21.00	1.242	0.395	0.490
Full Power for Aux ANT 2								
	LTE Band 2/1RB#0 20M	Front Side	18900	22.93	24.00	1.279	0.200	0.256
	LTE Band 2/1RB#0 20M	Back Side	18900	22.93	24.00	1.279	0.372	0.476
	LTE Band 2/1RB#0 20M	Right Side	18900	22.93	24.00	1.279	0.143	0.183
	LTE Band 2/1RB#0 20M	Bottom Side	18900	22.93	24.00	1.279	0.318	0.407
	LTE Band 2/50RB#0 20M	Front Side	18900	22.08	23.00	1.236	0.146	0.180
	LTE Band 2/50RB#0 20M	Back Side	18900	22.08	23.00	1.236	0.272	0.336
	LTE Band 2/50RB#0 20M	Right Side	18900	22.08	23.00	1.236	0.104	0.129
	LTE Band 2/50RB#0 20M	Bottom Side	18900	22.08	23.00	1.236	0.232	0.287
Reduced Power Level 2 for Main ANT								
	LTE Band 4/1RB#0 20M	Front Side	20175	21.87	23.00	1.297	0.353	0.458
29#	LTE Band 4/1RB#0 20M	Back Side	20175	21.87	23.00	1.297	0.510	0.662
	LTE Band 4/1RB#0 20M	Left Side	20175	21.87	23.00	1.297	0.204	0.265
30#	LTE Band 4/1RB#0 20M	Top Side	20175	21.87	23.00	1.297	0.548	0.711
	LTE Band 4/50RB#0 20M	Front Side	20175	20.79	22.00	1.321	0.269	0.355
	LTE Band 4/50RB#0 20M	Back Side	20175	20.79	22.00	1.321	0.388	0.513
	LTE Band 4/50RB#0 20M	Left Side	20175	20.79	22.00	1.321	0.157	0.207
	LTE Band 4/50RB#0 20M	Top Side	20175	20.79	22.00	1.321	0.420	0.555
Full Power for Aux ANT 2								
	LTE Band 4/1RB#0 20M	Front Side	20175	22.88	24.00	1.294	0.205	0.265
	LTE Band 4/1RB#0 20M	Back Side	20175	22.88	24.00	1.294	0.346	0.448
	LTE Band 4/1RB#0 20M	Right Side	20175	22.88	24.00	1.294	0.193	0.250
	LTE Band 4/1RB#0 20M	Bottom Side	20175	22.88	24.00	1.294	0.402	0.520
	LTE Band 4/50RB#0 20M	Front Side	20175	21.85	23.00	1.303	0.150	0.195
	LTE Band 4/50RB#0 20M	Back Side	20175	21.85	23.00	1.303	0.253	0.329
	LTE Band 4/50RB#0 20M	Right Side	20175	21.85	23.00	1.303	0.141	0.184



	LTE Band 4/50RB#0 20M	Bottom Side	20175	21.85	23.00	1.303	0.293	0.382
Full Power for Main ANT								
	LTE Band 5/1RB#0 10M	Front Side	20525	22.91	24.00	1.285	0.189	0.243
31#	LTE Band 5/1RB#0 10M	Back Side	20525	22.91	24.00	1.285	0.300	0.386
	LTE Band 5/1RB#0 10M	Left Side	20525	22.91	24.00	1.285	0.136	0.175
	LTE Band 5/1RB#0 10M	Top Side	20525	22.91	24.00	1.285	0.215	0.276
	LTE Band 5/25RB#0 10M	Front Side	20525	21.99	23.00	1.262	0.180	0.227
	LTE Band 5/25RB#0 10M	Back Side	20525	21.99	23.00	1.262	0.262	0.331
	LTE Band 5/25RB#0 10M	Left Side	20525	21.99	23.00	1.262	0.112	0.141
	LTE Band 5/25RB#0 10M	Top Side	20525	21.99	23.00	1.262	0.155	0.195
Full Power for Aux ANT 1								
	LTE Band 5/1RB#0 10M	Front Side	20525	22.91	24.00	1.285	0.110	0.141
	LTE Band 5/1RB#0 10M	Back Side	20525	22.91	24.00	1.285	0.225	0.289
	LTE Band 5/1RB#0 10M	Left Side	20525	22.91	24.00	1.285	0.083	0.107
	LTE Band 5/1RB#0 10M	Bottom Side	20525	22.91	24.00	1.285	0.125	0.161
	LTE Band 5/25RB#0 10M	Front Side	20525	21.99	23.00	1.262	0.076	0.095
	LTE Band 5/25RB#0 10M	Back Side	20525	21.99	23.00	1.262	0.197	0.249
	LTE Band 5/25RB#0 10M	Left Side	20525	21.99	23.00	1.262	0.077	0.097
	LTE Band 5/25RB#0 10M	Bottom Side	20525	21.99	23.00	1.262	0.098	0.124
Reduced Power Level 2 for Main ANT								
	LTE Band 7/1RB#0 20M	Front Side	21100	21.35	22.50	1.303	0.268	0.349
32#	LTE Band 7/1RB#0 20M	Back Side	21100	21.35	22.50	1.303	0.420	0.547
	LTE Band 7/1RB#0 20M	Left Side	21100	21.35	22.50	1.303	0.164	0.214
33#	LTE Band 7/1RB#0 20M	Top Side	21100	21.35	22.50	1.303	0.543	0.708
	LTE Band 7/50RB#0 20M	Front Side	21100	20.34	21.50	1.306	0.197	0.257
	LTE Band 7/50RB#0 20M	Back Side	21100	20.34	21.50	1.306	0.310	0.405
	LTE Band 7/50RB#0 20M	Left Side	21100	20.34	21.50	1.306	0.120	0.157
	LTE Band 7/50RB#0 20M	Top Side	21100	20.34	21.50	1.306	0.411	0.537
Full Power for Aux ANT 2								
	LTE Band 7/1RB#0 20M	Front Side	21100	22.89	24.00	1.291	0.214	0.276
	LTE Band 7/1RB#0 20M	Back Side	21100	22.89	24.00	1.291	0.295	0.381
	LTE Band 7/1RB#0 20M	Right Side	21100	22.89	24.00	1.291	0.211	0.272
	LTE Band 7/1RB#0 20M	Bottom Side	21100	22.89	24.00	1.291	0.139	0.179
	LTE Band 7/50RB#0 20M	Front Side	21100	21.85	23.00	1.303	0.167	0.218
	LTE Band 7/50RB#0 20M	Back Side	21100	21.85	23.00	1.303	0.230	0.300
	LTE Band 7/50RB#0 20M	Right Side	21100	21.85	23.00	1.303	0.165	0.214
	LTE Band 7/50RB#0 20M	Bottom Side	21100	21.85	23.00	1.303	0.108	0.141
Full Power for Main ANT								



	LTE Band 13/1RB#0 10M	Front Side	23230	22.92	24.00	1.282	0.135	0.173
34#	LTE Band 13/1RB#0 10M	Back Side	23230	22.92	24.00	1.282	0.229	0.294
	LTE Band 13/1RB#0 10M	Left Side	23230	22.92	24.00	1.282	0.200	0.256
	LTE Band 13/1RB#0 10M	Top Side	23230	22.92	24.00	1.282	0.169	0.217
	LTE Band 13/25RB#0 10M	Front Side	23230	21.88	23.00	1.294	0.120	0.155
	LTE Band 13/25RB#0 10M	Back Side	23230	21.88	23.00	1.294	0.185	0.239
	LTE Band 13/25RB#0 10M	Left Side	23230	21.88	23.00	1.294	0.178	0.230
	LTE Band 13/25RB#0 10M	Top Side	23230	21.88	23.00	1.294	0.125	0.162
Full Power for Aux ANT 1								
	LTE Band 13/1RB#0 10M	Front Side	23230	22.92	24.00	1.282	0.085	0.109
	LTE Band 13/1RB#0 10M	Back Side	23230	22.92	24.00	1.282	0.151	0.194
	LTE Band 13/1RB#0 10M	Left Side	23230	22.92	24.00	1.282	0.090	0.115
	LTE Band 13/1RB#0 10M	Bottom Side	23230	22.92	24.00	1.282	0.102	0.131
	LTE Band 13/25RB#0 10M	Front Side	23230	21.88	23.00	1.294	0.062	0.081
	LTE Band 13/25RB#0 10M	Back Side	23230	21.88	23.00	1.294	0.140	0.181
	LTE Band 13/25RB#0 10M	Left Side	23230	21.88	23.00	1.294	0.079	0.102
	LTE Band 13/25RB#0 10M	Bottom Side	23230	21.88	23.00	1.294	0.077	0.100
Full Power for Main ANT								
	LTE Band 26/1RB#0 15M	Front Side	26865	22.97	24.00	1.268	0.165	0.209
35#	LTE Band 26/1RB#0 15M	Back Side	26865	22.97	24.00	1.268	0.309	0.392
	LTE Band 26/1RB#0 15M	Left Side	26865	22.97	24.00	1.268	0.108	0.137
	LTE Band 26/1RB#0 15M	Top Side	26865	22.97	24.00	1.268	0.173	0.219
	LTE Band 26/36RB#0 15M	Front Side	26865	22.02	23.00	1.253	0.154	0.193
	LTE Band 26/36RB#0 15M	Back Side	26865	22.02	23.00	1.253	0.277	0.347
	LTE Band 26/36RB#0 15M	Left Side	26865	22.02	23.00	1.253	0.082	0.103
	LTE Band 26/36RB#0 15M	Top Side	26865	22.02	23.00	1.253	0.131	0.165
Full Power for Aux ANT 1								
	LTE Band 26/1RB#0 15M	Front Side	26865	22.97	24.00	1.268	0.090	0.114
	LTE Band 26/1RB#0 15M	Back Side	26865	22.97	24.00	1.268	0.153	0.194
	LTE Band 26/1RB#0 15M	Left Side	26865	22.97	24.00	1.268	0.067	0.085
	LTE Band 26/1RB#0 15M	Bottom Side	26865	22.97	24.00	1.268	0.100	0.127
	LTE Band 26/36RB#0 15M	Front Side	26865	22.02	23.00	1.253	0.067	0.083
	LTE Band 26/36RB#0 15M	Back Side	26865	22.02	23.00	1.253	0.157	0.197
	LTE Band 26/36RB#0 15M	Left Side	26865	22.02	23.00	1.253	0.071	0.089
	LTE Band 26/36RB#0 15M	Bottom Side	26865	22.02	23.00	1.253	0.083	0.104
Full Power for Main ANT								
	LTE Band 38/1RB#0 20M	Front Side	38000	22.37	23.50	1.297	0.186	0.243
36#	LTE Band 38/1RB#0 20M	Back Side	38000	22.37	23.50	1.297	0.219	0.286



	LTE Band 38/1RB#0 20M	Left Side	38000	22.37	23.50	1.297	0.134	0.175
37#	LTE Band 38/1RB#0 20M	Top Side	38000	22.37	23.50	1.297	0.326	0.425
	LTE Band 38/50RB#0 20M	Front Side	38000	21.28	22.50	1.324	0.140	0.191
	LTE Band 38/50RB#0 20M	Back Side	38000	21.28	22.50	1.324	0.164	0.223
	LTE Band 38/50RB#0 20M	Left Side	38000	21.28	22.50	1.324	0.101	0.137
	LTE Band 38/50RB#0 20M	Top Side	38000	21.28	22.50	1.324	0.245	0.331

Full Power for Aux ANT 2

	LTE Band 38/1RB#0 20M	Front Side	38000	22.37	23.50	1.297	0.063	0.082
	LTE Band 38/1RB#0 20M	Back Side	38000	22.37	23.50	1.297	0.096	0.125
	LTE Band 38/1RB#0 20M	Right Side	38000	22.37	23.50	1.297	0.043	0.056
	LTE Band 38/1RB#0 20M	Bottom Side	38000	22.37	23.50	1.297	0.053	0.069
	LTE Band 38/50RB#0 20M	Front Side	38000	21.28	22.50	1.324	0.045	0.059
	LTE Band 38/50RB#0 20M	Back Side	38000	21.28	22.50	1.324	0.068	0.091
	LTE Band 38/50RB#0 20M	Right Side	38000	21.28	22.50	1.324	0.030	0.040
	LTE Band 38/50RB#0 20M	Bottom Side	38000	21.28	22.50	1.324	0.037	0.050

Reduced Power Level 2 for Main ANT

	LTE Band 66/1RB#0 20M	Front Side	132322	21.42	22.50	1.282	0.383	0.491
38#	LTE Band 66/1RB#0 20M	Back Side	132322	21.42	22.50	1.282	0.549	0.704
	LTE Band 66/1RB#0 20M	Left Side	132322	21.42	22.50	1.282	0.203	0.260
39#	LTE Band 66/1RB#0 20M	Top Side	132322	21.42	22.50	1.282	0.591	0.758
	LTE Band 66/50RB#0 20M	Front Side	132322	20.39	21.50	1.291	0.291	0.376
	LTE Band 66/50RB#0 20M	Back Side	132322	20.39	21.50	1.291	0.415	0.536
	LTE Band 66/50RB#0 20M	Left Side	132322	20.39	21.50	1.291	0.155	0.200
	LTE Band 66/50RB#0 20M	Top Side	132322	20.39	21.50	1.291	0.452	0.584

Full Power for Aux ANT 2

	LTE Band 66/1RB#0 20M	Front Side	132322	22.96	24.00	1.271	0.221	0.281
	LTE Band 66/1RB#0 20M	Back Side	132322	22.96	24.00	1.271	0.371	0.471
	LTE Band 66/1RB#0 20M	Right Side	132322	22.96	24.00	1.271	0.204	0.259
	LTE Band 66/1RB#0 20M	Bottom Side	132322	22.96	24.00	1.271	0.410	0.521
	LTE Band 66/50RB#0 20M	Front Side	132322	21.98	23.00	1.265	0.161	0.204
	LTE Band 66/50RB#0 20M	Back Side	132322	21.98	23.00	1.265	0.271	0.343
	LTE Band 66/50RB#0 20M	Right Side	132322	21.98	23.00	1.265	0.149	0.188
	LTE Band 66/50RB#0 20M	Bottom Side	132322	21.98	23.00	1.265	0.299	0.379



➤ WLAN Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 2 for WLAN 2.4G/BT ANT								
	WLAN2.4GHz/802.11b	Front Side	1	15.66	17.00	1.361	0.107	0.146
40#	WLAN2.4GHz/802.11b	Back Side	1	15.66	17.00	1.361	0.431	0.590
	WLAN2.4GHz/802.11b	Right Side	1	15.66	17.00	1.361	0.321	0.439
	WLAN2.4GHz/802.11b	Top Side	1	15.66	17.00	1.361	0.084	0.114
Reduced Power Level 4 for simultaneous transmission								
	WLAN2.4GHz/802.11b	Front Side	1	14.48	16.00	1.419	0.075	0.107
	WLAN2.4GHz/802.11b	Back Side	1	14.48	16.00	1.419	0.251	0.358
	WLAN2.4GHz/802.11b	Right Side	1	14.48	16.00	1.419	0.193	0.275
	WLAN2.4GHz/802.11b	Top Side	1	14.48	16.00	1.419	0.050	0.072
Reduced Power Level 2 for WLAN 5G ANT								
	WLAN5.2GHz/802.11a	Front Side	44	12.52	14.00	1.406	0.243	0.353
41#	WLAN5.2GHz/802.11a	Back Side	44	12.52	14.00	1.406	0.474	0.688
	WLAN5.2GHz/802.11a	Right Side	44	12.52	14.00	1.406	0.198	0.287
42#	WLAN5.2GHz/802.11a	Top Side	44	12.52	14.00	1.406	0.476	0.691
Reduced Power Level 4 for simultaneous transmission								
	WLAN5.2GHz/802.11a	Front Side	44	10.98	12.50	1.419	0.177	0.259
	WLAN5.2GHz/802.11a	Back Side	44	10.98	12.50	1.419	0.273	0.400
	WLAN5.2GHz/802.11a	Right Side	44	10.98	12.50	1.419	0.144	0.211
	WLAN5.2GHz/802.11a	Top Side	44	10.98	12.50	1.419	0.317	0.464
Reduced Power Level 2 for WLAN 5G ANT								
	WLAN5.3GHz/802.11a	Front Side	52	11.89	13.50	1.449	0.254	0.380
43#	WLAN5.3GHz/802.11a	Back Side	52	11.89	13.50	1.449	0.440	0.658
Reduced Power Level 4 for simultaneous transmission								
	WLAN5.3GHz/802.11a	Front Side	52	10.35	12.00	1.462	0.184	0.278
	WLAN5.3GHz/802.11a	Back Side	52	10.35	12.00	1.462	0.239	0.361
Reduced Power Level 2 for WLAN 5G ANT								
	WLAN5.5GHz/802.11a	Front Side	100	11.38	13.00	1.452	0.380	0.569
44#	WLAN5.5GHz/802.11a	Back Side	100	11.38	13.00	1.452	0.513	0.769
Reduced Power Level 4 for simultaneous transmission								
	WLAN5.5GHz/802.11a	Front Side	100	8.60	10.00	1.380	0.187	0.266
	WLAN5.5GHz/802.11a	Back Side	100	8.60	10.00	1.380	0.299	0.426
Reduced Power Level 2 for WLAN 5G ANT								
	WLAN5.8GHz/802.11a	Front Side	149	10.21	12.00	1.510	0.250	0.390
45#	WLAN5.8GHz/802.11a	Back Side	149	10.21	12.00	1.510	0.405	0.631



	WLAN5.8GHz/802.11a	Right Side	149	10.21	12.00	1.510	0.168	0.262
46#	WLAN5.8GHz/802.11a	Top Side	149	10.21	12.00	1.510	0.426	0.664
Reduced Power Level 4 for simultaneous transmission								
	WLAN5.8GHz/802.11a	Front Side	149	7.53	9.00	1.403	0.093	0.135
	WLAN5.8GHz/802.11a	Back Side	149	7.53	9.00	1.403	0.146	0.211
	WLAN5.8GHz/802.11a	Right Side	149	7.53	9.00	1.403	0.056	0.081
	WLAN5.8GHz/802.11a	Top Side	149	7.53	9.00	1.403	0.175	0.253
Full Power for WLAN 2.4G/BT ANT								
	Bluetooth/DH5	Front Side	78	8.27	10.00	1.489	0.015	0.029
47#	Bluetooth/DH5	Back Side	78	8.27	10.00	1.489	0.027	0.052
	Bluetooth/DH5	Right Side	78	8.27	10.00	1.489	0.018	0.035
	Bluetooth/DH5	Top Side	78	8.27	10.00	1.489	0.020	0.039

Note:

1. For TDD-LTE, the reported SAR should be scaled with the duty cycle scaling factor 1.006.
2. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.005, 5G WLAN 802.11a with 1.302 and Bluetooth with 1.302.



16.4. Extremity SAR Assessment

➤ General Guidance

1. According to KDB 648747 D04v01r03 The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
3. According to the user manual, the EUT diagonal size is greater than 16cm, therefore the 0mm extremity SAR of WLAN 5GHz is required. There are two types of antennas in this device, only the worst antenna was tested the extremity SAR in this report.

➤ Test Results

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)
Reduced Power Level 2 for WLAN 5G ANT								
	WLAN5.3GHz/802.11a	Front Side	52	11.89	13.50	1.449	0.237	0.354
48#	WLAN5.3GHz/802.11a	Back Side	52	11.89	13.50	1.449	0.332	0.496
Reduced Power Level 2 for WLAN 5G ANT								
49#	WLAN5.5GHz/802.11a	Front Side	100	11.38	13.00	1.452	0.526	0.788
	WLAN5.5GHz/802.11a	Back Side	100	11.38	13.00	1.452	0.487	0.730

Note:

The 5G WLAN 802.11a reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.302.



17. Simultaneous Transmission Evaluation

17.1. Simultaneous Transmission Consideration

No.	Simultaneous Transmission Consideration	Head	Body-Worn	Hotspot
1	WWAN+WLAN 2.4GHz/5GHz	Yes	Yes	Yes
2	WWAN+WLAN 5.2GHz/5.8GHz	Yes	Yes	Yes
3	WWAN+WLAN 5.3GHz/5.5GHz	Yes	Yes	No
4	WWAN+Bluetooth	No	Yes	Yes

Note:

1. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of the WWAN and WLAN transmitters. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
2. The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
3. Simultaneous Transmission SAR evaluation is not required for BT and WLAN, because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
4. Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
(The ratio is determined by: $(\text{SAR1} + \text{SAR2})^{1.5}/\text{Ri} \leq 0.04$,
Ri is the separation distance between the peak SAR locations for the antenna pair in mm.)
5. This device does not support the combination of WWAN+WLAN 2.4GHz+WLAN 5GHz.

17.2. Simultaneous Transmission Analysis

➤ Head Simultaneous Transmission for WWAN(2/3/4G)+WLAN

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM 850	Right Cheek	0.500	0.099	0.289	0.599	0.789
	Right Tilt	0.379	0.075	0.420	0.454	0.799
	Left Cheek	0.304	0.288	0.406	0.592	0.710
	Left Tilt	0.253	0.171	0.502	0.424	0.755
GSM 1900	Right Cheek	0.604	0.099	0.289	0.703	0.893
	Right Tilt	0.395	0.075	0.420	0.470	0.815
	Left Cheek	0.333	0.288	0.406	0.621	0.739
	Left Tilt	0.376	0.171	0.502	0.547	0.878
WCDMA II	Right Cheek	0.790	0.099	0.289	0.889	1.079
	Right Tilt	0.750	0.075	0.420	0.825	1.170
	Left Cheek	0.436	0.288	0.406	0.724	0.842
	Left Tilt	0.536	0.171	0.502	0.707	1.038
WCDMA IV	Right Cheek	0.611	0.099	0.289	0.710	0.900
	Right Tilt	0.559	0.075	0.420	0.634	0.979
	Left Cheek	0.368	0.288	0.406	0.656	0.774
	Left Tilt	0.469	0.171	0.502	0.640	0.971
WCDMA V	Right Cheek	0.740	0.099	0.289	0.839	1.029
	Right Tilt	0.553	0.075	0.420	0.628	0.973
	Left Cheek	0.456	0.288	0.406	0.744	0.862
	Left Tilt	0.409	0.171	0.502	0.580	0.911
LTE Band 2	Right Cheek	0.739	0.099	0.289	0.838	1.028
	Right Tilt	0.763	0.075	0.420	0.838	1.183
	Left Cheek	0.428	0.288	0.406	0.716	0.834
	Left Tilt	0.550	0.171	0.502	0.721	1.052
LTE Band 4	Right Cheek	0.689	0.099	0.289	0.788	0.978
	Right Tilt	0.738	0.075	0.420	0.813	1.158
	Left Cheek	0.416	0.288	0.406	0.704	0.822
	Left Tilt	0.541	0.171	0.502	0.712	1.043
LTE Band 5	Right Cheek	0.659	0.099	0.289	0.758	0.948
	Right Tilt	0.519	0.075	0.420	0.594	0.939
	Left Cheek	0.412	0.288	0.406	0.700	0.818
	Left Tilt	0.306	0.171	0.502	0.477	0.808
LTE Band 7	Right Cheek	0.541	0.099	0.289	0.640	0.830



	Right Tilt	0.555	0.075	0.420	0.630	0.975
	Left Cheek	0.541	0.288	0.406	0.829	0.947
	Left Tilt	0.708	0.171	0.502	0.879	1.210
LTE Band 13	Right Cheek	0.379	0.099	0.289	0.478	0.668
	Right Tilt	0.333	0.075	0.420	0.408	0.753
	Left Cheek	0.323	0.288	0.406	0.611	0.729
	Left Tilt	0.215	0.171	0.502	0.386	0.717
LTE Band 26	Right Cheek	0.573	0.099	0.289	0.672	0.862
	Right Tilt	0.487	0.075	0.420	0.562	0.907
	Left Cheek	0.395	0.288	0.406	0.683	0.801
	Left Tilt	0.298	0.171	0.502	0.469	0.800
LTE Band 38	Right Cheek	0.471	0.099	0.289	0.570	0.760
	Right Tilt	0.518	0.075	0.420	0.593	0.938
	Left Cheek	0.560	0.288	0.406	0.848	0.966
	Left Tilt	0.694	0.171	0.502	0.865	1.196
LTE Band 66	Right Cheek	0.721	0.099	0.289	0.820	1.010
	Right Tilt	0.671	0.075	0.420	0.746	1.091
	Left Cheek	0.423	0.288	0.406	0.711	0.829
	Left Tilt	0.495	0.171	0.502	0.666	0.997

➤ Body Simultaneous Transmission for WWAN+WLAN

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM 850	Front Side	0.120	0.107	0.278	0.227	0.398
	Back Side	0.356	0.358	0.426	0.714	0.782
	Left Side	0.166			0.166	0.166
	Right Side		0.275	0.211	0.275	0.211
	Top Side	0.213	0.072	0.464	0.285	0.677
	Bottom Side	0.132			0.132	0.132
GSM 1900	Front Side	0.409	0.107	0.278	0.516	0.687
	Back Side	0.553	0.358	0.426	0.911	0.979
	Left Side	0.216			0.216	0.216
	Right Side	0.119	0.275	0.211	0.394	0.330
	Top Side	0.496	0.072	0.464	0.568	0.960
	Bottom Side	0.218			0.218	0.218
WCDMA II	Front Side	0.562	0.107	0.278	0.669	0.840
	Back Side	0.752	0.358	0.426	1.110	1.178
	Left Side	0.027			0.027	0.027
	Right Side	0.195	0.275	0.211	0.470	0.406



	Top Side	0.794	0.072	0.464	0.866	1.258
	Bottom Side	0.597			0.597	0.597
WCDMA IV	Front Side	0.419	0.107	0.278	0.526	0.697
	Back Side	0.605	0.358	0.426	0.963	1.031
	Left Side	0.029			0.029	0.029
	Right Side	0.272	0.275	0.211	0.547	0.483
	Top Side	0.609	0.072	0.464	0.681	1.073
	Bottom Side	0.439			0.439	0.439
WCDMA V	Front Side	0.282	0.107	0.278	0.389	0.560
	Back Side	0.504	0.358	0.426	0.862	0.930
	Left Side	0.146			0.146	0.146
	Right Side		0.275	0.211	0.275	0.211
	Top Side	0.190	0.072	0.464	0.262	0.654
	Bottom Side	0.195			0.195	0.195
LTE Band 2	Front Side	0.521	0.107	0.278	0.628	0.799
	Back Side	0.681	0.358	0.426	1.039	1.107
	Left Side	0.260			0.260	0.260
	Right Side	0.183	0.275	0.211	0.458	0.394
	Top Side	0.686	0.072	0.464	0.758	1.150
	Bottom Side	0.407			0.407	0.407
LTE Band 4	Front Side	0.458	0.107	0.278	0.565	0.736
	Back Side	0.662	0.358	0.426	1.020	1.088
	Left Side	0.265			0.265	0.265
	Right Side	0.250	0.275	0.211	0.525	0.461
	Top Side	0.711	0.072	0.464	0.783	1.175
	Bottom Side	0.520			0.520	0.520
LTE Band 5	Front Side	0.243	0.107	0.278	0.350	0.521
	Back Side	0.386	0.358	0.426	0.744	0.812
	Left Side	0.175			0.175	0.175
	Right Side		0.275	0.211	0.275	0.211
	Top Side	0.276	0.072	0.464	0.348	0.740
	Bottom Side	0.161			0.161	0.161
LTE Band 7	Front Side	0.349	0.107	0.278	0.456	0.627
	Back Side	0.547	0.358	0.426	0.905	0.973
	Left Side	0.214			0.214	0.214
	Right Side	0.272	0.275	0.211	0.547	0.483
	Top Side	0.708	0.072	0.464	0.780	1.172
	Bottom Side	0.179			0.179	0.179
LTE Band 13	Front Side	0.173	0.107	0.278	0.280	0.451
	Back Side	0.294	0.358	0.426	0.652	0.720
	Left Side	0.256			0.256	0.256



	Right Side		0.275	0.211	0.275	0.211
	Top Side	0.217	0.072	0.464	0.289	0.681
	Bottom Side	0.131			0.131	0.131
LTE Band 26	Front Side	0.209	0.107	0.278	0.316	0.487
	Back Side	0.392	0.358	0.426	0.750	0.818
	Left Side	0.137			0.137	0.137
	Right Side		0.275	0.211	0.275	0.211
	Top Side	0.219	0.072	0.464	0.291	0.683
	Bottom Side	0.127			0.127	0.127
LTE Band 38	Front Side	0.243	0.107	0.278	0.350	0.521
	Back Side	0.286	0.358	0.426	0.644	0.712
	Left Side	0.175			0.175	0.175
	Right Side	0.056	0.275	0.211	0.331	0.267
	Top Side	0.425	0.072	0.464	0.497	0.889
	Bottom Side	0.069			0.069	0.069
LTE Band 66	Front Side	0.491	0.107	0.278	0.598	0.769
	Back Side	0.704	0.358	0.426	1.062	1.130
	Left Side	0.260			0.260	0.260
	Right Side	0.259	0.275	0.211	0.534	0.470
	Top Side	0.758	0.072	0.464	0.830	1.222
	Bottom Side	0.521			0.521	0.521

➤ Body Simultaneous Transmission for WWAN+Bluetooth

WWAN Band	Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
		WWAN	Bluetooth	
		1g SAR (W/kg)	1g SAR (W/kg)	
GSM 850	Front Side	0.120	0.029	0.149
	Back Side	0.356	0.052	0.408
	Left Side	0.166		0.166
	Right Side		0.035	0.035
	Top Side	0.213	0.039	0.252
	Bottom Side	0.132		0.132
GSM 1900	Front Side	0.409	0.029	0.438
	Back Side	0.553	0.052	0.605
	Left Side	0.216		0.216
	Right Side	0.119	0.035	0.154
	Top Side	0.496	0.039	0.535
	Bottom Side	0.218		0.218
WCDMA II	Front Side	0.562	0.029	0.591
	Back Side	0.752	0.052	0.804



	Left Side	0.027		0.027
	Right Side	0.195	0.035	0.230
	Top Side	0.794	0.039	0.833
	Bottom Side	0.597		0.597
WCDMA IV	Front Side	0.419	0.029	0.448
	Back Side	0.605	0.052	0.657
	Left Side	0.029		0.029
	Right Side	0.272	0.035	0.307
	Top Side	0.609	0.039	0.648
	Bottom Side	0.439		0.439
WCDMA V	Front Side	0.282	0.029	0.311
	Back Side	0.504	0.052	0.556
	Left Side	0.146		0.146
	Right Side		0.035	0.035
	Top Side	0.190	0.039	0.229
	Bottom Side	0.195		0.195
LTE Band 2	Front Side	0.521	0.029	0.550
	Back Side	0.681	0.052	0.733
	Left Side	0.260		0.260
	Right Side	0.183	0.035	0.218
	Top Side	0.686	0.039	0.725
	Bottom Side	0.407		0.407
LTE Band 4	Front Side	0.458	0.029	0.487
	Back Side	0.662	0.052	0.714
	Left Side	0.265		0.265
	Right Side	0.250	0.035	0.285
	Top Side	0.711	0.039	0.750
	Bottom Side	0.520		0.520
LTE Band 5	Front Side	0.243	0.029	0.272
	Back Side	0.386	0.052	0.438
	Left Side	0.175		0.175
	Right Side		0.035	0.035
	Top Side	0.276	0.039	0.315
	Bottom Side	0.161		0.161
LTE Band 7	Front Side	0.349	0.029	0.378
	Back Side	0.547	0.052	0.599
	Left Side	0.214		0.214
	Right Side	0.272	0.035	0.307
	Top Side	0.708	0.039	0.747
	Bottom Side	0.179		0.179
LTE Band 13	Front Side	0.173	0.029	0.202



	Back Side	0.294	0.052	0.346
	Left Side	0.256		0.256
	Right Side		0.035	0.035
	Top Side	0.217	0.039	0.256
	Bottom Side	0.131		0.131
LTE Band 26	Front Side	0.209	0.029	0.238
	Back Side	0.392	0.052	0.444
	Left Side	0.137		0.137
	Right Side		0.035	0.035
	Top Side	0.219	0.039	0.258
	Bottom Side	0.127		0.127
LTE Band 38	Front Side	0.243	0.029	0.272
	Back Side	0.286	0.052	0.338
	Left Side	0.175		0.175
	Right Side	0.056	0.035	0.091
	Top Side	0.425	0.039	0.464
	Bottom Side	0.069		0.069
LTE Band 66	Front Side	0.491	0.029	0.520
	Back Side	0.704	0.052	0.756
	Left Side	0.260		0.260
	Right Side	0.259	0.035	0.294
	Top Side	0.758	0.039	0.797
	Bottom Side	0.521		0.521



18. Uncertainty Assessment

According to KDB 865664 D01 SAR measurement 100 MHz to 6GHz, when the highest measured 1-g SAR is less than 1.5 W/kg and 10-g extremity SAR less than 3.75 W/kg, the expanded SAR measurement uncertainty must be less than 30% with a confidence interval of k=2. When these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE 1528-2013 is not required in the SAR report and submitted for equipment approval. For this device, both the 1-g SAR is less than 1.5 W/kg and 10-g extremity SAR less than 3.75 W/kg. Therefore the measurement uncertainty table is not required in this report.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other Annex (B,C,D,E,F) will be submitted separately.

***** END OF MAIN REPORT *****