



FCC RF Test Report

APPLICANT : Relay, Inc.
EQUIPMENT : Relay Beacon XL2
BRAND NAME : Relay
MODEL NAME : RY0280
FCC ID : 2AMBHRY0280
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 30, 2024 ~ Aug. 26, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 Antenna Requirements.....	18
4 LIST OF MEASURING EQUIPMENT.....	19
5 MEASUREMENT UNCERTAINTY.....	20
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR473016	Rev. 01	Initial issue of report	Dec. 10, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.25 dB at 2483.50 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	Not connect to AC Mains
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Relay, Inc.

4200 Six Forks Rd, Suite 1800, Raleigh NC 27609, USA

1.2 Manufacturer

Relay, Inc.

4200 Six Forks Rd, Suite 1800, Raleigh NC 27609, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Relay Beacon XL2
Brand Name	Relay
Model Name	RY0280
FCC ID	2AMBHRY0280
SN	Conducted/ Radiation: 40030300A
HW Version	DVT
SW Version	RelayTag nRF52811 V0.1.8 20240812
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 1.69 dBm (0.0015 W) BLE 2Mbps: 1.62 dBm (0.0015 W) BLE 125kbps: 1.59 dBm (0.0014 W) BLE 500kbps: 1.60 dBm (0.0014 W)
99% Occupied Bandwidth	BLE 1Mbps: 1.047MHz BLE 2Mbps: 2.066MHz
Antenna Type / Gain	PCB Antenna type with gain 1.89 dBi
Type of Modulation	Bluetooth LE : FSK

Note: For BLE 1Mbps/2Mbps/125kbps/500kbps mode, the whole testing have assessed only BLE 1Mbps/2Mbps by referring to the higher output power.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / FSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
	Mode 7: Bluetooth Tx CH00_2402 MHz_BLE 125Kbps
	Mode 8: Bluetooth Tx CH19_2440 MHz_BLE 125Kbps
	Mode 9: Bluetooth Tx CH39_2480 MHz_BLE 125Kbps
	Mode 10: Bluetooth Tx CH00_2402 MHz_BLE 500Kbps
	Mode 11: Bluetooth Tx CH19_2440 MHz_BLE 500Kbps
	Mode 12: Bluetooth Tx CH39_2480 MHz_BLE 500Kbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps

2.3 Connection Diagram of Test System

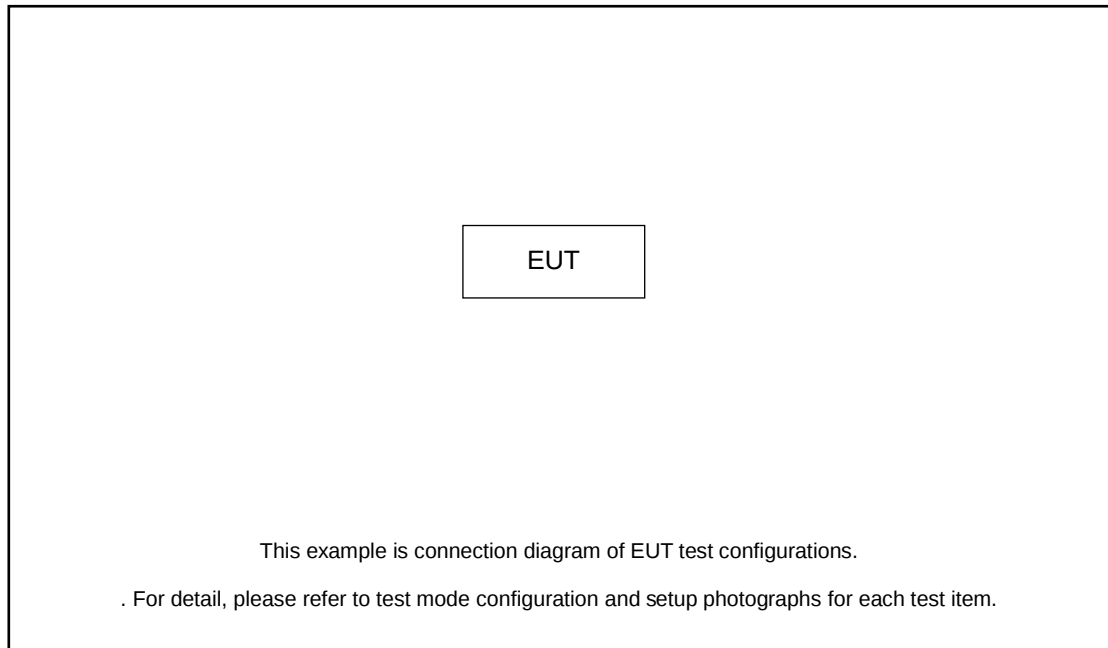

2.4 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.19 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.19 + 10 = 12.19 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

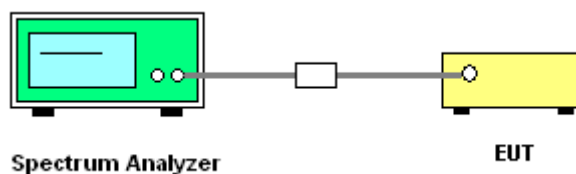

3.1.5 Test Result of 6dB Bandwidth & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

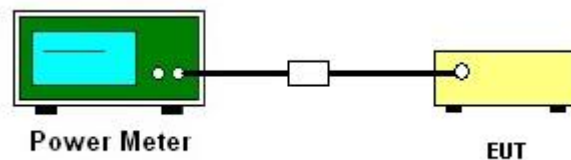

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

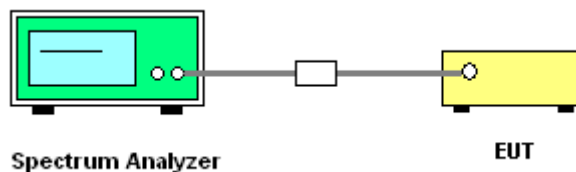

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

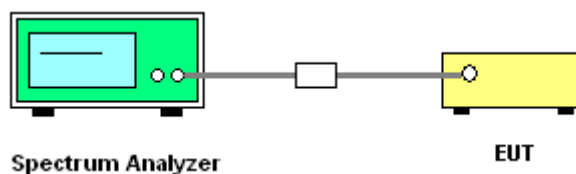

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

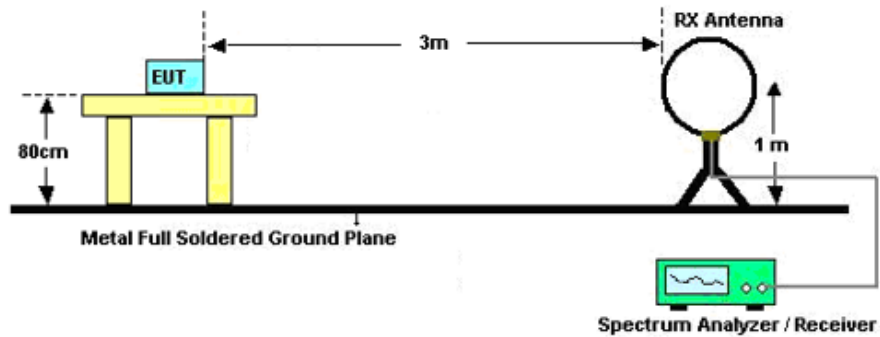

For radiated emissions from 30MHz to 1GHz

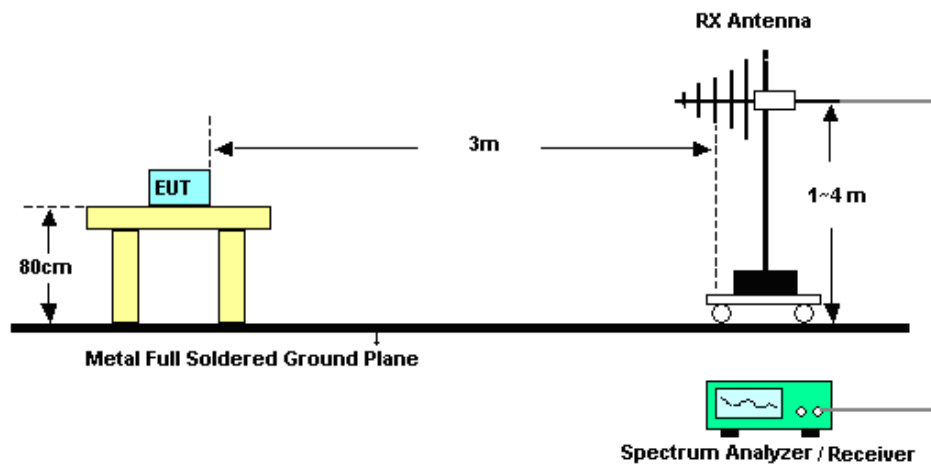

For radiated emissions above 1GHz

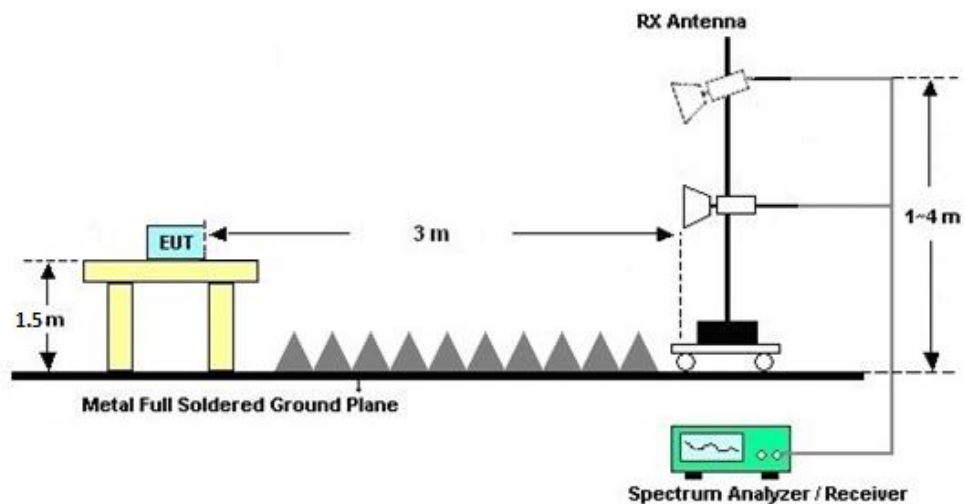

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 30, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Jul. 30, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Jul. 30, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 11, 2023	Aug. 26, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 26, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 26, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 26, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 26, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 26, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 26, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 03, 2024	Aug. 26, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 26, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 26, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 26, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 26, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 26, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2024.7.30

Test Engineer: Han Lei


DTS Bandwidth


Test Result

TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.69	2401.66	2402.35	0.5	PASS
	2440	0.69	2439.66	2440.34	0.5	PASS
	2480	0.69	2479.66	2480.35	0.5	PASS
BLE_2M	2402	1.14	2401.44	2402.58	0.5	PASS
	2440	1.14	2439.44	2440.58	0.5	PASS
	2480	1.14	2479.44	2480.58	0.5	PASS




Test Graphs

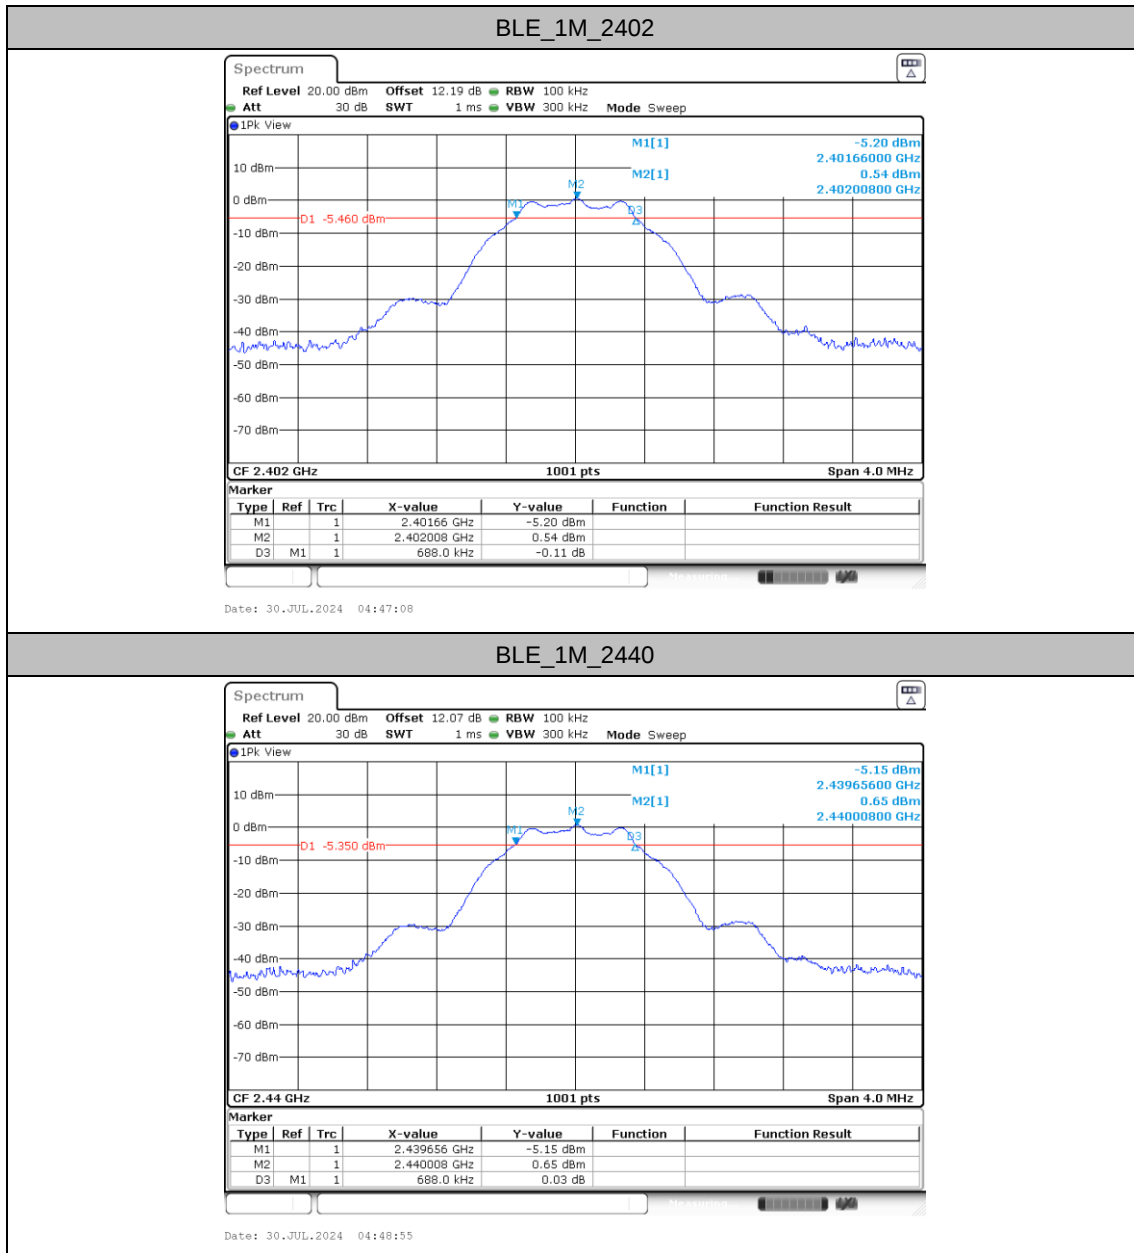

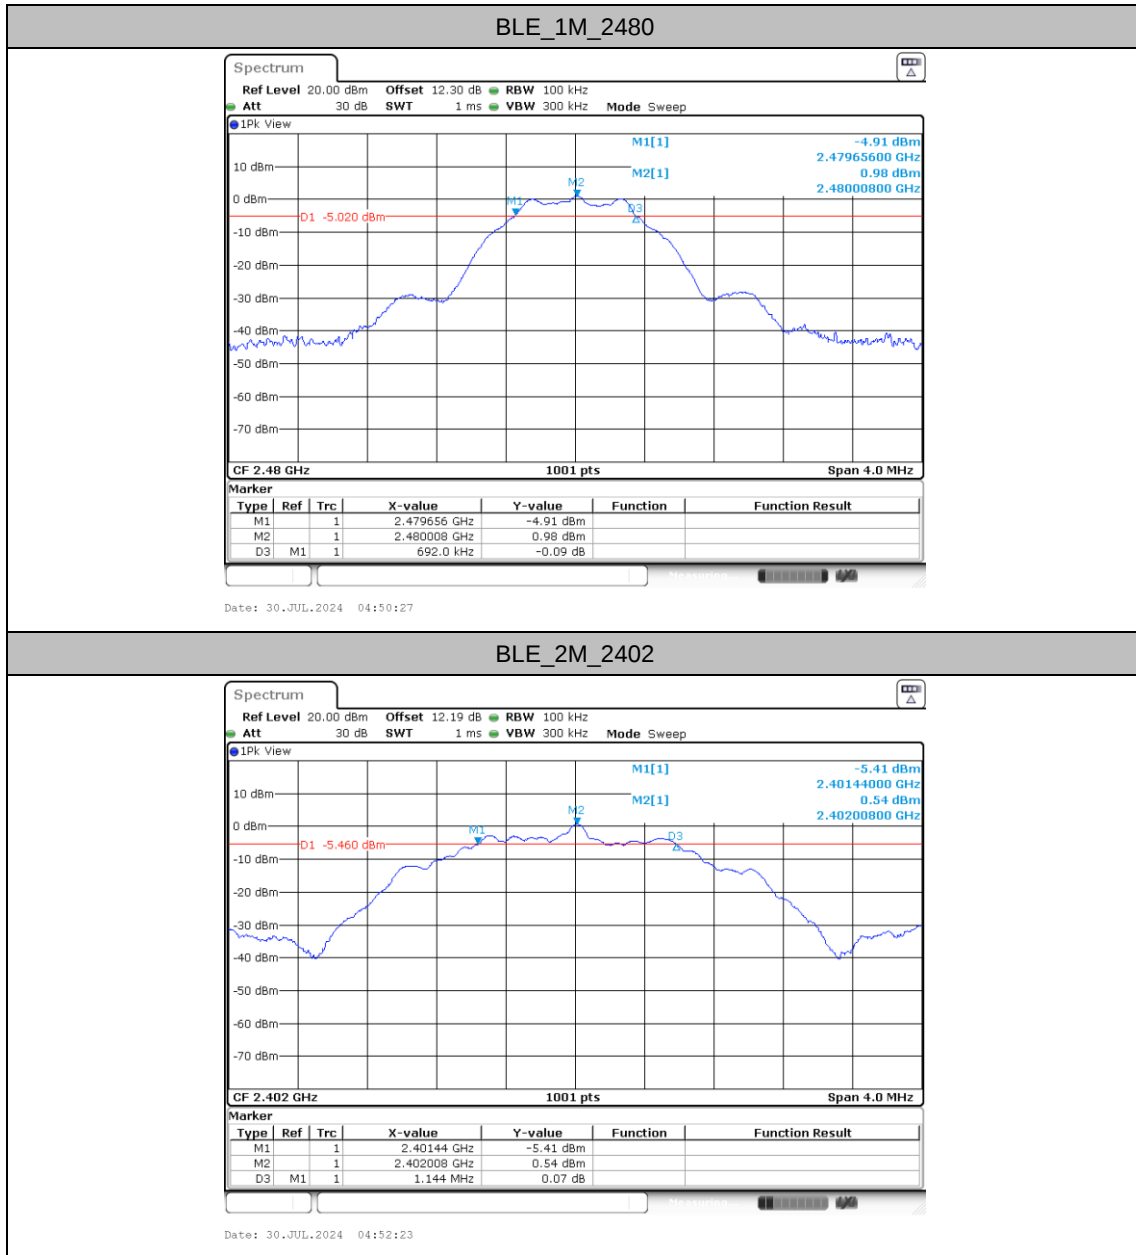




BLE_2M_2440

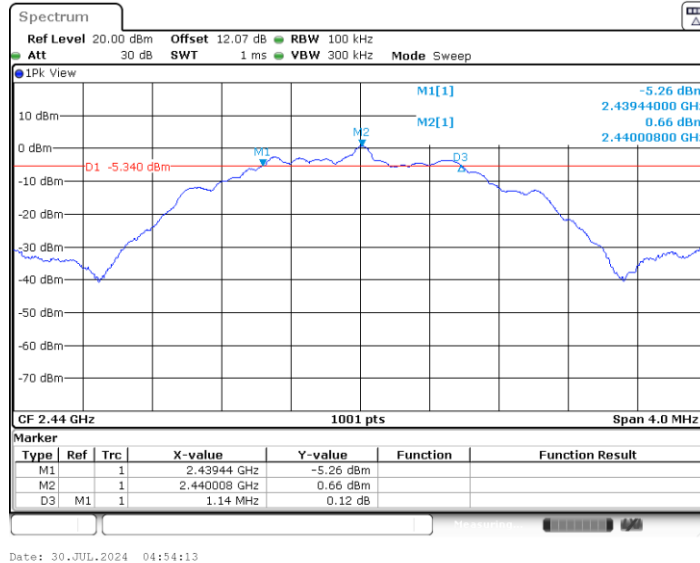

BLE_2M_2480

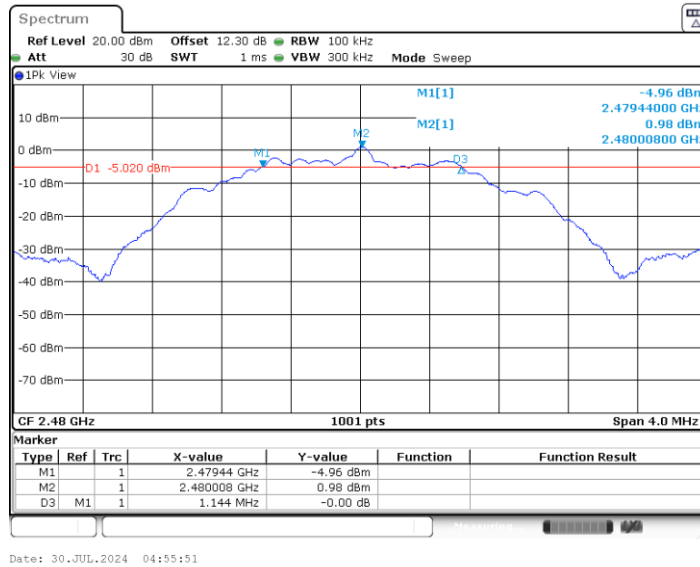




Occupied Channel Bandwidth

Test Result

TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.043	2401.4885	2402.5315	---	---
	2440	1.047	2439.4885	2440.5355	---	---
	2480	1.047	2479.4885	2480.5355	---	---
BLE_2M	2402	2.054	2400.9930	2403.0470	---	---
	2440	2.058	2438.9930	2441.0509	---	---
	2480	2.066	2478.9890	2481.0549	---	---




Test Graphs

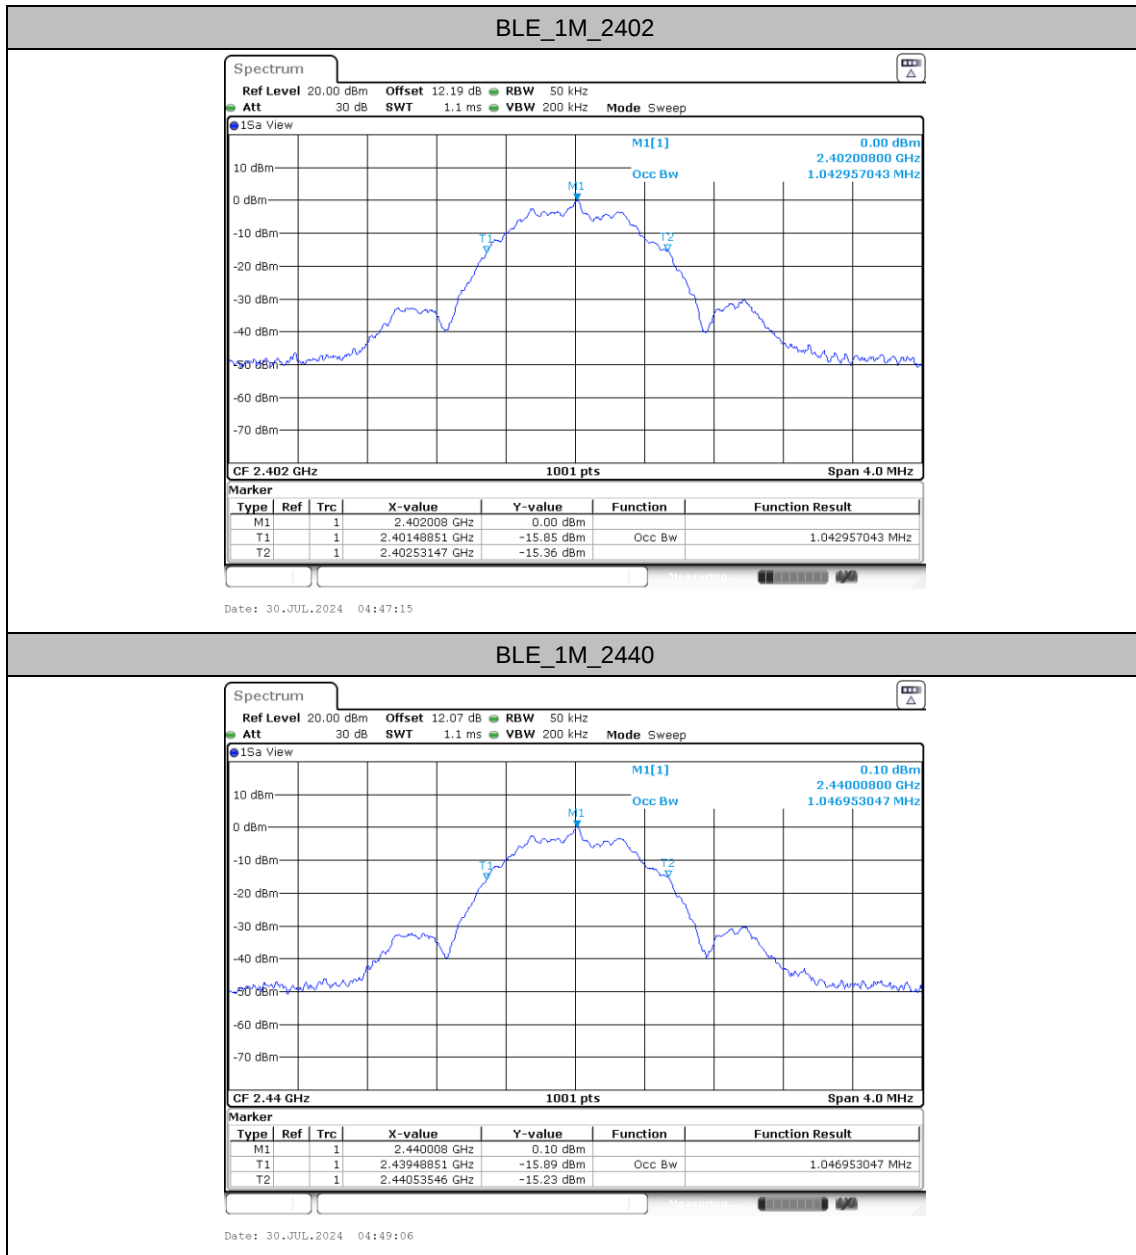




BLE_1M_2480

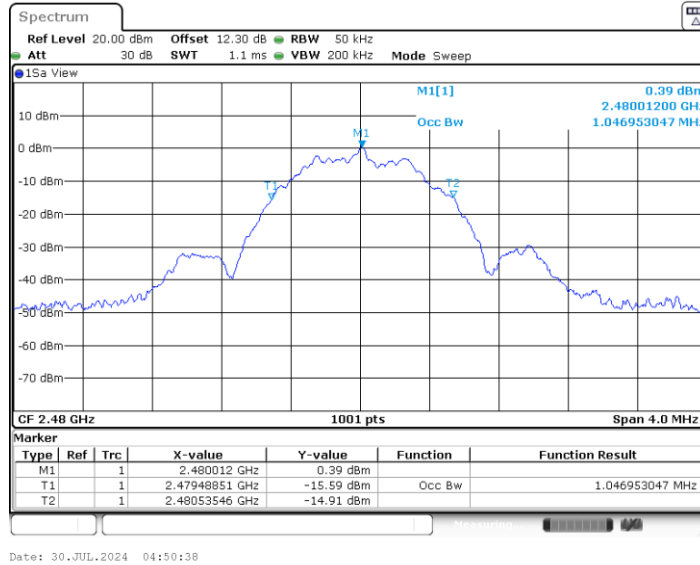

BLE_2M_2402

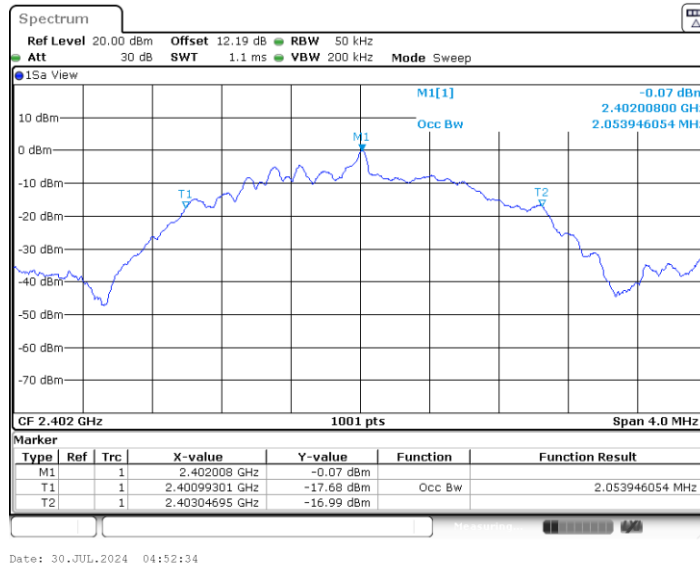





Maximum conducted output power

Test Result Peak

TestMode	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
BLE1M	0	1.63	30.00	1.89	3.52	36.00	Pass
	19	1.69	30.00	1.89	3.58	36.00	Pass
	39	1.65	30.00	1.89	3.54	36.00	Pass
BLE2M	0	1.55	30.00	1.89	3.44	36.00	Pass
	19	1.62	30.00	1.89	3.51	36.00	Pass
	39	1.60	30.00	1.89	3.49	36.00	Pass
BLE_125K	0	1.53	30.00	1.89	3.42	36.00	Pass
	19	1.59	30.00	1.89	3.48	36.00	Pass
	39	1.55	30.00	1.89	3.44	36.00	Pass
BLE_500K	0	1.54	30.00	1.89	3.43	36.00	Pass
	19	1.60	30.00	1.89	3.49	36.00	Pass
	39	1.57	30.00	1.89	3.46	36.00	Pass

Test Result Average

TestMode	CH.	Duty Factor (dB)	Average Conducted Power (dBm)
BLE1M	0	2.04	0.99
	19	2.04	1.09
	39	2.04	1.07
BLE2M	0	4.83	0.98
	19	4.83	1.04
	39	4.83	1.03
BLE_125K	0	0.83	0.95
	19	0.83	1.02
	39	0.83	1.00
BLE_500K	0	2.41	0.95
	19	2.41	0.99
	39	2.41	1.01

Power setting is default.




Maximum power spectral density


Test Result


TestMode	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-14.81	≤8.00	PASS
	2440	-14.52	≤8.00	PASS
	2480	-14.29	≤8.00	PASS
BLE_2M	2402	-17.24	≤8.00	PASS
	2440	-17.11	≤8.00	PASS
	2480	-16.83	≤8.00	PASS



Test Graphs

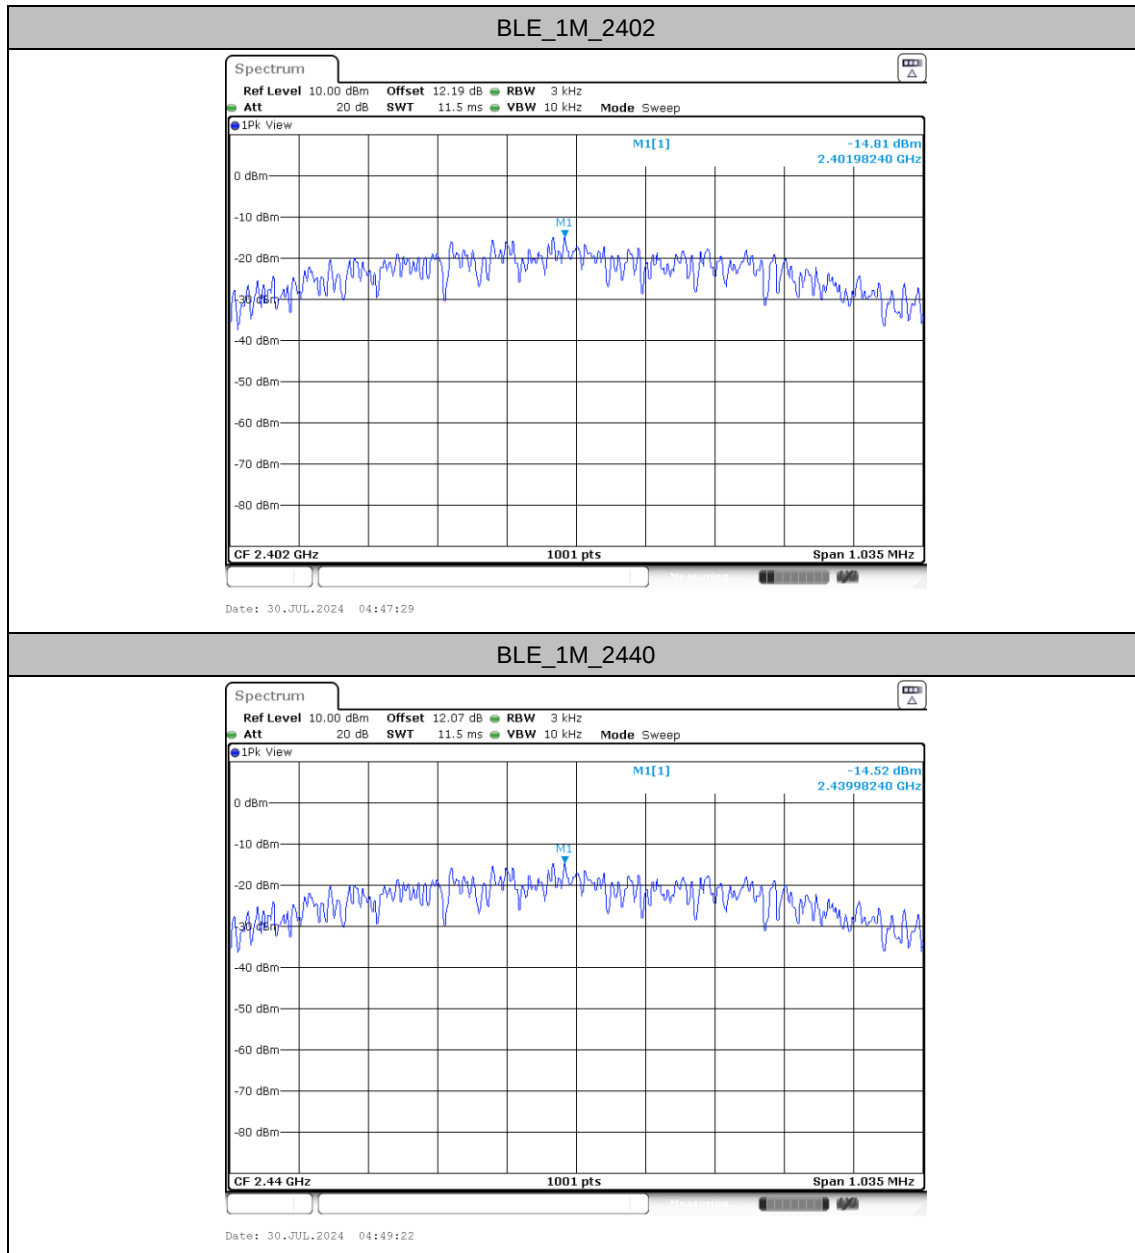

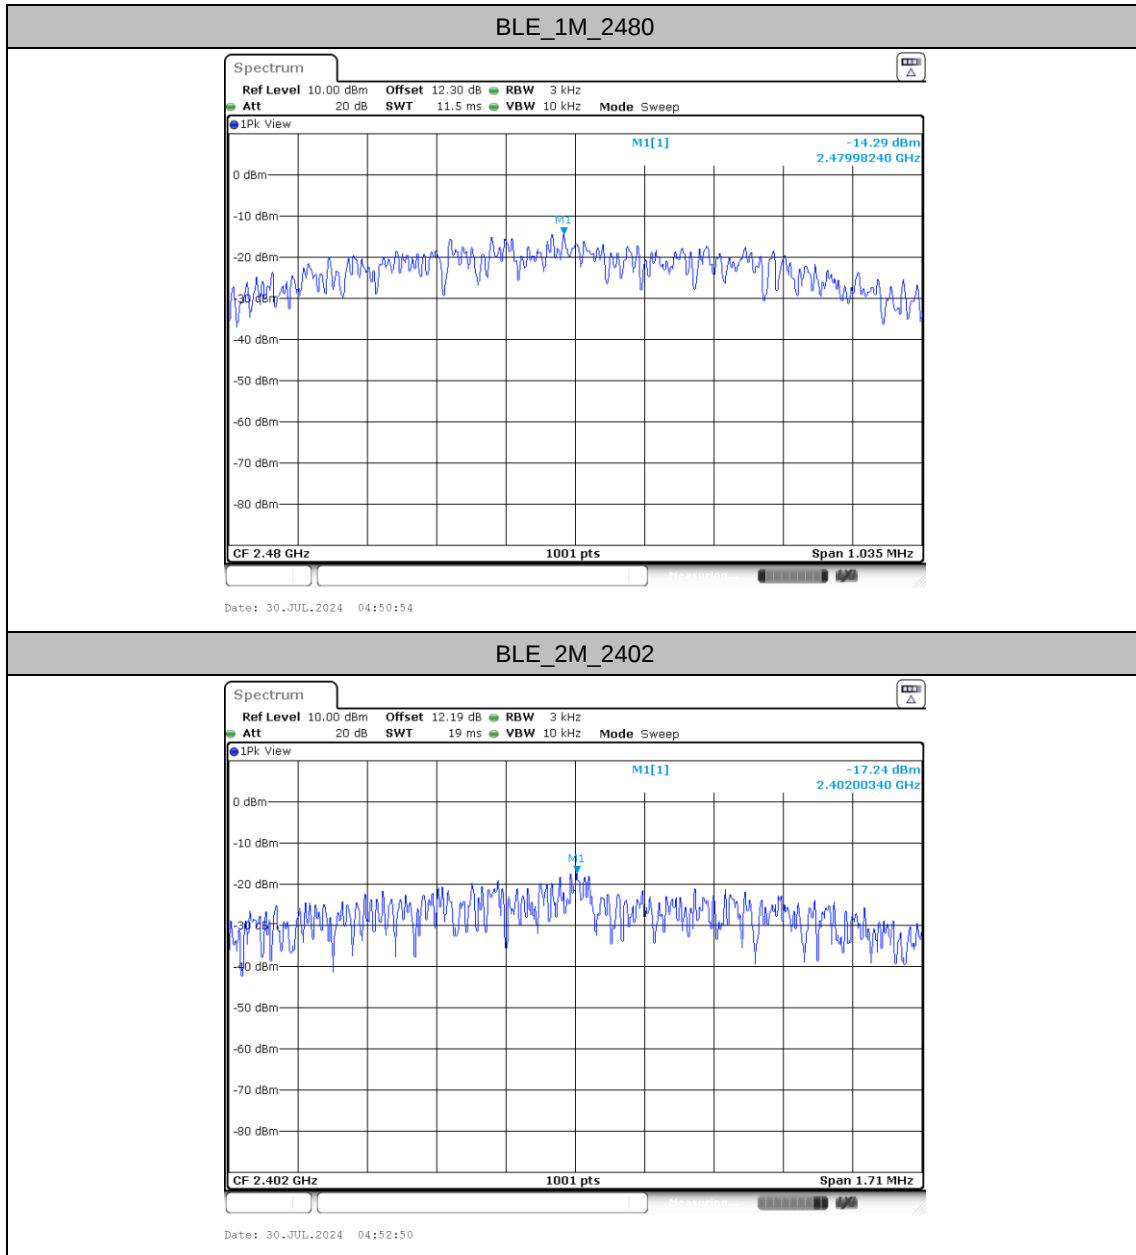

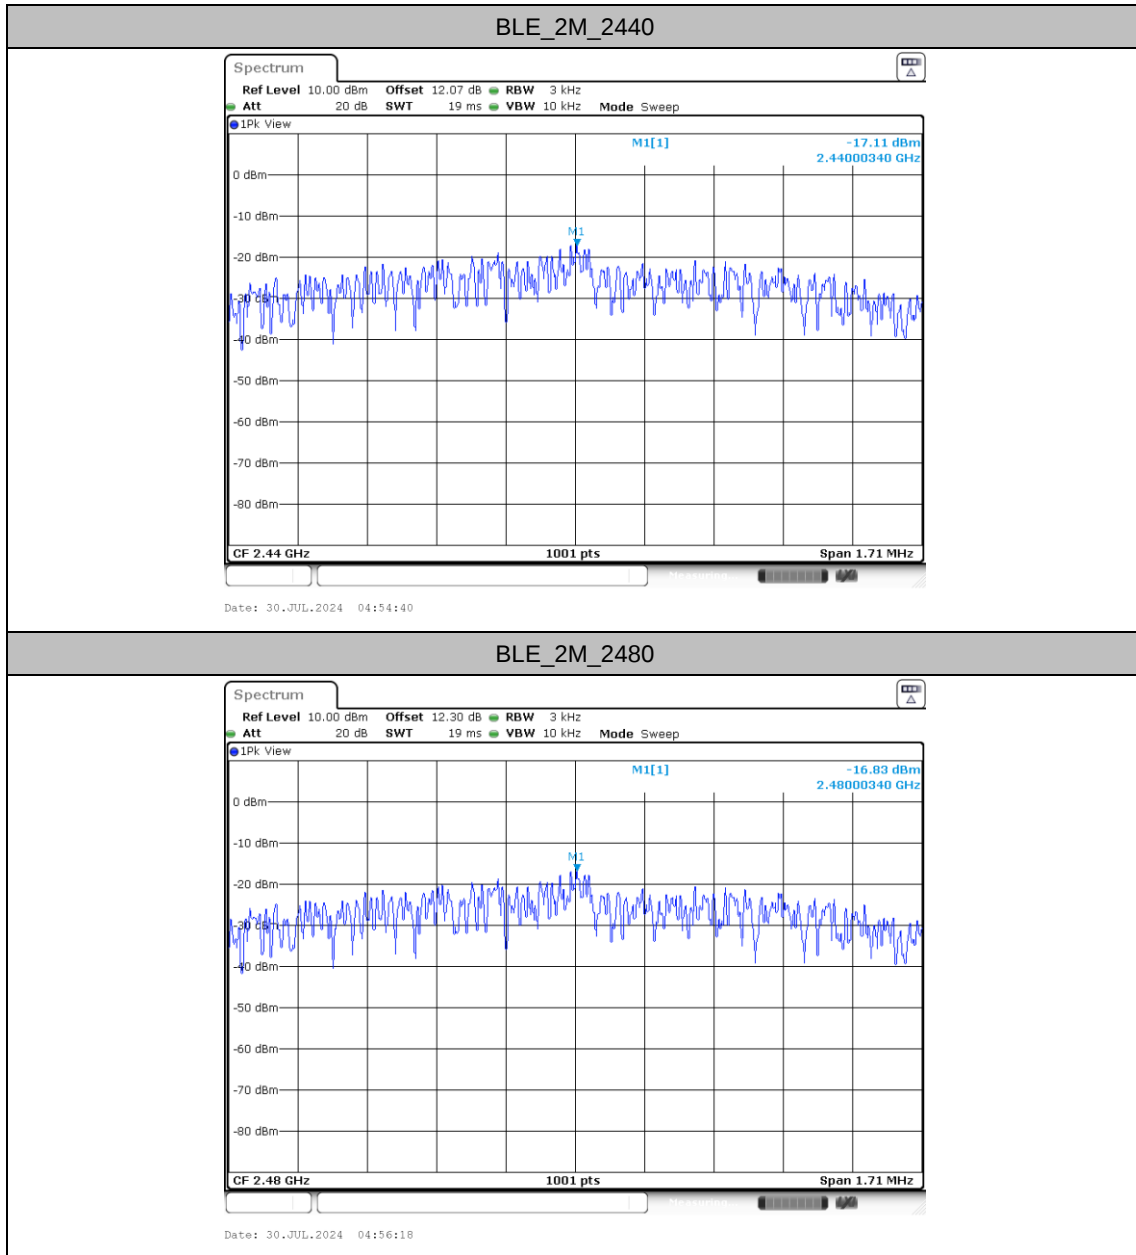




Reference level measurement

Test Result

TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	2402	2402.01	0.49
	2440	2440.00	0.61
	2480	2480.01	0.93
BLE_2M	2402	2402.00	0.51
	2440	2440.01	0.61
	2480	2480.00	0.94




Test Graphs

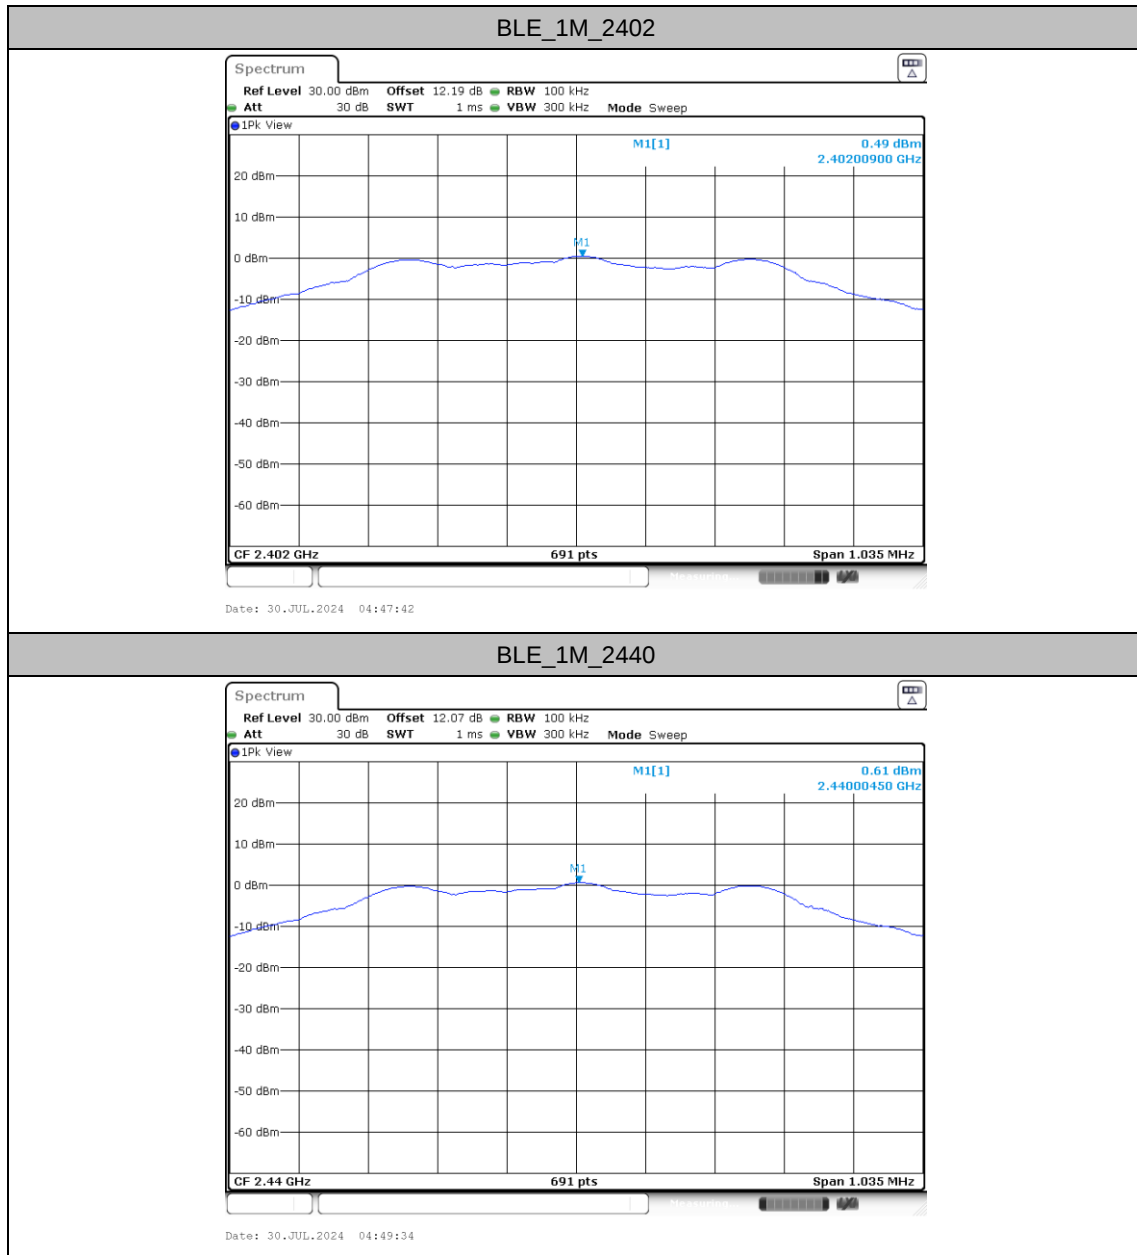





BLE_1M_2480

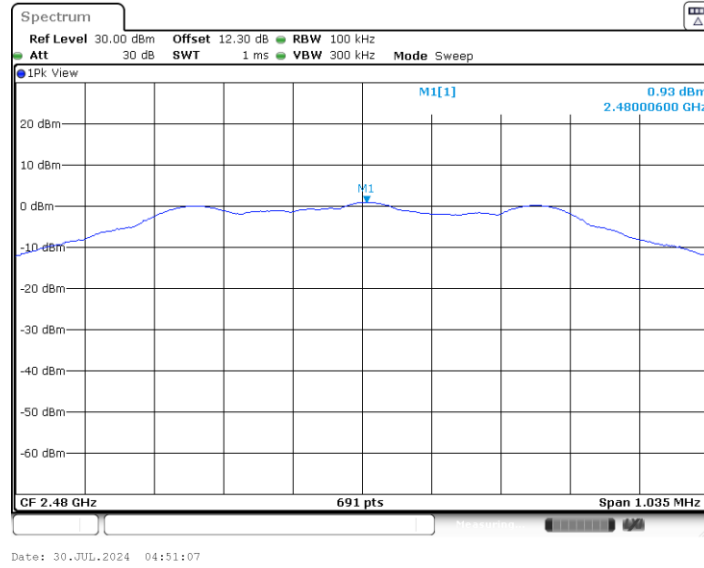

BLE_2M_2402

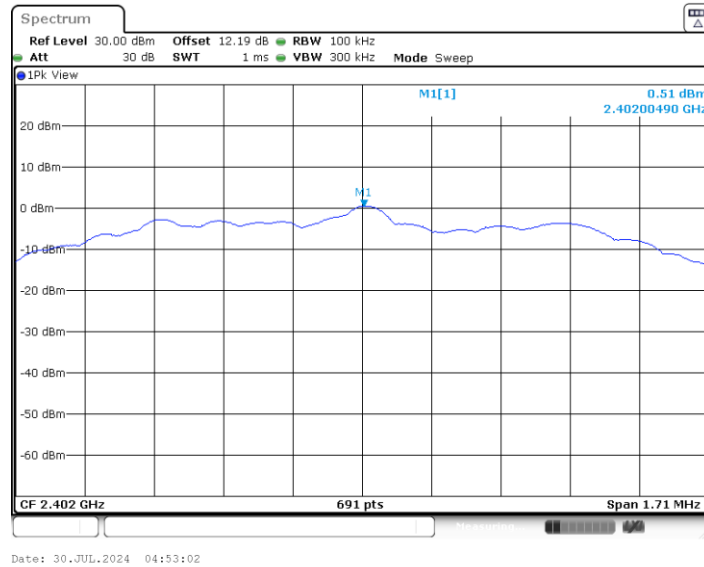

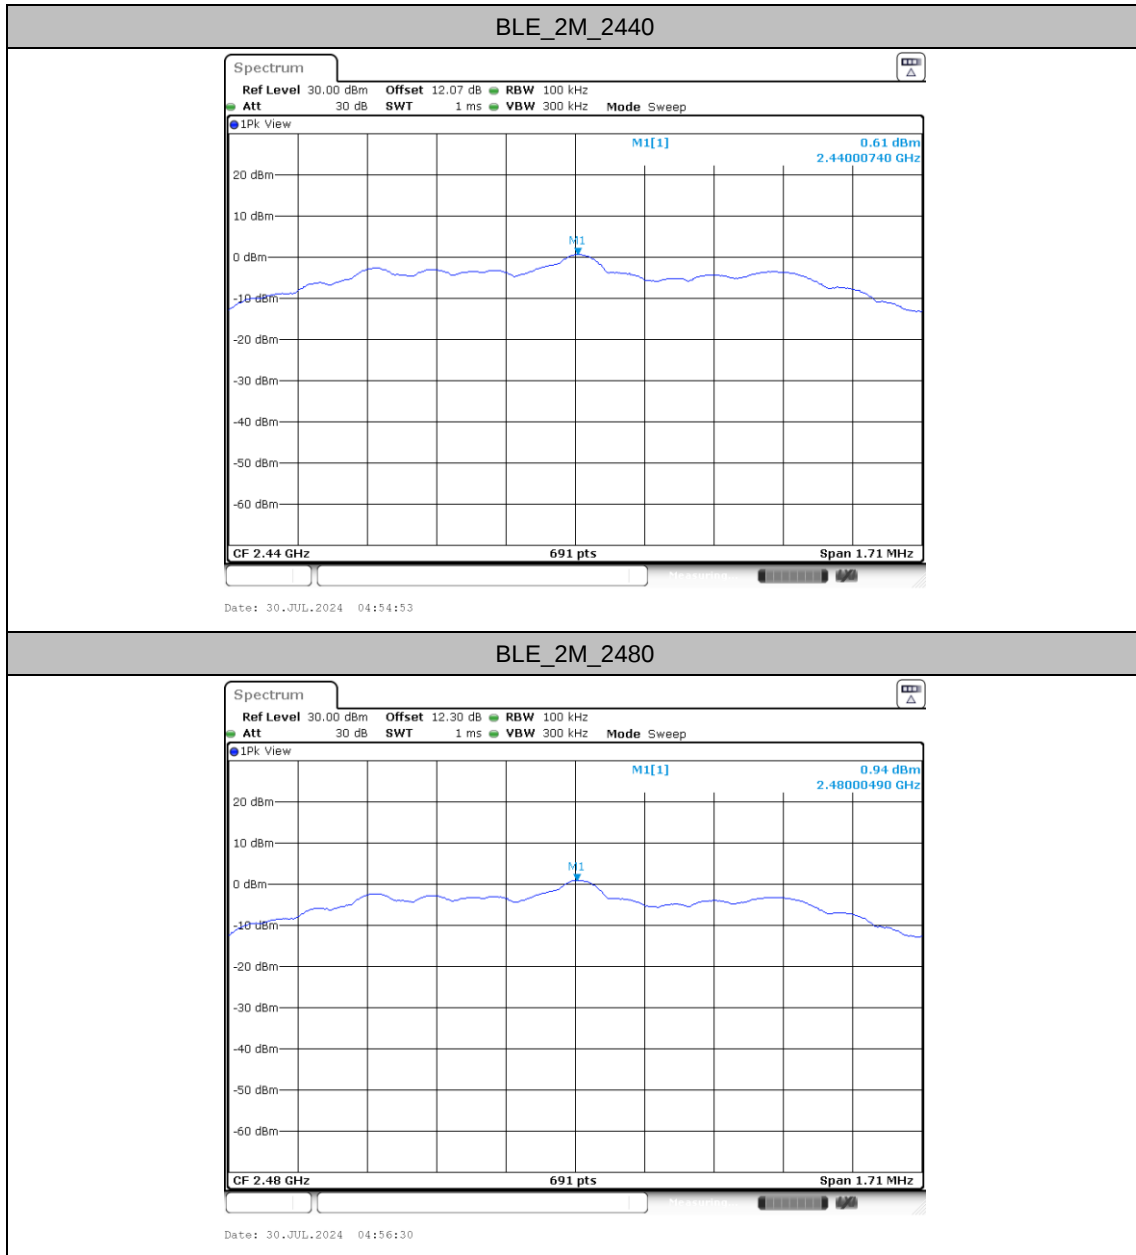




Band edge measurements

Test Result

TestMode	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
BLE_1M	Low	2402	0.49	-43.45	≤-19.51	PASS
	High	2480	0.93	-42.44	≤-19.07	PASS
BLE_2M	Low	2402	0.51	-31.23	≤-19.49	PASS
	High	2480	0.94	-42.91	≤-19.06	PASS




Test Graphs

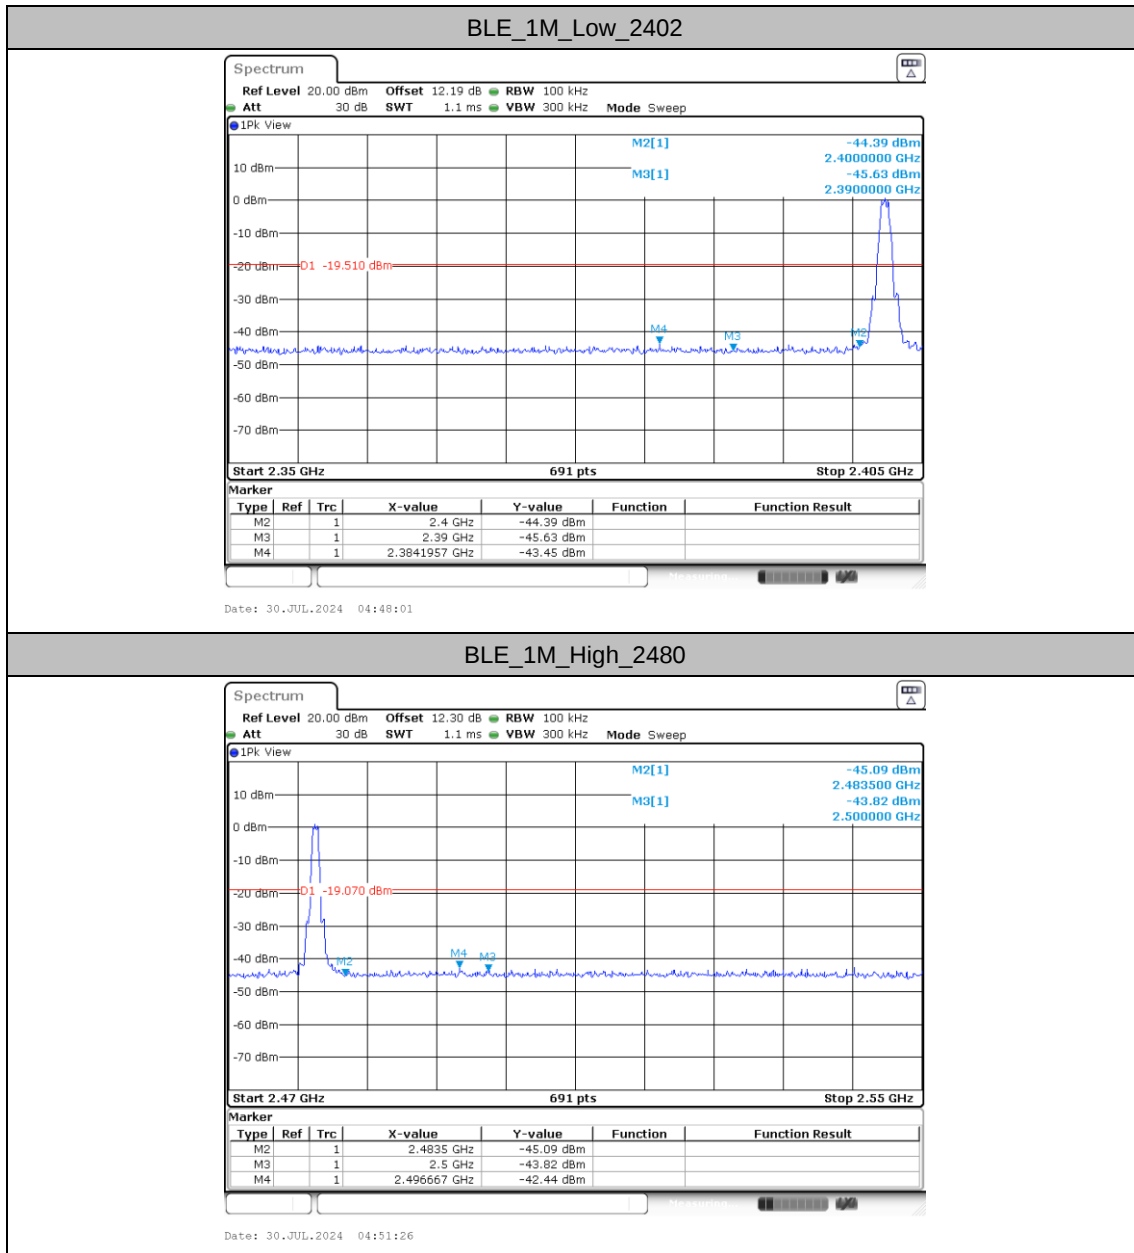




BLE_2M_Low_2402

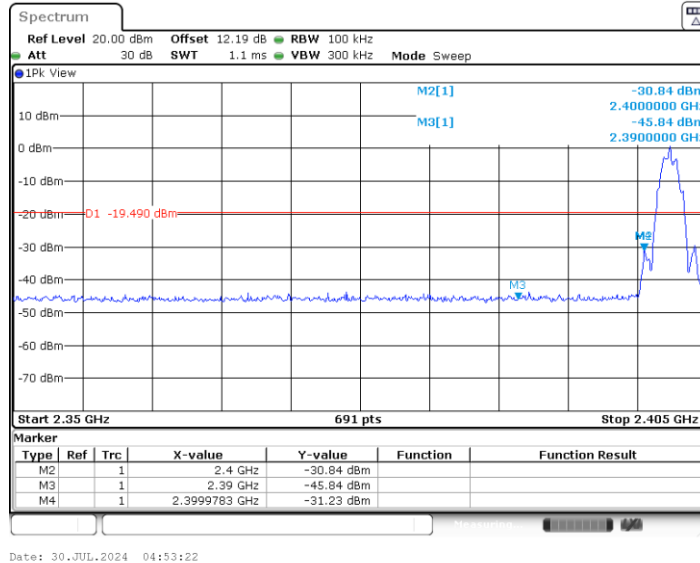

BLE_2M_High_2480

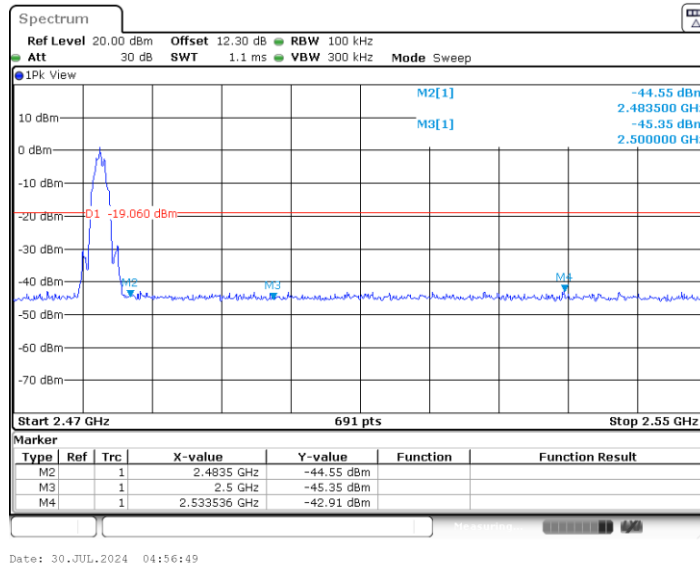




Conducted Spurious Emission


Test Result


TestMode	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	2402	30~1000	0.49	-59.15	≤-19.51	PASS
		1000~26500	0.49	-51.64	≤-19.51	PASS
	2440	30~1000	0.61	-60.28	≤-19.39	PASS
		1000~26500	0.61	-52.63	≤-19.39	PASS
	2480	30~1000	0.93	-59.66	≤-19.07	PASS
		1000~26500	0.93	-53.5	≤-19.07	PASS
BLE_2M	2402	30~1000	0.51	-59.98	≤-19.49	PASS
		1000~26500	0.51	-52.17	≤-19.49	PASS
	2440	30~1000	0.61	-59.99	≤-19.39	PASS
		1000~26500	0.61	-53.27	≤-19.39	PASS
	2480	30~1000	0.94	-59.88	≤-19.06	PASS
		1000~26500	0.94	-53.92	≤-19.06	PASS





Test Graphs

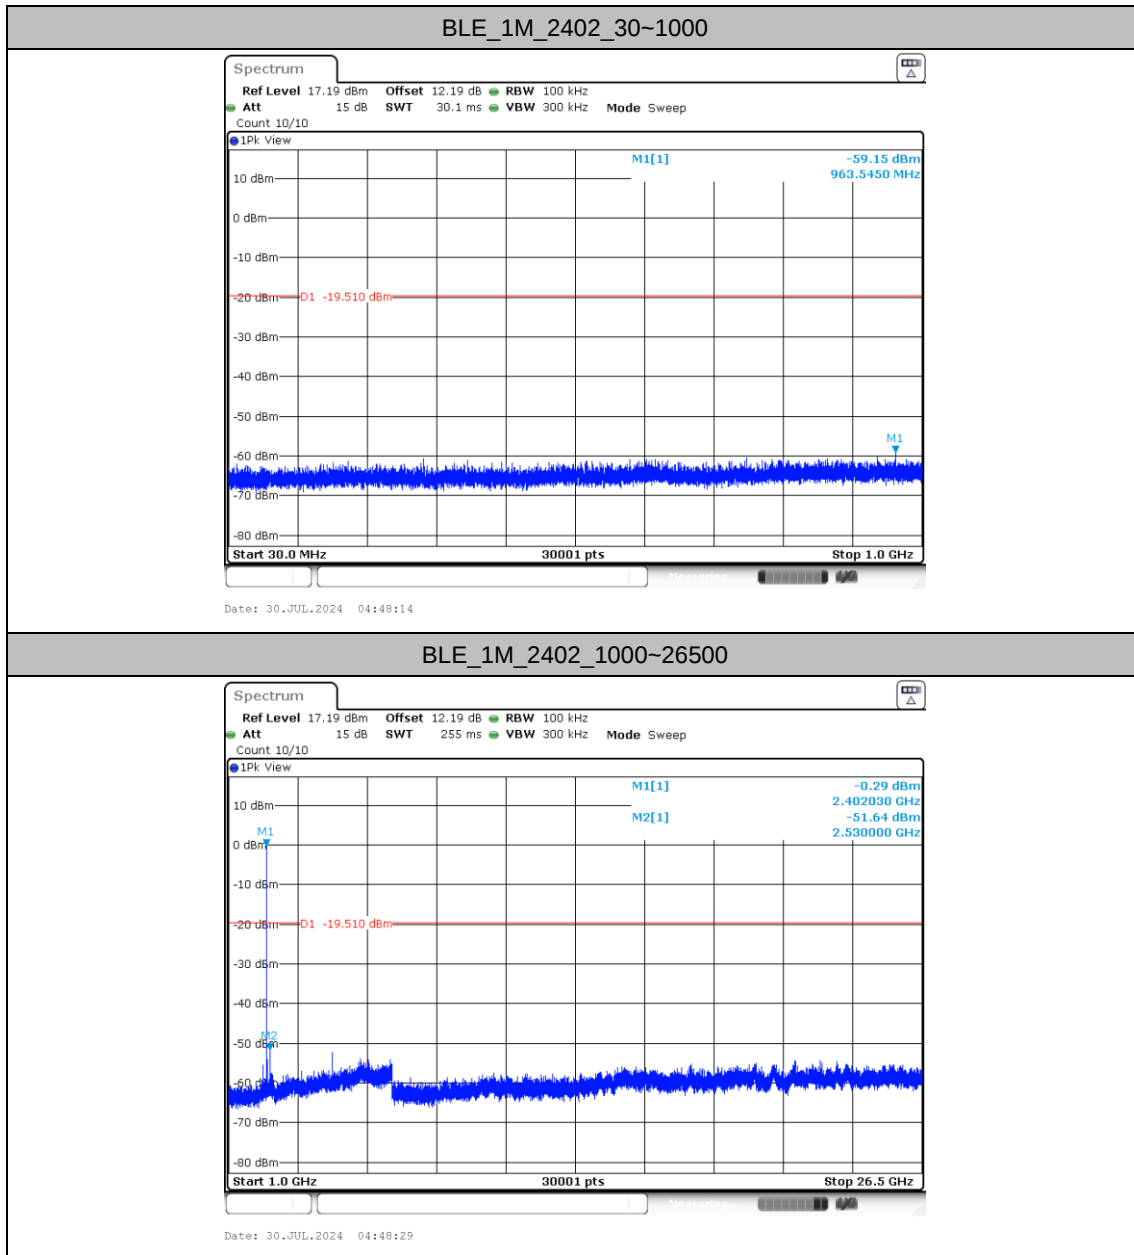


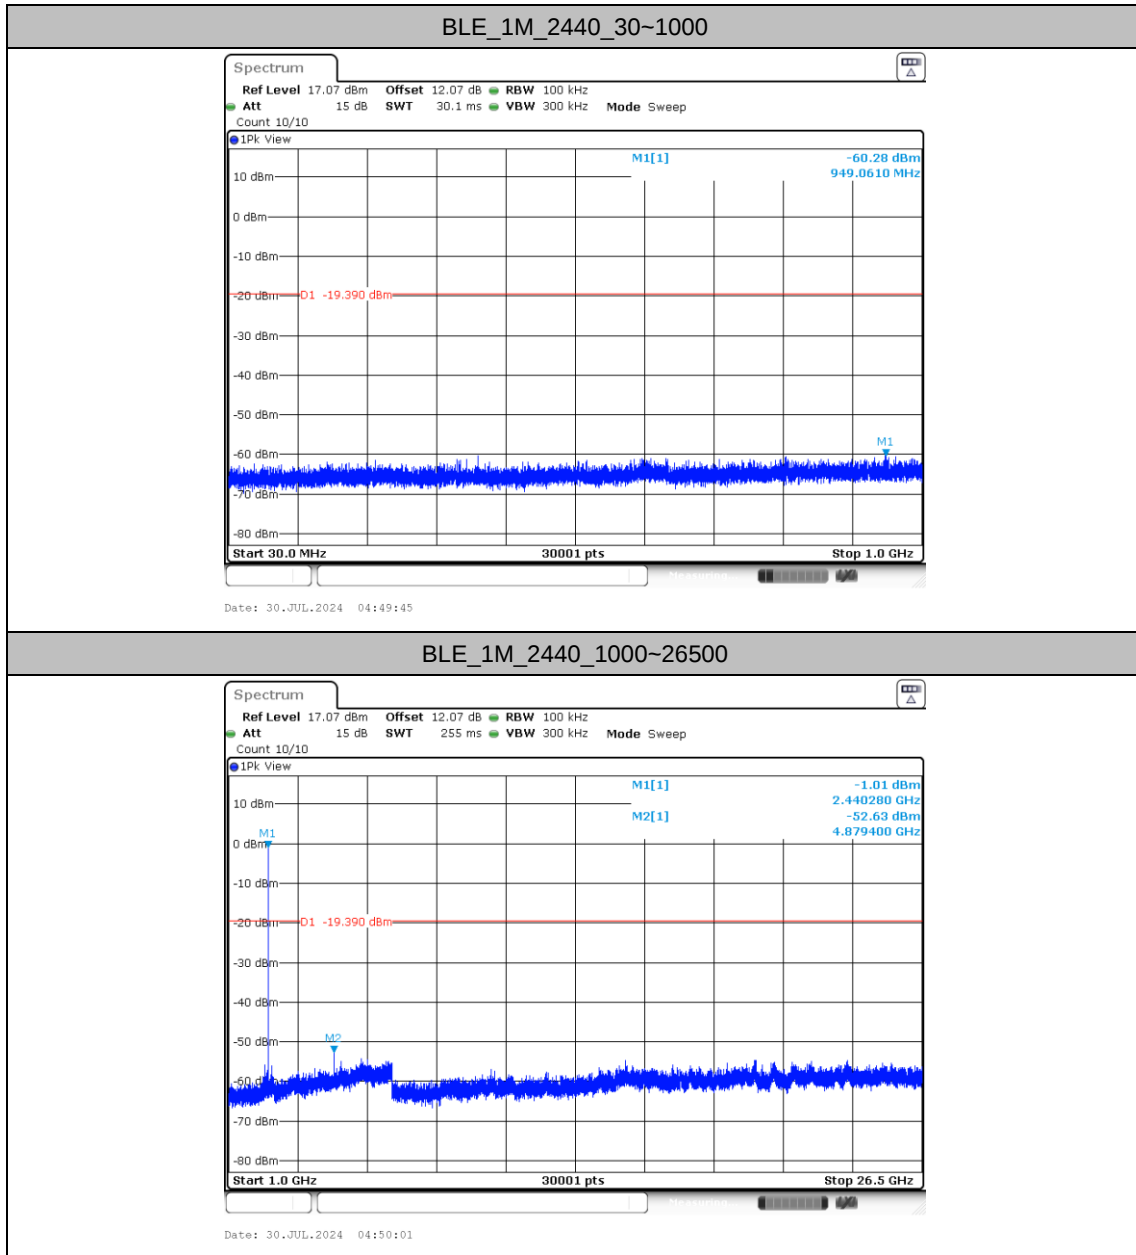

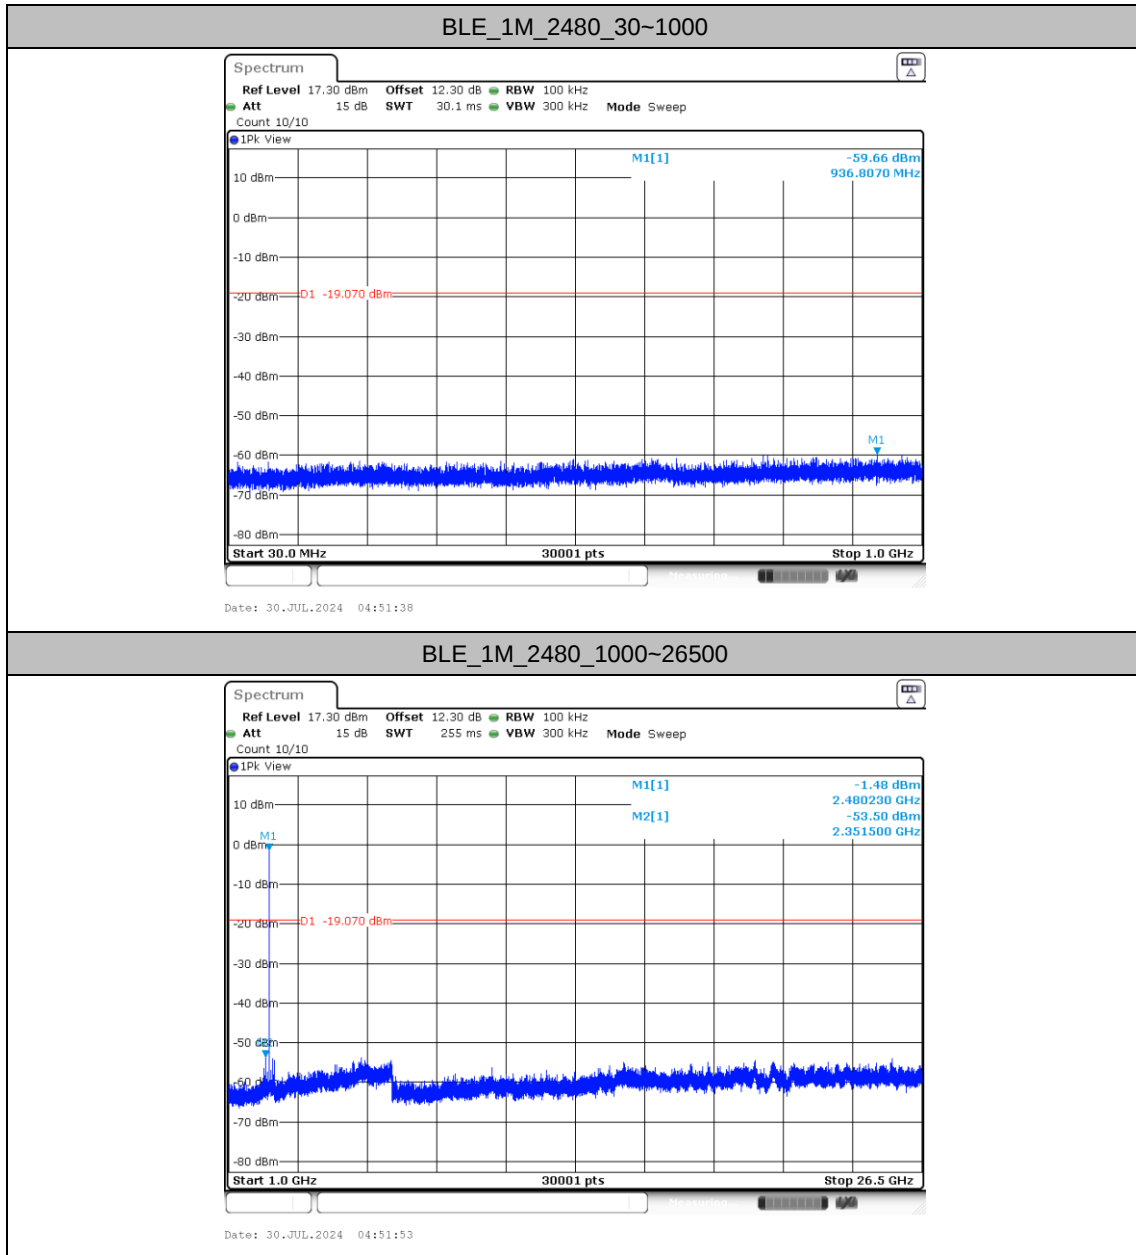

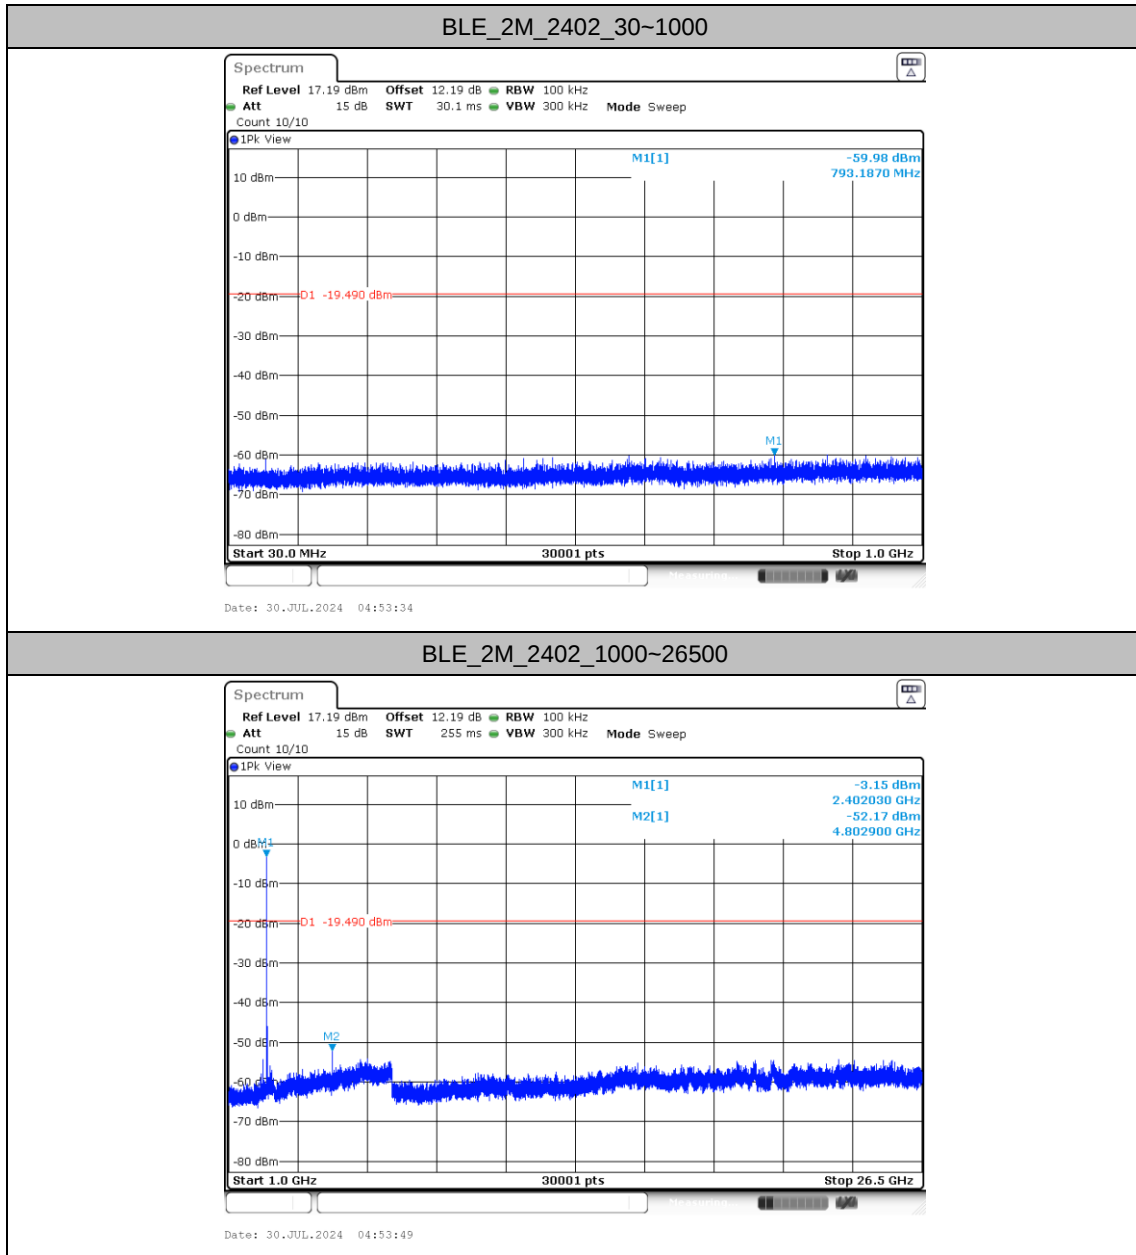

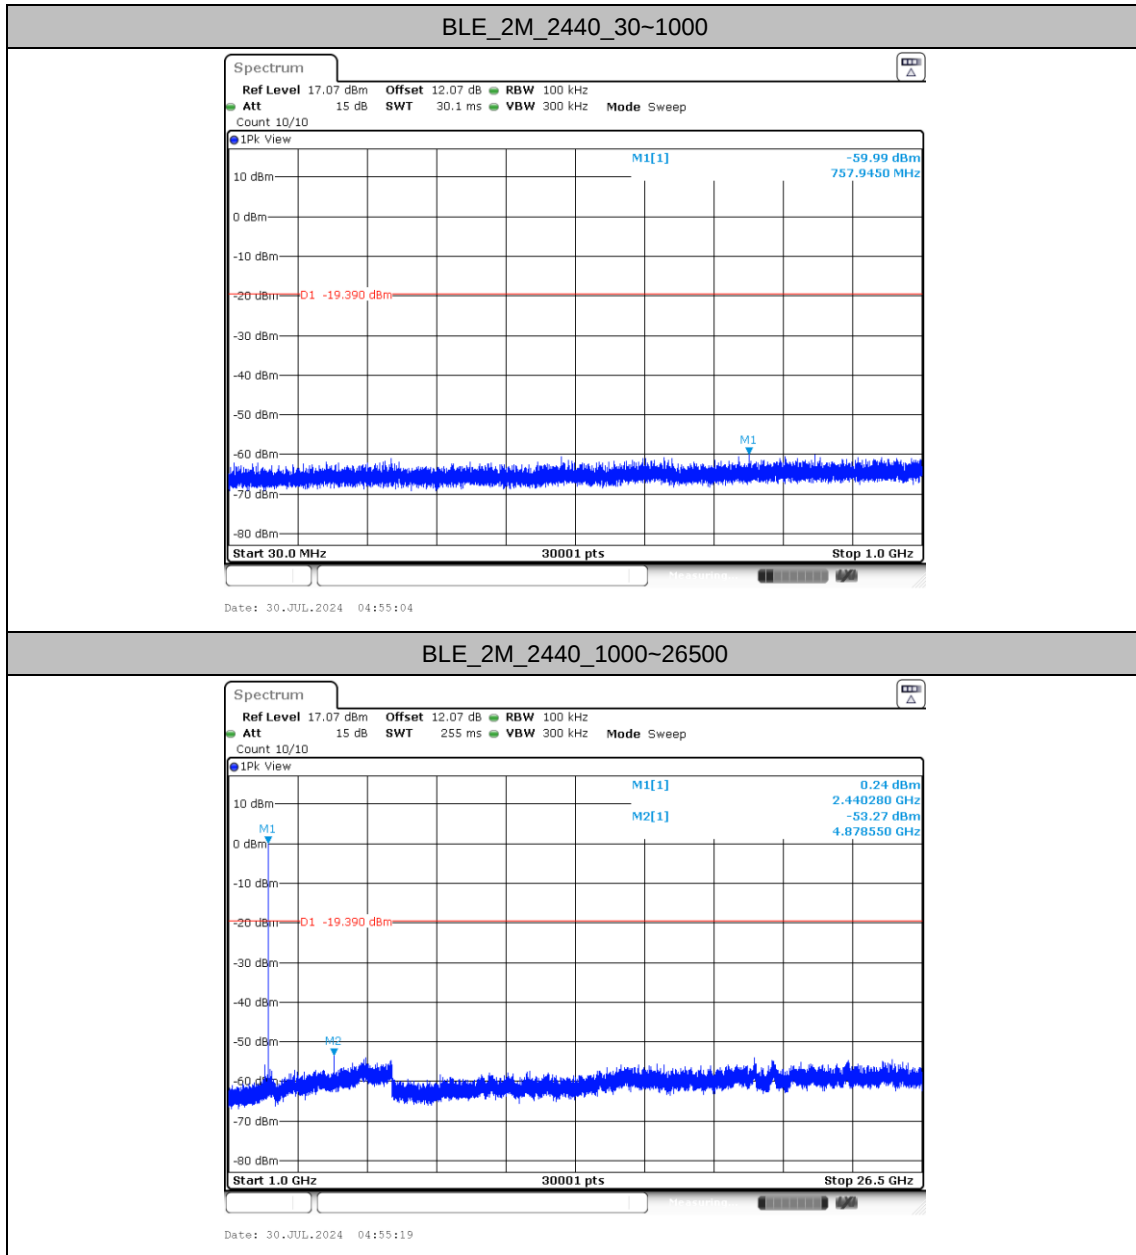

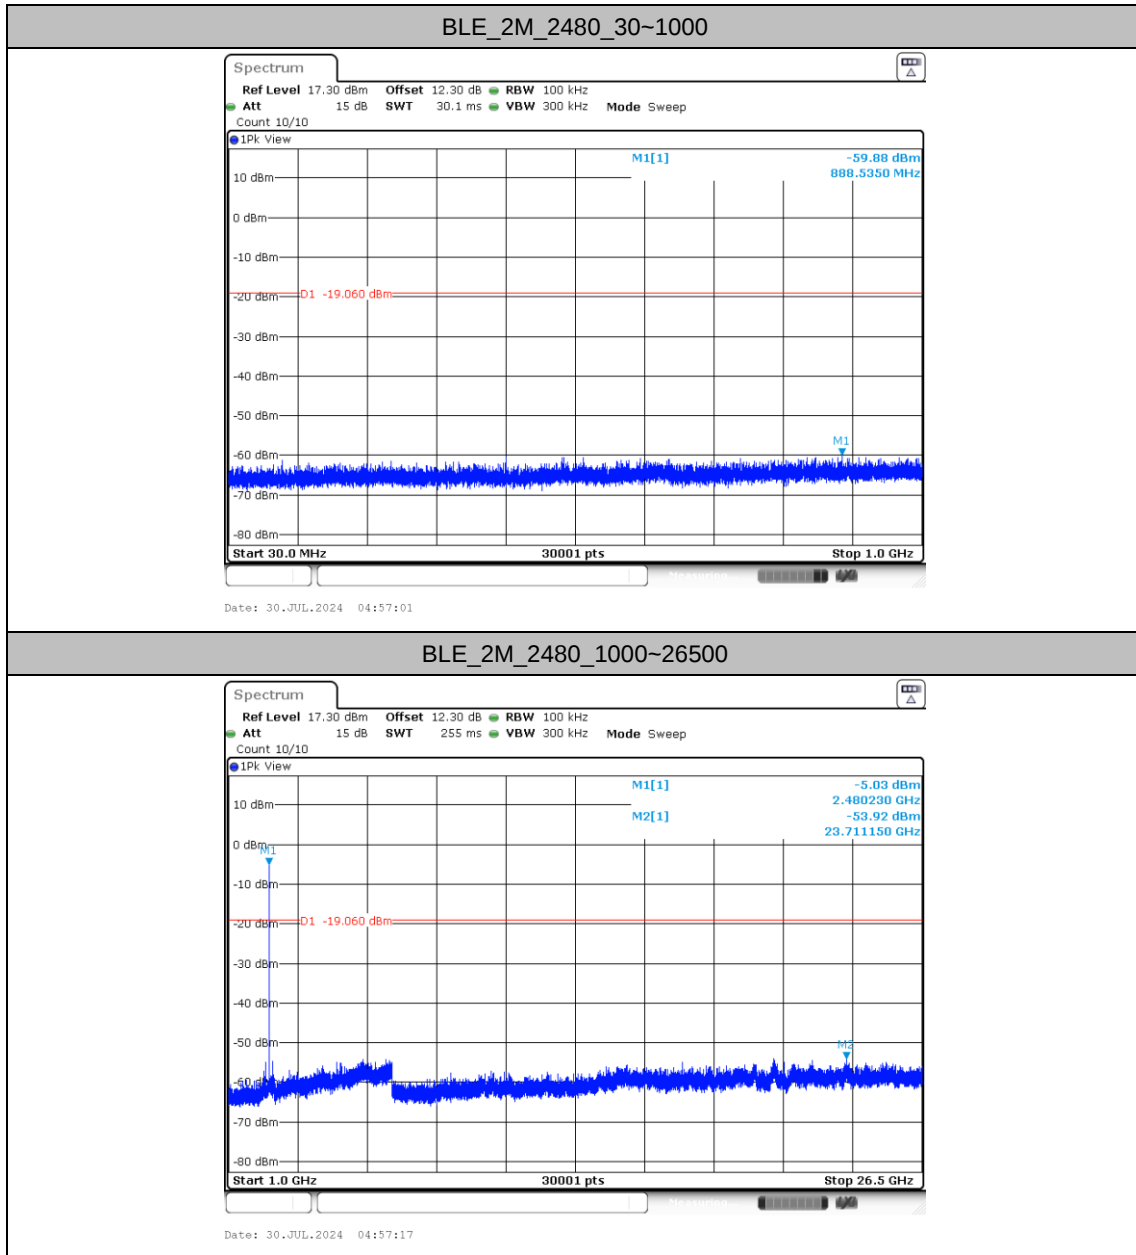



Appendix B. Radiated Spurious Emission

Test Engineer :	Jake zhou	Relative Humidity :	52~56%
		Temperature :	22-25℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	Bluetooth-LE_GSKF	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	00	2337.95	40.27	54.00	-13.73	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	00	7206.00	45.01	71.53	-26.52	V	PEAK	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE_GSKF	19	7320.00	43.98	74.00	-30.02	H	PEAK	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2483.56	67.24	74.00	-6.76	H	PEAK	Pass	Band Edge
3	Bluetooth-LE_GSKF	39	7440.00	43.16	74.00	-30.84	V	PEAK	Pass	Harmonic
4	Bluetooth-LE_GSKF	00	2337.56	39.83	54.00	-14.17	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE_GSKF	00	7206.00	44.79	68.54	-23.75	V	PEAK	Pass	Harmonic
5	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GSKF	19	7320.00	43.34	74.00	-30.66	V	PEAK	Pass	Harmonic
6	Bluetooth-LE_GSKF	39	2483.50	50.75	54.00	-3.25	H	AVERAGE	Pass	Band Edge
6	Bluetooth-LE_GSKF	39	7440.00	42.50	74.00	-31.50	V	PEAK	Pass	Harmonic

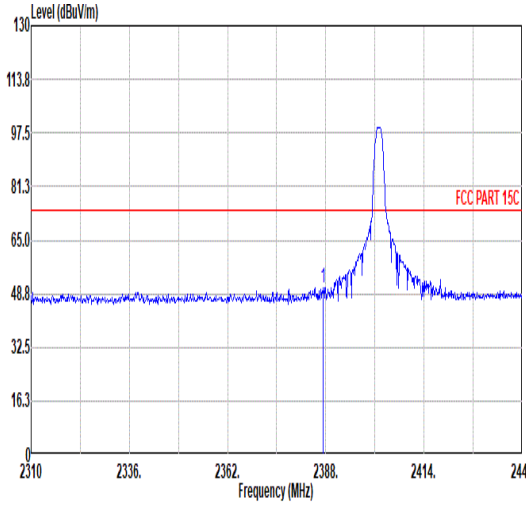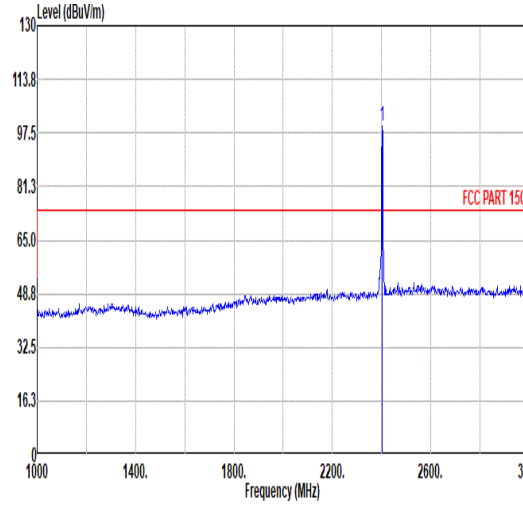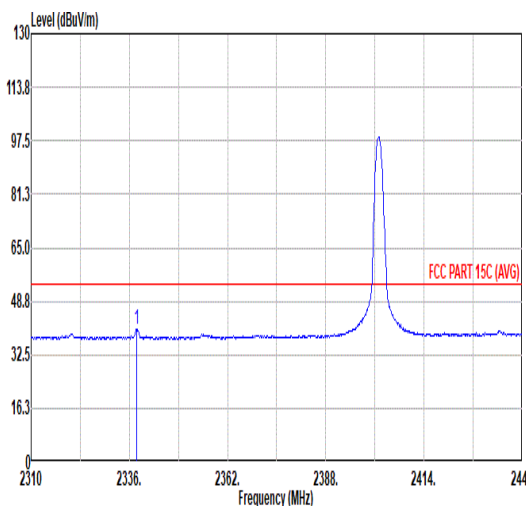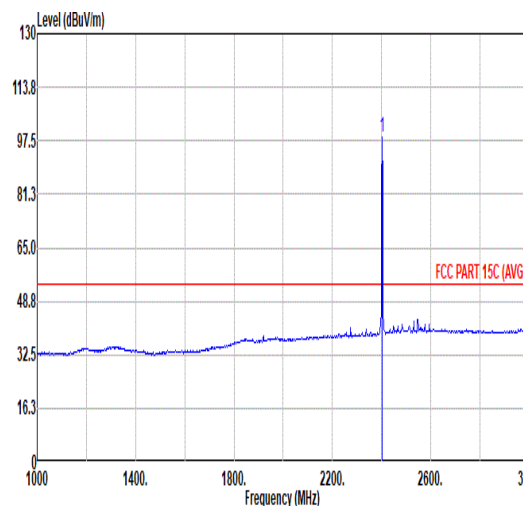


		1																																																																																																					
Mode		Band Edge																																																																																																					
		2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																					
Pol.	Horizontal										Fundamental																																																																																												
Peak																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2387.35</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>42.50</td><td>31.92</td><td>7.16</td><td>36.86</td><td>6.00</td><td>127</td><td>110 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2387.35	50.72	74.00	-23.28	42.50	31.92	7.16	36.86	6.00	127	110 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2402.00</td><td>99.51</td><td>-----</td><td>-----</td><td>91.17</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>127</td><td>110 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2402.00	99.51	-----	-----	91.17	32.02	7.18	36.86	6.00	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1 2387.35	50.72	74.00	-23.28	42.50	31.92	7.16	36.86	6.00	127	110 PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1 2402.00	99.51	-----	-----	91.17	32.02	7.18	36.86	6.00	127	110 PEAK																																																																																													
Avg																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2337.95</td><td>40.27</td><td>54.00</td><td>-13.73</td><td>32.34</td><td>31.72</td><td>7.08</td><td>36.87</td><td>6.00</td><td>127</td><td>110 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2337.95	40.27	54.00	-13.73	32.34	31.72	7.08	36.87	6.00	127	110 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2402.00</td><td>98.65</td><td>-----</td><td>-----</td><td>90.31</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>127</td><td>110 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2402.00	98.65	-----	-----	90.31	32.02	7.18	36.86	6.00	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1 2337.95	40.27	54.00	-13.73	32.34	31.72	7.08	36.87	6.00	127	110 AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1 2402.00	98.65	-----	-----	90.31	32.02	7.18	36.86	6.00	127	110 AVERAGE																																																																																													

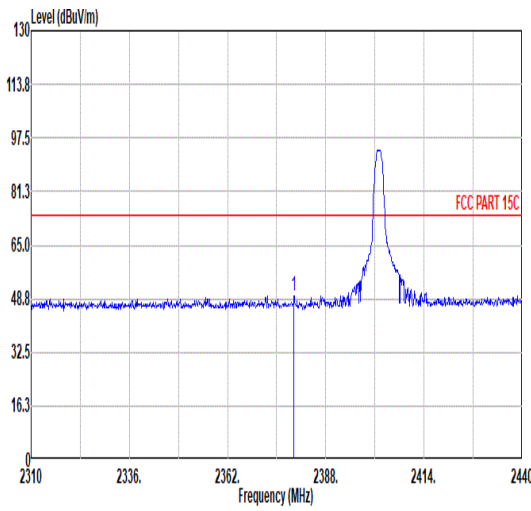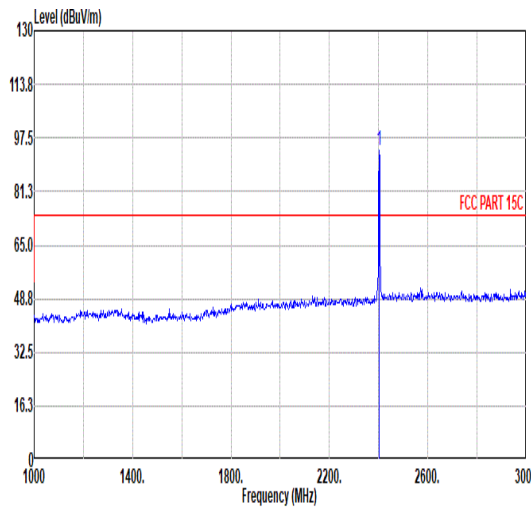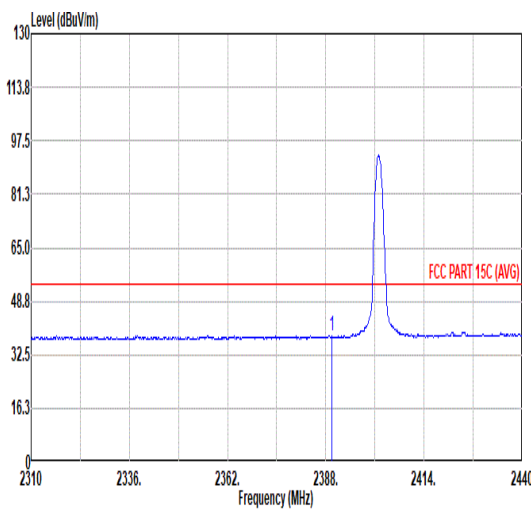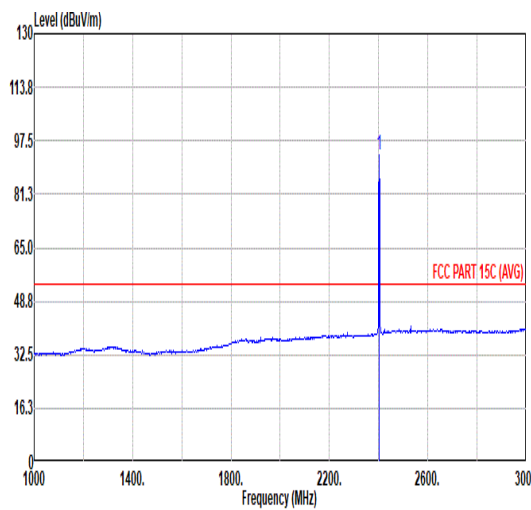

Mode	1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.55</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>41.60</td><td>31.88</td><td>7.15</td><td>36.86</td><td>6.00</td><td>305</td><td>96</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.55	49.77	74.00	-24.23	41.60	31.88	7.15	36.86	6.00	305	96	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.89</td><td>-----</td><td>-----</td><td>85.55</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>305</td><td>96</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.89	-----	-----	85.55	32.02	7.18	36.86	6.00	305	96
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2379.55	49.77	74.00	-24.23	41.60	31.88	7.15	36.86	6.00	305	96	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	93.89	-----	-----	85.55	32.02	7.18	36.86	6.00	305	96	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>38.24</td><td>54.00</td><td>-15.76</td><td>30.00</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>305</td><td>96</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	38.24	54.00	-15.76	30.00	31.94	7.16	36.86	6.00	305	96	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.07</td><td>-----</td><td>-----</td><td>84.73</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>305</td><td>96</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.07	-----	-----	84.73	32.02	7.18	36.86	6.00	305	96
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.56	38.24	54.00	-15.76	30.00	31.94	7.16	36.86	6.00	305	96	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	93.07	-----	-----	84.73	32.02	7.18	36.86	6.00	305	96	AVERAGE																																																																																																			




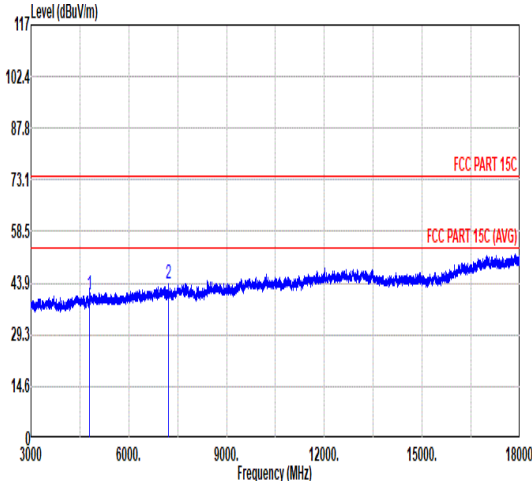


Mode	1																																																						
	Harmonic																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																						
Pol.	Horizontal																																																						
Peak Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>40.59</td><td>74.00</td><td>-33.41</td><td>61.31</td><td>34.32</td><td>10.27</td><td>65.31</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>43.89</td><td>76.96</td><td>-33.07</td><td>62.58</td><td>35.89</td><td>12.61</td><td>67.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	40.59	74.00	-33.41	61.31	34.32	10.27	65.31	0.00	--	-- PEAK	2	43.89	76.96	-33.07	62.58	35.89	12.61	67.19	0.00	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
1	40.59	74.00	-33.41	61.31	34.32	10.27	65.31	0.00	--	-- PEAK																																													
2	43.89	76.96	-33.07	62.58	35.89	12.61	67.19	0.00	--	-- Peak																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>40.59</td><td>74.00</td><td>-33.41</td><td>61.31</td><td>34.32</td><td>10.27</td><td>65.31</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>43.89</td><td>76.96</td><td>-33.07</td><td>62.58</td><td>35.89</td><td>12.61</td><td>67.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	40.59	74.00	-33.41	61.31	34.32	10.27	65.31	0.00	--	-- PEAK	2	43.89	76.96	-33.07	62.58	35.89	12.61	67.19	0.00	--	-- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
1	40.59	74.00	-33.41	61.31	34.32	10.27	65.31	0.00	--	-- PEAK																																													
2	43.89	76.96	-33.07	62.58	35.89	12.61	67.19	0.00	--	-- Peak																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>41.31</td><td>74.00</td><td>-32.69</td><td>62.03</td><td>34.32</td><td>10.27</td><td>65.31</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>45.01</td><td>71.53</td><td>-26.52</td><td>63.70</td><td>35.89</td><td>12.61</td><td>67.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	41.31	74.00	-32.69	62.03	34.32	10.27	65.31	0.00	--	-- PEAK	2	45.01	71.53	-26.52	63.70	35.89	12.61	67.19	0.00	--	-- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
1	41.31	74.00	-32.69	62.03	34.32	10.27	65.31	0.00	--	-- PEAK																																													
2	45.01	71.53	-26.52	63.70	35.89	12.61	67.19	0.00	--	-- Peak																																													







Mode	2																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg	Horizontal Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 73.1 dBuV/m and FCC PART 15C (AVG) at 58.5 dBuV/m. Two blue vertical lines mark frequencies 1 (4880.00 MHz) and 2 (7320.00 MHz). The measured signal is shown as a blue line fluctuating around 43.9 dBuV/m. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>40.51</td><td>74.00</td><td>-33.49</td><td>60.79</td><td>34.62</td><td>10.35</td><td>65.25</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>43.98</td><td>74.00</td><td>-30.02</td><td>62.90</td><td>35.74</td><td>12.79</td><td>67.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.51	74.00	-33.49	60.79	34.62	10.35	65.25	0.00	--	--	PEAK	2	7320.00	43.98	74.00	-30.02	62.90	35.74	12.79	67.45	0.00	--	--	PEAK	Vertical Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 73.1 dBuV/m and FCC PART 15C (AVG) at 58.5 dBuV/m. Two blue vertical lines mark frequencies 1 (4880.00 MHz) and 2 (7320.00 MHz). The measured signal is shown as a blue line fluctuating around 43.9 dBuV/m. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>40.49</td><td>74.00</td><td>-33.51</td><td>60.77</td><td>34.62</td><td>10.35</td><td>65.25</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>43.89</td><td>74.00</td><td>-30.11</td><td>62.81</td><td>35.74</td><td>12.79</td><td>67.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.49	74.00	-33.51	60.77	34.62	10.35	65.25	0.00	--	--	PEAK	2	7320.00	43.89	74.00	-30.11	62.81	35.74	12.79	67.45	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	40.51	74.00	-33.49	60.79	34.62	10.35	65.25	0.00	--	--	PEAK																																																																																																																		
2	7320.00	43.98	74.00	-30.02	62.90	35.74	12.79	67.45	0.00	--	--	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	40.49	74.00	-33.51	60.77	34.62	10.35	65.25	0.00	--	--	PEAK																																																																																																																		
2	7320.00	43.89	74.00	-30.11	62.81	35.74	12.79	67.45	0.00	--	--	PEAK																																																																																																																		

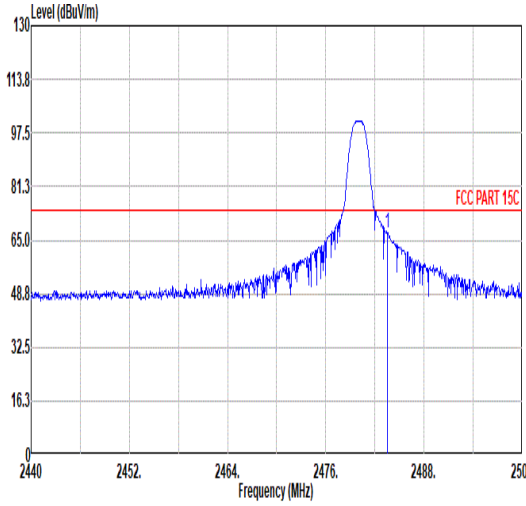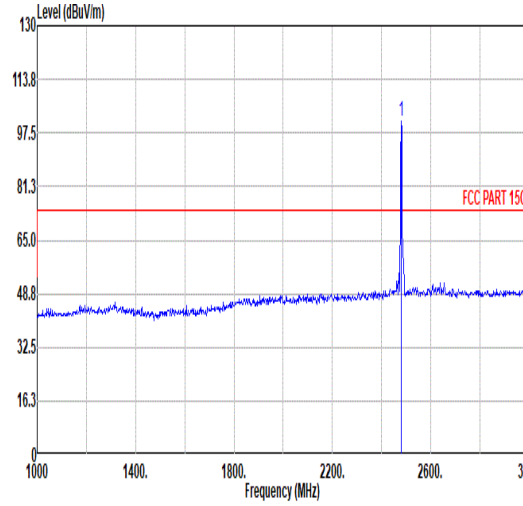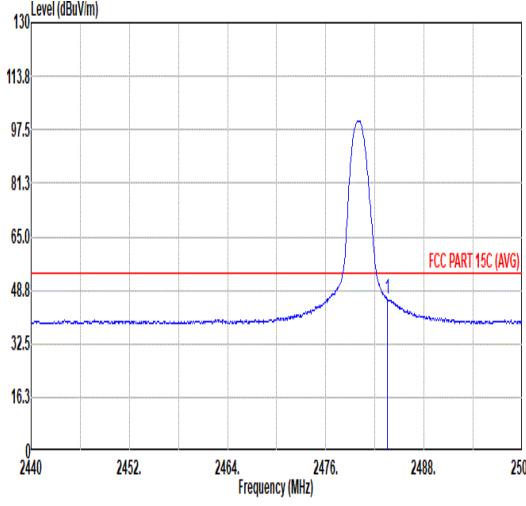
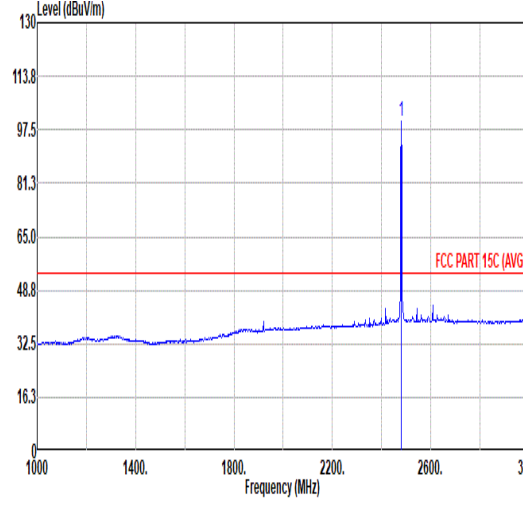


		3																																																				
Mode	Band Edge																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																					
Pol.	Horizontal																																																					
Peak																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>67.24</td><td>74.00</td><td>-6.76</td><td>58.16</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>145 108 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	67.24	74.00	-6.76	58.16	32.60	7.33	36.85	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.56	67.24	74.00	-6.76	58.16	32.60	7.33	36.85	6.00	145 108 PEAK																																												
Fundamental																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.22</td><td>-----</td><td>-----</td><td>92.15</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>145 108 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.22	-----	-----	92.15	32.60	7.32	36.85	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2480.00	101.22	-----	-----	92.15	32.60	7.32	36.85	6.00	145 108 PEAK																																												
Avg																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>46.15</td><td>54.00</td><td>-7.85</td><td>37.07</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>145 108 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.15	54.00	-7.85	37.07	32.60	7.33	36.85	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	46.15	54.00	-7.85	37.07	32.60	7.33	36.85	6.00	145 108 AVERAGE																																												
Avg																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>100.22</td><td>-----</td><td>-----</td><td>91.15</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>145 108 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.22	-----	-----	91.15	32.60	7.32	36.85	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2480.00	100.22	-----	-----	91.15	32.60	7.32	36.85	6.00	145 108 AVERAGE																																												

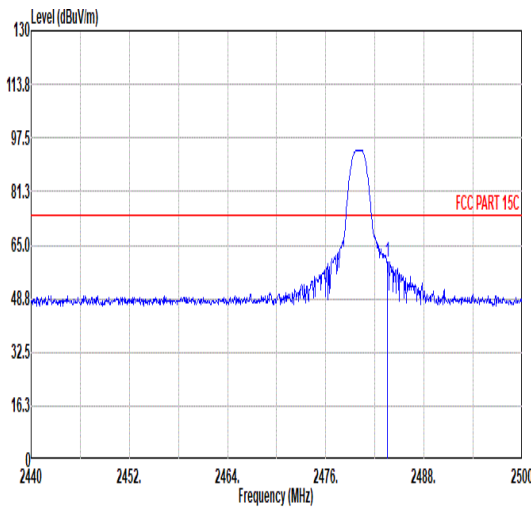
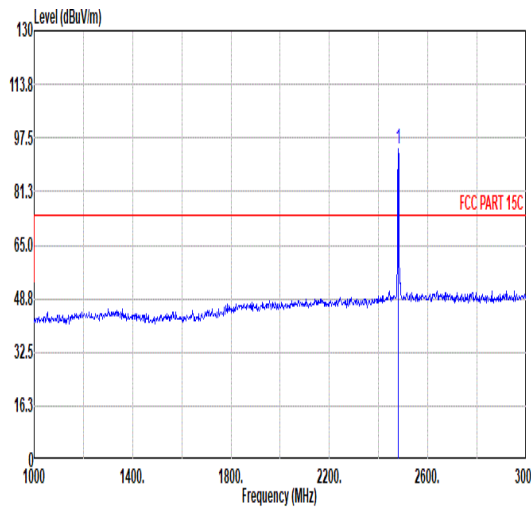
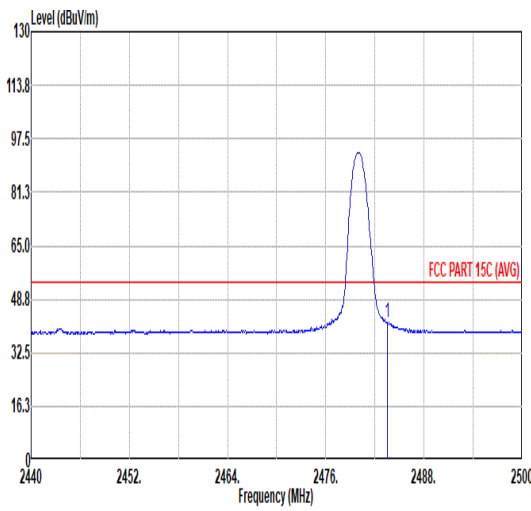
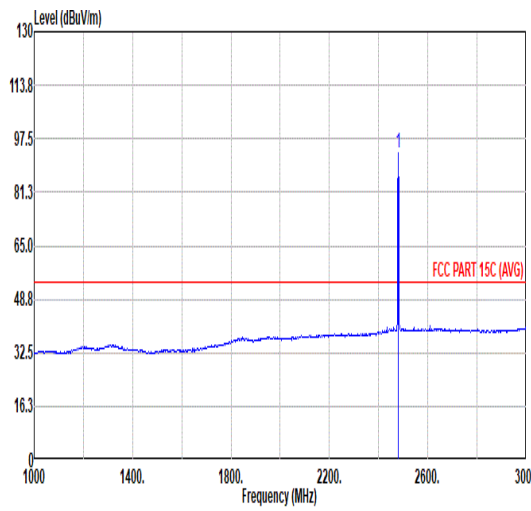


Mode	3																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>60.03</td><td>74.00</td><td>-13.97</td><td>50.95</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>388</td><td>146</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	60.03	74.00	-13.97	50.95	32.60	7.33	36.85	6.00	388	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	60.03	74.00	-13.97	50.95	32.60	7.33	36.85	6.00	388	146	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.17</td><td>-----</td><td>-----</td><td>85.10</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>388</td><td>146</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.17	-----	-----	85.10	32.60	7.32	36.85	6.00	388	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	94.17	-----	-----	85.10	32.60	7.32	36.85	6.00	388	146	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>32.52</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>388</td><td>146</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	41.60	54.00	-12.40	32.52	32.60	7.33	36.85	6.00	388	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	41.60	54.00	-12.40	32.52	32.60	7.33	36.85	6.00	388	146	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.28</td><td>-----</td><td>-----</td><td>84.21</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>388</td><td>146</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.28	-----	-----	84.21	32.60	7.32	36.85	6.00	388	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	93.28	-----	-----	84.21	32.60	7.32	36.85	6.00	388	146	AVERAGE																																											



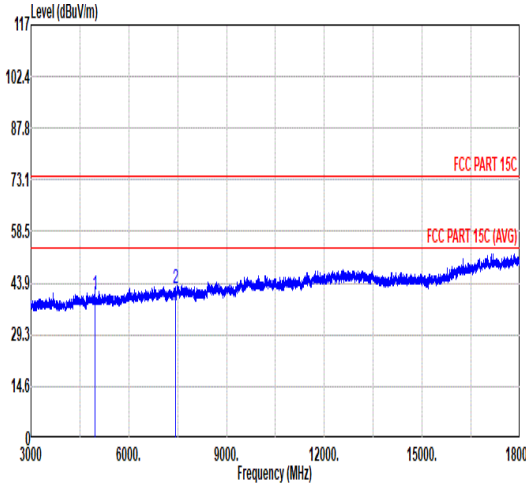
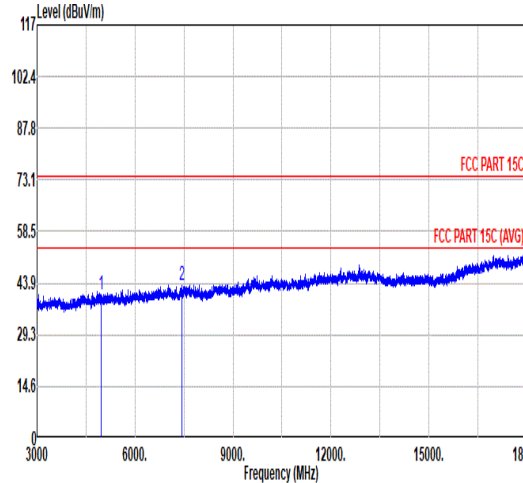


Mode	3																																																																				
	Harmonic																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.72</td><td>74.00</td><td>-33.28</td><td>61.39</td><td>34.54</td><td>10.44</td><td>65.65</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.38</td><td>74.00</td><td>-31.62</td><td>60.63</td><td>35.66</td><td>12.93</td><td>66.84</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.72	74.00	-33.28	61.39	34.54	10.44	65.65	0.00	--	--	PEAK	2	7440.00	42.38	74.00	-31.62	60.63	35.66	12.93	66.84	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4960.00	40.72	74.00	-33.28	61.39	34.54	10.44	65.65	0.00	--	--	PEAK																																																									
2	7440.00	42.38	74.00	-31.62	60.63	35.66	12.93	66.84	0.00	--	--	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.78</td><td>74.00</td><td>-33.22</td><td>61.45</td><td>34.54</td><td>10.44</td><td>65.65</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.16</td><td>74.00</td><td>-30.84</td><td>61.41</td><td>35.66</td><td>12.93</td><td>66.84</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.78	74.00	-33.22	61.45	34.54	10.44	65.65	0.00	--	--	PEAK	2	7440.00	43.16	74.00	-30.84	61.41	35.66	12.93	66.84	0.00	--	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4960.00	40.78	74.00	-33.22	61.45	34.54	10.44	65.65	0.00	--	--	PEAK																																																									
2	7440.00	43.16	74.00	-30.84	61.41	35.66	12.93	66.84	0.00	--	--	PEAK																																																									

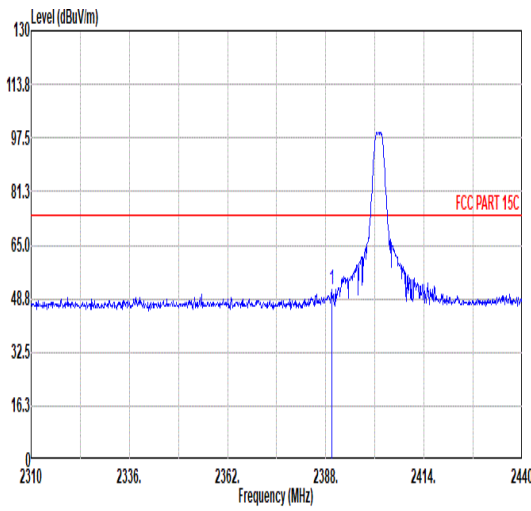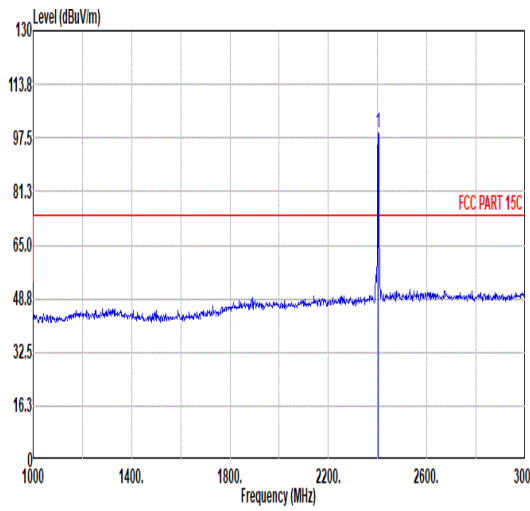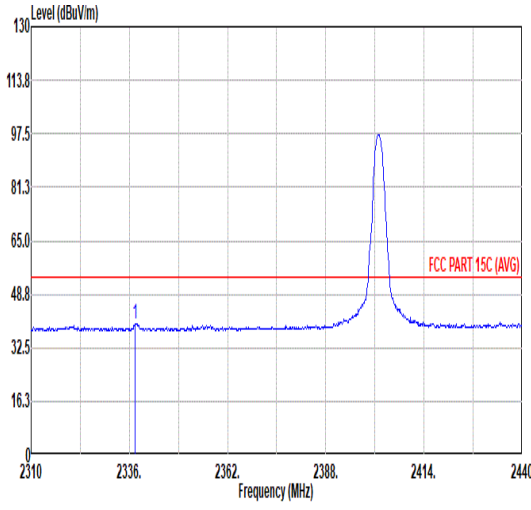
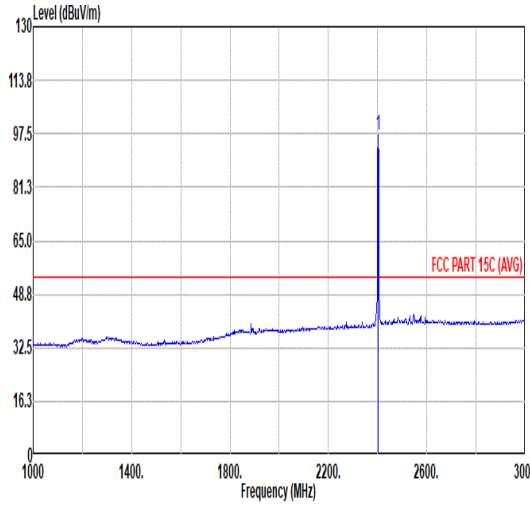


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>51.37</td><td>74.00</td><td>-22.63</td><td>43.13</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>128</td><td>109</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	51.37	74.00	-22.63	43.13	31.94	7.16	36.86	6.00	128	109	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.24</td><td>-----</td><td>-----</td><td>90.90</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>128</td><td>109</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.24	-----	-----	90.90	32.02	7.18	36.86	6.00	128	109
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.56	51.37	74.00	-22.63	43.13	31.94	7.16	36.86	6.00	128	109	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	99.24	-----	-----	90.90	32.02	7.18	36.86	6.00	128	109	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2337.56</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>31.90</td><td>31.72</td><td>7.00</td><td>36.87</td><td>6.00</td><td>128</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2337.56	39.83	54.00	-14.17	31.90	31.72	7.00	36.87	6.00	128	109	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.05</td><td>-----</td><td>-----</td><td>88.71</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>128</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.05	-----	-----	88.71	32.02	7.18	36.86	6.00	128	109
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2337.56	39.83	54.00	-14.17	31.90	31.72	7.00	36.87	6.00	128	109	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	97.05	-----	-----	88.71	32.02	7.18	36.86	6.00	128	109	AVERAGE																																																																																							

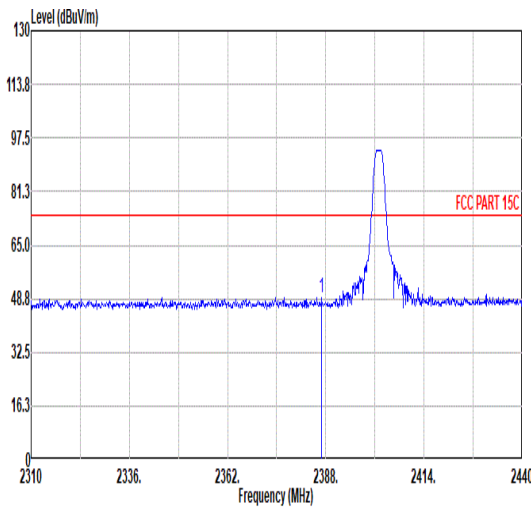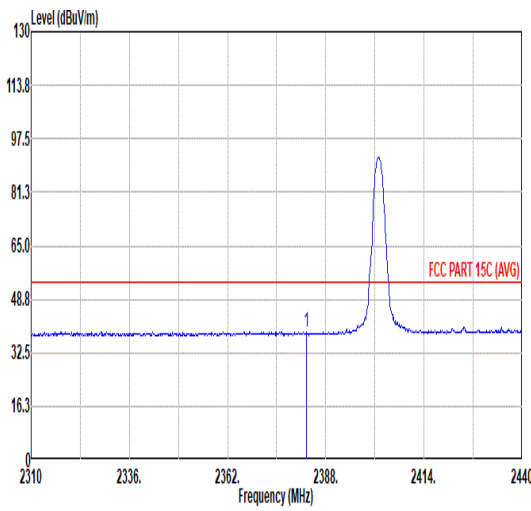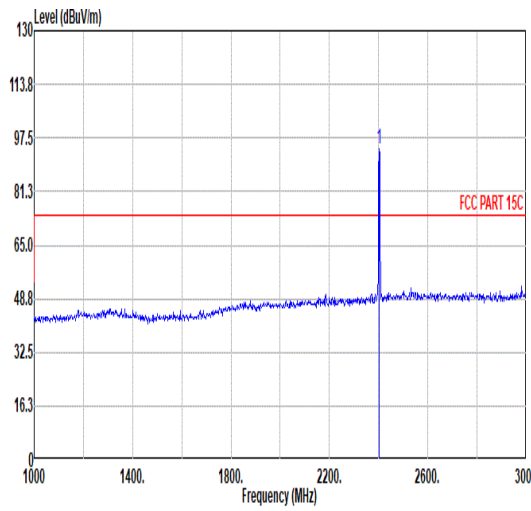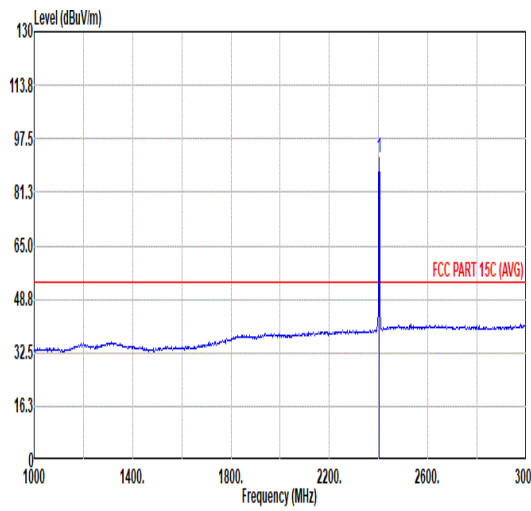

		4																																									
Mode	Band Edge																																										
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																										
Pol.	Vertical					Fundamental																																					
Peak																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.96</td><td>48.99</td><td>74.00</td><td>-25.01</td><td>40.77</td><td>31.92</td><td>7.16</td><td>36.86</td><td>6.00</td><td>305 96 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2386.96	48.99	74.00	-25.01	40.77	31.92	7.16	36.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																	
1	2386.96	48.99	74.00	-25.01	40.77	31.92	7.16	36.86	6.00	305 96 PEAK																																	
Avg																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.00</td><td>38.94</td><td>54.00</td><td>-15.06</td><td>30.75</td><td>31.90</td><td>7.15</td><td>36.86</td><td>6.00</td><td>305 96 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2382.00	38.94	54.00	-15.06	30.75	31.90	7.15	36.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																	
1	2382.00	38.94	54.00	-15.06	30.75	31.90	7.15	36.86	6.00	305 96 AVERAGE																																	
Peak																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.95</td><td>-----</td><td>-----</td><td>85.61</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>305 96 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2402.00	93.95	-----	-----	85.61	32.02	7.18	36.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																	
1	2402.00	93.95	-----	-----	85.61	32.02	7.18	36.86	6.00	305 96 PEAK																																	
Avg																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>91.78</td><td>-----</td><td>-----</td><td>83.44</td><td>32.02</td><td>7.18</td><td>36.86</td><td>6.00</td><td>305 96 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2402.00	91.78	-----	-----	83.44	32.02	7.18	36.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																	
1	2402.00	91.78	-----	-----	83.44	32.02	7.18	36.86	6.00	305 96 AVERAGE																																	



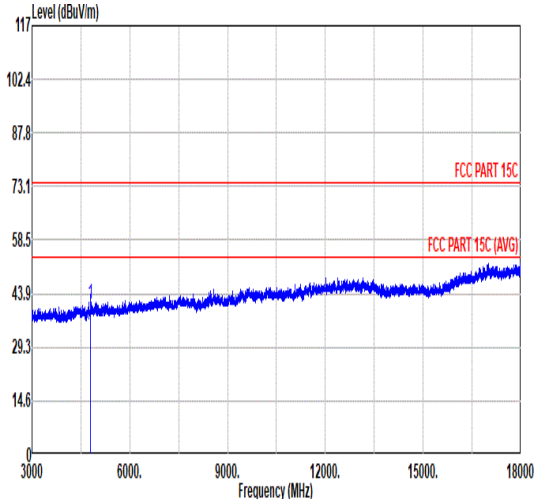
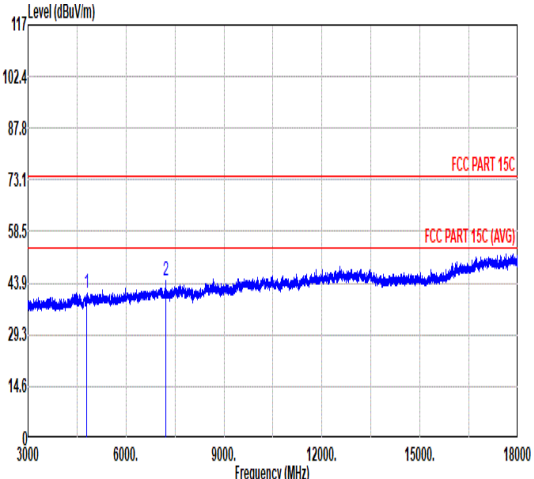


Mode	4																																																																																																												
	Harmonic																																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																												
Pol.	Horizontal						Vertical																																																																																																						
Peak Avg																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>41.27</td><td>74.00</td><td>-32.73</td><td>61.99</td><td>34.32</td><td>10.27</td><td>65.31</td><td>0.00</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.27	74.00	-32.73	61.99	34.32	10.27	65.31	0.00	--	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>41.03</td><td>74.00</td><td>-32.97</td><td>61.75</td><td>34.32</td><td>10.27</td><td>65.31</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7206.00</td><td>44.79</td><td>68.54</td><td>-23.75</td><td>63.48</td><td>35.89</td><td>12.61</td><td>67.19</td><td>0.00</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.03	74.00	-32.97	61.75	34.32	10.27	65.31	0.00	--	PEAK	2	7206.00	44.79	68.54	-23.75	63.48	35.89	12.61	67.19	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	4804.00	41.27	74.00	-32.73	61.99	34.32	10.27	65.31	0.00	--	PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	4804.00	41.03	74.00	-32.97	61.75	34.32	10.27	65.31	0.00	--	PEAK																																																																																																		
2	7206.00	44.79	68.54	-23.75	63.48	35.89	12.61	67.19	0.00	--	Peak																																																																																																		







Mode	5																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>39.99</td><td>74.00</td><td>-34.01</td><td>60.27</td><td>34.62</td><td>10.35</td><td>65.25</td><td>0.00</td><td>-- -- PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>43.17</td><td>74.00</td><td>-30.83</td><td>62.09</td><td>35.74</td><td>12.79</td><td>67.45</td><td>0.00</td><td>-- -- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	39.99	74.00	-34.01	60.27	34.62	10.35	65.25	0.00	-- -- PEAK	2	7320.00	43.17	74.00	-30.83	62.09	35.74	12.79	67.45	0.00	-- -- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4880.00	39.99	74.00	-34.01	60.27	34.62	10.35	65.25	0.00	-- -- PEAK																																																								
2	7320.00	43.17	74.00	-30.83	62.09	35.74	12.79	67.45	0.00	-- -- PEAK																																																								
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.50</td><td>74.00</td><td>-33.50</td><td>60.78</td><td>34.62</td><td>10.35</td><td>65.25</td><td>0.00</td><td>-- -- PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>43.34</td><td>74.00</td><td>-30.66</td><td>62.26</td><td>35.74</td><td>12.79</td><td>67.45</td><td>0.00</td><td>-- -- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.50	74.00	-33.50	60.78	34.62	10.35	65.25	0.00	-- -- PEAK	2	7320.00	43.34	74.00	-30.66	62.26	35.74	12.79	67.45	0.00	-- -- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4880.00	40.50	74.00	-33.50	60.78	34.62	10.35	65.25	0.00	-- -- PEAK																																																								
2	7320.00	43.34	74.00	-30.66	62.26	35.74	12.79	67.45	0.00	-- -- PEAK																																																								

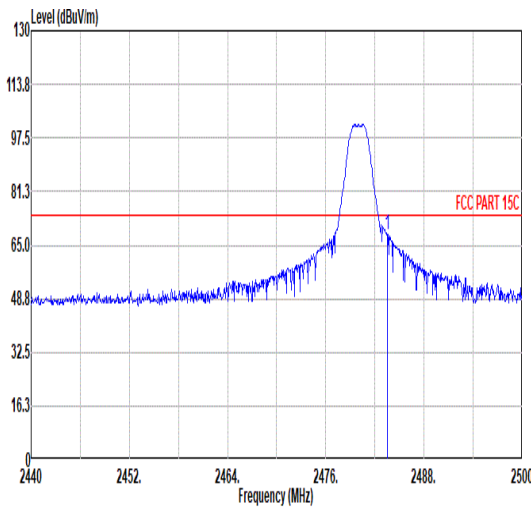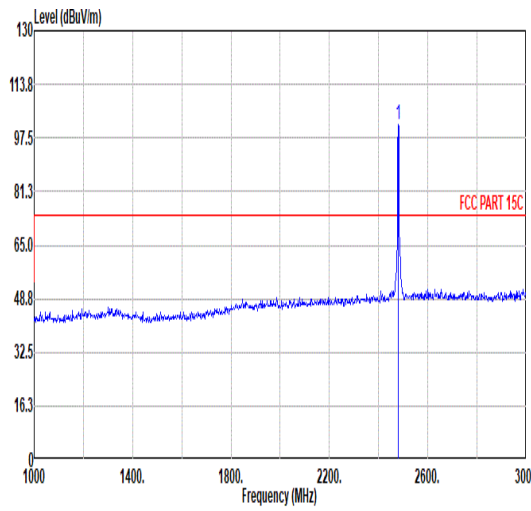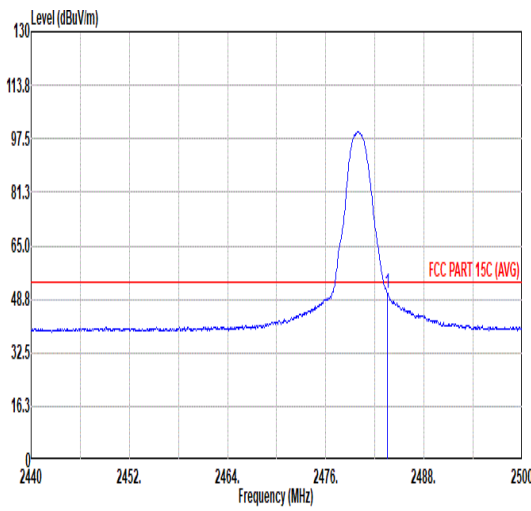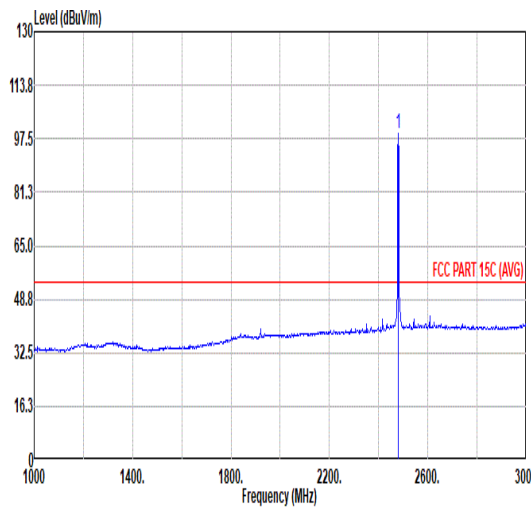

Mode	6																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>68.26</td><td>74.00</td><td>-5.74</td><td>59.18</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>144</td><td>109</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	68.26	74.00	-5.74	59.18	32.60	7.33	36.85	6.00	144	109	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.62</td><td>-----</td><td>-----</td><td>92.55</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>144</td><td>109</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.62	-----	-----	92.55	32.60	7.32	36.85	6.00	144	109
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.56	68.26	74.00	-5.74	59.18	32.60	7.33	36.85	6.00	144	109	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	101.62	-----	-----	92.55	32.60	7.32	36.85	6.00	144	109	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.75</td><td>54.00</td><td>-3.25</td><td>41.67</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>144</td><td>109</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.75	54.00	-3.25	41.67	32.60	7.33	36.85	6.00	144	109	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.31</td><td>-----</td><td>-----</td><td>90.24</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>144</td><td>109</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.31	-----	-----	90.24	32.60	7.32	36.85	6.00	144	109
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	50.75	54.00	-3.25	41.67	32.60	7.33	36.85	6.00	144	109	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	99.31	-----	-----	90.24	32.60	7.32	36.85	6.00	144	109	AVERAGE																																																																																																			

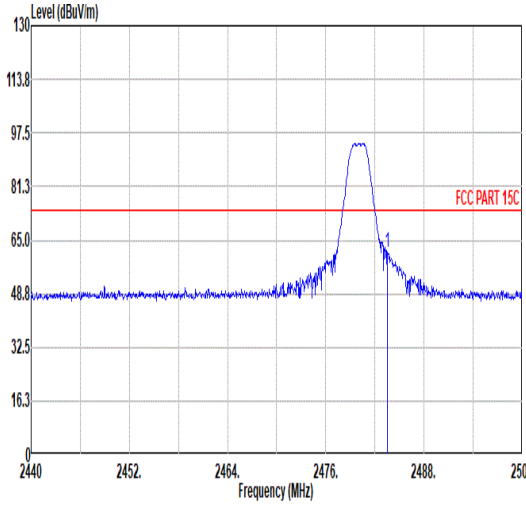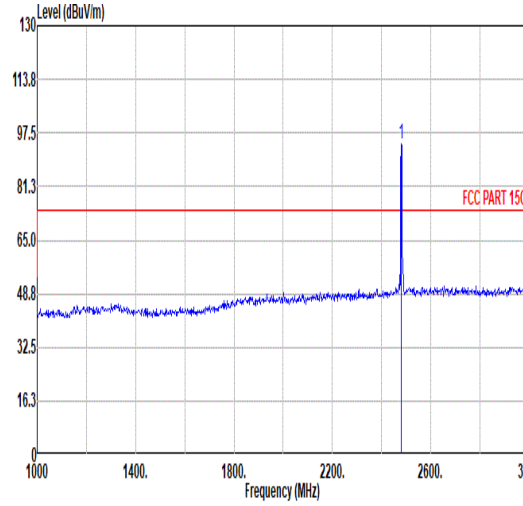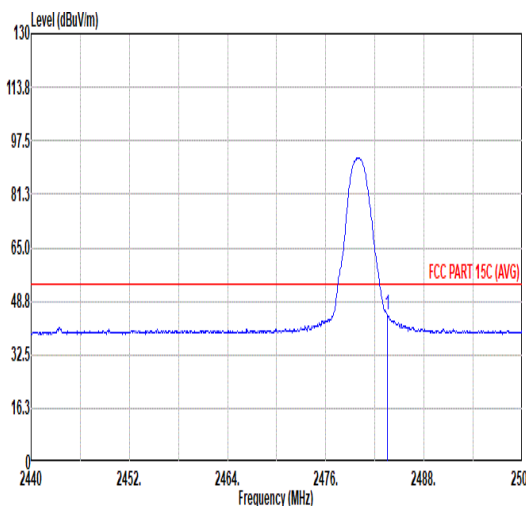
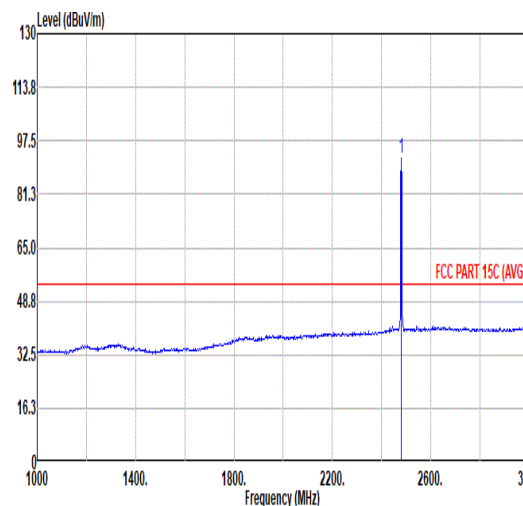


		6																																																																																											
Mode		Band Edge																																																																																											
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																											
Pol.	Vertical					Fundamental																																																																																							
Peak																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.50</td><td>61.28</td><td>74.00</td><td>-12.72</td><td>52.20</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>388</td><td>147 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.50	61.28	74.00	-12.72	52.20	32.60	7.33	36.85	6.00	388	147 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>94.38</td><td>-----</td><td>-----</td><td>85.31</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>388</td><td>147 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	94.38	-----	-----	85.31	32.60	7.32	36.85	6.00	388
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2483.50	61.28	74.00	-12.72	52.20	32.60	7.33	36.85	6.00	388	147 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2480.00	94.38	-----	-----	85.31	32.60	7.32	36.85	6.00	388	147 PEAK																																																																																			
Avg																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.50</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>35.67</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>388</td><td>147 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.50	44.75	54.00	-9.25	35.67	32.60	7.33	36.85	6.00	388	147 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>92.19</td><td>-----</td><td>-----</td><td>83.12</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>388</td><td>147 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	92.19	-----	-----	83.12	32.60	7.32	36.85	6.00	388
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2483.50	44.75	54.00	-9.25	35.67	32.60	7.33	36.85	6.00	388	147 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2480.00	92.19	-----	-----	83.12	32.60	7.32	36.85	6.00	388	147 AVERAGE																																																																																			





Mode	6																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.75</td><td>74.00</td><td>-33.25</td><td>61.42</td><td>34.54</td><td>10.44</td><td>65.65</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.03</td><td>74.00</td><td>-31.97</td><td>60.28</td><td>35.66</td><td>12.93</td><td>66.84</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.75	74.00	-33.25	61.42	34.54	10.44	65.65	0.00	--	PEAK	2	7440.00	42.03	74.00	-31.97	60.28	35.66	12.93	66.84	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.58</td><td>74.00</td><td>-33.42</td><td>61.25</td><td>34.54</td><td>10.44</td><td>65.65</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.50</td><td>74.00</td><td>-31.50</td><td>60.75</td><td>35.66</td><td>12.93</td><td>66.84</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.58	74.00	-33.42	61.25	34.54	10.44	65.65	0.00	--	PEAK	2	7440.00	42.50	74.00	-31.50	60.75	35.66	12.93	66.84	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4960.00	40.75	74.00	-33.25	61.42	34.54	10.44	65.65	0.00	--	PEAK																																																																																																														
2	7440.00	42.03	74.00	-31.97	60.28	35.66	12.93	66.84	0.00	--	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4960.00	40.58	74.00	-33.42	61.25	34.54	10.44	65.65	0.00	--	PEAK																																																																																																														
2	7440.00	42.50	74.00	-31.50	60.75	35.66	12.93	66.84	0.00	--	PEAK																																																																																																														

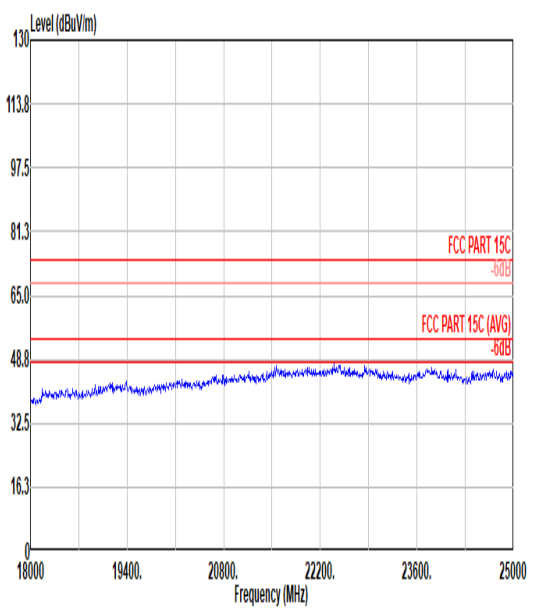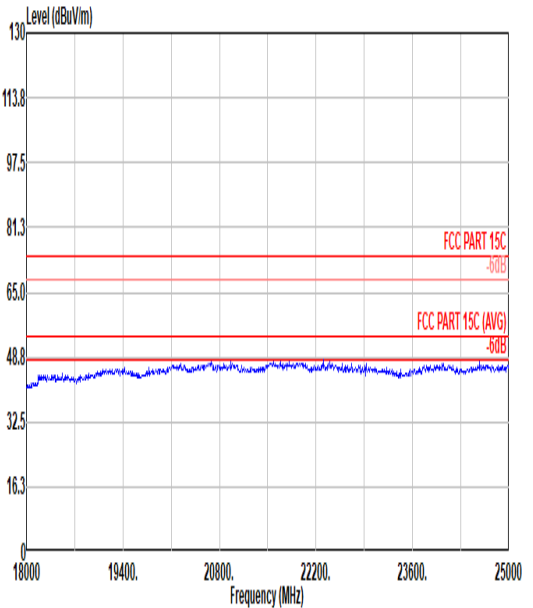

Mode	6	
	18G-25G	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
Pol.	Horizontal	Vertical
Peak Avg		

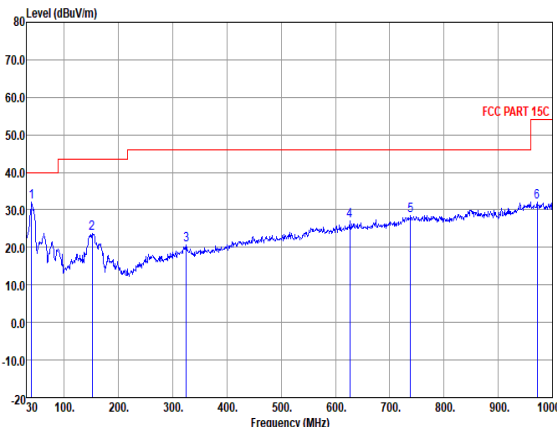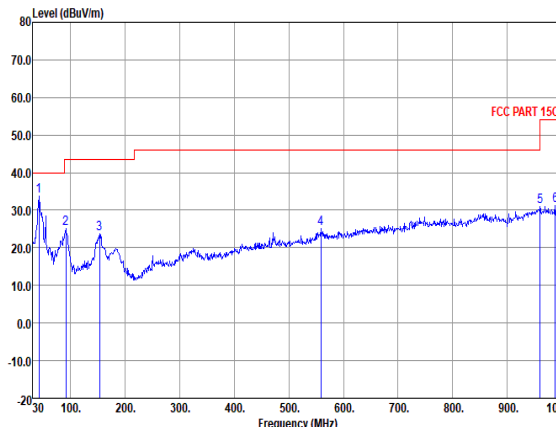


Mode	6																																																																																																																																																																																																						
	LF																																																																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																						
Pol.	Horizontal										Vertical																																																																																																																																																																																												
Peak																																																																																																																																																																																																							
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamp Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 p</td><td>39.70</td><td>32.06</td><td>-7.94</td><td>40.00</td><td>44.45</td><td>19.61</td><td>0.86</td><td>32.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>151.25</td><td>23.62</td><td>-19.88</td><td>43.50</td><td>37.54</td><td>16.99</td><td>1.80</td><td>32.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>324.88</td><td>20.75</td><td>-25.25</td><td>46.00</td><td>31.47</td><td>19.47</td><td>2.65</td><td>32.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>626.55</td><td>27.10</td><td>-18.90</td><td>46.00</td><td>30.48</td><td>26.22</td><td>3.69</td><td>33.29</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>738.10</td><td>28.48</td><td>-17.52</td><td>46.00</td><td>29.50</td><td>28.16</td><td>4.04</td><td>33.22</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>971.87</td><td>32.07</td><td>-21.93</td><td>54.00</td><td>27.86</td><td>31.01</td><td>4.63</td><td>31.43</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 p	39.70	32.06	-7.94	40.00	44.45	19.61	0.86	32.86	---	---	Peak	2	151.25	23.62	-19.88	43.50	37.54	16.99	1.80	32.71	---	---	Peak	3	324.88	20.75	-25.25	46.00	31.47	19.47	2.65	32.84	---	---	Peak	4	626.55	27.10	-18.90	46.00	30.48	26.22	3.69	33.29	---	---	Peak	5	738.10	28.48	-17.52	46.00	29.50	28.16	4.04	33.22	---	---	Peak	6	971.87	32.07	-21.93	54.00	27.86	31.01	4.63	31.43	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamp Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 p</td><td>41.64</td><td>33.68</td><td>-6.32</td><td>40.00</td><td>47.12</td><td>18.49</td><td>0.90</td><td>32.83</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>91.11</td><td>25.04</td><td>-18.46</td><td>43.50</td><td>41.63</td><td>14.75</td><td>1.35</td><td>32.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>153.19</td><td>23.61</td><td>-19.89</td><td>43.50</td><td>37.66</td><td>16.85</td><td>1.81</td><td>32.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>558.65</td><td>25.06</td><td>-20.94</td><td>46.00</td><td>28.94</td><td>26.09</td><td>3.27</td><td>33.24</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>960.23</td><td>31.01</td><td>-22.99</td><td>54.00</td><td>26.95</td><td>31.01</td><td>4.61</td><td>31.56</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>988.36</td><td>31.20</td><td>-22.80</td><td>54.00</td><td>27.14</td><td>30.65</td><td>4.66</td><td>31.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 p	41.64	33.68	-6.32	40.00	47.12	18.49	0.90	32.83	---	---	Peak	2	91.11	25.04	-18.46	43.50	41.63	14.75	1.35	32.69	---	---	Peak	3	153.19	23.61	-19.89	43.50	37.66	16.85	1.81	32.71	---	---	Peak	4	558.65	25.06	-20.94	46.00	28.94	26.09	3.27	33.24	---	---	Peak	5	960.23	31.01	-22.99	54.00	26.95	31.01	4.61	31.56	---	---	Peak	6	988.36	31.20	-22.80	54.00	27.14	30.65	4.66	31.25	---	---	Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark																																																																																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																													
1 p	39.70	32.06	-7.94	40.00	44.45	19.61	0.86	32.86	---	---	Peak																																																																																																																																																																																												
2	151.25	23.62	-19.88	43.50	37.54	16.99	1.80	32.71	---	---	Peak																																																																																																																																																																																												
3	324.88	20.75	-25.25	46.00	31.47	19.47	2.65	32.84	---	---	Peak																																																																																																																																																																																												
4	626.55	27.10	-18.90	46.00	30.48	26.22	3.69	33.29	---	---	Peak																																																																																																																																																																																												
5	738.10	28.48	-17.52	46.00	29.50	28.16	4.04	33.22	---	---	Peak																																																																																																																																																																																												
6	971.87	32.07	-21.93	54.00	27.86	31.01	4.63	31.43	---	---	Peak																																																																																																																																																																																												
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark																																																																																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																													
1 p	41.64	33.68	-6.32	40.00	47.12	18.49	0.90	32.83	---	---	Peak																																																																																																																																																																																												
2	91.11	25.04	-18.46	43.50	41.63	14.75	1.35	32.69	---	---	Peak																																																																																																																																																																																												
3	153.19	23.61	-19.89	43.50	37.66	16.85	1.81	32.71	---	---	Peak																																																																																																																																																																																												
4	558.65	25.06	-20.94	46.00	28.94	26.09	3.27	33.24	---	---	Peak																																																																																																																																																																																												
5	960.23	31.01	-22.99	54.00	26.95	31.01	4.61	31.56	---	---	Peak																																																																																																																																																																																												
6	988.36	31.20	-22.80	54.00	27.14	30.65	4.66	31.25	---	---	Peak																																																																																																																																																																																												

Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	62.50	0.391	2.556	2.7kHz
Bluetooth LE 2Mbps	32.87	0.206	4.859	5.1kHz
Bluetooth LE 125kbps	82.57	0.309	3.236	3.7kHz
Bluetooth LE 500kbps	57.43	0.108	9.299	10kHz

Bluetooth LE 1Mbps

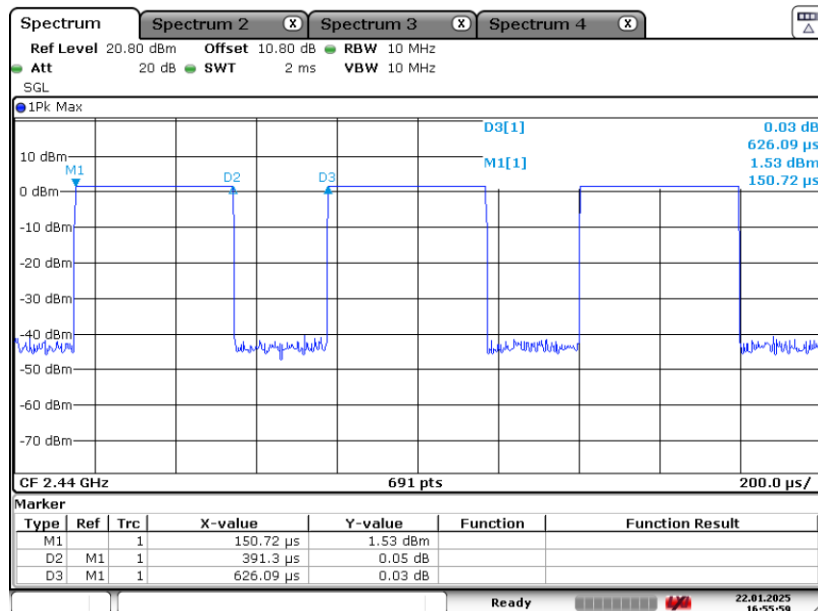




Bluetooth LE 2Mbps

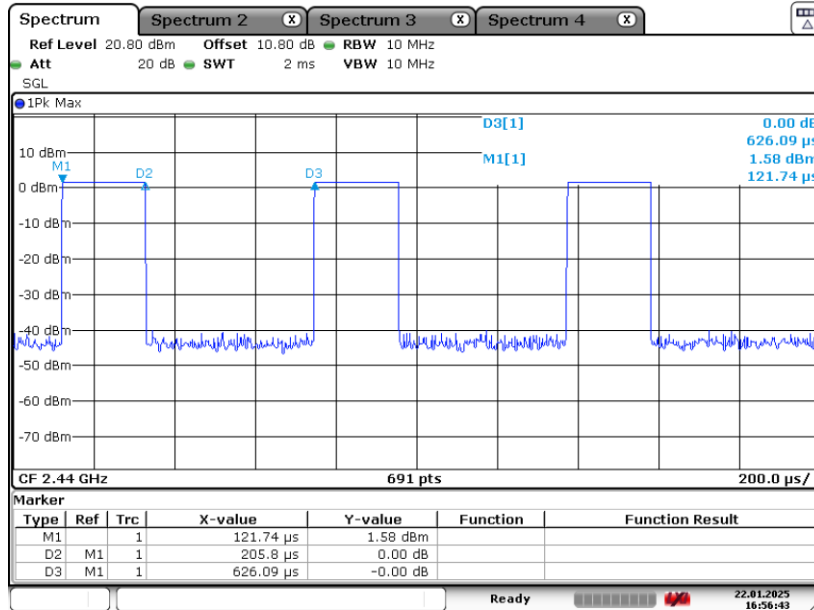

Bluetooth LE 125kbps

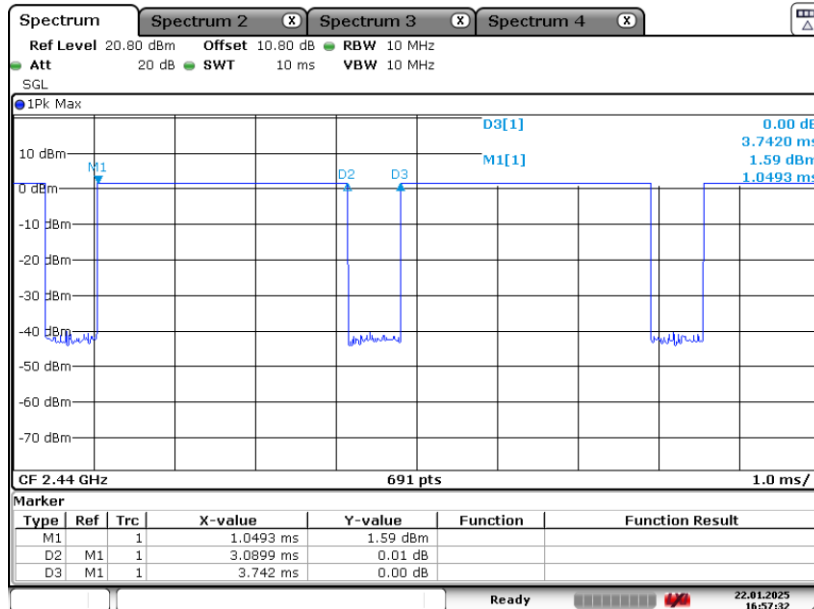



Bluetooth LE 500kpbs

