




9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	(5180-5240MHz)		



Condition	Mode	Frequency (MHz)	-26 dB (MHz)	Verdict
NVNT	a	5180	20.569	Pass
NVNT	a	5200	20.954	Pass
NVNT	a	5240	20.7	Pass
NVNT	n20	5180	20.793	Pass
NVNT	n20	5200	20.946	Pass
NVNT	n20	5240	20.849	Pass
NVNT	n40	5190	38.819	Pass
NVNT	n40	5230	38.708	Pass
NVNT	ac20	5180	20.806	Pass
NVNT	ac20	5200	20.887	Pass
NVNT	ac20	5240	20.658	Pass
NVNT	ac40	5190	38.842	Pass
NVNT	ac40	5230	38.993	Pass
NVNT	ac80	5210	81.184	Pass
NVNT	ax20	5180	20.756	Pass
NVNT	ax20	5200	20.891	Pass
NVNT	ax20	5240	20.84	Pass
NVNT	ax40	5190	39.853	Pass
NVNT	ax40	5230	39.153	Pass
NVNT	ax80	5210	81.363	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.717
NVNT	a	5200	16.715
NVNT	a	5240	16.698
NVNT	n20	5180	17.74
NVNT	n20	5200	17.729
NVNT	n20	5240	17.721
NVNT	n40	5190	36.482
NVNT	n40	5230	36.549
NVNT	ac20	5180	17.737
NVNT	ac20	5200	17.733
NVNT	ac20	5240	17.718
NVNT	ac40	5190	36.467
NVNT	ac40	5230	36.421
NVNT	ac80	5210	75.661
NVNT	ax20	5180	18.925
NVNT	ax20	5200	18.997
NVNT	ax20	5240	18.96
NVNT	ax40	5190	36.258
NVNT	ax40	5230	37.755
NVNT	ax80	5210	76.875


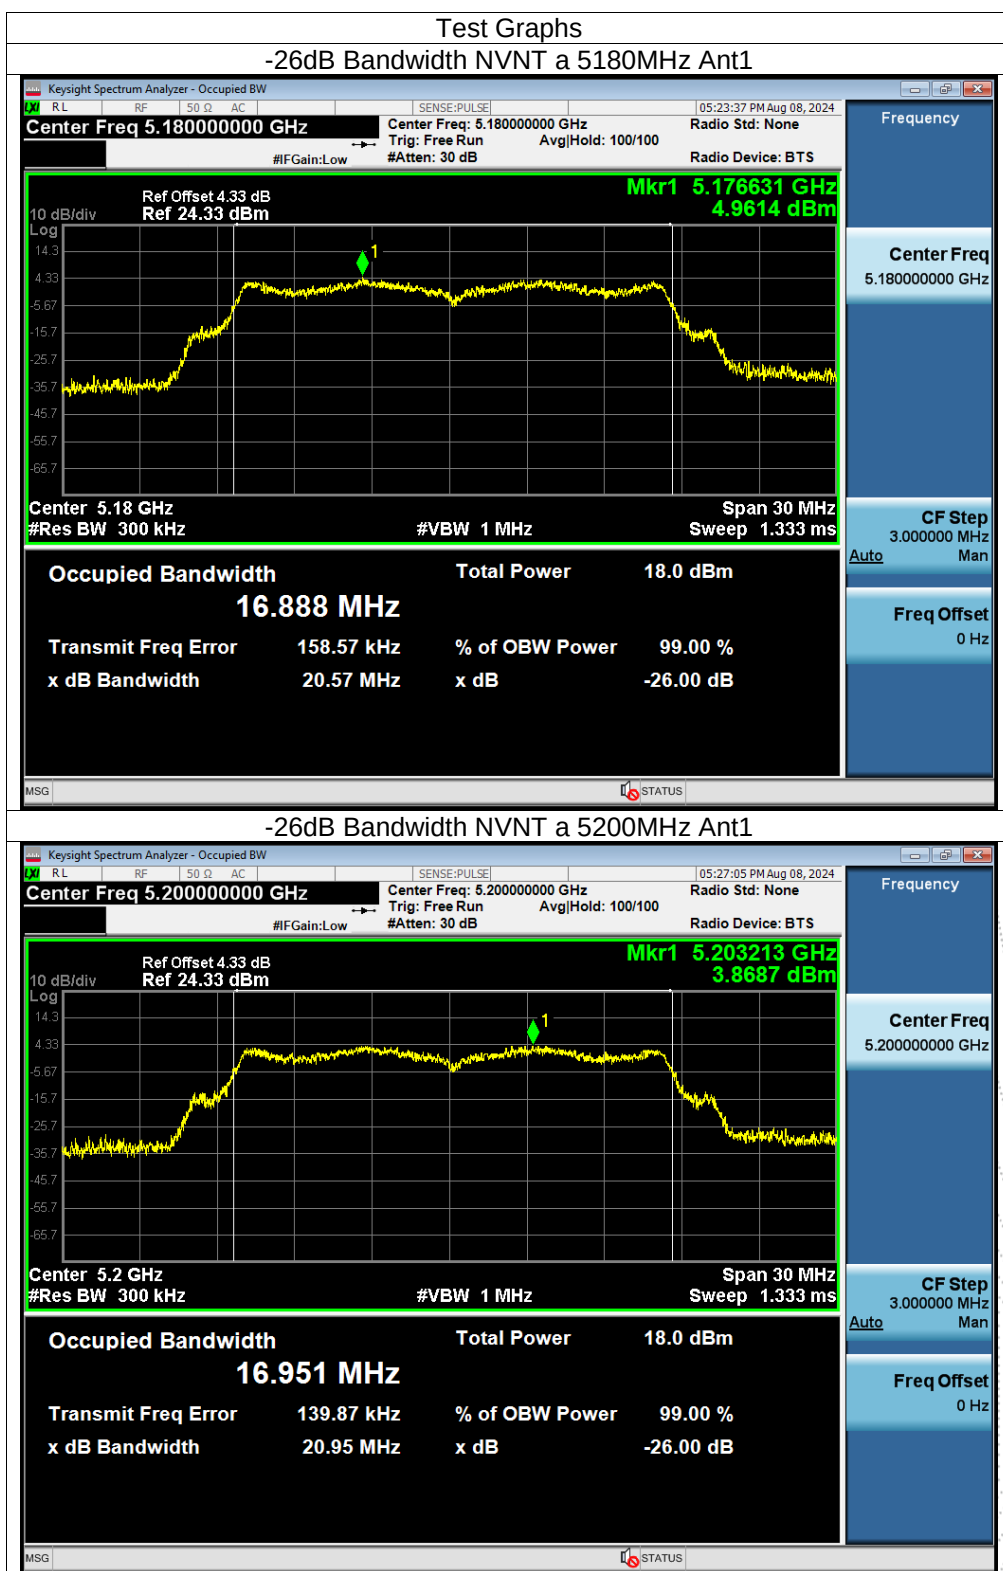


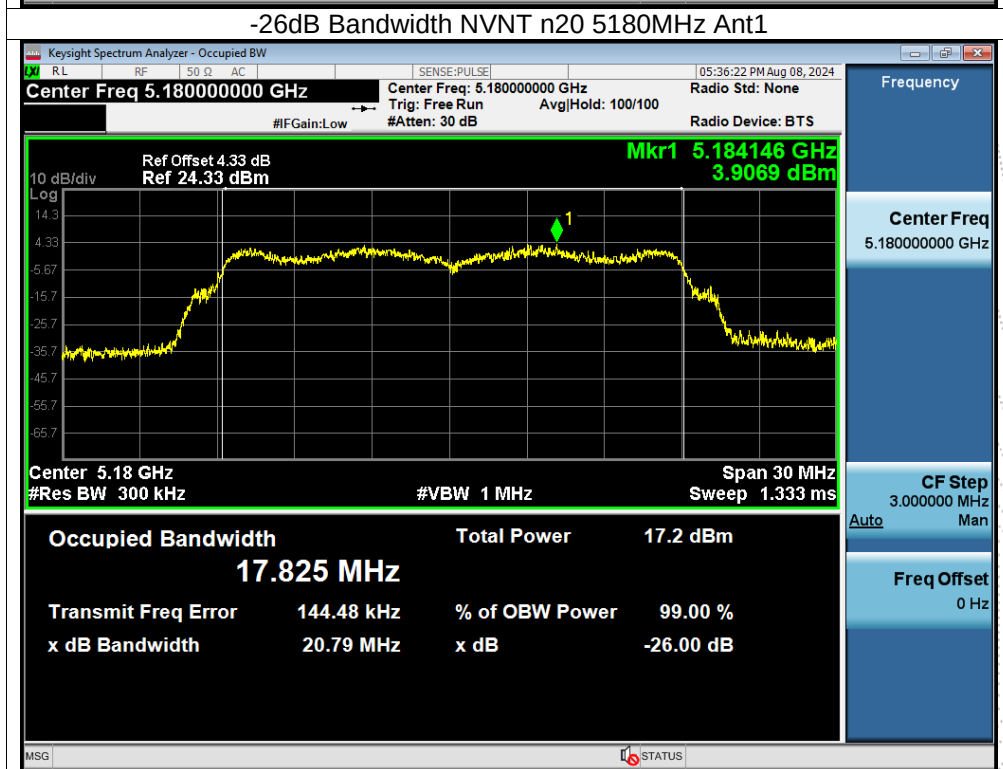
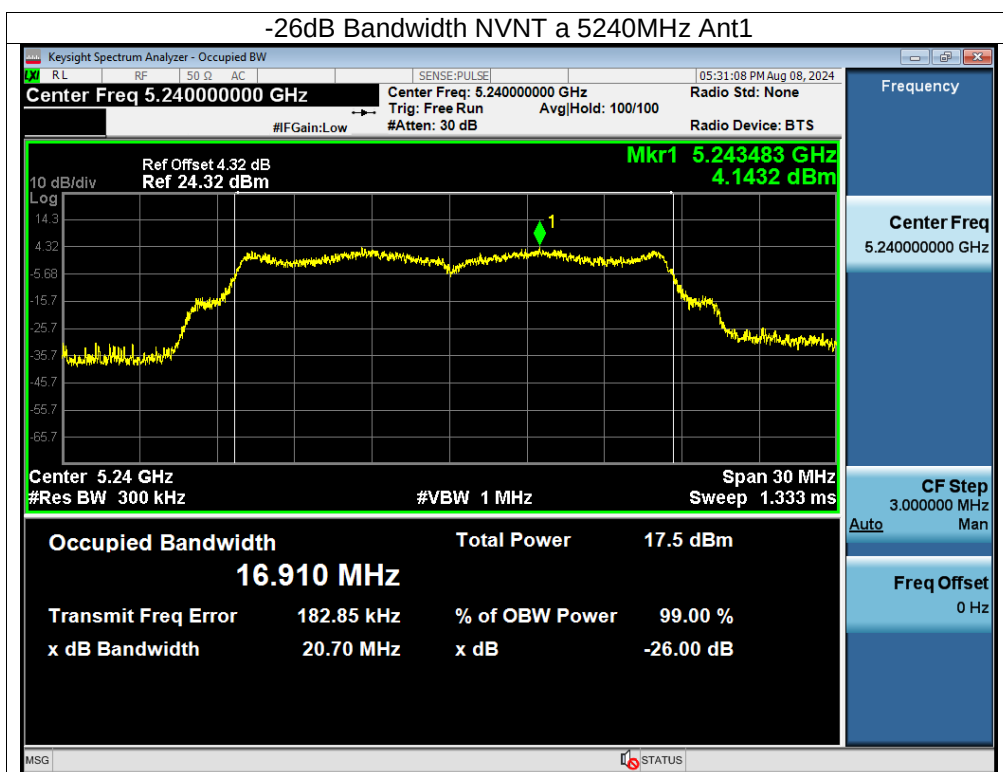


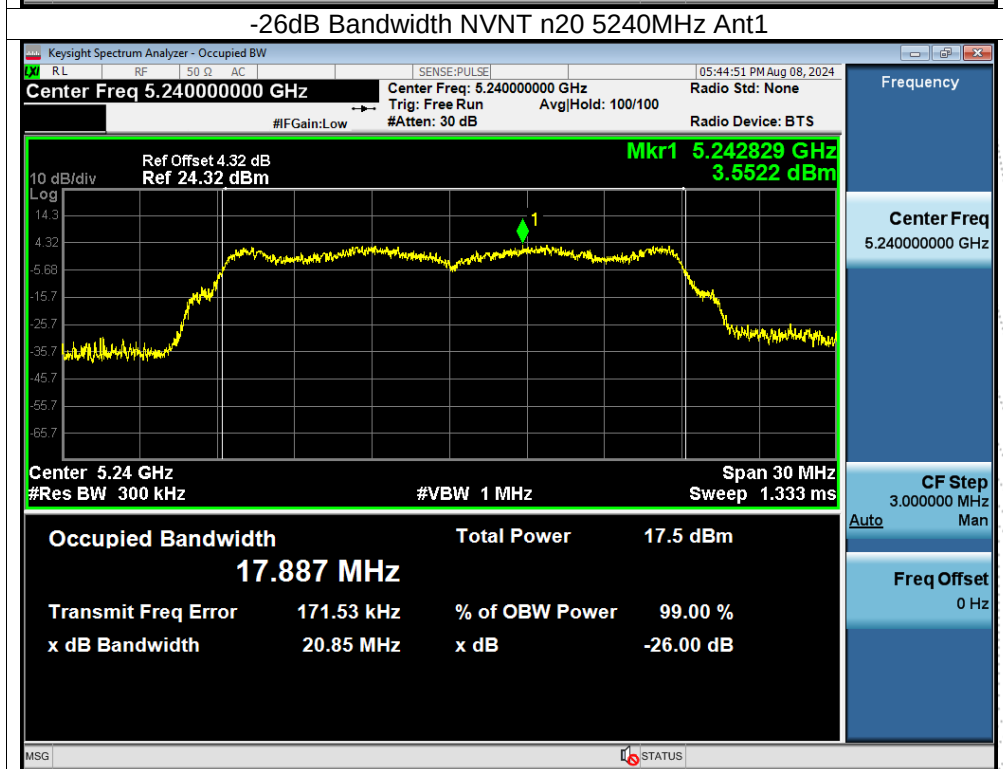
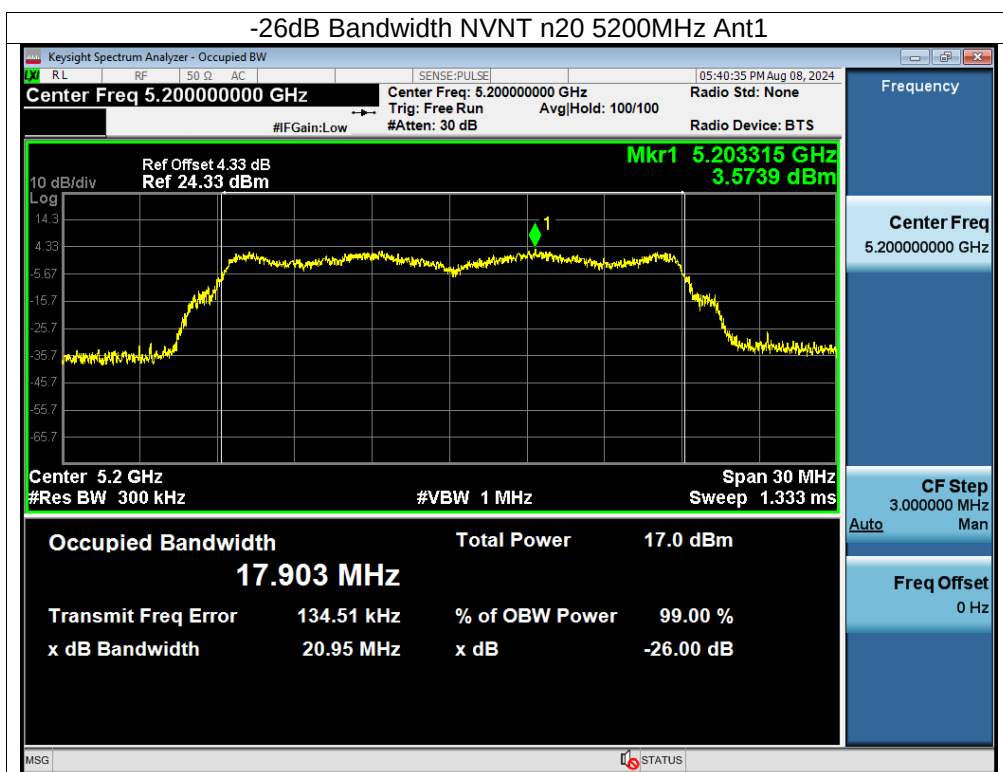


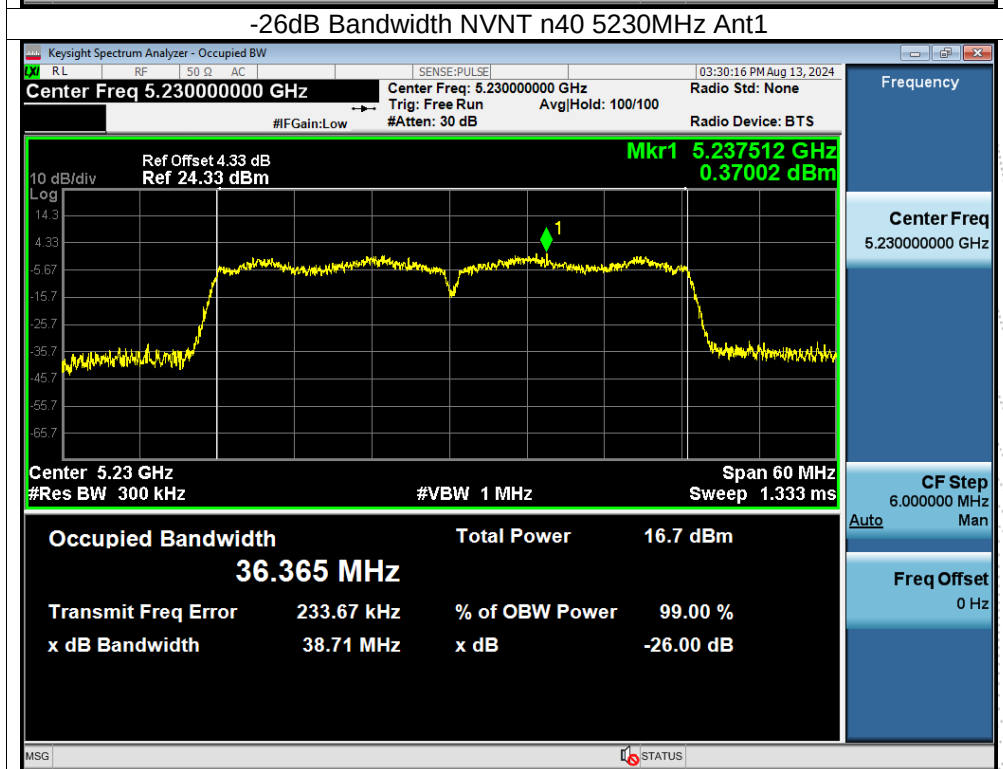
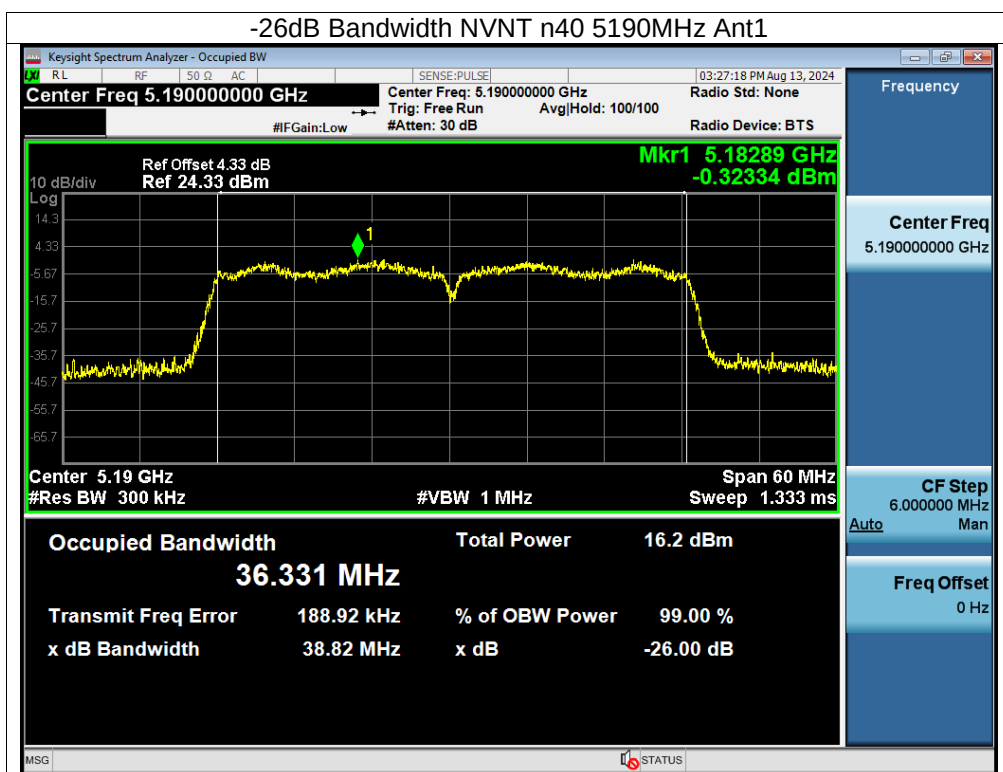


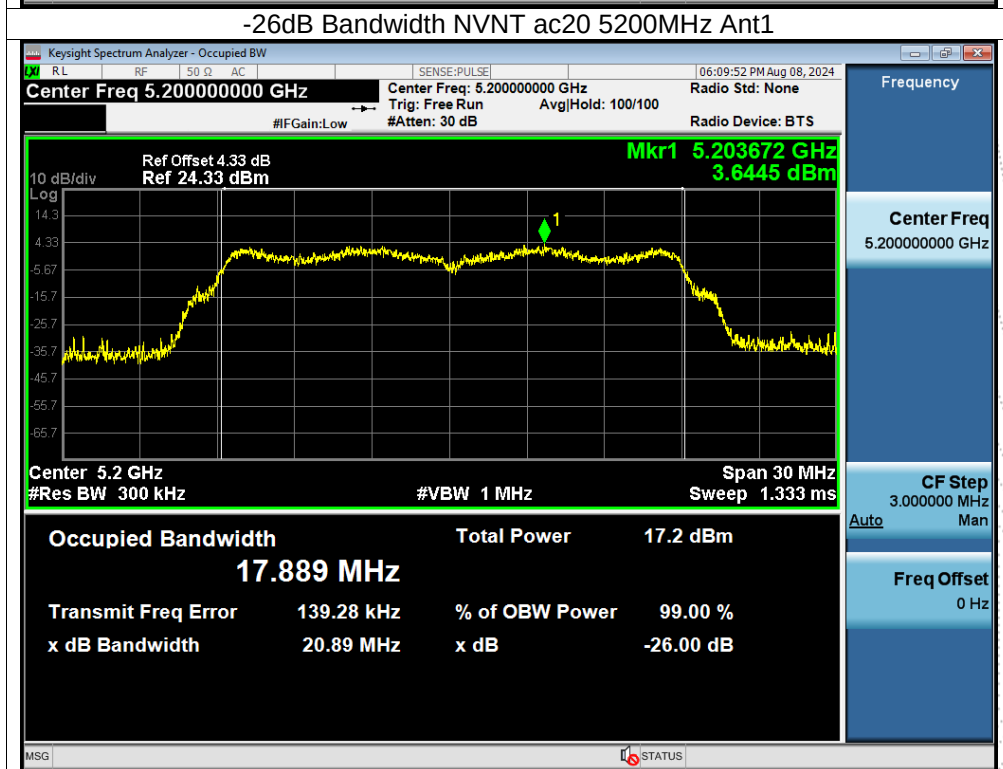
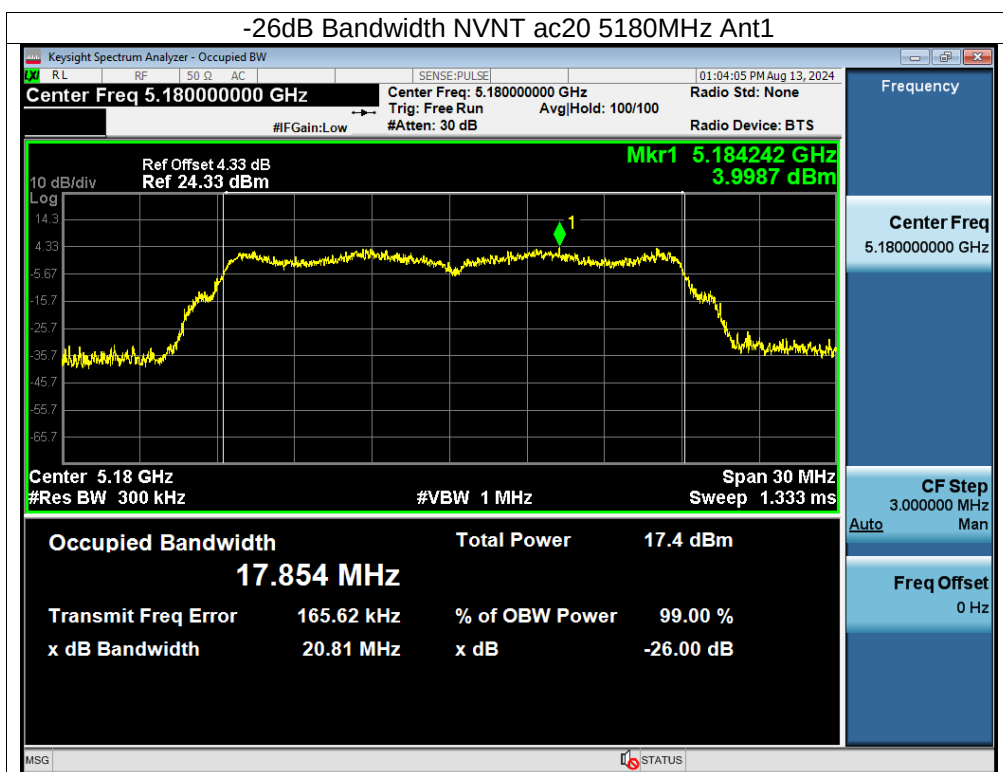


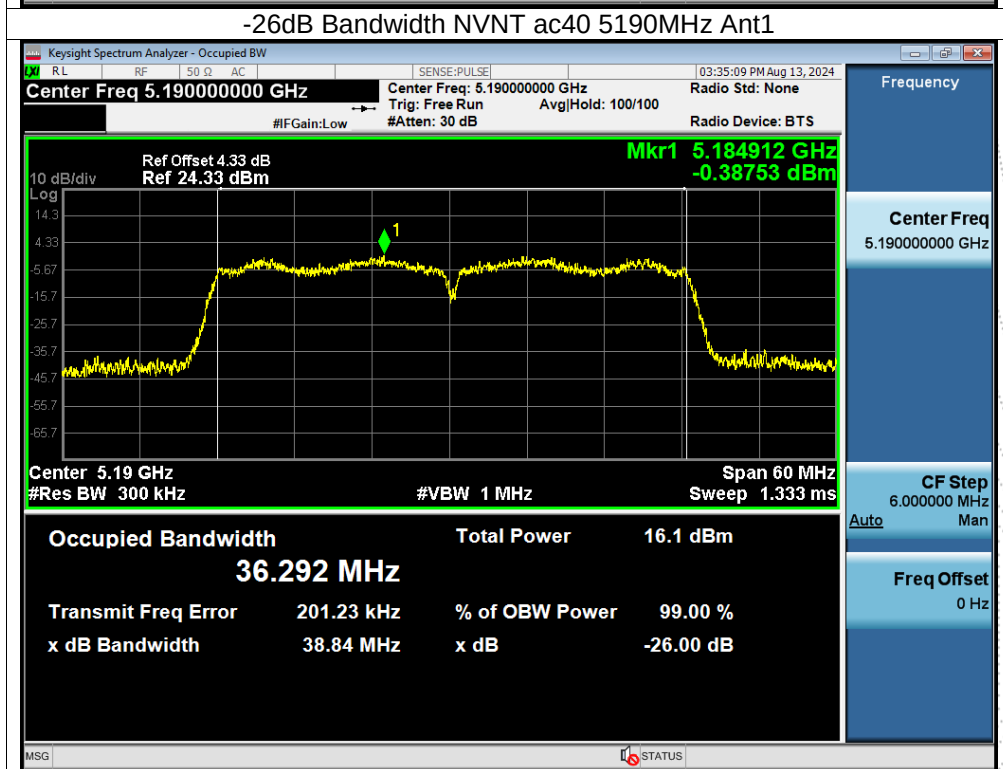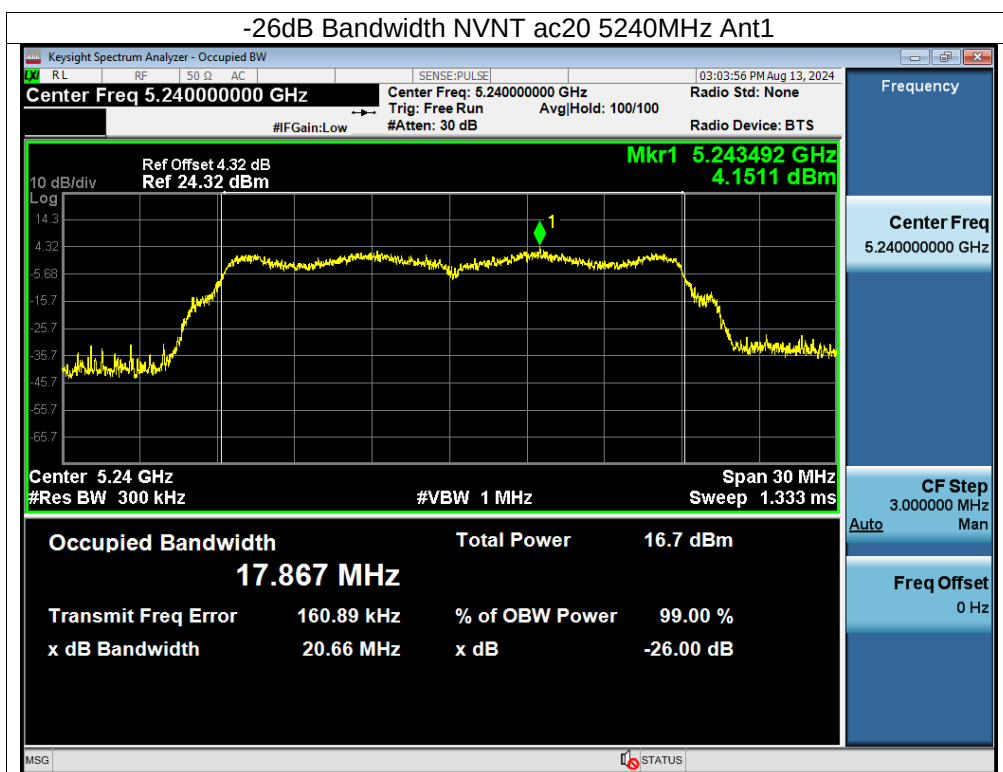


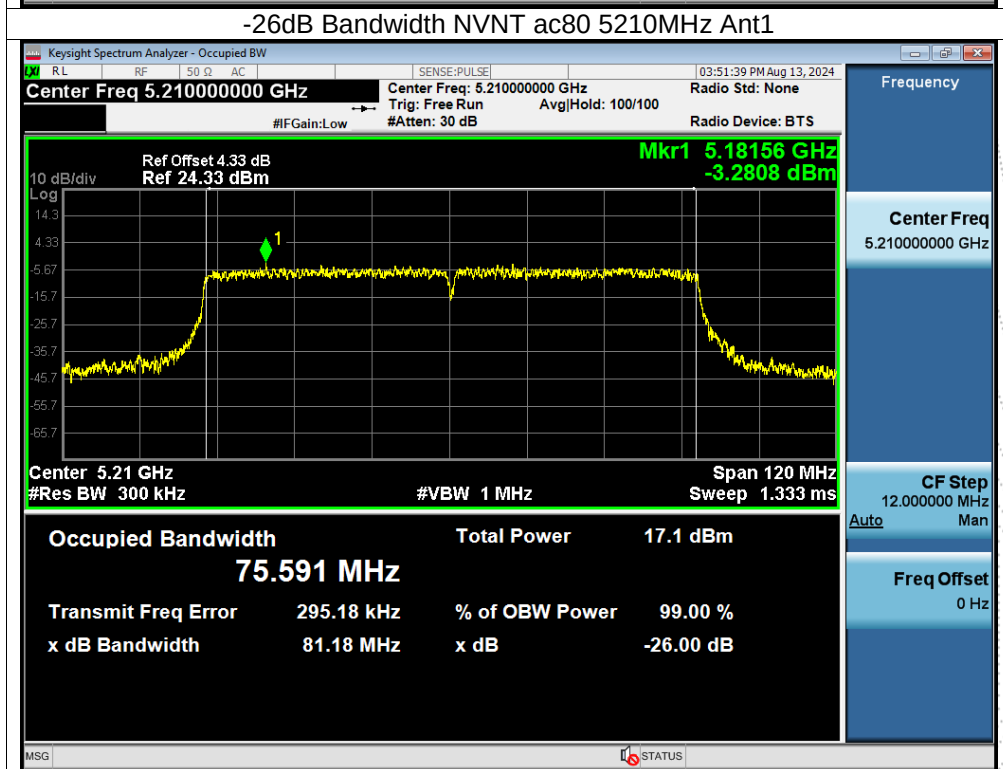
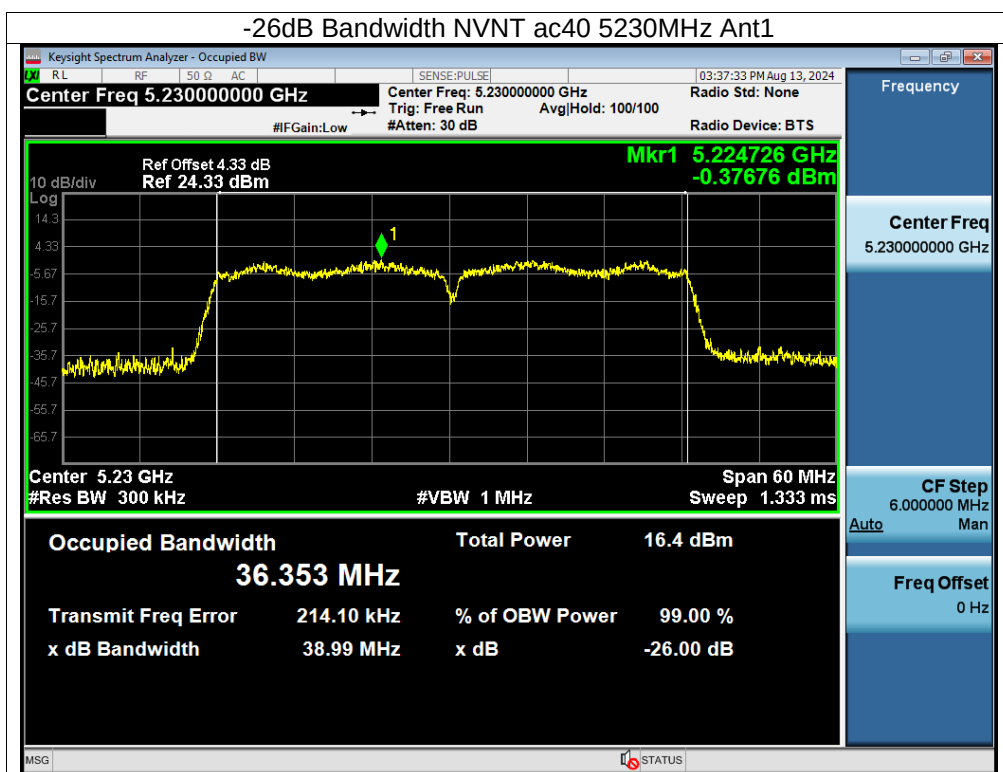


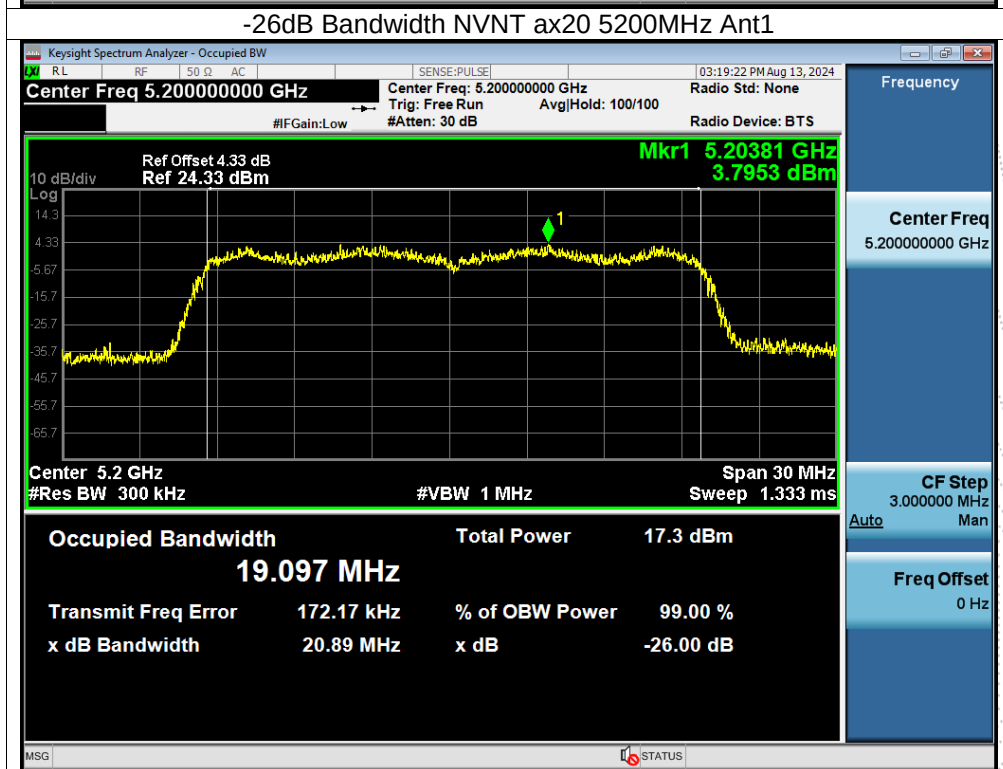
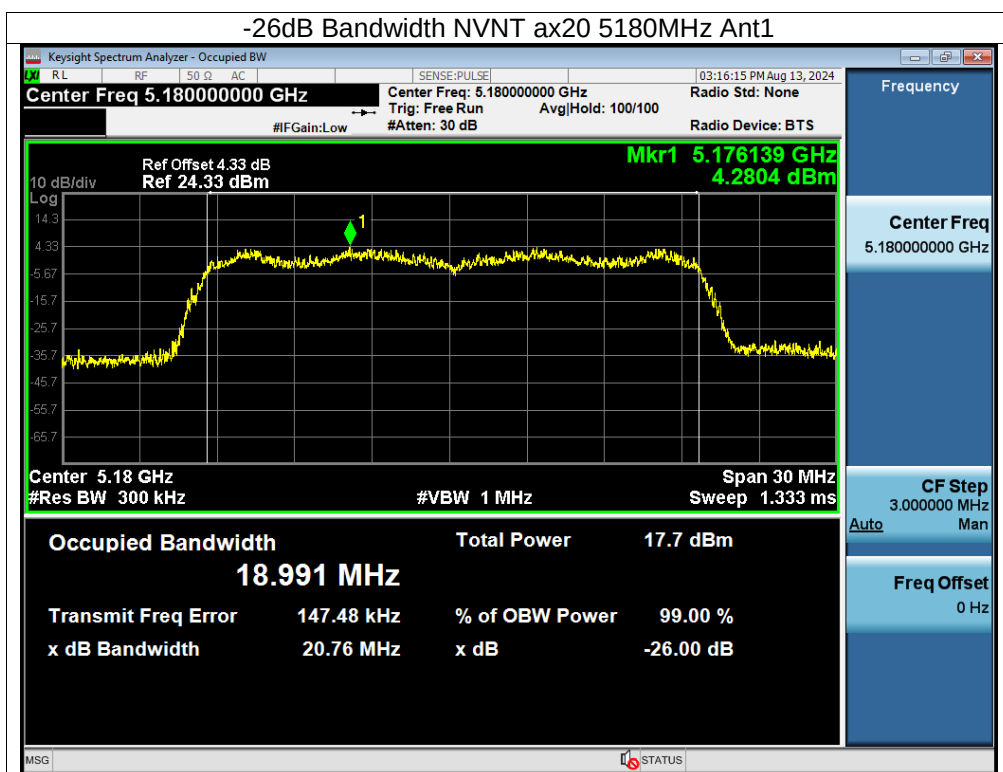


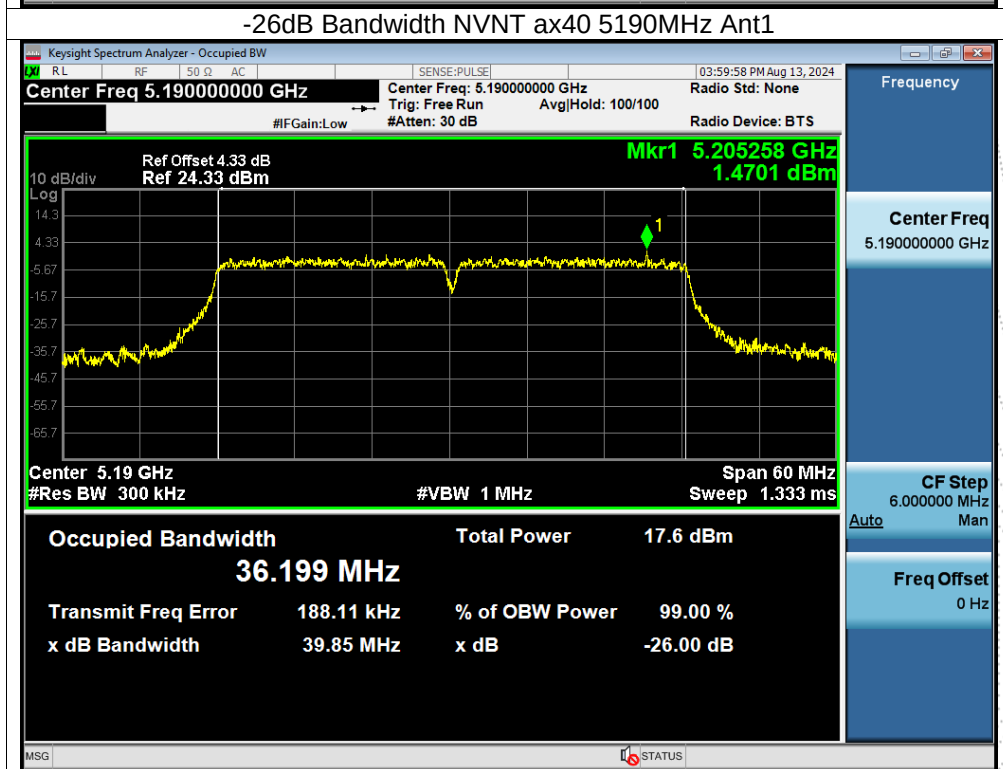
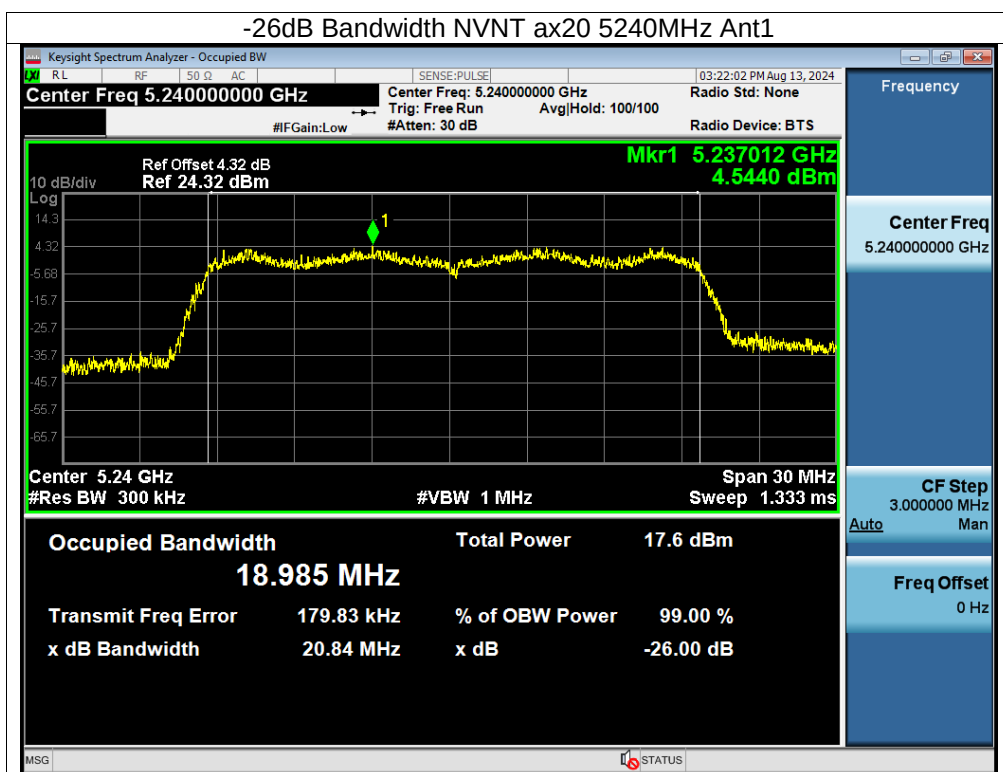


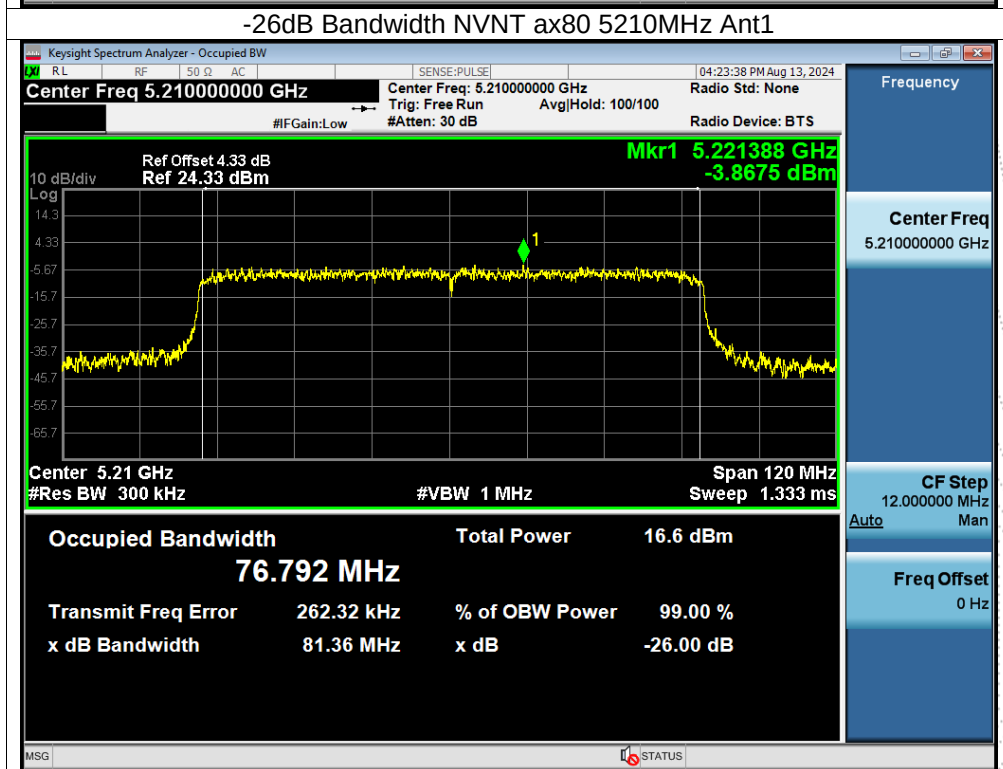
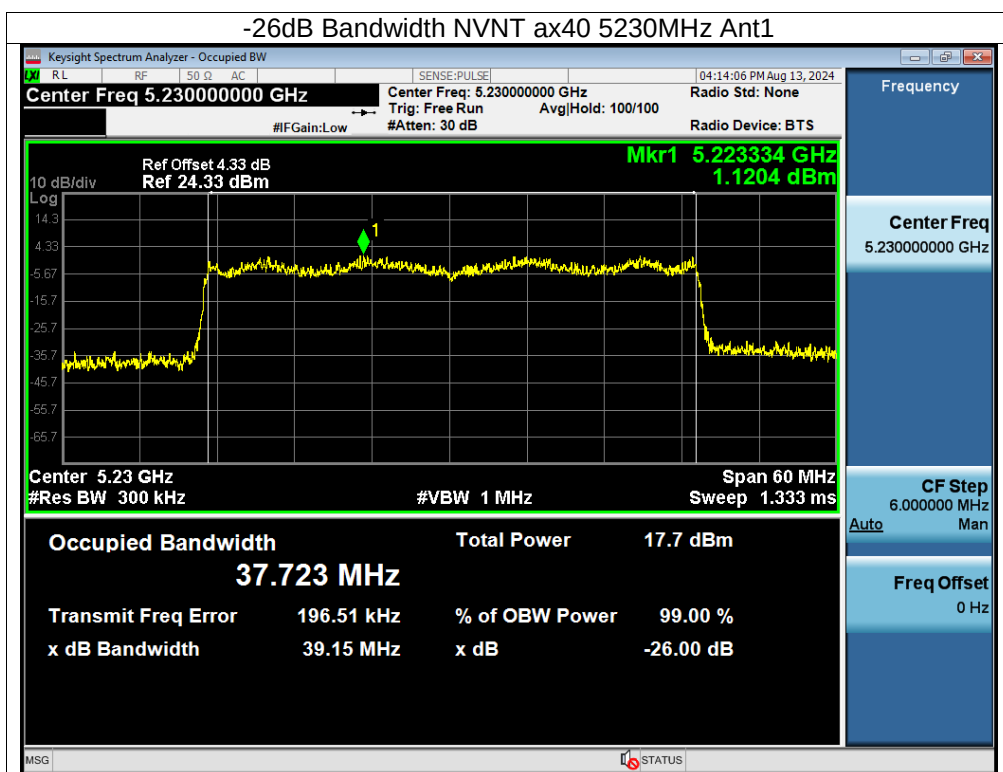



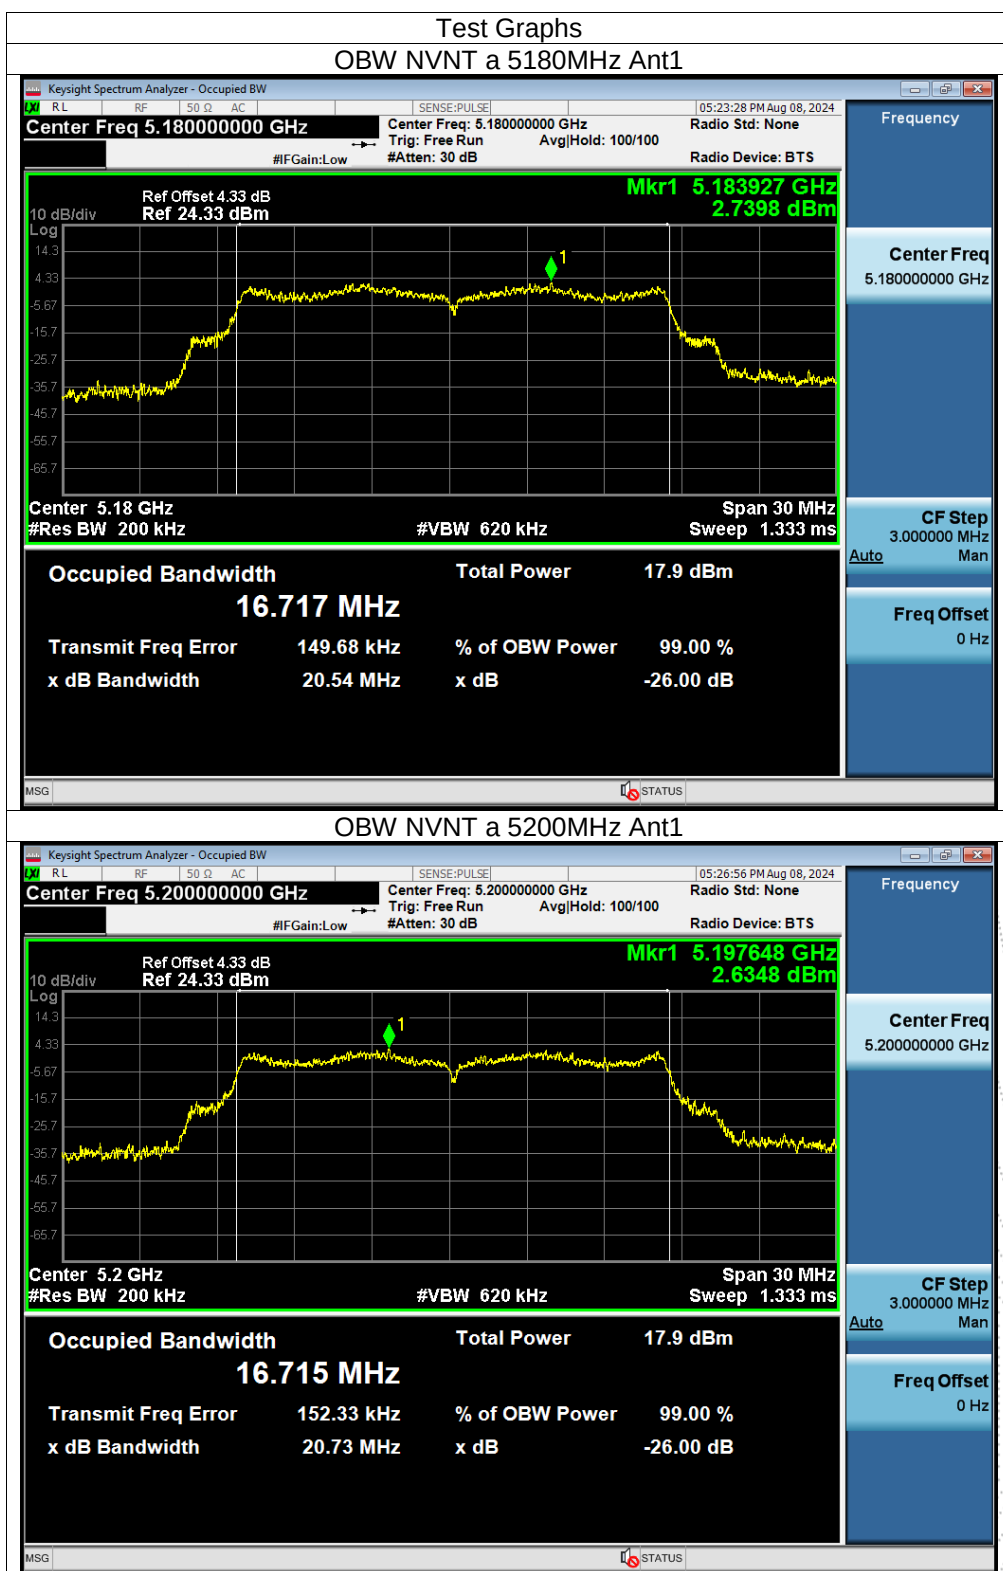


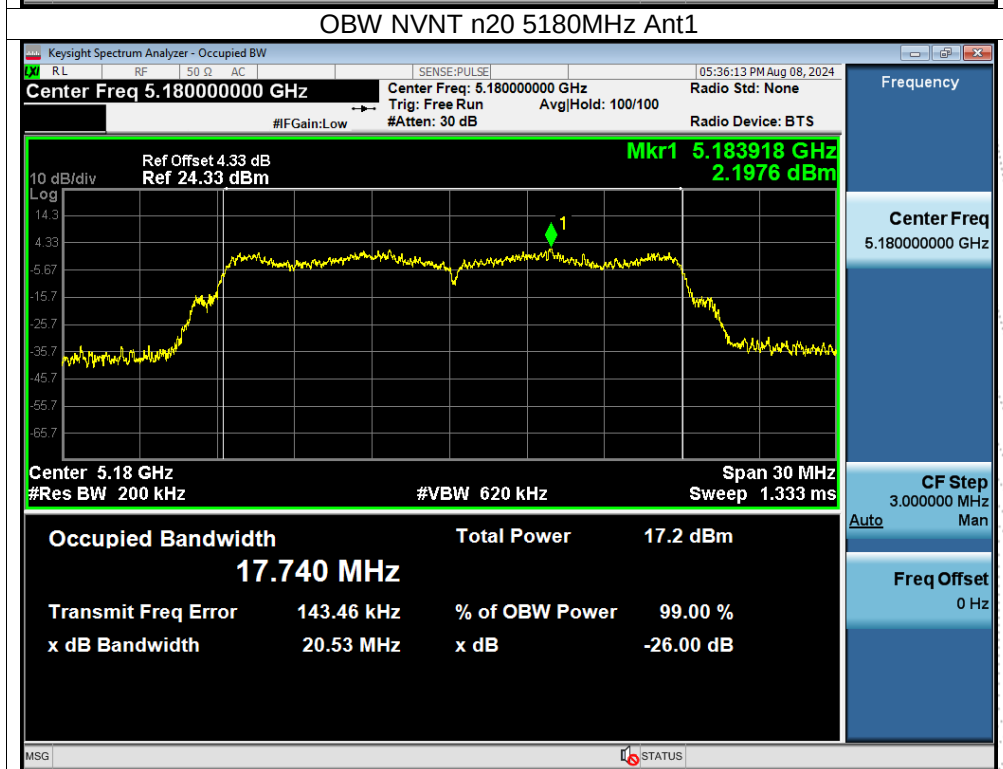
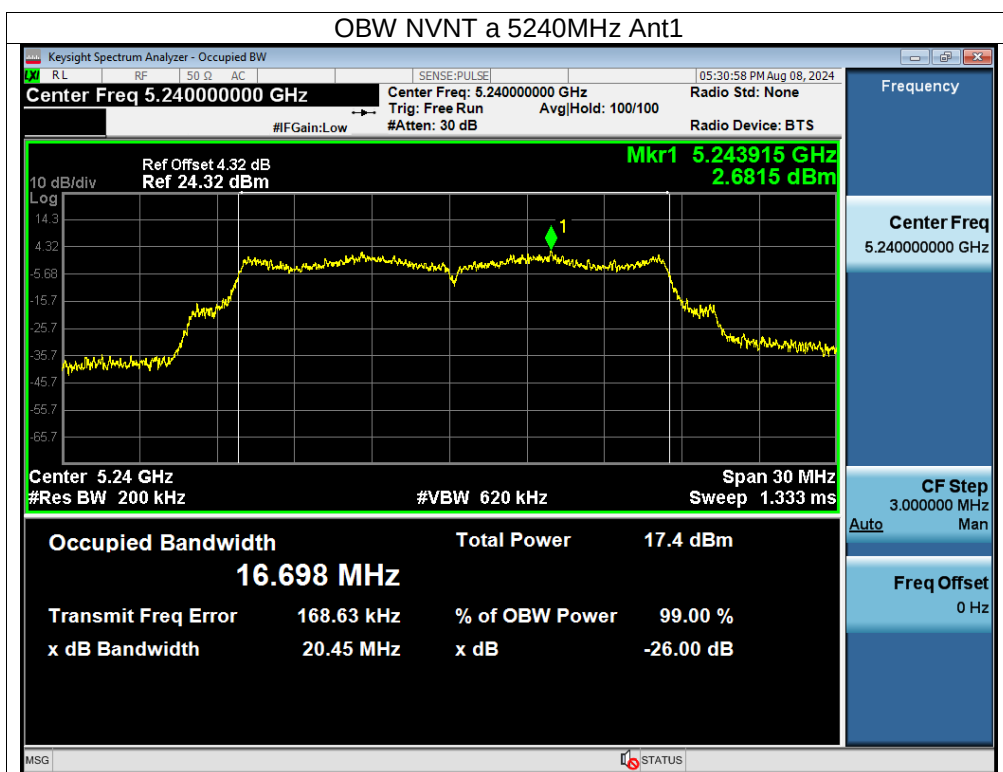


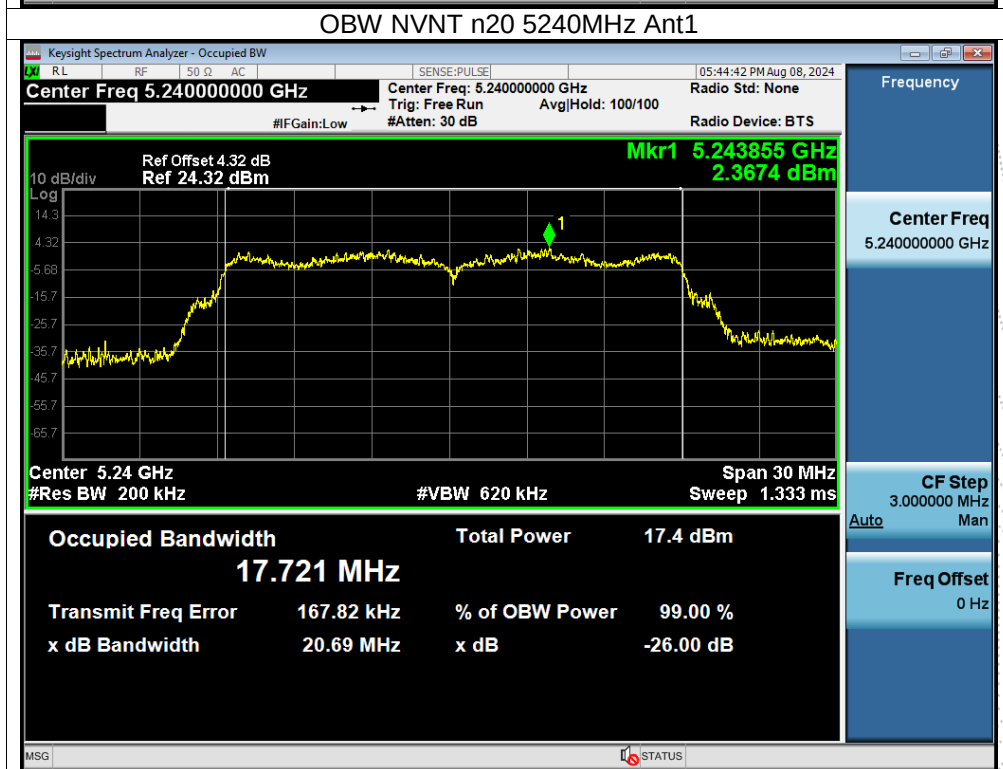
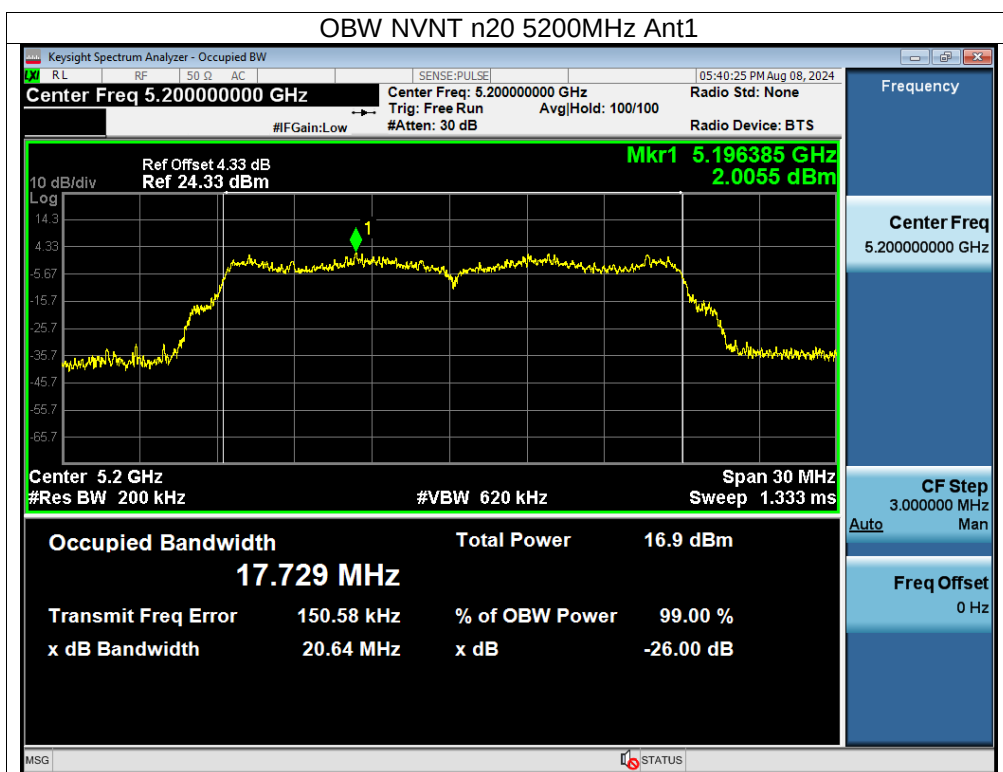


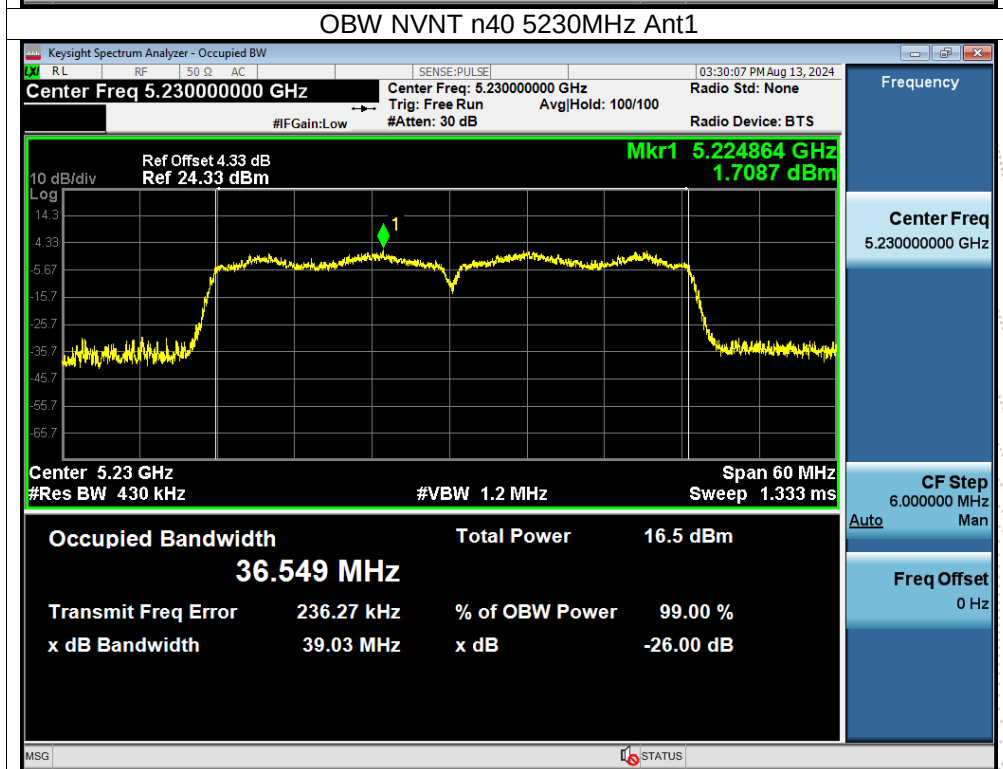
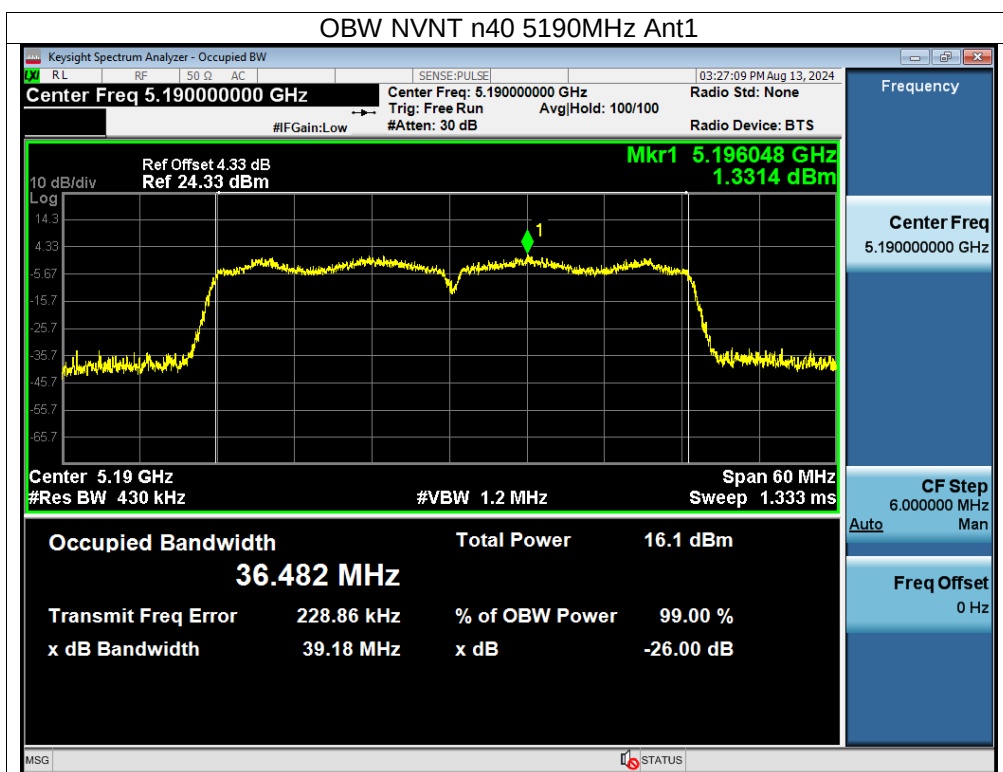


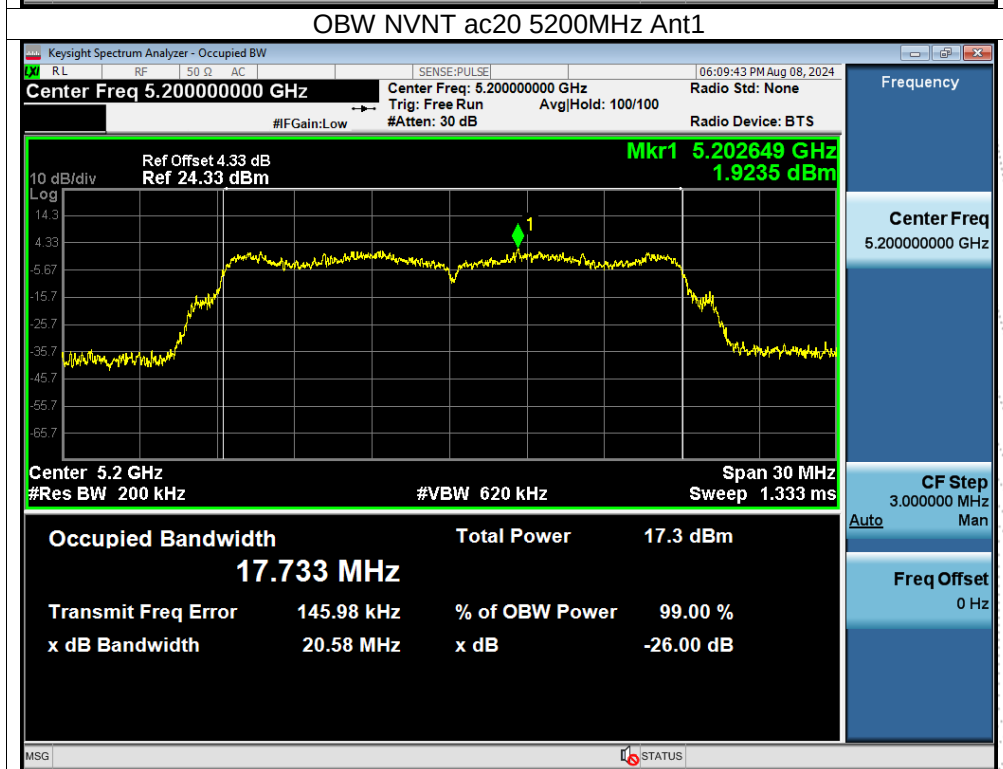
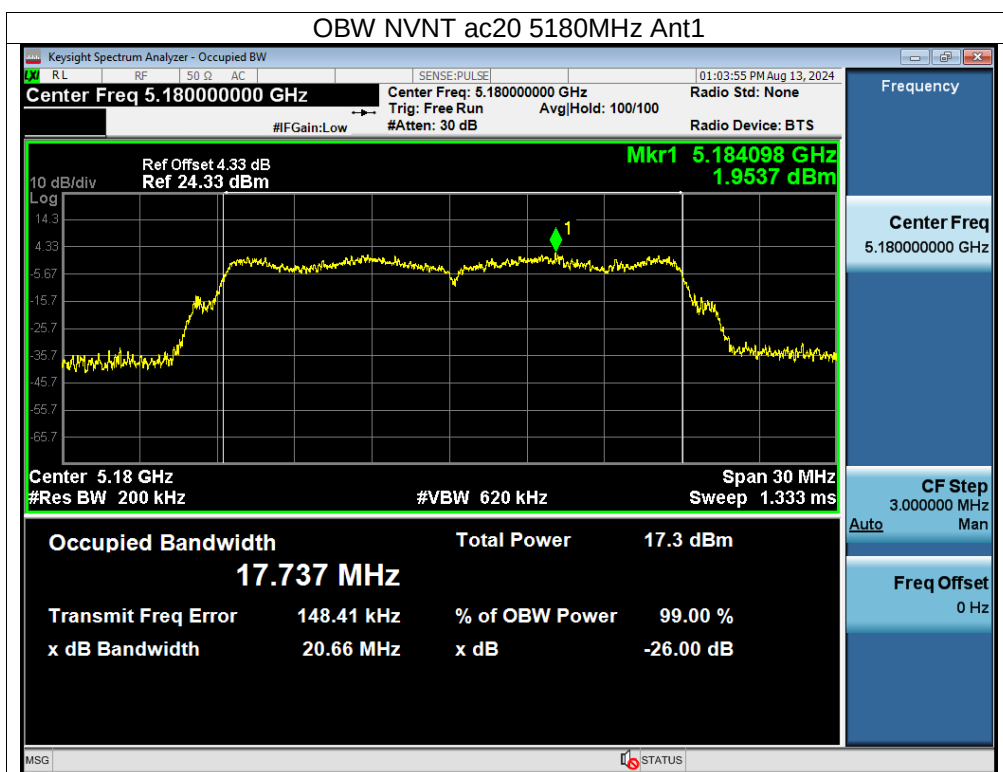


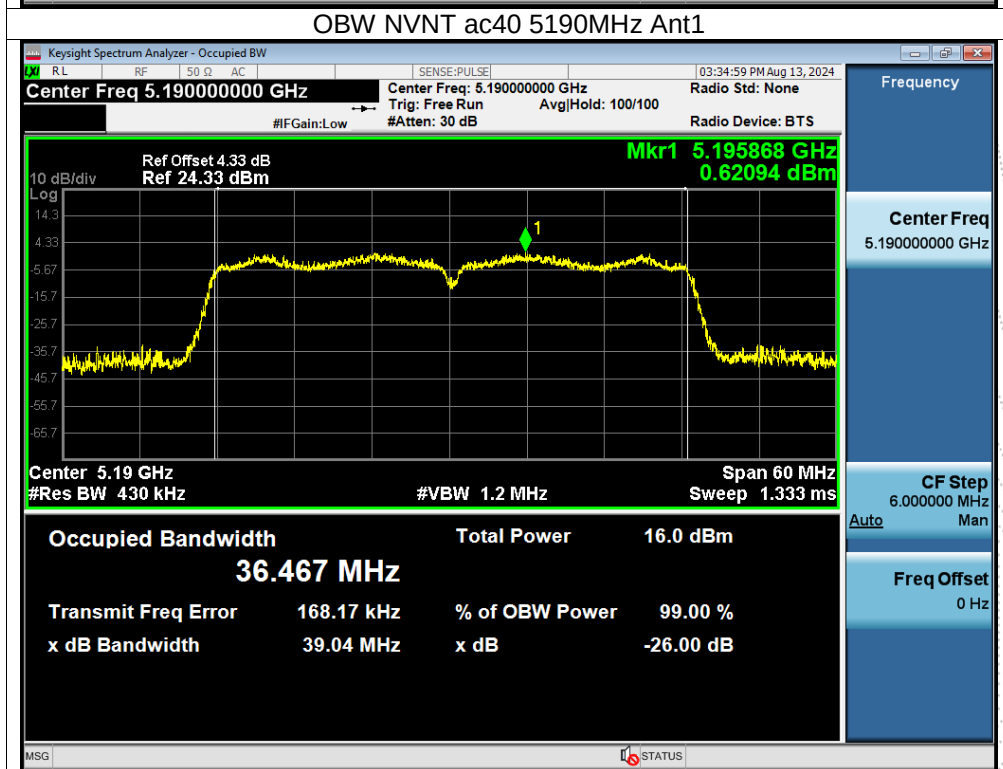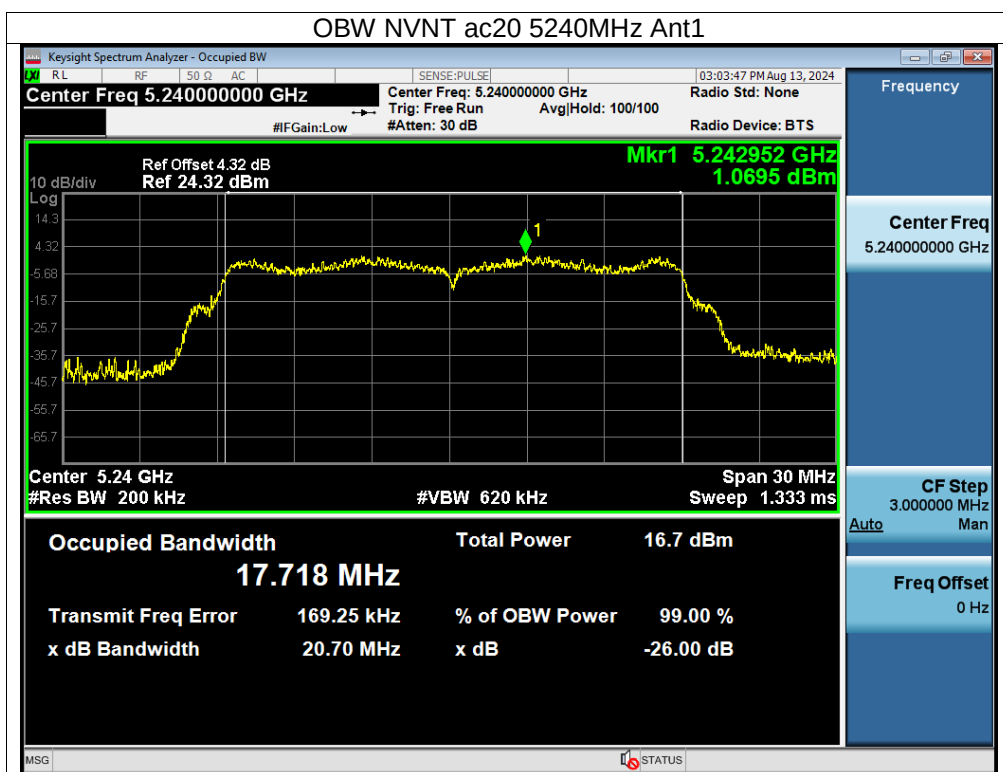

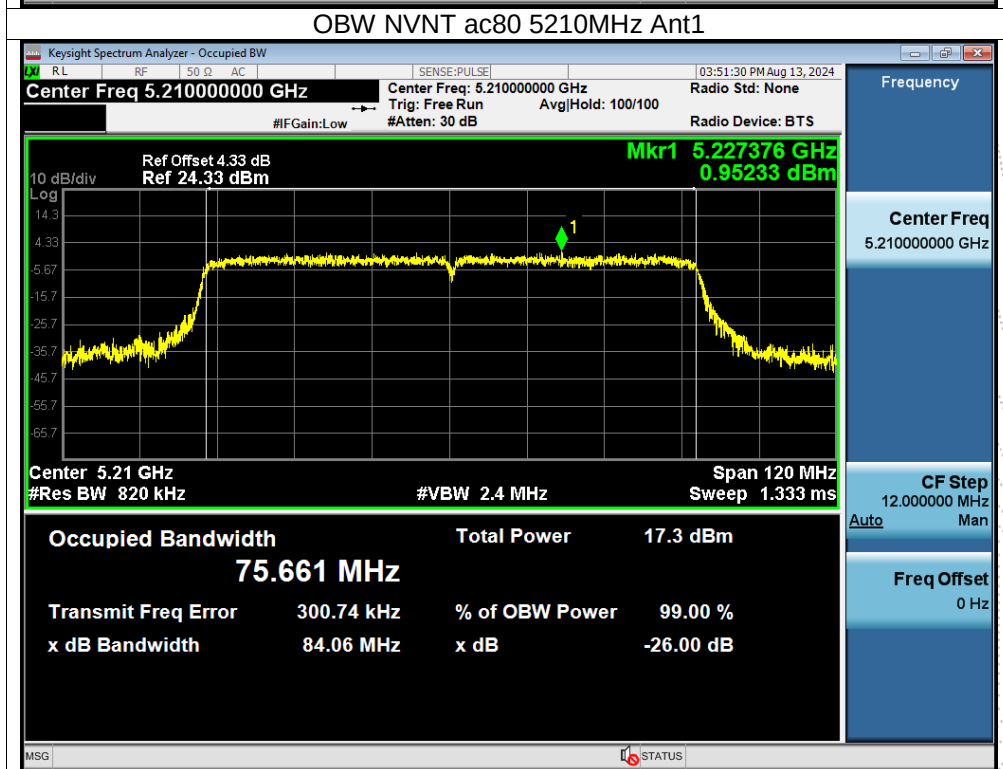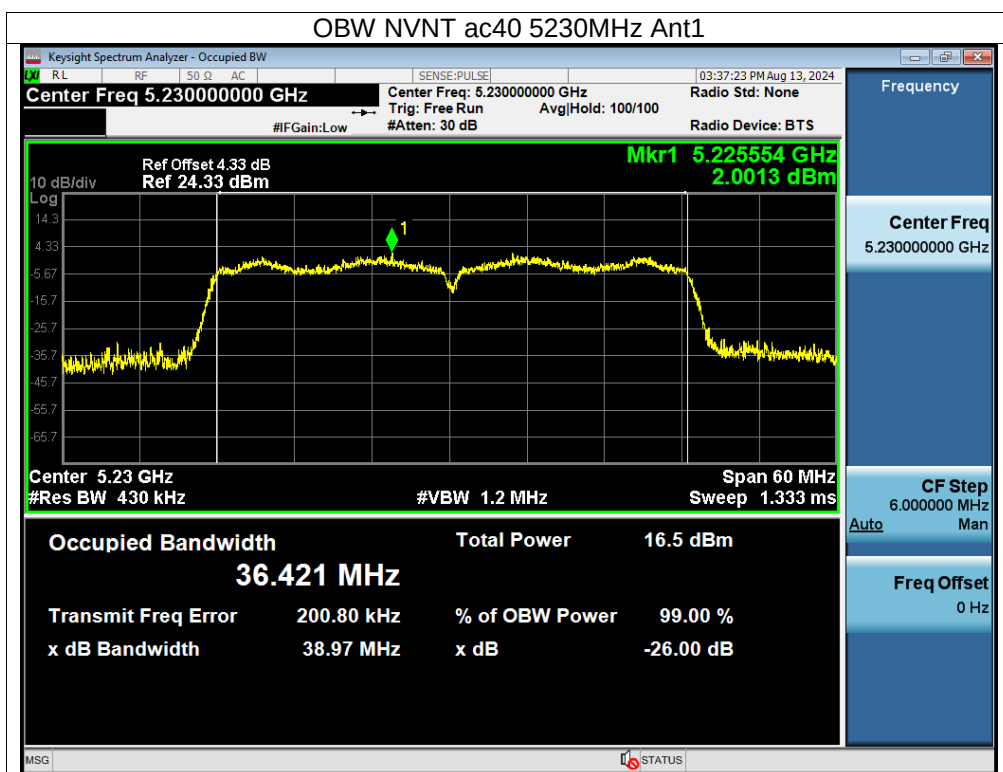

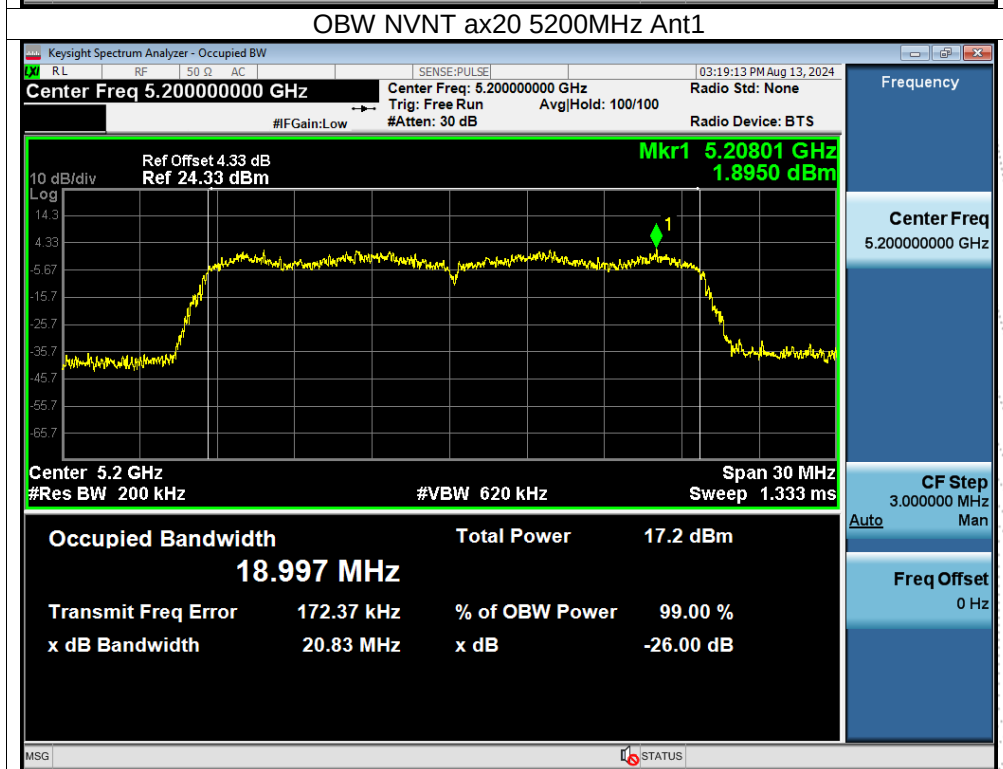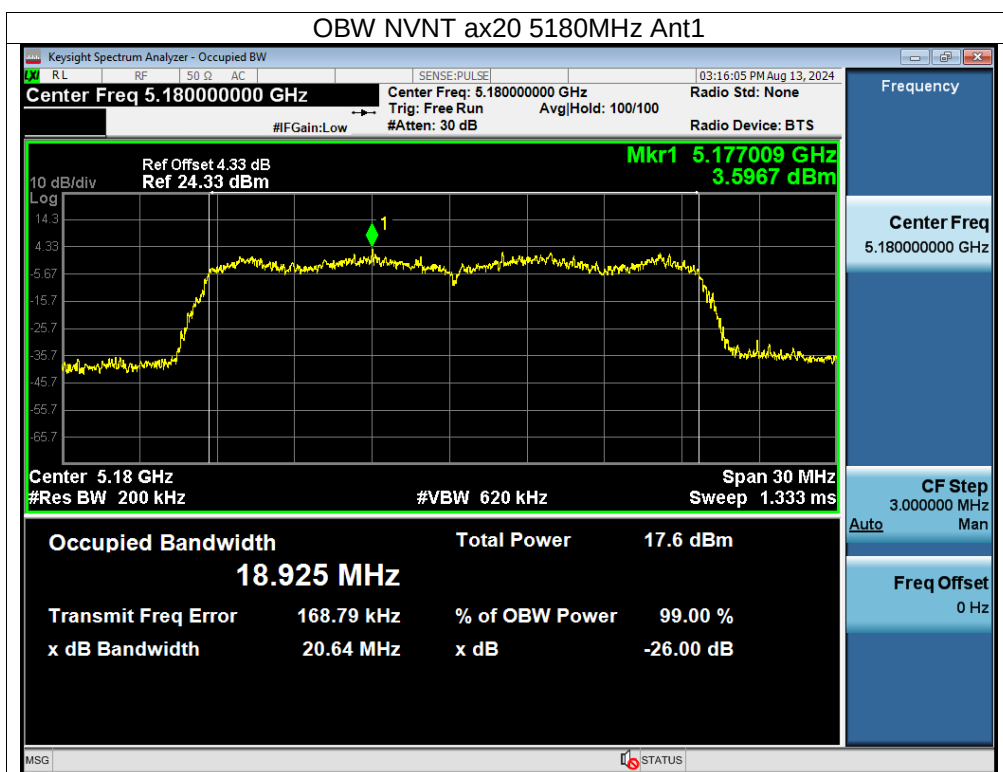


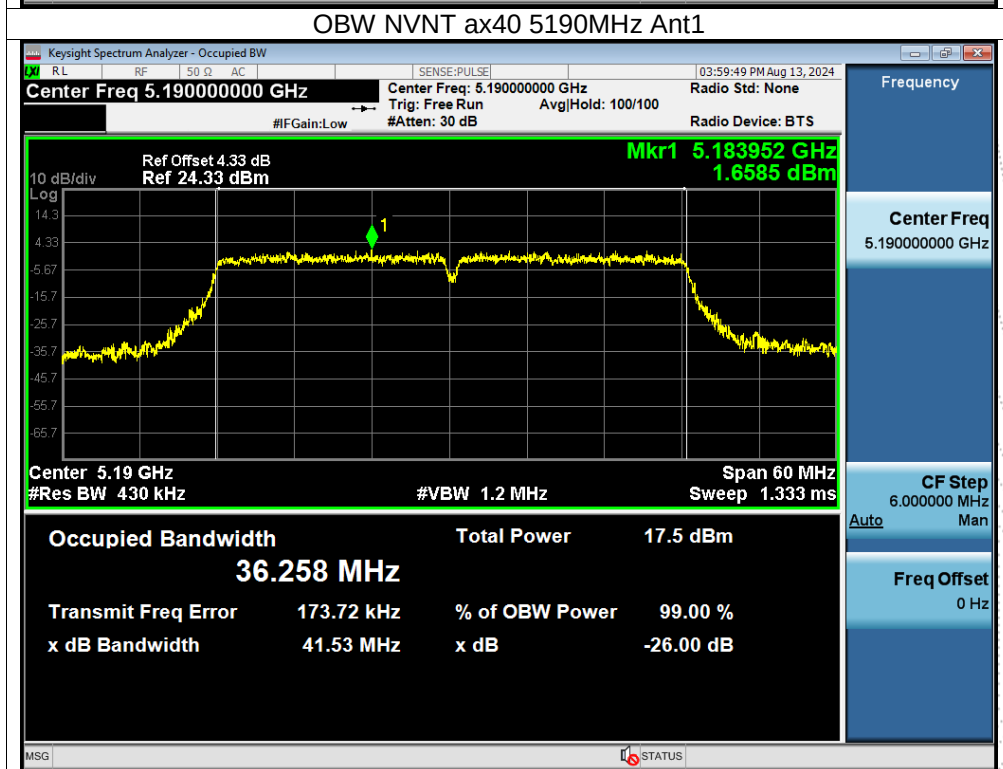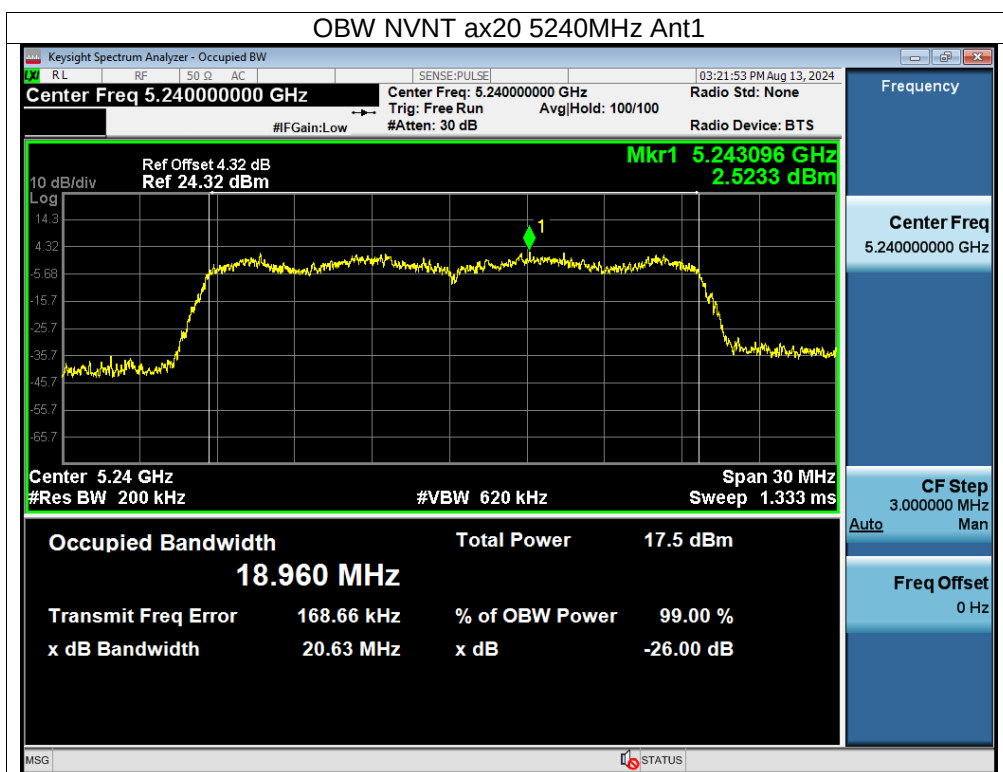

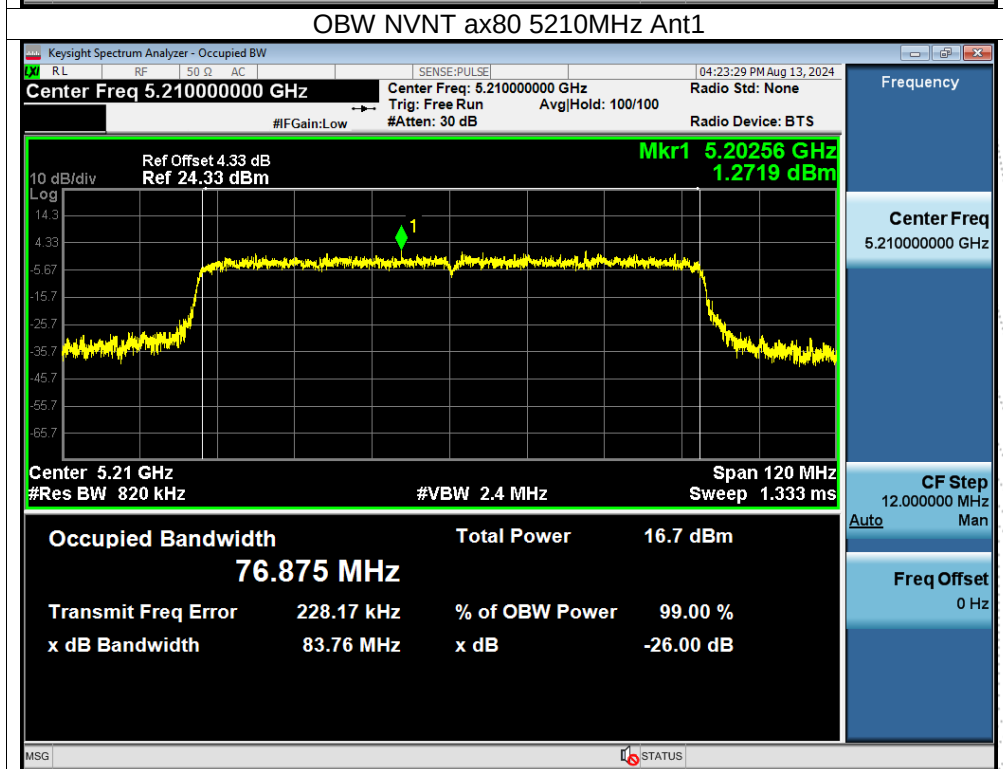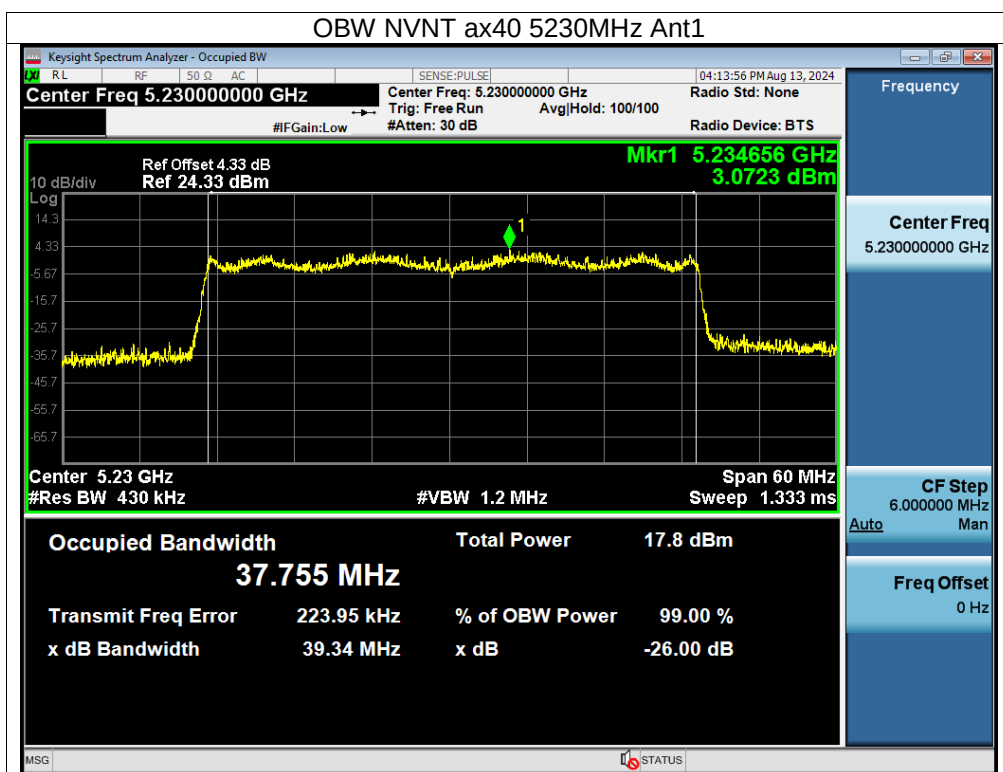



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.365	0.5	Pass
NVNT	a	5785	16.32	0.5	Pass
NVNT	a	5825	16.341	0.5	Pass
NVNT	n20	5745	17.594	0.5	Pass
NVNT	n20	5785	17.589	0.5	Pass
NVNT	n20	5825	17.576	0.5	Pass
NVNT	n40	5755	35.487	0.5	Pass
NVNT	n40	5795	35.249	0.5	Pass
NVNT	ac20	5745	17.587	0.5	Pass
NVNT	ac20	5785	17.595	0.5	Pass
NVNT	ac20	5825	17.588	0.5	Pass
NVNT	ac40	5755	35.773	0.5	Pass
NVNT	ac40	5795	35.317	0.5	Pass
NVNT	ac80	5775	75.133	0.5	Pass
NVNT	ax20	5745	18.983	0.5	Pass
NVNT	ax20	5785	18.995	0.5	Pass
NVNT	ax20	5825	19.002	0.5	Pass
NVNT	ax40	5755	37.557	0.5	Pass
NVNT	ax40	5795	37.544	0.5	Pass
NVNT	ax80	5775	75.856	0.5	Pass


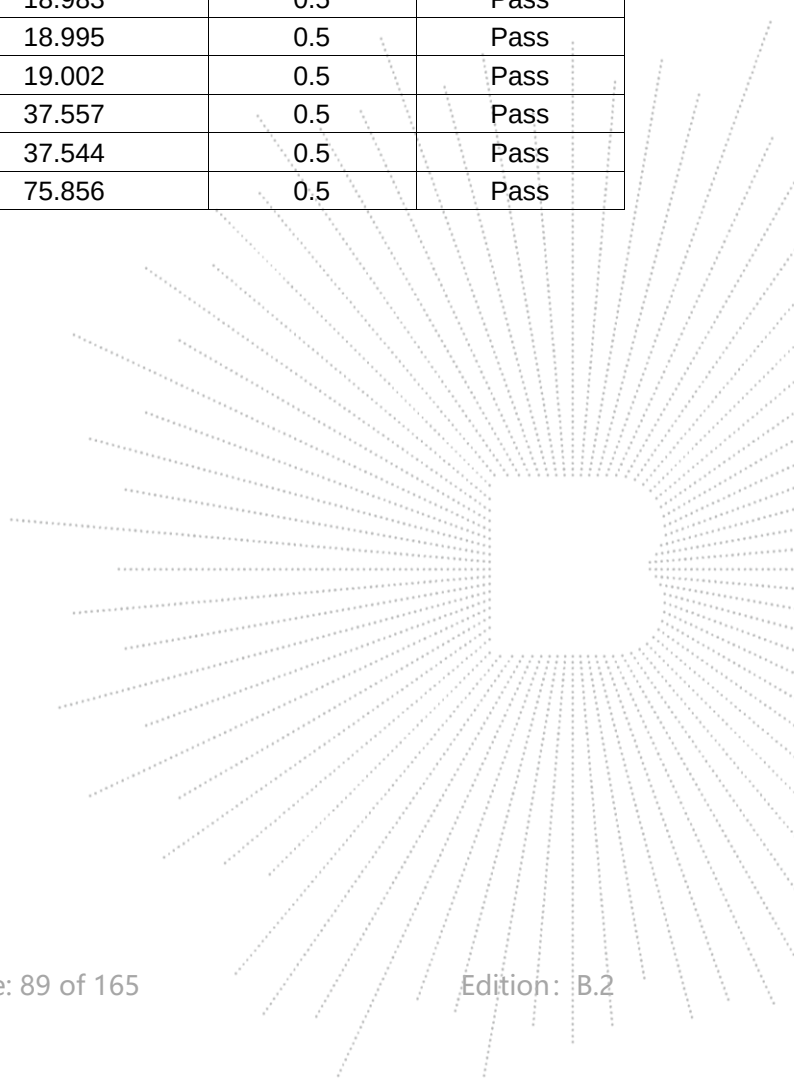




Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	16.815
NVNT	a	5785	16.859
NVNT	a	5825	16.759
NVNT	n20	5745	17.895
NVNT	n20	5785	17.936
NVNT	n20	5825	17.899
NVNT	n40	5755	36.291
NVNT	n40	5795	36.24
NVNT	ac20	5745	17.855
NVNT	ac20	5785	17.921
NVNT	ac20	5825	17.846
NVNT	ac40	5755	36.293
NVNT	ac40	5795	36.242
NVNT	ac80	5775	75.406
NVNT	ax20	5745	19.037
NVNT	ax20	5785	19.096
NVNT	ax20	5825	19.087
NVNT	ax40	5755	37.647
NVNT	ax40	5795	37.621
NVNT	ax80	5775	76.86


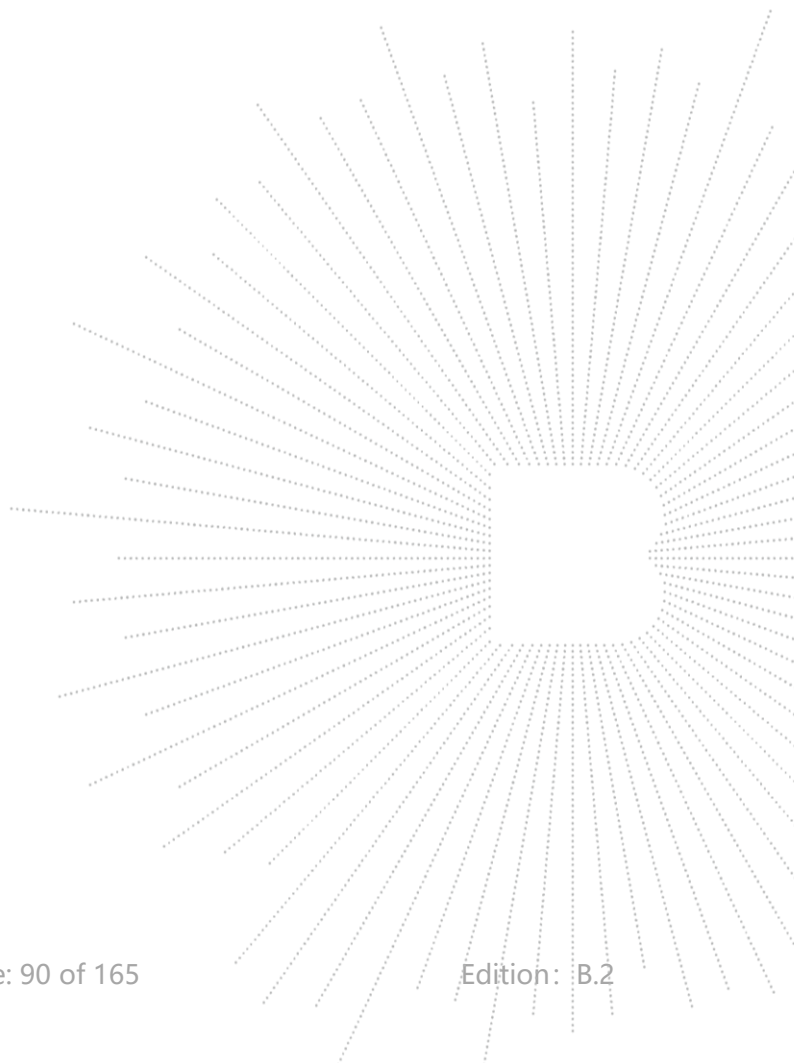



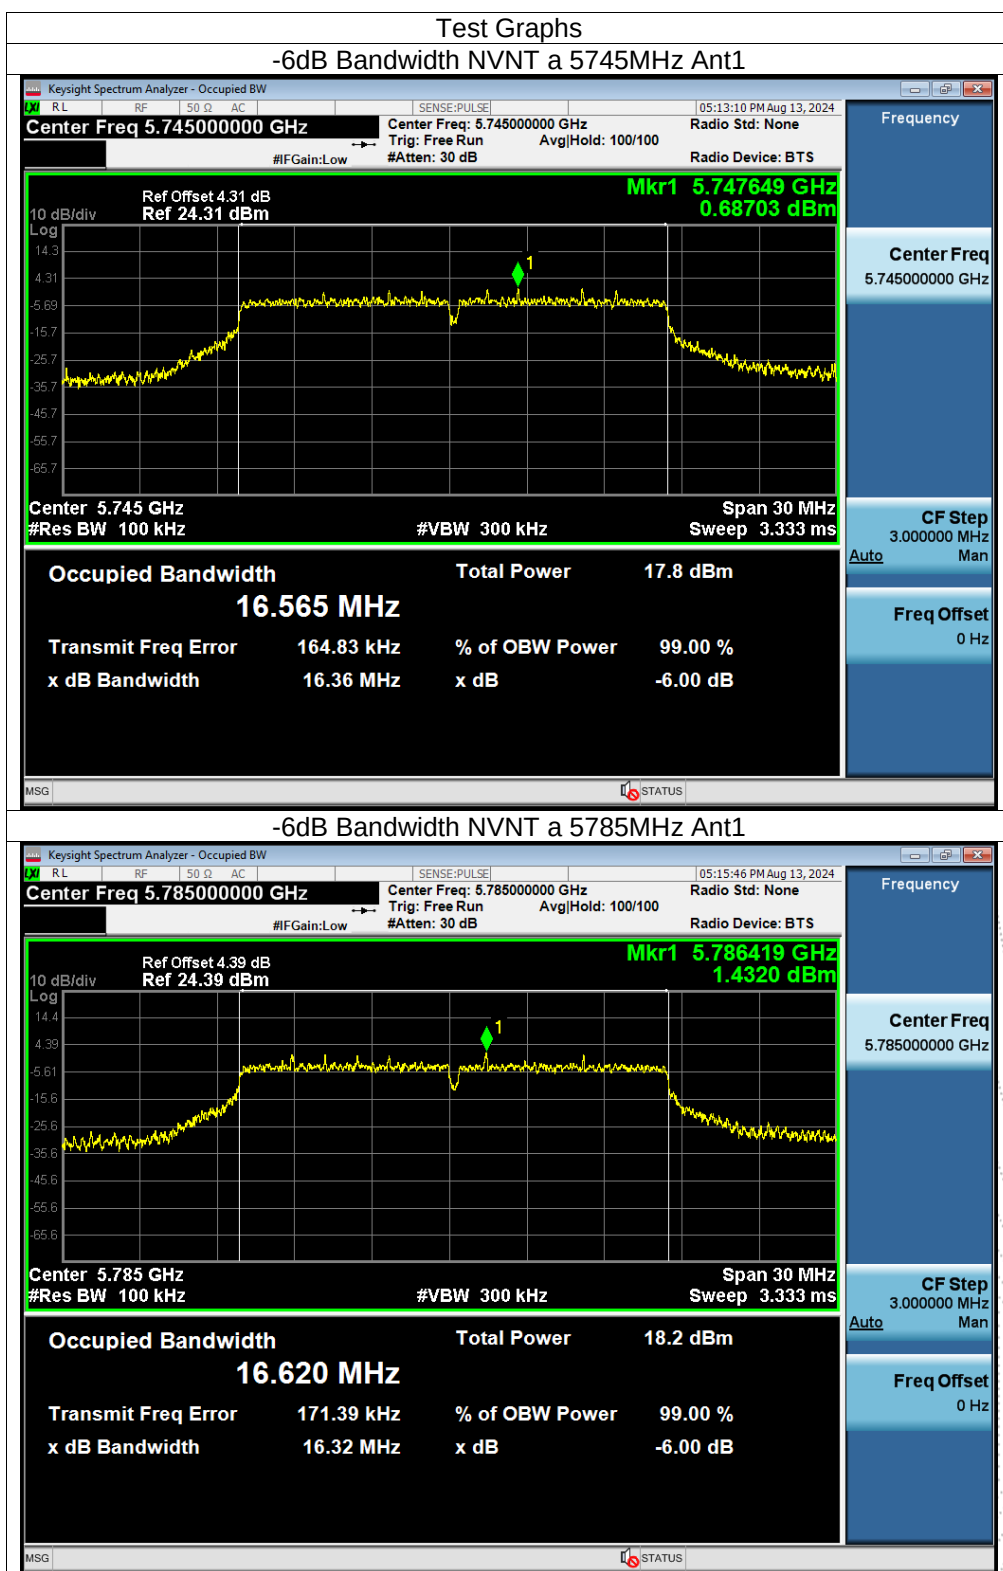


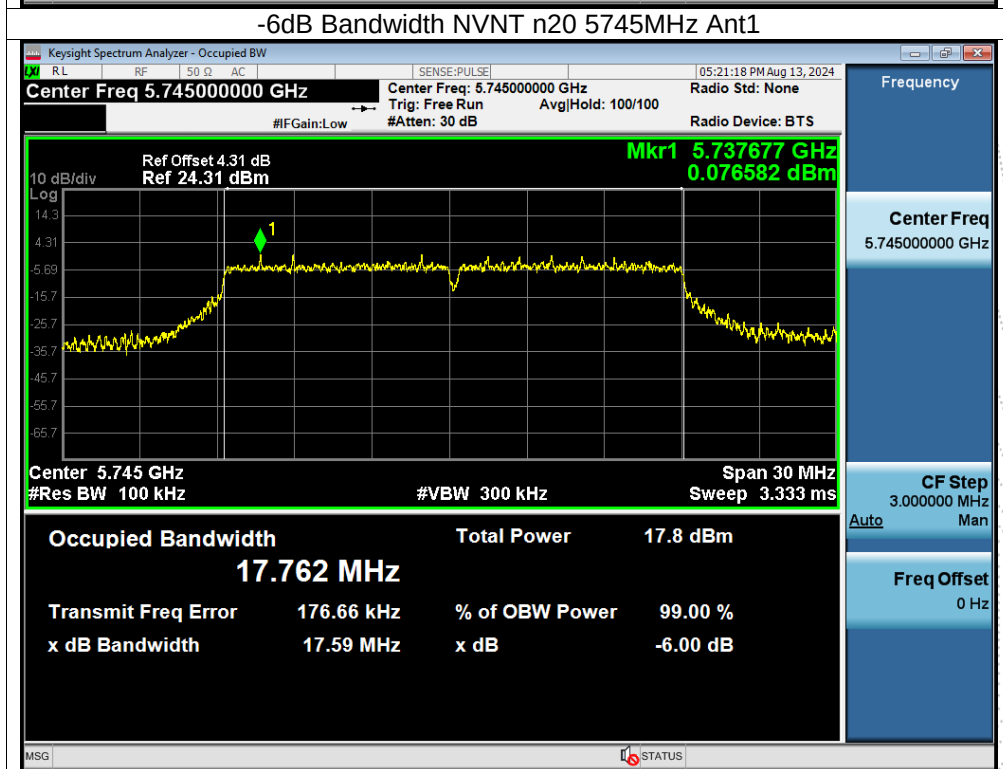
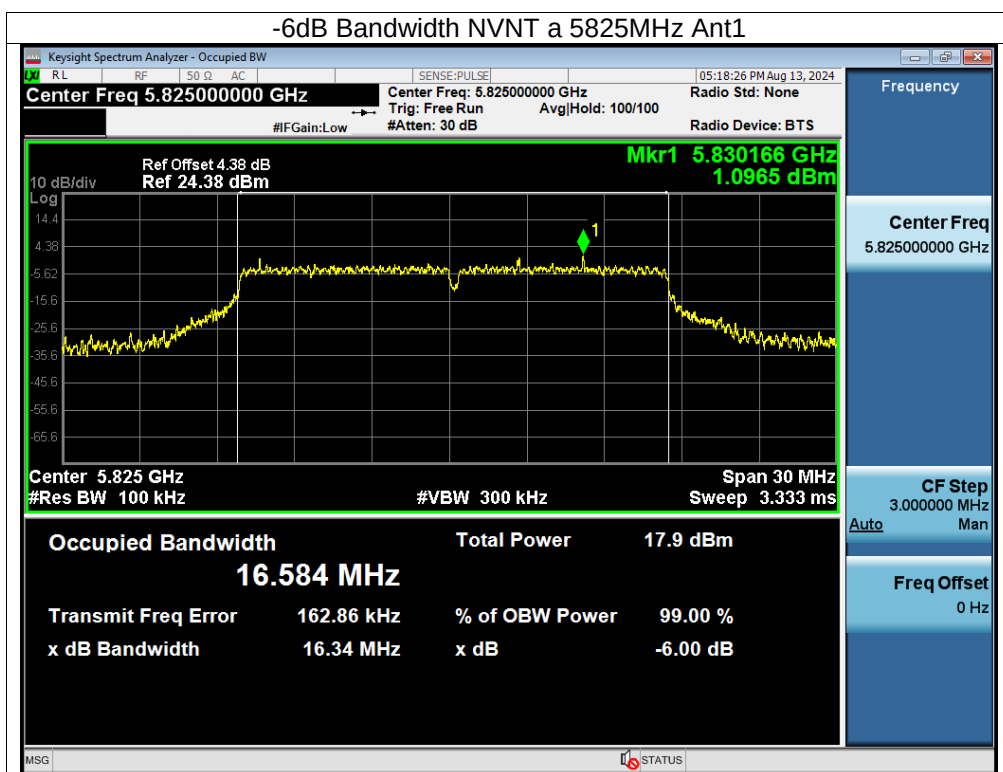


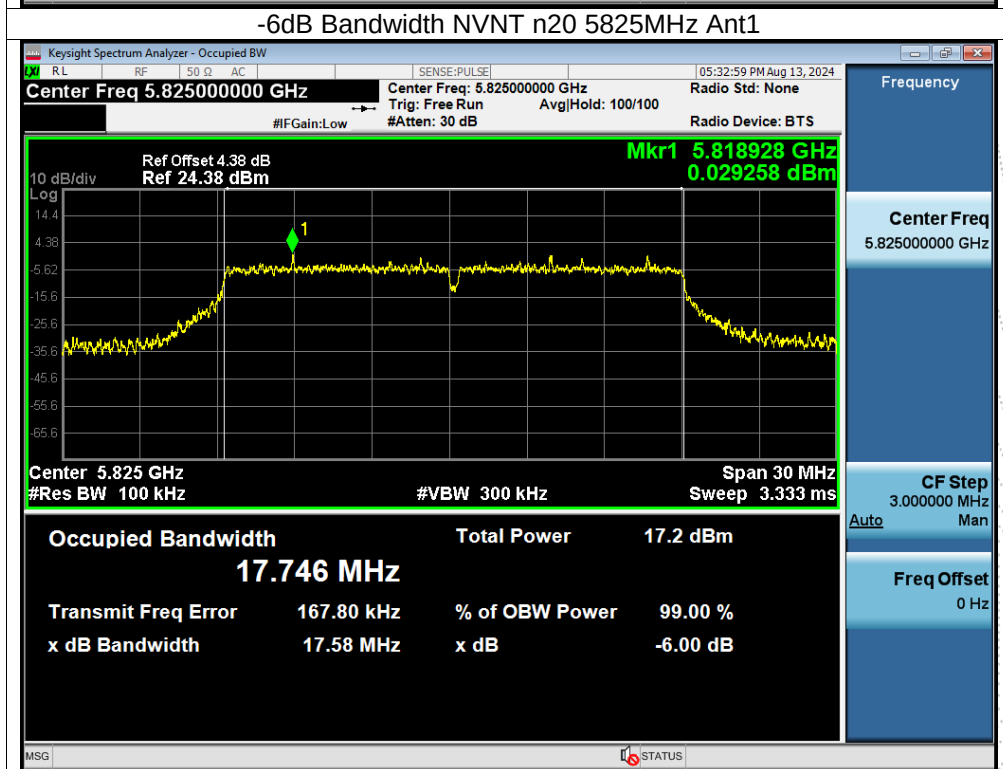
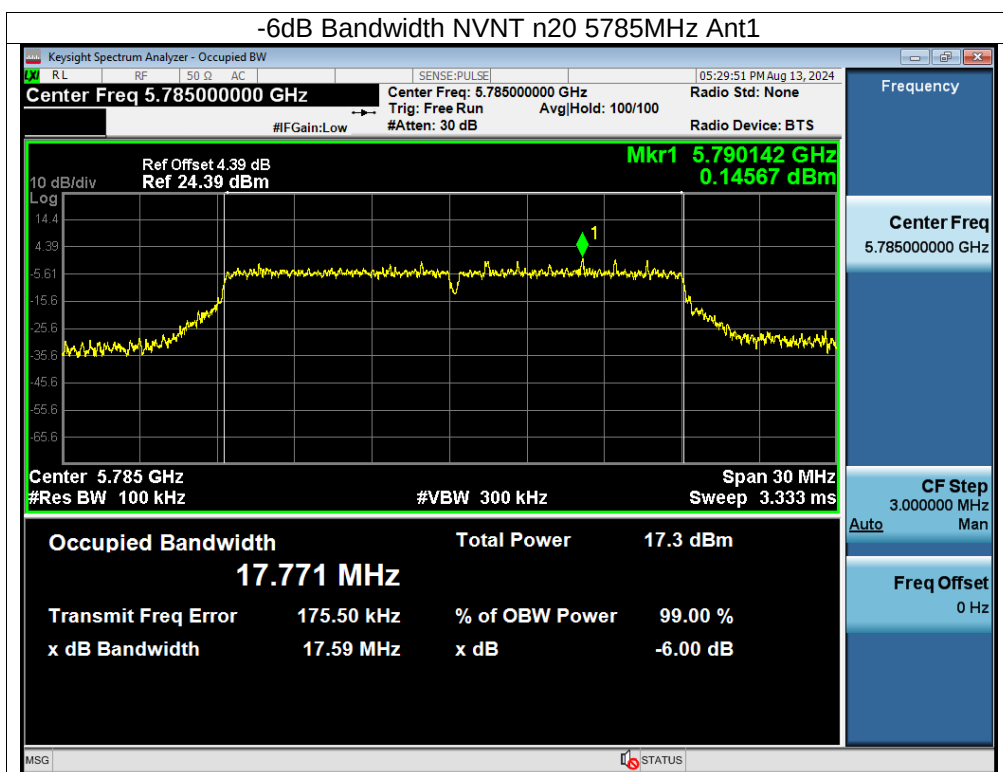


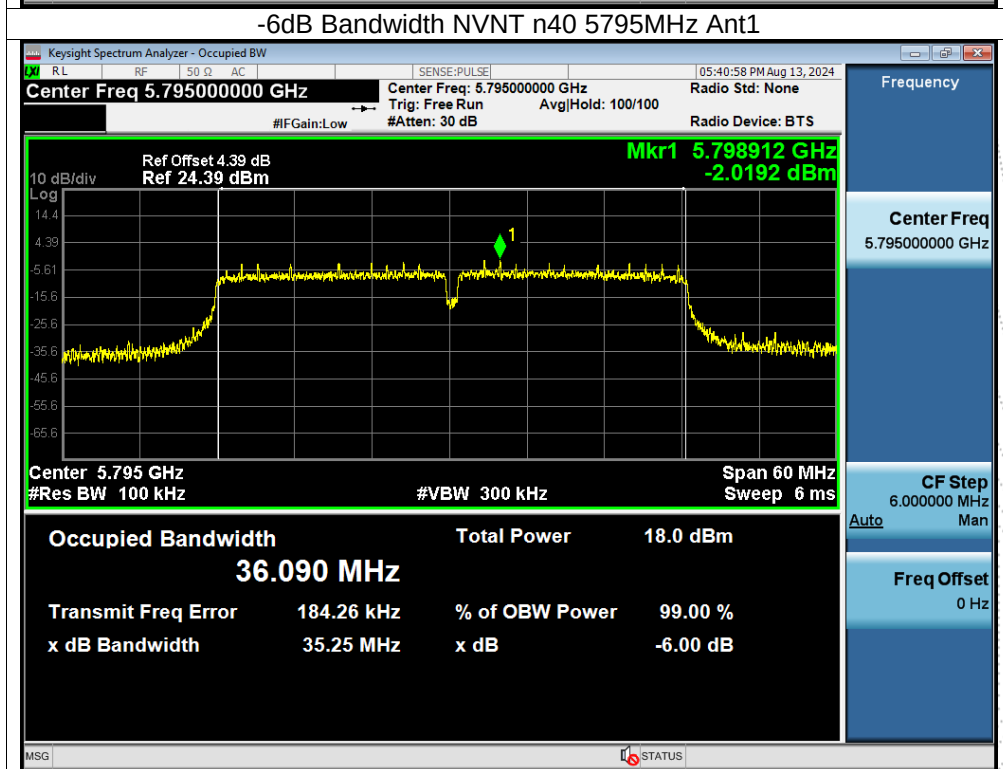
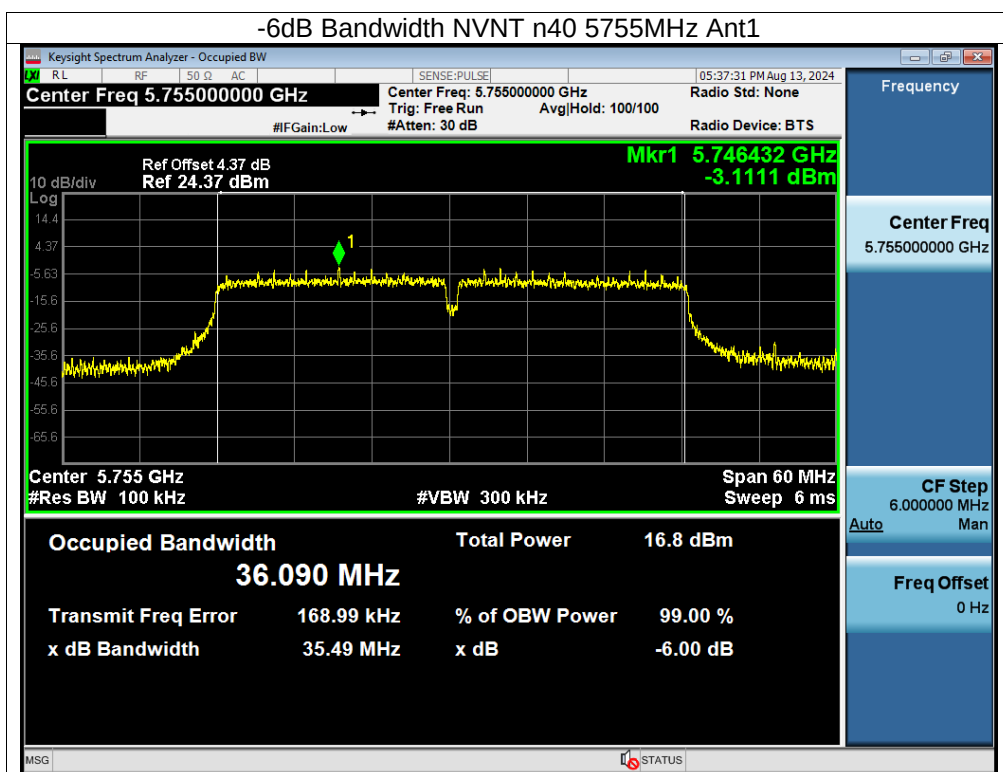


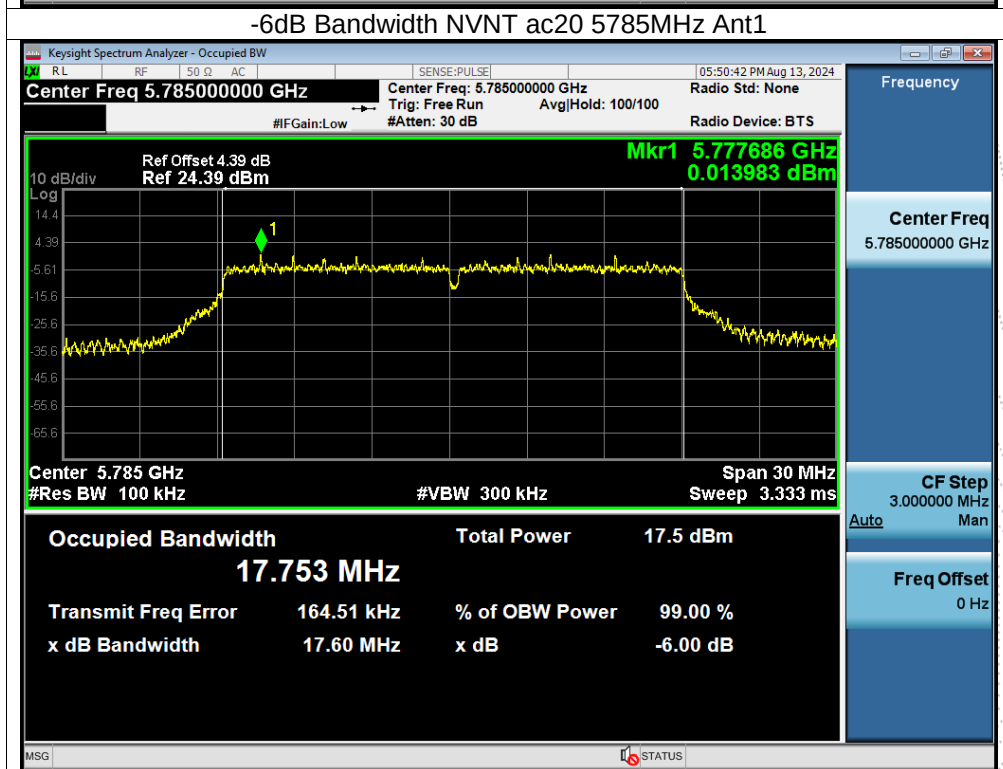
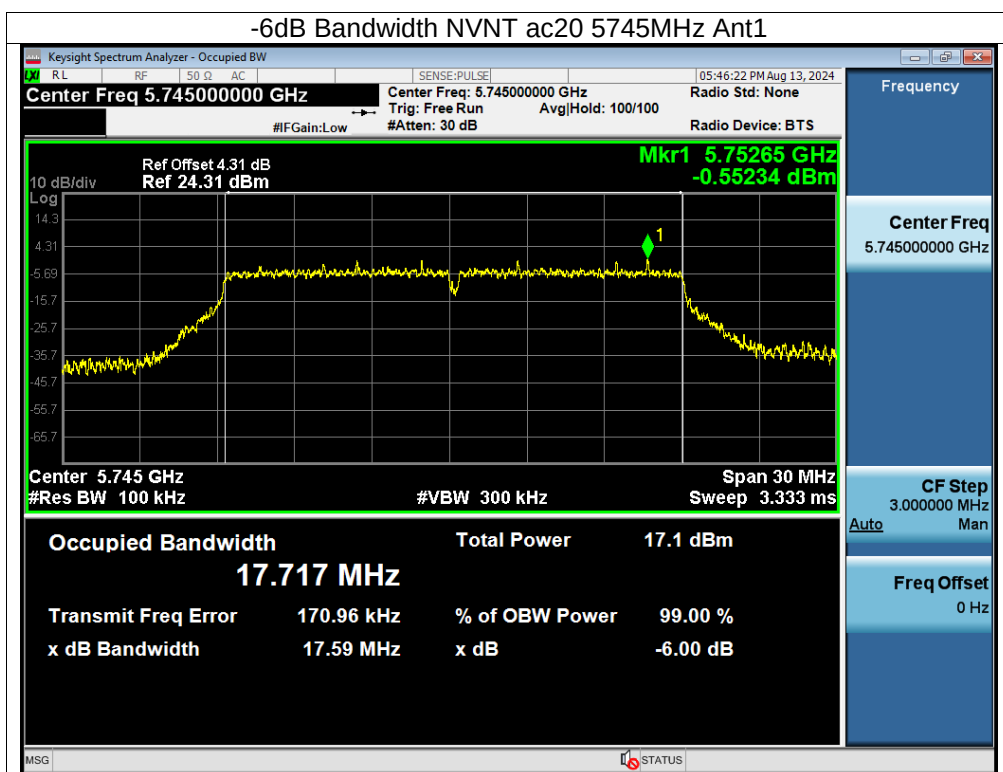


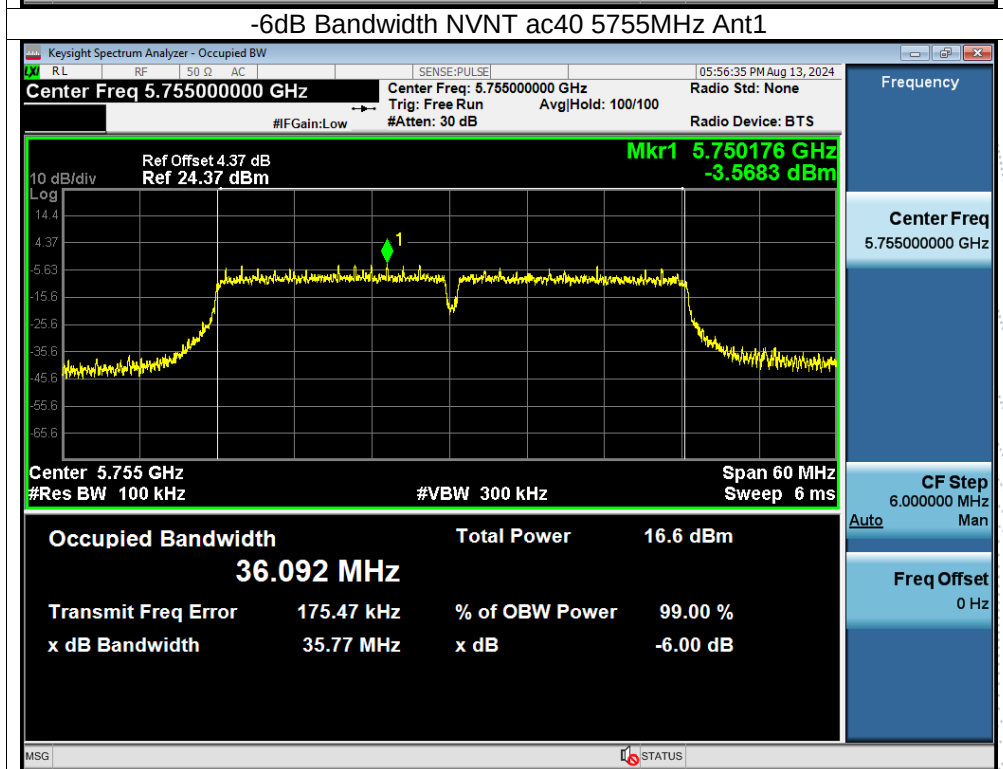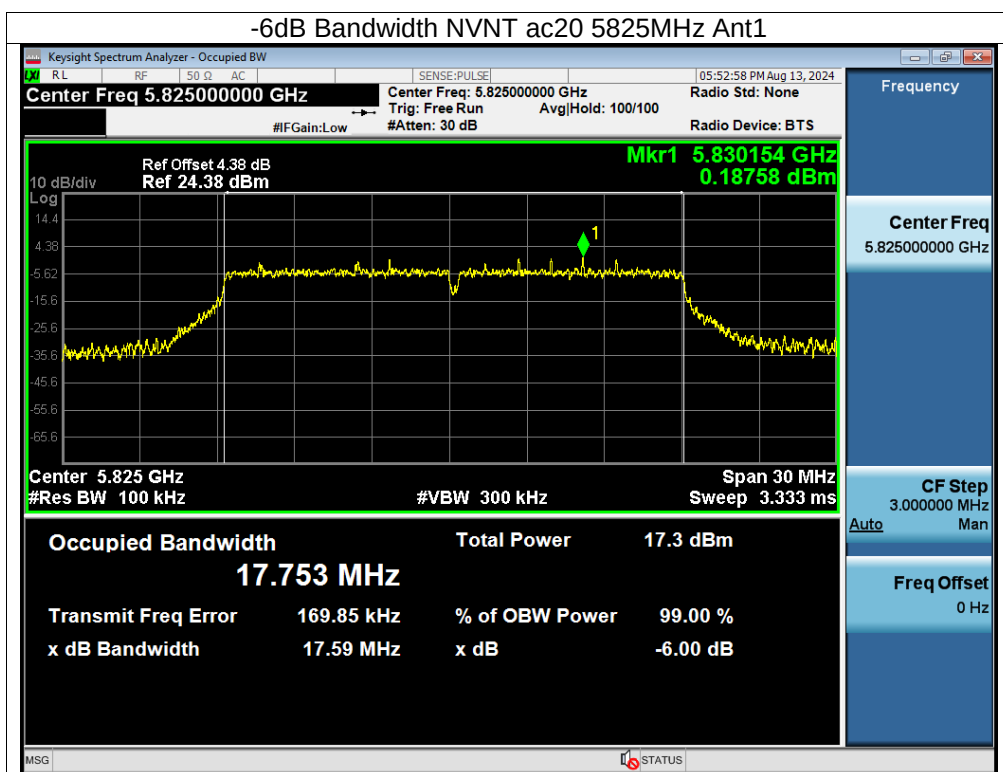


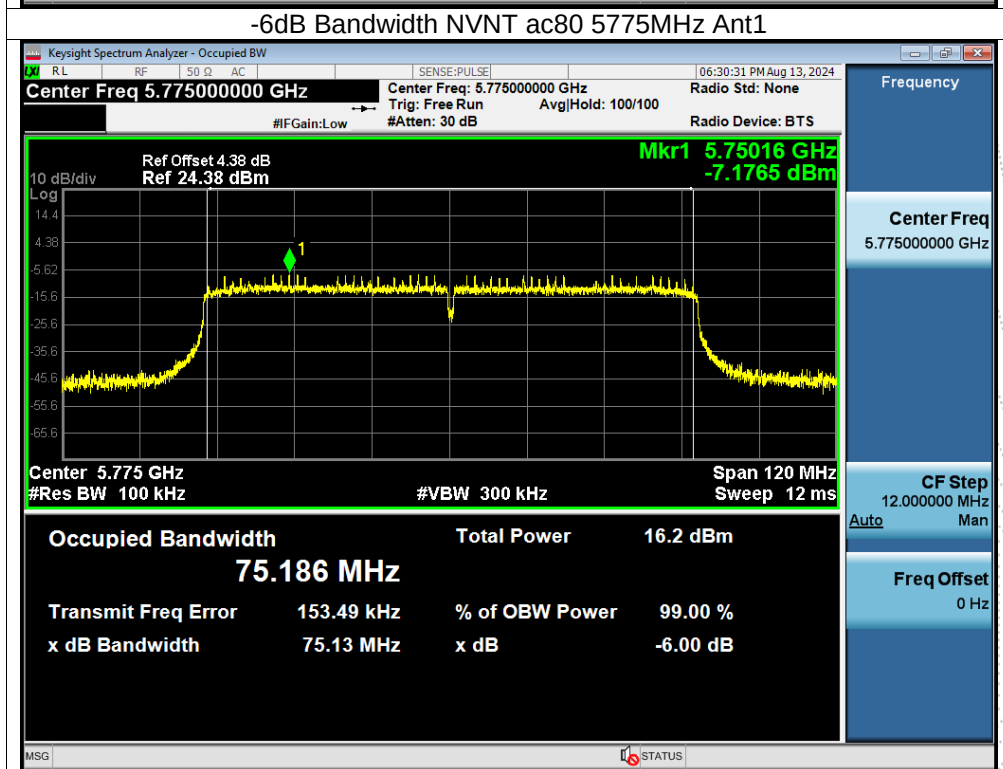
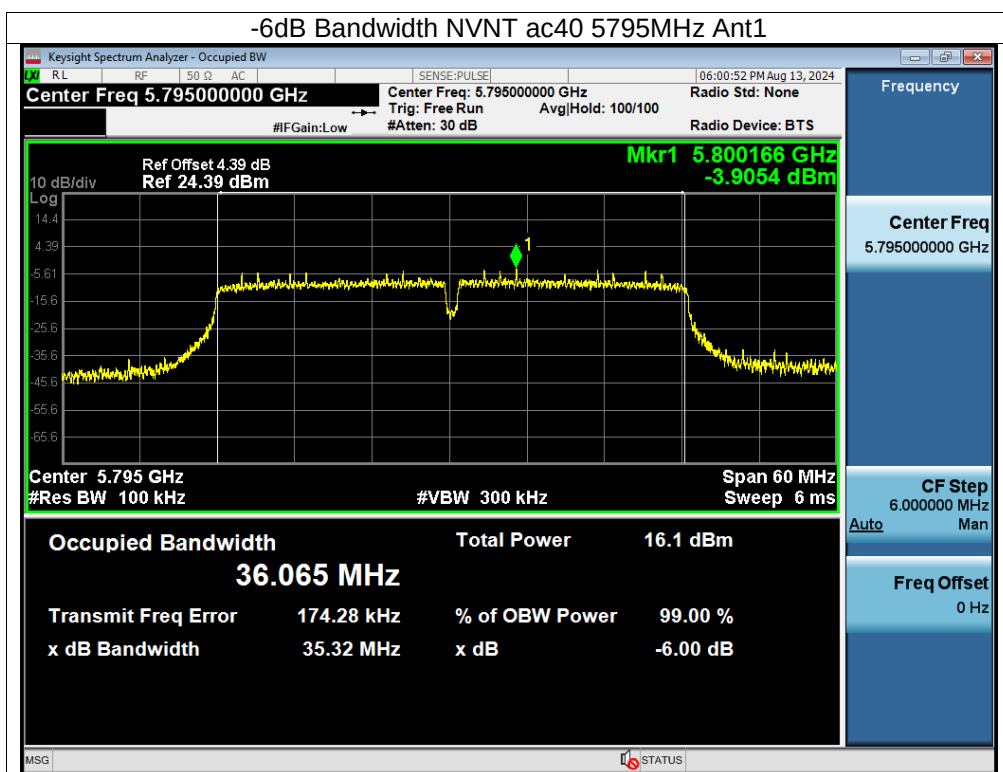


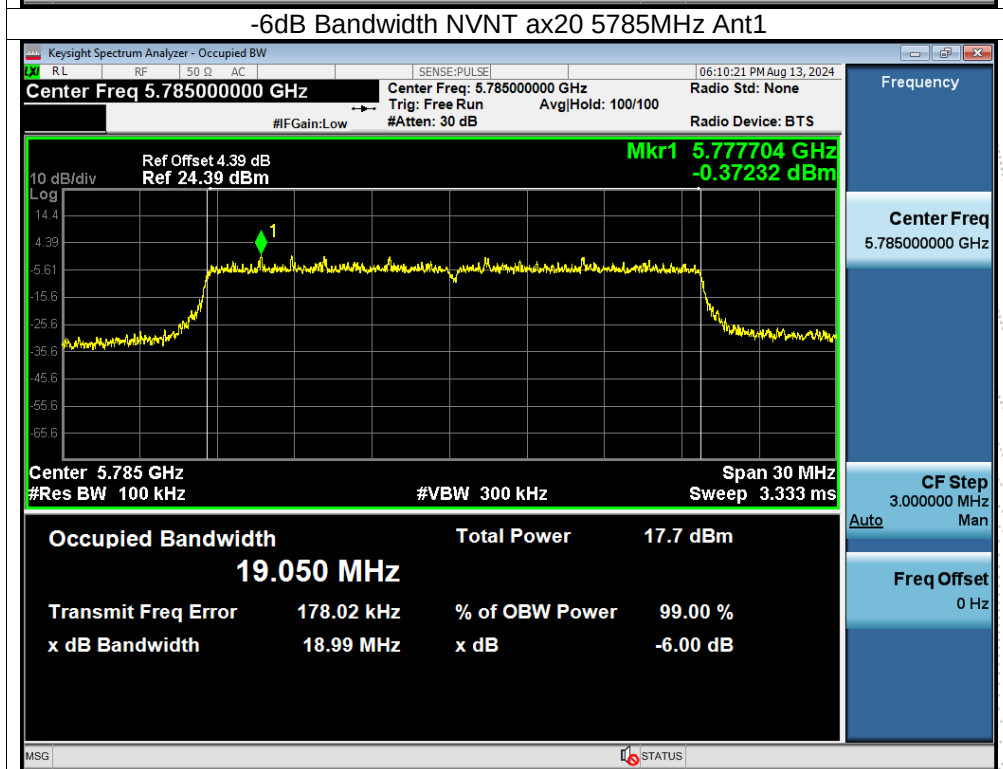
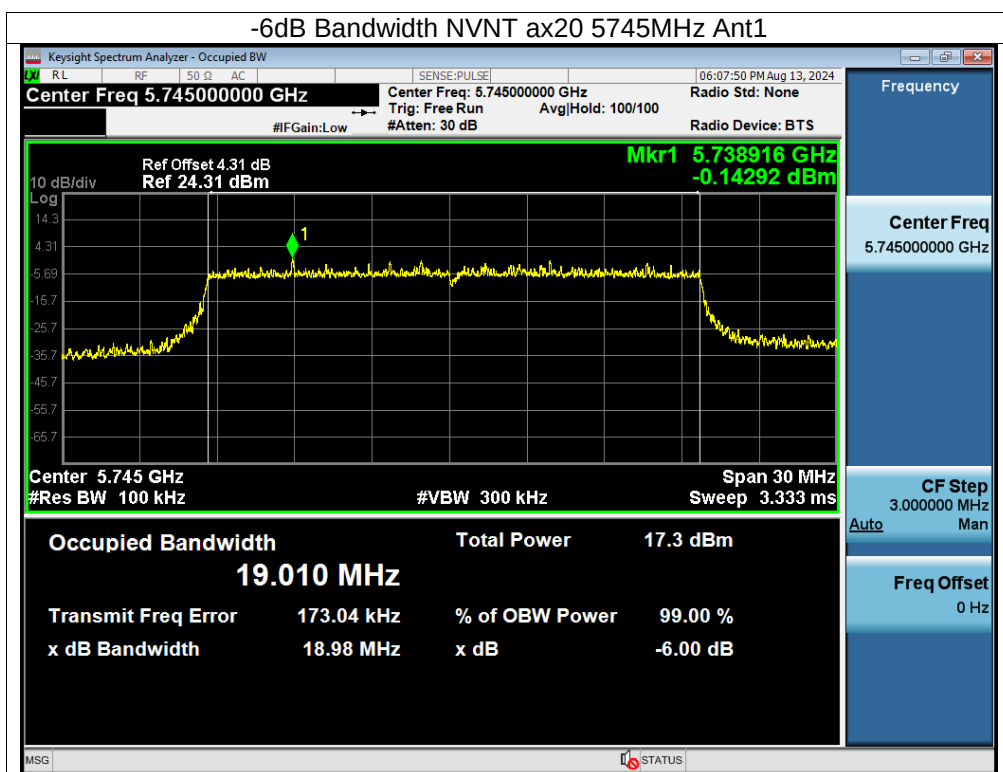


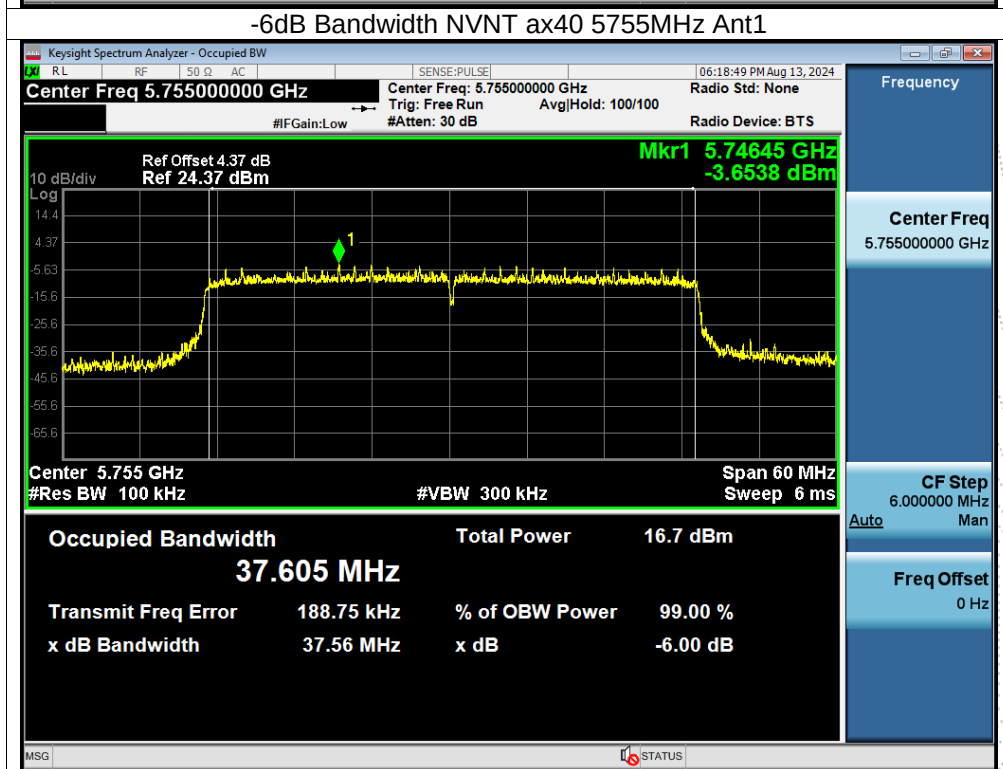
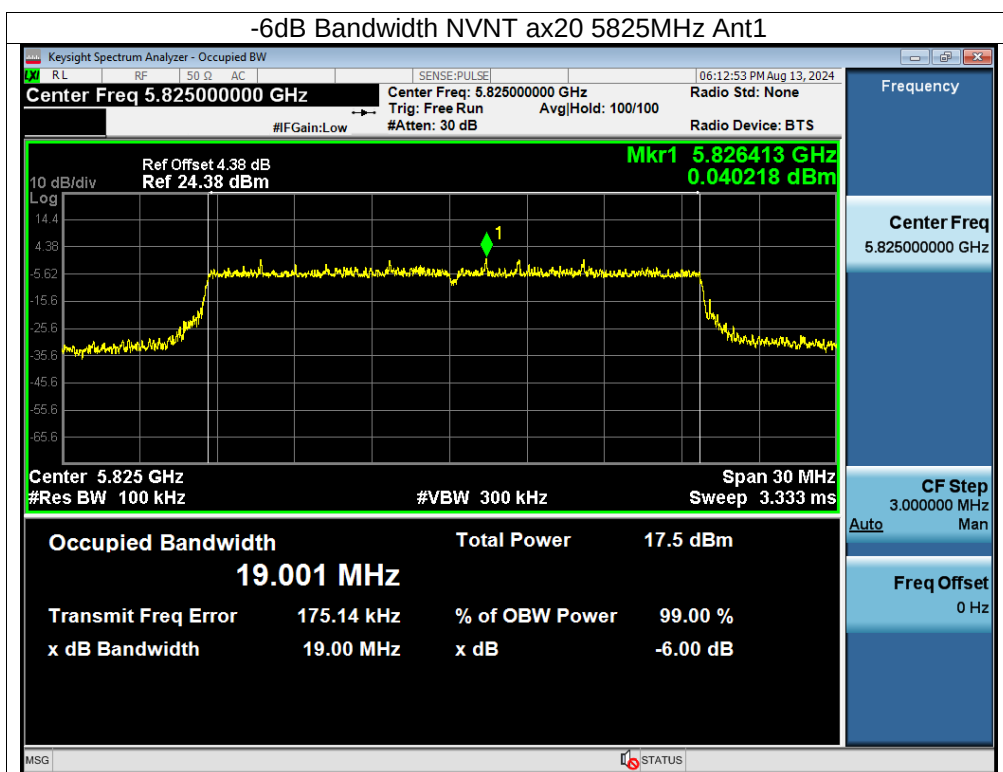


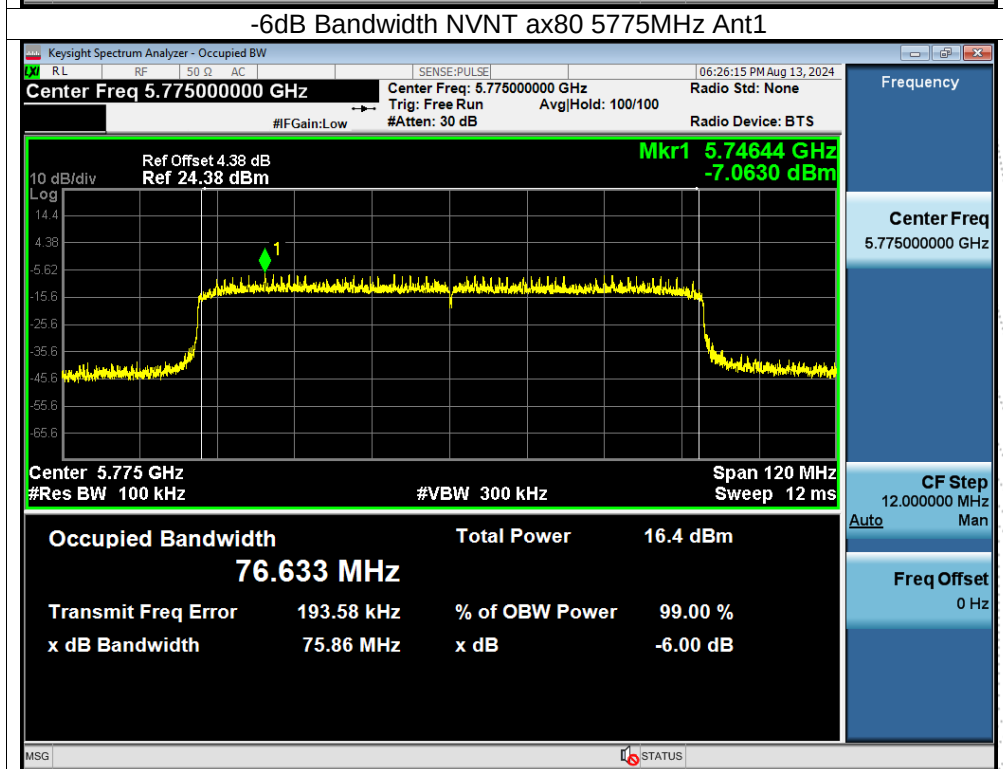
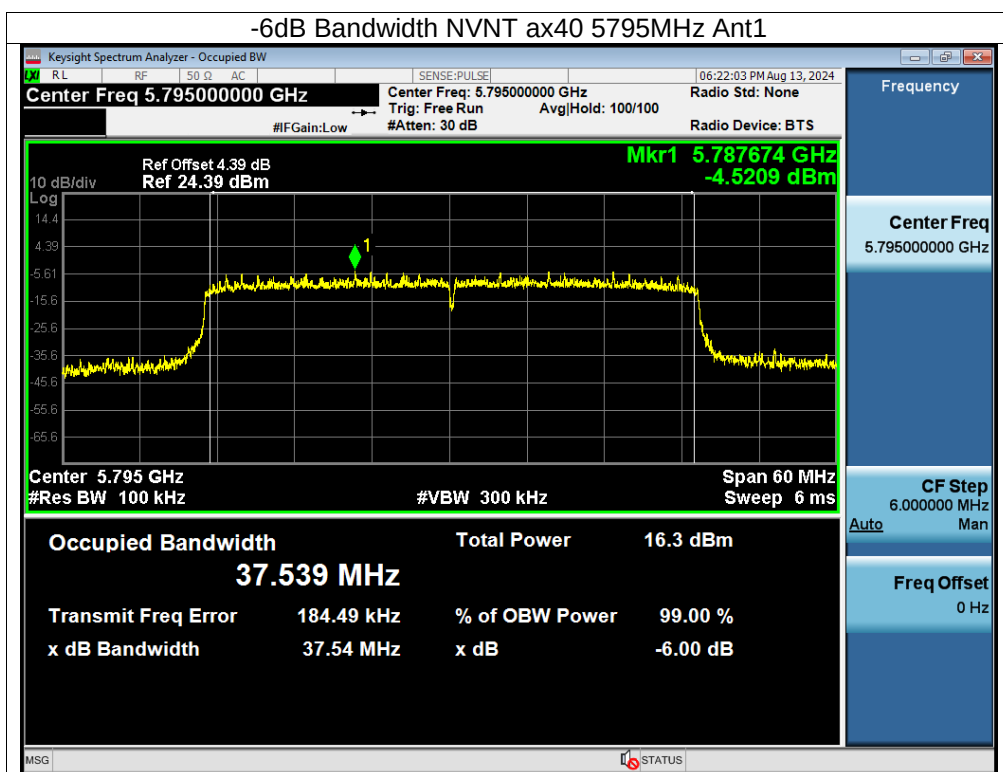



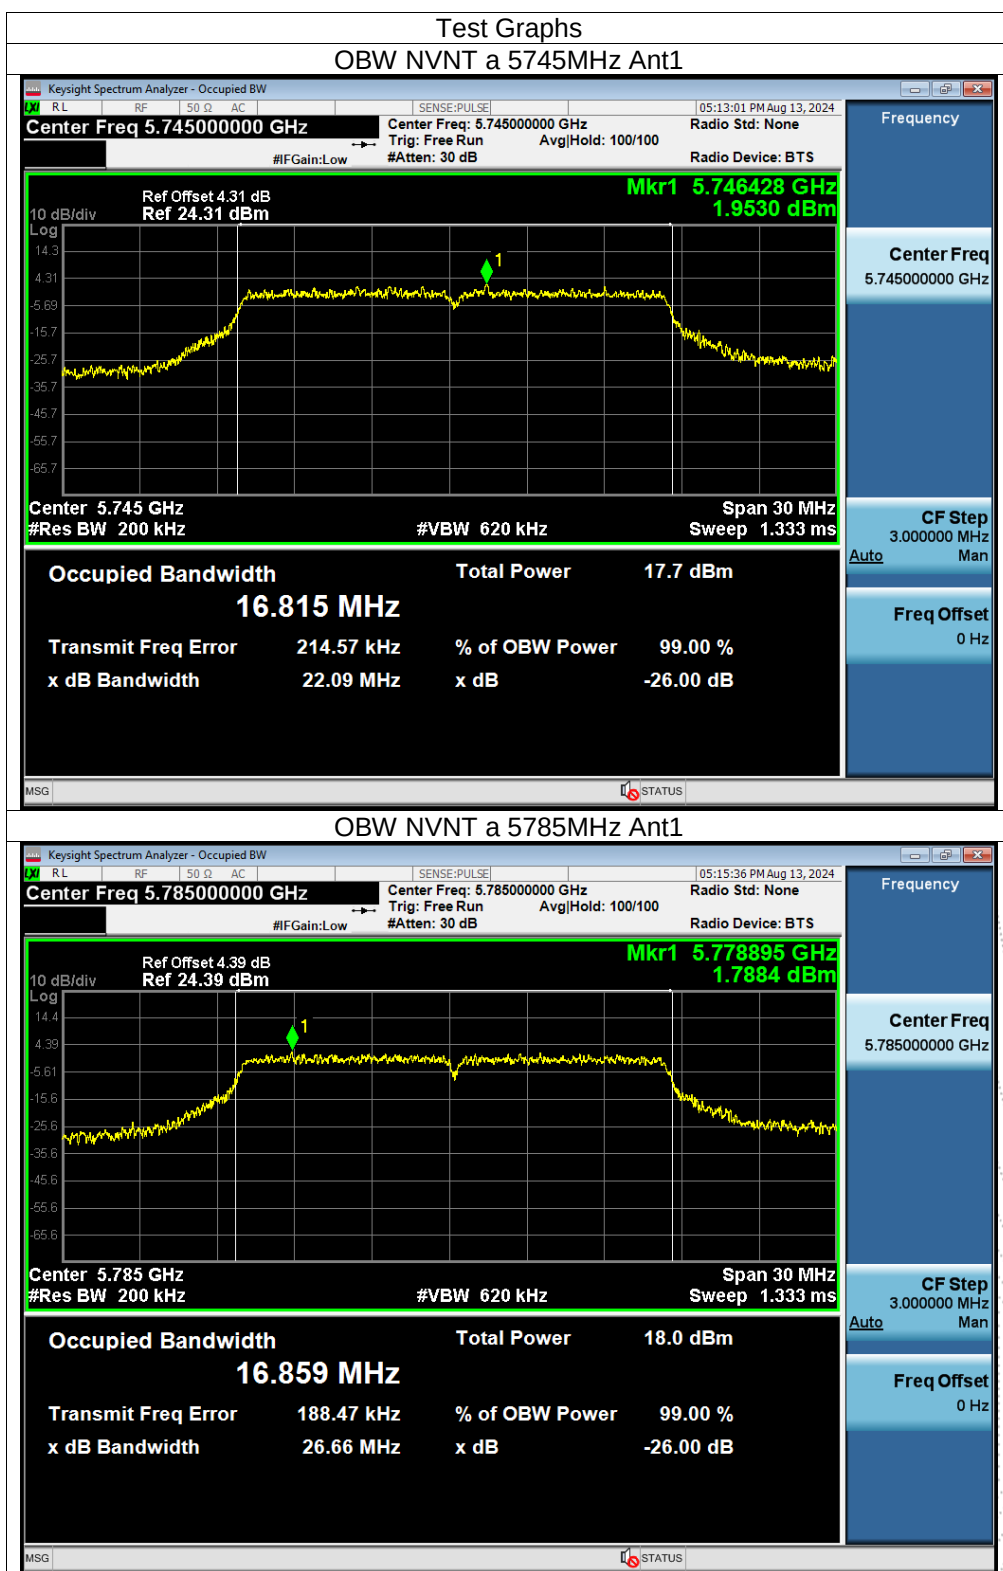


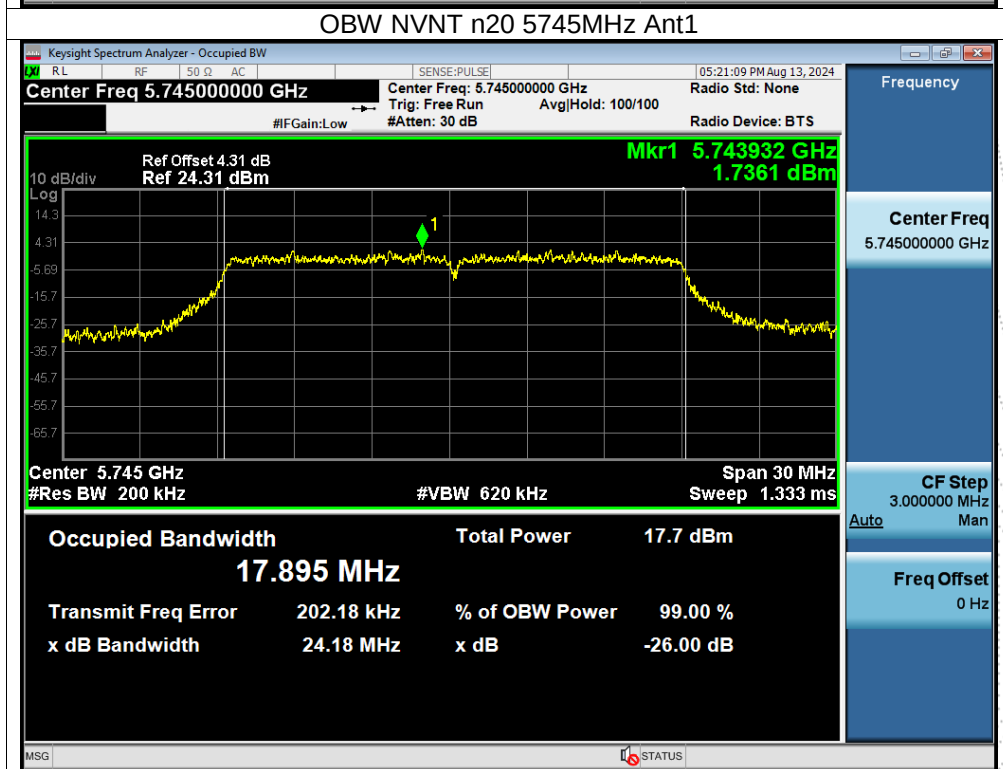
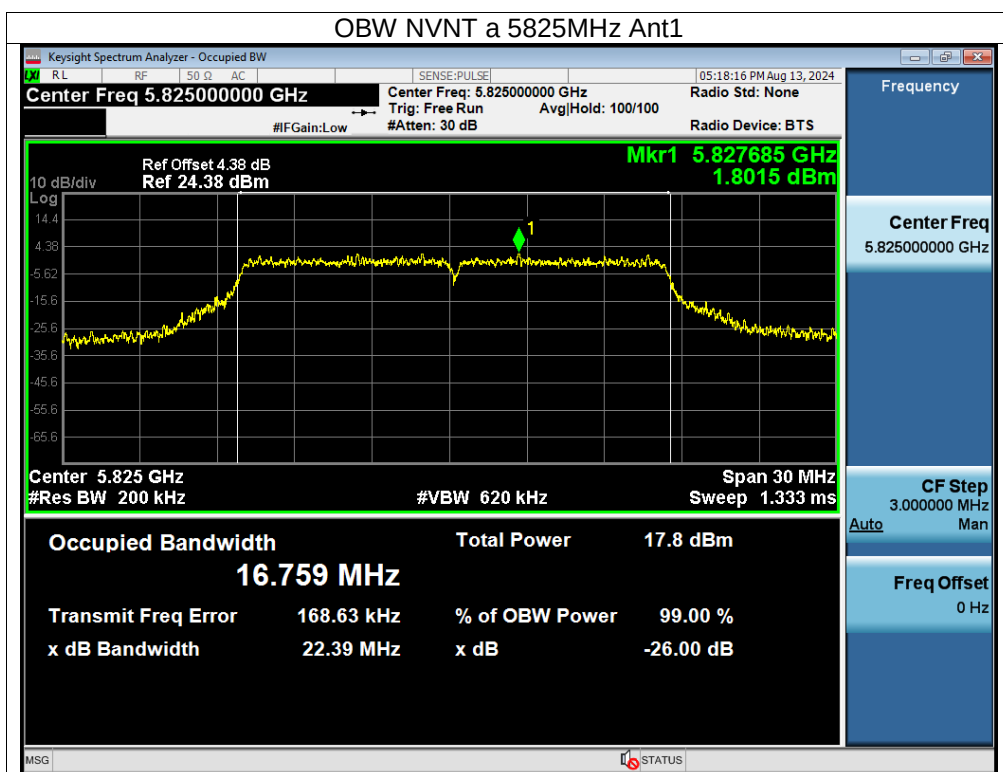


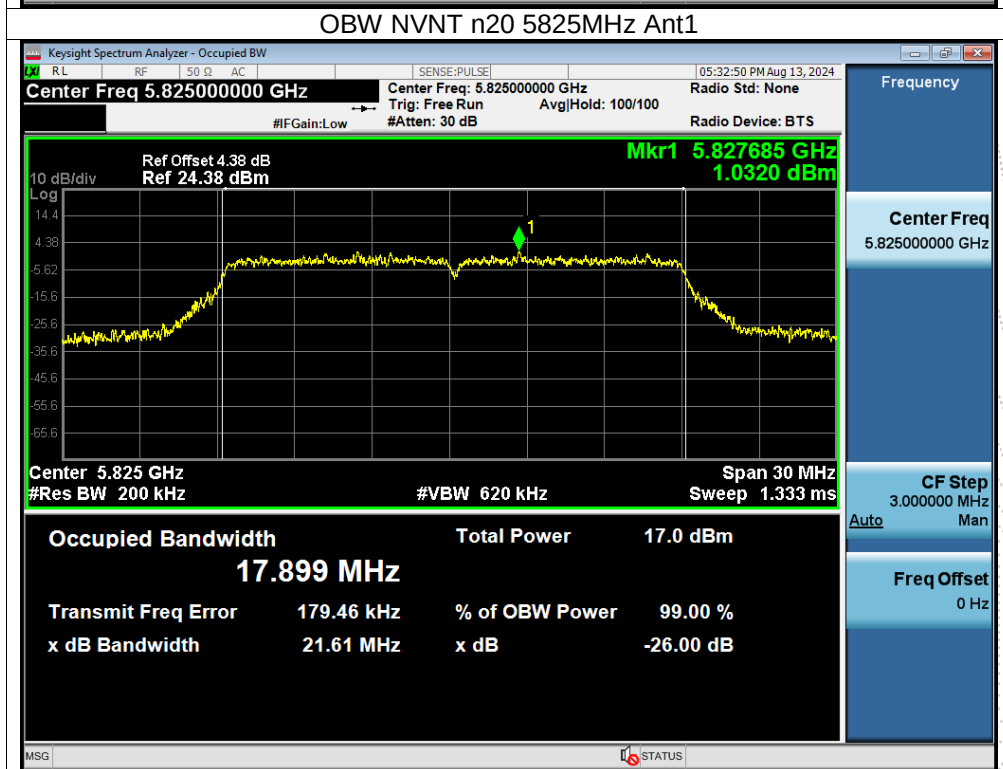
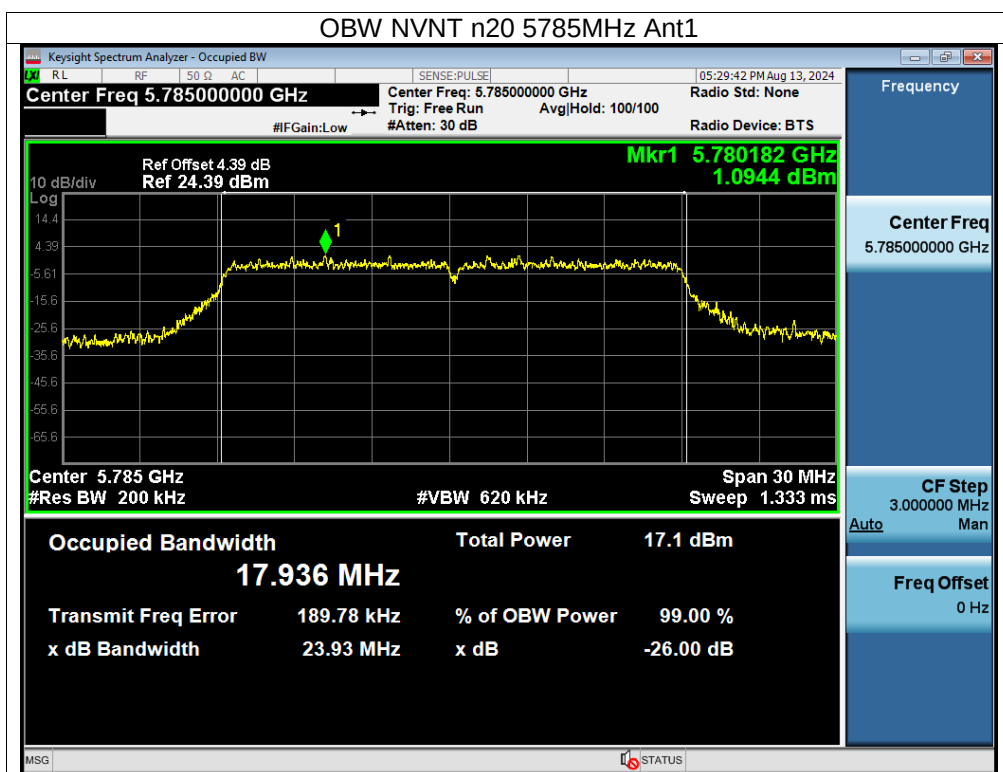


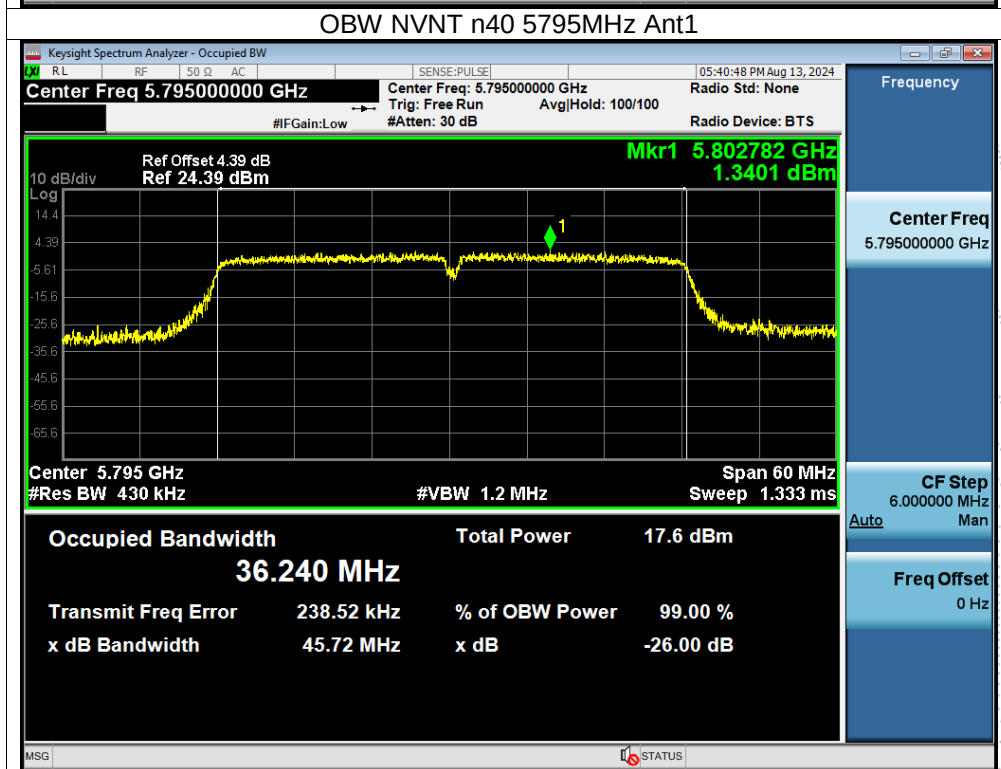
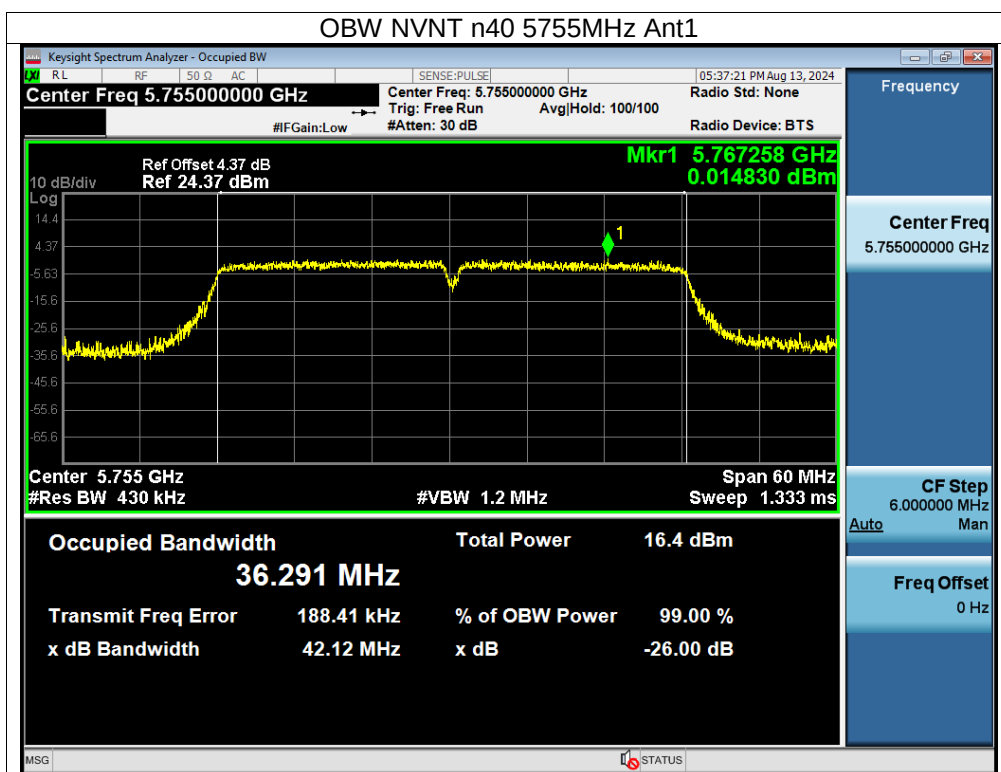


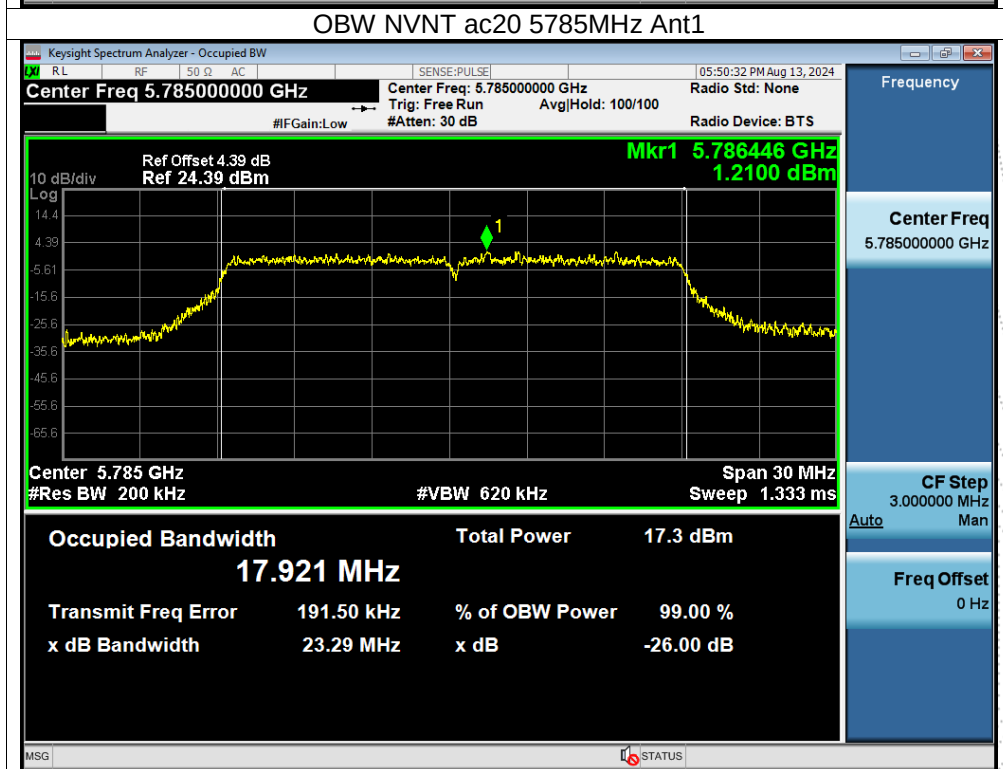
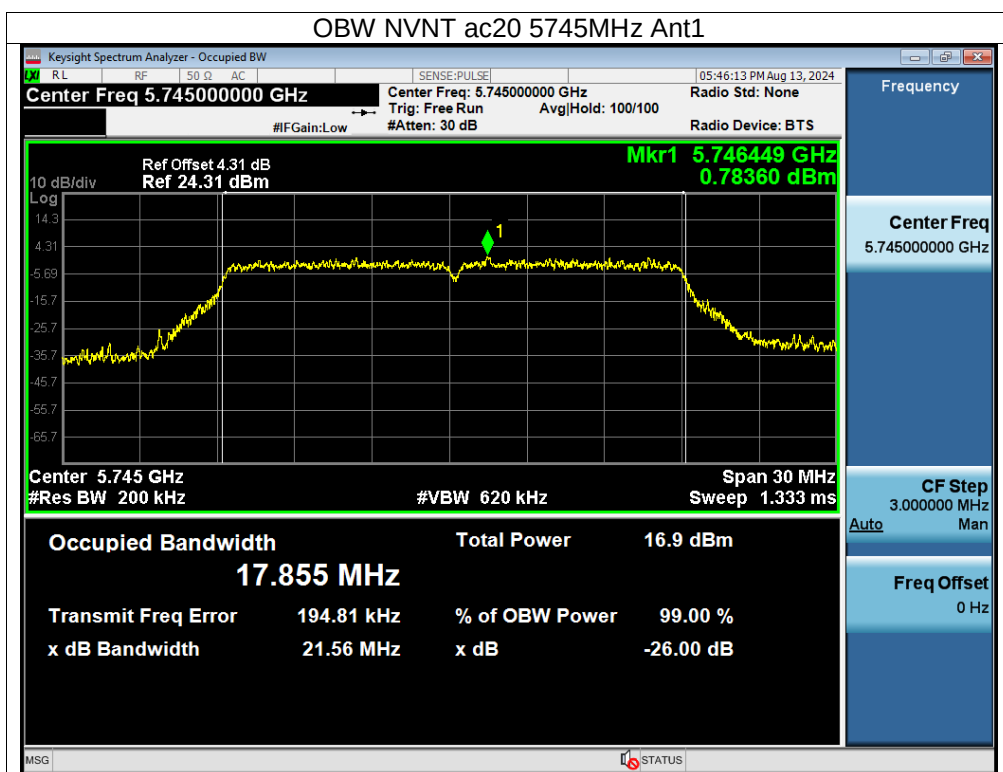


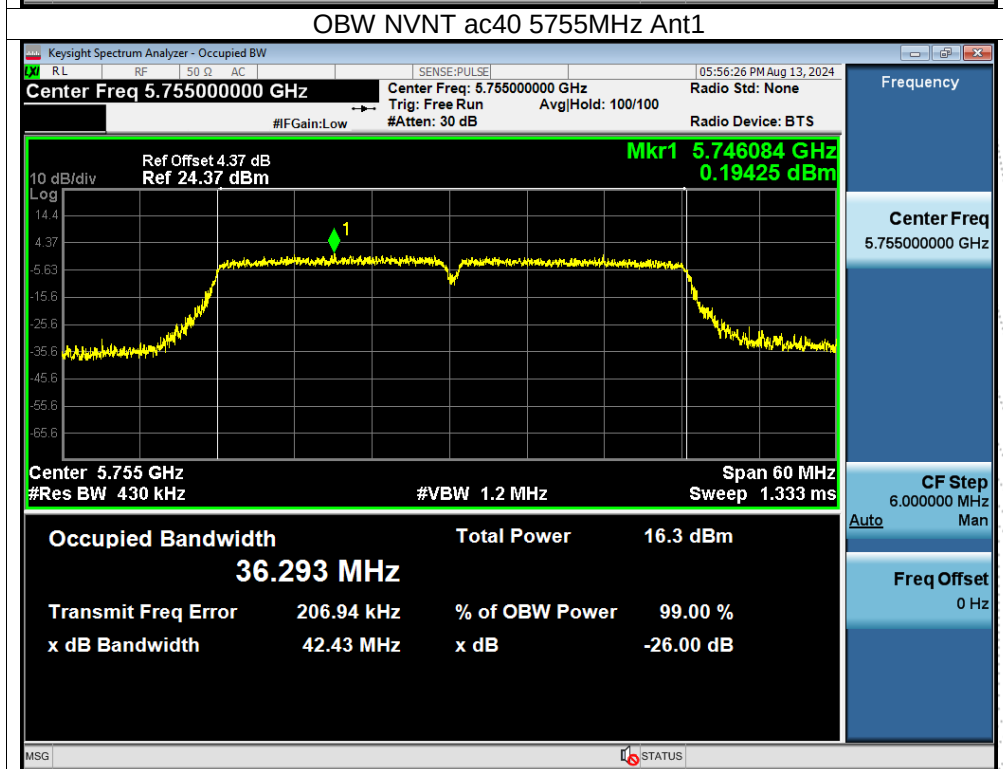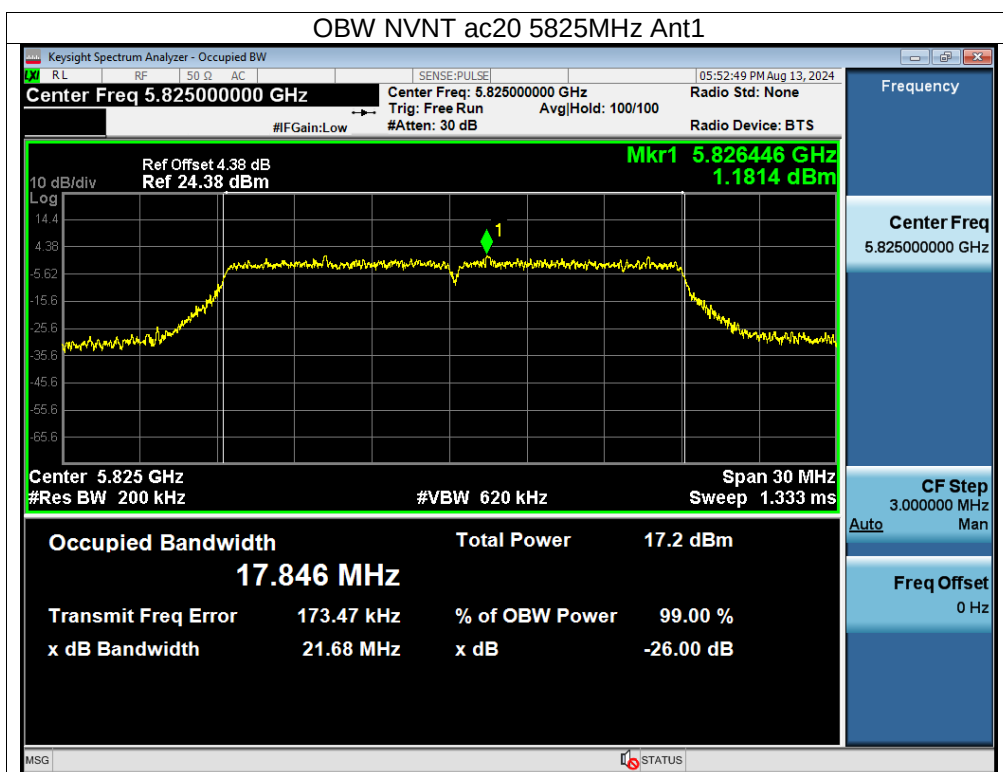

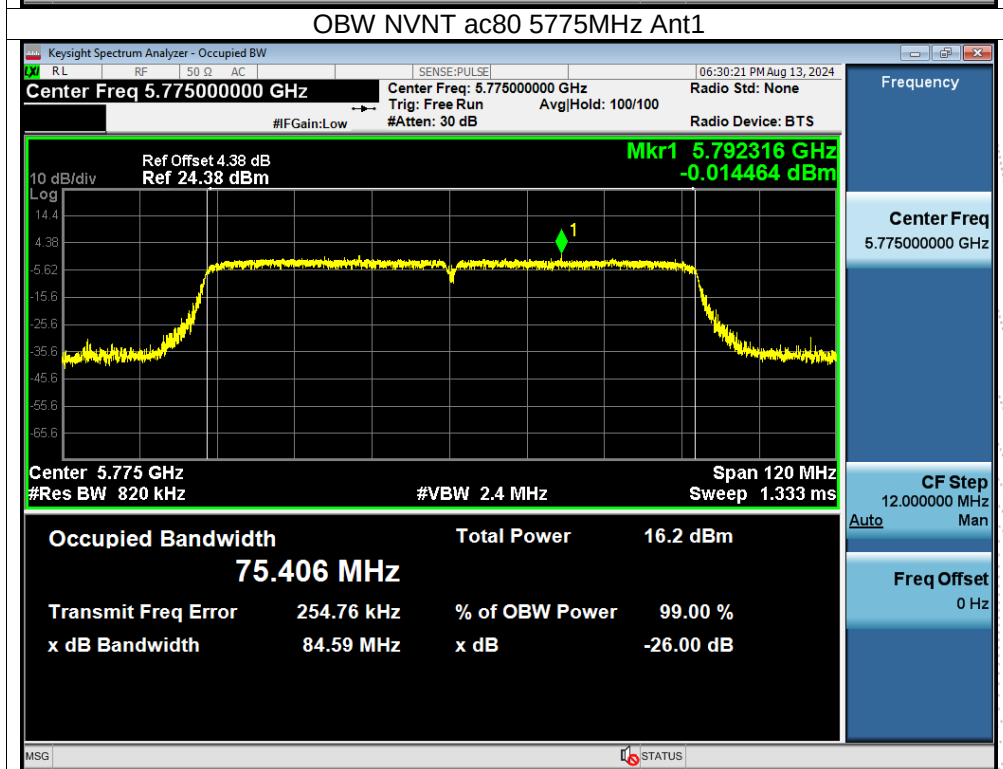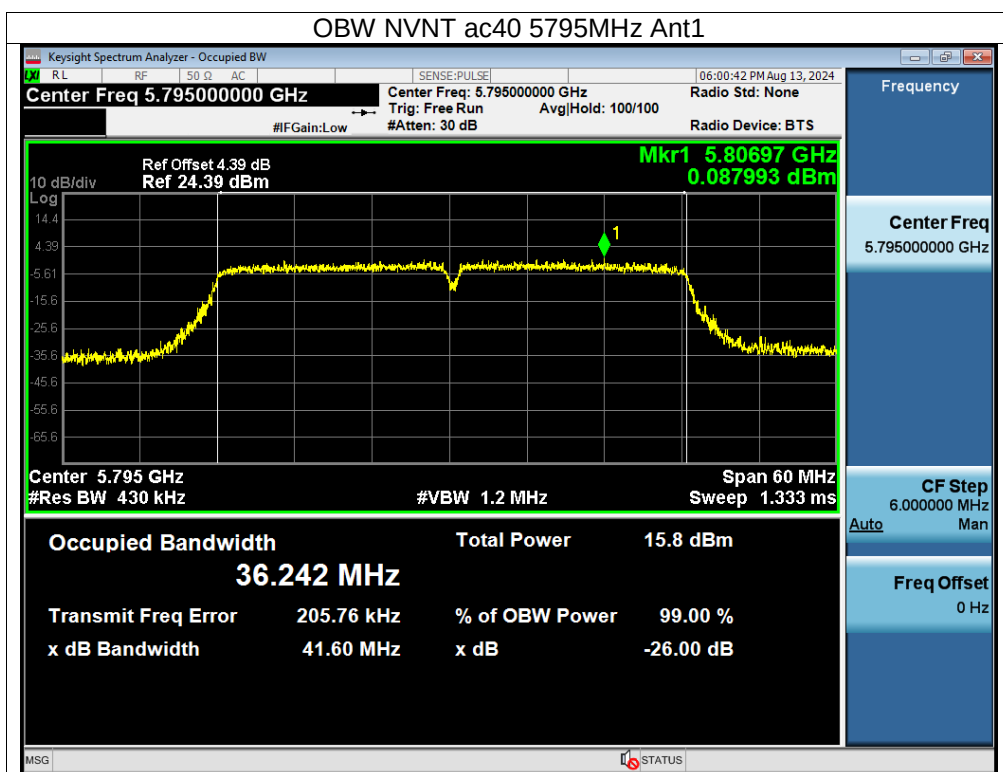

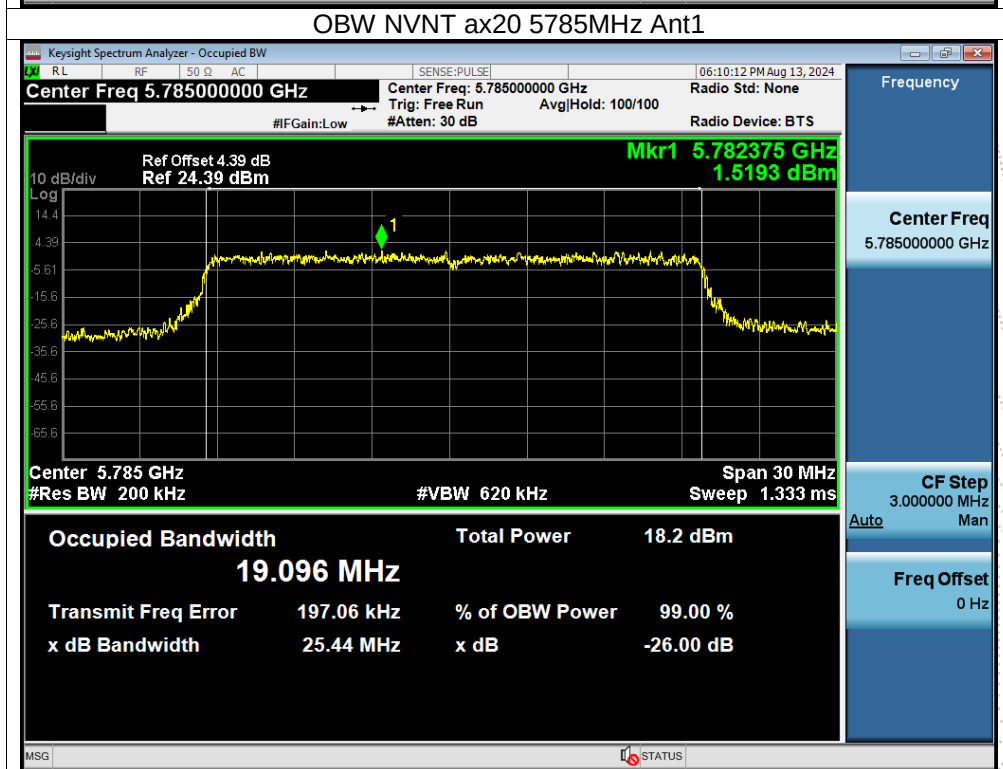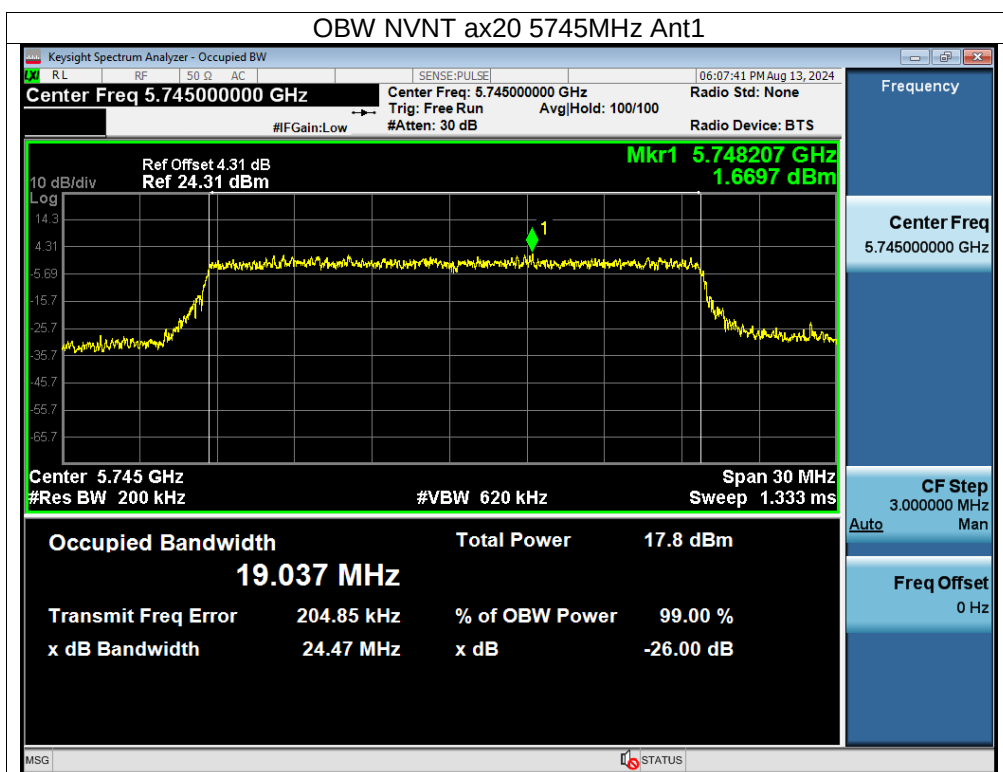

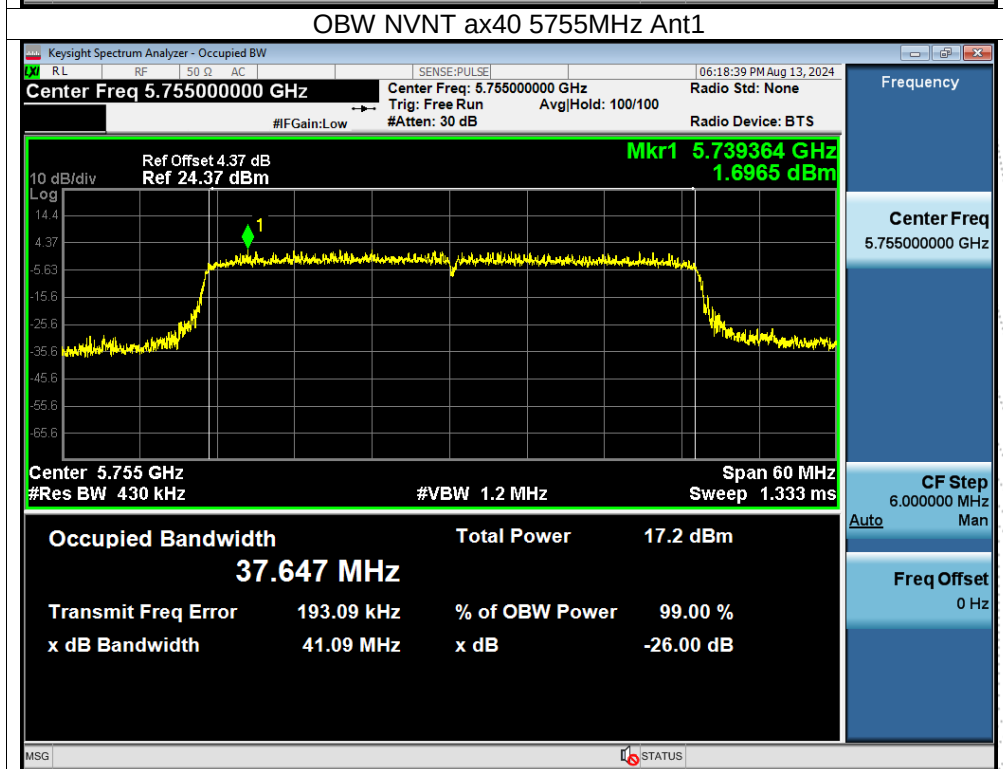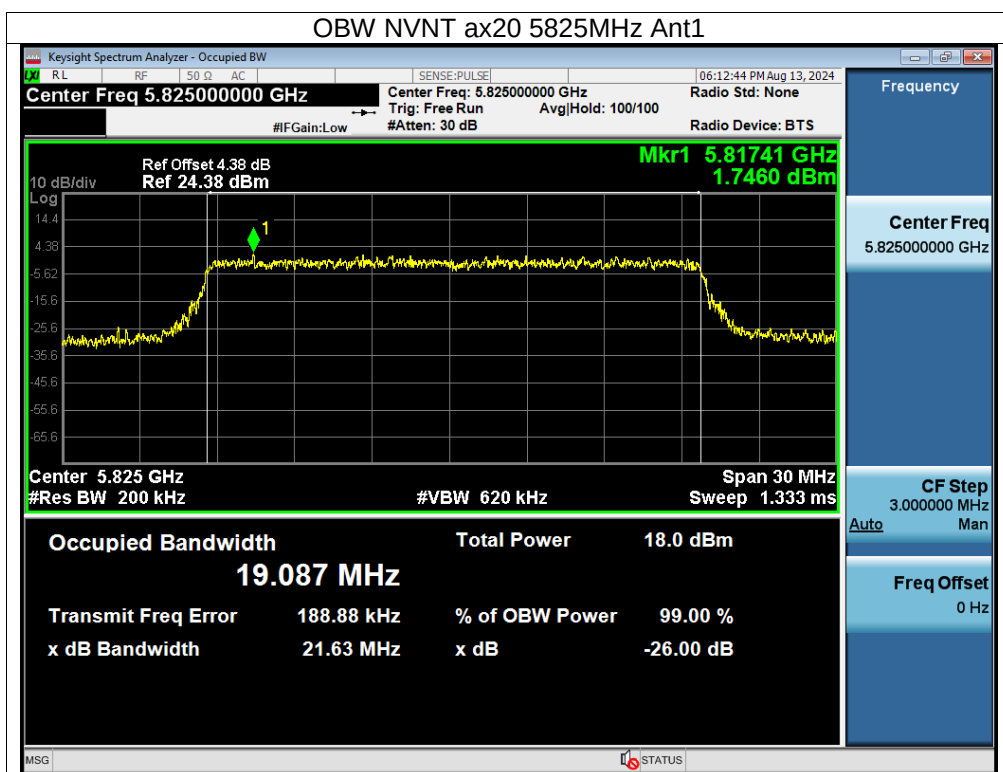

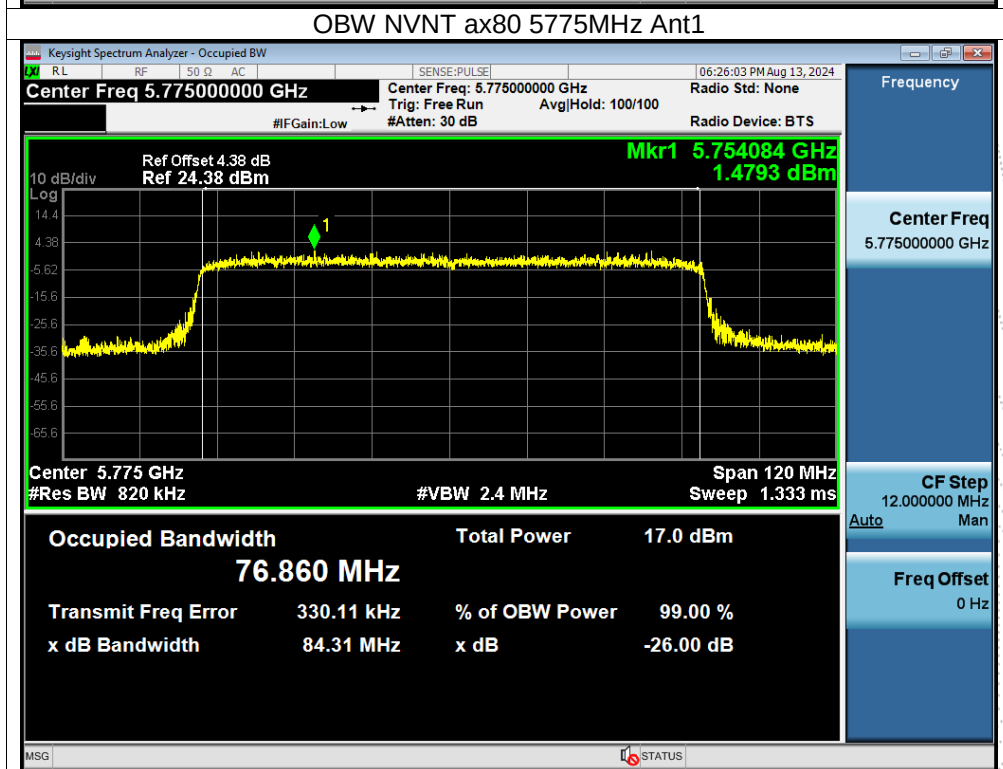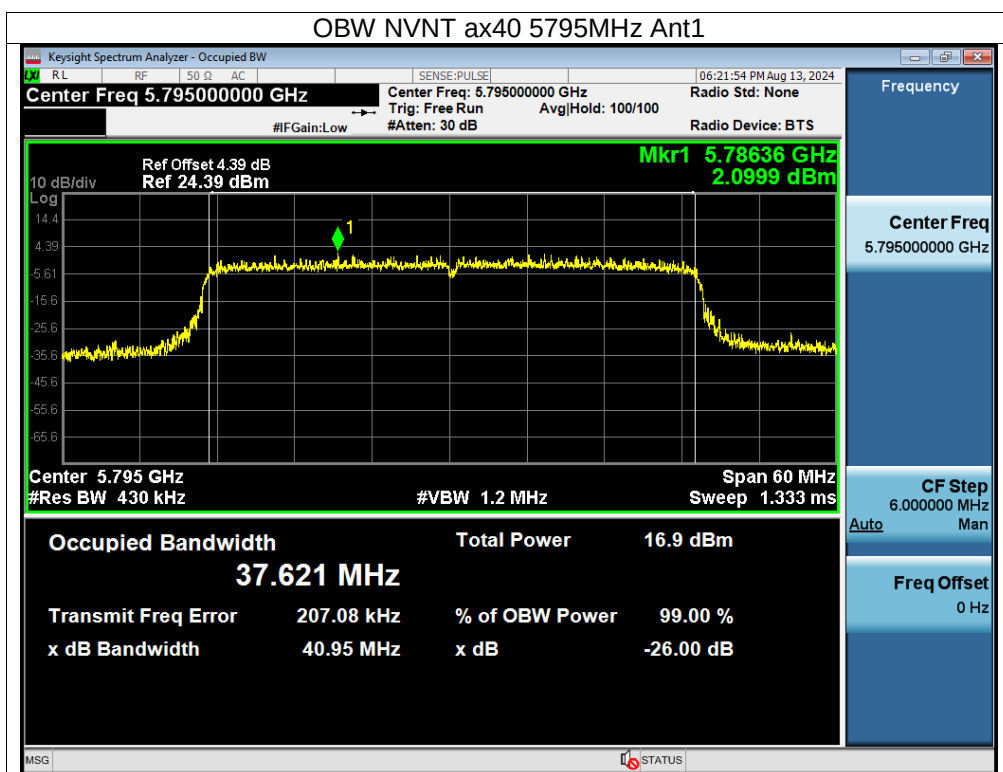

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	0.25W
5250~5350	0.25W
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.


(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

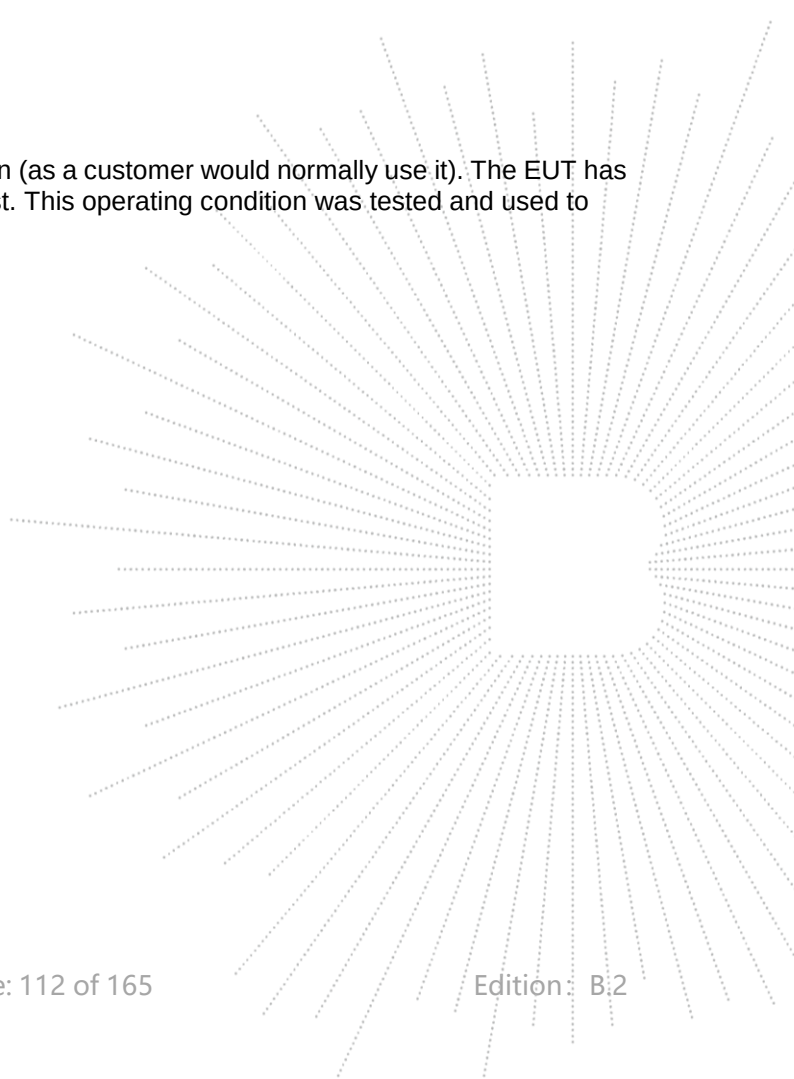

10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	5180-5240MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	12.42	24	Pass
NVNT	a	5200	12.34	24	Pass
NVNT	a	5240	11.84	24	Pass
NVNT	n20	5180	11.59	24	Pass
NVNT	n20	5200	11.4	24	Pass
NVNT	n20	5240	11.87	24	Pass
NVNT	n40	5190	10.55	24	Pass
NVNT	n40	5230	10.98	24	Pass
NVNT	ac20	5180	11.69	24	Pass
NVNT	ac20	5200	11.79	24	Pass
NVNT	ac20	5240	11.11	24	Pass
NVNT	ac40	5190	10.46	24	Pass
NVNT	ac40	5230	10.8	24	Pass
NVNT	ac80	5210	9.59	24	Pass
NVNT	ax20	5180	11.15	24	Pass
NVNT	ax20	5200	10.83	24	Pass
NVNT	ax20	5240	11.07	24	Pass
NVNT	ax40	5190	13.68	24	Pass
NVNT	ax40	5230	11.22	24	Pass
NVNT	ax80	5210	12.82	24	Pass

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	5745-5825MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	12.06	30	Pass
NVNT	a	5785	12.43	30	Pass
NVNT	a	5825	12.29	30	Pass
NVNT	n20	5745	12.1	30	Pass
NVNT	n20	5785	11.54	30	Pass
NVNT	n20	5825	11.46	30	Pass
NVNT	n40	5755	10.83	30	Pass
NVNT	n40	5795	12.01	30	Pass
NVNT	ac20	5745	11.34	30	Pass
NVNT	ac20	5785	11.64	30	Pass
NVNT	ac20	5825	11.52	30	Pass
NVNT	ac40	5755	10.59	30	Pass
NVNT	ac40	5795	10.2	30	Pass
NVNT	ac80	5775	9.34	30	Pass
NVNT	ax20	5745	11.43	30	Pass
NVNT	ax20	5785	11.69	30	Pass
NVNT	ax20	5825	11.63	30	Pass
NVNT	ax40	5755	10.48	30	Pass
NVNT	ax40	5795	10.13	30	Pass
NVNT	ax80	5775	9.79	30	Pass

11. Out Of Band Emissions

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 24V

5180-5240MHz

