


Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2412MHz
Test by :Scott Chang

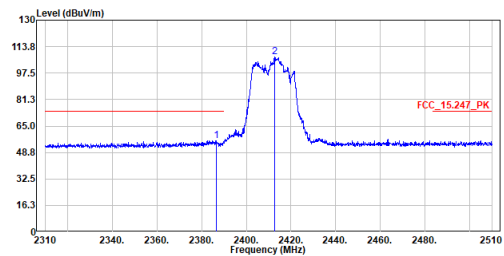


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2386.400	56.12	74.00	-17.88	44.21	11.91	Peak
2	2412.800	107.59	-----	-----	95.54	12.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2412MHz
Test by :Scott Chang

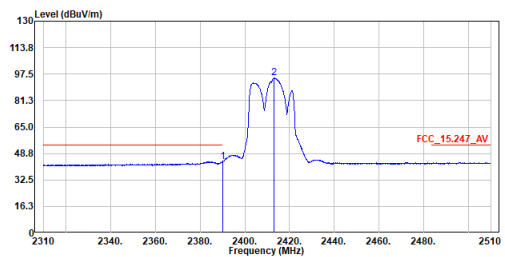


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2390.000	43.77	54.00	-10.23	31.84	11.93	Average
2	2413.100	94.98	-----	-----	82.93	12.05	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2412MHz
Test by :Scott Chang

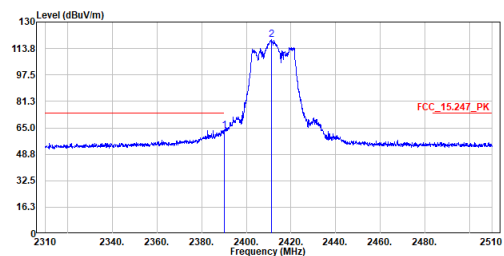


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2390.000	63.44	74.00	-10.56	51.51	11.93	Peak
2	2411.200	118.98	-----	-----	106.95	12.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2412MHz
Test by :Scott Chang

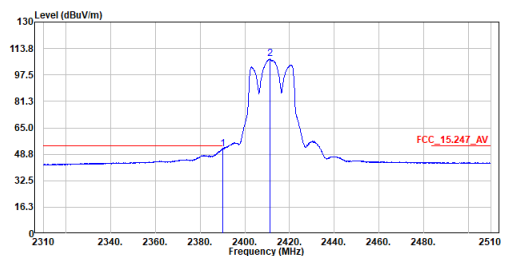


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2390.000	52.20	54.00	-1.80	40.27	11.93	Average
2	2411.300	107.26	-----	-----	95.23	12.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax20_TX_2412MHz
Test by :Scott Chang

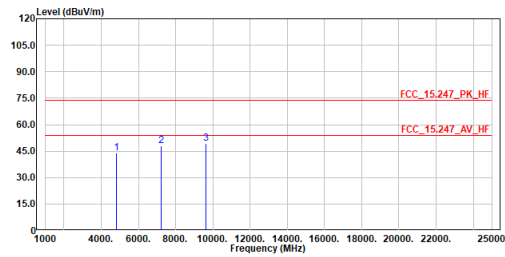


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4824.000	43.73	74.00	-30.27	58.41	-14.68	Peak
2	7236.000	48.05	74.00	-25.95	56.00	-7.95	Peak
3	9648.000	49.53	74.00	-24.47	54.01	-4.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax20_TX_2412MHz
Test by :Scott Chang

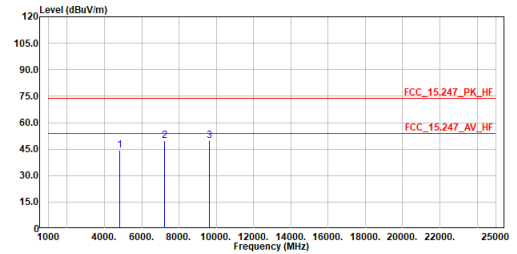


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4824.000	44.37	74.00	-29.63	59.05	-14.68	Peak
2	7236.000	49.86	74.00	-24.14	57.81	-7.95	Peak
3	9648.000	49.79	74.00	-24.21	54.27	-4.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2437MHz
Test by :Scott Chang

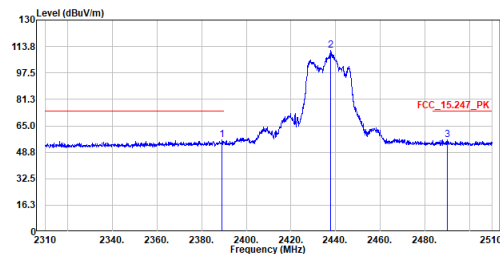


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.200	56.30	74.00	-17.70	44.37	11.93	Peak
2	2437.900	111.40	-----	-----	99.23	12.17	Peak
3	2489.900	56.34	74.00	-17.66	43.91	12.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2437MHz
Test by :Scott Chang

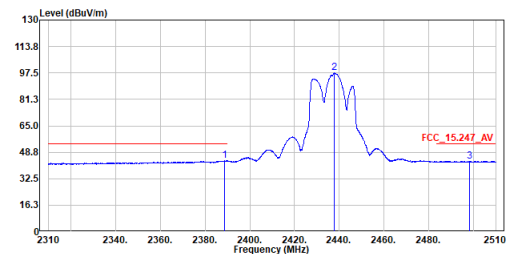


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2388.800	43.62	54.00	-10.38	31.69	11.93	Average
2	2437.700	97.49	-----	-----	85.32	12.17	Average
3	2498.400	43.20	54.00	-10.80	30.72	12.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2437MHz
Test by :Scott Chang

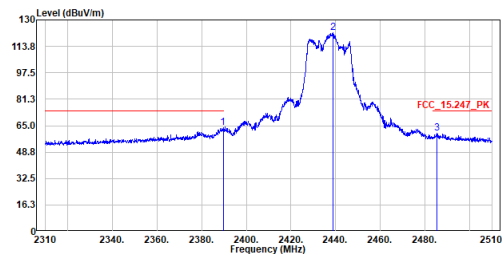


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.600	63.83	74.00	-10.17	51.90	11.93	Peak
2	2438.800	122.18	-----	-----	110.01	12.17	Peak
3	2485.500	60.30	74.00	-13.70	47.90	12.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2437MHz
Test by :Scott Chang

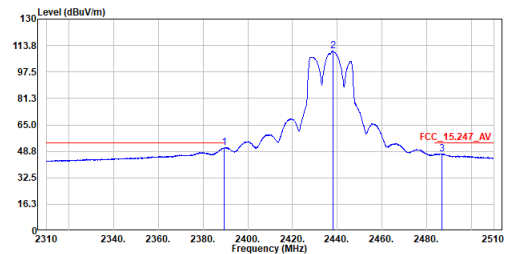


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.500	51.07	54.00	-2.93	39.14	11.93	Average
2	2438.000	110.42	-----	-----	98.25	12.17	Average
3	2486.800	47.31	54.00	-6.69	34.89	12.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax20_TX_2437MHz
Test by :Scott Chang

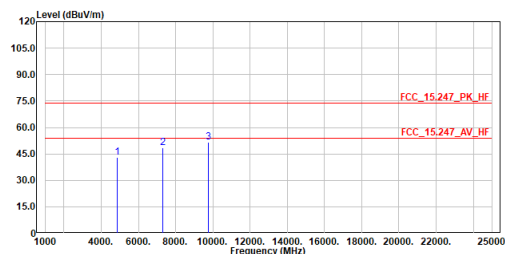


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	43.20	74.00	-30.80	57.68	-14.48	Peak
2	7311.000	48.39	74.00	-25.61	56.27	-7.88	Peak
3	9748.000	51.71	74.00	-22.29	55.99	-4.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax20_TX_2437MHz
Test by :Scott Chang

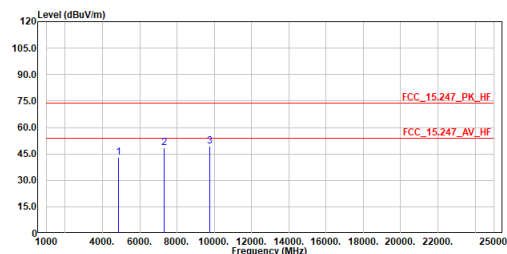


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	42.89	74.00	-31.11	57.37	-14.48	Peak
2	7311.000	48.59	74.00	-25.41	56.47	-7.88	Peak
3	9748.000	49.22	74.00	-24.78	53.50	-4.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2462MHz
Test by :Scott Chang

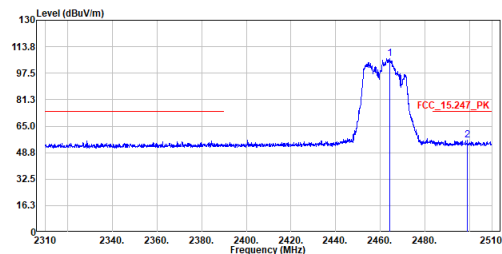


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2462.100	106.40	-----	-----	94.10	12.30	Peak
2	2499.000	56.51	74.00	-17.49	44.03	12.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2462MHz
Test by :Scott Chang

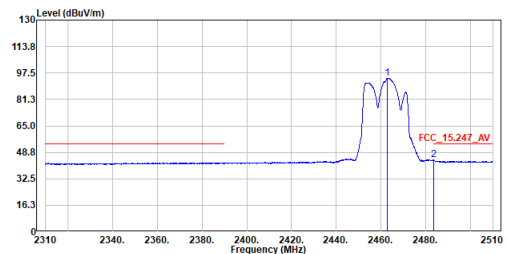


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2462.900	94.39	-----	-----	82.09	12.30	Average
2	2483.600	43.95	54.00	-10.05	31.55	12.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2462MHz
Test by :Scott Chang

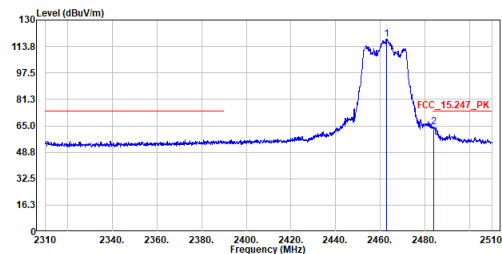


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2462.700	118.38	-----	-----	106.08	12.30	Peak
2	2483.900	64.48	74.00	-9.52	52.08	12.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2462MHz
Test by :Scott Chang

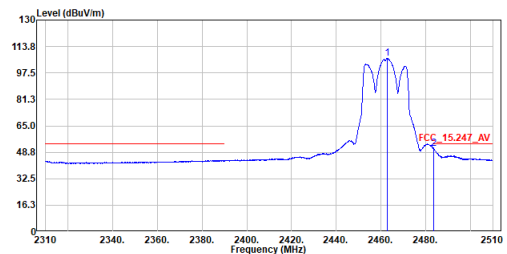


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2462.800	106.55	-----	-----	94.25	12.30	Average
2	2483.600	51.08	54.00	-2.92	38.68	12.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax20_TX_2462MHz
Test by :Scott Chang

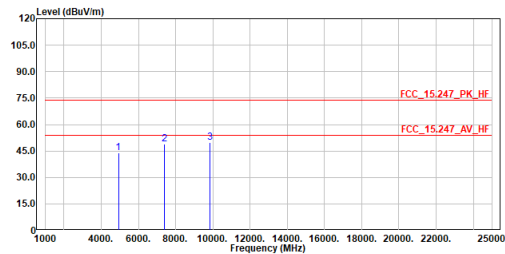


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	43.99	74.00	-30.01	58.27	-14.28	Peak
2	7386.000	48.87	74.00	-25.13	56.66	-7.79	Peak
3	9848.000	49.99	74.00	-24.01	54.07	-4.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax20_TX_2462MHz
Test by :Scott Chang

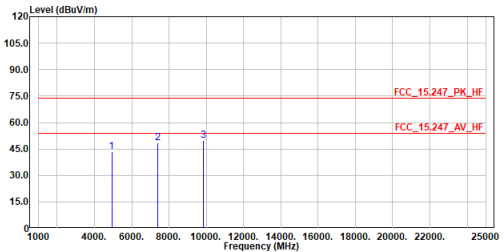


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	43.28	74.00	-30.72	57.56	-14.28	Peak
2	7386.000	48.57	74.00	-25.43	56.36	-7.79	Peak
3	9848.000	49.62	74.00	-24.38	53.70	-4.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2422MHz
Test by :Scott Chang

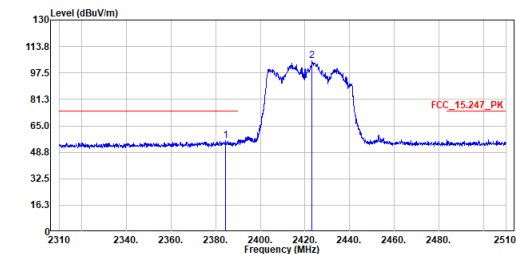


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2384.400	55.78	74.00	-18.22	43.88	11.90	Peak
2	2423.100	104.78	-----	-----	92.68	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2422MHz
Test by :Scott Chang

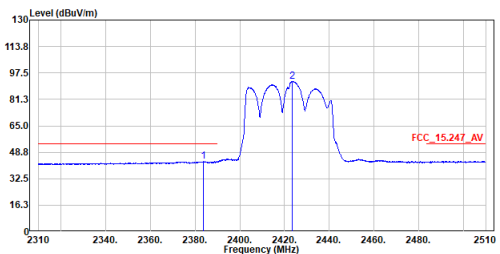


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2383.700	43.12	54.00	-10.88	31.22	11.90	Average
2	2423.600	92.22	-----	-----	80.12	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2422MHz
Test by :Scott Chang

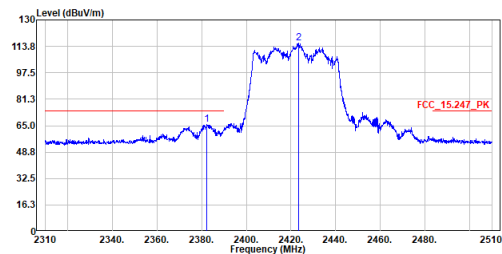


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2382.300	65.58	74.00	-8.42	53.69	11.89	Peak
2	2423.400	115.57	-----	-----	103.47	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2422MHz
Test by :Scott Chang

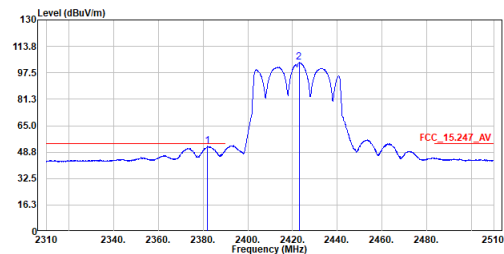


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2382.000	52.26	54.00	-1.74	40.37	11.89	Average
2	2422.900	103.95	-----	-----	91.85	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax40_TX_2422MHz
Test by :Scott Chang

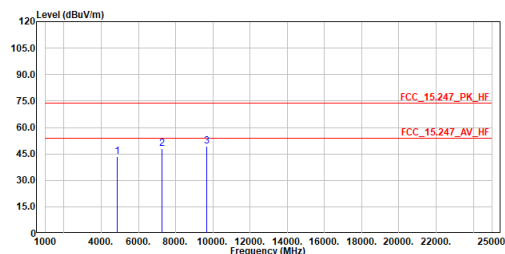


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	43.32	74.00	-30.68	57.92	-14.60	Peak
2	7266.000	48.12	74.00	-25.88	56.05	-7.93	Peak
3	9688.000	49.49	74.00	-24.51	53.89	-4.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax40_TX_2422MHz
Test by :Scott Chang

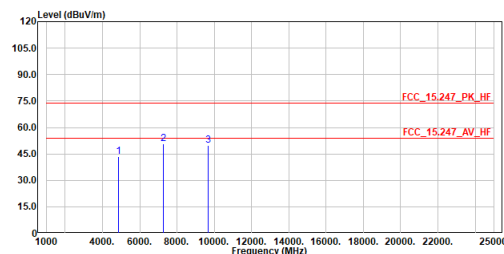


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	43.49	74.00	-30.51	58.09	-14.60	Peak
2	7266.000	50.91	74.00	-23.09	58.84	-7.93	Peak
3	9688.000	49.88	74.00	-24.12	54.28	-4.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2437MHz
Test by :Scott Chang

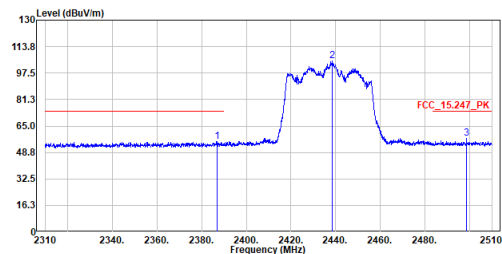


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2387.000	55.26	74.00	-18.74	43.35	11.91	Peak
2	2437.800	104.83	-----	-----	92.66	12.17	Peak
3	2498.600	57.45	74.00	-16.55	44.97	12.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2437MHz
Test by :Scott Chang

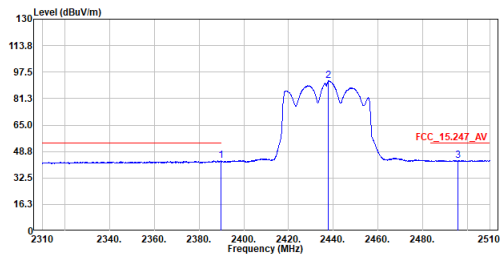


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.900	43.05	54.00	-10.95	31.12	11.93	Average
2	2437.800	92.09	-----	-----	79.92	12.17	Average
3	2495.800	43.29	54.00	-10.71	30.83	12.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2437MHz
Test by :Scott Chang

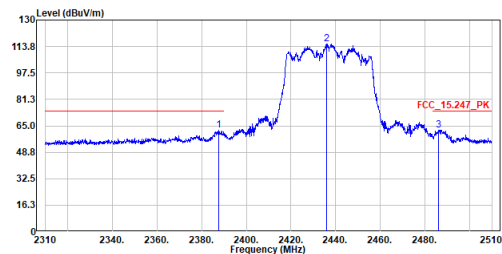


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2387.600	62.47	74.00	-11.53	50.55	11.92	Peak
2	2436.100	115.52	-----	-----	103.36	12.16	Peak
3	2486.100	62.45	74.00	-11.55	50.05	12.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2437MHz
Test by :Scott Chang

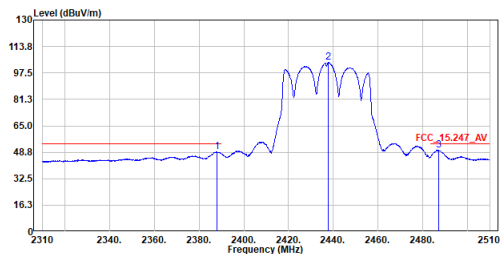


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2388.100	49.09	54.00	-4.91	37.17	11.92	Average
2	2437.900	104.01	-----	-----	91.84	12.17	Average
3	2487.000	50.09	54.00	-3.91	37.67	12.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax40_TX_2437MHz
Test by :Scott Chang

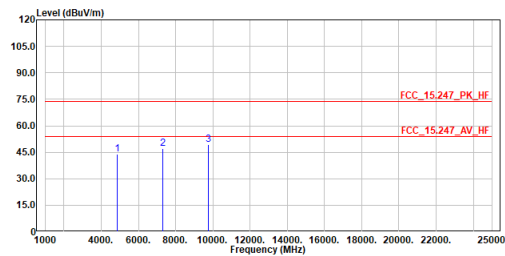


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	43.84	74.00	-30.16	58.32	-14.48	Peak
2	7311.000	47.23	74.00	-26.77	55.11	-7.88	Peak
3	9748.000	49.25	74.00	-24.75	53.53	-4.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax40_TX_2437MHz
Test by :Scott Chang

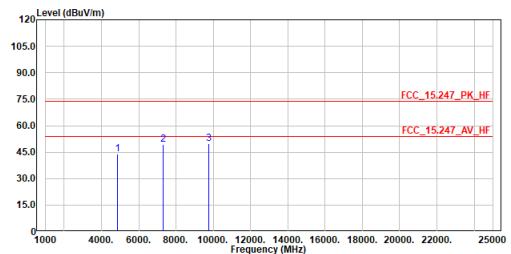


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	43.88	74.00	-30.12	58.36	-14.48	Peak
2	7311.000	49.18	74.00	-24.82	57.06	-7.88	Peak
3	9748.000	49.65	74.00	-24.35	53.93	-4.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2452MHz
Test by :Scott Chang

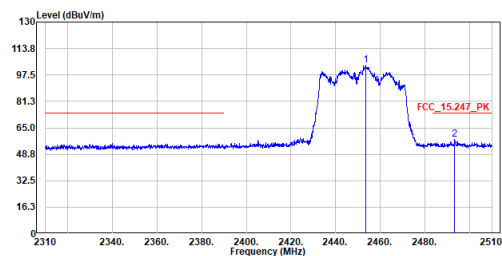


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.500	103.34	-----	-----	91.09	12.25	Peak
2	2493.400	57.66	74.00	-16.34	45.21	12.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2452MHz
Test by :Scott Chang

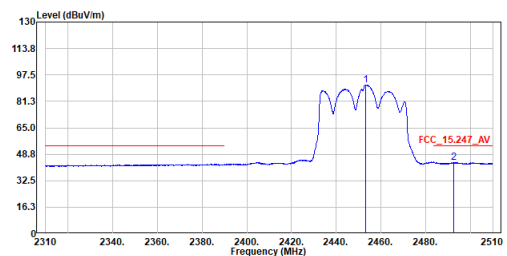


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.300	91.45	-----	-----	79.20	12.25	Average
2	2492.600	43.76	54.00	-10.24	31.31	12.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2452MHz
Test by :Scott Chang

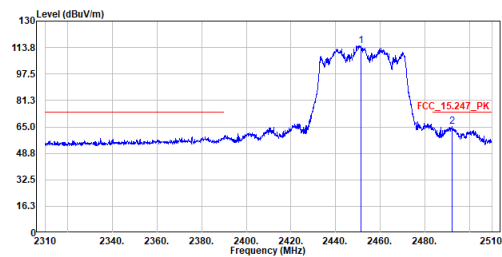


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2451.200	114.95	74.00	-8.86	102.71	12.24	Peak
2	2492.000	65.14	74.00	-8.86	52.71	12.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2452MHz
Test by :Scott Chang

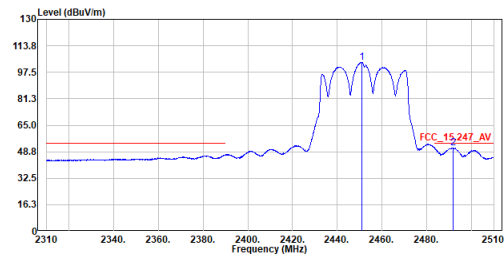


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2451.100	103.57	74.00	-2.81	91.33	12.24	Average
2	2491.900	51.19	74.00	-2.81	38.76	12.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax40_TX_2452MHz
Test by :Scott Chang

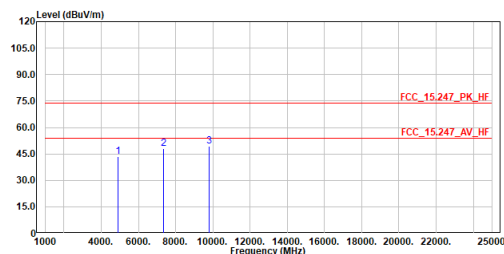


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	43.64	74.00	-30.36	58.00	-14.36	Peak
2	7356.000	47.87	74.00	-26.13	55.70	-7.83	Peak
3	9808.000	49.46	74.00	-24.54	53.62	-4.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax40_TX_2452MHz
Test by :Scott Chang

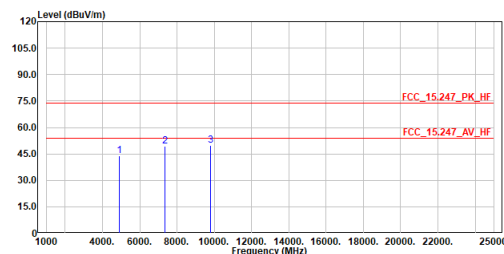

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	44.06	74.00	-29.94	58.42	-14.36	Peak
2	7356.000	49.44	74.00	-24.56	57.27	-7.83	Peak
3	9808.000	49.68	74.00	-24.32	53.84	-4.16	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Appendix G. Test Result of Radiated Emissions Co-location

30 MHz ~ 1 GHz: Bluetooth + WiFi 2.4 GHz


Site :HC-C802
Condition :3m Horizontal
Mode :LF_WiFi2.4G+BT
Test by :Brook Cheng

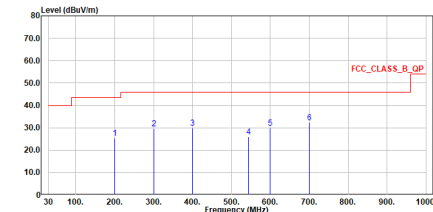

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	199.944	25.27	43.50	-18.23	31.28	-6.01	QP
2	301.018	29.66	46.00	-16.34	31.70	-2.04	QP
3	399.958	29.81	46.00	-16.19	29.20	0.61	QP
4	544.488	26.08	46.00	-19.92	22.21	3.87	QP
5	599.972	30.01	46.00	-15.99	24.66	5.35	QP
6	699.979	32.19	46.00	-13.81	25.22	6.97	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C802
Condition :3m Vertical
Mode :LF_WiFi2.4G+BT
Test by :Brook Cheng

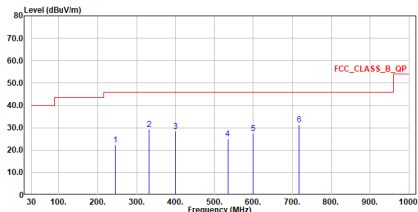


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	244.370	22.32	46.00	-23.68	27.57	-5.25	QP
2	332.543	29.14	46.00	-16.86	31.88	-2.74	QP
3	399.958	28.34	46.00	-17.66	29.60	-1.26	QP
4	534.109	25.03	46.00	-20.97	23.64	1.39	QP
5	600.069	27.44	46.00	-18.56	24.39	3.05	QP
6	717.439	31.52	46.00	-14.48	26.75	4.77	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Bluetooth + WiFi 5 GHz


Site :HC-C802
Condition :3m Horizontal
Mode :LF_WiFi5G+BT
Test by :Brook Cheng

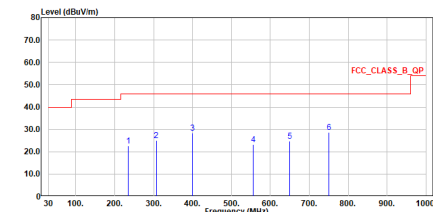

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	234.088	22.63	46.00	-23.37	28.67	-6.04	QP
2	306.644	25.04	46.00	-20.96	28.54	-3.50	QP
3	399.958	28.45	46.00	-17.55	29.71	-1.26	QP
4	555.643	23.31	46.00	-22.69	21.50	1.81	QP
5	650.315	24.67	46.00	-21.33	20.84	3.83	QP
6	749.934	28.58	46.00	-17.42	23.21	5.37	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C802
Condition :3m Vertical
Mode :LF_WiFi5G+BT
Test by :Brook Cheng

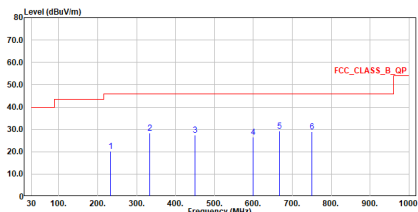


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	232.730	20.16	46.00	-25.84	26.39	-6.23	QP
2	333.319	28.42	46.00	-17.58	31.16	-2.74	QP
3	449.234	27.36	46.00	-18.64	27.18	0.18	QP
4	600.069	26.71	46.00	-19.29	23.66	3.05	QP
5	667.484	29.39	46.00	-16.61	25.35	4.04	QP
6	749.934	28.07	46.00	-17.13	23.50	5.37	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Bluetooth + WiFi 6 GHz

Site :HC-C802
Condition :3m Horizontal
Mode :LF_WiFi6G+BT
Test by :Brook Cheng

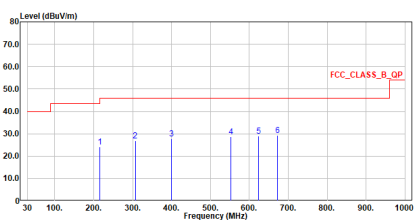

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.



Site :HC-C802
Condition :3m Vertical
Mode :LF_WiFi6G+BT
Test by :Brook Cheng

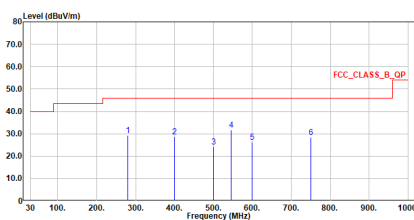



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz:

Bluetooth + WiFi 2.4 GHz

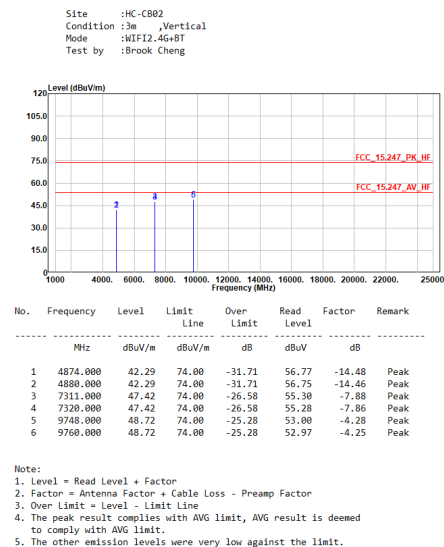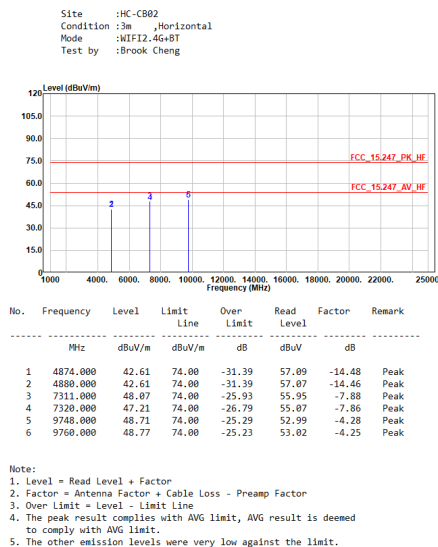


Bluetooth + WiFi 5 GHz

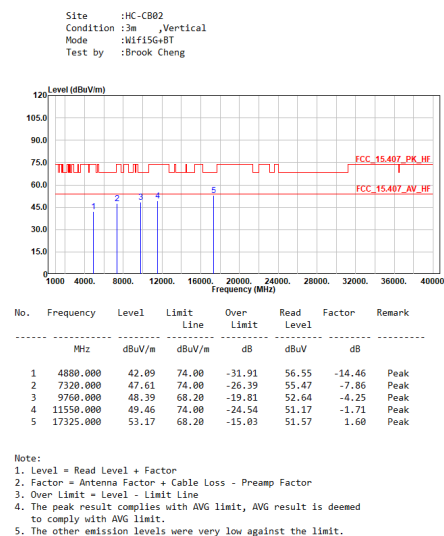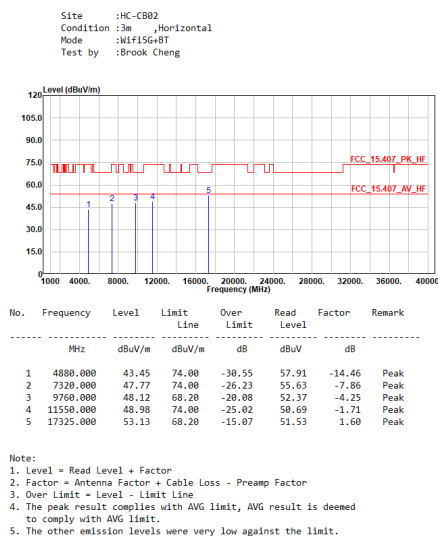

Bluetooth + WiFi 6 GHz


Site :HC-C802
Condition :3m ,Horizontal
Mode :Wifi6G+BT
Test by :Brook Cheng

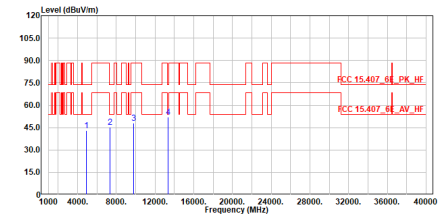

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4880.000	43.20	74.00	-30.80	57.66	-14.46	Peak
2	7320.000	45.33	74.00	-28.67	53.19	-7.86	Peak
3	9760.000	48.14	88.22	-40.08	52.39	-4.25	Peak
4	13330.000	51.86	74.00	-22.14	50.93	0.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-C802
Condition :3m ,Vertical
Mode :Wifi6G+BT
Test by :Brook Cheng

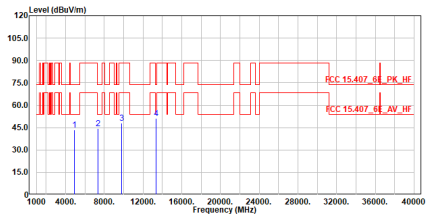

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4880.000	43.41	74.00	-30.59	57.87	-14.46	Peak
2	7320.000	44.20	74.00	-29.80	52.06	-7.86	Peak
3	9760.000	48.08	88.22	-40.14	52.33	-4.25	Peak
4	13330.000	51.21	74.00	-22.79	50.28	0.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.