



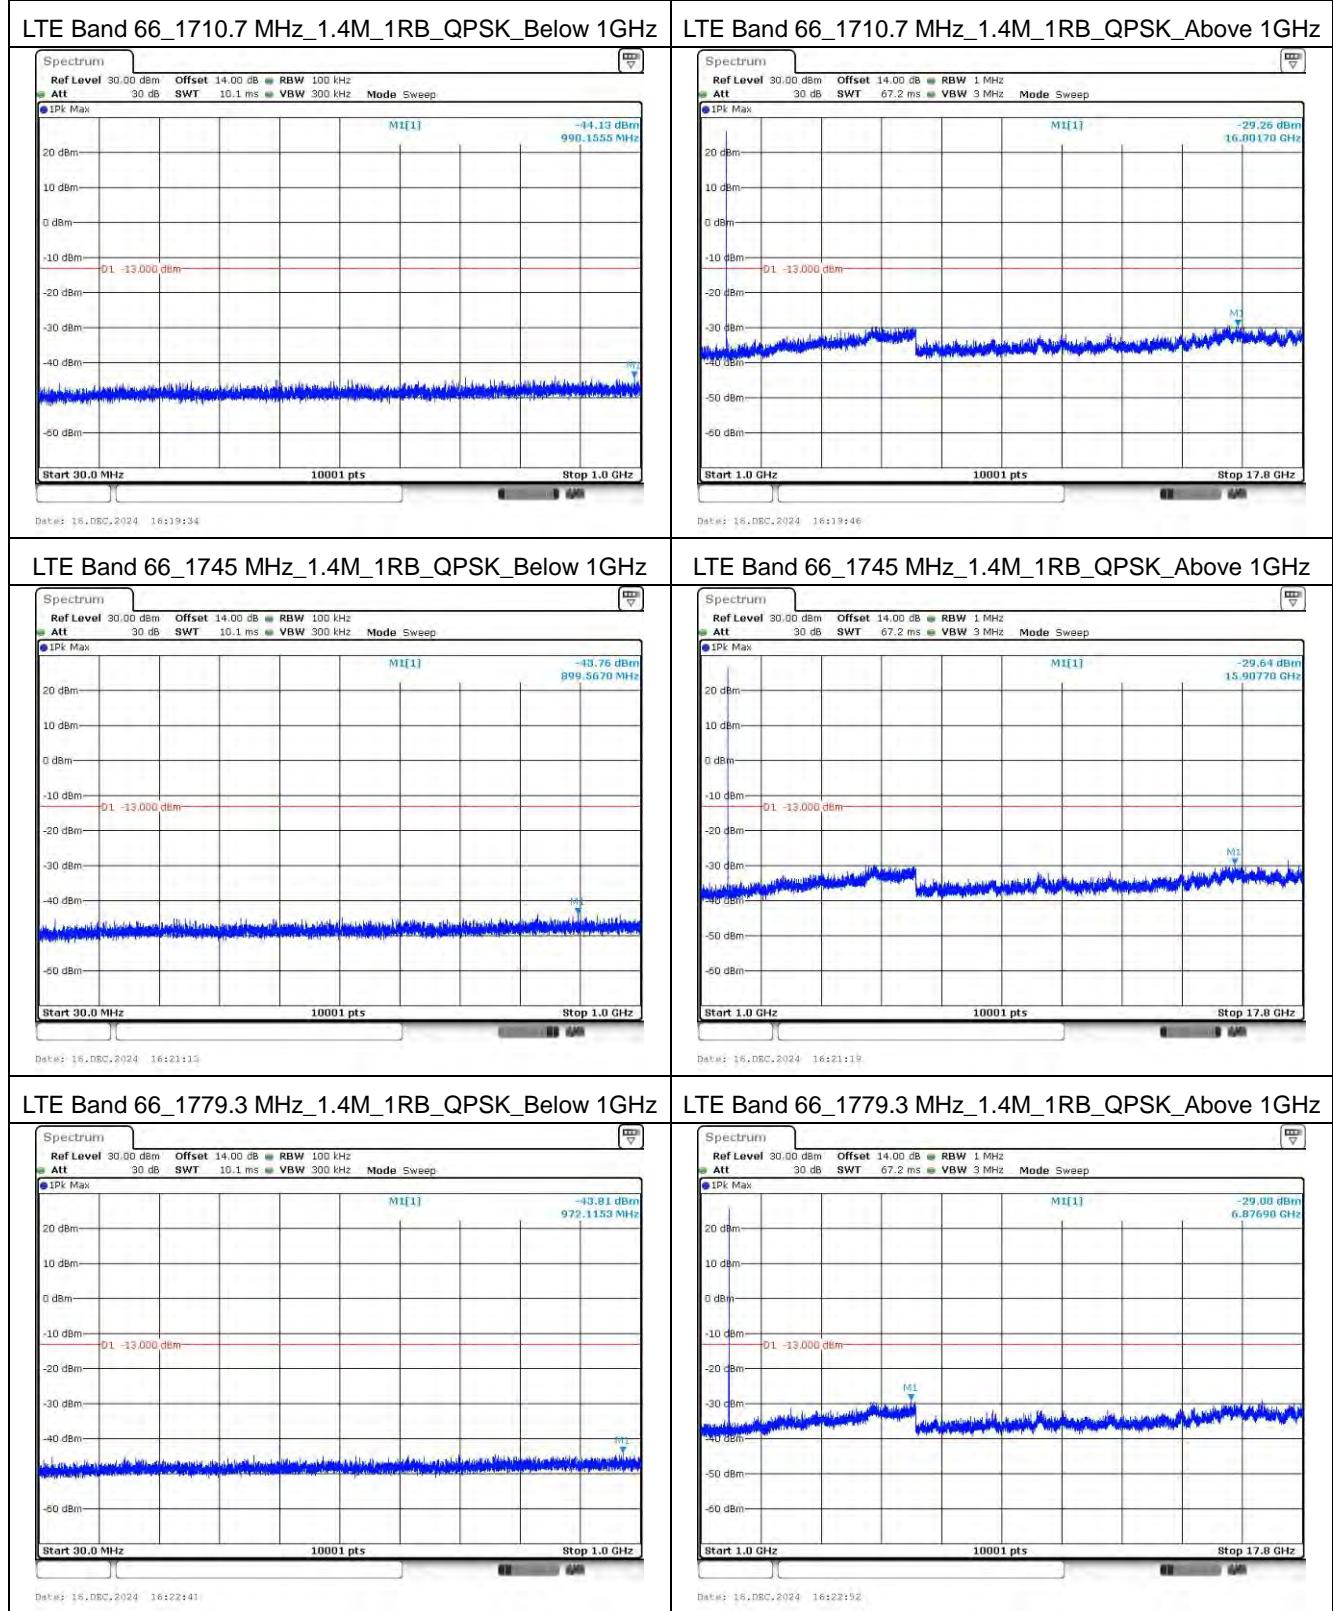



Mode 2: LTE Band 4 / 66

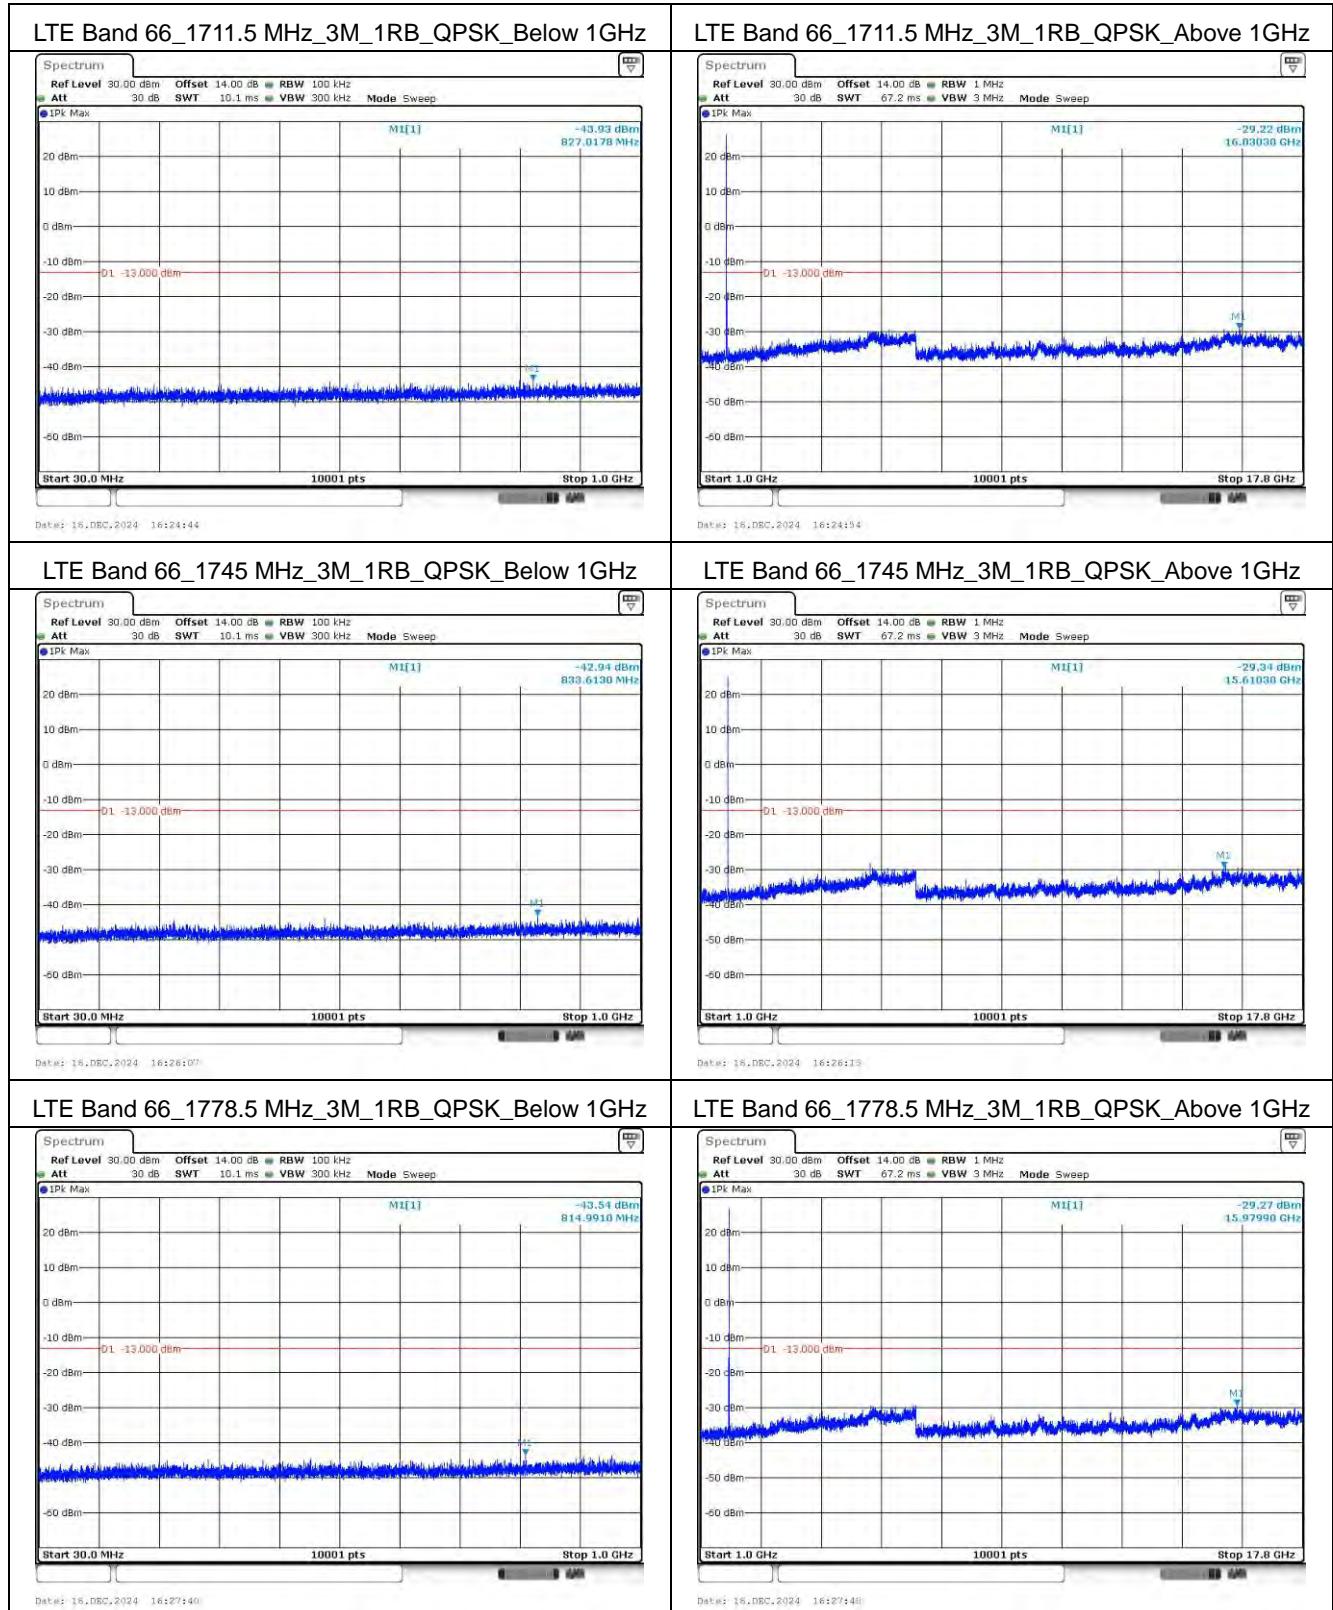


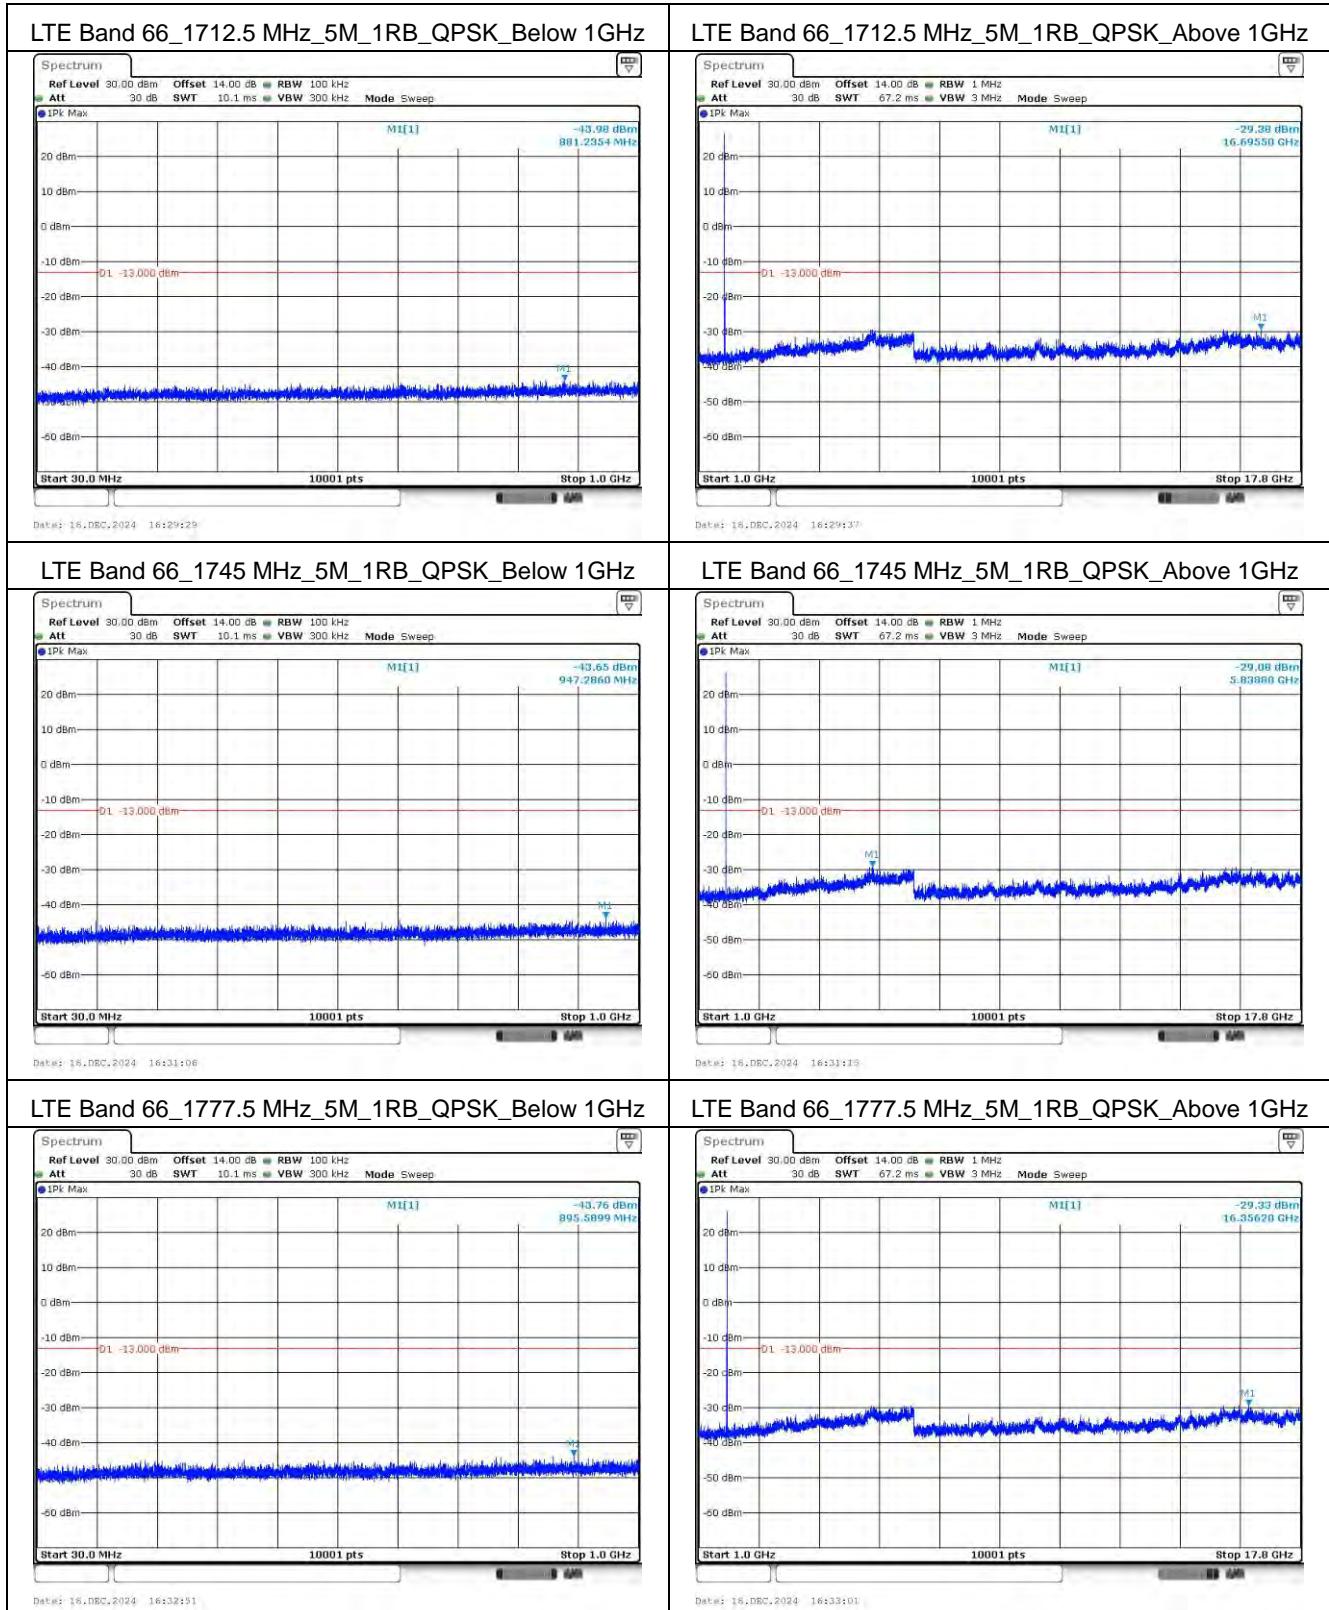


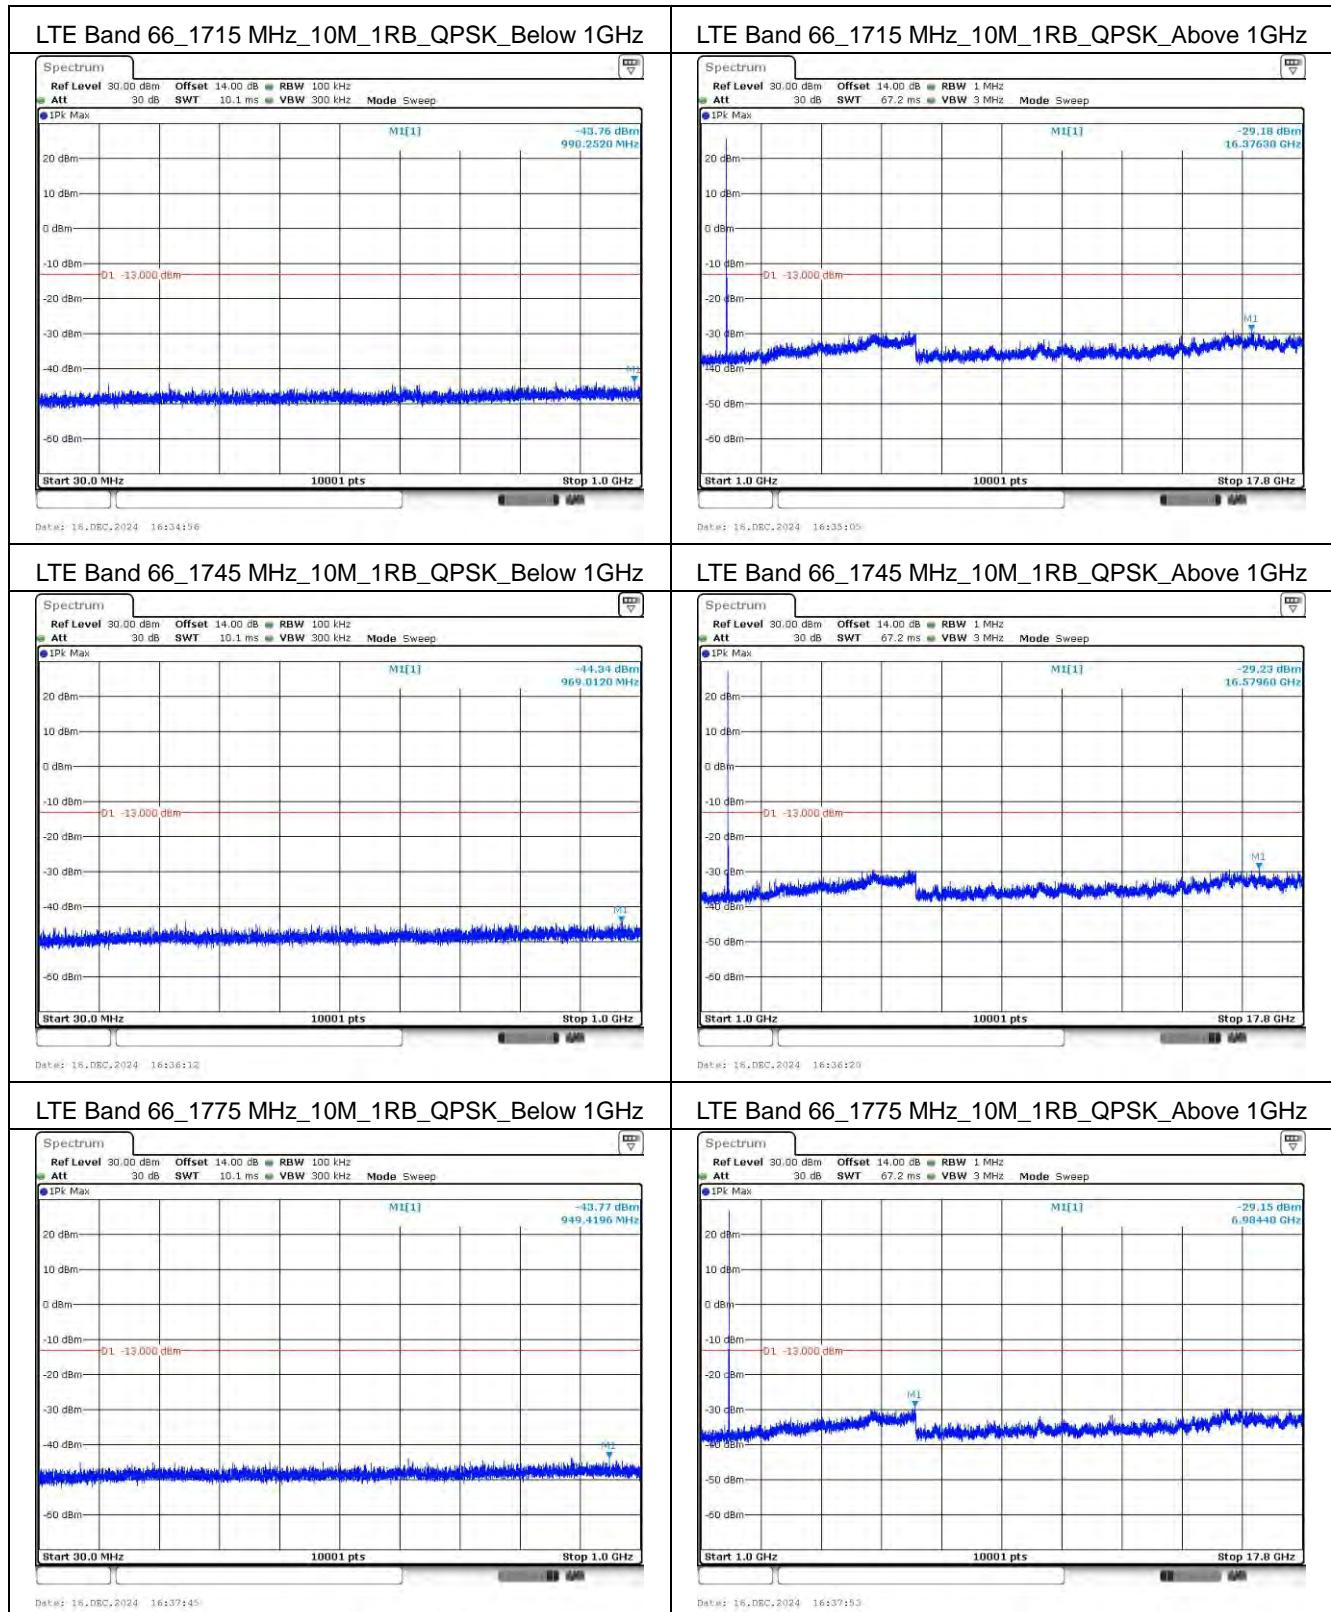


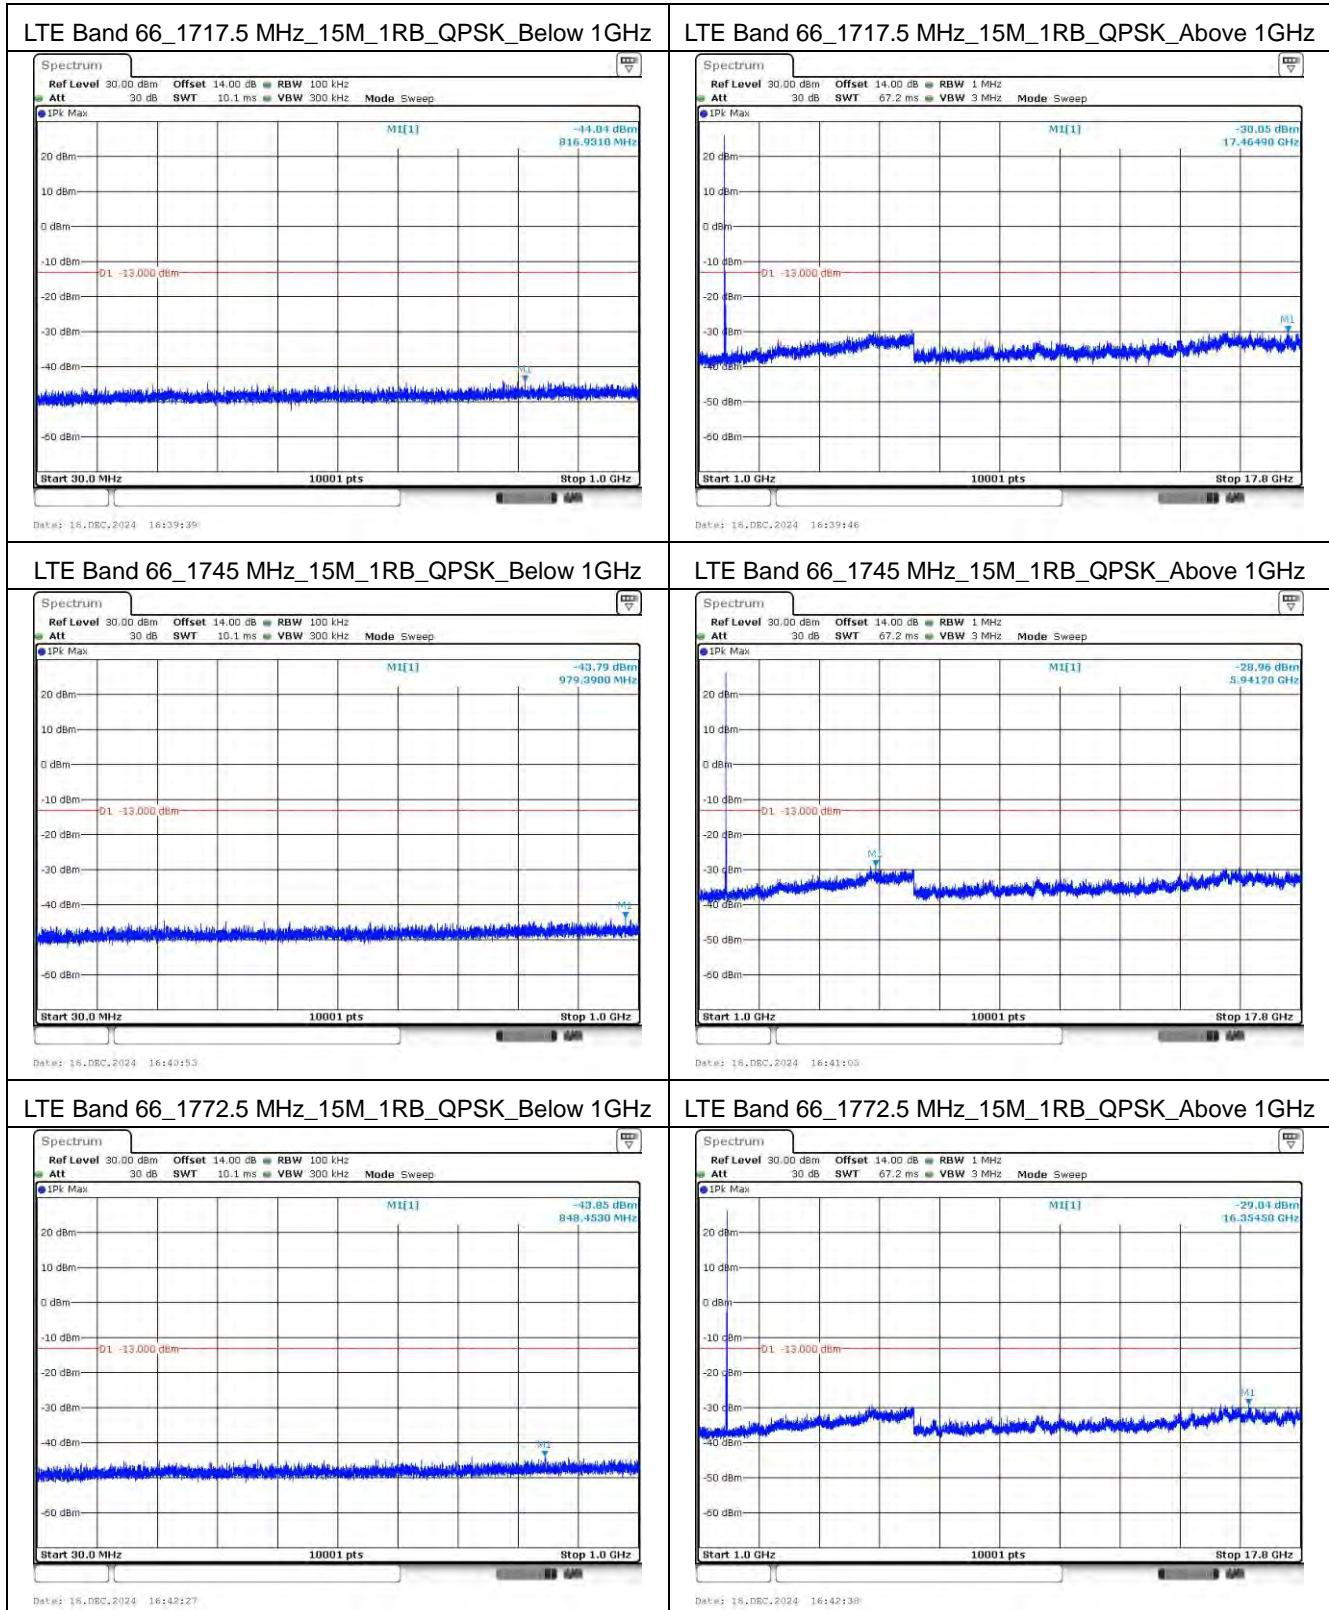


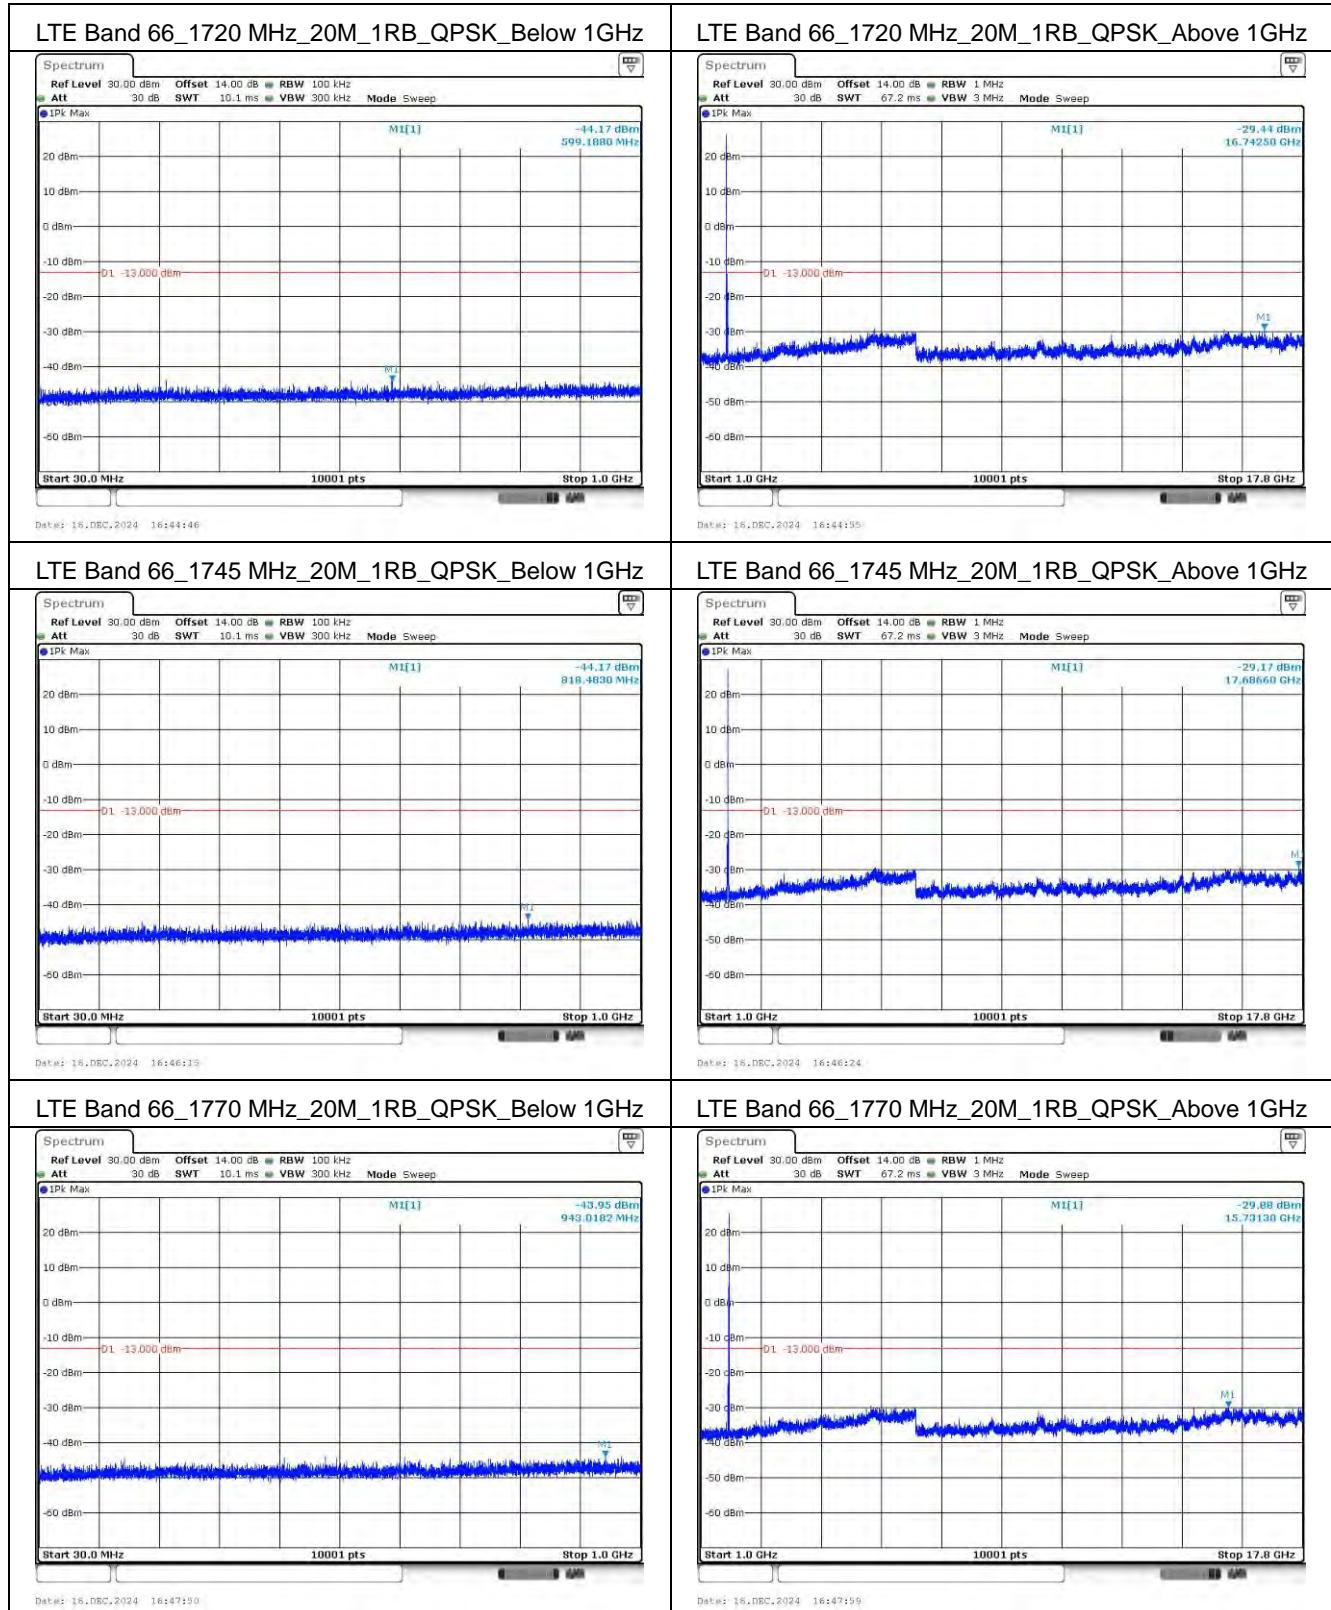


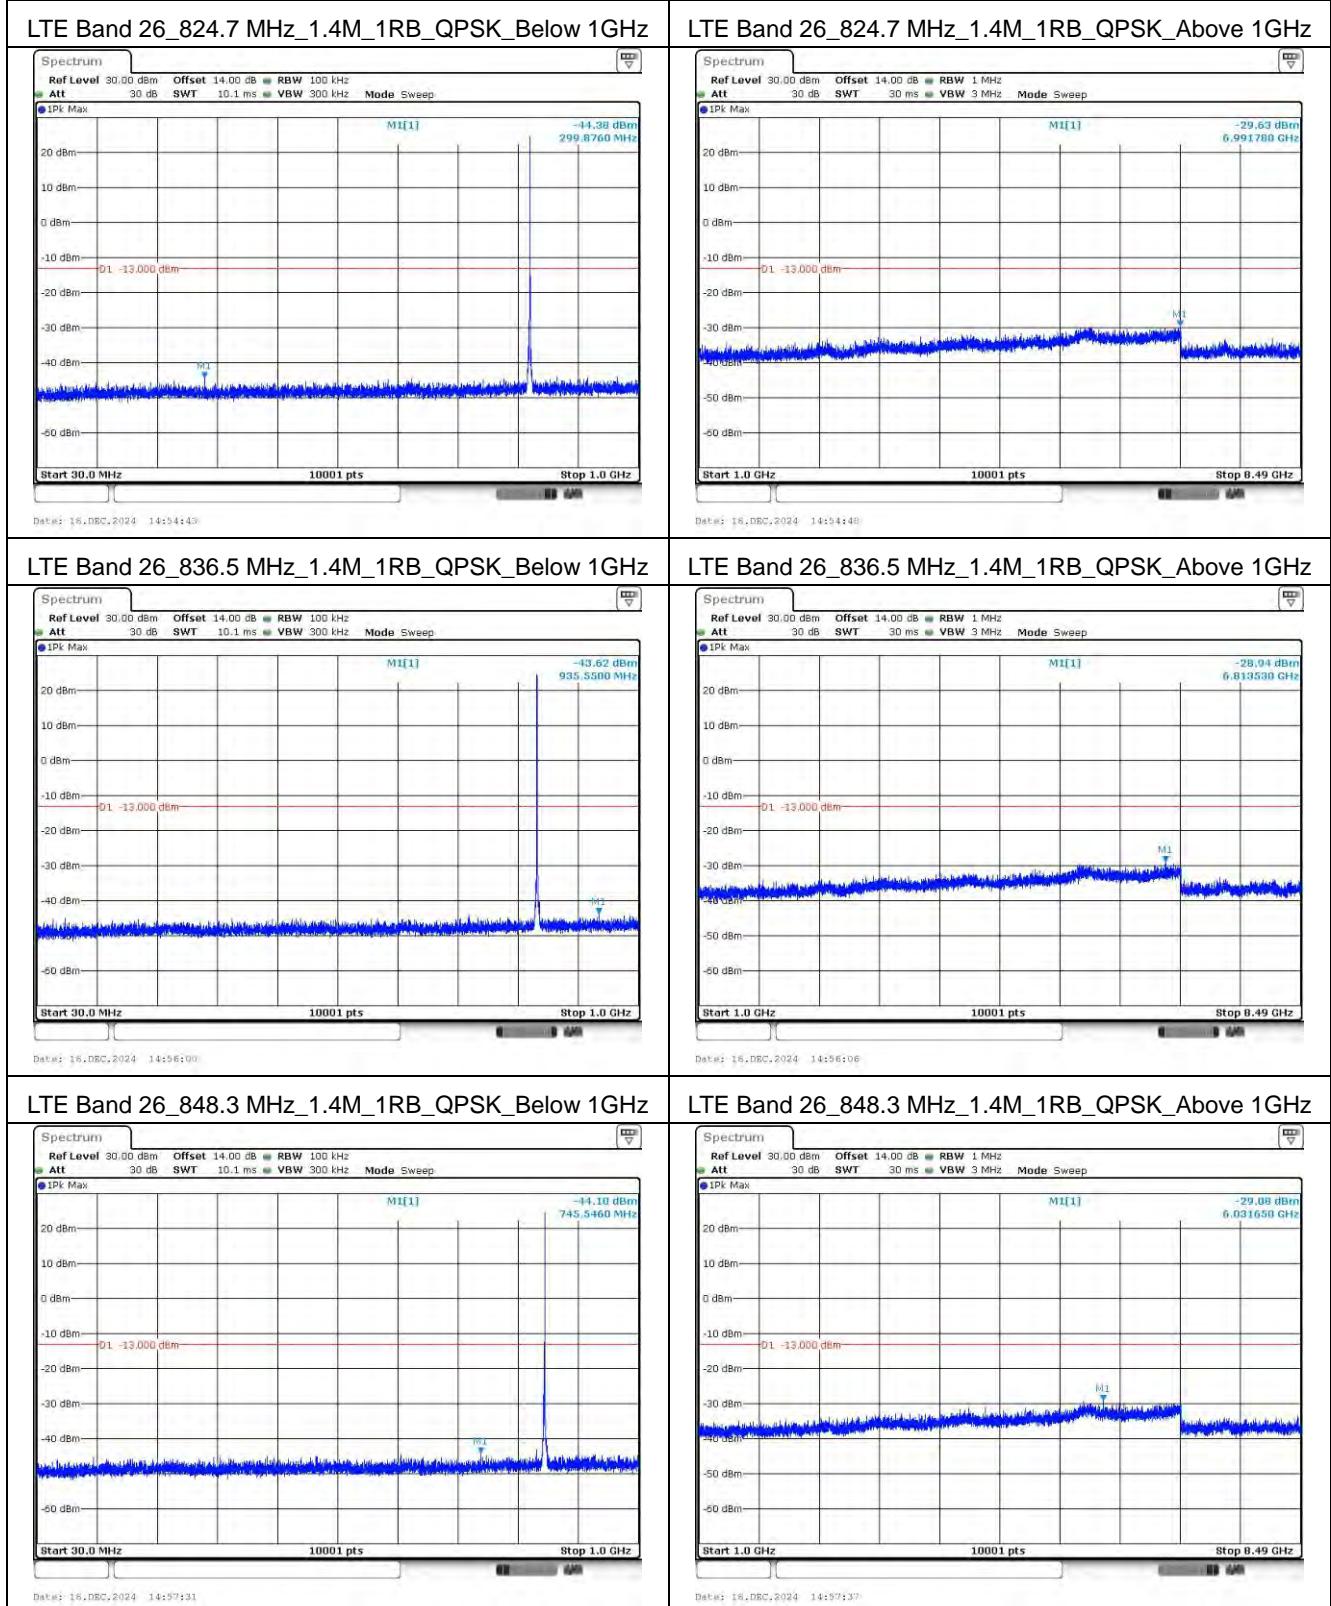
Mode 3: LTE Band 5 / 26 (Part 22)

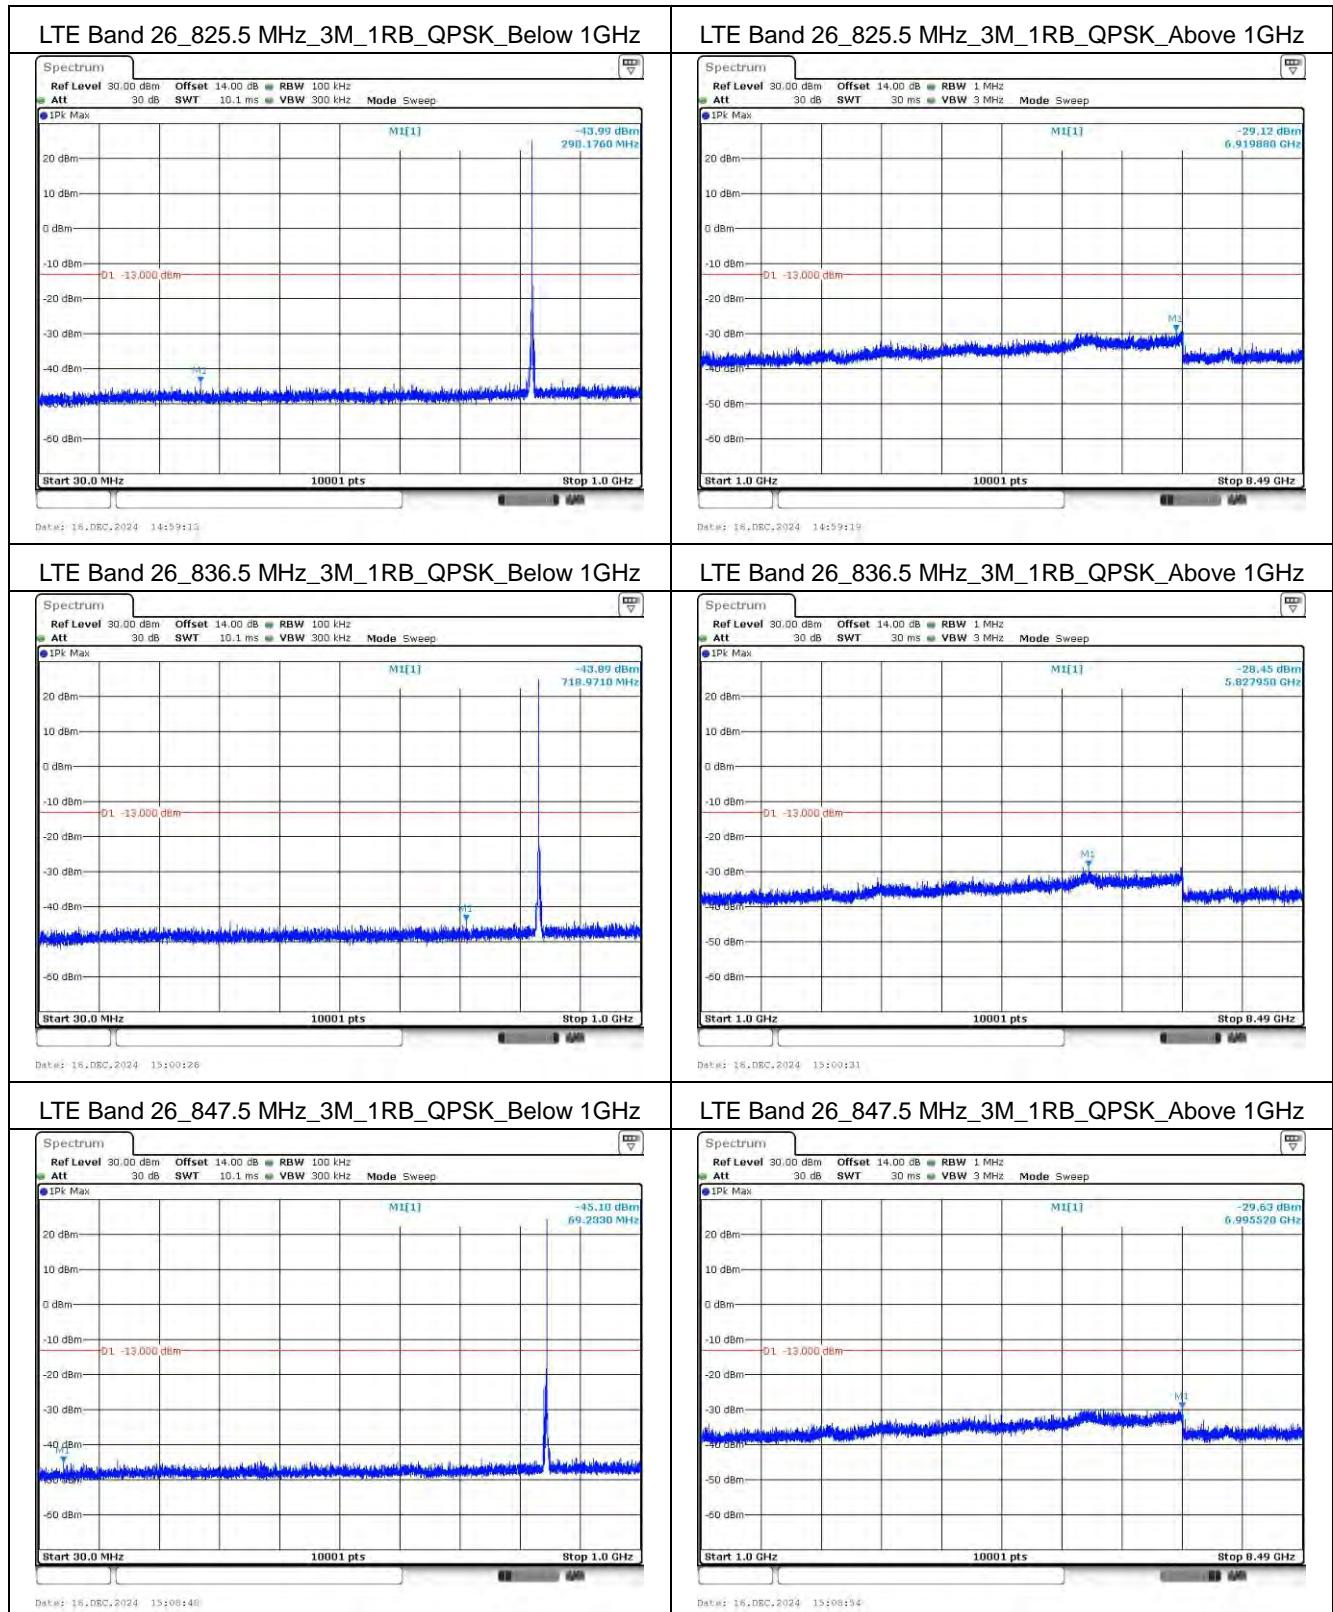
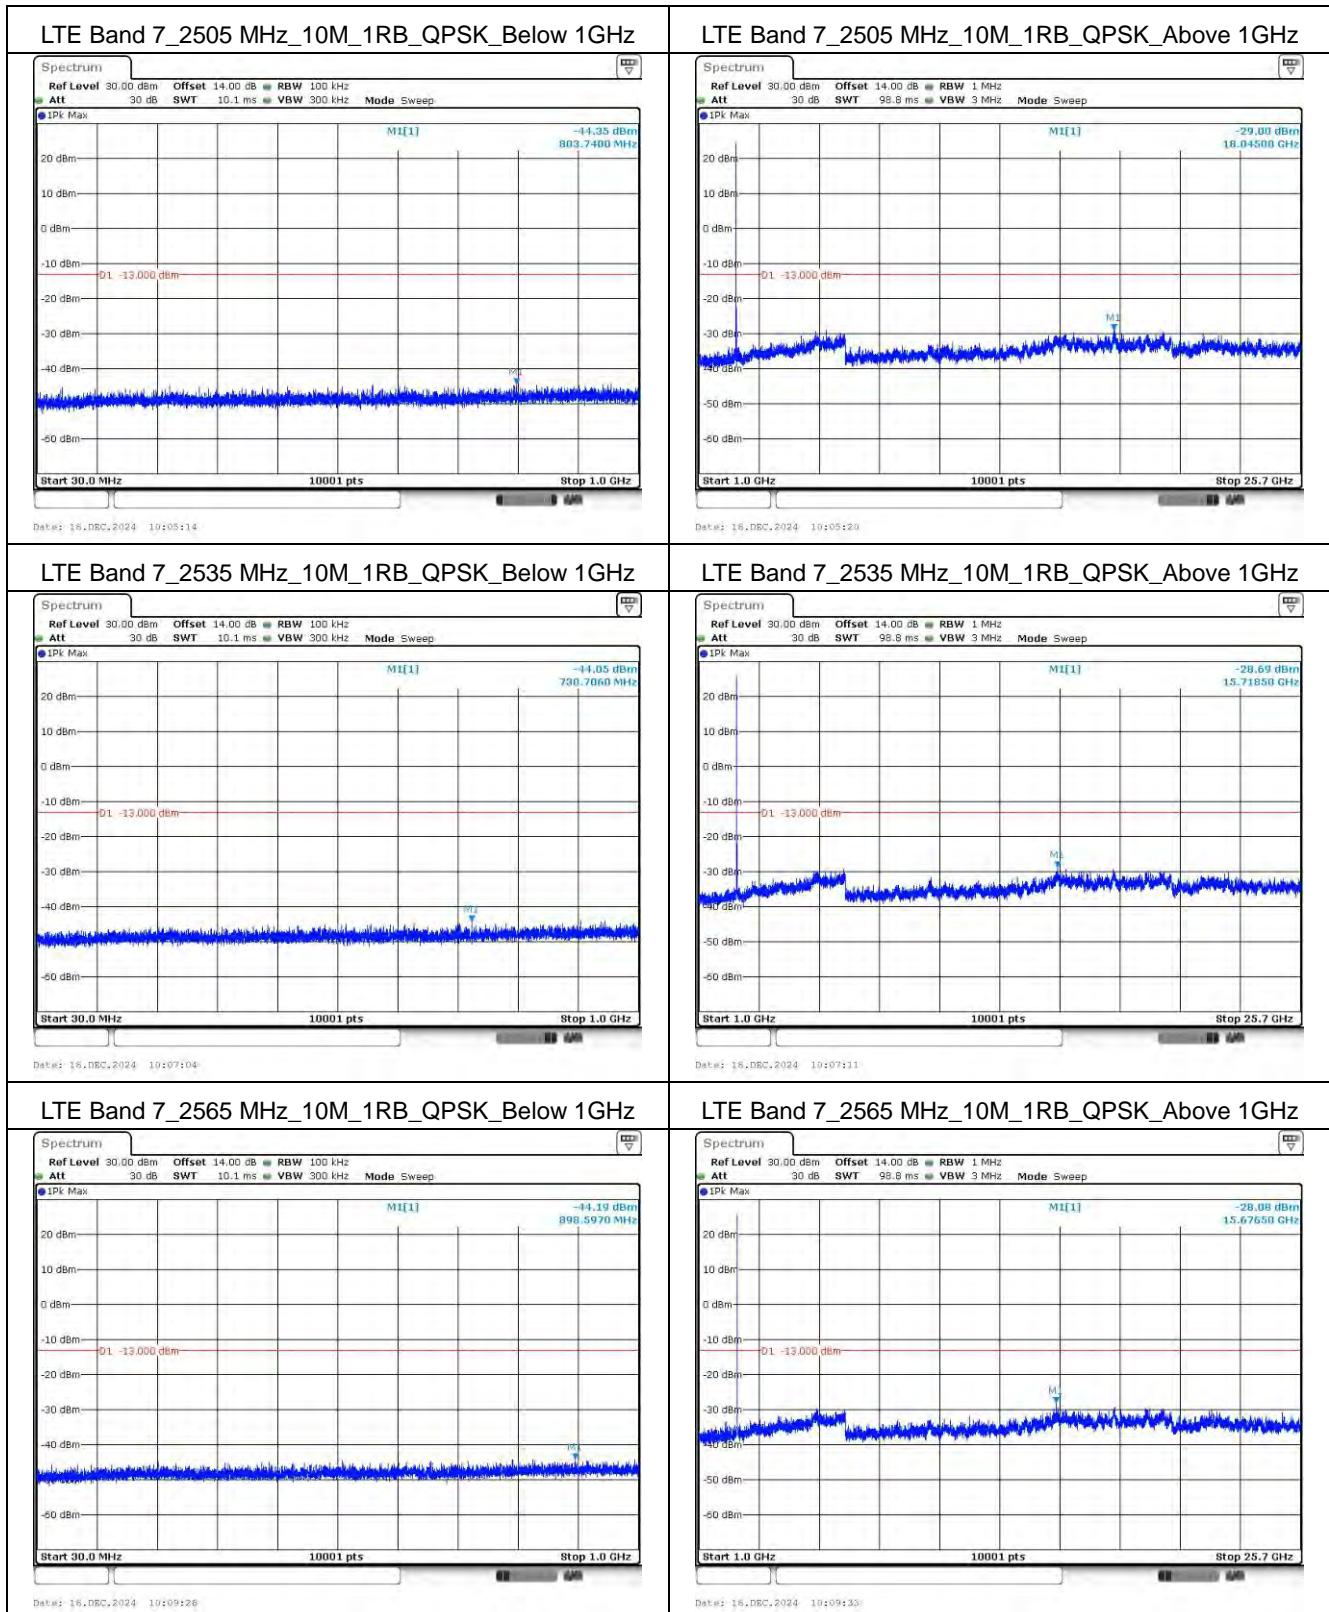


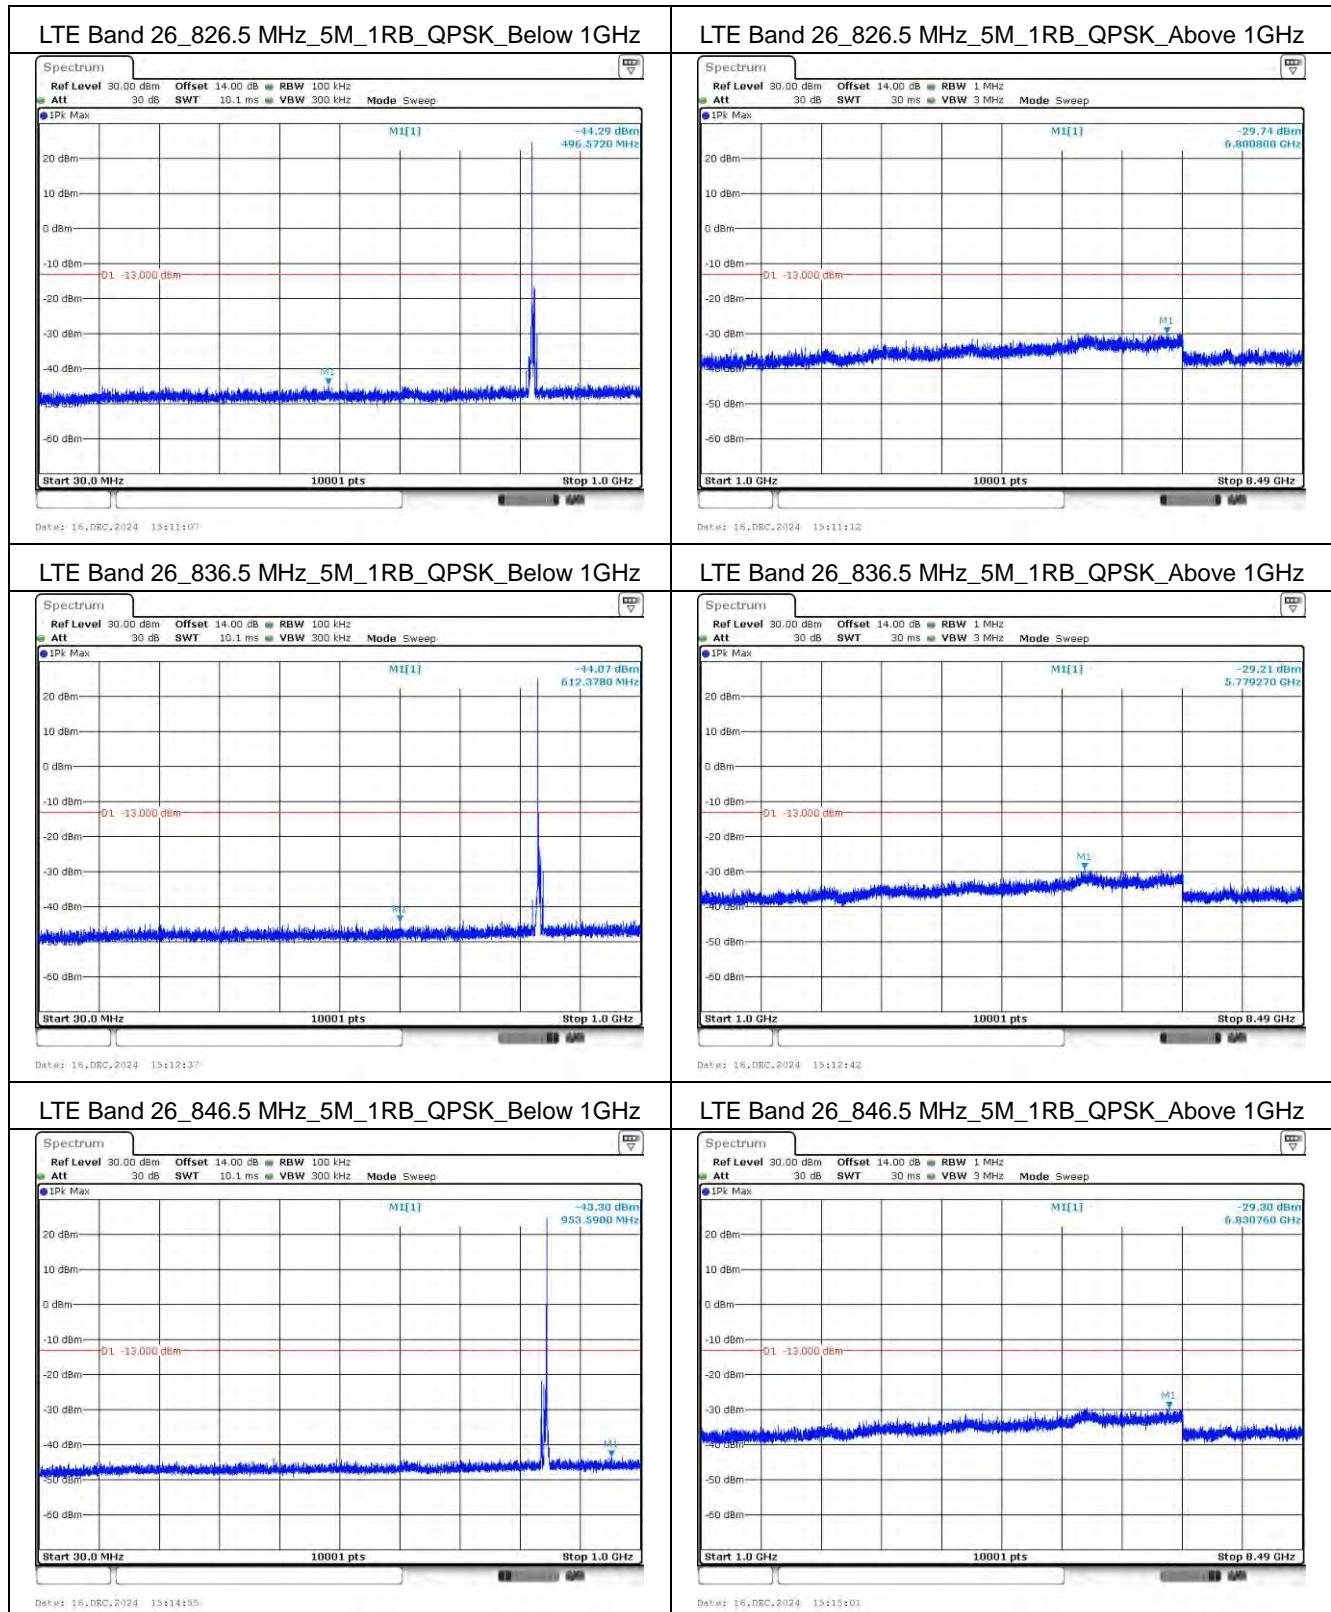


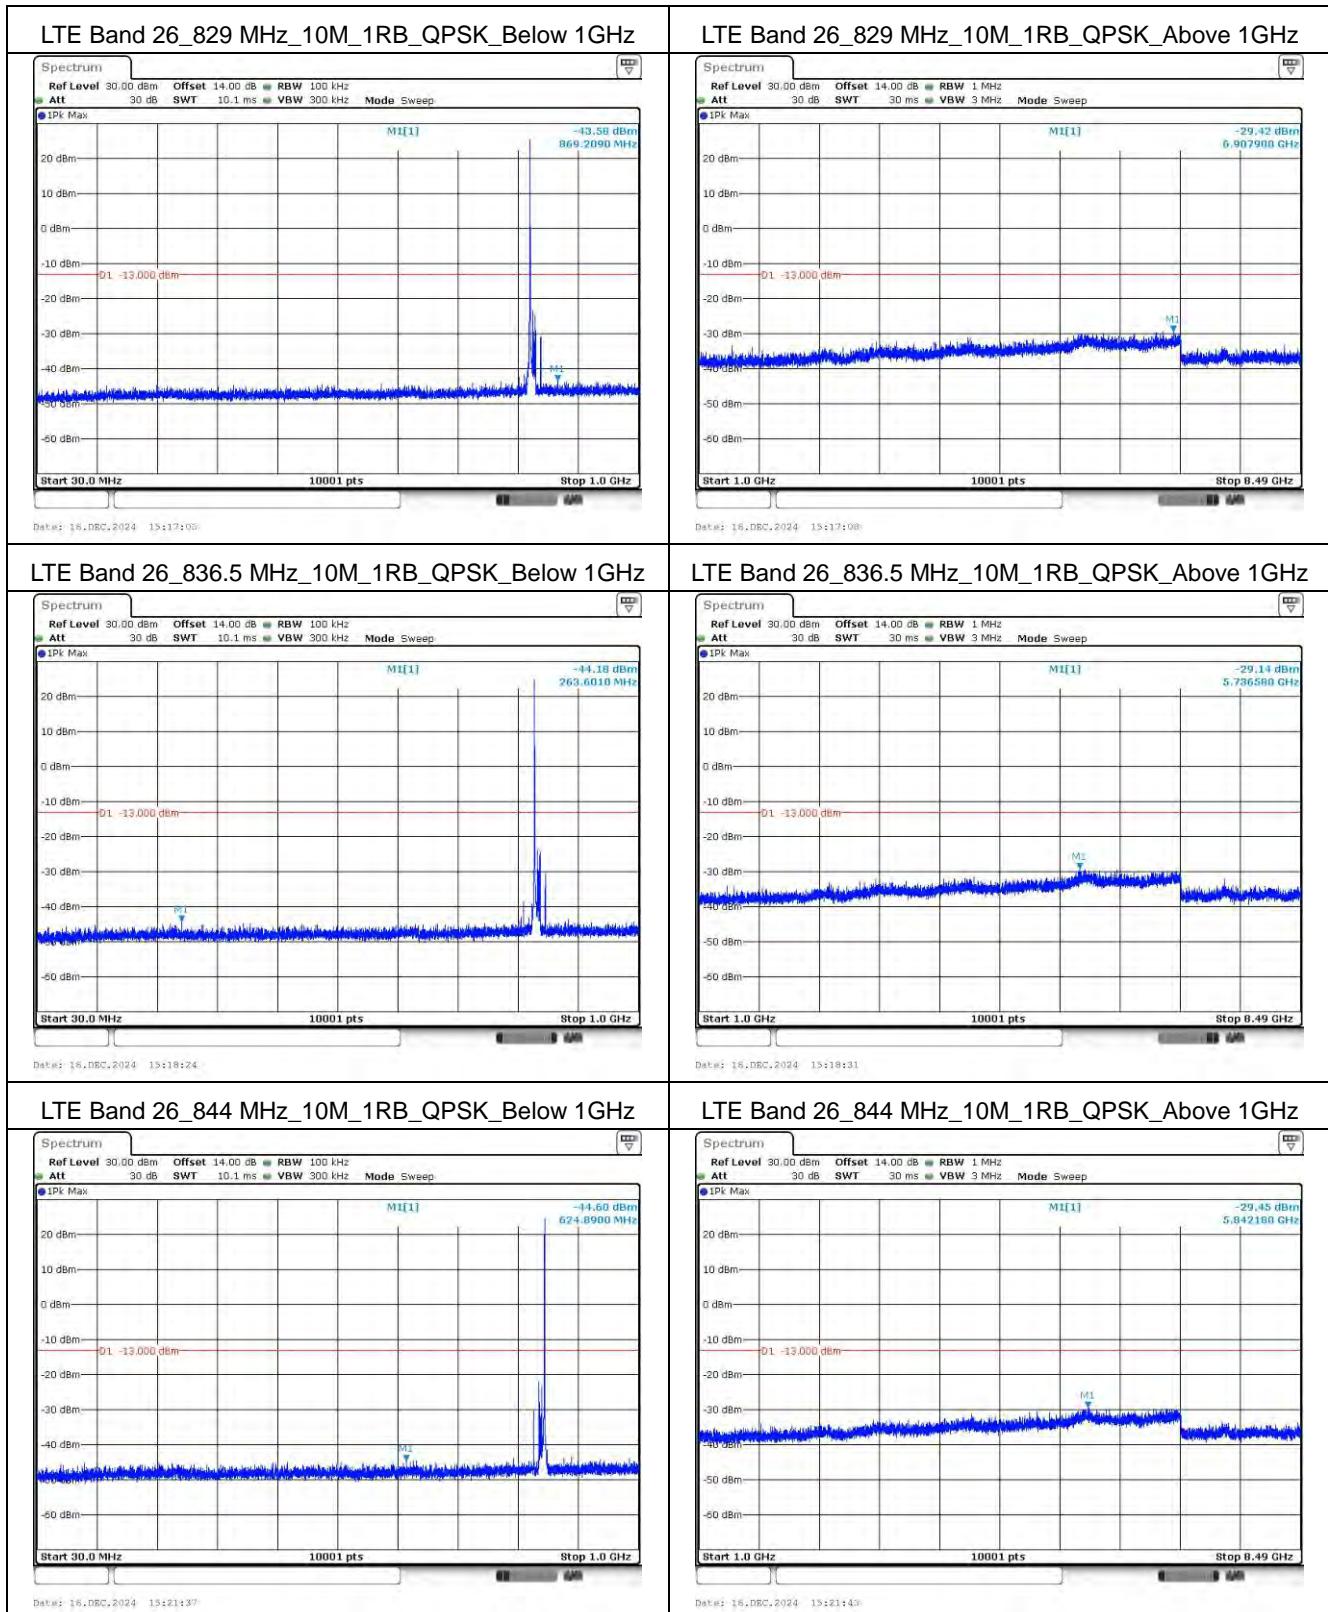


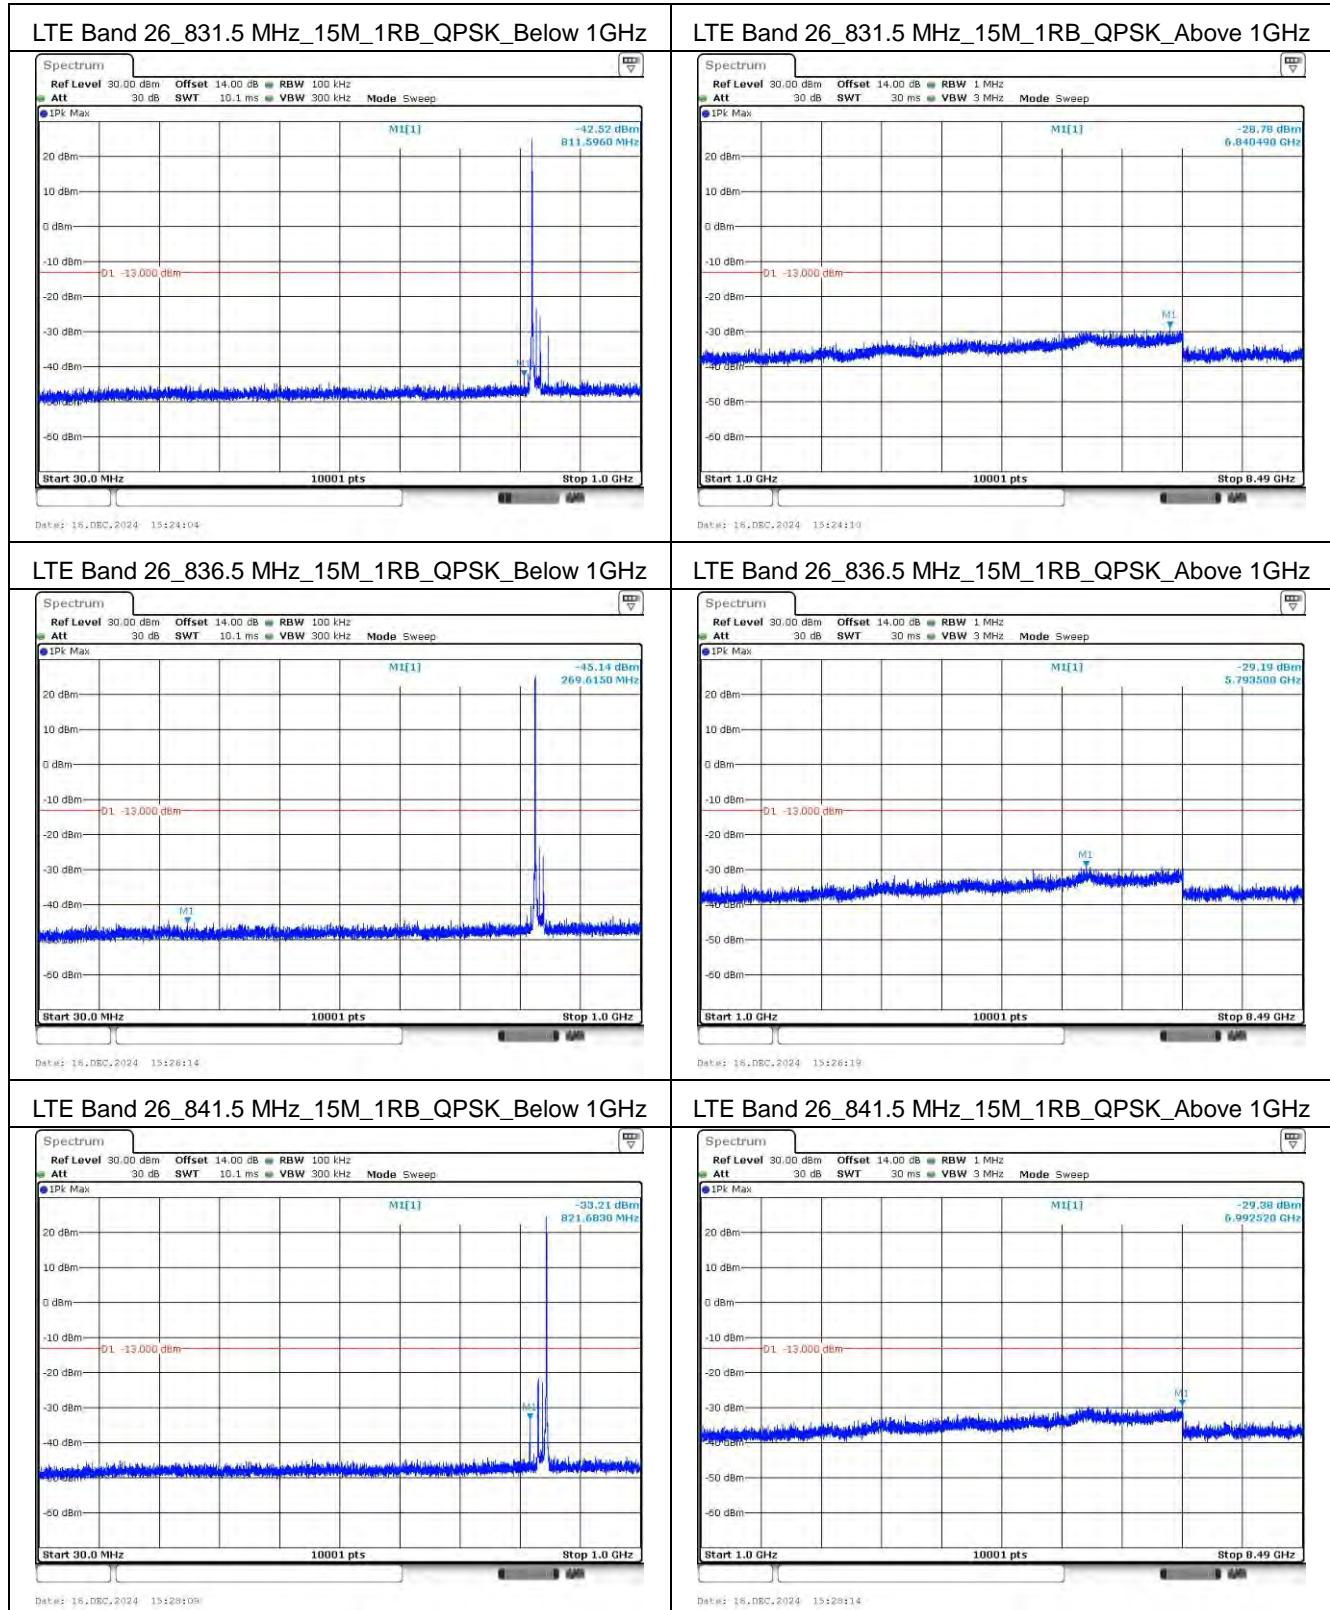


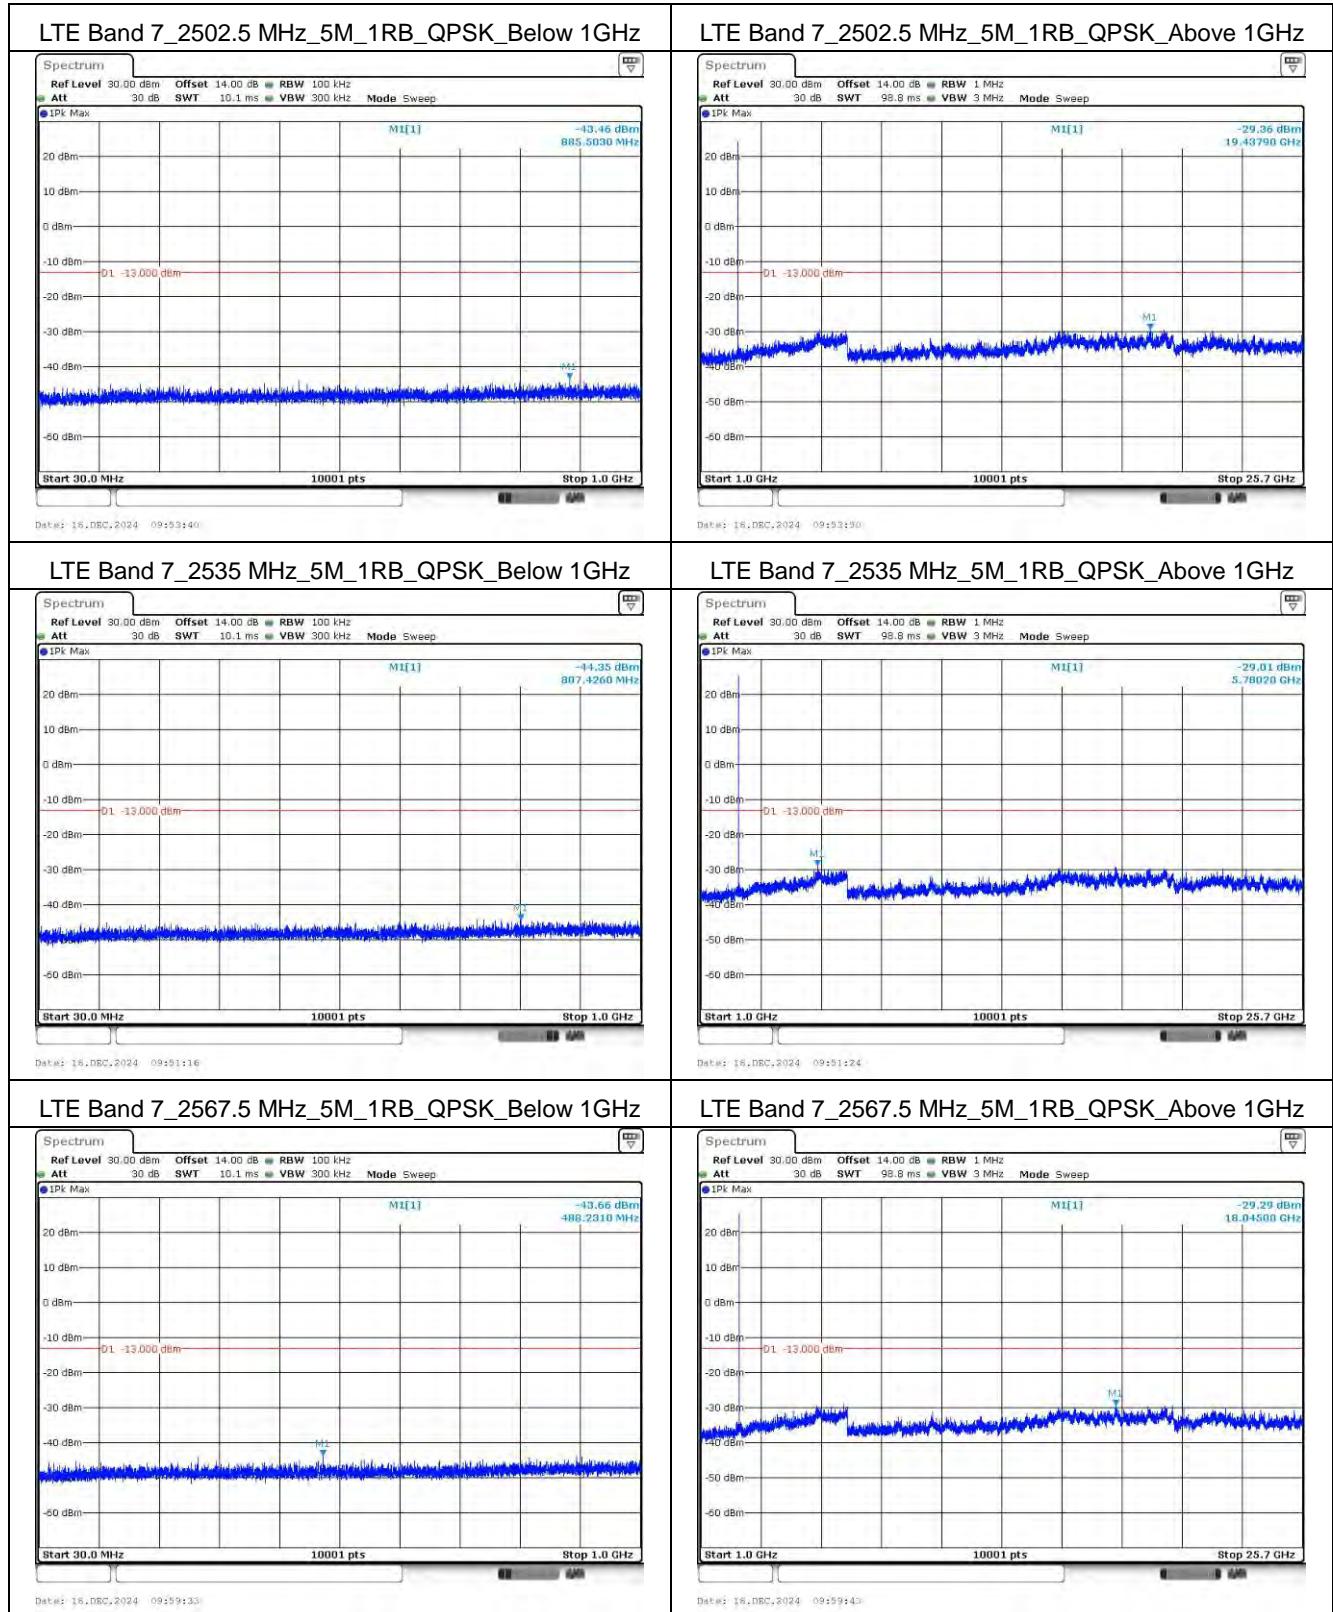
Mode 4: LTE Band 7


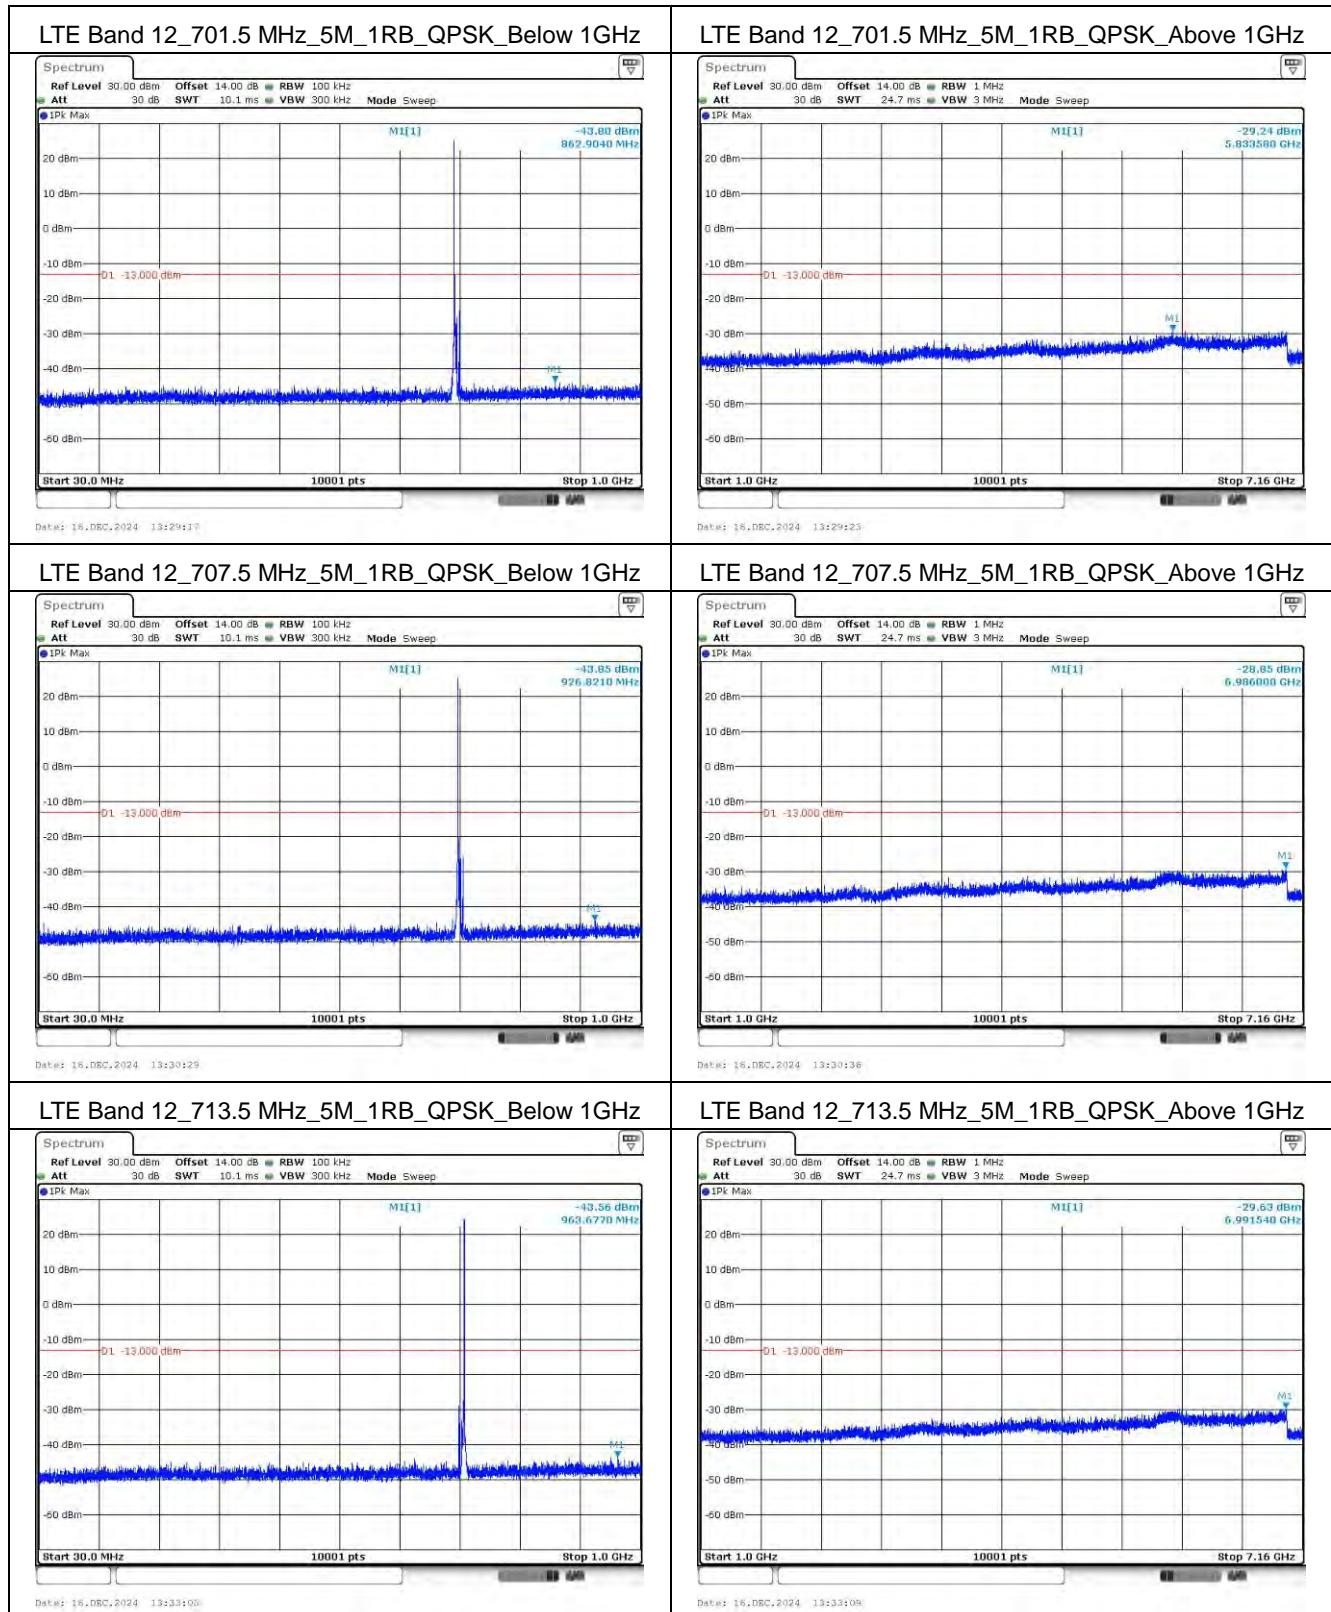


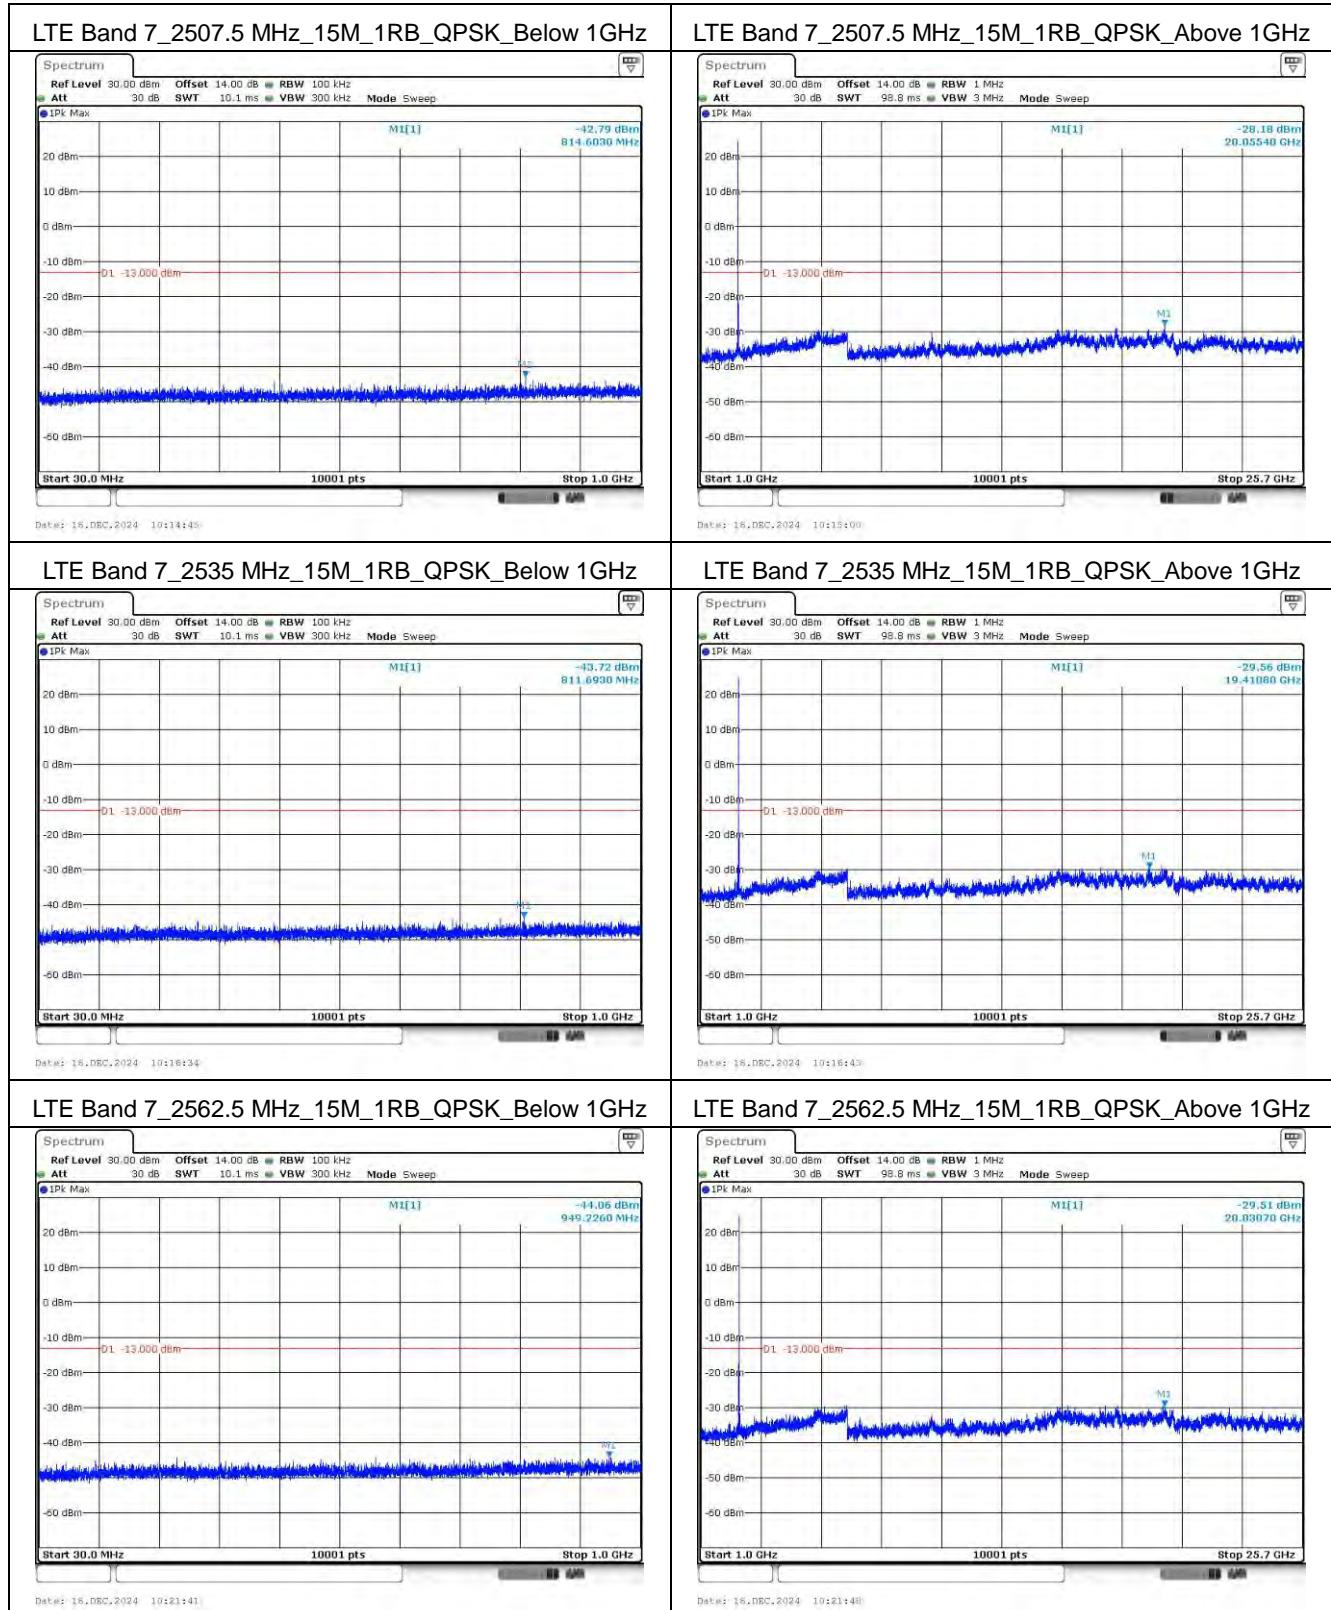


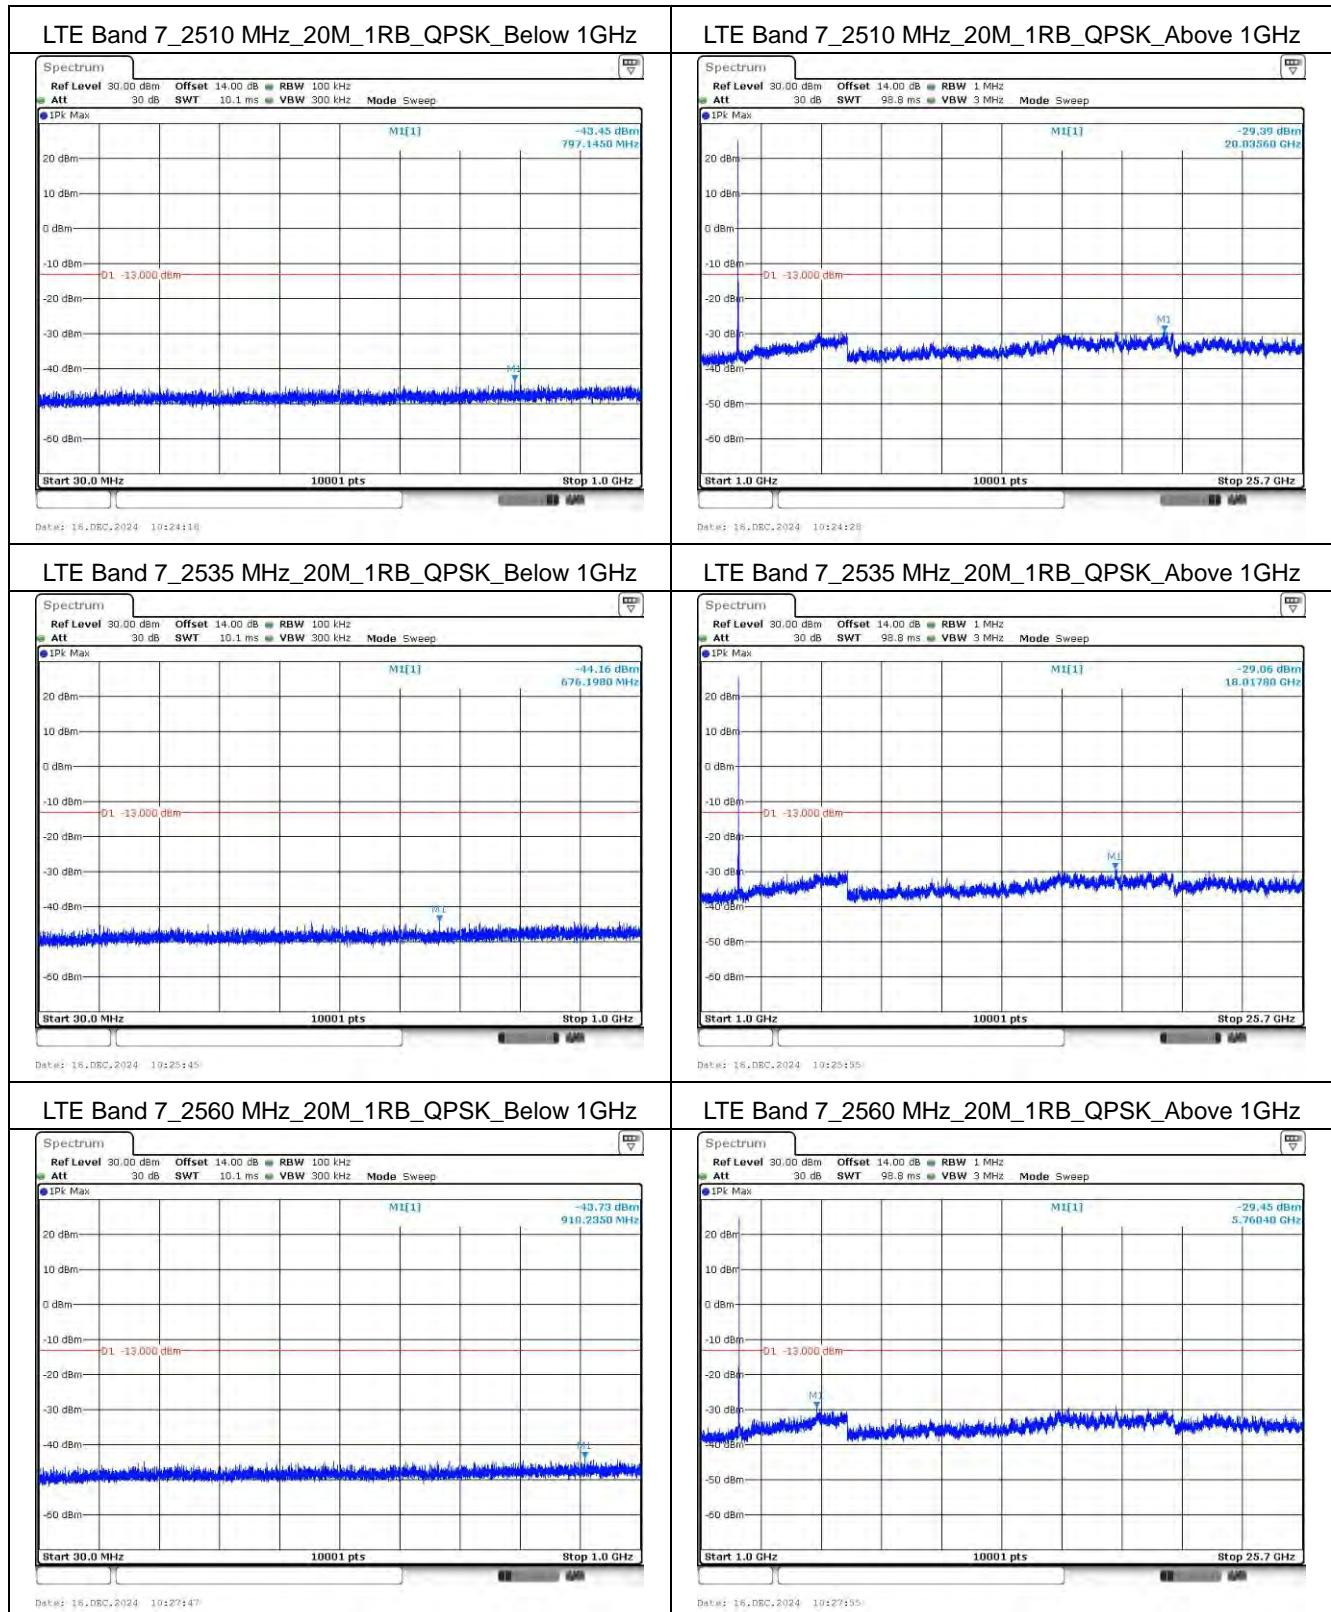


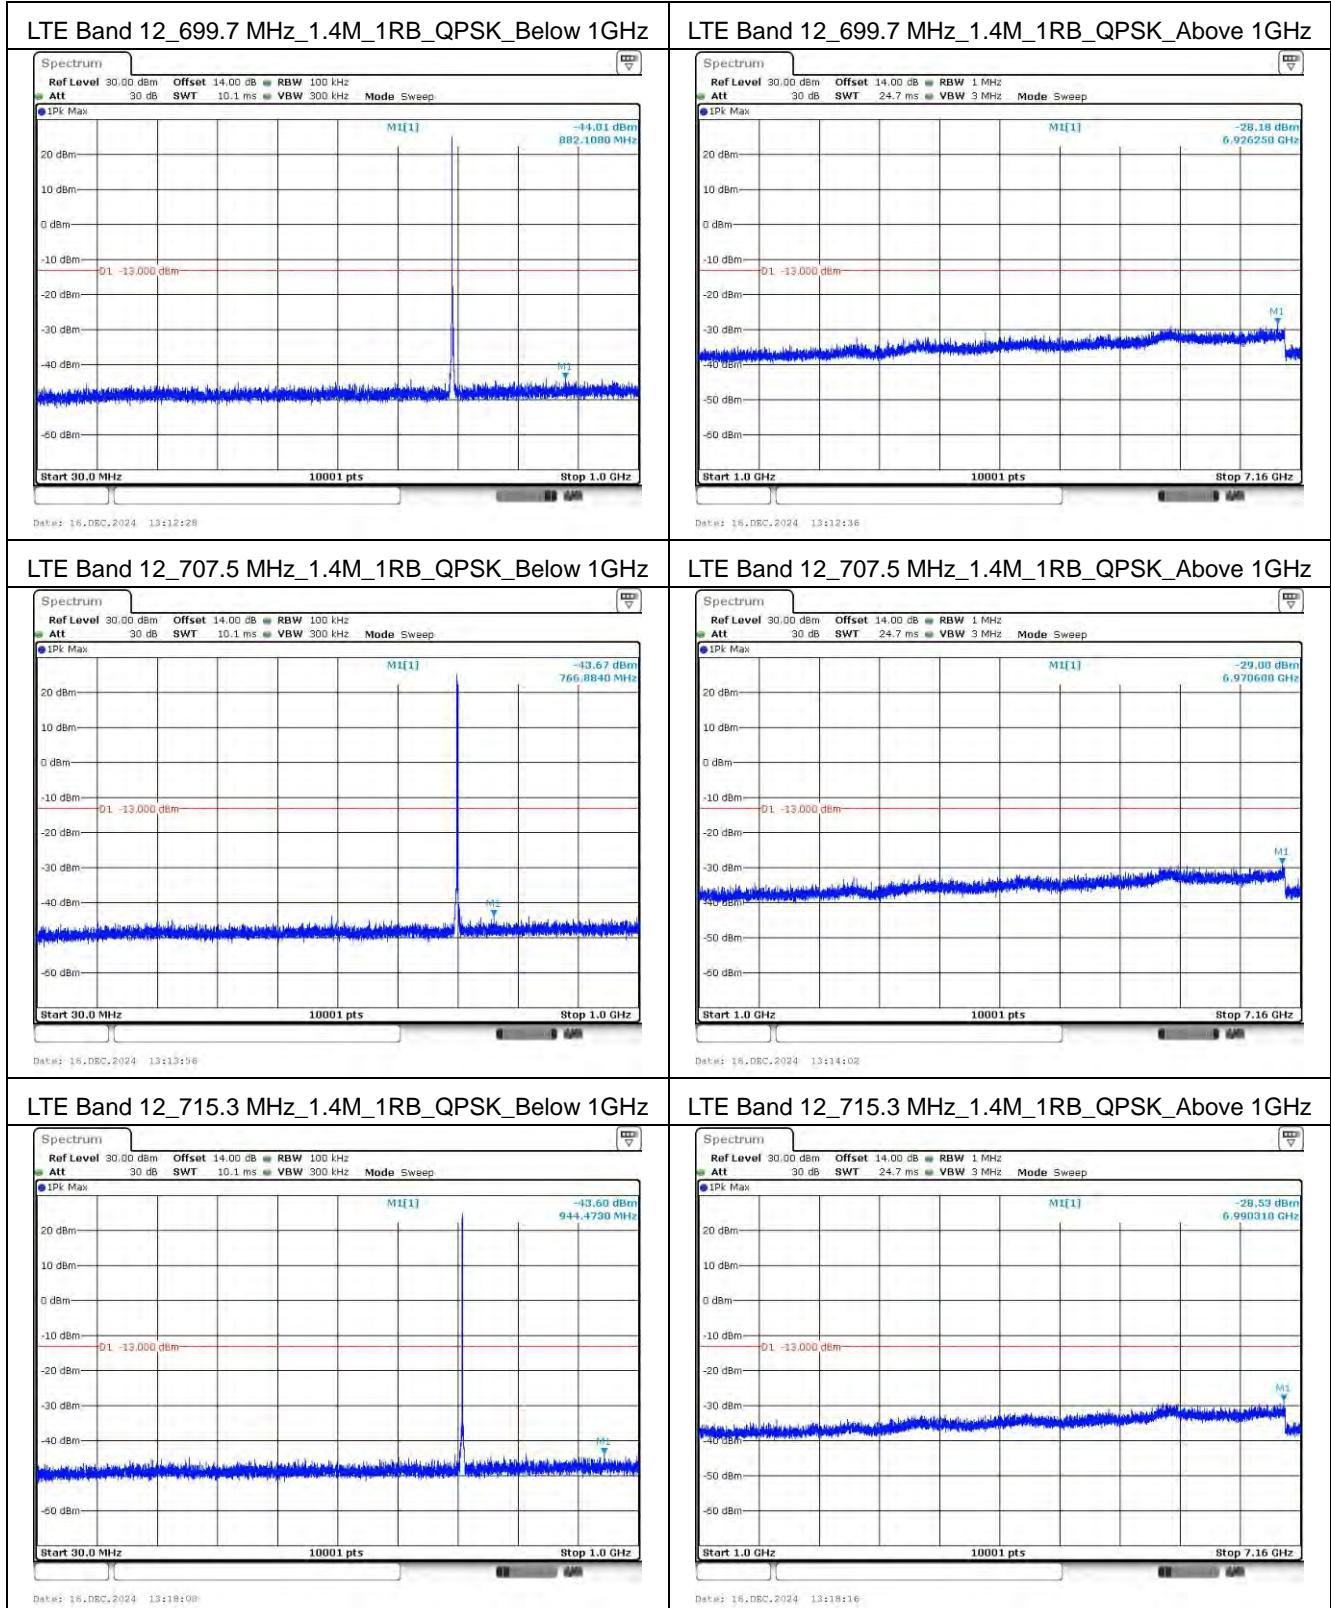
Mode 5: LTE Band 12

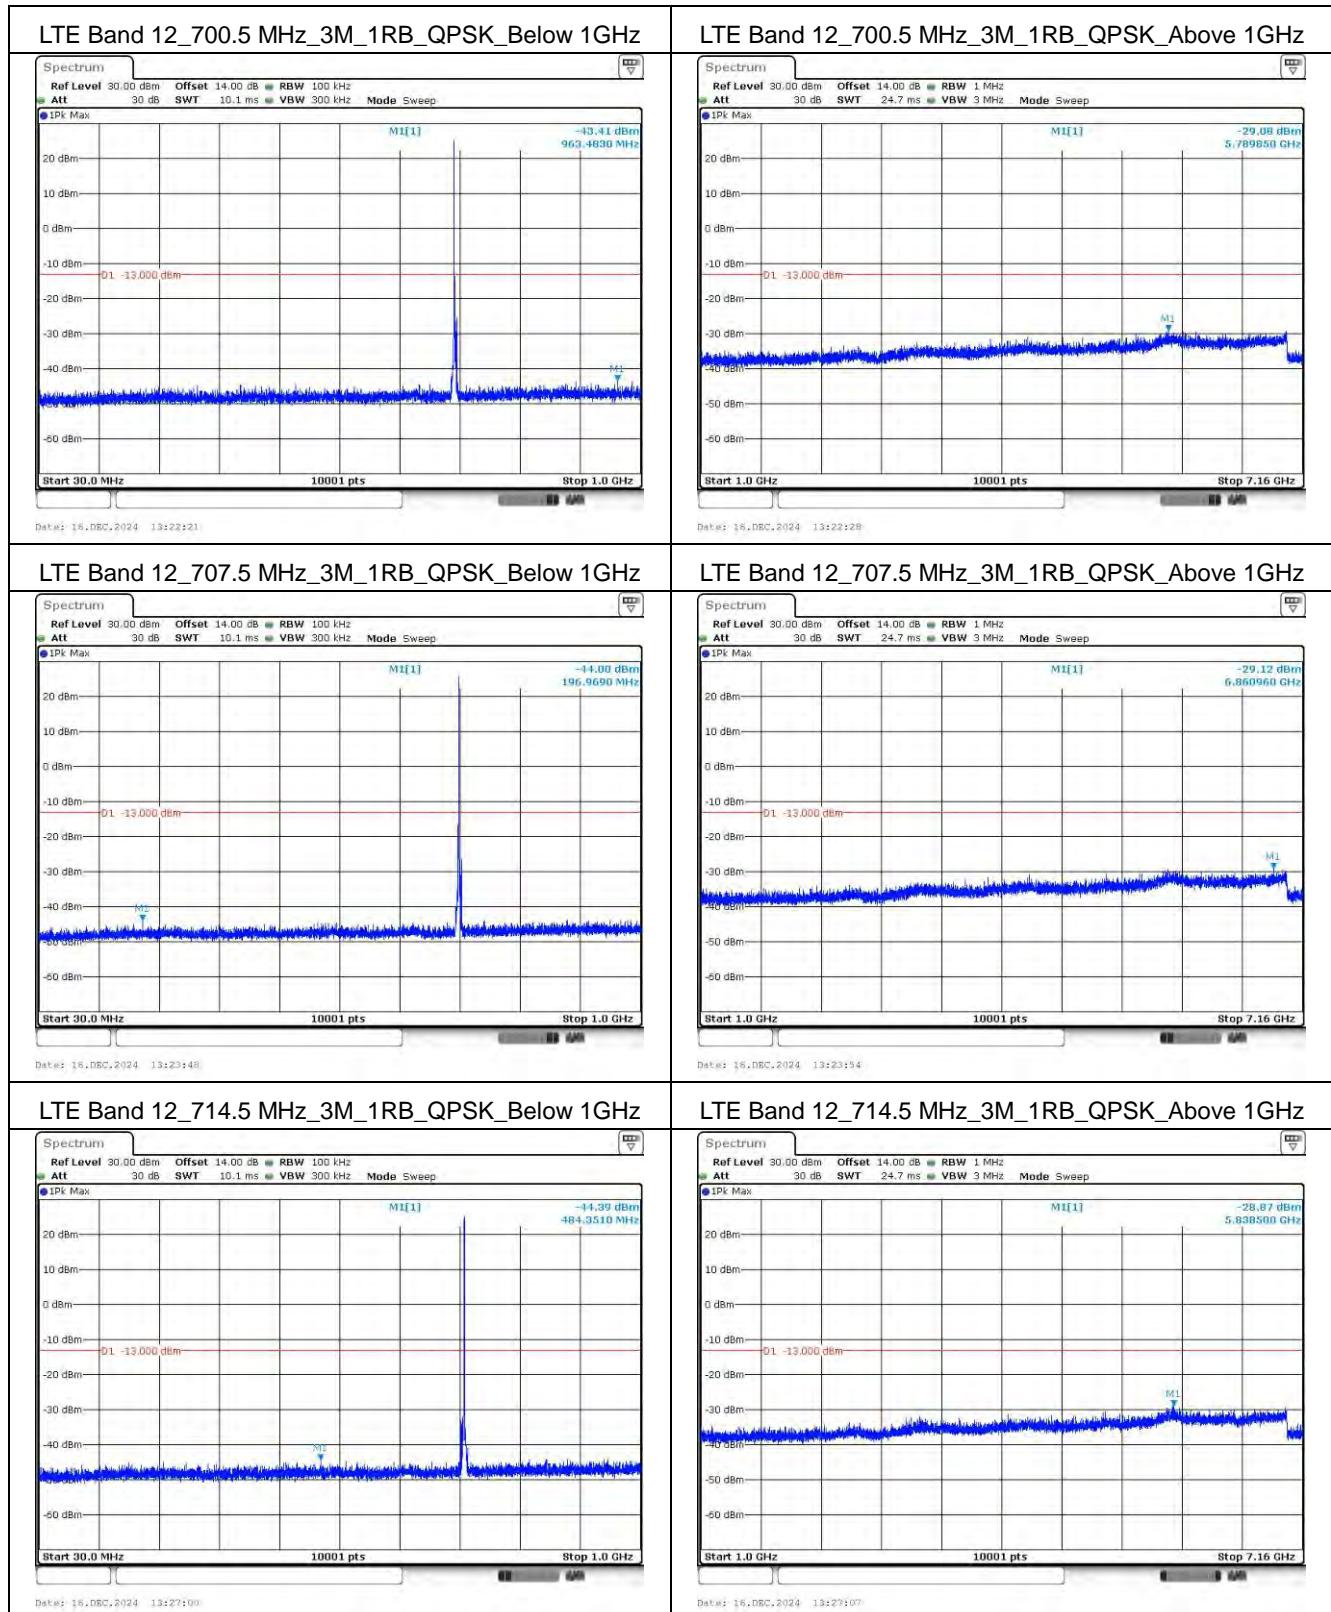
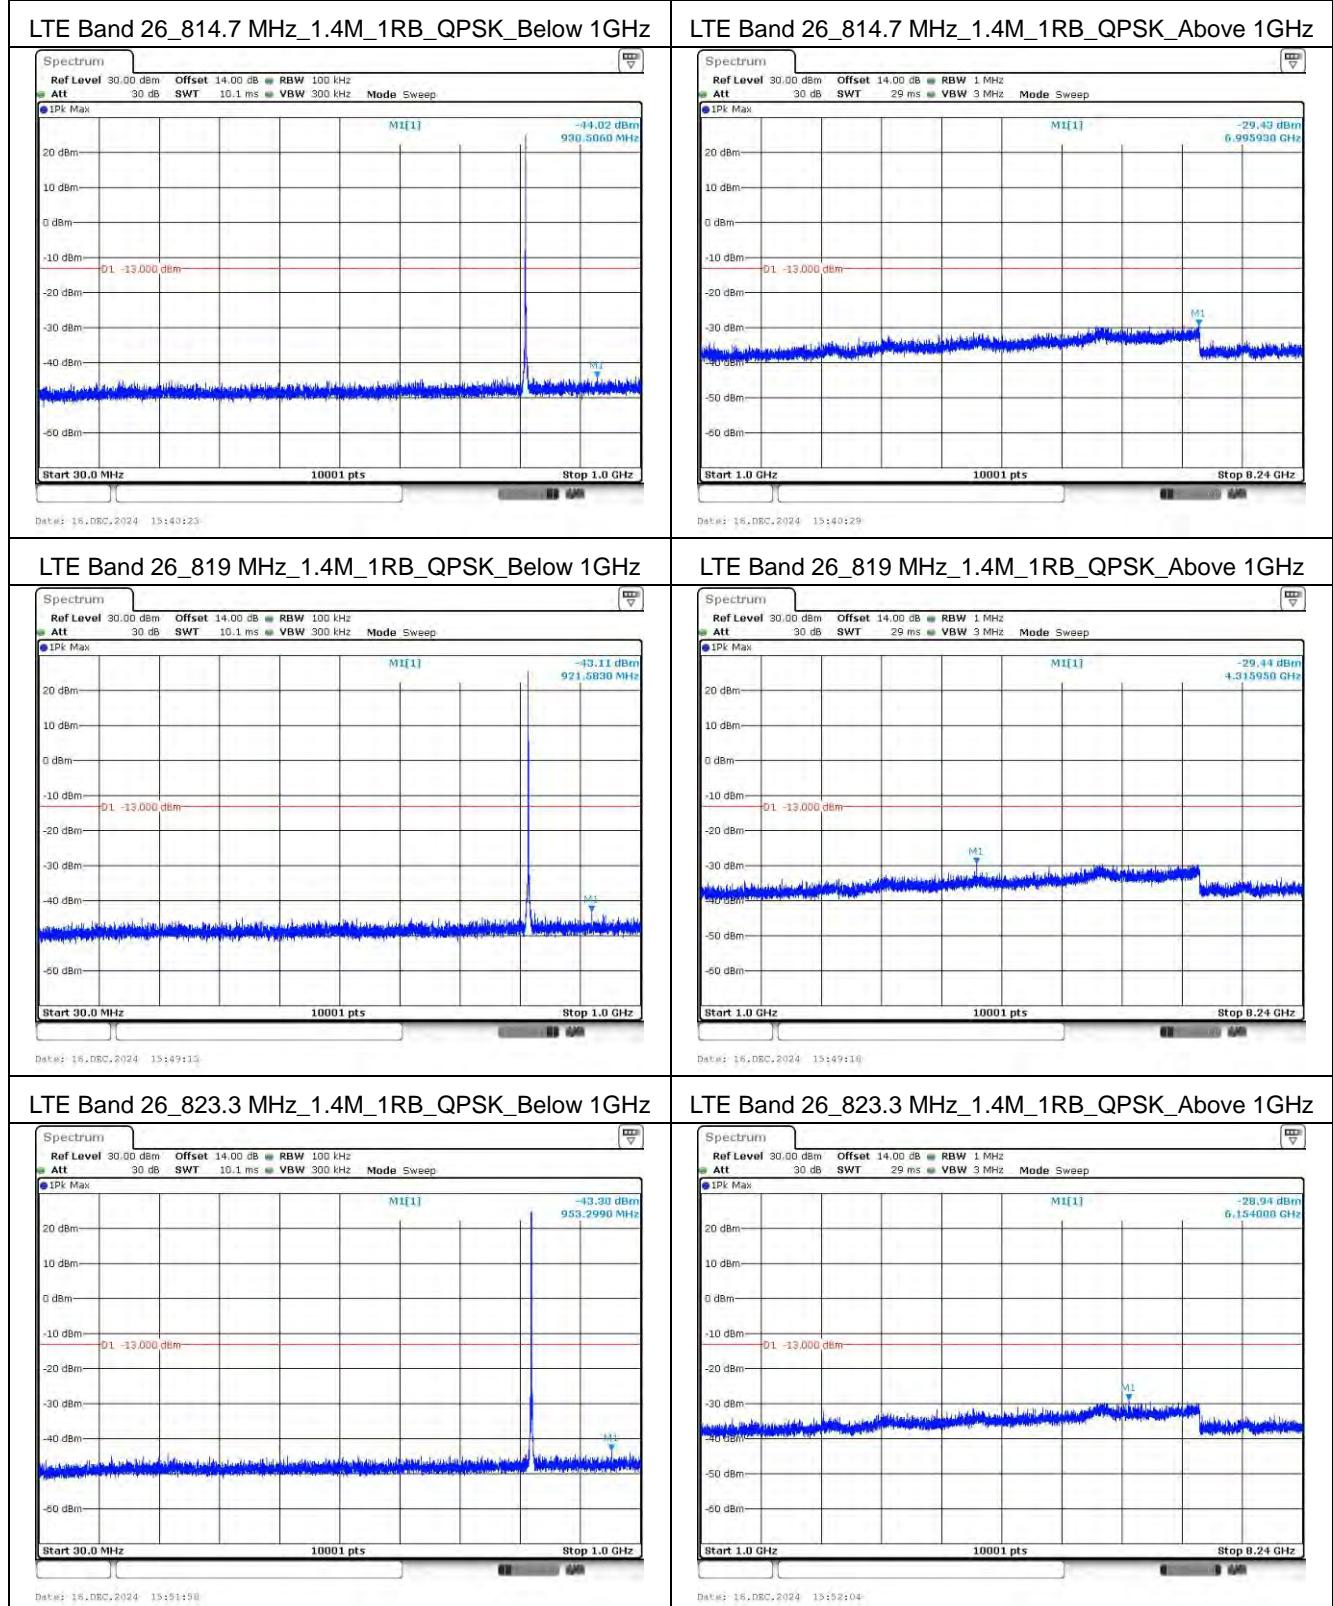





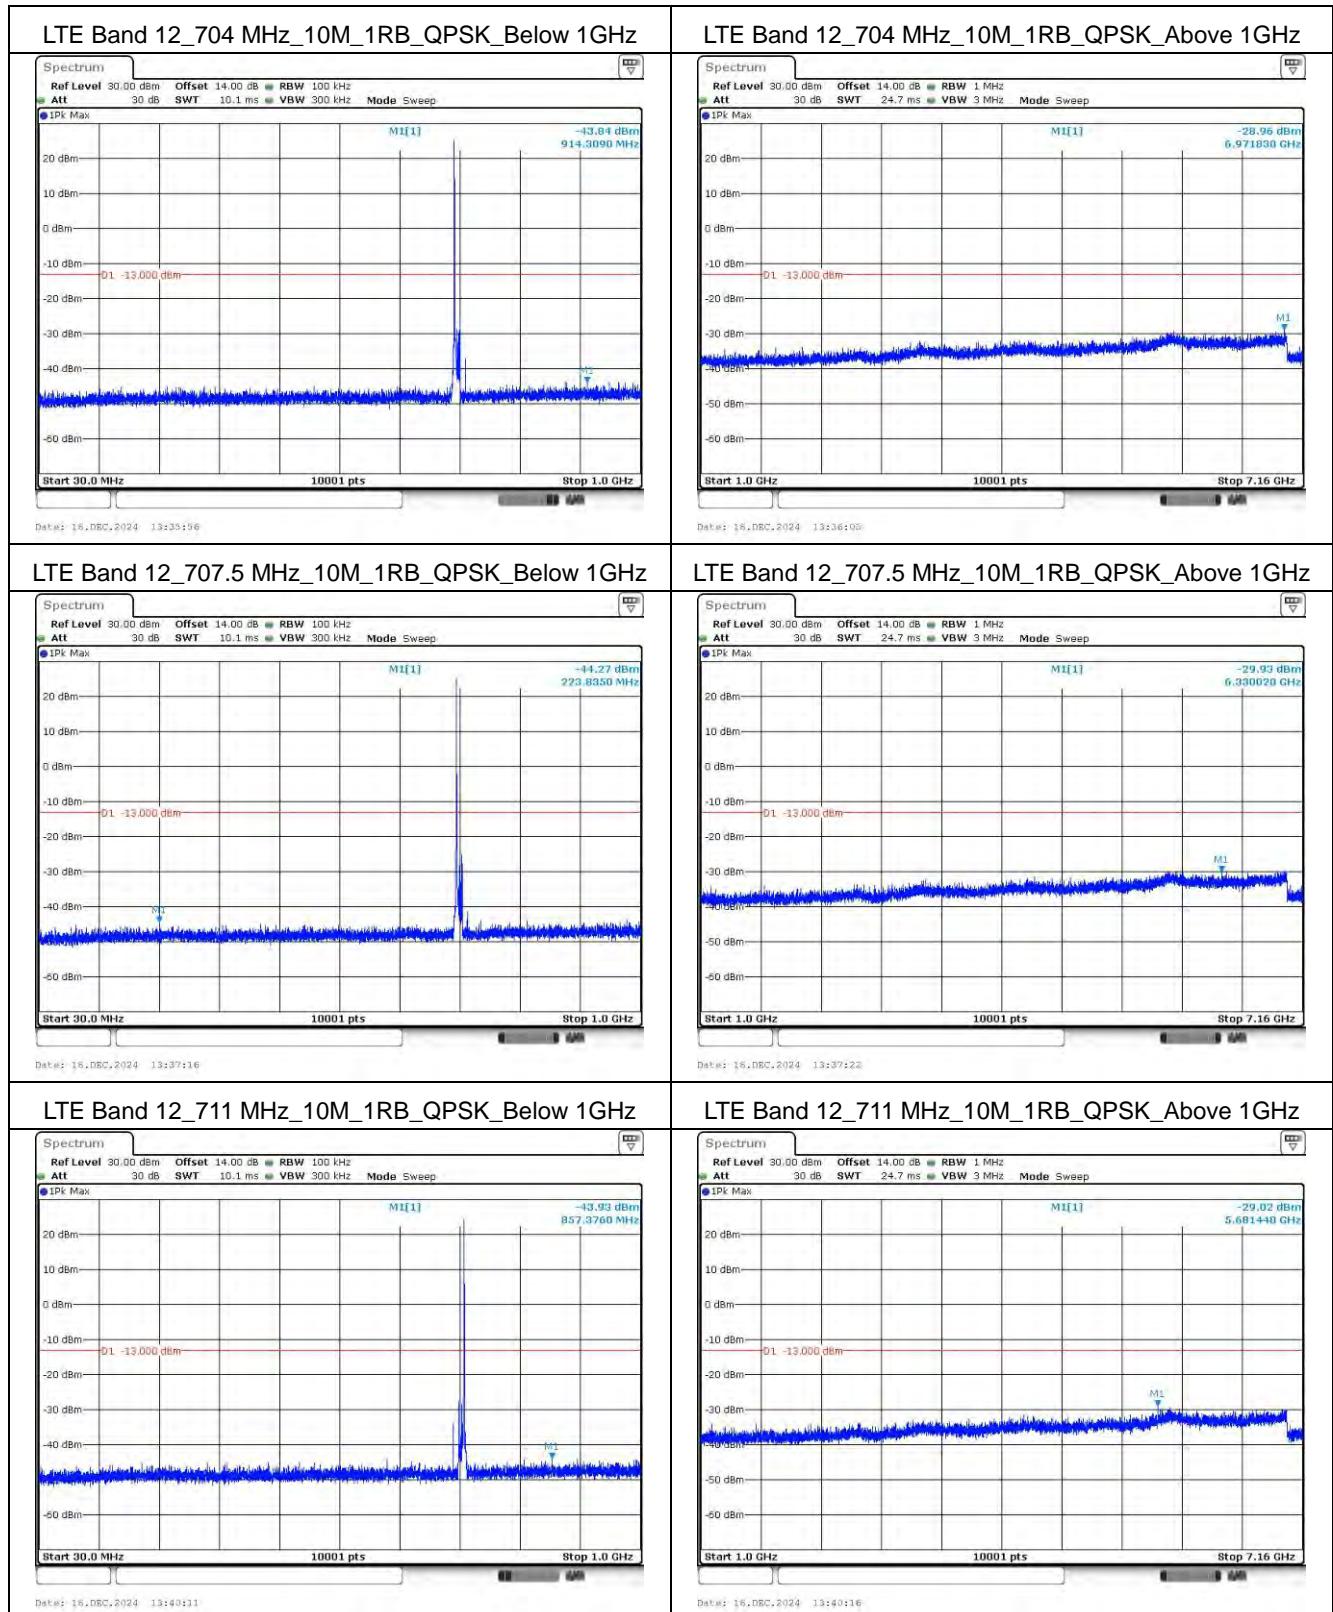


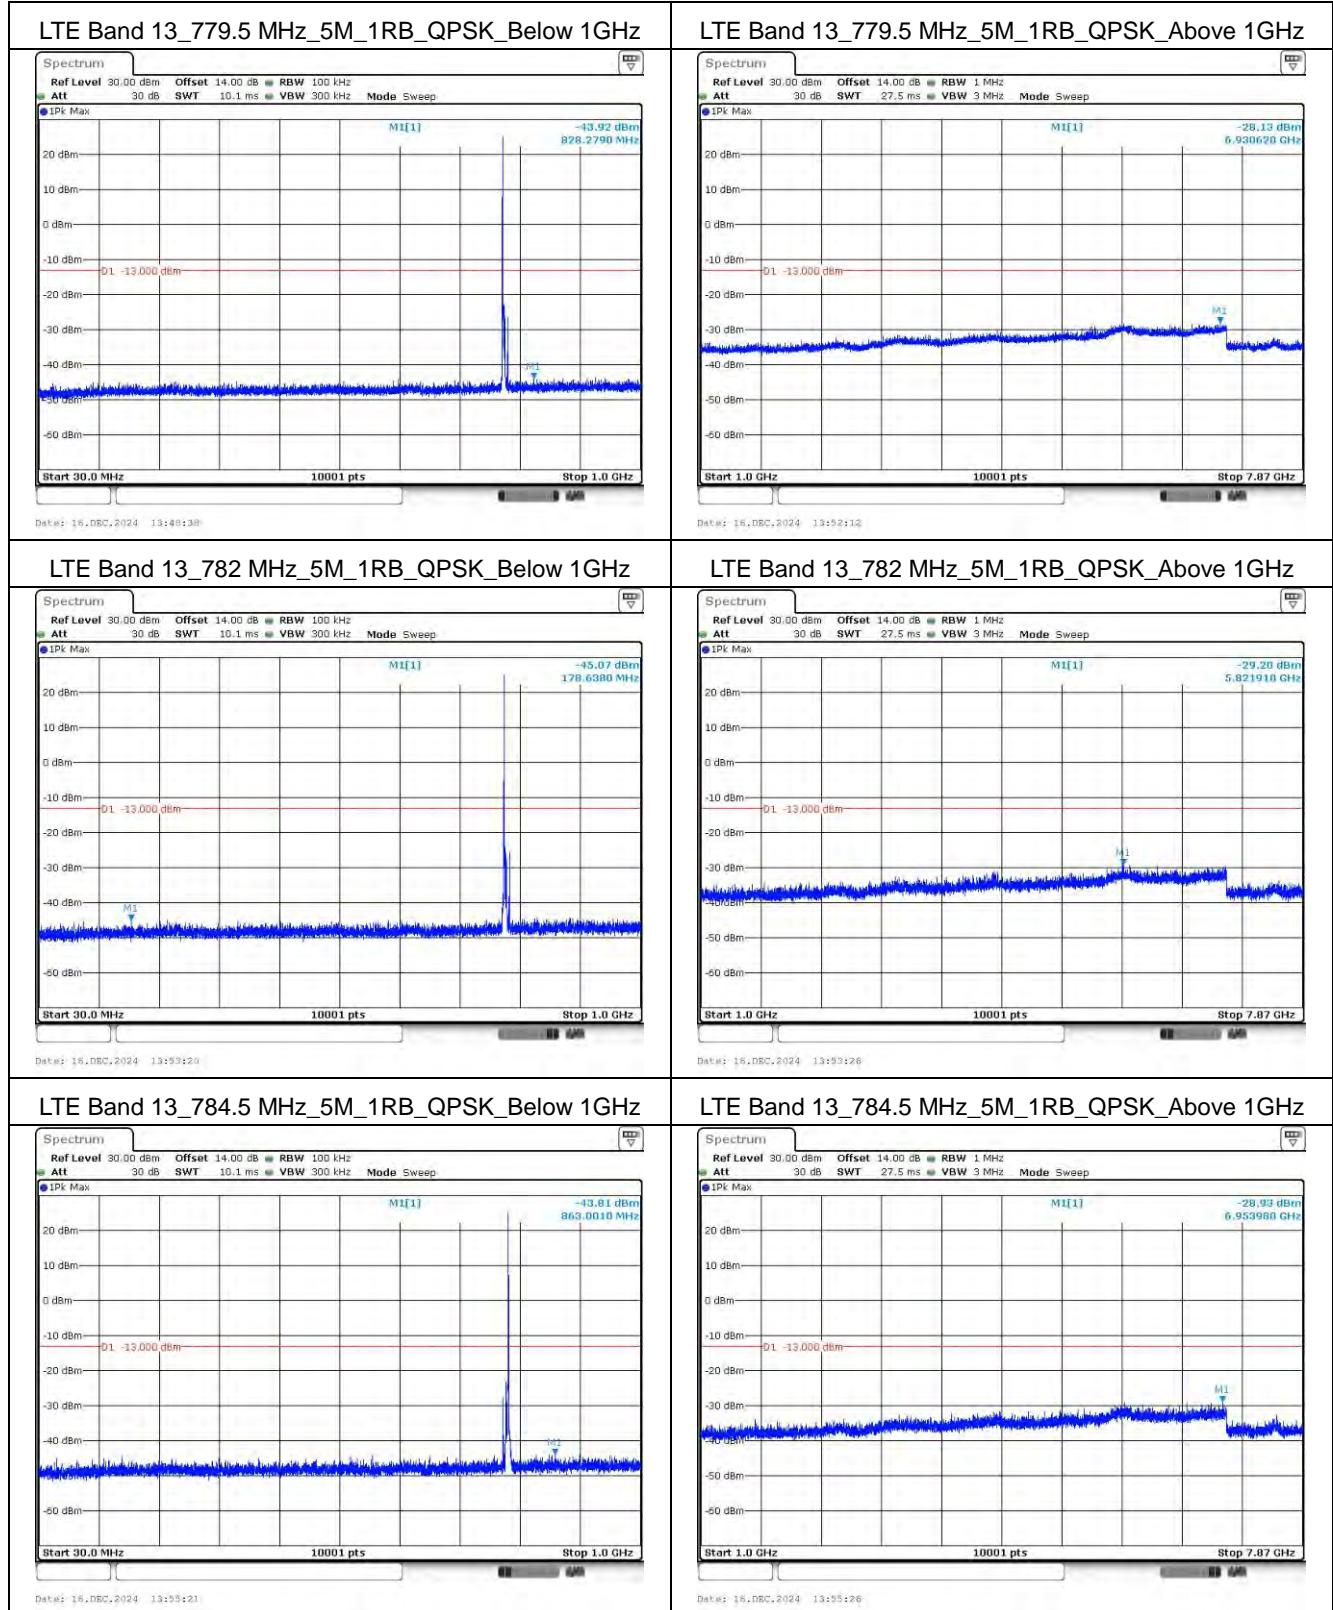
Mode 6: LTE Band 13

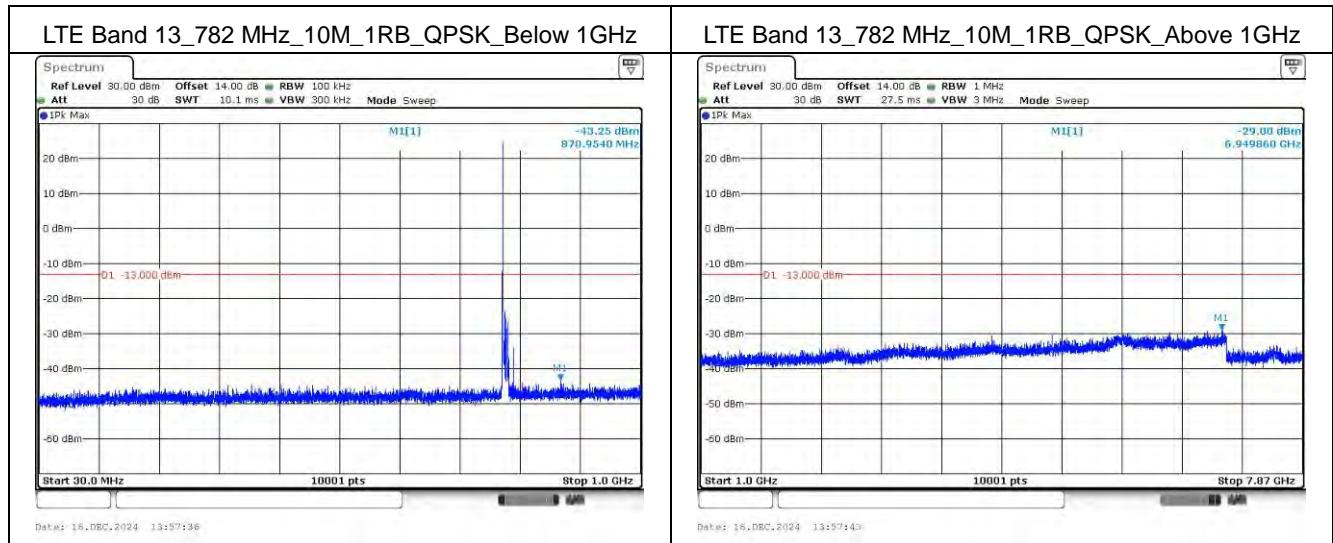
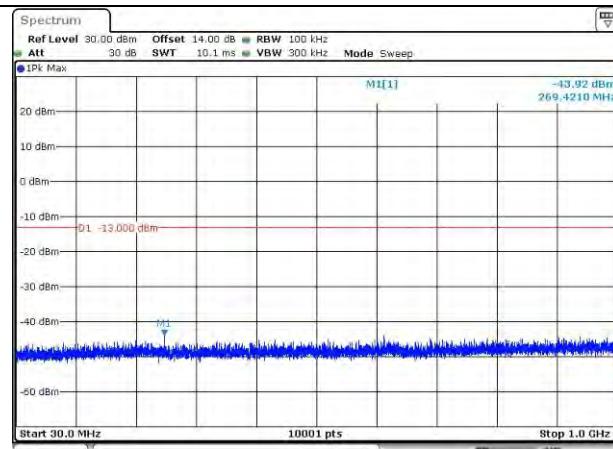
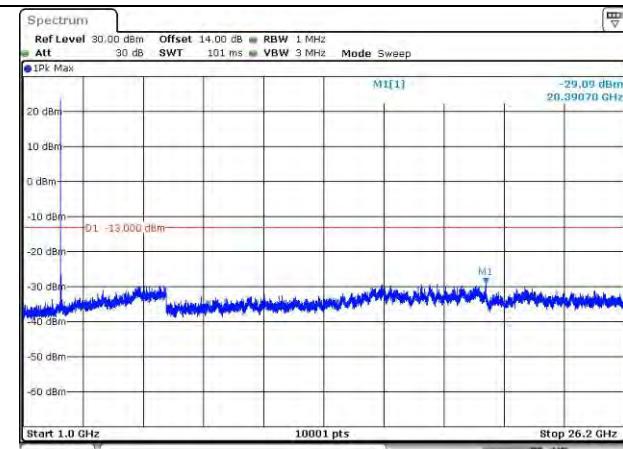
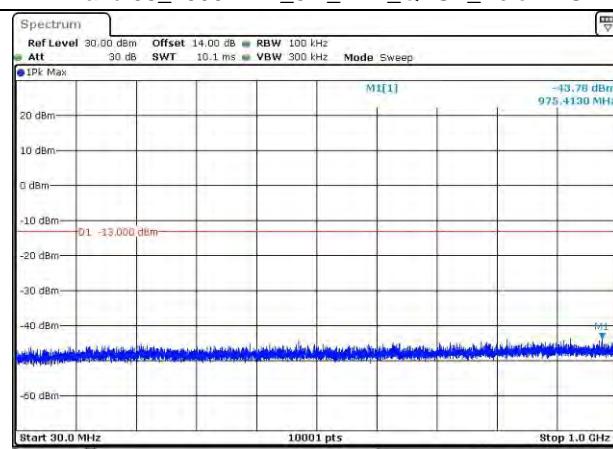
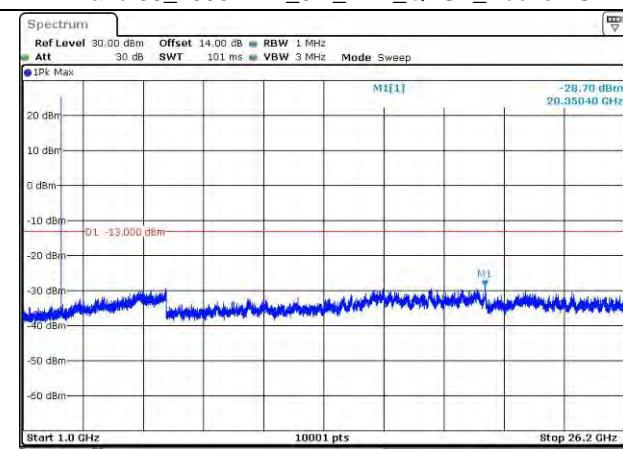
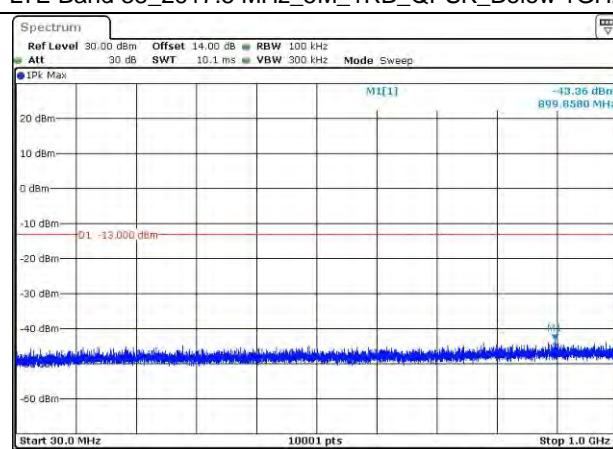
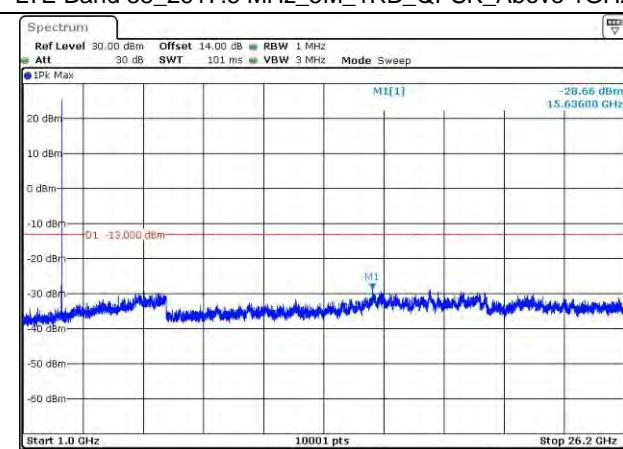



Mode 7: LTE Band 26 (Part 90)

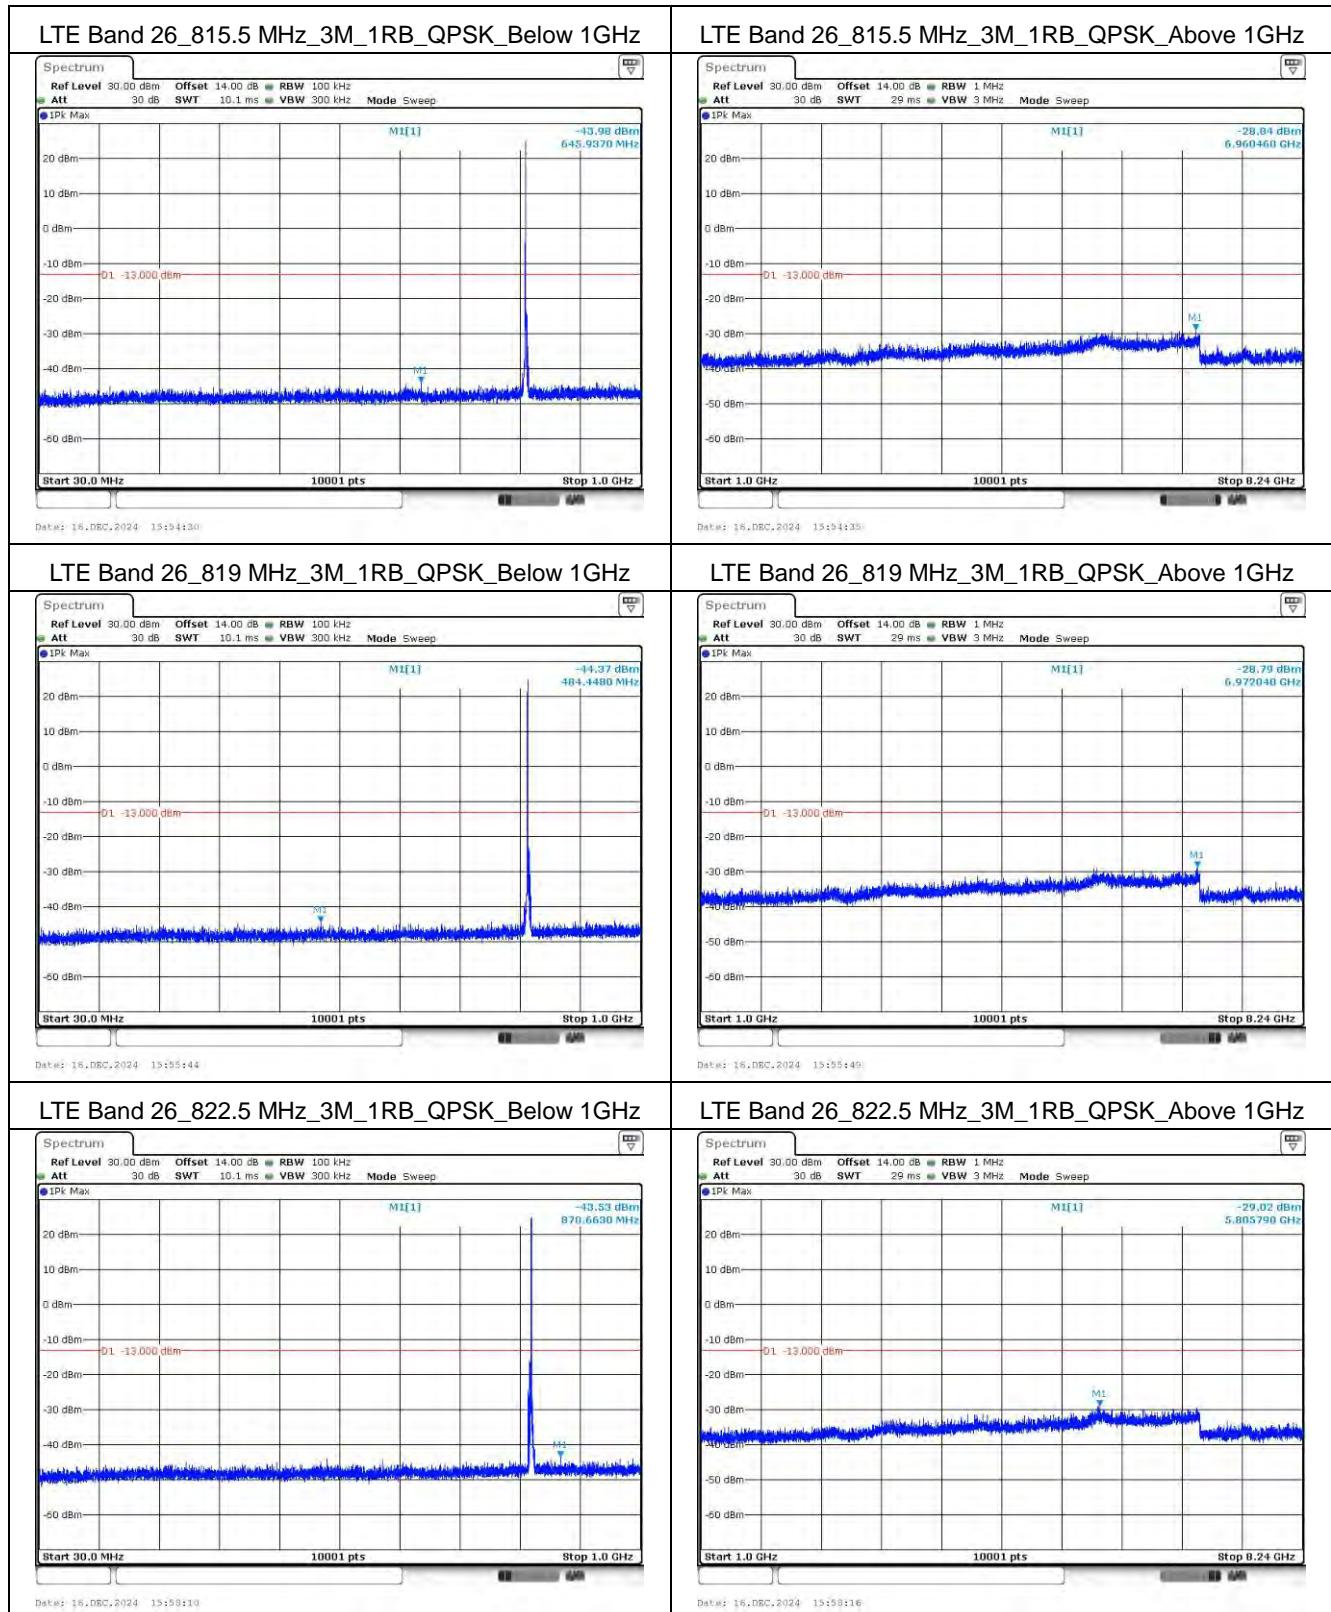
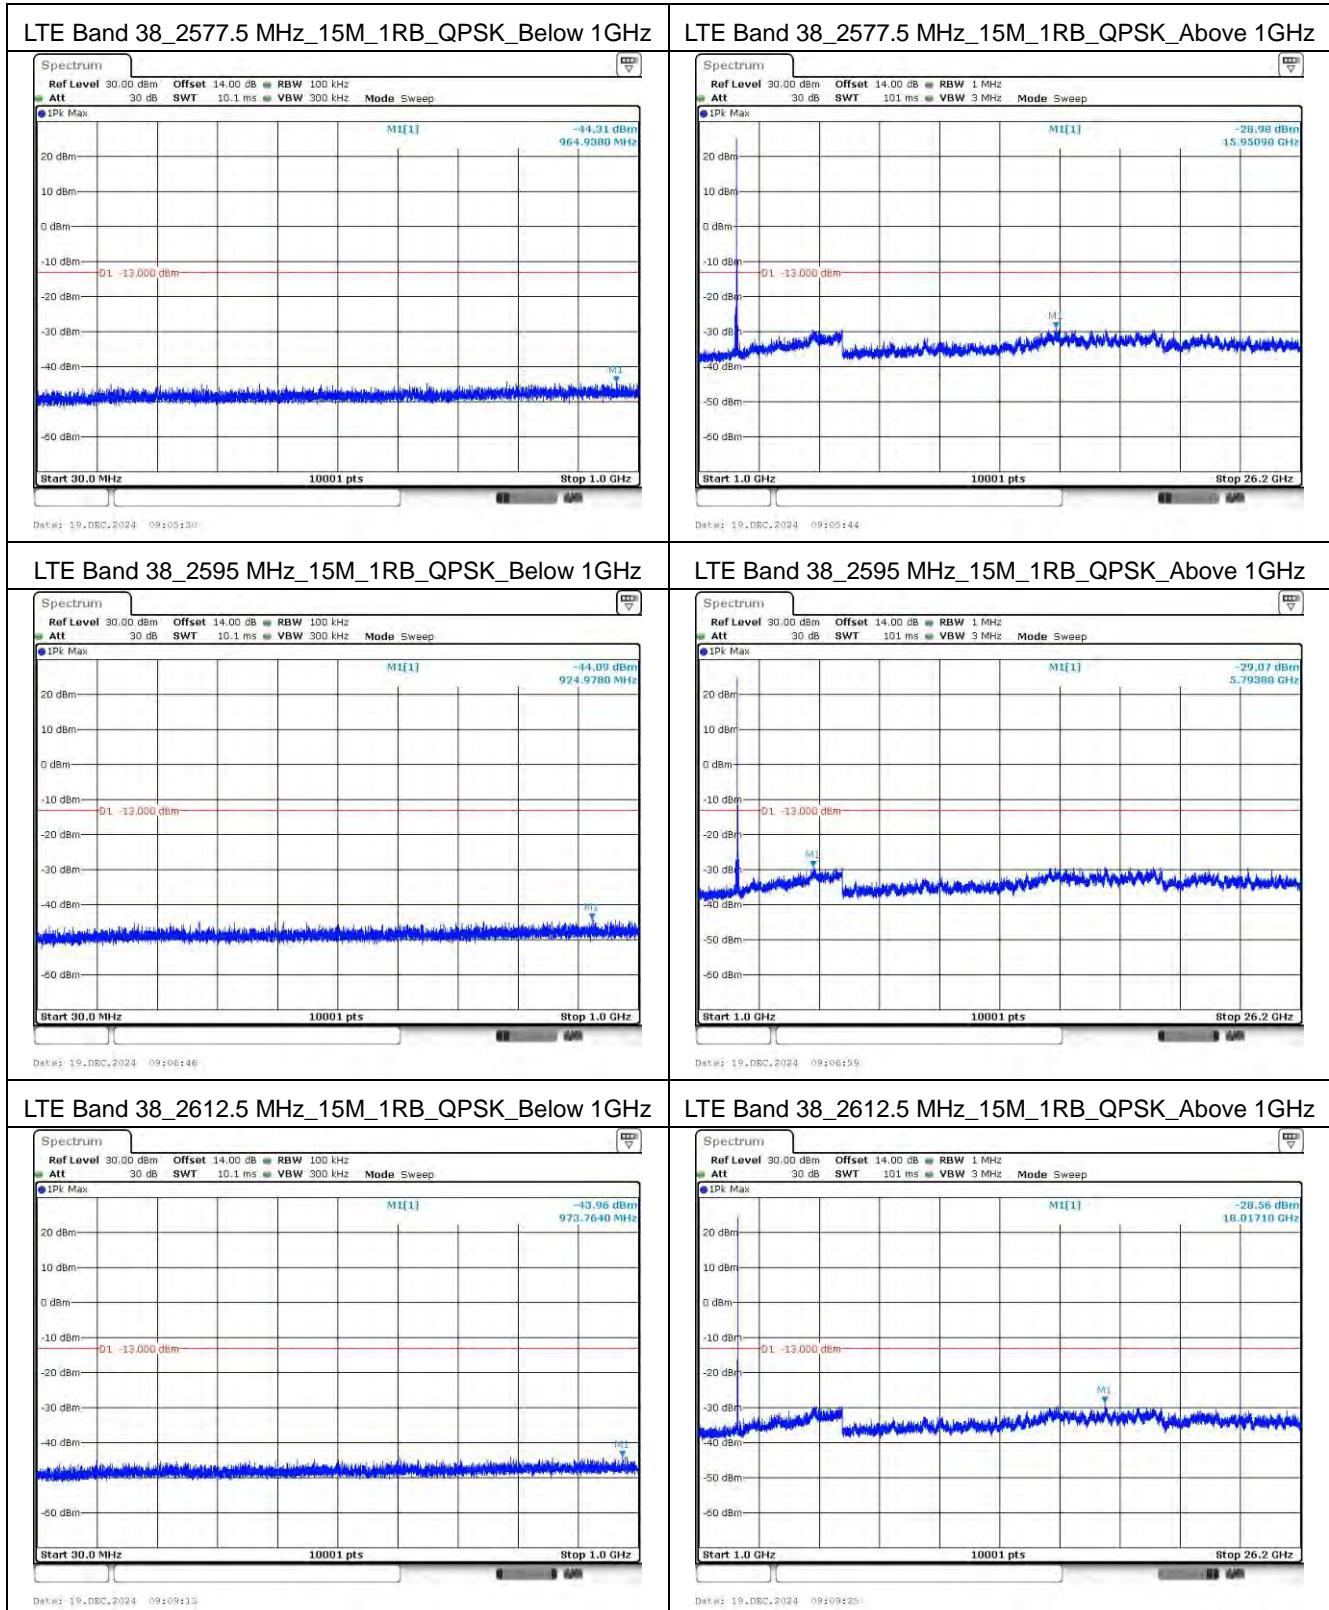


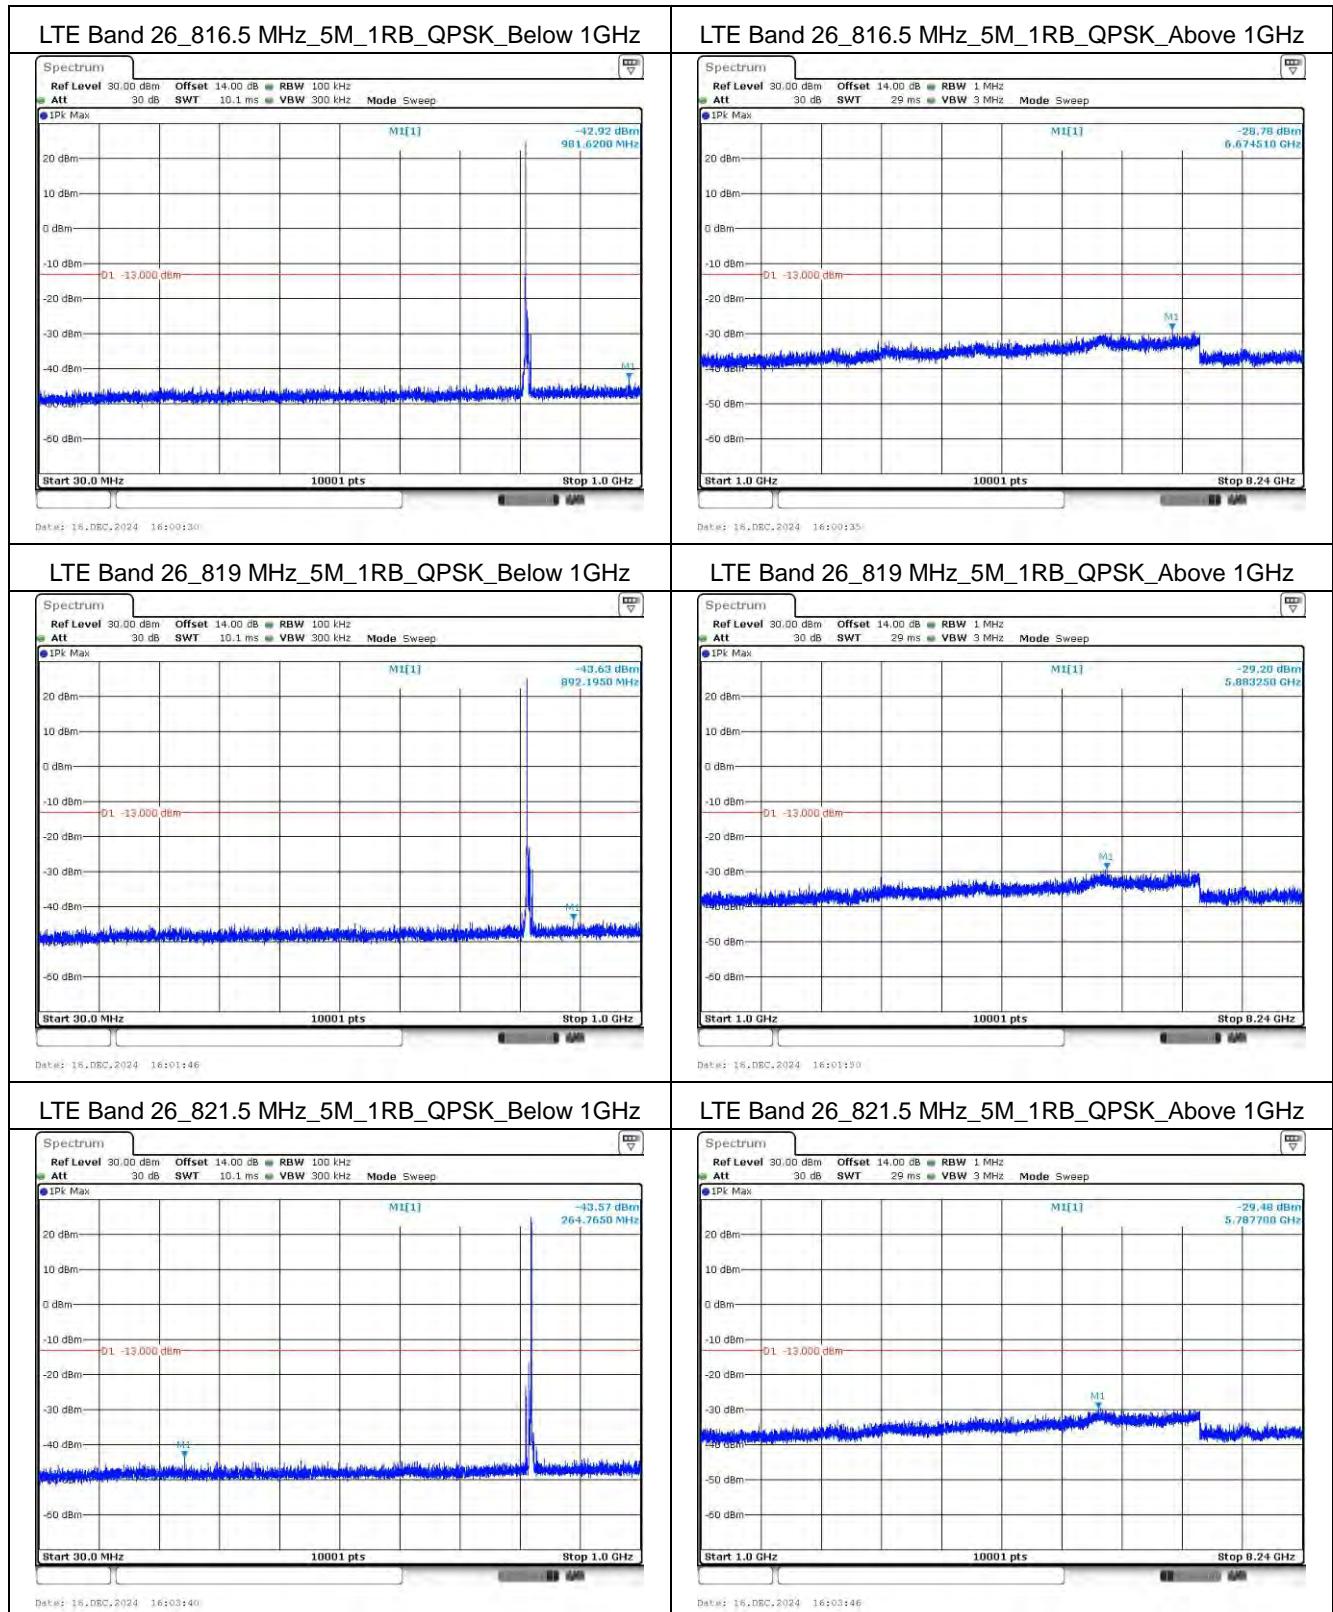







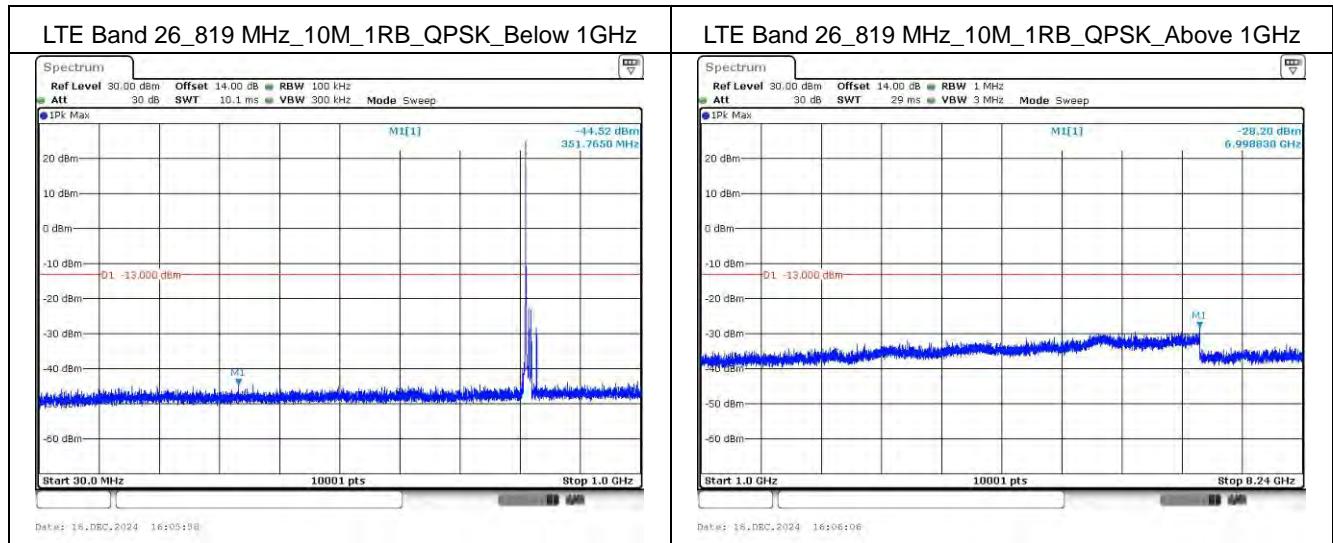



Mode 8: LTE Band 38
LTE Band 38_2572.5 MHz_5M_1RB_QPSK_Below 1GHz

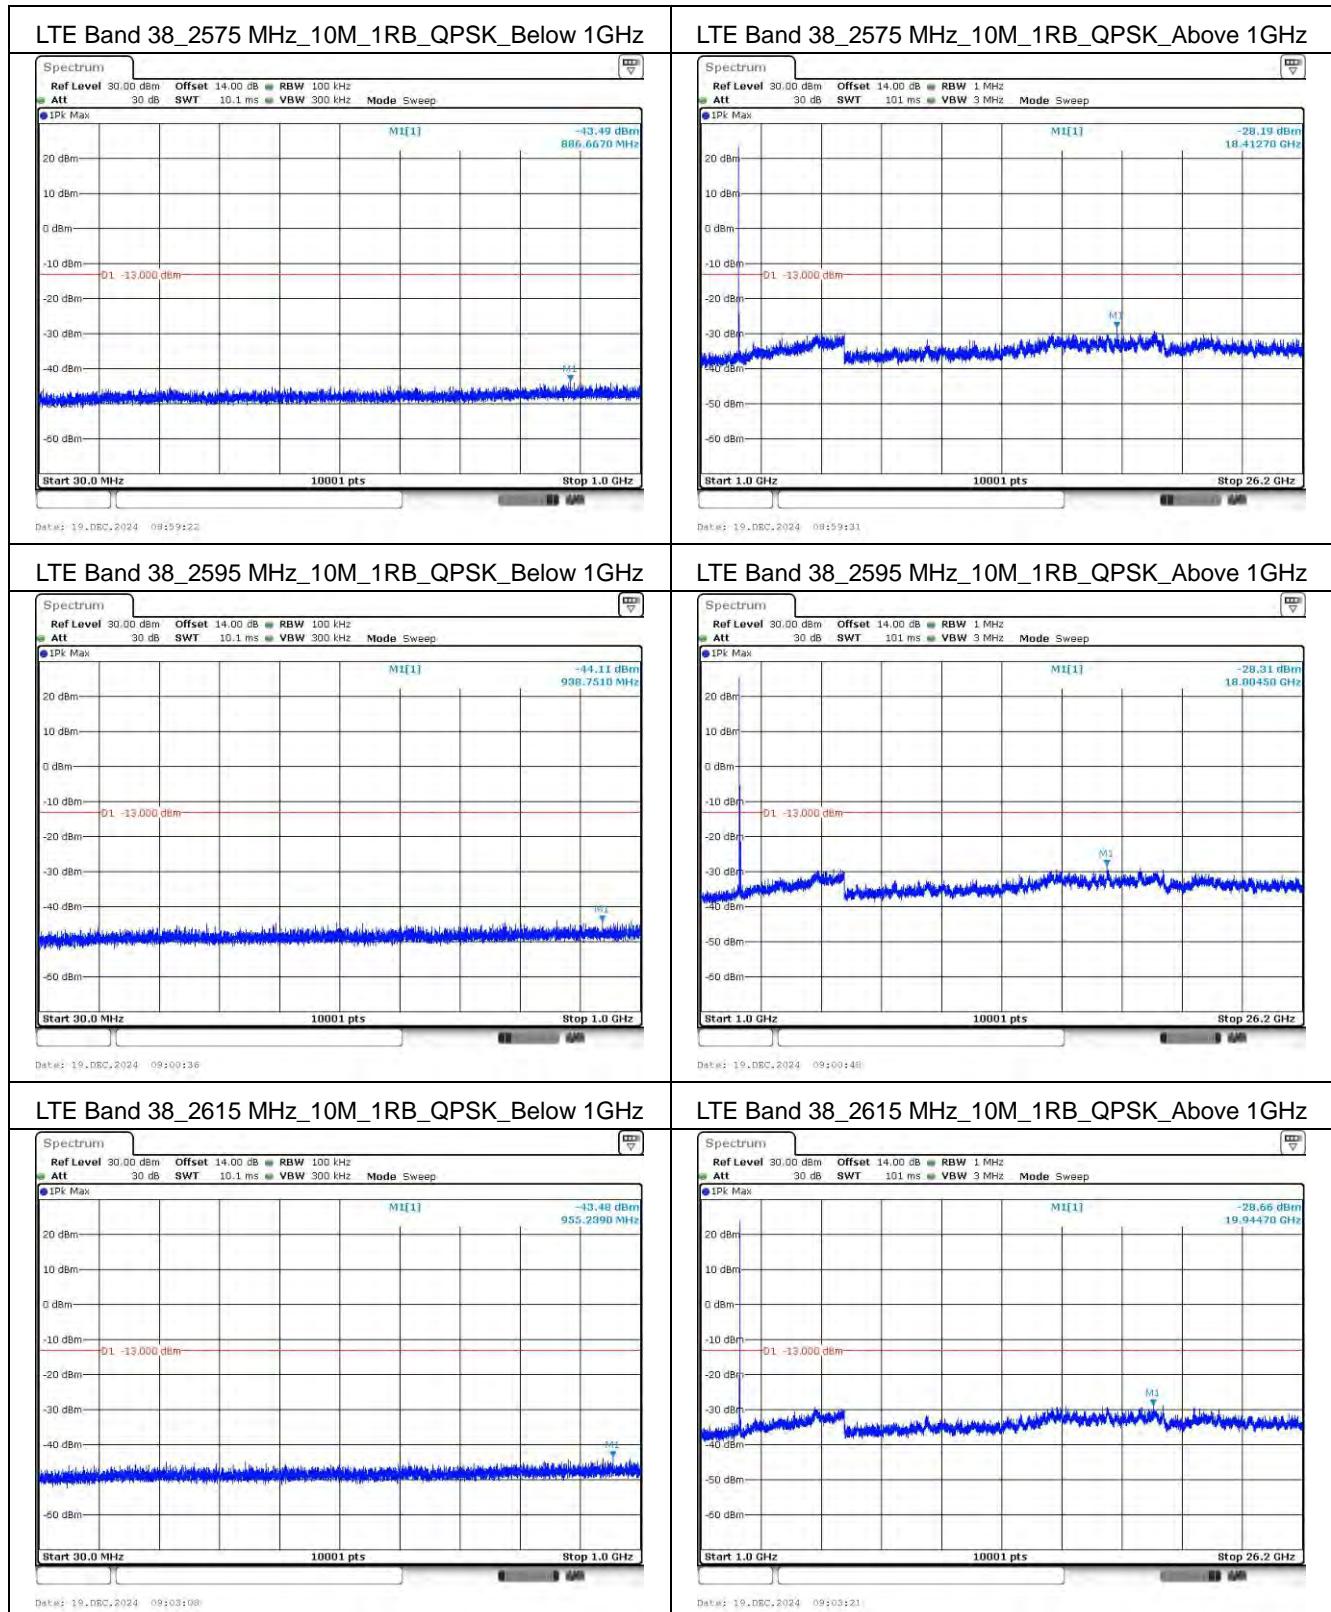LTE Band 38_2572.5 MHz_5M_1RB_QPSK_Above 1GHz

LTE Band 38_2595 MHz_5M_1RB_QPSK_Below 1GHz

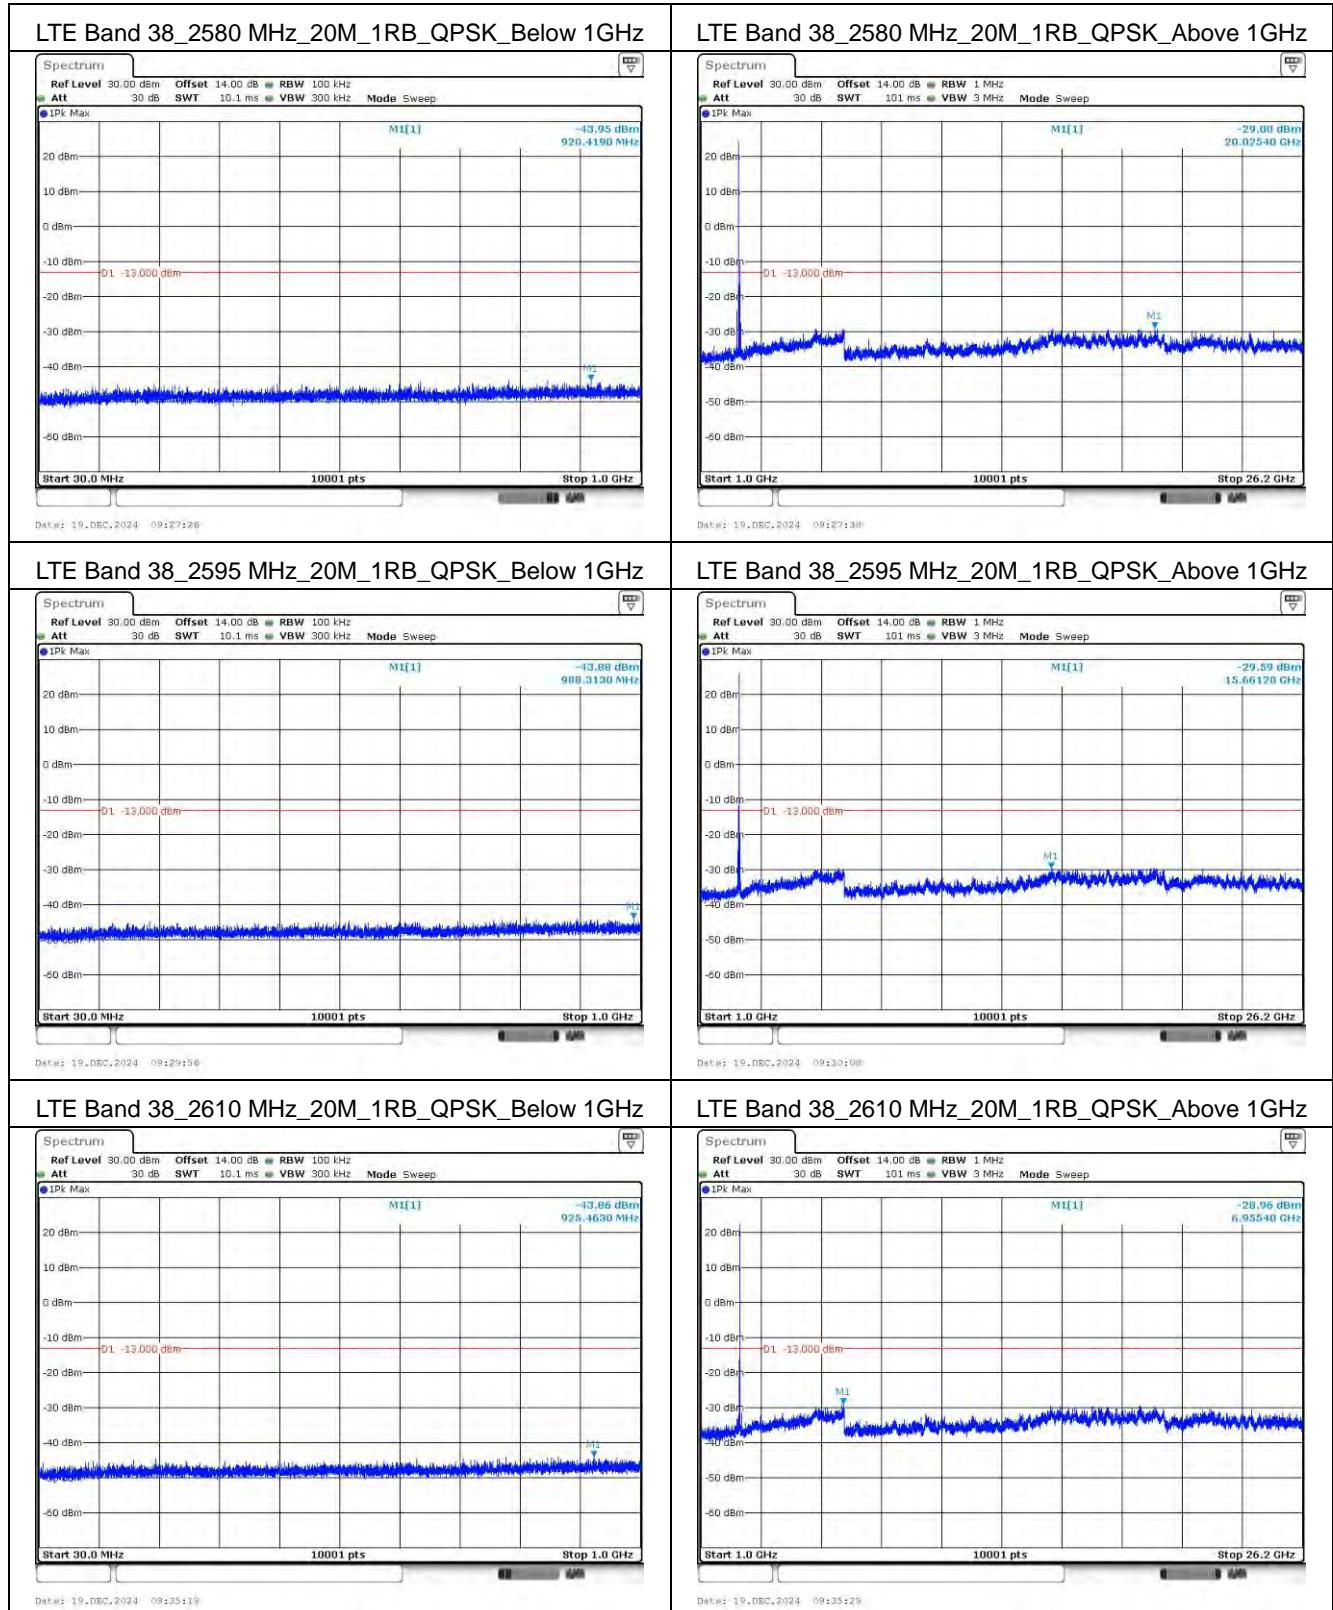LTE Band 38_2595 MHz_5M_1RB_QPSK_Above 1GHz

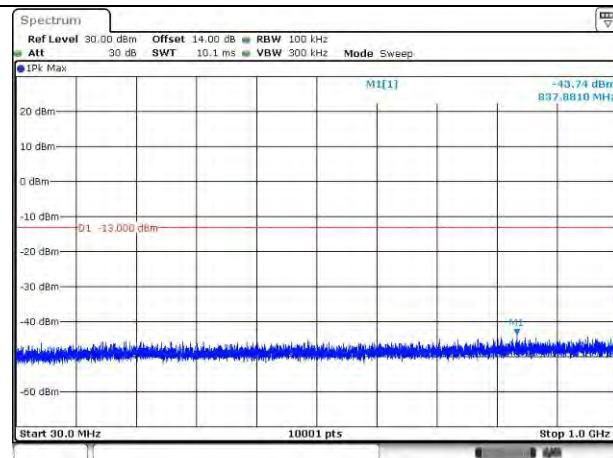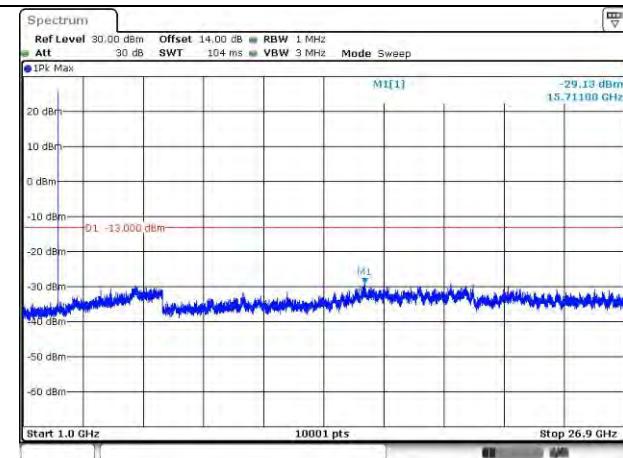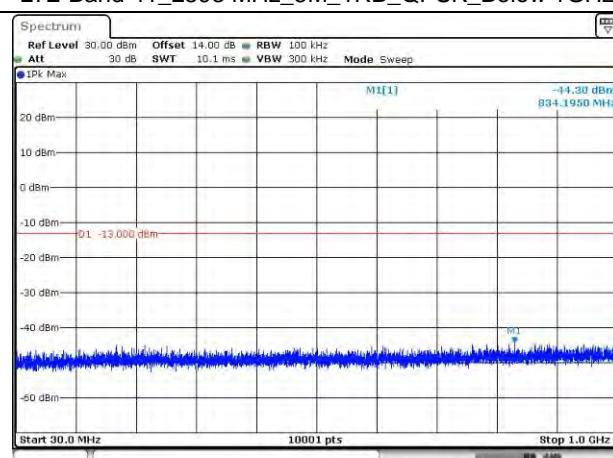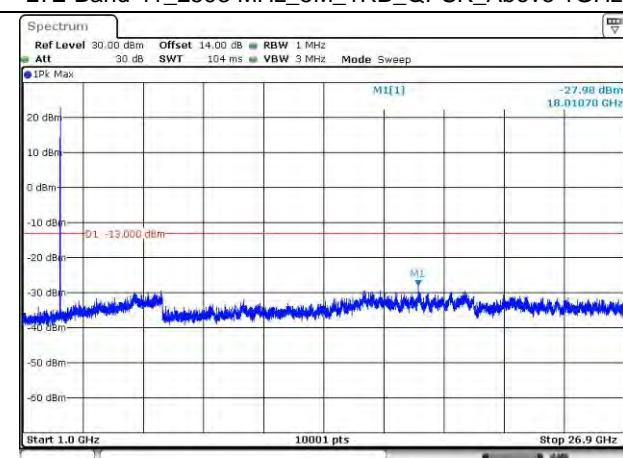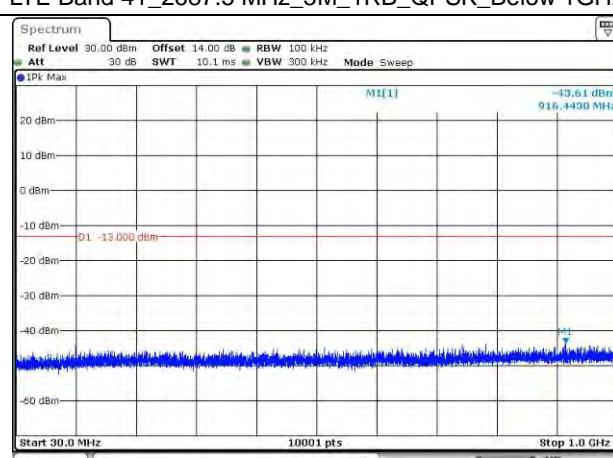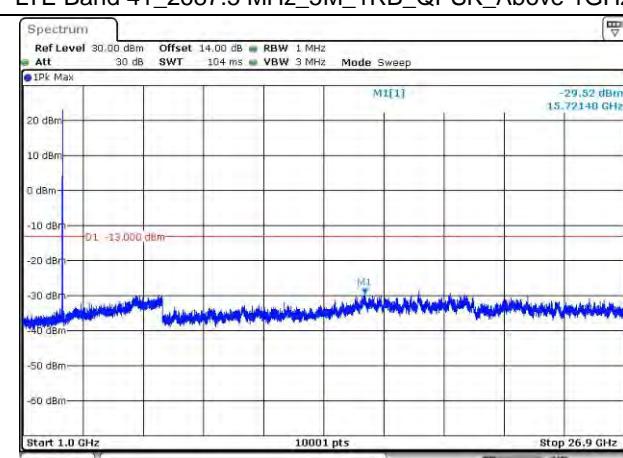LTE Band 38_2617.5 MHz_5M_1RB_QPSK_Below 1GHz

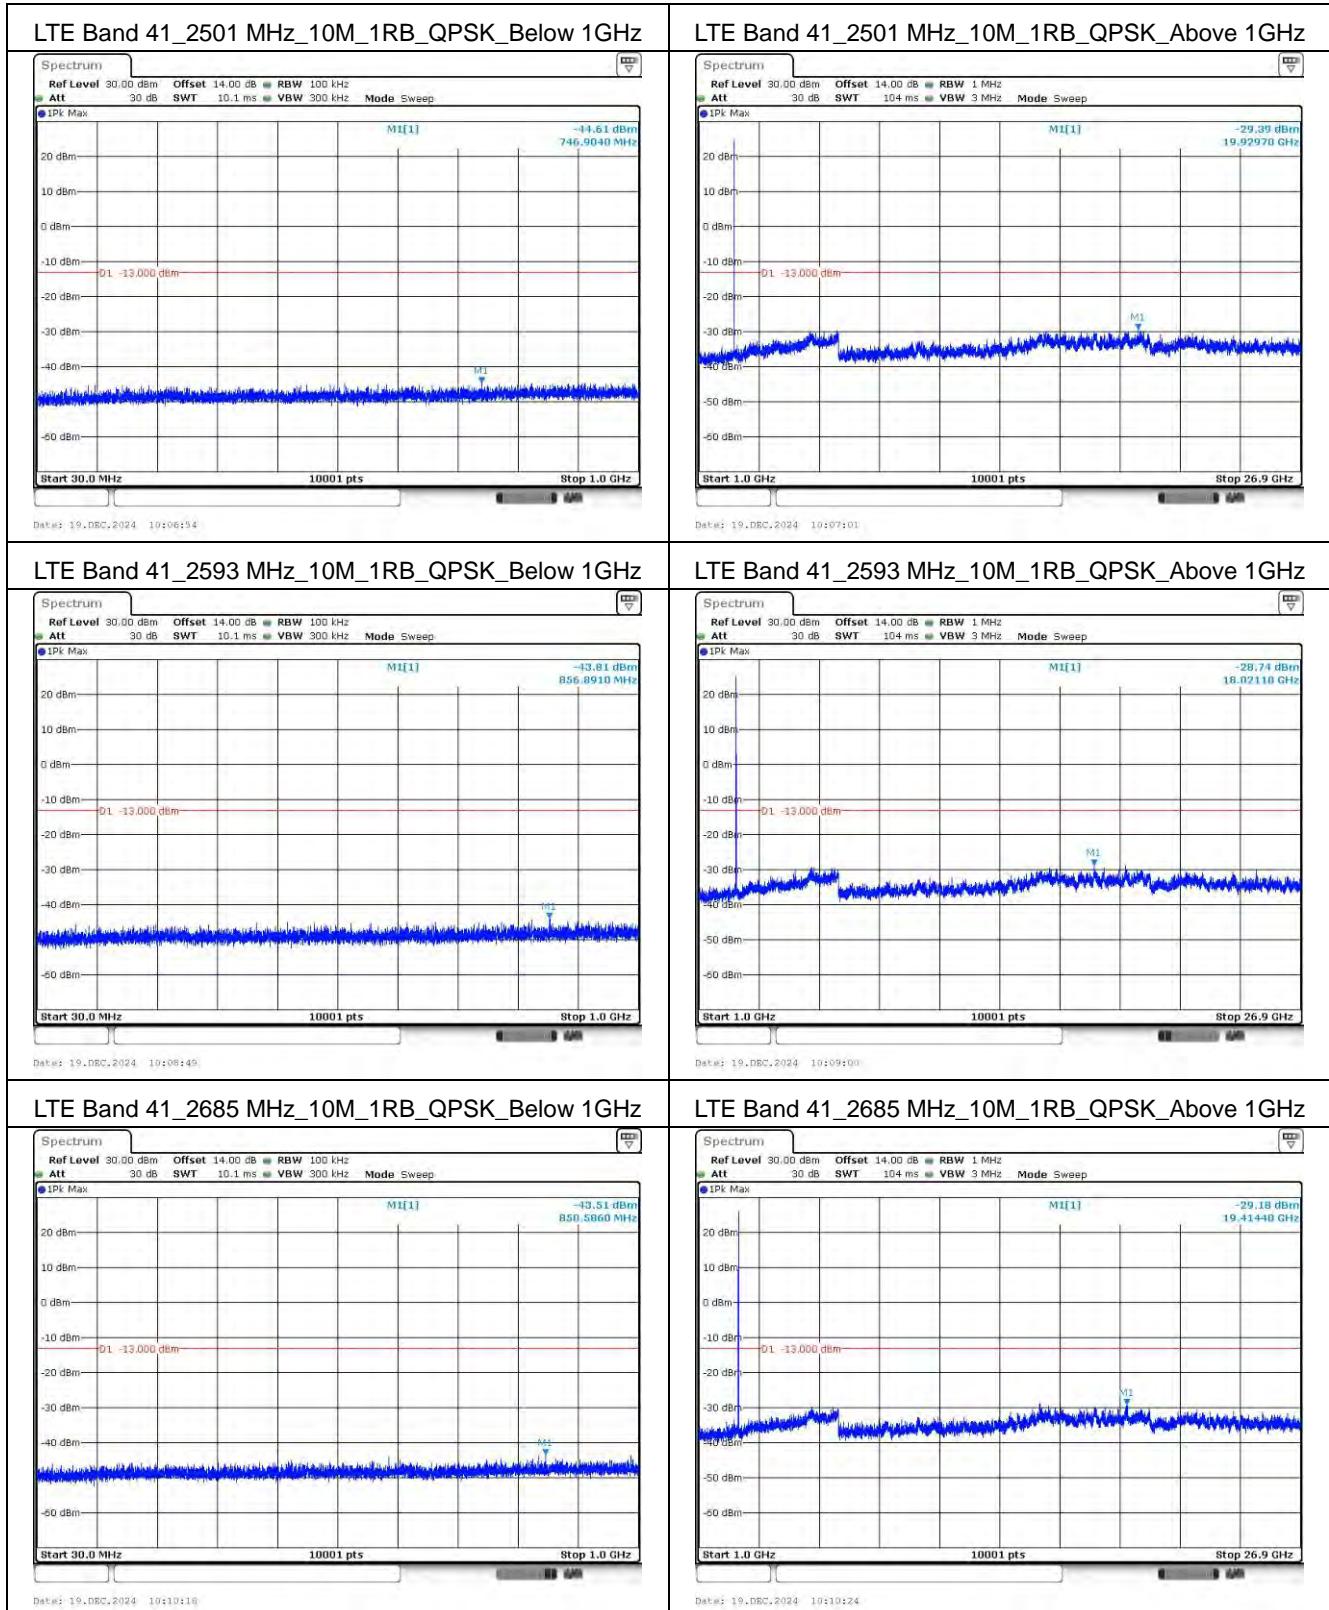LTE Band 38_2617.5 MHz_5M_1RB_QPSK_Above 1GHz


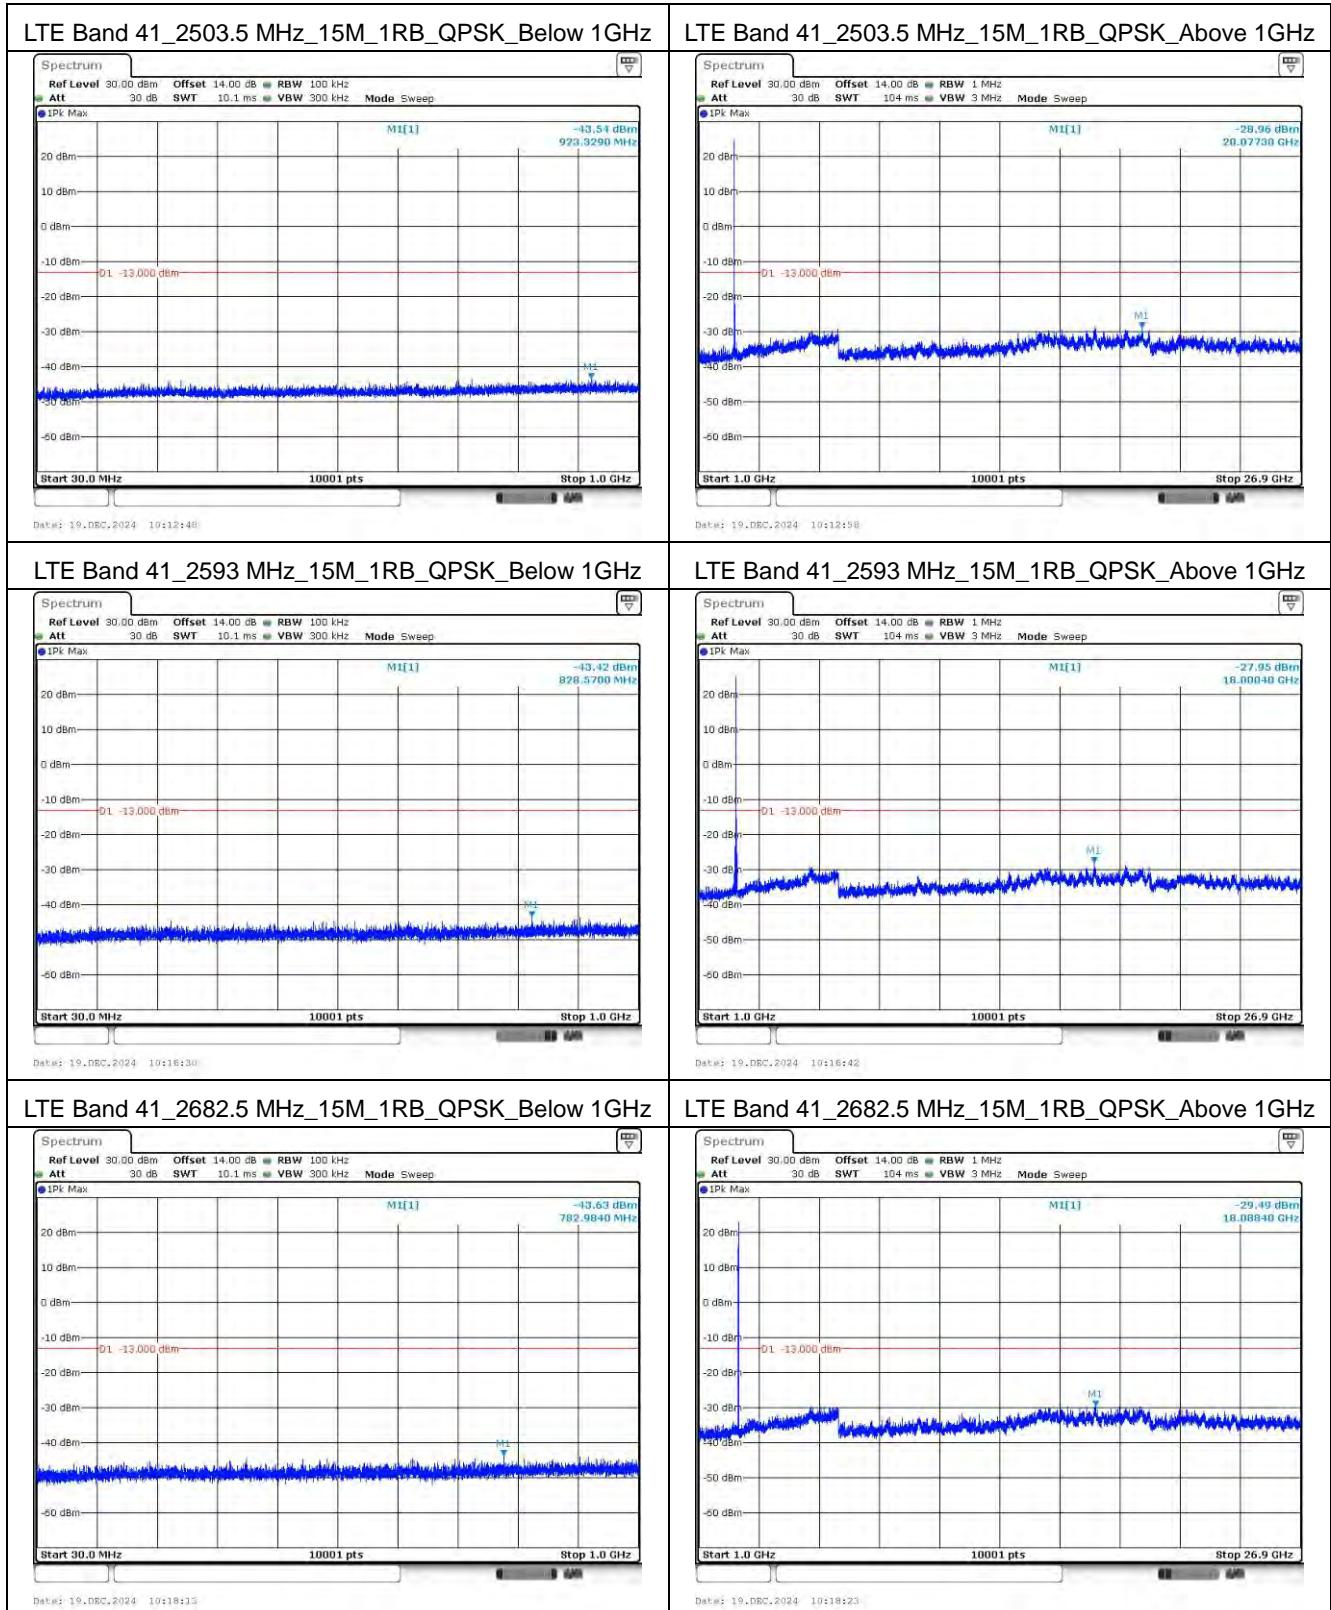







Mode 9: LTE Band 41
LTE Band 41_2498.5 MHz_5M_1RB_QPSK_Below 1GHz

LTE Band 41_2498.5 MHz_5M_1RB_QPSK_Above 1GHz

LTE Band 41_2593 MHz_5M_1RB_QPSK_Below 1GHz

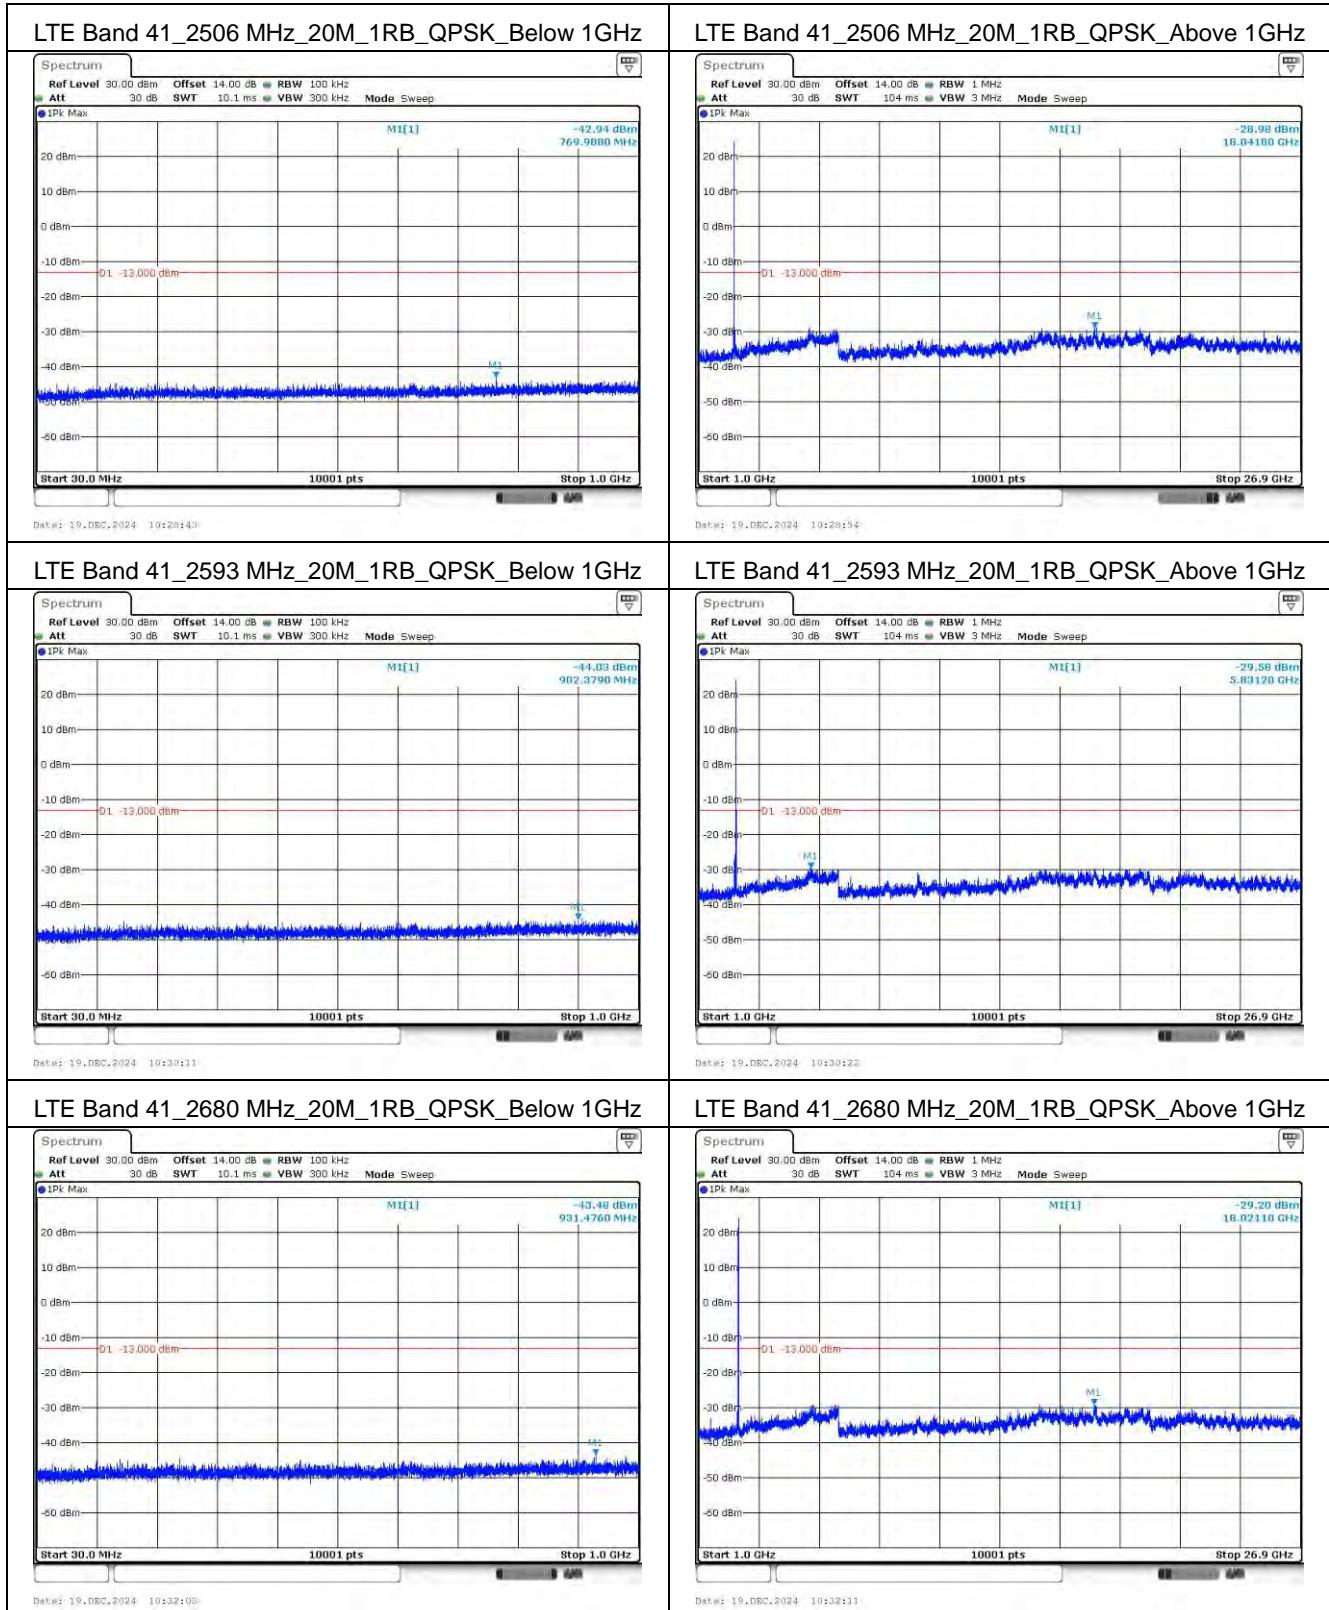LTE Band 41_2593 MHz_5M_1RB_QPSK_Above 1GHz

LTE Band 41_2687.5 MHz_5M_1RB_QPSK_Below 1GHz

LTE Band 41_2687.5 MHz_5M_1RB_QPSK_Above 1GHz






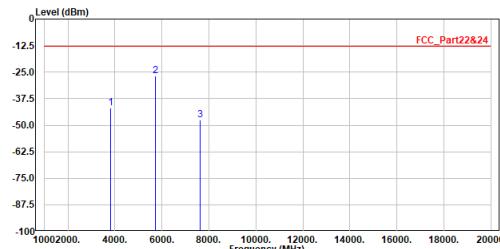


Appendix D.2 Test Result of Radiated Spurious Emission

Mode 1: LTE Band 2 / 25




Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band25_CH26590
 Test by :Brook Cheng



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	3810.000	-41.78	-13.00	-28.78	-35.06	-6.72	Peak
2	5715.000	-26.82	-13.00	-13.82	-25.42	-1.40	Peak
3	7620.000	-47.73	-13.00	-34.73	-51.94	4.21	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dB_{uV/m}) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band25_CH26590
 Test by :Brook Cheng

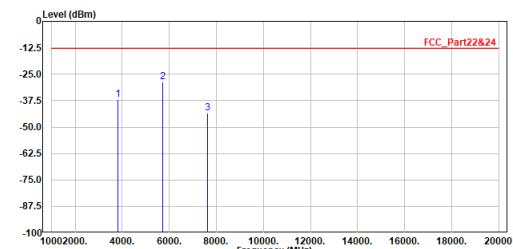


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	3810.000	-37.04	-13.00	-24.04	-30.32	-6.72	Peak
2	5715.000	-28.69	-13.00	-15.69	-27.29	-1.40	Peak
3	7620.000	-43.57	-13.00	-30.57	-47.78	4.21	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dB_{uV/m}) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Mode 2: LTE Band 4 / 66




Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band66_CH132572
 Test by :Brook Cheng

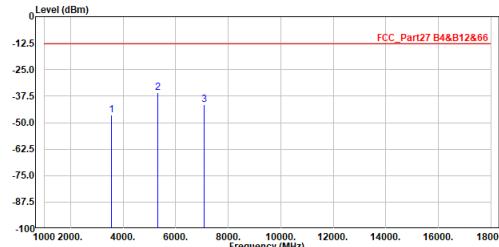

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level		
1	3540.000	-46.26	-13.00	-33.26	-38.25	-8.01	Peak
2	5310.000	-36.02	-13.00	-23.02	-33.91	-2.11	Peak
3	7080.000	-41.46	-13.00	-28.46	-45.13	3.67	Peak


Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band66_CH132572
 Test by :Brook Cheng

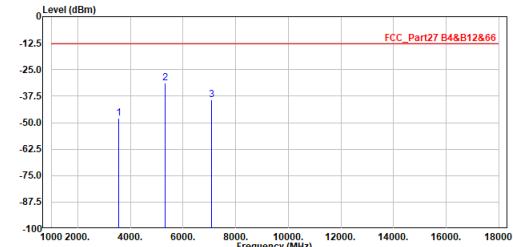


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level		
1	3540.000	-47.89	-13.00	-34.89	-39.88	-8.01	Peak
2	5310.000	-31.32	-13.00	-18.32	-29.21	-2.11	Peak
3	7080.000	-39.43	-13.00	-26.43	-43.10	3.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

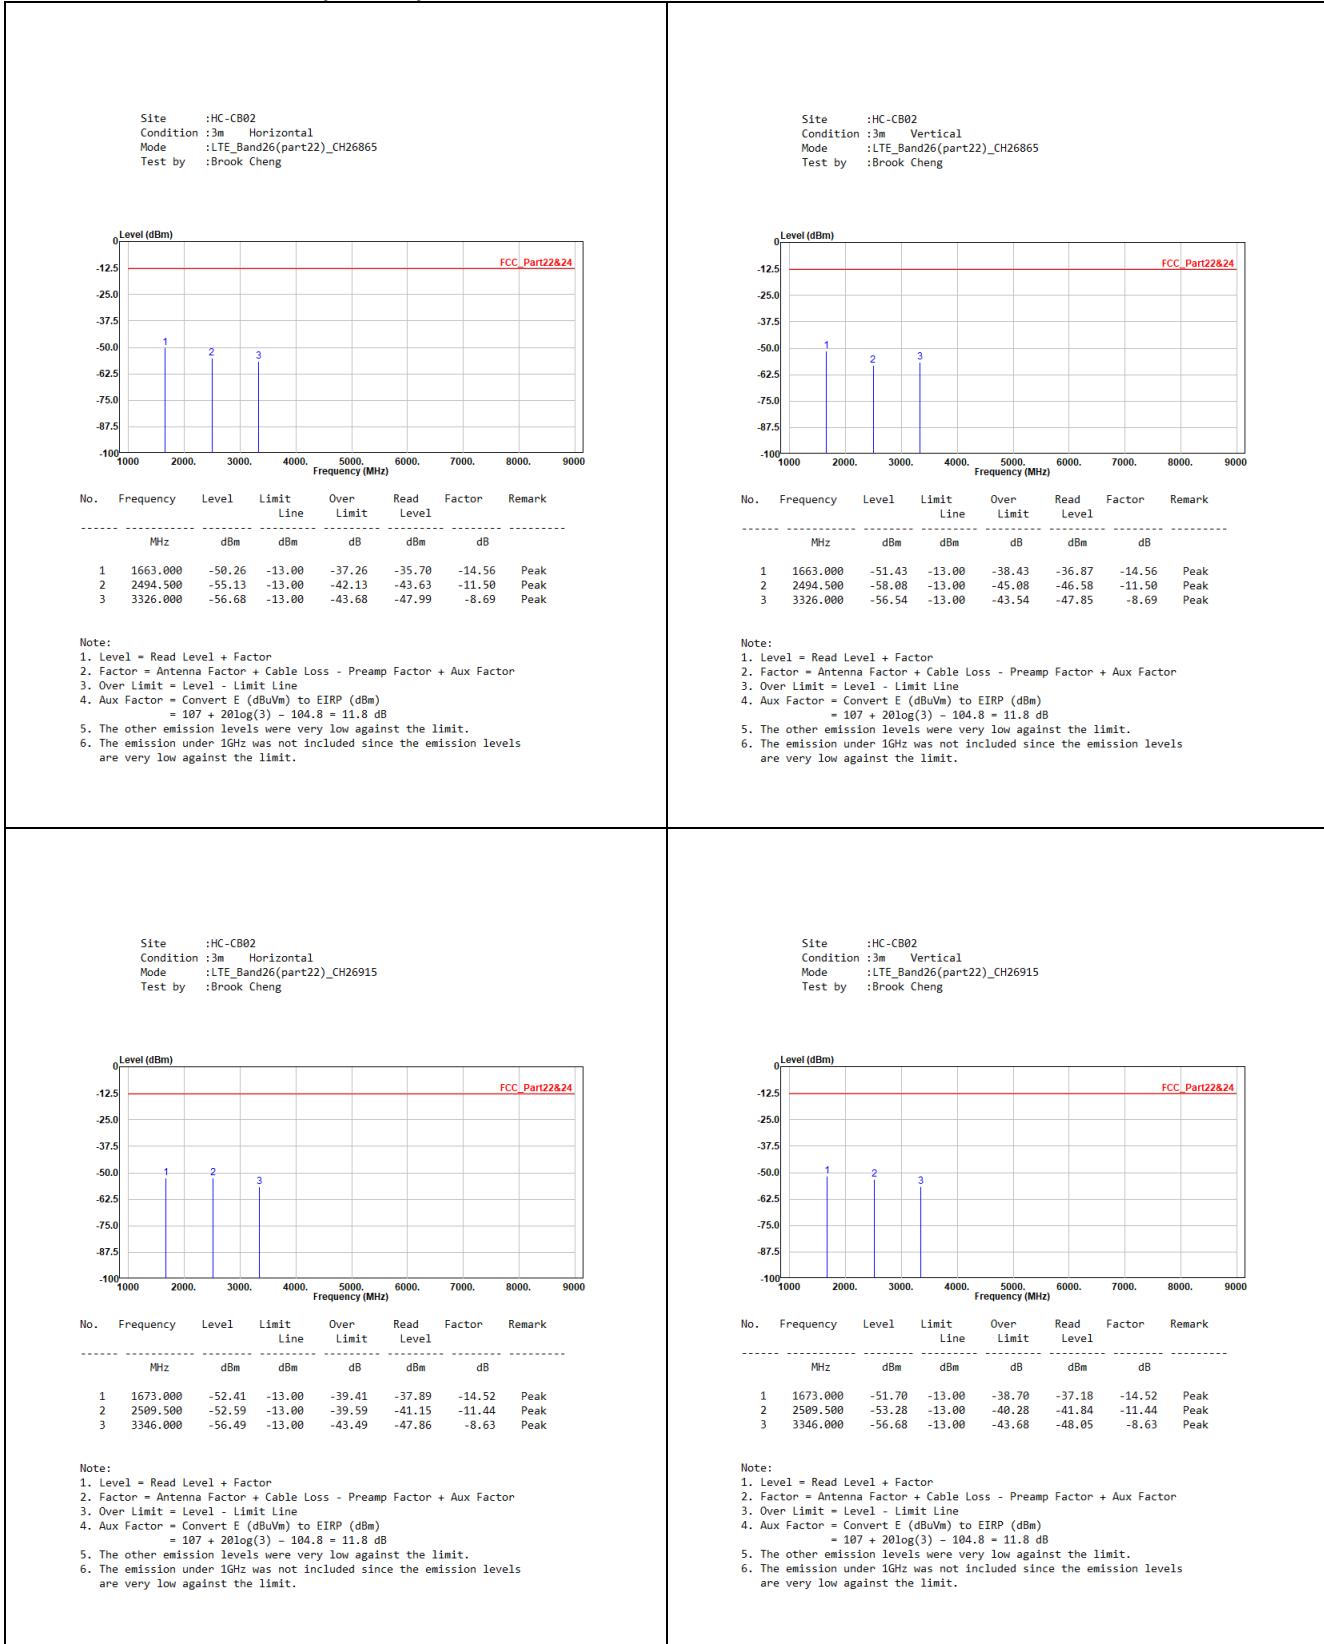Mode 3: LTE Band 5 / 26 (Part 22)


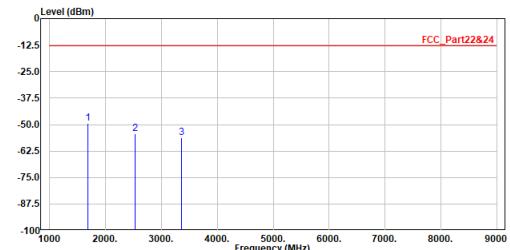
Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band26(part22)_CH26965
 Test by :Brook Cheng

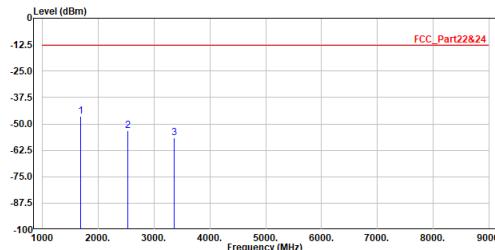

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1683.000	-46.53	-13.00	-33.53	-32.05	-14.48	Peak
2	2524.500	-53.10	-13.00	-40.10	-41.70	-11.40	Peak
3	3366.000	-56.77	-13.00	-43.77	-48.19	-8.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band26(part22)_CH26965
 Test by :Brook Cheng




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1683.000	-49.31	-13.00	-36.31	-34.83	-14.48	Peak
2	2524.500	-54.51	-13.00	-41.51	-43.11	-11.40	Peak
3	3366.000	-56.07	-13.00	-43.07	-47.49	-8.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Mode 4: LTE Band 7

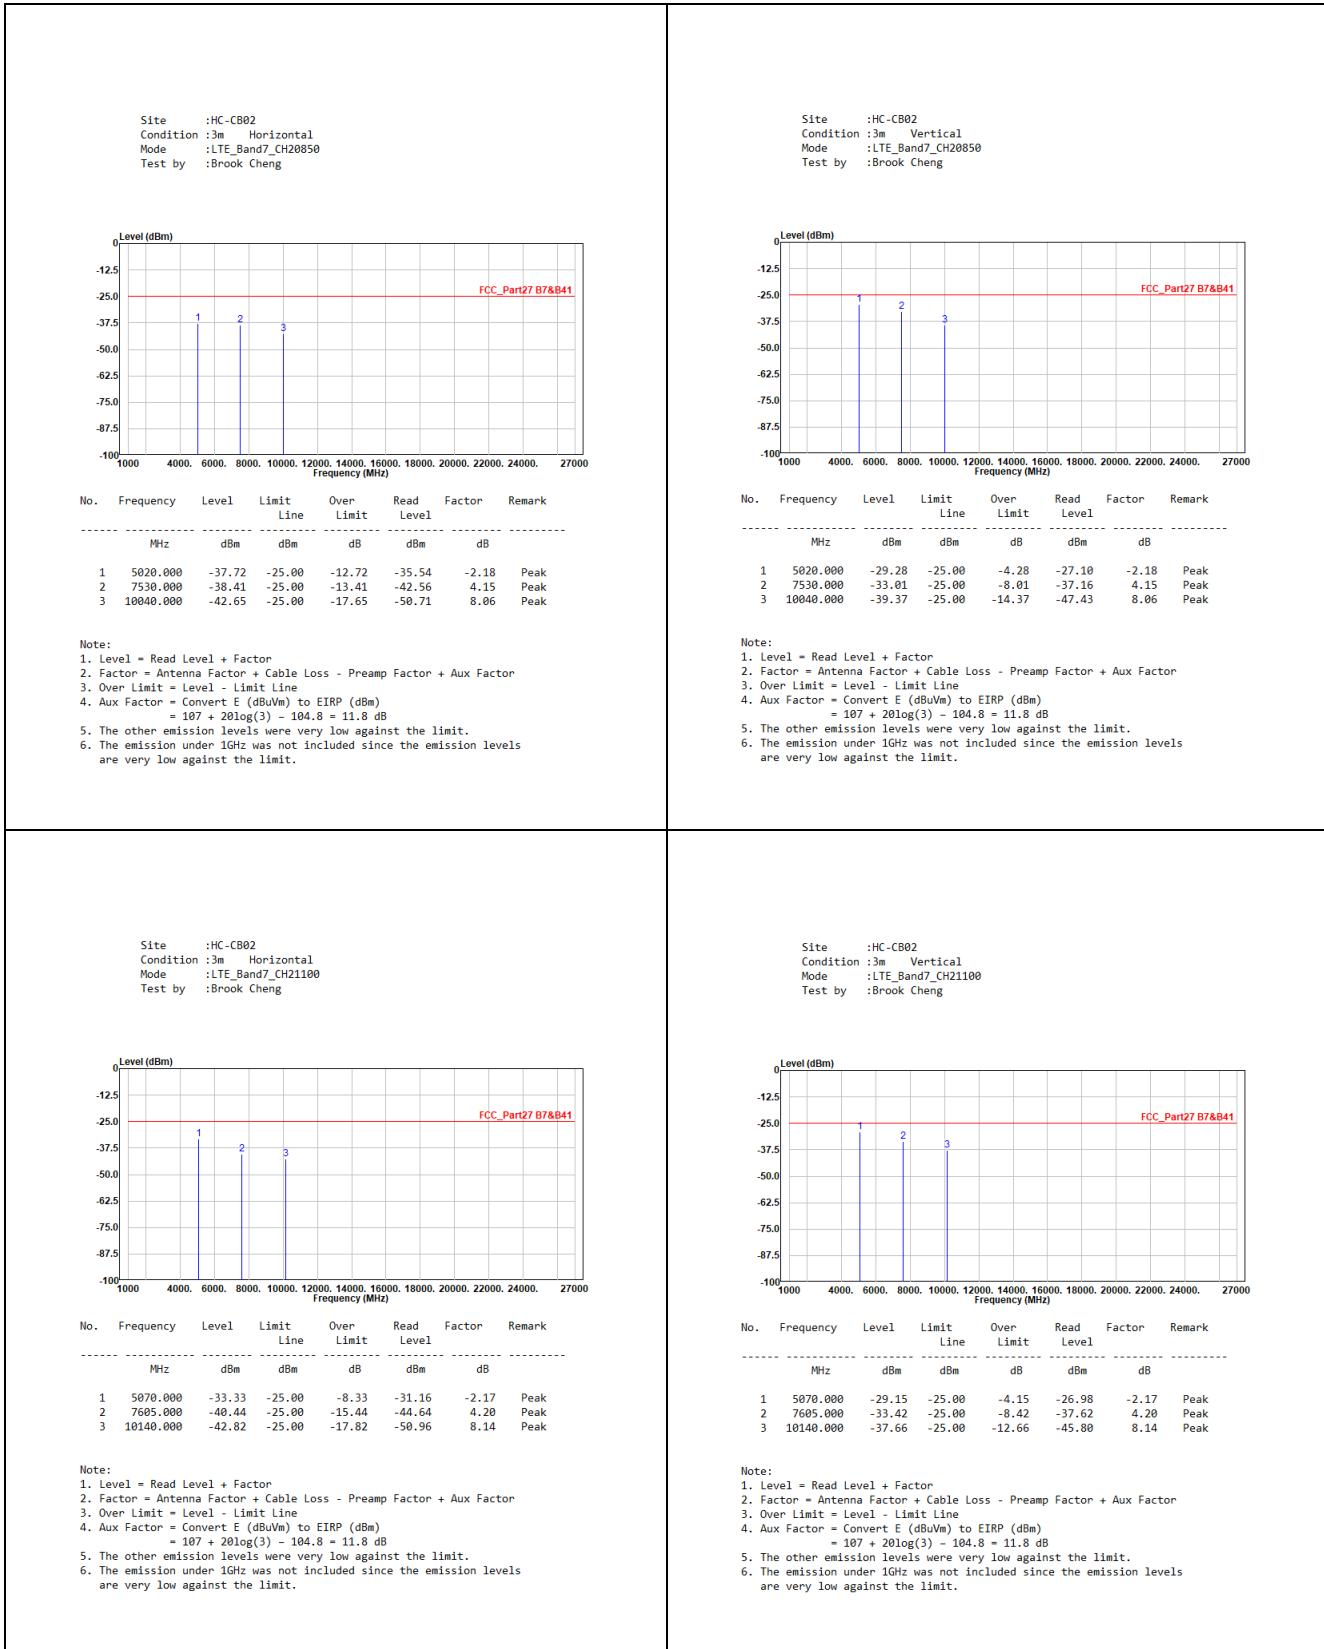


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band7_CH21350
 Test by :Brook Cheng

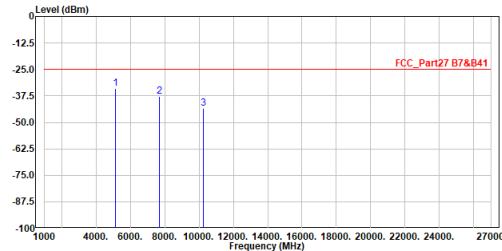

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5120.000	-33.96	-25.00	-8.96	-31.81	-2.15	Peak
2	7680.000	-37.92	-25.00	-12.92	-42.16	4.24	Peak
3	10240.000	-43.28	-25.00	-18.28	-51.51	8.23	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band7_CH21350
 Test by :Brook Cheng

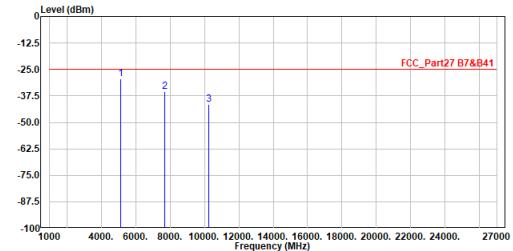


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5120.000	-29.43	-25.00	-4.43	-27.28	-2.15	Peak
2	7680.000	-35.51	-25.00	-10.51	-39.75	4.24	Peak
3	10240.000	-41.61	-25.00	-16.61	-49.84	8.23	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Mode 5: LTE Band 12


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band12_CH23060
 Test by :Brook Cheng

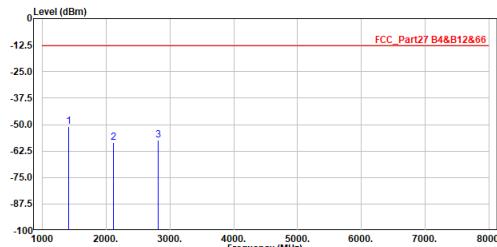

No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1408.000	-50.76	-13.00	-37.76	-35.15	-15.61	Peak
2	2112.000	-58.52	-13.00	-45.52	-45.80	-12.72	Peak
3	2816.000	-57.26	-13.00	-44.26	-46.97	-10.29	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band12_CH23060
 Test by :Brook Cheng

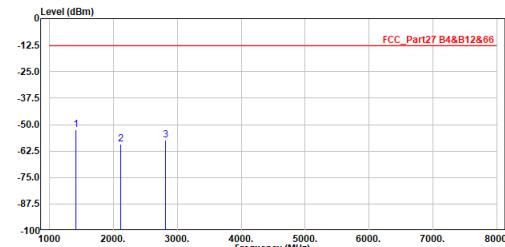


No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1408.000	-52.52	-13.00	-39.52	-36.91	-15.61	Peak
2	2112.000	-59.09	-13.00	-46.09	-46.37	-12.72	Peak
3	2816.000	-57.48	-13.00	-44.48	-47.19	-10.29	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band12_CH23095
 Test by :Brook Cheng

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band12_CH23095
 Test by :Brook Cheng

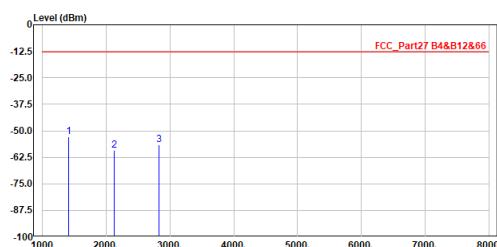

No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1415.000	-52.77	-13.00	-39.77	-37.19	-15.58	Peak
2	2122.500	-59.07	-13.00	-46.07	-46.39	-12.68	Peak
3	2830.000	-56.53	-13.00	-43.53	-46.30	-10.23	Peak


Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

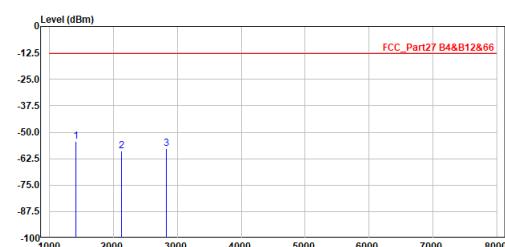

No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1415.000	-54.34	-13.00	-41.34	-38.76	-15.58	Peak
2	2122.500	-59.03	-13.00	-46.03	-46.35	-12.68	Peak
3	2830.000	-57.64	-13.00	-44.64	-47.41	-10.23	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band12_CH23130
 Test by :Brook Cheng

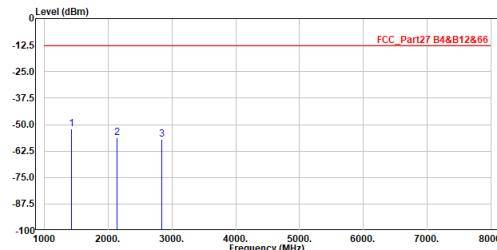

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	dBm	dB	
1	1422.000	-52.16	-13.00	-39.16	-36.60	-15.56	Peak
2	2133.000	-56.21	-13.00	-43.21	-43.56	-12.65	Peak
3	2844.000	-56.95	-13.00	-43.95	-46.77	-10.18	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band12_CH23130
 Test by :Brook Cheng

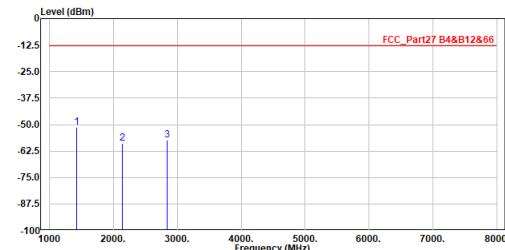

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	dBm	dB	
1	1422.000	-51.19	-13.00	-38.19	-35.63	-15.56	Peak
2	2133.000	-58.96	-13.00	-45.96	-46.31	-12.65	Peak
3	2844.000	-57.45	-13.00	-44.45	-47.27	-10.18	Peak


Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Mode 6: LTE Band 13



Mode 7: LTE Band 26 (Part 90)

Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band26(part90)_CH26740
 Test by :Brook Cheng

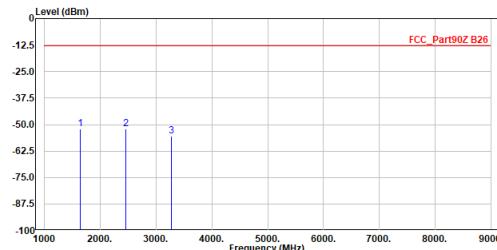


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dBm	dBm		
1	1638.000	-52.25	-13.00	-39.25	-37.57	-14.68	Peak
2	2457.000	-51.91	-13.00	-38.91	-40.29	-11.62	Peak
3	3276.000	-55.54	-13.00	-42.54	-46.71	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band26(part90)_CH26740
 Test by :Brook Cheng

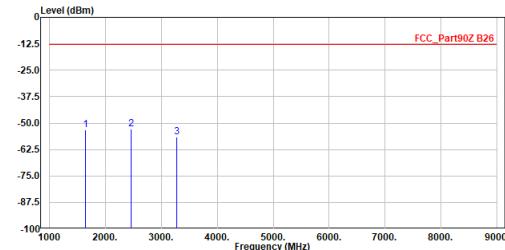


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dBm	dBm		
1	1638.000	-53.28	-13.00	-40.28	-38.60	-14.68	Peak
2	2457.000	-52.77	-13.00	-39.77	-41.15	-11.62	Peak
3	3276.000	-56.64	-13.00	-43.64	-47.81	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Mode 8: LTE Band 38


Site :HC-CB02
Condition :3m Horizontal
Mode :LTE_Band38_CH37850
Test by :Brook Cheng

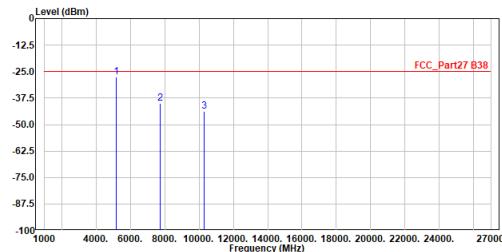

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Line	Level	dB	
1	5160.000	-27.37	-25.00	-2.37	-25.23	-2.14	Peak
2	7740.000	-39.92	-25.00	-14.92	-44.20	4.28	Peak
3	10320.000	-43.81	-25.00	-18.81	-52.10	8.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :LTE_Band38_CH37850
Test by :Brook Cheng

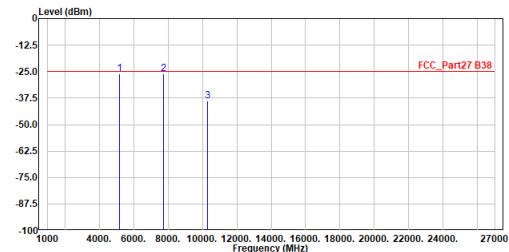

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Line	Level	dB	
1	5160.000	-26.09	-25.00	-1.09	-23.95	-2.14	Peak
2	7740.000	-26.09	-25.00	-1.09	-30.37	4.28	Peak
3	10320.000	-38.69	-25.00	-13.69	-46.98	8.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :LTE_Band38_CH38000
Test by :Brook Cheng

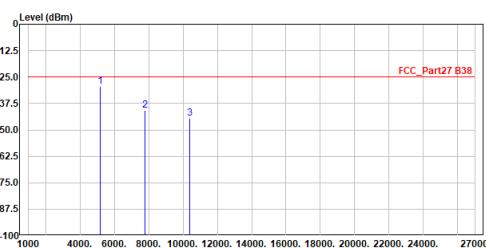

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Line	Level	dB	
1	5190.000	-29.54	-25.00	-4.54	-27.40	-2.14	Peak
2	7785.000	-40.88	-25.00	-15.88	-45.11	4.31	Peak
3	10380.000	-44.35	-25.00	-19.35	-52.69	8.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :LTE_Band38_CH38000
Test by :Brook Cheng

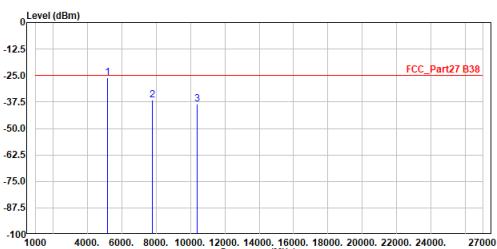

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Line	Level	dB	
1	5190.000	-26.14	-25.00	-1.14	-24.98	-2.14	Peak
2	7785.000	-36.62	-25.00	-11.62	-40.93	4.31	Peak
3	10380.000	-38.42	-25.00	-13.42	-46.76	8.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band38_CH38150
 Test by :Brook Cheng

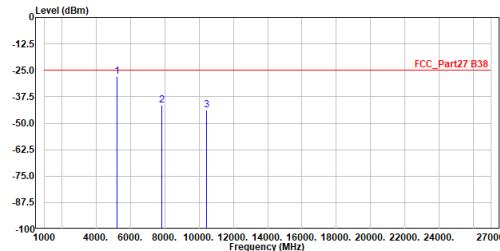

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level		
1	5220.000	-27.87	-25.00	-2.87	-25.73	-2.14	Peak
2	7830.000	-41.36	-25.00	-16.36	-45.70	4.34	Peak
3	10440.000	-43.84	-25.00	-18.84	-52.23	8.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band38_CH38150
 Test by :Brook Cheng

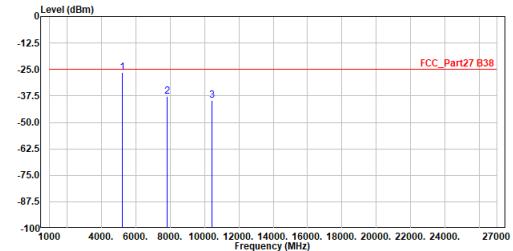


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level		
1	5220.000	-26.57	-25.00	-1.57	-24.43	-2.14	Peak
2	7830.000	-37.86	-25.00	-12.86	-42.20	4.34	Peak
3	10440.000	-39.52	-25.00	-14.52	-47.91	8.39	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Mode 9: LTE Band 41


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band41_CH39750
 Test by :Brook Cheng

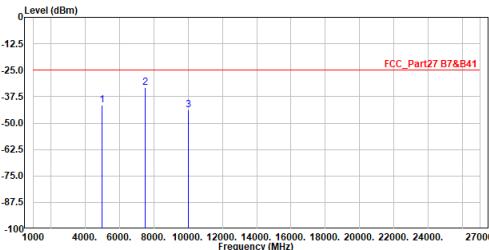

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5012.000	-41.36	-25.00	-16.36	-39.19	-2.17	Peak
2	7518.000	-33.36	-25.00	-8.36	-37.50	4.14	Peak
3	10024.000	-43.95	-25.00	-18.95	-52.00	8.05	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band41_CH39750
 Test by :Brook Cheng

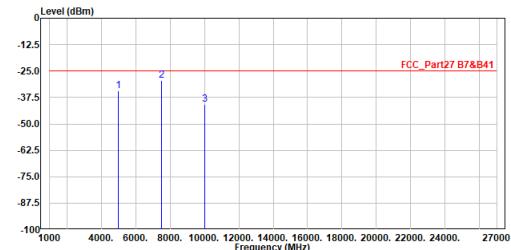

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5012.000	-34.44	-25.00	-9.44	-32.27	-2.17	Peak
2	7518.000	-29.27	-25.00	-4.27	-33.41	4.14	Peak
3	10024.000	-40.77	-25.00	-15.77	-48.82	8.05	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band41_CH40620
 Test by :Brook Cheng

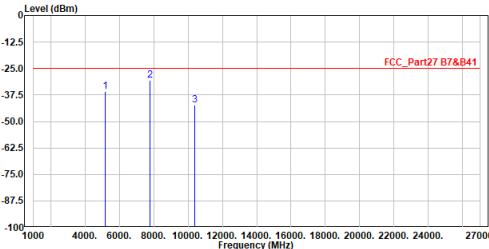

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5186.000	-35.69	-25.00	-10.69	-33.56	-2.13	Peak
2	7779.000	-30.69	-25.00	-5.69	-34.99	4.30	Peak
3	10372.000	-42.33	-25.00	-17.33	-50.66	8.33	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band41_CH40620
 Test by :Brook Cheng

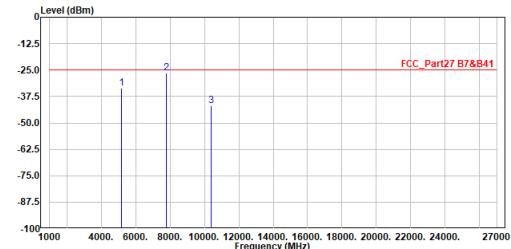

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5186.000	-33.55	-25.00	-8.55	-31.42	-2.13	Peak
2	7779.000	-26.44	-25.00	-1.44	-30.74	4.30	Peak
3	10372.000	-42.01	-25.00	-17.01	-50.34	8.33	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
 Condition :3m Horizontal
 Mode :LTE_Band41_CH41490
 Test by :Brook Cheng

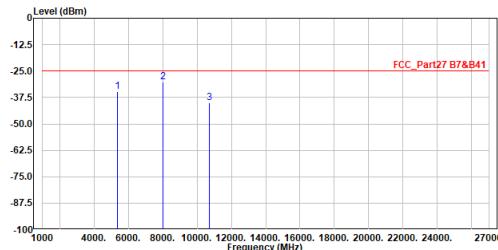

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5360.000	-34.68	-25.00	-9.68	-32.59	-2.09	Peak
2	8040.000	-30.16	-25.00	-5.16	-34.69	4.53	Peak
3	10720.000	-39.95	-25.00	-14.95	-48.74	8.79	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
 Condition :3m Vertical
 Mode :LTE_Band41_CH41490
 Test by :Brook Cheng

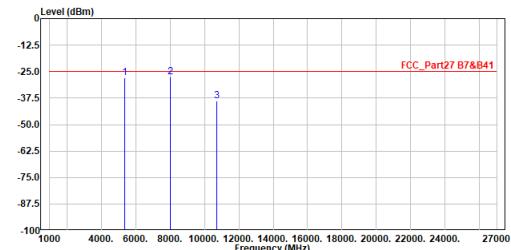

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5360.000	-27.97	-25.00	-2.97	-25.88	-2.09	Peak
2	8040.000	-27.41	-25.00	-2.41	-31.94	4.53	Peak
3	10720.000	-38.81	-25.00	-13.81	-47.68	8.79	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
 3. Over Limit = Level - Limit Line
 4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
 $= 107 + 20\log(3) - 104.8 = 11.8 \text{ dB}$
 5. The other emission levels were very low against the limit.
 6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Appendix E. Test Result of Conducted Band Edge

Mode 1: LTE Band 2 / 25

