



GETT.ASIA

GETT Asia Ltd.

KEYBOARDS

X7RA SERIES

KPL-G20130



## SPECIAL FEATURES

- Medical and industry keyboard
- Scissor-switch design
- Integrated Clean mode for cleaning
- Integrated Trackball
- Flat key profile
- Excellent tactile feeling

## SPECIFICATION

Number of keys:	83 (US/EU-Layout)	Operating temperature:	0°C ~ +40°C
Keyswitch technology:	Scissor mechanism	Storage temperature:	-40°C ~ +55°C
Switching cycles:	Approx. 5 mill. (per key)	Dimensions:	364.4 (L) x 133.4 (W) x 30.4 (T) mm
Housing material:	Plastic	Warranty:	2 years
Housing color:	White & black	Certification:	EN60601-1-2 Ed4, CE, FCC-ID
Interfaces:	2.4Ghz wireless		EN301489-1-17+EN300328
Optical trackball:	Dia. 22mm	OPTIONAL:	
Weight:	590+-10 g		Battery Cover nut M3


## ORDER INFORMATION

Cat. No.	Trackball	M3 Nut	2.4Ghz	Material	Color	Layout
KPL-G20130	✓		✓	Plastic	Black	US/DE/JP/KR/FR
KPL-G10131	✓	✓	✓	Plastic	White	US/DE/JP/KR/FR
KPL-G10130	✓		✓	Plastic	White	US/DE/JP/KR/FR
KPL-G20131	✓	✓	✓	Plastic	Black	US/DE/JP/KR/FR

Other layouts, configurations and interfaces on request.



## TECHNICAL DRAWING (IN MM)

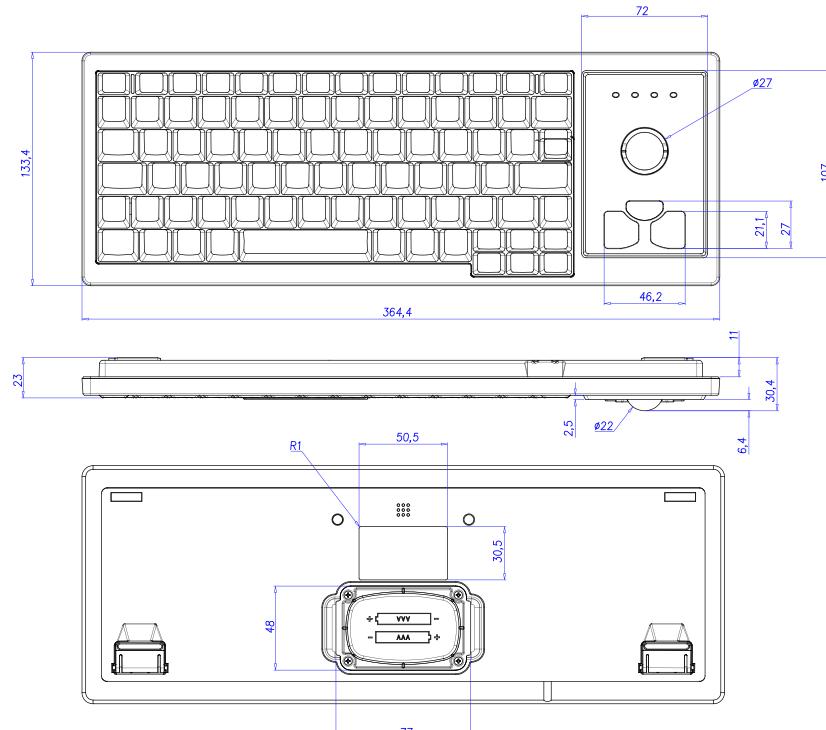

## EN60601-1-2 Ed 4

EN60601-1-2 Ed 4 applies to the basic safety and essential performance of Medical Equipment (ME) equipment and ME systems in the presence of electromagnetic disturbances and to electromagnetic disturbances emitted by ME equipment and Me systems.

## SHORT OPERATING INSTRUCTIONS

## CLEAN MODE

Press Fn and F5 to enable clean mode. Clean mode is indicated by the three Lock-LEDs flashing.

## WIRELESS LEDs INDICATE

Press Fn, you can see the green Power-led on,

- 1) If the status Num lock on, it means, the led on
- 2) If the status Caps lock on, it means, the led on
- 3) If the status Scroll lock on, it means, the led on

power saving mode design

## CLEANING INSTRUCTION

For further details please refer to below link:

<https://gett-group.com/en/gett-service/cleaning-and-material-resistances>

Federal Communications Commission (FCC) Statement. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received,

including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide Reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications made to this device not expressly approved by **GETT Asia Ltd.**

may void the FCC authorization to operate this device. Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

**RF exposure statement:**

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The device is installed and operated without restriction.