


right channel:

[TestMode: TX lowest channel]; [Polarity: Horizontal]

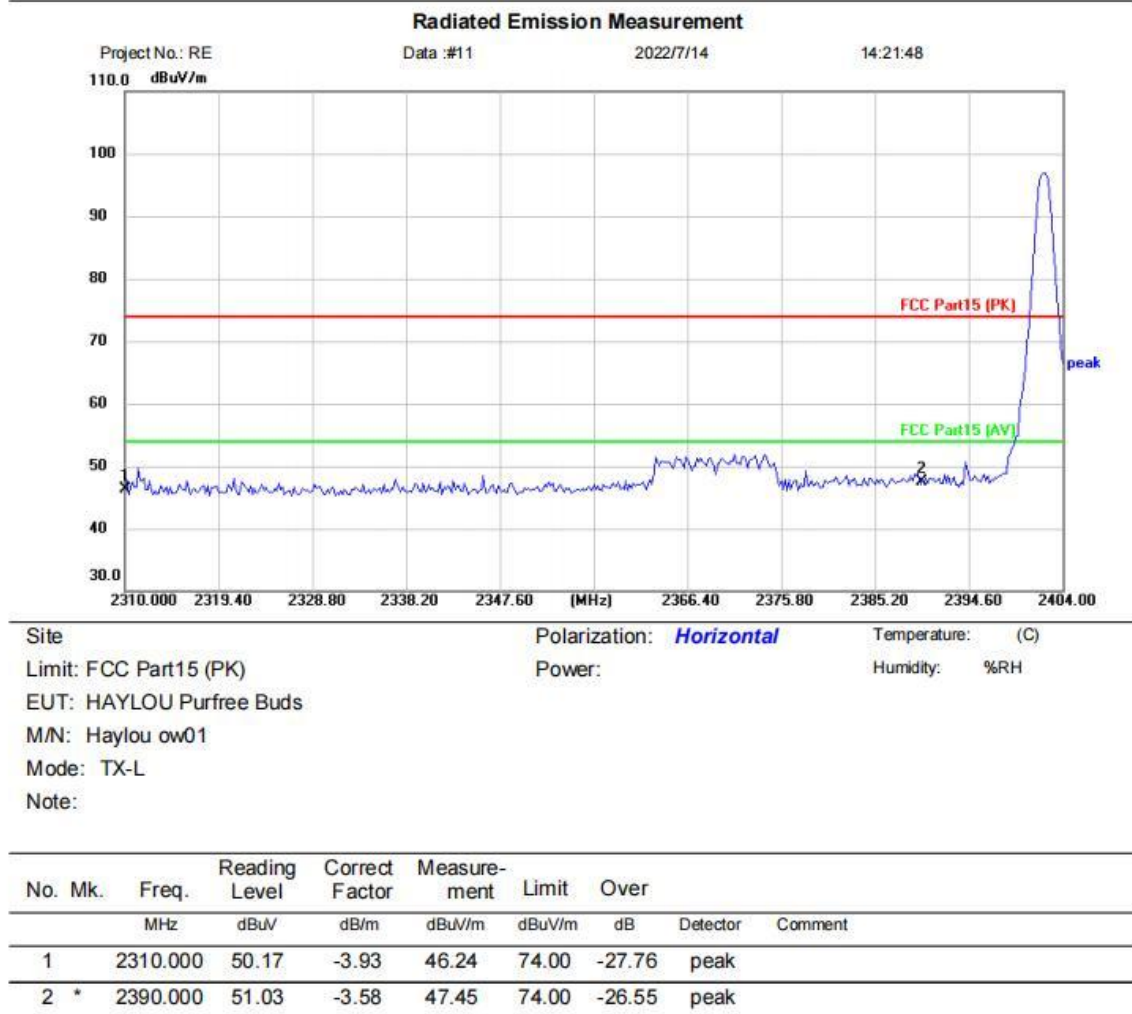


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

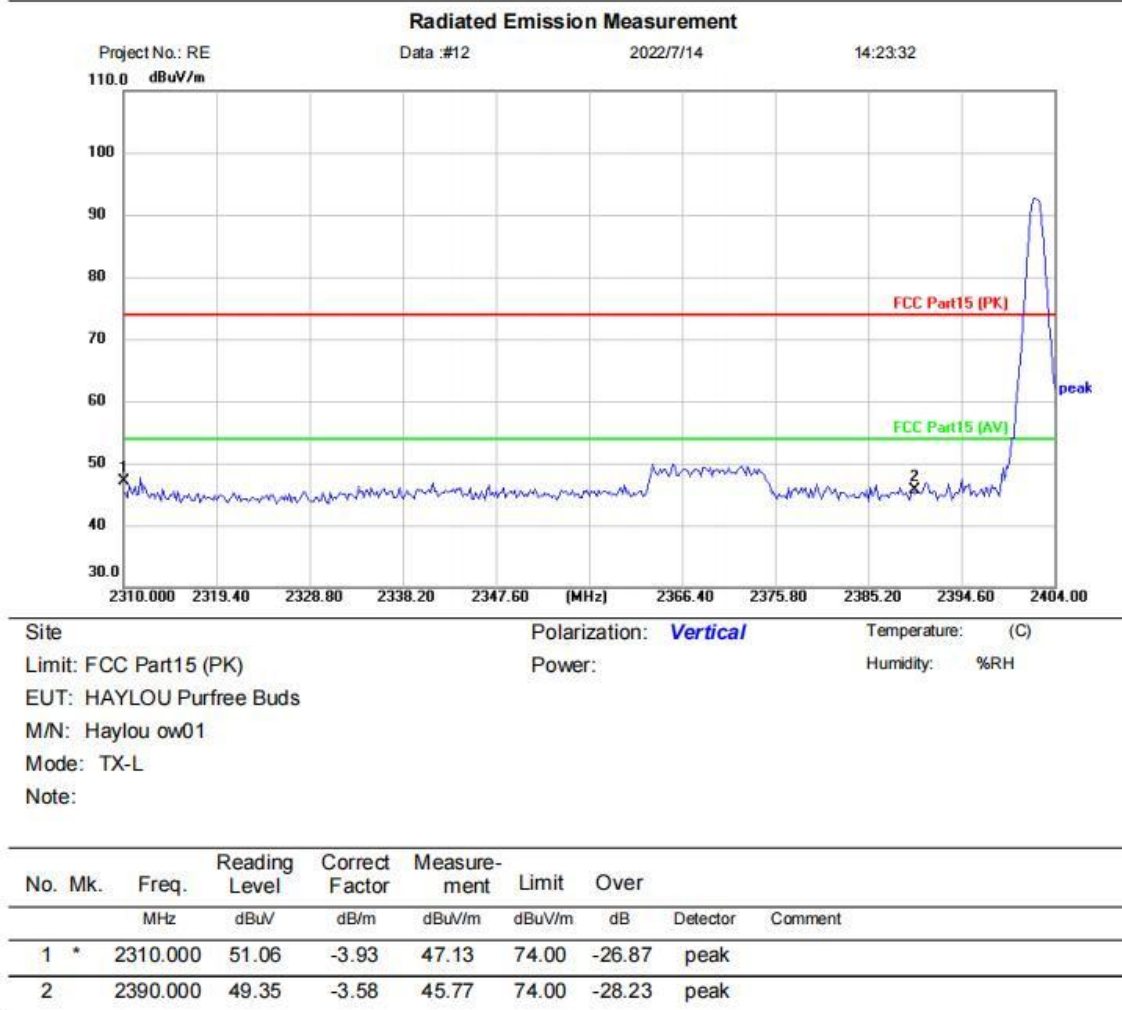


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

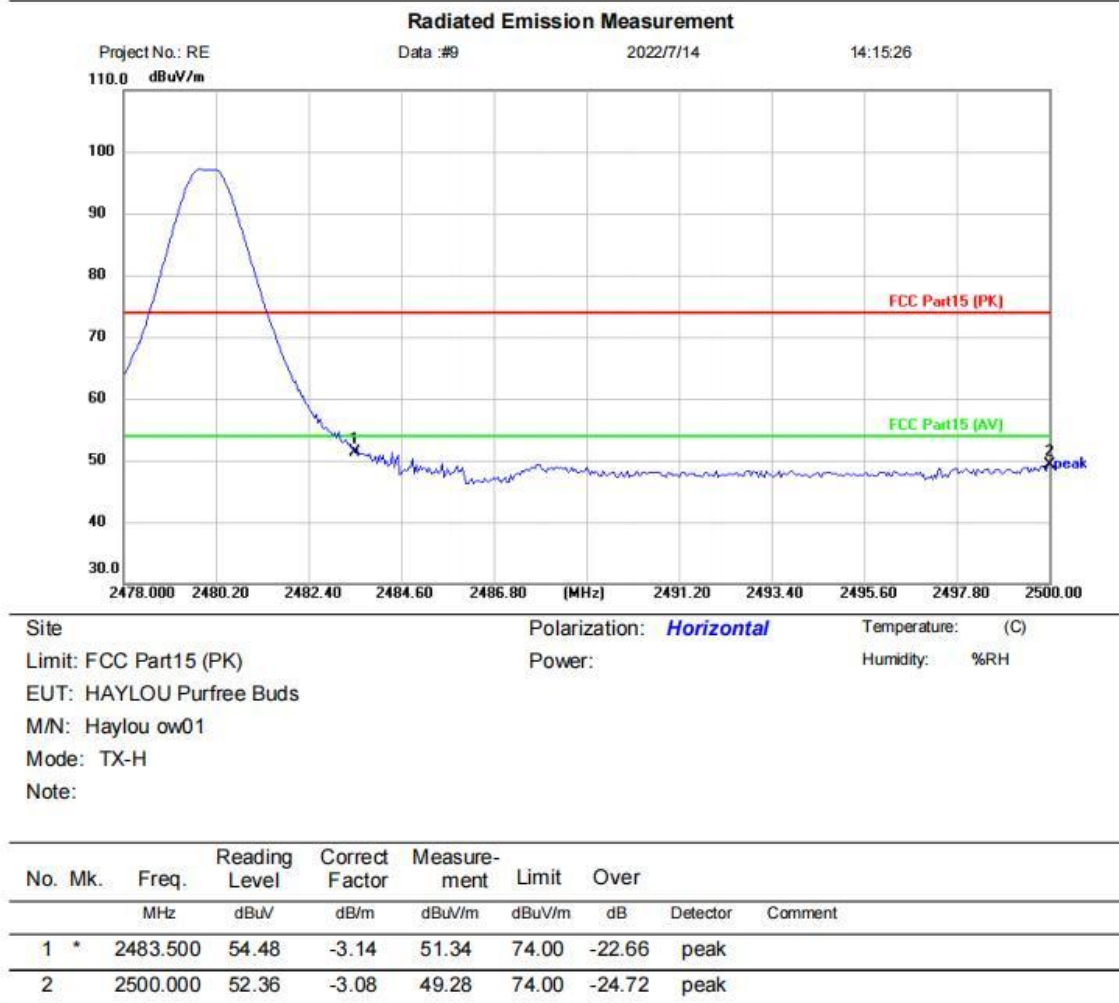


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

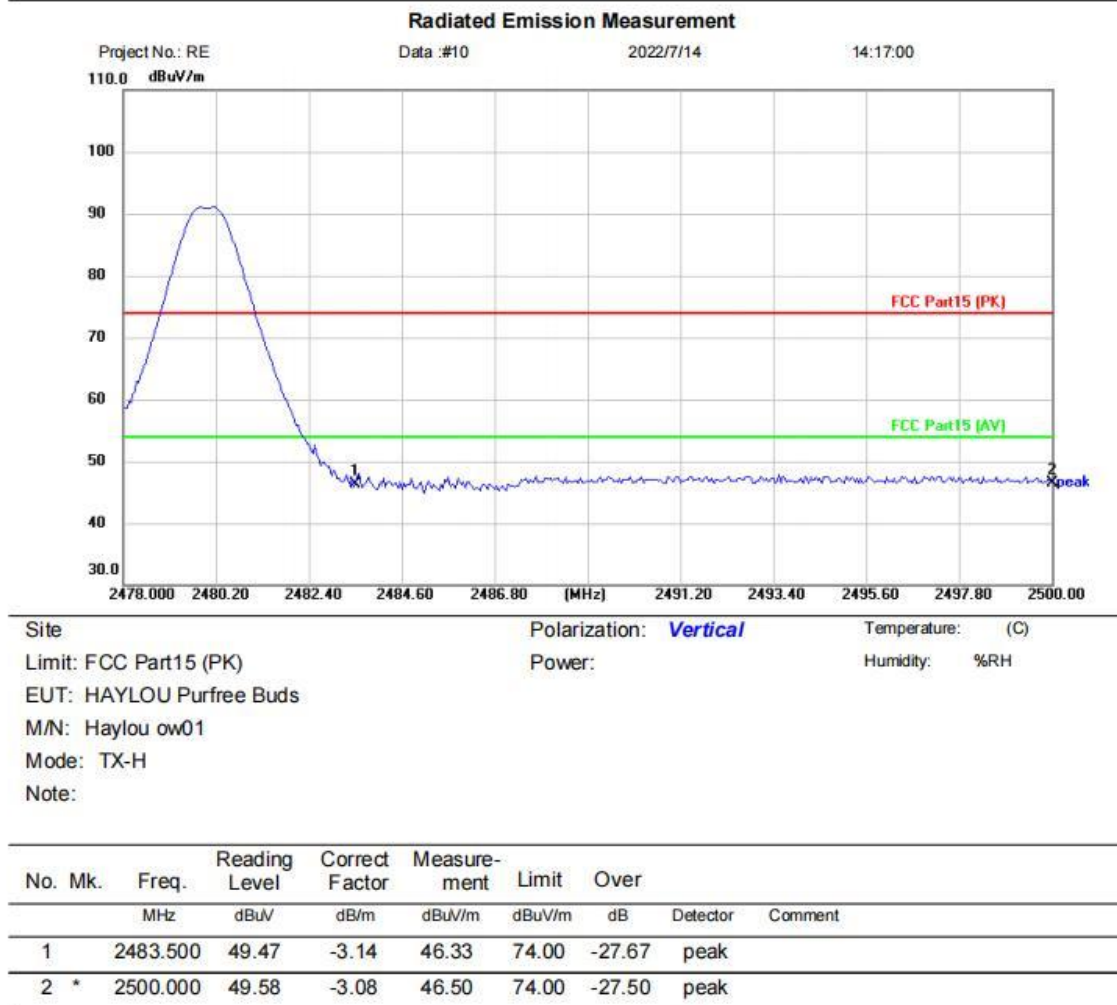

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


17 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

17.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

17.2 BLOCK DIAGRAM OF TEST SETUP

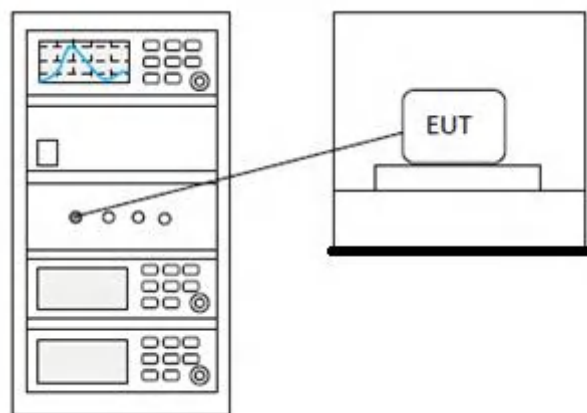

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


18 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

18.2 BLOCK DIAGRAM OF TEST SETUP

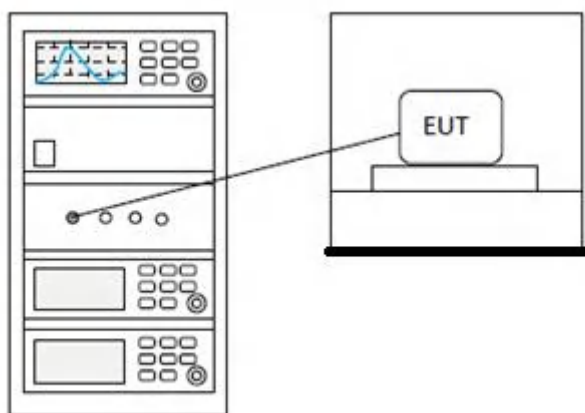

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


19 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

19.2 BLOCK DIAGRAM OF TEST SETUP

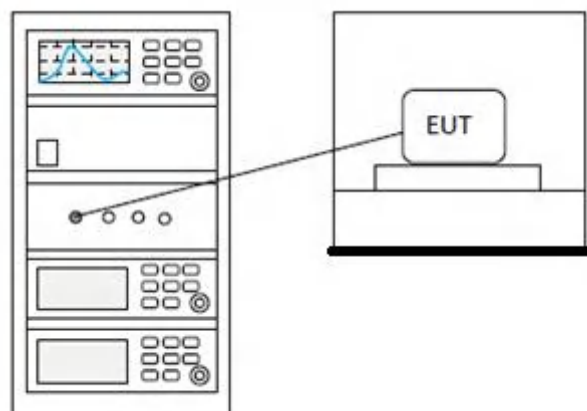

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


20 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

20.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

20.2 BLOCK DIAGRAM OF TEST SETUP

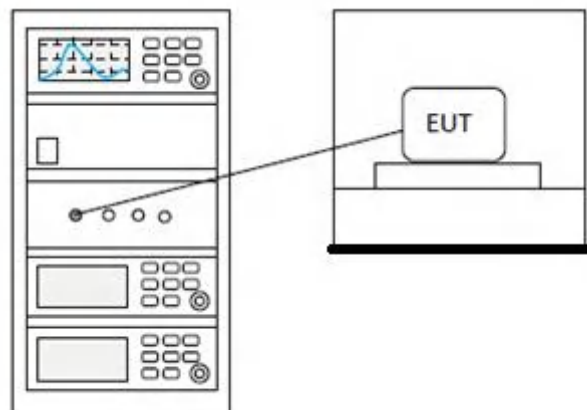

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

21 APPENDIX


Appendix1

left channel:


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-1.1	21	Pass
NVNT	1-DH1	2441	Ant1	-1.168	21	Pass
NVNT	1-DH1	2480	Ant1	-0.667	21	Pass
NVNT	2-DH1	2402	Ant1	-3.129	21	Pass
NVNT	2-DH1	2441	Ant1	-3.157	21	Pass
NVNT	2-DH1	2480	Ant1	-2.629	21	Pass
NVNT	3-DH1	2402	Ant1	-2.471	21	Pass
NVNT	3-DH1	2441	Ant1	-2.47	21	Pass
NVNT	3-DH1	2480	Ant1	-2.003	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

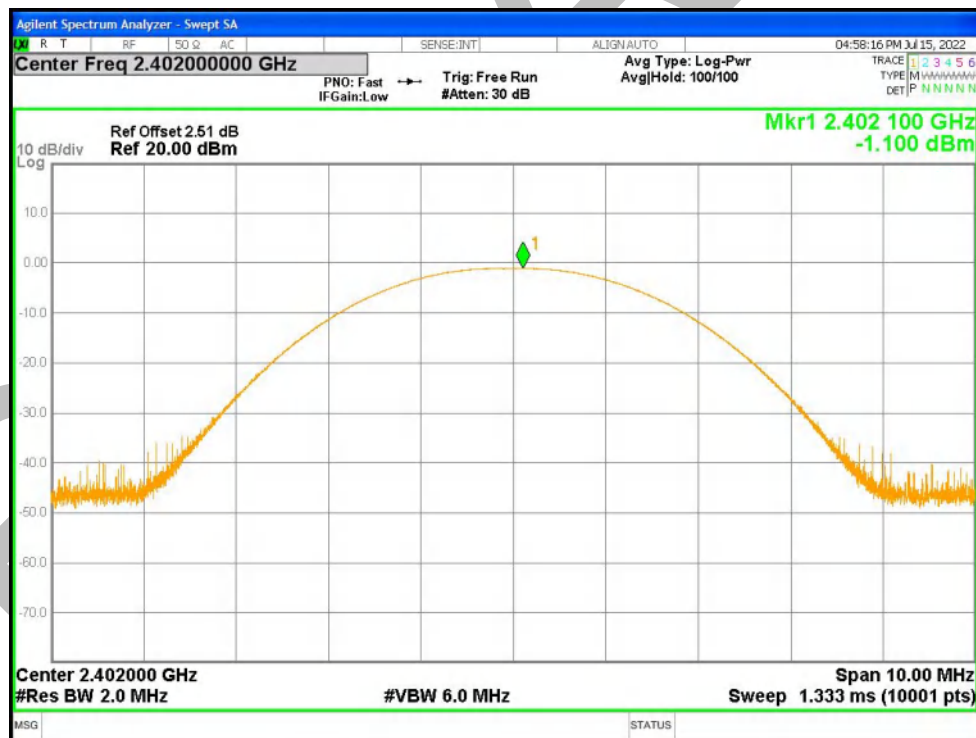


Power NVNT 1-DH1 2441MHz Ant1

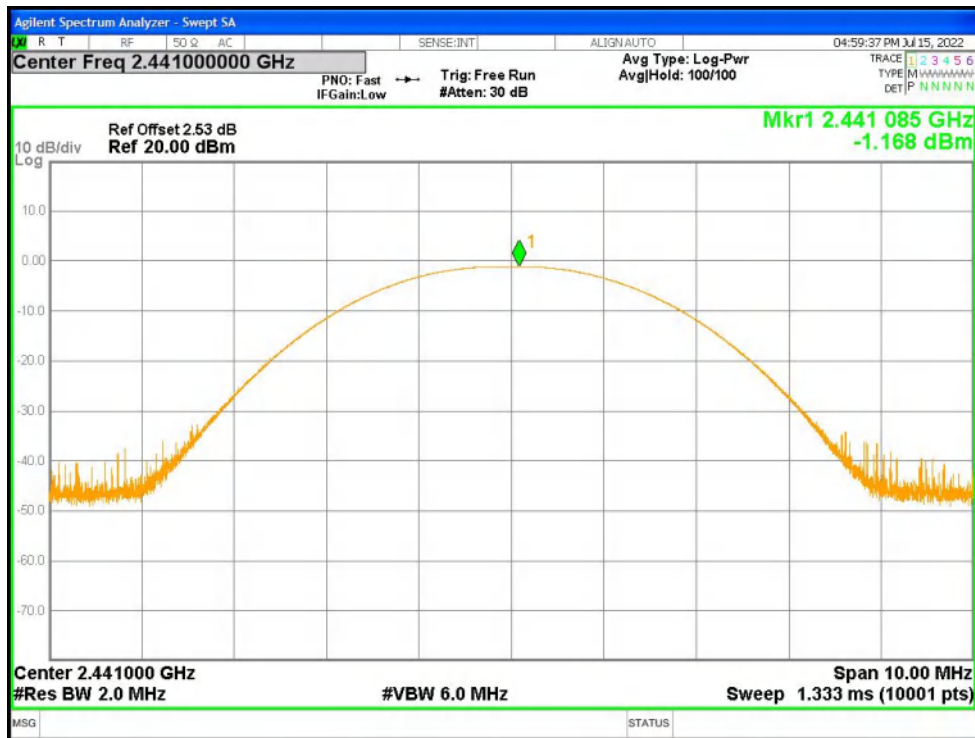


Power NVNT 1-DH1 2480MHz Ant1

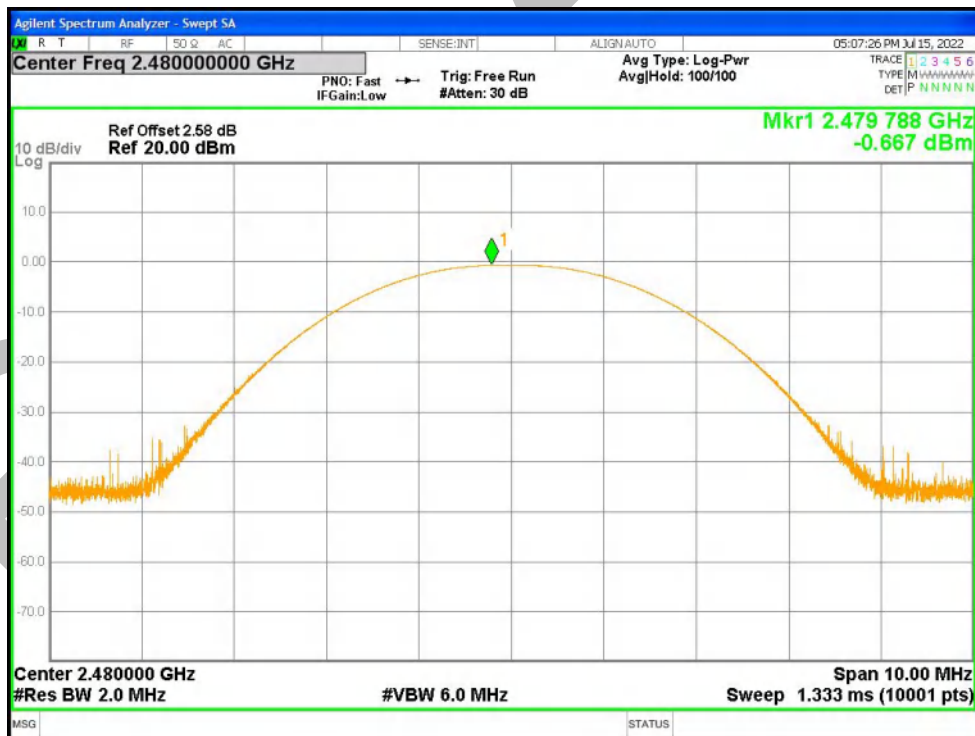


Power NVNT 2-DH1 2402MHz Ant1

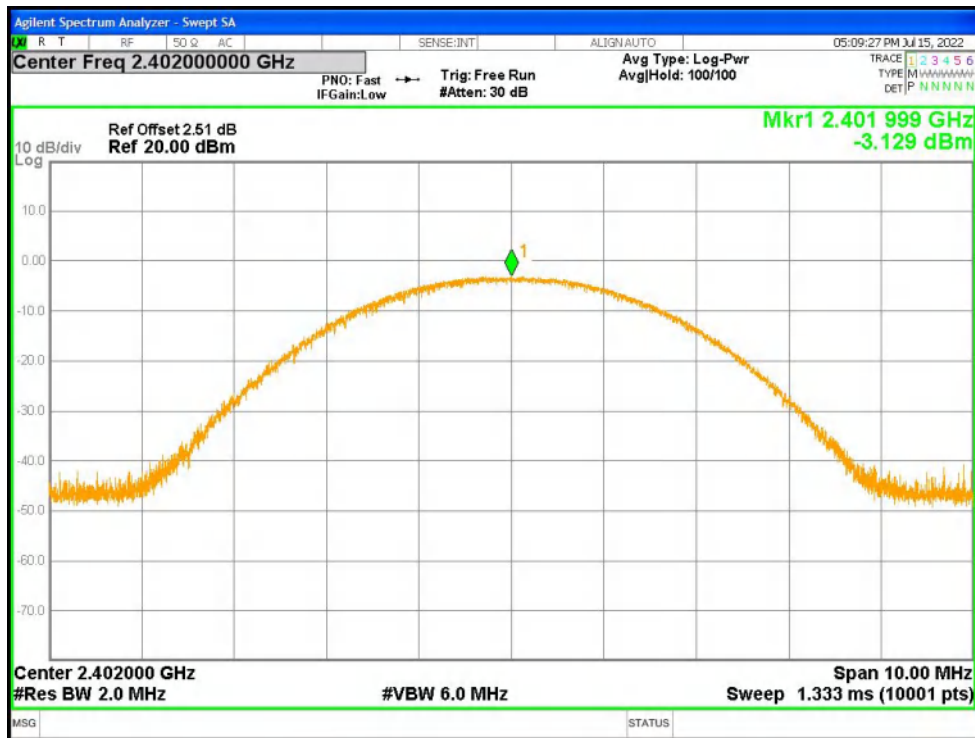


Power NVNT 2-DH1 2441MHz Ant1

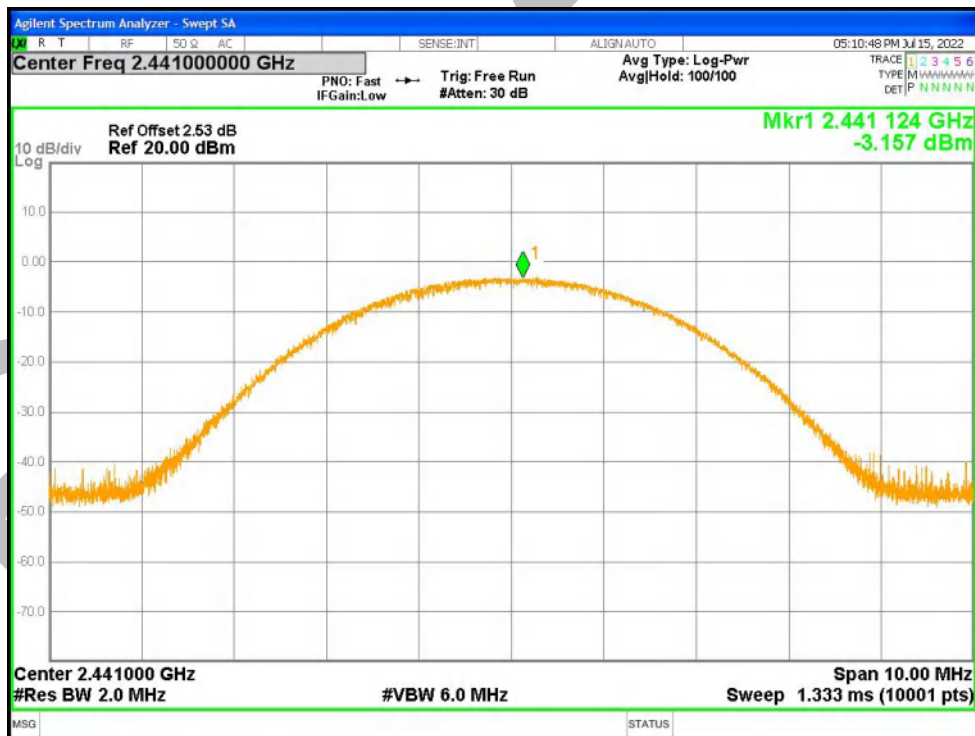


Power NVNT 2-DH1 2480MHz Ant1

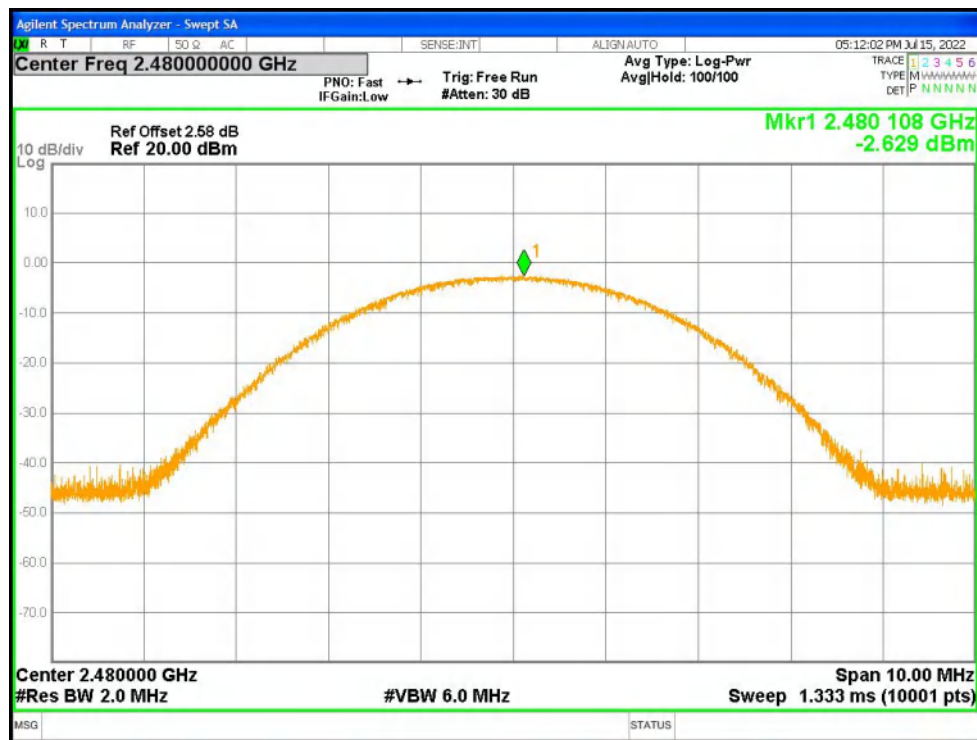


Power NVNT 3-DH1 2402MHz Ant1

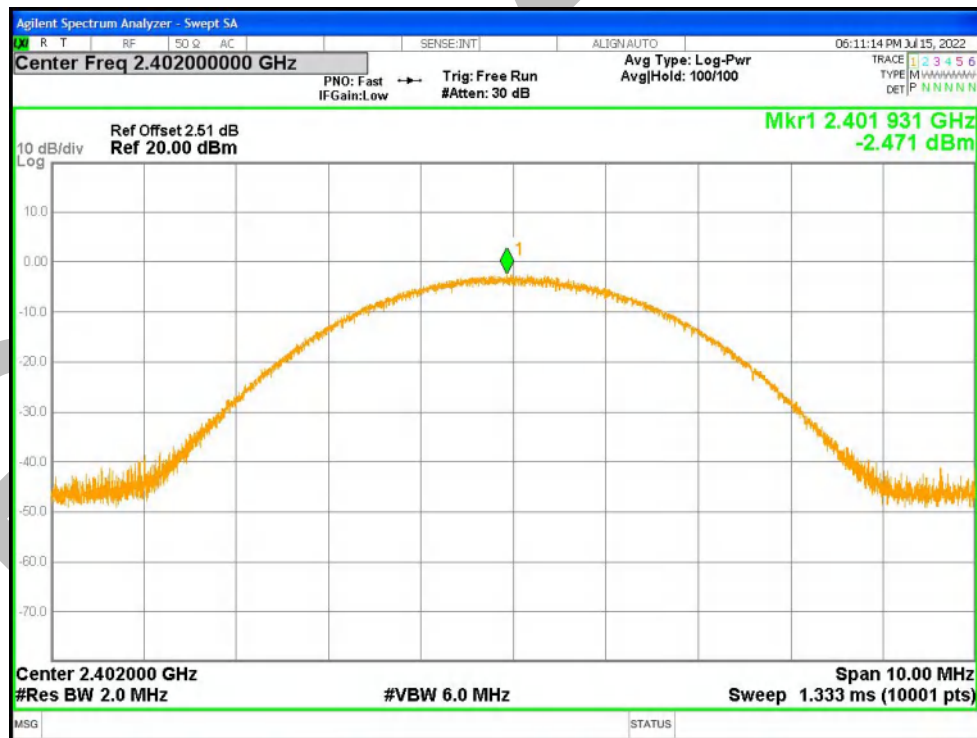

Power NVNT 3-DH1 2441MHz Ant1

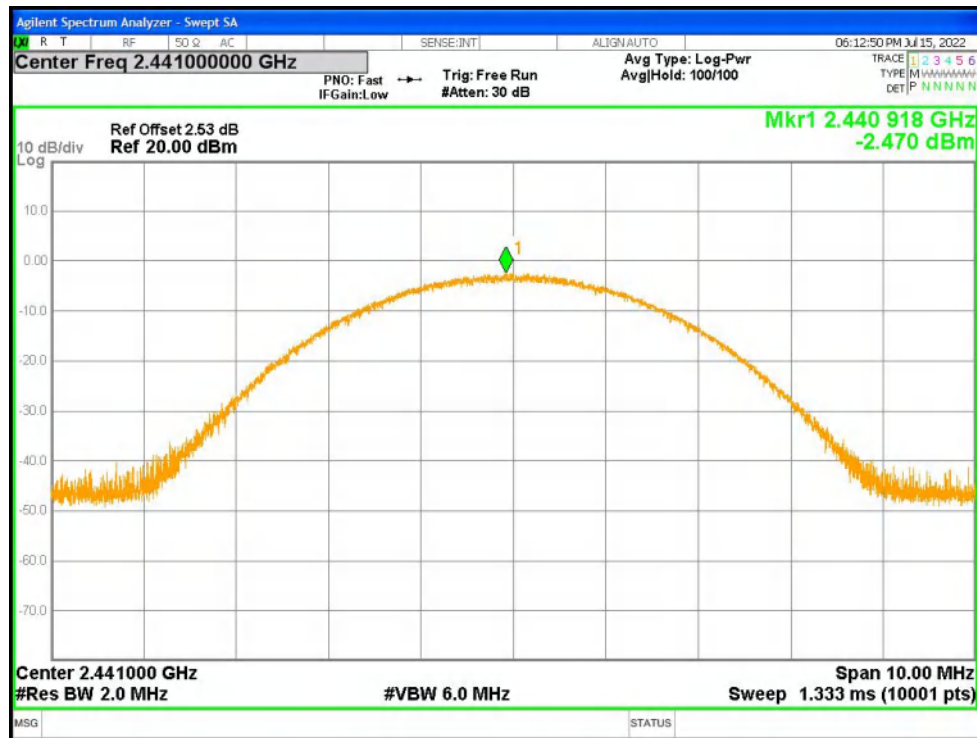


Power NVNT 3-DH1 2480MHz Ant1

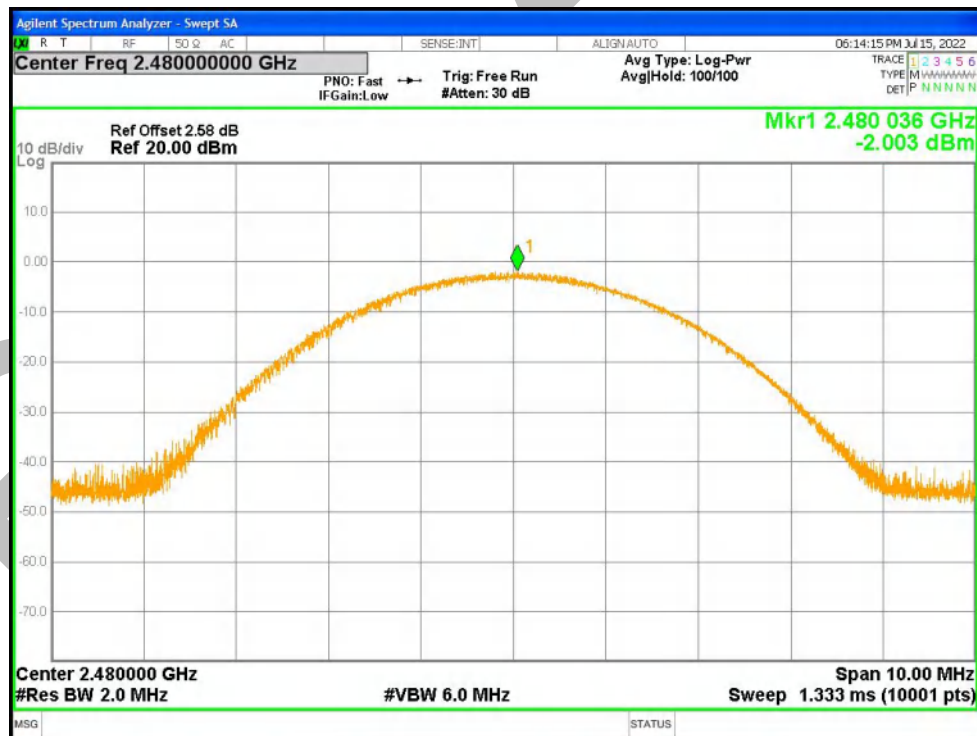

-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.944	0	Pass
NVNT	1-DH1	2441	Ant1	0.949	0	Pass
NVNT	1-DH1	2480	Ant1	0.934	0	Pass
NVNT	2-DH1	2402	Ant1	1.324	0	Pass
NVNT	2-DH1	2441	Ant1	1.34	0	Pass
NVNT	2-DH1	2480	Ant1	1.334	0	Pass
NVNT	3-DH1	2402	Ant1	1.301	0	Pass
NVNT	3-DH1	2441	Ant1	1.285	0	Pass
NVNT	3-DH1	2480	Ant1	1.276	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

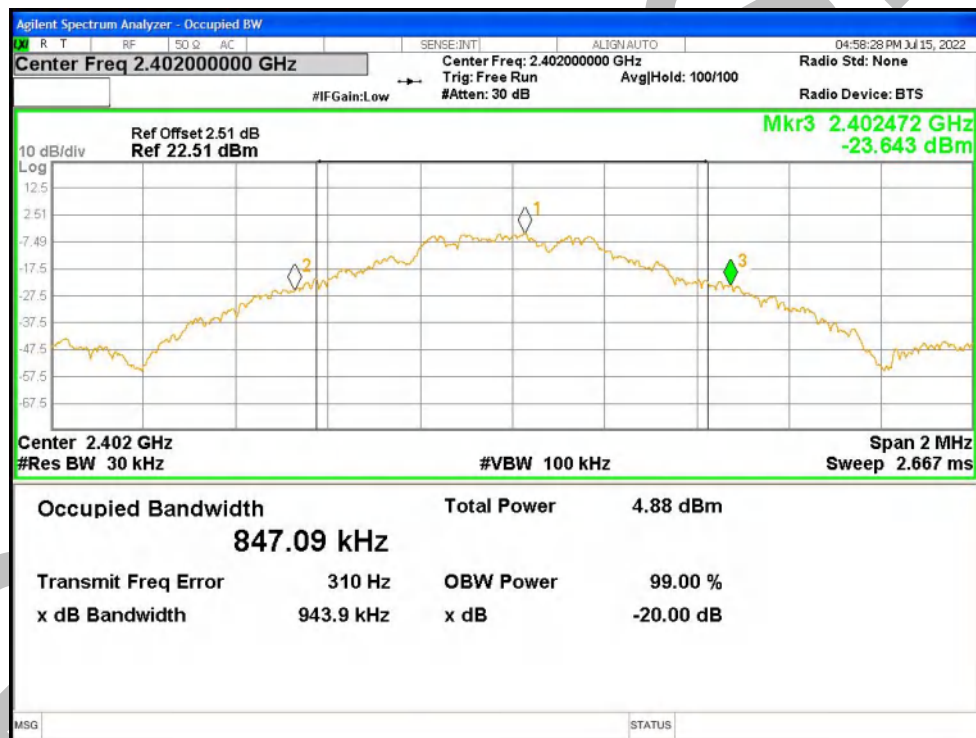


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

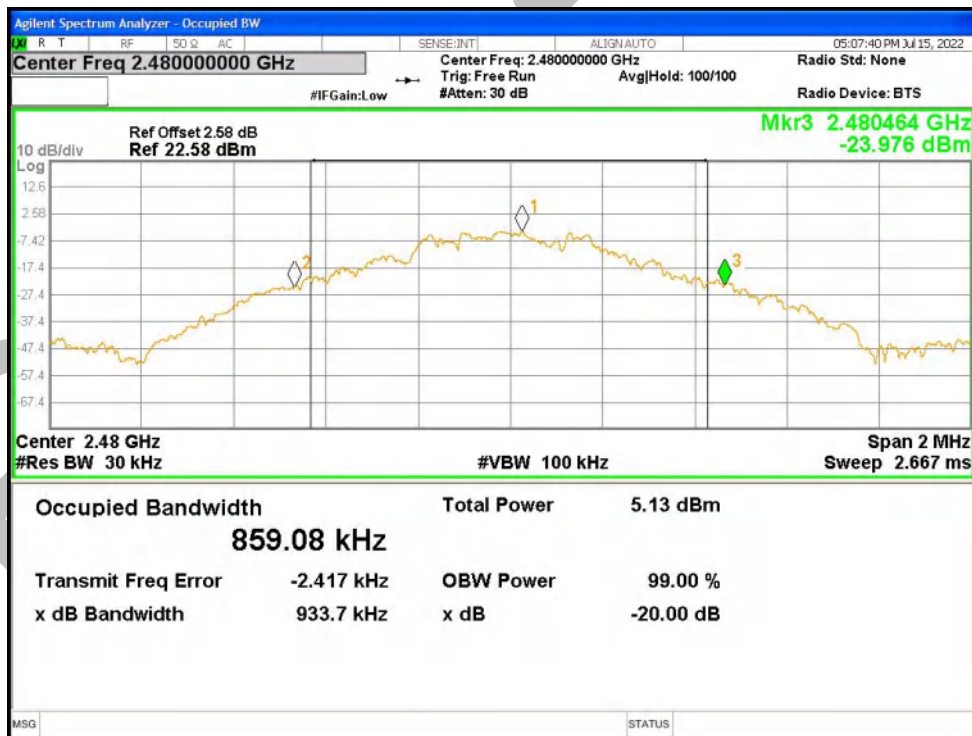


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

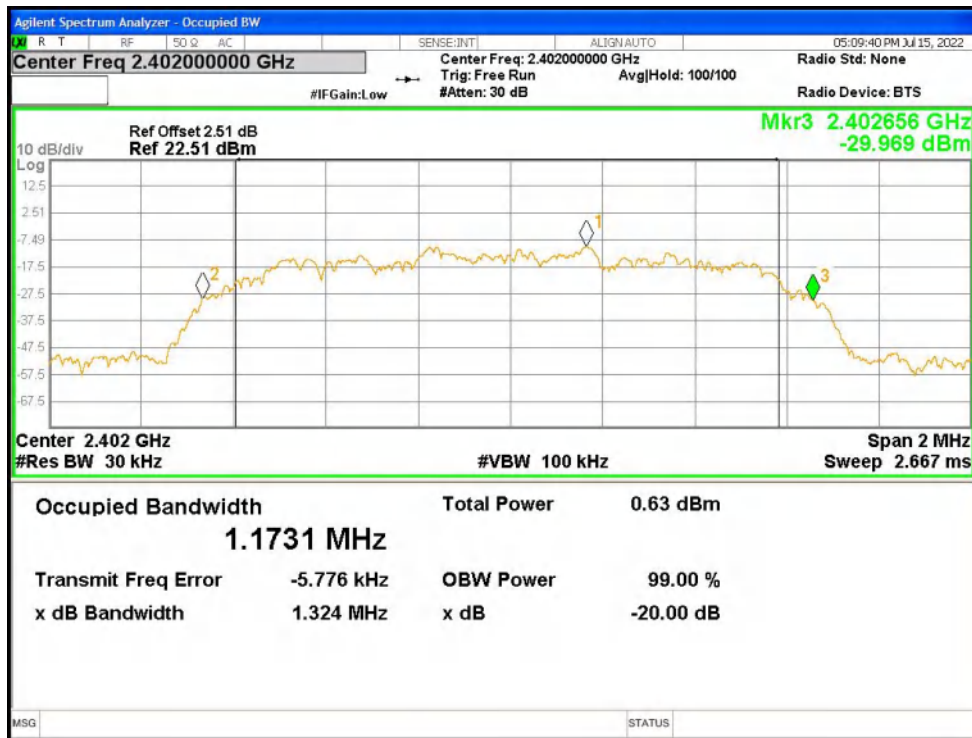


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

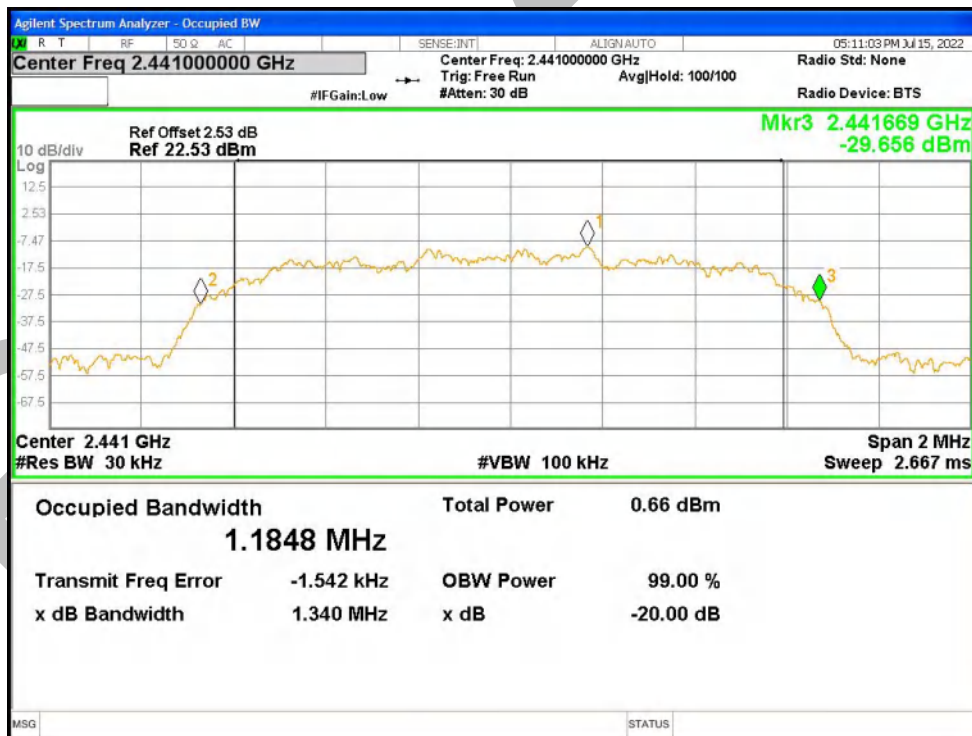


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

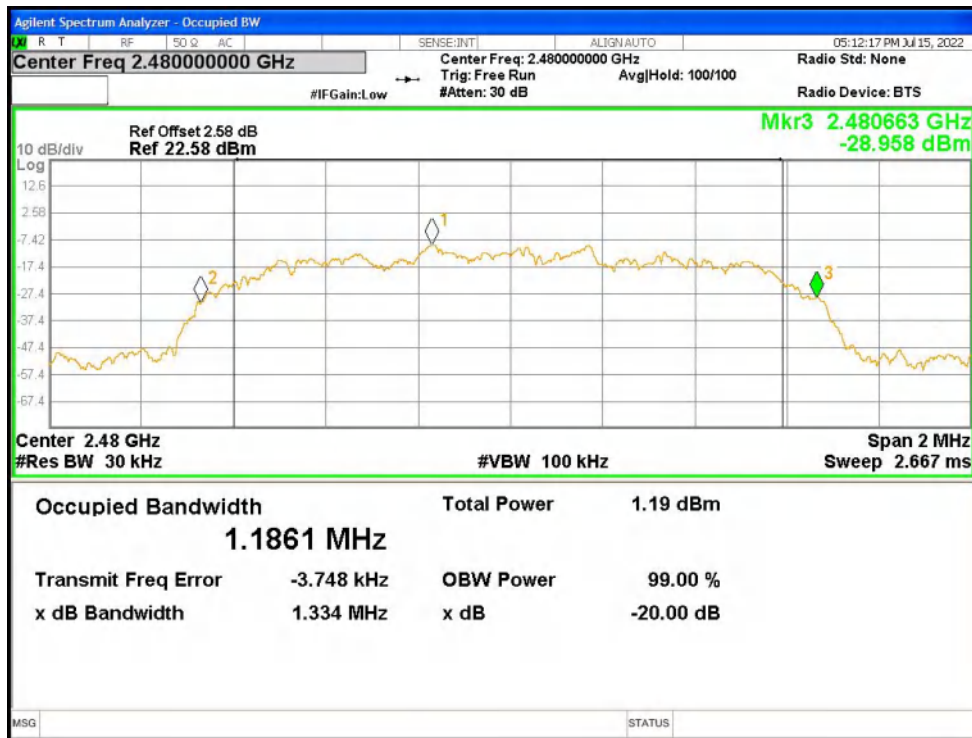


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

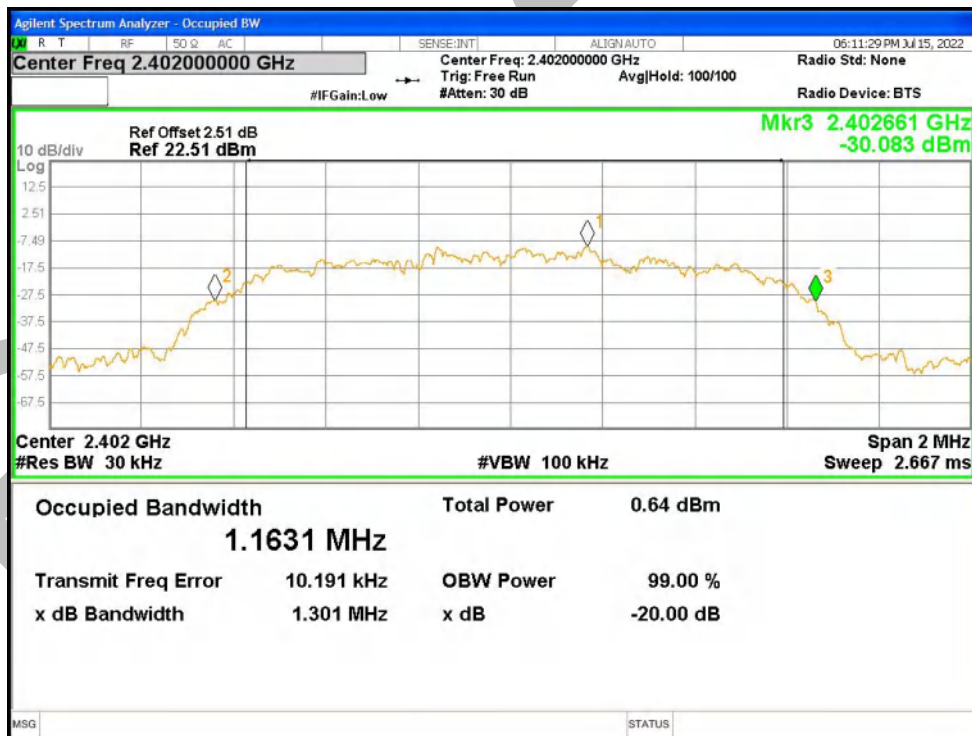

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

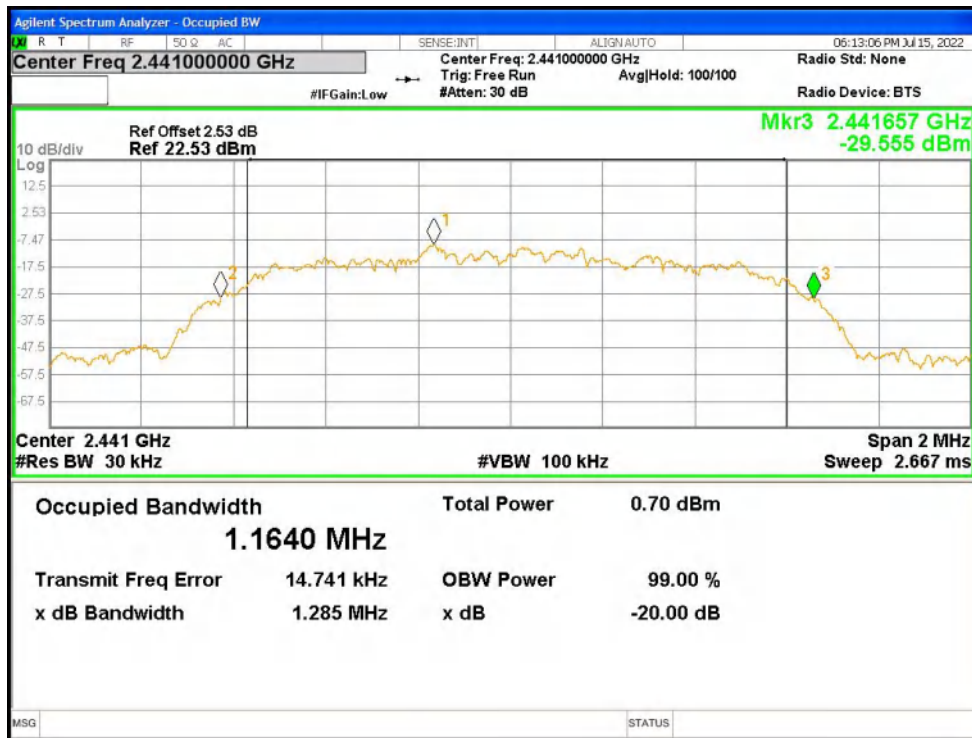


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

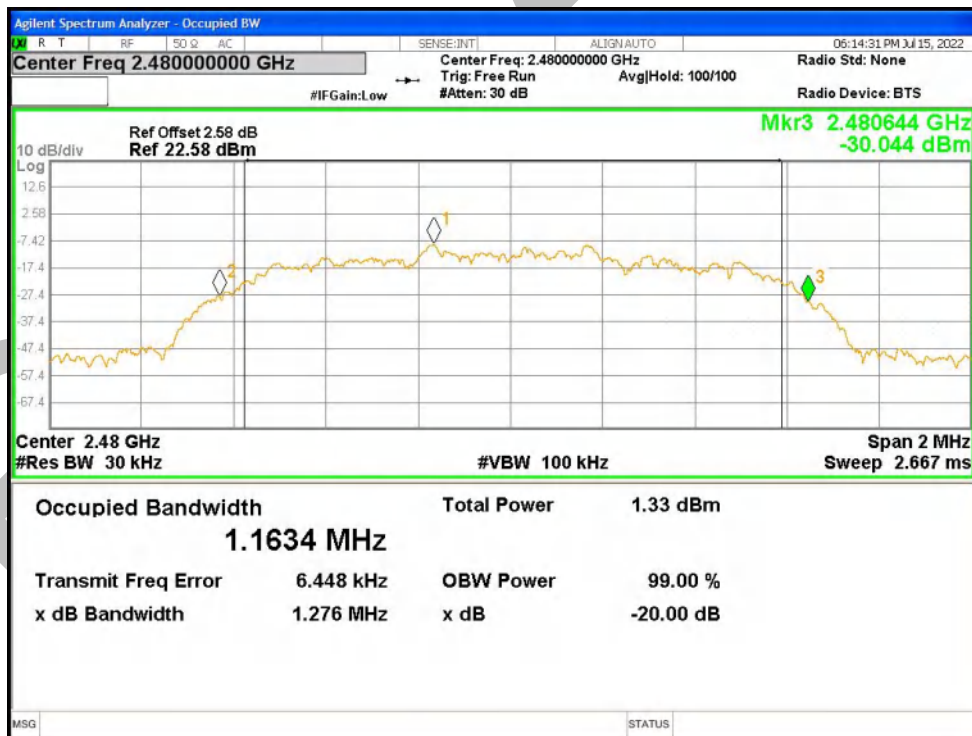


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.82953
NVNT	1-DH1	2441	Ant1	0.84676
NVNT	1-DH1	2480	Ant1	0.84529
NVNT	2-DH1	2402	Ant1	1.18381
NVNT	2-DH1	2441	Ant1	1.18459
NVNT	2-DH1	2480	Ant1	1.18907
NVNT	3-DH1	2402	Ant1	1.17412
NVNT	3-DH1	2441	Ant1	1.16672
NVNT	3-DH1	2480	Ant1	1.16502


OBW NVNT 1-DH1 2402MHz Ant1

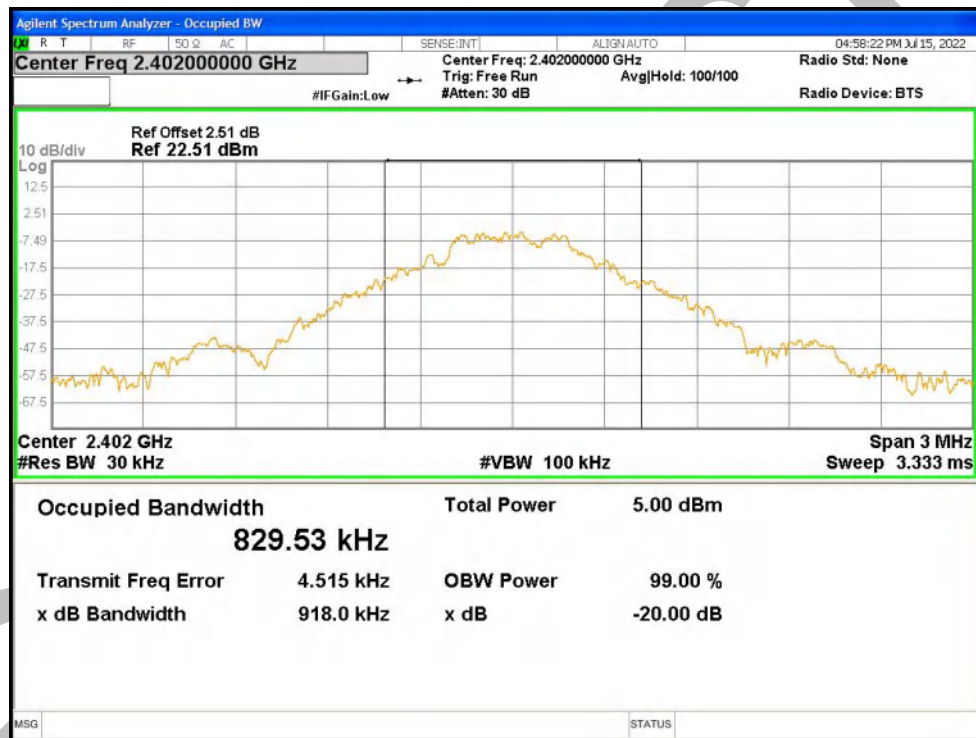


OBW NVNT 1-DH1 2441MHz Ant1

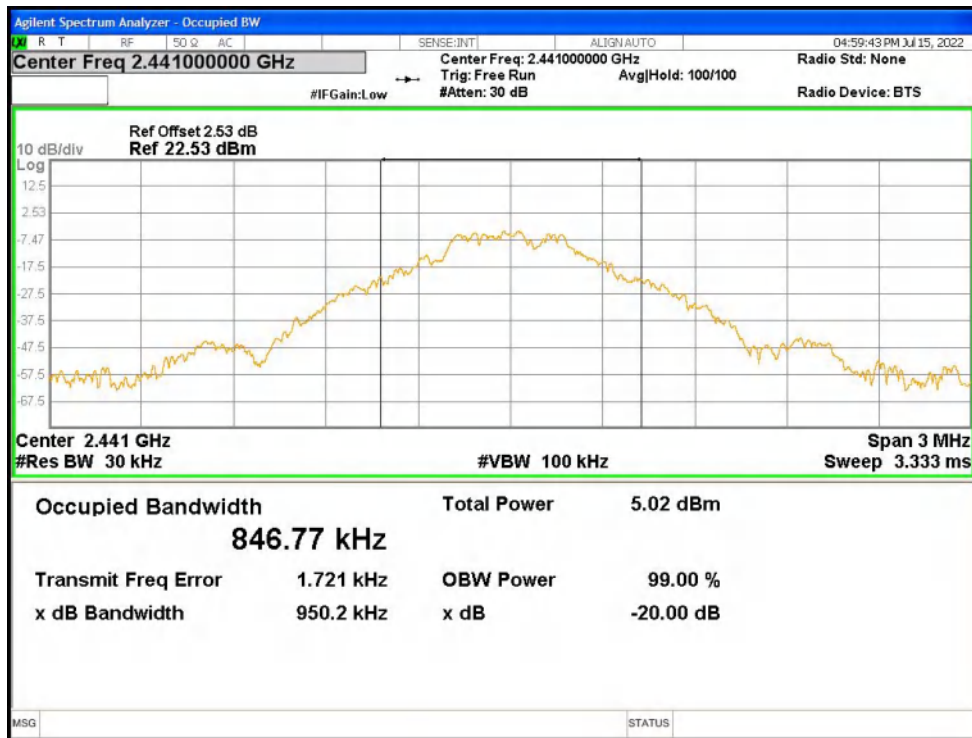


OBW NVNT 1-DH1 2480MHz Ant1

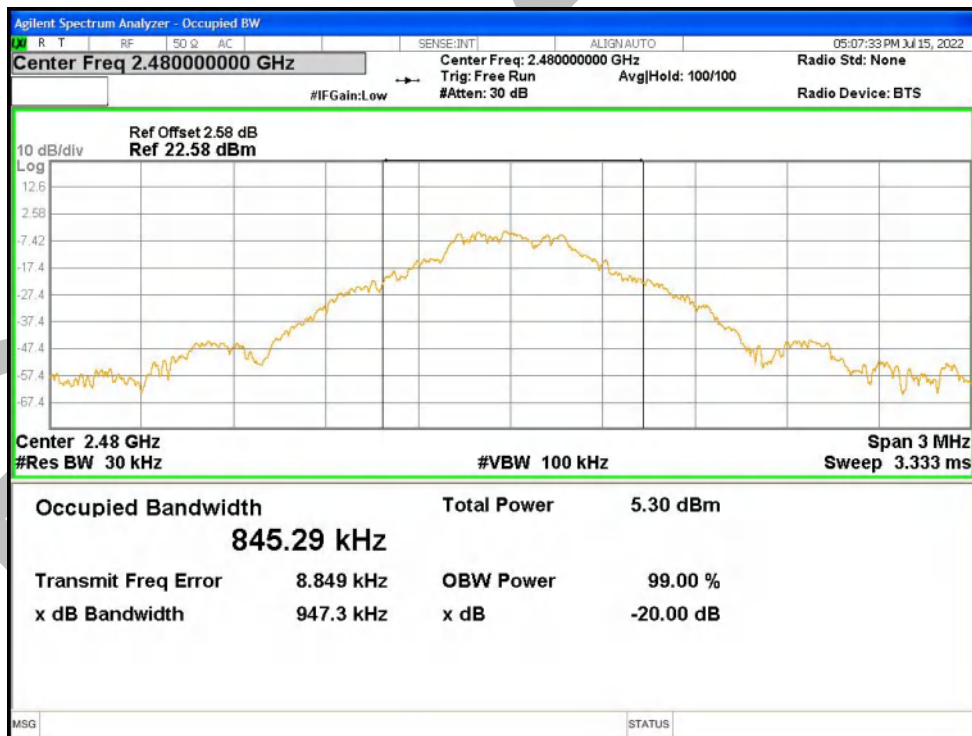


OBW NVNT 2-DH1 2402MHz Ant1

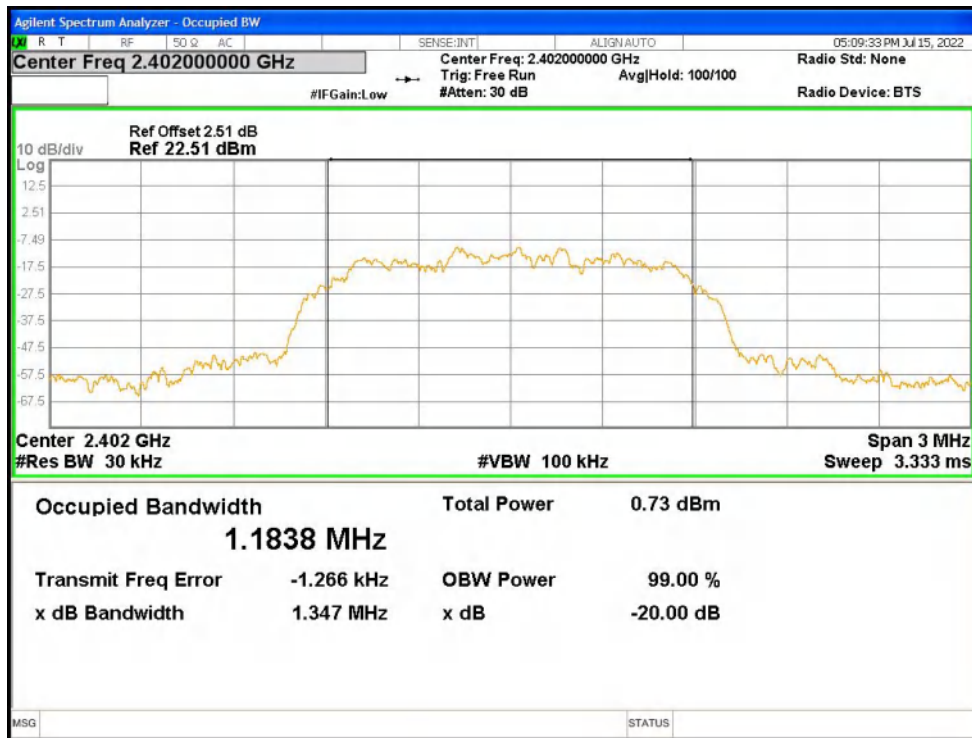


OBW NVNT 2-DH1 2441MHz Ant1

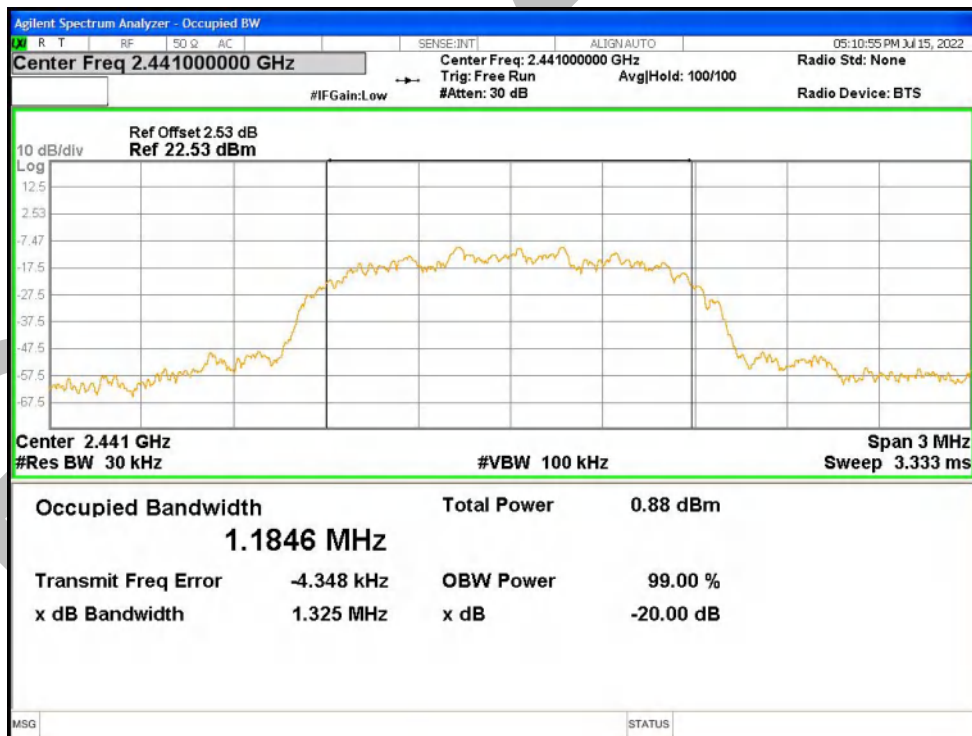


OBW NVNT 2-DH1 2480MHz Ant1

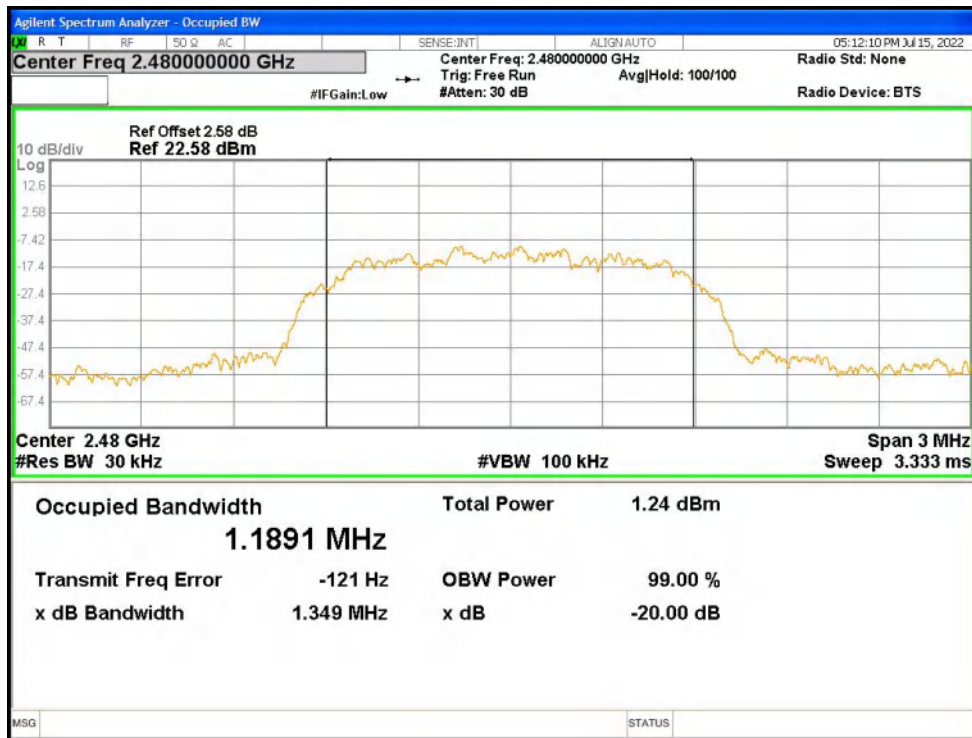


OBW NVNT 3-DH1 2402MHz Ant1

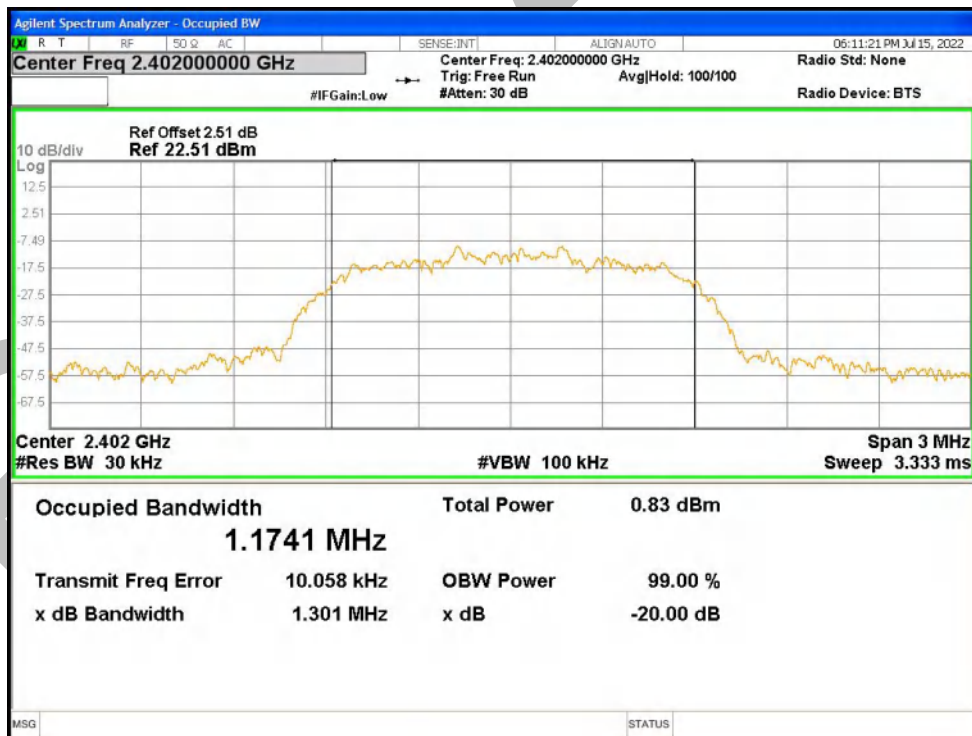

OBW NVNT 3-DH1 2441MHz Ant1

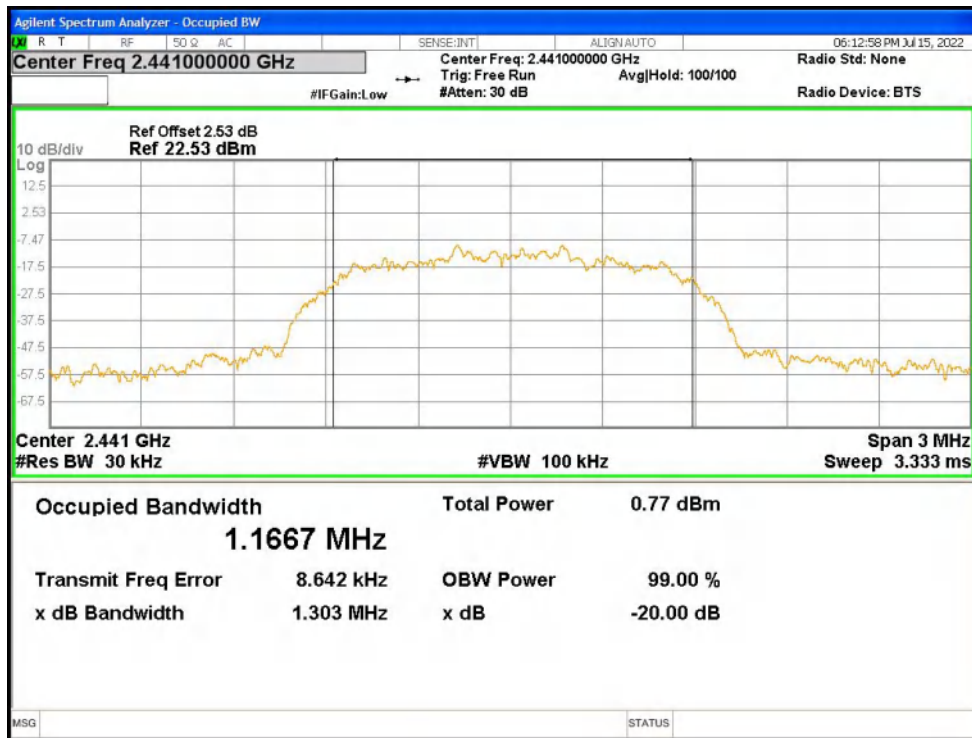

OBW NVNT 3-DH1 2480MHz Ant1

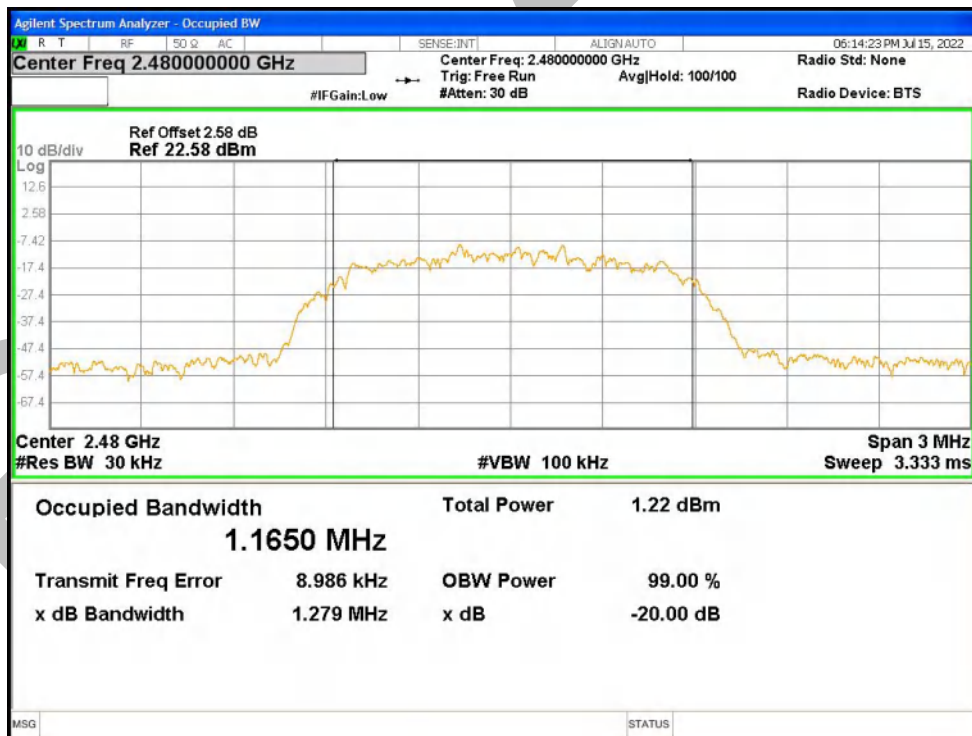


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-54.83	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-54.79	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-48.88	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-49.38	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-50.46	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-50.4	-20	Pass

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

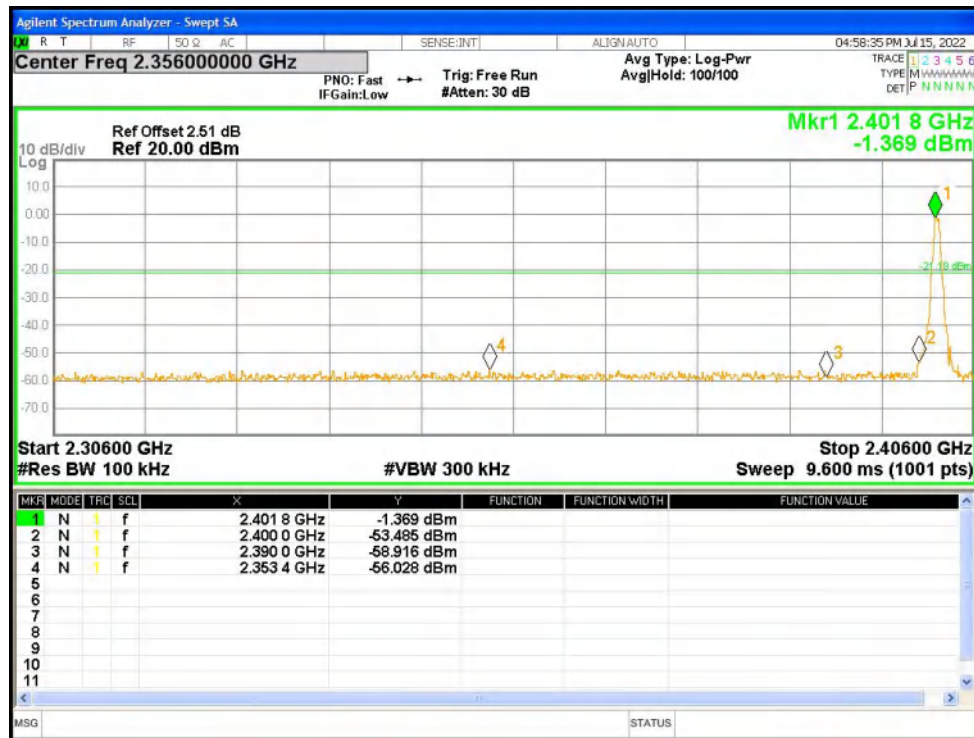

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

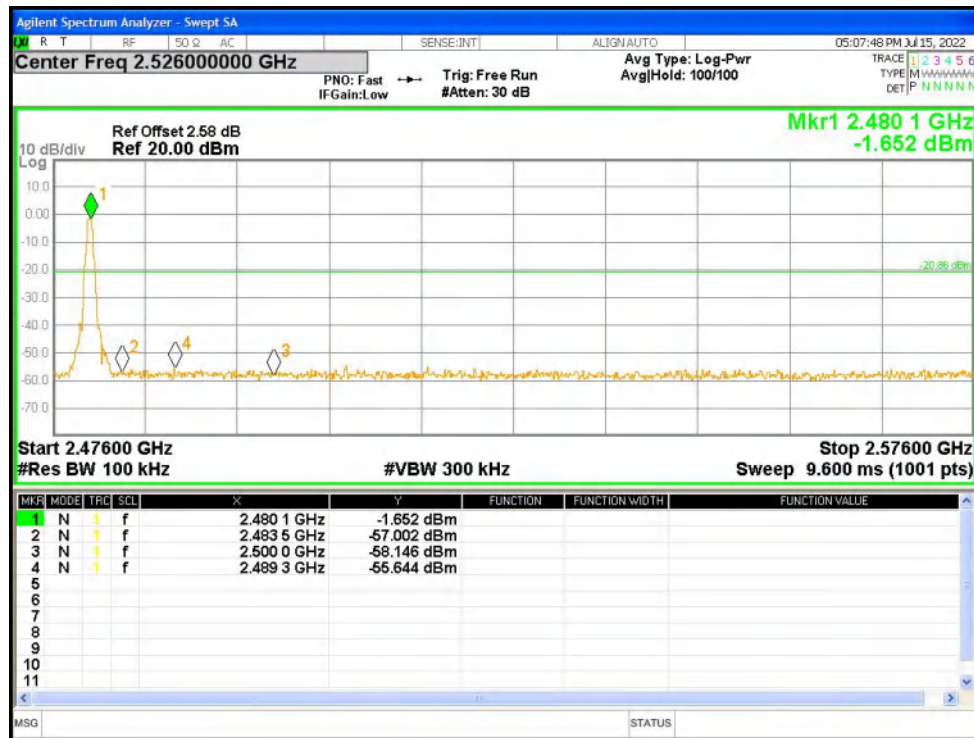

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

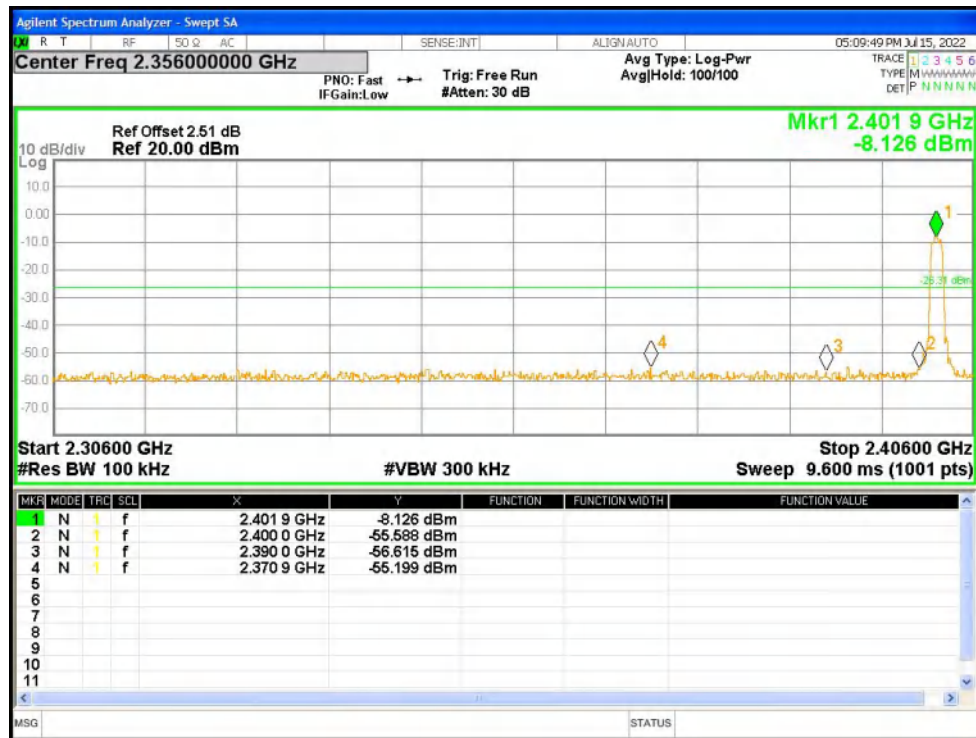

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

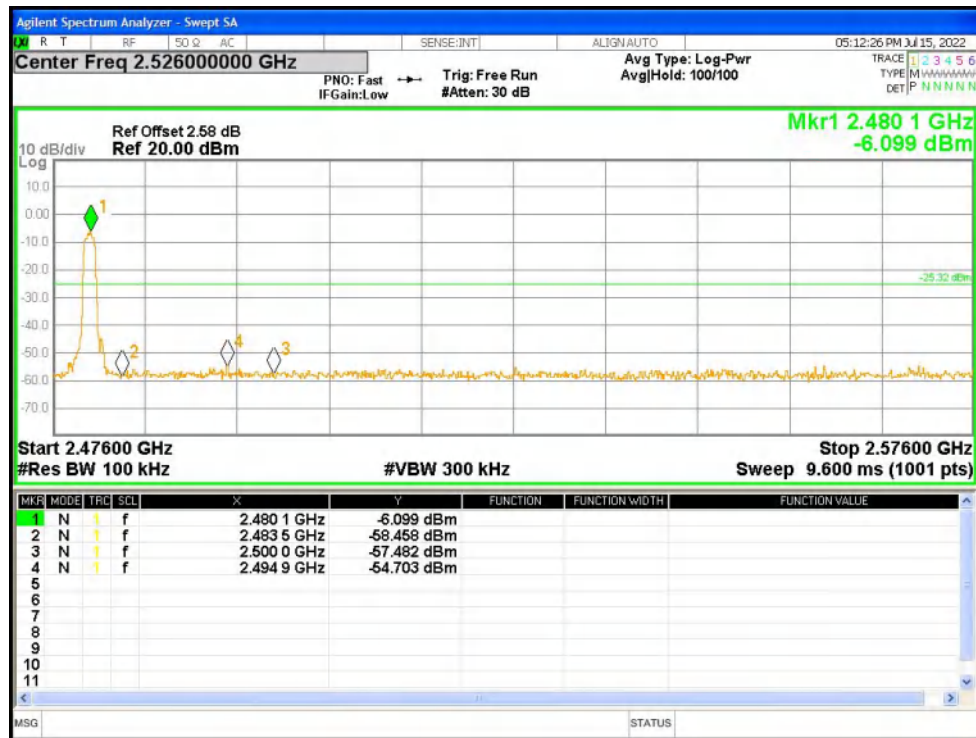

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

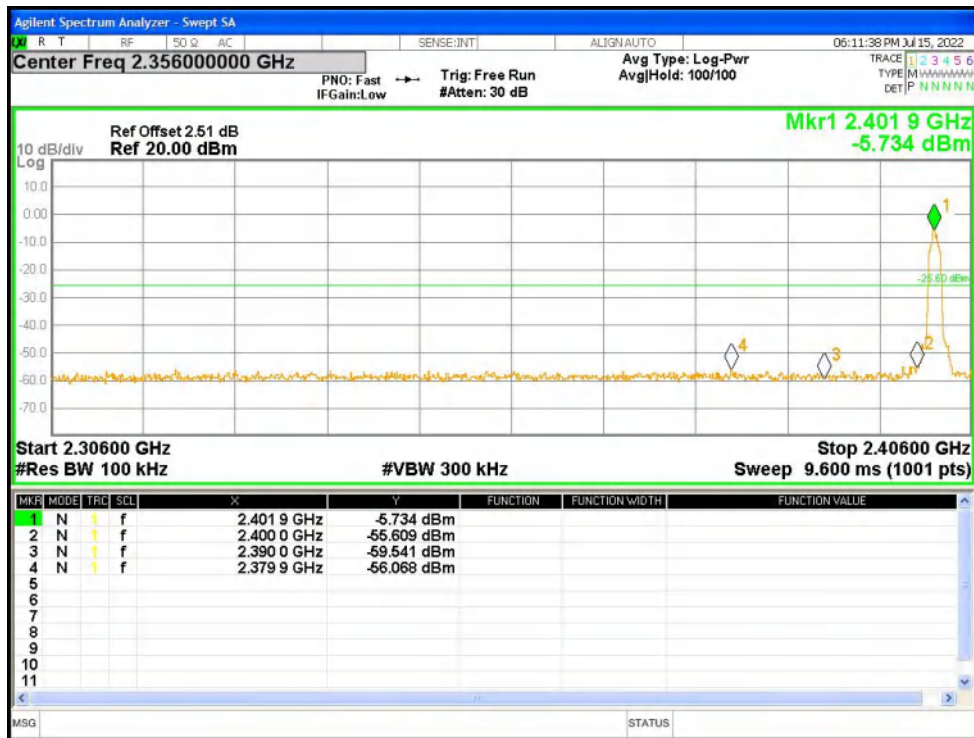

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

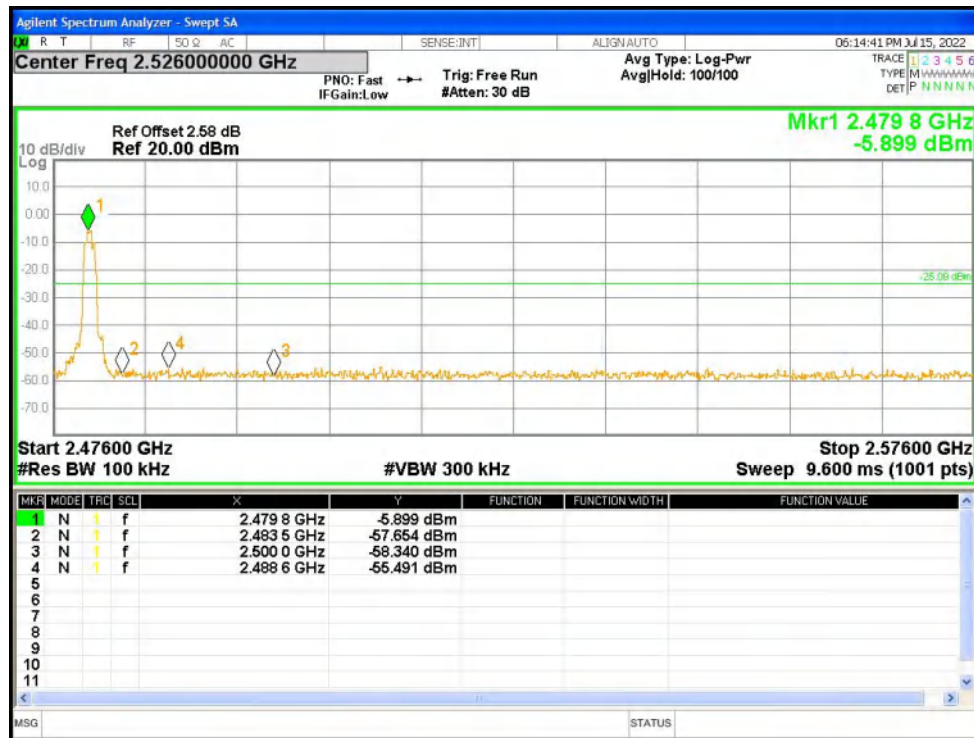


Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-53.23	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-53.28	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-48.16	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-47.98	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-48.95	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-49.04	-20	Pass

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

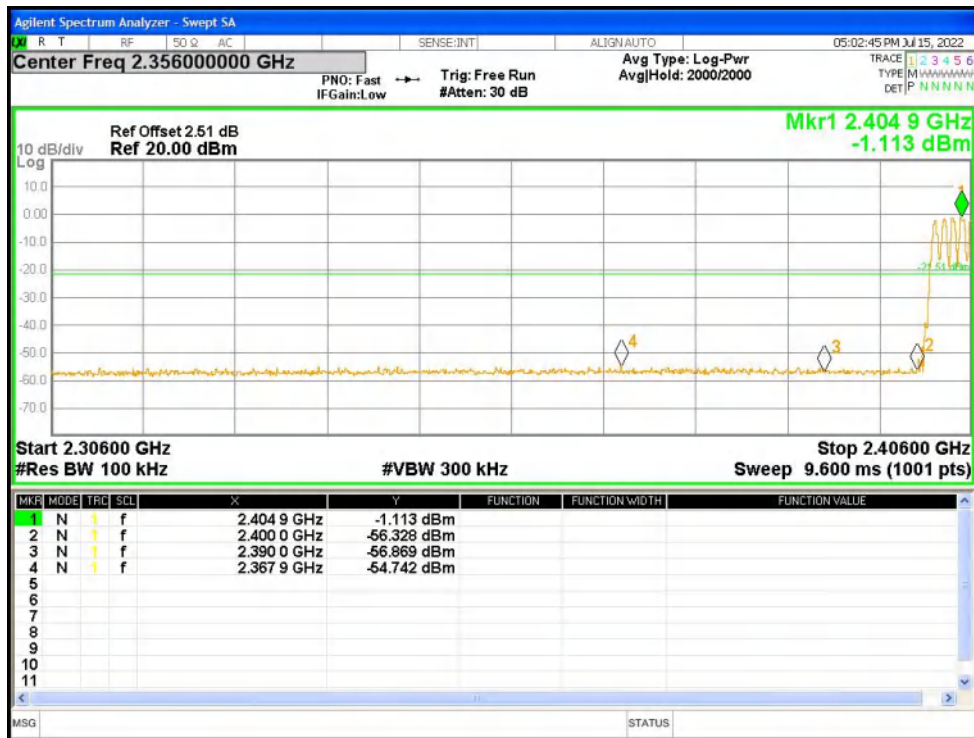

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

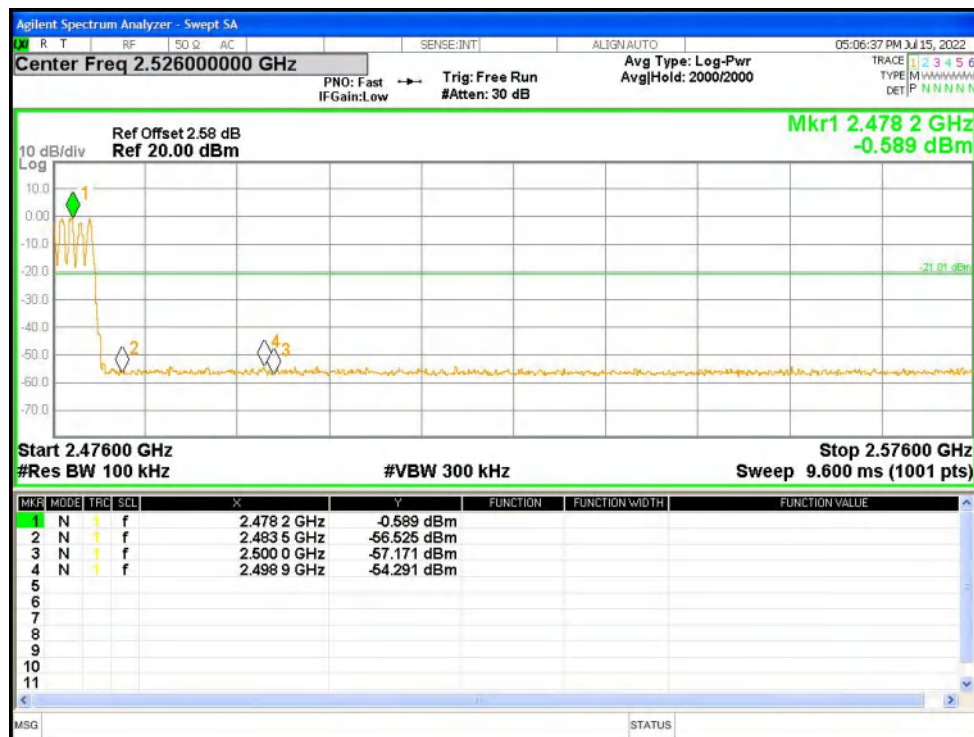

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

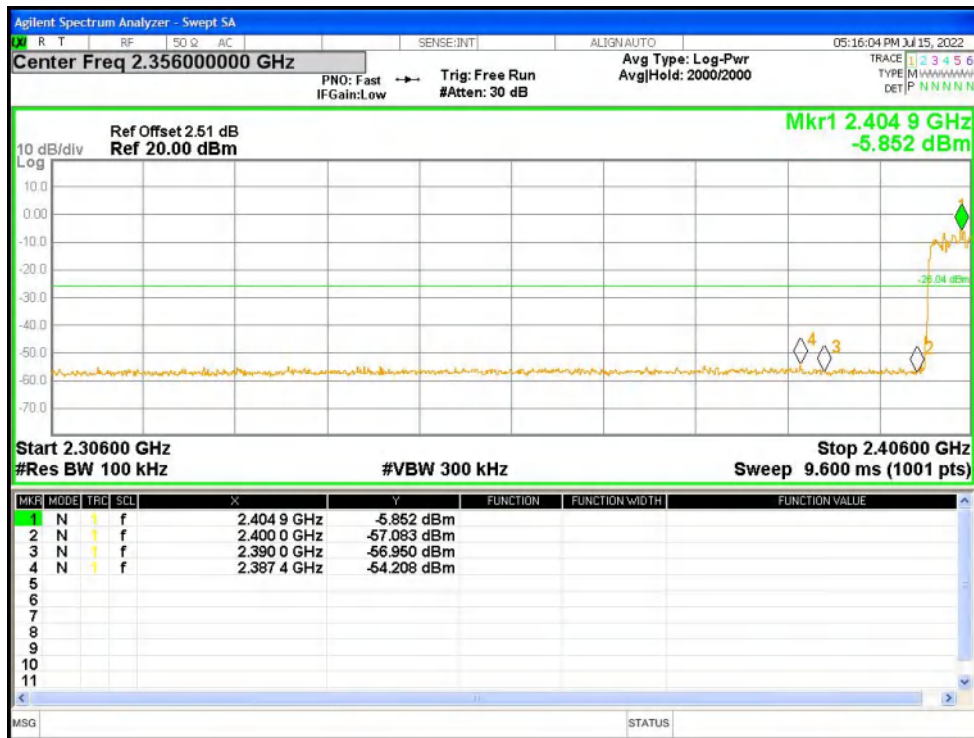

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

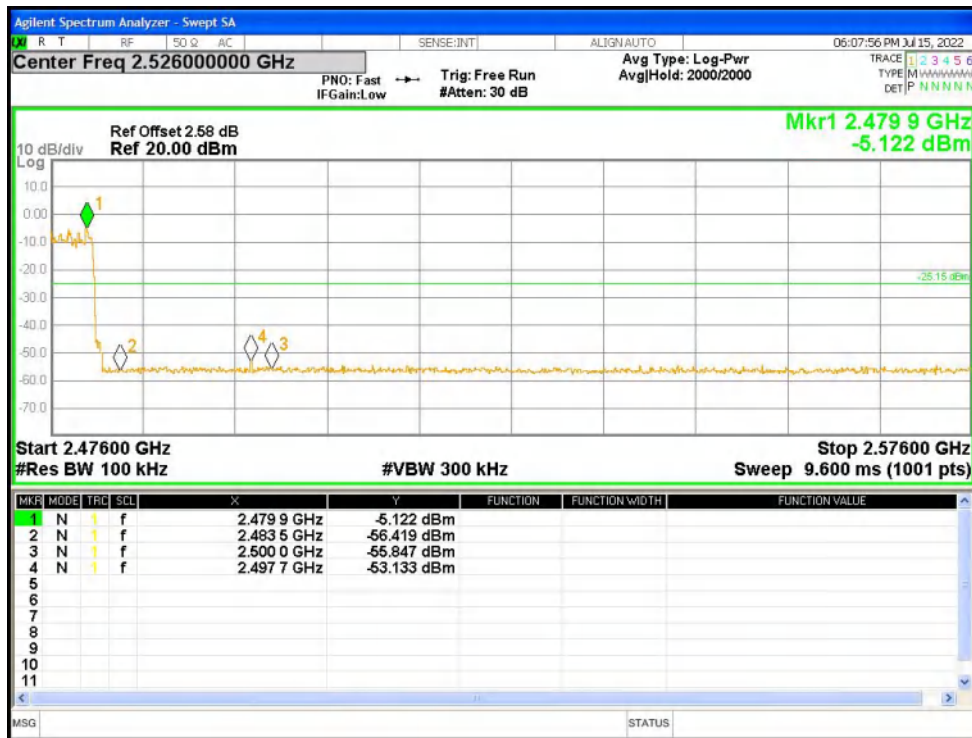

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

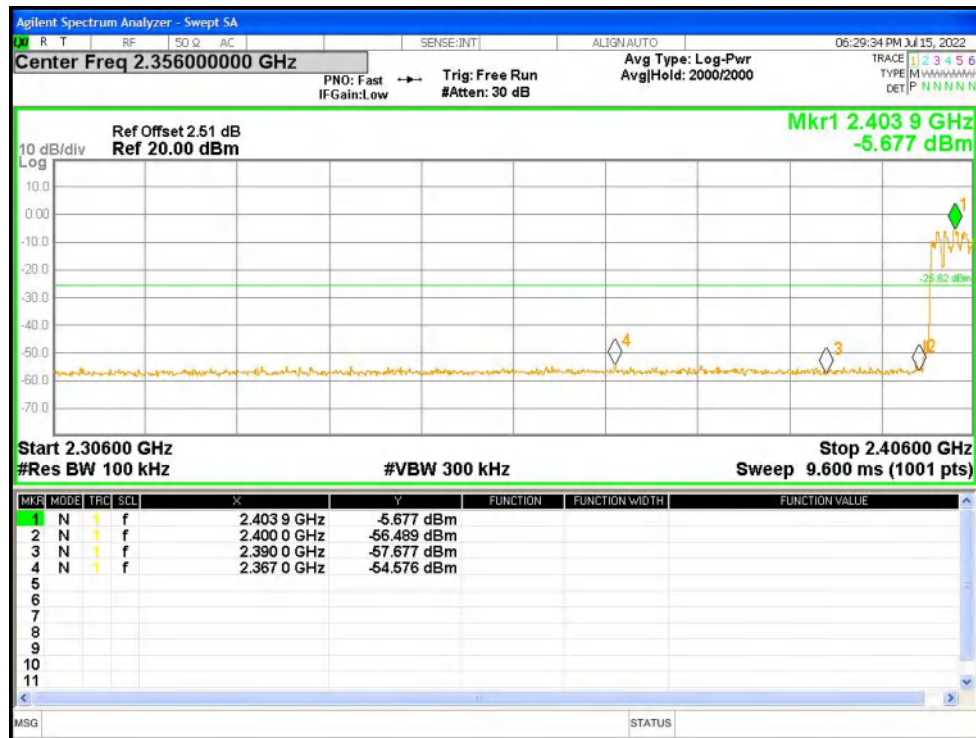

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

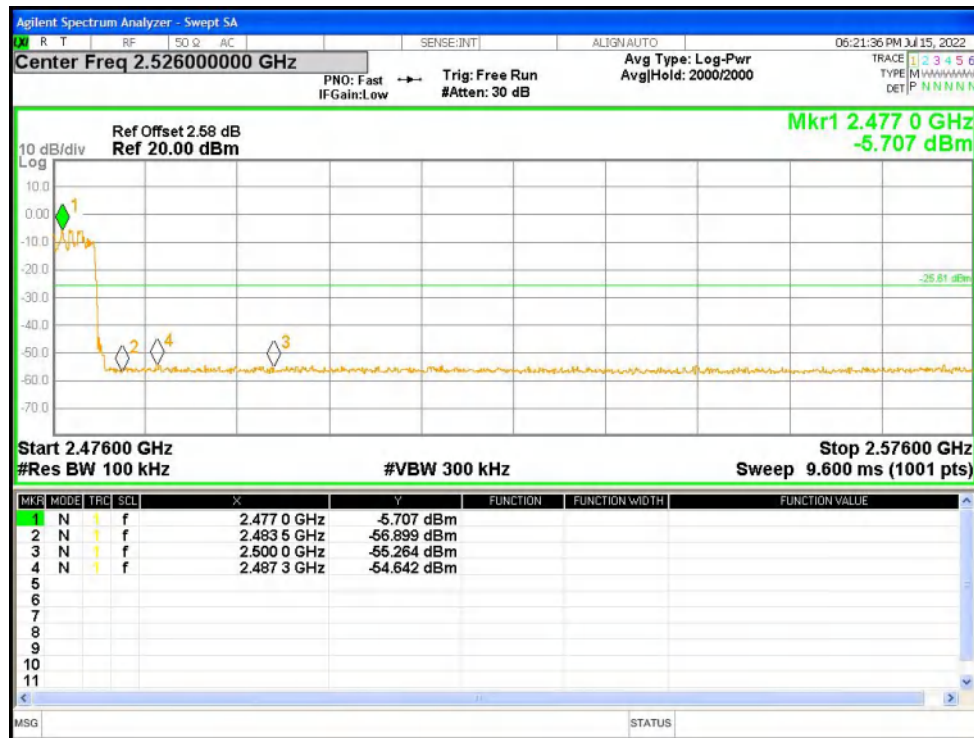


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-43.87	-20	Pass
NVNT	1-DH1	2441	Ant1	-43.6	-20	Pass
NVNT	1-DH1	2480	Ant1	-43.48	-20	Pass
NVNT	2-DH1	2402	Ant1	-39.22	-20	Pass
NVNT	2-DH1	2441	Ant1	-39.39	-20	Pass
NVNT	2-DH1	2480	Ant1	-39.82	-20	Pass
NVNT	3-DH1	2402	Ant1	-39.17	-20	Pass
NVNT	3-DH1	2441	Ant1	-39.39	-20	Pass
NVNT	3-DH1	2480	Ant1	-40.19	-20	Pass


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

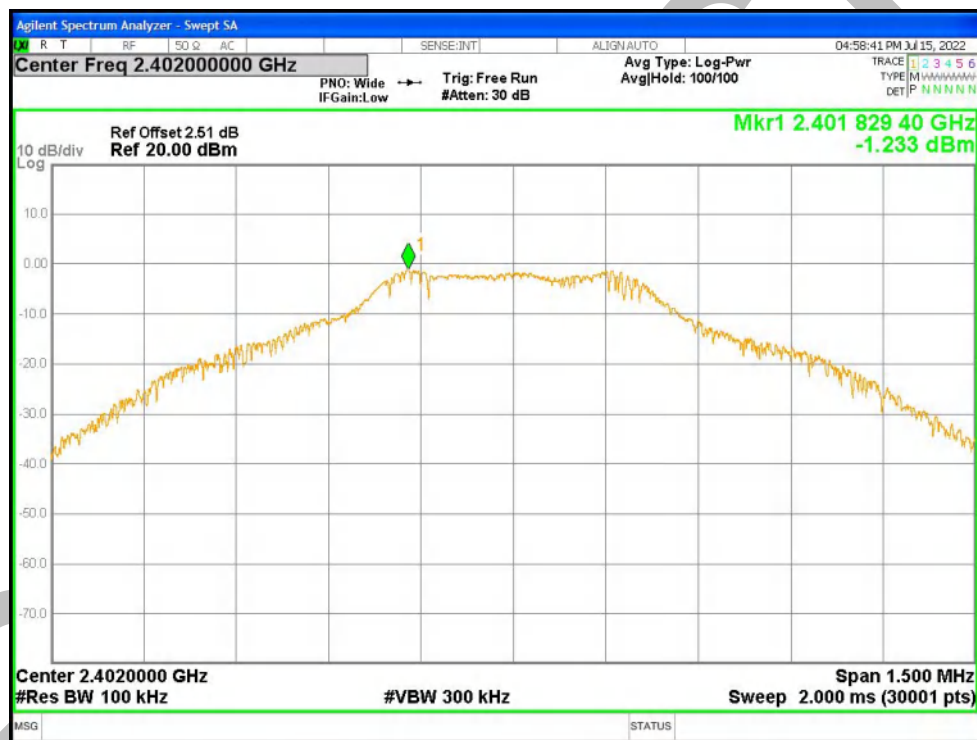

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

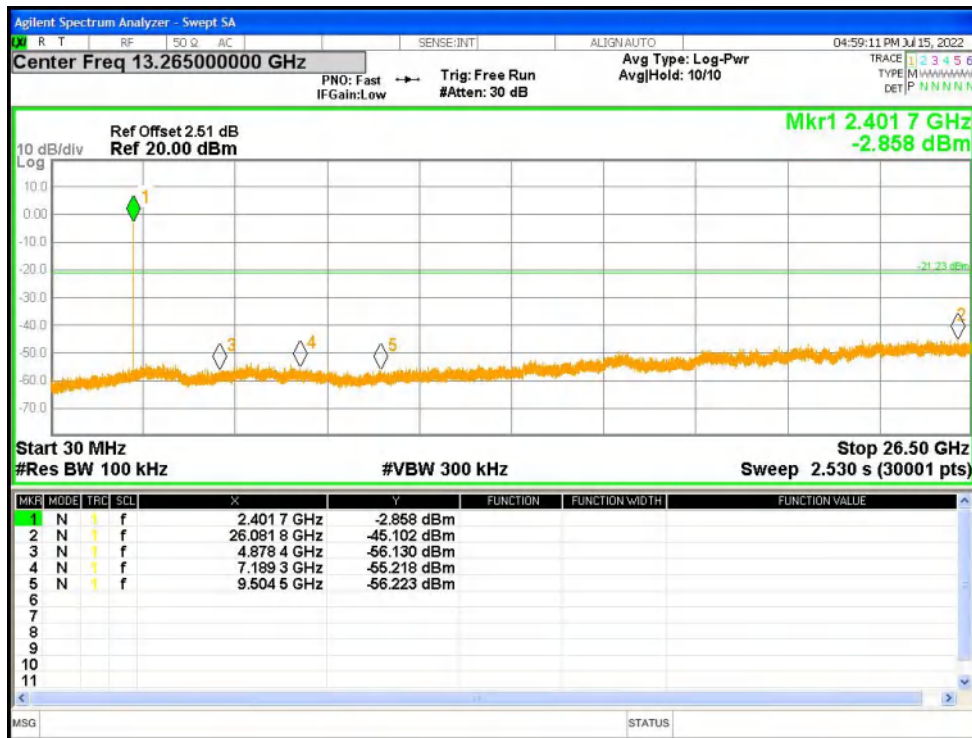

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

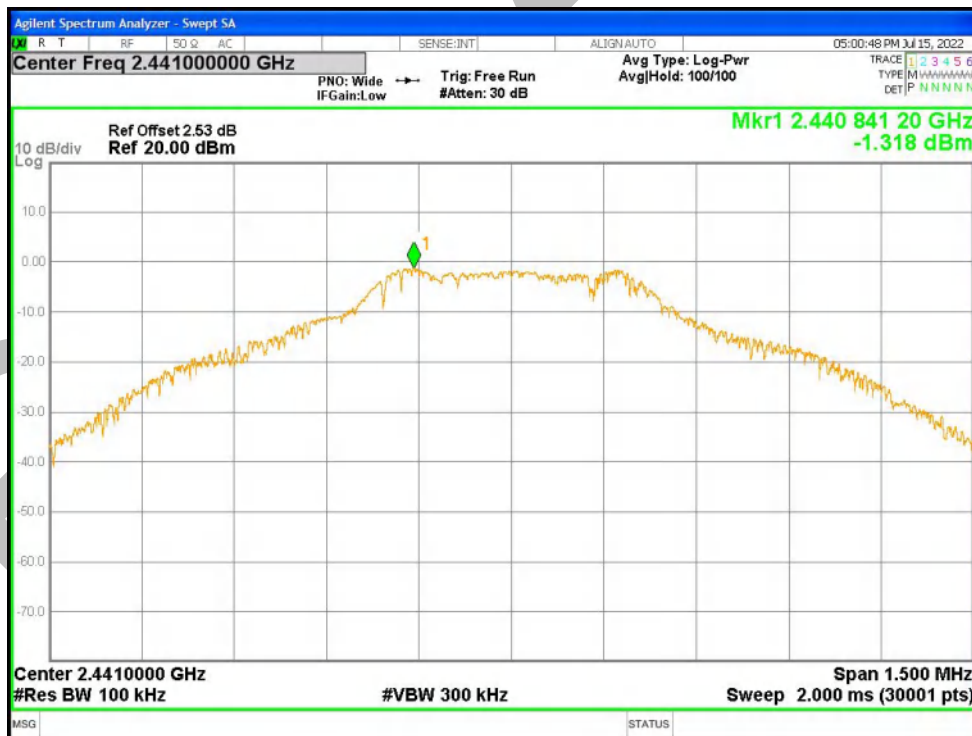

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission