

## 10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)		
<b>TX 802.11a Mode</b>				
CH36	5180	9.332	23.98	Pass
CH40	5200	9.191	23.98	Pass
CH48	5240	8.996	23.98	Pass
<b>TX 802.11 n20M Mode</b>				
CH36	5180	8.249	23.98	Pass
CH40	5200	8.155	23.98	Pass
CH48	5240	8.631	23.98	Pass
<b>TX 802.11 n40M Mode</b>				
CH38	5190	7.878	23.98	Pass
CH46	5230	7.099	23.98	Pass
<b>TX 802.11 AC20M Mode</b>				
CH36	5180	8.857	23.98	Pass
CH40	5200	9.240	23.98	Pass
CH48	5240	8.944	23.98	Pass
<b>TX 802.11 AC40M Mode</b>				
CH38	5190	7.923	23.98	Pass
CH46	5230	7.774	23.98	Pass
<b>TX 802.11 AC80M Mode</b>				
CH42	5210	6.707	23.98	Pass

## 11. Out Of Band Emissions

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data


## 11.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V


5.1G

### 5.180~5.240 GHz


(802.11a) Band Edge, Left Side

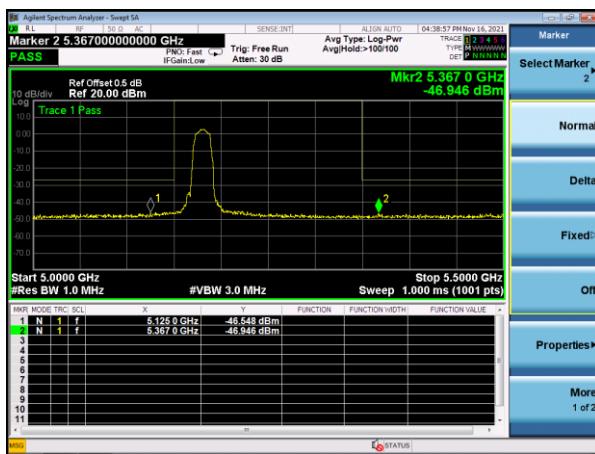


(802.11n20) Band Edge, Left Side

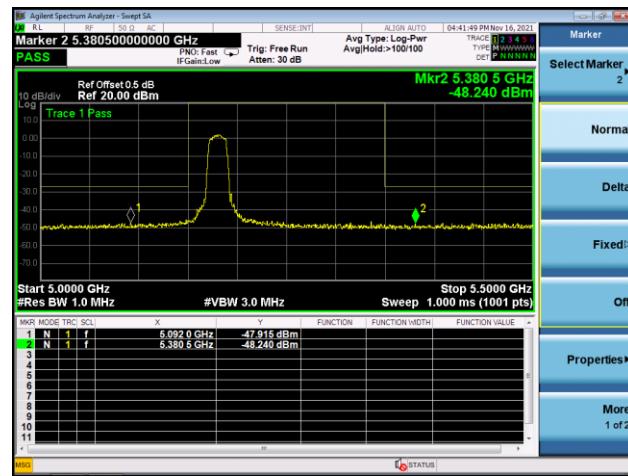

(802.11a) Band Edge, Right Side

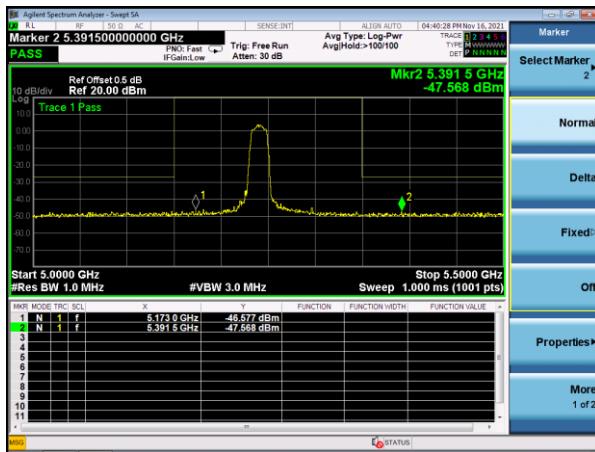


(802.11n20) Band Edge, Right Side

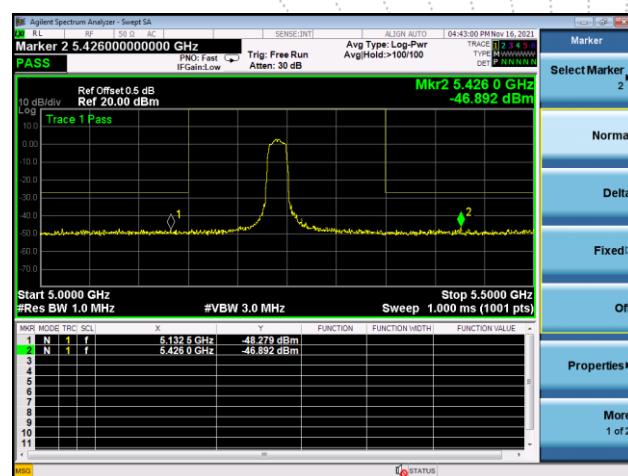


### 5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

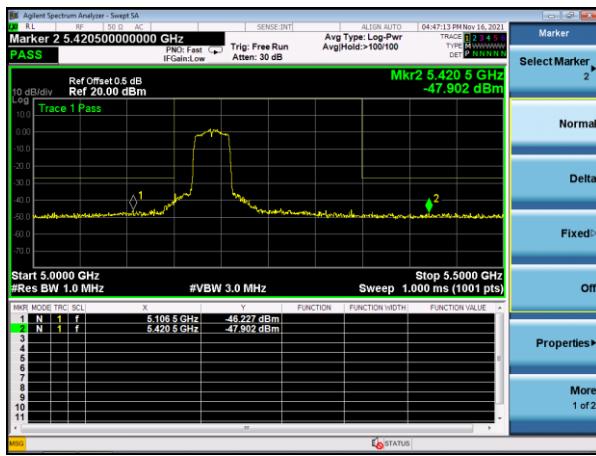


(802.11ac20) Band Edge, Left Side

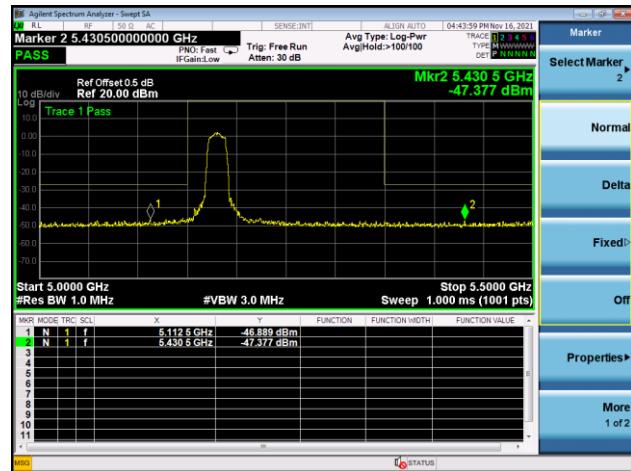

(802.11n40) Band Edge, Right Side

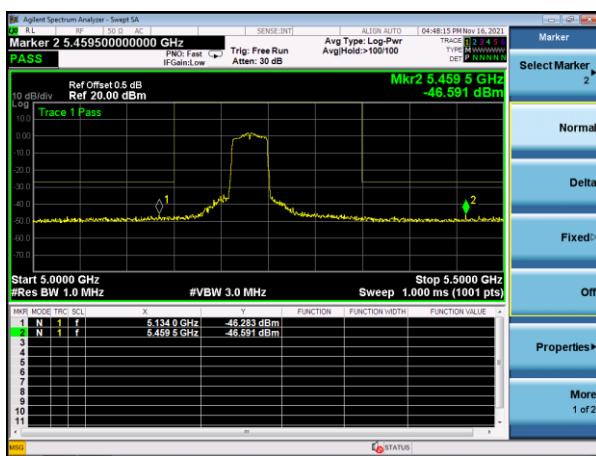


(802.11ac20) Band Edge, Right Side

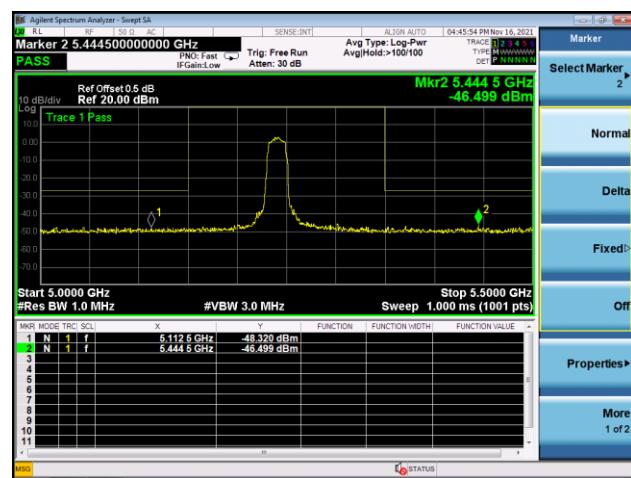


### 5.180~5.240 GHz


(802.11ac40) Band Edge, Left Side

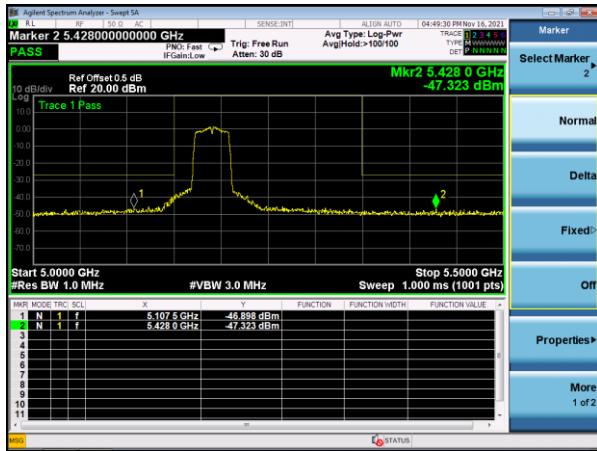


(802.11ac80) Band Edge, Left Side

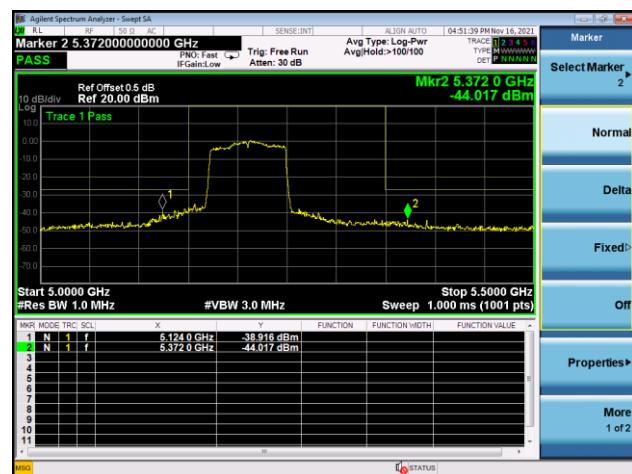

(802.11ac40) Band Edge, Right Side

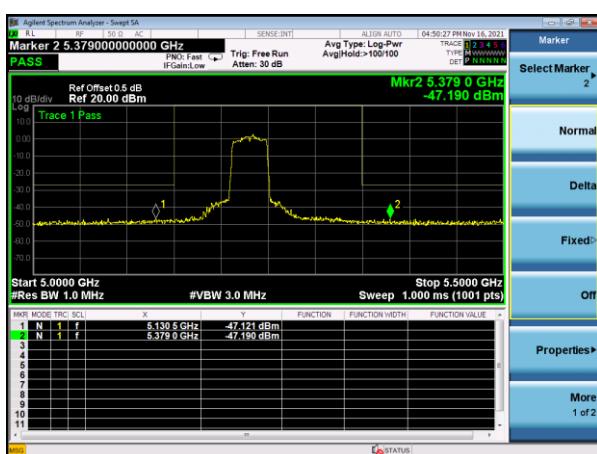


(802.11ac80) Band Edge, Right Side

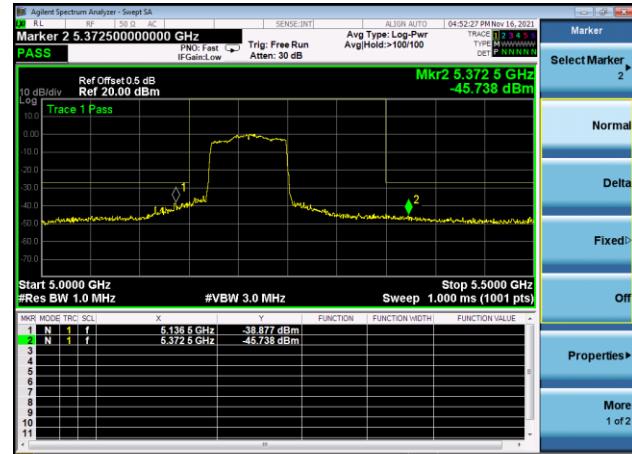

## 12. Spurious RF Conducted Emissions

### 12.1 Block Diagram Of Test Setup

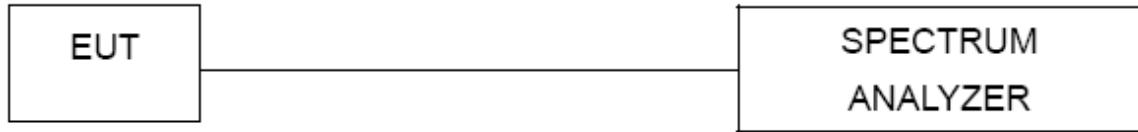

### 12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:  
(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..

### 12.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 12.4 Test Result


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

About:26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 5.1G

### Test Plot


802.11a on channel 36

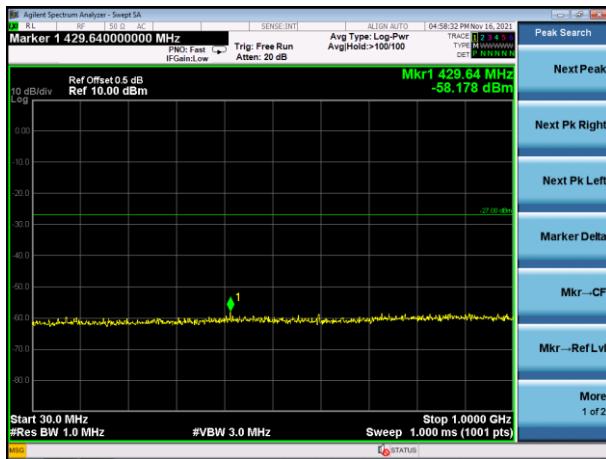


802.11a on channel 40



802.11a on channel 36

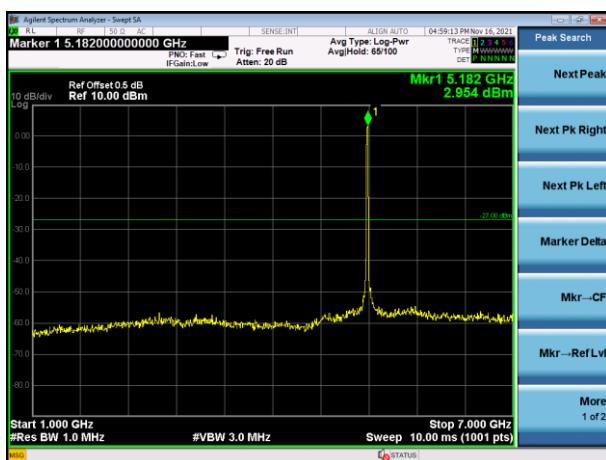

802.11a on channel 40

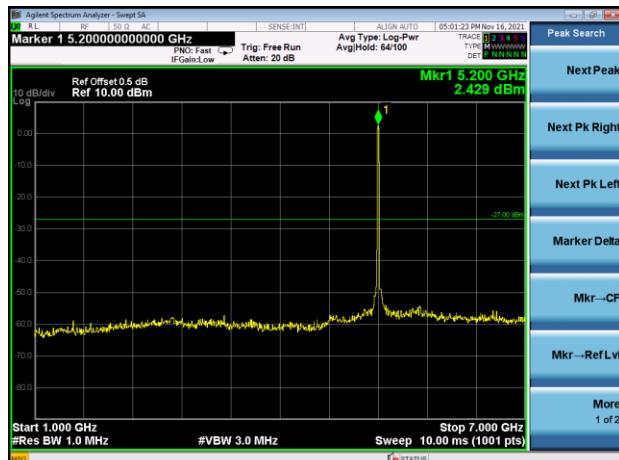

802.11a on channel 36




802.11a on channel 40




### Test Plot


802.11a on channel 48

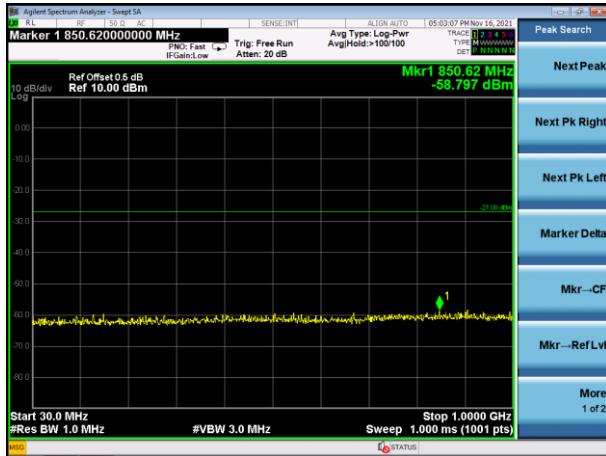

802.11n20 on channel 36

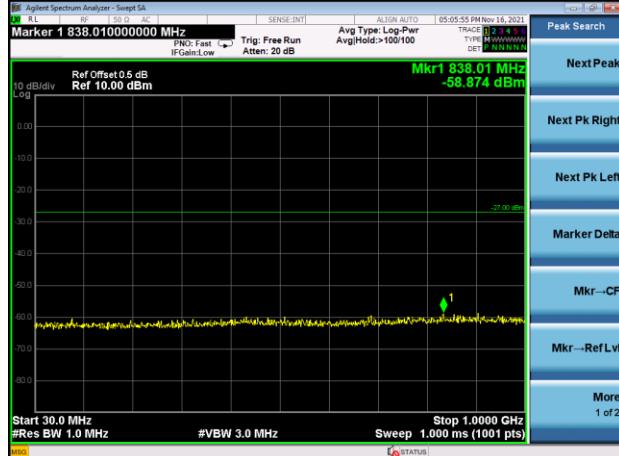

802.11a on channel 48

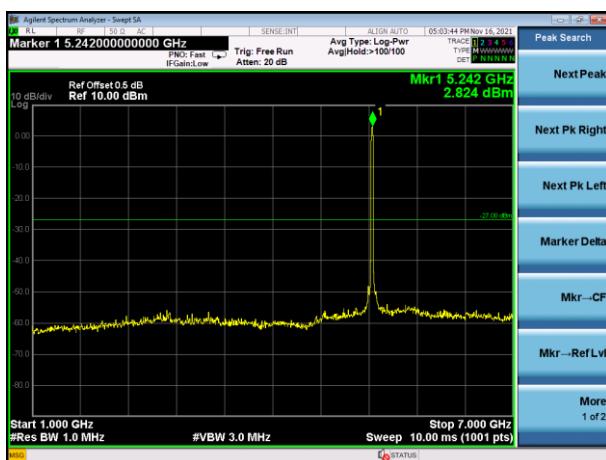

802.11n20 on channel 36



802.11a on channel 48




802.11n20 on channel 36




### Test Plot


802.11n20 on channel 40

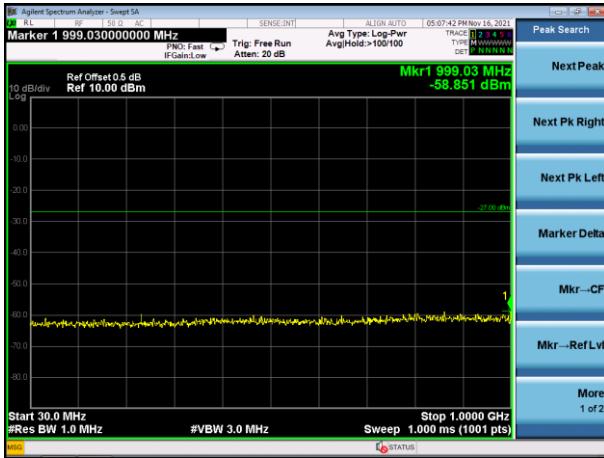

802.11n20 on channel 48

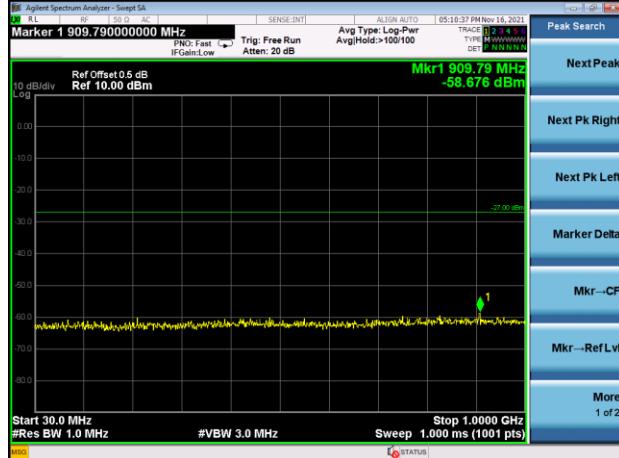

802.11n20 on channel 40

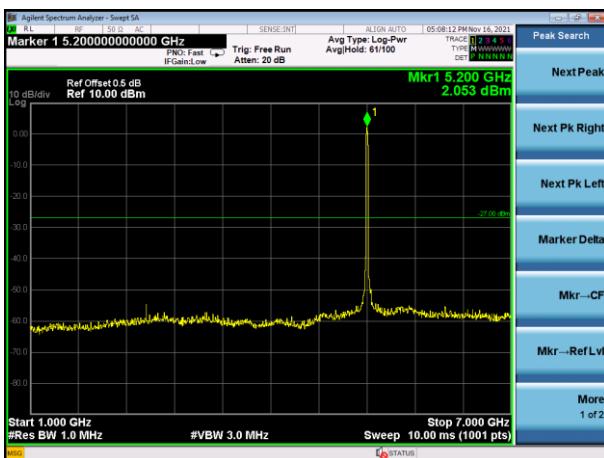

802.11n20 on channel 48



802.11n20 on channel 40



802.11n20 on channel 48




### Test Plot


802.11n40 on channel 38




802.11n40 on channel 46

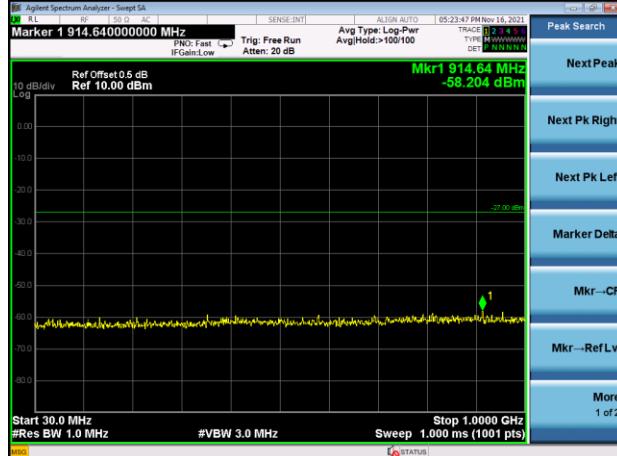


802.11n40 on channel 38

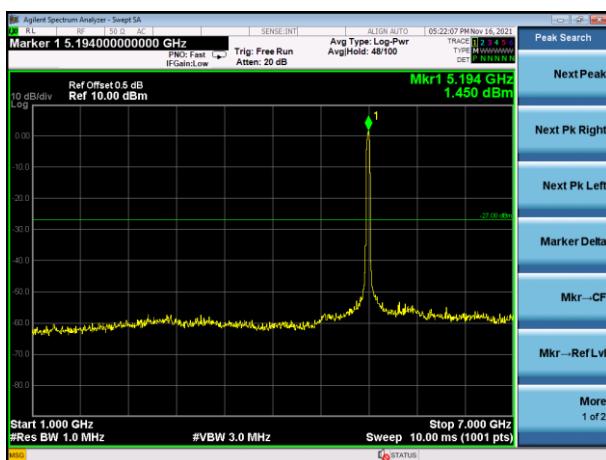

802.11n40 on channel 46

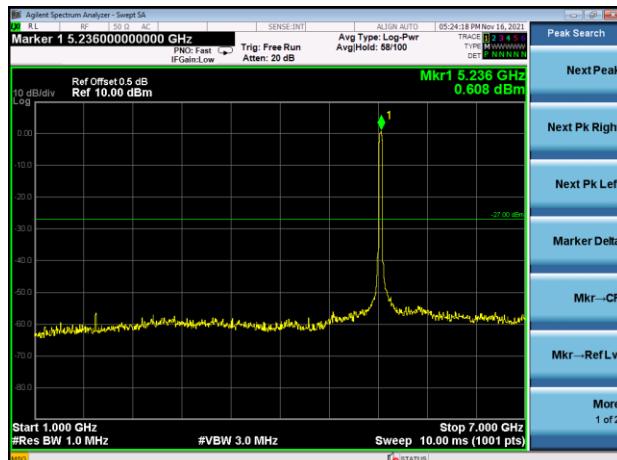

802.11n40 on channel 38

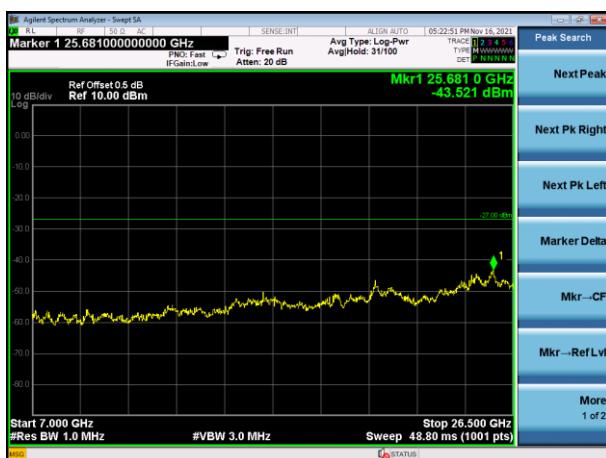


802.11n40 on channel 46




### Test Plot


802.11ac20 on channel 36

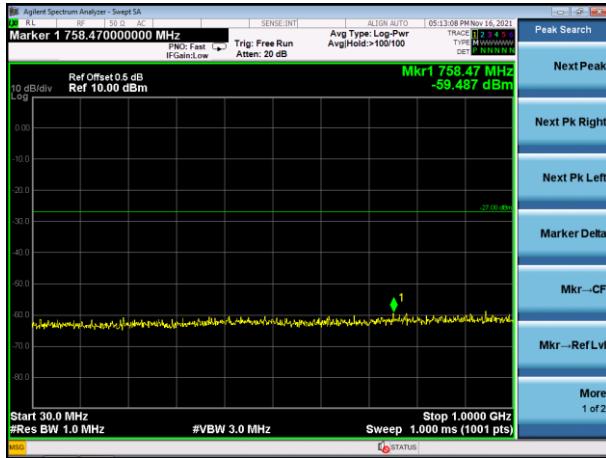

802.11ac20 on channel 40

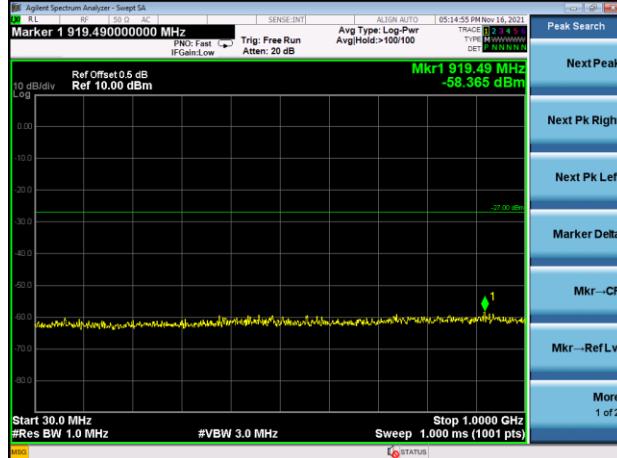

802.11ac20 on channel 36

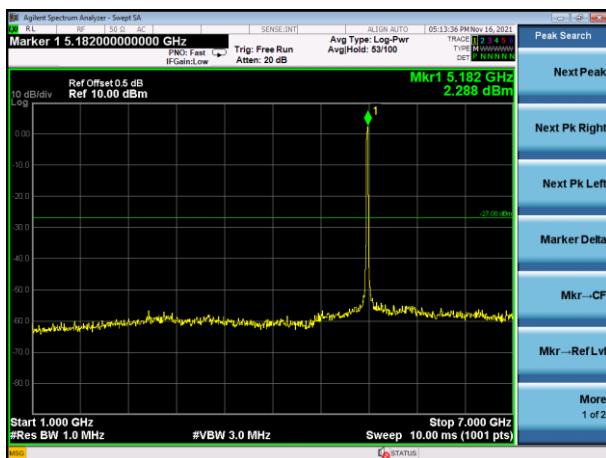

802.11ac20 on channel 40



802.11ac20 on channel 36



802.11ac20 on channel 40

