

TEST REPORT

Applicant Name : Shen Zhen Dong Hua Xiang Technology Co., Ltd.
Address : 4th Floor, Building B, Jinye Industrial Zone, 31 Queshan Road, Dalang Street, Longhua District, Shenzhen
Report Number : SZNS1211118-59480E-RF
FCC ID: 2A3PC-DX01

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Wireless microphone
Model No.: DX01
Multiple Model(s) No.: DX02, DX06, DX08, DX09, DX10, DX12, DX18, H6, H8, H1
Trade Mark: N/A
Date Received: 2021-11-18
Date of Test: 2021-11-26 to 2021-11-29
Report Date: 2021-11-30

| | |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Ding
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk **. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| TEST METHODOLOGY | 4 |
| MEASUREMENT UNCERTAINTY..... | 5 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EUT EXERCISE SOFTWARE | 6 |
| SPECIAL ACCESSORIES | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| SUPPORT EQUIPMENT LIST AND DETAILS | 6 |
| EXTERNAL I/O CABLE..... | 6 |
| BLOCK DIAGRAM OF TEST SETUP | 7 |
| SUMMARY OF TEST RESULTS..... | 10 |
| TEST EQUIPMENT LIST | 11 |
| FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE..... | 12 |
| APPLICABLE STANDARD | 12 |
| TEST RESULT: | 12 |
| FCC §15.203 – ANTENNA REQUIREMENT | 13 |
| APPLICABLE STANDARD | 13 |
| ANTENNA CONNECTOR CONSTRUCTION | 13 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | 14 |
| APPLICABLE STANDARD | 14 |
| EUT SETUP..... | 14 |
| EMI TEST RECEIVER SETUP..... | 14 |
| TEST PROCEDURE | 15 |
| TRANSD FACTOR & MARGIN CALCULATION | 15 |
| TEST DATA | 15 |
| FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS..... | 20 |
| APPLICABLE STANDARD | 20 |
| EUT SETUP | 20 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 21 |
| TEST PROCEDURE | 21 |
| FACTOR & MARGIN CALCULATION | 21 |
| TEST DATA | 21 |
| FCC §15.247(a) (1)-CHANNEL SEPARATION TEST | 29 |
| APPLICABLE STANDARD | 29 |
| TEST PROCEDURE | 29 |
| TEST DATA | 29 |
| FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH..... | 32 |
| APPLICABLE STANDARD | 32 |
| TEST PROCEDURE | 32 |
| TEST DATA | 33 |

| | |
|--|-----------|
| FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST | 44 |
| APPLICABLE STANDARD | 44 |
| TEST PROCEDURE | 44 |
| TEST DATA | 44 |
| FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)..... | 47 |
| APPLICABLE STANDARD | 47 |
| TEST PROCEDURE | 47 |
| TEST DATA | 47 |
| FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT | 57 |
| APPLICABLE STANDARD | 57 |
| TEST PROCEDURE | 57 |
| TEST DATA | 57 |
| FCC §15.247(d) - BAND EDGES TESTING | 63 |
| APPLICABLE STANDARD | 63 |
| TEST PROCEDURE | 63 |
| TEST DATA | 63 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|-------------------------------------|--|
| Product | Wireless microphone |
| Tested Model No. | DX01 |
| Multiple Model | DX02, DX06, DX08, DX09, DX10, DX12, DX18, H6, H8, H1 |
| Model difference* | Refer to the DoS letter |
| Frequency Range | 2402~2480MHz |
| Maximum conducted Peak output power | 5.71dBm |
| Modulation Technique | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Antenna Specification* | Internal Antenna: 3.5dBi(provided by the applicant) |
| Voltage Range | DC5V from adapter or Charging Box or DC3.7V from battery |
| Sample number | SZNS1211118-59480E-RF-S1 (Assigned by ATC) |
| Sample/EUT Status | Good condition |

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

| Parameter | Uncertainty | |
|------------------------------------|----------------|--------|
| Occupied Channel Bandwidth | 5% | |
| RF output power, conducted | 0.73dB | |
| Unwanted Emission, conducted | 1.6dB | |
| AC Power Lines Conducted Emissions | 2.72dB | |
| Emissions, Radiated | 30MHz - 1GHz | 4.28dB |
| | 1GHz- 18GHz | 4.98dB |
| | 18GHz- 26.5GHz | 5.06dB |
| Temperature | 1°C | |
| Humidity | 6% | |
| Supply voltages | 0.4% | |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Test mode 1: Charging by Charging Box + BT Transmitting

Test mode 2: Charging by Adapter + BT Transmitting

EUT Exercise Software

Software “FCC tool V1.0.0”* was used during testing and the power level was 21*.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|---|-------------|------------|---------------|
| SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO., LTD | Adapter | KA1803A-US | E470034 |


External I/O Cable

| Cable Description | Length (m) | From Port | To |
|-----------------------------------|---------------|------------------|---------|
| Un-shielding Detachable USB Cable | 0.25 | EUT/Charging box | Adapter |


Block Diagram of Test Setup

For conducted emission:

Test mode 1:

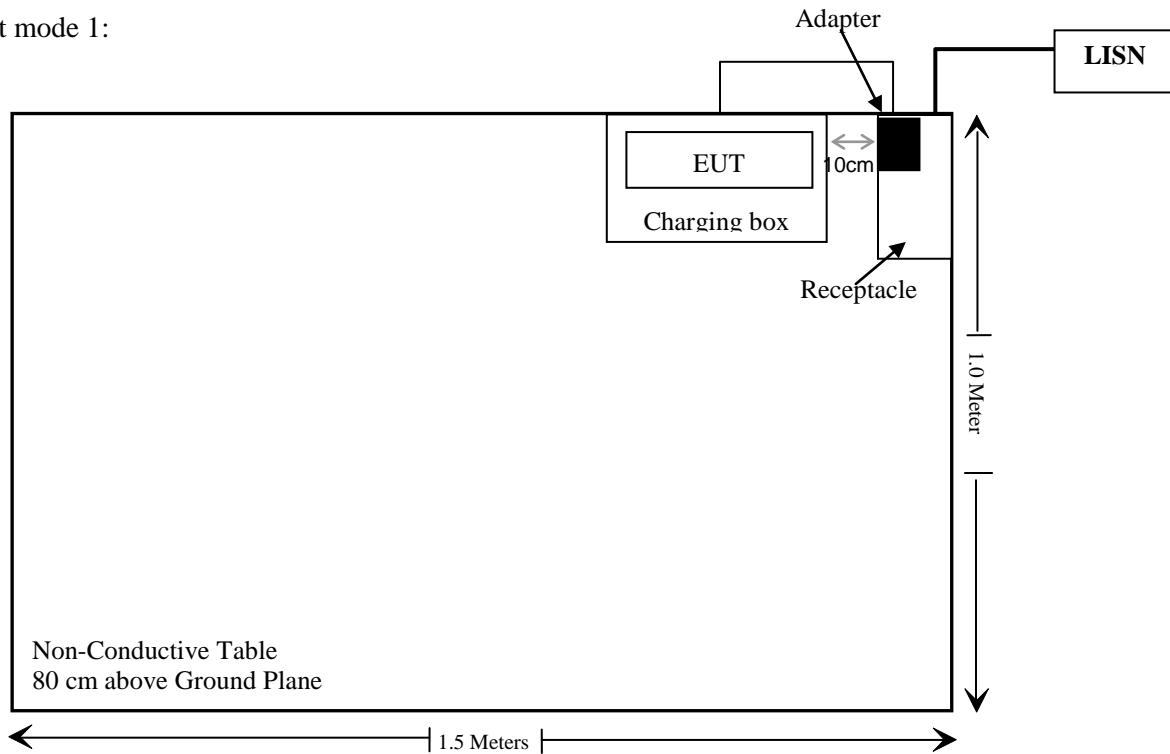


Test mode 2:

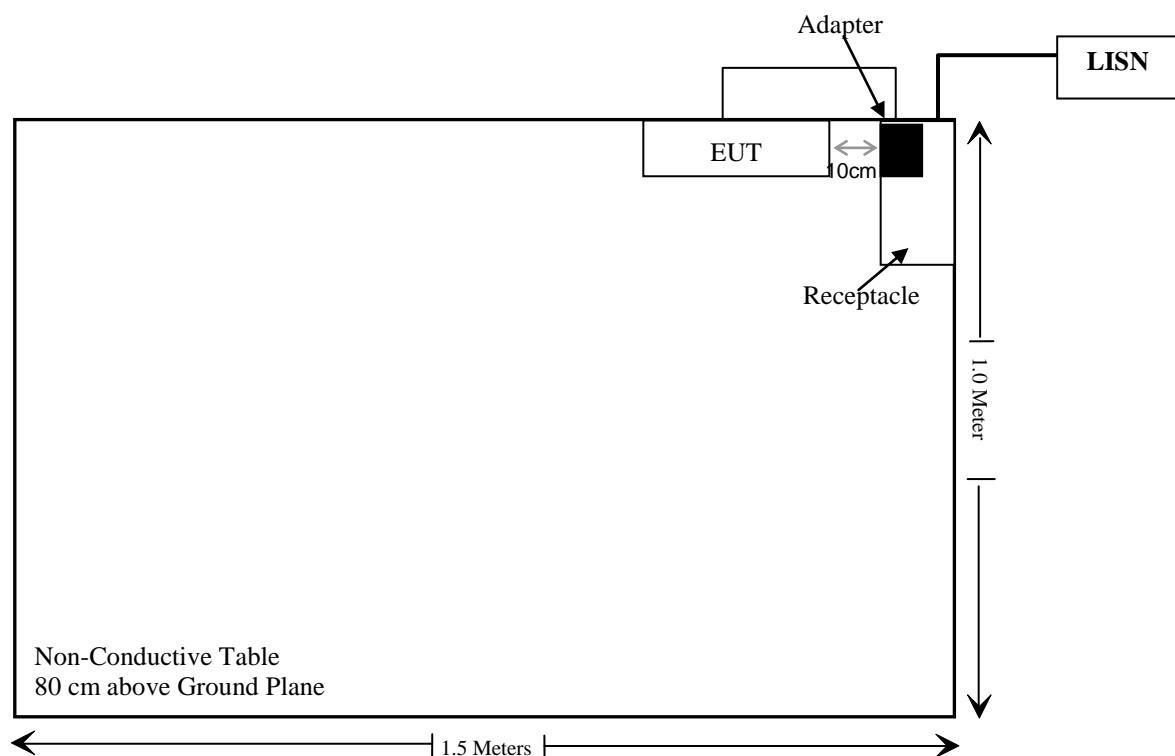


For radiated emission:


Below 1GHz:

Test mode 1:

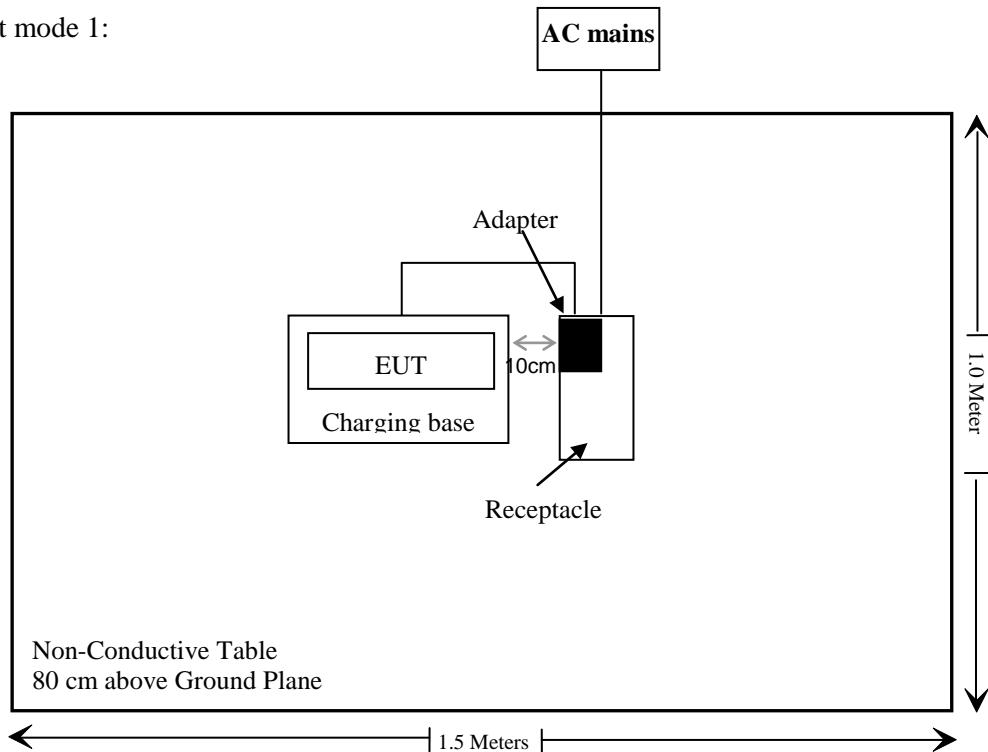

Test mode 2:

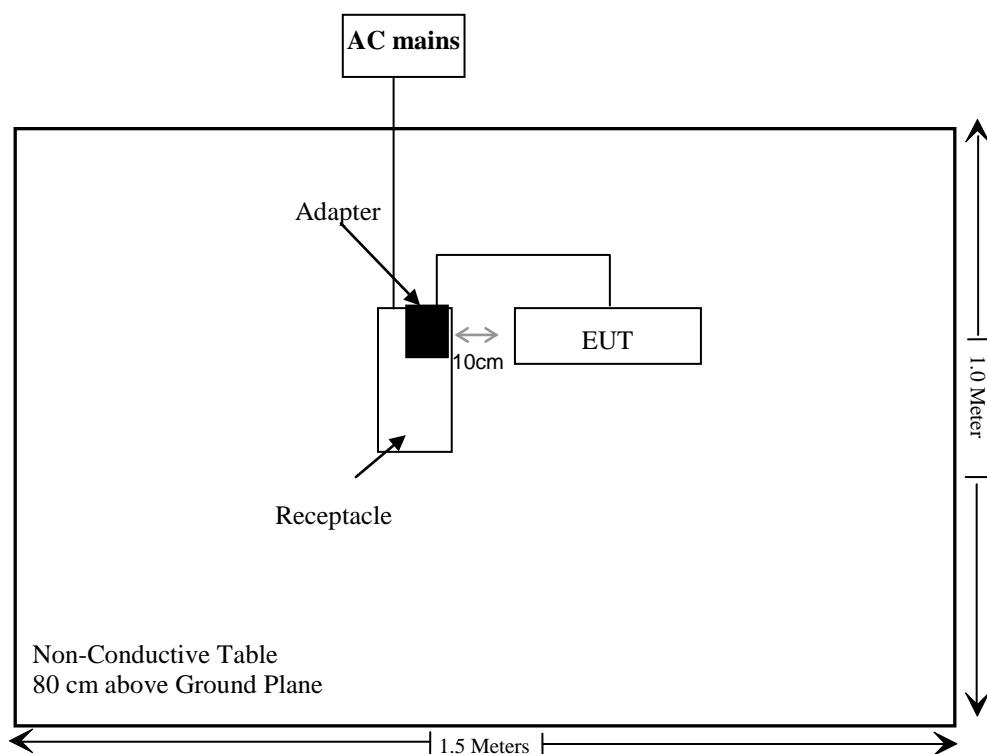

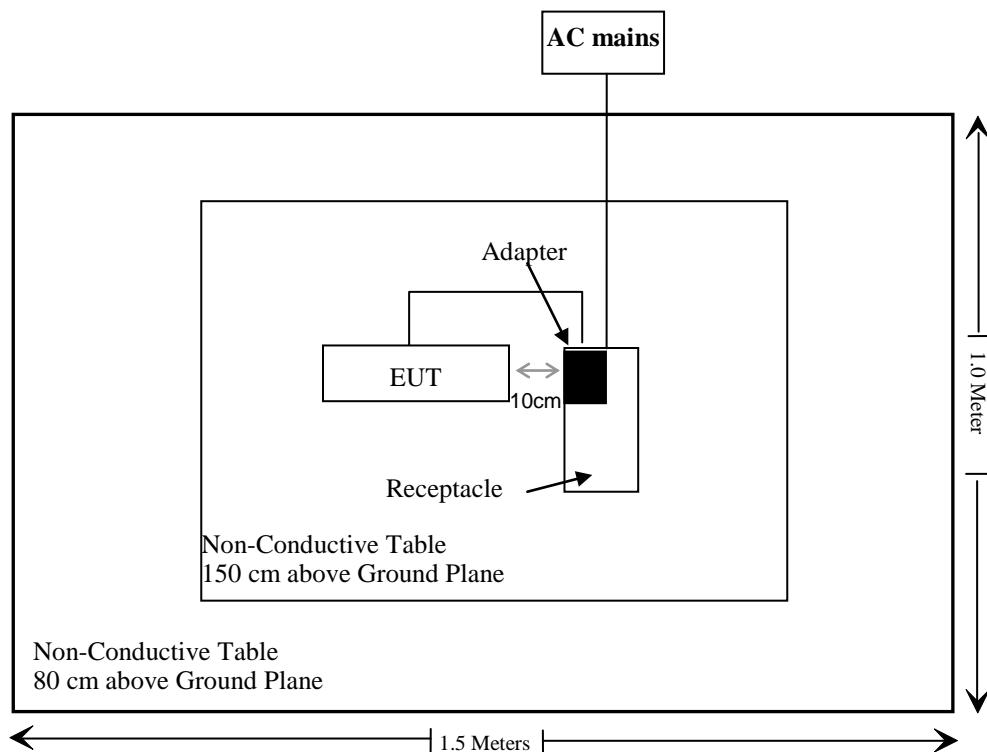Above 1GHz:

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|----------------------------------|---|-----------|
| FCC§15.247 (i), §1.1310 &§2.1093 | RF Exposure | Compliant |
| §15.203 | Antenna Requirement | Compliant |
| §15.207(a) | AC Line Conducted Emissions | Compliant |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions | Compliant |
| §15.247(a)(1) | 20 dB Emission Bandwidth & 99% Occupied Bandwidth | Compliant |
| §15.247(a)(1) | Channel Separation Test | Compliant |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliant |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliant |
| §15.247(b)(1) | Peak Output Power Measurement | Compliant |
| §15.247(d) | Band edges | Compliant |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--|------------------------------|-------------------|-----------------|------------------|----------------------|
| Conducted Emissions Test | | | | | |
| Rohde& Schwarz | EMI Test Receiver | ESCI | 100784 | 2021/02/03 | 2022/02/02 |
| R & S | L.I.S.N. | ENV216 | 101314 | 2020/12/25 | 2021/12/24 |
| Anritsu Corp | 50Ω Coaxial Switch | MP59B | 6200506474 | 2020/12/25 | 2021/12/24 |
| Unknown | RF Coaxial Cable | N-2m | No.2 | 2020/12/25 | 2021/12/24 |
| Conducted Emission Test Software: e3 19821b (V9) | | | | | |
| Radiated Emissions Test | | | | | |
| Rohde&Schwarz | Test Receiver | ESR | 101817 | 2020/12/24 | 2021/12/23 |
| Rohde & Schwarz | Spectrum Analyzer | FSV-40 | 101495 | 2020/12/24 | 2021/12/23 |
| A.H. Systems, inc. | Preamplifier | PAM-0118P | 531 | 2021/11/09 | 2022/11/08 |
| SONOMA INSTRUMENT | Amplifier | 310 N | 186131 | 2020/12/25 | 2021/12/24 |
| Quinstar | Amplifier | QLW-184055 36-J0 | 15964001002 | 2020/11/28 | 2021/11/27 |
| Anritsu Corp | 50 Coaxial Switch | MP59B | 6100237248 | 2020/12/25 | 2021/12/24 |
| Schwarzbeck | Bilog Antenna | VULB9163 | 9163-323 | 2020/01/04 | 2023/01/03 |
| Schwarzbeck | Horn Antenna | BBHA9120D | 9120D-1067 | 2020/01/05 | 2023/01/04 |
| Schwarzbeck | HORN ANTENNA | BBHA9170 | 9170-359 | 2020/01/05 | 2023/01/04 |
| Wainwright | High Pass Filter | WHKX3.6/18 G-10SS | 5 | 2020/12/25 | 2021/12/24 |
| Unknown | RF Coaxial Cable | N-5m | No.3 | 2020/12/25 | 2021/12/24 |
| Unknown | RF Coaxial Cable | N-1m | No.5 | 2020/12/25 | 2021/12/24 |
| Unknown | RF Coaxial Cable | N-10m | No.7 | 2020/12/25 | 2021/12/24 |
| Unknown | RF Coaxial Cable | N-2m | No.8 | 2020/12/25 | 2021/12/24 |
| Radiated Emission Test Software: e3 19821b(V9) | | | | | |
| RF Conducted Test | | | | | |
| Rohde&Schwarz | Spectrum Analyzer | FSV40 | 101495 | 2020/12/24 | 2021/12/23 |
| Rohde & Schwarz | Open Switch and Control Unit | OSP120 +OSP -B157 | 101244 + 100866 | 2020/12/24 | 2021/12/23 |

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310 &§2.1093 – RF EXPOSURE**Applicable Standard**

According to FCC §2.1093 and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:**For worst case:**

| Mode | Frequency (MHz) | Maximum Tune-up power | | Calculated Distance (mm) | Calculated Value | Threshold (1-g SAR) | SAR Test Exclusion |
|-----------|-----------------|-----------------------|------|--------------------------|------------------|---------------------|--------------------|
| | | (dBm) | (mW) | | | | |
| Bluetooth | 2480 | 6.0 | 3.98 | 5 | 1.3 | 3.0 | Yes |

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal Antenna arrangement, which was permanently attached and the antenna gain is 3.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

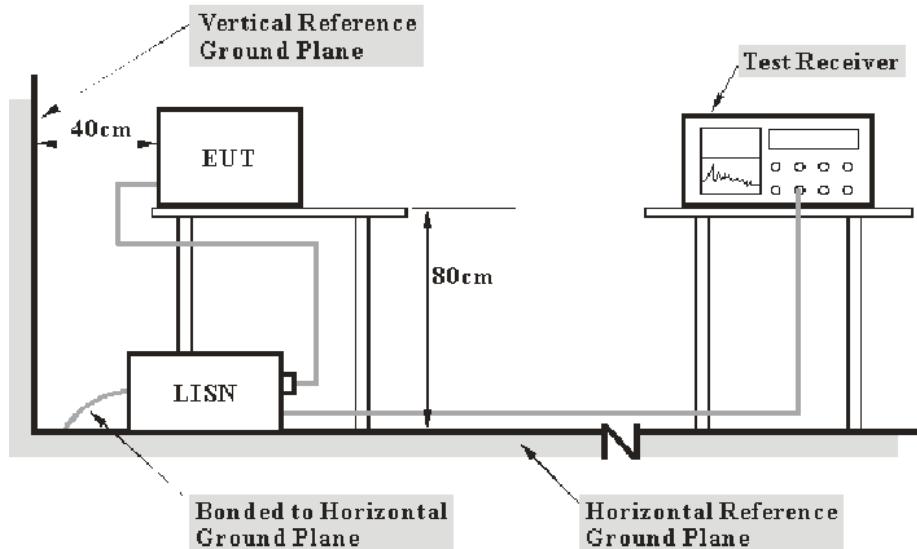

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correct Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data


Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Bin Duan on 2021-11-26.


EUT operation mode: Test mode 1 & 2

Test mode1
AC 120V/60 Hz, Line

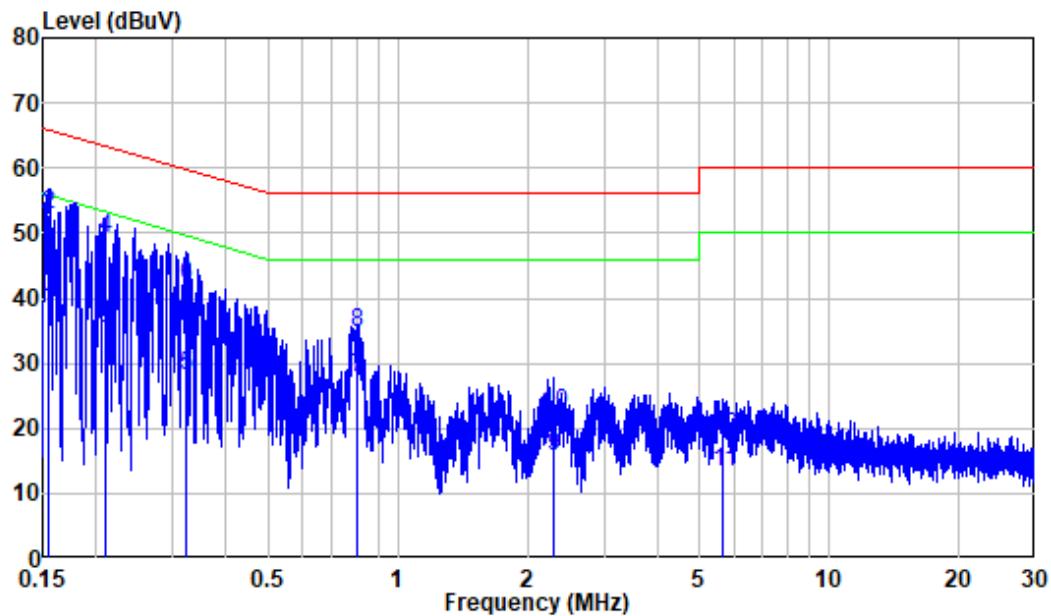


Site : Shielding Room
Condition: Line
Mode : Charging by Charging Box+Transmitting
Model : DX01

| Freq | Factor | Read | Limit | Over | Remark |
|------|--------|-------|-------|-------|----------------------|
| | | Level | Level | Line | |
| 1 | 0.156 | 9.89 | 28.49 | 38.38 | 55.70 -17.32 Average |
| 2 | 0.156 | 9.89 | 42.80 | 52.69 | 65.70 -13.01 QP |
| 3 | 0.209 | 9.80 | 25.51 | 35.31 | 53.25 -17.94 Average |
| 4 | 0.209 | 9.80 | 39.28 | 49.08 | 63.25 -14.17 QP |
| 5 | 0.323 | 9.80 | 18.34 | 28.14 | 49.62 -21.48 Average |
| 6 | 0.323 | 9.80 | 32.19 | 41.99 | 59.62 -17.63 QP |
| 7 | 0.807 | 9.81 | 17.87 | 27.68 | 46.00 -18.32 Average |
| 8 | 0.807 | 9.81 | 24.77 | 34.58 | 56.00 -21.42 QP |
| 9 | 2.294 | 9.92 | 5.82 | 15.74 | 46.00 -30.26 Average |
| 10 | 2.294 | 9.92 | 12.53 | 22.45 | 56.00 -33.55 QP |
| 11 | 5.668 | 10.02 | 3.20 | 13.22 | 50.00 -36.78 Average |
| 12 | 5.668 | 10.02 | 8.81 | 18.83 | 60.00 -41.17 QP |

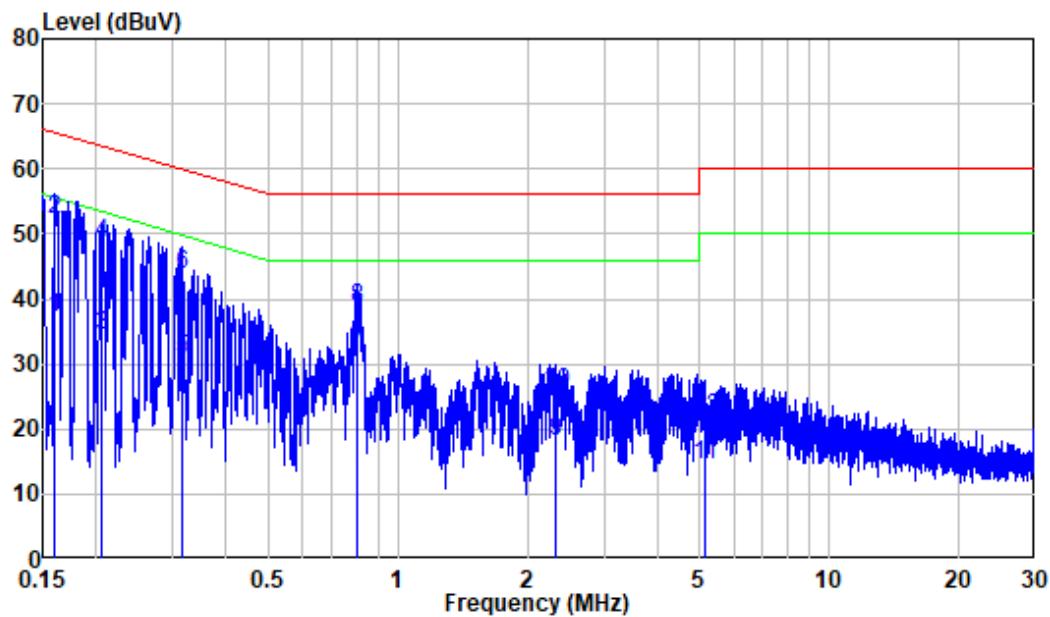AC 120V/60 Hz, Neutral

Site : Shielding Room
Condition: Neutral
Mode : Charging by Charging Box+ Transmitting
Model : DX01


| | Freq | Factor | Read Level | Limit Level | Limit Line | Over Limit | Remark |
|----|-------|--------|------------|-------------|------------|------------|---------|
| | | | MHz | dB | dBuV | dBuV | dB |
| 1 | 0.160 | 9.92 | 27.12 | 37.04 | 55.47 | -18.43 | Average |
| 2 | 0.160 | 9.92 | 42.41 | 52.33 | 65.47 | -13.14 | QP |
| 3 | 0.205 | 10.00 | 24.39 | 34.39 | 53.41 | -19.02 | Average |
| 4 | 0.205 | 10.00 | 38.66 | 48.66 | 63.41 | -14.75 | QP |
| 5 | 0.315 | 9.95 | 20.92 | 30.87 | 49.85 | -18.98 | Average |
| 6 | 0.315 | 9.95 | 33.76 | 43.71 | 59.85 | -16.14 | QP |
| 7 | 0.801 | 9.91 | 22.01 | 31.92 | 46.00 | -14.08 | Average |
| 8 | 0.801 | 9.91 | 28.70 | 38.61 | 56.00 | -17.39 | QP |
| 9 | 2.329 | 9.94 | 8.25 | 18.19 | 46.00 | -27.81 | Average |
| 10 | 2.329 | 9.94 | 15.78 | 25.72 | 56.00 | -30.28 | QP |
| 11 | 5.139 | 10.05 | 4.29 | 14.34 | 50.00 | -35.66 | Average |
| 12 | 5.139 | 10.05 | 11.62 | 21.67 | 60.00 | -38.33 | QP |

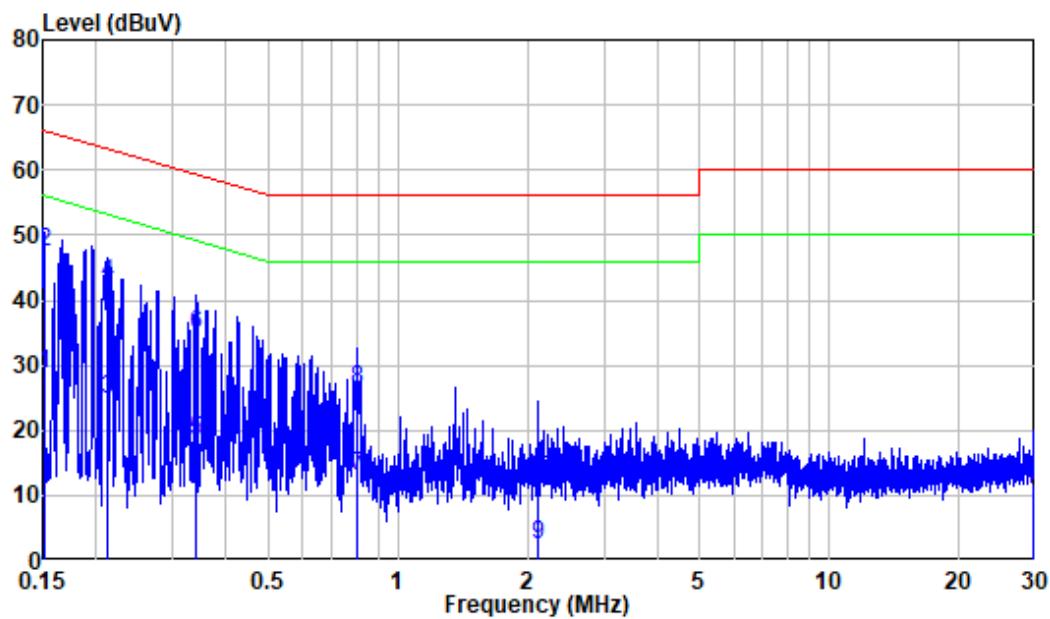Test mode2
AC 120V/60 Hz, Line

Site : Shielding Room
Condition: Line
Mode : Charging by Adapter+Transmitting
Model : DX01

| Freq | Factor | Read | | Limit Line | Over Limit | Remark |
|------|--------|-------|-------|------------|------------|----------------|
| | | MHz | dB | dBuV | dBuV | |
| 1 | 0.151 | 9.90 | 18.91 | 28.81 | 55.94 | -27.13 Average |
| 2 | 0.151 | 9.90 | 37.62 | 47.52 | 65.94 | -18.42 QP |
| 3 | 0.213 | 9.80 | 15.07 | 24.87 | 53.09 | -28.22 Average |
| 4 | 0.213 | 9.80 | 32.83 | 42.63 | 63.09 | -20.46 QP |
| 5 | 0.341 | 9.80 | 8.77 | 18.57 | 49.17 | -30.60 Average |
| 6 | 0.341 | 9.80 | 24.90 | 34.70 | 59.17 | -24.47 QP |
| 7 | 0.801 | 9.81 | 3.30 | 13.11 | 46.00 | -32.89 Average |
| 8 | 0.801 | 9.81 | 16.38 | 26.19 | 56.00 | -29.81 QP |
| 9 | 2.105 | 9.92 | -7.50 | 2.42 | 46.00 | -43.58 Average |
| 10 | 2.105 | 9.92 | 2.43 | 12.35 | 56.00 | -43.65 QP |
| 11 | 29.822 | 10.50 | 0.43 | 10.93 | 50.00 | -39.07 Average |
| 12 | 29.822 | 10.50 | 1.29 | 11.79 | 60.00 | -48.21 QP |

AC 120V/60 Hz, Neutral


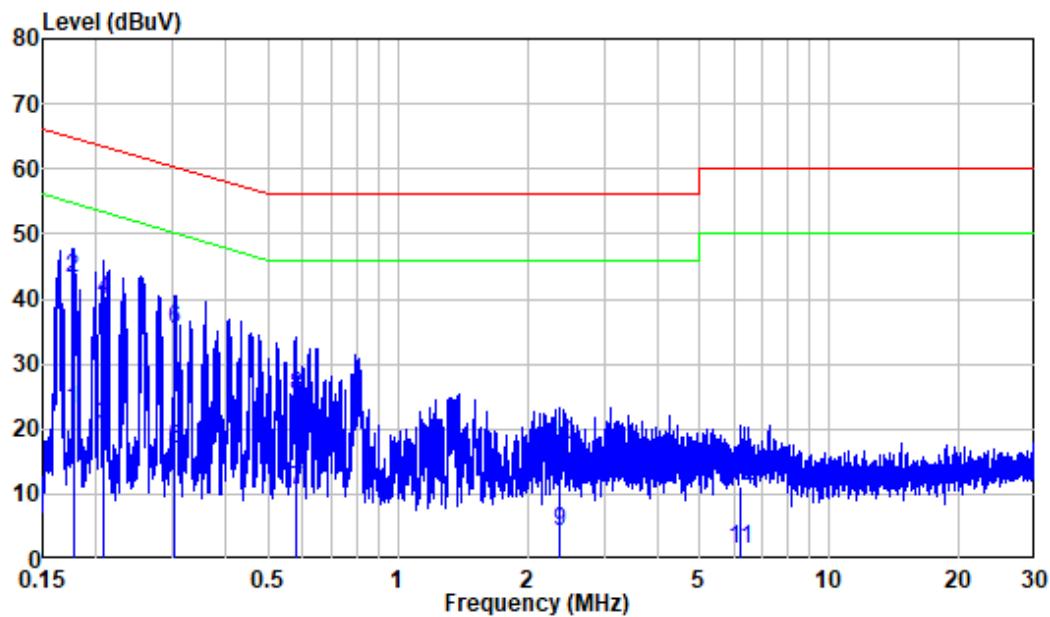


Site : Shielding Room
Condition: Neutral
Mode : Charging by Adapter+ Transmitting
Model : DX01

| | Freq | Factor | Read Level | Limit Level | Line | Over Limit | Remark |
|----|-------|--------|------------|-------------|-------|------------|---------|
| | | | MHz | dB | dBuV | dBuV | dB |
| 1 | 0.177 | 9.96 | 13.07 | 23.03 | 54.65 | -31.62 | Average |
| 2 | 0.177 | 9.96 | 33.17 | 43.13 | 64.65 | -21.52 | QP |
| 3 | 0.208 | 10.00 | 10.59 | 20.59 | 53.29 | -32.70 | Average |
| 4 | 0.208 | 10.00 | 29.99 | 39.99 | 63.29 | -23.30 | QP |
| 5 | 0.302 | 9.95 | 6.91 | 16.86 | 50.18 | -33.32 | Average |
| 6 | 0.302 | 9.95 | 25.49 | 35.44 | 60.18 | -24.74 | QP |
| 7 | 0.580 | 9.91 | 0.55 | 10.46 | 46.00 | -35.54 | Average |
| 8 | 0.580 | 9.91 | 15.08 | 24.99 | 56.00 | -31.01 | QP |
| 9 | 2.371 | 9.94 | -5.61 | 4.33 | 46.00 | -41.67 | Average |
| 10 | 2.371 | 9.94 | 7.52 | 17.46 | 56.00 | -38.54 | QP |
| 11 | 6.223 | 10.06 | -8.61 | 1.45 | 50.00 | -48.55 | Average |
| 12 | 6.223 | 10.06 | 1.06 | 11.12 | 60.00 | -48.88 | QP |

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

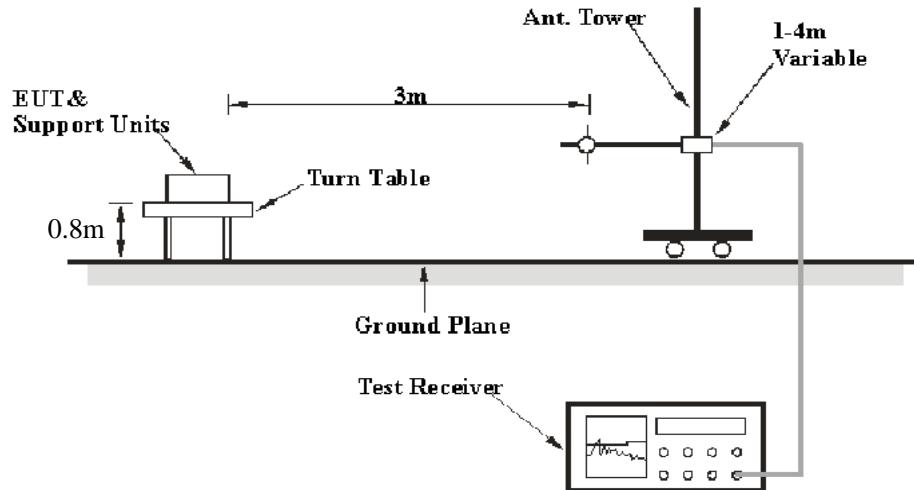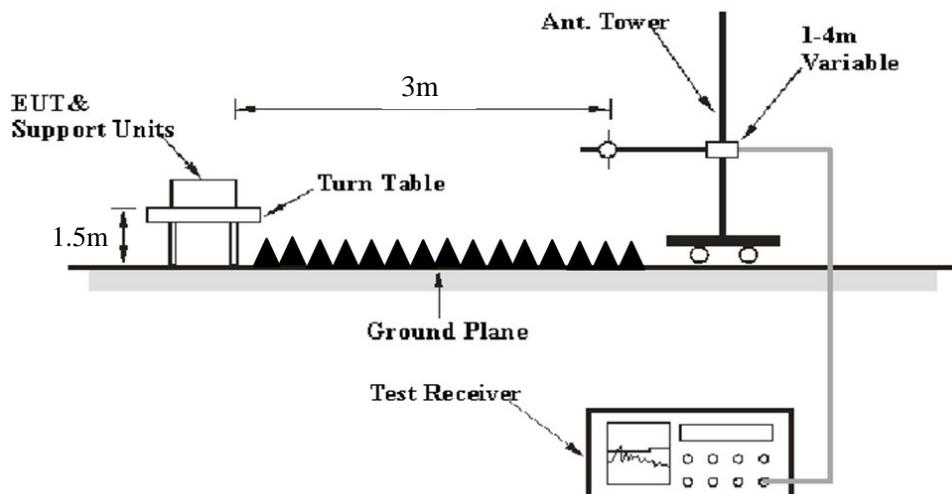EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | PK |
| | 1 MHz | 10 Hz | / | Average |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for Over Limit/margin calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24-25 °C |
| Relative Humidity: | 52 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Chao Mo on 2021-11-26.


EUT operation mode: Test mode 1 & 2

(Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode at X axis, Y axis, Z axis, the worst case is GFSK Mode, Low channel at Z axis)

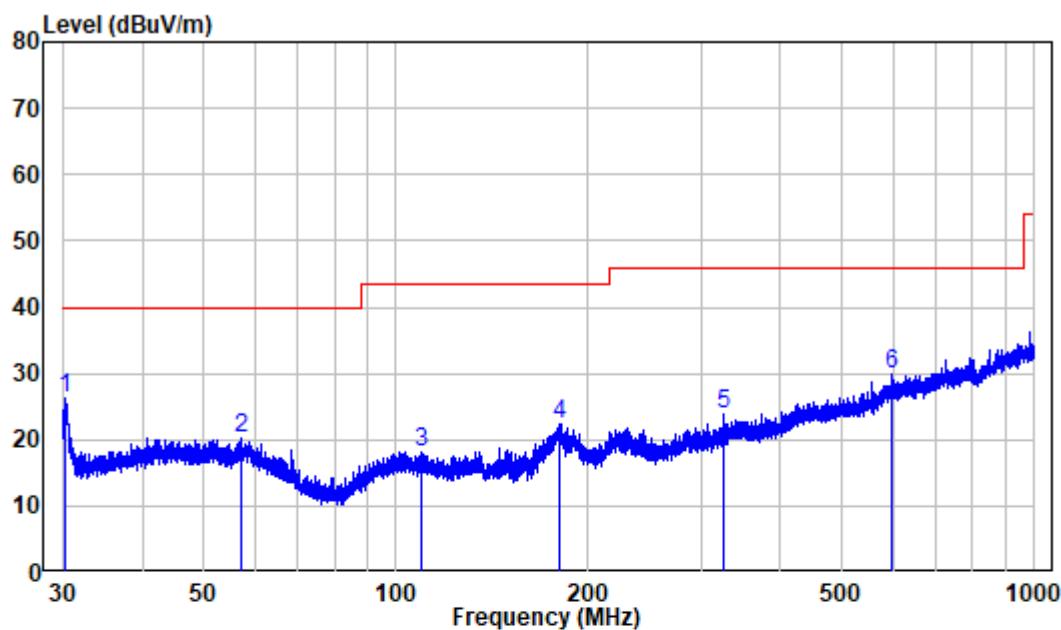Below 1GHz:
Test mode1, Low Channel**Horizontal**

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS1211118-59480E-RF
Mode : Charging by Charging Box+Transmitting

| Freq | Factor | Read | Limit | Over | Remark | |
|------|--------|--------|-------|-------|--------|-------------|
| | | Level | Level | Line | | |
| | | MHz | dB/m | dBuV | dBuV/m | dB |
| 1 | 30.33 | -12.28 | 38.41 | 26.13 | 40.00 | -13.87 Peak |
| 2 | 57.32 | -9.95 | 30.17 | 20.22 | 40.00 | -19.78 Peak |
| 3 | 109.22 | -11.99 | 30.11 | 18.12 | 43.50 | -25.38 Peak |
| 4 | 180.02 | -12.60 | 34.80 | 22.20 | 43.50 | -21.30 Peak |
| 5 | 326.45 | -7.96 | 31.74 | 23.78 | 46.00 | -22.22 Peak |
| 6 | 599.58 | -1.96 | 31.89 | 29.93 | 46.00 | -16.07 Peak |

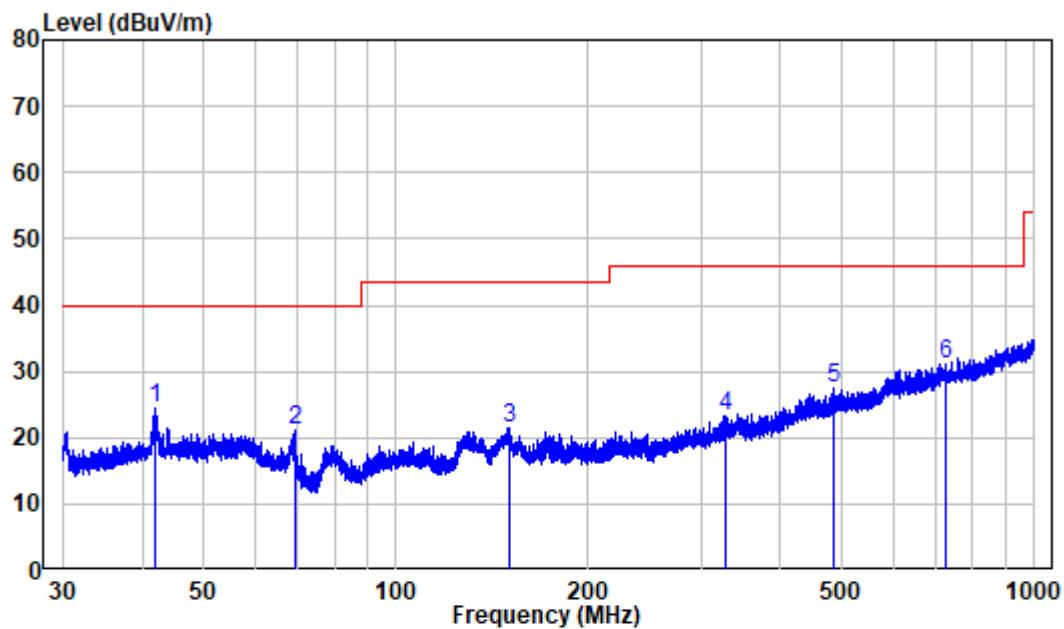Vertical


Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS1211118-59480E-RF

Mode : Charging by Charging Box+Transmitting

| | Freq | Factor | Read Level | Limit Level | Over Line | Over Limit | Remark |
|---|--------|--------|------------|-------------|-----------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 42.04 | -9.93 | 34.28 | 24.35 | 40.00 | -15.65 | Peak |
| 2 | 69.30 | -14.42 | 35.56 | 21.14 | 40.00 | -18.86 | Peak |
| 3 | 150.27 | -15.09 | 36.66 | 21.57 | 43.50 | -21.93 | Peak |
| 4 | 328.17 | -7.87 | 31.07 | 23.20 | 46.00 | -22.80 | Peak |
| 5 | 484.76 | -4.97 | 32.38 | 27.41 | 46.00 | -18.59 | Peak |
| 6 | 727.44 | -0.97 | 32.11 | 31.14 | 46.00 | -14.86 | Peak |

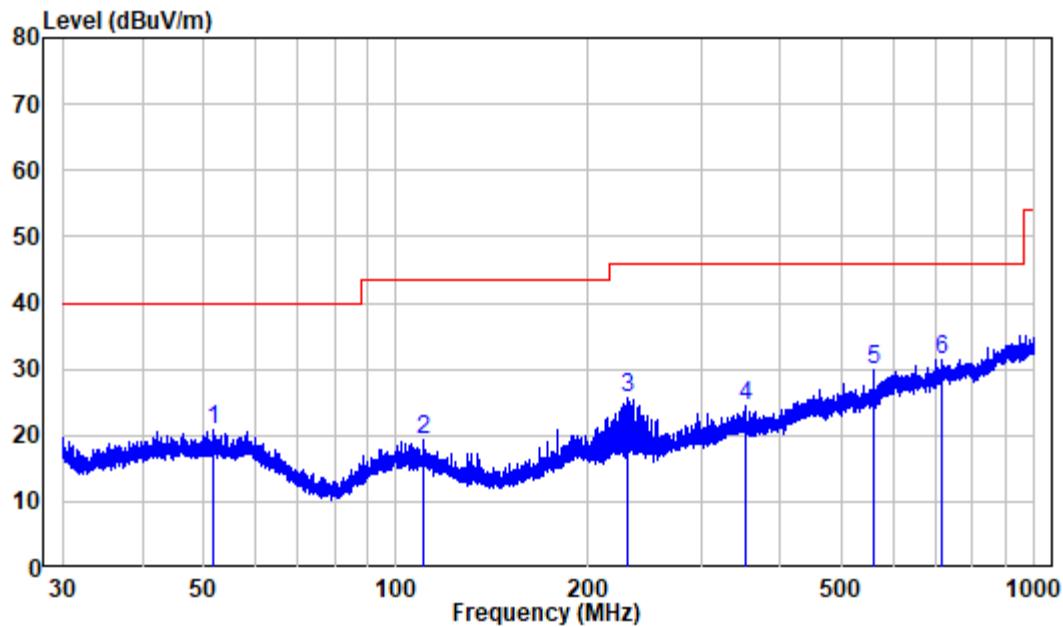Test mode2, Low Channel**Horizontal**


Site : chamber

Condition: 3m HORIZONTAL

Job No. : SZNS1211118-59480E-RF

Mode : Charging by Adapter+Transmitting

| Freq | Factor | Read | Limit | Over | Remark |
|------|--------|--------|-------|-------|-------------------|
| | | Level | Level | Line | |
| 1 | 51.84 | -9.90 | 30.70 | 20.80 | 40.00 -19.20 Peak |
| 2 | 110.04 | -11.98 | 31.43 | 19.45 | 43.50 -24.05 Peak |
| 3 | 231.01 | -11.19 | 36.93 | 25.74 | 46.00 -20.26 Peak |
| 4 | 353.10 | -7.42 | 31.84 | 24.42 | 46.00 -21.58 Peak |
| 5 | 561.68 | -3.97 | 33.94 | 29.97 | 46.00 -16.03 Peak |
| 6 | 717.63 | -1.27 | 32.71 | 31.44 | 46.00 -14.56 Peak |

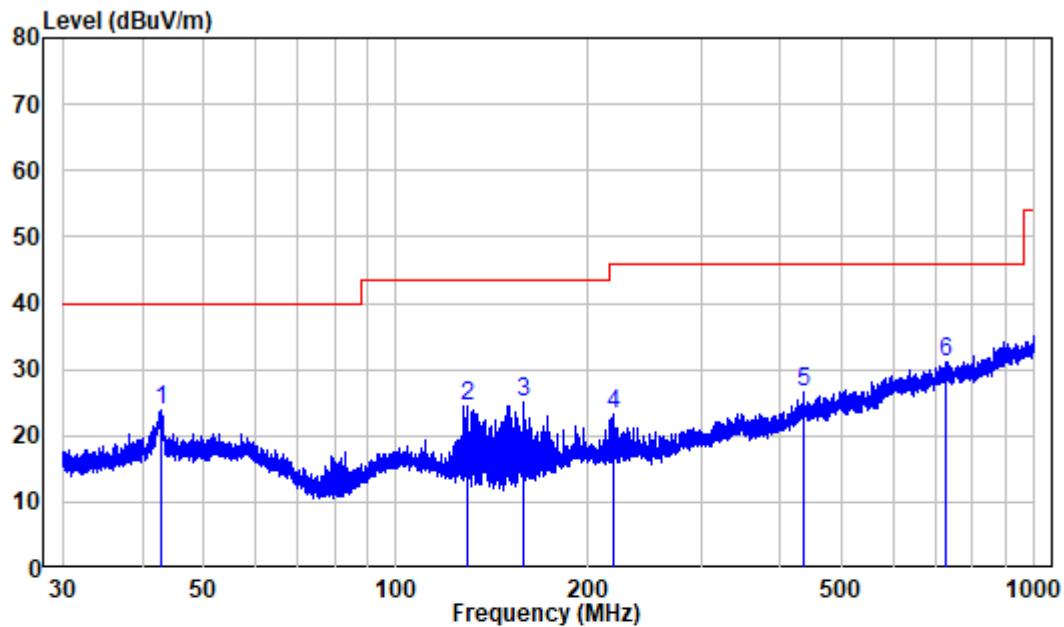Vertical

Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS1211118-59480E-RF

Mode : Charging by Adapter+Transmitting

| | Freq | Factor | Read Level | Limit Level | Over Line | Over Limit | Remark |
|---|--------|--------|------------|-------------|-----------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 42.88 | -9.89 | 33.70 | 23.81 | 40.00 | -16.19 | Peak |
| 2 | 129.41 | -14.74 | 39.32 | 24.58 | 43.50 | -18.92 | Peak |
| 3 | 158.46 | -14.29 | 39.20 | 24.91 | 43.50 | -18.59 | Peak |
| 4 | 219.75 | -11.45 | 34.80 | 23.35 | 46.00 | -22.65 | Peak |
| 5 | 435.21 | -5.36 | 31.95 | 26.59 | 46.00 | -19.41 | Peak |
| 6 | 725.21 | -1.14 | 32.38 | 31.24 | 46.00 | -14.76 | Peak |

Above 1GHz, Test mode2 (worst case):

| Frequency (MHz) | Receiver | | Turntable Angle Degree | Rx Antenna | | Factor (dB/m) | Absolute Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------|-------------------|-------|------------------------------|---------------|----------------|------------------|-------------------------------|-------------------|----------------|
| | Reading (dBuV) | PK/AV | | Height (m) | Polar (H/V) | | | | |
| DH1 Low Channel | | | | | | | | | |
| 2310 | 48.82 | PK | 325 | 1.5 | H | -7.23 | 41.59 | 74 | -32.41 |
| 2310 | 48.09 | PK | 169 | 2.0 | V | -7.23 | 40.86 | 74 | -33.14 |
| 2390 | 57.63 | PK | 223 | 1.1 | H | -7.21 | 50.42 | 74 | -23.58 |
| 2390 | 56.82 | PK | 142 | 2.2 | V | -7.21 | 49.61 | 74 | -24.39 |
| 4804 | 46.24 | PK | 148 | 2.1 | H | -3.52 | 42.72 | 74 | -31.28 |
| 4804 | 46.44 | PK | 300 | 2.1 | V | -3.52 | 42.92 | 74 | -31.08 |
| DH1 Middle Channel | | | | | | | | | |
| 4882 | 43.53 | PK | 130 | 1.2 | H | -3.37 | 40.16 | 74 | -33.84 |
| 4882 | 43.9 | PK | 267 | 1.2 | V | -3.37 | 40.53 | 74 | -33.47 |
| DH1 High Channel | | | | | | | | | |
| 2483.5 | 61.11 | PK | 35 | 1.9 | H | -7.2 | 53.91 | 74 | -20.09 |
| 2483.5 | 55.63 | PK | 295 | 2.2 | V | -7.2 | 48.43 | 74 | -25.57 |
| 2500 | 48.43 | PK | 205 | 1.8 | H | -7.18 | 41.25 | 74 | -32.75 |
| 2500 | 48.22 | PK | 350 | 1.7 | V | -7.18 | 41.04 | 74 | -32.96 |
| 4960 | 43.43 | PK | 317 | 1.4 | H | -3.01 | 40.42 | 74 | -33.58 |
| 4960 | 44.73 | PK | 115 | 1.2 | V | -3.01 | 41.72 | 74 | -32.28 |

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

Low Channel

Horizontal

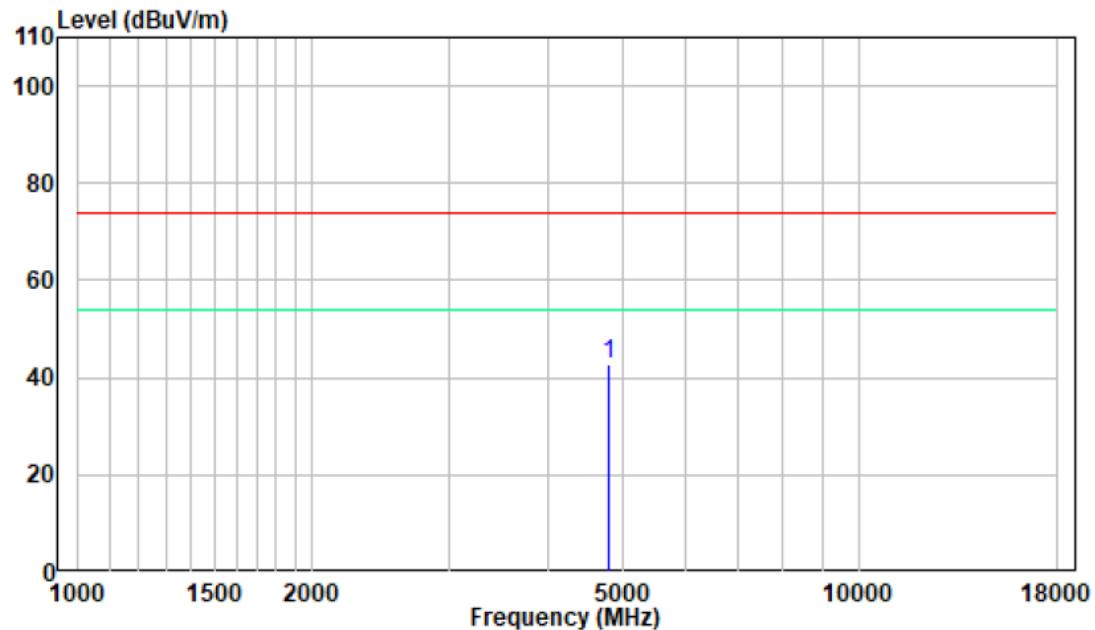


Vertical

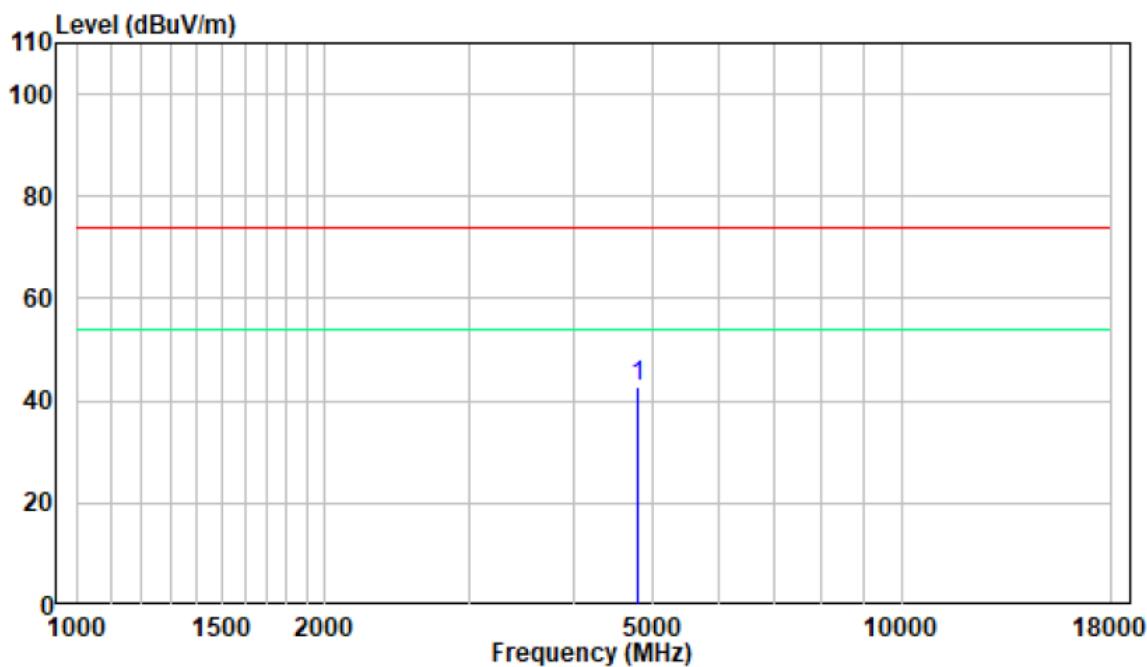

18-25GHz: (Pre-Scan plots)

Low Channel

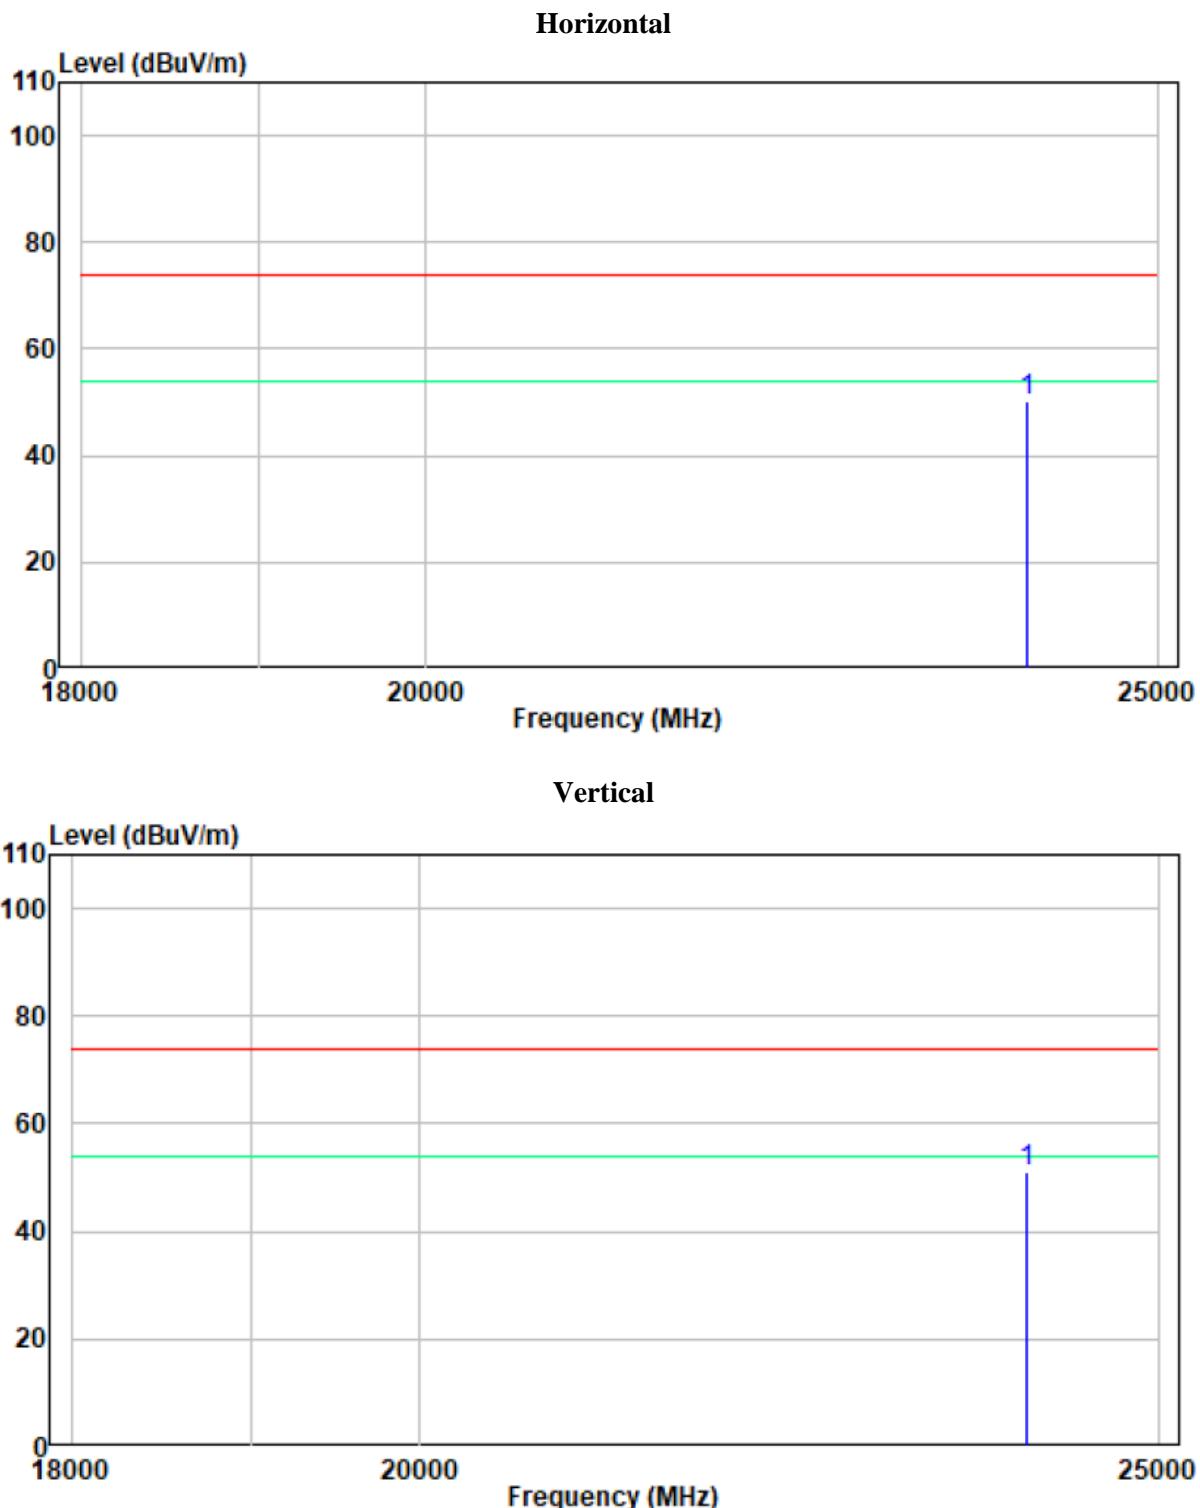

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.1 kPa |



The testing was performed by Paul Liu from 2021-11-26 to 2021-11-29

EUT operation mode: Transmitting


Test Result: Compliant.

| Test Mode | Antenna | Channel | Result[MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| DH1 | Ant1 | Hop | 1.003 | >=0.694 | PASS |
| 2DH1 | Ant1 | Hop | 1 | >=0.890 | PASS |
| 3DH1 | Ant1 | Hop | 1 | >=0.860 | PASS |

Please refer to the below plots:

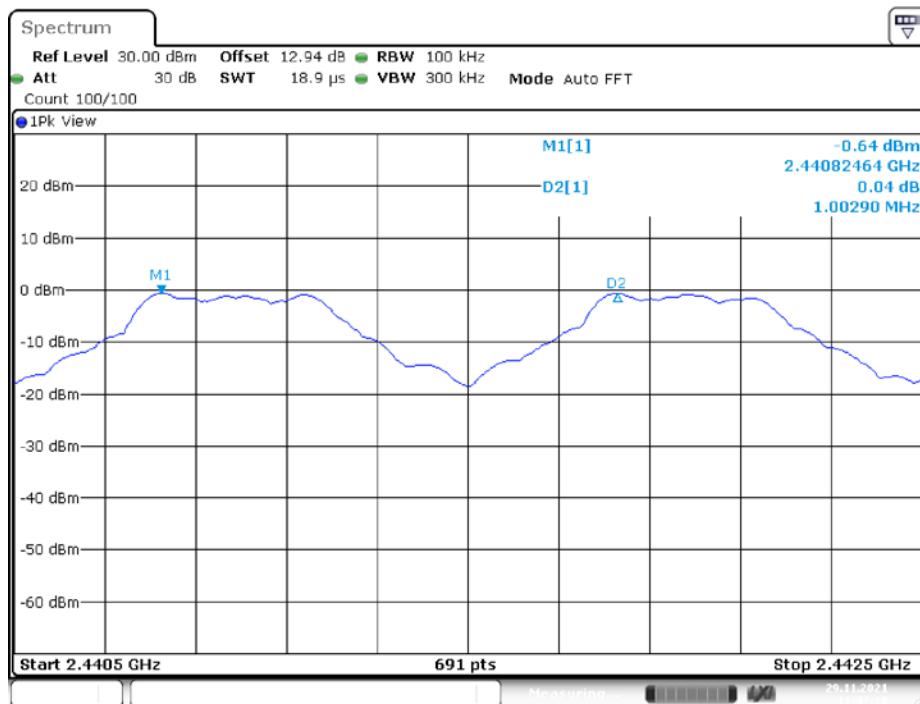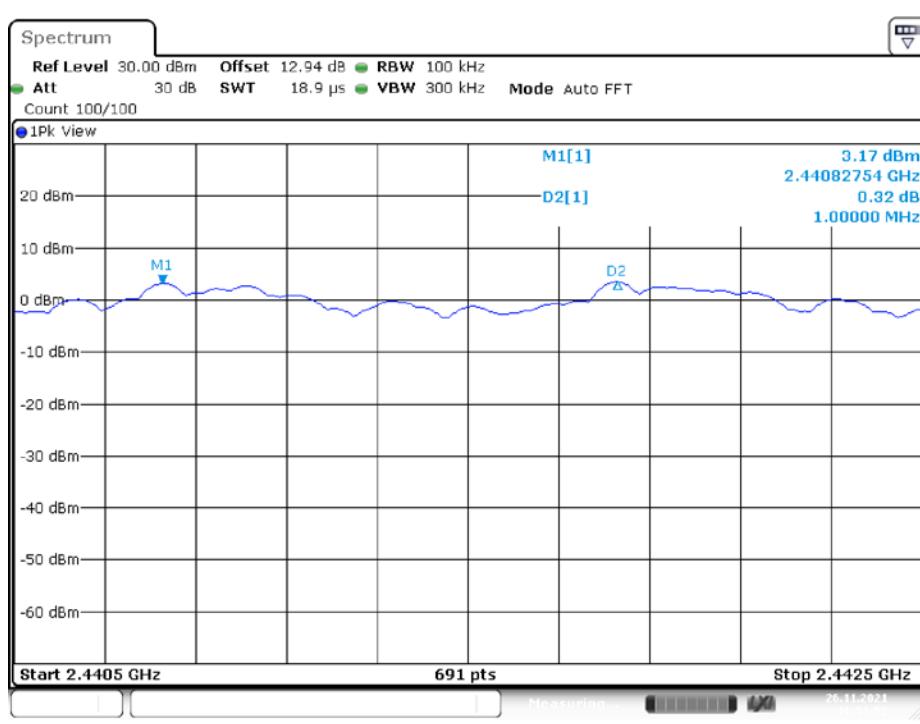DH1_Ant1_Hop**2DH1_Ant1_Hop**

3DH1_Ant1_Hop

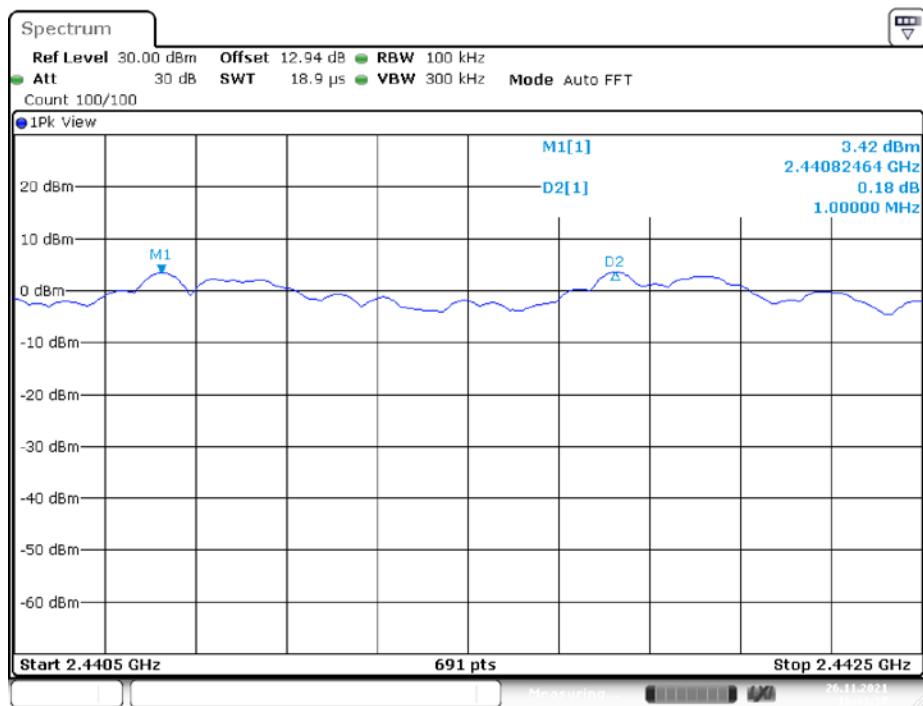

Date: 26.NOV.2021 16:43:37

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.1 kPa |

The testing was performed by Paul Liu from 2021-11-26 to 2021-11-29



EUT operation mode: Transmitting

Test Result: Compliant.


| Test Mode | Antenna | Channel | 20db EBW[MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|---------------|------------|---------|
| DH1 | Ant1 | 2402 | 1.038 | --- | PASS |
| | | 2441 | 1.041 | --- | PASS |
| | | 2480 | 1.035 | --- | PASS |
| 2DH1 | Ant1 | 2402 | 1.338 | --- | PASS |
| | | 2441 | 1.335 | --- | PASS |
| | | 2480 | 1.332 | --- | PASS |
| 3DH1 | Ant1 | 2402 | 1.284 | --- | PASS |
| | | 2441 | 1.290 | --- | PASS |
| | | 2480 | 1.290 | --- | PASS |

| Test Mode | Antenna | Channel | 99% Occupied Bandwidth [MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|------------------------------|------------|---------|
| DH1 | Ant1 | 2402 | 0.911 | --- | PASS |
| | | 2441 | 0.92 | --- | PASS |
| | | 2480 | 0.899 | --- | PASS |
| 2DH1 | Ant1 | 2402 | 1.205 | --- | PASS |
| | | 2441 | 1.22 | --- | PASS |
| | | 2480 | 1.229 | --- | PASS |
| 3DH1 | Ant1 | 2402 | 1.184 | --- | PASS |
| | | 2441 | 1.193 | --- | PASS |
| | | 2480 | 1.193 | --- | PASS |

Please refer to the below plots:

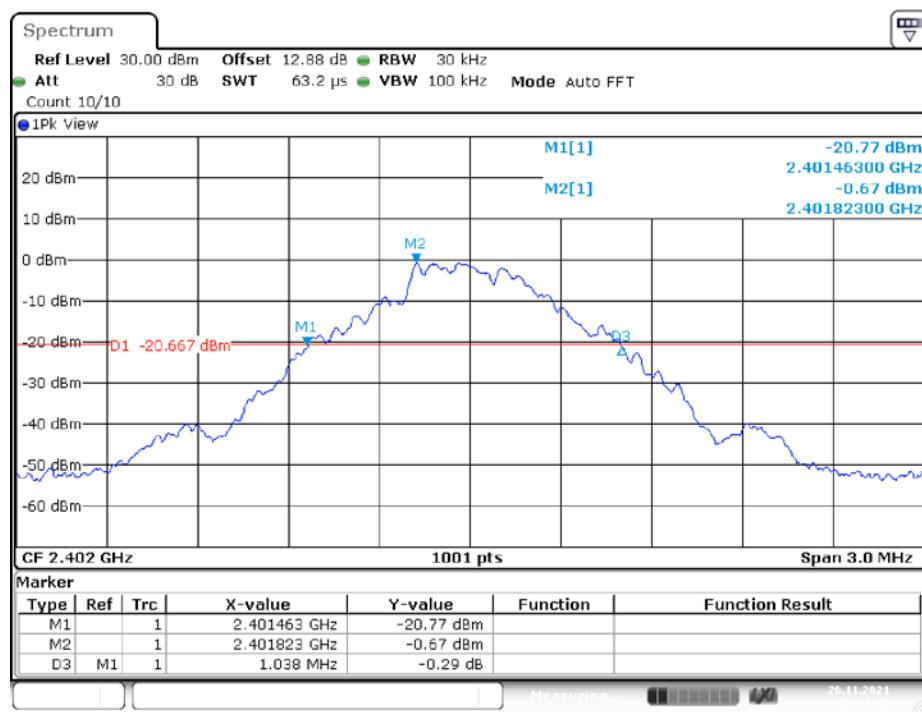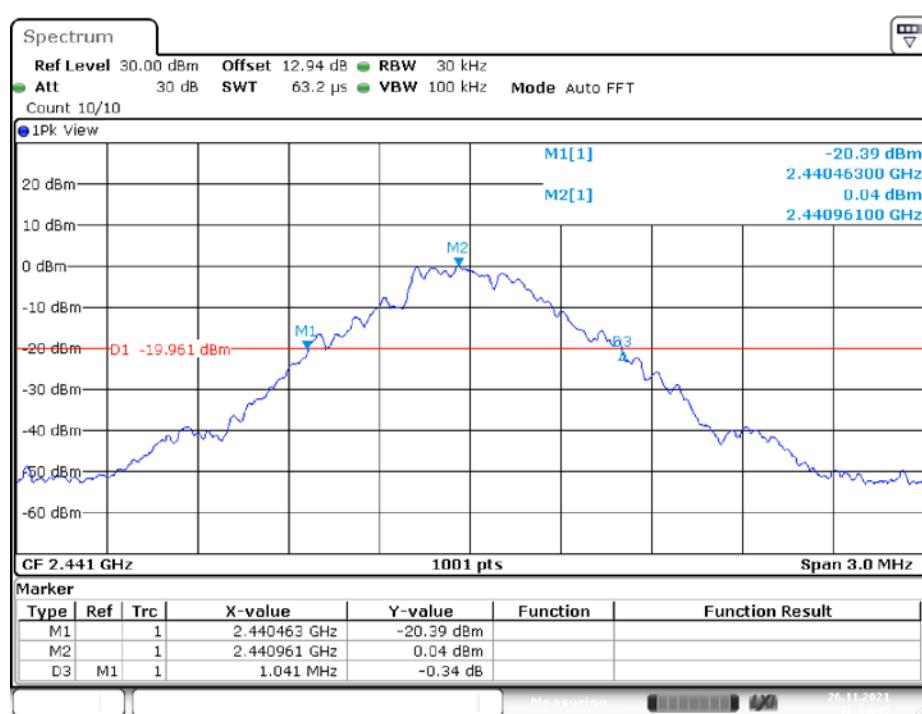
20 dB EMISSION BANDWIDTH**DH1_Ant1_2402MHz****DH1_Ant1_2441MHz**

DH1_Ant1_2480MHz

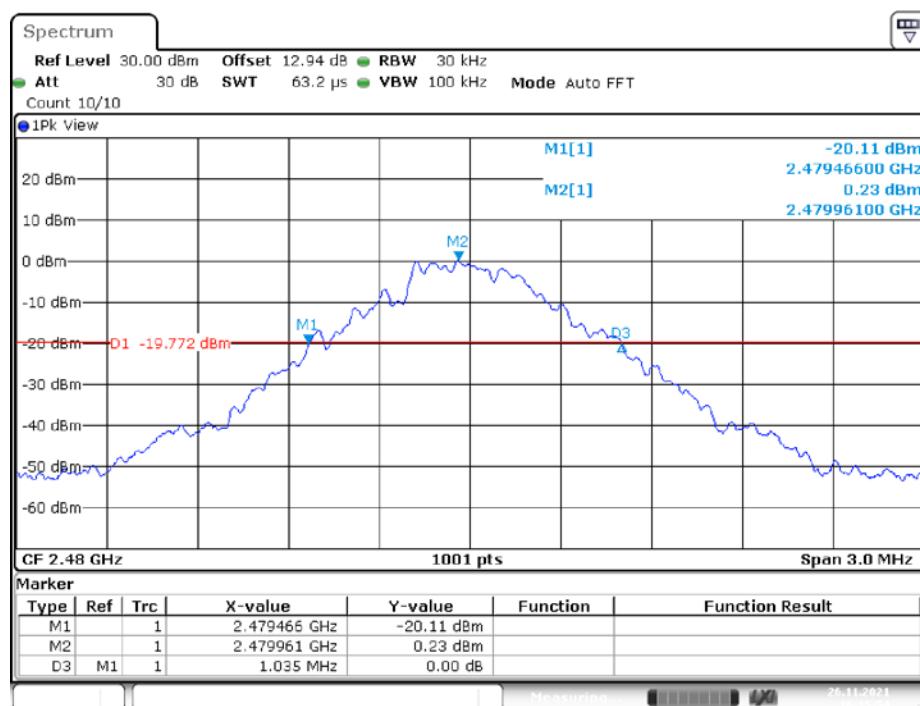


Date: 26.NOV.2021 16:15:54

2DH1_Ant1_2402MHz

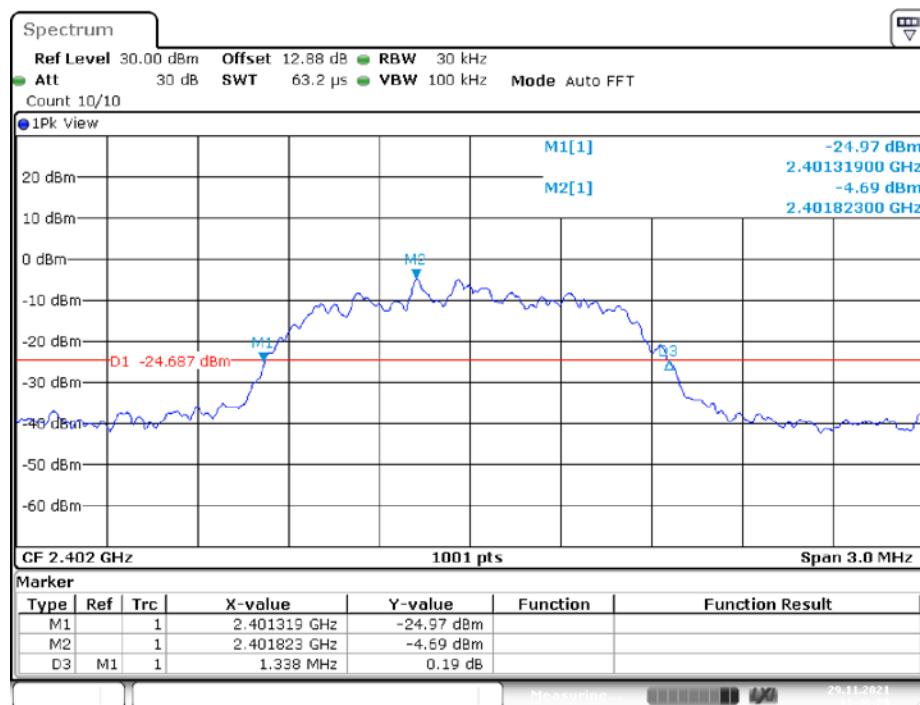


Date: 29.NOV.2021 11:46:30

2DH1_Ant1_2441MHz

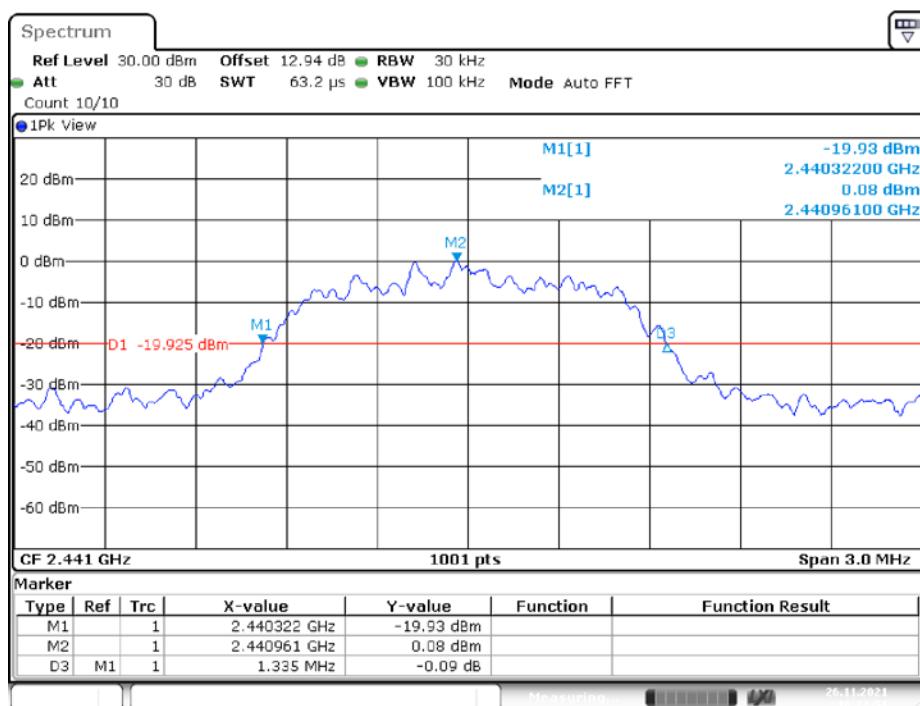


Date: 26.NOV.2021 16:22:50

2DH1_Ant1_2480MHz

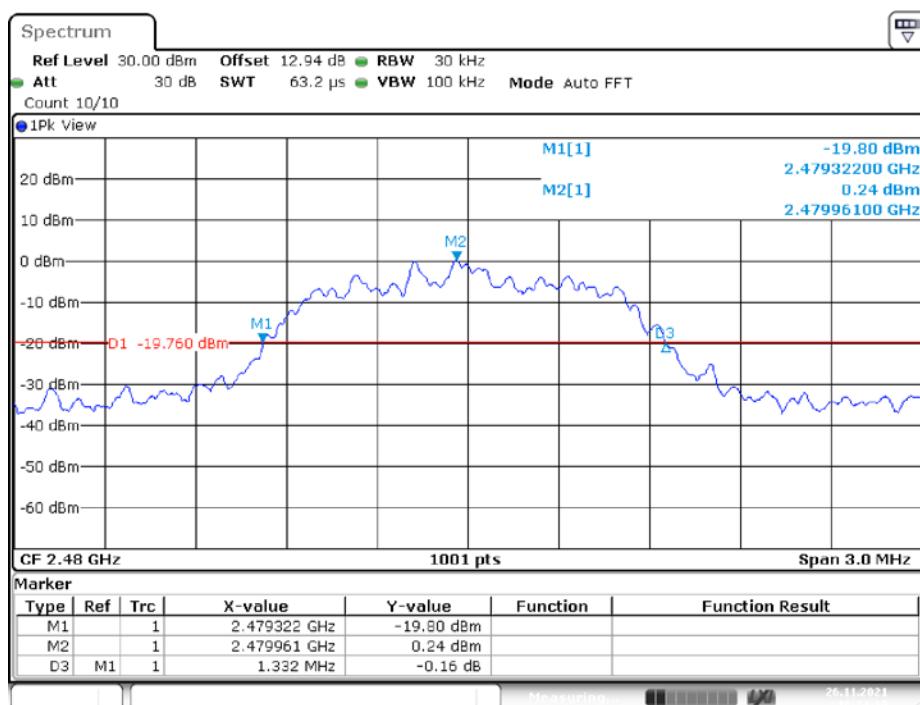


Date: 26.NOV.2021 16:24:09

3DH1_Ant1_2402MHz

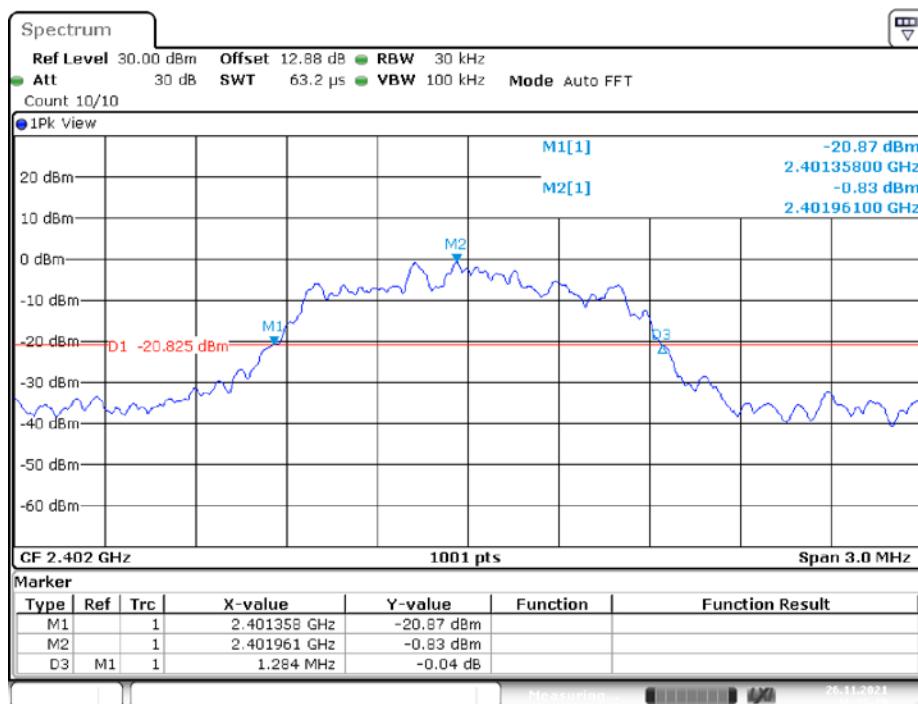


Date: 26.NOV.2021 16:25:29


3DH1_Ant1_2441MHz

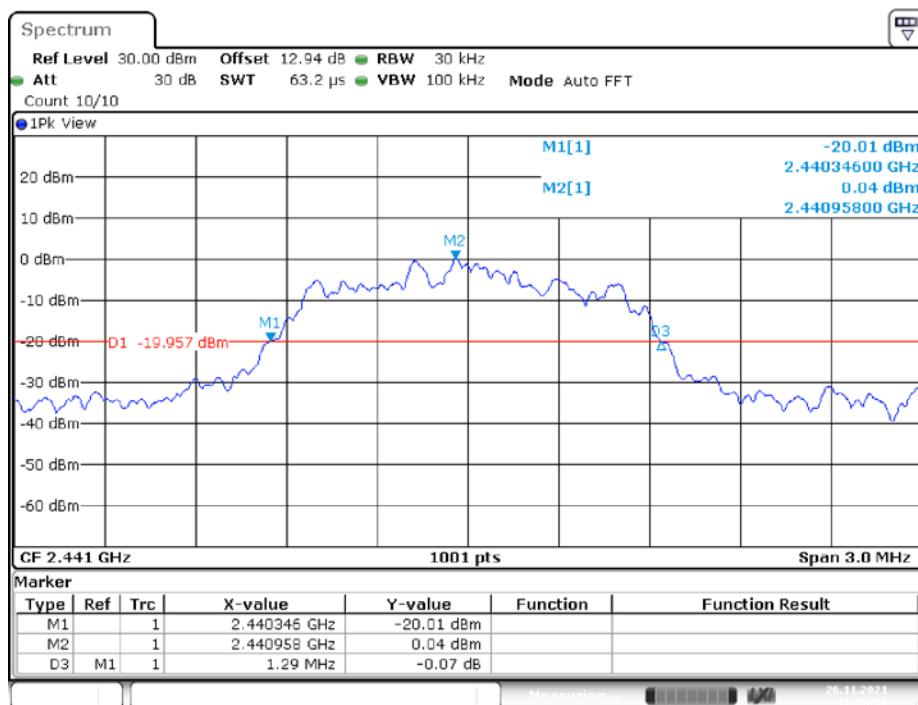


Date: 26.NOV.2021 16:26:51

3DH1_Ant1_2480MHz

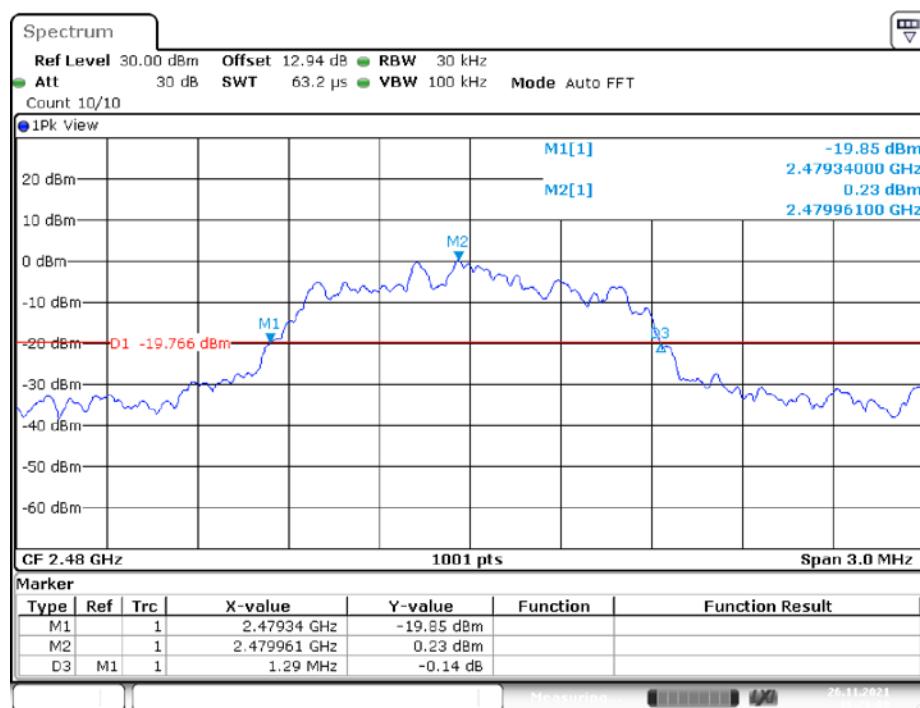

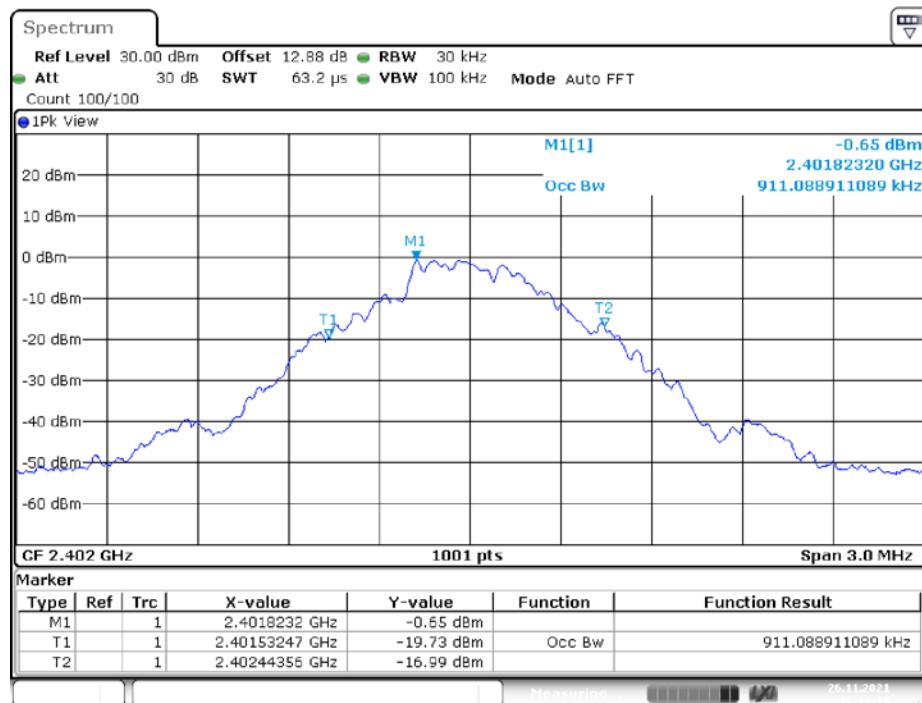
99% OCCUPIED BANDWIDTH**DH1_Ant1_2402MHz**

Date: 26.NOV.2021 16:13:30

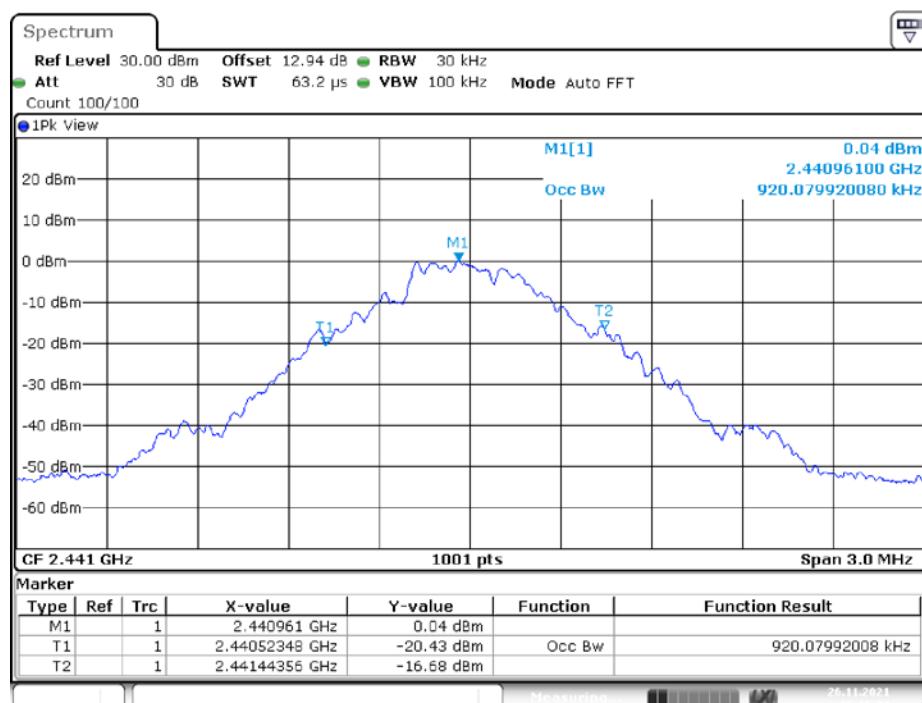DH1_Ant1_2441MHz


Date: 26.NOV.2021 16:15:04

DH1_Ant1_2480MHz

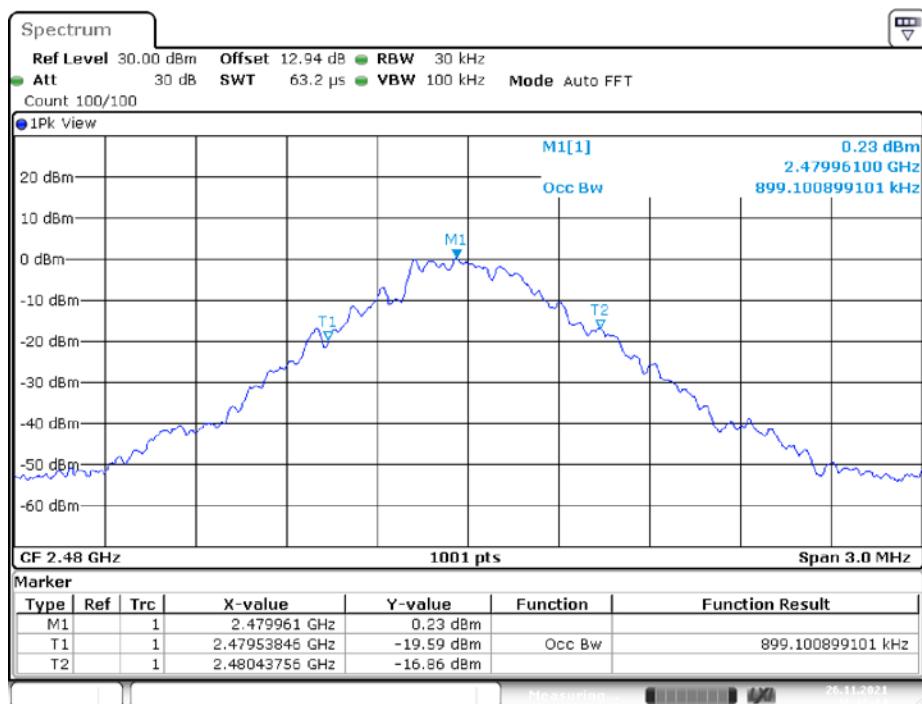


Date: 26.NOV.2021 16:16:14

2DH1_Ant1_2402MHz

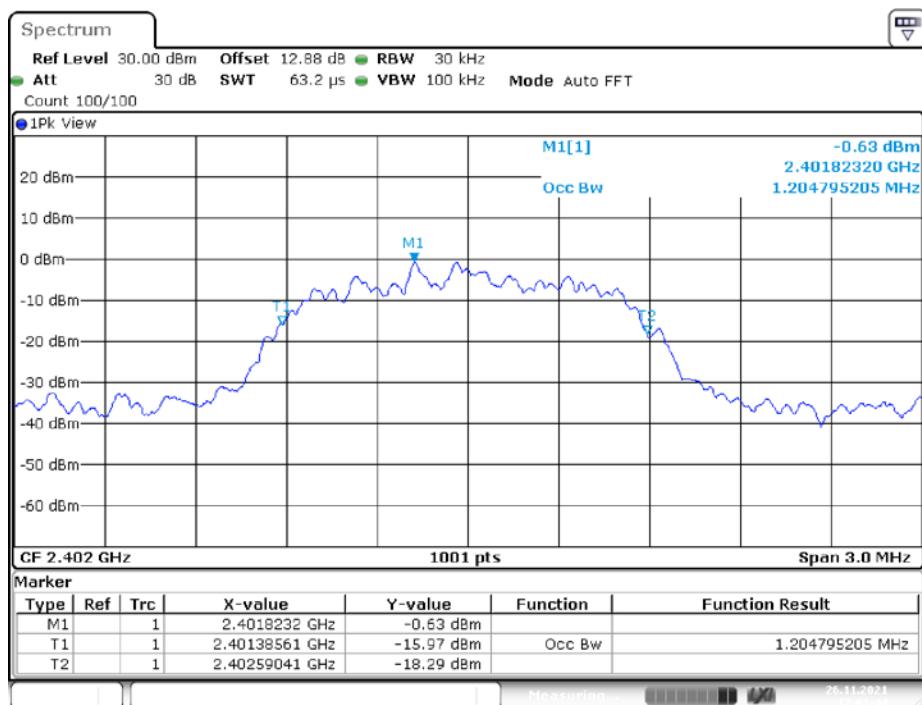


Date: 26.NOV.2021 17:02:43

2DH1_Ant1_2441MHz

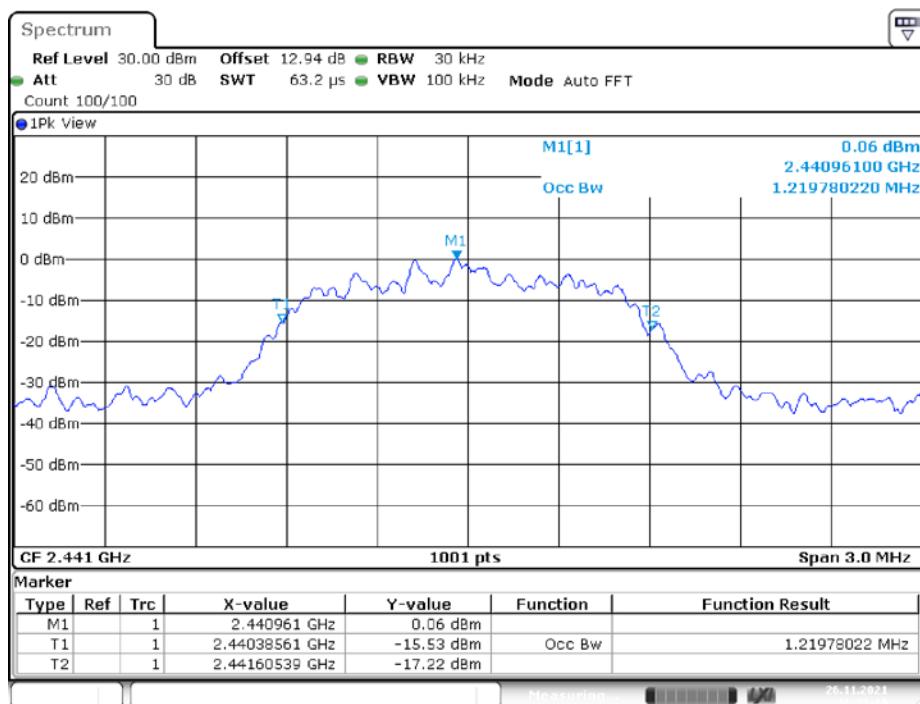


Date: 26.NOV.2021 16:23:10

2DH1_Ant1_2480MHz

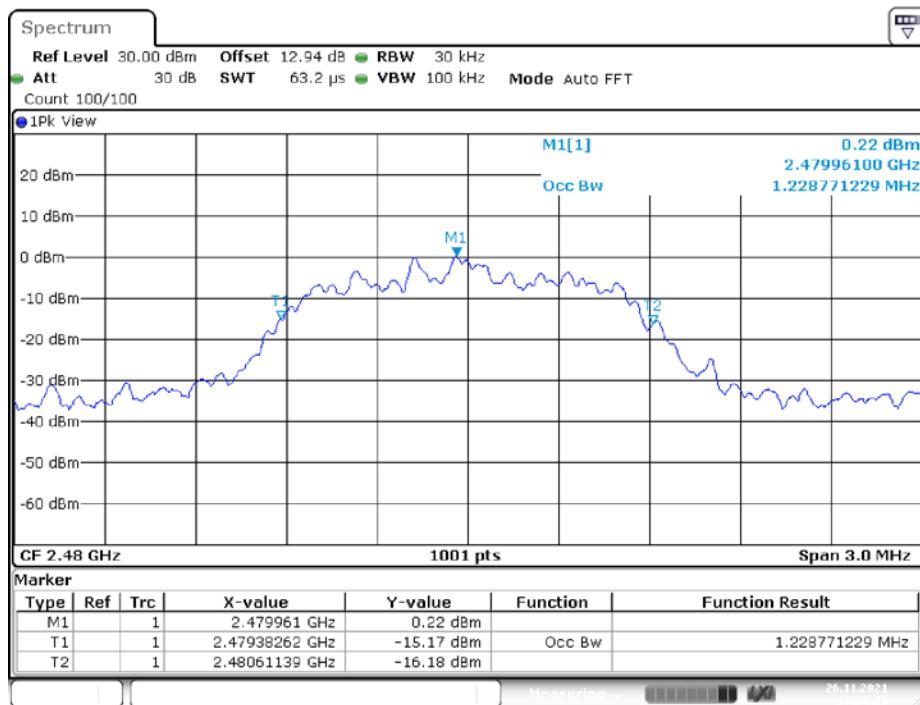


Date: 26.NOV.2021 16:24:29

3DH1_Ant1_2402MHz

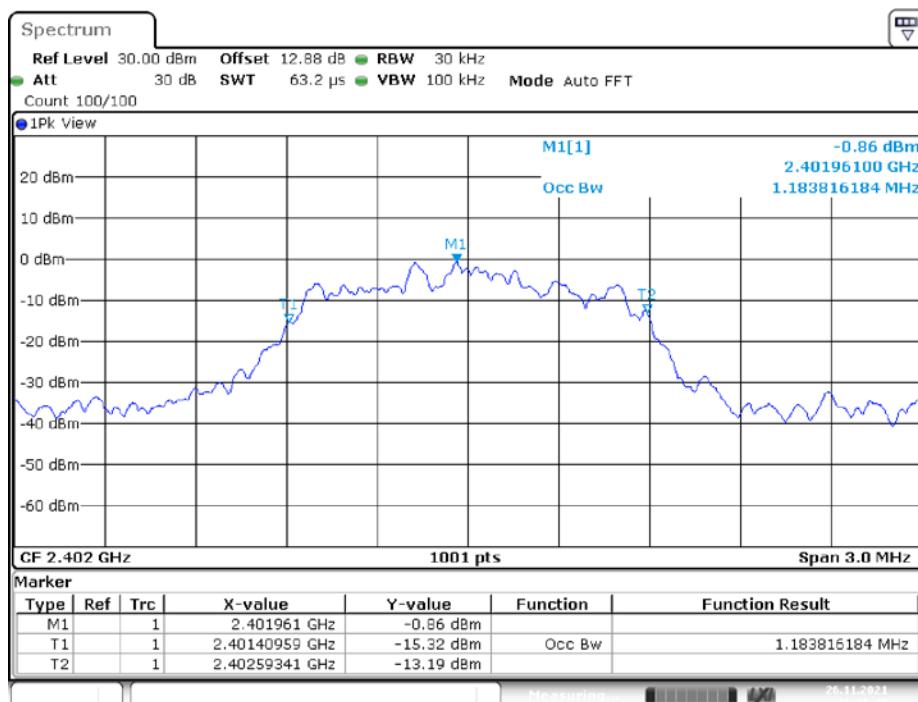


Date: 26.NOV.2021 16:25:48

3DH1_Ant1_2441MHz

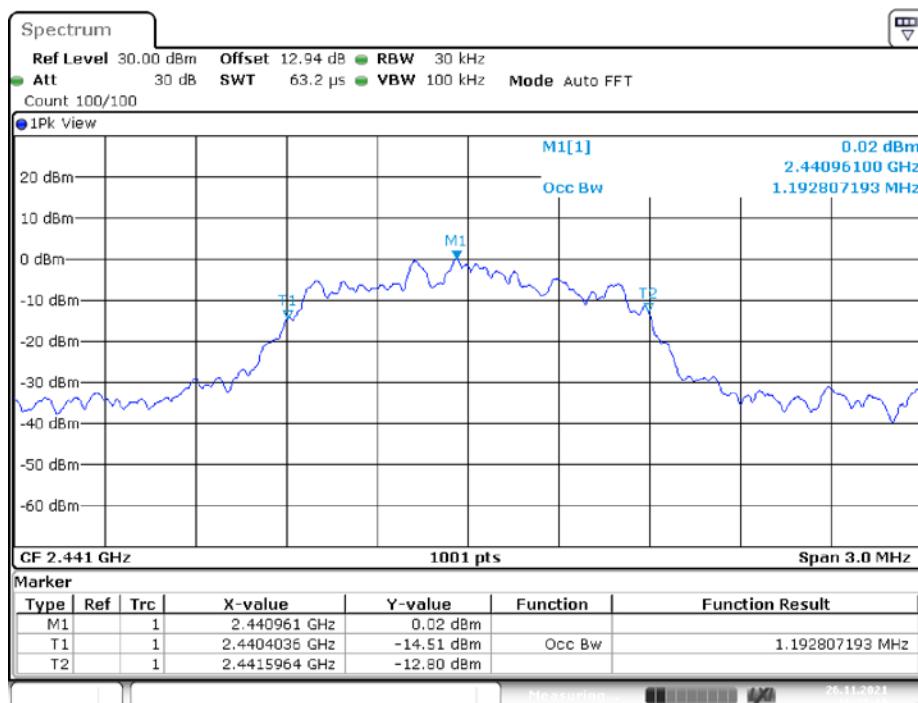

Date: 26.NOV.2021 16:27:10

3DH1_Ant1_2480MHz

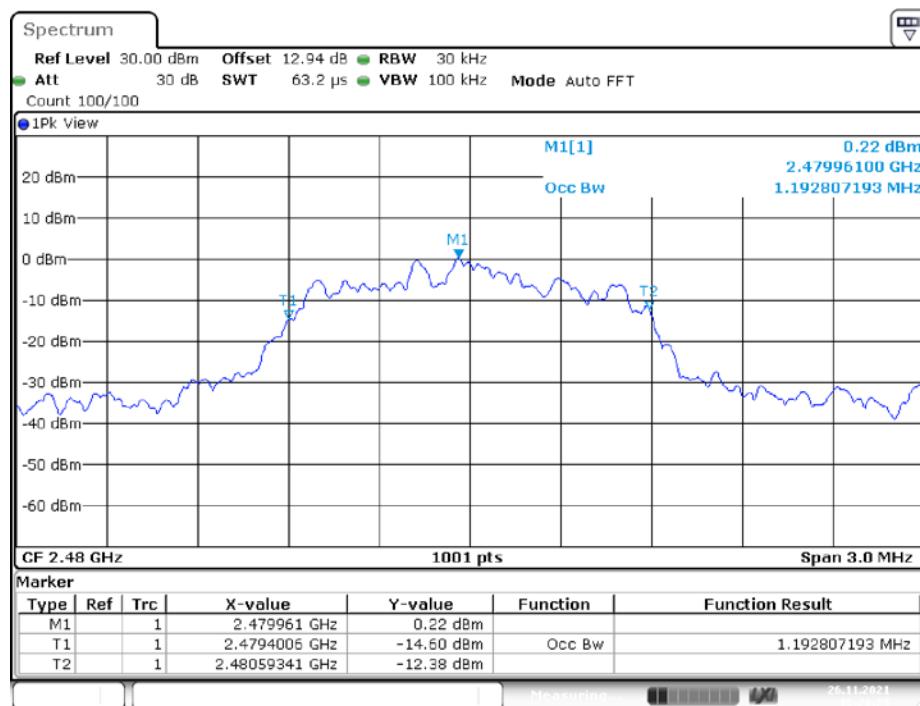

Date: 26.NOV.2021 16:28:25

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions



| | |
|--------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 101.1 kPa |

The testing was performed by Paul Liu on 2021-11-26.


EUT operation mode: Transmitting

Test Result: Compliant.

| TestMode | Antenna | Channel | Result[Num] | Limit[Num] | Verdict |
|----------|---------|---------|-------------|------------|---------|
| DH1 | Ant1 | Hop | 79 | >=15 | PASS |
| 2DH1 | Ant1 | Hop | 79 | >=15 | PASS |
| 3DH1 | Ant1 | Hop | 79 | >=15 | PASS |

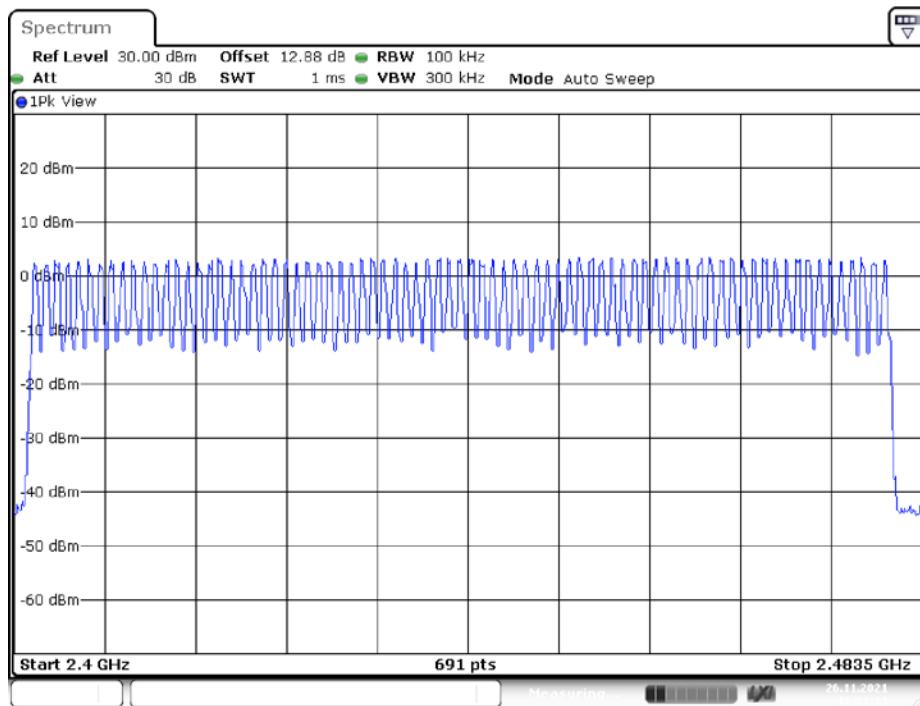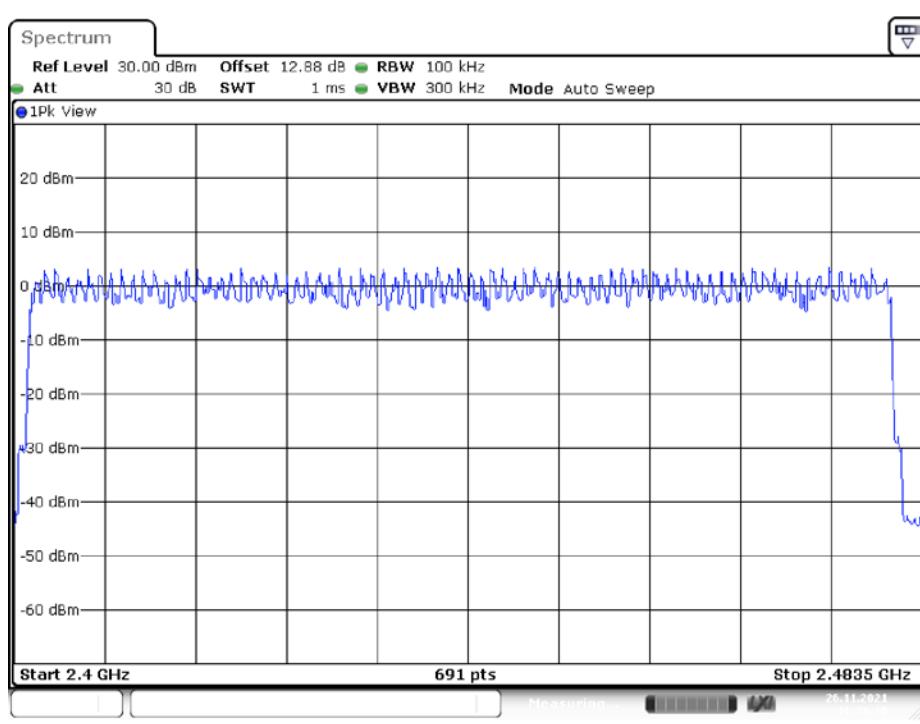DH1_Ant1_Hop**2DH1_Ant1_Hop**

3DH1_Ant1_Hop

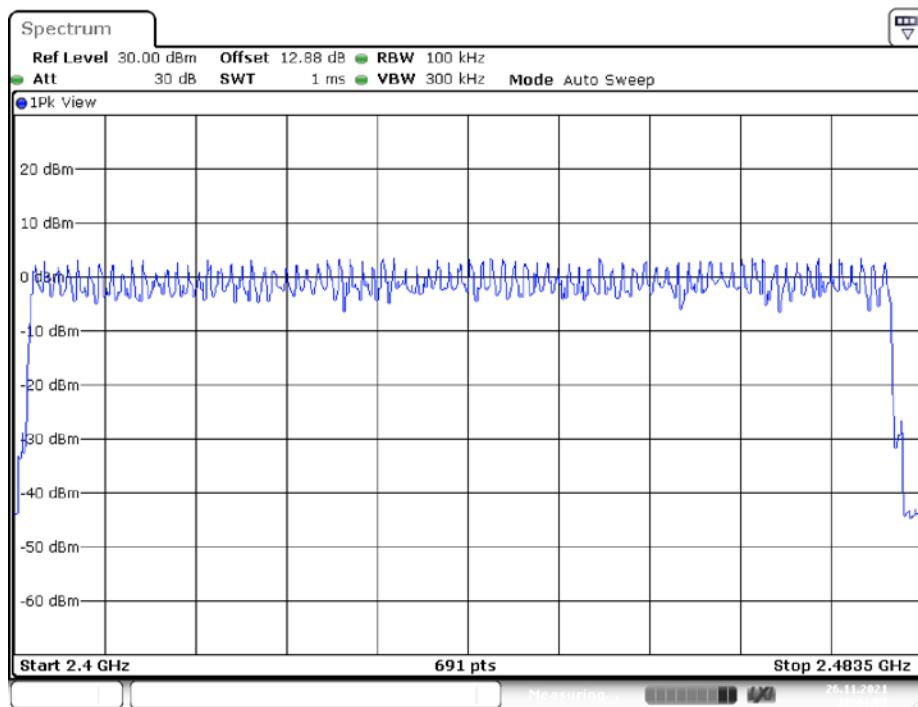

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.1 kPa |

The testing was performed by Paul Liu from 2021-11-26 to 2021-11-29

EUT operation mode: Transmitting


Test Result: Compliant.

| Test Mode | Antenna | Channel | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit[s] | Verdict |
|-----------|---------|---------|-----------------|-----------------|-----------|------------|---------|
| DH1 | Ant1 | Hop | 0.37 | 280 | 0.104 | ≤ 0.4 | PASS |
| DH3 | Ant1 | Hop | 1.62 | 140 | 0.226 | ≤ 0.4 | PASS |
| DH5 | Ant1 | Hop | 2.86 | 100 | 0.286 | ≤ 0.4 | PASS |
| 2DH1 | Ant1 | Hop | 0.38 | 280 | 0.106 | ≤ 0.4 | PASS |
| 2DH3 | Ant1 | Hop | 1.62 | 140 | 0.226 | ≤ 0.4 | PASS |
| 2DH5 | Ant1 | Hop | 2.86 | 100 | 0.286 | ≤ 0.4 | PASS |
| 3DH1 | Ant1 | Hop | 0.38 | 280 | 0.106 | ≤ 0.4 | PASS |
| 3DH3 | Ant1 | Hop | 1.62 | 140 | 0.226 | ≤ 0.4 | PASS |
| 3DH5 | Ant1 | Hop | 2.86 | 100 | 0.286 | ≤ 0.4 | PASS |


Note 1: A period time=0.4*79=31.6(S), Result=Burst Width*Total Hops

Note 2: Total Hops =Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)

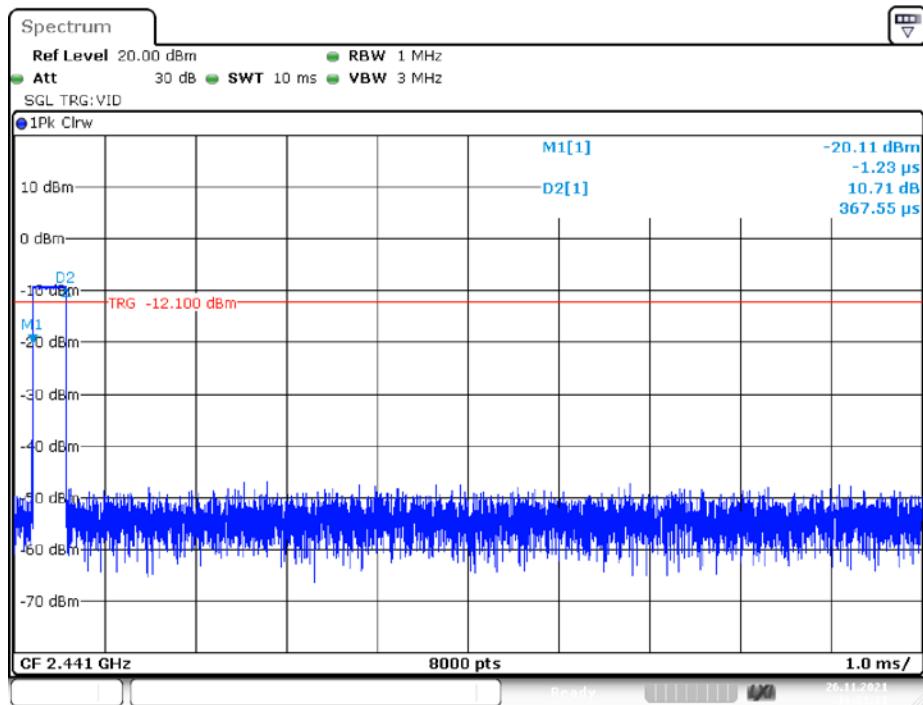
DH1_Ant1_Hop

Date: 26.NOV.2021 16:31:31

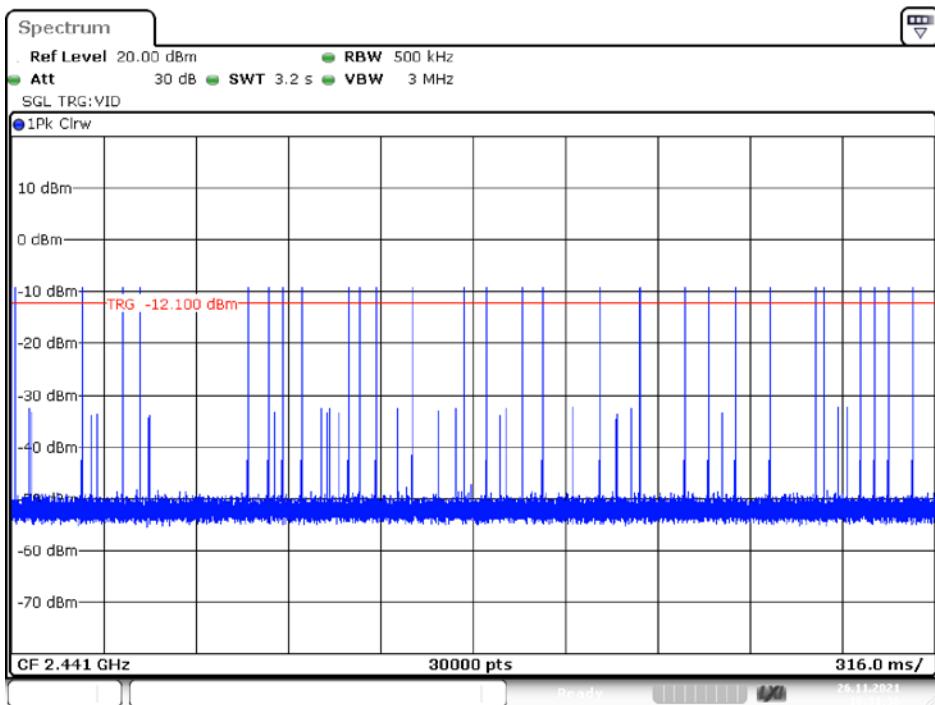


Date: 26.NOV.2021 16:31:36

DH3_Ant1_Hop


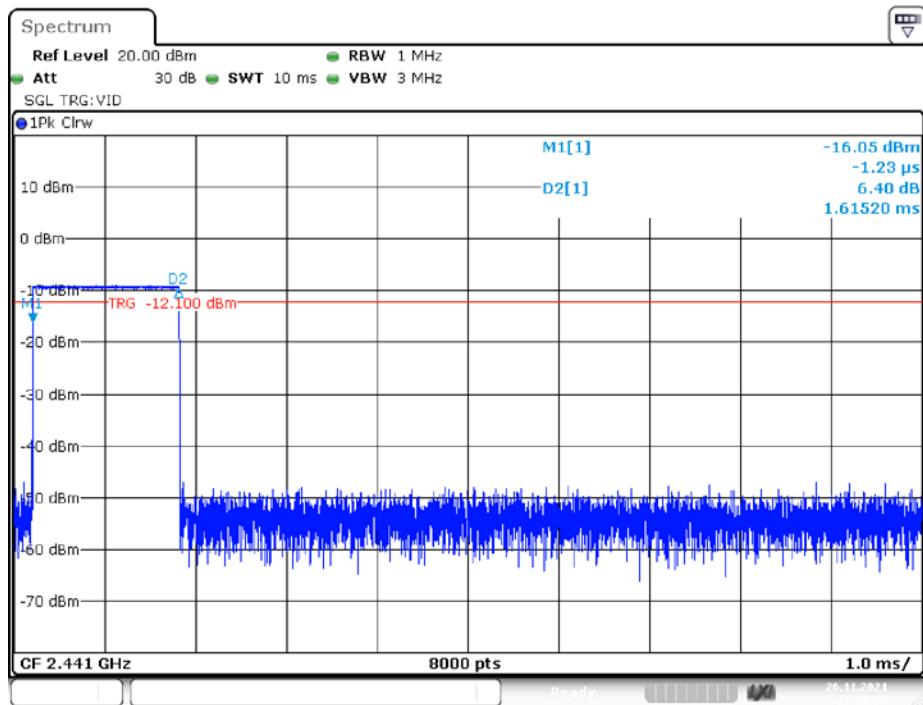


Date: 26.NOV.2021 17:03:37

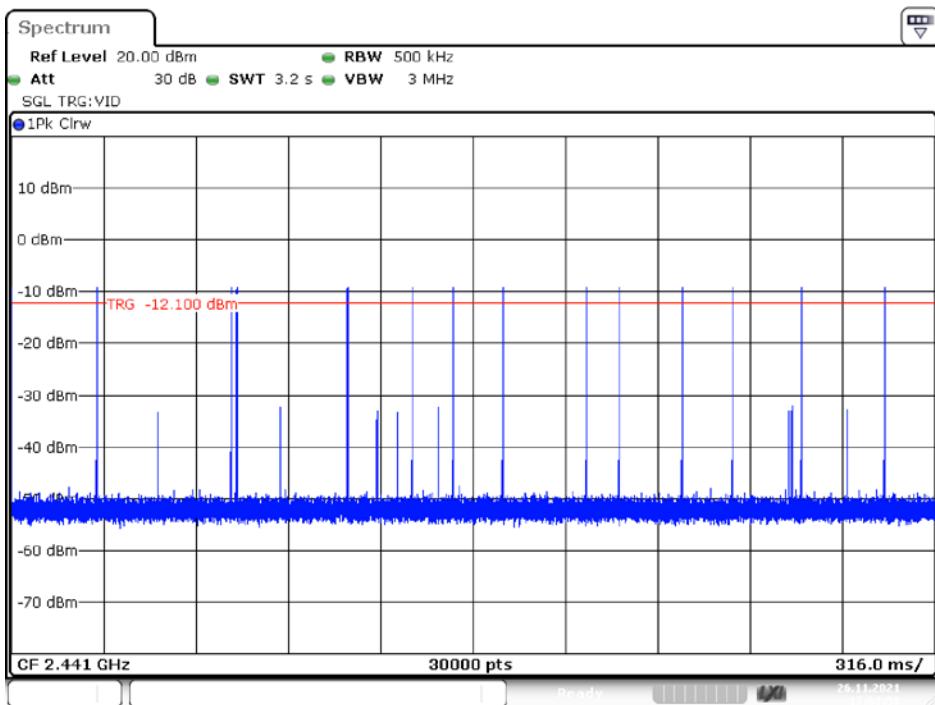


Date: 26.NOV.2021 17:03:58


DH5_Ant1_Hop

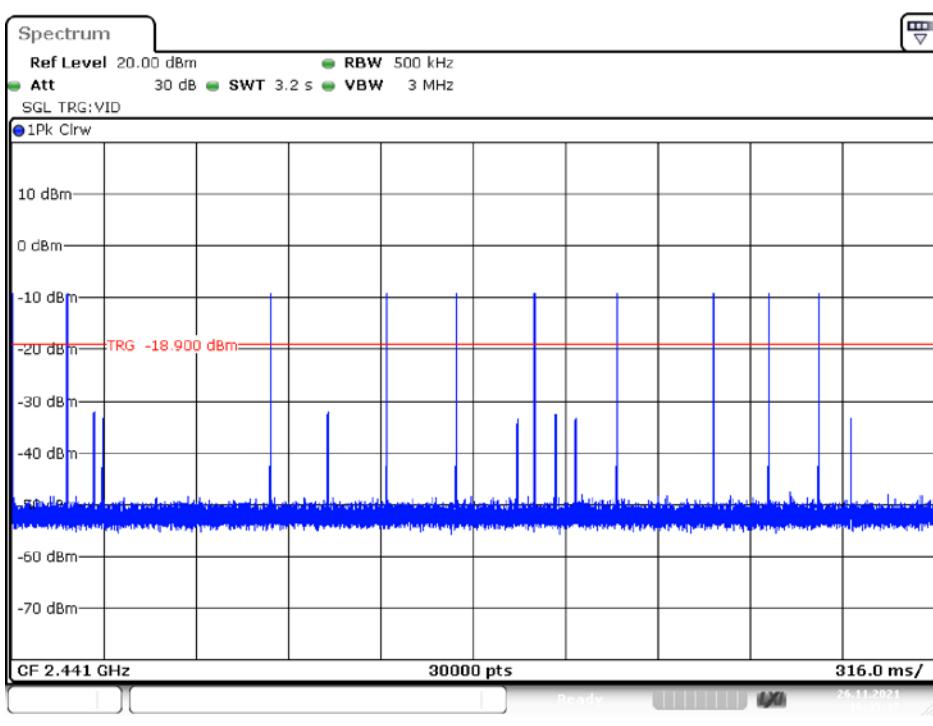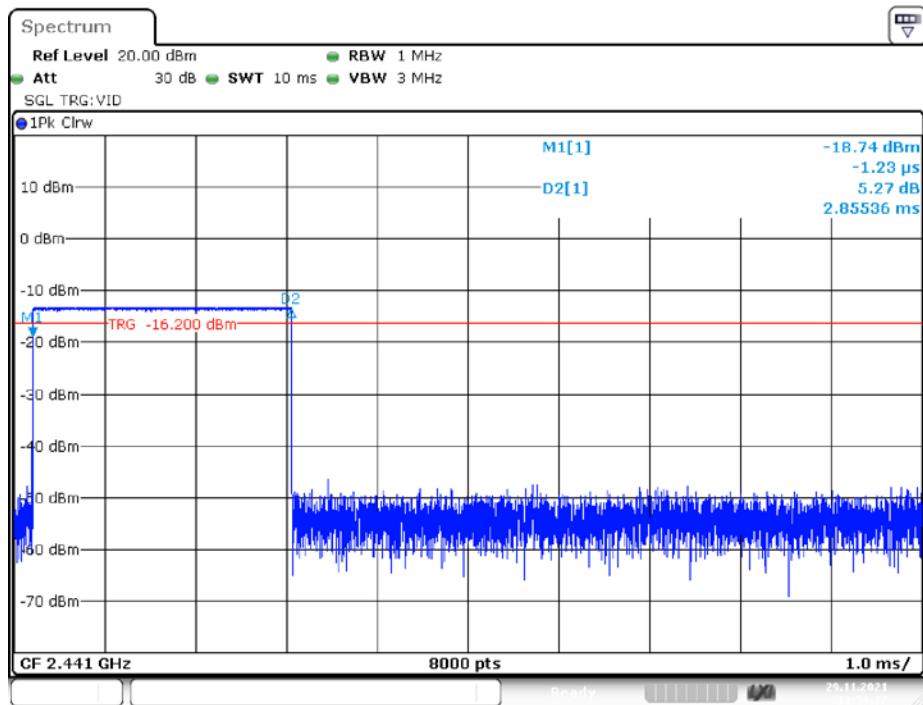

2DH1_Ant1_Hop

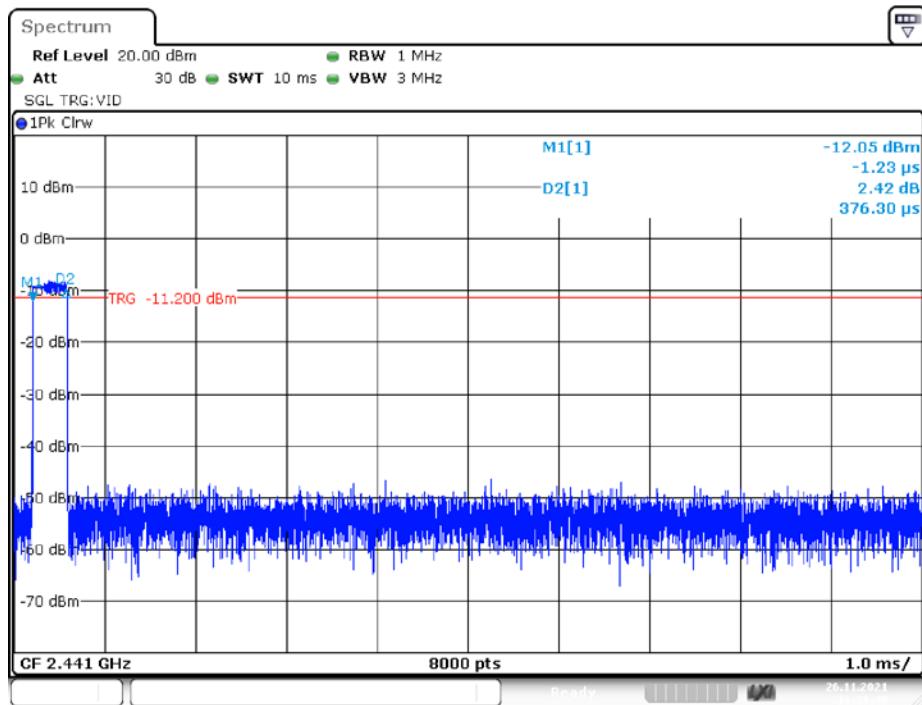


Date: 26.NOV.2021 16:38:48

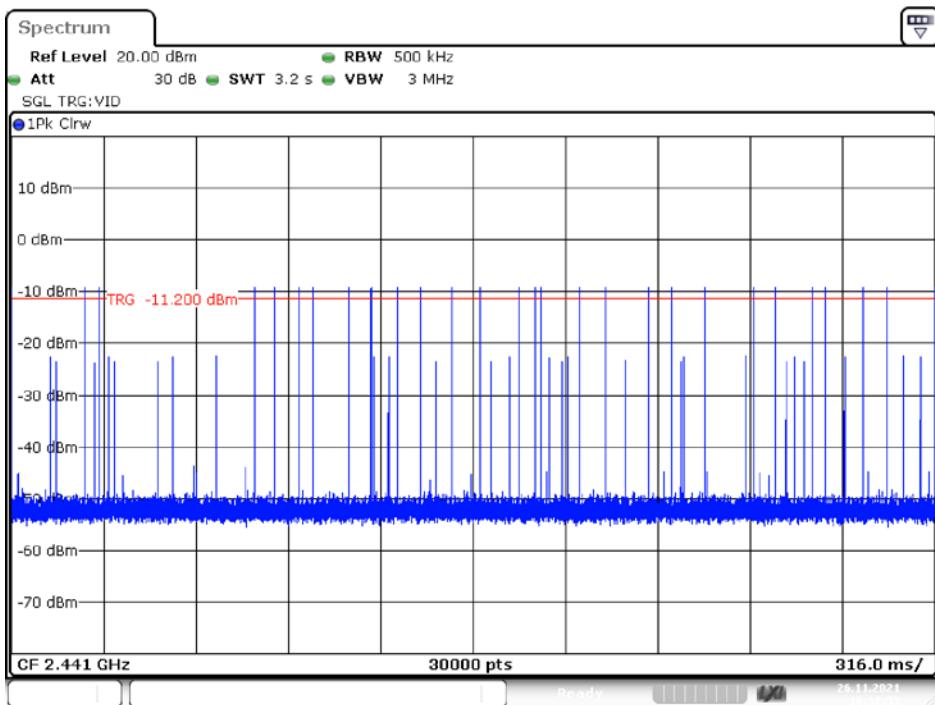


Date: 26.NOV.2021 16:38:53

2DH3_Ant1_Hop


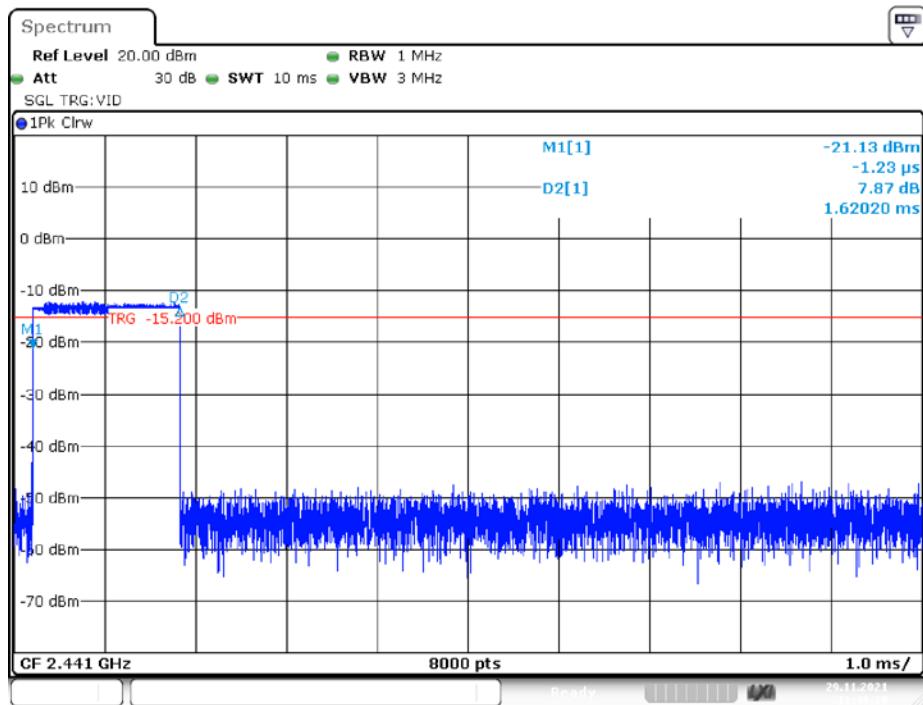


Date: 29.NOV.2021 11:48:31


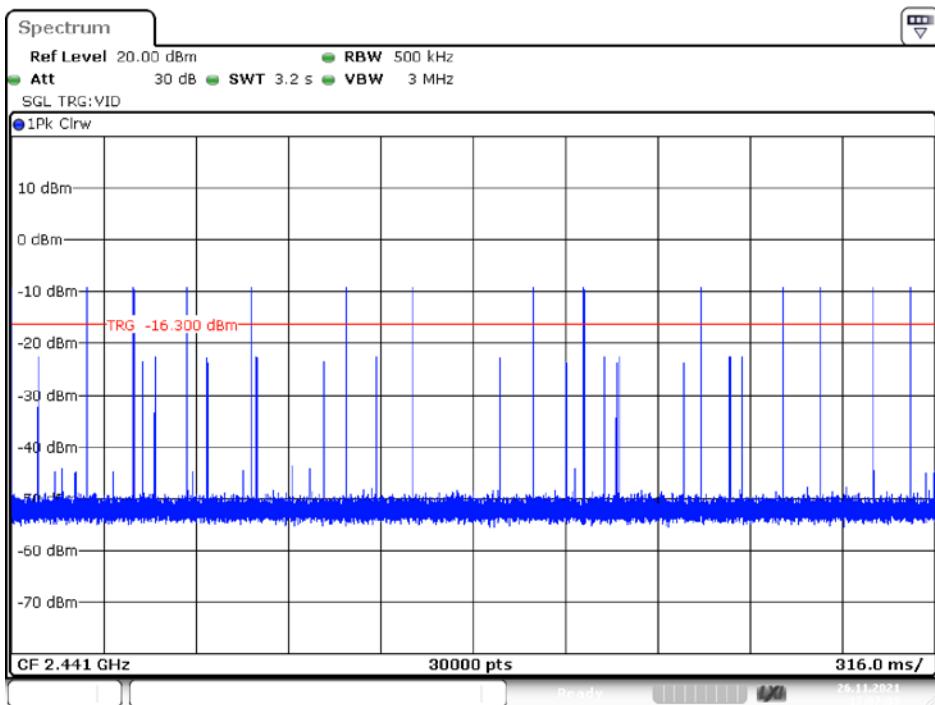


Date: 26.NOV.2021 17:07:09



2DH5_Ant1_Hop

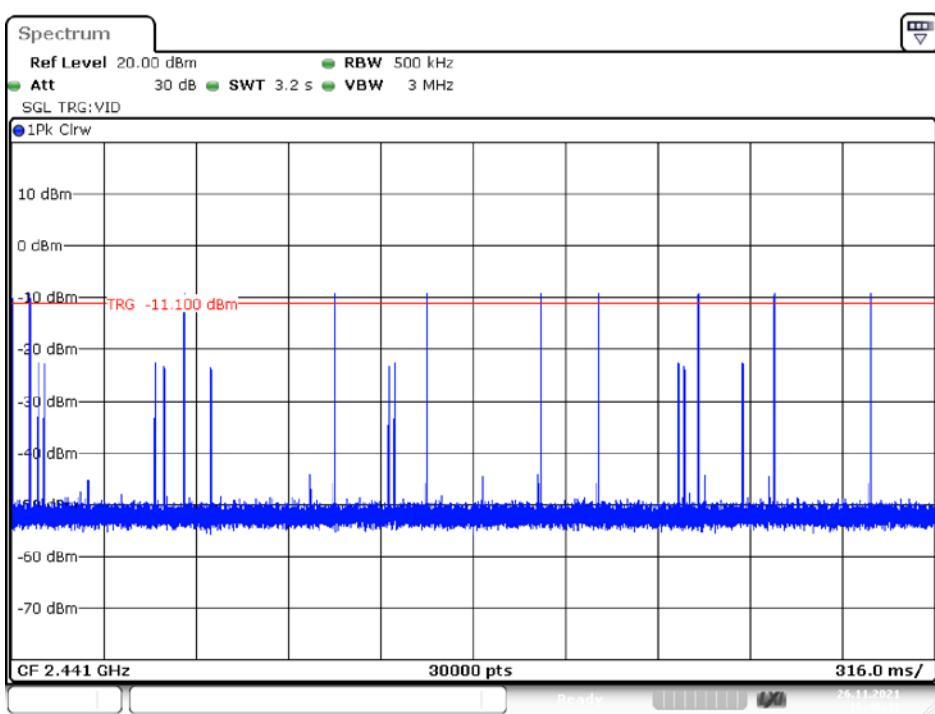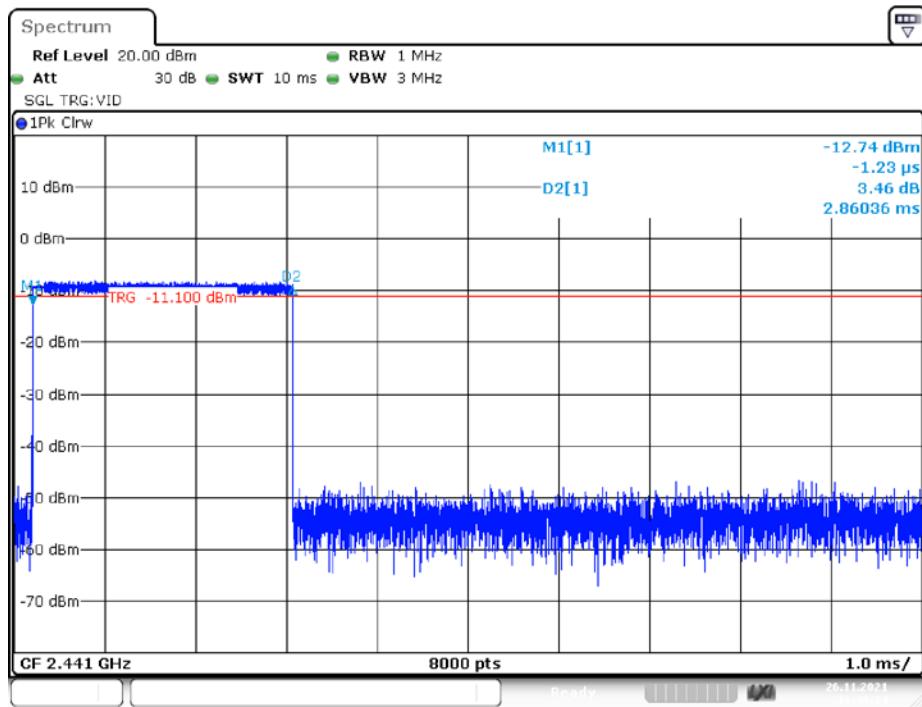



3DH1_Ant1_Hop

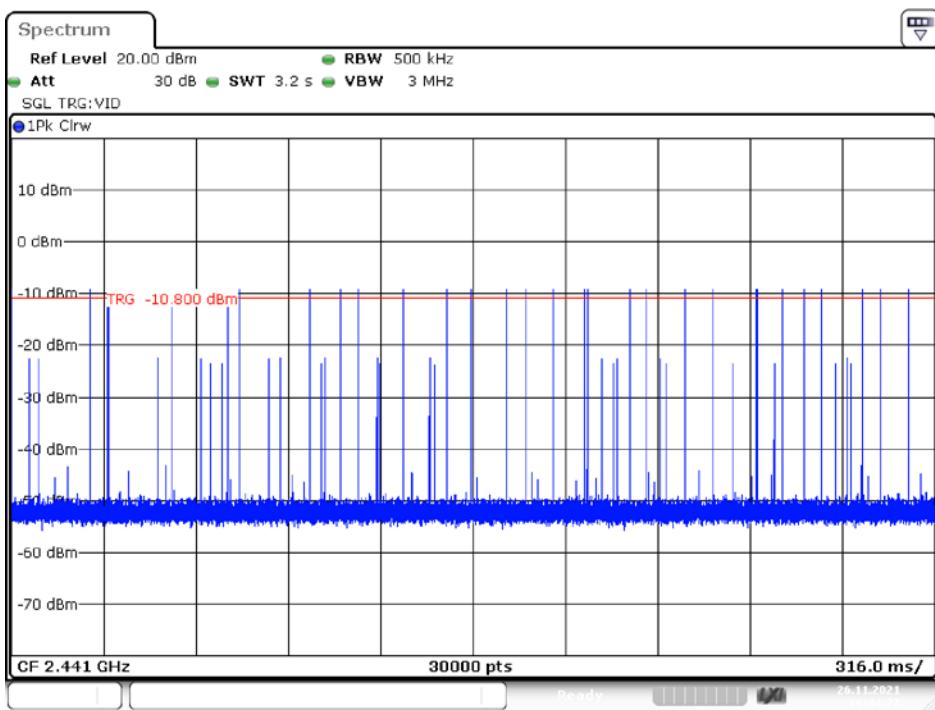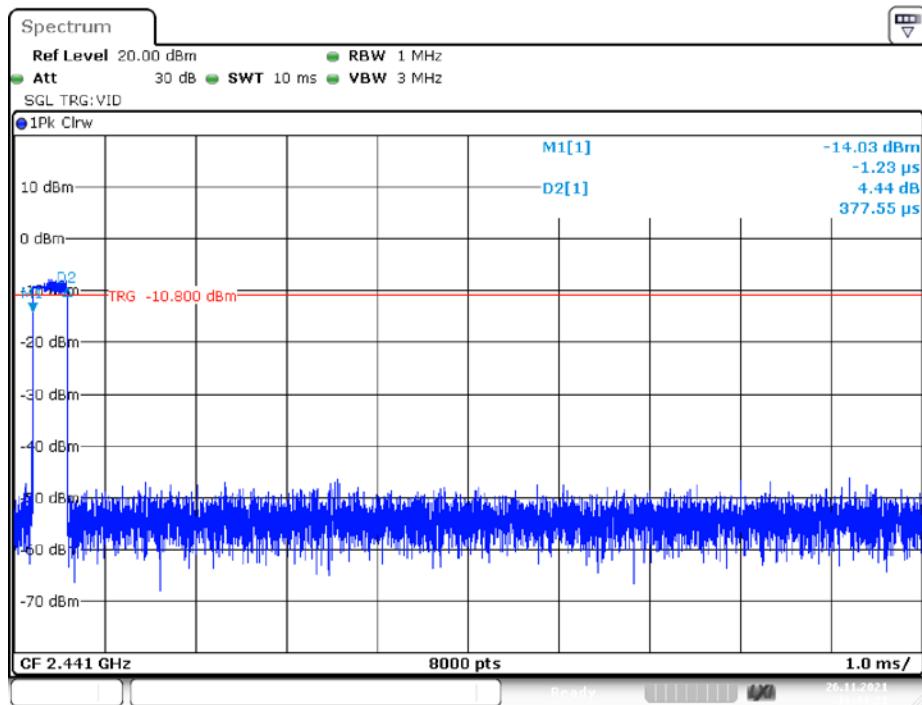

3DH3_Ant1_Hop

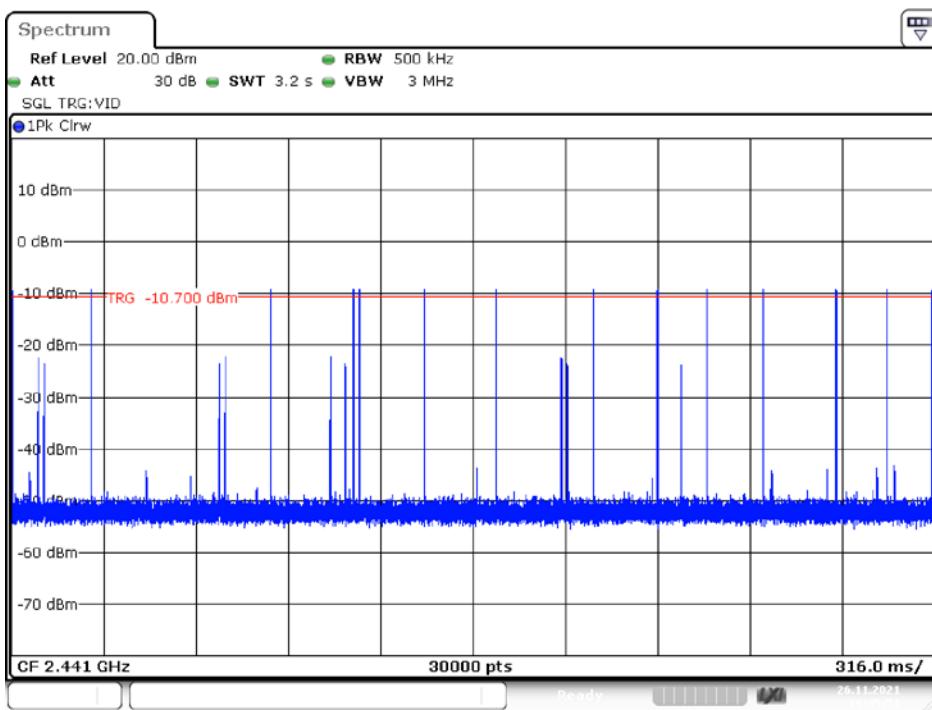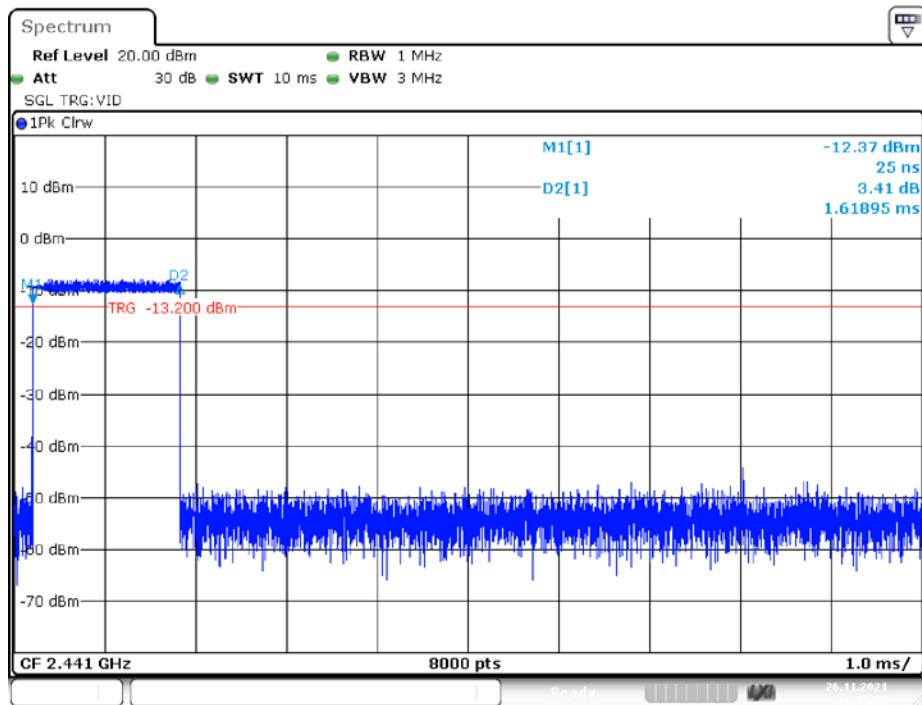

3DH5_Ant1_Hop

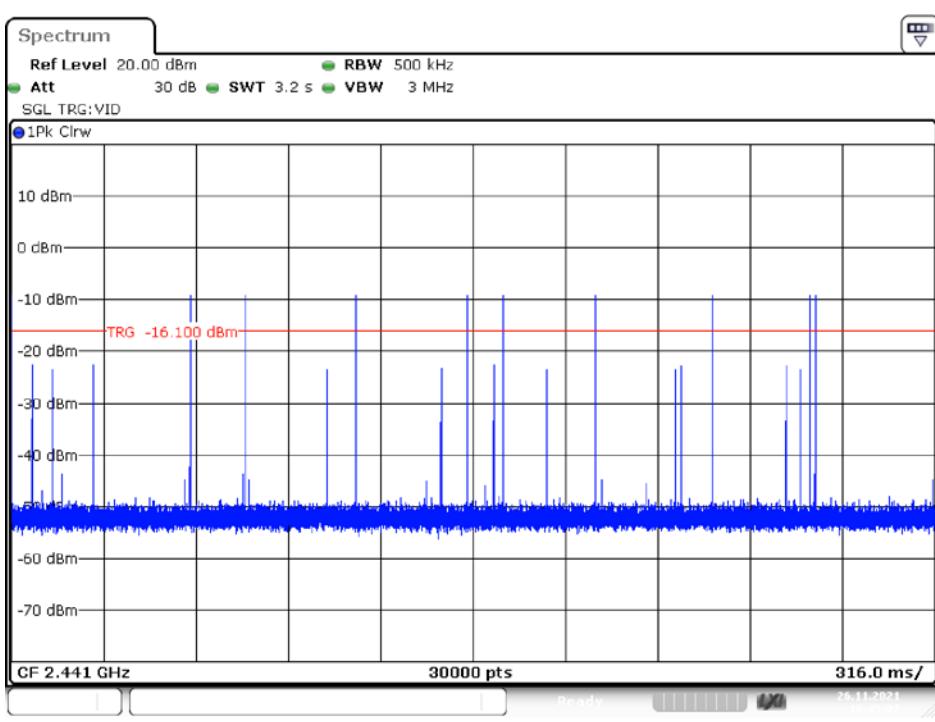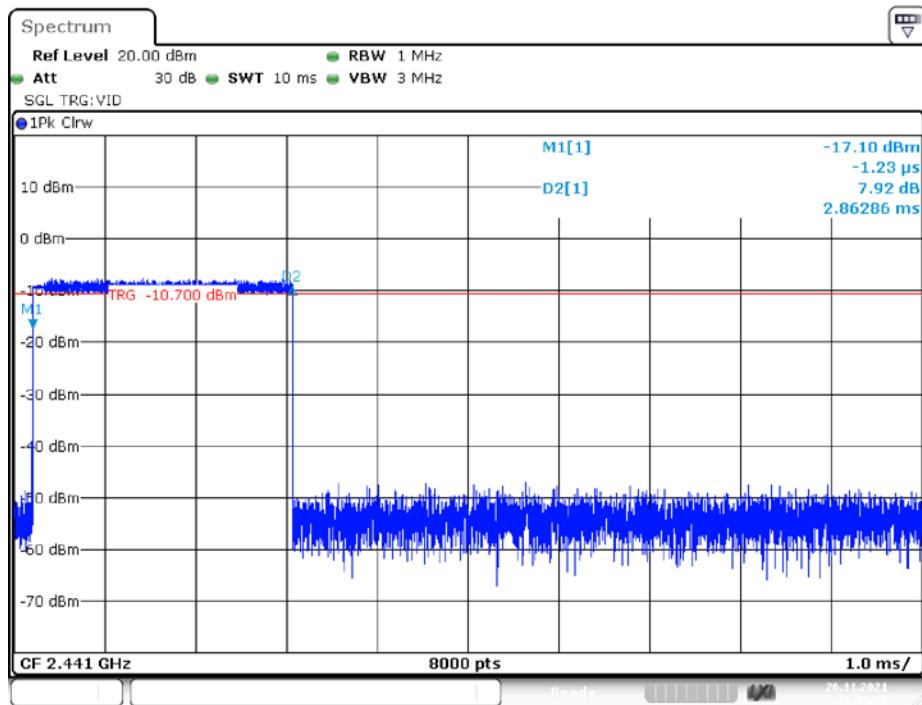

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions



| | |
|--------------------|-----------|
| Temperature: | 23°C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 101.1 kPa |


The testing was performed by Paul Liu on 2021-11-26.

EUT operation mode: Transmitting


Test Result: Compliant.

| Test Mode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| DH1 | Ant1 | 2402 | 3.39 | <=20.97 | PASS |
| | | 2441 | 3.94 | <=20.97 | PASS |
| | | 2480 | 3.99 | <=20.97 | PASS |
| 2DH1 | Ant1 | 2402 | 4.81 | <=20.97 | PASS |
| | | 2441 | 5.35 | <=20.97 | PASS |
| | | 2480 | 5.41 | <=20.97 | PASS |
| 3DH1 | Ant1 | 2402 | 5.10 | <=20.97 | PASS |
| | | 2441 | 5.61 | <=20.97 | PASS |
| | | 2480 | 5.71 | <=20.97 | PASS |

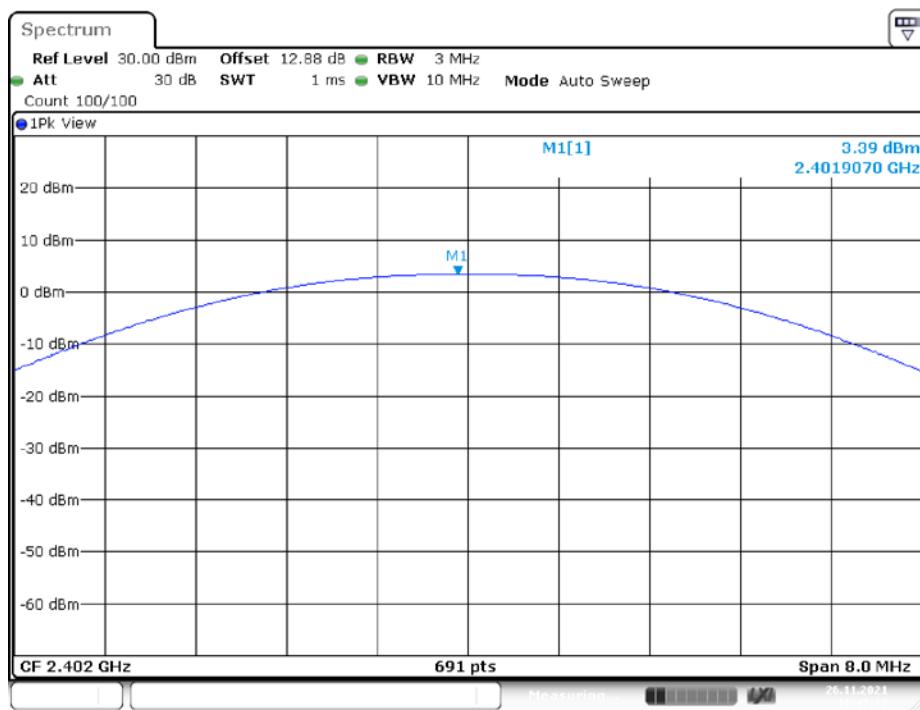
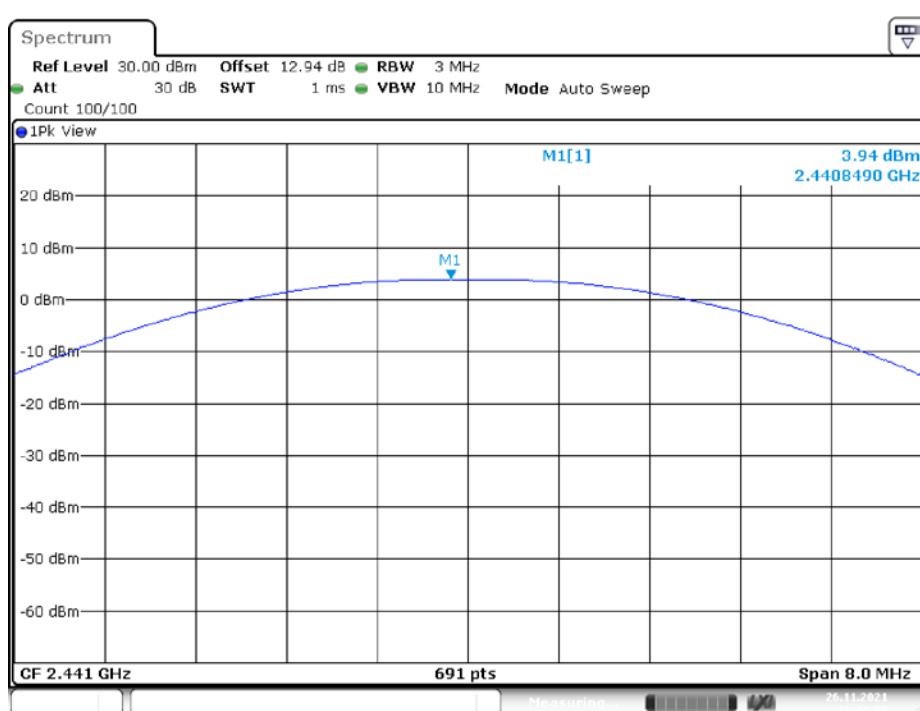
DH1_Ant1_2402MHz**DH1_Ant1_2441MHz**


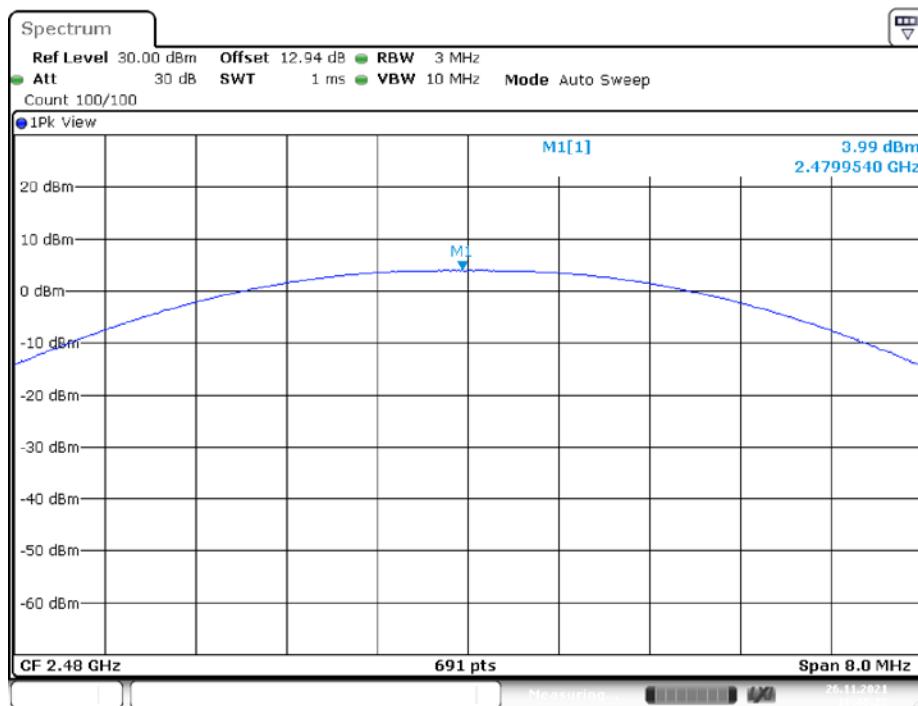
DH1_Ant1_2480MHz


Date: 26.NOV.2021 16:46:22

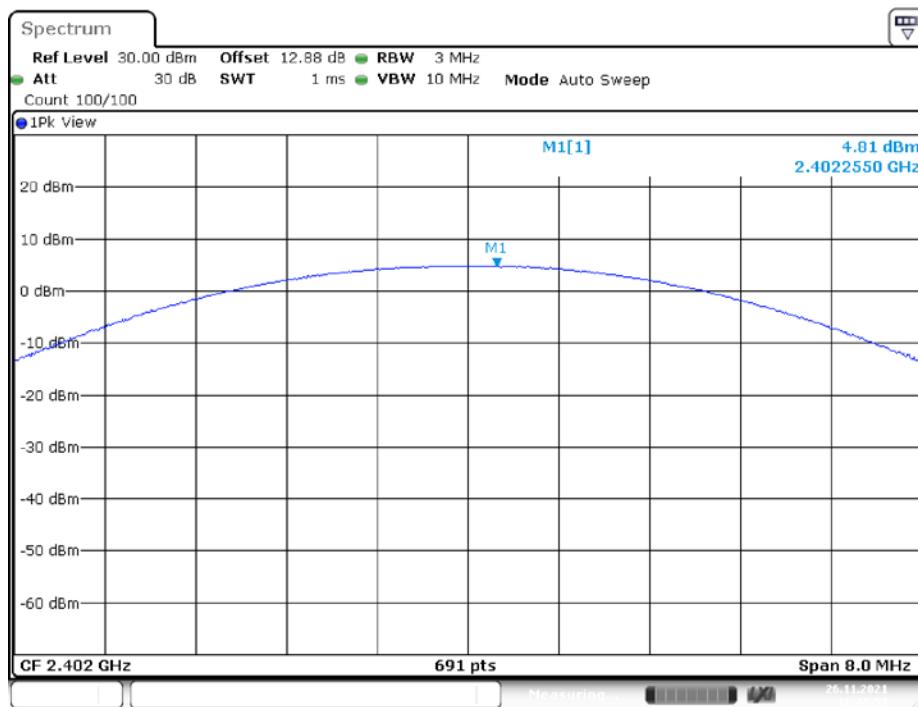2DH1_Ant1_2402MHz

Date: 26.NOV.2021 16:46:53

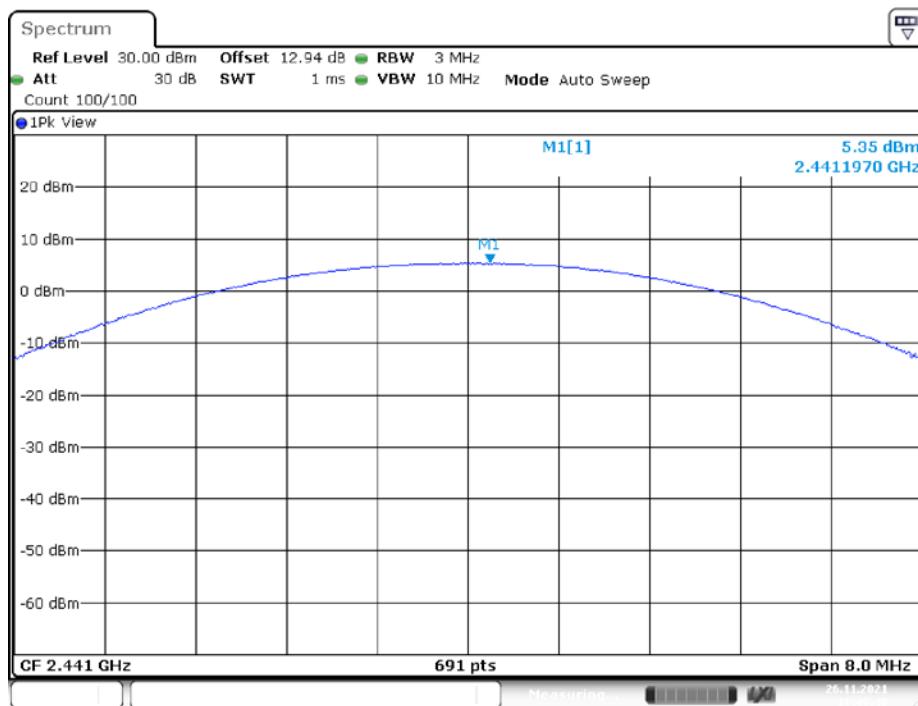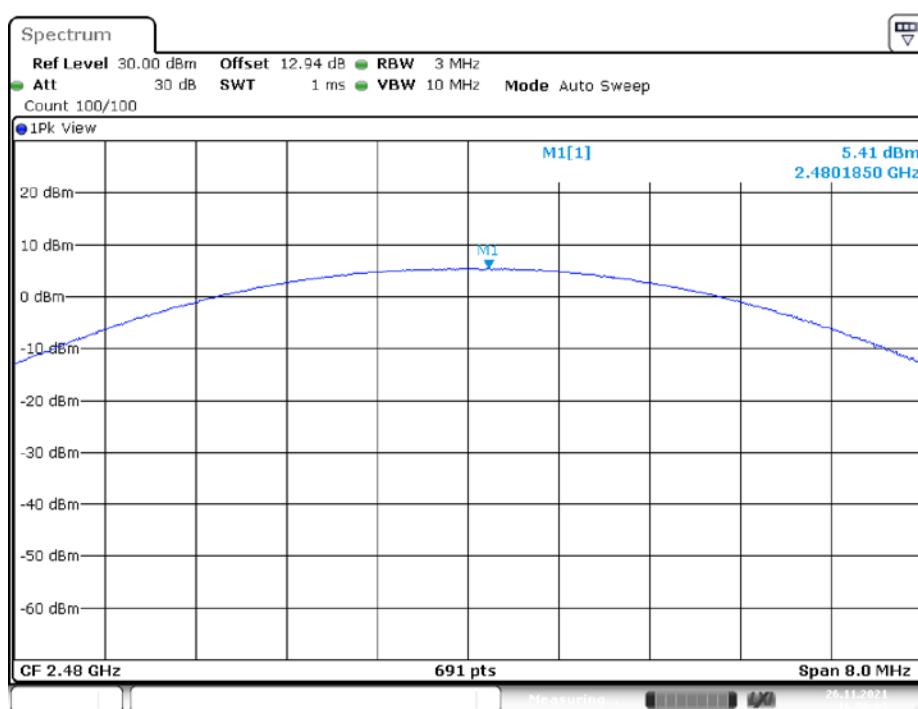2DH1_Ant1_2441MHz**2DH1_Ant1_2480MHz**

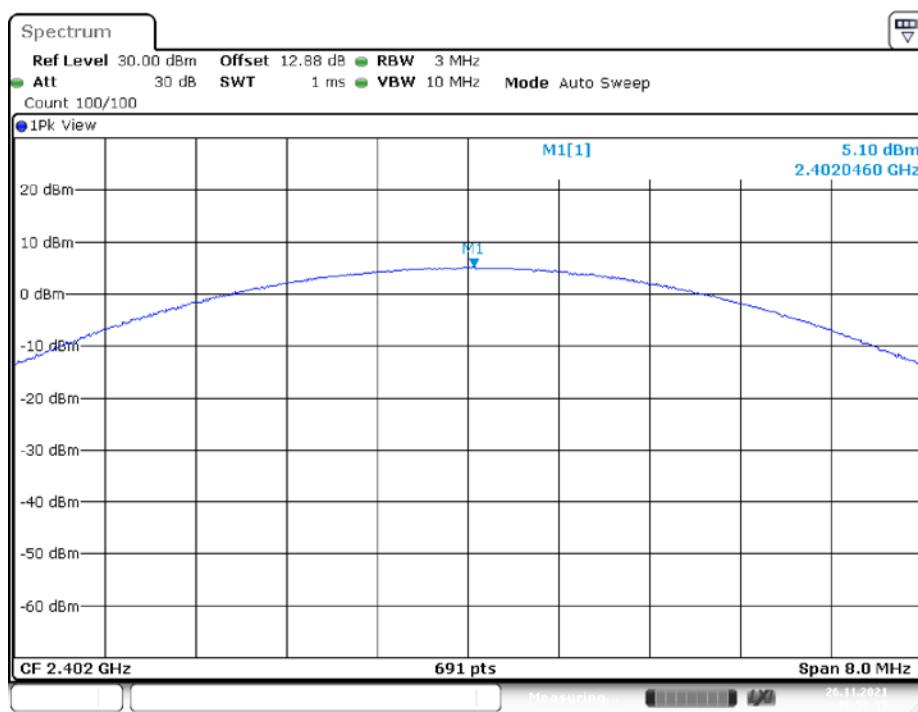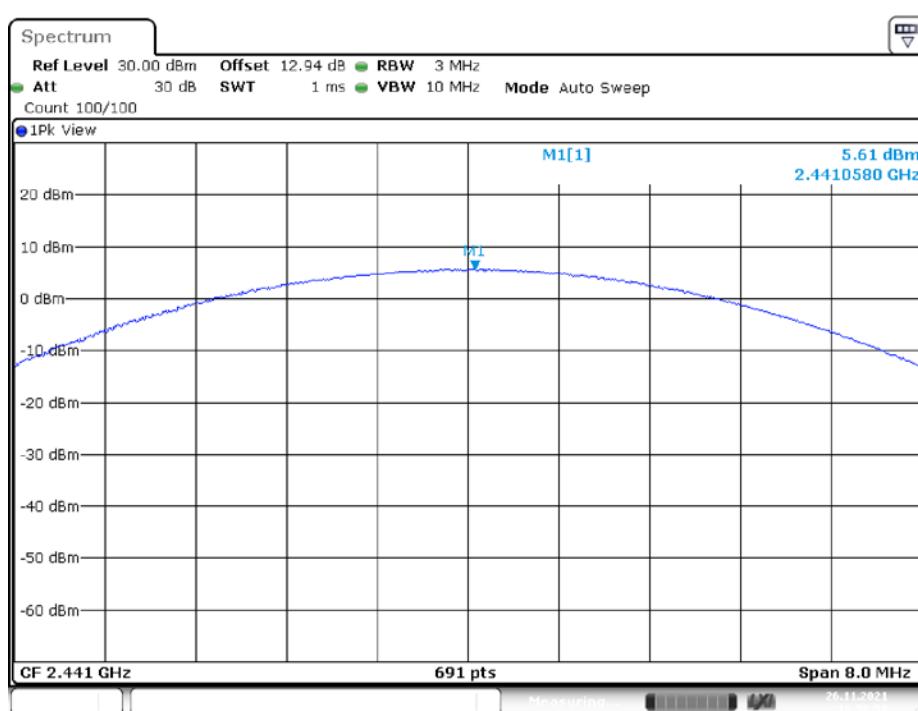3DH1_Ant1_2402MHz**3DH1_Ant1_2441MHz**

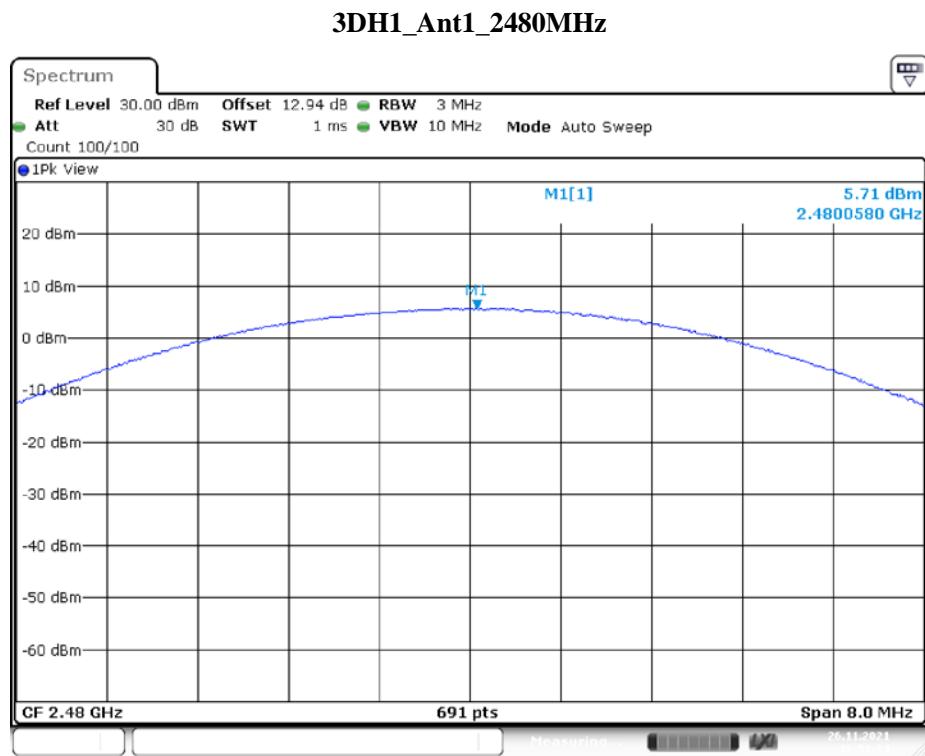

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 23°C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 101.1 kPa |


The testing was performed by Paul Liu on 2021-11-26.

EUT operation mode: Transmitting


Test Result: Compliant.

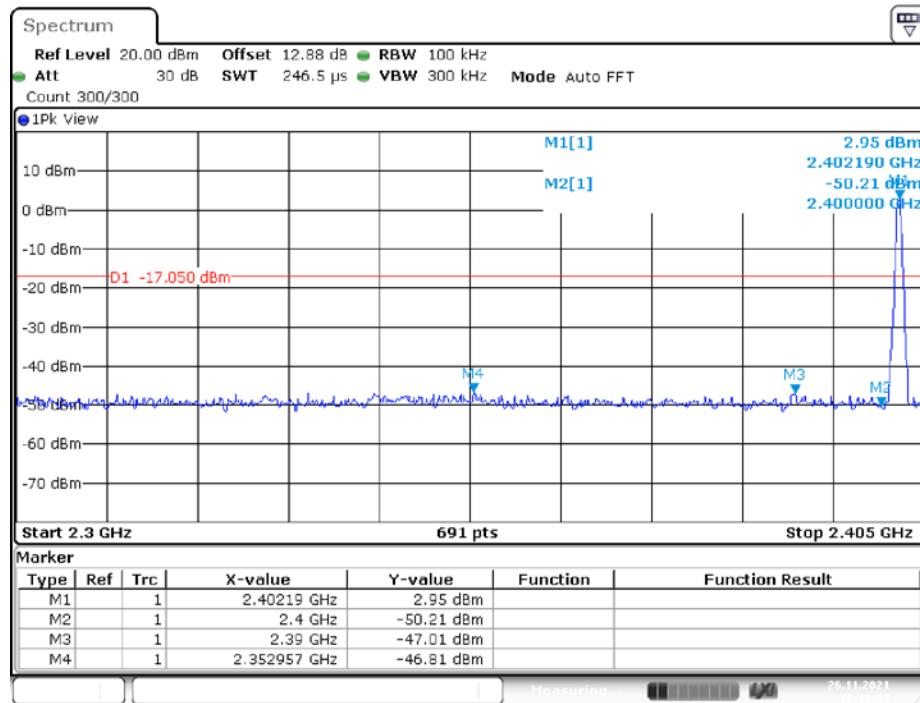Conducted Band Edge Result:**DH1_Ant1_Low_2402MHz**


Date: 26.NOV.2021 16:13:46

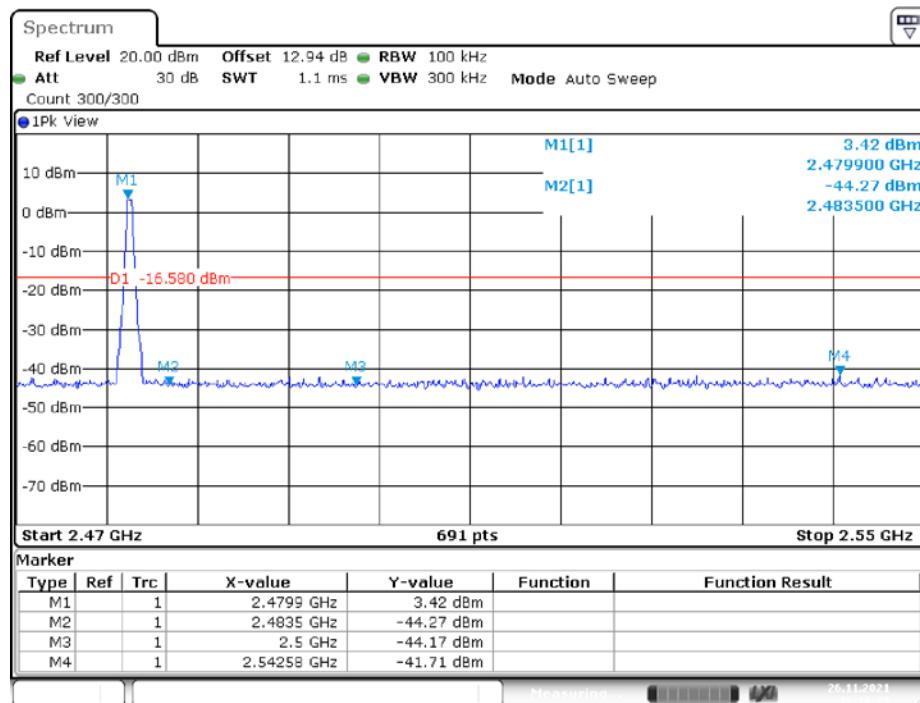DH1_Ant1_High_2480MHz

Date: 26.NOV.2021 16:16:29

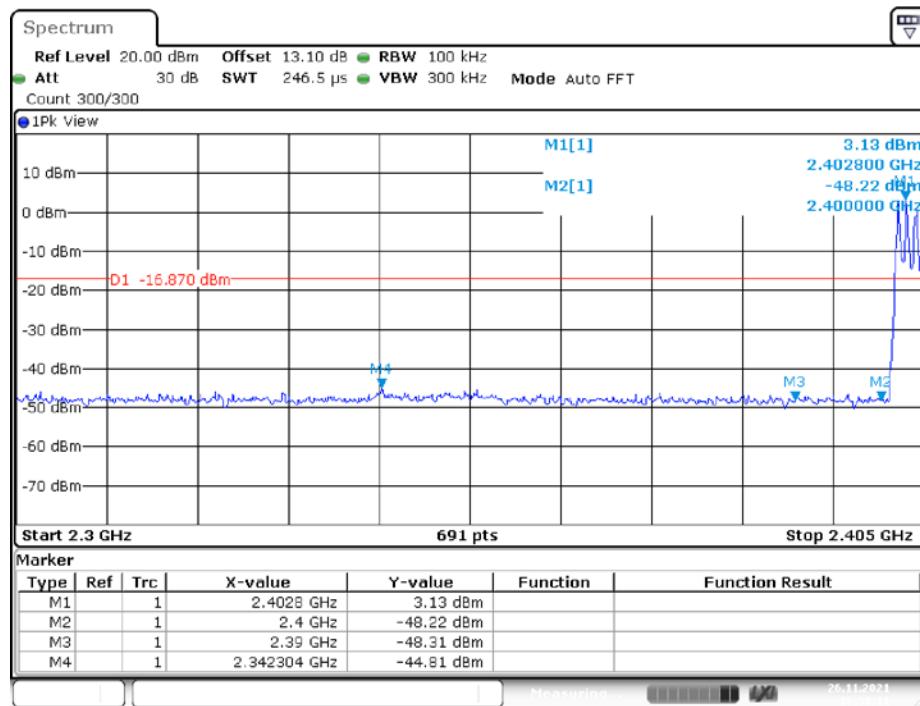
DH1_Ant1_Low_Hop_2402MHz

Date: 26.NOV.2021 16:30:11

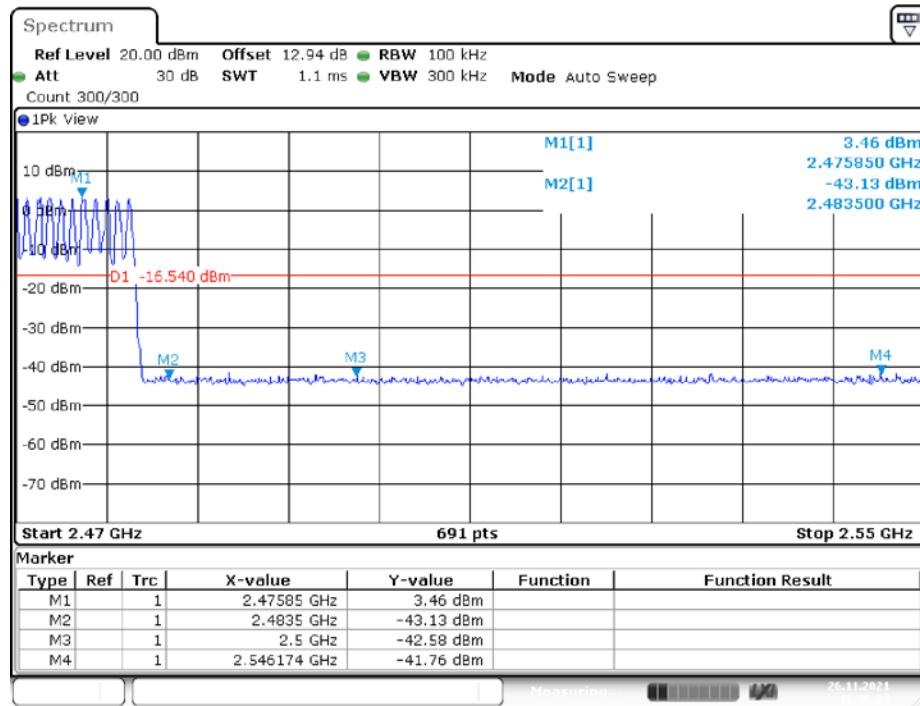DH1_Ant1_High_Hop_2480MHz


Date: 26.NOV.2021 16:36:24

2DH1_Ant1_Low_2402MHz

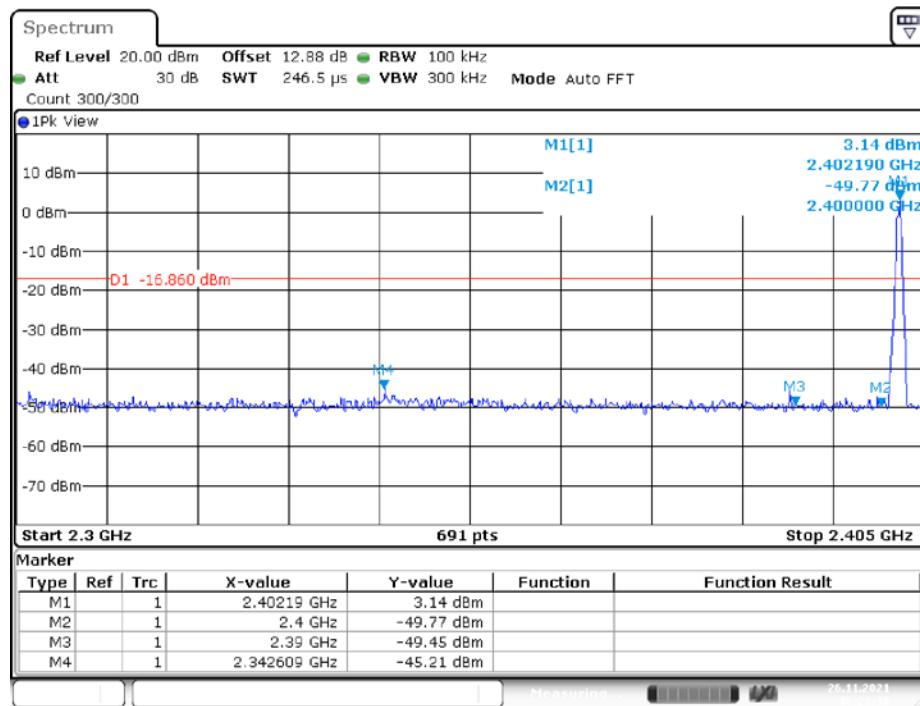


Date: 26.NOV.2021 16:21:39

2DH1_Ant1_High_2480MHz

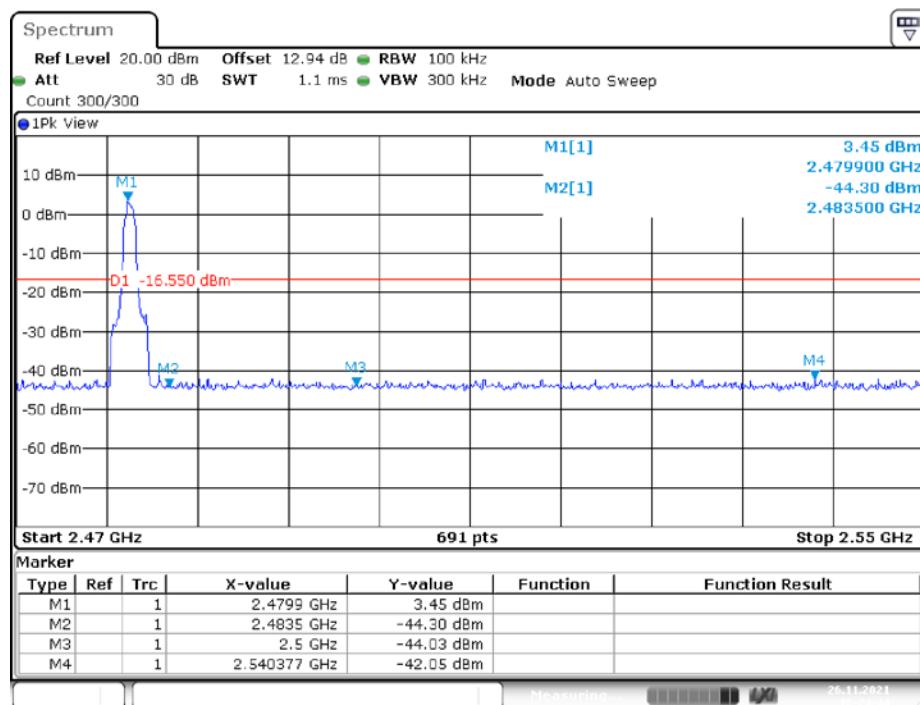


Date: 26.NOV.2021 16:24:44


2DH1_Ant1_Low_Hop_2402MHz

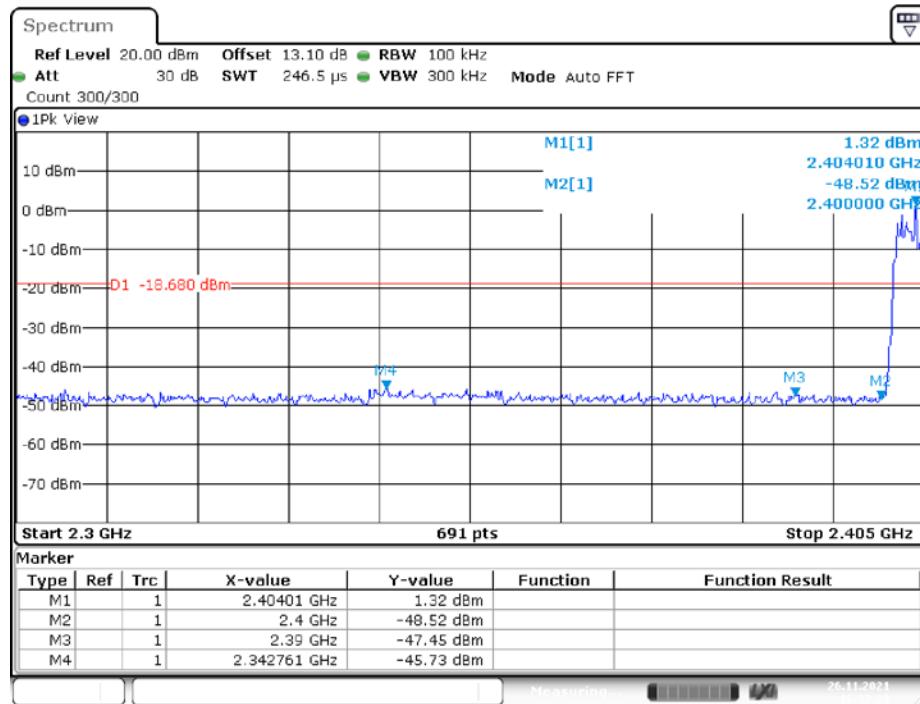

2DH1_Ant1_High_Hop_2480MHz

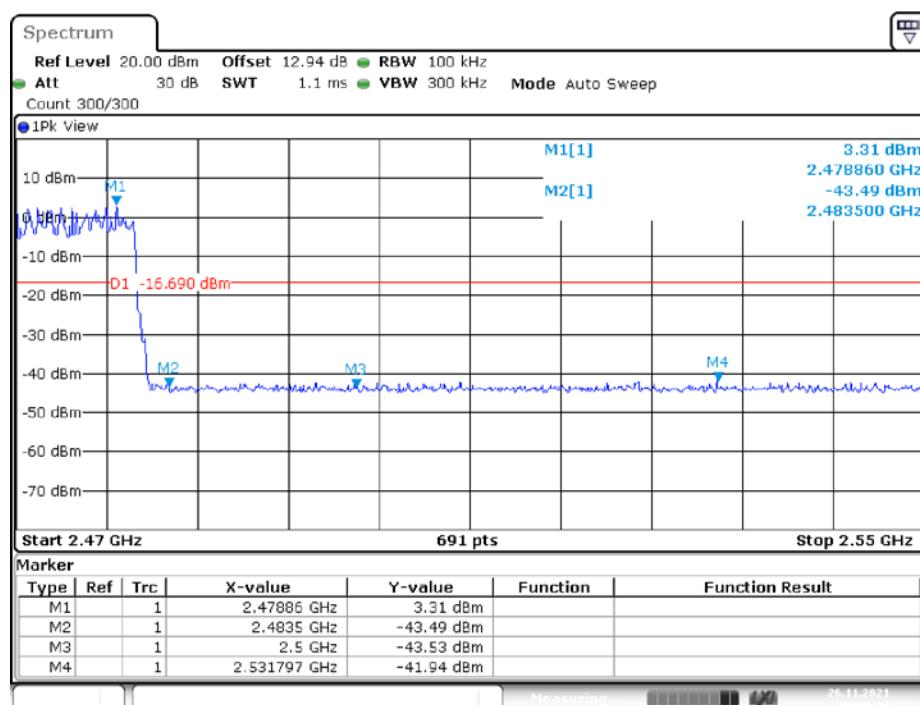


3DH1_Ant1_Low_2402MHz

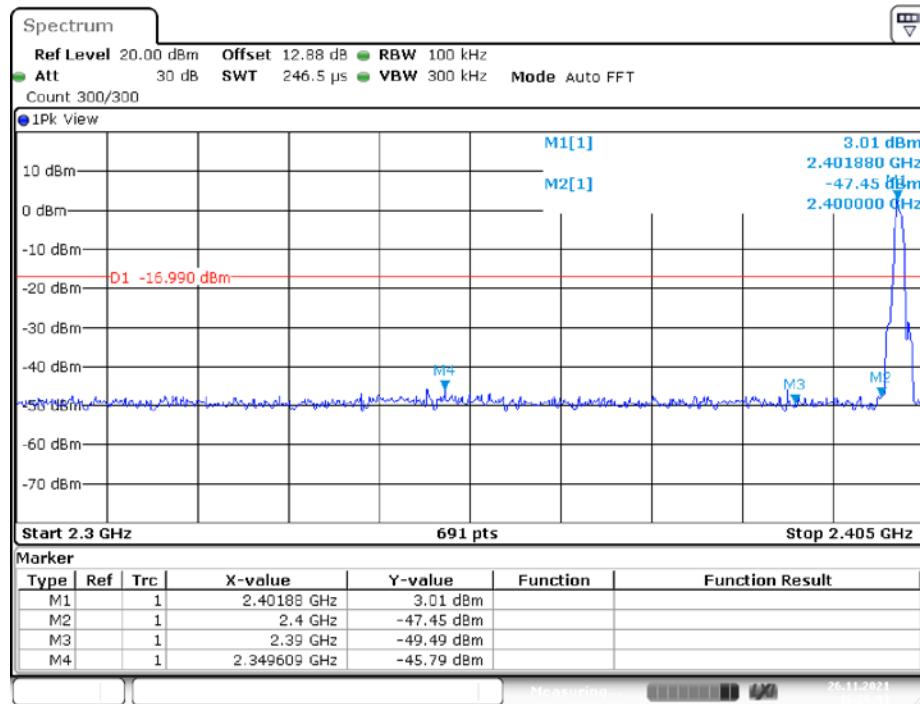


Date: 26.NOV.2021 16:26:03

3DH1_Ant1_High_2480MHz

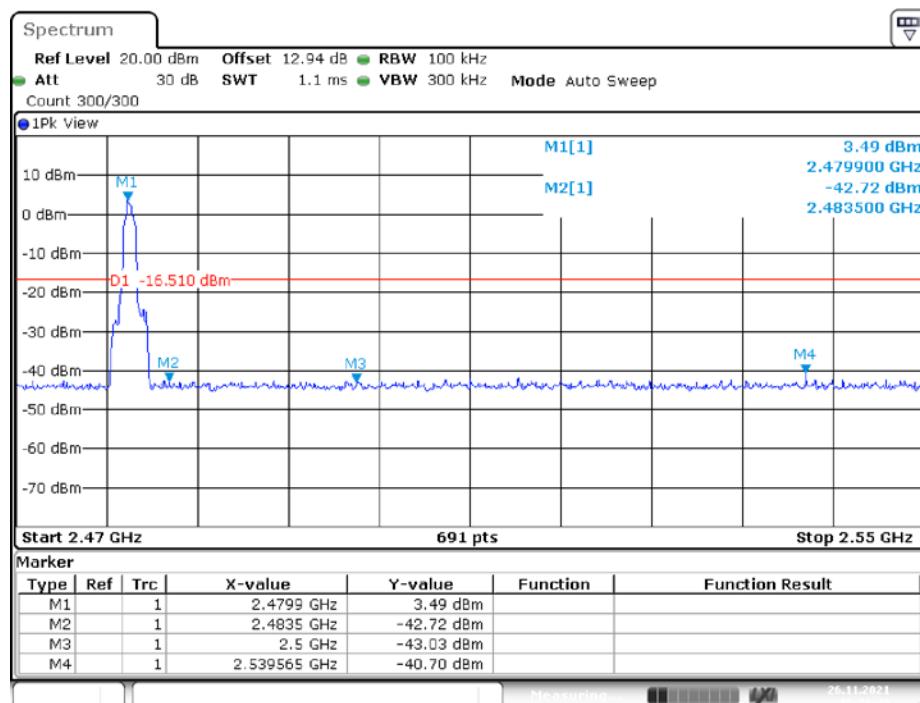


Date: 26.NOV.2021 16:26:40

3DH1_Ant1_Low_Hop_2402MHz

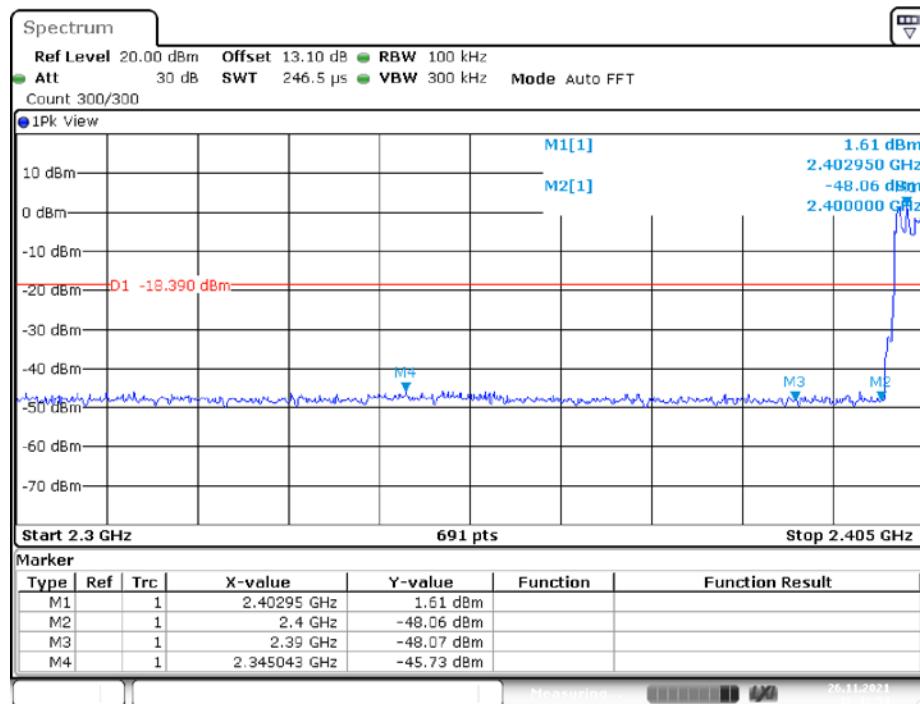

Date: 26.NOV.2021 16:42:53

3DH1_Ant1_High_Hop_2480MHz

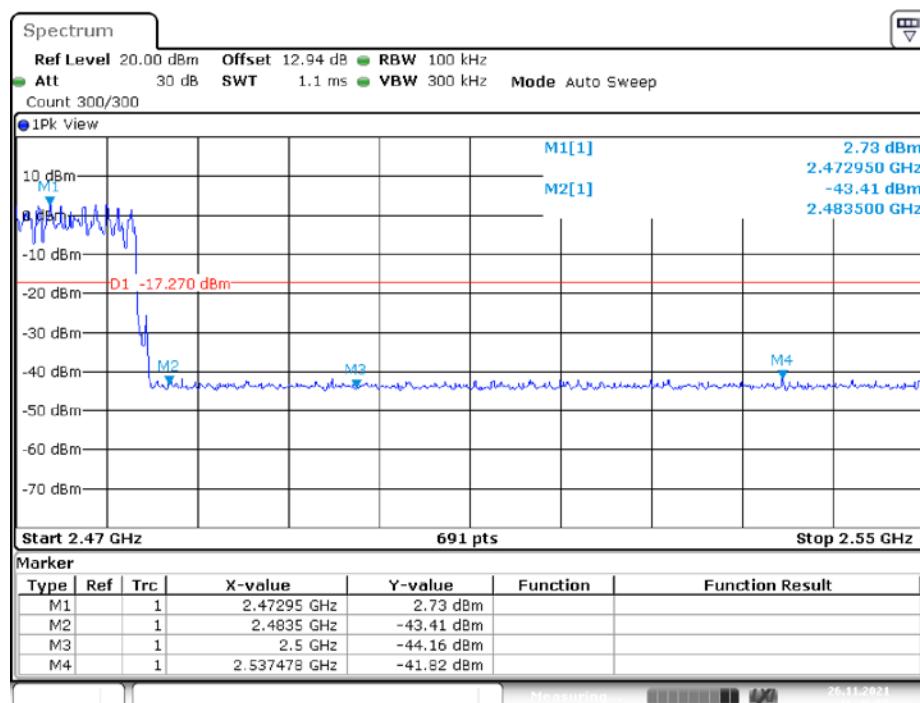

Date: 26.NOV.2021 16:46:55

***** END OF REPORT *****