


User Manual



Intercom System
Multi-function Helmet Headset

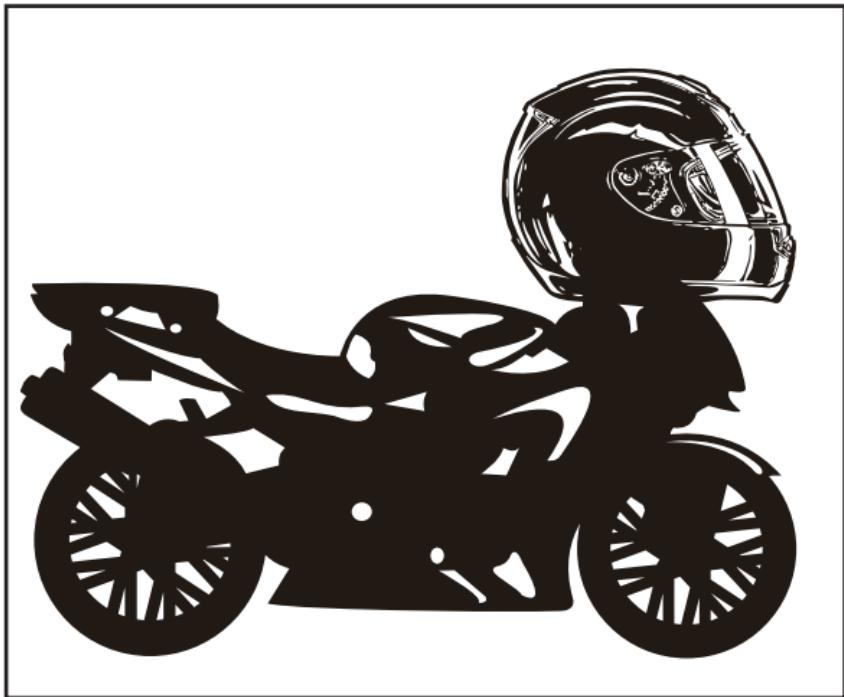

About the host

- ①. Power on/phone/play/pause
- ②. Power off
- ③. Volume up/previous song
- ④. Volume down/next song



FM radio/ I button

II button



Earphone & charge plug

Power on/off: hold ①button for about 2 seconds, then the red light goes on, release when the blue light flashes. It enters into on mode. short press② button,it enters into off mode.

Pairing of the host with cell phone/mp3/gps: At power off state, directly long press ① button. Red and blue lights flashing alternately. Turn the cell phone/mp3/gps Bluetooth on, search for Bluetooth devices, the device name displayed on the phone: M5, and then click pairing. Red light off, blue lights flashing rhythmically. Pairing success.

Operation of host to Bluetooth mobile phone:

[Answer a call]: when an incoming call lasts for about 6 s, the host will automatically answer it.

[Decline a call]: when there is an incoming call, within 5 s ring short press ① button to decline it.

[End a call]: during a call, short press the① button to end it.

[Call the last telephone number]: when M5 are in standby state, long press ① button for about 2s to automatically call the last telephone number in the call log.

[Voice control]: double-click ① button to enter voice control mode. Doubleclick it again to exit the model.

[play/pause music]:short press ① button to pause and play

[Previous song]: long press volume “+” button

[Next song]: long press volume “-“ button

[Volume control]:short press volume “+” button to increase the volume, short press volume “-” button to reduce the volume.

[FM radio function] after startup, connect the earphones.

Press I button for 3 s to enable radio function. Listen the radio information you like ; if you want to exit radio state, short press I button again.

[Frequency modulation]: in radio state, short press volume “+”or“-“button to automatically search radio stations

[Radio volume regulation]: in radio state, long press volume “+” button to gradually increase the volume; long press volume “-” button to gradually reduce the volume.


Two M5 pairing.(A.B)

At power on state, long-press A device's I button and B device's II button together for 8 seconds.

Alternating red and blue flashing lights indicate and then press the A device's I button. The A device's red light goes off, blue lights flashes, and it starts to search for the pairing state. The B device's red light goes off, blue lights flashes. It means that two devices are pairing successfully. Then after a short-press on either A device's I button or B device's II button, you can enter intercom status.(A device's red light flashes, B device's blue lights flashes)

Paring of 5 phones: (A.B.C.D.E.)

Pairing Schematic

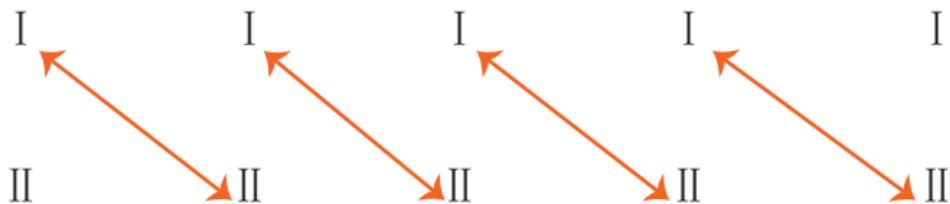

1. In the state of power-on, long press I button and II button and B at the same time to clear the paring records. After paring with the 5 devices as shown in the figure below, press A device' I button the machine will complete the connection among the 5 devices.
2. If any one of Device B, Device C and Device D wants to exit the intercommunication, press the I button and II button to exit the group intercommunication. If it wants to go back to intercommunication state, press I once and then press II .

3. If Device A exits the intercommunication, press I once to go back to intercommunication state.
4. If Device E exits the intercommunication, press II once to go back to intercommunication state.
5. Under 5-people intercommunication state, only Device A and Device E can be connected with the mobile phone.

Method to clean devices pairing data:

press mode I and mode II buttons simultaneously for about 3 seconds, the red light flashes, the pairing data clean.
(please open the antenna ,it can influnce calling effect)

Packing Accessories

Earphone

Deck, installation screwdrive

USB charging device

§ 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*** RF warning for Portable device:**

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.