


dji MIC MINI

Quick Start Guide

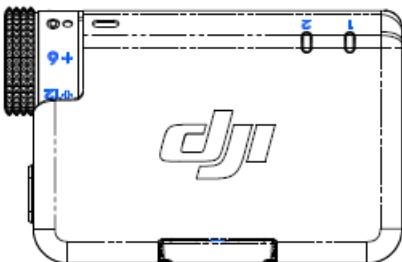


Introduction

DJI Mic Mini is a dual-channel wireless audio system that includes two wireless transmitters and a dual-channel receiver, supporting the simultaneous recording of two audio sources. Each transmitter is equipped with a high-quality omnidirectional microphone and features a clip for easy attachment and portability. The included charging case can charge both the transmitters and receiver simultaneously and facilitates automatic pairing between them.

DJI Mic Mini

DJI Mic Mini Transmitter

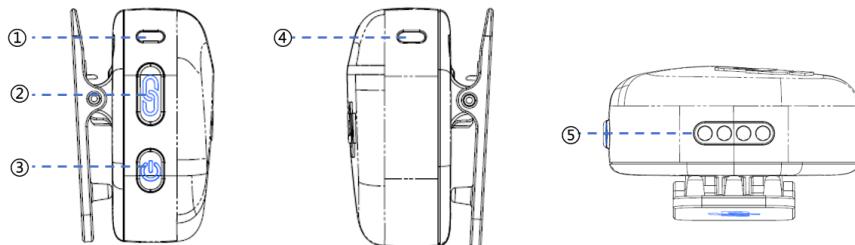

1. System Status Indicator

Indicates the status of the transmitter. See the table below for details.

LED	Description
Battery Level	
Solid Red	$\leq 10\%$
Solid Blue/Green	> 10% (Blue light/green light depending on the working mode)
Connection status with the receiver	
Solid Green	linked
Green light flashing slowly	unlinked

Green light flashing fast	linking
Connection status via the Bluetooth	
Solid Blue	linked
Blue light flashing slowly	unlinked
Blue light flashing slowly	linking

2. Power button

Press and hold for 2 seconds to turn on/off. A short press toggles noise cancellation. Double-click switches wireless working modes.

3. Pairing button


Press and hold for 2 seconds to initiate pairing. Once connected, a short press can control recording start/stop on a mobile phone, Osmo Pocket 3, or Osmo Action

4.

4. Noise cancellation indicator light.

LED	Description
Solid Yellow	Noise reduction is enabled
Light off	Noise reduction is disabled

DJI Mic Mini Receiver

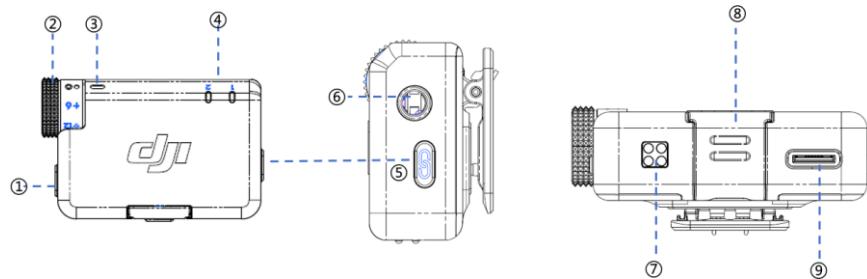

1. Power Button

Press and hold for 2 seconds to turn the power on or off. Press briefly to enable or disable noise cancellation.

2. Dial

Rotate to adjust the transmitter's gain to different levels.

3. RX Status Indicator Light

LED	Description
Solid Red	Battery level \leq 10%
Solid Green	Mono Track
Solid Cyan	Stereo Track
Solid Blue	Linked to a mobile device via the Bluetooth
Blue light flashing slowly	Awaiting connection to a mobile device via Bluetooth
Blue light flashing fast	Connecting to a mobile device via Bluetooth

1. TX1 status indicator light/TX2 status indicator light

LED	Description
Battery Level	
Solid Red	\leq 10%
Solid Green	$>$ 10%
Status	
Light off	Receiver not connected
Green light flashing fast	Connecting
Solid Yellow	TX1/TX2 noise reduction activated

2. Pairing Button

Press and hold for 2 seconds to start frequency pairing. Double-click to switch between mono/stereo.

3. 3.5 mm TRS Headphone Jack

Insert 3.5 mm TRS headphones to monitor the sound picked up by the transmitter.

4. Camera Cold Shoe Mount

For mounting to the camera's cold shoe.


5. Data Port (USB-C)

For connecting to a computer for updates, or when paired with a transmitter to be used as a computer microphone, and also for charging.

6. Charging Contacts

Connect to the charging case contacts for charging.

DJI Mic Mini Charging Case

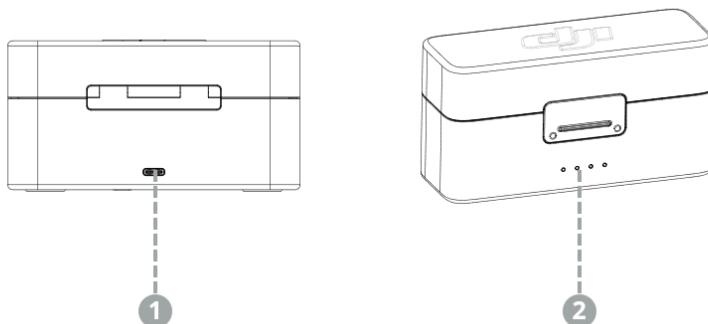

1. Charging port (USB-C)

Charge the charging case itself through the USB-C port.

2. Power indicator

Displays information about the current charge level of the charging case. See the table below for details.

 Indicates the battery level of the charging case.

 LED is on
 LED is off

 LED is flashing

LED1	LED2	LED3	LED4	Battery Level During Charging (LEDs blink in sequence)
●	●	●	●	76–99%
●	●	●	○	51–75%
●	●	○	○	26–50%
●	○	○	○	≤25%
○	○	○	○	Fully charged (Power off)
LED1	LED2	LED3	LED4	Battery Level
○	○	○	○	76–100%
○	○	○	○	51–75%
○	○	○	○	26–50%
○	○	○	○	10–25%
●	○	○	○	<10%

Specifications

DJI Mic Mini Launcher (DMMT01)	
Bluetooth Protocol	BR/EDR/BLE
Operating Frequency	2.4000-2.4835 GHz
SDR (GFSK)	1 Mbps 和2 Mbps
SDR (GFSK) Frequency	2.4000-2.4835 GHz
Transmitter Power (EIRP)	< 20 dBm

DJI Mic Mini Receiver (DMMR01)	
Bluetooth Protocol	BR/EDR/BLE
Operating Frequency	2.4000-2.4835 GHz
SDR (GFSK)	2.4000-2.4835 GHz
Transmitter Power (EIRP)	< 20 dBm

DJI Mic Mini Charging Case (DMMC01)	
Working Temperature	-10 °C to 45 °C

FCC Compliance Notice

Supplier's Declaration of Conformity

Product name: DJI Mic Mini Transmitter / DJI Mic Mini Receiver

Model Number: DMMT01 / DMMR01

Responsible Party: DJI Research LLC

Responsible Party Address: 17301 Edwards Road, Cerritos, CA 90703

Website: www.dji.com

We, DJI Research LLC, being the responsible party, declares that the above mentioned model was tested to demonstrate complying with all applicable FCC rules and regulations.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The portable device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA).

These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body.

These requirements set a SAR limit of 4 W/kg averaged over ten gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the limbs.

ISED Compliance Notice

CAN ICES-003 (B) / NMB-003(B)

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1)This device may not cause interference.(2)This device must accept any interference, including interference that may cause undesired operation of the device. L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils

radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :(1)L'appareil ne doit pas produire de brouillage; (2)L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with RSS-102 radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The portable device is designed to meet the requirements for exposure to radio waves established by the RSS-102.

Cet équipement est conforme aux limites d'exposition aux rayonnements CNR-102 établies pour un environnement non contrôlé. L'utilisateur final doit suivre les instructions spécifiques pour satisfaire les normes. Cet émetteur ne doit pas être co-implanté ou fonctionner en conjonction avec toute autre antenne ou transmetteur. Le dispositif portatif est conçu pour répondre aux exigences d'exposition aux ondes radio établie par le développement énergétique DURABLE.

These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on body.

Ces exigences un SAR limite de 1,6 W/kg en moyenne pour un gramme de tissu. La valeur SAR la plus élevée signalée en vertu de cette norme lors de la certification de produit à utiliser lorsqu'il est correctement porté sur le corps.

These requirements set a SAR limit of 4W/kg averaged over ten grams of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the limbs.

Ces exigences un SAR limite de 4 W/kg en moyenne pour dix gramme de tissu. La valeur SAR la plus élevée signalée en vertu de cette norme lors de la certification de produit à utiliser lorsqu'il est correctement porté sur le membres.