

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Power (dBm)	Verdict
n78	30	10	620334	1@1	DFT_BPSK	23.66	PASS
n78	30	10	620334	24@0	DFT_QPSK	22.78	PASS
n78	30	10	620334	12@6	DFT_QPSK	23.77	PASS
n78	30	10	620334	1@1	DFT_QPSK	23.61	PASS
n78	30	10	620334	1@22	DFT_QPSK	23.68	PASS
n78	30	10	620334	1@1	DFT_QAM16	22.57	PASS
n78	30	10	620334	1@1	DFT_QAM64	21.07	PASS
n78	30	10	620334	1@1	DFT_QAM256	19.12	PASS
n78	30	10	620334	1@1	CP_QPSK	22.05	PASS
n78	30	10	636666	1@1	DFT_BPSK	24.46	PASS
n78	30	10	636666	24@0	DFT_QPSK	23.48	PASS
n78	30	10	636666	12@6	DFT_QPSK	24.48	PASS
n78	30	10	636666	1@1	DFT_QPSK	24.44	PASS
n78	30	10	636666	1@22	DFT_QPSK	24.29	PASS
n78	30	10	636666	1@1	DFT_QAM16	23.38	PASS
n78	30	10	636666	1@1	DFT_QAM64	21.90	PASS
n78	30	10	636666	1@1	DFT_QAM256	19.96	PASS
n78	30	10	636666	1@1	CP_QPSK	22.91	PASS
n78	30	10	653000	1@1	DFT_BPSK	25.10	PASS
n78	30	10	653000	24@0	DFT_QPSK	24.21	PASS
n78	30	10	653000	12@6	DFT_QPSK	25.20	PASS
n78	30	10	653000	1@1	DFT_QPSK	25.06	PASS
n78	30	10	653000	1@22	DFT_QPSK	25.06	PASS
n78	30	10	653000	1@1	DFT_QAM16	23.93	PASS
n78	30	10	653000	1@1	DFT_QAM64	22.55	PASS
n78	30	10	653000	1@1	DFT_QAM256	20.56	PASS
n78	30	10	653000	1@1	CP_QPSK	23.50	PASS
n78	30	15	620500	1@1	DFT_BPSK	23.70	PASS
n78	30	15	620500	36@0	DFT_QPSK	22.89	PASS
n78	30	15	620500	18@9	DFT_QPSK	23.89	PASS
n78	30	15	620500	1@1	DFT_QPSK	23.68	PASS
n78	30	15	620500	1@36	DFT_QPSK	23.79	PASS
n78	30	15	620500	1@1	DFT_QAM16	22.66	PASS
n78	30	15	620500	1@1	DFT_QAM64	21.20	PASS
n78	30	15	620500	1@1	DFT_QAM256	19.21	PASS
n78	30	15	620500	1@1	CP_QPSK	22.11	PASS
n78	30	15	636666	1@1	DFT_BPSK	24.50	PASS
n78	30	15	636666	36@0	DFT_QPSK	23.51	PASS
n78	30	15	636666	18@9	DFT_QPSK	24.59	PASS
n78	30	15	636666	1@1	DFT_QPSK	24.48	PASS
n78	30	15	636666	1@36	DFT_QPSK	24.22	PASS

n78	30	15	636666	1@1	DFT_QAM16	23.36	PASS
n78	30	15	636666	1@1	DFT_QAM64	21.99	PASS
n78	30	15	636666	1@1	DFT_QAM256	20.00	PASS
n78	30	15	636666	1@1	CP_QPSK	22.91	PASS
n78	30	15	652832	1@1	DFT_BPSK	25.08	PASS
n78	30	15	652832	36@0	DFT_QPSK	24.20	PASS
n78	30	15	652832	18@9	DFT_QPSK	25.18	PASS
n78	30	15	652832	1@1	DFT_QPSK	25.00	PASS
n78	30	15	652832	1@36	DFT_QPSK	25.02	PASS
n78	30	15	652832	1@1	DFT_QAM16	23.98	PASS
n78	30	15	652832	1@1	DFT_QAM64	22.46	PASS
n78	30	15	652832	1@1	DFT_QAM256	20.52	PASS
n78	30	15	652832	1@1	CP_QPSK	23.44	PASS
n78	30	20	620668	1@1	DFT_BPSK	23.63	PASS
n78	30	20	620668	50@0	DFT_QPSK	22.90	PASS
n78	30	20	620668	25@12	DFT_QPSK	23.96	PASS
n78	30	20	620668	1@1	DFT_QPSK	23.62	PASS
n78	30	20	620668	1@49	DFT_QPSK	23.77	PASS
n78	30	20	620668	1@1	DFT_QAM16	22.56	PASS
n78	30	20	620668	1@1	DFT_QAM64	21.05	PASS
n78	30	20	620668	1@1	DFT_QAM256	19.13	PASS
n78	30	20	620668	1@1	CP_QPSK	22.06	PASS
n78	30	20	636666	1@1	DFT_BPSK	24.44	PASS
n78	30	20	636666	50@0	DFT_QPSK	23.53	PASS
n78	30	20	636666	25@12	DFT_QPSK	24.57	PASS
n78	30	20	636666	1@1	DFT_QPSK	24.45	PASS
n78	30	20	636666	1@49	DFT_QPSK	24.09	PASS
n78	30	20	636666	1@1	DFT_QAM16	23.41	PASS
n78	30	20	636666	1@1	DFT_QAM64	21.87	PASS
n78	30	20	636666	1@1	DFT_QAM256	19.91	PASS
n78	30	20	636666	1@1	CP_QPSK	22.87	PASS
n78	30	20	652666	1@1	DFT_BPSK	25.04	PASS
n78	30	20	652666	50@0	DFT_QPSK	24.22	PASS
n78	30	20	652666	25@12	DFT_QPSK	25.25	PASS
n78	30	20	652666	1@1	DFT_QPSK	25.01	PASS
n78	30	20	652666	1@49	DFT_QPSK	25.04	PASS
n78	30	20	652666	1@1	DFT_QAM16	23.85	PASS
n78	30	20	652666	1@1	DFT_QAM64	22.48	PASS
n78	30	20	652666	1@1	DFT_QAM256	20.52	PASS
n78	30	20	652666	1@1	CP_QPSK	23.41	PASS
n78	30	40	621334	1@1	DFT_BPSK	23.35	PASS
n78	30	40	621334	100@0	DFT_QPSK	22.86	PASS
n78	30	40	621334	50@25	DFT_QPSK	23.99	PASS
n78	30	40	621334	1@1	DFT_QPSK	23.37	PASS

n78	30	40	621334	1@104	DFT_QPSK	23.55	PASS
n78	30	40	621334	1@1	DFT_QAM16	22.29	PASS
n78	30	40	621334	1@1	DFT_QAM64	20.82	PASS
n78	30	40	621334	1@1	DFT_QAM256	19.96	PASS
n78	30	40	621334	1@1	CP_QPSK	21.76	PASS
n78	30	40	636666	1@1	DFT_BPSK	23.98	PASS
n78	30	40	636666	100@0	DFT_QPSK	23.36	PASS
n78	30	40	636666	50@25	DFT_QPSK	24.53	PASS
n78	30	40	636666	1@1	DFT_QPSK	23.93	PASS
n78	30	40	636666	1@104	DFT_QPSK	23.53	PASS
n78	30	40	636666	1@1	DFT_QAM16	22.80	PASS
n78	30	40	636666	1@1	DFT_QAM64	21.47	PASS
n78	30	40	636666	1@1	DFT_QAM256	19.46	PASS
n78	30	40	636666	1@1	CP_QPSK	22.36	PASS
n78	30	40	652000	1@1	DFT_BPSK	24.64	PASS
n78	30	40	652000	100@0	DFT_QPSK	24.15	PASS
n78	30	40	652000	50@25	DFT_QPSK	25.25	PASS
n78	30	40	652000	1@1	DFT_QPSK	24.69	PASS
n78	30	40	652000	1@104	DFT_QPSK	24.74	PASS
n78	30	40	652000	1@1	DFT_QAM16	23.59	PASS
n78	30	40	652000	1@1	DFT_QAM64	22.10	PASS
n78	30	40	652000	1@1	DFT_QAM256	20.13	PASS
n78	30	40	652000	1@1	CP_QPSK	23.19	PASS
n78	30	50	621668	1@1	DFT_BPSK	23.61	PASS
n78	30	50	621668	128@0	DFT_QPSK	22.99	PASS
n78	30	50	621668	64@32	DFT_QPSK	24.03	PASS
n78	30	50	621668	1@1	DFT_QPSK	23.63	PASS
n78	30	50	621668	1@131	DFT_QPSK	24.05	PASS
n78	30	50	621668	1@1	DFT_QAM16	22.61	PASS
n78	30	50	621668	1@1	DFT_QAM64	21.07	PASS
n78	30	50	621668	1@1	DFT_QAM256	19.05	PASS
n78	30	50	621668	1@1	CP_QPSK	22.08	PASS
n78	30	50	636666	1@1	DFT_BPSK	24.35	PASS
n78	30	50	636666	128@0	DFT_QPSK	23.41	PASS
n78	30	50	636666	64@32	DFT_QPSK	24.60	PASS
n78	30	50	636666	1@1	DFT_QPSK	24.29	PASS
n78	30	50	636666	1@131	DFT_QPSK	23.83	PASS
n78	30	50	636666	1@1	DFT_QAM16	23.21	PASS
n78	30	50	636666	1@1	DFT_QAM64	21.77	PASS
n78	30	50	636666	1@1	DFT_QAM256	19.79	PASS
n78	30	50	636666	1@1	CP_QPSK	22.77	PASS
n78	30	50	651666	1@1	DFT_BPSK	24.89	PASS
n78	30	50	651666	128@0	DFT_QPSK	24.30	PASS
n78	30	50	651666	64@32	DFT_QPSK	25.38	PASS

n78	30	50	651666	1@1	DFT_QPSK	24.92	PASS
n78	30	50	651666	1@131	DFT_QPSK	25.04	PASS
n78	30	50	651666	1@1	DFT_QAM16	23.76	PASS
n78	30	50	651666	1@1	DFT_QAM64	22.38	PASS
n78	30	50	651666	1@1	DFT_QAM256	20.45	PASS
n78	30	50	651666	1@1	CP_QPSK	23.28	PASS
n78	30	60	622000	1@1	DFT_BPSK	23.47	PASS
n78	30	60	622000	162@0	DFT_QPSK	23.03	PASS
n78	30	60	622000	81@40	DFT_QPSK	24.05	PASS
n78	30	60	622000	1@1	DFT_QPSK	23.48	PASS
n78	30	60	622000	1@160	DFT_QPSK	23.85	PASS
n78	30	60	622000	1@1	DFT_QAM16	22.29	PASS
n78	30	60	622000	1@1	DFT_QAM64	20.86	PASS
n78	30	60	622000	1@1	DFT_QAM256	20.05	PASS
n78	30	60	622000	1@1	CP_QPSK	21.87	PASS
n78	30	60	636666	1@1	DFT_BPSK	24.36	PASS
n78	30	60	636666	162@0	DFT_QPSK	23.41	PASS
n78	30	60	636666	81@40	DFT_QPSK	24.55	PASS
n78	30	60	636666	1@1	DFT_QPSK	24.35	PASS
n78	30	60	636666	1@160	DFT_QPSK	23.80	PASS
n78	30	60	636666	1@1	DFT_QAM16	23.29	PASS
n78	30	60	636666	1@1	DFT_QAM64	21.80	PASS
n78	30	60	636666	1@1	DFT_QAM256	19.86	PASS
n78	30	60	636666	1@1	CP_QPSK	22.80	PASS
n78	30	60	651332	1@1	DFT_BPSK	24.95	PASS
n78	30	60	651332	162@0	DFT_QPSK	24.36	PASS
n78	30	60	651332	81@40	DFT_QPSK	25.47	PASS
n78	30	60	651332	1@1	DFT_QPSK	24.89	PASS
n78	30	60	651332	1@160	DFT_QPSK	25.03	PASS
n78	30	60	651332	1@1	DFT_QAM16	23.97	PASS
n78	30	60	651332	1@1	DFT_QAM64	22.23	PASS
n78	30	60	651332	1@1	DFT_QAM256	20.51	PASS
n78	30	60	651332	1@1	CP_QPSK	23.26	PASS
n78	30	70	622334		DFT_BPSK	20.95	PASS
n78	30	70	622334		DFT_QPSK	20.96	PASS
n78	30	70	622334		DFT_QPSK	20.93	PASS
n78	30	70	622334		DFT_QPSK	20.94	PASS
n78	30	70	622334		DFT_QPSK	20.96	PASS
n78	30	70	622334		DFT_QAM16	20.95	PASS
n78	30	70	622334		DFT_QAM64	20.95	PASS
n78	30	70	622334		DFT_QAM256	20.94	PASS
n78	30	70	622334		CP_QPSK	20.96	PASS
n78	30	70	636666		DFT_BPSK	21.37	PASS
n78	30	70	636666		DFT_QPSK	21.36	PASS

n78	30	70	636666		DFT_QPSK	21.38	PASS
n78	30	70	636666		DFT_QPSK	21.39	PASS
n78	30	70	636666		DFT_QPSK	21.36	PASS
n78	30	70	636666		DFT_QAM16	21.36	PASS
n78	30	70	636666		DFT_QAM64	21.36	PASS
n78	30	70	636666		DFT_QAM256	21.36	PASS
n78	30	70	636666		CP_QPSK	21.35	PASS
n78	30	70	651000		DFT_BPSK	22.33	PASS
n78	30	70	651000		DFT_QPSK	22.32	PASS
n78	30	70	651000		DFT_QPSK	22.32	PASS
n78	30	70	651000		DFT_QPSK	22.32	PASS
n78	30	70	651000		DFT_QPSK	22.30	PASS
n78	30	70	651000		DFT_QAM16	22.30	PASS
n78	30	70	651000		DFT_QAM64	22.31	PASS
n78	30	70	651000		DFT_QAM256	22.31	PASS
n78	30	70	651000		CP_QPSK	22.31	PASS
n78	30	80	622668	1@1	DFT_BPSK	23.24	PASS
n78	30	80	622668	216@0	DFT_QPSK	23.03	PASS
n78	30	80	622668	108@54	DFT_QPSK	24.20	PASS
n78	30	80	622668	1@1	DFT_QPSK	23.26	PASS
n78	30	80	622668	1@215	DFT_QPSK	23.87	PASS
n78	30	80	622668	1@1	DFT_QAM16	22.21	PASS
n78	30	80	622668	1@1	DFT_QAM64	20.72	PASS
n78	30	80	622668	1@1	DFT_QAM256	18.73	PASS
n78	30	80	622668	1@1	CP_QPSK	21.68	PASS
n78	30	80	636666	1@1	DFT_BPSK	24.51	PASS
n78	30	80	636666	216@0	DFT_QPSK	23.40	PASS
n78	30	80	636666	108@54	DFT_QPSK	24.53	PASS
n78	30	80	636666	1@1	DFT_QPSK	24.53	PASS
n78	30	80	636666	1@215	DFT_QPSK	23.50	PASS
n78	30	80	636666	1@1	DFT_QAM16	23.50	PASS
n78	30	80	636666	1@1	DFT_QAM64	22.04	PASS
n78	30	80	636666	1@1	DFT_QAM256	19.98	PASS
n78	30	80	636666	1@1	CP_QPSK	23.05	PASS
n78	30	80	650666	1@1	DFT_BPSK	24.34	PASS
n78	30	80	650666	216@0	DFT_QPSK	24.32	PASS
n78	30	80	650666	108@54	DFT_QPSK	25.51	PASS
n78	30	80	650666	1@1	DFT_QPSK	24.39	PASS
n78	30	80	650666	1@215	DFT_QPSK	24.94	PASS
n78	30	80	650666	1@1	DFT_QAM16	23.35	PASS
n78	30	80	650666	1@1	DFT_QAM64	21.85	PASS
n78	30	80	650666	1@1	DFT_QAM256	19.86	PASS
n78	30	80	650666	1@1	CP_QPSK	22.81	PASS
n78	30	90	623000	1@1	DFT_BPSK	23.13	PASS

n78	30	90	623000	240@0	DFT_QPSK	23.08	PASS
n78	30	90	623000	120@60	DFT_QPSK	24.22	PASS
n78	30	90	623000	1@1	DFT_QPSK	23.15	PASS
n78	30	90	623000	1@243	DFT_QPSK	23.94	PASS
n78	30	90	623000	1@1	DFT_QAM16	22.04	PASS
n78	30	90	623000	1@1	DFT_QAM64	20.56	PASS
n78	30	90	623000	1@1	DFT_QAM256	18.55	PASS
n78	30	90	623000	1@1	CP_QPSK	21.48	PASS
n78	30	90	636666	1@1	DFT_BPSK	24.42	PASS
n78	30	90	636666	240@0	DFT_QPSK	23.44	PASS
n78	30	90	636666	120@60	DFT_QPSK	24.52	PASS
n78	30	90	636666	1@1	DFT_QPSK	24.39	PASS
n78	30	90	636666	1@243	DFT_QPSK	23.23	PASS
n78	30	90	636666	1@1	DFT_QAM16	23.51	PASS
n78	30	90	636666	1@1	DFT_QAM64	21.86	PASS
n78	30	90	636666	1@1	DFT_QAM256	19.89	PASS
n78	30	90	636666	1@1	CP_QPSK	22.82	PASS
n78	30	90	650332	1@1	DFT_BPSK	24.13	PASS
n78	30	90	650332	240@0	DFT_QPSK	24.26	PASS
n78	30	90	650332	120@60	DFT_QPSK	25.47	PASS
n78	30	90	650332	1@1	DFT_QPSK	24.13	PASS
n78	30	90	650332	1@243	DFT_QPSK	24.76	PASS
n78	30	90	650332	1@1	DFT_QAM16	22.92	PASS
n78	30	90	650332	1@1	DFT_QAM64	21.48	PASS
n78	30	90	650332	1@1	DFT_QAM256	19.57	PASS
n78	30	90	650332	1@1	CP_QPSK	22.46	PASS
n78	30	100	623334	1@1	DFT_BPSK	22.99	PASS
n78	30	100	623334	270@0	DFT_QPSK	23.09	PASS
n78	30	100	623334	135@67	DFT_QPSK	24.16	PASS
n78	30	100	623334	1@1	DFT_QPSK	22.97	PASS
n78	30	100	623334	1@271	DFT_QPSK	23.69	PASS
n78	30	100	623334	1@1	DFT_QAM16	21.83	PASS
n78	30	100	623334	1@1	DFT_QAM64	20.44	PASS
n78	30	100	623334	1@1	DFT_QAM256	18.44	PASS
n78	30	100	623334	1@1	CP_QPSK	21.35	PASS
n78	30	100	636666	1@1	DFT_BPSK	24.23	PASS
n78	30	100	636666	270@0	DFT_QPSK	23.37	PASS
n78	30	100	636666	135@67	DFT_QPSK	24.48	PASS
n78	30	100	636666	1@1	DFT_QPSK	24.22	PASS
n78	30	100	636666	1@271	DFT_QPSK	23.00	PASS
n78	30	100	636666	1@1	DFT_QAM16	23.20	PASS
n78	30	100	636666	1@1	DFT_QAM64	21.71	PASS
n78	30	100	636666	1@1	DFT_QAM256	19.70	PASS
n78	30	100	636666	1@1	CP_QPSK	22.64	PASS


n78	30	100	650000	1@1	DFT_BPSK	23.83	PASS
n78	30	100	650000	270@0	DFT_QPSK	24.18	PASS
n78	30	100	650000	135@67	DFT_QPSK	25.42	PASS
n78	30	100	650000	1@1	DFT_QPSK	23.82	PASS
n78	30	100	650000	1@271	DFT_QPSK	24.67	PASS
n78	30	100	650000	1@1	DFT_QAM16	22.65	PASS
n78	30	100	650000	1@1	DFT_QAM64	21.31	PASS
n78	30	100	650000	1@1	DFT_QAM256	19.39	PASS
n78	30	100	650000	1@1	CP_QPSK	22.16	PASS

3 Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n78	30	10	636666	24@0	DFT_BPSK	4.21	13	PASS
n78	30	10	636666	24@0	DFT_QPSK	5.33	13	PASS
n78	30	10	636666	24@0	DFT_QAM16	6.11	13	PASS
n78	30	10	636666	24@0	DFT_QAM64	6.28	13	PASS
n78	30	10	636666	24@0	DFT_QAM256	6.66	13	PASS
n78	30	15	636666	36@0	DFT_BPSK	4.29	13	PASS
n78	30	15	636666	36@0	DFT_QPSK	5.46	13	PASS
n78	30	15	636666	36@0	DFT_QAM16	6.09	13	PASS
n78	30	15	636666	36@0	DFT_QAM64	6.49	13	PASS
n78	30	15	636666	36@0	DFT_QAM256	6.58	13	PASS
n78	30	20	636666	50@0	DFT_BPSK	4.41	13	PASS
n78	30	20	636666	50@0	DFT_QPSK	5.53	13	PASS
n78	30	20	636666	50@0	DFT_QAM16	6.07	13	PASS
n78	30	20	636666	50@0	DFT_QAM64	6.41	13	PASS
n78	30	20	636666	50@0	DFT_QAM256	6.55	13	PASS
n78	30	40	636666	100@0	DFT_BPSK	3.82	13	PASS
n78	30	40	636666	100@0	DFT_QPSK	5.34	13	PASS
n78	30	40	636666	100@0	DFT_QAM16	6.32	13	PASS
n78	30	40	636666	100@0	DFT_QAM64	6.56	13	PASS
n78	30	40	636666	100@0	DFT_QAM256	6.72	13	PASS
n78	30	50	636666	128@0	DFT_BPSK	4.84	13	PASS
n78	30	50	636666	128@0	DFT_QPSK	5.91	13	PASS
n78	30	50	636666	128@0	DFT_QAM16	6.69	13	PASS
n78	30	50	636666	128@0	DFT_QAM64	6.92	13	PASS
n78	30	50	636666	128@0	DFT_QAM256	6.97	13	PASS
n78	30	60	636666	162@0	DFT_BPSK	6.06	13	PASS
n78	30	60	636666	162@0	DFT_QPSK	6.31	13	PASS
n78	30	60	636666	162@0	DFT_QAM16	7.10	13	PASS
n78	30	60	636666	162@0	DFT_QAM64	7.23	13	PASS
n78	30	60	636666	162@0	DFT_QAM256	7.22	13	PASS
n78	30	70	636666		DFT_BPSK	7.25	13	PASS
n78	30	70	636666		DFT_QPSK	7.27	13	PASS
n78	30	70	636666		DFT_QAM16	7.22	13	PASS
n78	30	70	636666		DFT_QAM64	7.23	13	PASS
n78	30	70	636666		DFT_QAM256	7.21	13	PASS
n78	30	80	636666	216@0	DFT_BPSK	5.58	13	PASS
n78	30	80	636666	216@0	DFT_QPSK	6.99	13	PASS
n78	30	80	636666	216@0	DFT_QAM16	7.30	13	PASS
n78	30	80	636666	216@0	DFT_QAM64	7.51	13	PASS
n78	30	80	636666	216@0	DFT_QAM256	7.47	13	PASS
n78	30	90	636666	240@0	DFT_BPSK	5.74	13	PASS
n78	30	90	636666	240@0	DFT_QPSK	7.11	13	PASS

n78	30	90	636666	240@0	DFT_QAM16	7.46	13	PASS
n78	30	90	636666	240@0	DFT_QAM64	7.43	13	PASS
n78	30	90	636666	240@0	DFT_QAM256	7.49	13	PASS
n78	30	100	636666	270@0	DFT_BPSK	6.05	13	PASS
n78	30	100	636666	270@0	DFT_QPSK	7.28	13	PASS
n78	30	100	636666	270@0	DFT_QAM16	7.55	13	PASS
n78	30	100	636666	270@0	DFT_QAM64	7.55	13	PASS
n78	30	100	636666	270@0	DFT_QAM256	7.67	13	PASS


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=636666 RB=24@0

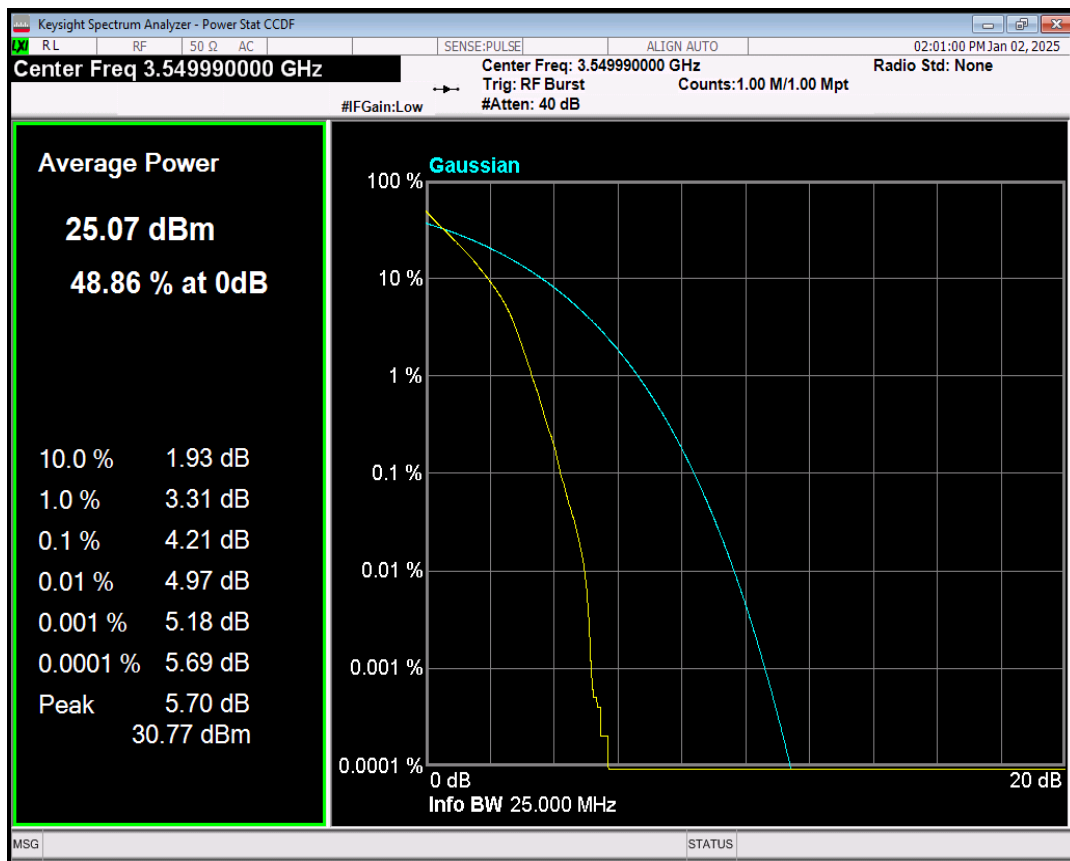


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=636666 RB=24@0

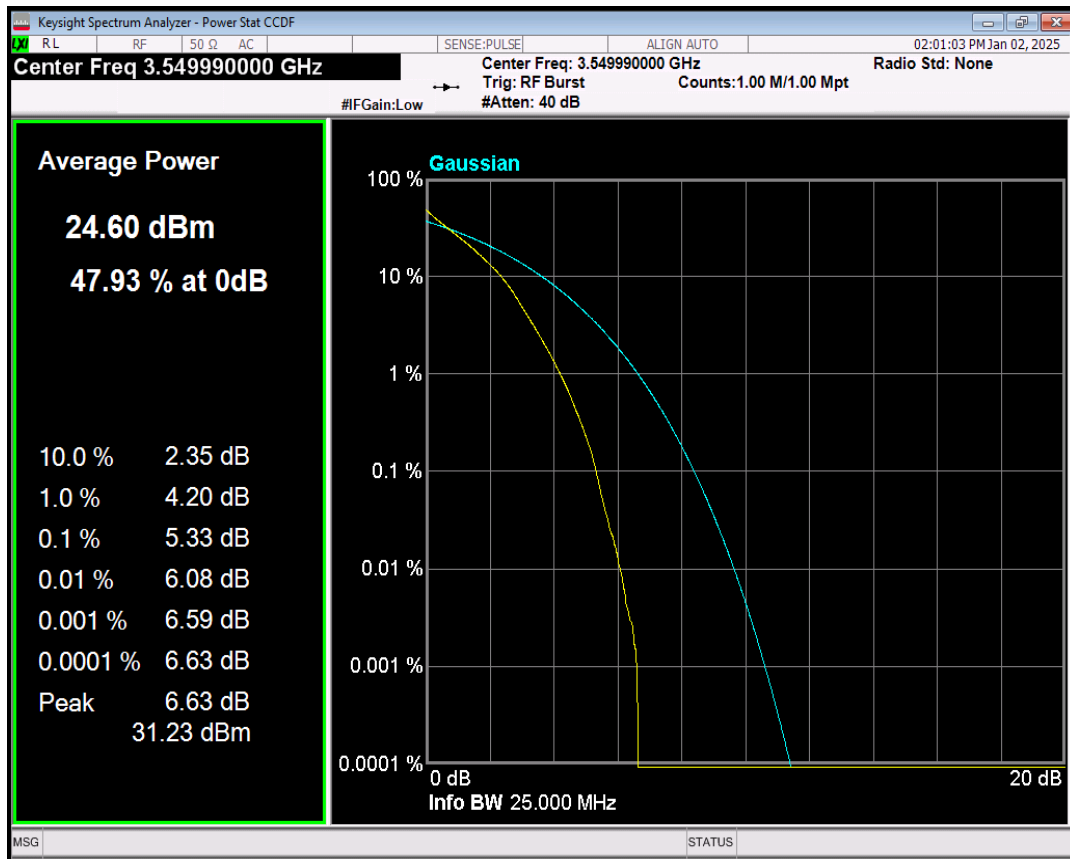


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=636666 RB=24@0

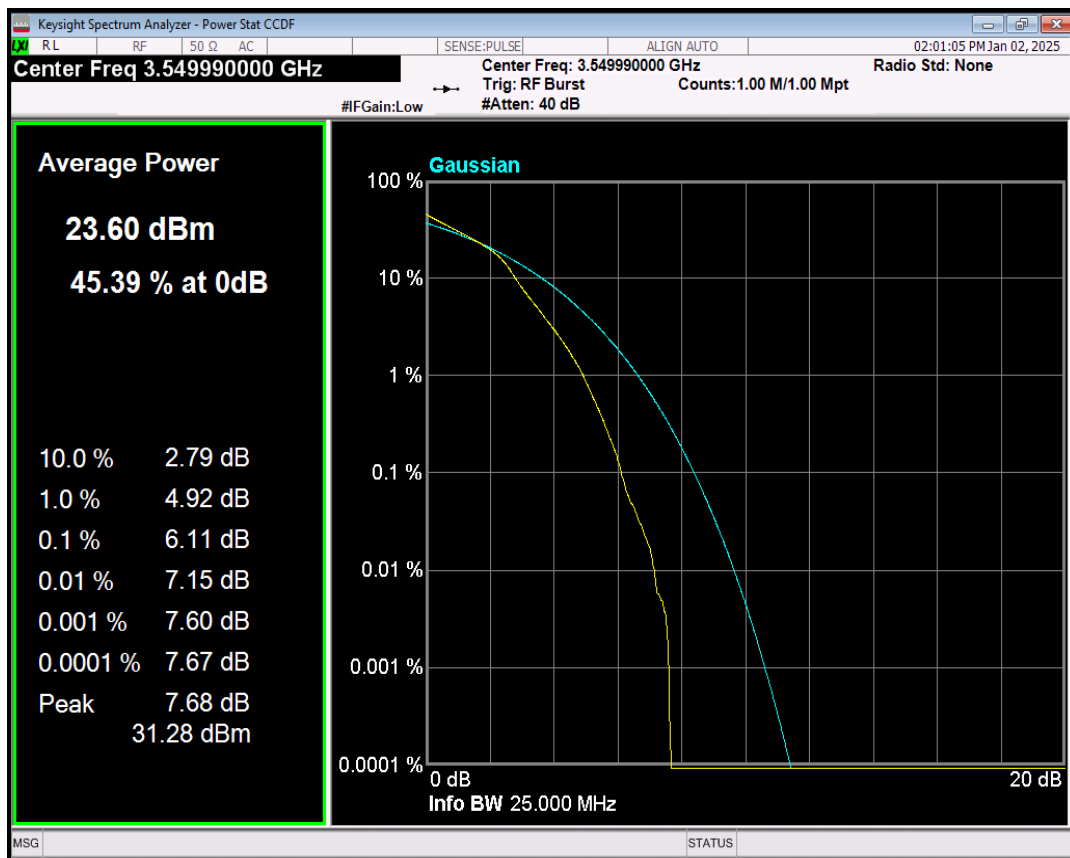


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=636666 RB=24@0

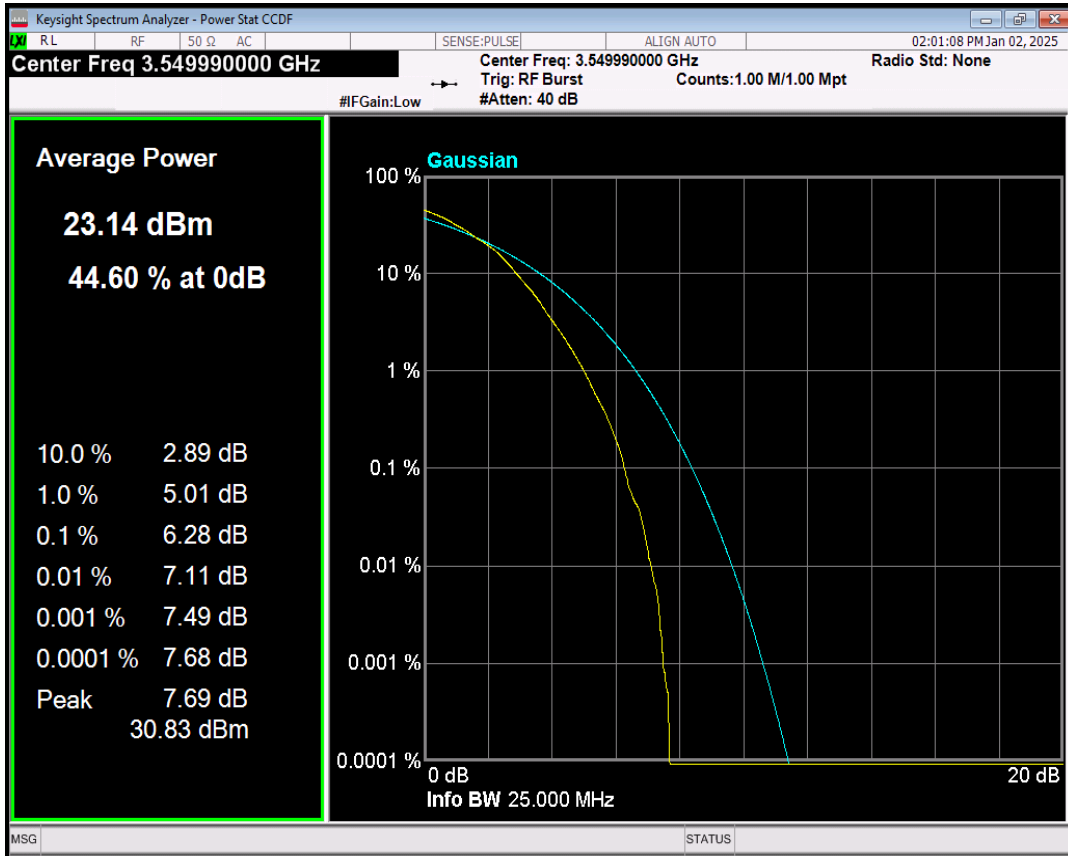


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=636666 RB=24@0

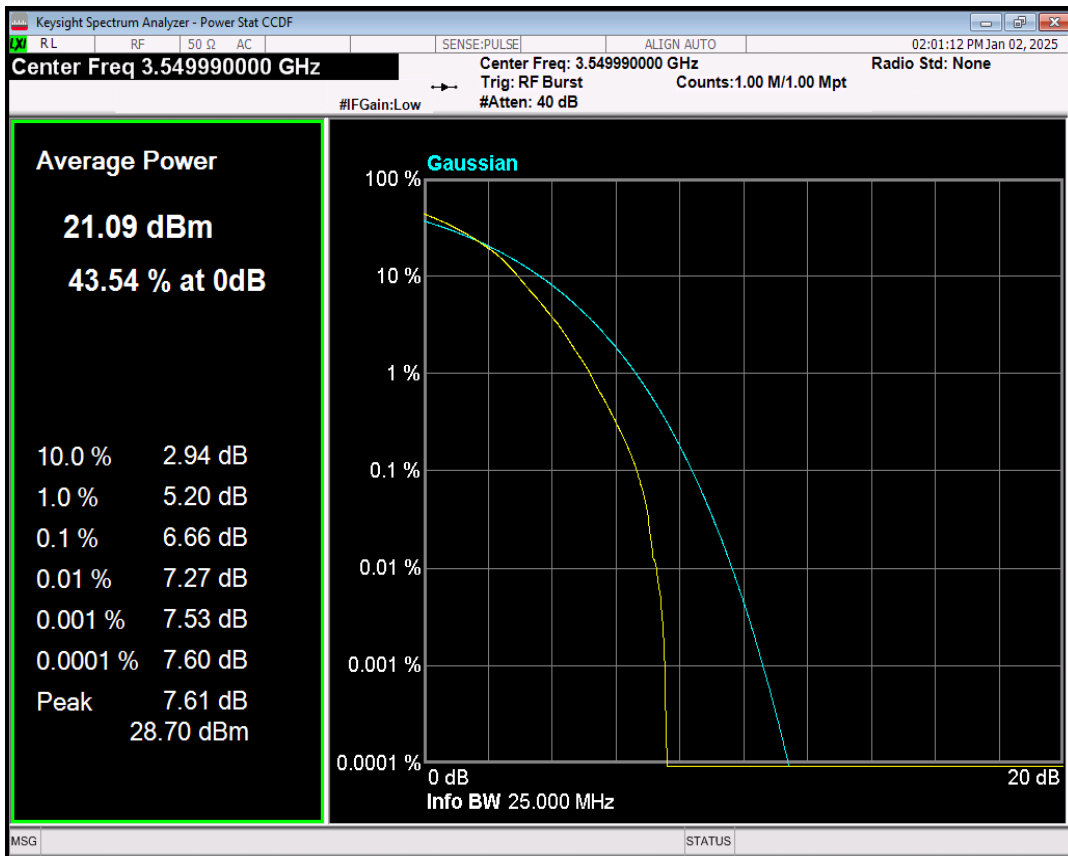


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=636666 RB=36@0

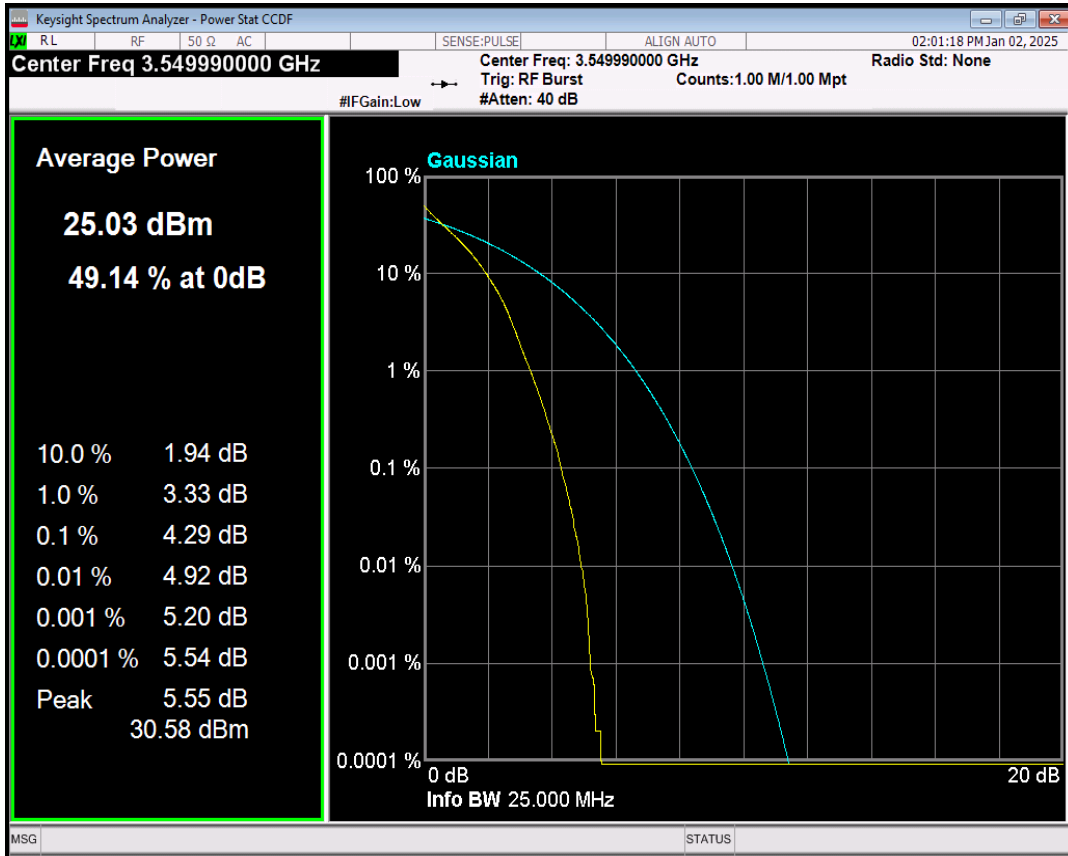


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=636666 RB=36@0

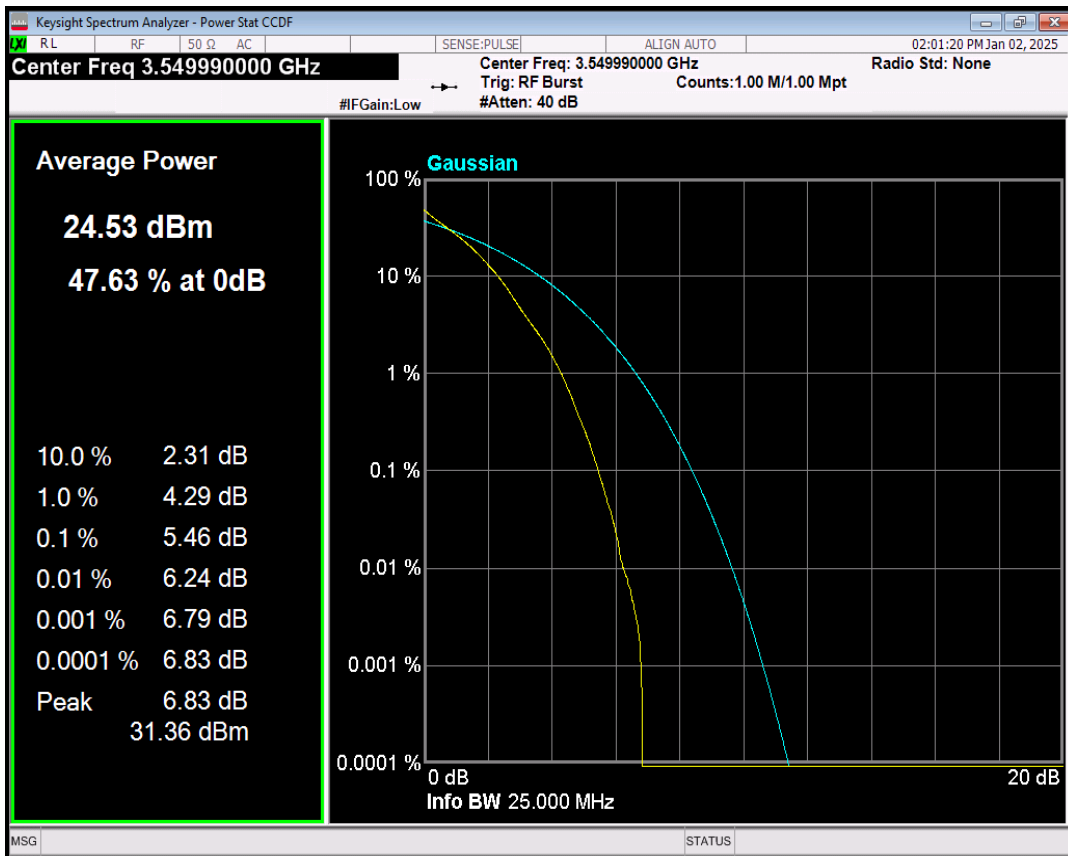


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=636666 RB=36@0

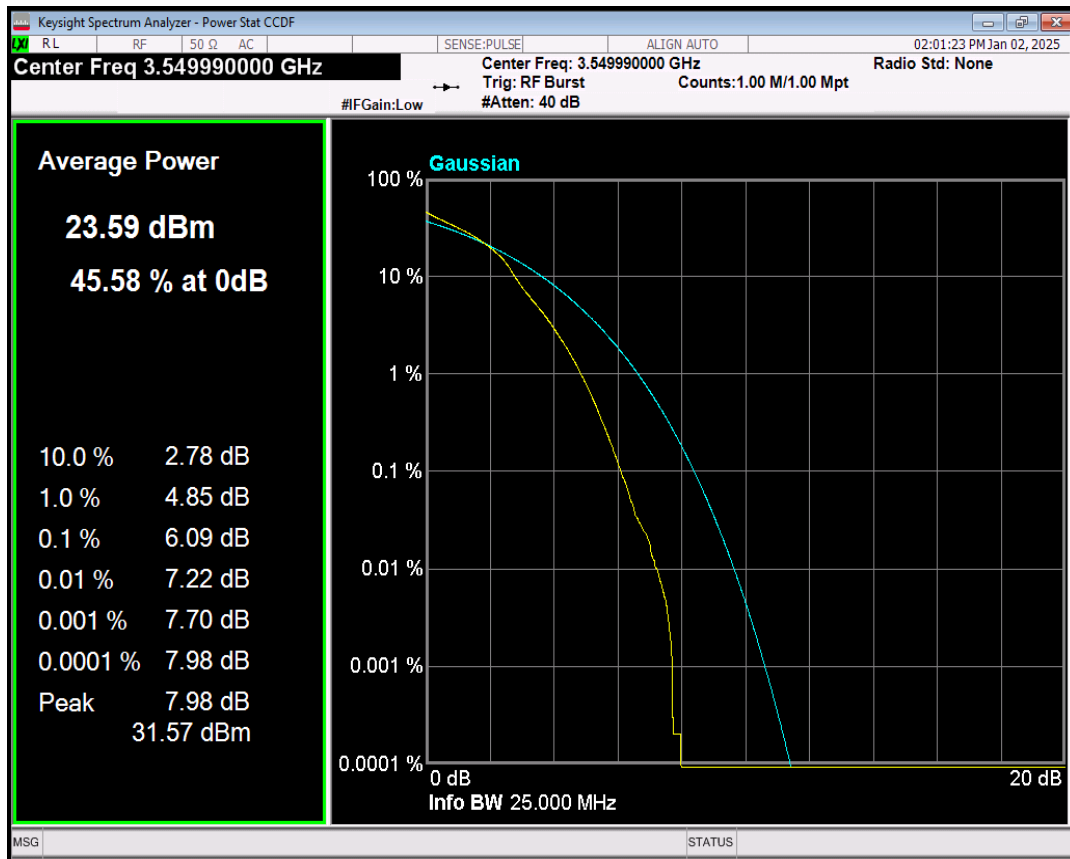


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=636666 RB=36@0

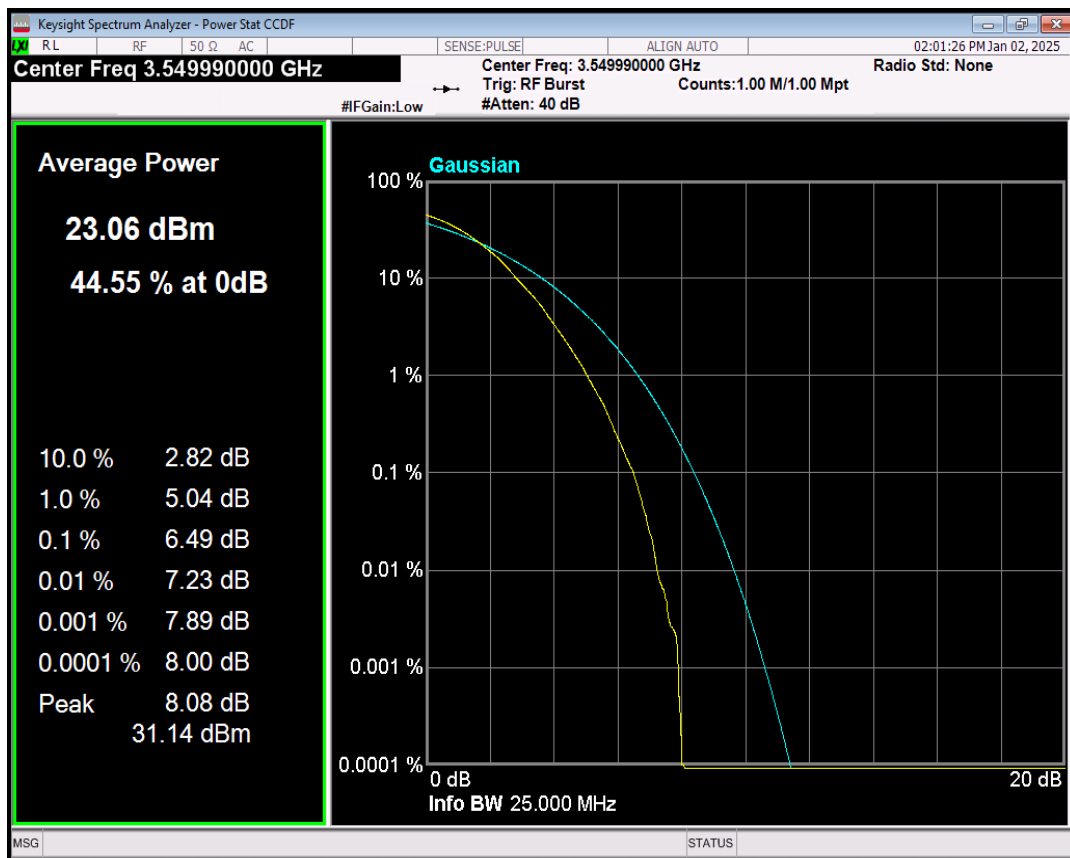


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=636666 RB=36@0

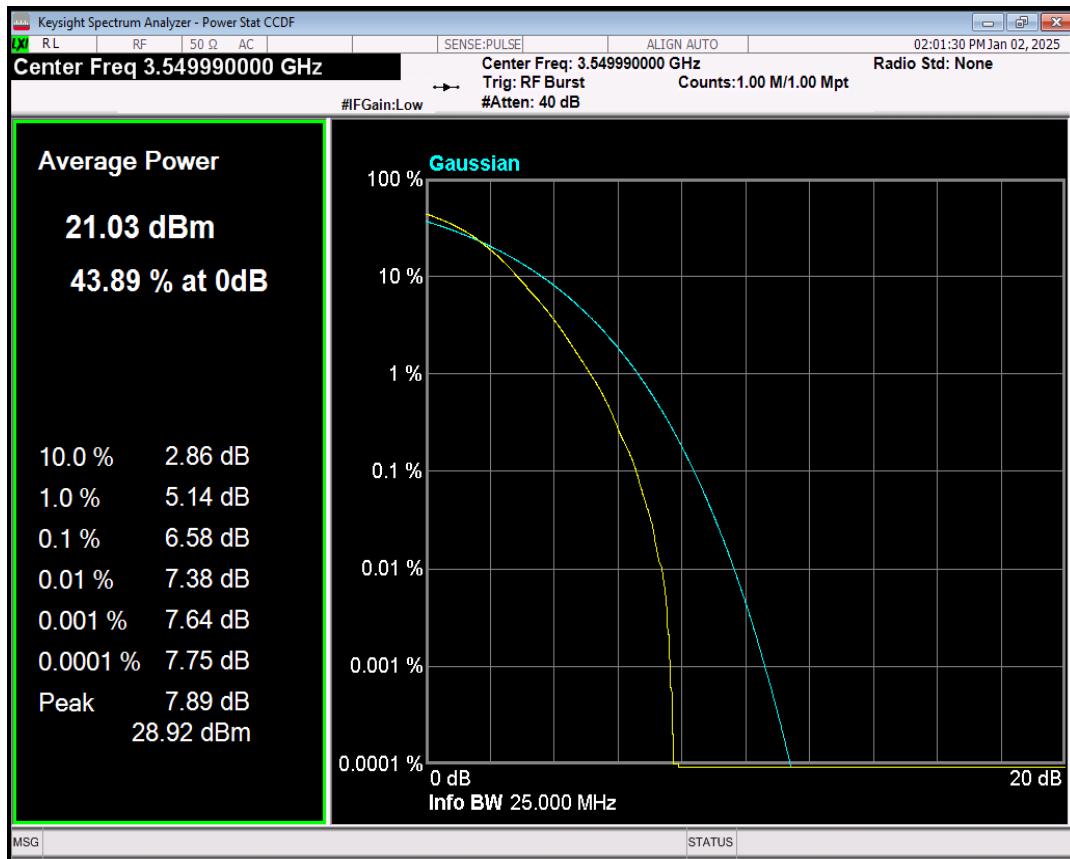


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=636666 RB=50@0

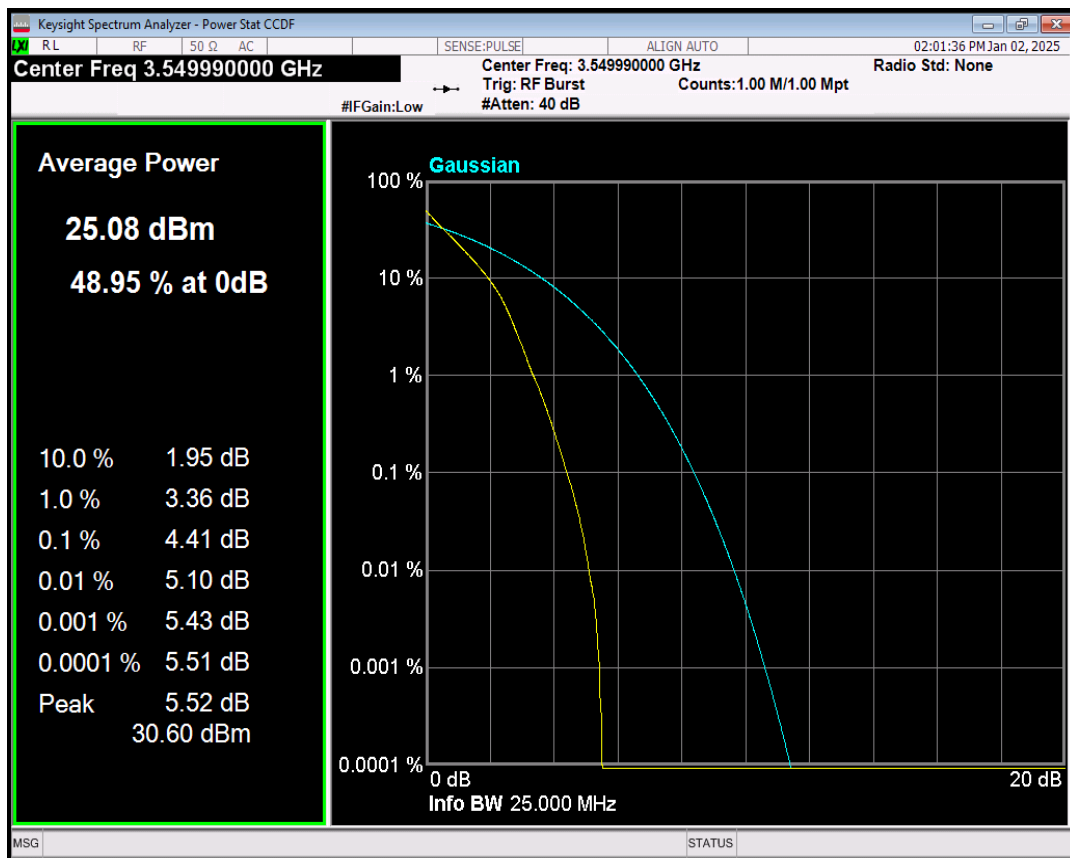


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=636666 RB=50@0

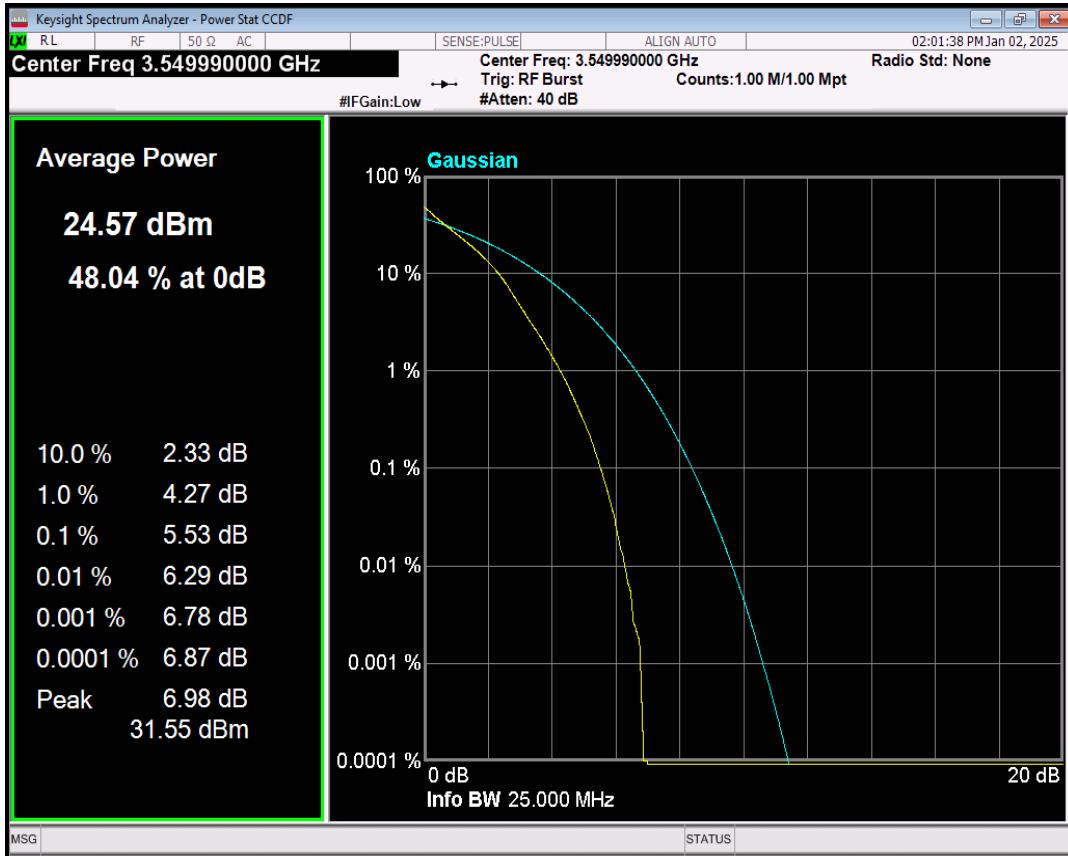


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=636666 RB=50@0

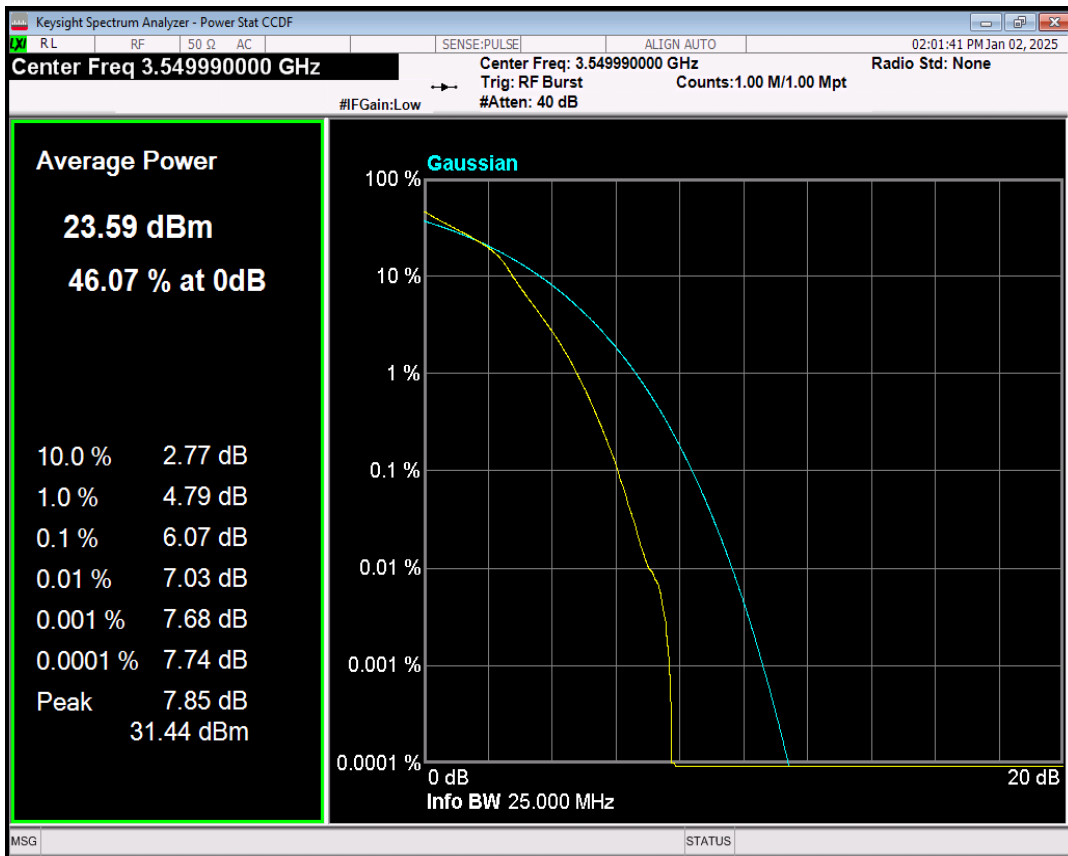


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=636666 RB=50@0

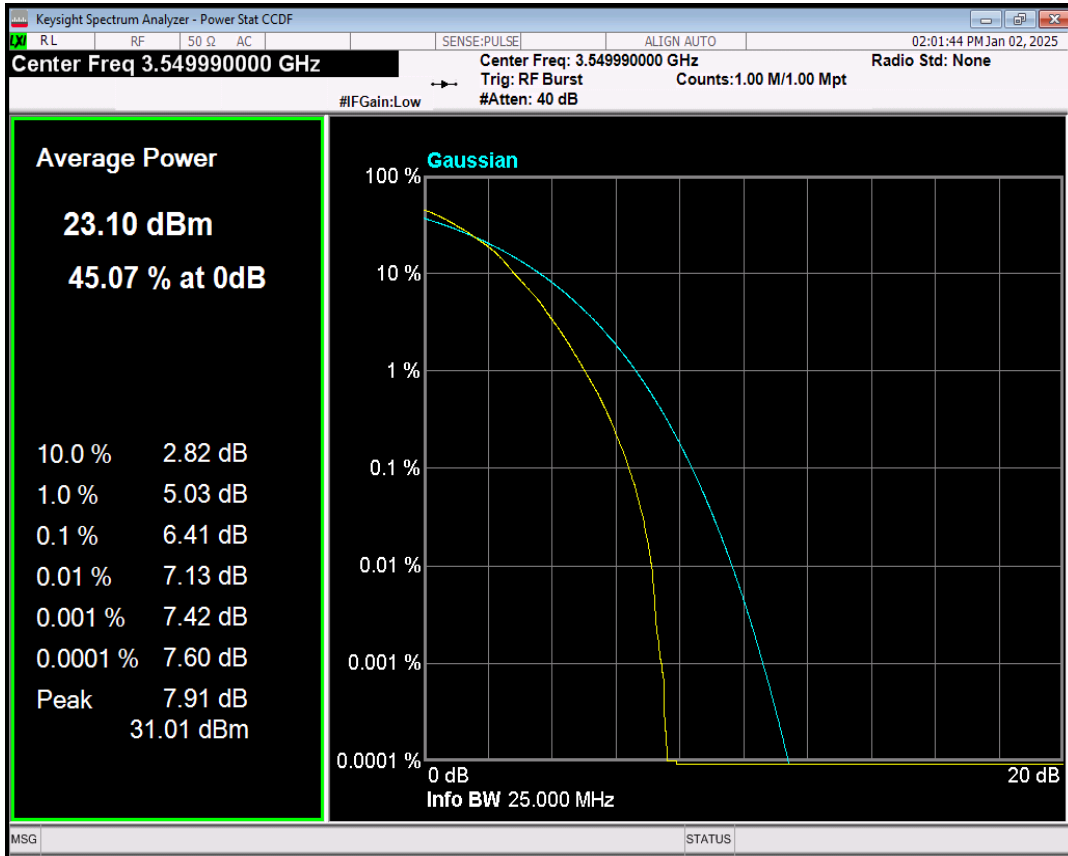


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=636666 RB=50@0

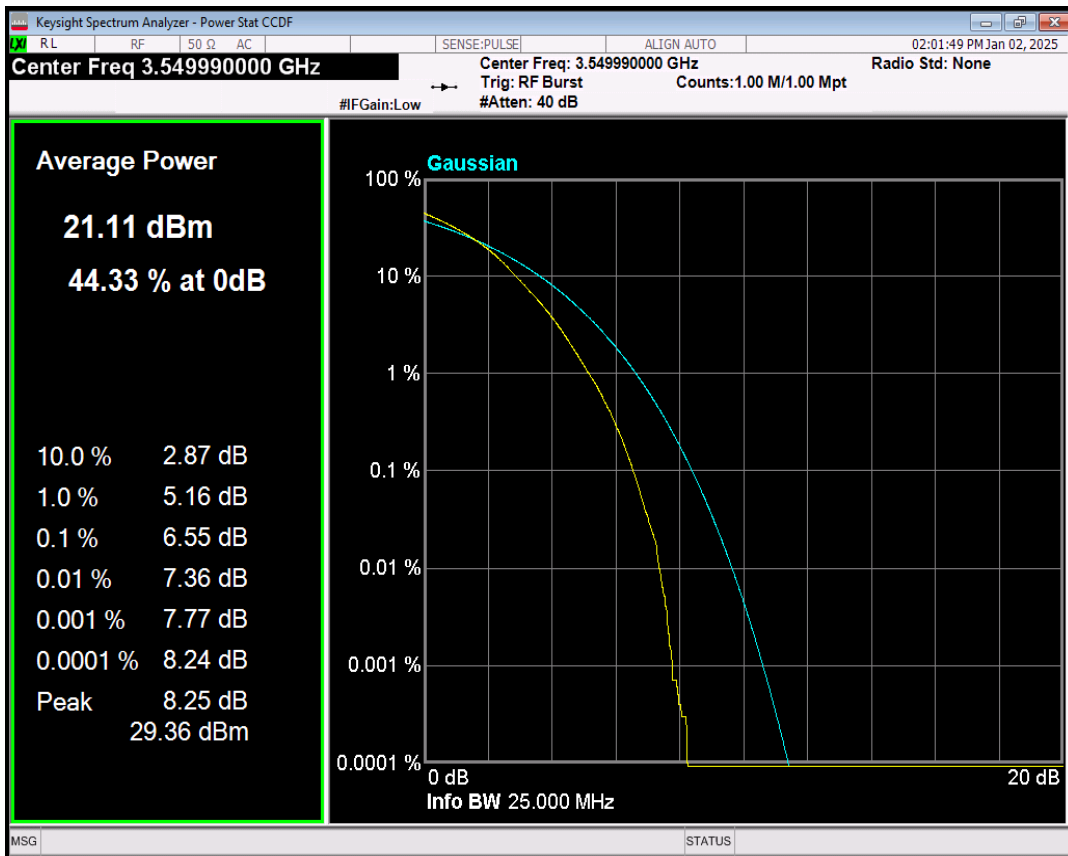


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=636666 RB=100@0

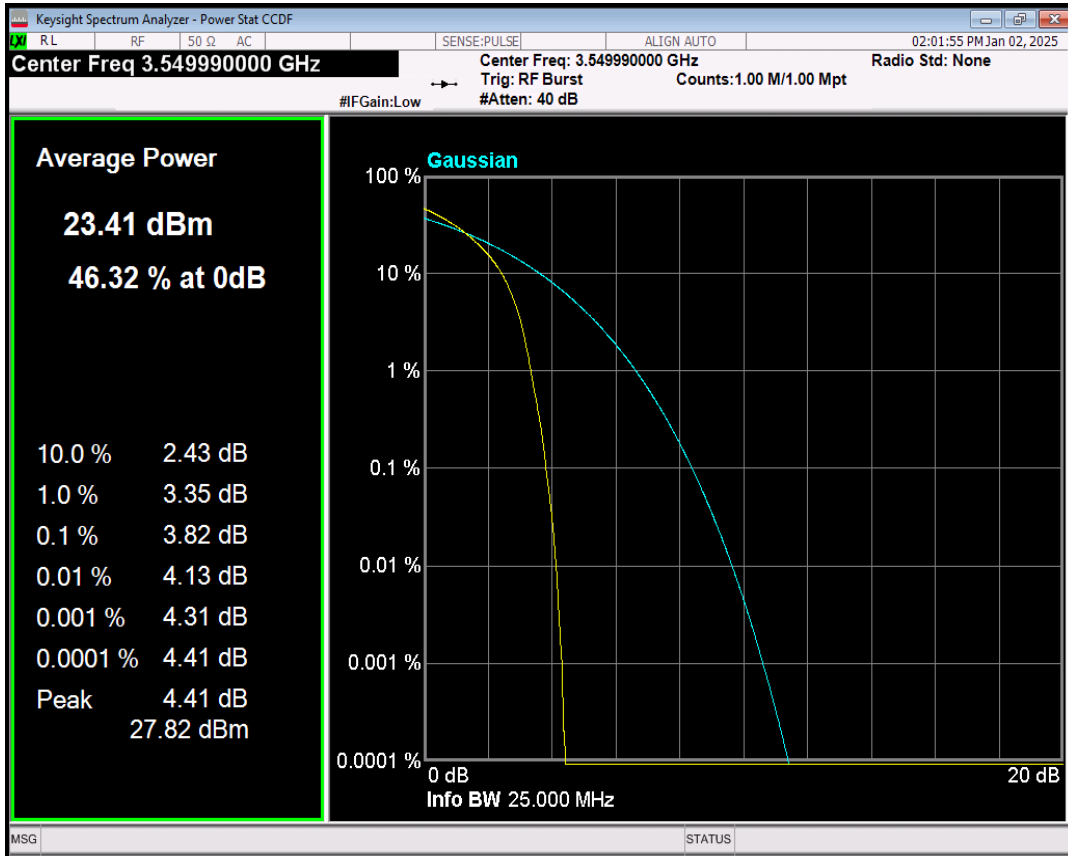


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=636666 RB=100@0

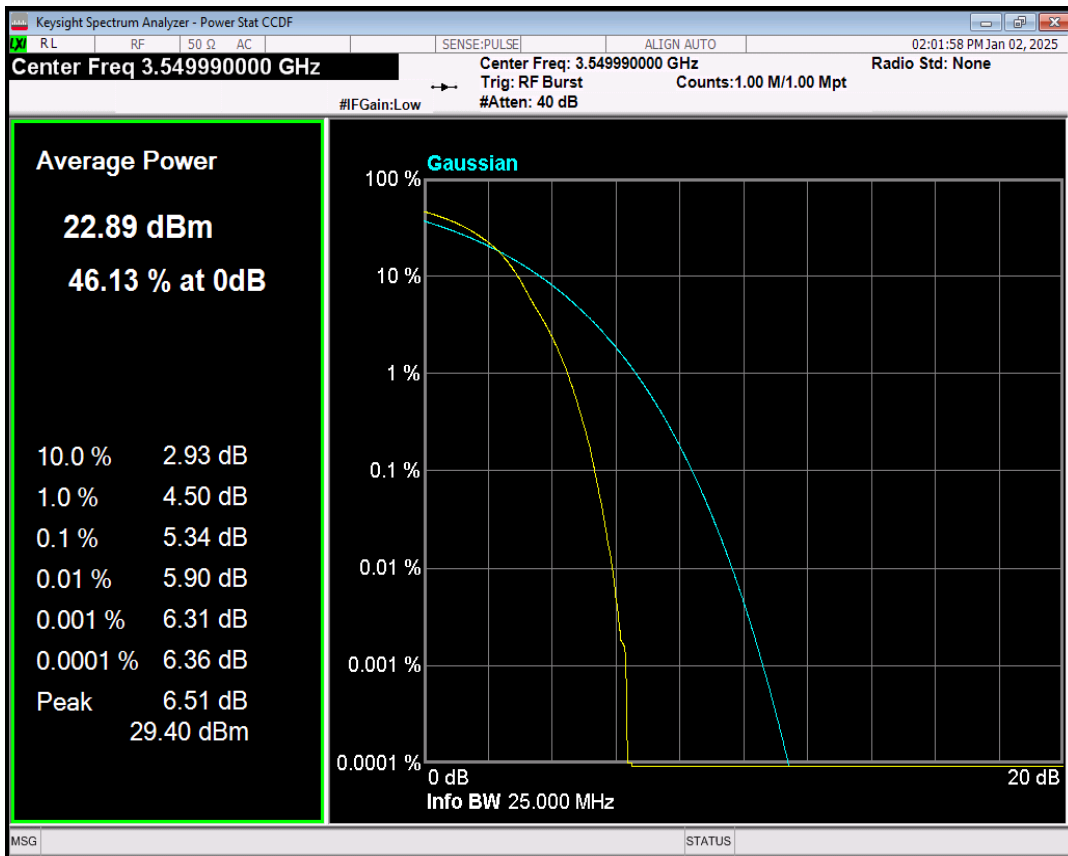


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=636666 RB=100@0

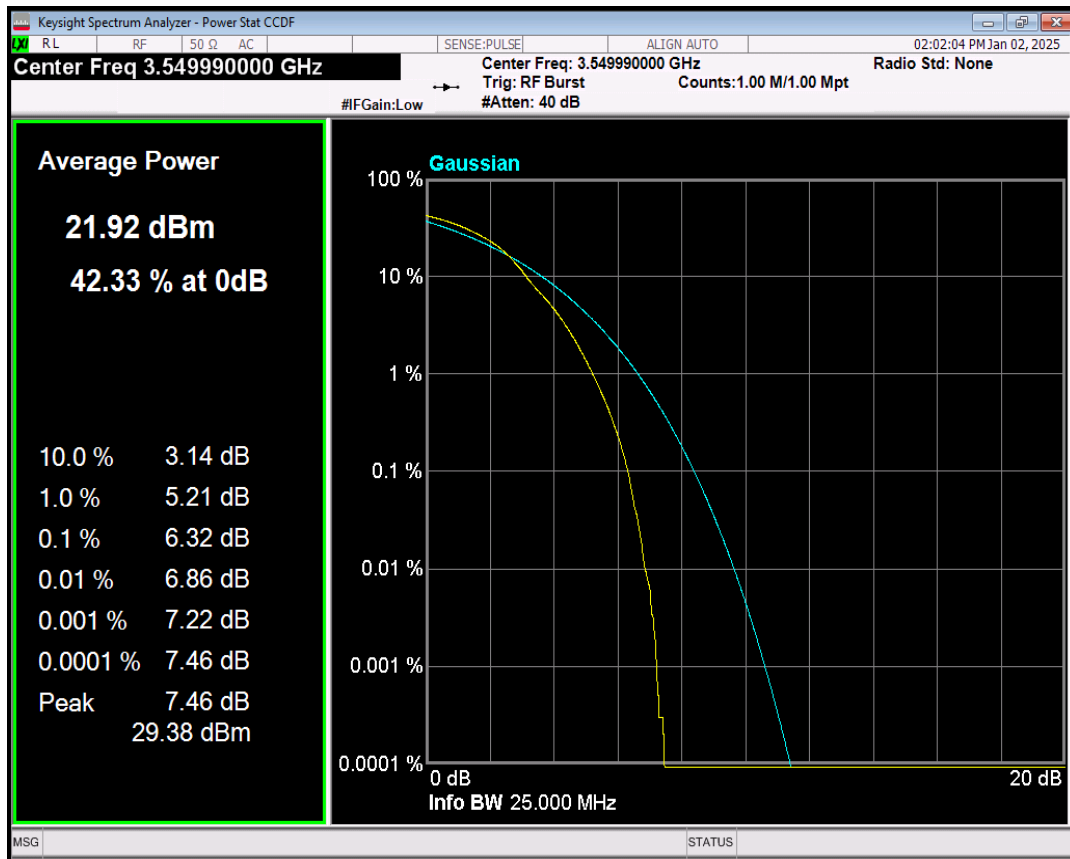


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=636666 RB=100@0

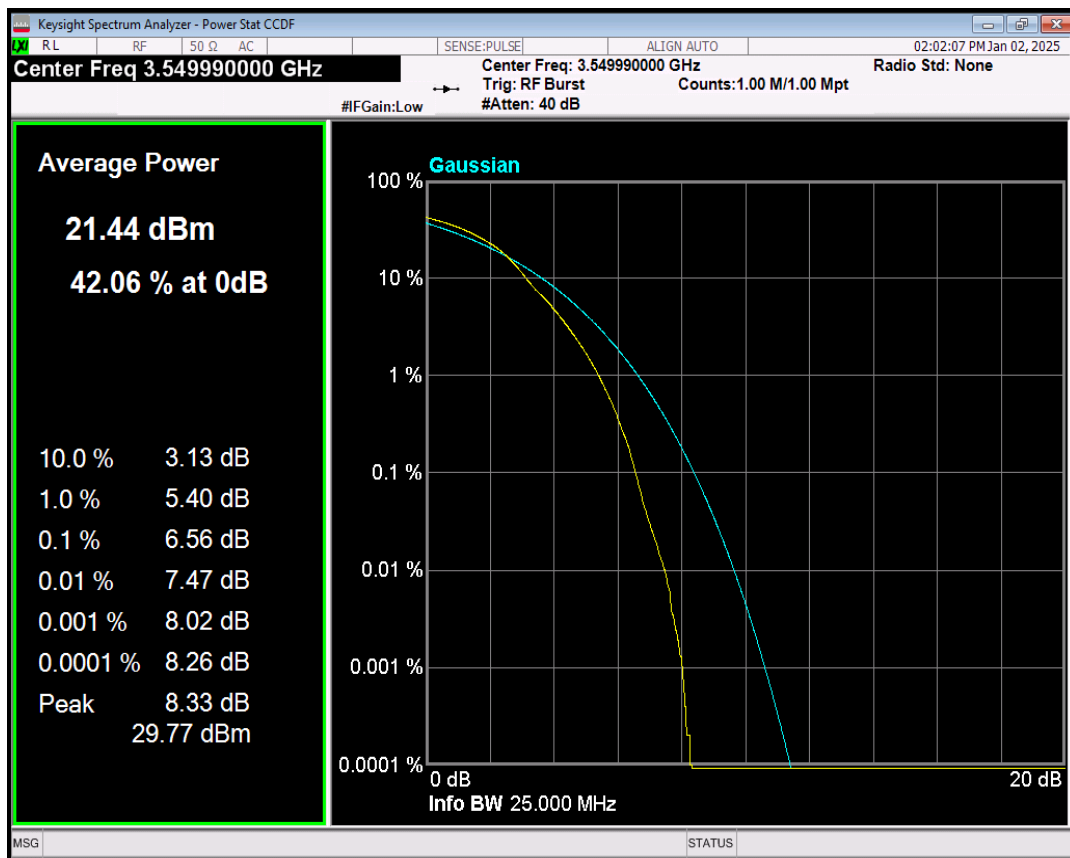


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=636666 RB=100@0

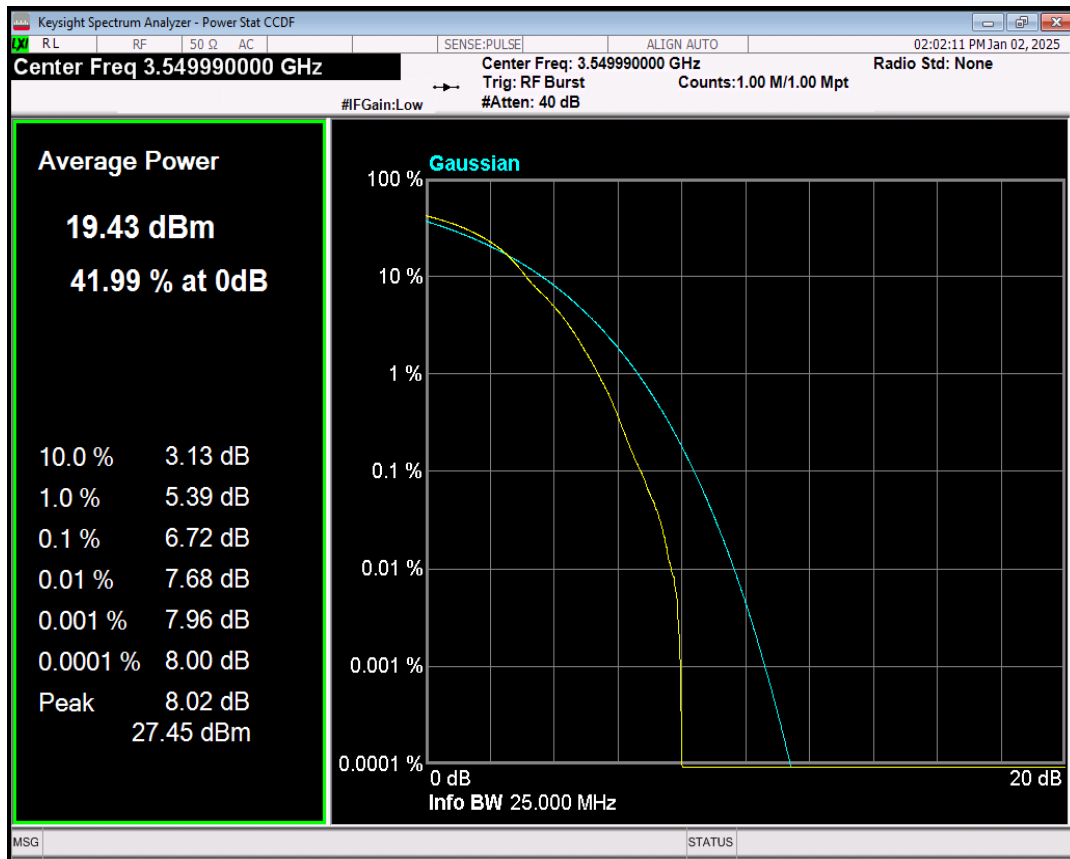


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=636666 RB=128@0

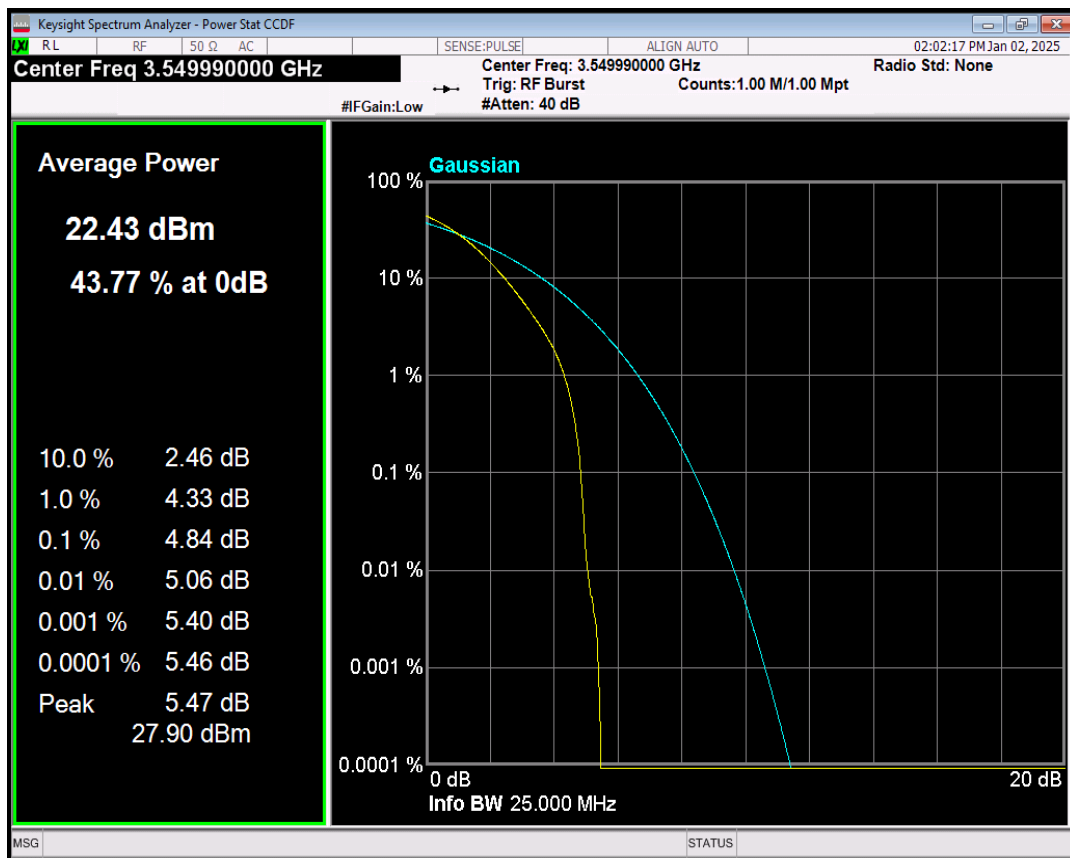


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=636666 RB=128@0

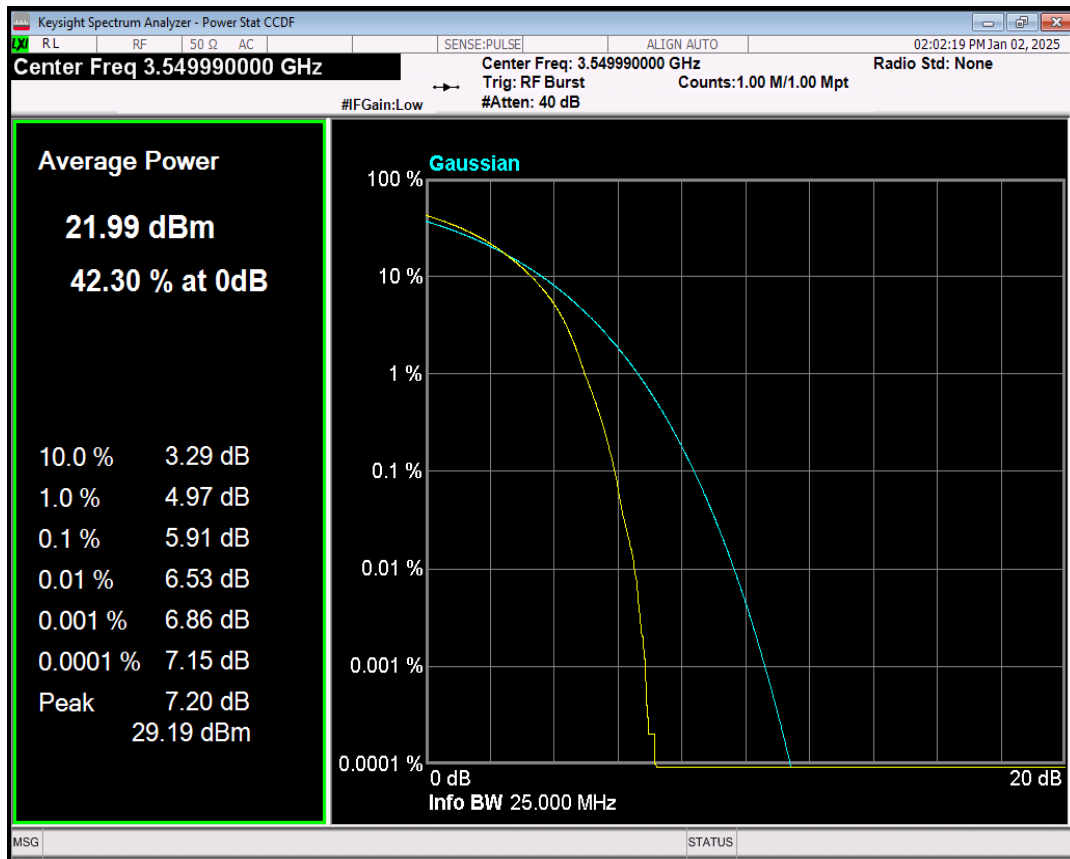


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=636666 RB=128@0

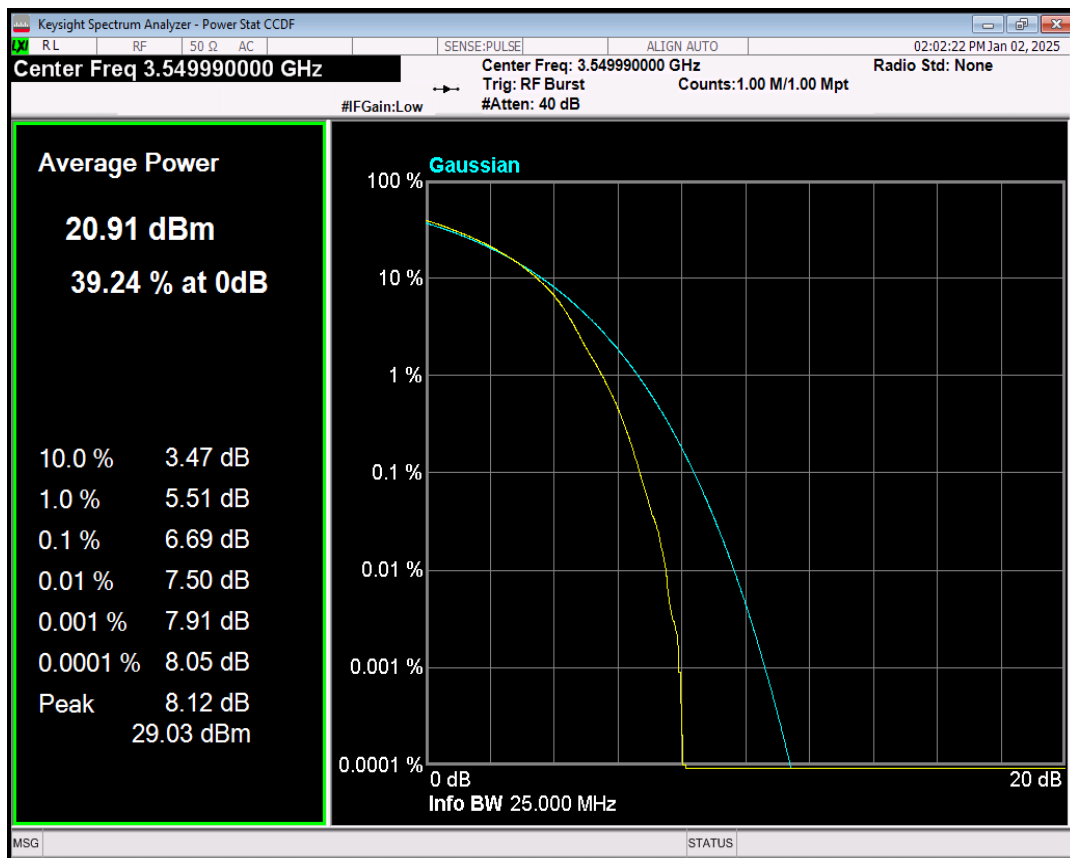


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=636666 RB=128@0

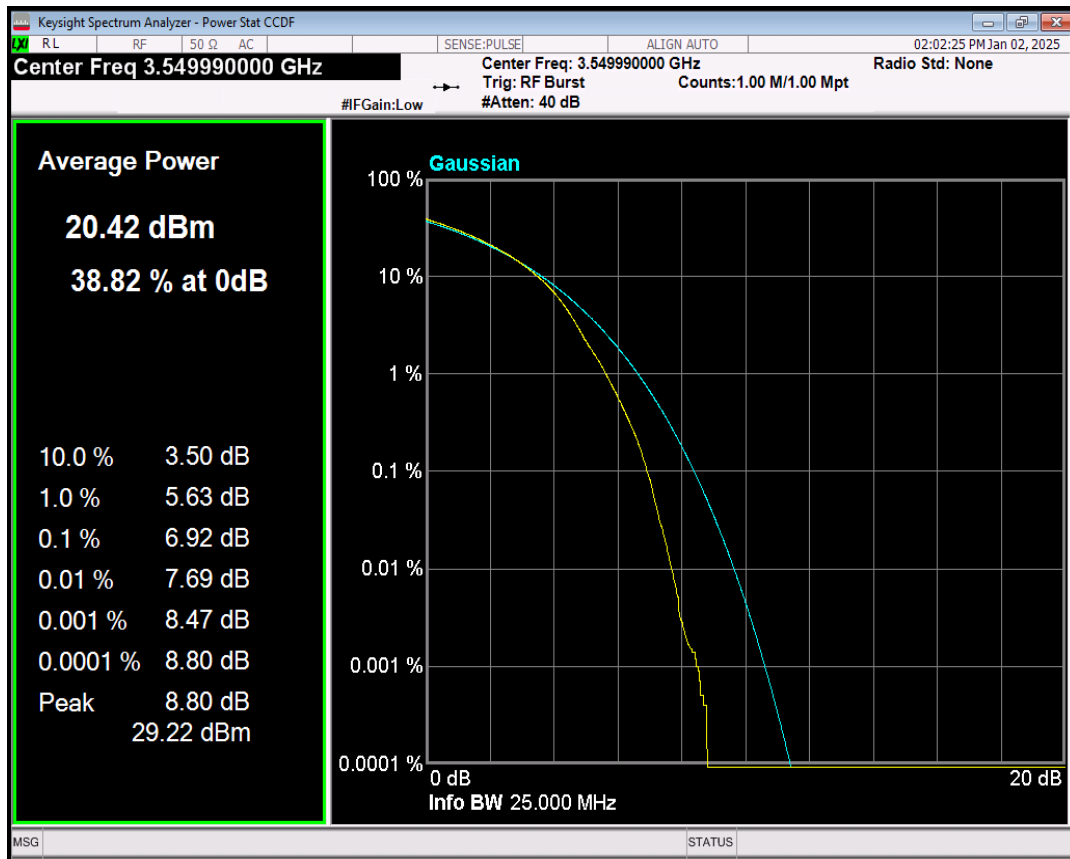


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=636666 RB=128@0

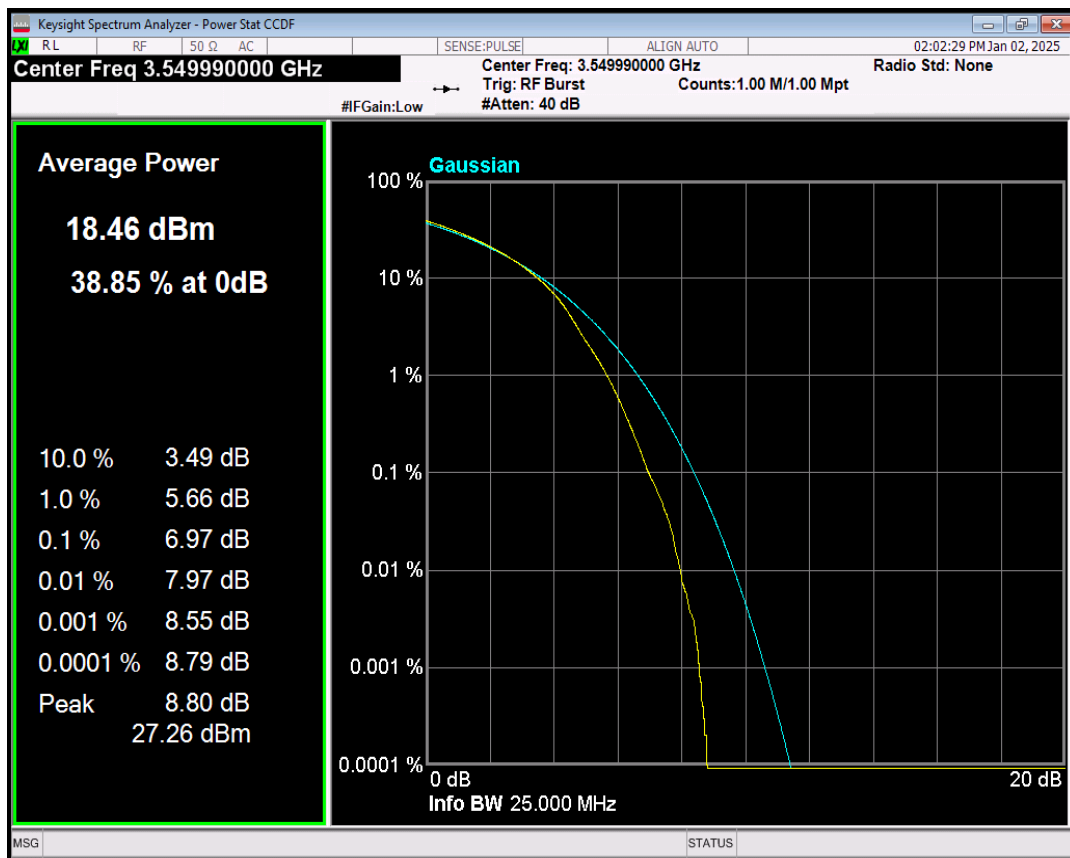


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=636666 RB=162@0

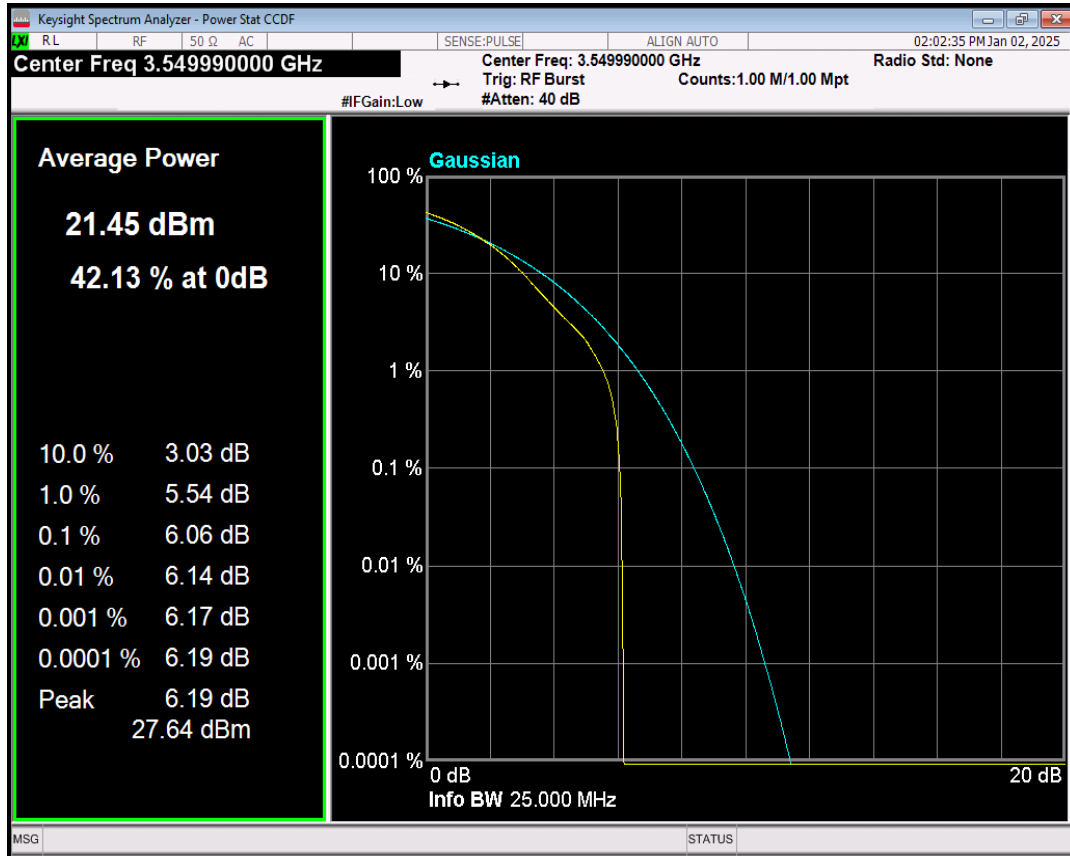


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=636666 RB=162@0

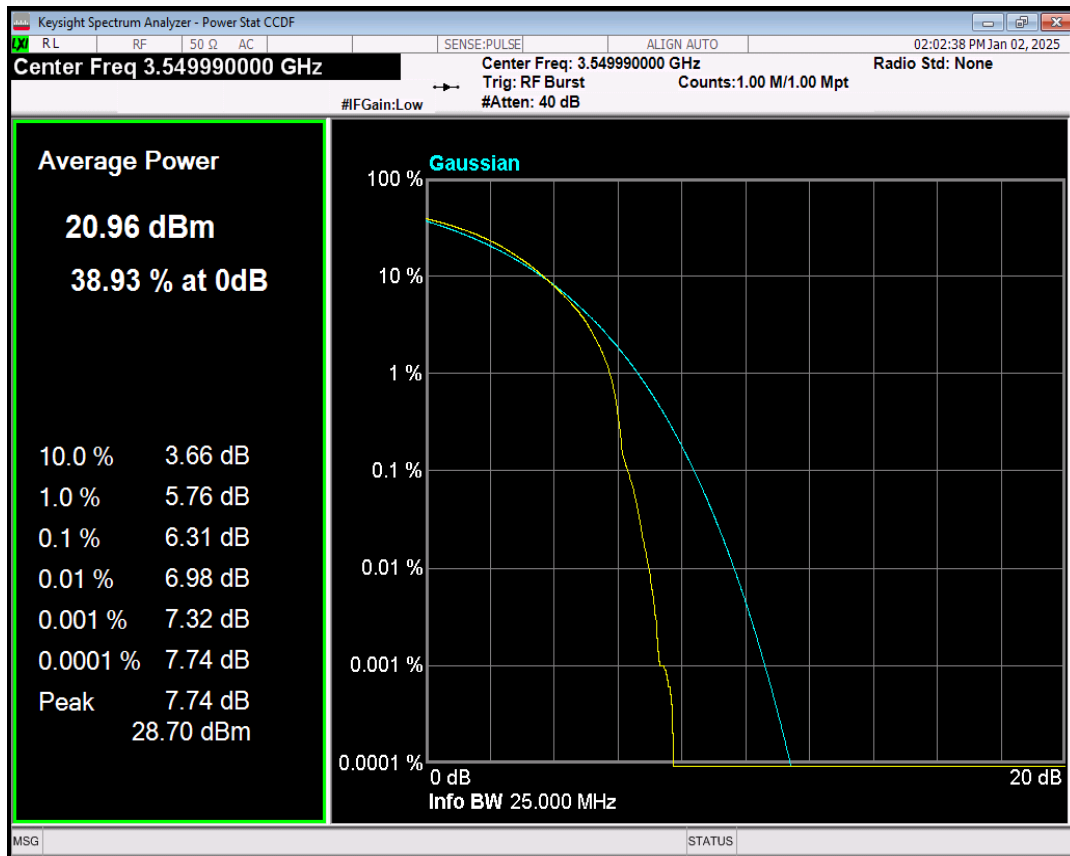


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=636666 RB=162@0

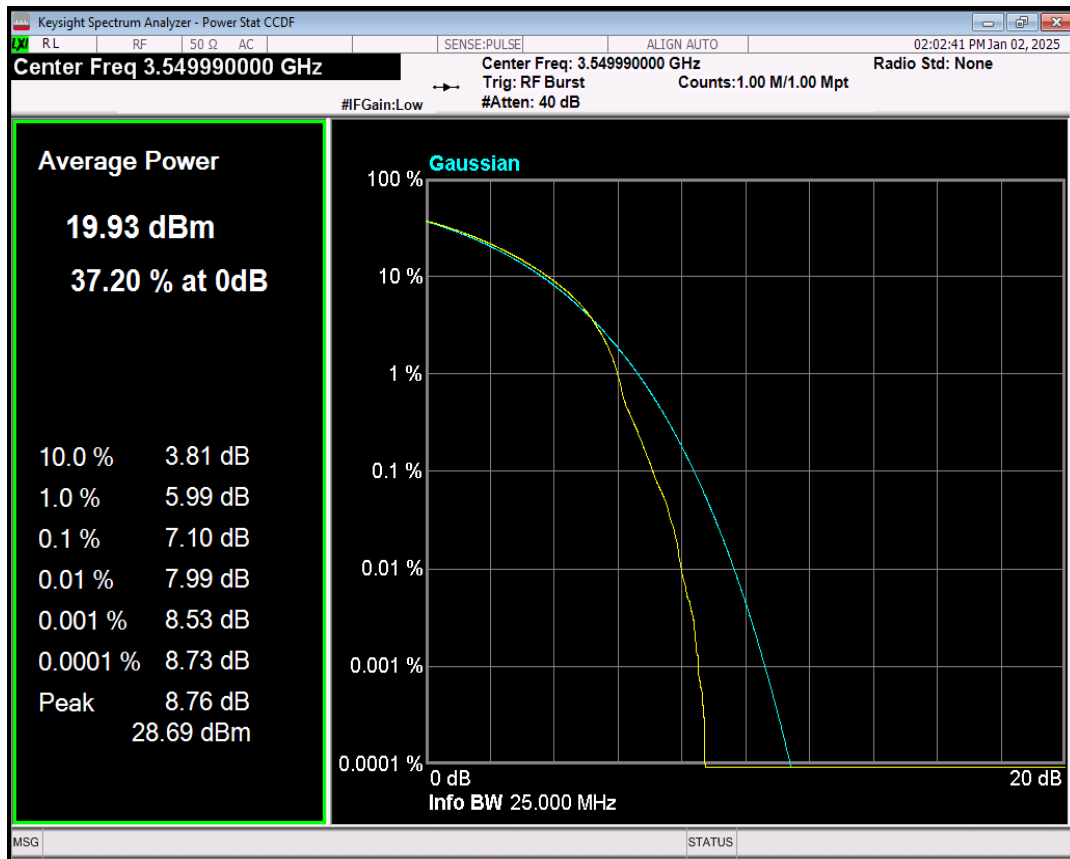


n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=636666 RB=162@0

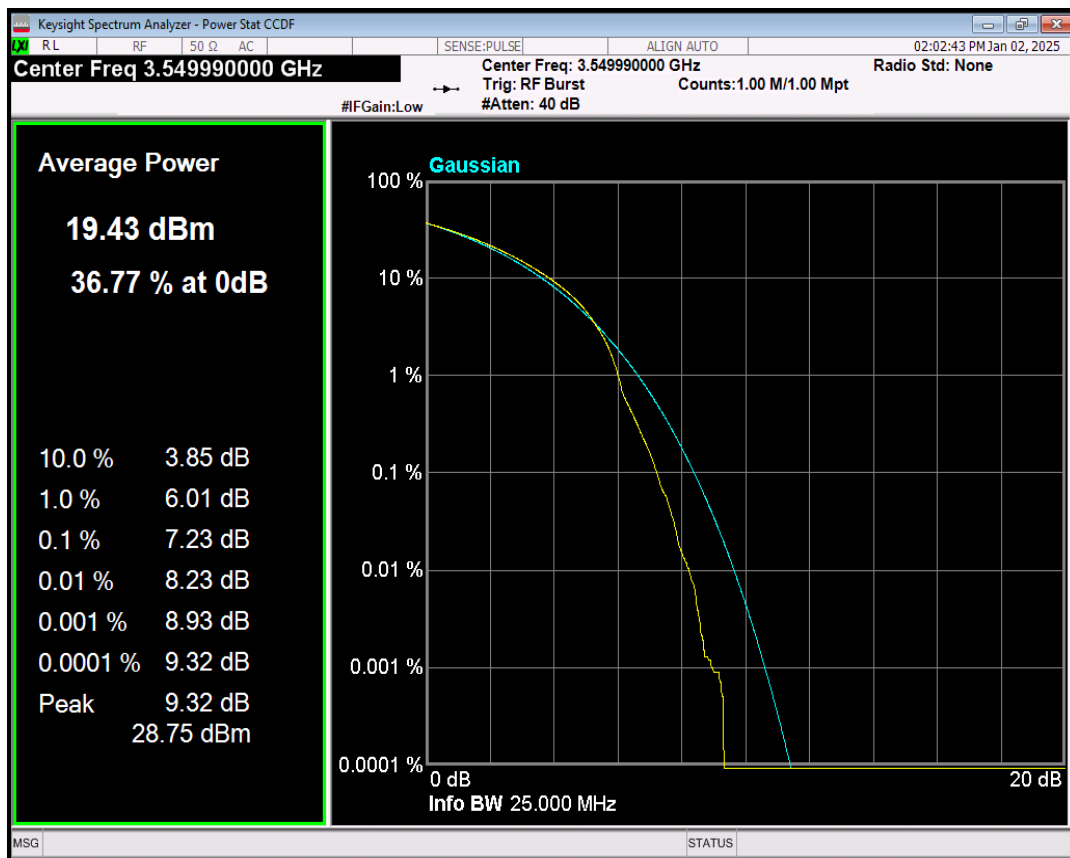


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=636666 RB=162@0

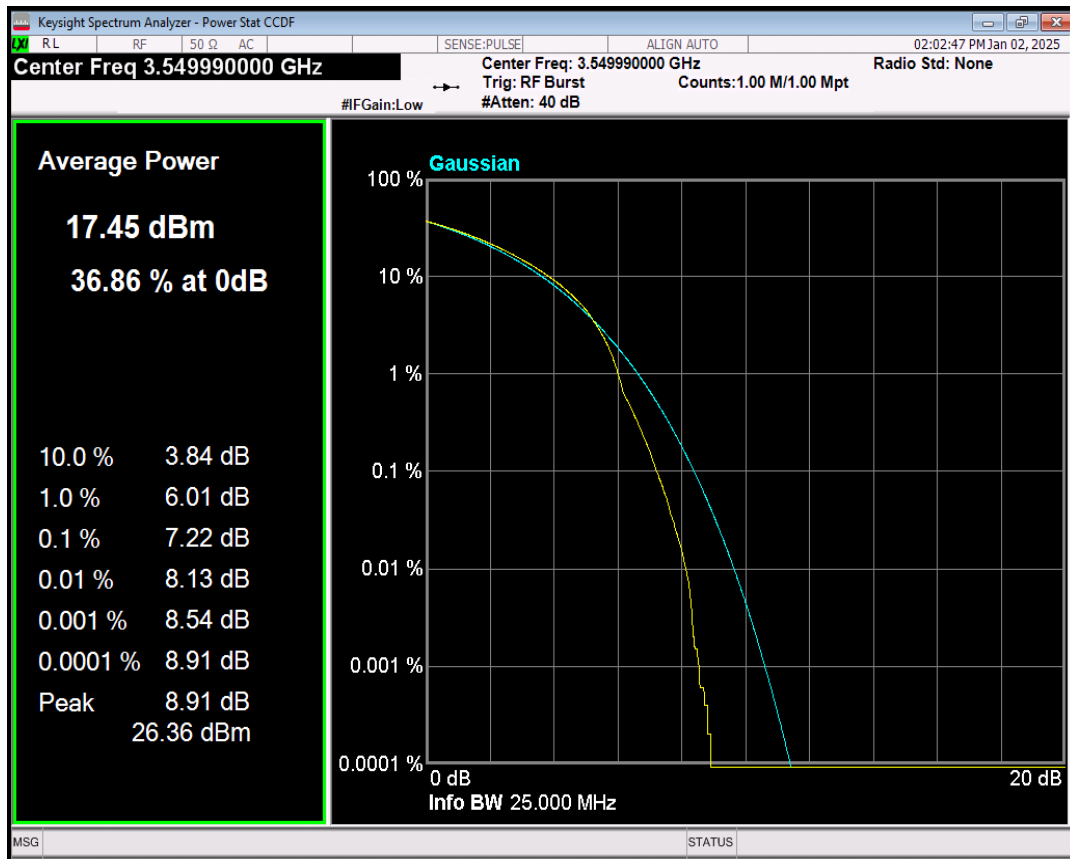


n78 SCS=30kHz DFT_BPSK BW=70MHz Channel=636666 RB=

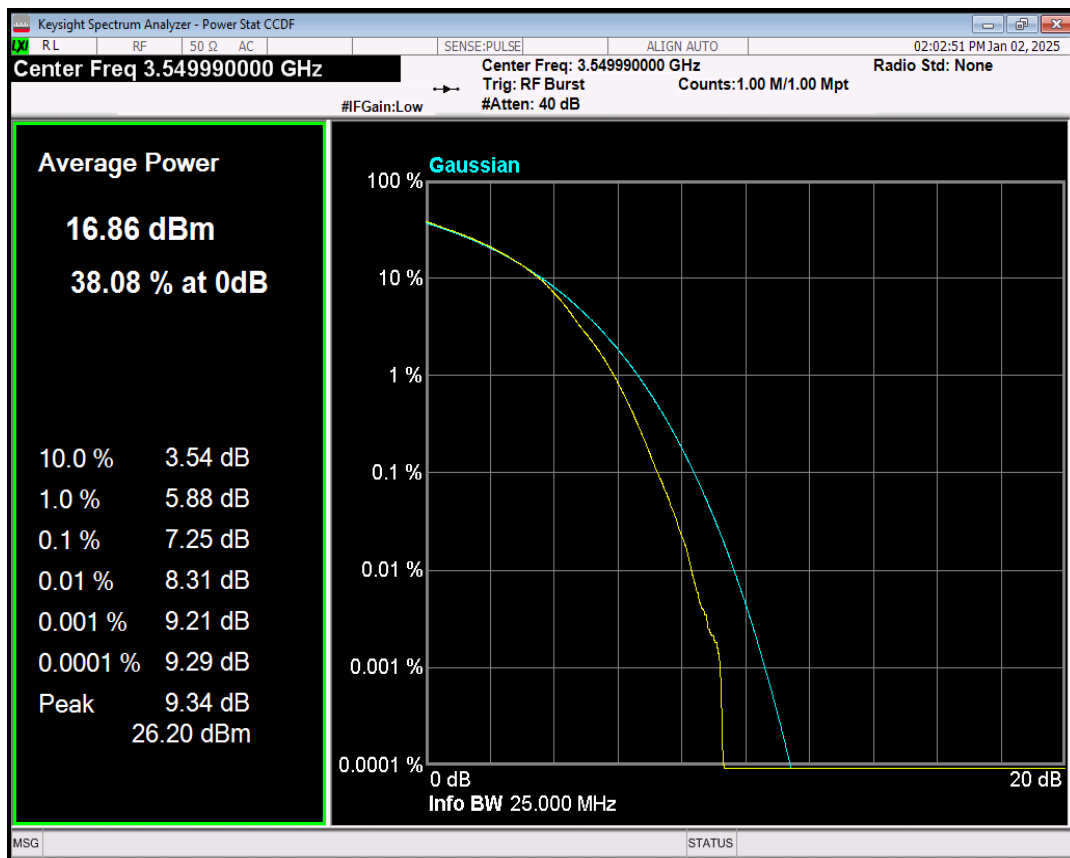


n78 SCS=30kHz DFT_QPSK BW=70MHz Channel=636666 RB=

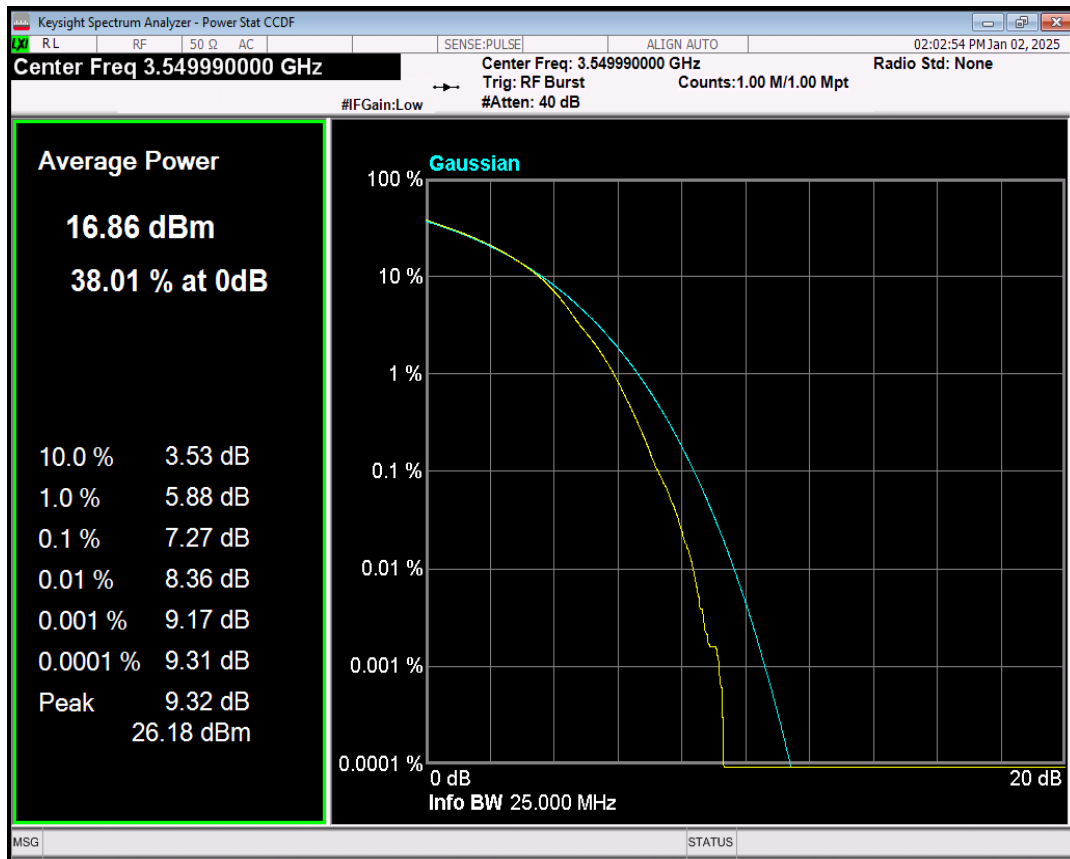


n78 SCS=30kHz DFT_QAM16 BW=70MHz Channel=636666 RB=

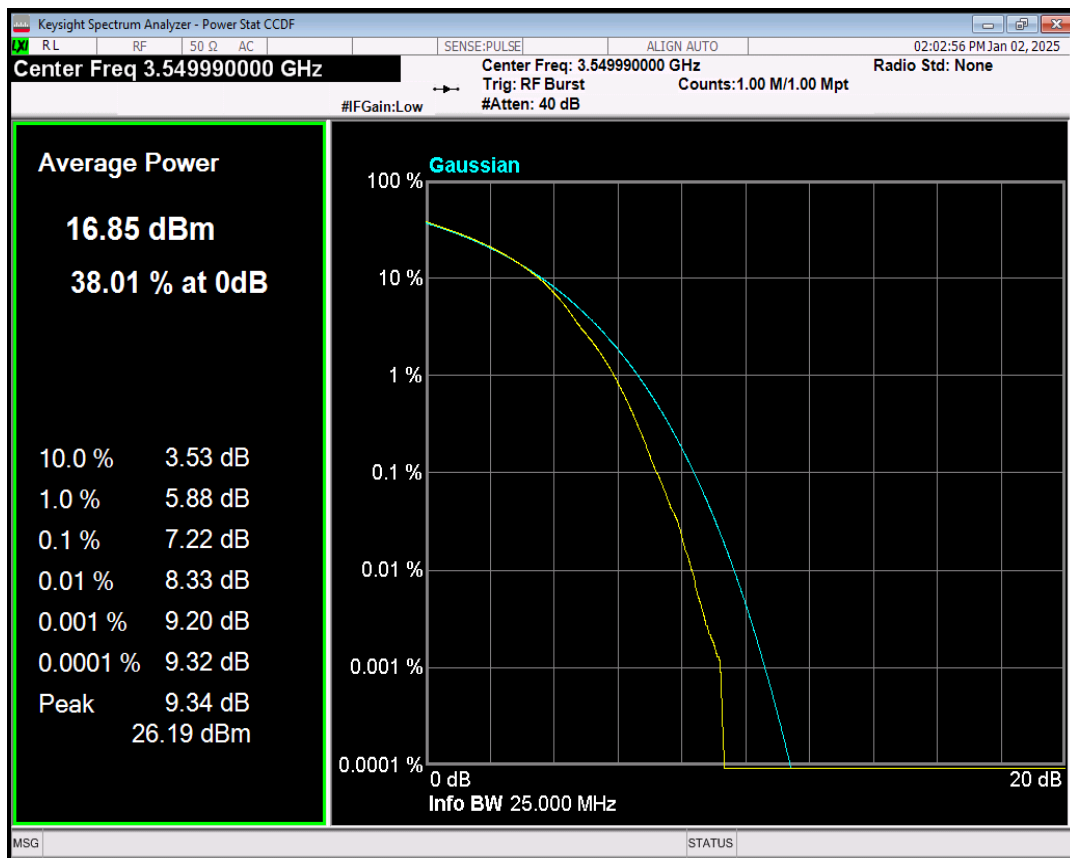


n78 SCS=30kHz DFT_QAM64 BW=70MHz Channel=636666 RB=

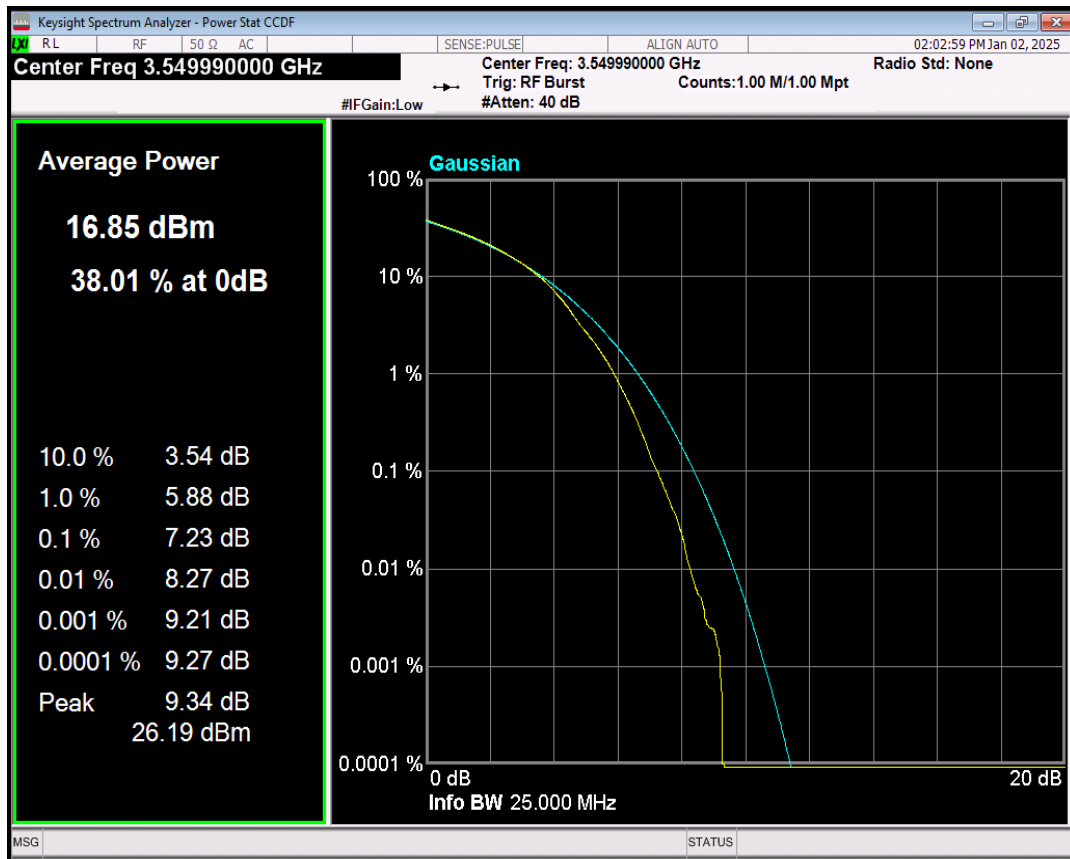


n78 SCS=30kHz DFT_QAM256 BW=70MHz Channel=636666 RB=

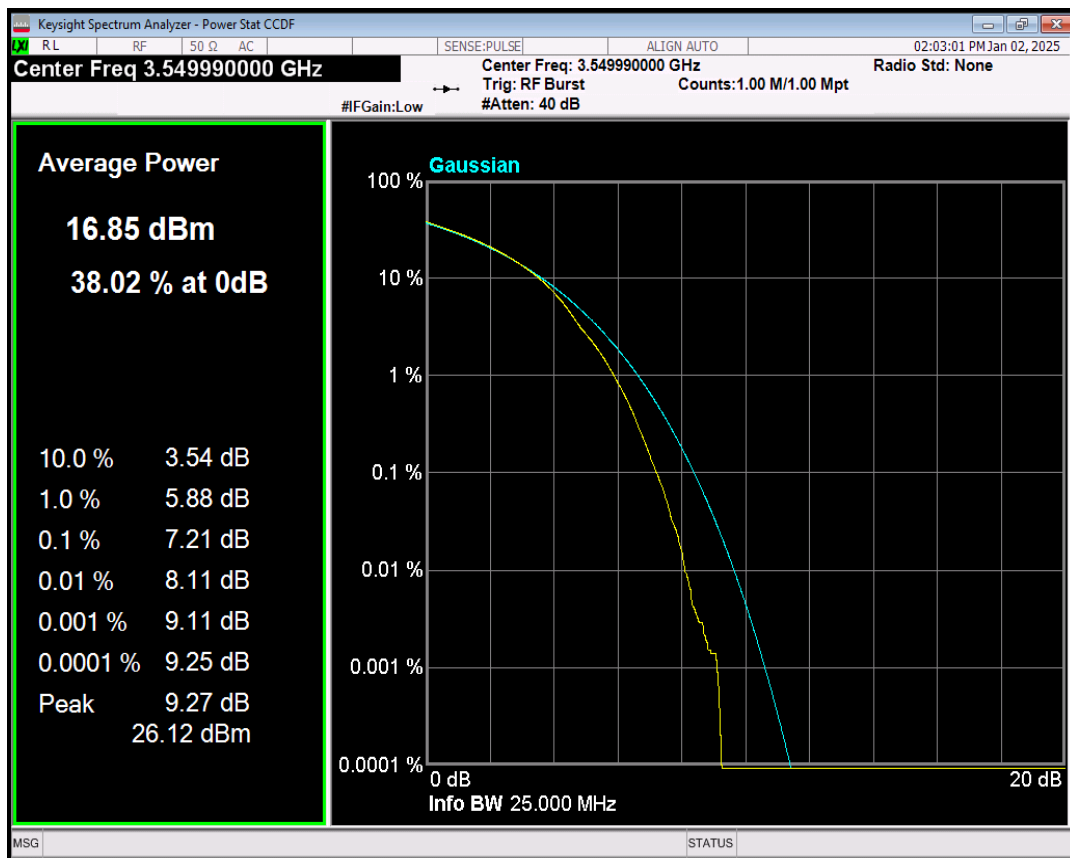


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=636666 RB=216@0

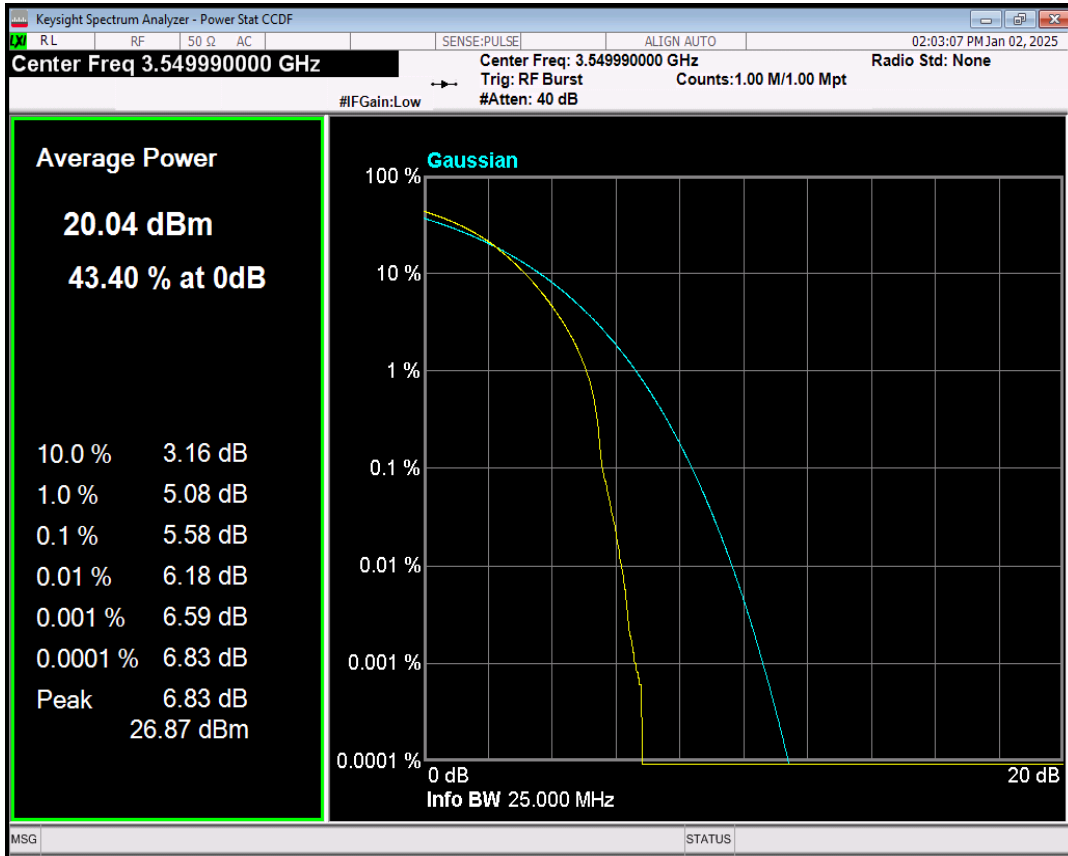


n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=636666 RB=216@0

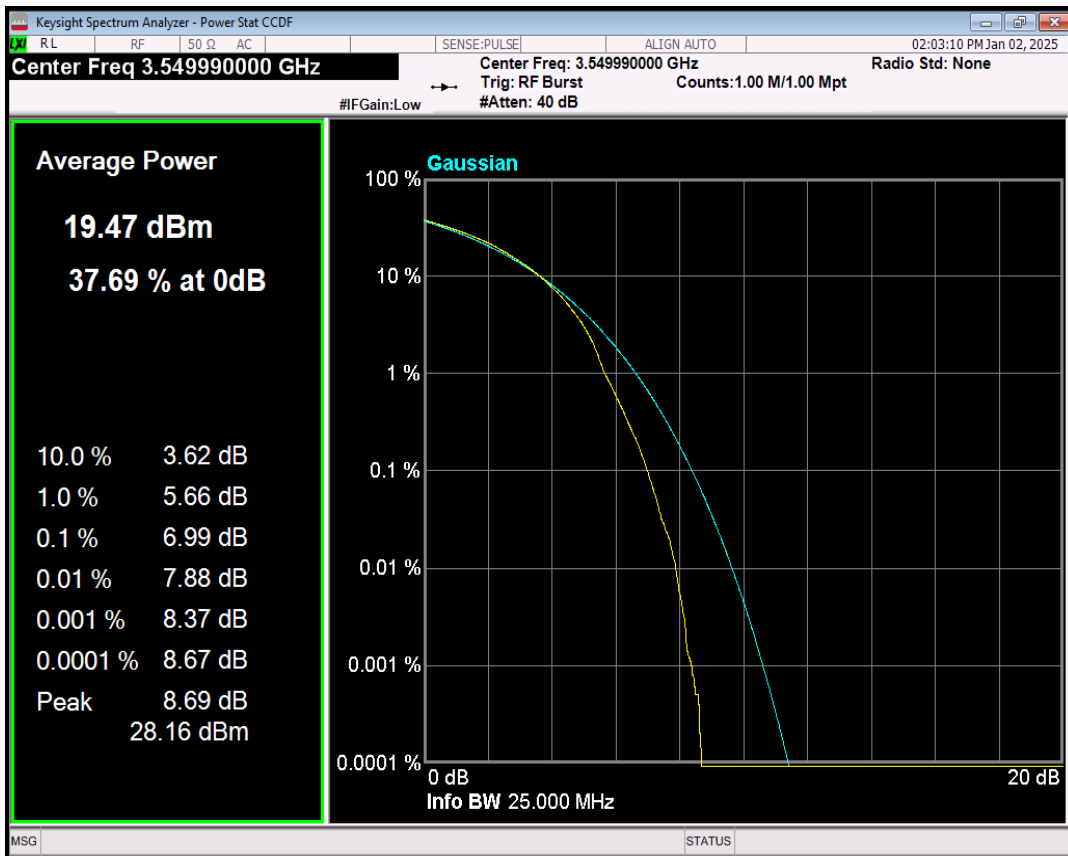


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=636666 RB=216@0

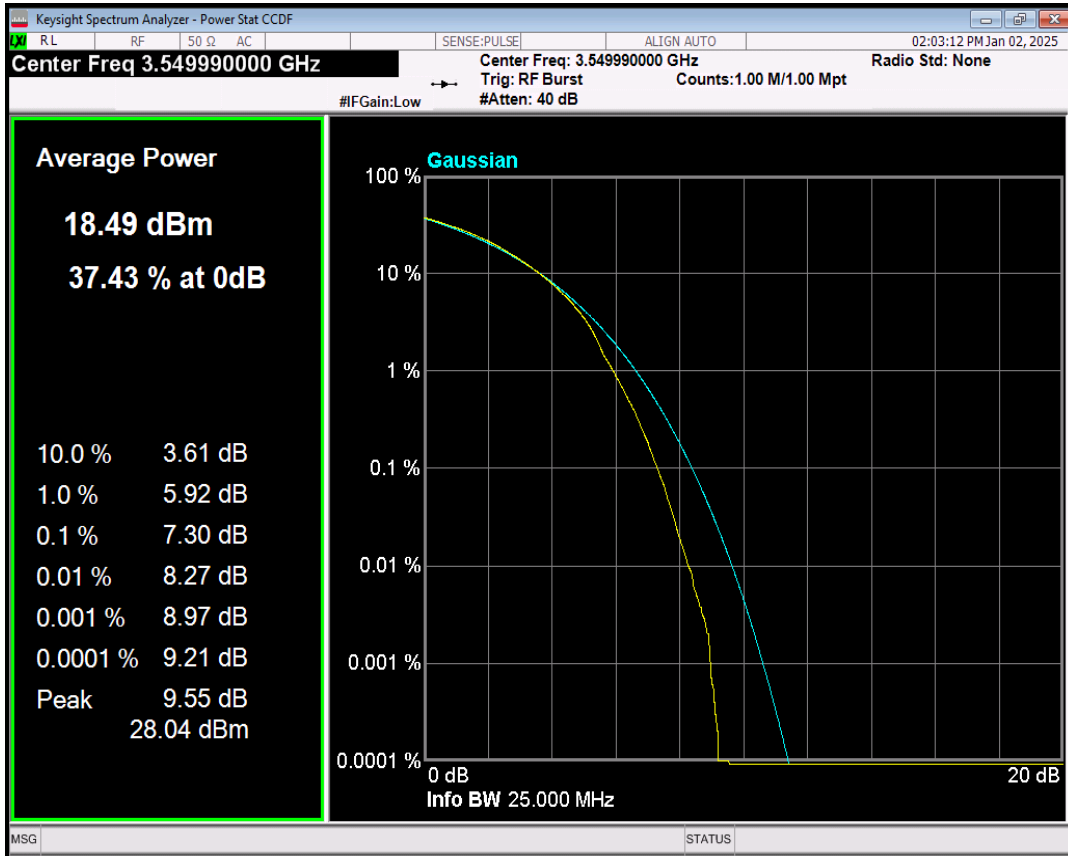


n78 SCS=30kHz DFT_QAM64 BW=80MHz Channel=636666 RB=216@0

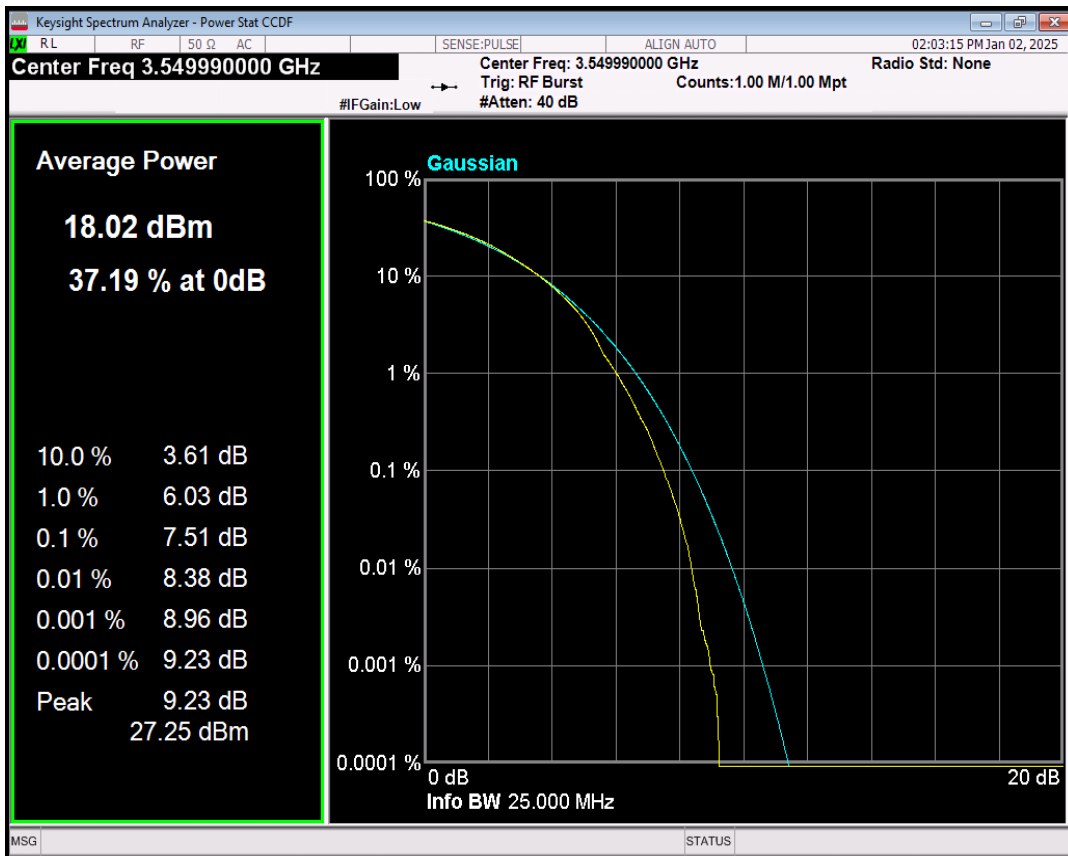


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=636666 RB=216@0

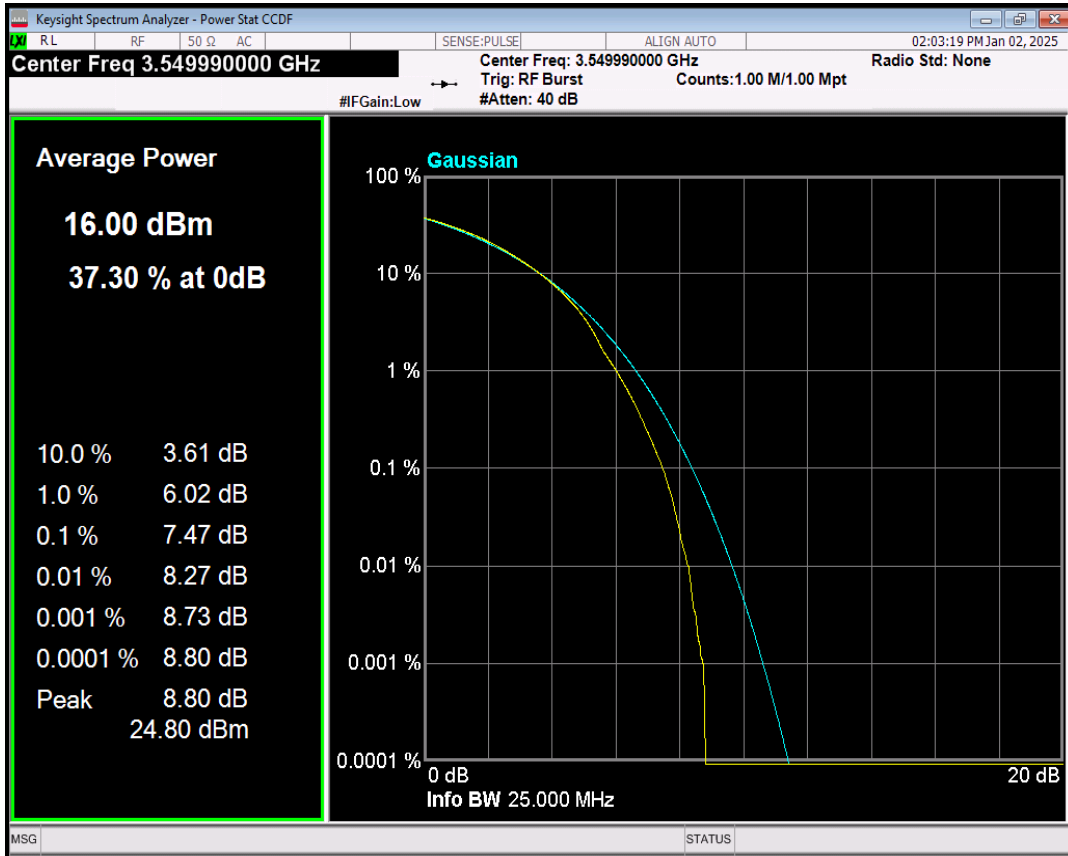


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=636666 RB=240@0

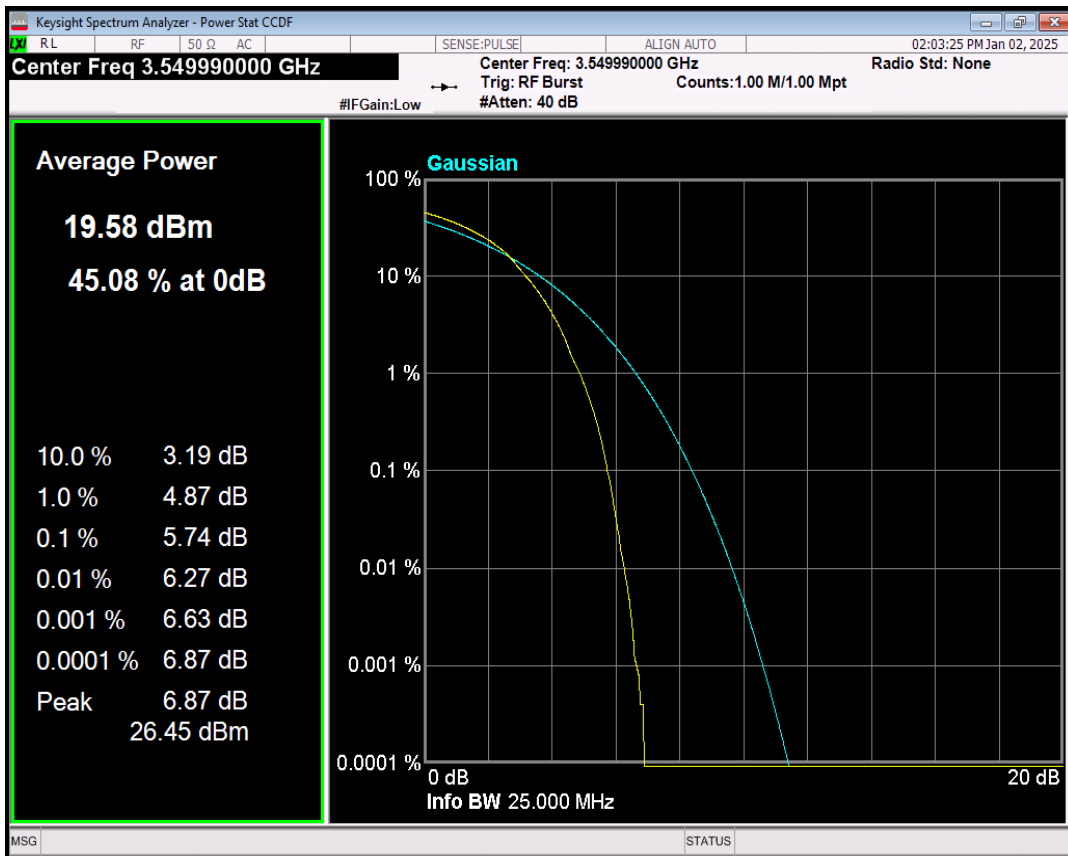



n78 SCS=30kHz DFT_QPSK BW=90MHz Channel=636666 RB=240@0

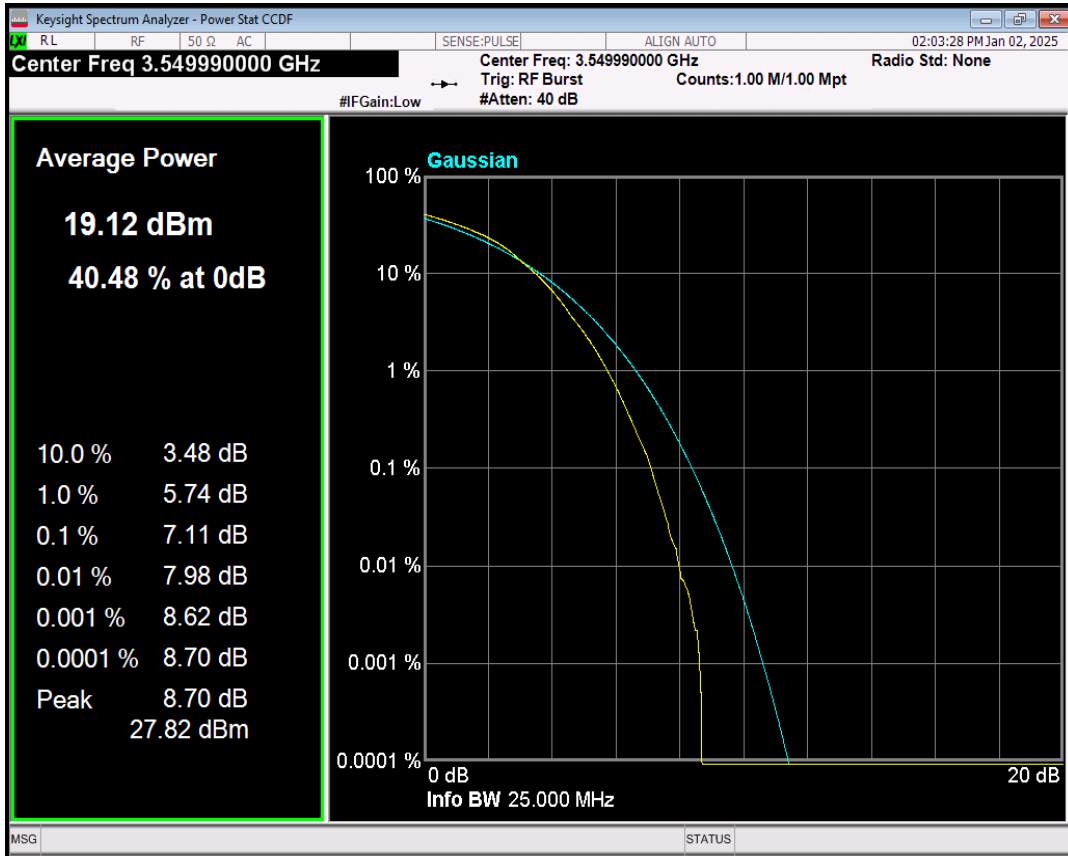


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=636666 RB=240@0

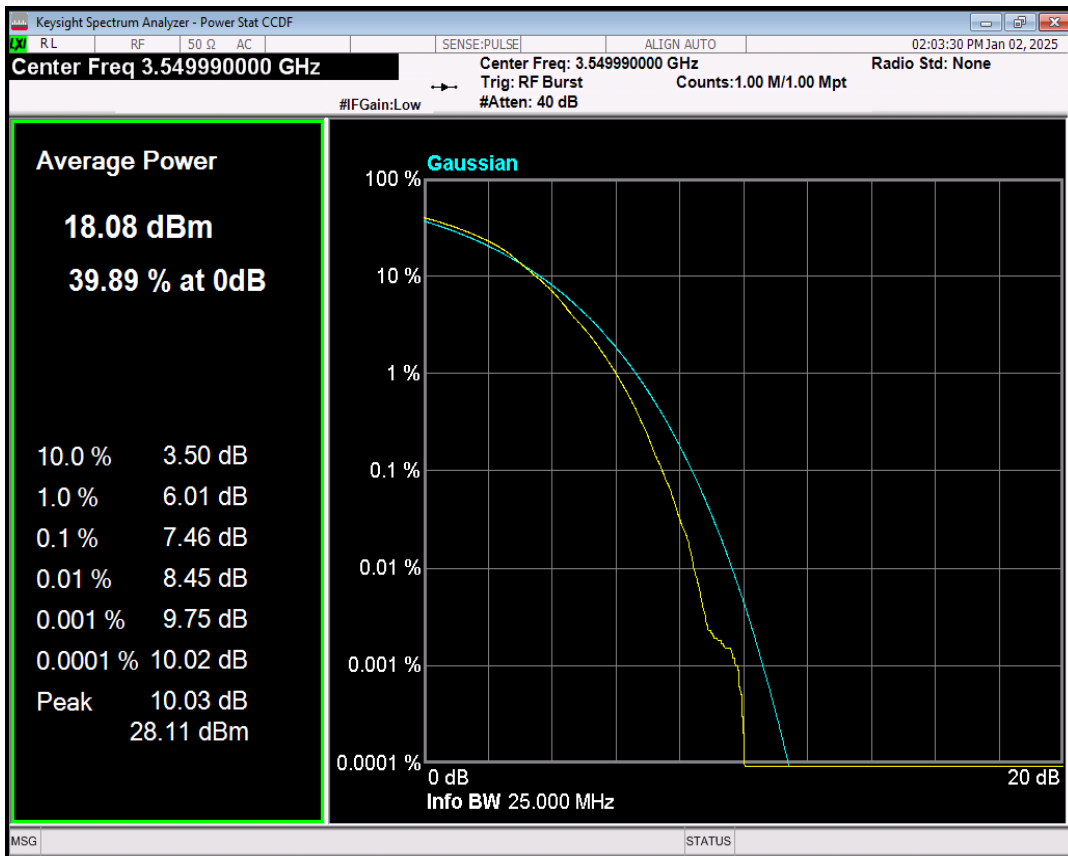


n78 SCS=30kHz DFT_QAM64 BW=90MHz Channel=636666 RB=240@0

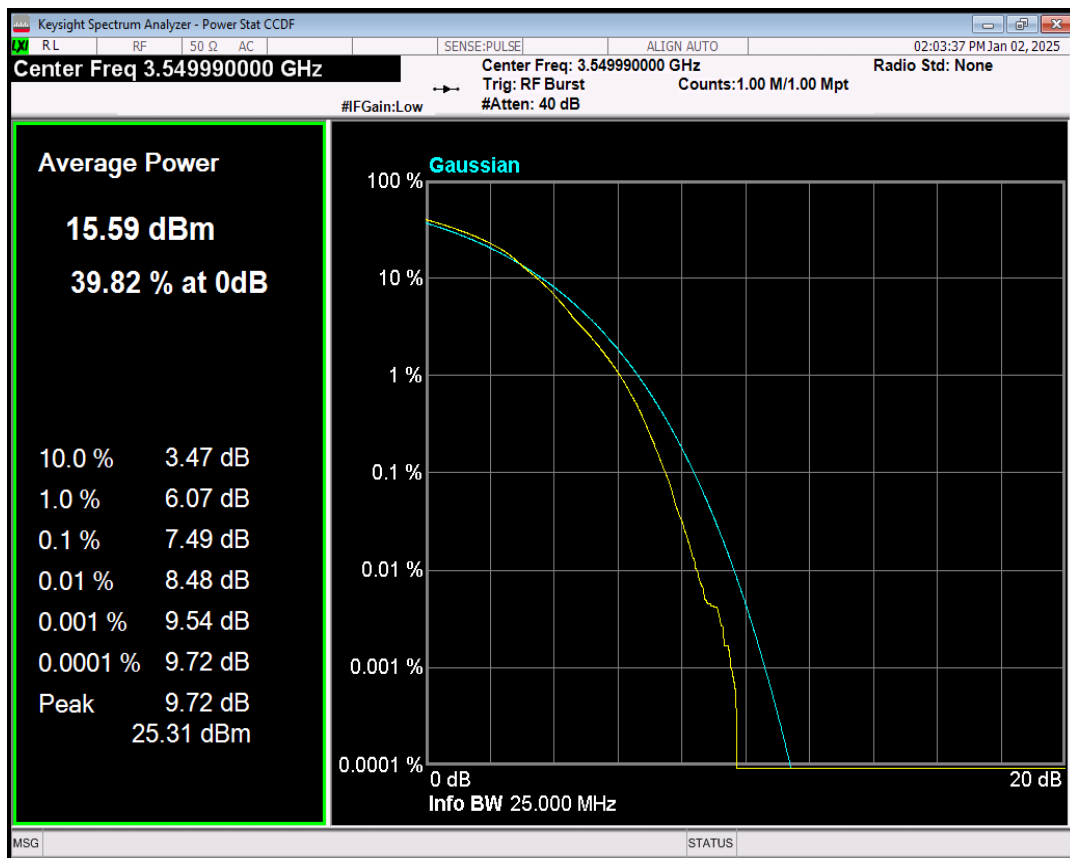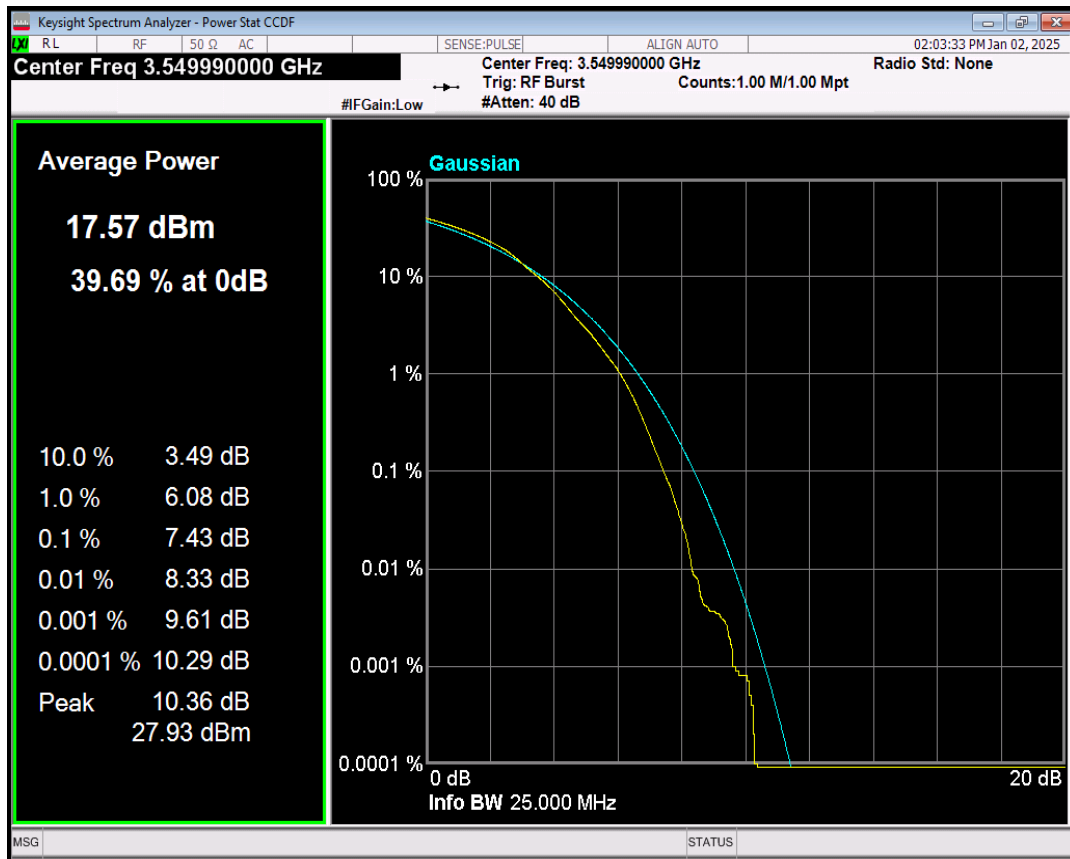


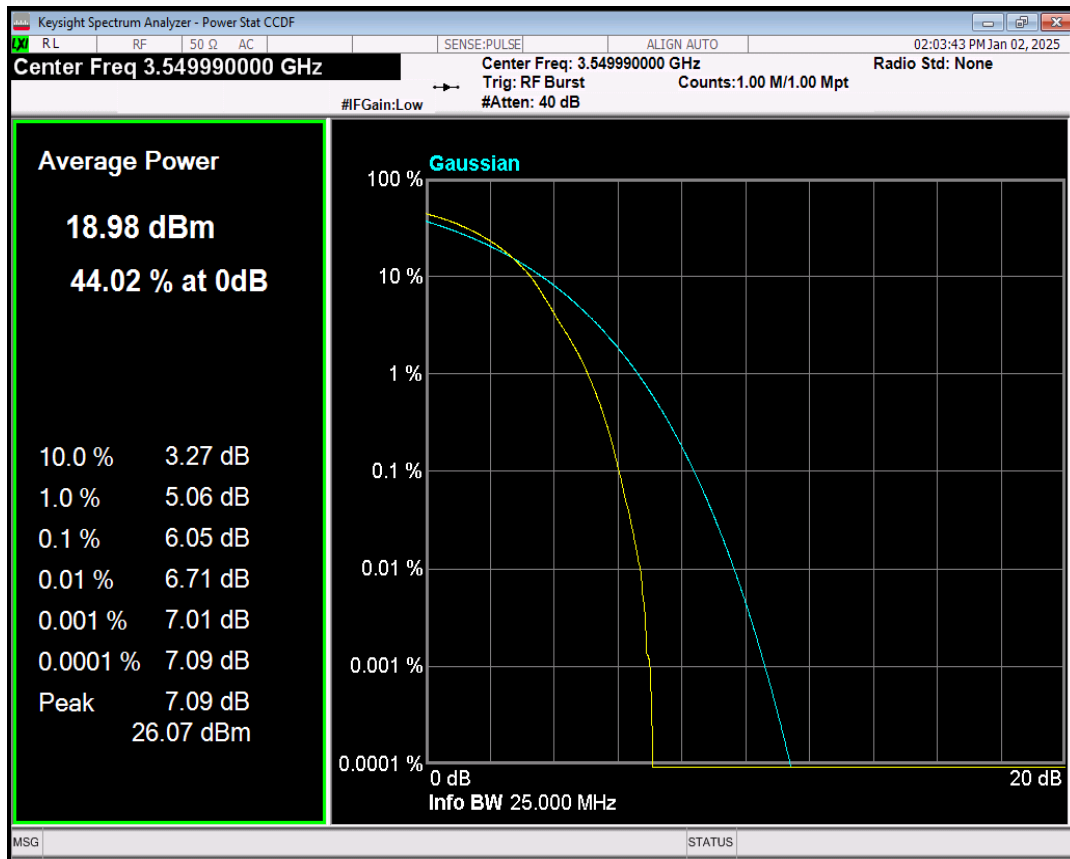


n78 SCS=30kHz DFT_QPSK BW=100MHz Channel=636666 RB=270@0

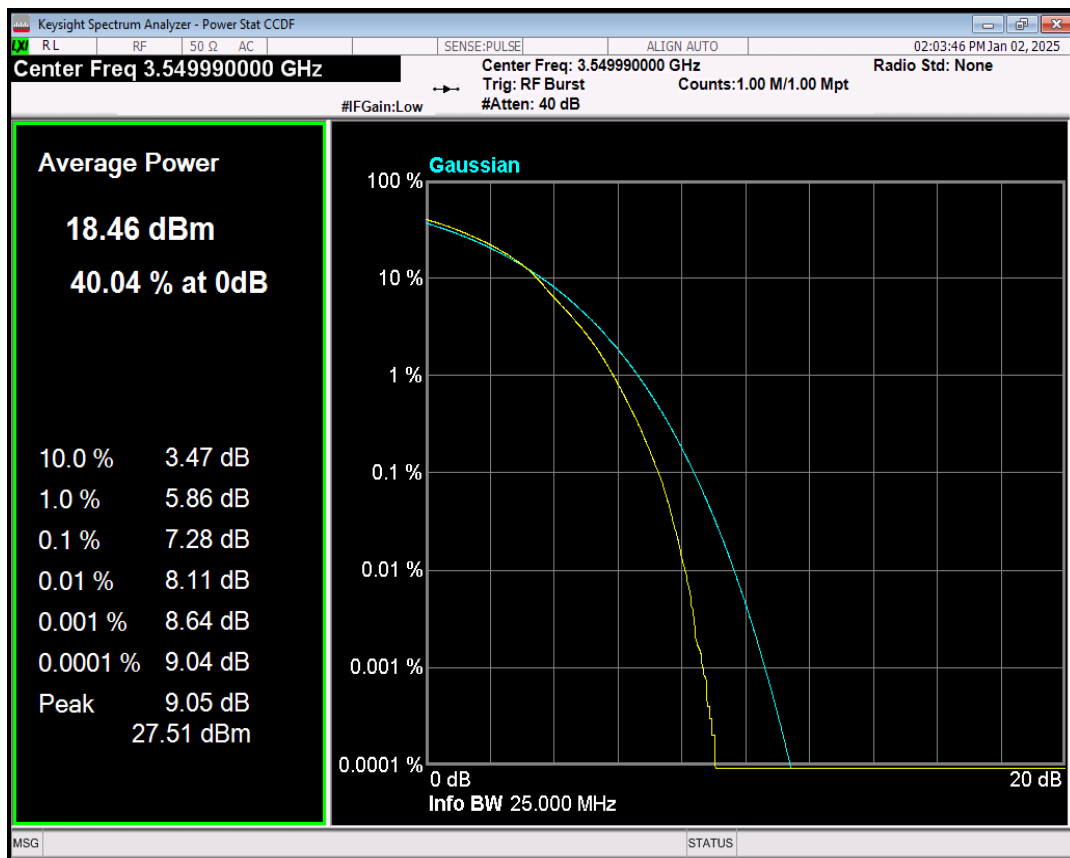


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=636666 RB=270@0

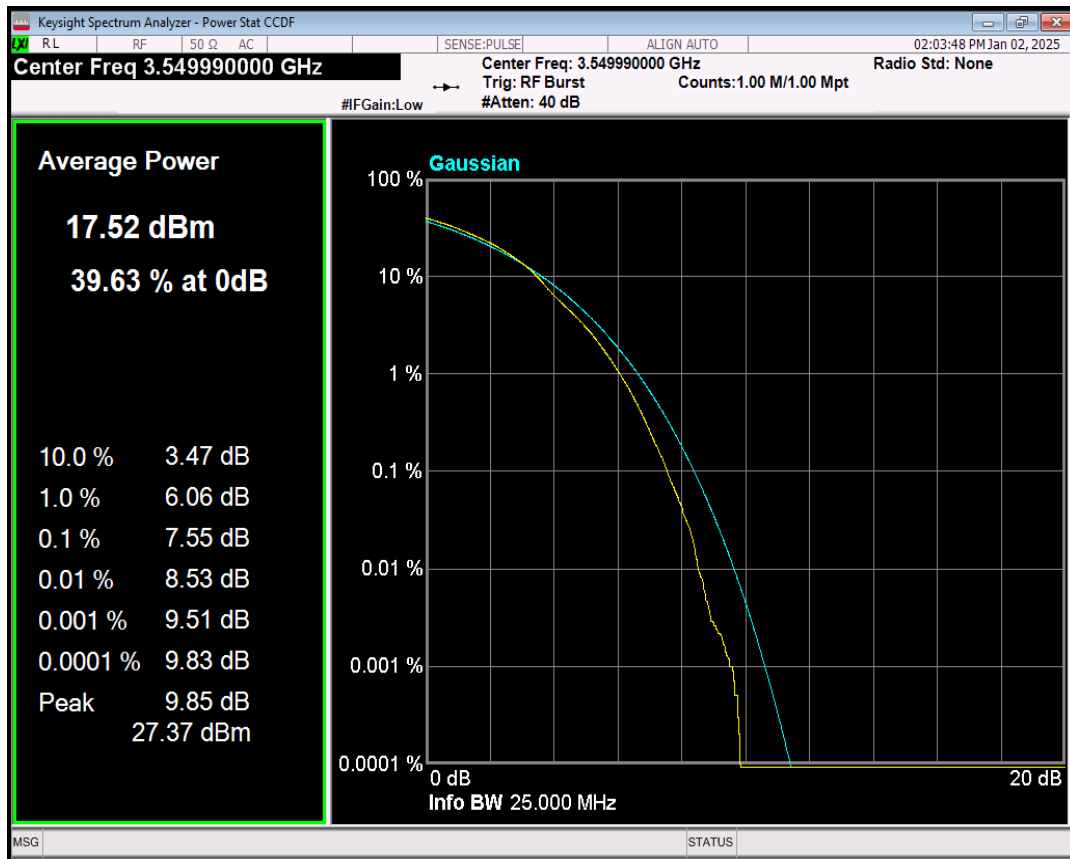

n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=636666 RB=270@0

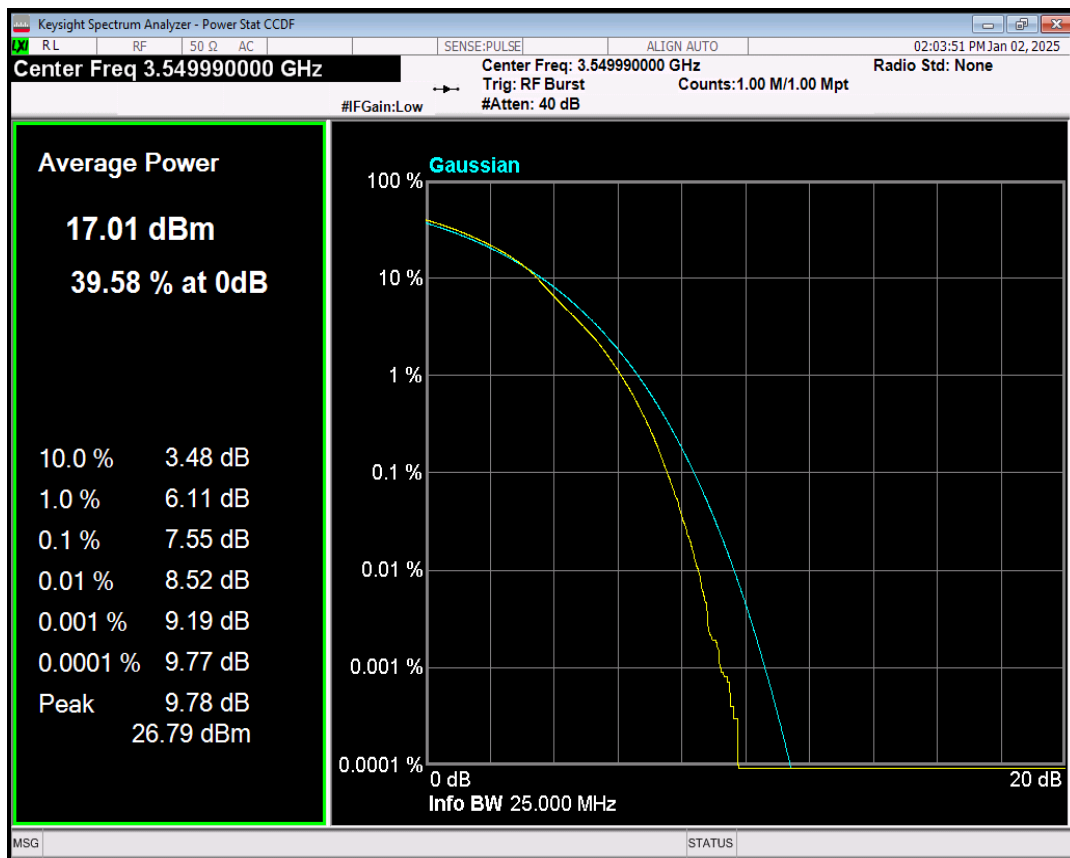

n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=636666 RB=270@0

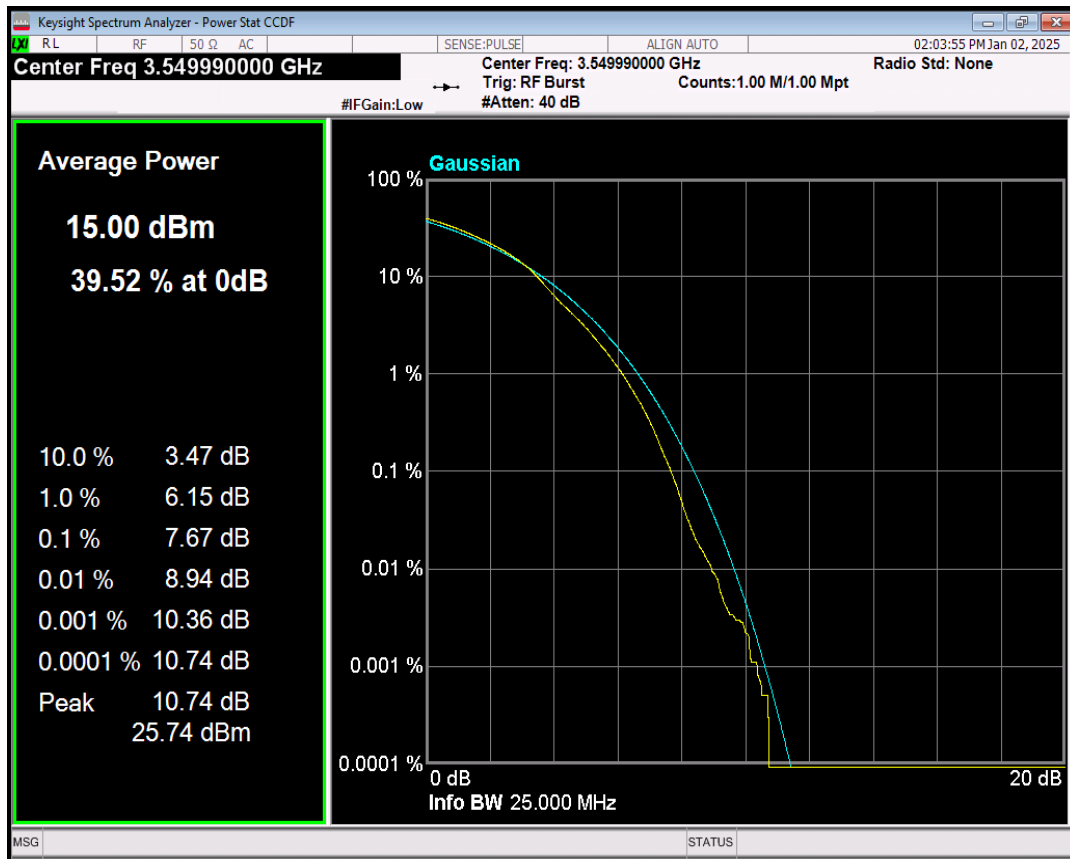


4 Occupied bandwidth for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n78	30	10	636666	24@0	DFT_BPSK	2.974	3.000	PASS
n78	30	10	636666	24@0	DFT_QPSK	8.587	9.601	PASS
n78	30	10	636666	24@0	DFT_QAM16	8.595	9.520	PASS
n78	30	10	636666	24@0	DFT_QAM64	8.575	9.396	PASS
n78	30	10	636666	24@0	DFT_QAM256	8.594	9.474	PASS
n78	30	15	636666	36@0	DFT_BPSK	12.926	14.390	PASS
n78	30	15	636666	36@0	DFT_QPSK	12.882	14.164	PASS
n78	30	15	636666	36@0	DFT_QAM16	12.919	14.143	PASS
n78	30	15	636666	36@0	DFT_QAM64	12.908	14.073	PASS
n78	30	15	636666	36@0	DFT_QAM256	12.871	14.016	PASS
n78	30	20	636666	50@0	DFT_BPSK	17.968	19.223	PASS
n78	30	20	636666	50@0	DFT_QPSK	17.959	18.992	PASS
n78	30	20	636666	50@0	DFT_QAM16	17.945	19.152	PASS
n78	30	20	636666	50@0	DFT_QAM64	17.969	19.250	PASS
n78	30	20	636666	50@0	DFT_QAM256	17.966	19.481	PASS
n78	30	40	636666	100@0	DFT_BPSK	35.917	37.973	PASS
n78	30	40	636666	100@0	DFT_QPSK	35.983	37.995	PASS
n78	30	40	636666	100@0	DFT_QAM16	35.900	38.174	PASS
n78	30	40	636666	100@0	DFT_QAM64	35.911	38.040	PASS
n78	30	40	636666	100@0	DFT_QAM256	35.858	38.048	PASS
n78	30	50	636666	128@0	DFT_BPSK	45.824	48.921	PASS
n78	30	50	636666	128@0	DFT_QPSK	45.867	48.688	PASS
n78	30	50	636666	128@0	DFT_QAM16	45.923	48.348	PASS
n78	30	50	636666	128@0	DFT_QAM64	45.850	48.512	PASS
n78	30	50	636666	128@0	DFT_QAM256	45.831	48.739	PASS
n78	30	60	636666	162@0	DFT_BPSK	57.885	60.933	PASS
n78	30	60	636666	162@0	DFT_QPSK	58.007	61.098	PASS
n78	30	60	636666	162@0	DFT_QAM16	57.983	60.800	PASS
n78	30	60	636666	162@0	DFT_QAM64	57.966	60.895	PASS
n78	30	60	636666	162@0	DFT_QAM256	58.022	61.133	PASS
n78	30	70	636666		DFT_BPSK	64.371	68.836	PASS
n78	30	70	636666		DFT_QPSK	64.639	68.568	PASS
n78	30	70	636666		DFT_QAM16	64.642	69.541	PASS
n78	30	70	636666		DFT_QAM64	64.603	67.998	PASS
n78	30	70	636666		DFT_QAM256	64.169	68.080	PASS
n78	30	80	636666	216@0	DFT_BPSK	77.270	81.140	PASS
n78	30	80	636666	216@0	DFT_QPSK	77.212	81.077	PASS
n78	30	80	636666	216@0	DFT_QAM16	77.084	81.097	PASS
n78	30	80	636666	216@0	DFT_QAM64	77.043	81.238	PASS
n78	30	80	636666	216@0	DFT_QAM256	77.082	81.236	PASS
n78	30	90	636666	240@0	DFT_BPSK	85.937	90.532	PASS

n78	30	90	636666	240@0	DFT_QPSK	85.734	90.354	PASS
n78	30	90	636666	240@0	DFT_QAM16	85.910	90.482	PASS
n78	30	90	636666	240@0	DFT_QAM64	85.766	90.411	PASS
n78	30	90	636666	240@0	DFT_QAM256	85.796	90.427	PASS
n78	30	100	636666	270@0	DFT_BPSK	96.370	101.318	PASS
n78	30	100	636666	270@0	DFT_QPSK	96.017	101.564	PASS
n78	30	100	636666	270@0	DFT_QAM16	96.268	101.456	PASS
n78	30	100	636666	270@0	DFT_QAM64	95.612	99.804	PASS
n78	30	100	636666	270@0	DFT_QAM256	96.358	101.230	PASS


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=636666 RB=24@0

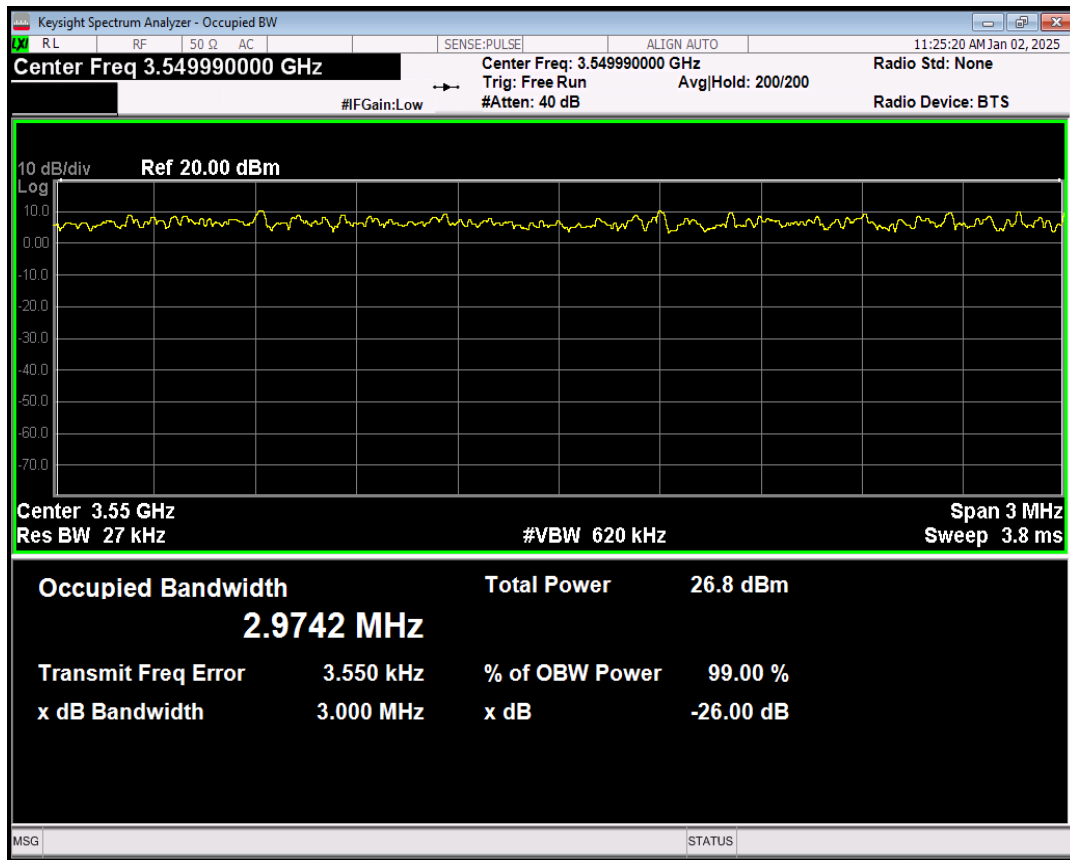


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=636666 RB=24@0

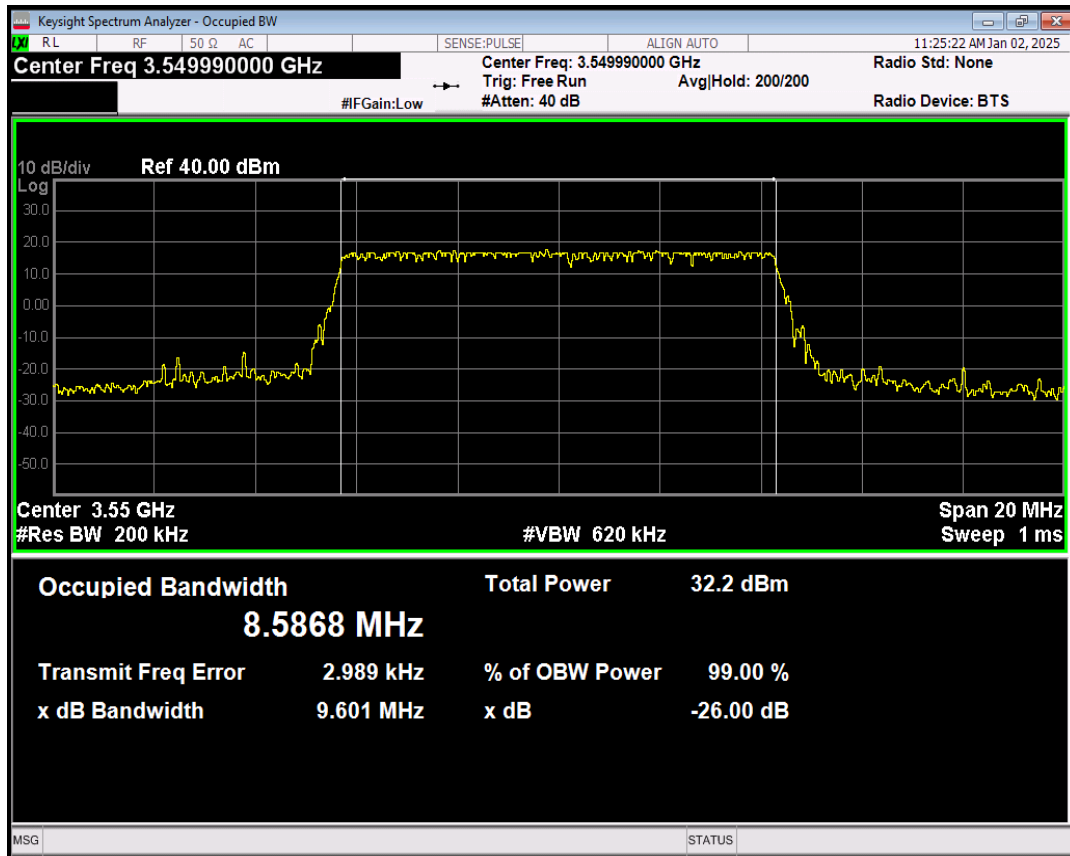


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=636666 RB=24@0

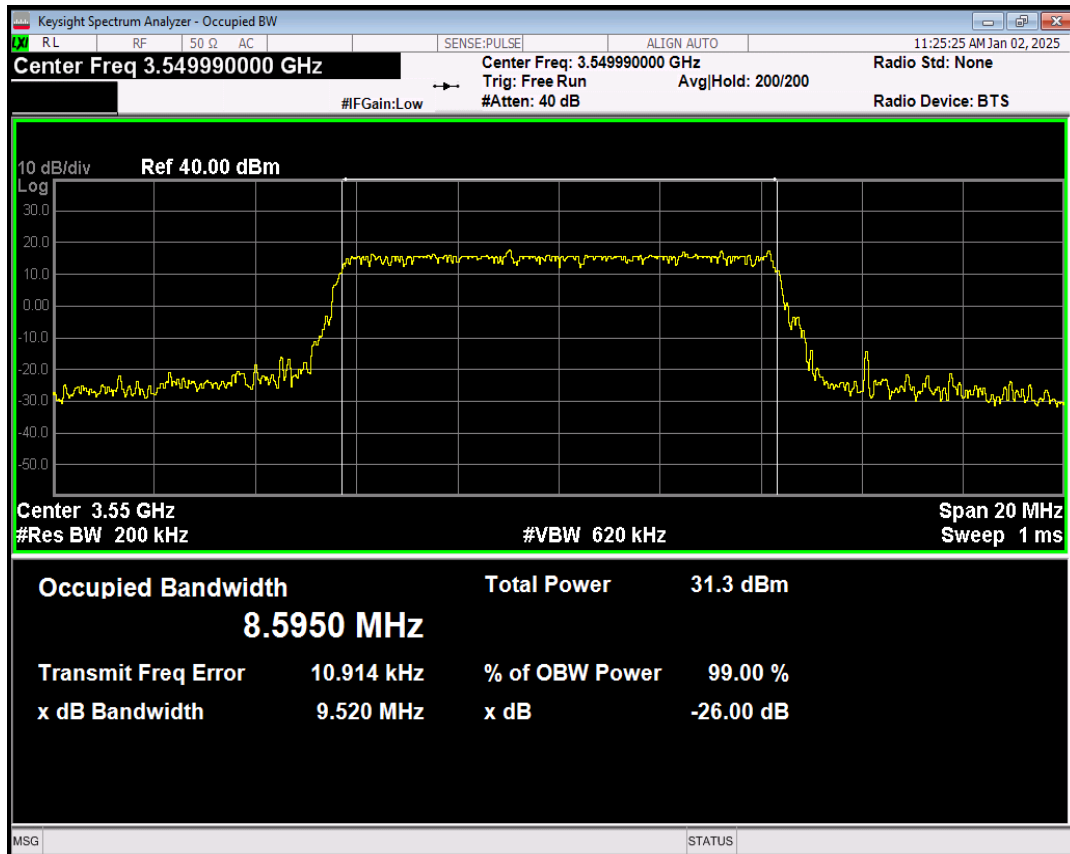


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=636666 RB=24@0

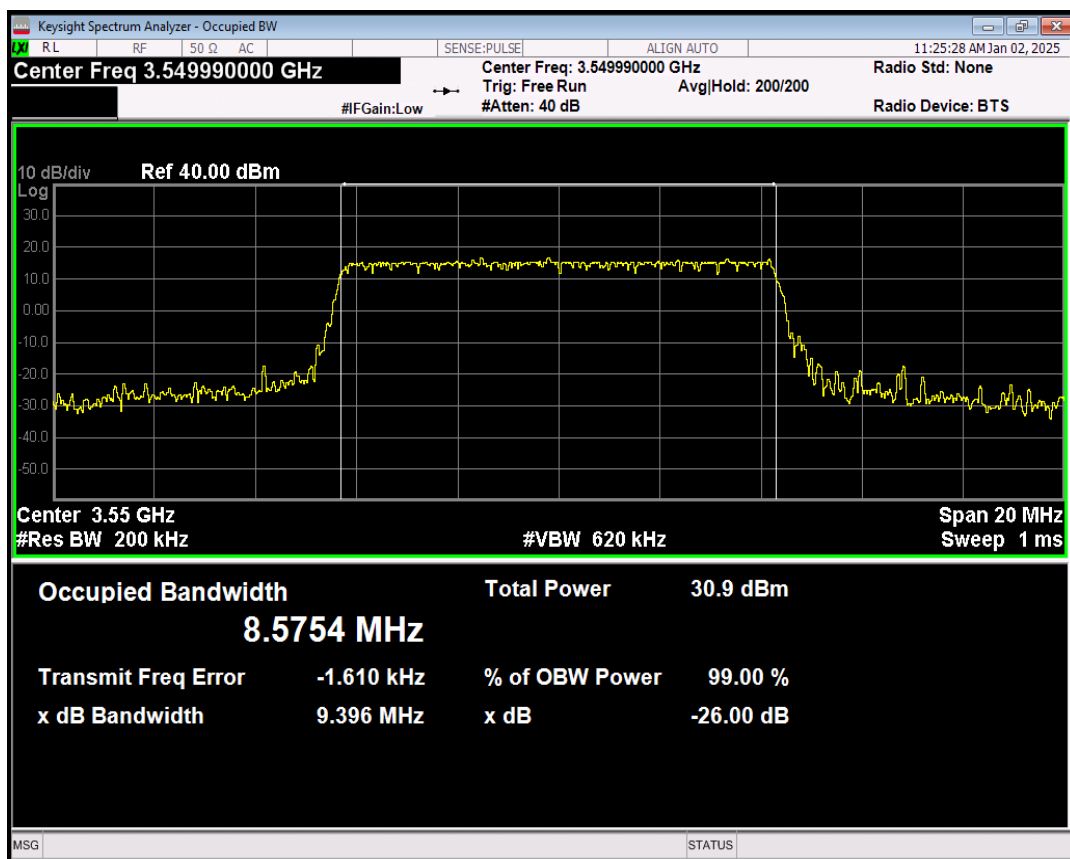


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=636666 RB=24@0

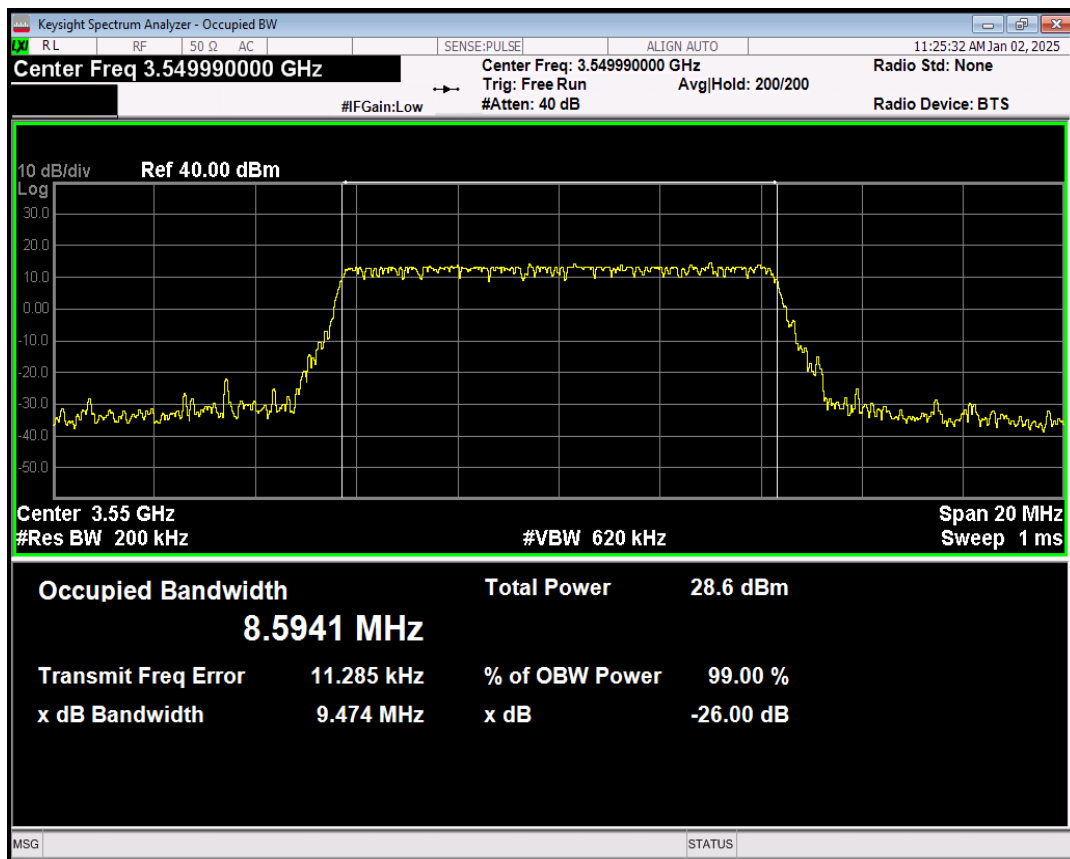


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=636666 RB=36@0

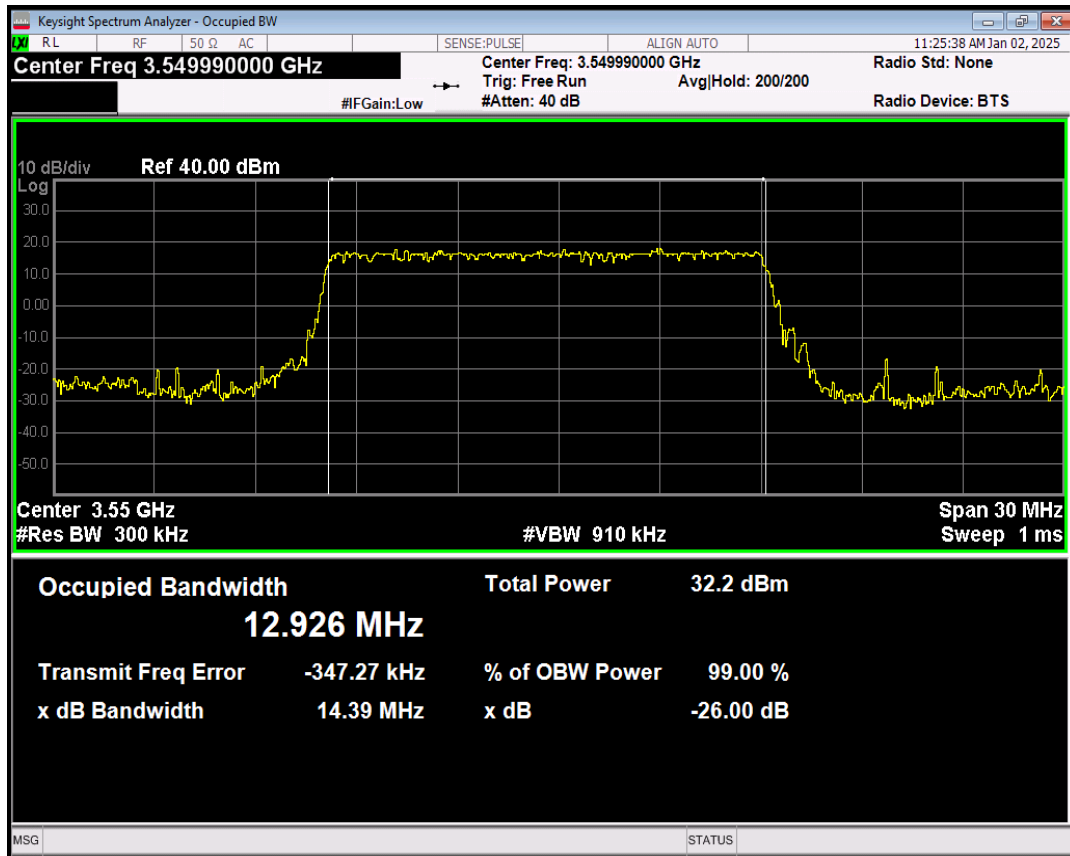


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=636666 RB=36@0

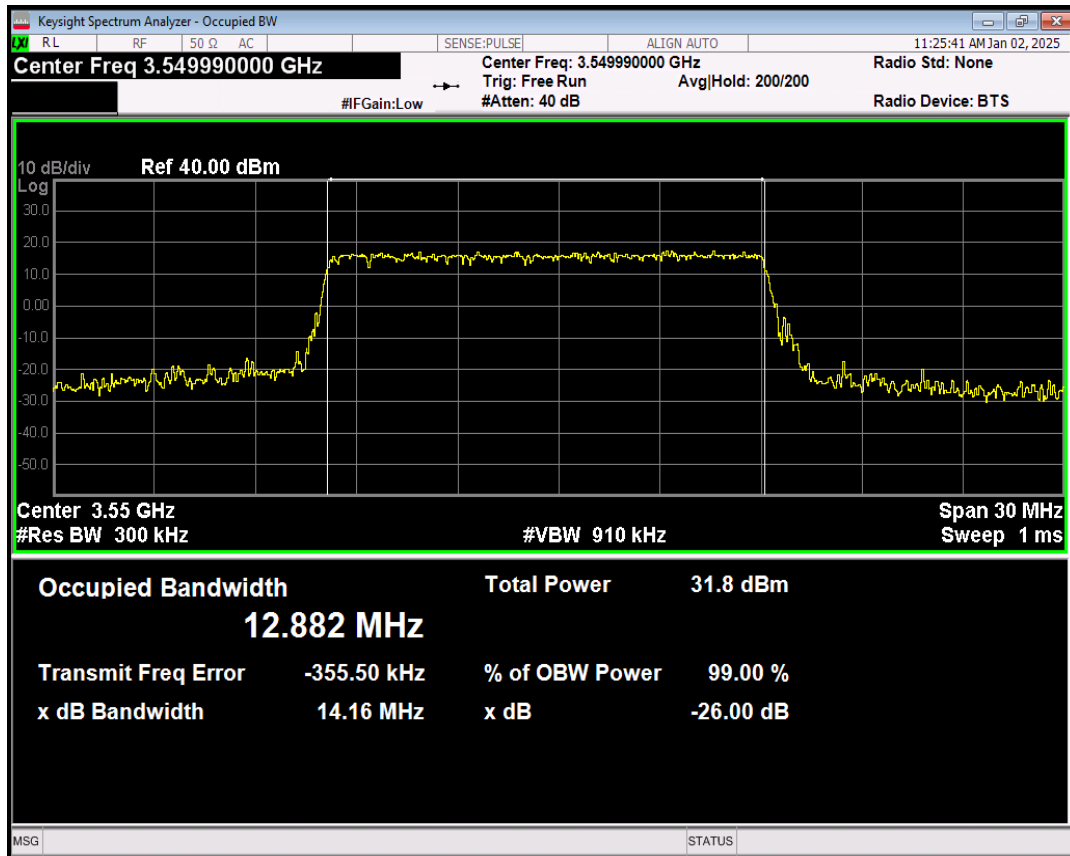


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=636666 RB=36@0

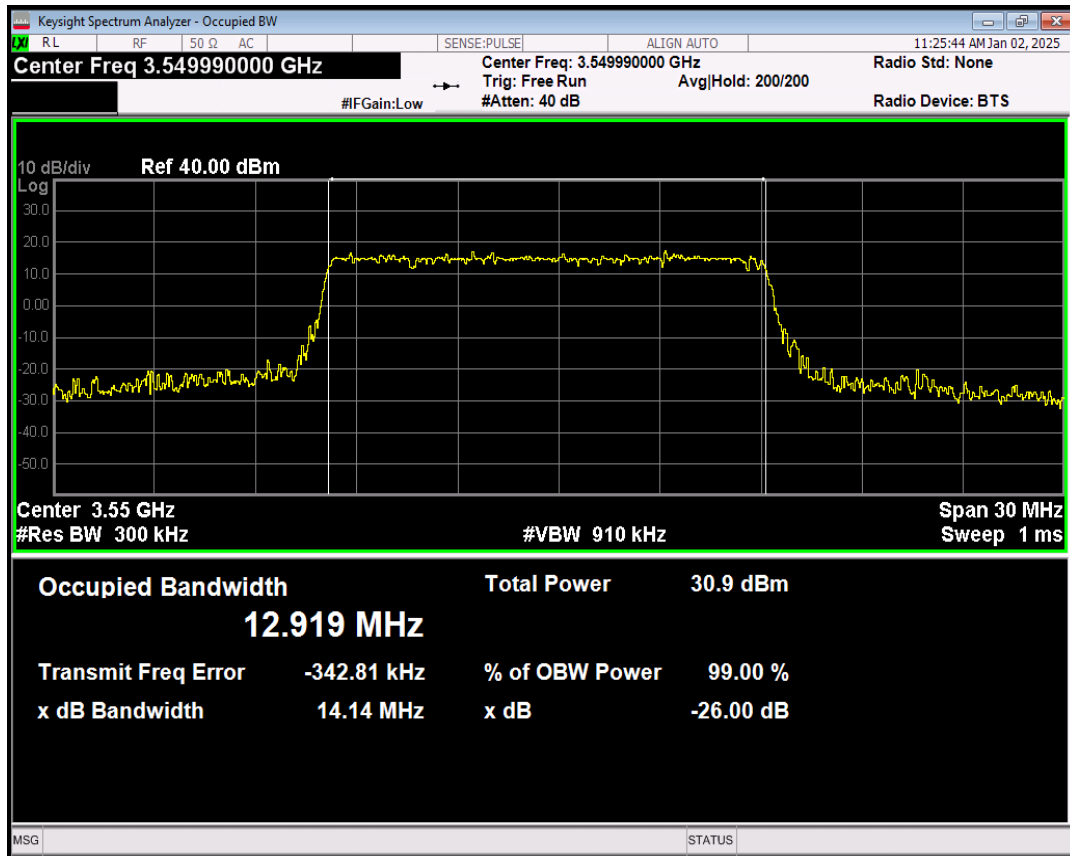


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=636666 RB=36@0

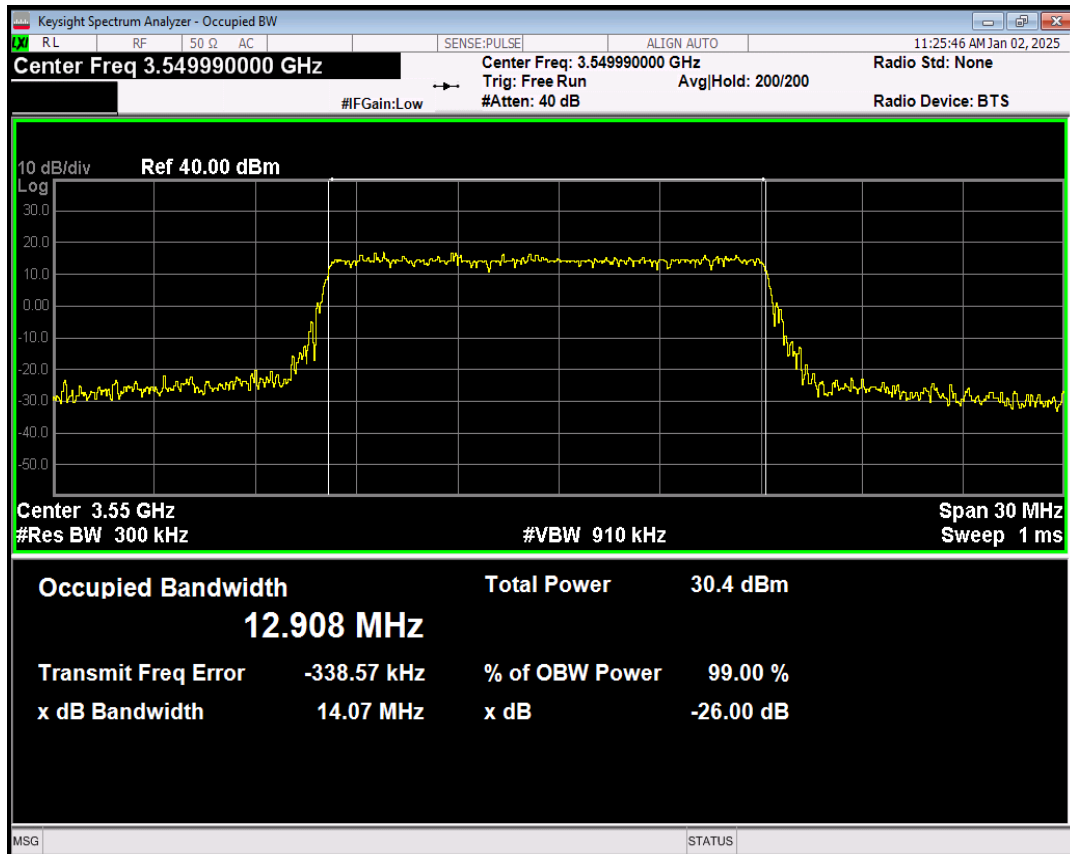


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=636666 RB=36@0

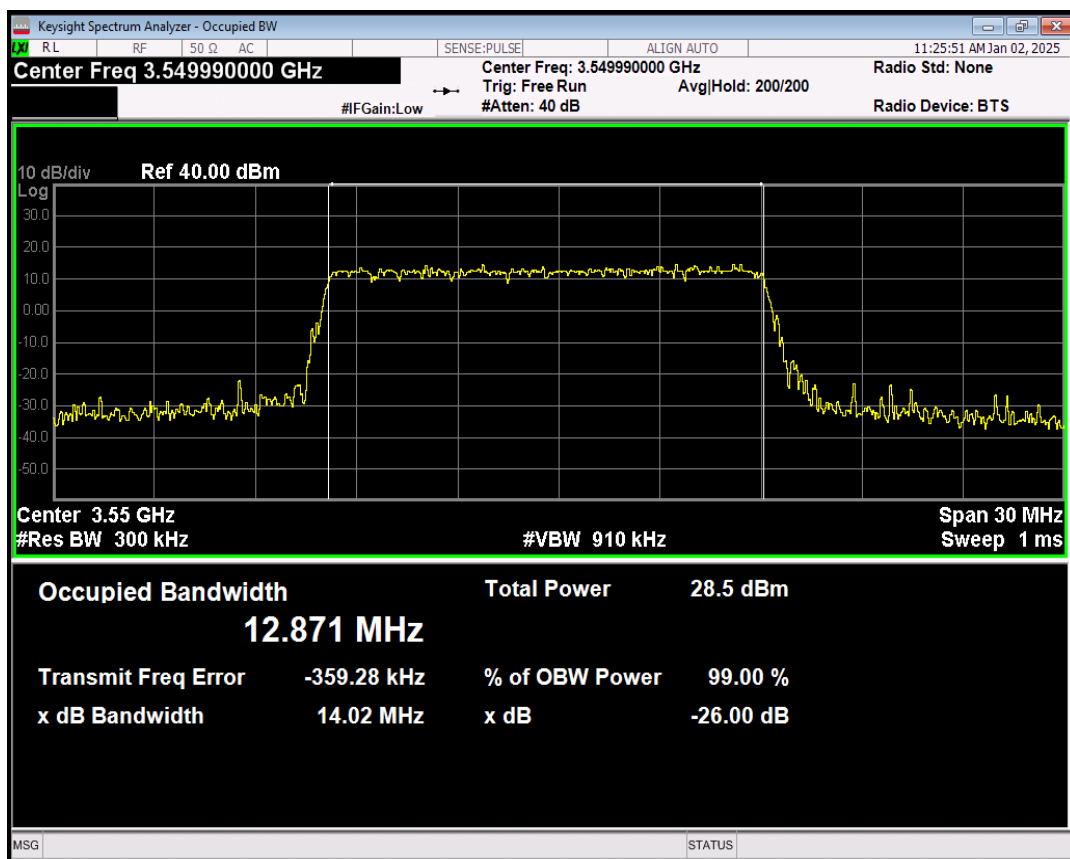


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=636666 RB=50@0

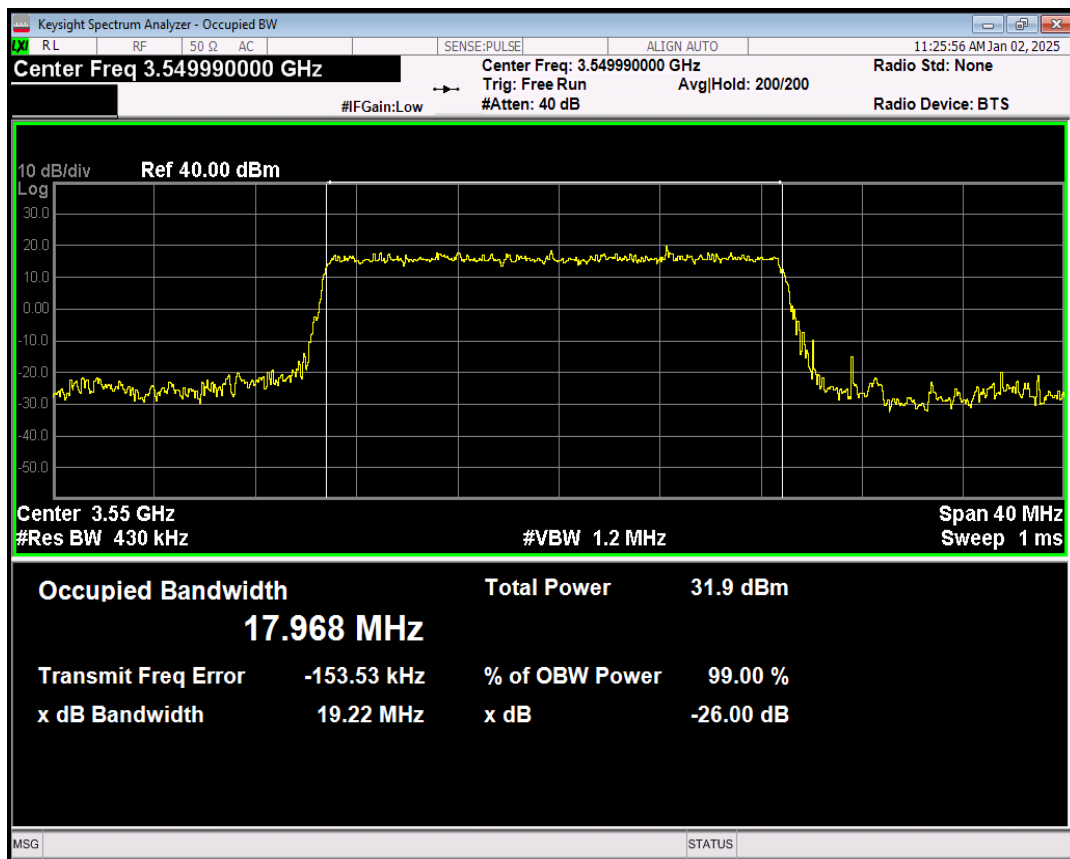


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=636666 RB=50@0

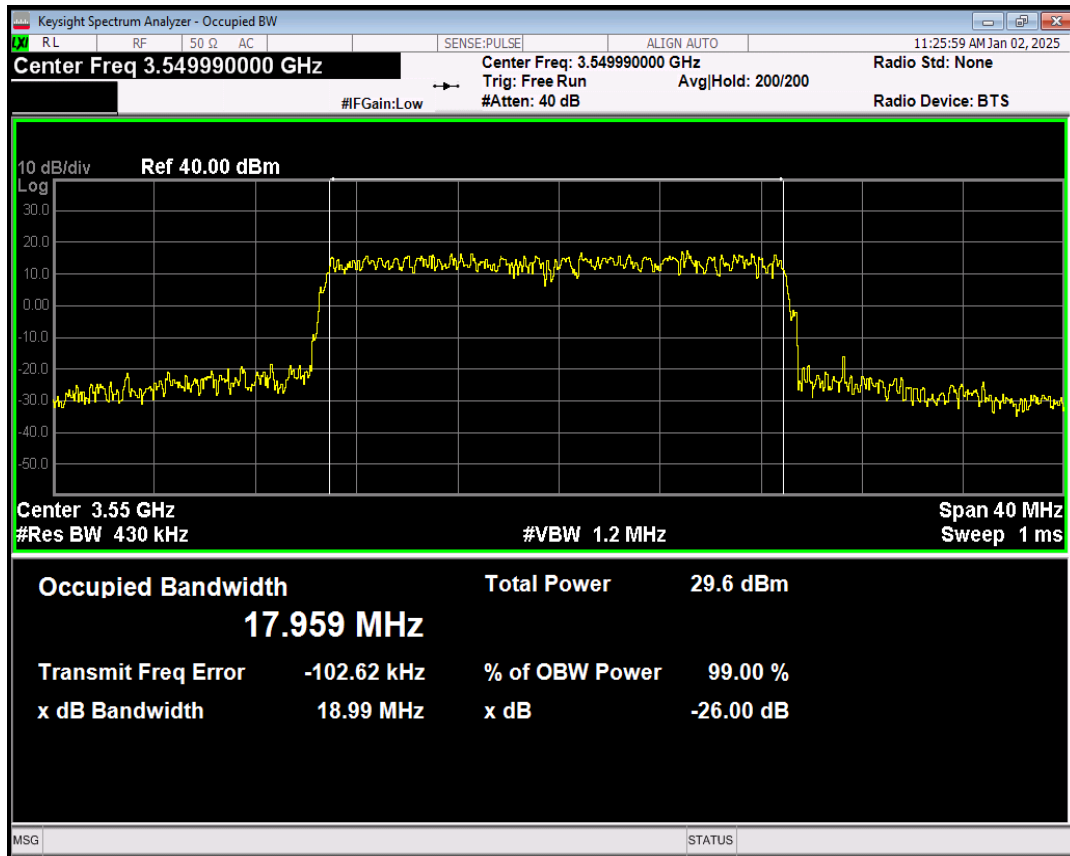


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=636666 RB=50@0

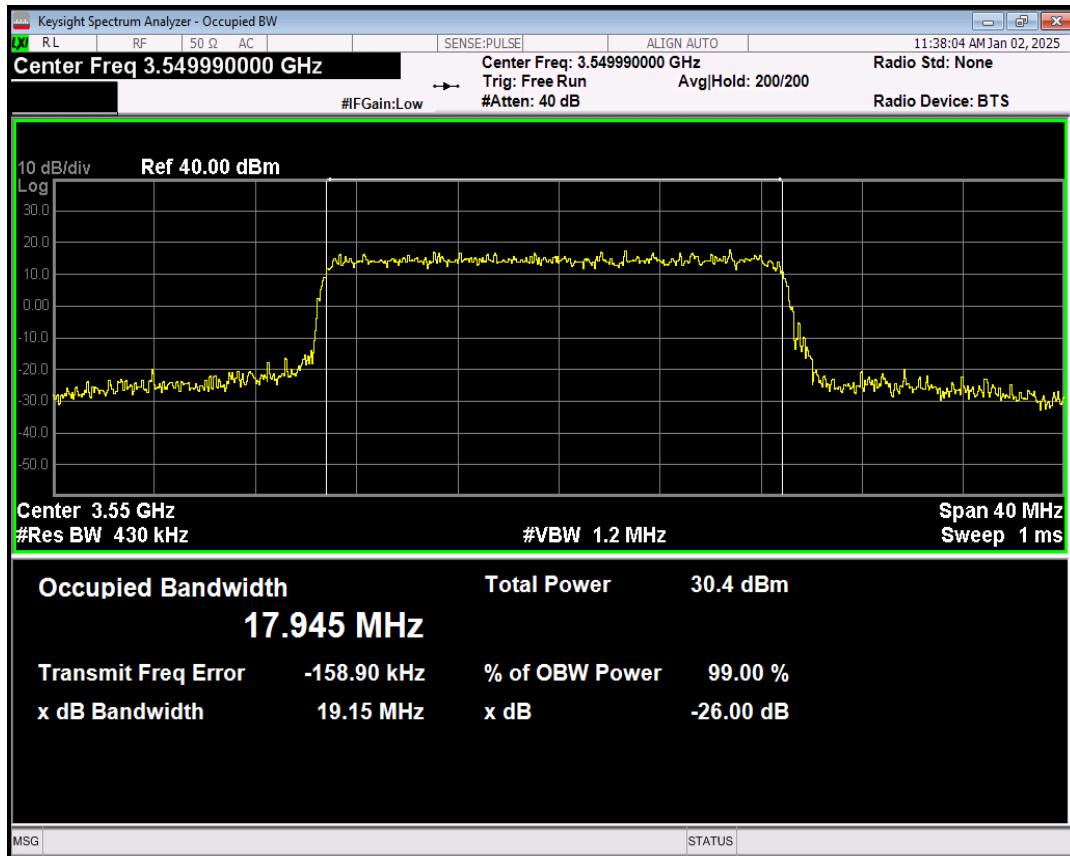


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=636666 RB=50@0

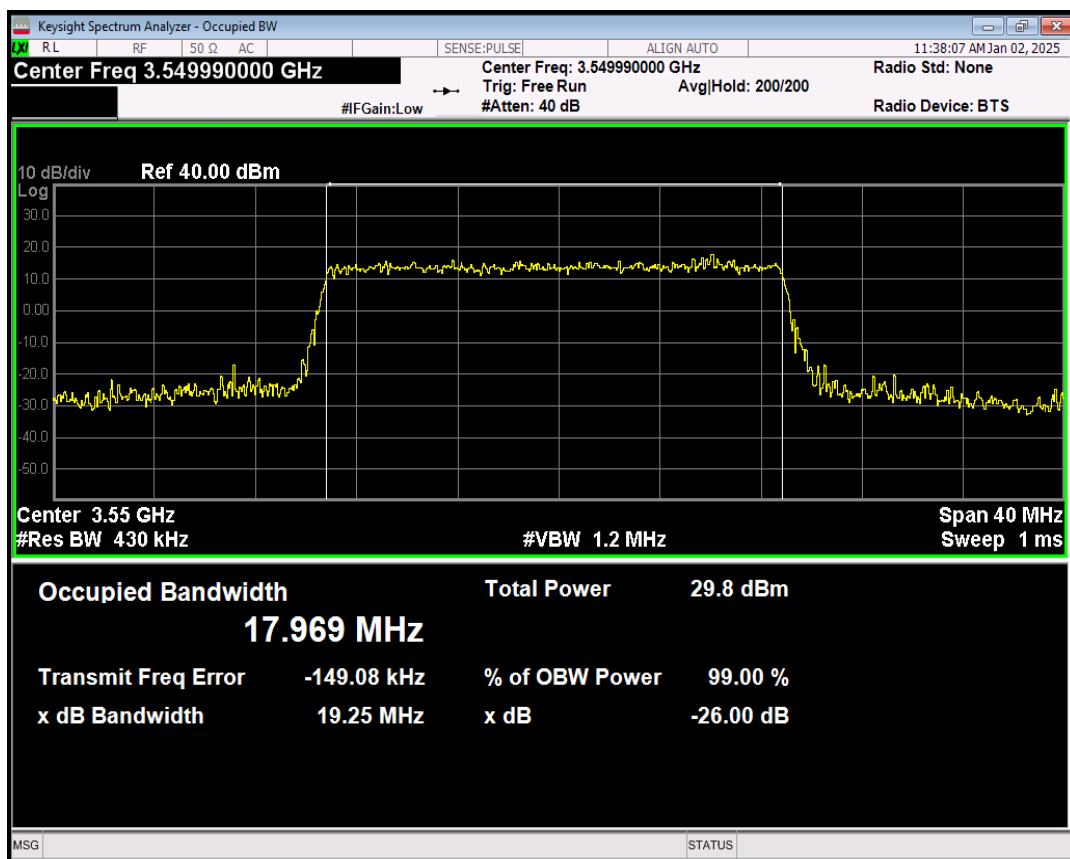


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=636666 RB=50@0

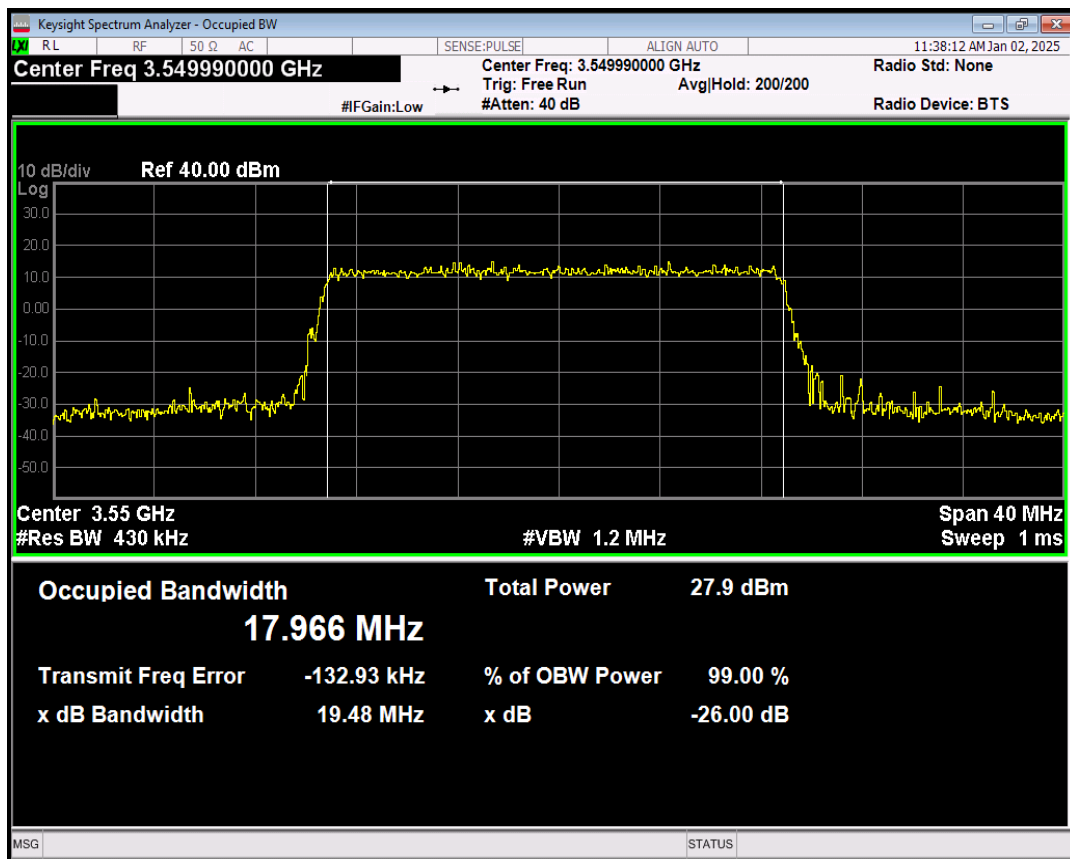


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=636666 RB=100@0

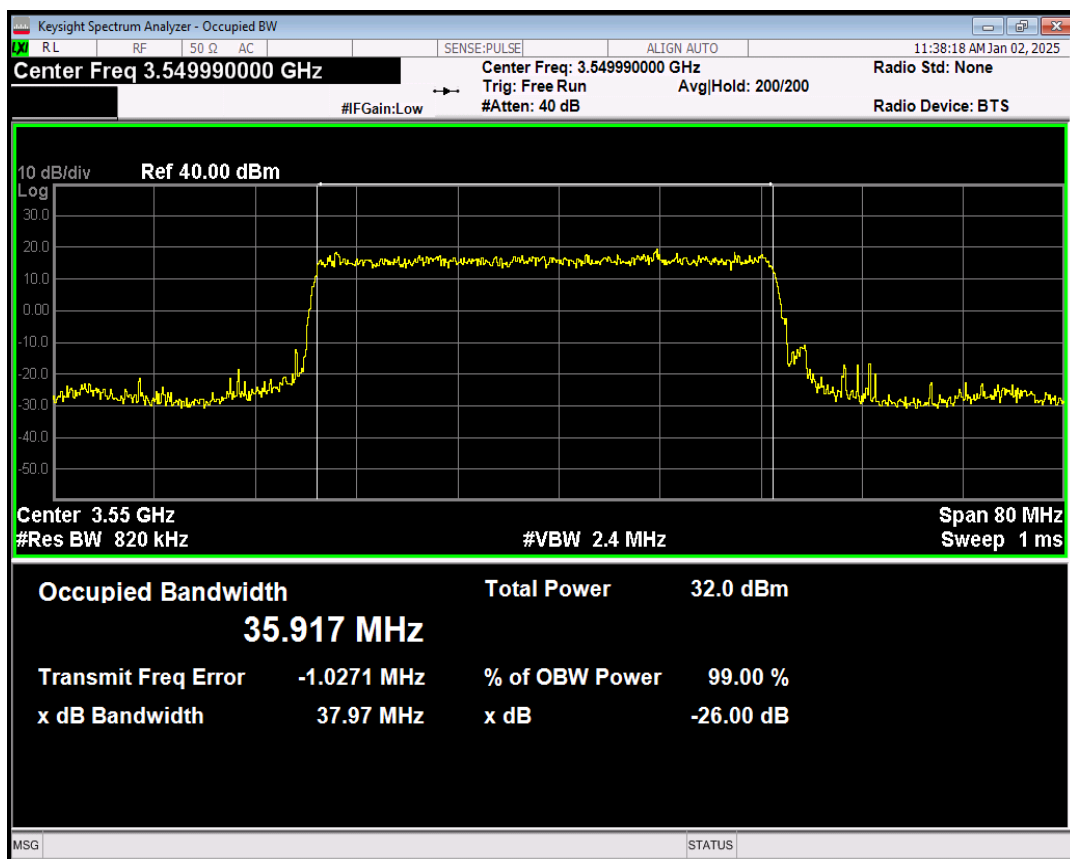


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=636666 RB=100@0

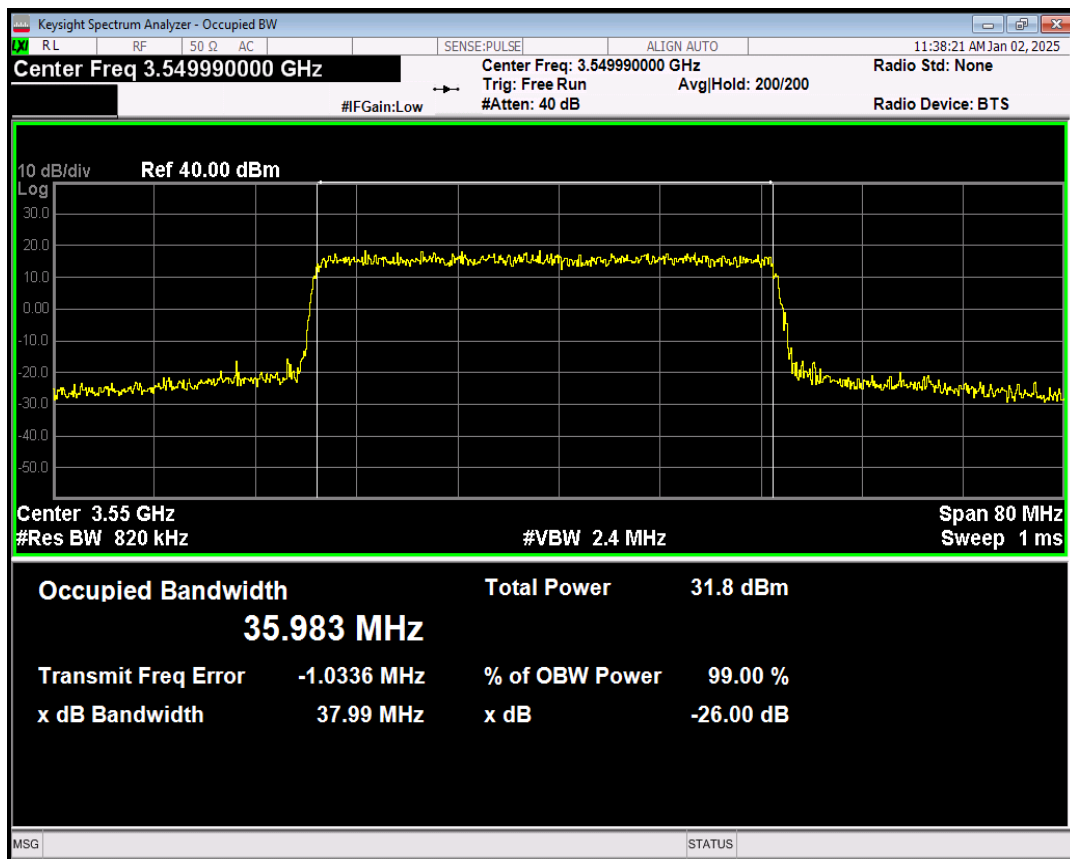


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=636666 RB=100@0

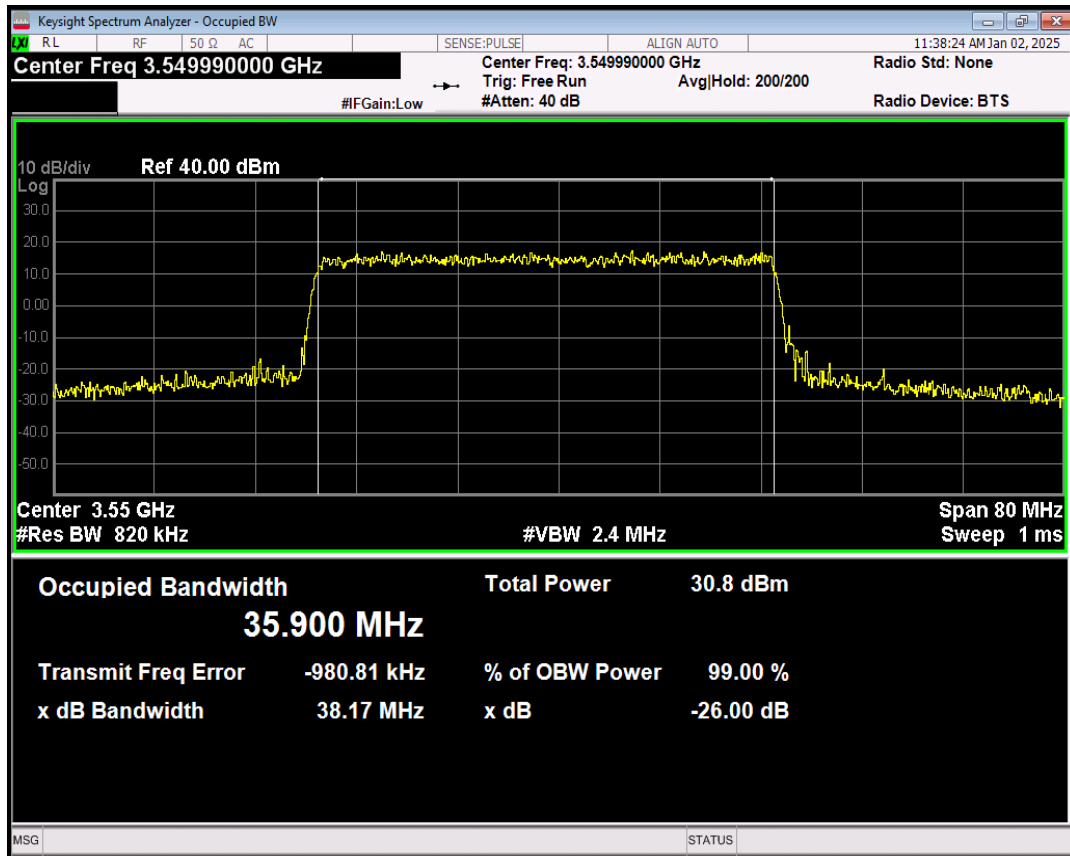


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=636666 RB=100@0

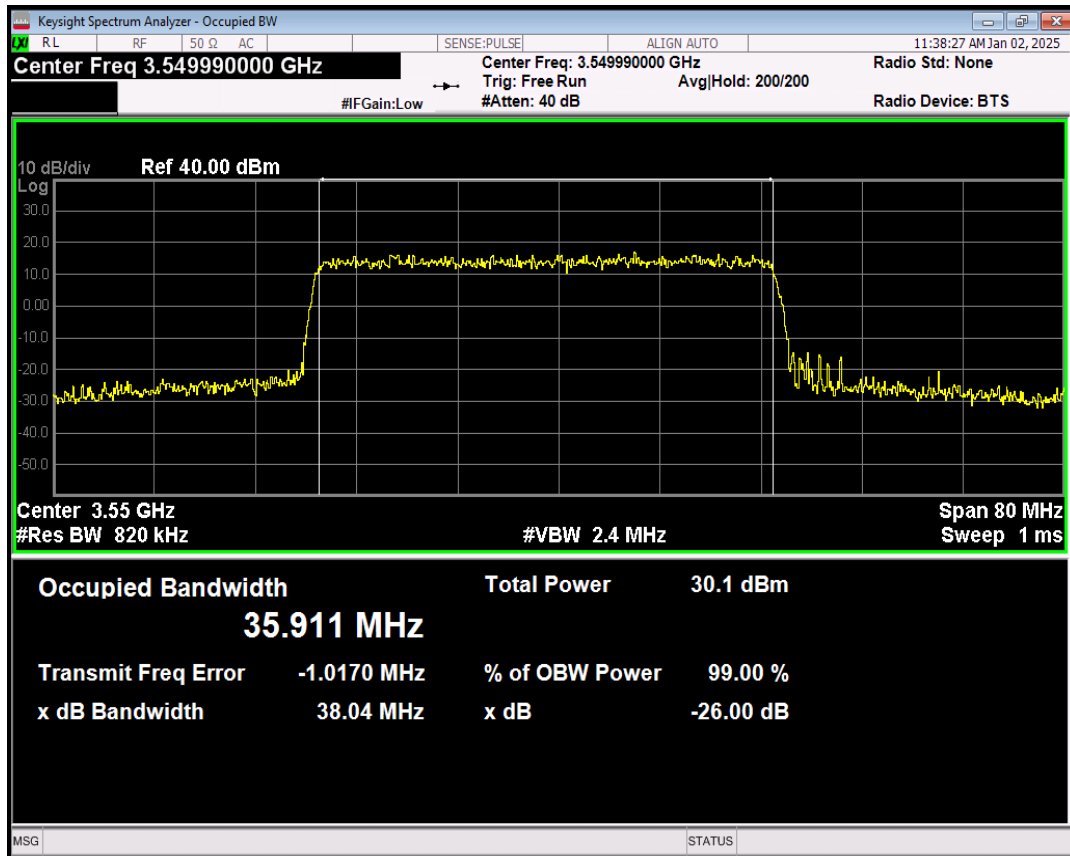


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=636666 RB=100@0

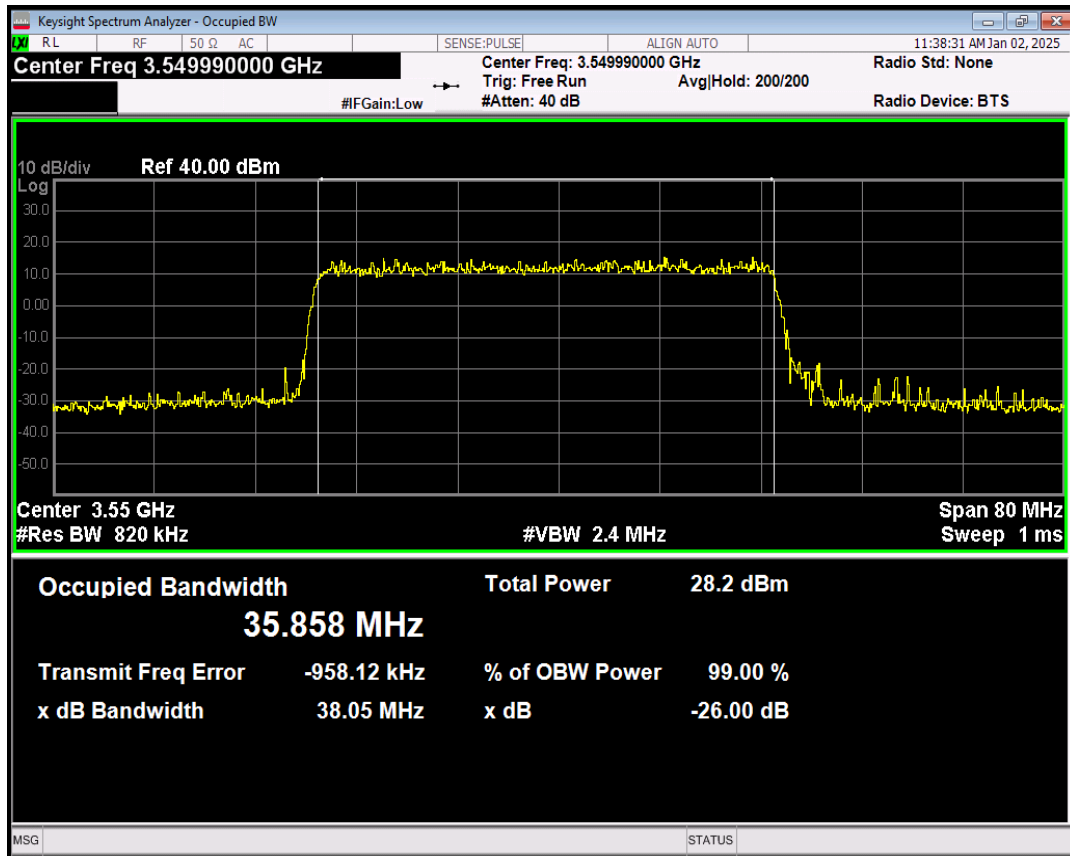


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=636666 RB=128@0

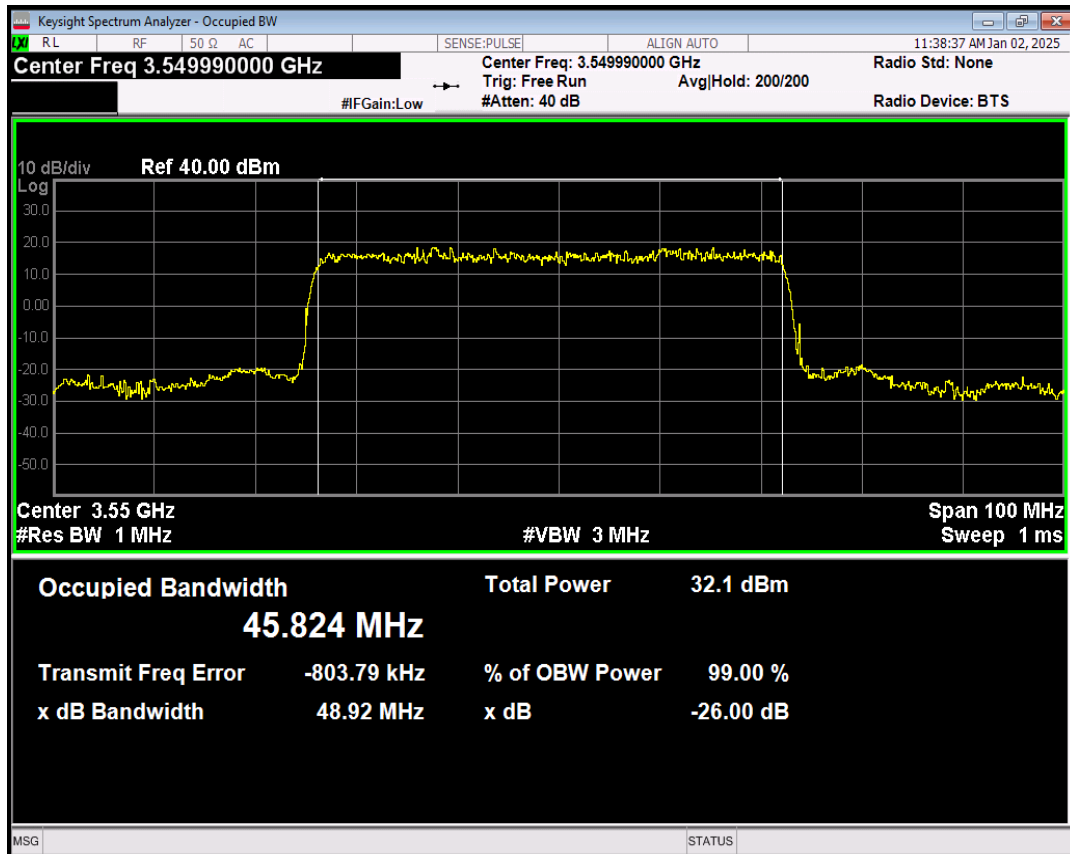


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=636666 RB=128@0

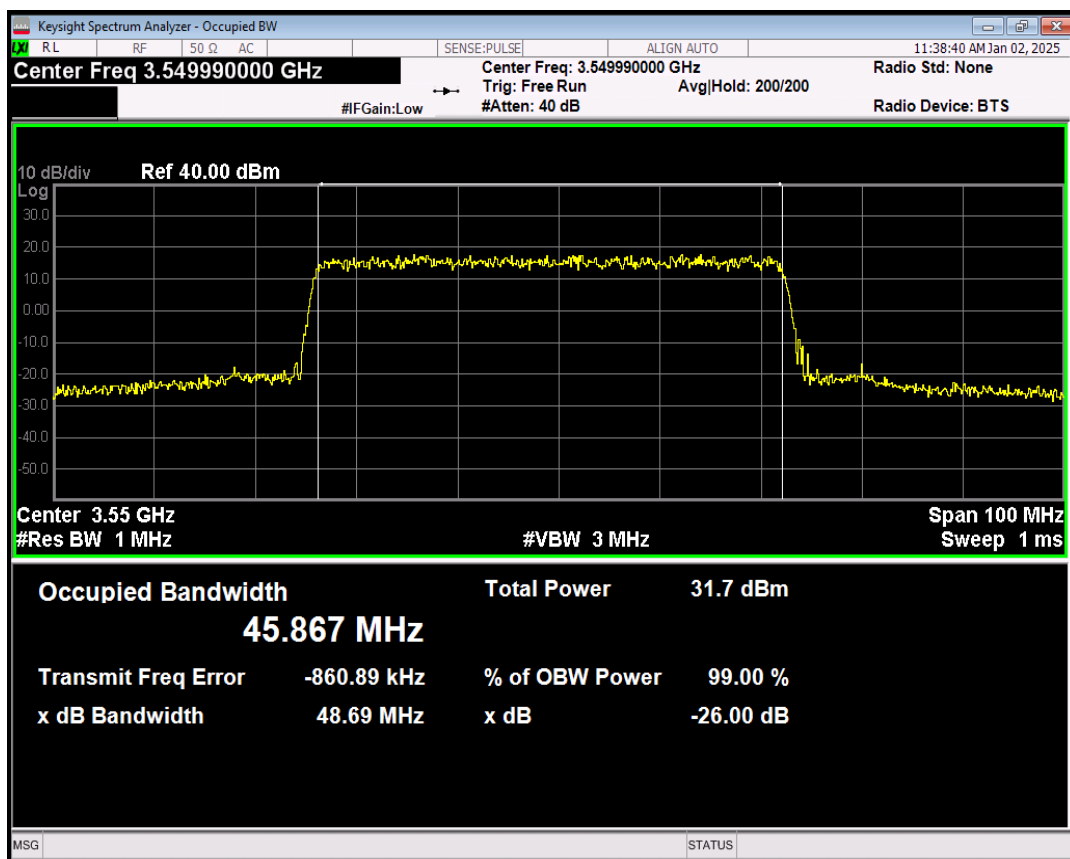


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=636666 RB=128@0

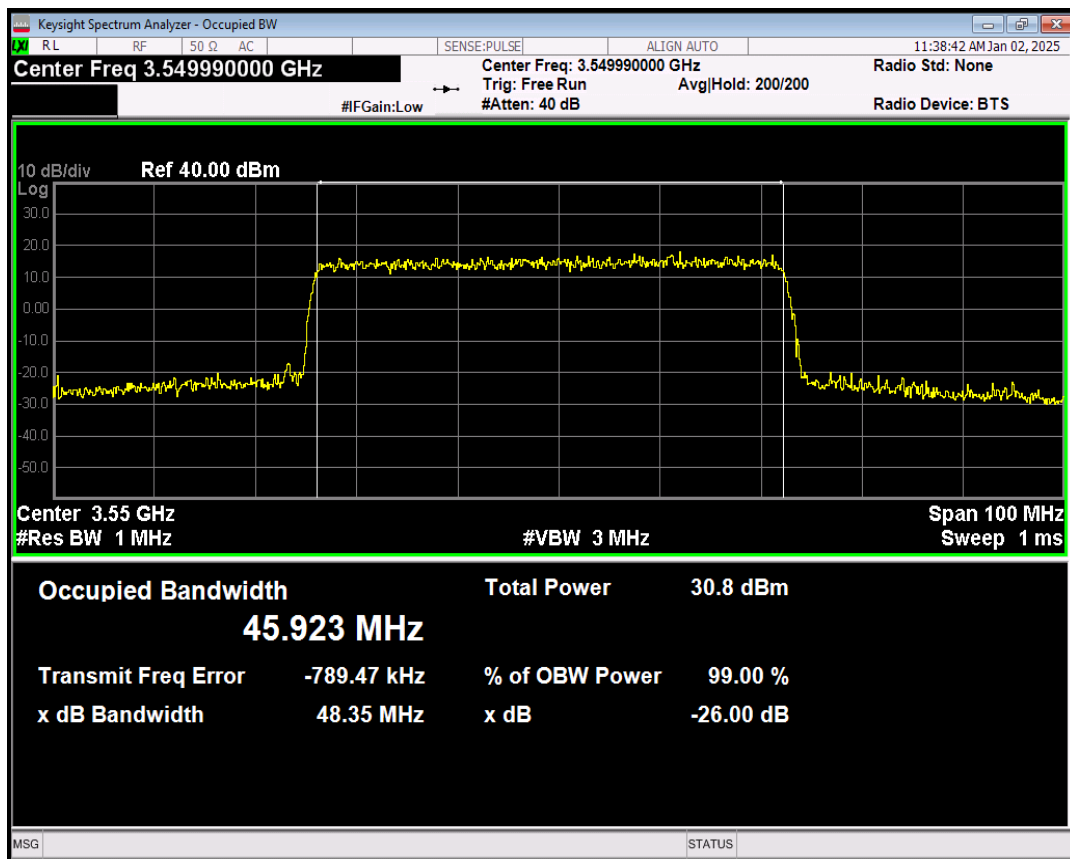


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=636666 RB=128@0

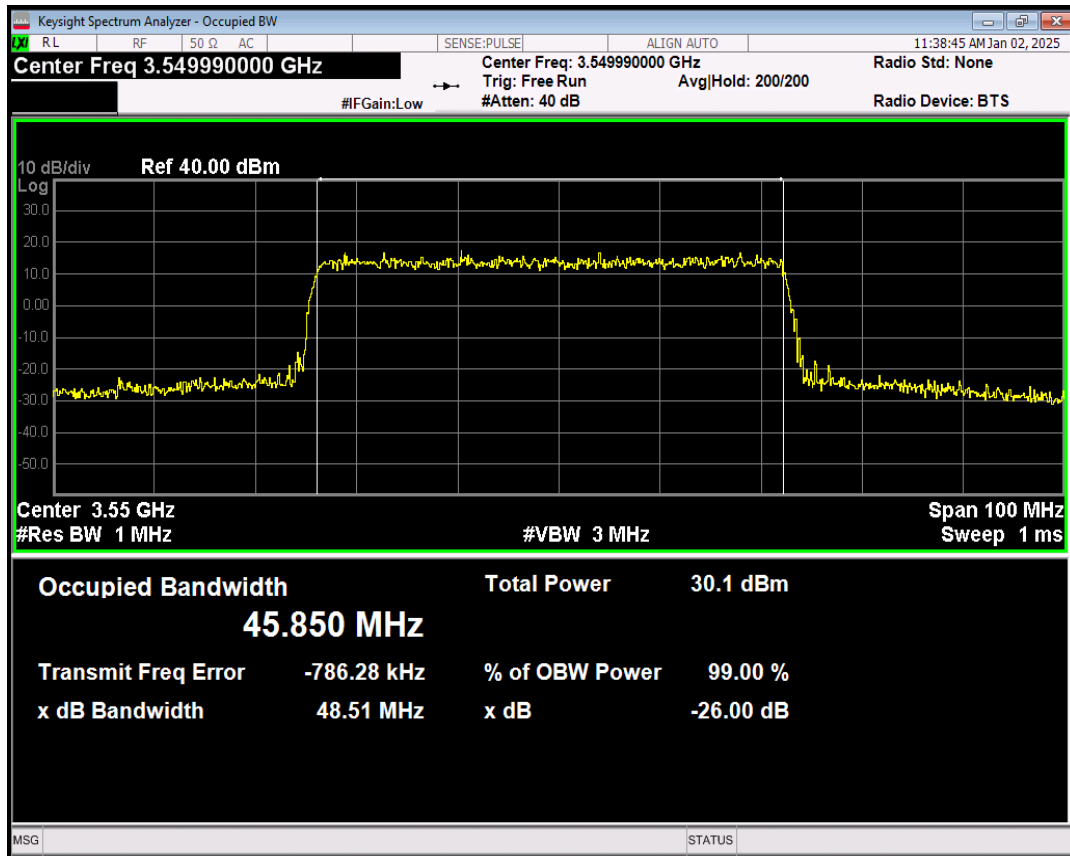


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=636666 RB=128@0

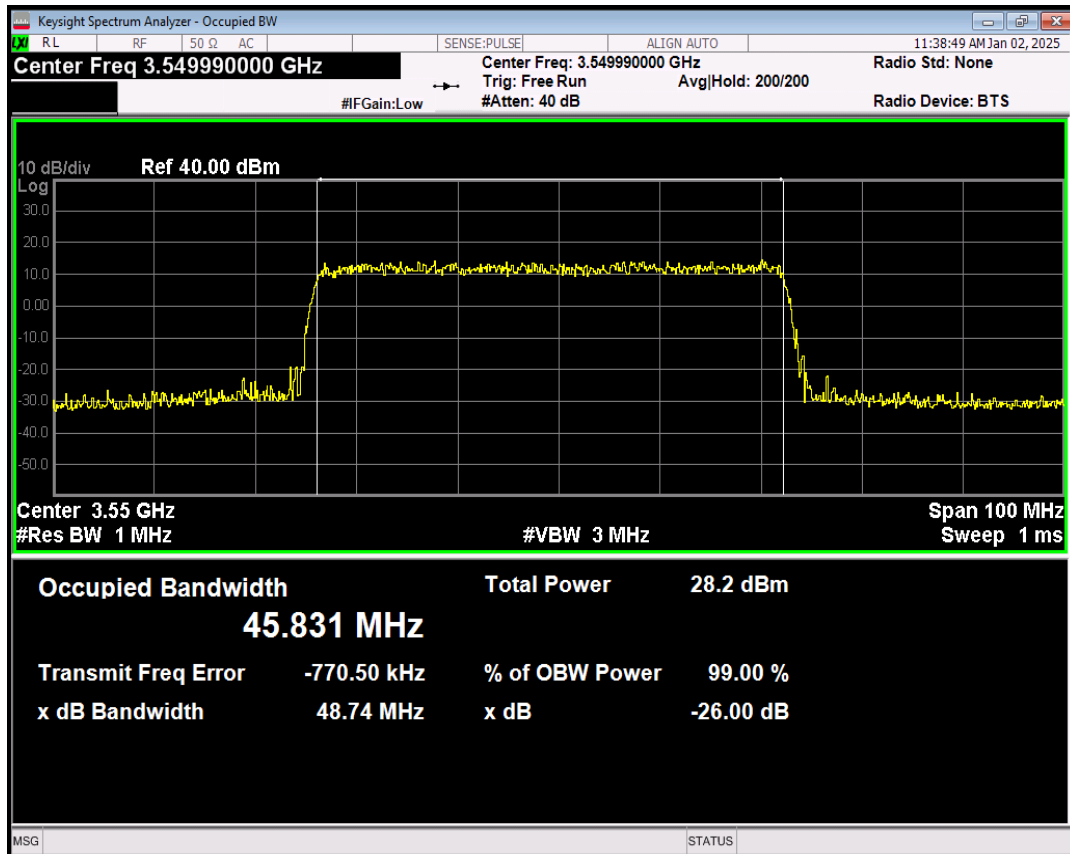


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=636666 RB=162@0

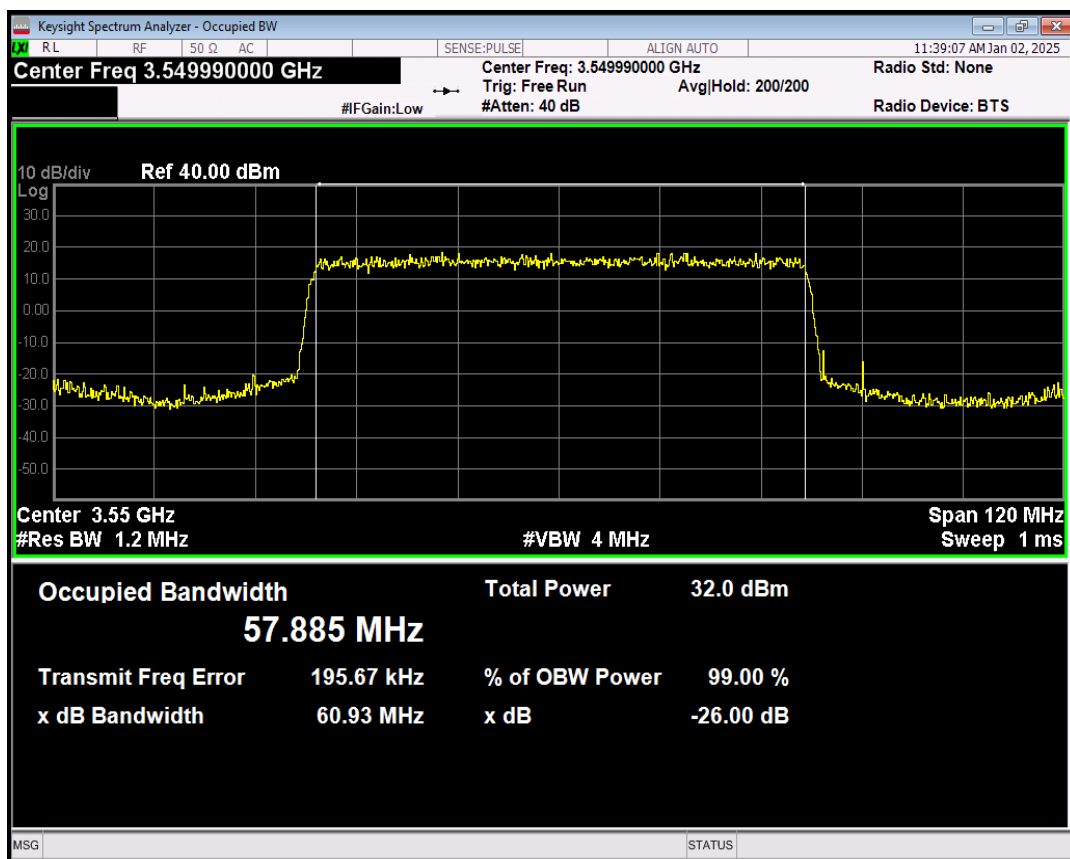


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=636666 RB=162@0

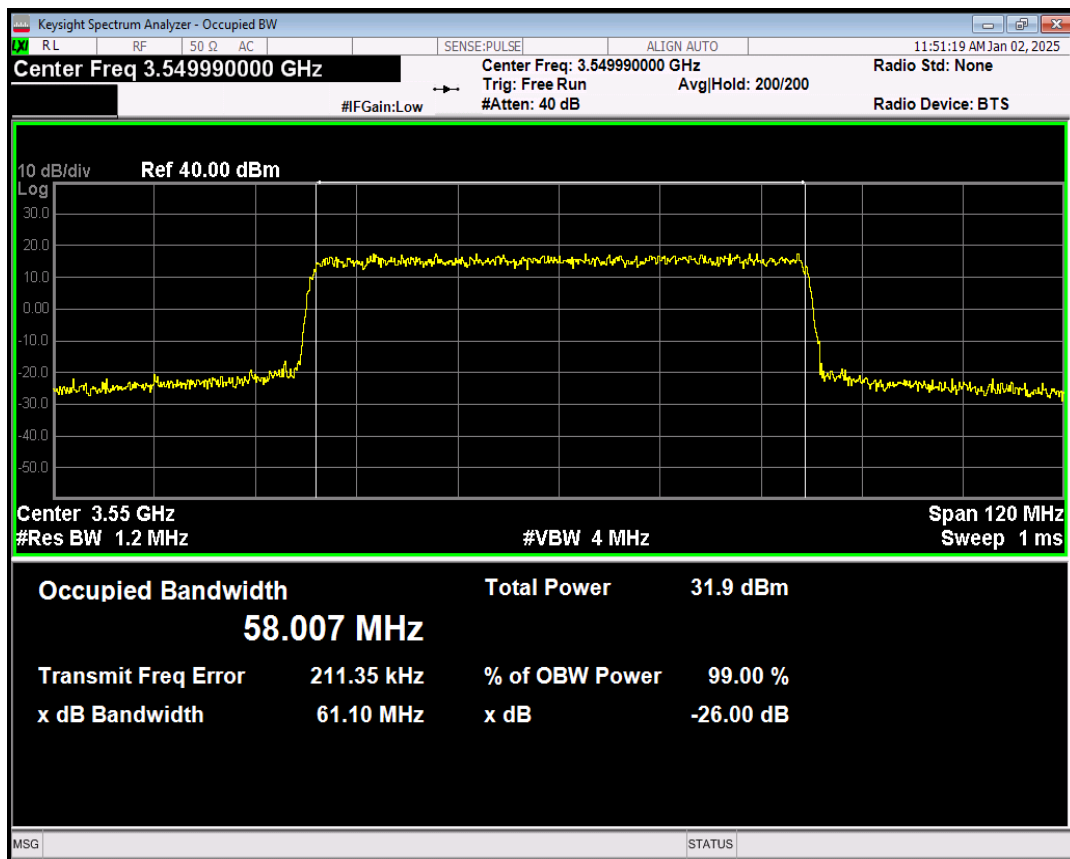


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=636666 RB=162@0

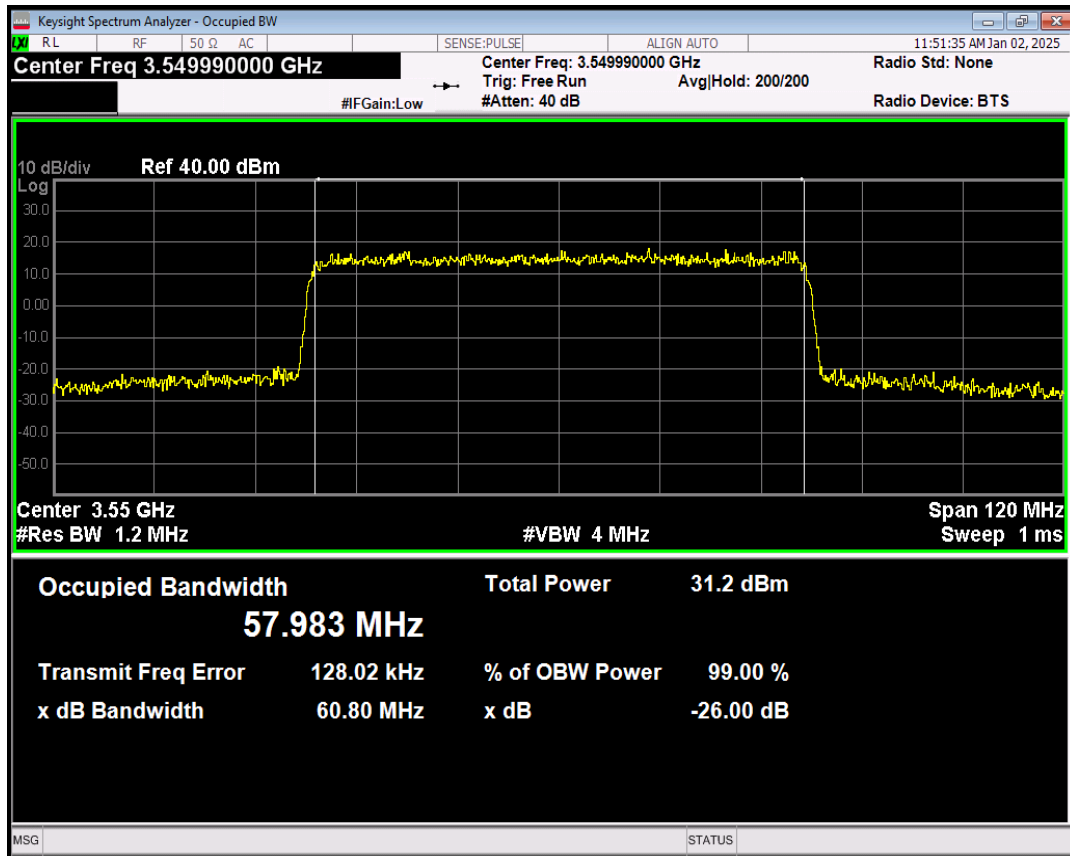


n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=636666 RB=162@0

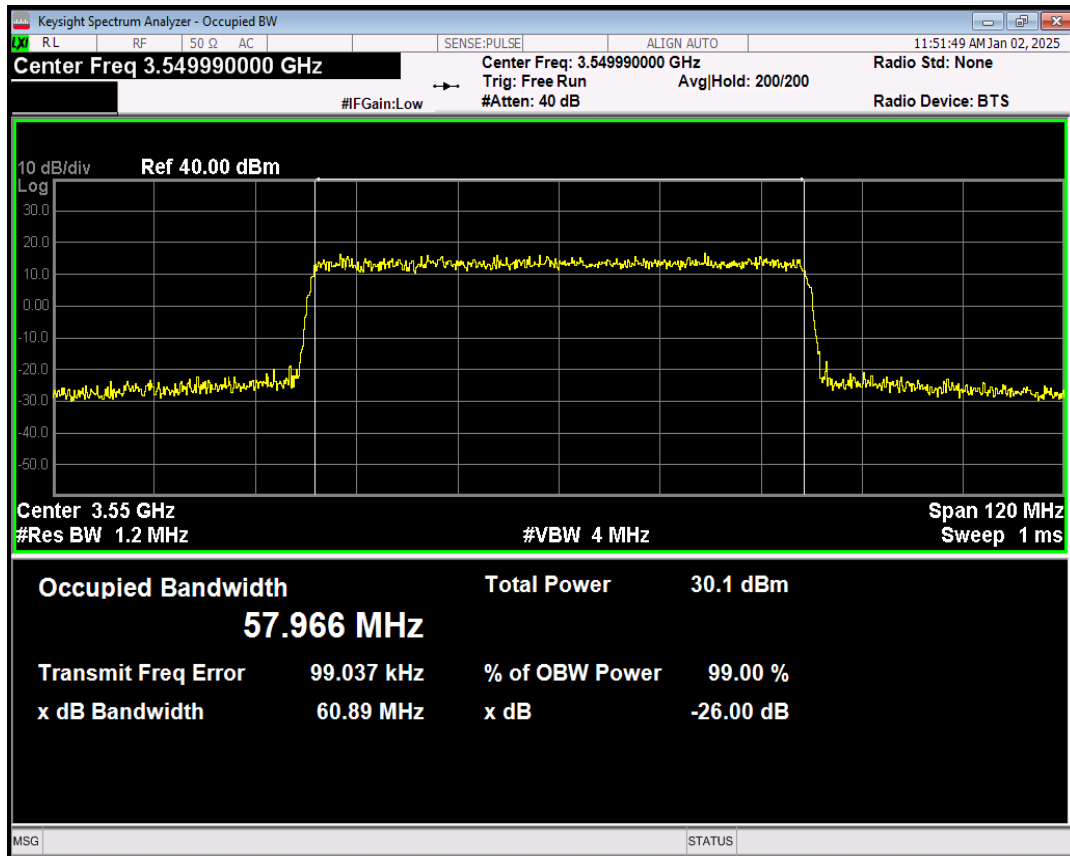


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=636666 RB=162@0

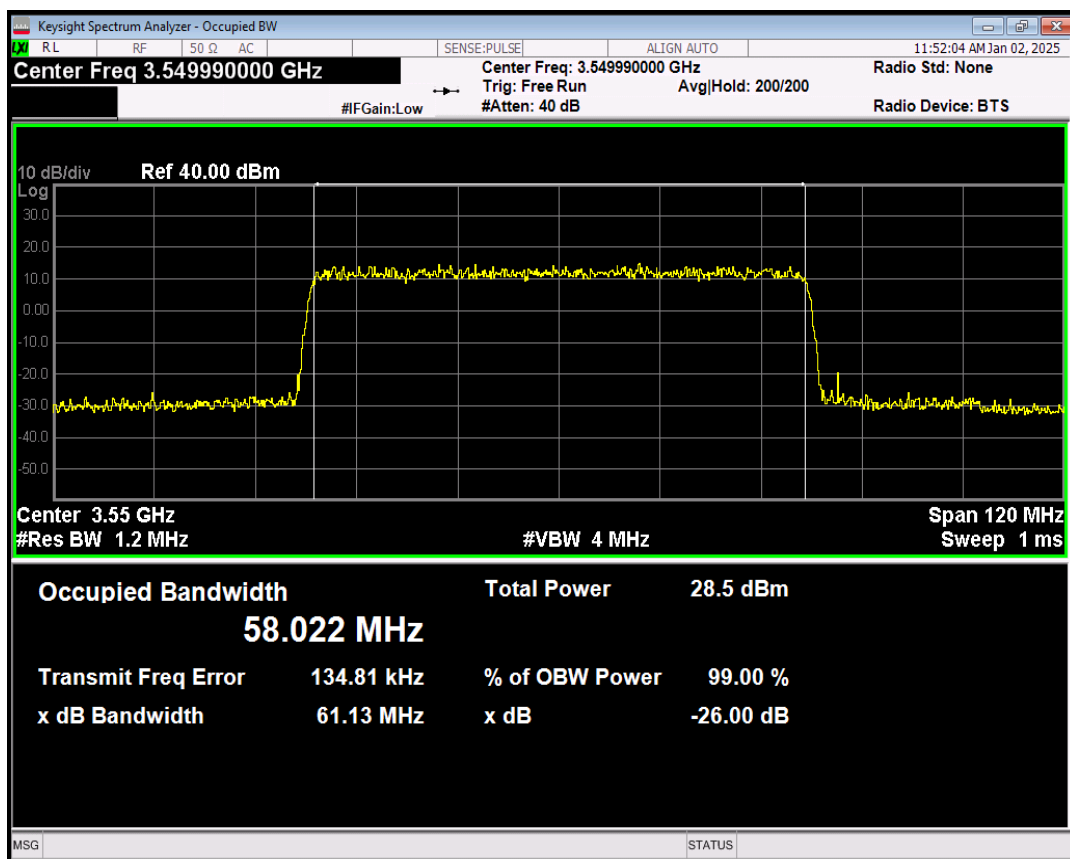


n78 SCS=30kHz DFT_BPSK BW=70MHz Channel=636666 RB=

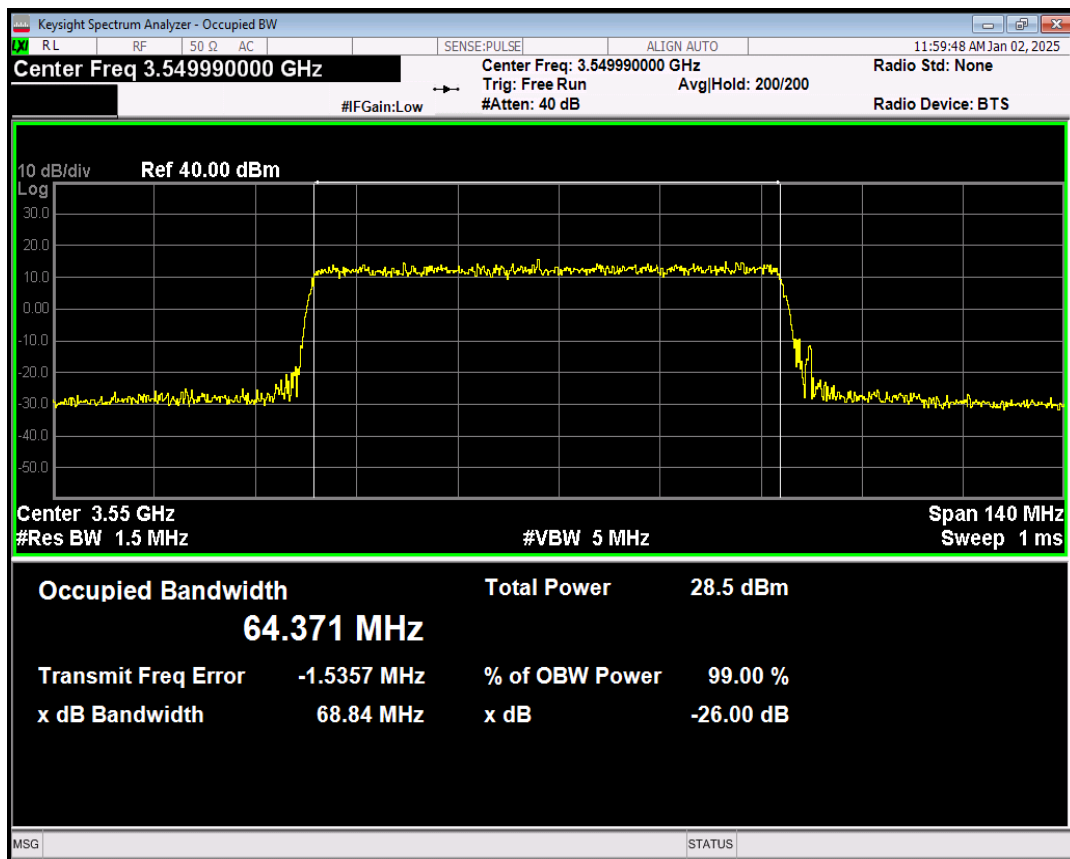


n78 SCS=30kHz DFT_QPSK BW=70MHz Channel=636666 RB=

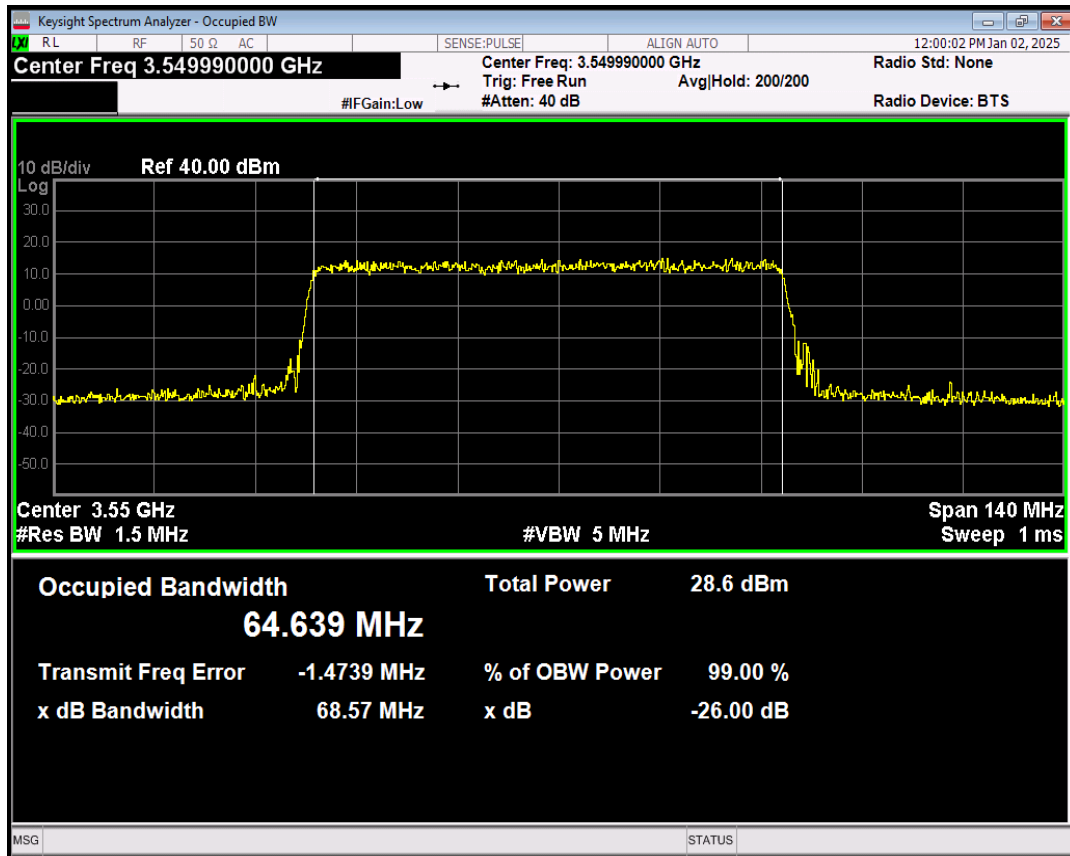


n78 SCS=30kHz DFT_QAM16 BW=70MHz Channel=636666 RB=

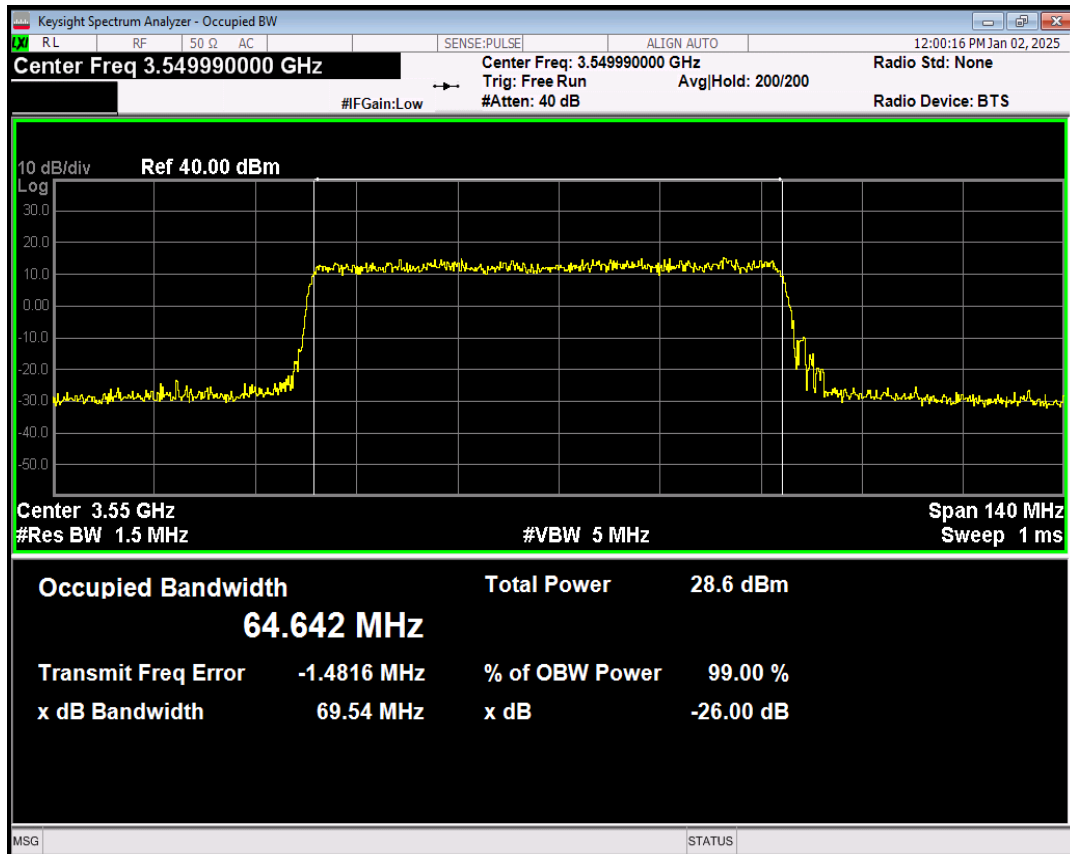


n78 SCS=30kHz DFT_QAM64 BW=70MHz Channel=636666 RB=

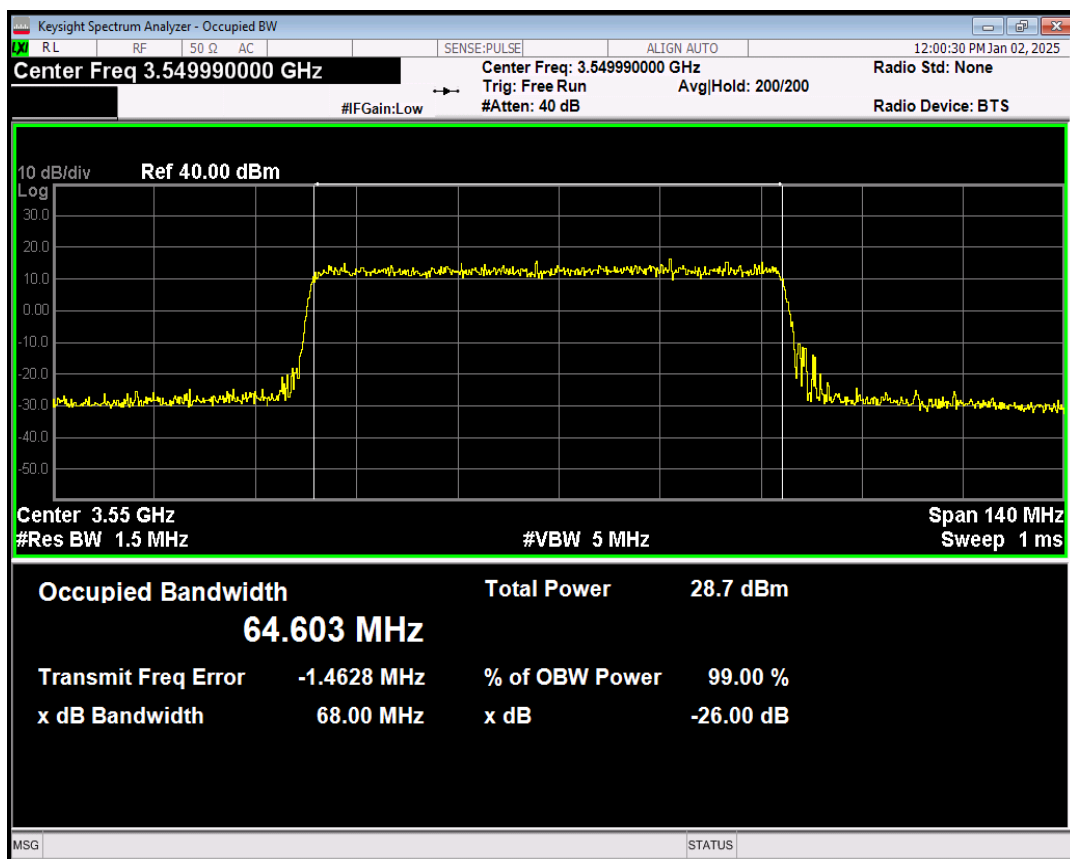


n78 SCS=30kHz DFT_QAM256 BW=70MHz Channel=636666 RB=

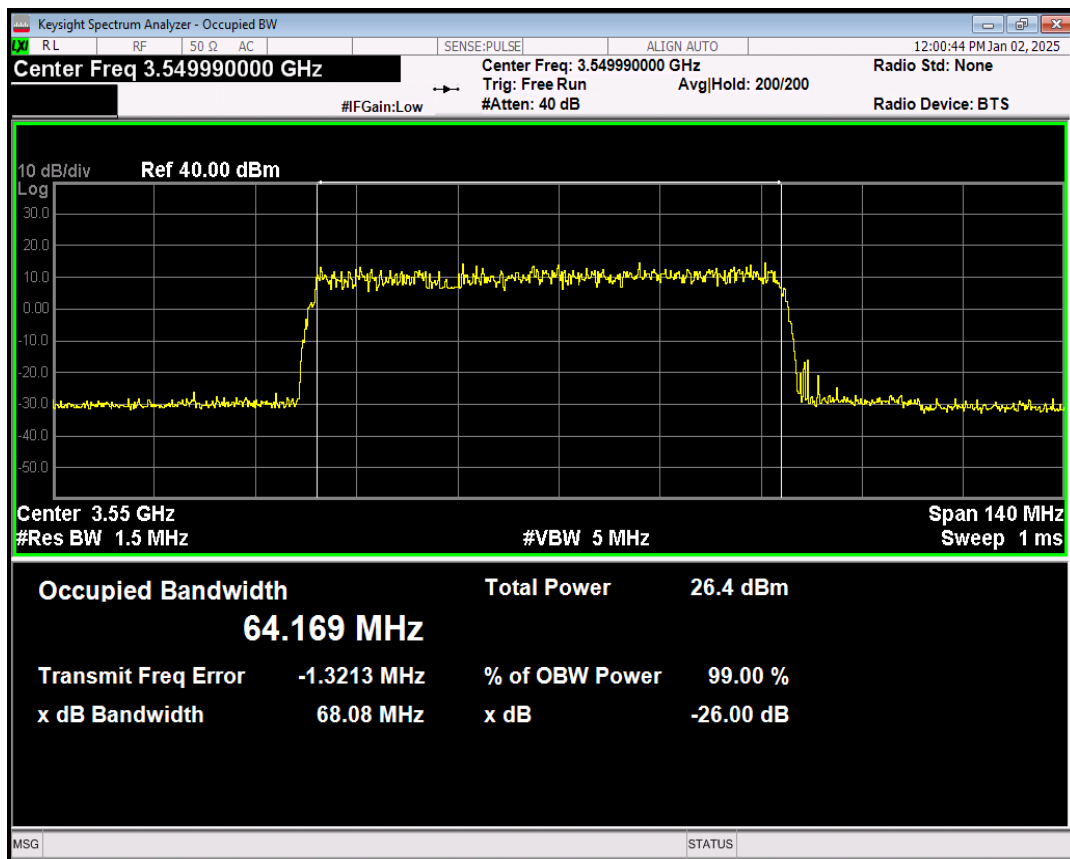


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=636666 RB=216@0

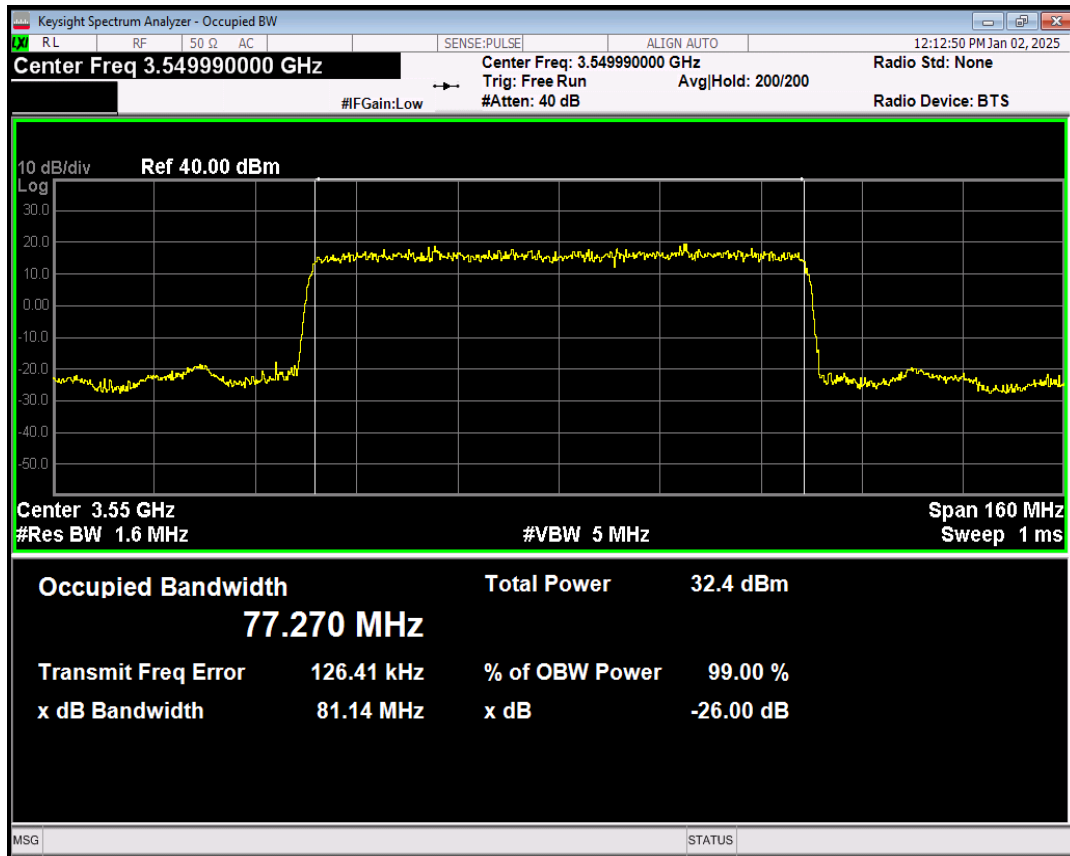


n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=636666 RB=216@0

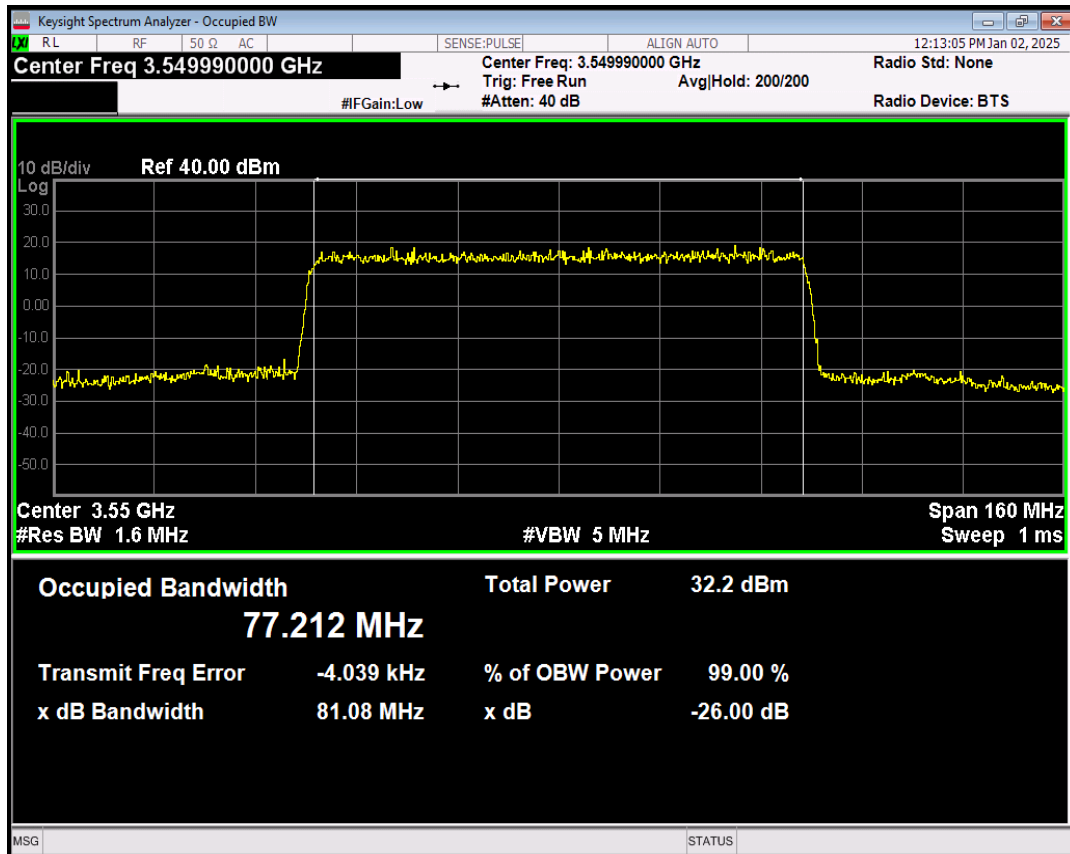


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=636666 RB=216@0

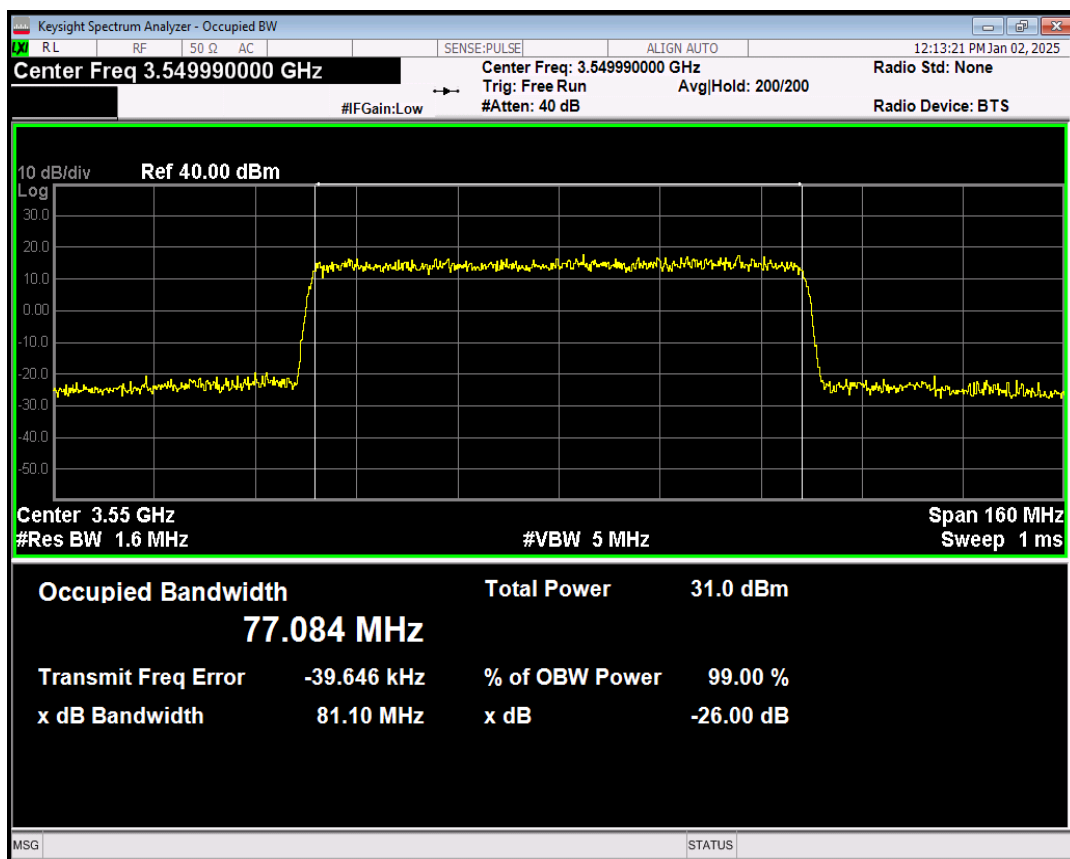


n78 SCS=30kHz DFT_QAM64 BW=80MHz Channel=636666 RB=216@0

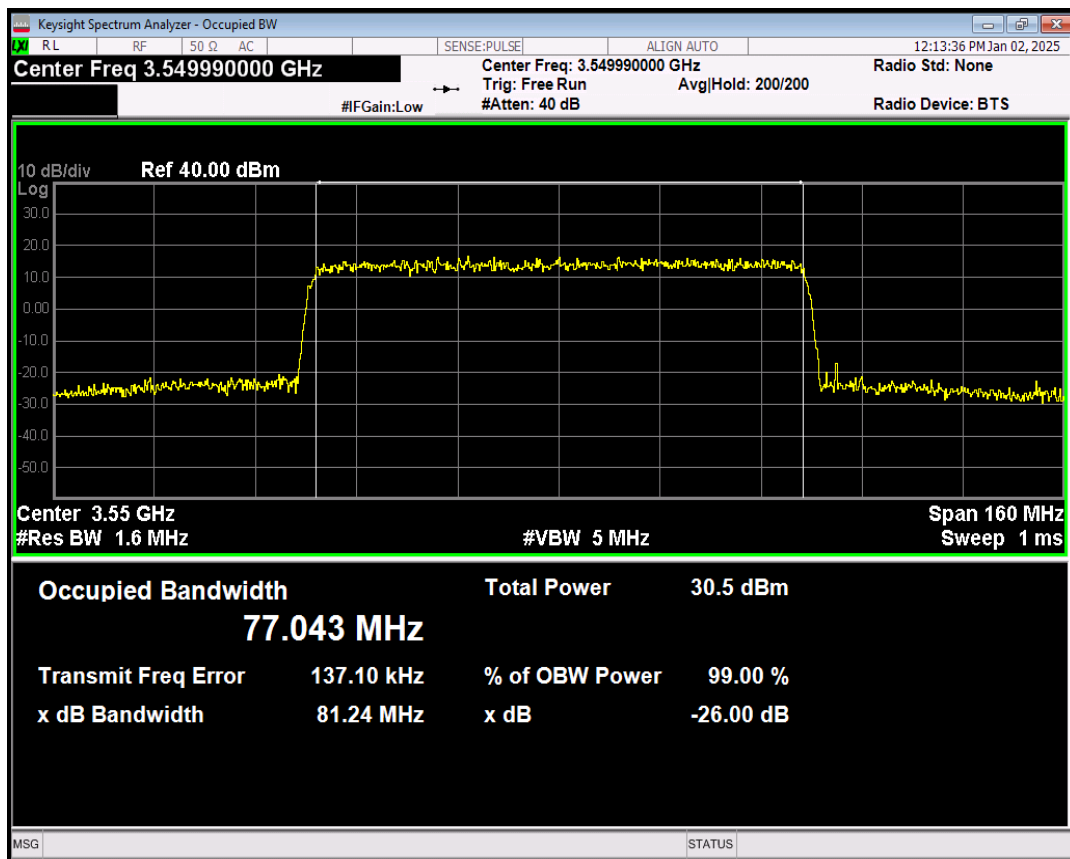


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=636666 RB=216@0

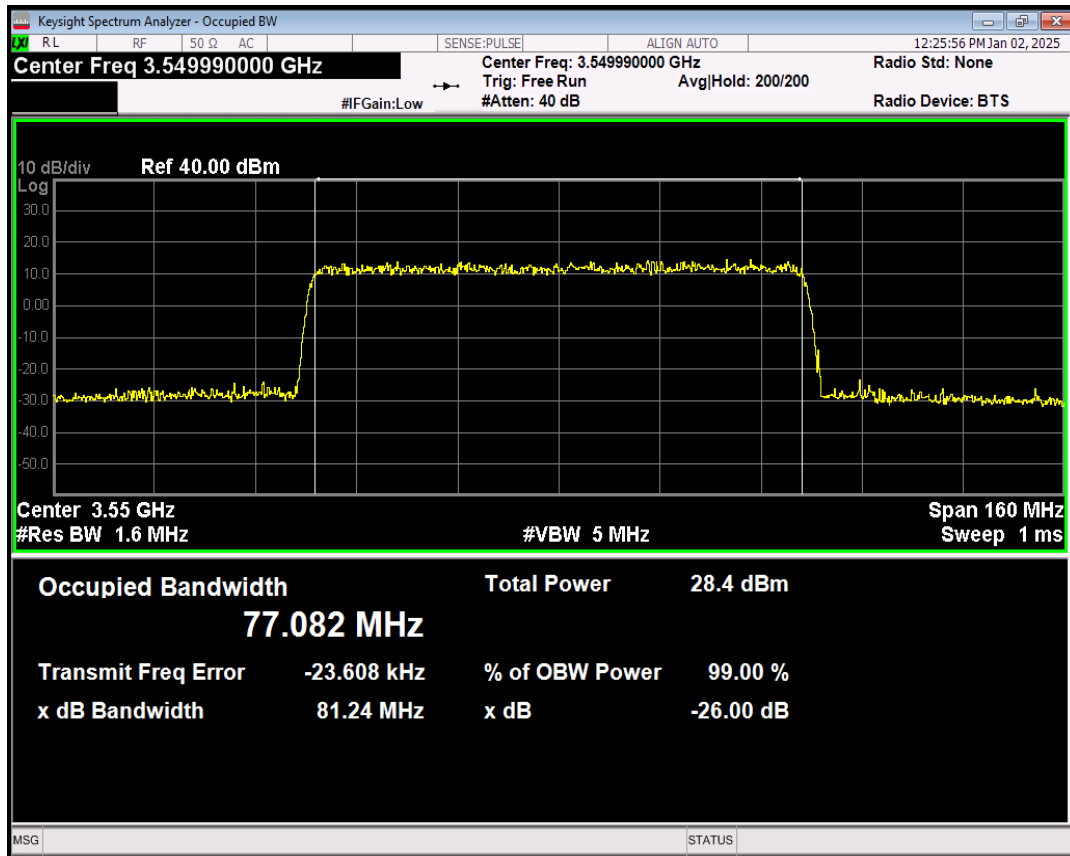


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=636666 RB=240@0

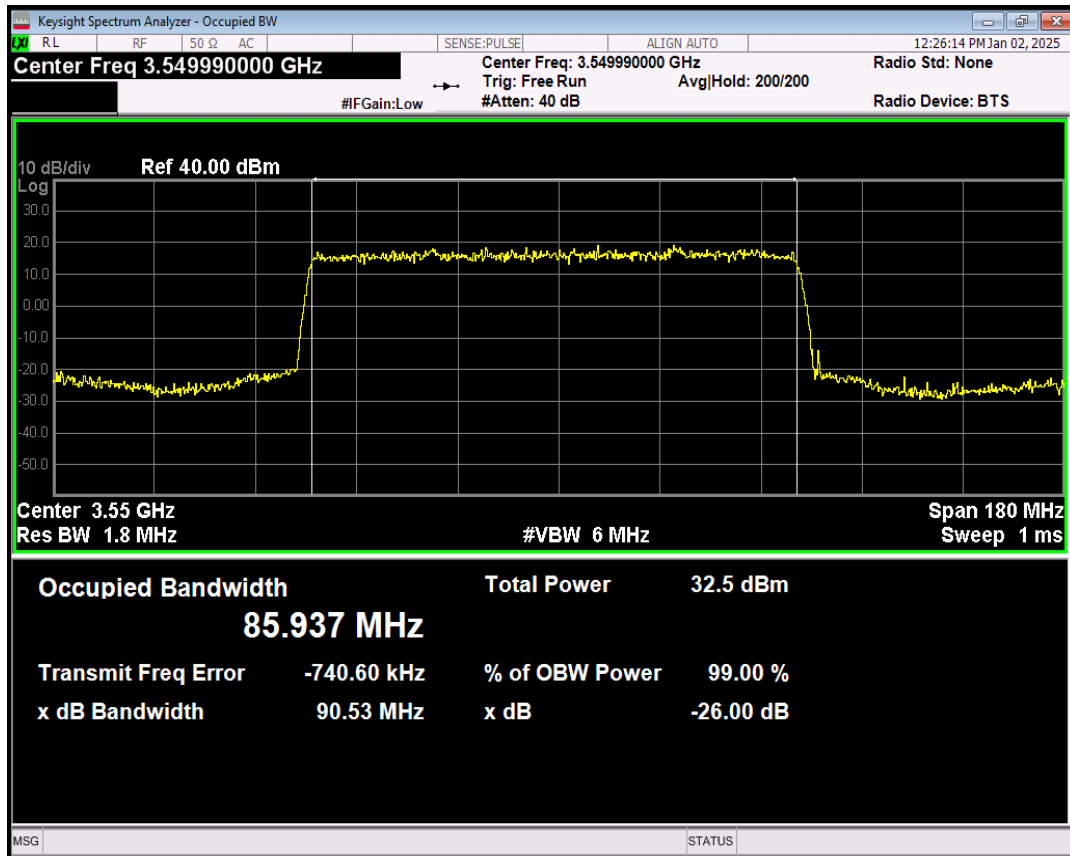


n78 SCS=30kHz DFT_QPSK BW=90MHz Channel=636666 RB=240@0

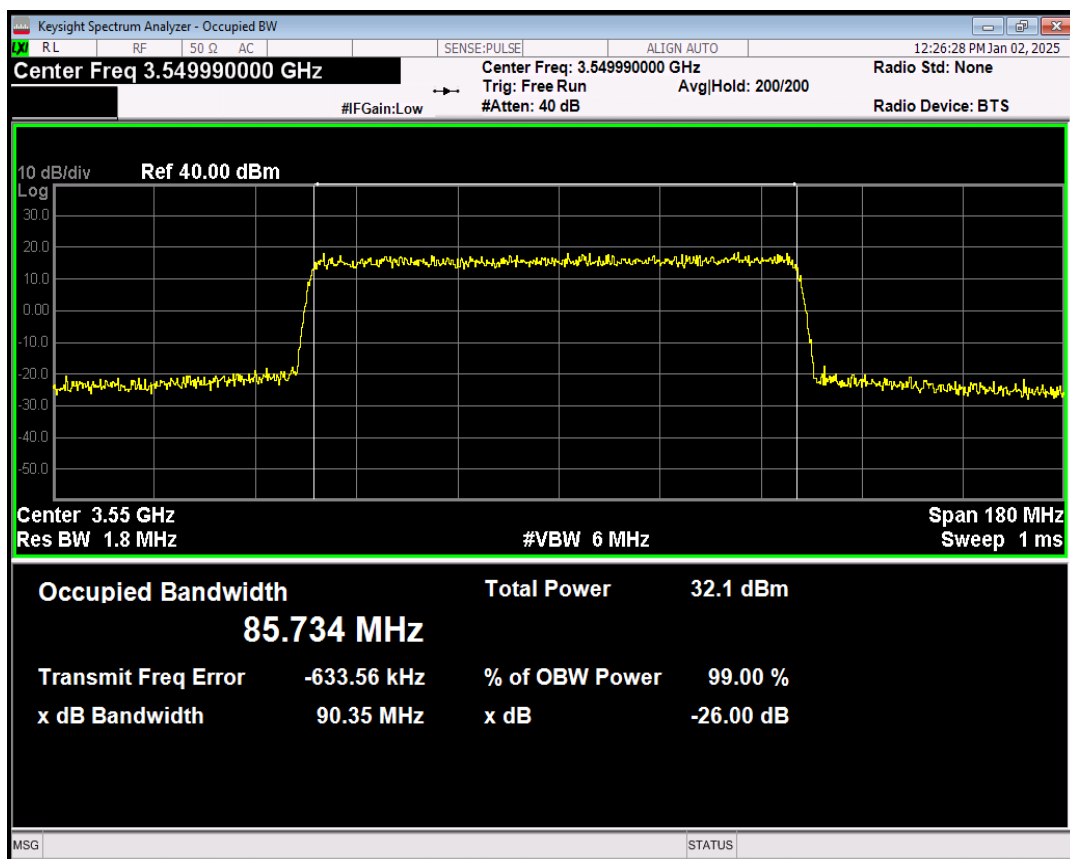


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=636666 RB=240@0

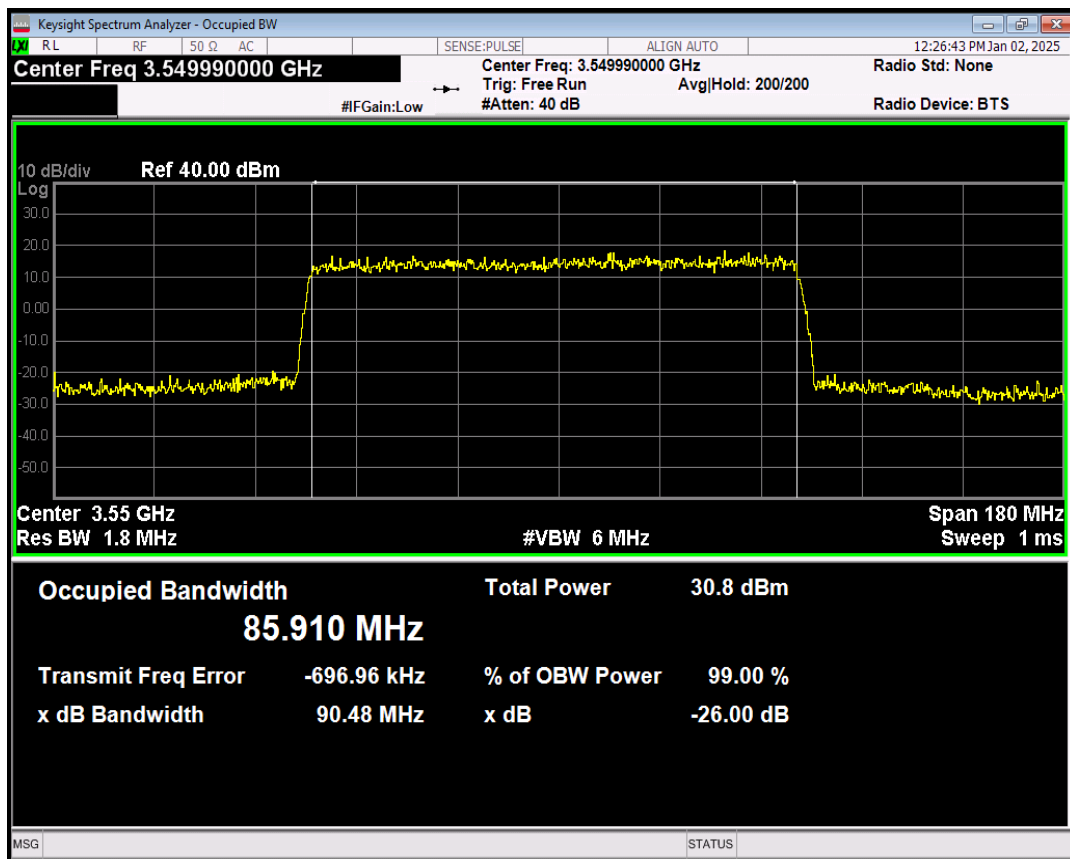


n78 SCS=30kHz DFT_QAM64 BW=90MHz Channel=636666 RB=240@0

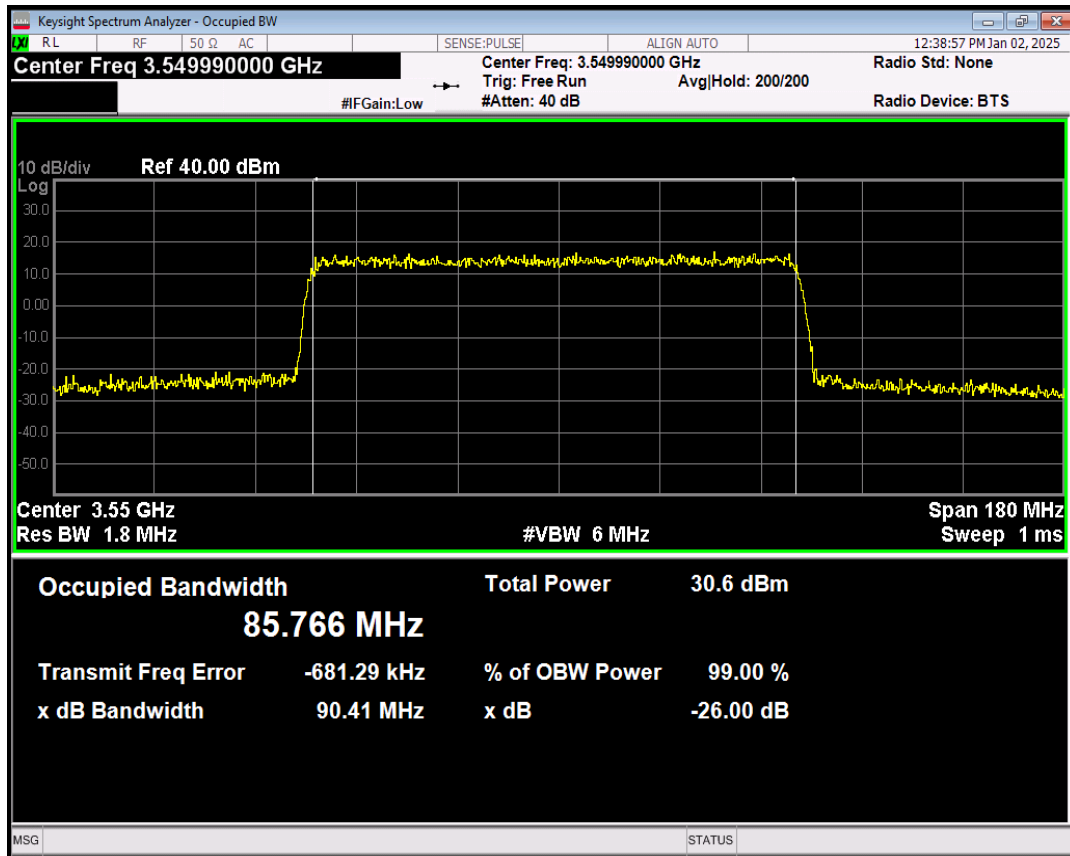


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=636666 RB=240@0

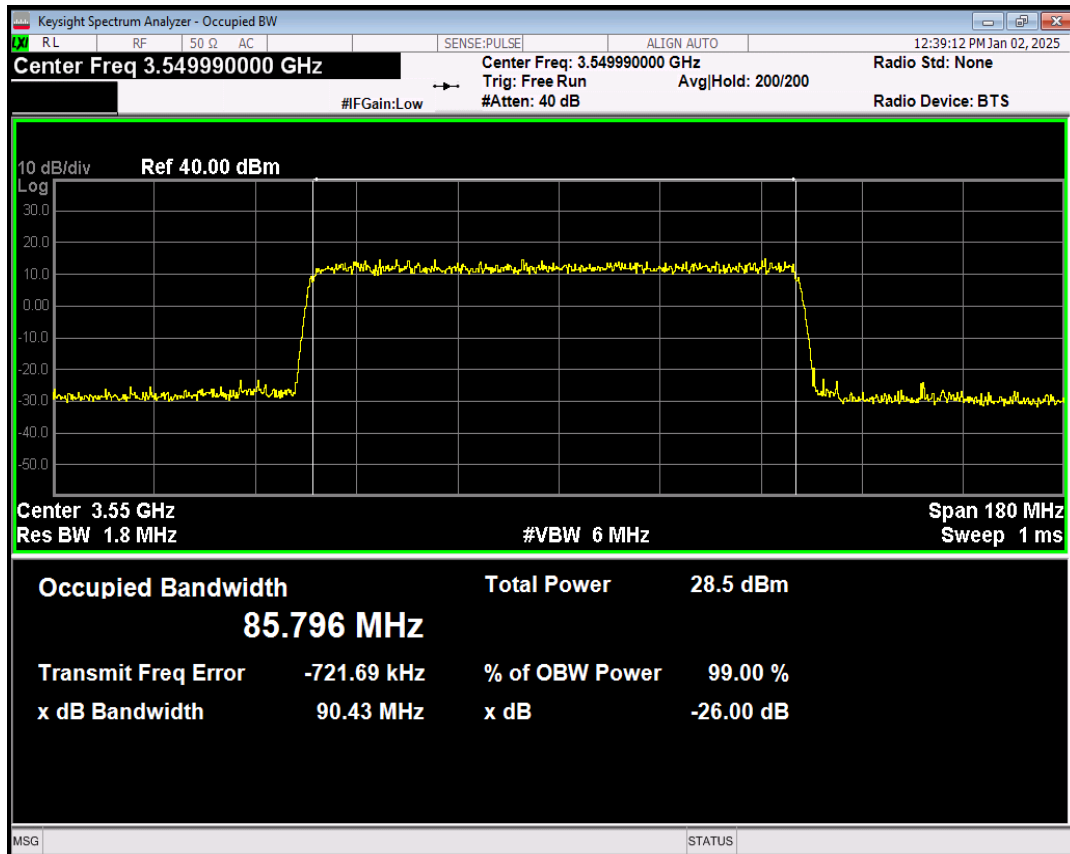


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=636666 RB=270@0

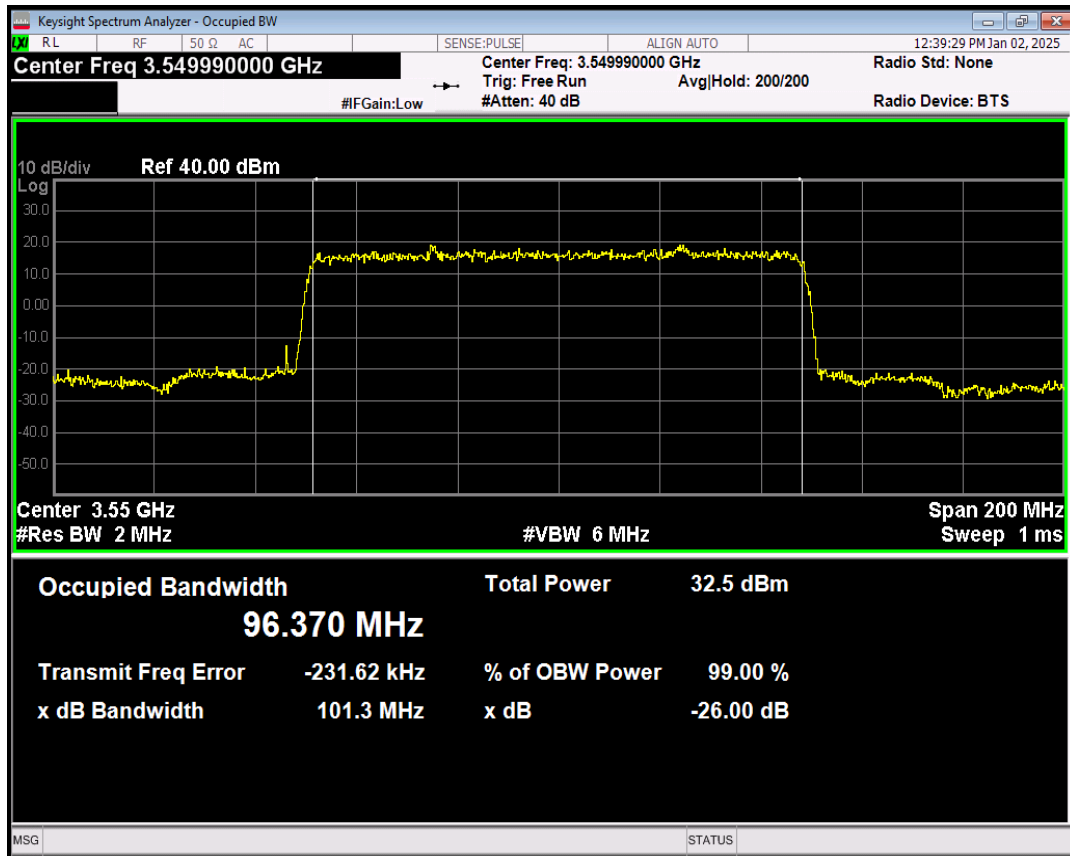

n78 SCS=30kHz DFT_QPSK BW=100MHz Channel=636666 RB=270@0

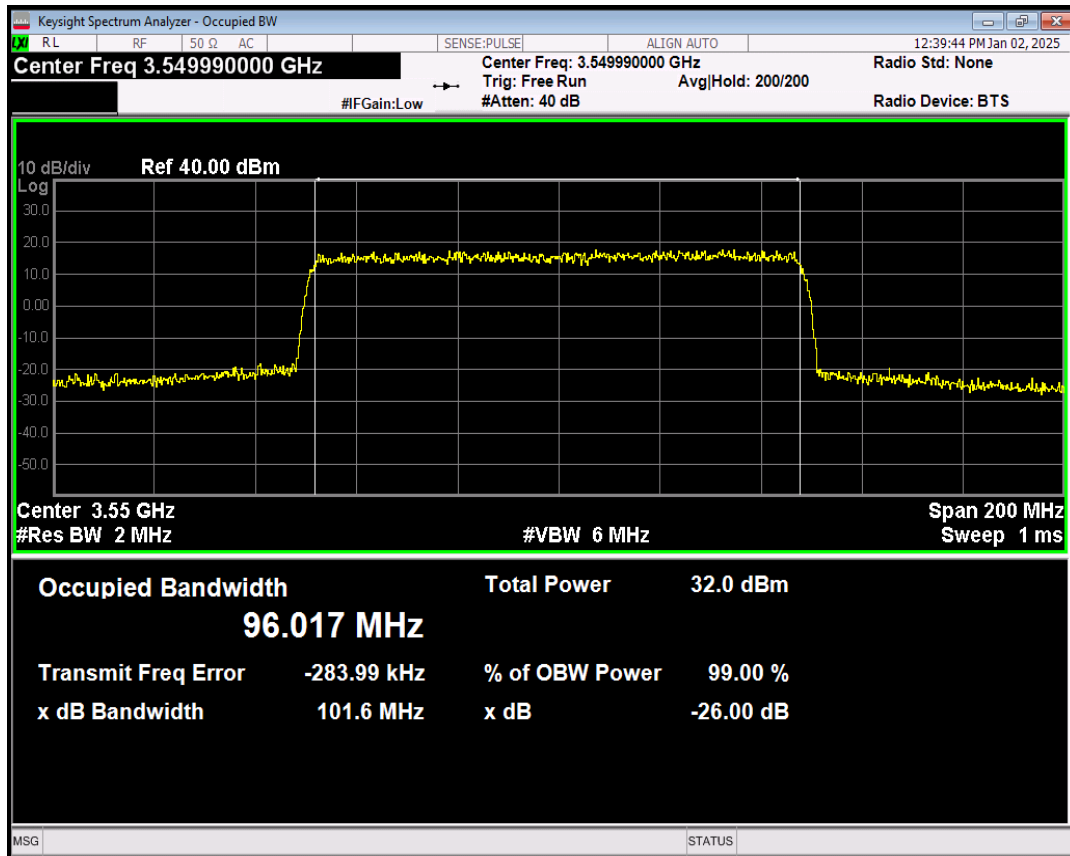

n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=636666 RB=270@0

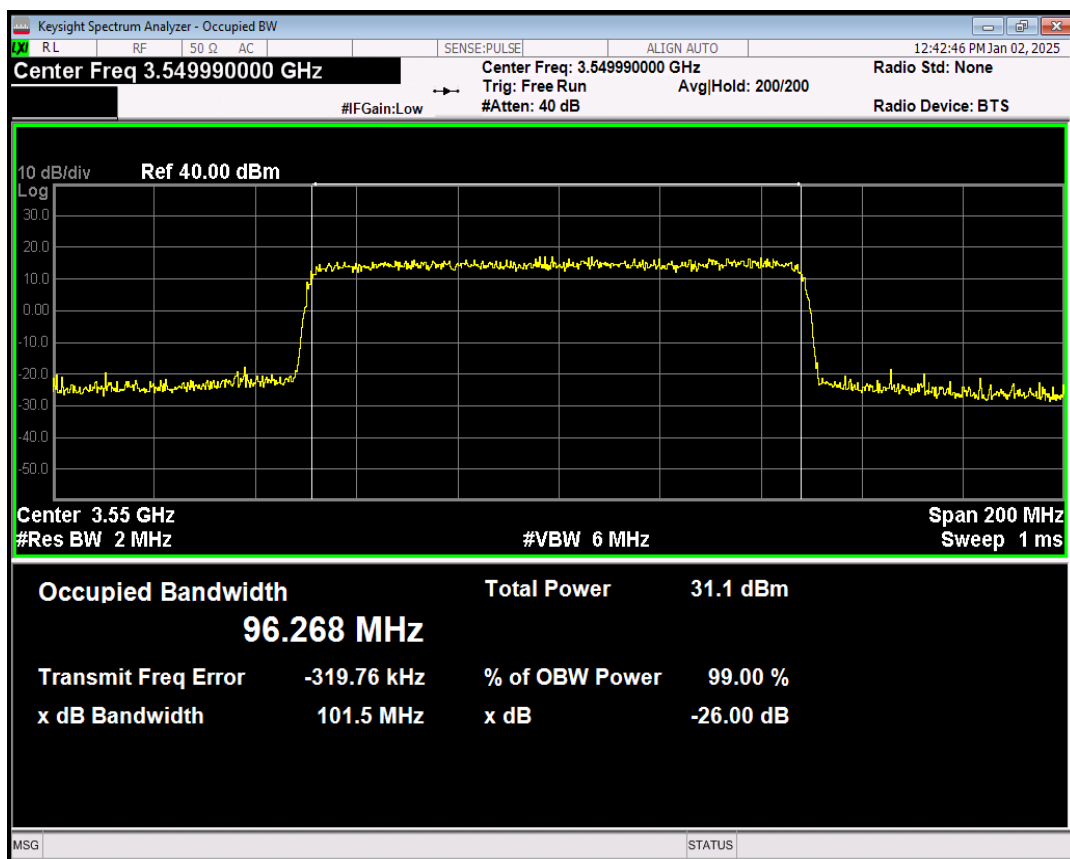

n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=636666 RB=270@0

