




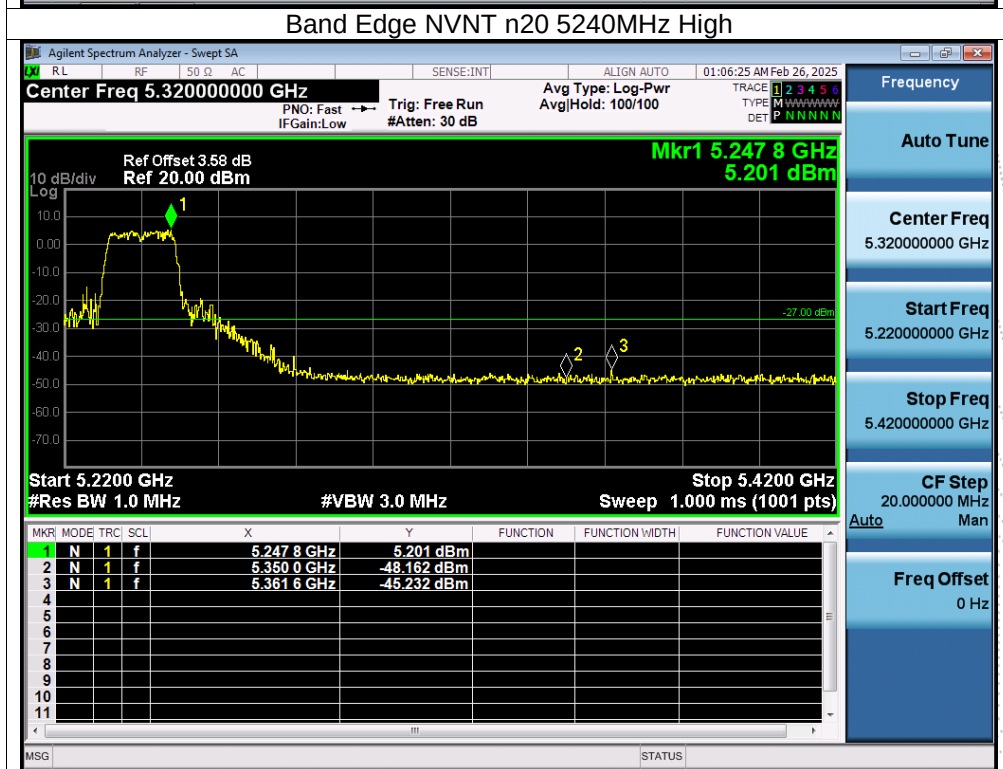
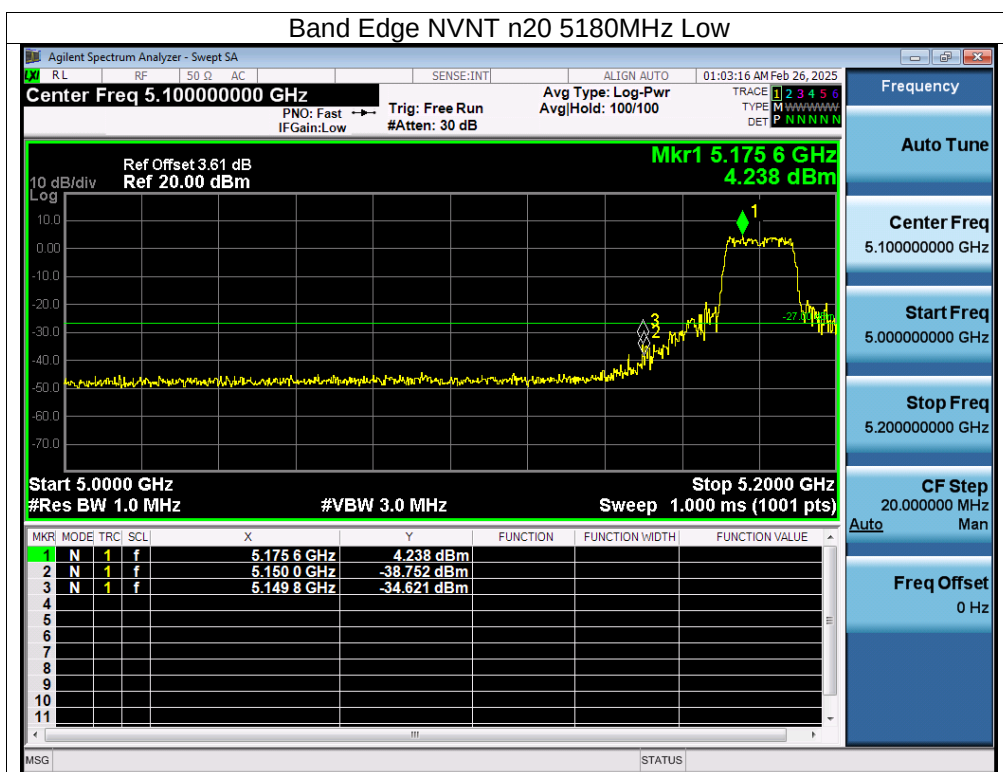
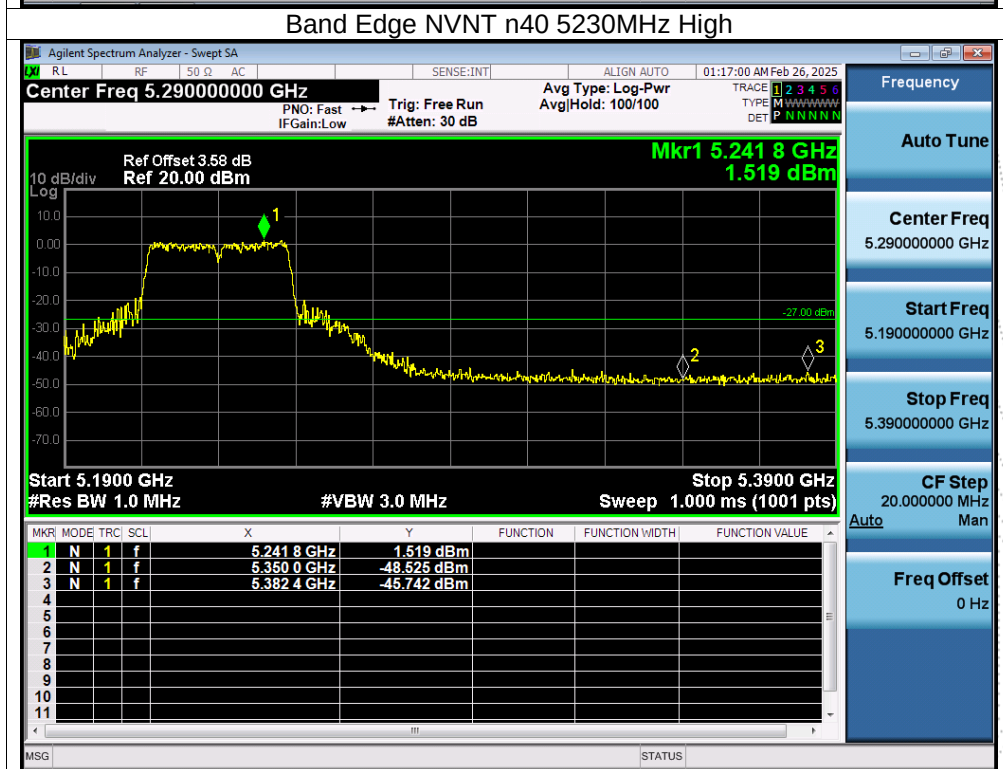
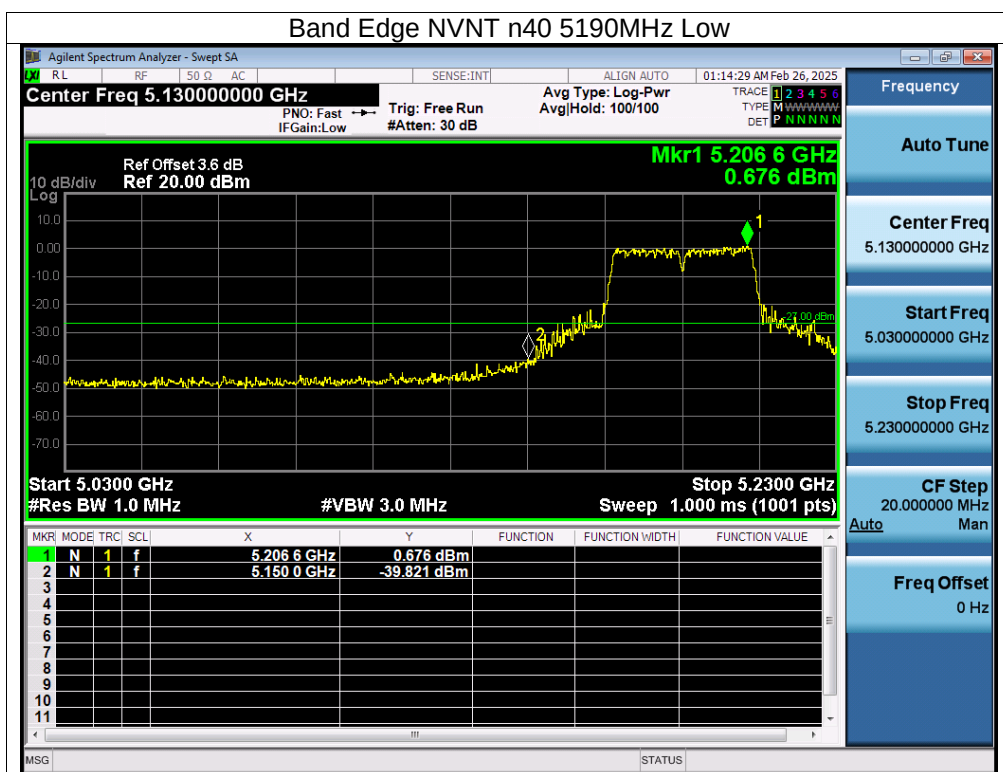
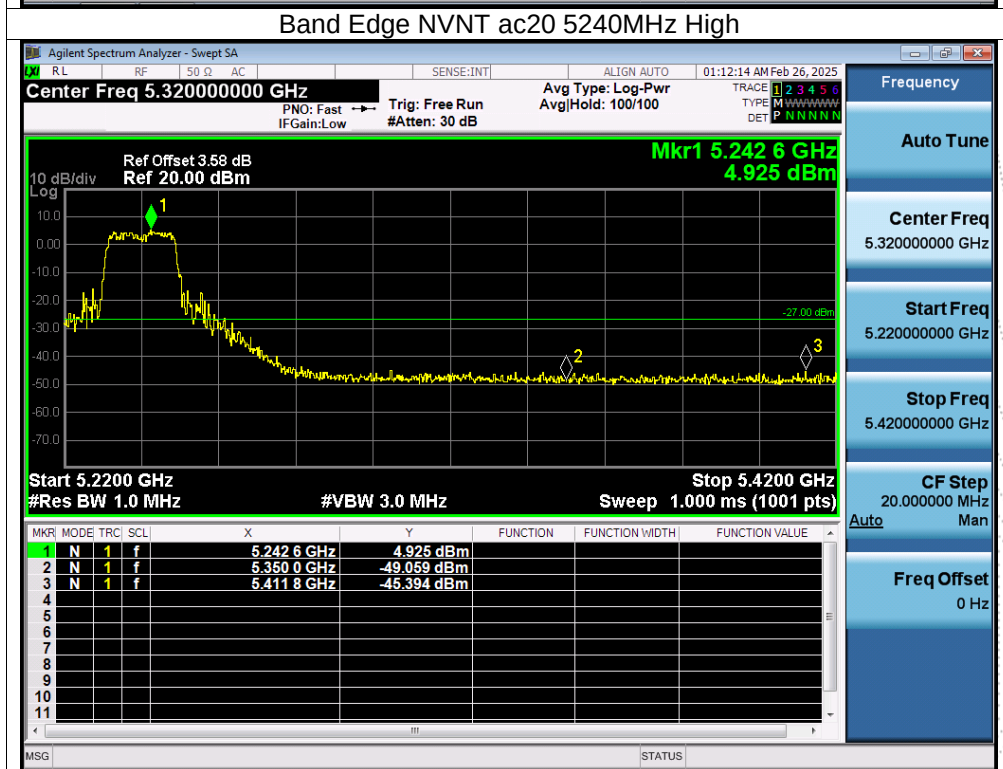


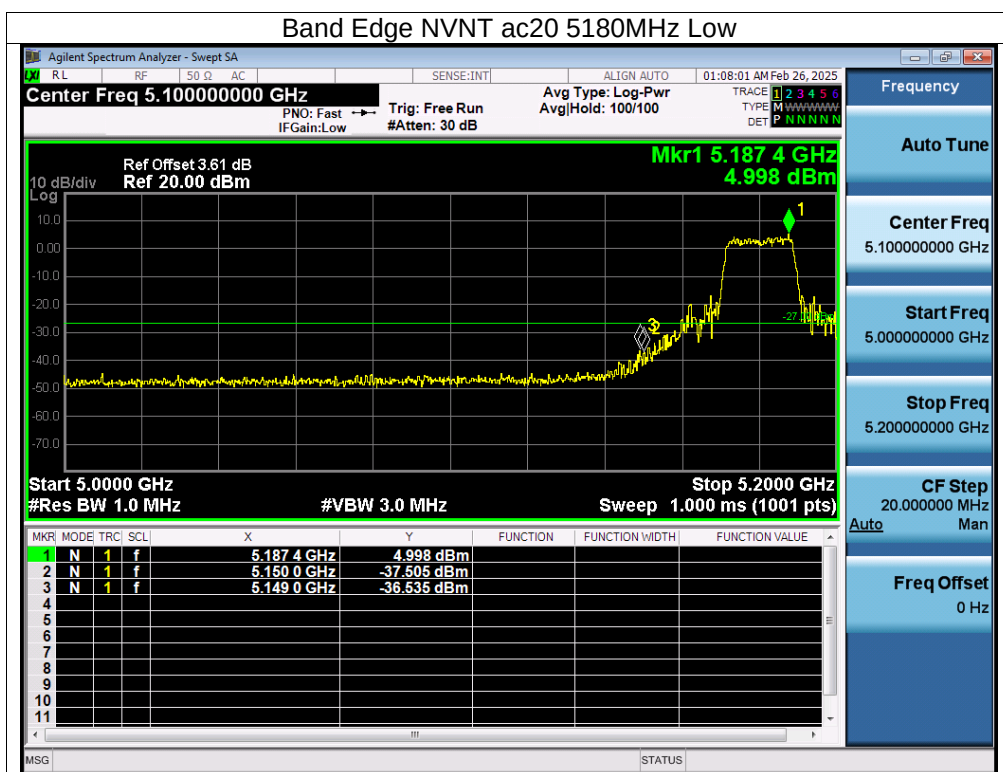


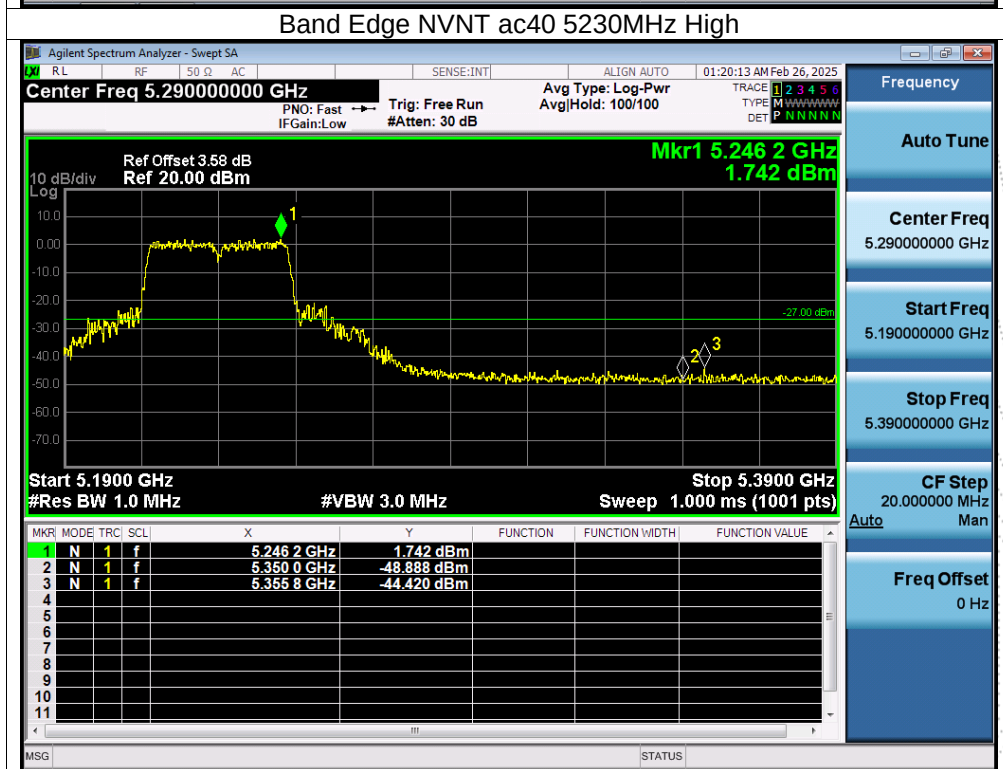



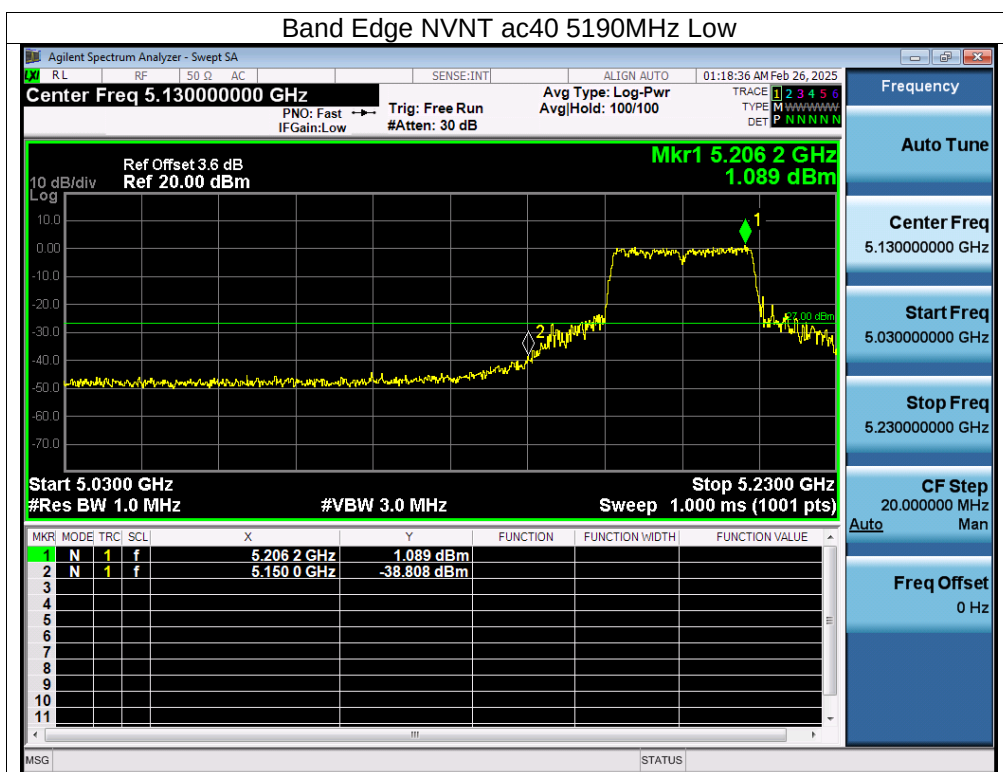



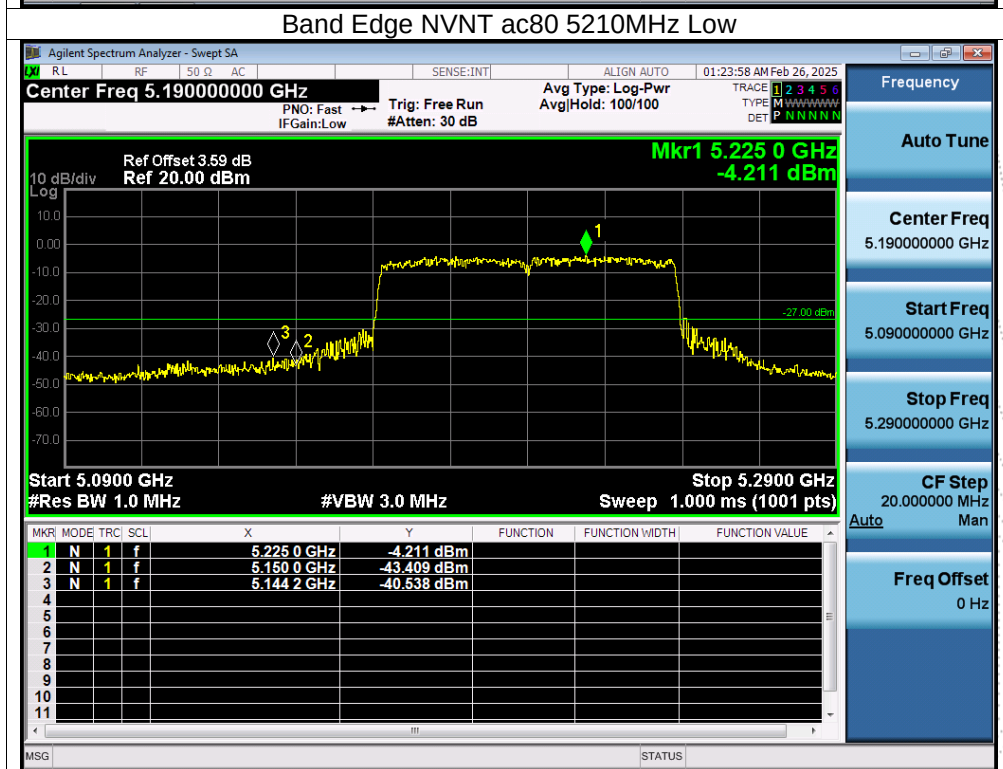



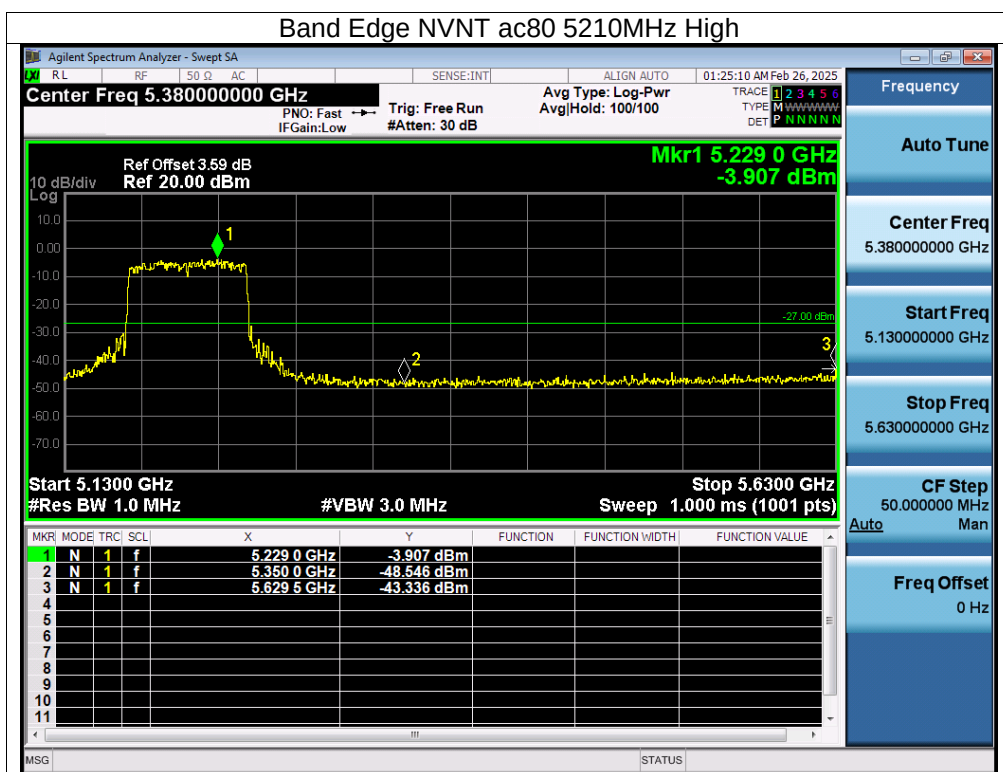






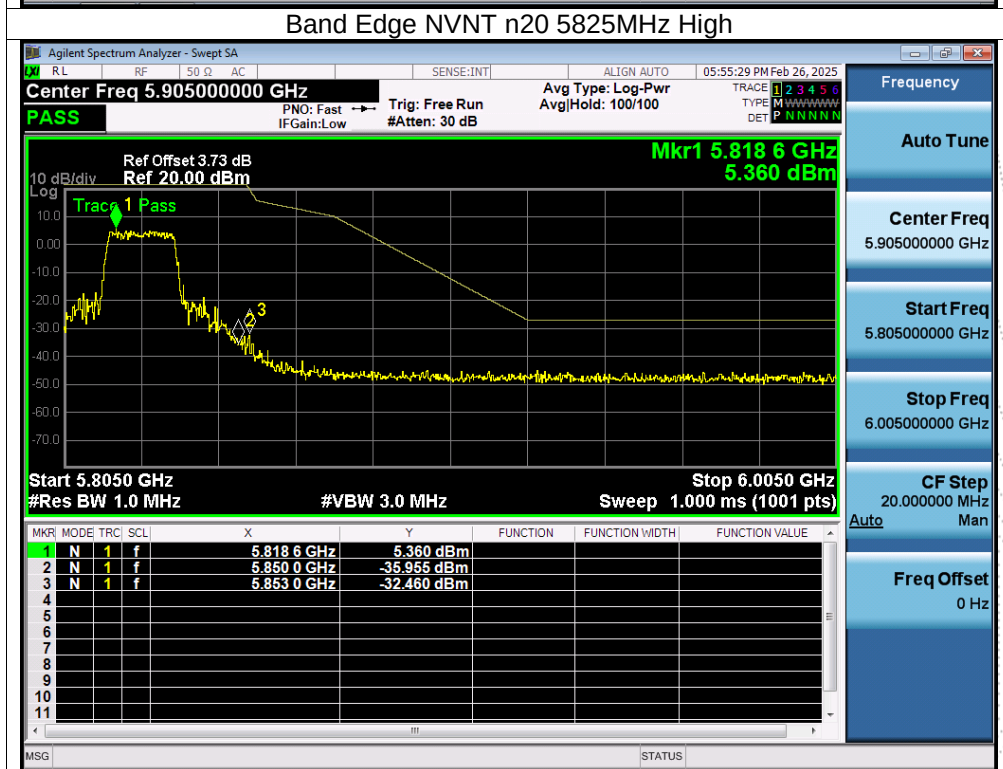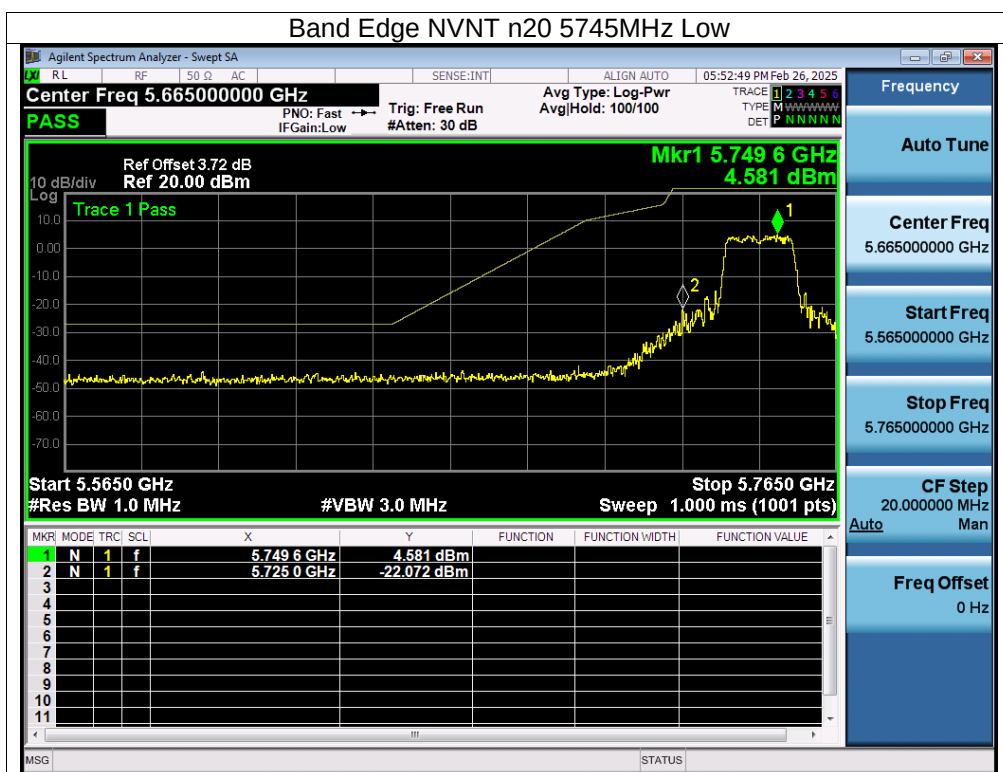

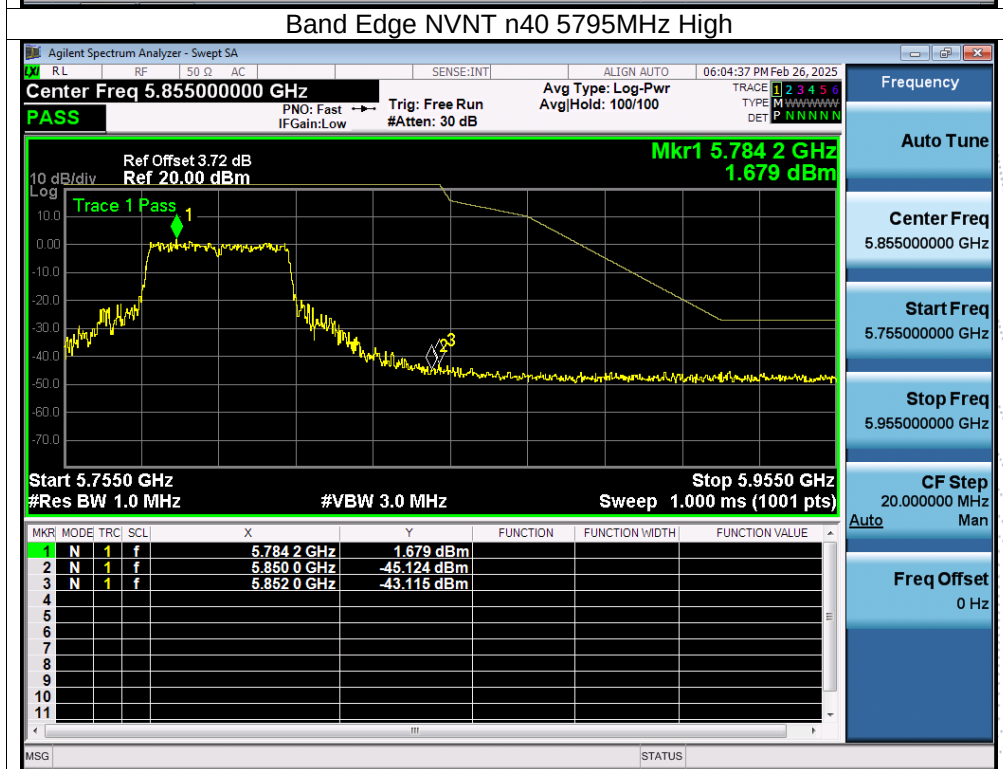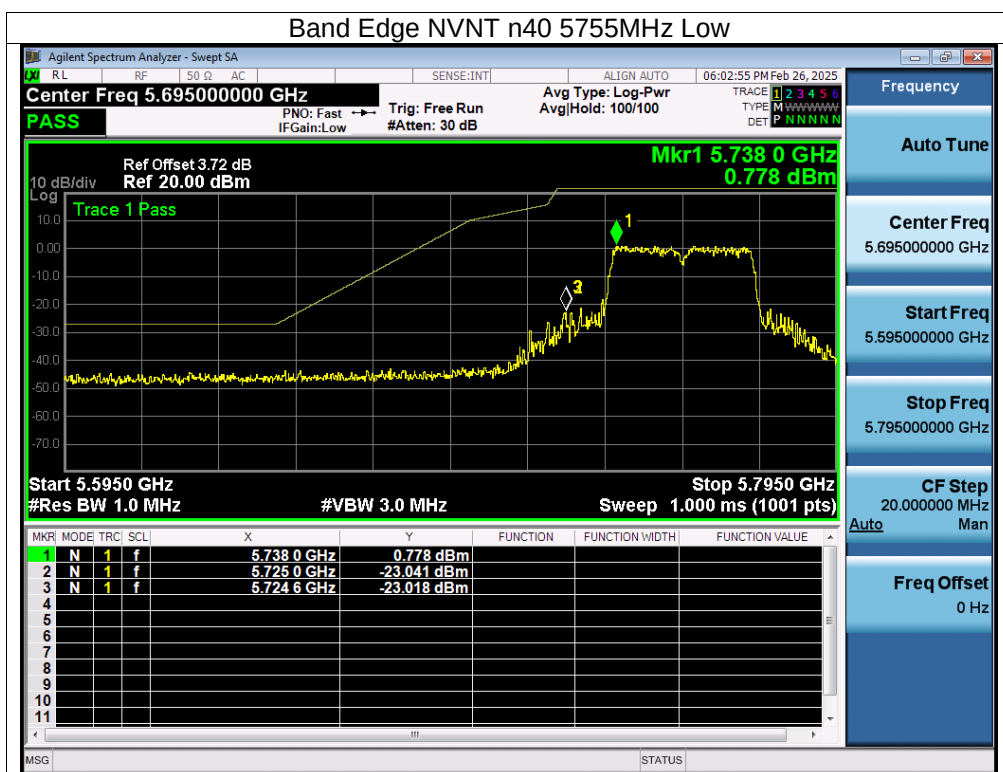

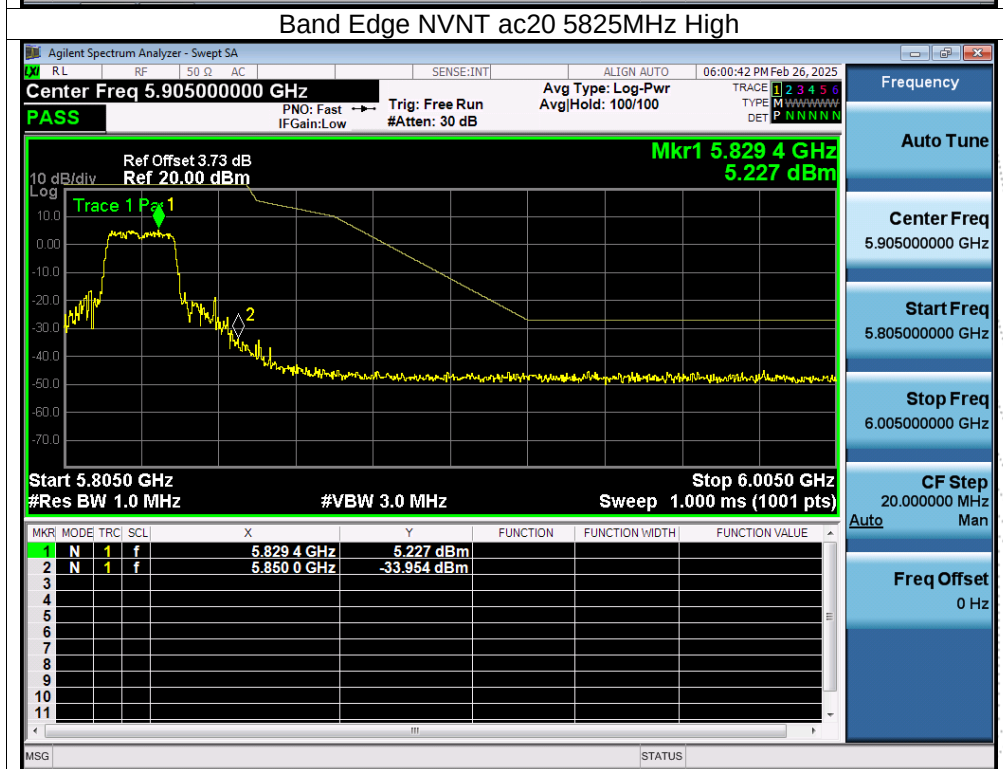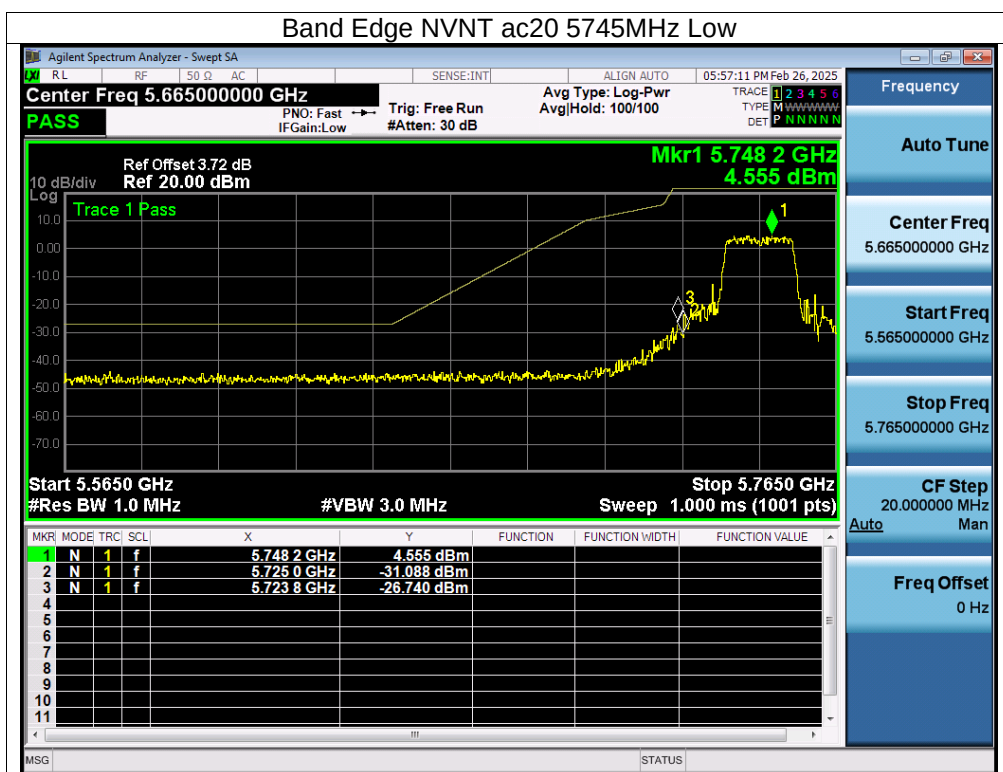

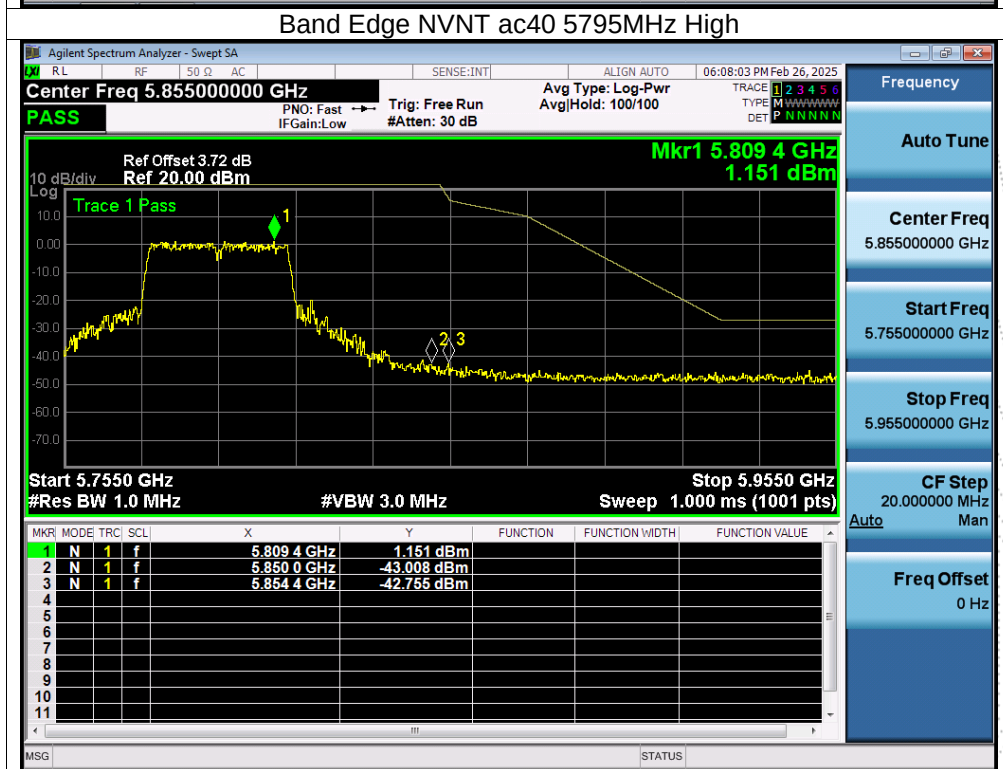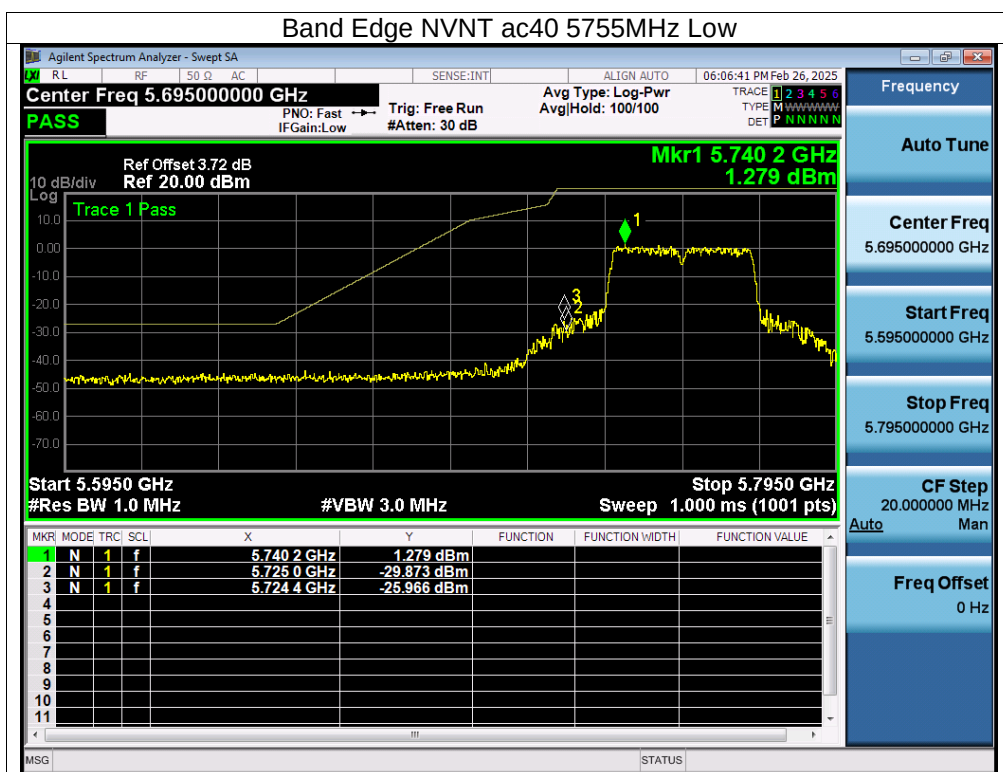

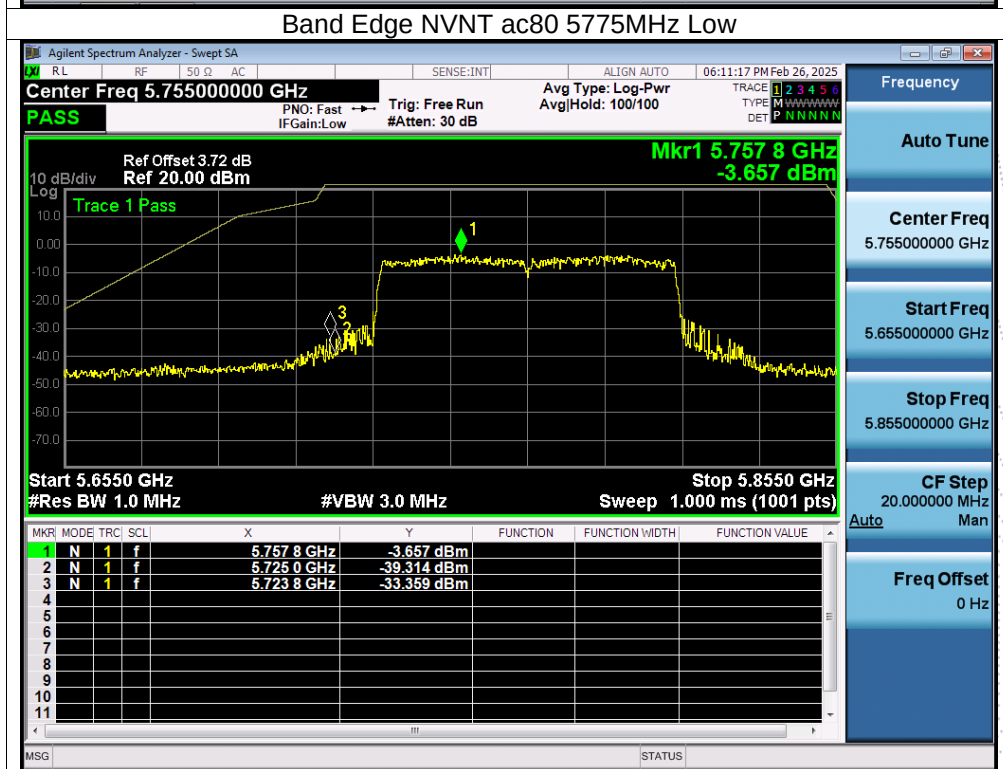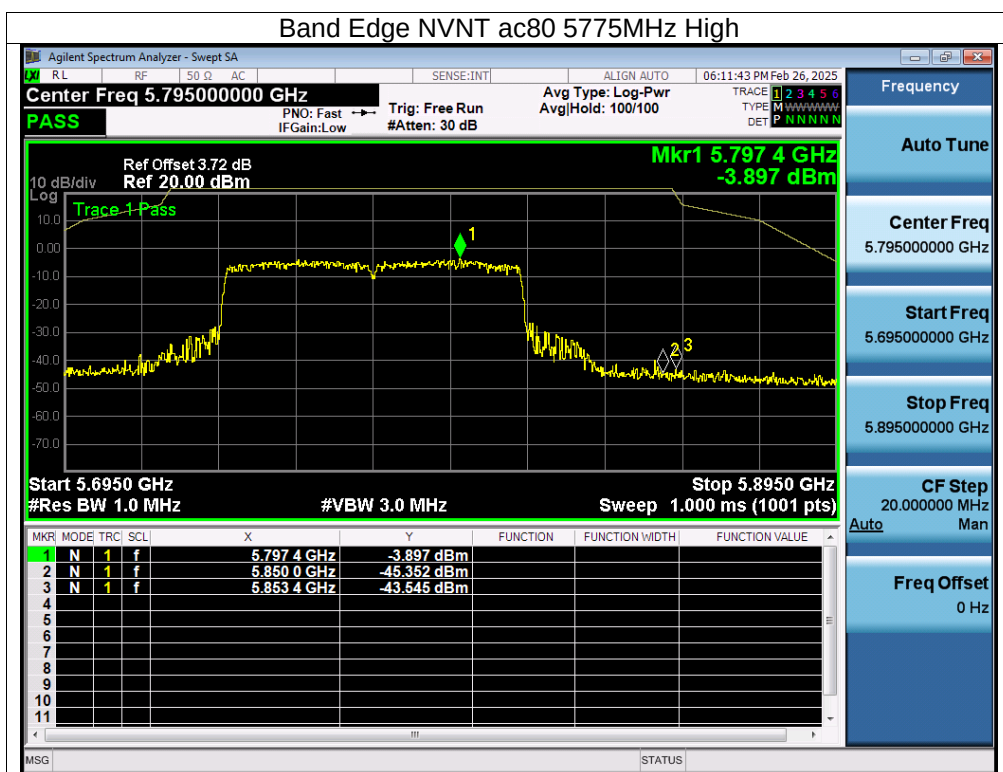

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup



12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..

12.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


12.4 Test Result

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


About: 26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Test Graphs



Tx. Spurious NVNT a 5180MHz Emission


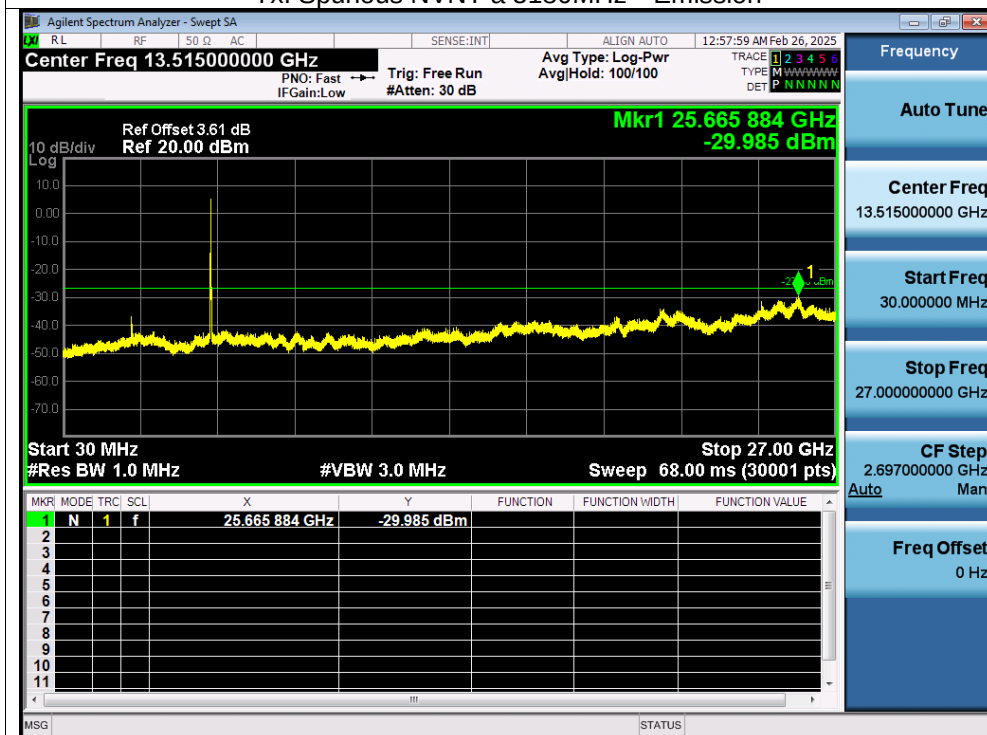




Tx. Spurious NVNT a 5200MHz Emission


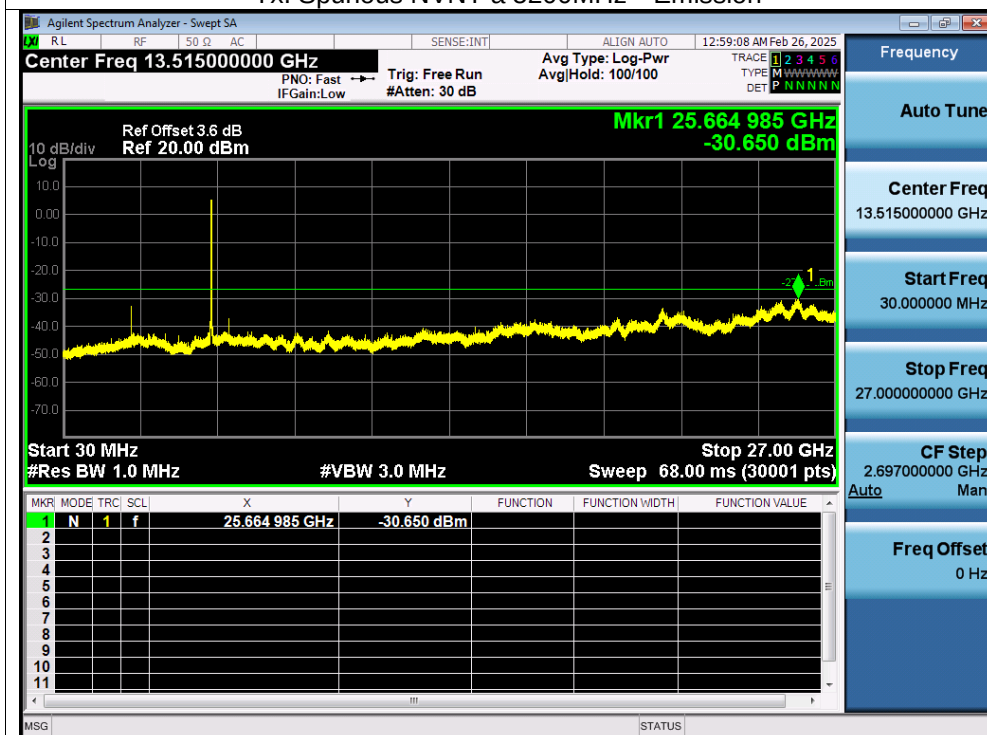


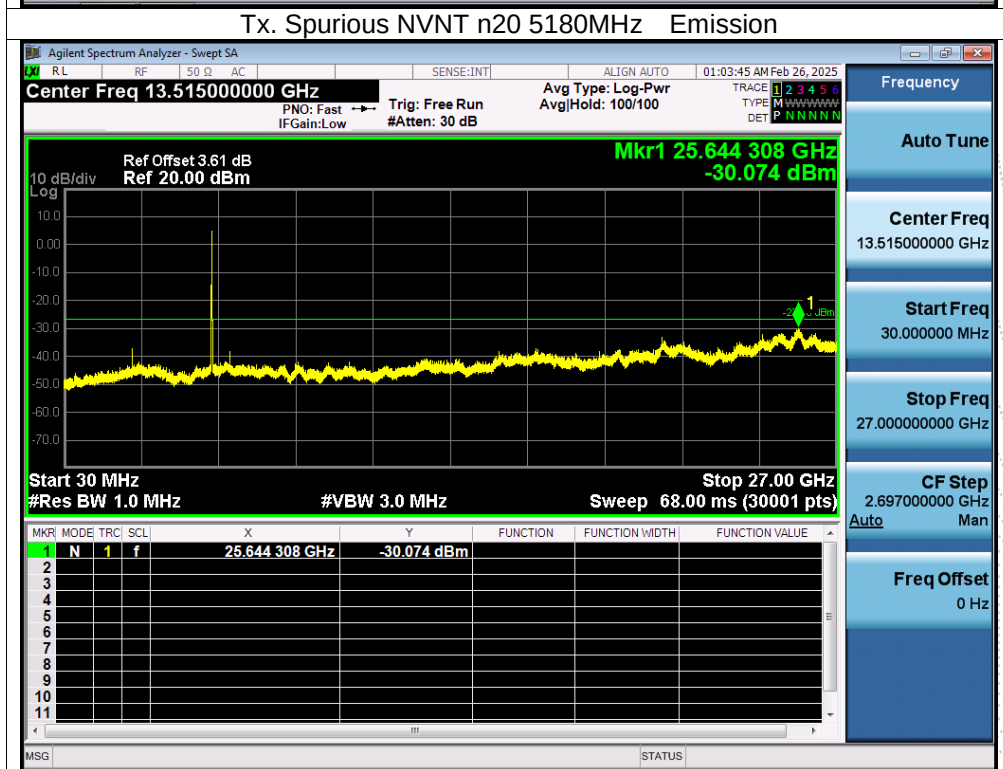
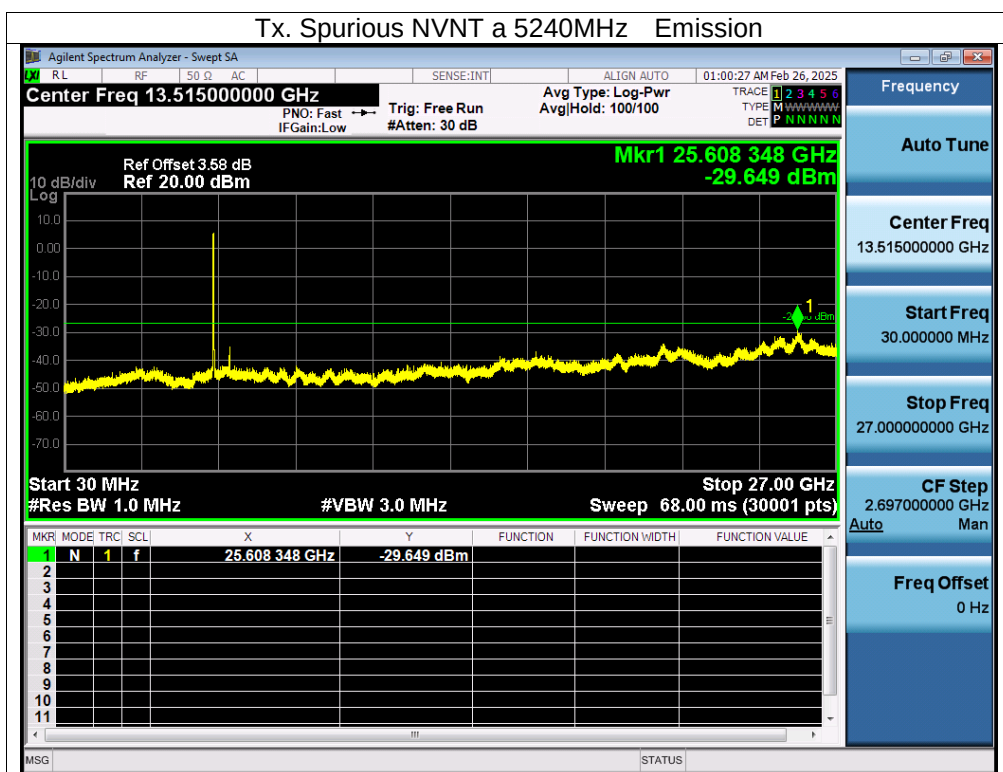


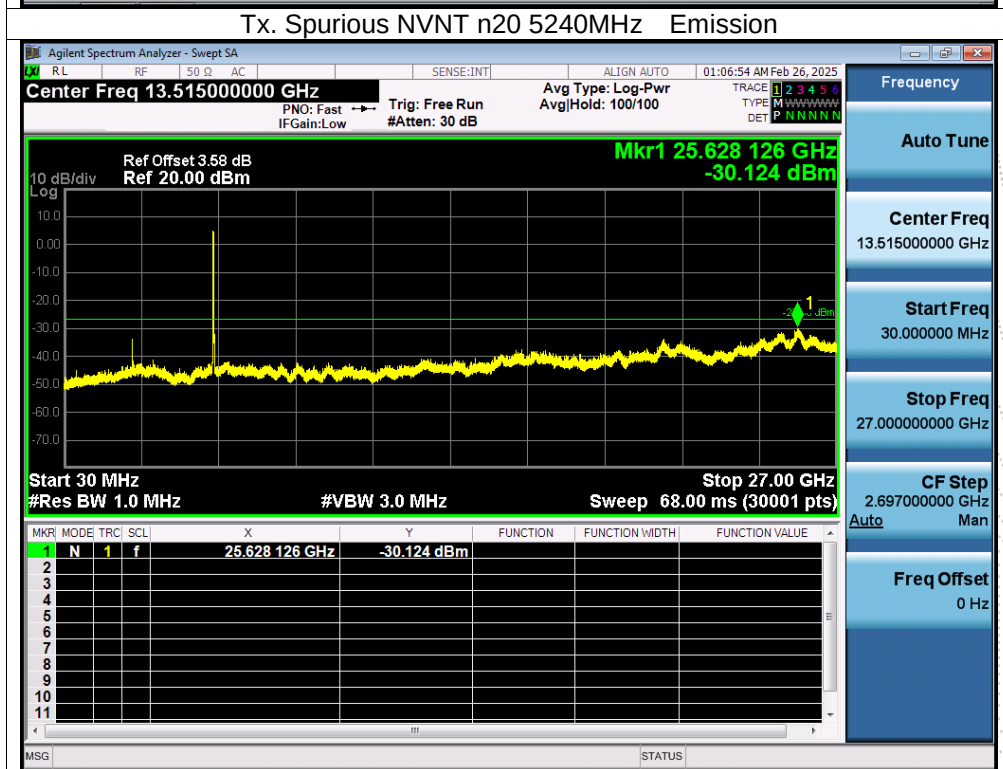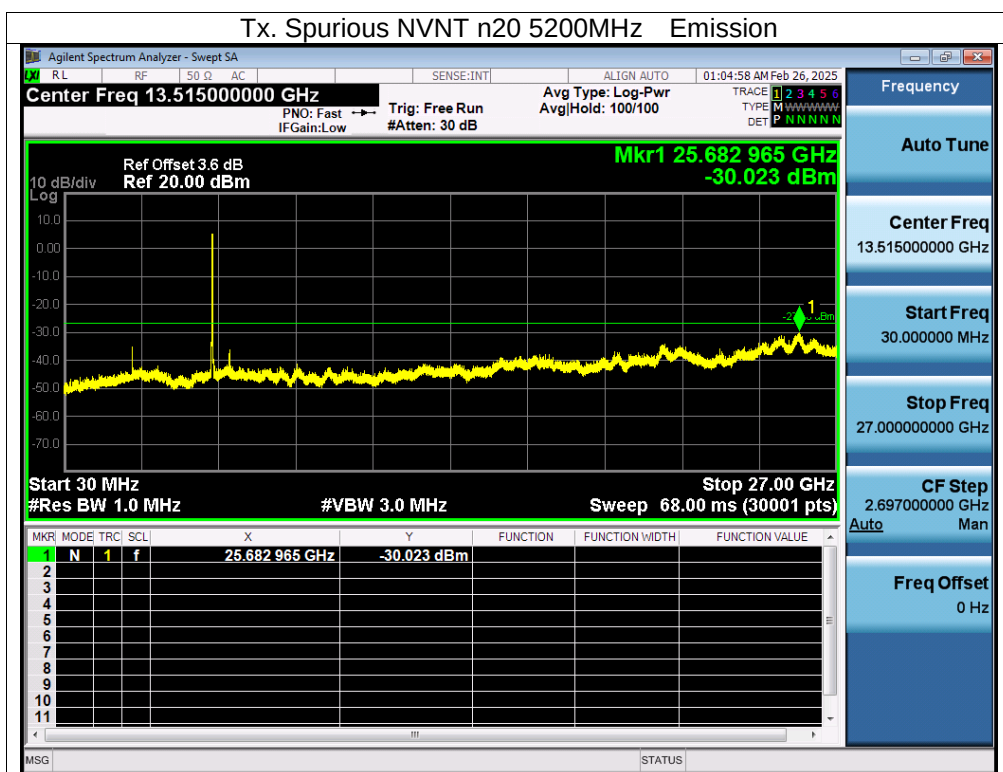

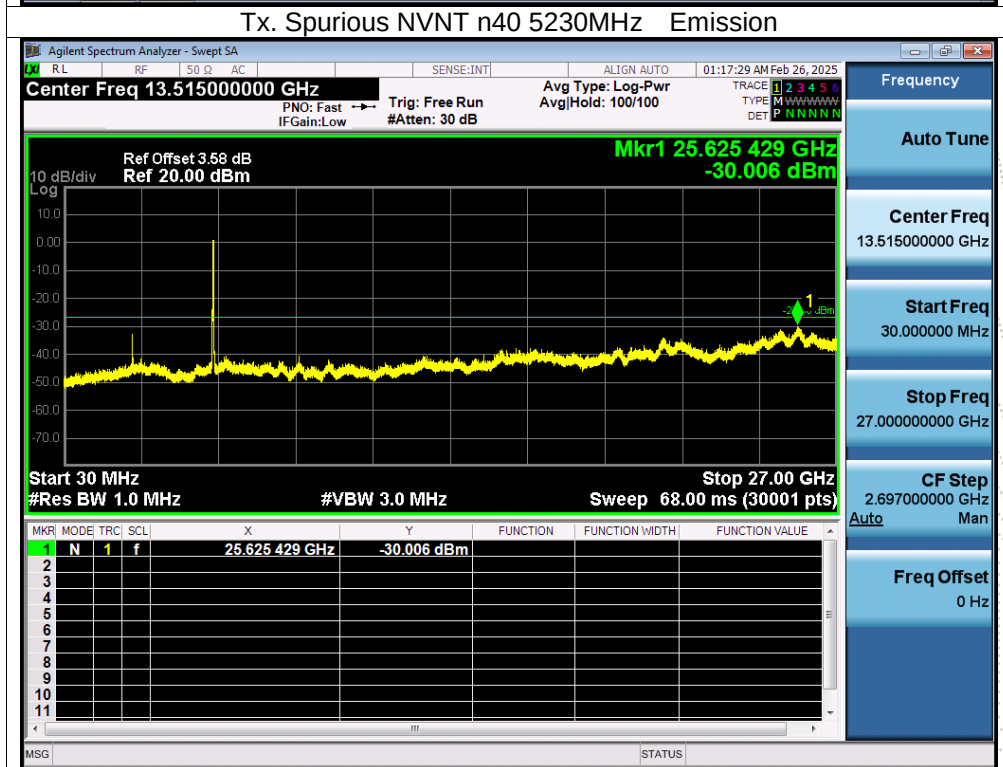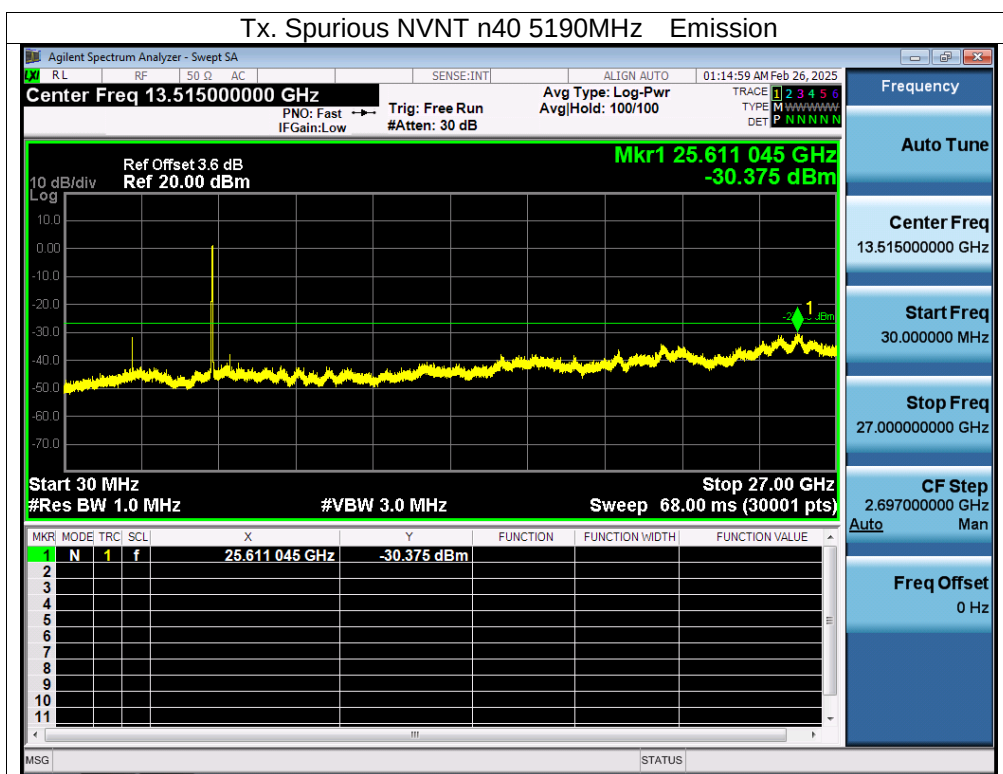

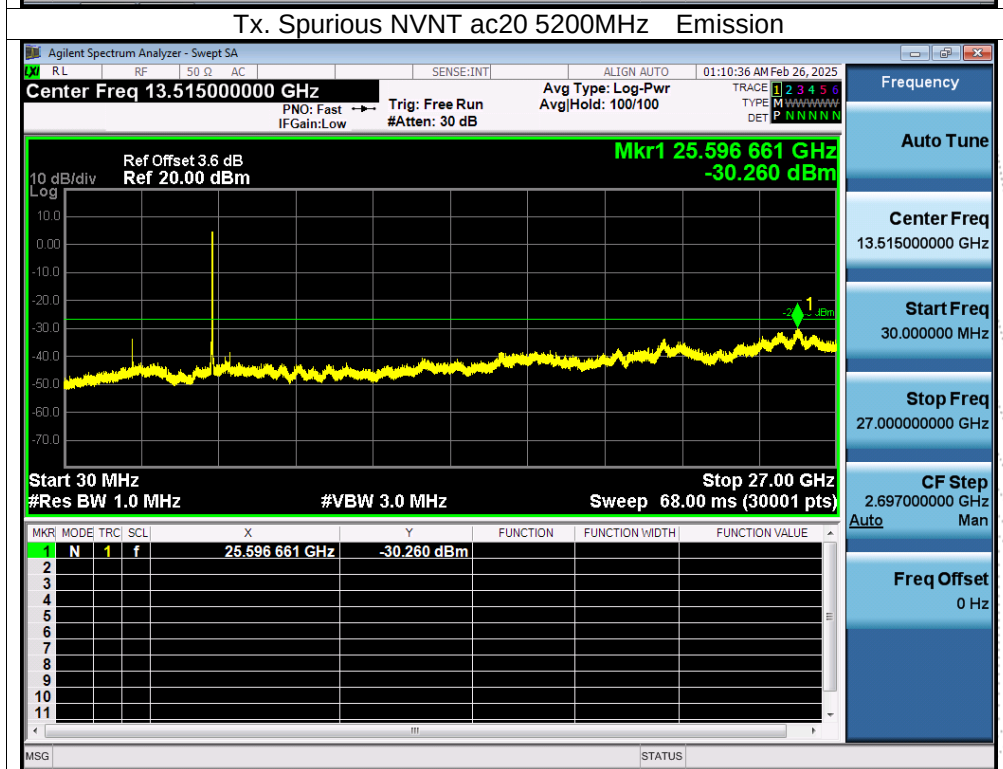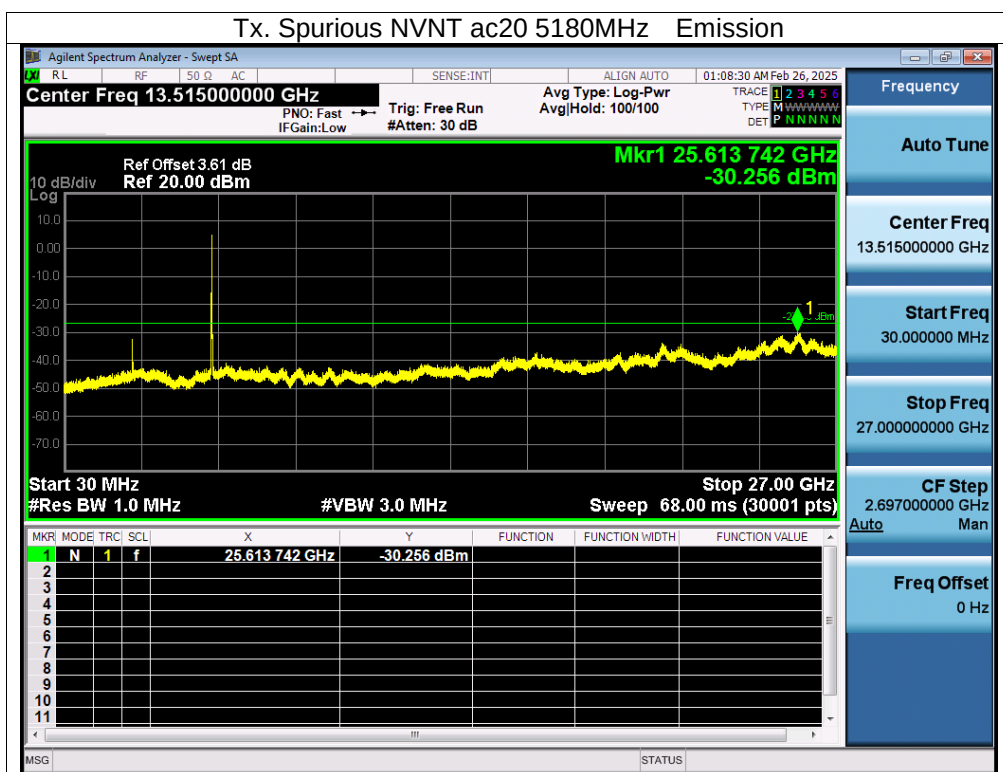


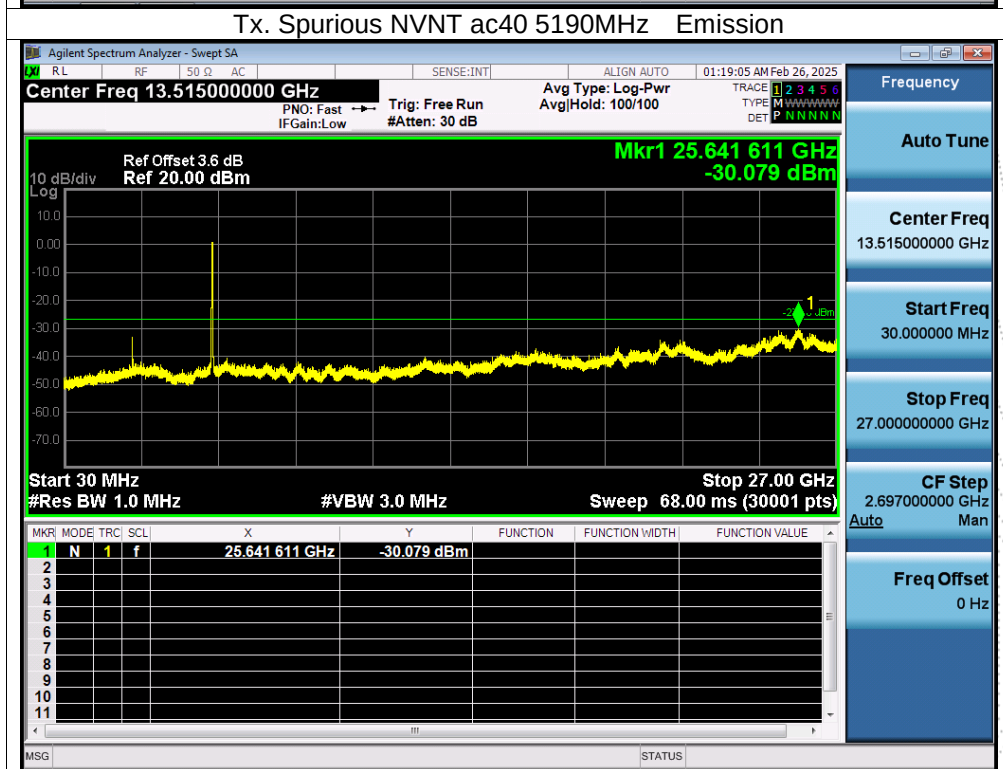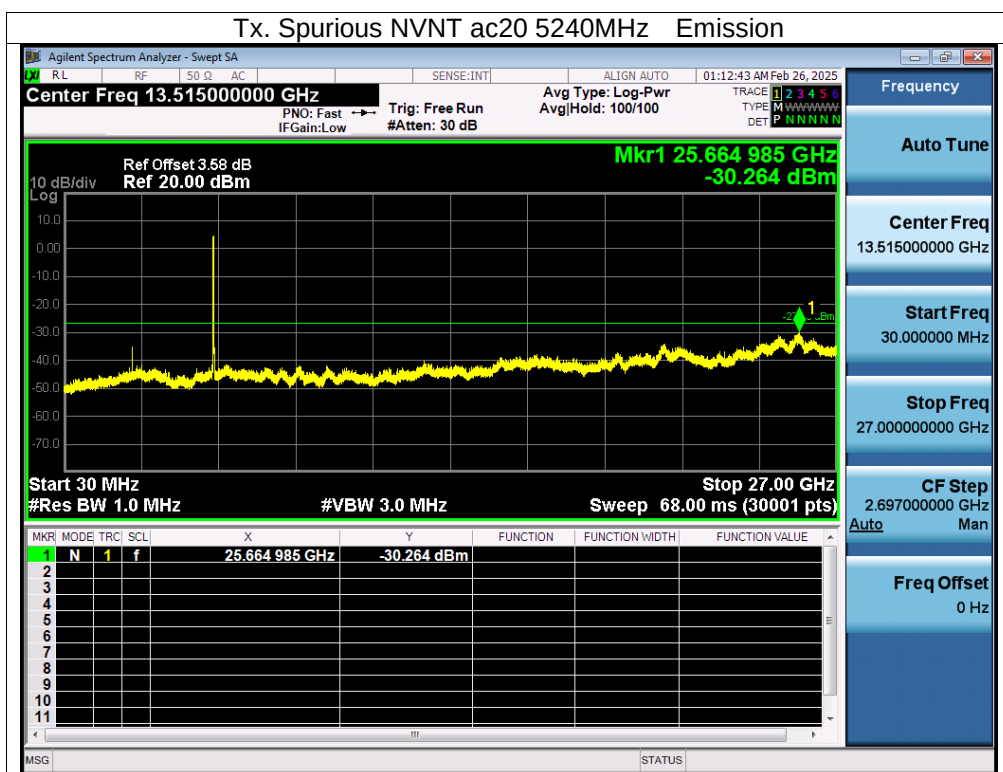

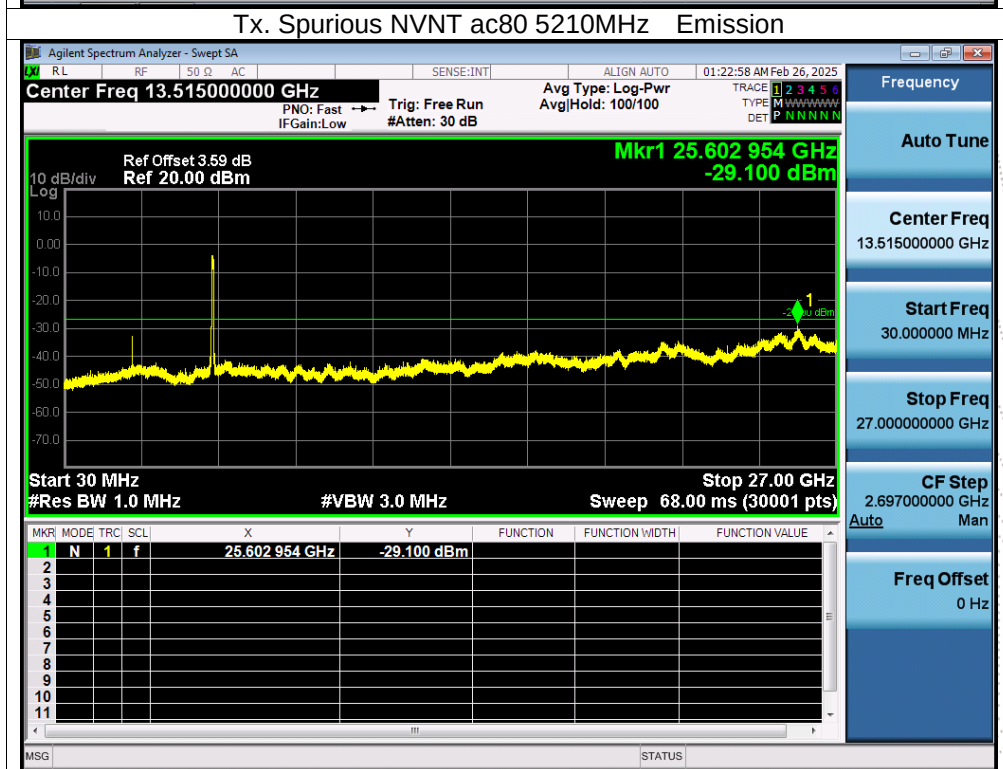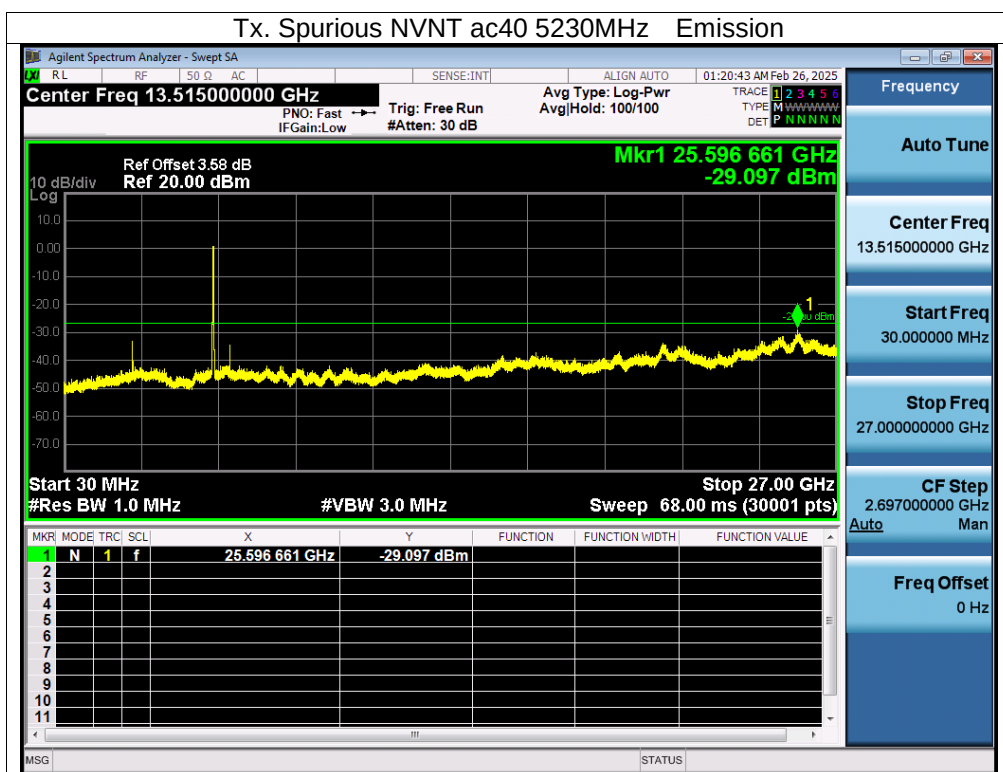




Test Graphs



Tx. Spurious NVNT a 5745MHz Emission


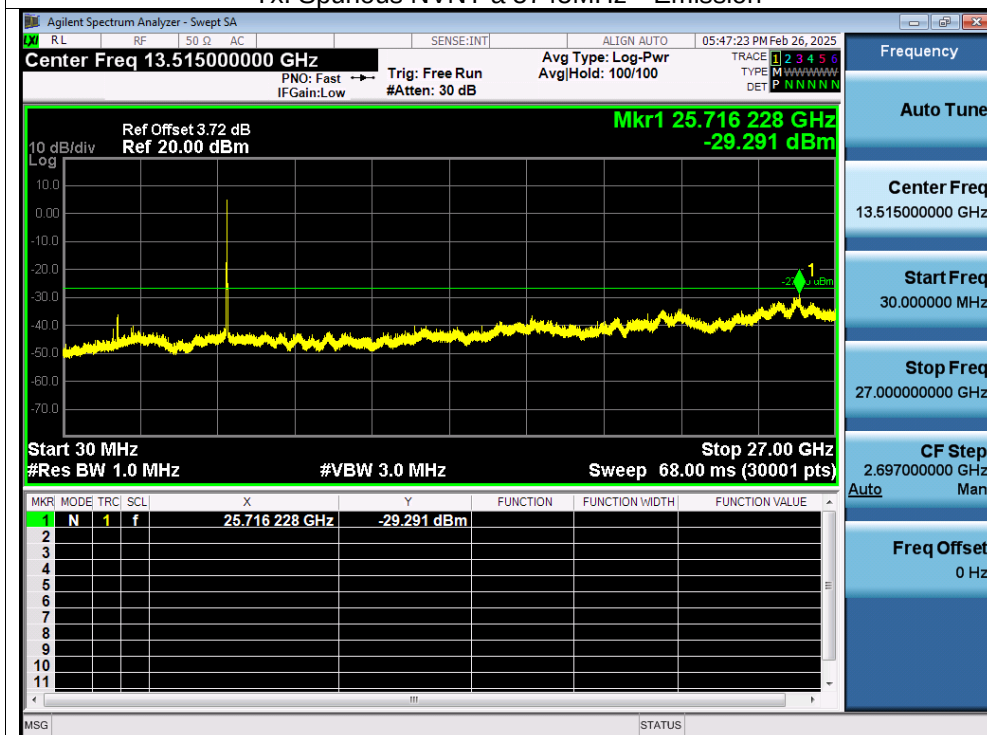




Tx. Spurious NVNT a 5785MHz Emission


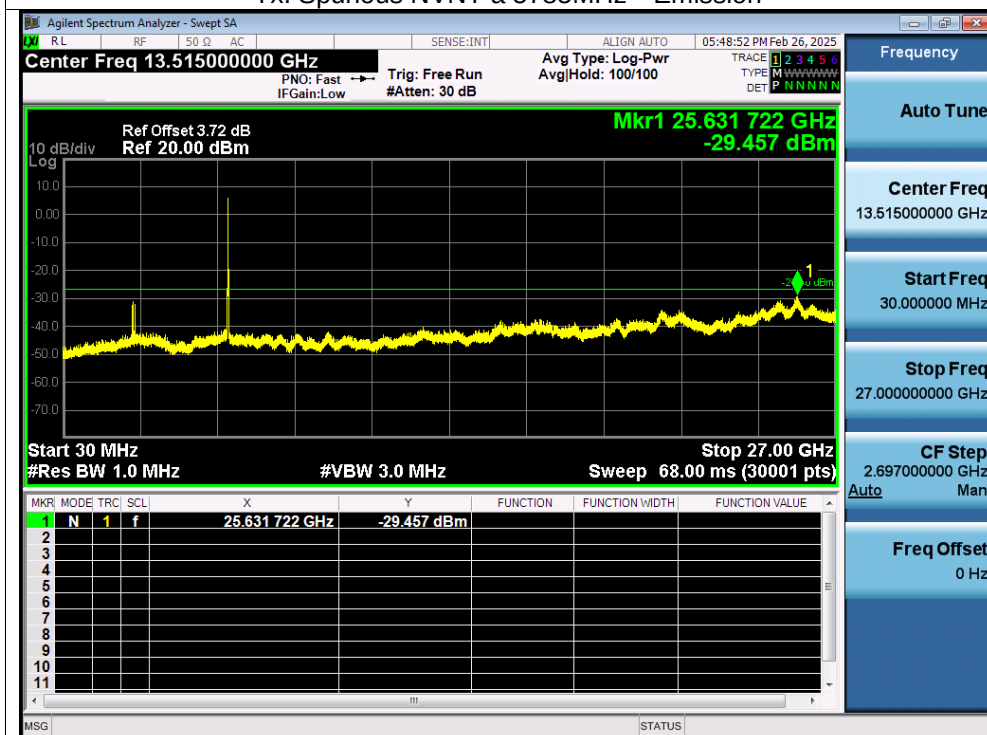


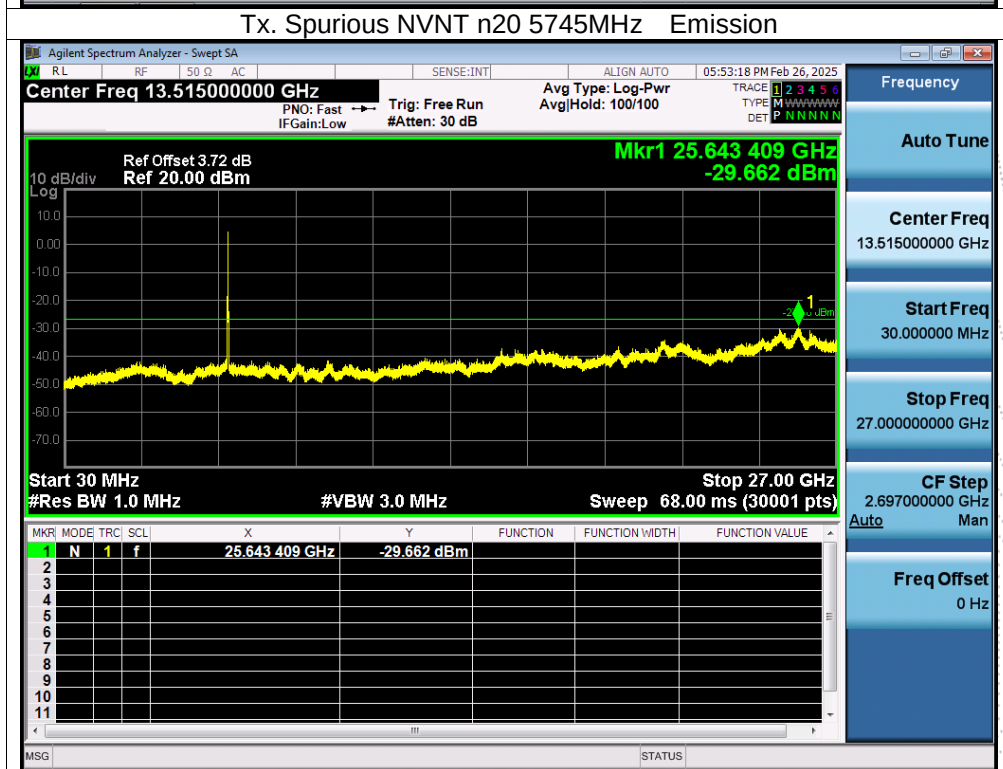
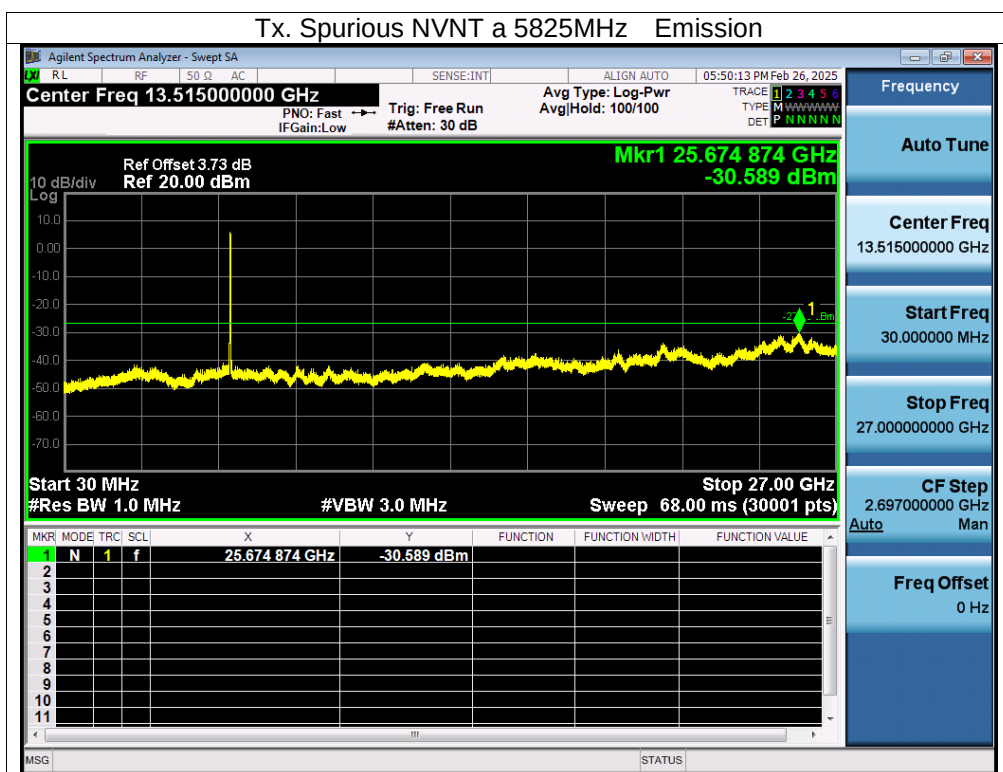


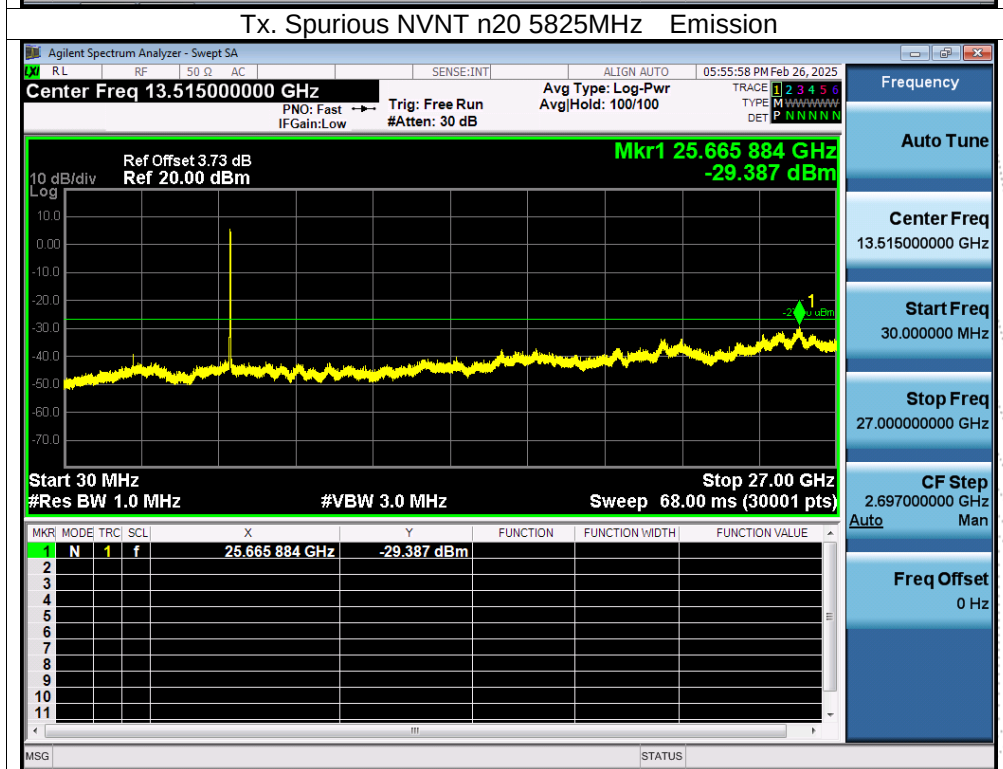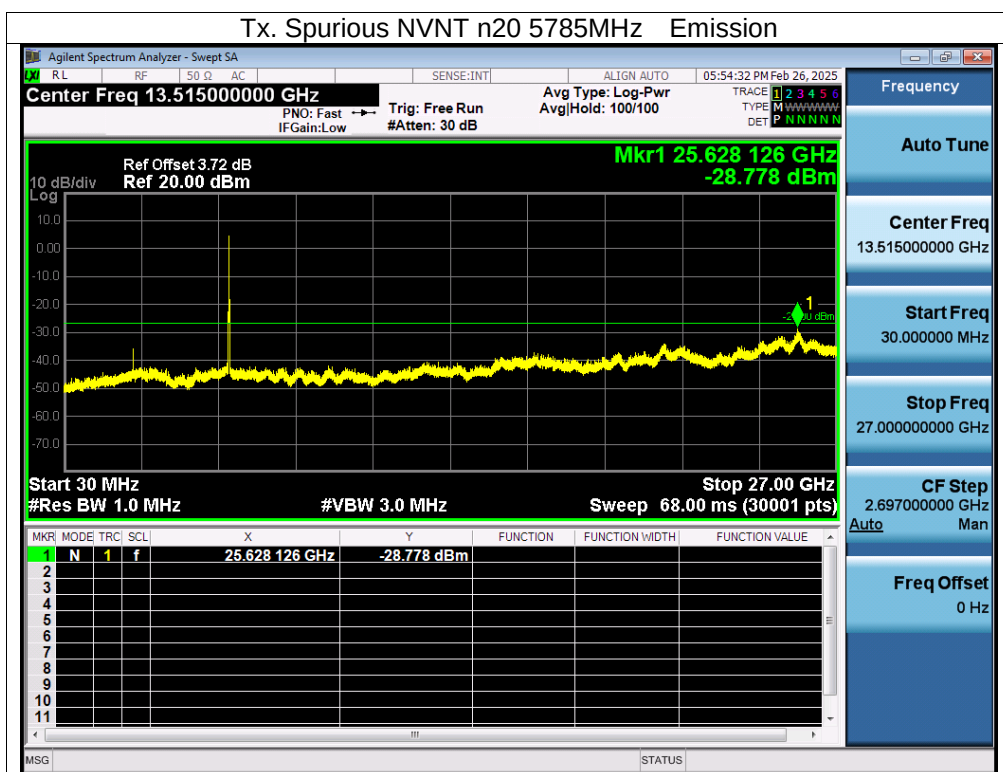

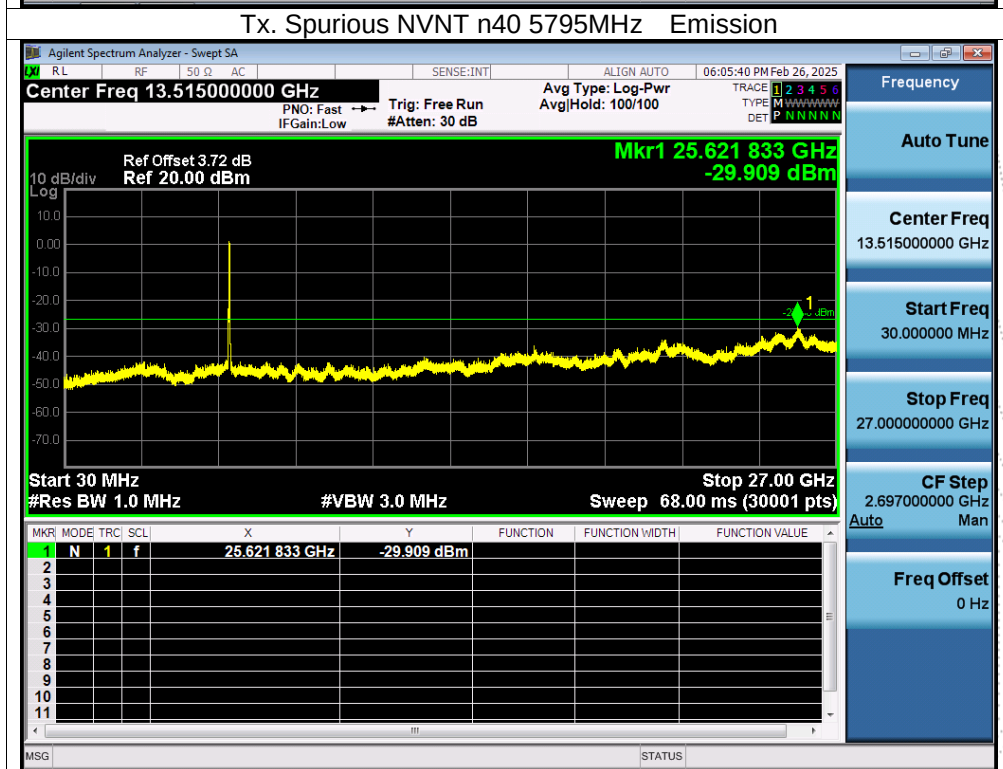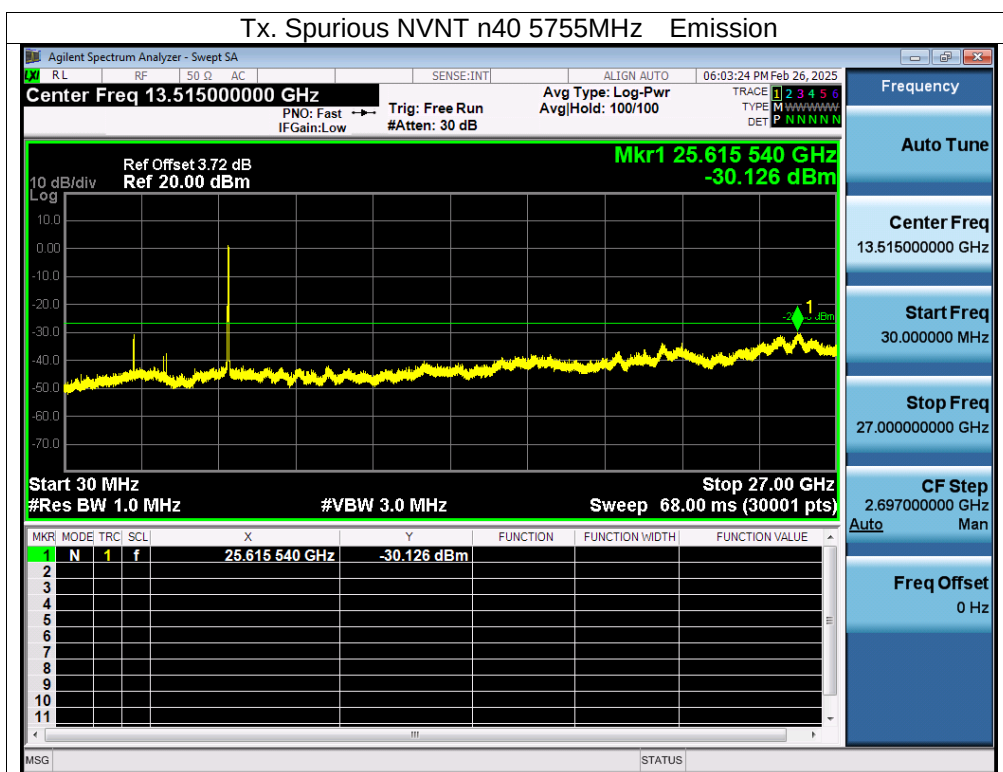

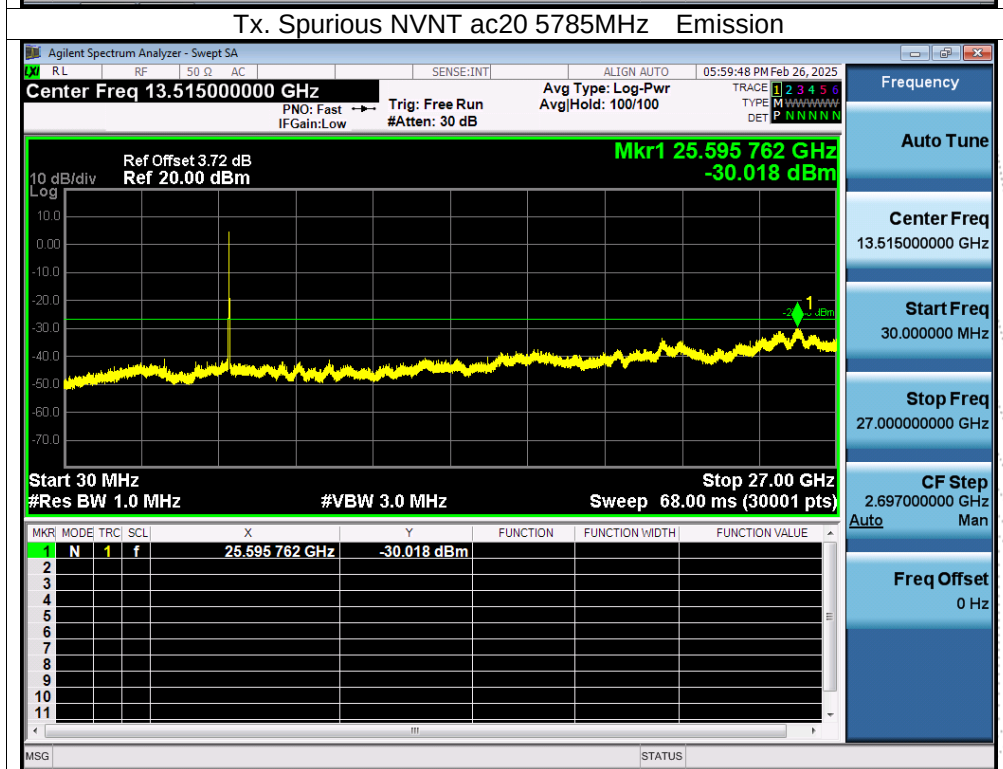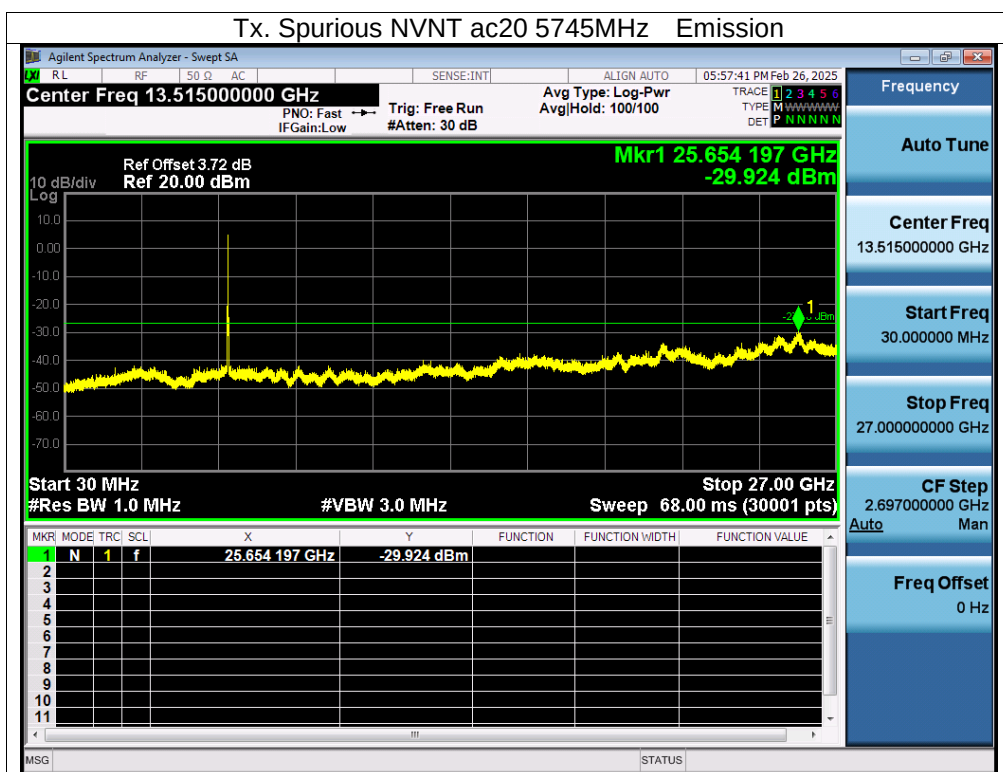


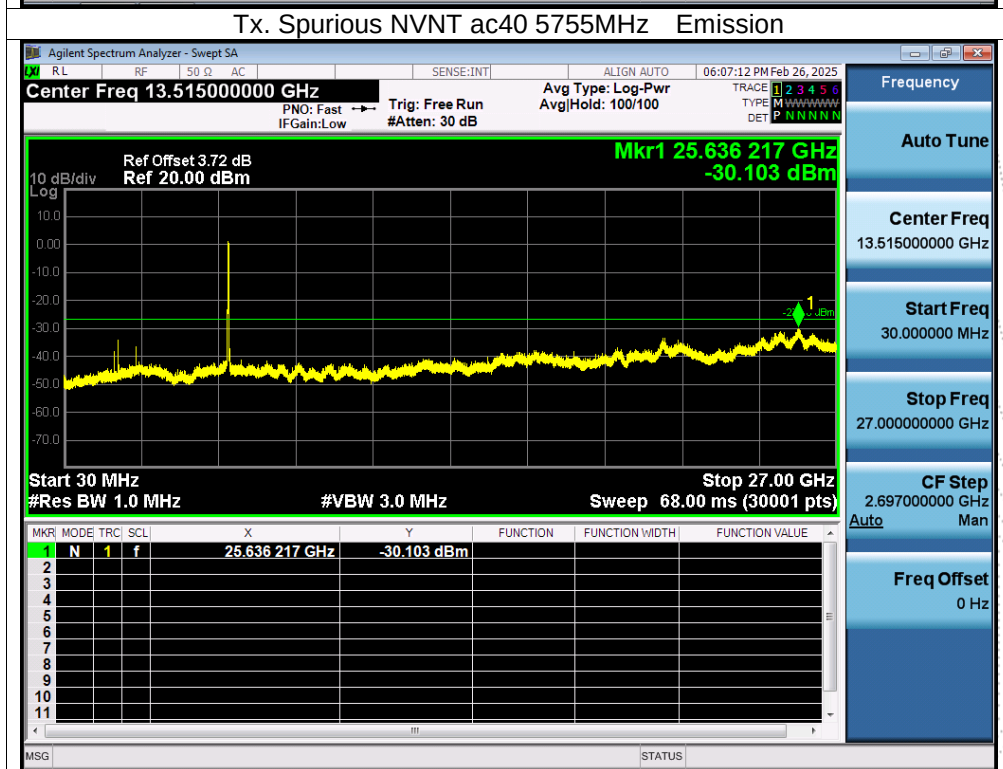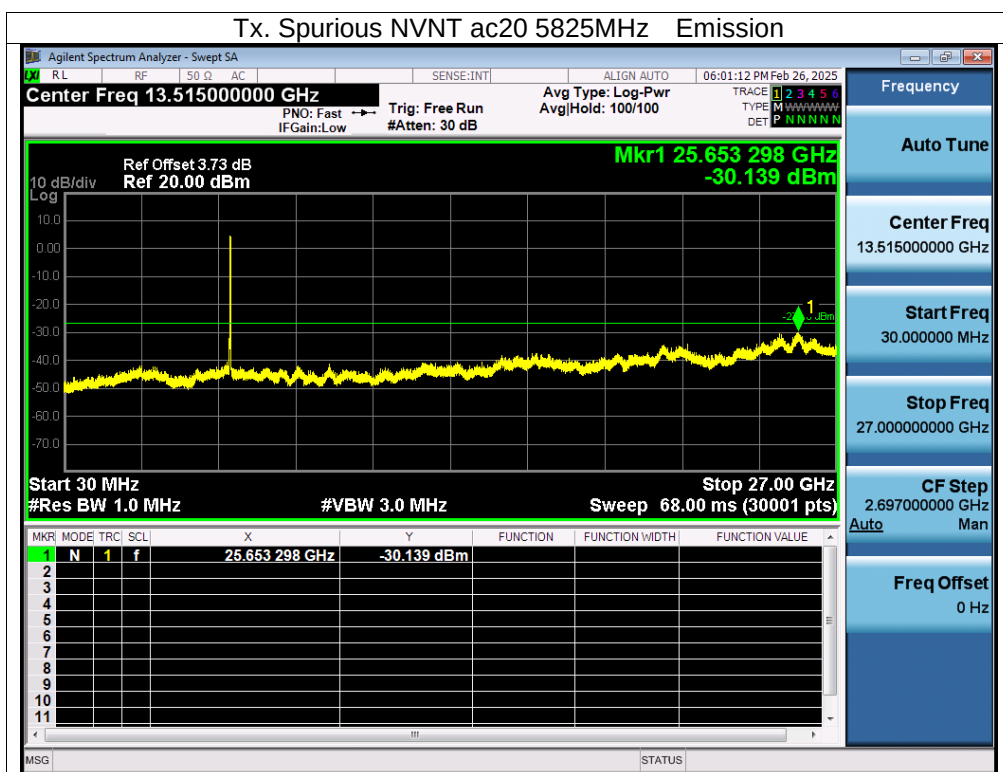

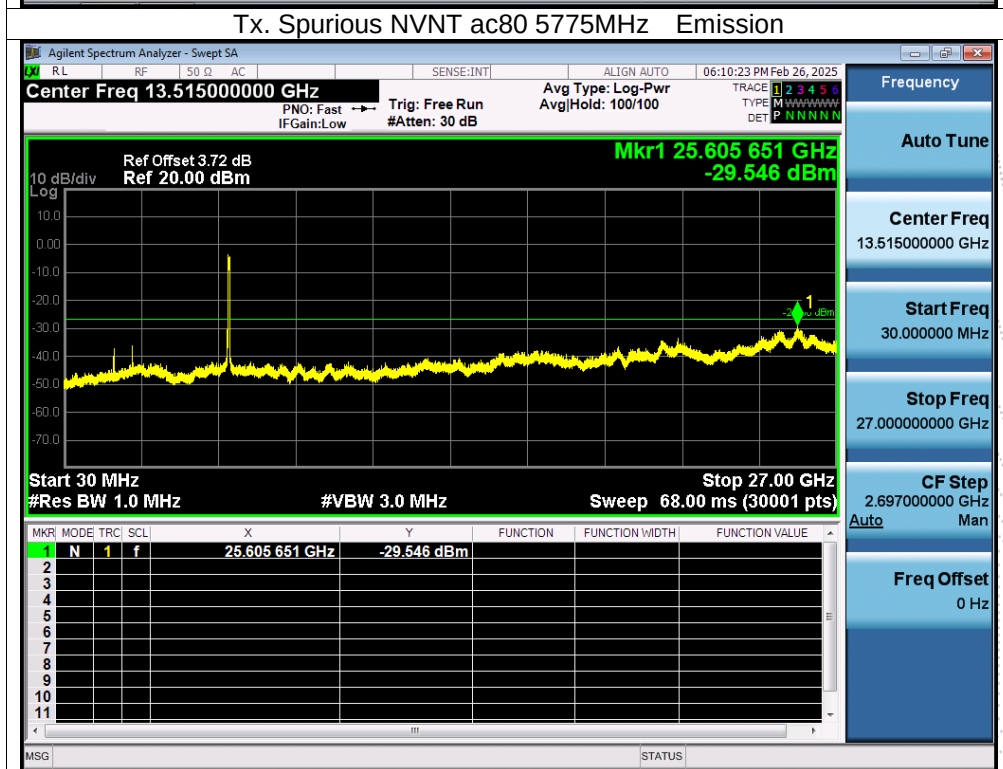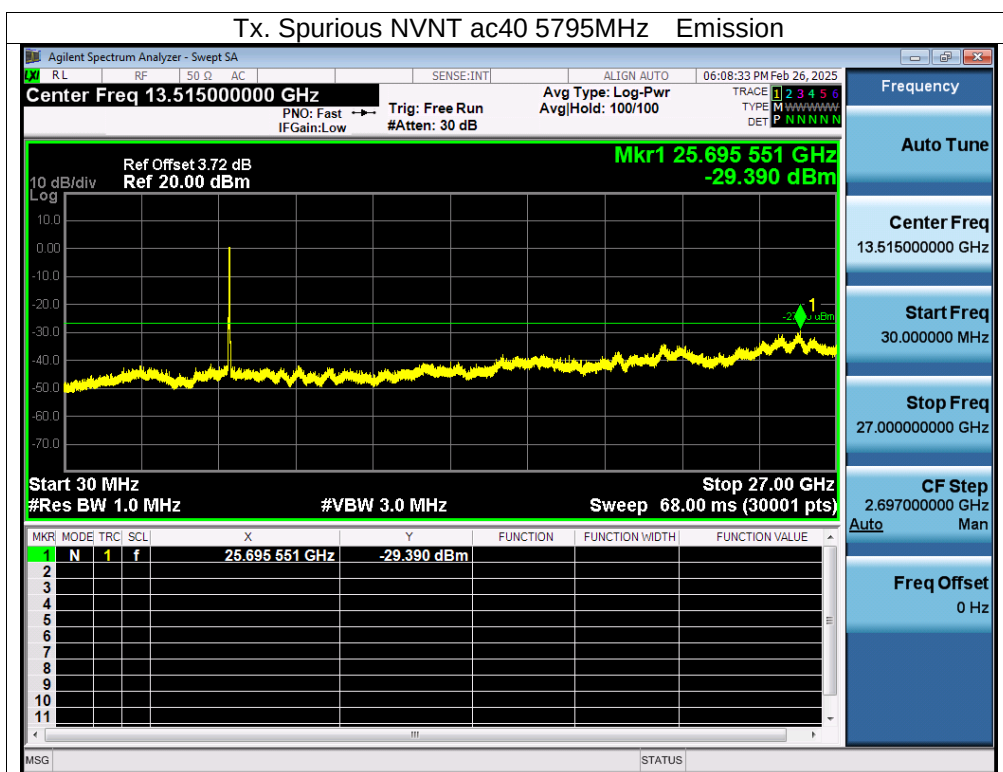

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

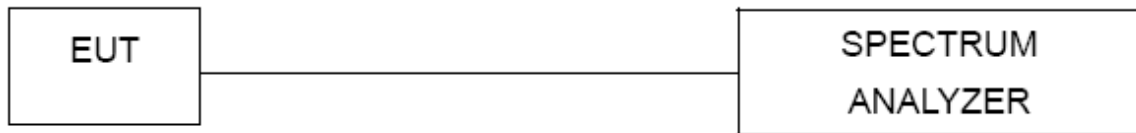

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.87V
Test Mode:	TX Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5180.0051	5180	0.0051	0.9846
		V max (V)	4.45	5180.0047	5180	0.0047	0.9073
		V min (V)	3.29	5180.0106	5180	0.0106	2.0463
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.87	T (°C)	-20	5180.0017	5180	0.0017	0.3282
		T (°C)	-10	5180.0020	5180	0.0020	0.3861
		T (°C)	0	5180.0081	5180	0.0081	1.5637
		T (°C)	10	5180.0078	5180	0.0078	1.5058
		T (°C)	20	5180.0022	5180	0.0022	0.4247
		T (°C)	30	5180.0079	5180	0.0079	1.5251
		T (°C)	40	5180.0051	5180	0.0051	0.9846
		T (°C)	50	5180.0077	5180	0.0077	1.4865
		T (°C)	60	5180.0036	5180	0.0036	0.6950
		T (°C)	70	5180.0107	5180	0.0107	2.0656
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5200.0028	5200	0.0028	0.5385
		V max (V)	4.45	5200.0121	5200	0.0121	2.3269
		V min (V)	3.29	5200.0072	5200	0.0072	1.3846
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.87	T (°C)	-20	5200.00250	5200	0.00250	0.4808
		T (°C)	-10	5200.00390	5200	0.00390	0.7500
		T (°C)	0	5200.00060	5200	0.00060	0.1154
		T (°C)	10	5200.01060	5200	0.01060	2.0385
		T (°C)	20	5200.00240	5200	0.00240	0.4615
		T (°C)	30	5200.00560	5200	0.00560	1.0769
		T (°C)	40	5200.00000	5200	0.00000	0.0000
		T (°C)	50	5200.00090	5200	0.00090	0.1731
		T (°C)	60	5200.00640	5200	0.00640	1.2308
		T (°C)	70	5200.00570	5200	0.00570	1.0962
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5240.0125	5240	0.0125	2.3855
		V max (V)	4.45	5240.0110	5240	0.0110	2.0992
		V min (V)	3.29	5240.0119	5240	0.0119	2.2710
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.87	T (°C)	-20	5240.0004	5240	0.0004	0.0763
		T (°C)	-10	5240.0048	5240	0.0048	0.9160
		T (°C)	0	5240.0113	5240	0.0113	2.1565
		T (°C)	10	5240.0046	5240	0.0046	0.8779
		T (°C)	20	5240.0041	5240	0.0041	0.7824
		T (°C)	30	5240.0041	5240	0.0041	0.7824
		T (°C)	40	5240.0116	5240	0.0116	2.2137
		T (°C)	50	5240.0115	5240	0.0115	2.1947
		T (°C)	60	5240.0035	5240	0.0035	0.6679
		T (°C)	70	5240.0061	5240	0.0061	1.1641
Limits				5150-5250 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.87V
Test Mode:	TX Frequency(5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5745.00110	5745	0.00110	0.1915
		V max (V)	4.45	5745.01150	5745	0.01150	2.0017
		V min (V)	3.29	5745.01060	5745	0.01060	1.8451
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.87	T (°C)	-20	5745.00390	5745	0.00390	0.6789
		T (°C)	-10	5745.00520	5745	0.00520	0.9051
		T (°C)	0	5745.00280	5745	0.00280	0.4874
		T (°C)	10	5745.00910	5745	0.00910	1.5840
		T (°C)	20	5745.00430	5745	0.00430	0.7485
		T (°C)	30	5745.00470	5745	0.00470	0.8181
		T (°C)	40	5745.00660	5745	0.00660	1.1488
		T (°C)	50	5745.01020	5745	0.01020	1.7755
		T (°C)	60	5745.00930	5745	0.00930	1.6188
		T (°C)	70	5745.00060	5745	0.00060	0.1044
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5785.01330	5785	0.01330	2.2990
		V max (V)	4.45	5785.01310	5785	0.01310	2.2645
		V min (V)	3.29	5785.00290	5785	0.00290	0.5013
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.87	T (°C)	-20	5785.00780	5785	0.00780	1.3483
		T (°C)	-10	5785.00690	5785	0.00690	1.1927
		T (°C)	0	5785.00220	5785	0.00220	0.3803
		T (°C)	10	5785.01240	5785	0.01240	2.1435
		T (°C)	20	5785.00200	5785	0.00200	0.3457
		T (°C)	30	5785.00670	5785	0.00670	1.1582
		T (°C)	40	5785.00250	5785	0.00250	0.4322
		T (°C)	50	5785.00490	5785	0.00490	0.8470
		T (°C)	60	5785.00690	5785	0.00690	1.1927
		T (°C)	70	5785.00480	5785	0.00480	0.8297
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5825.00100	5825	0.00100	0.1717
		V max (V)	4.45	5825.00430	5825	0.00430	0.7382
		V min (V)	3.29	5825.00120	5825	0.00120	0.2060
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.87	T (°C)	-20	5825.01230	5825	0.01230	2.1116
		T (°C)	-10	5825.00830	5825	0.00830	1.4249
		T (°C)	0	5825.01290	5825	0.01290	2.2146
		T (°C)	10	5825.00390	5825	0.00390	0.6695
		T (°C)	20	5825.00940	5825	0.00940	1.6137
		T (°C)	30	5825.00300	5825	0.00300	0.5150
		T (°C)	40	5825.01220	5825	0.01220	2.0944
		T (°C)	50	5825.01040	5825	0.01040	1.7854
		T (°C)	60	5825.00130	5825	0.00130	0.2232
		T (°C)	70	5825.01040	5825	0.01040	1.7854
Limits				5725-5850 MHz			
Result				Complies			

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result

5.1G

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	100	0	0
NVNT	n20	5180	100	0	0
NVNT	n40	5190	100	0	0
NVNT	ac20	5180	100	0	0
NVNT	ac40	5190	100	0	0
NVNT	ac80	5210	100	0	0

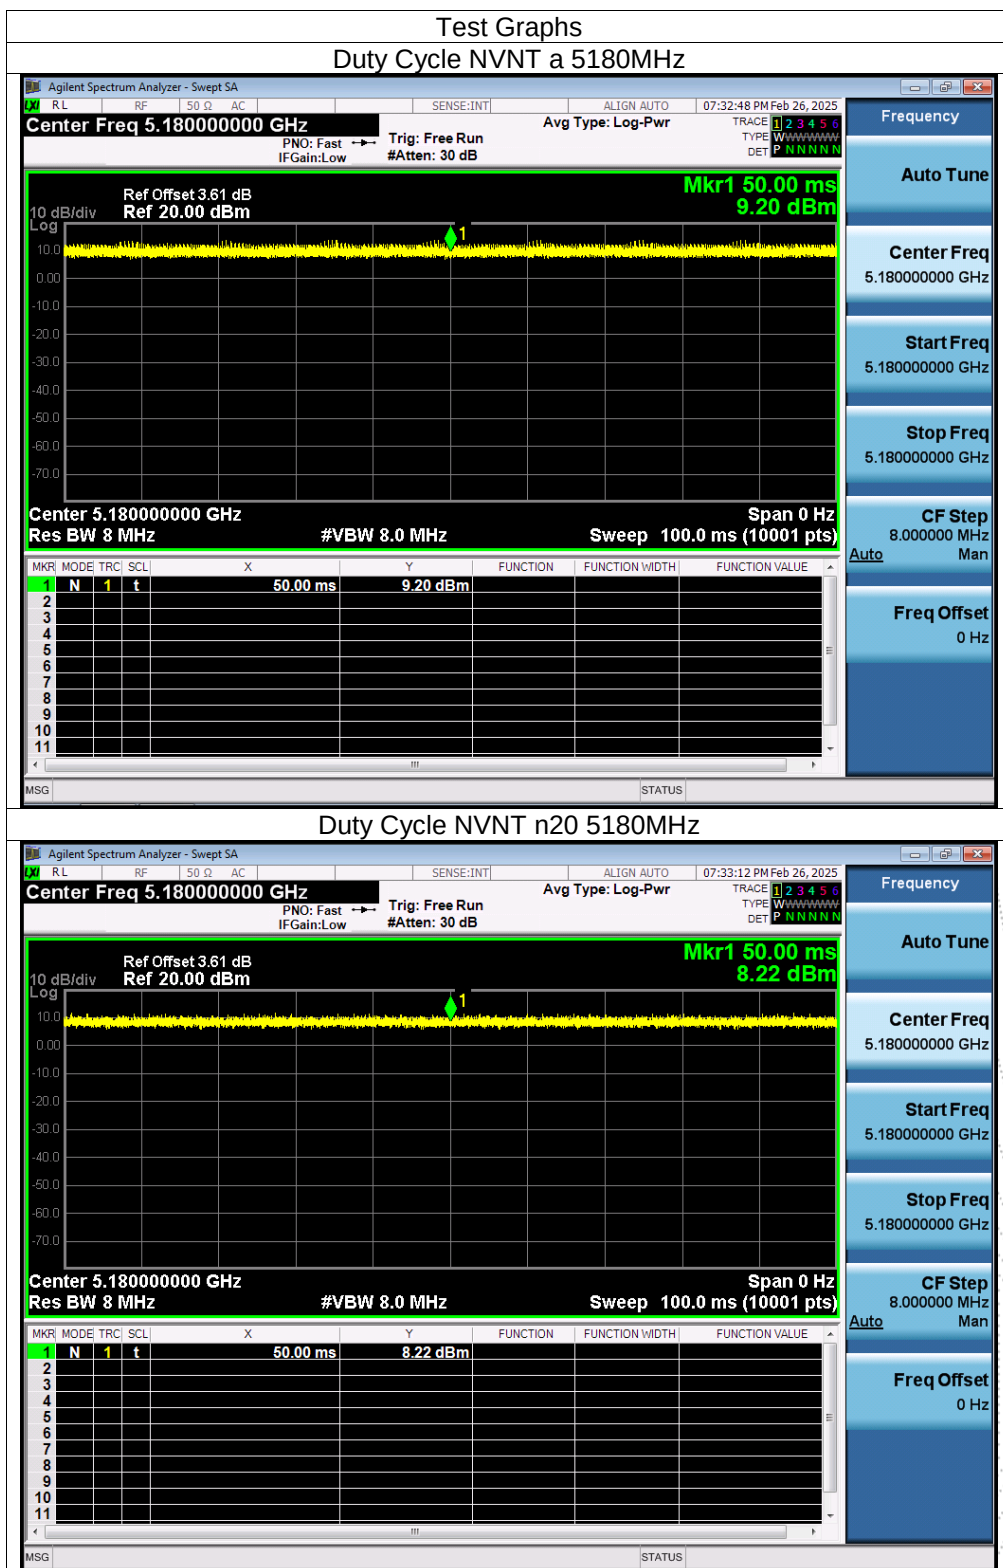

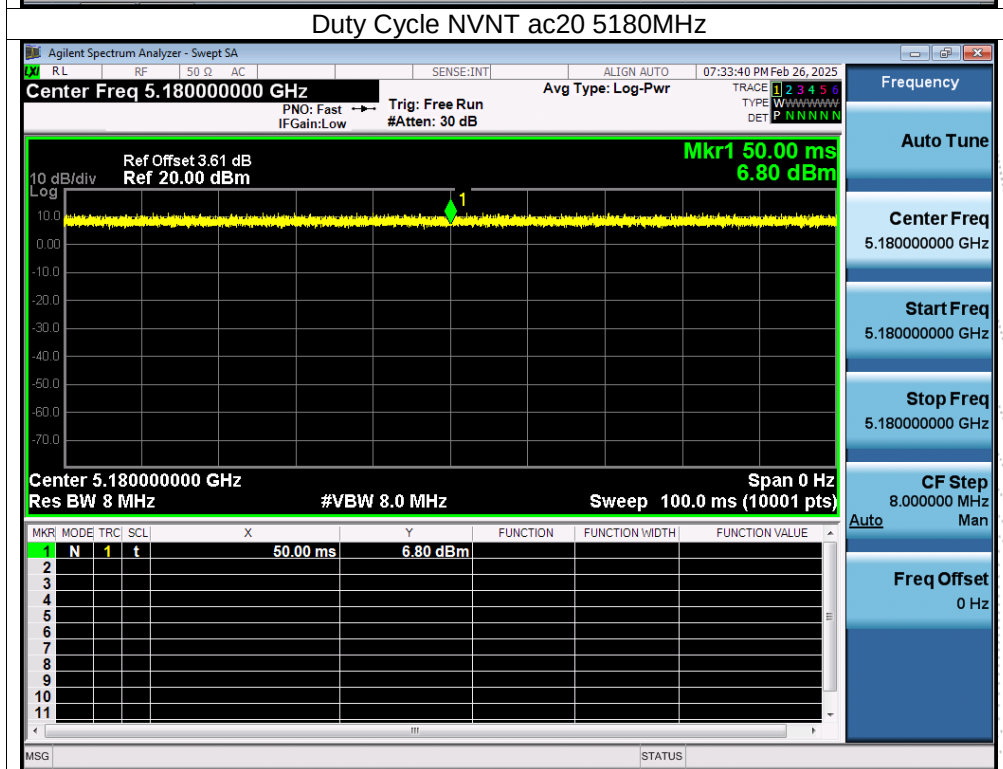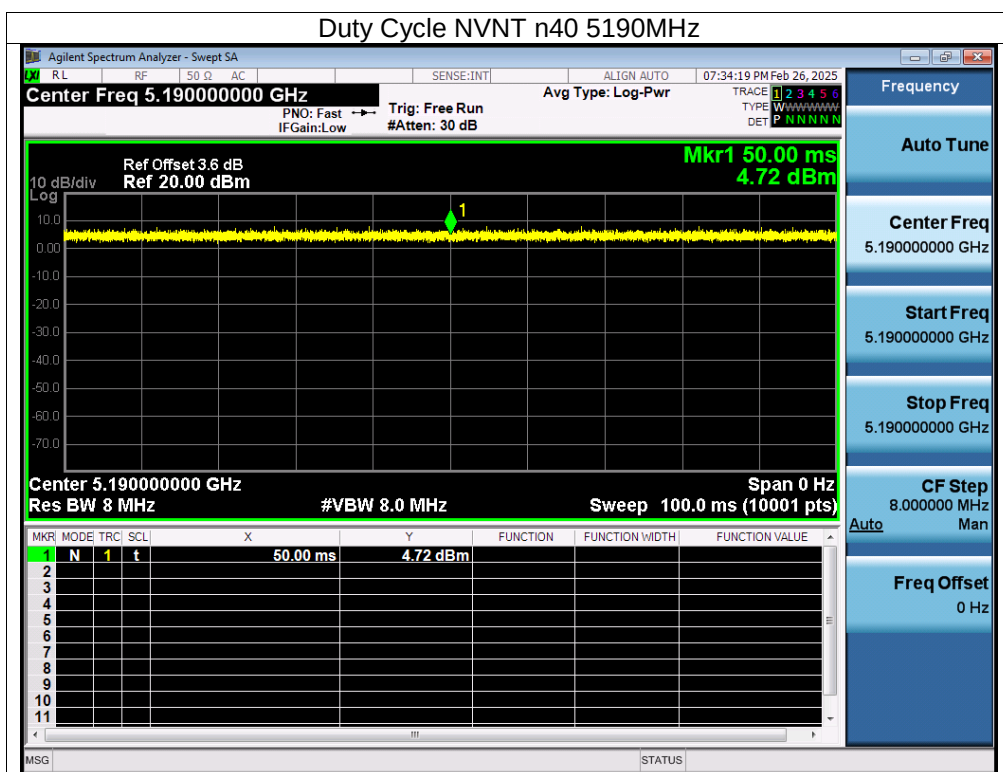

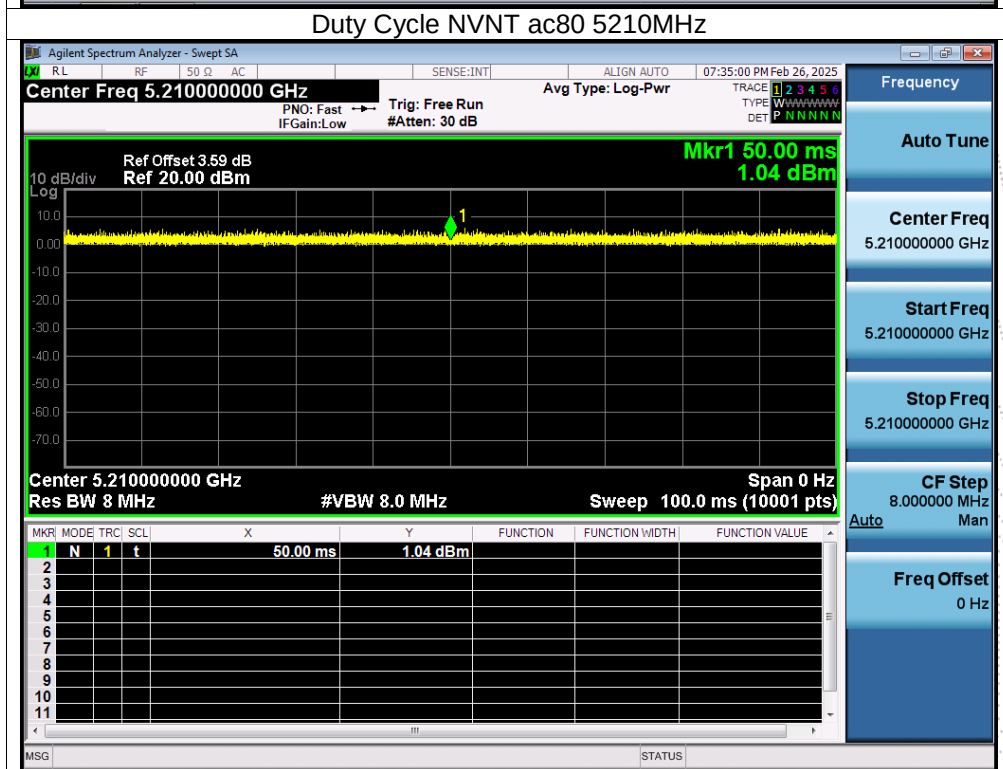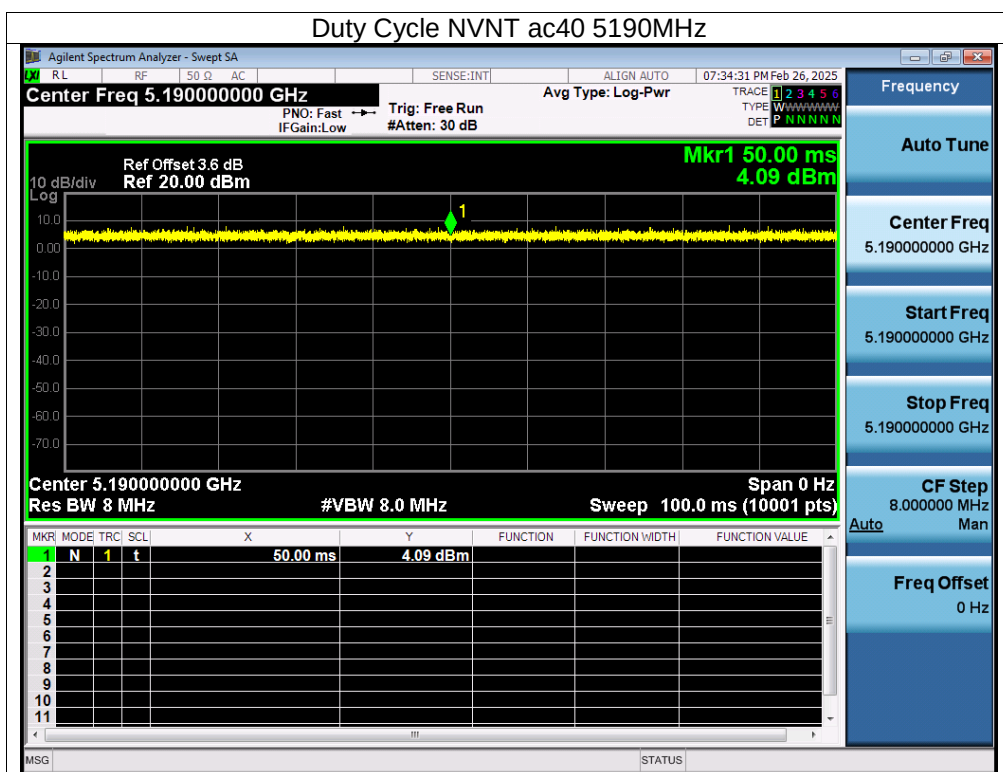

5.8G

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	100	0	0
NVNT	n20	5745	100	0	0
NVNT	n40	5755	100	0	0
NVNT	ac20	5745	100	0	0
NVNT	ac40	5755	100	0	0
NVNT	ac80	5775	100	0	0

