

TEST REPORT

Product Name: Robint-Delivery
FCC ID: 2A3PX-R1
Trademark: ROBINT
Model Number: R1, R2, RHS1, RHS2, RDL1, RDL2
Prepared For: Beijing Robint Technology Co., Ltd.
Address: Room 2006, Jinqiu International Building, No.6 Zhichun Road, Haidian District, Beijing China
Manufacturer: Beijing Robint Technology Co., Ltd.
Address: Room 2006, Jinqiu International Building, No.6 Zhichun Road, Haidian District, Beijing China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Mar. 29, 2022
Sample tested Date: Mar. 29, 2022 to Apr. 15, 2022
Issue Date: Apr. 15, 2022
Report No.: CTB220415081RFX
Test Standards: FCC Part 2, 22, 24E, 27
Test Results: PASS
Remark: This is LTE radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Test Mode	7
4.5 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. RF EXPOSURE	10
6.1 Standard Applicable	10
6.2 Test Result	10
7. RF OUTPUT POWER	11
7.1 Standard Applicable	11
7.2 Test Procedure	11
7.3 Summary of Test Results/Plots	12
8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER	21
8.1 Standard Applicable	21
8.2 Test Procedure	21
8.3 Summary of Test Results	21
9. EMISSION BANDWIDTH	22
9.1 Standard Applicable	22
9.2 Test Procedure	22
9.3 Summary of Test Results/Plots	22
10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	23
10.1 Standard Applicable	23
10.2 Test Procedure	24
10.3 Summary of Test Results/Plots	24
11. SPURIOUS RADIATED EMISSIONS	25
11.1 Standard Applicable	25
11.2 Test Procedure	26
11.3 Summary of Test Results/Plots	27
12. FREQUENCY STABILITY	42
12.1 Standard Applicable	42
12.2 Test Procedure	42
12.3 Summary of Test Results/Plots	42

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220415081RFX	Apr. 15, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
Conducted output power	Part 2.1046(a)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 22.913(a)(5)/Part27.50(h)(2)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
peak-to-average ratio	Part 27.50(d)	KDB 971168 D01v02r02	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	KDB 971168 D01v02r02	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	KDB 971168 D01v02r02	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Field strength of spurious radiation	Part 2.1053/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Frequency stability	Part 2.1055/Part 27.54	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10 ⁻⁷

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	R1, R2, RHS1, RHS2, RDL1, RDL2
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: R1
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	FDD-LTE BAND 2: 1850-1910MHz FDD-LTE BAND 5:824-849MHz FDD-LTE BAND 7:2500-2570MHz TDD-LTE BAND 38: 2570-2620MHz TDD-LTE BAND 41: 2555-2655MHz
Max. RF output power:	FDD-LTE BAND 2: 22.87 dBm FDD-LTE BAND 5: 22.55 dBm FDD-LTE BAND 7: 23.23 dBm TDD-LTE BAND 38: 23.38 dBm TDD-LTE BAND 41: 22.98 dBm
Type of Modulation:	QPSK, 16QAM
Antenna installation:	Internal antenna
Antenna Gain:	FDD-LTE BAND 2:0.41dBi FDD-LTE BAND 5: -2.6dBi FDD-LTE BAND 7: 1.28 dBi TDD-LTE BAND 12: 1.02dBi TDD-LTE BAND 41: 0.76 dBi
Ratings:	AC120V/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE BAND 2	Low, Middle, High Channels
TM2	FDD-LTE BAND 5	Low, Middle, High Channels
TM3	FDD-LTE BAND 7	Low, Middle, High Channels
TM4	TDD-LTE BAND 38	Low, Middle, High Channels
TM5	TDD-LTE BAND 41	Low, Middle, High Channels

4.5 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

6. RF EXPOSURE

6.1 Standard Applicable

According to §1.1307 and §2.1091, §2.1093, the portable transmitter must comply the RF exposure requirements.

6.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure report.

7. RF OUTPUT POWER

7.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

7.2 Test Procedure

Conducted output power test method:

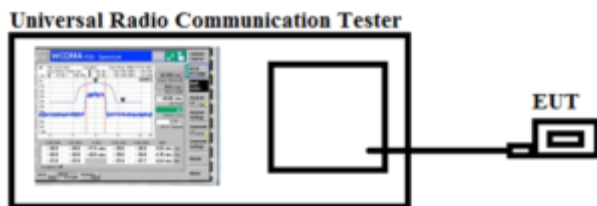

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.3 Summary of Test Results/Plots

Max. Radiated Power:

FDD-LTE Band 2

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.20	<33.00	PASS
		H	20.83		
	MCH	V	21.42		PASS
		H	22.00		
	HCH	V	20.34		PASS
		H	20.63		
16QAM	LCH	V	21.06	<33.00	PASS
		H	21.88		
	MCH	V	20.89		PASS
		H	21.96		
	HCH	V	20.36		PASS
		H	20.38		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.99	<33.00	PASS
		H	21.77		
	MCH	V	21.42		PASS
		H	20.90		
	HCH	V	20.06		PASS
		H	21.60		
16QAM	LCH	V	20.92	<33.00	PASS
		H	20.26		
	MCH	V	20.53		PASS
		H	20.78		
	HCH	V	21.19		PASS
		H	20.28		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.97	<33.00	PASS
		H	21.75		
	MCH	V	21.83		PASS

	HCH	H	21.71		PASS
		V	21.90		
		H	20.53		
16QAM	LCH	V	20.84	<33.00	PASS
		H	20.66		
	MCH	V	20.05		PASS
		H	20.81		
	HCH	V	20.76		PASS
		H	21.67		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.82	<33.00	PASS
		H	21.64		
	MCH	V	20.98		PASS
		H	21.68		
	HCH	V	20.92		PASS
		H	20.40		
16QAM	LCH	V	21.12	<33.00	PASS
		H	21.37		
	MCH	V	20.18		PASS
		H	21.64		
	HCH	V	20.67		PASS
		H	21.37		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.33	<33.00	PASS
		H	21.60		
	MCH	V	21.37		PASS
		H	20.04		
	HCH	V	21.52		PASS
		H	21.90		
16QAM	LCH	V	21.10	<33.00	PASS
		H	21.26		
	MCH	V	20.65		PASS
		H	20.79		
	HCH	V	21.89		PASS
		H	20.02		

Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.98	<33.00	PASS
		H	20.91		
	MCH	V	21.31		PASS
		H	21.14		
	HCH	V	21.66		PASS
		H	21.87		
16QAM	LCH	V	20.61	<33.00	PASS
		H	20.86		
	MCH	V	20.34		PASS
		H	20.73		
	HCH	V	20.88		PASS
		H			

FDD-LTE Band 38

DD-LTE Band 30

Channel Bandwidth: 5.0 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.39	<33.00	PASS
		H	21.20		
	MCH	V	22.25		PASS
		H	21.38		
	HCH	V	21.17		PASS
		H	21.91		
16QAM	LCH	V	22.75	<33.00	PASS
		H	22.12		
	MCH	V	21.86		PASS
		H	22.07		
	HCH	V	21.67		PASS
		H	21.32		
Channel Bandwidth: 10.0 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.15	<33.00	PASS
		H	22.87		
	MCH	V	21.80		PASS
		H	22.32		
	HCH	V	22.61		PASS
		H	21.17		

16QAM	LCH	V	21.53	<30.00	PASS
		H	21.44		
	MCH	V	21.75		PASS
		H	21.80		
	HCH	V	22.56		PASS
		H	23.00		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.82	<30.00	PASS
		H	22.94		
	MCH	V	21.84		PASS
		H	22.09		
	HCH	V	22.77		PASS
		H	22.68		
16QAM	LCH	V	22.09	<30.00	PASS
		H	21.06		
	MCH	V	21.90		PASS
		H	21.78		
	HCH	V	22.84		PASS
		H	22.34		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.94	<30.00	PASS
		H	22.38		
	MCH	V	22.69		PASS
		H	21.06		
	HCH	V	21.40		PASS
		H	21.12		
16QAM	LCH	V	22.77	<30.00	PASS
		H	21.51		
	MCH	V	22.66		PASS
		H	22.05		
	HCH	V	21.04		PASS
		H	21.47		

FDD-LTE Band 5

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.21	<38.45	PASS
		H	20.57		
	MCH	V	20.75		PASS
		H	20.93		
	HCH	V	20.41		PASS
		H	20.93		
16QAM	LCH	V	20.04	<38.45	PASS
		H	20.08		
	MCH	V	20.17		PASS
		H	20.63		
	HCH	V	20.77		PASS
		H	20.74		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.99	<38.45	PASS
		H	20.02		
	MCH	V	20.65		PASS
		H	20.98		
	HCH	V	20.94		PASS
		H	20.65		
16QAM	LCH	V	20.47	<38.45	PASS
		H	20.29		
	MCH	V	20.35		PASS
		H	20.92		
	HCH	V	20.43		PASS
		H	20.04		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.14	<38.45	PASS
		H	20.31		
	MCH	V	20.63		PASS
		H	20.05		
	HCH	V	20.10		PASS
		H	20.33		

16QAM	LCH	V	20.99	<38.45	PASS
		H	20.38		
	MCH	V	20.91		PASS
		H	20.24		
	HCH	V	20.75		PASS
		H	20.67		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.78	<38.45	PASS
		H	20.71		
	MCH	V	20.64		PASS
		H	20.35		
	HCH	V	20.26		PASS
		H	20.76		
16QAM	LCH	V	20.59	<38.45	PASS
		H	20.31		
	MCH	V	20.66		PASS
		H	20.88		
	HCH	V	20.08		PASS
		H	20.01		

FDD-LTE Band 7

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.07	<33.00	PASS
		H	21.53		
	MCH	V	21.46		PASS
		H	20.70		
	HCH	V	21.10		PASS
		H	21.05		
16QAM	LCH	V	20.56	<33.00	PASS
		H	21.27		
	MCH	V	22.20		PASS
		H	21.86		
	HCH	V	21.67		PASS
		H	22.39		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit	Verdict

				(dBm)	
QPSK	LCH	V	21.34	<33.00	PASS
		H	22.50		
	MCH	V	21.83		PASS
		H	20.79		
	HCH	V	21.00		PASS
		H	21.07		
16QAM	LCH	V	21.67	<33.00	PASS
		H	21.84		
	MCH	V	21.73		PASS
		H	22.36		
	HCH	V	20.95		PASS
		H	22.37		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.37	<33.00	PASS
		H	22.13		
	MCH	V	21.43		PASS
		H	21.39		
	HCH	V	21.59		PASS
		H	22.33		
16QAM	LCH	V	20.69	<33.00	PASS
		H	21.87		
	MCH	V	21.72		PASS
		H	22.23		
	HCH	V	20.78		PASS
		H	22.26		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.95	<33.00	PASS
		H	21.74		
	MCH	V	21.22		PASS
		H	20.74		
	HCH	V	22.37		PASS
		H	21.44		
16QAM	LCH	V	21.81	<33.00	PASS
		H	21.73		

	MCH	V	20.97		PASS
		H	21.42		
	HCH	V	22.19		PASS
		H	22.43		

TDD-LTE Band 41

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.93	<33.00	PASS
		H	20.40		
	MCH	V	21.60		PASS
		H	20.65		
	HCH	V	22.01		PASS
		H	21.09		
16QAM	LCH	V	21.88	<33.00	PASS
		H	20.81		
	MCH	V	22.28		PASS
		H	21.40		
	HCH	V	21.66		PASS
		H	21.64		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.52	<33.00	PASS
		H	21.72		
	MCH	V	20.64		PASS
		H	22.08		
	HCH	V	20.52		PASS
		H	20.86		
16QAM	LCH	V	21.03	<33.00	PASS
		H	20.67		
	MCH	V	20.75		PASS
		H	21.65		
	HCH	V	21.75		PASS
		H	21.95		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.17	<33.00	PASS

	MCH	H	22.29	<33.00	PASS
		V	21.97		
		H	20.58		PASS
	HCH	V	20.68		
		H	21.10		
16QAM	LCH	V	20.94	<33.00	PASS
		H	21.01		
	MCH	V	22.13		PASS
		H	21.38		
	HCH	V	20.50		PASS
		H	21.89		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.58	<33.00	PASS
		H	20.44		
	MCH	V	20.83		PASS
		H	21.69		
	HCH	V	21.94		PASS
		H	21.44		
16QAM	LCH	V	21.89	<33.00	PASS
		H	20.35		
	MCH	V	20.71		PASS
		H	21.53		
	HCH	V	20.91		PASS
		H	21.20		

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER

8.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

8.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

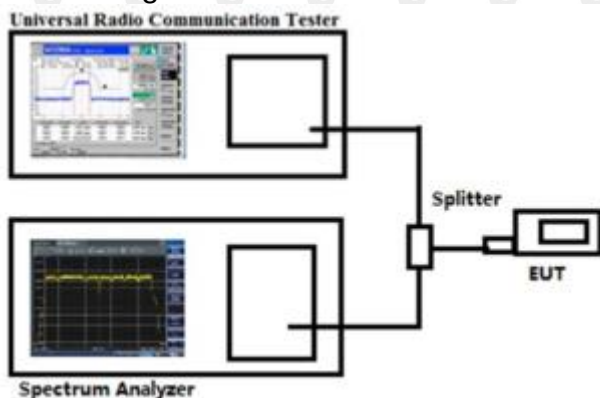

8.3 Summary of Test Results

Please refer to Appendix B: Peak-to-Average Ratio

Test result: Pass

9. EMISSION BANDWIDTH

9.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

9.2 Test Procedure

According to § 22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

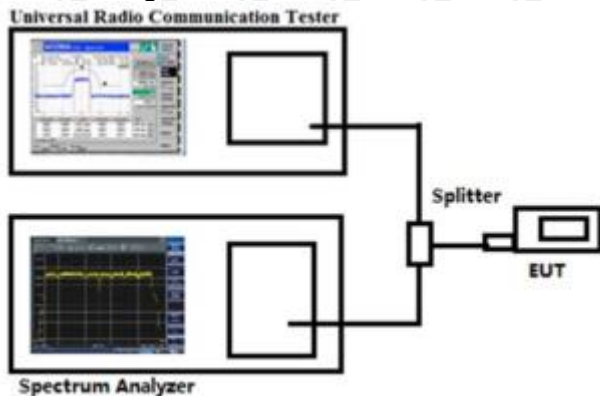

9.3 Summary of Test Results/Plots

Please refer to Appendix C: 26dB Bandwidth and Occupied Bandwidth
Test result: Pass

10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

10.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10 th harmonic.

Test Configuration for the out of band emissions testing:

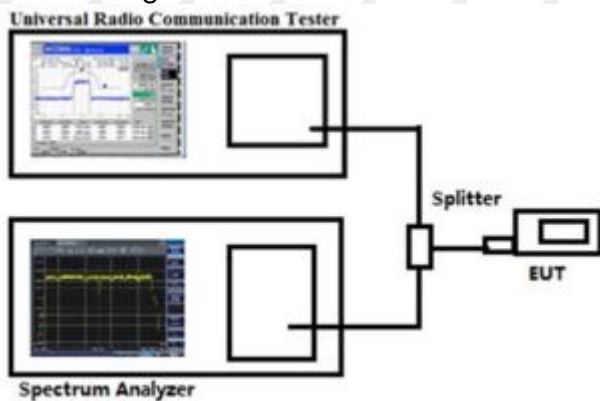

10.3 Summary of Test Results/Plots

Please refer to Appendix D & E: Band Edge & Conducted Spurious Emission
Test result: Pass

11.SPURIOUS RADIATED EMISSIONS

11.1 Standard Applicable

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to § 27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to § 27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to § 27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of

operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

11.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

11.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.

Test Data:

QPSK

Band 7 20775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1336.914	147	256	-57.67	-13	-44.67	Pass	H
1682.429	147	243	-47.41	-13	-34.41	Pass	H
3867.309	148	259	-49.90	-13	-36.90	Pass	H
5926.238	149	28	-46.07	-13	-33.07	Pass	H
6556.935	148	108	-44.79	-13	-31.79	Pass	H
8001.810	147	328	-41.84	-13	-28.84	Pass	H
1181.319	150	16	-54.24	-13	-41.24	Pass	V
1424.907	148	117	-56.57	-13	-43.57	Pass	V
3596.468	147	325	-50.85	-13	-37.85	Pass	V
3900.220	149	302	-51.46	-13	-38.46	Pass	V
5851.915	147	15	-45.52	-13	-32.52	Pass	V
6584.025	147	280	-48.32	-13	-35.32	Pass	V

Band 7 21100 channel/BW 5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.035	151	14	-54.58	-13	-41.58	Pass	H
1725.114	147	71	-48.80	-13	-35.80	Pass	H
3853.292	150	318	-47.44	-13	-34.44	Pass	H
5927.139	147	56	-42.18	-13	-29.18	Pass	H
6504.833	147	216	-43.49	-13	-30.49	Pass	H
8058.294	151	79	-45.55	-13	-32.55	Pass	H
1191.791	151	65	-57.66	-13	-44.66	Pass	V
1383.036	146	225	-59.64	-13	-46.64	Pass	V
3535.795	149	47	-48.85	-13	-35.85	Pass	V
3854.372	150	73	-47.81	-13	-34.81	Pass	V
5820.741	147	168	-44.02	-13	-31.02	Pass	V
6519.553	150	28	-45.83	-13	-32.83	Pass	V

Band 7 21425 channel/BW 5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.588	149	165	-53.651	-13	-40.65	Pass	H
1702.091	146	208	-48.956	-13	-35.96	Pass	H
3900.869	146	4	-44.174	-13	-31.17	Pass	H
5890.521	150	198	-41.568	-13	-28.57	Pass	H
6511.016	146	341	-44.165	-13	-31.16	Pass	H
8079.590	150	235	-42.705	-13	-29.71	Pass	H
1204.729	146	292	-54.555	-13	-41.55	Pass	V
1461.572	150	158	-56.609	-13	-43.61	Pass	V
3542.782	149	55	-50.573	-13	-37.57	Pass	V
3830.544	150	319	-48.337	-13	-35.34	Pass	V
5803.017	146	118	-47.459	-13	-34.46	Pass	V
6558.221	150	155	-48.488	-13	-35.49	Pass	V

16QAM

Band 7 20775 channel/BW 5 (lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.825	150	78	-56.55	-13	-43.55	Pass	H
1726.285	149	291	-52.97	-13	-39.97	Pass	H
3902.486	151	213	-50.47	-13	-37.47	Pass	H
5858.221	150	89	-46.45	-13	-33.45	Pass	H
6497.692	151	329	-47.86	-13	-34.86	Pass	H
7997.269	148	138	-47.83	-13	-34.83	Pass	H
1219.537	149	99	-57.55	-13	-44.55	Pass	V
1439.397	148	217	-55.34	-13	-42.34	Pass	V
3571.423	150	12	-50.36	-13	-37.36	Pass	V
3835.328	150	137	-48.45	-13	-35.45	Pass	V
5804.448	146	356	-46.43	-13	-33.43	Pass	V
6552.667	146	95	-48.08	-13	-35.08	Pass	V

Band 7 21100 channel/BW 5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1295.830	150	142	-57.01	-13	-44.01	Pass	H
1715.462	146	280	-53.75	-13	-40.75	Pass	H
3877.169	150	330	-49.16	-13	-36.16	Pass	H
5866.314	146	194	-44.86	-13	-31.86	Pass	H
6458.405	149	260	-50.57	-13	-37.57	Pass	H
8018.511	151	31	-46.11	-13	-33.11	Pass	H
1233.443	149	4	-54.38	-13	-41.38	Pass	V
1393.811	148	257	-63.29	-13	-50.29	Pass	V
3590.295	147	55	-52.04	-13	-39.04	Pass	V
3914.602	148	273	-53.51	-13	-40.51	Pass	V
5827.383	150	136	-51.79	-13	-38.79	Pass	V
6516.447	150	16	-48.89	-13	-35.89	Pass	V

Band 7 21425 channel/BW 5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1337.948	149	156	-57.12	-13	-44.12	Pass	H
1668.740	149	170	-51.84	-13	-38.84	Pass	H
3841.514	149	127	-46.83	-13	-33.83	Pass	H
5911.252	146	42	-42.88	-13	-29.88	Pass	H
6526.565	147	69	-43.27	-13	-30.27	Pass	H
8001.111	151	110	-46.21	-13	-33.21	Pass	H
1256.550	148	61	-53.84	-13	-40.84	Pass	V
1405.030	147	266	-53.72	-13	-40.72	Pass	V
3523.014	148	303	-52.15	-13	-39.15	Pass	V
3907.089	149	195	-46.73	-13	-33.73	Pass	V
5790.819	147	323	-45.35	-13	-32.35	Pass	V
6580.124	146	325	-47.42	-13	-34.42	Pass	V

QPSK

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.923	150	78	-55.07	-13	-42.07	Pass	H
1726.041	149	291	-50.38	-13	-37.38	Pass	H
3902.205	151	213	-49.01	-13	-36.01	Pass	H
5856.340	150	89	-44.81	-13	-31.81	Pass	H
6497.289	151	329	-44.34	-13	-31.34	Pass	H
7996.504	148	138	-47.49	-13	-34.49	Pass	H
1218.853	149	99	-55.37	-13	-42.37	Pass	V
1440.383	148	217	-58.29	-13	-45.29	Pass	V
3570.413	150	12	-52.19	-13	-39.19	Pass	V
3836.225	150	137	-48.14	-13	-35.14	Pass	V
5802.271	146	356	-45.27	-13	-32.27	Pass	V
6552.230	146	95	-48.48	-13	-35.48	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1296.050	150	142	-56.31	-13	-43.31	Pass	H
1715.369	146	280	-51.81	-13	-38.81	Pass	H
3876.610	150	330	-50.52	-13	-37.52	Pass	H
5867.686	146	194	-45.34	-13	-32.34	Pass	H
6458.449	149	260	-49.16	-13	-36.16	Pass	H
8020.853	151	31	-48.51	-13	-35.51	Pass	H
1235.106	149	4	-53.82	-13	-40.82	Pass	V
1394.738	148	257	-59.09	-13	-46.09	Pass	V
3590.206	147	55	-53.87	-13	-40.87	Pass	V
3915.015	148	273	-50.98	-13	-37.98	Pass	V
5829.043	150	136	-48.55	-13	-35.55	Pass	V
6518.620	150	16	-48.26	-13	-35.26	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1340.713	149	156	-56.73	-13	-43.73	Pass	H
1669.900	149	170	-52.00	-13	-39.00	Pass	H
3845.500	149	127	-45.66	-13	-32.66	Pass	H
5906.908	146	42	-40.96	-13	-27.96	Pass	H
6531.650	147	69	-42.47	-13	-29.47	Pass	H
8000.071	151	110	-44.74	-13	-31.74	Pass	H
1257.628	148	61	-56.49	-13	-43.49	Pass	V
1403.175	147	266	-56.84	-13	-43.84	Pass	V
3525.243	148	303	-52.79	-13	-39.79	Pass	V
3912.129	149	195	-48.59	-13	-35.59	Pass	V
5788.308	147	323	-43.05	-13	-30.05	Pass	V
6576.285	146	325	-47.76	-13	-34.76	Pass	V

16QAM

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.388	147	256	-58.58	-13	-45.58	Pass	H
1686.285	147	243	-47.50	-13	-34.50	Pass	H
3871.595	148	259	-48.88	-13	-35.88	Pass	H
5922.236	149	28	-44.97	-13	-31.97	Pass	H
6559.259	148	108	-44.23	-13	-31.23	Pass	H
7999.466	147	328	-42.32	-13	-29.32	Pass	H
1179.127	150	16	-52.48	-13	-39.48	Pass	V
1427.446	148	117	-55.56	-13	-42.56	Pass	V
3593.941	147	325	-51.51	-13	-38.51	Pass	V
3904.708	149	302	-51.53	-13	-38.53	Pass	V
5855.285	147	15	-45.36	-13	-32.36	Pass	V
6579.994	147	280	-49.33	-13	-36.33	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.387	151	14	-54.45	-13	-41.45	Pass	H
1724.842	147	71	-50.85	-13	-37.85	Pass	H
3853.828	150	318	-48.20	-13	-35.20	Pass	H
5927.747	147	56	-43.39	-13	-30.39	Pass	H
6504.467	147	216	-45.24	-13	-32.24	Pass	H
8058.305	151	79	-43.22	-13	-30.22	Pass	H
1191.468	151	65	-57.90	-13	-44.90	Pass	V
1383.042	146	225	-56.63	-13	-43.63	Pass	V
3536.693	149	47	-48.94	-13	-35.94	Pass	V
3855.255	150	73	-49.01	-13	-36.01	Pass	V
5820.512	147	168	-46.75	-13	-33.75	Pass	V
6519.526	150	28	-45.41	-13	-32.41	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.212	149	165	-56.287	-13	-43.29	Pass	H
1703.699	146	208	-49.706	-13	-36.71	Pass	H
3901.055	146	4	-44.234	-13	-31.23	Pass	H
5890.032	150	198	-42.648	-13	-29.65	Pass	H
6509.796	146	341	-41.373	-13	-28.37	Pass	H
8078.278	150	235	-45.896	-13	-32.90	Pass	H
1205.270	146	292	-55.728	-13	-42.73	Pass	V
1461.157	150	158	-59.167	-13	-46.17	Pass	V
3542.135	149	55	-50.175	-13	-37.17	Pass	V
3830.941	150	319	-50.928	-13	-37.93	Pass	V
5802.269	146	118	-48.924	-13	-35.92	Pass	V
6556.507	150	155	-45.845	-13	-32.84	Pass	V

Note:

- 1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 2 18607 channel/BW 1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1336.645	150	78	-54.63	-13	-41.63	Pass	H
1726.235	149	291	-48.52	-13	-35.52	Pass	H
3901.918	151	213	-49.66	-13	-36.66	Pass	H
5857.237	150	89	-47.61	-13	-34.61	Pass	H
6498.052	151	329	-48.57	-13	-35.57	Pass	H
7997.461	148	138	-44.12	-13	-31.12	Pass	H
1218.029	149	99	-57.94	-13	-44.94	Pass	V
1438.008	148	217	-58.01	-13	-45.01	Pass	V
3571.465	150	12	-49.33	-13	-36.33	Pass	V
3837.048	150	137	-49.28	-13	-36.28	Pass	V
5804.472	146	356	-47.83	-13	-34.83	Pass	V
6553.247	146	95	-48.83	-13	-35.83	Pass	V

Band 2 18900 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1294.045	150	142	-59.86	-13	-46.86	Pass	H
1714.096	146	280	-48.20	-13	-35.20	Pass	H
3876.192	150	330	-49.98	-13	-36.98	Pass	H
5867.580	146	194	-45.95	-13	-32.95	Pass	H
6458.406	149	260	-48.39	-13	-35.39	Pass	H
8019.397	151	31	-46.66	-13	-33.66	Pass	H
1234.406	149	4	-59.47	-13	-46.47	Pass	V
1394.470	148	257	-61.40	-13	-48.40	Pass	V
3588.766	147	55	-55.07	-13	-42.07	Pass	V
3914.633	148	273	-50.77	-13	-37.77	Pass	V
5827.231	150	136	-48.11	-13	-35.11	Pass	V
6515.914	150	16	-46.29	-13	-33.29	Pass	V

Band 2 19193 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1338.320	149	156	-57.88	-13	-44.88	Pass	H
1668.993	149	170	-50.64	-13	-37.64	Pass	H
3846.378	149	127	-45.45	-13	-32.45	Pass	H
5906.717	146	42	-43.37	-13	-30.37	Pass	H
6529.402	147	69	-45.41	-13	-32.41	Pass	H
8001.698	151	110	-46.60	-13	-33.60	Pass	H
1260.724	148	61	-54.58	-13	-41.58	Pass	V
1406.087	147	266	-54.71	-13	-41.71	Pass	V
3524.754	148	303	-52.97	-13	-39.97	Pass	V
3911.073	149	195	-50.07	-13	-37.07	Pass	V
5792.345	147	323	-45.30	-13	-32.30	Pass	V
6574.974	146	325	-48.41	-13	-35.41	Pass	V

16QAM

Band 2 18607 channel/BW 1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1338.824	147	256	-57.74	-13	-44.74	Pass	H
1683.308	147	243	-48.62	-13	-35.62	Pass	H
3867.352	148	259	-50.40	-13	-37.40	Pass	H
5921.926	149	28	-47.11	-13	-34.11	Pass	H
6558.453	148	108	-44.55	-13	-31.55	Pass	H
7999.157	147	328	-44.40	-13	-31.40	Pass	H
1179.718	150	16	-54.03	-13	-41.03	Pass	V
1424.156	148	117	-56.91	-13	-43.91	Pass	V
3597.873	147	325	-51.77	-13	-38.77	Pass	V
3903.550	149	302	-49.89	-13	-36.89	Pass	V
5852.225	147	15	-43.42	-13	-30.42	Pass	V
6582.341	147	280	-49.21	-13	-36.21	Pass	V

Band 2 18900 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.451	151	14	-56.01	-13	-43.01	Pass	H
1724.871	147	71	-48.35	-13	-35.35	Pass	H
3853.222	150	318	-49.75	-13	-36.75	Pass	H
5927.217	147	56	-41.77	-13	-28.77	Pass	H
6504.626	147	216	-46.20	-13	-33.20	Pass	H
8058.229	151	79	-44.59	-13	-31.59	Pass	H
1191.401	151	65	-56.46	-13	-43.46	Pass	V
1383.127	146	225	-59.65	-13	-46.65	Pass	V
3536.114	149	47	-48.92	-13	-35.92	Pass	V
3854.468	150	73	-46.65	-13	-33.65	Pass	V
5819.864	147	168	-47.35	-13	-34.35	Pass	V
6519.641	150	28	-47.26	-13	-34.26	Pass	V

Band 2 19193 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.877	149	165	-53.643	-13	-40.64	Pass	H
1703.918	146	208	-47.515	-13	-34.51	Pass	H
3900.734	146	4	-45.731	-13	-32.73	Pass	H
5887.806	150	198	-41.763	-13	-28.76	Pass	H
6509.544	146	341	-43.793	-13	-30.79	Pass	H
8079.382	150	235	-42.659	-13	-29.66	Pass	H
1205.771	146	292	-54.217	-13	-41.22	Pass	V
1459.692	150	158	-58.132	-13	-45.13	Pass	V
3542.242	149	55	-52.655	-13	-39.66	Pass	V
3830.523	150	319	-51.757	-13	-38.76	Pass	V
5801.548	146	118	-46.197	-13	-33.20	Pass	V
6557.475	150	155	-45.471	-13	-32.47	Pass	V

Note:

1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 41 40265 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1356.24	149	165	-56.00	-25	-31.00	Pass	H
1718.80	146	208	-50.75	-25	-25.75	Pass	H
3883.84	146	4	-50.26	-25	-25.26	Pass	H
5823.49	150	198	-44.58	-25	-19.58	Pass	H
6606.09	146	341	-40.70	-25	-15.70	Pass	H
8121.44	150	235	-45.23	-25	-20.23	Pass	H
1203.67	146	292	-54.22	-25	-29.22	Pass	V
1442.60	150	158	-61.93	-25	-36.93	Pass	V
3539.88	149	55	-50.70	-25	-25.70	Pass	V
3818.38	150	319	-46.13	-25	-21.13	Pass	V
5803.90	146	118	-43.88	-25	-18.88	Pass	V
6642.87	150	155	-44.16	-25	-19.16	Pass	V

Band 41 40740 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1329.65	149	165	-57.99	-25	-32.99	Pass	H
1754.51	146	208	-52.36	-25	-27.36	Pass	H
3915.96	146	4	-50.30	-25	-25.30	Pass	H
5850.68	150	198	-38.86	-25	-13.86	Pass	H
6478.28	146	341	-42.93	-25	-17.93	Pass	H
7993.15	150	235	-43.07	-25	-18.07	Pass	H
1175.31	146	292	-51.02	-25	-26.02	Pass	V
1514.97	150	158	-58.87	-25	-33.87	Pass	V
3576.29	149	55	-48.64	-25	-23.64	Pass	V
3871.00	150	319	-49.31	-25	-24.31	Pass	V
5755.71	146	118	-42.87	-25	-17.87	Pass	V
6534.33	150	155	-45.15	-25	-20.15	Pass	V

Band 41 41215 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1423.88	149	165	-58.02	-25	-33.02	Pass	H
1741.56	146	208	-49.48	-25	-24.48	Pass	H
3963.78	146	4	-45.89	-25	-20.89	Pass	H
5840.25	150	198	-39.17	-25	-14.17	Pass	H
6543.39	146	341	-45.47	-25	-20.47	Pass	H
8146.59	150	235	-46.11	-25	-21.11	Pass	H
1194.71	146	292	-54.26	-25	-29.26	Pass	V
1514.02	150	158	-62.25	-25	-37.25	Pass	V
3478.66	149	55	-51.69	-25	-26.69	Pass	V
3922.56	150	319	-52.01	-25	-27.01	Pass	V
5824.31	146	118	-47.14	-25	-22.14	Pass	V
6544.11	150	155	-49.19	-25	-24.19	Pass	V

16QAM

Band 41 40365 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1316.68	149	165	-57.51	-25	-32.51	Pass	H
1632.16	146	208	-49.97	-25	-24.97	Pass	H
3940.77	146	4	-50.26	-25	-25.26	Pass	H
5892.93	150	198	-40.60	-25	-15.60	Pass	H
6485.97	146	341	-45.37	-25	-20.37	Pass	H
8034.82	150	235	-48.10	-25	-23.10	Pass	H
1218.91	146	292	-54.15	-25	-29.15	Pass	V
1539.04	150	158	-57.85	-25	-32.85	Pass	V
3494.72	149	55	-51.06	-25	-26.06	Pass	V
3782.52	150	319	-50.79	-25	-25.79	Pass	V
5797.33	146	118	-43.55	-25	-18.55	Pass	V
6585.48	150	155	-43.65	-25	-18.65	Pass	V

Band 41 40740 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1411.75	149	165	-53.64	-25	-28.64	Pass	H
1769.70	146	208	-49.28	-25	-24.28	Pass	H
3955.48	146	4	-44.65	-25	-19.65	Pass	H
5881.35	150	198	-43.86	-25	-18.86	Pass	H
6525.52	146	341	-42.55	-25	-17.55	Pass	H
8140.18	150	235	-43.01	-25	-18.01	Pass	H
1257.91	146	292	-54.64	-25	-29.64	Pass	V
1385.60	150	158	-59.15	-25	-34.15	Pass	V
3463.04	149	55	-52.21	-25	-27.21	Pass	V
3820.53	150	319	-45.86	-25	-20.86	Pass	V
5706.17	146	118	-42.58	-25	-17.58	Pass	V
6461.16	150	155	-47.24	-25	-22.24	Pass	V

Band 41 41215 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1346.93	149	165	-57.21	-25	-32.21	Pass	H
1744.37	146	208	-44.09	-25	-19.09	Pass	H
3834.92	146	4	-47.21	-25	-22.21	Pass	H
5972.67	150	198	-44.42	-25	-19.42	Pass	H
6471.63	146	341	-39.98	-25	-14.98	Pass	H
8166.25	150	235	-46.49	-25	-21.49	Pass	H
1193.07	146	292	-54.89	-25	-29.89	Pass	V
1425.70	150	158	-53.29	-25	-28.29	Pass	V
3569.12	149	55	-49.34	-25	-24.34	Pass	V
3735.99	150	319	-47.26	-25	-22.26	Pass	V
5743.52	146	118	-46.81	-25	-21.81	Pass	V
6545.81	150	155	-47.52	-25	-22.52	Pass	V

Note:

1)Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 38 37775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1340.51	148	319	-56.22	-25	-31.22	Pass	H
1781.92	153	233	-46.45	-25	-21.45	Pass	H
3903.12	151	41	-49.22	-25	-24.22	Pass	H
5929.48	150	70	-43.28	-25	-18.28	Pass	H
6416.66	148	190	-52.08	-25	-27.08	Pass	H
7928.70	146	9	-44.96	-25	-19.96	Pass	H
1165.82	150	265	-62.59	-25	-37.59	Pass	V
1345.37	148	128	-55.36	-25	-30.36	Pass	V
3517.34	147	53	-46.91	-25	-21.91	Pass	V
3913.48	154	234	-52.35	-25	-27.35	Pass	V
5799.08	152	32	-44.51	-25	-19.51	Pass	V
6642.42	149	222	-46.95	-25	-21.95	Pass	V

Band 38 38000 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1235.48	145	147	-54.86	-25	-29.86	Pass	H
1625.95	150	5	-46.73	-25	-21.73	Pass	H
3802.05	153	252	-50.40	-25	-25.40	Pass	H
5758.60	148	211	-48.45	-25	-23.45	Pass	H
6398.49	152	337	-47.21	-25	-22.21	Pass	H
7897.38	146	35	-47.38	-25	-22.38	Pass	H
1121.56	145	340	-60.61	-25	-35.61	Pass	V
1340.12	149	72	-57.41	-25	-32.41	Pass	V
3470.05	151	28	-46.15	-25	-21.15	Pass	V
3738.50	146	39	-50.74	-25	-25.74	Pass	V
5703.60	155	135	-44.34	-25	-19.34	Pass	V
6454.29	151	281	-50.25	-25	-25.25	Pass	V

Band 38 38225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1379.16	153	308	-56.14	-25	-31.14	Pass	H
1753.03	152	171	-48.74	-25	-23.74	Pass	H
3818.47	146	170	-50.31	-25	-25.31	Pass	H
5878.57	153	315	-45.23	-25	-20.23	Pass	H
6472.47	145	320	-46.33	-25	-21.33	Pass	H
7903.20	154	349	-49.79	-25	-24.79	Pass	H
1312.68	150	211	-56.16	-25	-31.16	Pass	V
1468.66	148	232	-61.83	-25	-36.83	Pass	V
3479.18	149	296	-49.49	-25	-24.49	Pass	V
3818.58	152	73	-48.66	-25	-23.66	Pass	V
5754.62	154	142	-44.56	-25	-19.56	Pass	V
6621.24	150	229	-51.50	-25	-26.50	Pass	V

16QAM

Band 38 37775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1419.15	151	331	-52.89	-25	-27.89	Pass	H
1795.41	149	321	-53.34	-25	-28.34	Pass	H
3970.14	152	6	-45.51	-25	-20.51	Pass	H
5842.19	152	162	-43.54	-25	-18.54	Pass	H
6416.59	148	157	-43.59	-25	-18.59	Pass	H
7993.77	153	17	-43.41	-25	-18.41	Pass	H
1298.16	150	94	-60.11	-25	-35.11	Pass	V
1354.98	150	212	-54.44	-25	-29.44	Pass	V
3492.40	148	191	-45.29	-25	-20.29	Pass	V
3832.45	154	211	-47.27	-25	-22.27	Pass	V
5848.46	153	61	-46.14	-25	-21.14	Pass	V
6526.13	155	192	-53.15	-25	-28.15	Pass	V

Band 38 38000 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1292.61	155	42	-52.06	-25	-27.06	Pass	H
1810.16	154	231	-48.87	-25	-23.87	Pass	H
3944.49	149	188	-49.76	-25	-24.76	Pass	H
5779.08	146	169	-48.43	-25	-23.43	Pass	H
6590.48	149	349	-51.48	-25	-26.48	Pass	H
7943.06	151	16	-43.23	-25	-18.23	Pass	H
1192.73	151	60	-54.74	-25	-29.74	Pass	V
1382.53	151	29	-55.19	-25	-30.19	Pass	V
3652.26	152	100	-54.50	-25	-29.50	Pass	V
3739.77	150	347	-48.91	-25	-23.91	Pass	V
5884.43	150	216	-44.05	-25	-19.05	Pass	V
6504.84	151	352	-47.91	-25	-22.91	Pass	V

Band 38 38225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1293.60	150	287	-53.29	-25	-28.29	Pass	H
1776.94	155	297	-50.06	-25	-25.06	Pass	H
3866.18	148	339	-46.61	-25	-21.61	Pass	H
5869.16	146	16	-44.59	-25	-19.59	Pass	H
6451.10	154	145	-45.48	-25	-20.48	Pass	H
7954.92	146	86	-45.19	-25	-20.19	Pass	H
1236.11	153	312	-62.73	-25	-37.73	Pass	V
1446.89	148	308	-59.80	-25	-34.80	Pass	V
3577.30	150	7	-50.26	-25	-25.26	Pass	V
3776.42	154	333	-55.39	-25	-30.39	Pass	V
5805.91	152	18	-45.18	-25	-20.18	Pass	V
6642.23	151	112	-52.02	-25	-27.02	Pass	V

Note:

1)Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

12. FREQUENCY STABILITY

12.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

12.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a

Frequency Domain Analyzer in histogram mode

12.3 Summary of Test Results/Plots

Note: 1.Normal Voltage NV=DC3.8V; Low Voltage LV=DC3.87V; High Voltage HV=DC3.88V

Please refer to Appendix F: Frequency Stability

Test result: Pass

***** END OF REPORT *****