



Test Data**Maximum Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.33	0	-4.33	30	Pass
NVNT	BLE	2442	Ant1	-3.173	0	-3.173	30	Pass
NVNT	BLE	2480	Ant1	-4.499	0	-4.499	30	Pass

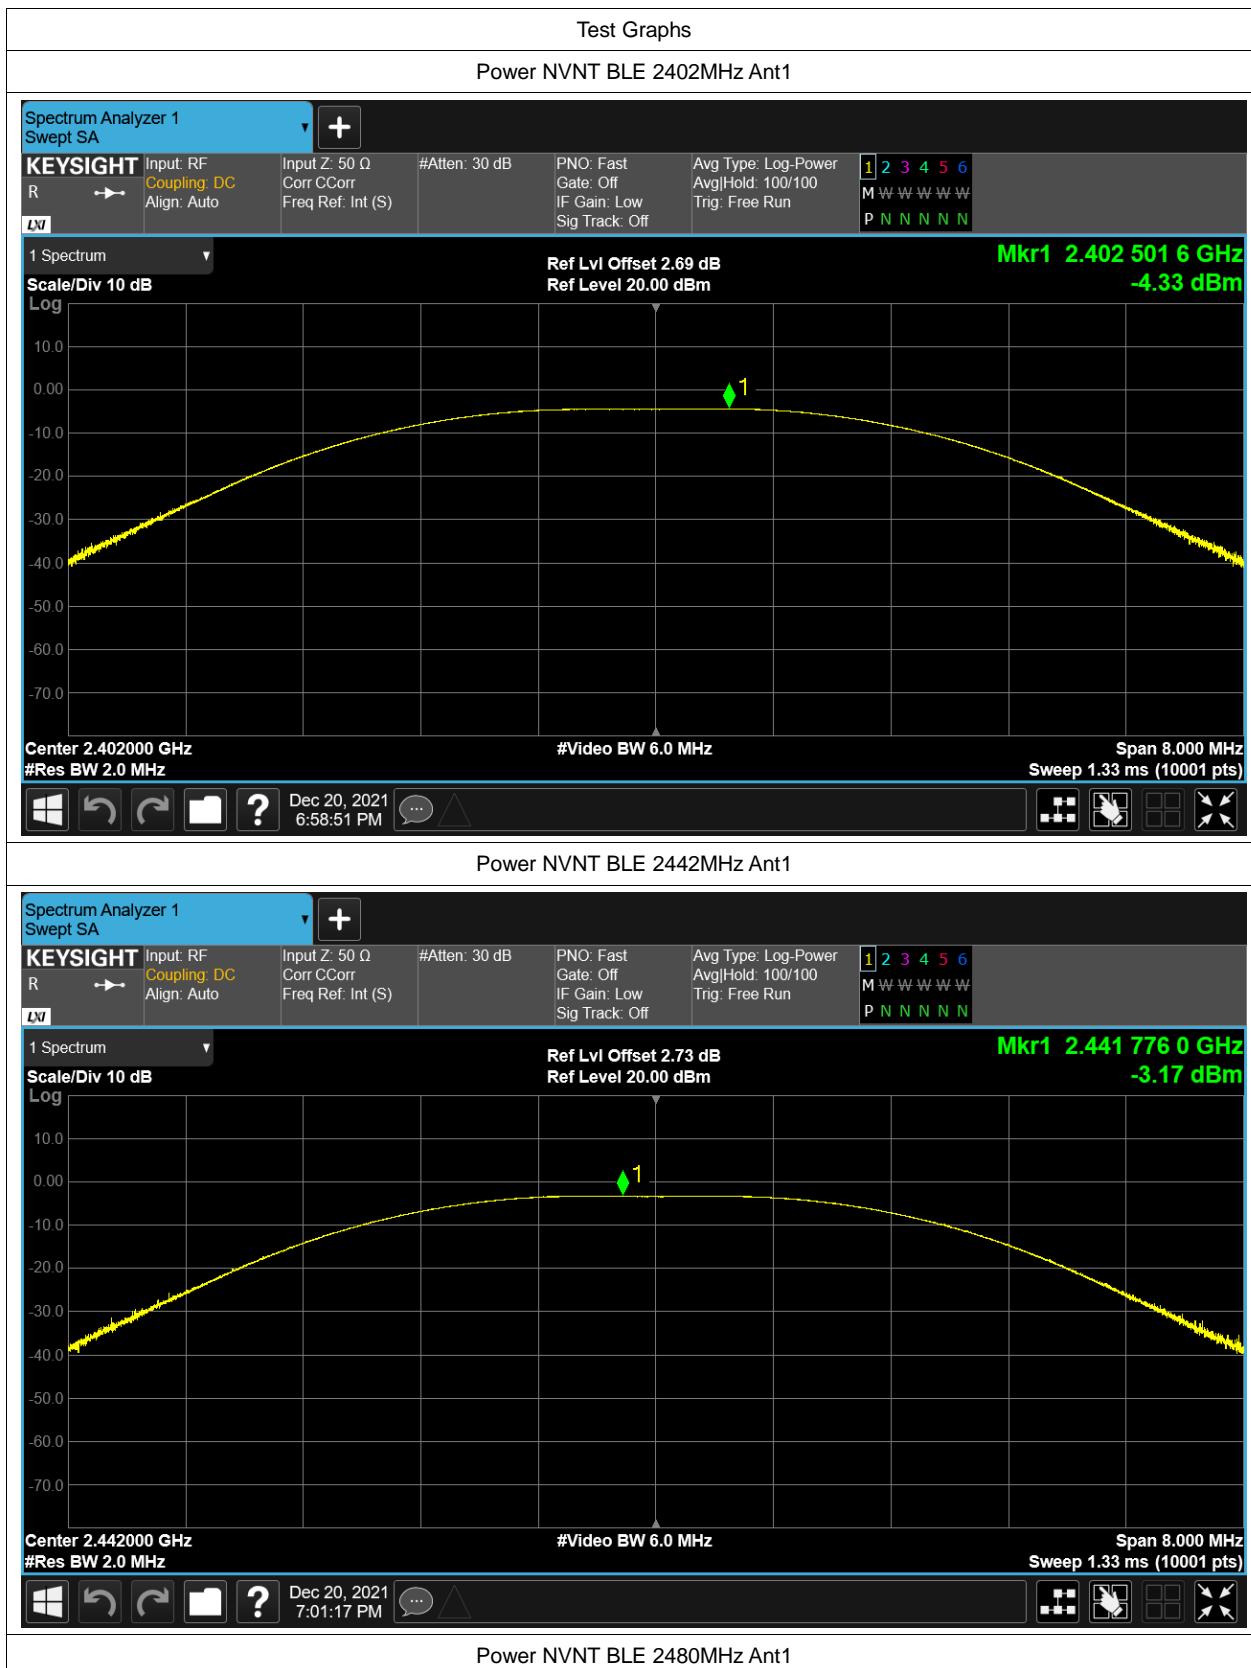

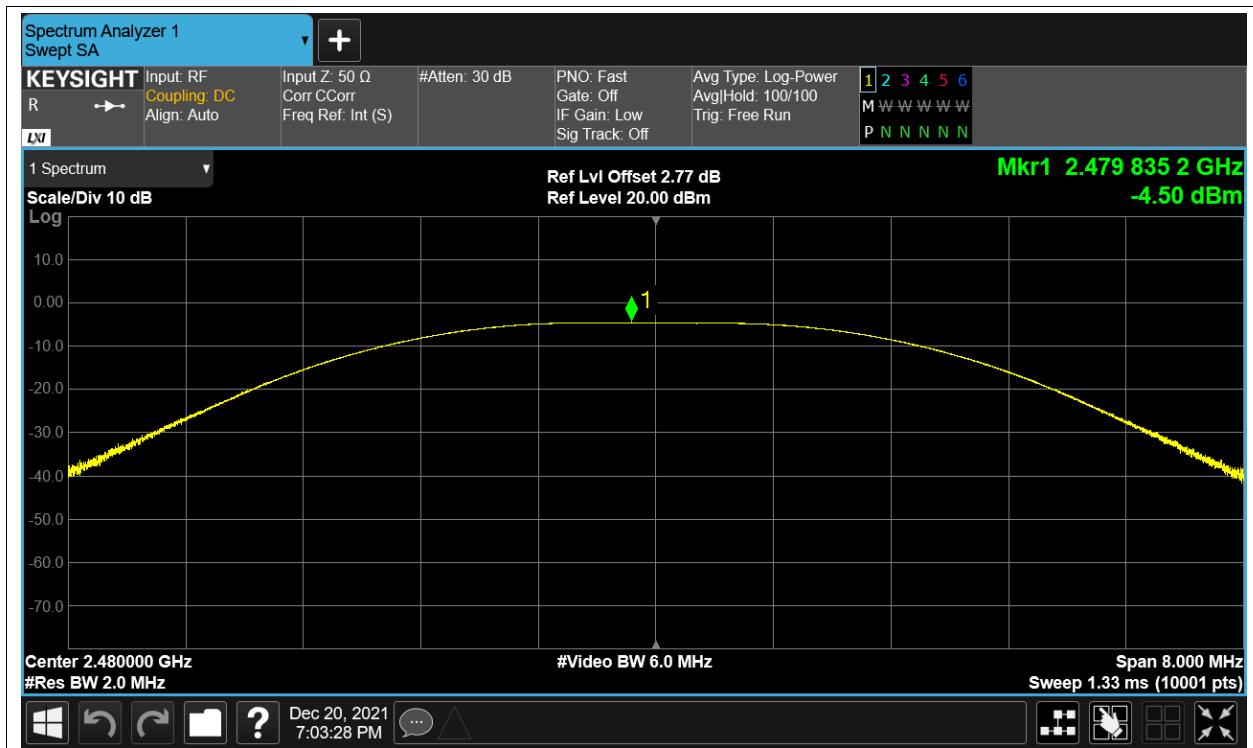

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.15	0.5	Pass
NVNT	BLE	2442	Ant1	1.155	0.5	Pass
NVNT	BLE	2480	Ant1	1.157	0.5	Pass





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	2.082828351
NVNT	BLE	2442	Ant1	2.085378724
NVNT	BLE	2480	Ant1	2.088933511

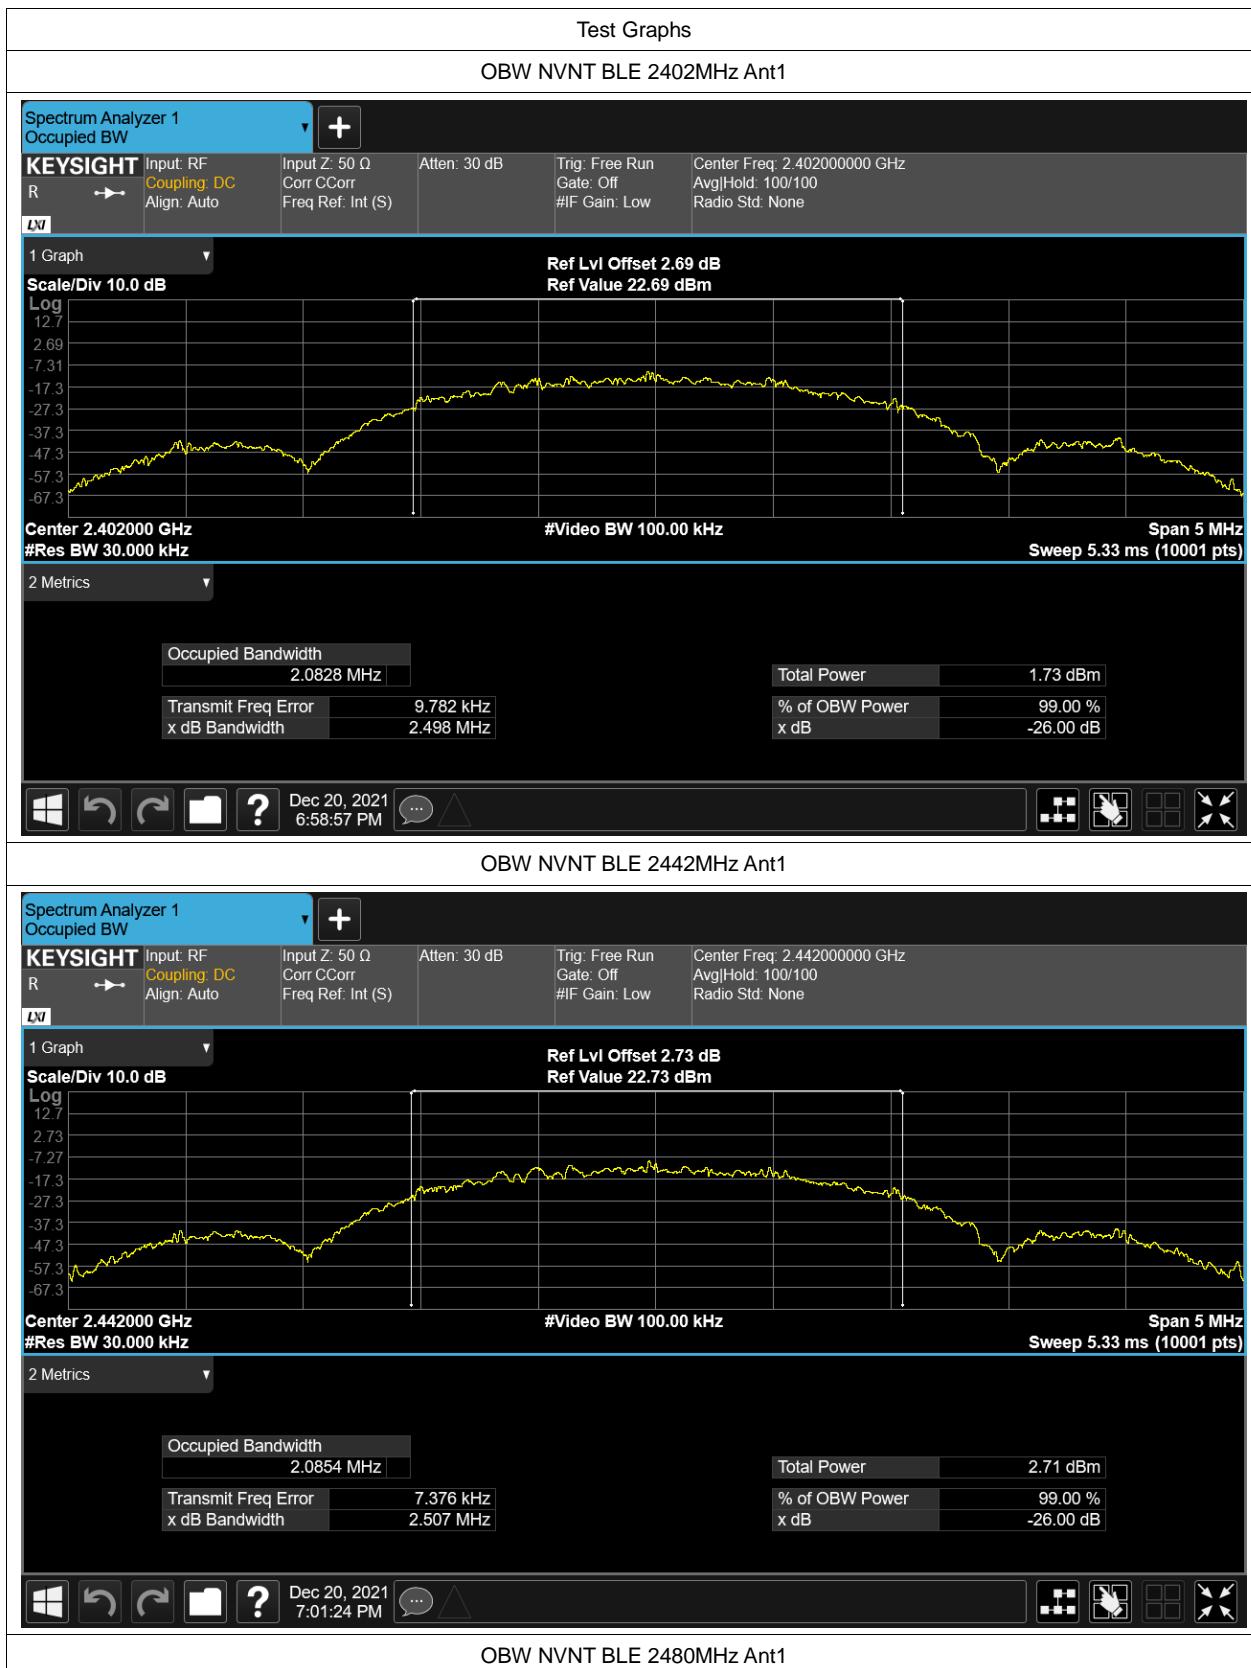




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-22.952	8	Pass
NVNT	BLE	2442	Ant1	-21.847	8	Pass
NVNT	BLE	2480	Ant1	-23.229	8	Pass



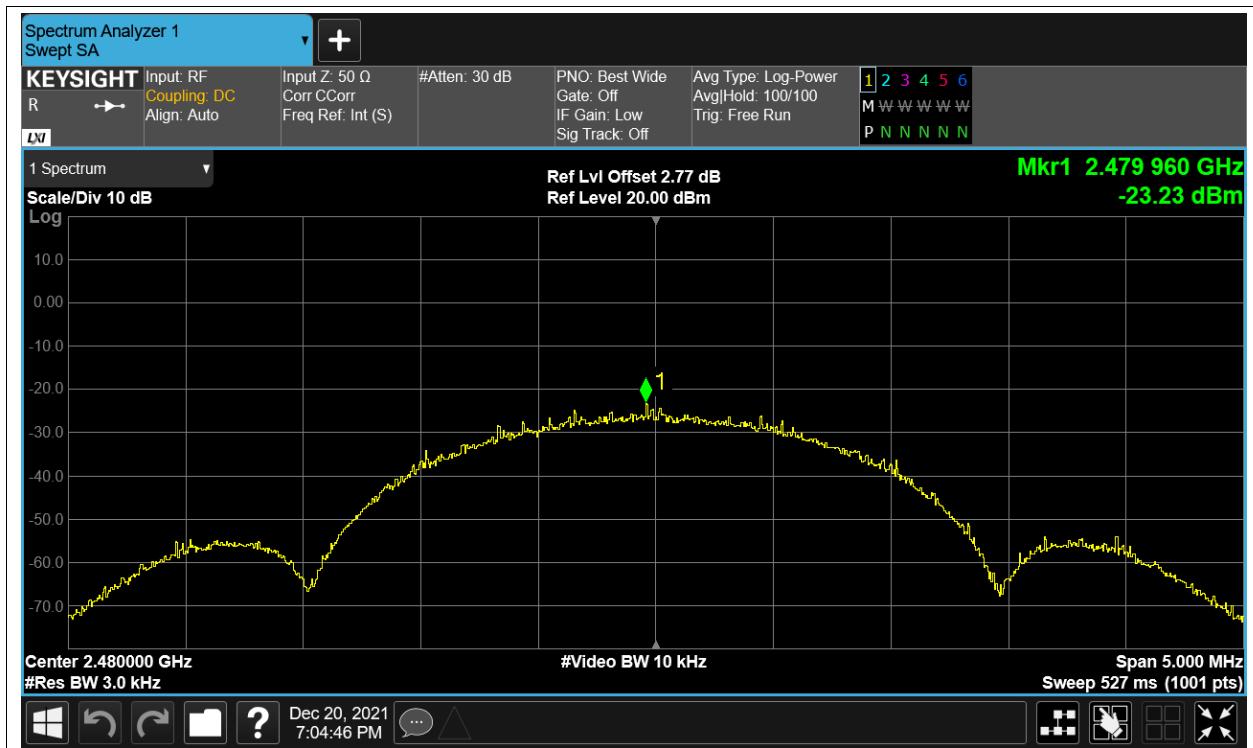

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.26	-20	Pass
NVNT	BLE	2480	Ant1	-49.21	-20	Pass





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-44.24	-20	Pass
NVNT	BLE	2442	Ant1	-44.71	-20	Pass
NVNT	BLE	2480	Ant1	-43.34	-20	Pass



