



LEAKSMART HUB3.0



COPYRIGHT INFO

The information contained in this document is the proprietary information of Waxman Industries, Inc., Ltd. The contents are confidential and any disclosure to persons other than the officers, employees, agents or subcontractors of the owner or licensee of this document, without the prior written consent of Waxman, is strictly prohibited.

Further, no portion of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, without the prior written consent of Waxman, the copyright holder.

Waxman publishes this document without making any warranty as to the content contained herein. Further Waxman reserves the right to make modifications, additions and deletions to this document due to typographical errors, inaccurate information, or improvements to reference design platforms or products mentioned in the document at any time and without notice. Such changes will, nevertheless be incorporated into new editions of this document.

WARRANTY

For details on the Waxman leakSMART hub3.0 warranty policy, please visit our website:

www.waxman.com

TABLE OF CONTENTS

1 REVISION HISTORY.....	6
1.1 REVISION HISTORY.....	6
1.2 REFERENCES.....	6
2 USING THIS MANUAL.....	7
2.1 PURPOSE AND AUDIENCE.....	7
2.2 SUMMARY OF CHAPTERS.....	7
3 OVERVIEW.....	8
3.1 LEAKSMART COMPONENTS.....	8
3.2 LEAKSMART HUB3.0 BLOCK DIAGRAM.....	9
3.3 LEAKSMART HUB3.0 - SPECIFICATIONS AND FEATURES.....	9
3.4 PROTOCOL & SECURITY SUPPORT.....	10
3.5 WI-FI ADDRESSES AND PORT NUMBERS.....	10
3.5.1 <i>Hardware Address</i>	10
3.5.2 <i>Port Numbers</i>	10
3.6 LEAKSMART HUB3.0 INFORMATION LABEL.....	10
4 THE LEAKSMART HUB3.0 USER INTERFACES.....	12
4.1 POWER SUPPLY.....	12
4.2 WI-FI.....	13
4.3 ZIGBEE.....	13
4.4 USER INTERFACE SWITCH.....	14
4.5 USER LED INDICATIONS.....	14
5 INSTALLATION OF LEAKSMART HUB3.0.....	16
5.1 LEAKSMART HUB3.0 BOX CONTENT.....	16
5.2 USER REQUIRED ITEMS.....	16
6 MOBILE APPLICATION SETUP OF LEAKSMART HUB3.0.....	17
7 CONTACT US AND SUPPORT.....	18
8 APPENDIX-A.....	19
8.1 ACRONYMS & GLOSSARY.....	19
9 APPENDIX-B.....	20
9.1 COMPLIANCE.....	20
FCC STATEMENT.....	21
RF RADIATION EXPOSURE STATEMENT.....	21
IC STATEMENT.....	21

LIST OF FIGURES

Figure 1 - leakSMART hub3.0 Block Diagram.....	9
Figure 2 - Product Label-1 inside battery holder	11
Figure 3 - Serial Number Label-2 on the bottom side of enclosure.....	11
Figure 4 - User interaction Block Diagram.....	12
Figure 5 - Power supply adapter.....	12
Figure 6 - Li-ion battery compartment and placement with polarity.....	13

LIST OF TABLES

Table 1 - Revision History.....	6
Table 2 – References.....	6
Table 3 - References.....	7
Table 4 - leakSMART hub3.0 specifications.....	10
Table 5 - User LED Indications.....	15
Table 6 - leakSMART hub3.0 Box Content.....	16
Table 7 - Other Require Equipment.....	16
Table 8 - Acronyms & Glossary.....	19

1 REVISION HISTORY**1.1 Revision History**

Rev.	Date	Description	Prepared By	Reviewed By	Approved By
0.1	24-Jan-18	Initial draft version released	Waxman	Waxman	
0.2	02-Feb-18	Updated based on review comments	Waxman	Waxman	
1.0	07-Feb-18	Updated based on review comments	Waxman	Waxman	
1.1	06-March-18	Final Release	Waxman	Waxman	
1.2	02-April-18	SAR warning added in section 5	Waxman	Waxman	

Table 1 - Revision History**1.2 References**

Documents	Revision
leakSMART hub3.0 PRD	1.0
leakSMART Hub3.0 User Guide_v1.1	1.1

Table 2 – References

2 USING THIS MANUAL

2.1 Purpose and Audience

This document provides Introduction, key features, design platform Architecture and interfaces, setup and use of leakSMART hub3.0. It is intended for the users who are configuring this product. The user need to use this product to protects your home or building from water damage 24/7 with smart home technology that detects water leaks, alerts the home owner, and shuts off the main water supply automatically to prevent any further damage—even if disaster strikes and Internet is down.

2.2 Summary of chapters

Chapter No.	Chapter	Description
3	Overview	Describes Introduction, block diagram, Specifications, key features and the protocols it supports. Includes technical specifications.
4	Design Architecture and Interfaces	Describes Hardware interface idea and wireless technology support details.
5	Installation of Hub 3.0	Describe details of List of content in box of product and how to install it on field
6	Setup of Hub 3.0	Describes setup and configuration procedure with Wi-Fi using mobile application.
7	Contact us and support	Instructions for contacting Waxman and Technical Support details
8	Appendix A	Acronyms and Glossary – Full forms of used short names
9	Appendix B	Hub 3.0 compliance details

Table 3 - References

3 OVERVIEW

The “leakSMART hub3.0” is a smart, customize, advance Product for next generation water leakage detection and damage prevention system with the help of leak detect sensor in Internet of Things. It also automatically shuts off the water as soon as a leak is detected during sensor is configured in Protect Mode. It is targeted for multiple use cases in various segments of IoT such as **Smart Home and Buildings**. The leakSMART hub3.0 is designed with core features like **ZigBee** and **Wi-Fi** Connectivity.

- Connect
 - leakSMART monitors the home 24/7 for water leaks and temperature changes to help avoid water damage.
- Protect
 - The system can immediately detect both leaking water and dropping temperatures using leakSMART water leak sensors. The water alarm sensor will alert the system to automatically shut off the home's water supply when a water leak is detected.
- Trust
 - Your home's water is shut off as soon as a leak is detected. Plus, you can remotely control your main water valve from anywhere.

3.1 leakSMART Components

leakSMART System consists of below mentioned components.

- **leakSMART Valve** – A patented valve that connects directly to your home's main water supply, ready to automatically shut off your water in the event of a leak. The leakSMART Valve is an electronic valve that fits most residential main water lines in the U.S. Professional installation of the leakSMART Valve is strongly recommended for automatically shutting off the water once a leak is detected.
- **leakSMART Sensor** - Each wireless, waterproof and reusable leakSMART Sensor monitors both moisture and temperature and will signal your leakSMART Hub at the first sign of a leak. These sensors are placed strategically throughout your home near appliances, plumbing fixtures and pipe seams.
- **leakSMART Hub** - If a water leak is detected in your home, the leakSMART Hub receives the signals from the leak sensors placed in your home and directs the leakSMART Valve to immediately shut off your home's water supply to eliminate the threat of water damage.
- **leakSMART App** – A new version of app that shall deliver instant notification when a leak is detected in your home that your water is subsequently shut off. Additionally, it shall alert you on your smart device if certain temperatures are reached or if sensor batteries are running low.
- **leakSMART Cloud** - leakSMART Cloud shall be based on Ayla Cloud which is a completely managed service that provides a full suite of operational, business intelligence, and analytics services to manage a cloud connected deployment throughout its lifecycle.

3.2 leakSMART hub3.0 Block Diagram

leakSMART hub3.0 is one of the component of leakSMART System which is a Full Home Water Leak Detection System.

leakSMART is the customized hub for their next generation of leak detection and prevention system.

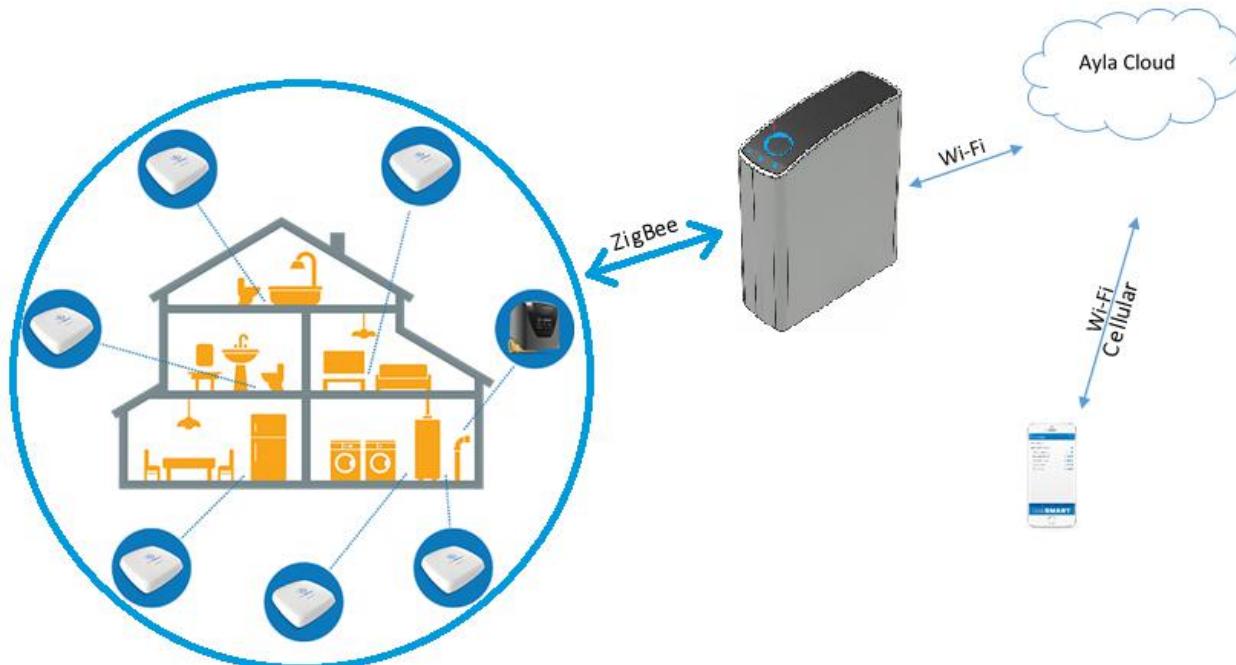


Figure 1 - leakSMART hub3.0 Block Diagram

3.3 leakSMART hub3.0 - Specifications and Features

Hub3.0 Kit Content	1. Hub3.0 with battery pre-installed 2. Power adapter 3. Quick start guide
Power Adapter	Input of Power Adaptor: 100-240V AC / 50-60Hz Output of Power Adaptor: 5V DC, 1A Type: Wall plug mount Pin standard: NEMA 1-15P (two-pole, no ground)
Primary supply	Through AC/DC power adapter
Secondary supply	Built-in, field replaceable Li-Po battery pack Uninterrupted switching to secondary supply in absence of primary supply.
Backup on secondary supply	Up to 3.5 hours continuous operation of the product.
Battery	Li-po battery (18350 cell)- 3.7V, 850mAh
Wi-Fi	802.11 b/g/n, WPA-PSK, WEP, PCB Trace Antenna, Wi-Fi compliant
ZigBee	802.15.4 (2.4 GHz)
Antenna diversity	Support for ZigBee Antenna 1: PCB trace antenna Antenna 2: Chip antenna

Flash	8MB
Operation Buttons	1x User input (Wi-Fi Provisioning) 1x Factory reset 1x Power On/Off
Status Indicator	1x RGB LED
Operating System	FreeRTOS
Certification:	FCC, IC
Operating Temperature	0C to 45C
Storage Temperature	-20C to 45C (Driven by battery specifications)
Operating Humidity	10%~90%RH (Non-condensing)
Storage Humidity	10%~90%RH (Non-condensing)
Enclosure Dimensions (in mm)	92 x 35 x 90 mm(L x W x H)
Weight (in g)	90gram

Table 4 - leakSMART hub3.0 specifications

Note: The Primary source of power is Adapter and battery is only used for backup when primary source is not present.

3.4 Protocol & Security Support

The Hub3.0 contains a full-featured wireless software stack:

- AP and Station Mode for Wi-Fi
- ZigBee
- WPA/WPA2 Personal

3.5 Wi-Fi Addresses and Port Numbers

3.5.1 Hardware Address

The hardware address of Wi-Fi is also referred to as the physical address, or MAC address. Sample ways hardware address may be represented:

- 00-80-A3-14-1B-18
- 00:80:A3:14:1B:18

3.5.2 Port Numbers

Every TCP connection is defined by a destination and source IP Address, and a destination and source port number. For example, a Telnet server commonly uses TCP port number 23.

The following is a list of the default server port numbers running on the leakSMART hub3.0:

- **TCP Port 443:** HTTPS (Web Manager Configuration)
- **TCP Port 80:** HTTP (Web Manager Configuration)

3.6 leakSMART hub3.0 information Label

The leakSMART hub3.0 information Label on the device contains the following information about the specific unit:

- Label-1
 - ◆ Company logo
 - ◆ Model Name
 - ◆ Serial Number
 - ◆ MAC Address
 - ◆ Wi-Fi module FCC ID
 - ◆ Wi-Fi module IC ID
 - ◆ FCC ID
 - ◆ IC ID

e.g.:



Figure 2 - Product Label-1 inside battery holder

- Label-2
 - ◆ Company logo
 - ◆ Serial Number
 - ◆ Wi-Fi MAC Address
 - ◆ QR Code with Serial Number and Wi-Fi MAC Address details

e.g.:

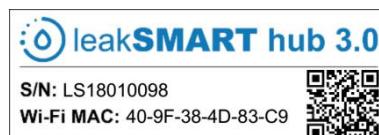


Figure 3 – Serial Number Label-2 on the bottom side of enclosure

4 THE LEAKSMART HUB3.0 USER INTERFACES

The leakSMART hub3.0 implements an advanced next generation wireless interfaces like Wi-Fi and ZigBee. This section provides information about different user interactions of Hub3.0.

The basic user interaction diagram is shown as per below image:

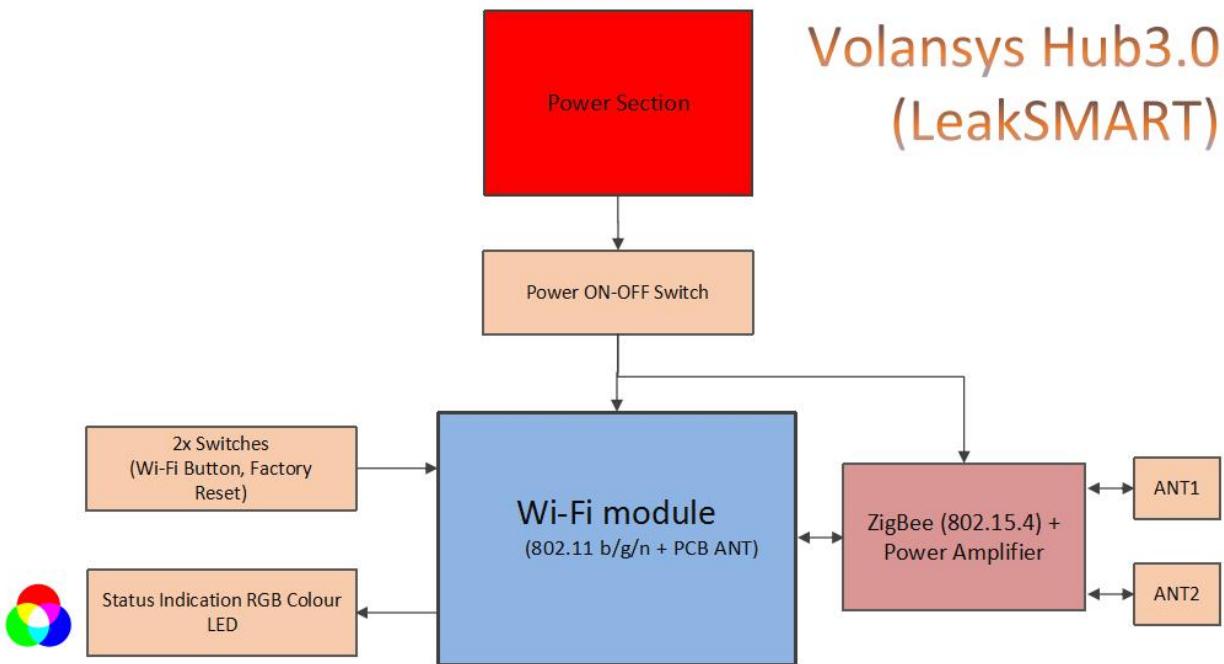


Figure 4 – User interaction Block Diagram

The above diagram has following main Sections:

1. Power Section - Power supply and Battery Protection, Battery Charging and Switching Circuit
2. Wi-Fi
3. ZigBee
4. User Interface Switch
5. Status Indication RGB LED

4.1 Power Supply

The leakSMART board power is supplied by two sources:

1. **Primary Supply (Power Adapter):** It is the main power source of leakSMART hub3.0. The output of power supply adapter is 5V, 1A power adaptor.



Figure 5 - Power supply adapter

2. **Secondary Supply (Li-ion battery):** It supports 3.8 to 4.2V range and it is used for battery backup and supply power if power adapter is not used.



Figure 6 – Li-ion battery compartment and placement with polarity

Note: User must initially supply power through power adapter once and then it can switch supply power through battery.

4.2 Wi-Fi

leakSMART hub3.0 support of Single Band (2.4GHz) Wi-Fi Module. This module is FCC/CE/IC/NCC Certified.

The Hub3.0 supports following features:

- Wi-Fi Micro-controller Smart Energy Platform Solution
- I/O Interface Support: UART, JTAG, GPIO, SSP, I2C and GPT
- Support of IEEE 802.11b/g/n Wi-Fi
- Integrated Printed- Antenna
- LGA package

4.3 ZigBee

● ZigBee :

The ZigBee SoC is an ultra-low power, high performance wireless chip. It supports following features:

- 2.4GHz IEEE802.15.4 compliant
- TX power 8.5 dBm/10 dBm & with PA upto max. 20dBm
- Receiver sensitivity -96 dBm
- TX current 24 mA at 10 dBm
- TX current 21.2 mA at 8.5 dBm
- RX current 14.3 mA at maximum input level -2 dBm
- 3.3 V operation
- Support with both Chip and PCB Antenna

● Power Amplifier Module

The power amplifier module is a high-performance, fully integrated RF front-end module (FEM) designed for ZigBee applications.

- Integrated PA with up to +21 dBm output power
- Integrated LNA (2 dB noise figure typical) and bypass path
- Integrated antenna diversity switching for all modes
- Single-ended transmit/receive interface
- Fast switch on/off time: < 800 ns
- Supply range: 1.8 V to 3.6 V
- Sleep mode current: < 1 μ A typical
- No external bias resistor is required
- Antenna Diversity support

4.4 User Interface Switch

The leakSMART has three below user interaction switch:



Figure 9 – Hub3.0 switch details

1. **Wi-Fi Provisioning Button:** Use to put Wi-Fi in provision mode and press for 5 seconds to reset Wi-Fi credentials.
2. **Factory Reset:** To reset the Hub3.0 by 15 second long press. It is also used to reboot the system without removing power supply. Pressing the switch will drive logic zero on RESET signal, which will affects every modules on Hub3.0.
3. **Power ON/OFF Switch:** To ON and OFF the power of leakSMART hub3.0.

4.5 User LED Indications

Single RGB LED is used to provide indication about different Hub3.0 functionality.

Below table indicates color mark to represent specific events.

LED indication	Primary Supply	Secondary Supply
Red	No Wi-Fi Connection	No Wi-Fi Connection
Red Blinking	No Internet Access	No Internet Access
Blue	System is OK	NA
Green Blinking	Initializing Pairing Mode	Initializing Pairing Mode
Green	Firmware upgrade in progress	Firmware upgrade in progress
Yellow-Orange	NA	System is OK, running on battery
Yellow-Orange Blinking	NA	LOW Battery
Light Purple	Factory Reset in progress	Factory Reset in progress
Red and Blue blinking	Abnormal Condition	Abnormal Condition

Table 5 - User LED Indications



Figure 10 – Hub3.0 user interaction LED

5 INSTALLATION OF LEAKSMART HUB3.0

The leakSMART hub3.0 comes with its required contents and it is mentioned in below section.

5.1 leakSMART hub3.0 Box Content

The leakSMART hub3.0 comes with following listed items:

Item	Description
Hub3.0	Hub3.0 unit with 18350 Li-ion battery
Power Adapter	DC 5V, 1A
Documentation	Quick Start Guide

Table 6 - leakSMART hub3.0 Box Content

5.2 User required Items

To complete your demo installation you need following items and it is not standard parts of leakSMART hub3.0. User needs to manage it.

Item	Description
Internet connectivity	To connect hub3.0 to cloud over Wi-Fi
Mobile Device (Android/iOS)	To access application and function the hub3.0
Mobile Application	Mobile Application (Support on Android and/or iOS)

Table 7 - Other Require Equipment

Warning: User needs to keep the product at lease 20 cm away from the body when it is in working condition.

6 MOBILE APPLICATION SETUP OF LEAKSMART HUB3.0

Kindly refer leakSMART Hub3.0 User Guide_v1.1 for setup and configuration of Mobile application on Android and/or iOS platform.

7 CONTACT US AND SUPPORT

USA Office:

E-mail: customer-service@leaksmart.com

Waxman offers many resources to support our customers and leakSMART hub3.0 platform at
Website: <https://leaksmart.com/contact/>

For instance, you can ask a question and other technical details related to reference design platforms at our website. At this site you can also find FAQs, bulletins, warranty information, extended support services and Reference design platform documentation.

To contact technical support or sales, look up your local office at: techsupport@leaksmart.com

When you report a problem, please provide the Following information:

- Your name, company name, address, and phone number
- Description of the problem
- Status of the unit when the problem occurred.

8 APPENDIX-A**8.1 Acronyms & Glossary**

The following terms are used in this document

Sr No#	Terms	Definition
1.	GPIO	General Purpose Input and Output
2.	I2C	Inter Integrated Circuit
3.	IoT	Internet Of Things
4.	JTAG	Joint Test Action Group
5.	LDO	Low Dropout
6.	LED	Light Emitting Diode
7.	SDRAM	Synchronous Dynamic Random Access Memory
8.	PA	Power Amplifier
9.	SoC	System on Chip
10.	LNA	Low Noise Amplifier
11.	SPI	Serial Peripheral Interface
12.	TBD	To Be Define
13.	U.FL	Ultra-Miniature RF Connector
14.	UART	Universal Asynchronous receiver and Transmitter
15.	USB	Universal Serial Bus

Table 8 - Acronyms & Glossary

9 APPENDIX-B

9.1 Compliance

Design Platform Name Model:

leakSMART hub3.0

Conforms to the following standards or other normative documents:

FCC: FCC part 15 modular certification ID: _____

IC: Industry Canada RSS-247 modular certification IC: _____

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body

IC Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device. This device complies with RSS-247 of Industry Canada. Operation is subject to the condition that this device does not cause harmful interference. This Class B digital apparatus complies with Canadian ICES-003 (Cet appareil numérique de la Classe B conforme à la norme NMB-003 du Canada).

This equipment(IC: _____) complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement (IC: _____) est conforme aux limites IC d'exposition aux radiations définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps. Cet émetteur ne doit pas être situé ou opérant en conjonction avec une autre antenne ou émetteur.