



FCC REPORT

Report Reference No. : CHTEW21110069 Report Verification: 

Project No. : SHT2109065003EW

FCC ID. : 2A3QD-WB-BHA12A001

Applicant's name : Telecom Square, Inc.

Address..... : 3F Homat Horizon Building, 6-2 Gobancho, Chiyoda-ku, Tokyo 102-0076

Test item description : 12 Slots Sharing Power Bank

Trade Mark : -

Model/Type reference..... : ZBJ-886

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22
FCC CFR Title 47 Part 24
FCC CFR Title 47 Part 27

Date of receipt of test sample..... : Sep. 28, 2021

Date of testing..... : Sep. 29, 2021- Nov. 08, 2021

Date of issue..... : Nov. 09, 2021

Result..... : Pass

Compiled by
(position+printedname+signature).... : File administrators Silvia Li

Silvia Li

Supervised by
(position+printedname+signature).... : Project Engineer Aaron Fang

Aaron.Fang

Approved by
(position+printedname+signature).... : Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	7
3.4.	EUT operation mode	9
3.5.	EUT configuration	10
3.6.	Modifications	10
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>11</u>
4.1.	Testing Laboratory Information	11
4.2.	Equipments Used during the Test	11
4.3.	Environmental conditions	11
4.4.	Statement of the measurement uncertainty	12
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>13</u>
5.1.	ERP and EIRP	13
5.2.	Radiated Spurious Emission	28
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>58</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>58</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Rules Part 22](#): PUBLIC MOBILE SERVICES

[FCC Rules Part 24](#): PERSONAL COMMUNICATIONS SERVICES

[FCC Rules Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[ANSI C63.26: 2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2021-11-09	Original

2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50	Pass*	N/A
Peak-to-Average Ratio	Part 24.232 Part 27.50	Pass*	N/A
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	Pass*	N/A
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass*	N/A
Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass*	N/A
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	Pass*	N/A
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	Pass*	N/A
ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	Pass	Pan Xie
Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	Pass	Pan Xie

Note:

1. The measurement uncertainty is not included in the test result.
2. * reference to module report , which FCC ID is XMR201903EG25G

3. SUMMARY

3.1. Client Information

Applicant:	Telecom Square, Inc.
Address:	3F Homat Horizon Building, 6-2 Gobancho, Chiyoda-ku, Tokyo 102-0076
Manufacturer:	Skyroam Technology Co., Ltd.
Address:	No.902, 9th Floor, Weisheng Technology Building, No.9966 Shennan Avenue, Shenzhen, Guangdong, China

3.2. Product Description

Name of EUT:	12 Slots Sharing Power Bank		
Trade Mark:	-		
Model No.:	ZBJ-886		
Listed Model(s):	-		
Power supply:	DC 12V		
Adapter information:	Model:J652-1205000D Input: AC100-240V, 50/60Hz, 1.7A Output: 12.0Vdc, 5.0A 60.0W		
Hardware version:	bat-5310-B8		
Software version:	Bat-5310-bin-20210812.hex		
4G			
Operation Band:	☒ FDD Band 2 ☒ FDD Band 7 ☒ FDD Band 25 ☒ TDD Band 41	☒ FDD Band 4 ☒ FDD Band 12 ☒ FDD Band 26	☒ FDD Band 5 ☒ FDD Band 13 ☒ TDD Band 38
Transmit frequency:	FDD Band 2: 1850.7 MHz – 1909.3 MHz FDD Band 4: 1710.7 MHz – 1754.3 MHz FDD Band 5: 824.7 MHz – 848.3 MHz FDD Band 7: 2502.5 MHz – 2567.5 MHz FDD Band 12: 699.7 MHz – 715.3 MHz FDD Band 13: 779.5 MHz – 784.5 MHz FDD Band 25: 1850.7 MHz- 1914.3 MHz FDD Band 26: 824.7 MHz – 848.3 MHz TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2498.5 MHz – 2687.5 MHz		
Receive frequency:	FDD Band 2: 1930.7 MHz – 1989.3 MHz FDD Band 4: 2110.7 MHz – 2154.3 MHz FDD Band 5: 869.7 MHz – 893.3 MHz FDD Band 7: 2622.5 MHz – 2687.5 MHz FDD Band 12: 729.7 MHz – 745.3 MHz FDD Band 13: 748.5 MHz – 753.5 MHz FDD Band 25: 1930.7 MHz- 1994.3 MHz FDD Band 26: 869.7 MHz – 893.3 MHz		

	TDD Band 38: TDD Band 41:	2572.5 MHz – 2617.5 MHz 2498.5 MHz – 2687.5 MHz
Channel bandwidth:	FDD Band 2: FDD Band 4: FDD Band 5: FDD Band 7: FDD Band 12: FDD Band 13: FDD Band 25: FDD Band 26: TDD Band 38: TDD Band 41:	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz 1.4MHz, 3MHz, 5MHz, 10MHz 5MHz, 10MHz, 15MHz, 20MHz 1.4MHz, 3MHz, 5MHz, 10MHz 5MHz, 10MHz 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz 5MHz, 10MHz, 15MHz, 20MHz 5MHz, 10MHz, 15MHz, 20MHz
Power Class:	Class 3	
Modulation type:	QPSK, 16QAM	
Antenna type	Loop Antenna	
Antenna Gain	Band2:2.5dBi Band4:2.5dBi Band5:1.5dBi Band7:3.0dBi Band12:1.1dBi Band13:1.1dBi Band25:2.5dBi Band26:1.5dBi Band38:2.8dBi Band41:2.8dBi	

3.3. Operation state

➤ Test frequency list

FDD Band 2	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	18607	1850.7	607	1930.7
		3	18615	1851.5	615	1931.5
		5	18625	1852.5	625	1932.5
		10	18650	1855	650	1935
		15 ^[1]	18675	1857.5	675	1937.5
		20 ^[1]	18700	1860	700	1940
	Mid Range	1.4/3/5/10/15 ^[1] /20 ^[1]	18900	1880	900	1960
	High Range	1.4	19193	1909.3	1193	1989.3
		3	19185	1908.5	1185	1988.5
		5	19175	1907.5	1175	1987.5
		10	19150	1905	1150	1985
		15 ^[1]	19125	1902.5	1125	1982.5
		20 ^[1]	19100	1900	1100	1980
	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					
FDD Band 4	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	19957	1710.7	1957	2110.7
		3	19965	1711.5	1965	2111.5
		5	19975	1712.5	1975	2112.5
		10	20000	1715	2000	2115
		15	20025	1717.5	2025	2117.5
		20	20050	1720	2050	2120
	Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5
	High Range	1.4	20393	1754.3	2393	2154.3
		3	20385	1753.5	2385	2153.5
		5	20375	1752.5	2375	2152.5
		10	20350	1750	2350	2150
		15	20325	1747.5	2325	2147.5
		20	20300	1745	2300	2145
FDD Band 5	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	20407	824.7	2407	869.7
		3	20415	825.5	2415	870.5
		5	20425	826.5	2425	871.5
		10 ^[1]	20450	829	2450	874
	Mid Range	1.4/3/5/10 ^[1]	20525	836.5	2525	881.5
	High Range	1.4	20643	848.3	2643	893.3
		3	20635	847.5	2635	892.5
		5	20625	846.5	2625	891.5
		10 ^[1]	20600	844	2600	889
	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					
FDD Band 7	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	5	20775	2502.5	2775	2622.5
		10	20800	2505	2800	2625
		15	20825	2507.5	2825	2627.5
		20 ^[1]	20850	2510	2850	2630
	Mid Range	5/10/15/20 ^[1]	21100	2535	3100	2655
	High Range	5	21425	2567.5	3425	2687.5
		10	21400	2565	3400	2685
		15	21375	2562.5	3375	2682.5
		20 ^[1]	21350	2560	3350	2680
	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					
FDD Band 12	Table 4.3.1.12-1: Test frequencies for E-UTRA channel bandwidth for operating band 12					
	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	23017	699.7	5017	729.7
		3	23025	700.5	5025	730.5
		5 ^[1]	23035	701.5	5035	731.5
		10 ^[1]	23060	704	5060	734
	Mid Range	1.4/3/5 ^[1] /10 ^[1]	23095	707.5	5095	737.5
	High Range	1.4	23173	715.3	5173	745.3
		3	23165	714.5	5165	744.5
		5 ^[1]	23155	713.5	5155	743.5
		10 ^[1]	23130	711	5130	741
	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					
FDD Band 13	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	5 ^[1]	23205	779.5	5205	748.5
		10 ^[1]	23230	782	5230	751
	Mid Range	5 ^[1] /10 ^[1]	23230	782	5230	751
	High Range	5 ^[1]	23255	784.5	5255	753.5
		10 ^[1]	23230	782	5230	751
	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					

FDD Band 25	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	26047	1850.7	8047	1930.7
		3	26055	1851.5	8055	1931.5
		5	26065	1852.5	8065	1932.5
		10	26090	1855	8090	1935
		15 ⁽¹⁾	26115	1857.5	8115	1937.5
		20 ⁽¹⁾	26140	1860	8140	1940
	Mid Range	1.4/3/5/10/15 ⁽¹⁾ /20 ⁽¹⁾	26365	1882.5	8365	1962.5
	High Range	1.4	26683	1914.3	8683	1994.3
		3	26675	1913.5	8675	1993.5
		5	26665	1912.5	8665	1992.5
		10	26640	1910	8640	1990
		15 ⁽¹⁾	26615	1907.5	8615	1987.5
		20 ⁽¹⁾	26590	1905	8590	1985
	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					

FDD Band 26	Test Frequency ID	Banwidth[MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4	26797	824.7	8797	869.7
		3	26805	825.5	8805	870.5
		5	26815	826.5	8815	871.5
		10	26840	829	8840	874
		15	26865	831.5	8865	876.5
	Mid Range	1.4/3/5/10/15	26915	836.5	8915	881.5
	High Range	1.4	27033	848.3	9033	893.3
		3	27025	847.5	9025	892.5
		5	27015	846.5	9015	891.5
		10	26990	844	8990	889
		15	26965	841.5	8965	886.5

TDD Band 38	Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
	Low Range	5	37775	2572.5
		10	37800	2575
		15	37825	2577.5
		20	37850	2580
	Mid Range	5/10/15/20	38000	2595
	High Range	5	38225	2617.5
		10	38200	2615
		15	38175	2612.5
		20	38150	2610

TDD Band 41	Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
	Low Range	5	39675	2498.5
		10	39700	2501
		15	39725	2503.5
		20	39750	2506
	Mid Range	5/10/15/20	40620	2593
	High Range	5	41565	2687.5
		10	41540	2685
		15	41515	2682.5
20		41490	2680	

3.4. EUT operation mode

For RF test items

The EUT has been tested under typical operating condition. Testing was performed by configuring EUT to maximum output power status.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full
Conducted Output Power	2	o	o	o	o	o	o	o	o	o	o	o
	4	o	o	o	o	o	o	o	o	o	o	o
	5	o	o	o	o	-	-	o	o	o	o	o
	7	-	-	o	o	o	o	o	o	o	o	o
	12	o	o	o	o	-	-	o	o	o	o	o
	13	-	-	o	o	-	-	o	o	o	o	o
	25	o	o	o	o	o	o	o	o	o	o	o
	26	o	o	o	o	o	-	o	o	o	o	o
	38	-	-	o	o	o	o	o	o	o	o	o
Peak-to-Average Ratio	2	o	o	o	o	o	o	o	o	o	-	o
	4	o	o	o	o	o	o	o	o	o	-	o
	5	o	o	o	o	-	-	o	o	o	-	o
	7	-	-	o	o	o	o	o	o	o	-	o
	12	o	o	o	o	-	-	o	o	o	-	o
	13	-	-	o	o	-	-	o	o	o	-	o
	25	o	o	o	o	o	o	o	o	o	-	o
	26	o	o	o	o	o	-	o	o	o	-	o
	38	-	-	o	o	o	o	o	o	o	-	o
99% Occupied Bandwidth & 26 dB Bandwidth	2	o	o	o	o	o	o	o	o	-	-	o
	4	o	o	o	o	o	o	o	o	-	-	o
	5	o	o	o	o	-	-	o	o	-	-	o
	7	-	-	o	o	o	o	o	o	-	-	o
	12	o	o	o	o	-	-	o	o	-	-	o
	13	-	-	o	o	-	-	o	o	-	-	o
	25	o	o	o	o	o	o	o	o	-	-	o
	26	o	o	o	o	o	-	o	o	-	-	o
	38	-	-	o	o	o	o	o	o	-	-	o
Band Edge	2	o	o	o	o	o	o	o	o	o	-	o
	4	o	o	o	o	o	o	o	o	o	-	o
	5	o	o	o	o	-	-	o	o	o	-	o
	7	-	-	o	o	o	o	o	o	o	-	o
	12	o	o	o	o	-	-	o	o	o	-	o
	13	-	-	o	o	-	-	o	o	o	-	o
	25	o	o	o	o	o	o	o	o	o	-	o
	26	o	o	o	o	o	-	o	o	o	-	o
	38	-	-	o	o	o	o	o	o	o	-	o
Conducted Spurious Emission	2	o	o	o	o	o	o	o	o	o	-	-
	4	o	o	o	o	o	o	o	o	o	-	-
	5	o	o	o	o	-	-	o	o	o	-	-
	7	-	-	o	o	o	o	o	o	o	-	-
	12	o	o	o	o	-	-	o	o	o	-	-
	13	-	-	o	o	-	-	o	o	o	-	-
	25	o	o	o	o	o	o	o	o	o	-	-
	26	o	o	o	o	o	-	o	o	o	-	-

	38	-	-	o	o	o	o	o	o	o	-	-
	41	-	-	o	o	o	o	o	o	o	-	-
Frequency Stability	2	o	o	o	o	o	o	o	o	-	-	o
	4	o	o	o	o	o	o	o	o	-	-	o
	5	o	o	o	o	-	-	o	o	-	-	o
	7	-	-	o	o	o	o	o	o	-	-	o
	12	o	o	o	o	-	-	o	o	-	-	o
	13	-	-	o	o	-	-	o	o	-	-	o
	25	o	o	o	o	o	o	o	o	-	-	o
	26	o	o	o	o	o	-	o	o	-	-	o
	38	-	-	o	o	o	o	o	o	-	-	o
	41	-	-	o	o	o	o	o	o	-	-	o
ERP and EIRP	2	o	o	o	o	o	o	o	o	o	-	-
	4	o	o	o	o	o	o	o	o	o	-	-
	5	o	o	o	o	-	-	o	o	o	-	-
	7	-	-	o	o	o	o	o	o	o	-	-
	12	o	o	o	o	-	-	o	o	o	-	-
	13	-	-	o	o	-	-	o	o	o	-	-
	25	o	o	o	o	o	o	o	o	o	-	-
	26	o	o	o	o	o	-	o	o	o	-	-
	38	-	-	o	o	o	o	o	o	o	-	-
Radiated Spurious Emission	41	-	-	o	o	o	o	o	o	o	-	-
	2	o	o	o	o	o	o	o	o	o	-	-
	4	o	o	o	o	o	o	o	o	o	-	-
	5	o	o	o	o	-	-	o	o	o	-	-
	7	-	-	o	o	o	o	o	o	o	-	-
	12	o	o	o	o	-	-	o	o	o	-	-
	13	-	-	o	o	-	-	o	o	o	-	-
	25	o	o	o	o	o	o	o	o	o	-	-
	26	o	o	o	o	o	-	o	o	o	-	-
Remark	38	-	-	o	o	o	o	o	o	o	-	-
	41	-	-	o	o	o	o	o	o	o	-	-
	1. The mark "o" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not test. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.											

3.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.6. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4.2. Equipments Used during the Test

● Radiated Spurious Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2022/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2021/9/13	2022/9/12
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2022/04/05
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/4/27	2023/4/27
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2022/04/05
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2020/11/13	2021/11/12
●	Broadband Preamplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2021/03/05	2022/03/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	VN=Nominal Voltage	DC 12.0V
	VL=Lower Voltage	DC 10.8V
	VH=Higher Voltage	DC 13.2V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30° to + 50° centigrade
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Transmitter power Radiated	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Radiated spurious emissions	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Frequency error	15Hz for <1GHz 70Hz for >1GHz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

5. TEST CONDITIONS AND RESULTS

5.1. ERP and EIRP

LIMIT

LTE Band 2/7/25/38/41: 2W(33dBm) EIRP


LTE Band 4: 1W(30dBm) EIRP

LTE Band 5/26: 7W(38.50dBm) ERP

LTE Band 12: 3W(34.77dBm) ERP

LTE Band 13: 30W(44.77dBm) ERP

TEST CONFIGURATION

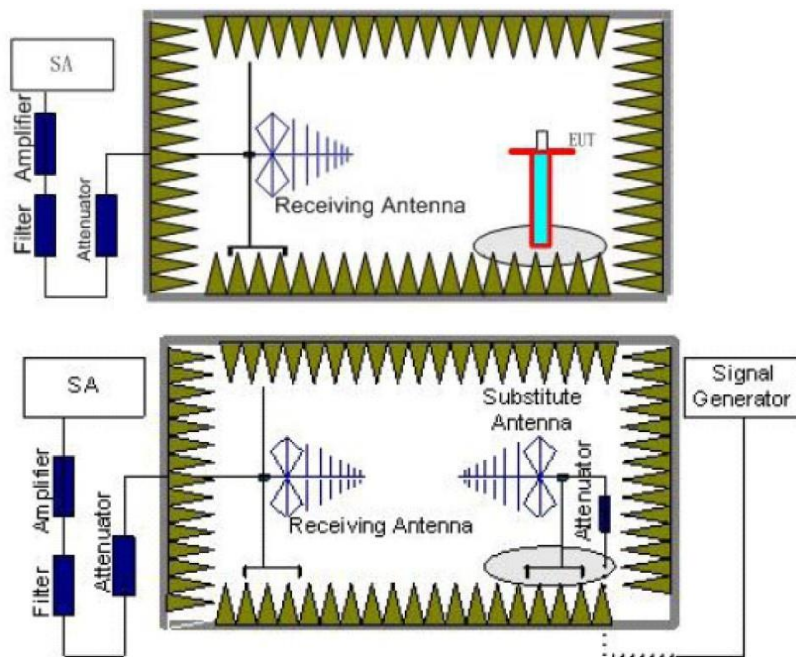

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.

- b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

LTE Band 2-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.50	17.96	≤33.00	PASS
	Mid	20.83	18.19		
	High	20.57	18.21		
16QAM	Low	20.41	17.91		PASS
	Mid	20.77	18.29		
	High	20.49	18.12		

LTE Band 2-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.43	17.91	≤33.00	PASS
	Mid	20.86	18.12		
	High	20.60	18.22		
16QAM	Low	20.32	17.81		PASS
	Mid	20.62	18.13		
	High	20.42	18.15		

LTE Band 2-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.44	17.89	≤33.00	PASS
	Mid	20.72	18.17		
	High	20.51	18.29		
16QAM	Low	20.44	18.03		PASS
	Mid	20.66	18.08		
	High	20.37	18.13		

LTE Band 2-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.53	17.84	≤33.00	PASS
	Mid	20.84	18.21		
	High	20.46	18.19		
16QAM	Low	20.62	18.08		PASS
	Mid	20.88	18.30		
	High	20.46	18.19		

LTE Band 2-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.46	17.86	≤33.00	PASS
	Mid	20.79	18.20		
	High	20.60	18.17		
16QAM	Low	20.34	17.91		PASS
	Mid	20.67	18.10		
	High	20.44	18.05		

LTE Band 2-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.41	17.85	≤33.00	PASS
	Mid	20.70	18.08		
	High	20.47	18.30		
16QAM	Low	20.27	17.91		PASS
	Mid	20.53	18.05		
	High	20.44	18.08		

LTE Band 4-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.61	18.04	≤30.00	PASS
	Mid	20.93	18.64		
	High	20.56	18.12		
16QAM	Low	20.49	17.98		PASS
	Mid	20.82	18.73		
	High	20.43	17.98		

LTE Band 4-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	17.99	≤30.00	PASS
	Mid	20.96	18.56		
	High	20.59	18.14		
16QAM	Low	20.38	17.85		PASS
	Mid	20.68	18.59		
	High	20.36	18.03		

LTE Band 4-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.55	17.97	≤30.00	PASS
	Mid	20.80	18.63		
	High	20.45	18.19		
16QAM	Low	20.57	18.19		PASS
	Mid	20.70	18.50		
	High	20.27	17.98		

LTE Band 4-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.64	17.88	≤30.00	PASS
	Mid	20.94	18.67		
	High	20.44	18.13		
16QAM	Low	20.73	18.18		PASS
	Mid	20.92	18.74		
	High	20.42	18.10		

LTE Band 4-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.54	17.90	≤30.00	PASS
	Mid	20.93	18.71		
	High	20.60	18.07		
16QAM	Low	20.39	17.97		PASS
	Mid	20.79	18.59		
	High	20.38	17.90		

LTE Band 4-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.49	17.89	≤30.00	PASS
	Mid	20.77	18.52		
	High	20.44	18.28		
16QAM	Low	20.31	18.02		PASS
	Mid	20.58	18.50		
	High	20.40	17.96		

LTE Band 5-1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.88	18.22	≤38.50	PASS
	Mid	21.44	18.70		
	High	20.80	18.47		
16QAM	Low	20.77	18.16		PASS
	Mid	21.37	18.80		
	High	20.72	18.38		

LTE Band 5-3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.83	18.20	≤38.50	PASS
	Mid	21.41	18.59		
	High	20.88	18.53		
16QAM	Low	20.70	18.07		PASS
	Mid	21.23	18.66		
	High	20.71	18.47		

LTE Band 5-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.82	18.15	≤38.50	PASS
	Mid	21.25	18.62		
	High	20.77	18.58		
16QAM	Low	20.86	18.35		PASS
	Mid	21.21	18.54		
	High	20.59	18.38		

LTE Band 5-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.89	18.09	≤38.50	PASS
	Mid	21.44	18.72		
	High	20.77	18.54		
16QAM	Low	20.94	18.30		PASS
	Mid	21.40	18.74		
	High	20.75	18.53		

LTE Band 7-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.05	17.97	≤33.00	PASS
	Mid	20.43	18.68		
	High	19.47	17.81		
16QAM	Low	19.99	17.93		PASS
	Mid	20.39	18.74		
	High	19.43	17.76		

LTE Band 7-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.02	17.96	≤33.00	PASS
	Mid	20.41	18.62		
	High	19.52	17.85		
16QAM	Low	19.95	17.88		PASS
	Mid	20.31	18.65		
	High	19.42	17.82		

LTE Band 7-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.01	17.93	≤33.00	PASS
	Mid	20.32	18.63		
	High	19.46	17.88		
16QAM	Low	20.04	18.04		PASS
	Mid	20.29	18.58		
	High	19.35	17.76		

LTE Band 7-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.06	17.89	≤33.00	PASS
	Mid	20.43	18.69		
	High	19.46	17.86		
16QAM	Low	20.09	18.02		PASS
	Mid	20.41	18.70		
	High	19.45	17.85		

LTE Band 12-1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.75	19.54	≤34.77	PASS
	Mid	21.10	20.15		
	High	21.37	19.61		
16QAM	Low	20.58	19.43		PASS
	Mid	20.98	20.19		
	High	21.27	19.50		

LTE Band 12-3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.68	19.50	≤34.77	PASS
	Mid	21.14	20.08		
	High	21.40	19.62		
16QAM	Low	20.51	19.34		PASS
	Mid	20.86	20.07		
	High	21.22	19.54		

LTE Band 12-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.65	19.44	≤34.77	PASS
	Mid	20.96	20.11		
	High	21.31	19.70		
16QAM	Low	20.72	19.68		PASS
	Mid	20.92	20.03		
	High	21.15	19.51		

LTE Band 12-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.73	19.36	≤34.77	PASS
	Mid	21.10	20.17		
	High	21.30	19.65		
16QAM	Low	20.76	19.57		PASS
	Mid	21.09	20.23		
	High	21.31	19.65		

LTE Band 13-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.88	18.09	<44.77	PASS
	Mid	21.34	18.67		
	High	20.48	17.79		
16QAM	Low	20.78	18.03		PASS
	Mid	21.25	18.79		
	High	20.37	17.68		

LTE Band 13-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Mid	21.42	18.63	<44.77	PASS
16QAM	Mid	21.10	18.61		PASS

LTE Band 25-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.79	18.19	≤33.00	PASS
	Mid	20.63	18.57		
	High	20.56	18.06		
16QAM	Low	20.66	18.11		PASS
	Mid	20.53	18.65		
	High	20.46	17.95		

LTE Band 25-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.73	18.17	≤33.00	PASS
	Mid	20.68	18.49		
	High	20.64	18.12		
16QAM	Low	20.60	18.04		PASS
	Mid	20.45	18.57		
	High	20.40	17.99		

LTE Band 25-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.73	18.12	≤33.00	PASS
	Mid	20.52	18.56		
	High	20.57	18.26		
16QAM	Low	20.78	18.35		PASS
	Mid	20.46	18.46		
	High	20.34	17.99		

LTE Band 25-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.78	18.03	≤33.00	PASS
	Mid	20.58	18.55		
	High	20.48	18.09		
16QAM	Low	20.85	18.27		PASS
	Mid	20.60	18.63		
	High	20.47	18.07		

LTE Band 25-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.74	18.08	≤33.00	PASS
	Mid	20.55	18.56		
	High	20.67	18.06		
16QAM	Low	20.58	18.11		PASS
	Mid	20.44	18.47		
	High	20.43	17.89		

LTE Band 25-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.62	18.01	≤33.00	PASS
	Mid	20.46	18.43		
	High	20.50	18.25		
16QAM	Low	20.46	18.05		PASS
	Mid	20.30	18.43		
	High	20.43	17.92		

LTE Band 26-1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.99	17.94	≤33.00	PASS
	Mid	20.93	18.59		
	High	20.66	17.81		
16QAM	Low	20.89	17.90		PASS
	Mid	20.86	18.69		
	High	20.56	17.70		

LTE Band 26-3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.91	17.90	≤33.00	PASS
	Mid	21.04	18.57		
	High	20.70	17.84		
16QAM	Low	20.78	17.78		PASS
	Mid	20.74	18.56		
	High	20.49	17.72		

LTE Band 26-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.88	17.84	≤33.00	PASS
	Mid	20.86	18.62		
	High	20.66	17.98		
16QAM	Low	20.91	18.01		PASS
	Mid	20.79	18.52		
	High	20.48	17.76		

LTE Band 26-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.00	17.80	≤33.00	PASS
	Mid	20.95	18.63		
	High	20.60	17.85		
16QAM	Low	21.06	18.03		PASS
	Mid	20.99	18.72		
	High	20.58	17.82		

LTE Band 26-15MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.90	17.81	≤33.00	PASS
	Mid	20.90	18.62		
	High	20.72	17.79		
16QAM	Low	20.75	17.82		PASS
	Mid	20.79	18.51		
	High	20.55	17.65		

LTE Band 38-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.60	18.13	≤33.00	PASS
	Mid	20.78	18.54		
	High	20.72	17.93		
16QAM	Low	20.50	18.07		PASS
	Mid	20.69	18.59		
	High	20.64	17.85		

LTE Band 38-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.54	18.10	≤33.00	PASS
	Mid	20.81	18.48		
	High	20.78	17.98		
16QAM	Low	20.45	18.00		PASS
	Mid	20.64	18.54		
	High	20.60	17.88		

LTE Band 38-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.54	18.06	≤33.00	PASS
	Mid	20.69	18.54		
	High	20.73	18.08		
16QAM	Low	20.58	18.23		PASS
	Mid	20.65	18.46		
	High	20.56	17.88		

LTE Band 38-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.57	17.99	≤33.00	PASS
	Mid	20.74	18.52		
	High	20.66	17.96		
16QAM	Low	20.63	18.18		PASS
	Mid	20.75	18.58		
	High	20.65	17.94		

LTE Band 41-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.91	17.97	≤33.00	PASS
	Mid	20.83	18.57		
	High	20.63	17.98		
16QAM	Low	20.78	17.89		PASS
	Mid	20.76	18.64		
	High	20.56	17.91		

LTE Band 41-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.78	17.87	≤33.00	PASS
	Mid	20.92	18.54		
	High	20.74	18.08		
16QAM	Low	20.68	17.78		PASS
	Mid	20.71	18.60		
	High	20.52	17.94		

LTE Band 41-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.83	17.89	≤33.00	PASS
	Mid	20.77	18.59		
	High	20.67	18.18		
16QAM	Low	20.92	18.13		PASS
	Mid	20.71	18.50		
	High	20.49	17.97		

LTE Band 41-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.87	17.81	≤33.00	PASS
	Mid	20.88	18.62		
	High	20.59	18.03		
16QAM	Low	20.97	18.05		PASS
	Mid	20.89	18.69		
	High	20.59	18.03		


5.2. Radiated Spurious Emission

LIMIT

LTE Band 2/4/5/12/13/25/26: -13dBm;

LTE Band 7/38/41: -25dBm

TEST CONFIGURATION

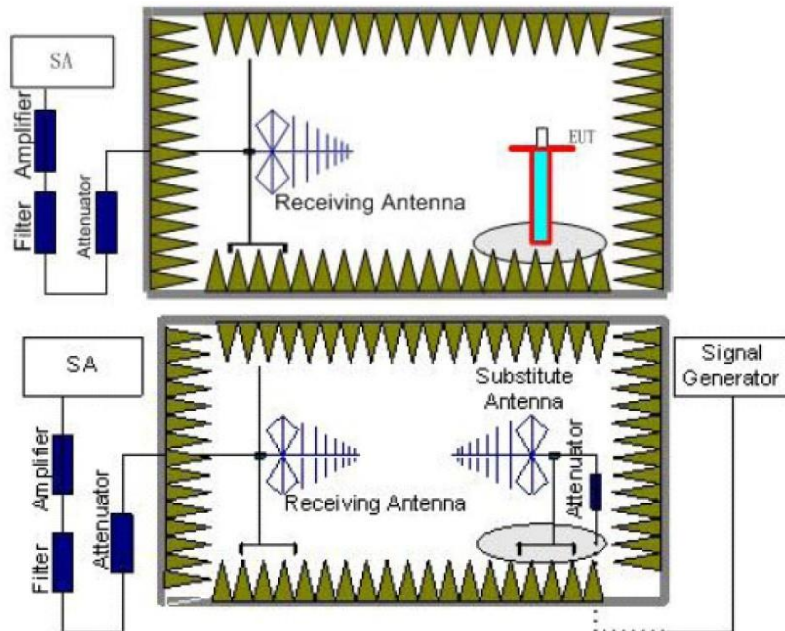

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal

- and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
 8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
 9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
 10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
 11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
 12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
 13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
 14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: only show the worse case for QPSK modulation.

Band 2 1880MHz


Polarization: Horizontal

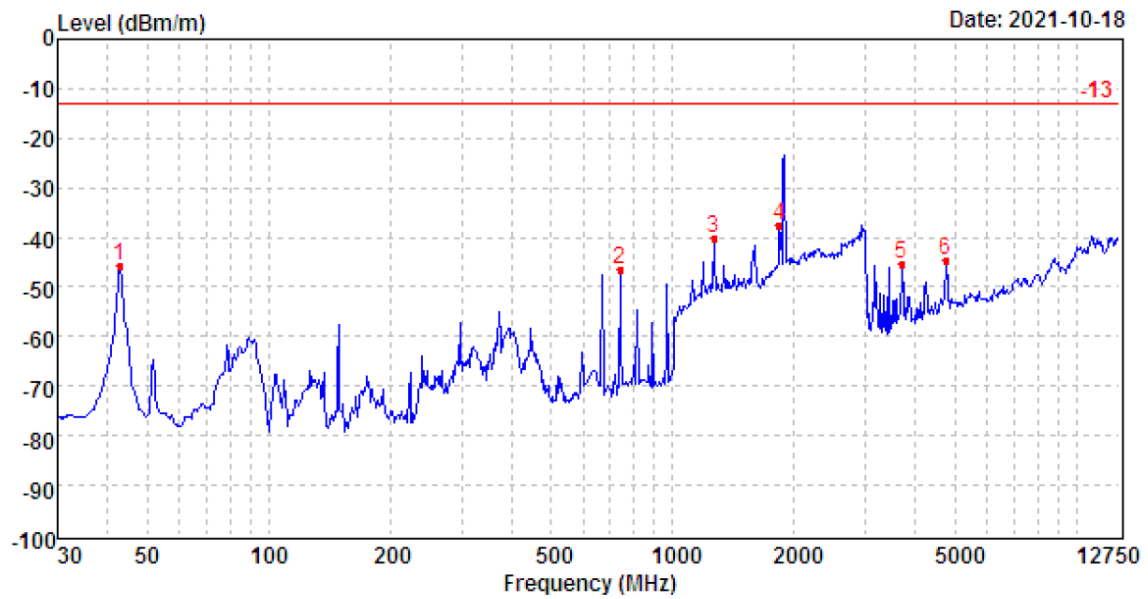

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	42.79	-48.27	26.49	6.96	30.90	-45.72	-13.00	-32.72	Peak
2	741.19	-56.56	29.48	10.37	29.63	-46.34	-13.00	-33.34	Peak
3	1263.65	-60.00	36.87	11.86	28.86	-40.13	-13.00	-27.13	Peak
4	1837.91	-62.51	37.19	13.18	25.46	-37.60	-13.00	-24.60	Peak
5	3695.11	-57.46	42.29	7.01	37.15	-45.31	-13.00	-32.31	Peak
6	4748.87	-62.47	43.60	8.31	34.17	-44.73	-13.00	-31.73	Peak

Band 2 1880MHz


Polarization: Vertical

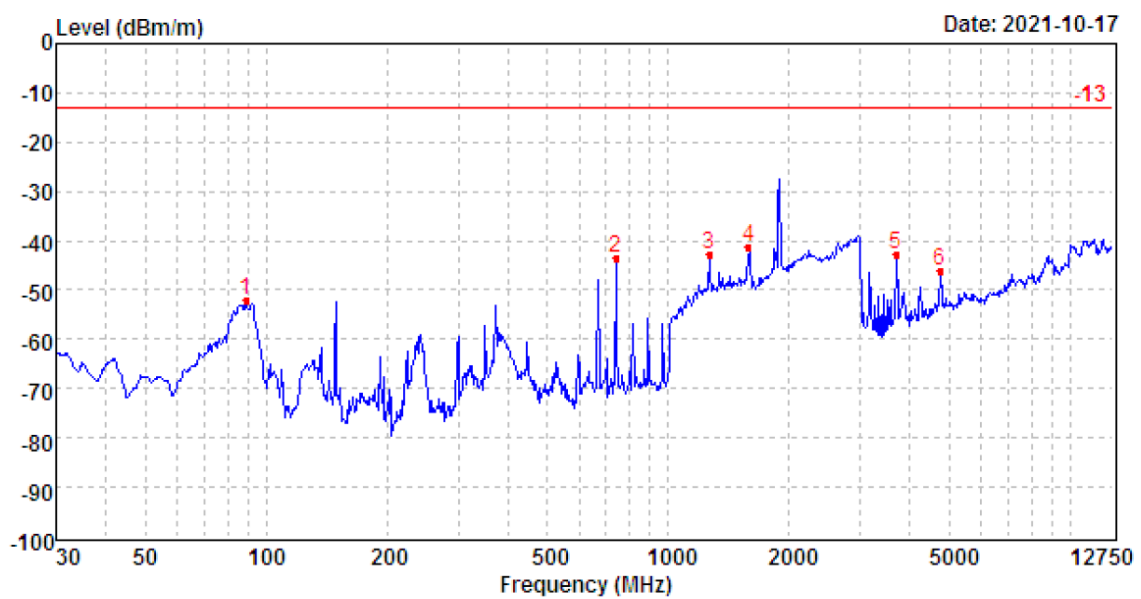

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	88.93	-54.25	25.42	7.41	30.76	-52.18	-13.00	-39.18	Peak
2	741.19	-53.78	29.60	10.37	29.63	-43.44	-13.00	-30.44	Peak
3	1263.65	-62.91	37.15	11.86	28.86	-42.76	-13.00	-29.76	Peak
4	1586.32	-63.42	37.76	12.62	28.27	-41.31	-13.00	-28.31	Peak
5	3695.11	-55.08	42.33	7.01	37.15	-42.89	-13.00	-29.89	Peak
6	4748.87	-63.95	43.60	8.31	34.17	-46.21	-13.00	-33.21	Peak

Band 2 1860MHz


Polarization: Horizontal

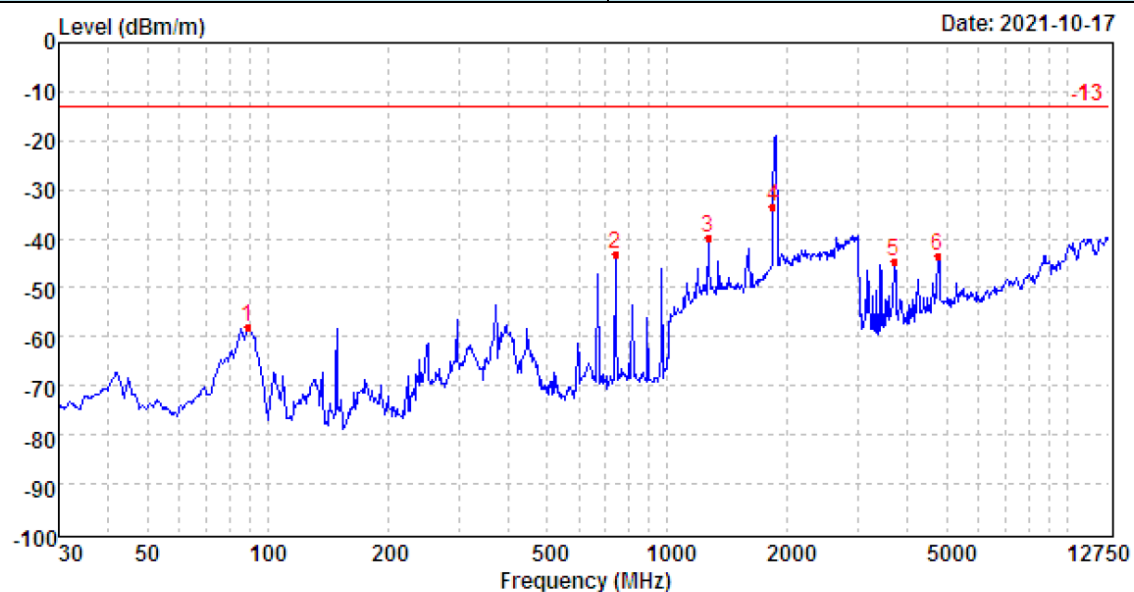

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	88.93	-52.44	17.66	7.41	30.76	-58.13	-13.00	-45.13	Peak
2	741.19	-53.42	29.48	10.37	29.63	-43.20	-13.00	-30.20	Peak
3	1263.65	-59.79	36.87	11.86	28.86	-39.92	-13.00	-26.92	Peak
4	1833.88	-58.25	37.14	13.17	25.49	-33.43	-13.00	-20.43	Peak
5	3695.11	-56.88	42.29	7.01	37.15	-44.73	-13.00	-31.73	Peak
6	4755.76	-61.36	43.61	8.33	34.16	-43.58	-13.00	-30.58	Peak

Band 2 1860MHz


Polarization: Vertical

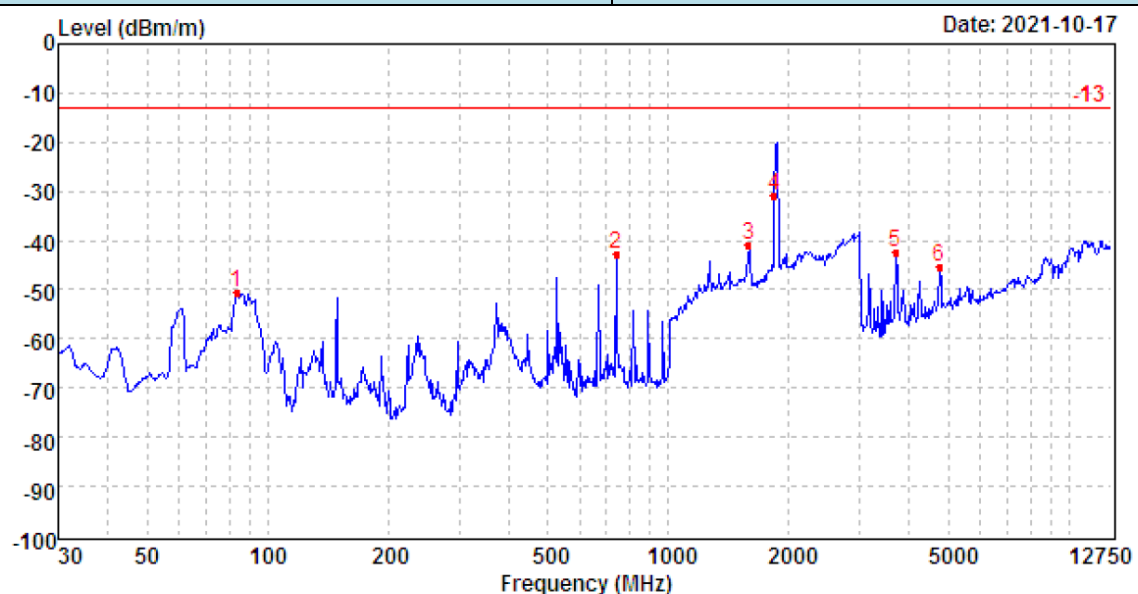

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	83.77	-50.04	23.09	7.37	30.80	-50.38	-13.00	-37.38	Peak
2	741.19	-53.21	29.60	10.37	29.63	-42.87	-13.00	-29.87	Peak
3	1586.32	-62.86	37.76	12.62	28.27	-40.75	-13.00	-27.75	Peak
4	1835.90	-55.33	36.81	13.17	25.48	-30.83	-13.00	-17.83	Peak
5	3695.11	-54.66	42.33	7.01	37.15	-42.47	-13.00	-29.47	Peak
6	4748.87	-63.09	43.60	8.31	34.17	-45.35	-13.00	-32.35	Peak

Band 2 1900MHz


Polarization: Horizontal

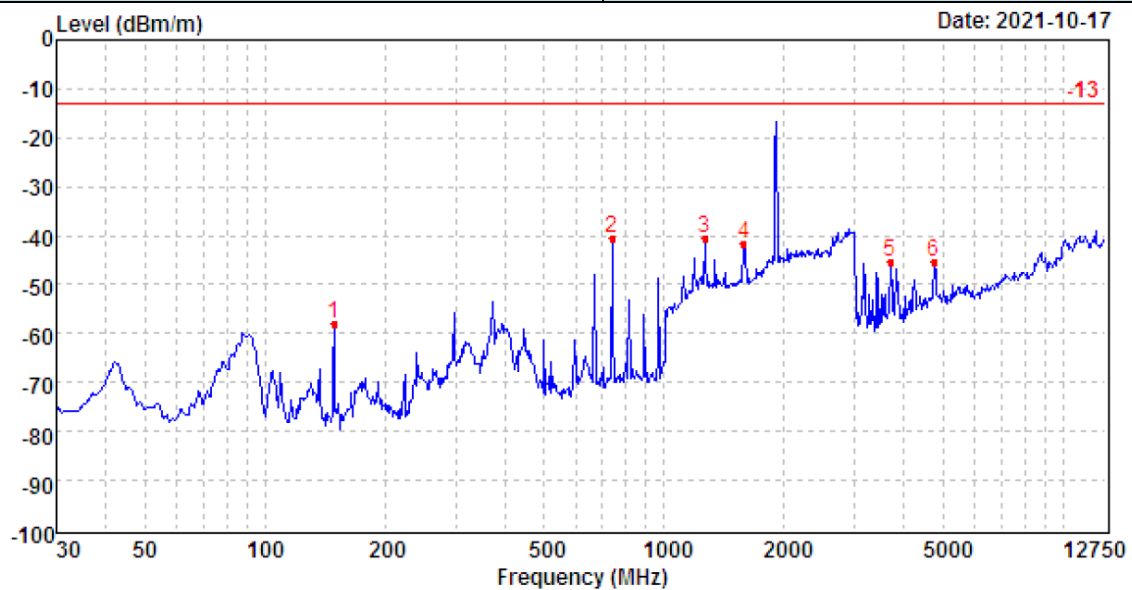

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-53.14	17.95	7.87	30.54	-57.86	-13.00	-44.86	Peak
2	741.19	-50.63	29.48	10.37	29.63	-40.41	-13.00	-27.41	Peak
3	1263.65	-60.22	36.87	11.86	28.86	-40.35	-13.00	-27.35	Peak
4	1586.32	-61.95	36.04	12.62	28.27	-41.56	-13.00	-28.56	Peak
5	3695.11	-57.47	42.29	7.01	37.15	-45.32	-13.00	-32.32	Peak
6	4748.87	-63.09	43.60	8.31	34.17	-45.35	-13.00	-32.35	Peak

Band 2 1900MHz


Polarization: Vertical

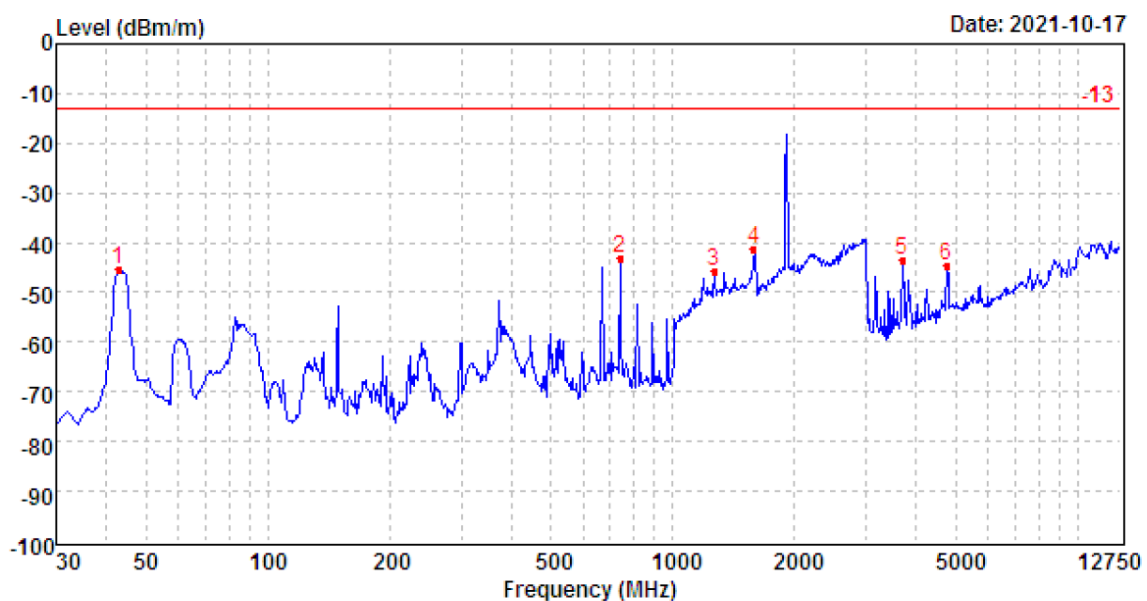

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	42.79	-42.96	21.39	6.96	30.90	-45.51	-13.00	-32.51	Peak
2	741.19	-53.49	29.60	10.37	29.63	-43.15	-13.00	-30.15	Peak
3	1263.65	-65.74	37.15	11.86	28.86	-45.59	-13.00	-32.59	Peak
4	1584.58	-63.25	37.76	12.62	28.27	-41.14	-13.00	-28.14	Peak
5	3695.11	-55.86	42.33	7.01	37.15	-43.67	-13.00	-30.67	Peak
6	4748.87	-62.40	43.60	8.31	34.17	-44.66	-13.00	-31.66	Peak

Band 4 1720MHz


Polarization: Horizontal

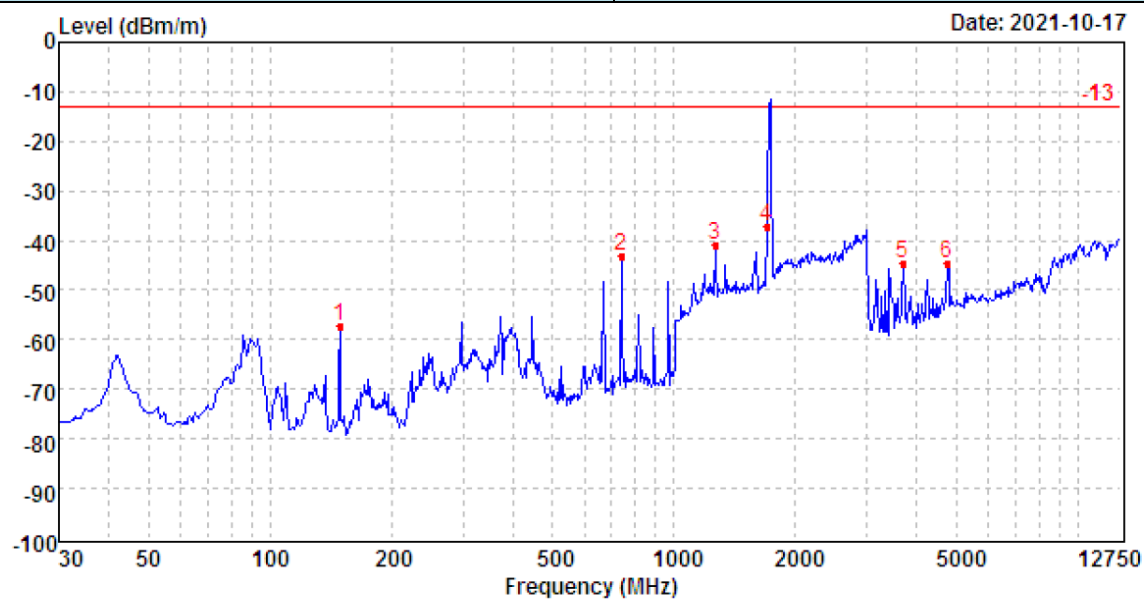

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-52.57	17.95	7.87	30.54	-57.29	-13.00	-44.29	Peak
2	741.19	-53.21	29.48	10.37	29.63	-42.99	-13.00	-29.99	Peak
3	1263.65	-60.58	36.87	11.86	28.86	-40.71	-13.00	-27.71	Peak
4	1700.00	-58.79	36.35	12.88	27.55	-37.11	-13.00	-24.11	Peak
5	3695.11	-56.76	42.29	7.01	37.15	-44.61	-13.00	-31.61	Peak
6	4748.87	-62.19	43.60	8.31	34.17	-44.45	-13.00	-31.45	Peak

Band 4 1720MHz


Polarization: Vertical

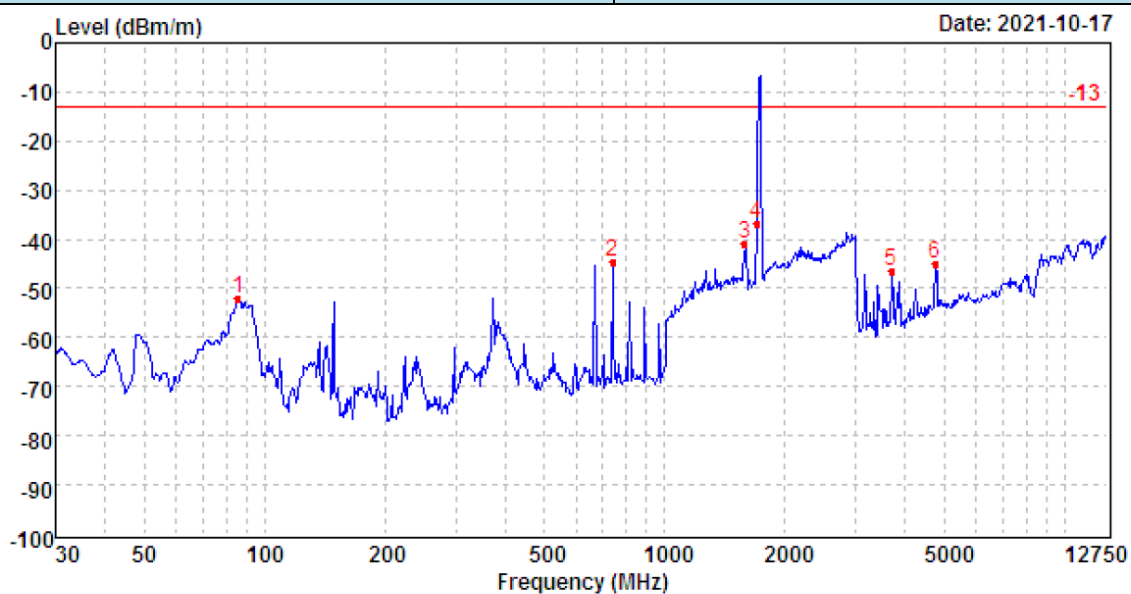

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	85.85	-52.58	24.05	7.39	30.79	-51.93	-13.00	-38.93	Peak
2	741.19	-54.86	29.60	10.37	29.63	-44.52	-13.00	-31.52	Peak
3	1584.58	-62.96	37.76	12.62	28.27	-40.85	-13.00	-27.85	Peak
4	1698.14	-58.48	36.23	12.87	27.56	-36.94	-13.00	-23.94	Peak
5	3695.11	-58.74	42.33	7.01	37.15	-46.55	-13.00	-33.55	Peak
6	4748.87	-62.85	43.60	8.31	34.17	-45.11	-13.00	-32.11	Peak

Band 4 1732.5MHz


Polarization: Horizontal

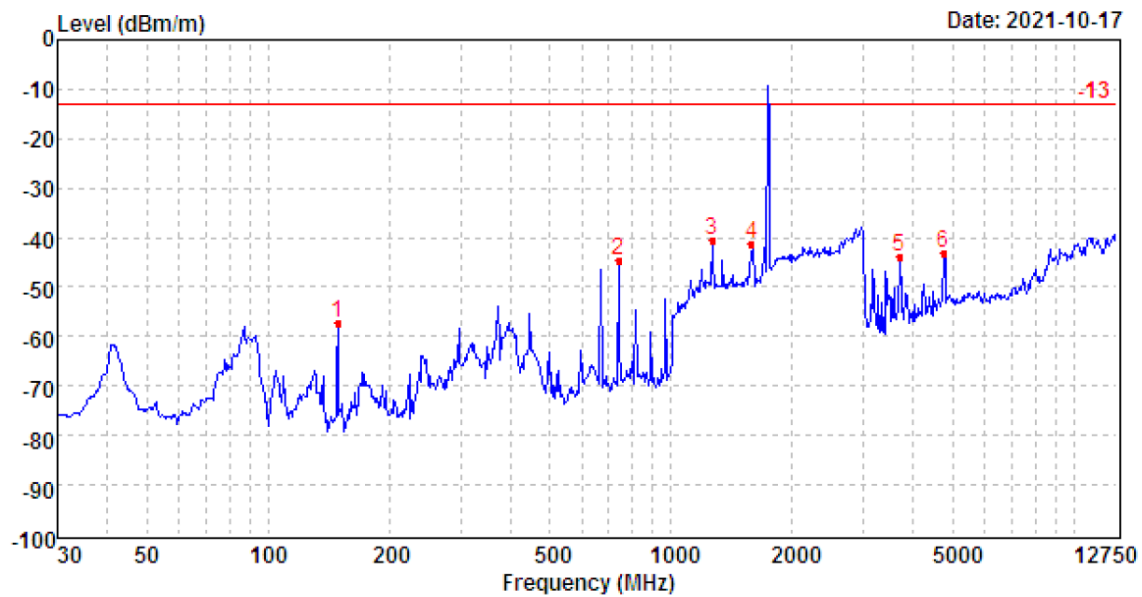


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-52.60	17.95	7.87	30.54	-57.32	-13.00	-44.32	Peak
2	741.19	-54.77	29.48	10.37	29.63	-44.55	-13.00	-31.55	Peak
3	1263.65	-60.35	36.87	11.86	28.86	-40.48	-13.00	-27.48	Peak
4	1586.32	-61.65	36.04	12.62	28.27	-41.26	-13.00	-28.26	Peak
5	3695.11	-55.97	42.29	7.01	37.15	-43.82	-13.00	-30.82	Peak
6	4755.76	-61.05	43.61	8.33	34.16	-43.27	-13.00	-30.27	Peak


Band 4 1732.5MHz

Polarization: Vertical

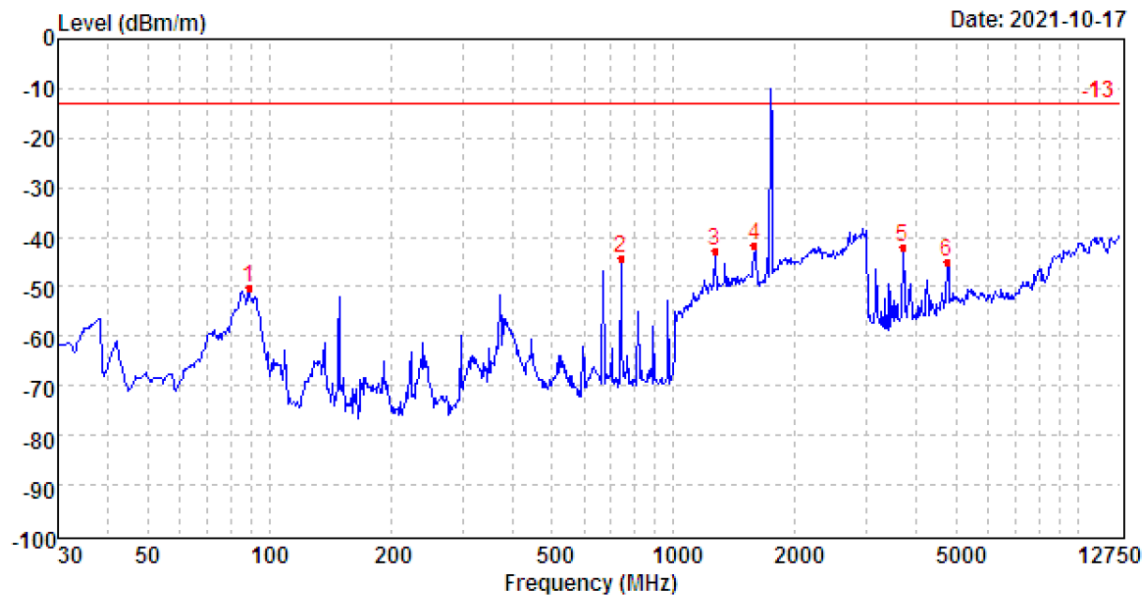


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	88.93	-52.31	25.42	7.41	30.76	-50.24	-13.00	-37.24	Peak
2	741.19	-54.47	29.60	10.37	29.63	-44.13	-13.00	-31.13	Peak
3	1262.26	-62.82	37.14	11.85	28.86	-42.69	-13.00	-29.69	Peak
4	1586.32	-63.89	37.76	12.62	28.27	-41.78	-13.00	-28.78	Peak
5	3695.11	-54.29	42.33	7.01	37.15	-42.10	-13.00	-29.10	Peak
6	4748.87	-62.59	43.60	8.31	34.17	-44.85	-13.00	-31.85	Peak

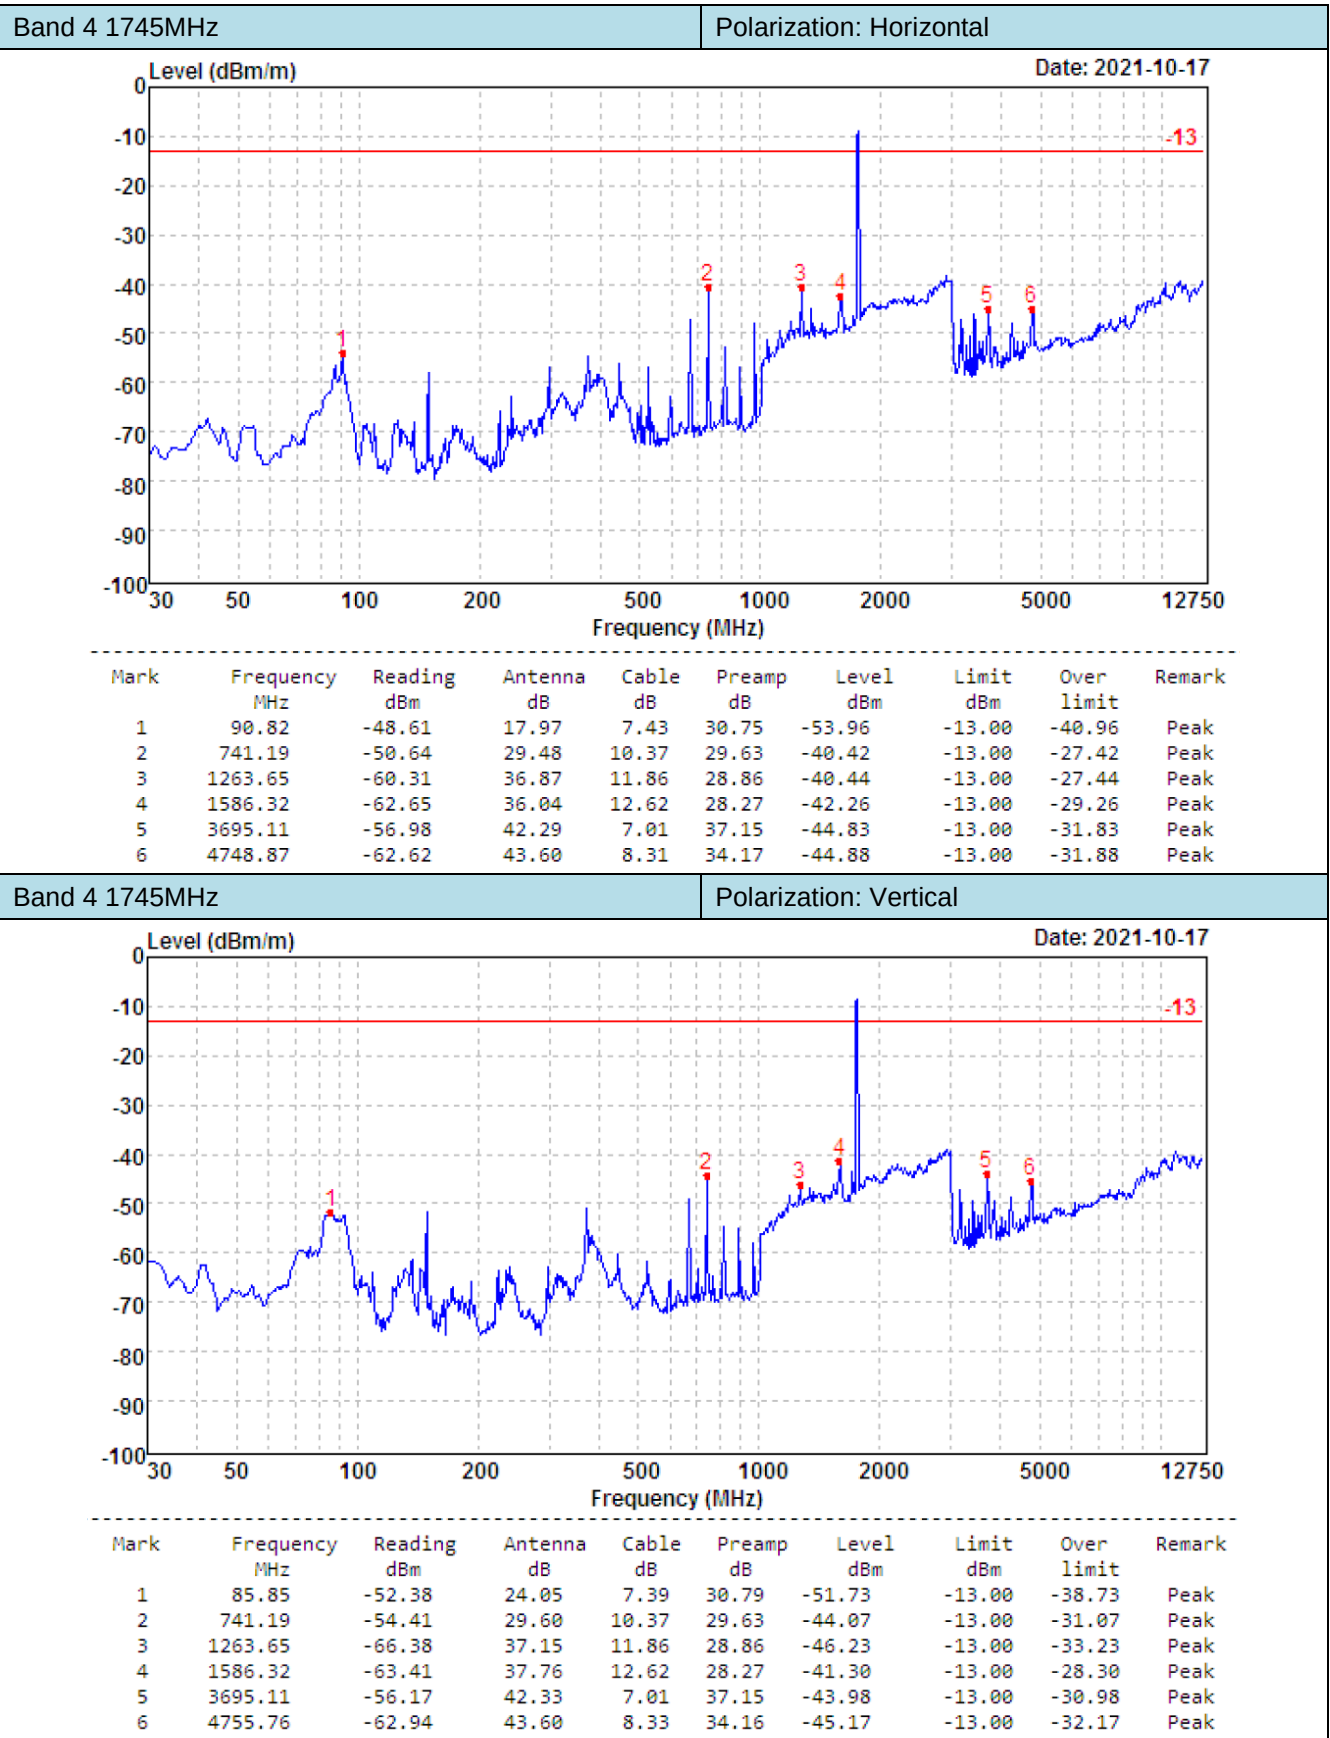

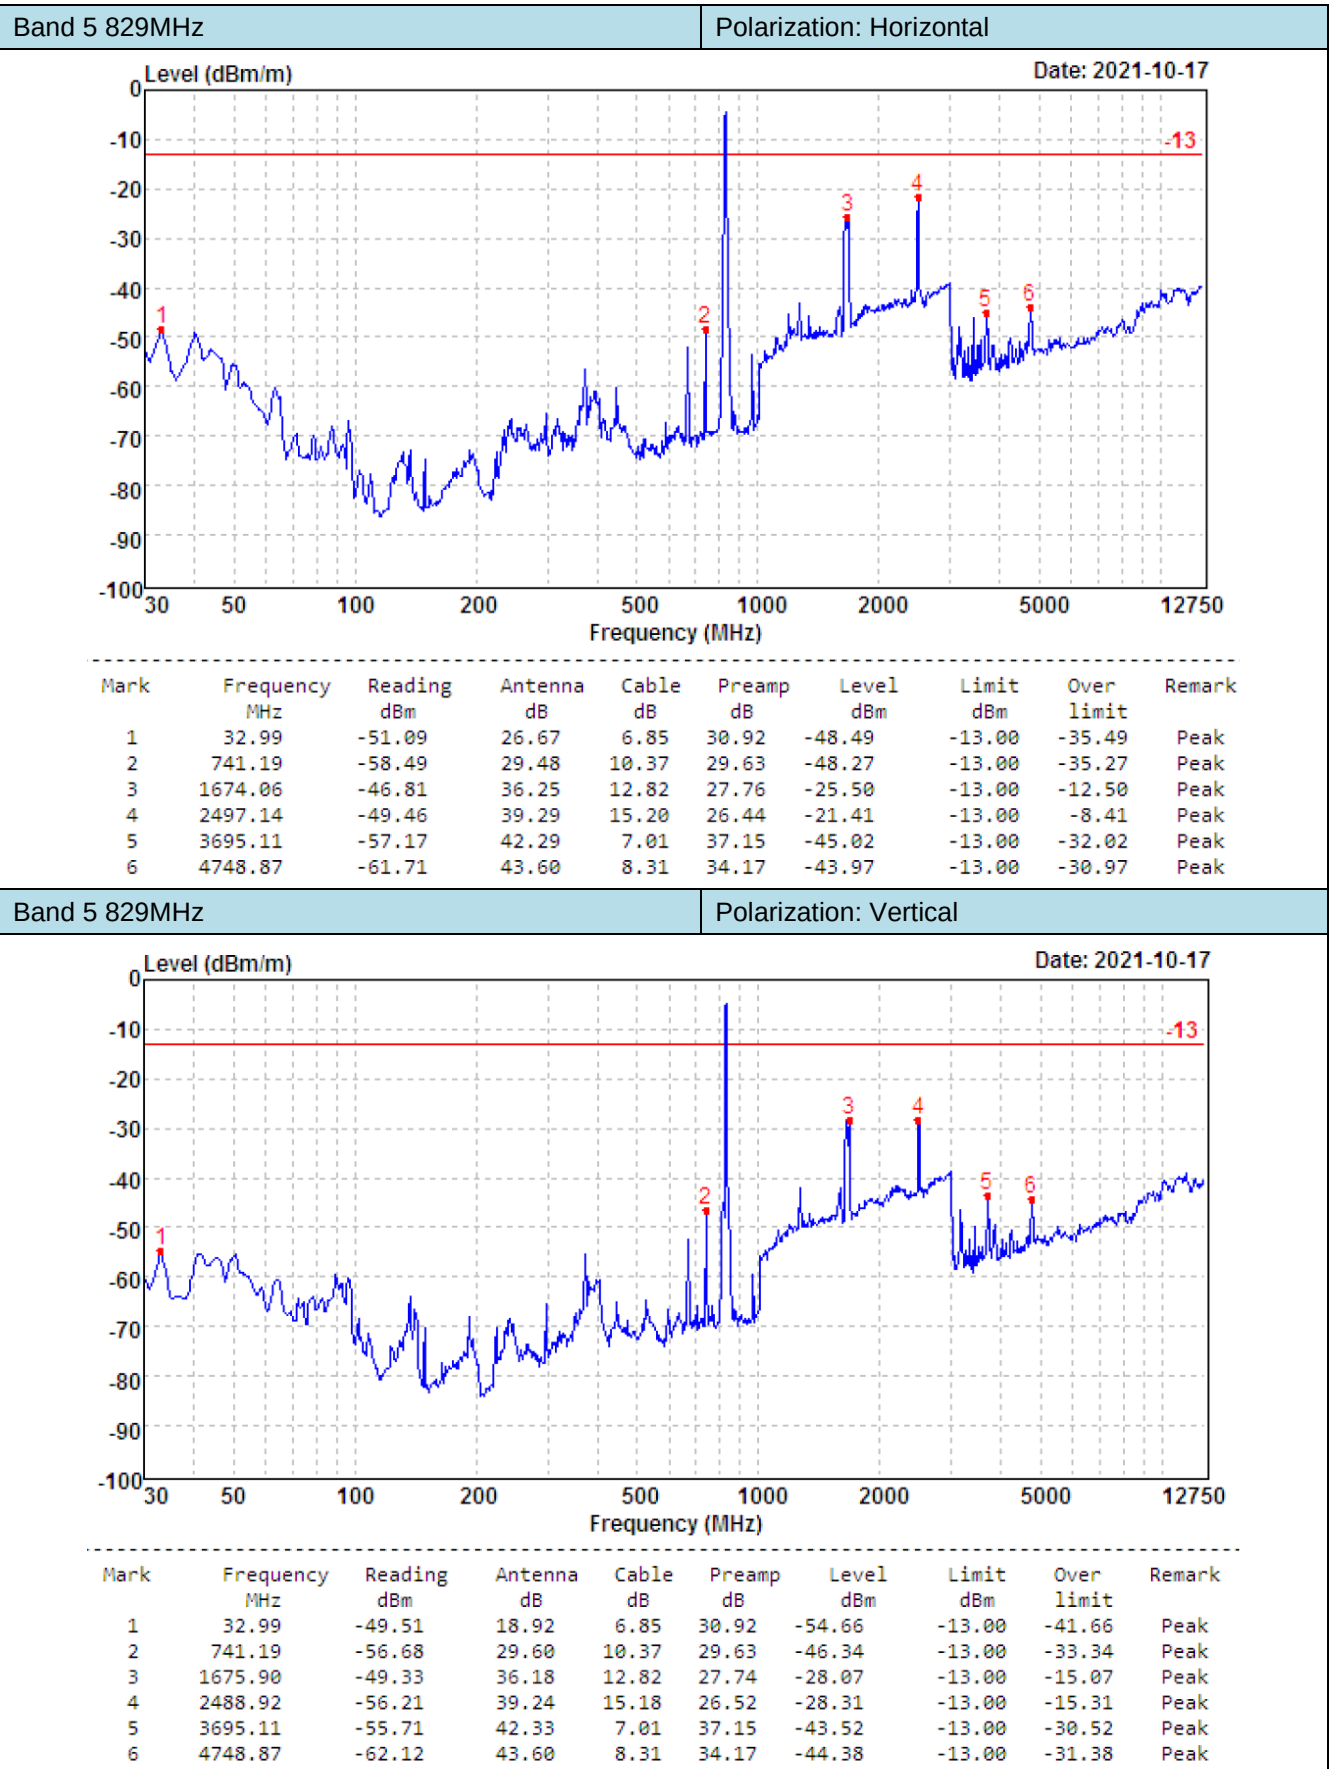

Band 5 836.5MHz


Polarization: Horizontal

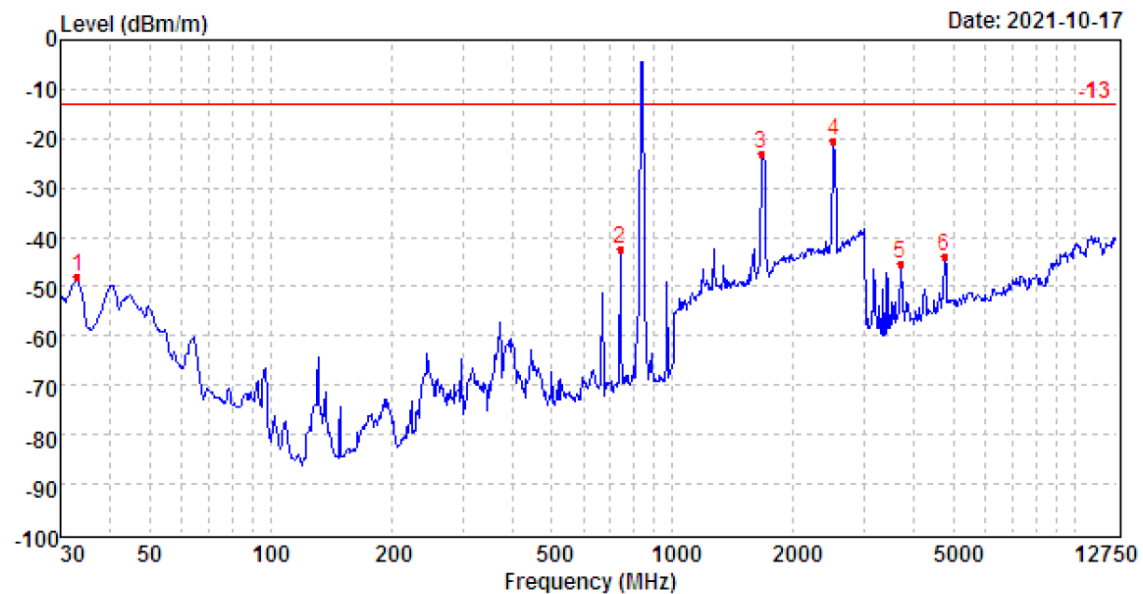

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	32.99	-50.45	26.67	6.85	30.92	-47.85	-13.00	-34.85	Peak
2	741.19	-52.49	29.48	10.37	29.63	-42.27	-13.00	-29.27	Peak
3	1659.41	-44.06	36.20	12.78	27.88	-22.96	-13.00	-9.96	Peak
4	2510.89	-48.66	39.22	15.24	26.32	-20.52	-13.00	-7.52	Peak
5	3695.11	-57.67	42.29	7.01	37.15	-45.52	-13.00	-32.52	Peak
6	4748.87	-61.78	43.60	8.31	34.17	-44.04	-13.00	-31.04	Peak

Band 5 836.5MHz


Polarization: Vertical

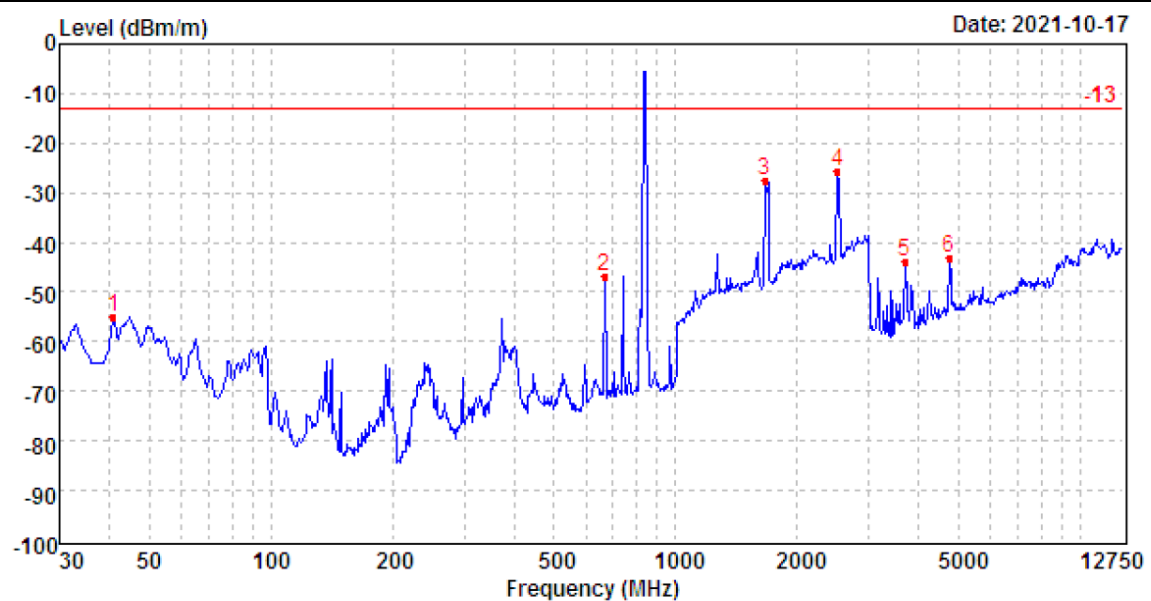

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	40.74	-52.37	21.18	6.94	30.91	-55.16	-13.00	-42.16	Peak
2	666.98	-55.40	28.37	10.13	29.77	-46.67	-13.00	-33.67	Peak
3	1661.23	-48.58	36.14	12.79	27.87	-27.52	-13.00	-14.52	Peak
4	2510.89	-53.74	39.22	15.24	26.32	-25.60	-13.00	-12.60	Peak
5	3695.11	-56.00	42.33	7.01	37.15	-43.81	-13.00	-30.81	Peak
6	4748.87	-61.04	43.60	8.31	34.17	-43.30	-13.00	-30.30	Peak

Band 5 844MHz


Polarization: Horizontal

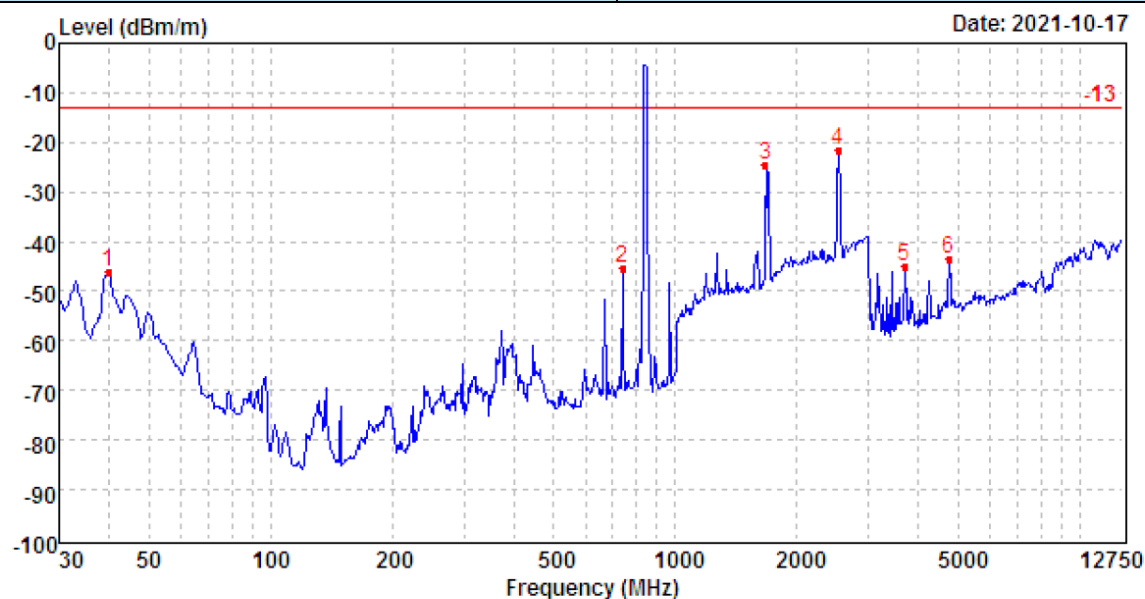

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	39.75	-50.00	27.74	6.93	30.92	-46.25	-13.00	-33.25	Peak
2	741.19	-55.49	29.48	10.37	29.63	-45.27	-13.00	-32.27	Peak
3	1672.22	-45.74	36.24	12.81	27.78	-24.47	-13.00	-11.47	Peak
4	2524.72	-49.72	39.14	15.25	26.25	-21.58	-13.00	-8.58	Peak
5	3695.11	-57.28	42.29	7.01	37.15	-45.13	-13.00	-32.13	Peak
6	4755.76	-61.40	43.61	8.33	34.16	-43.62	-13.00	-30.62	Peak

Band 5 844MHz


Polarization: Vertical

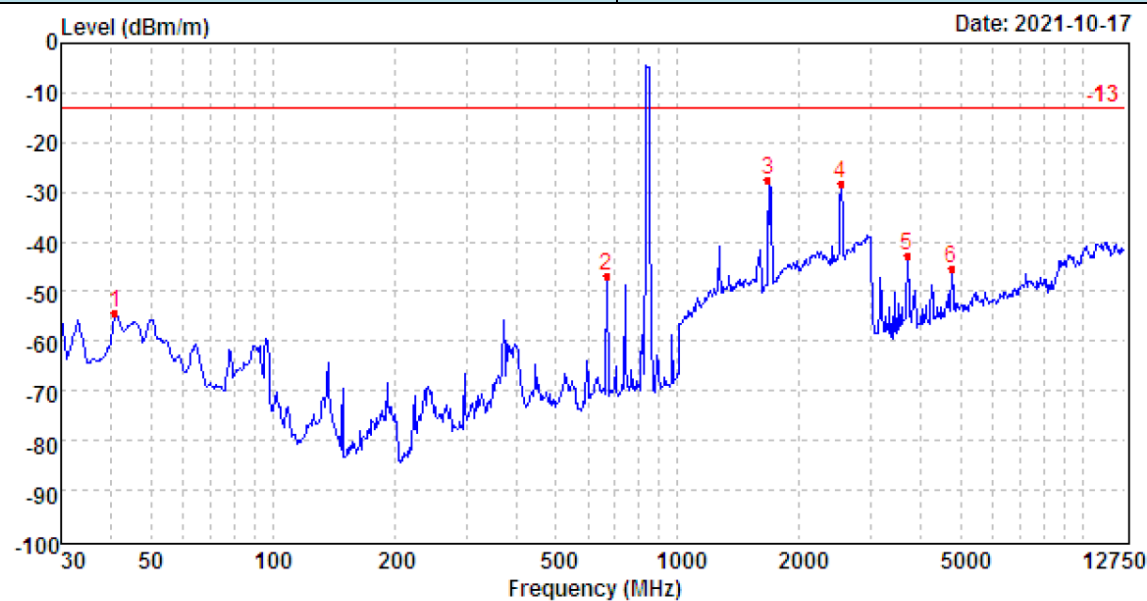

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	40.74	-51.48	21.18	6.94	30.91	-54.27	-13.00	-41.27	Peak
2	666.98	-55.40	28.37	10.13	29.77	-46.67	-13.00	-33.67	Peak
3	1672.22	-48.87	36.17	12.81	27.78	-27.67	-13.00	-14.67	Peak
4	2524.72	-56.43	39.21	15.25	26.25	-28.22	-13.00	-15.22	Peak
5	3689.76	-54.92	42.35	7.00	37.15	-42.72	-13.00	-29.72	Peak
6	4748.87	-63.07	43.60	8.31	34.17	-45.33	-13.00	-32.33	Peak

Band 7 2535MHz


Polarization: Horizontal

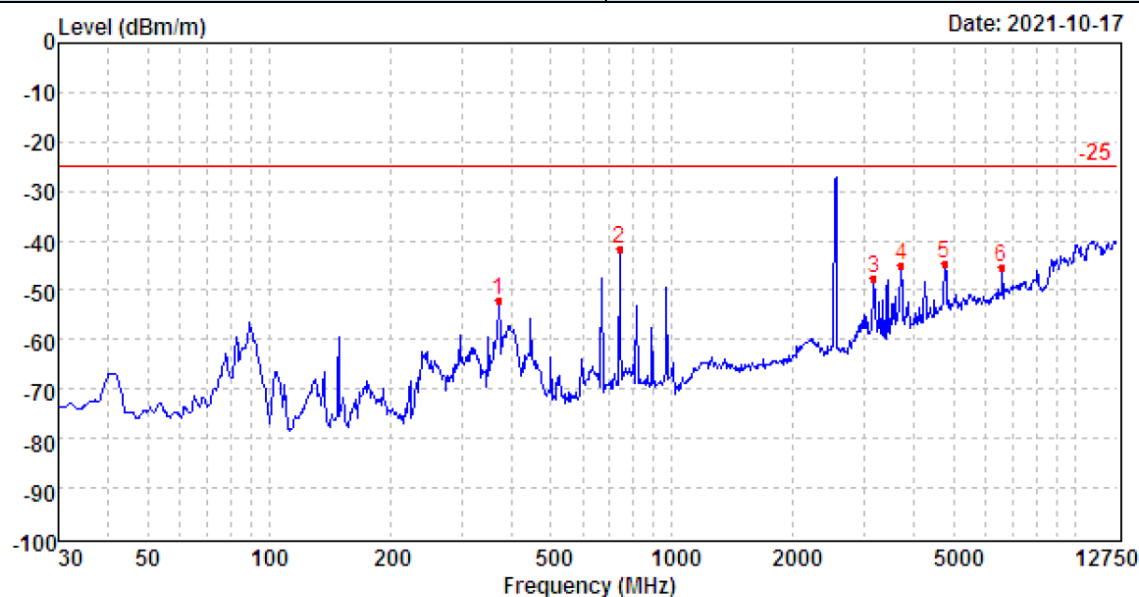

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	370.74	-55.46	24.64	9.03	30.14	-51.93	-25.00	-26.93	Peak
2	741.19	-52.01	29.48	10.37	29.63	-41.79	-25.00	-16.79	Peak
3	3168.08	-58.23	41.32	6.41	37.04	-47.54	-25.00	-22.54	Peak
4	3700.26	-57.14	42.29	7.01	37.16	-45.00	-25.00	-20.00	Peak
5	4748.67	-62.36	43.60	8.31	34.18	-44.63	-25.00	-19.63	Peak
6	6561.03	-67.45	46.41	9.77	34.11	-45.38	-25.00	-20.38	Peak

Band 7 2535MHz


Polarization: Vertical

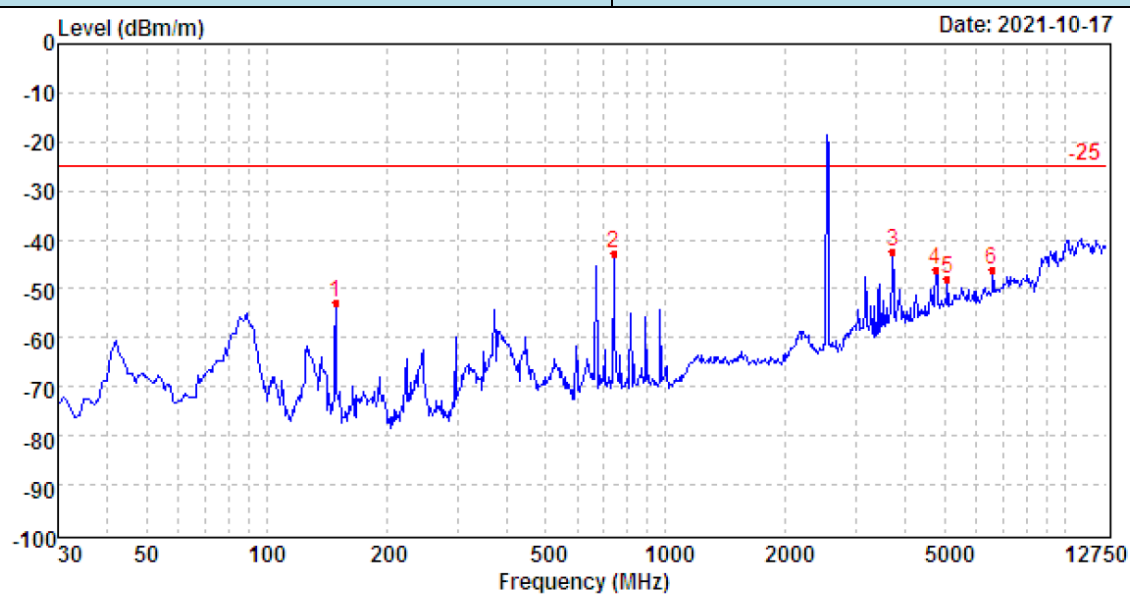

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-50.52	20.58	7.87	30.54	-52.61	-25.00	-27.61	Peak
2	741.19	-53.24	29.60	10.37	29.63	-42.90	-25.00	-17.90	Peak
3	3700.26	-54.61	42.32	7.01	37.16	-42.44	-25.00	-17.44	Peak
4	4748.67	-63.76	43.60	8.31	34.18	-46.03	-25.00	-21.03	Peak
5	5073.59	-66.34	44.29	8.90	34.86	-48.01	-25.00	-23.01	Peak
6	6561.03	-68.50	46.85	9.77	34.11	-45.99	-25.00	-20.99	Peak

Band 7 2510MHz


Polarization: Horizontal

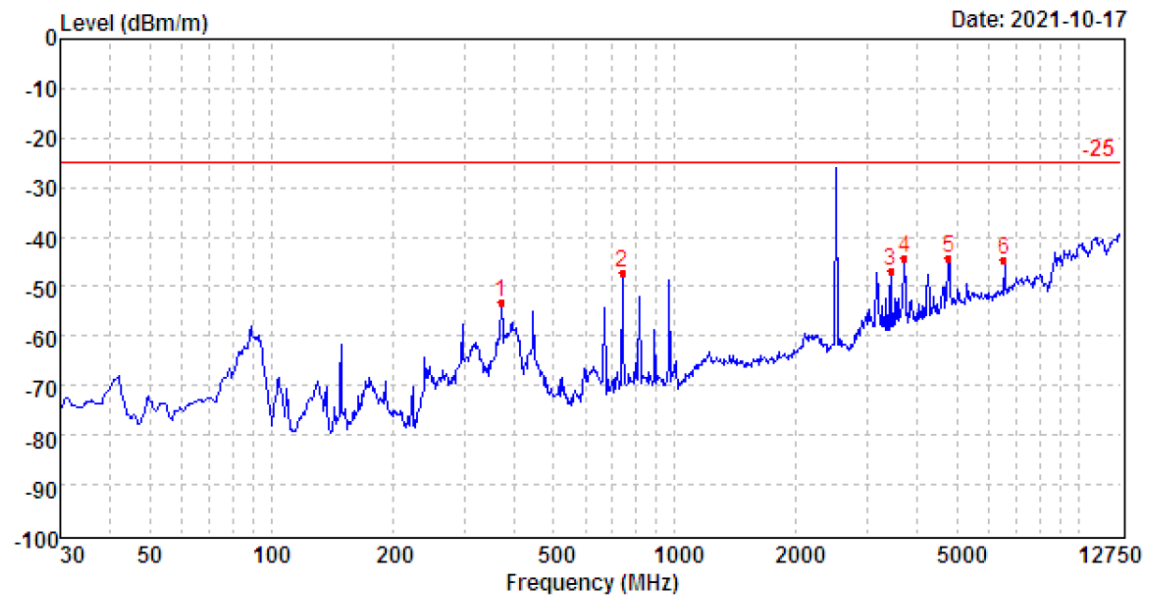

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	370.74	-56.54	24.64	9.03	30.14	-53.01	-25.00	-28.01	Peak
2	741.19	-57.57	29.48	10.37	29.63	-47.35	-25.00	-22.35	Peak
3	3419.49	-56.17	39.86	6.72	37.15	-46.74	-25.00	-21.74	Peak
4	3700.26	-56.26	42.29	7.01	37.16	-44.12	-25.00	-19.12	Peak
5	4760.78	-62.11	43.61	8.34	34.16	-44.32	-25.00	-19.32	Peak
6	6527.71	-66.45	46.35	9.75	34.15	-44.50	-25.00	-19.50	Peak

Band 7 2510MHz


Polarization: Vertical

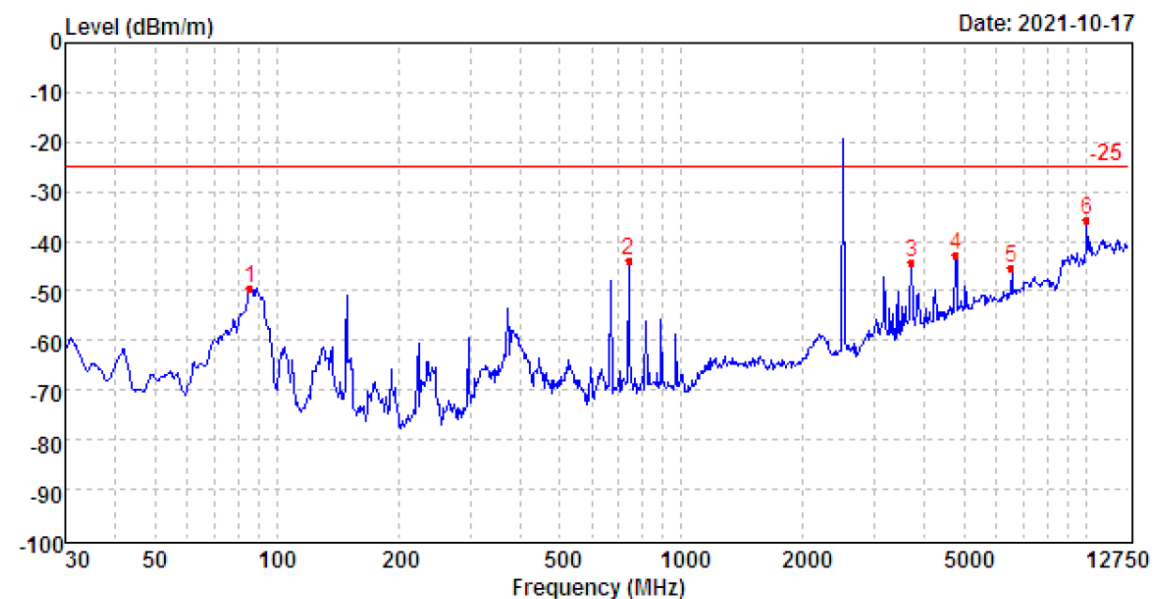

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	85.85	-50.05	24.05	7.39	30.79	-49.40	-25.00	-24.40	Peak
2	741.19	-54.36	29.60	10.37	29.63	-44.02	-25.00	-19.02	Peak
3	3700.26	-56.46	42.32	7.01	37.16	-44.29	-25.00	-19.29	Peak
4	4760.78	-60.69	43.60	8.34	34.16	-42.91	-25.00	-17.91	Peak
5	6527.71	-67.79	46.82	9.75	34.15	-45.37	-25.00	-20.37	Peak
6	10062.31	-67.17	50.73	12.38	31.46	-35.52	-25.00	-10.52	Peak

Band 7 2560MHz


Polarization: Horizontal

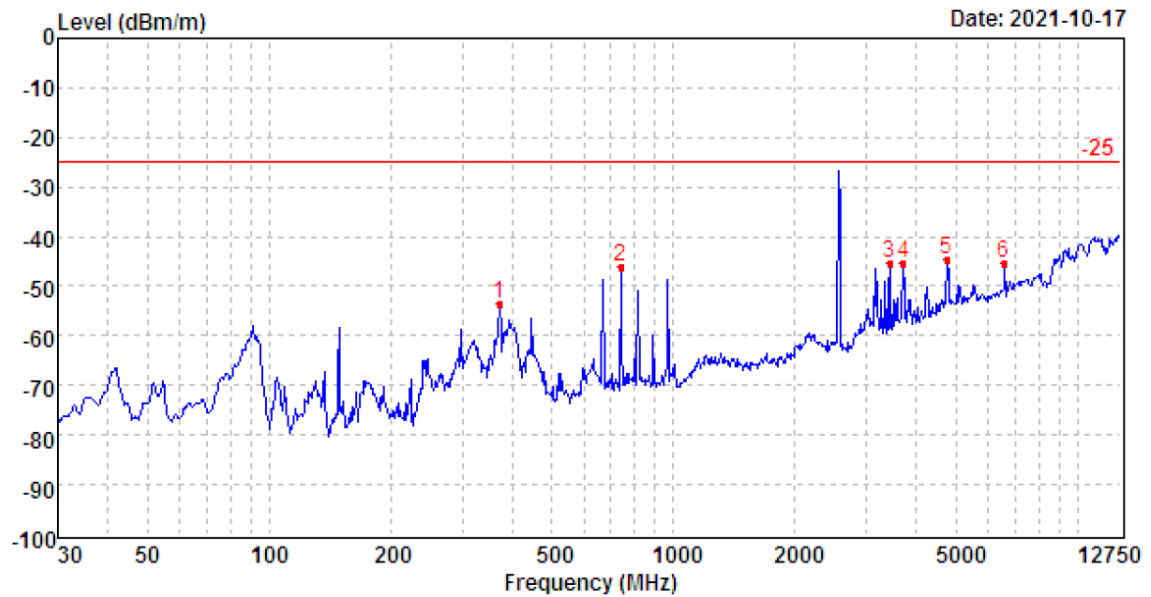

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	370.74	-56.91	24.64	9.03	30.14	-53.38	-25.00	-28.38	Peak
2	741.19	-56.29	29.48	10.37	29.63	-46.07	-25.00	-21.07	Peak
3	3419.49	-54.87	39.86	6.72	37.15	-45.44	-25.00	-20.44	Peak
4	3700.26	-57.38	42.29	7.01	37.16	-45.24	-25.00	-20.24	Peak
5	4748.67	-62.32	43.60	8.31	34.18	-44.59	-25.00	-19.59	Peak
6	6577.75	-67.65	46.44	9.78	34.08	-45.51	-25.00	-20.51	Peak

Band 7 2560MHz

Polarization: Vertical

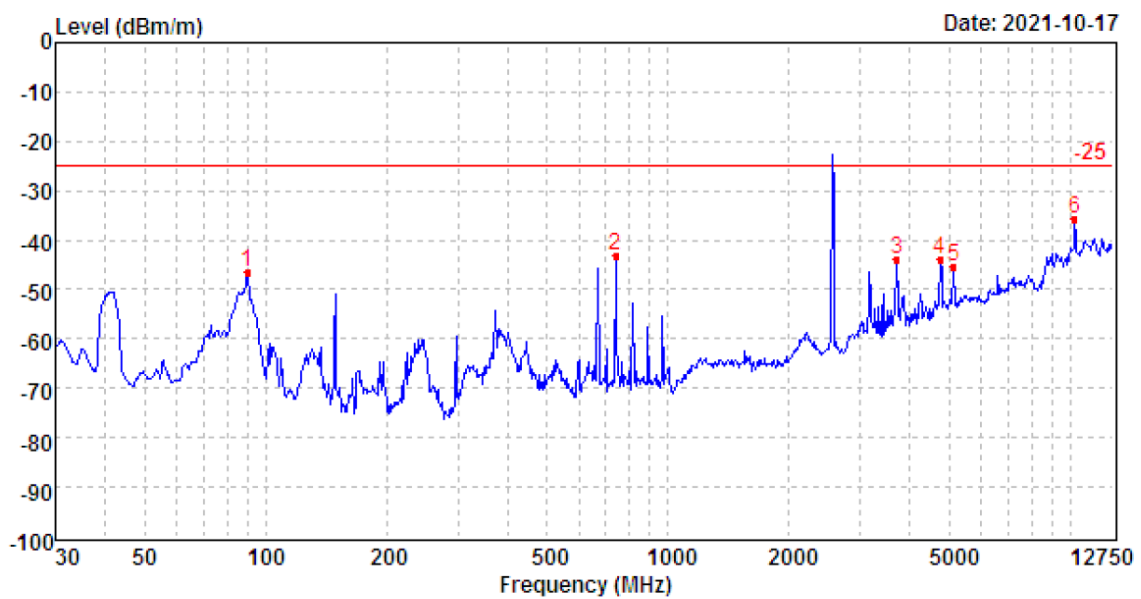

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	89.87	-48.89	25.83	7.42	30.75	-46.39	-25.00	-21.39	Peak
2	741.19	-53.38	29.60	10.37	29.63	-43.04	-25.00	-18.04	Peak
3	3700.26	-55.91	42.32	7.01	37.16	-43.74	-25.00	-18.74	Peak
4	4748.67	-61.74	43.60	8.31	34.18	-44.01	-25.00	-19.01	Peak
5	5125.52	-63.78	44.14	8.96	34.76	-45.44	-25.00	-20.44	Peak
6	10243.22	-67.37	51.40	12.42	32.18	-35.73	-25.00	-10.73	Peak