



TEST REPORT

Report No. : CHTEW21120172 Report verification: 

Project No. : SHT2108128606EW

FCC ID : 2A3QD-WB-HSTS61A01

Applicant's name : Telecom Square, Inc.

Address : 3F Homat Horizon Building, 6-2 Gobancho, Chiyoda-ku, Tokyo 102-0076

Test item description : TS-61

Trade Mark : -

Model/Type reference : TS-61

Listed Model(s) : -

Standard : FCC 47 CFR Part2.1093
IEEE Std C95.1, 1999 Edition
IEEE 1528: 2013

Date of receipt of test sample : Sep.02, 2021

Date of testing : Sep.03, 2021-Dec.17, 2021

Date of issue : Dec.20, 2021

Result : PASS

Compiled by
(Position+Printed name+Signature): File administrator Fanghui Zhu

Fanghui Zhu

Supervised by
(position+printedname+signature)....: Test Engineer: Patrick Qiu

Patrick Qiu

Approved by
(position+printedname+signature)....: Manager: Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Statement of Compliance</u>	<u>3</u>
<u>2.</u>	<u>Test Standards and Report version</u>	<u>4</u>
2.1.	Test Standards	4
2.2.	Report version	4
<u>3.</u>	<u>Summary</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	RF Specification Description	5
3.4.	Testing Laboratory Information	7
3.5.	Environmental conditions	7
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>8</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>9</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>10</u>
6.1.	SAR Measurement Set-up	10
6.2.	DASY5 E-field Probe System	11
6.3.	Phantoms	12
6.4.	Device Holder	12
<u>7.</u>	<u>SAR Test Procedure</u>	<u>13</u>
7.1.	Scanning Procedure	13
7.2.	Data Storage and Evaluation	15
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>17</u>
8.1.	Hotspot Mode Exposure conditions	17
<u>9.</u>	<u>Dielectric Property Measurements & System Check</u>	<u>18</u>
9.1.	Tissue Dielectric Parameters	18
9.2.	System Check	20
<u>10.</u>	<u>SAR Exposure Limits</u>	<u>30</u>
<u>11.</u>	<u>Conducted Power Measurement Results</u>	<u>31</u>
11.1.	WCDMA	31
11.2.	LTE	34
11.3.	LTE Up-Link Carrier Aggregation	75
11.4.	Wi-Fi	77
11.5.	Bluetooth	78
<u>12.</u>	<u>Maximum Tune-up Limit</u>	<u>79</u>
<u>13.</u>	<u>Antenna Location</u>	<u>95</u>
<u>14.</u>	<u>Measured and Reported SAR Results</u>	<u>96</u>
<u>15.</u>	<u>SAR Measurement Variability</u>	<u>112</u>
<u>16.</u>	<u>Simultaneous Transmission analysis</u>	<u>113</u>
<u>17.</u>	<u>TestSetup Photos</u>	<u>122</u>
<u>18.</u>	<u>External and Internal Photos of the EUT</u>	<u>123</u>

1. Statement of Compliance

Maximum Reported SAR (W/kg @1g)				
RF Exposure Conditions	PCB	DTS	NII	Simultaneous TX
Hotspot(Dist.= 10mm)	1.008	0.049	0.388	1.368

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Test Standards and Report version

2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02](#)

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

[TCB workshop](#) November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR)

2.2. Report version

Revision No.	Date of issue	Description
N/A	2021-12-20	Original

3. Summary

3.1. Client Information

Applicant:	Telecom Square, Inc.
Address:	3F Homat Horizon Building, 6-2 Gobancho, Chiyoda-ku, Tokyo 102-0076
Manufacturer:	Skyroam Technology Co., Ltd.
Address:	No.902, 9th Floor, Weisheng Technology Building, No.9966, Shennan Avenue, Shenzhen, Guangdong, China

3.2. Product Description

Main unit	
Name of EUT:	TS-61
Trade Mark:	-
Model No.:	TS-61
Listed Model(s):	-
Power supply:	DC 3.8V
Device Category:	Portable
Product stage:	Production unit
RF Exposure Environment:	General Population/Uncontrolled
HTW test sample No.:	YPHT210708970001
Hardware version:	Y6154A-V1.1
Software version:	y6154a_a_skyroam_v01_2021062914
Device Dimension:	Overall (Length x Width x Thickness): 140X70X18 mm

3.3. RF Specification Description

WCDMA	
Operation Band:	FDD Band II FDD Band IV FDD Band V
Power Class:	Class 3
Operating Mode:	UMTS Rel. 99 (Voice & Data) HSDPA HSUPA
Antenna Type:	FPC
LTE	
Operation Band:	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band CA_7C FDD Band 12 FDD Band 17 FDD Band 25 FDD Band 26

	TDD Band 41
Power Class:	Class 3
Operating Mode:	QPSK 16QAM 64QAM
Antenna Type:	FPC
Does this device support Carrier Aggregation (CA)? ☒ Yes ☐ No	
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No	
Wi-Fi 2.4G	
Operating Mode:	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Antenna Type:	FPC
Does this device 2.4GHz Wi-Fi support hotspot operation? ☒ Yes ☐ No	
Wi-Fi 5G	
Operation Band:	U-NII-1 U-NII-3
Operating Mode:	802.11a 802.11n(HT20) 802.11n(HT40) 802.11ac(VHT20) 802.11ac(VHT40) 802.11ac(VHT80)
Antenna Type:	FPC
Does this device 5GHz Wi-Fi support hotspot operation? ☐ Yes ☒ No	
Bluetooth	
Bluetooth version:	V5.0
Support function:	EDR
Operating Mode:	GFSK $\pi/4$ DQPSK 8DPSK
Antenna Type:	FPC
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
Bluetooth	
Bluetooth version:	V5.0
Support function:	BLE
Operating Mode:	GFSK
Antenna Type:	FPC
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
Remark: 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power.	

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEx	SPEAG	DAE4	1549	2021/03/23	2022/03/22
●	E-field Probe	SPEAG	EX3DV4	7494	2021/04/09	2022/04/08
●	Universal Radio Communication Tester	R&S	CMW500	137681	2021/05/27	2022/05/26
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2021/09/17	2022/09/16
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D450V3	1102	2021/01/20	2024/01/19
●	System Validation Dipole	SPEAG	D750V3	1180	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D835V2	4d238	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1750V2	1164	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1900V2	5d226	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D2450V2	1009	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D2600V2	1150	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D5GHzV2	1273	2021/01/26	2024/01/25
●	Signal Generator	R&S	SMB100A	114360	2021/08/05	2022/08/04
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2021/08/05	2022/08/04
●	Power sensor	R&S	NRP18A	101386	2021/05/27	2022/05/26
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2021/11/11	2022/11/10
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2021/11/11	2022/11/10
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2021/11/11	2022/11/10
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2021/11/11	2022/11/10

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

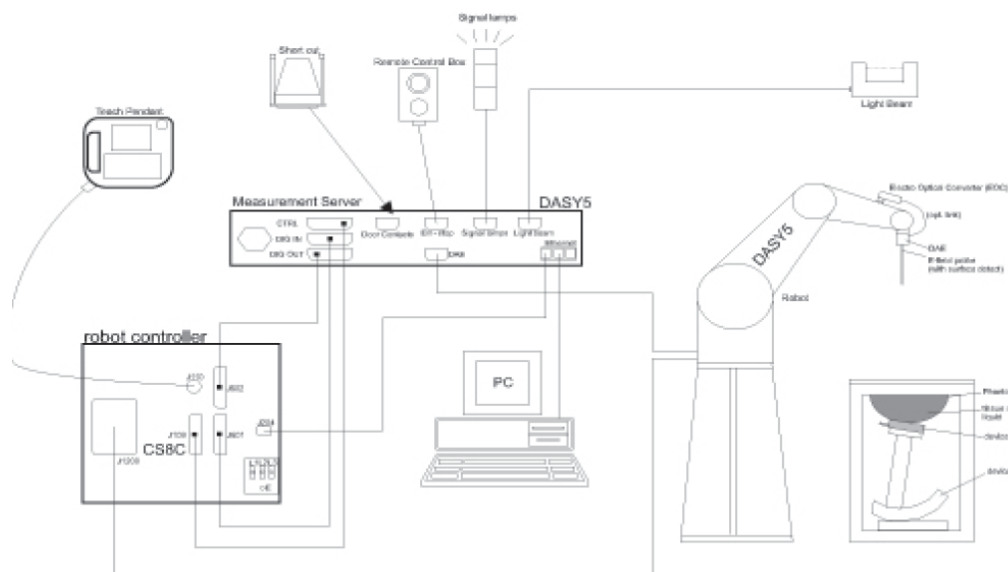

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

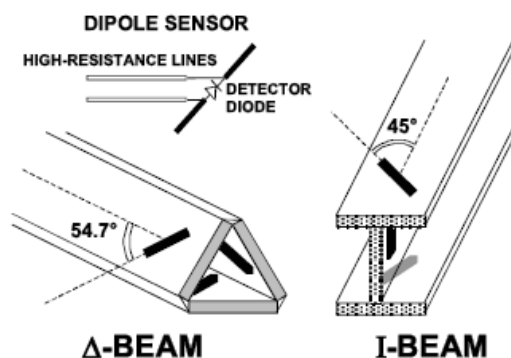

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM-Twin Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Resolutions per FCC KDB Publication 865664 D01v04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within $\pm 5 \%$.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$


SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom

8.1. Hotspot Mode Exposure conditions

The hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either 10 mm or that used in the body-worn accessory configuration, whichever is less for devices with dimension $> 9\text{ cm} \times 5\text{ cm}$. For smaller devices with dimensions $\leq 9\text{ cm} \times 5\text{ cm}$ because of a greater potential for next to body use a test separation of $\leq 5\text{ mm}$ must be used.

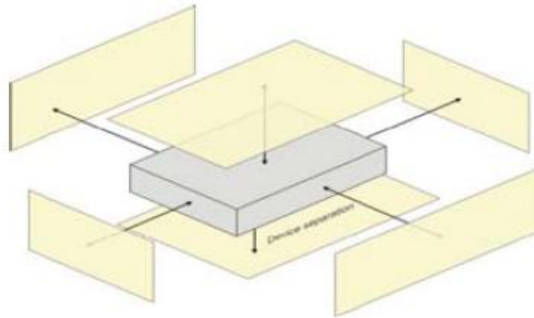

Picture 5 Test positions for Hotspot Mode

9. Dielectric Property Measurements & System Check

9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Tissue dielectric parameters for Head and Body				
Target Frequency (MHz)	Head		Body	
	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (S/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	40.60	0.890	0.933	-3.10%	4.83%	±5%	22.0	2021/9/9
835	41.50	40.25	0.900	0.940	-3.01%	4.44%	±5%	22.0	2021/9/10
1750	40.10	38.85	1.370	1.401	-3.12%	2.26%	±5%	22.0	2021/9/13
1900	40.00	38.46	1.400	1.469	-3.85%	4.93%	±5%	22.0	2021/9/14
2450	39.20	39.10	1.800	1.838	-0.26%	2.11%	±5%	22.0	2021/9/15
2600	39.00	38.86	1.960	1.947	-0.36%	-0.66%	±5%	22.0	2021/9/15
5250	35.93	34.85	4.706	4.609	-3.01%	-2.06%	±5%	22.0	2021/9/16
5750	35.36	34.12	5.219	5.103	-3.51%	-2.22%	±5%	22.0	2021/9/16

System Check Result:

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target.

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
750	8.43	8.80	2.20	5.59	5.88	1.47	4.39%	5.19%	$\pm 10\%$	22.4	2021/9/9
835	9.39	10.08	2.52	6.14	6.72	1.68	7.35%	9.45%	$\pm 10\%$	22.4	2021/9/10
1750	36.40	38.56	9.64	19.20	20.84	5.21	5.93%	8.54%	$\pm 10\%$	22.4	2021/9/13
1900	39.80	36.80	9.20	20.30	19.88	4.97	-7.54%	-2.07%	$\pm 10\%$	22.4	2021/9/14
2450	52.00	48.00	12.00	23.90	22.76	5.69	-7.69%	-4.77%	$\pm 10\%$	22.4	2021/9/15
2600	56.50	52.40	13.10	25.00	24.20	6.05	-7.26%	-3.20%	$\pm 10\%$	22.4	2021/9/15

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 100mW	Target 1W	Normalize to 1W	Measured 100mW					
5250	78.20	73.50	7.35	22.30	20.90	2.09	-6.01%	-6.28%	$\pm 10\%$	22.4	2021/9/16
5750	79.30	81.60	8.16	22.50	23.10	2.31	2.90%	2.67%	$\pm 10\%$	22.4	2021/9/16

Plots of System Performance Check

System Performance Check-Head 750MHz

DUT: D750V3; Type: D750V3; Serial: 1180

Date: 2021-09-09

Communication System: UID 0, A-CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 40.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW, dist=1.4mm/Area Scan (51x121x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.55 W/kg

Head/d=15mm, Pin=250mW, dist=1.4mm/Zoom Scan (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.29 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

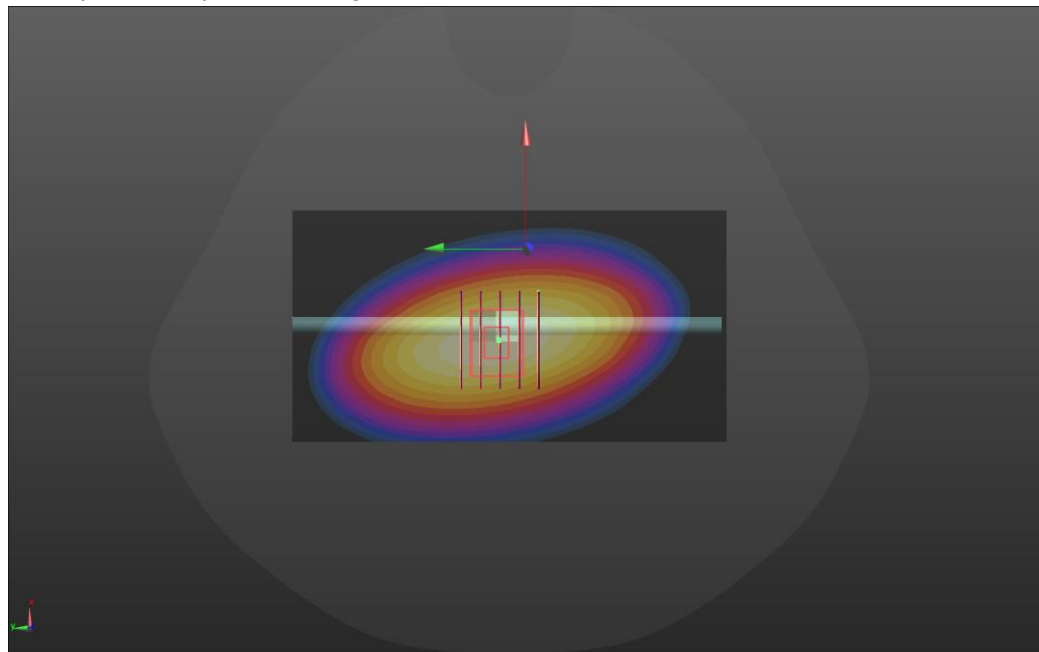

0 dB = 2.56 W/kg = 4.08 dBW/kg

System Performance Check-Head 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2021-09-10

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 40.245$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.6°C ; Liquid Temperature: 22.4°C ;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 835 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.03 W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.64 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.52 W/kg ; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

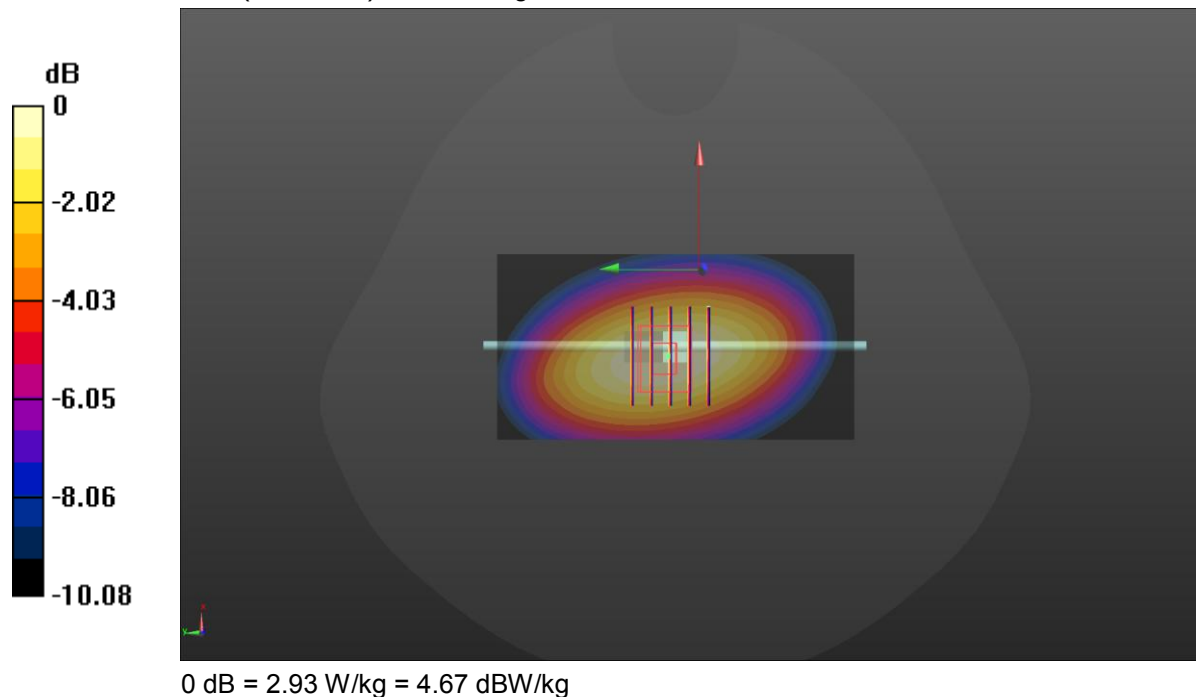

System Performance Check-Head 1750MHz

DUT: D1750V2; Type: D1750V2; Serial: 1164

Date: 2021-09-13

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 38.855$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.88, 8.88, 8.88) @ 1750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.7 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.95 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

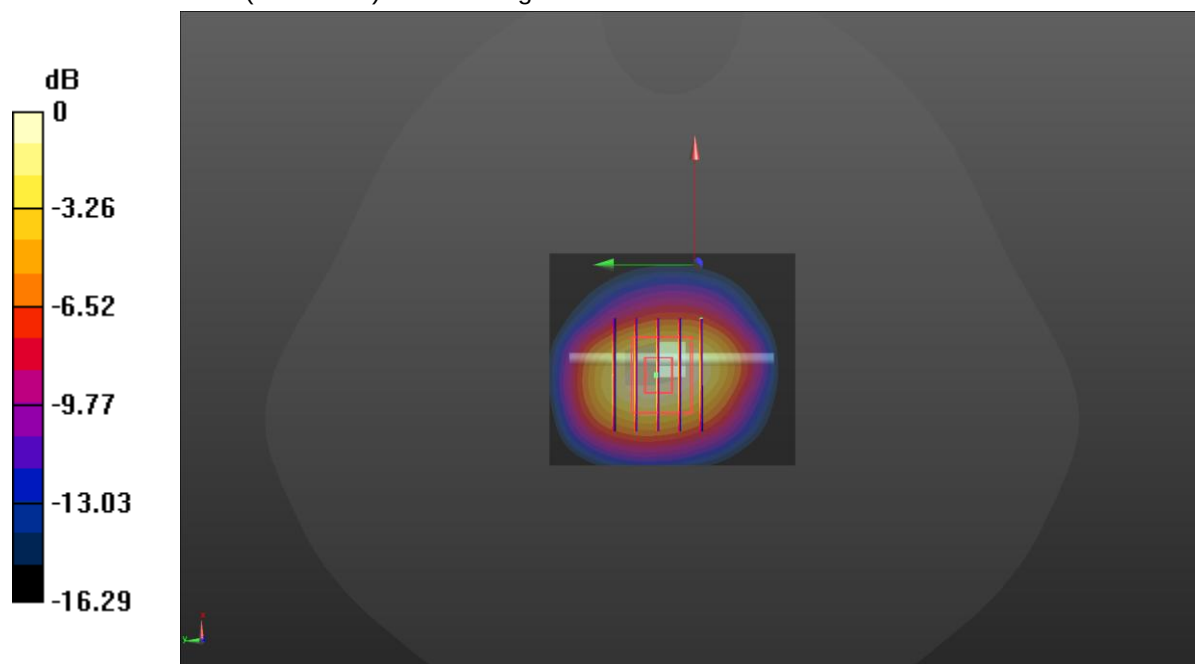

0 dB = 12.1 W/kg = 10.83 dBW/kg

System Performance Check-Head 1900MHz

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date: 2021-09-14

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.469$ S/m; $\epsilon_r = 38.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.2 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.85 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9.2 W/kg; SAR(10 g) = 4.97 W/kg

Maximum value of SAR (measured) = 11.4 W/kg

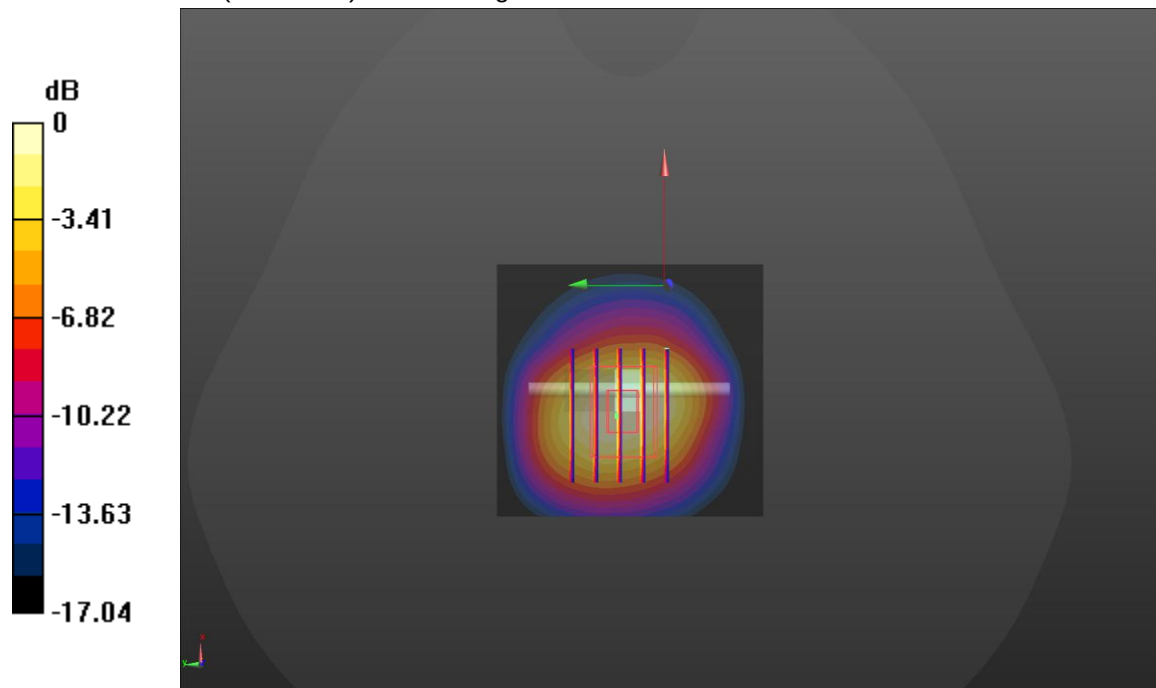

0 dB = 11.4 W/kg = 10.57 dBW/kg

SystemPerformanceCheck-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2021-09-15

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 39.096$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2450 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 17.0 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.40 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 23.9 W/kg

SAR(1 g) = 12 W/kg; SAR(10 g) = 5.69 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

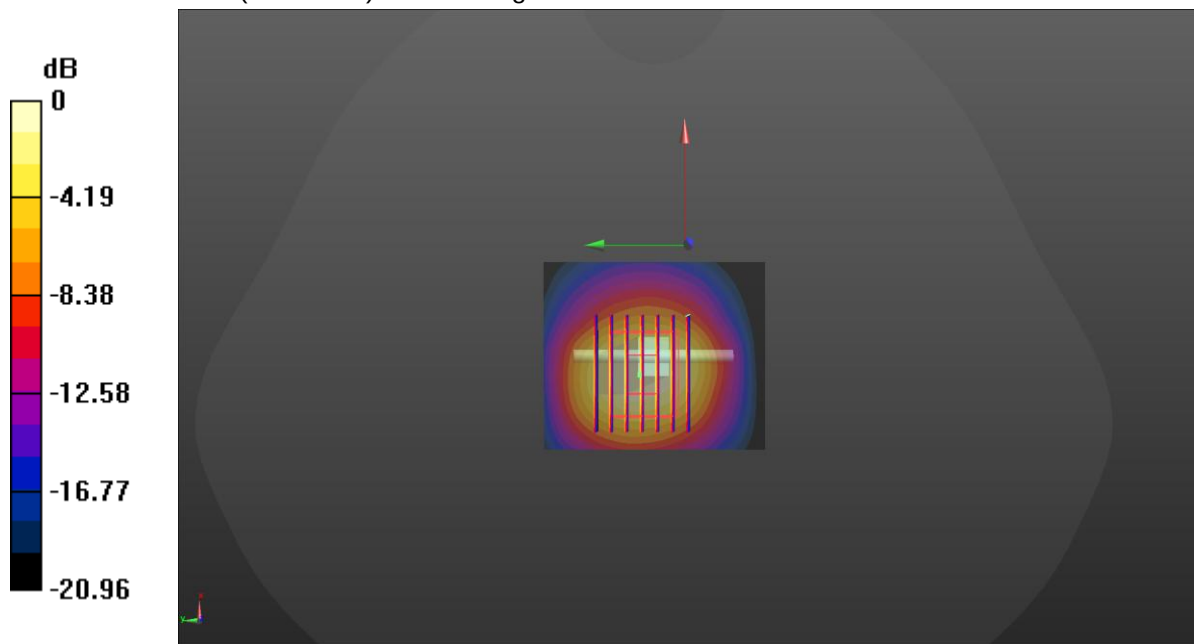

0 dB = 15.7 W/kg = 11.96 dBW/kg

SystemPerformanceCheck-Head 2600MHz

DUT: D2600V2; Type: D2600V2; Serial: 1150

Date: 2021-09-15

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.947$ S/m; $\epsilon_r = 38.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.68, 7.68, 7.68) @ 2600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.3 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.1 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.05 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

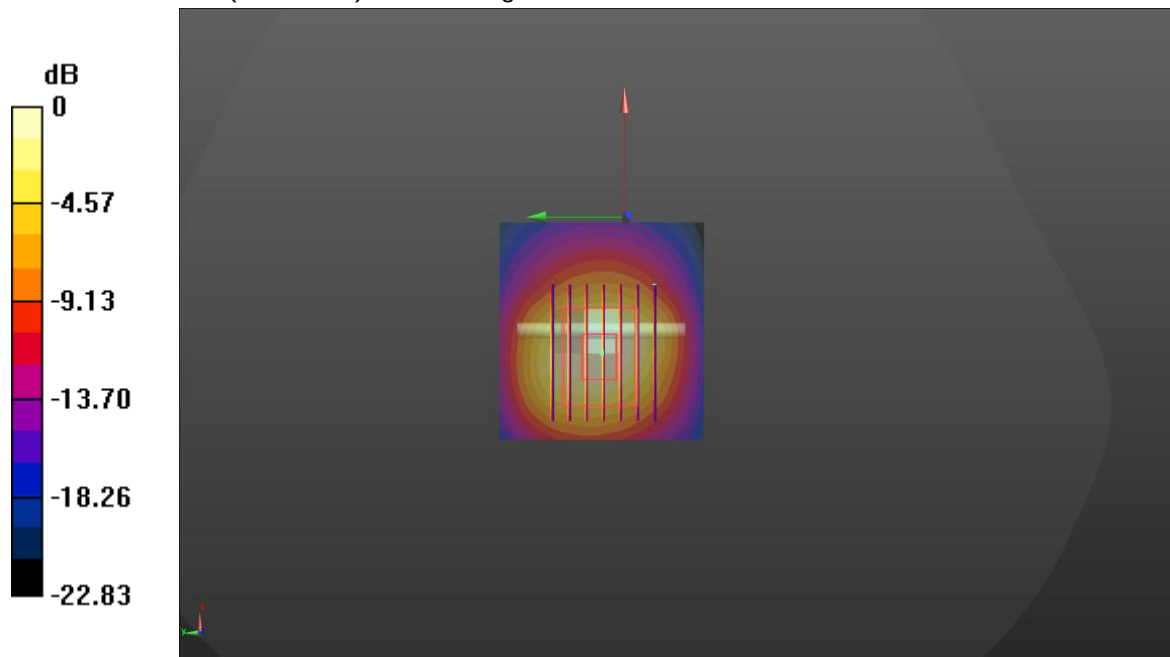

0 dB = 22.0 W/kg = 13.42 dBW/kg

SystemPerformanceCheck-Head 5250MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-09-16

Communication System: UID 0, Generic WIFI (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.609$ S/m; $\epsilon_r = 34.849$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(5.65, 5.65, 5.65) @ 5250 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, pin=100mW/Area Scan (31x31x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.6 W/kg


Head/d=10mm, pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.35 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

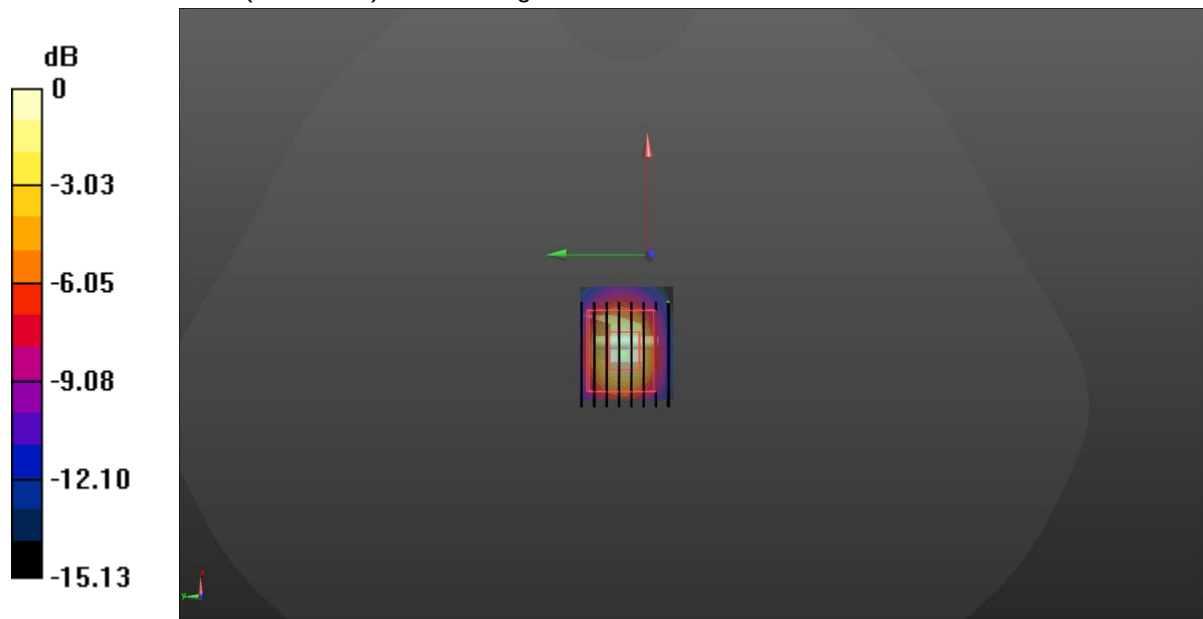

0 dB = 17.9 W/kg = 12.53 dBW/kg

SystemPerformanceCheck-Head 5750MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-09-16

Communication System: UID 0, Generic WIFI (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.103 \text{ S/m}$; $\epsilon_r = 34.123$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.86, 4.86, 4.86) @ 5750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW/Area Scan (41x41x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 23.1 W/kg


Head/d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 71.96 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 35.5 W/kg

SAR(1 g) = 8.16 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 19.6 W/kg

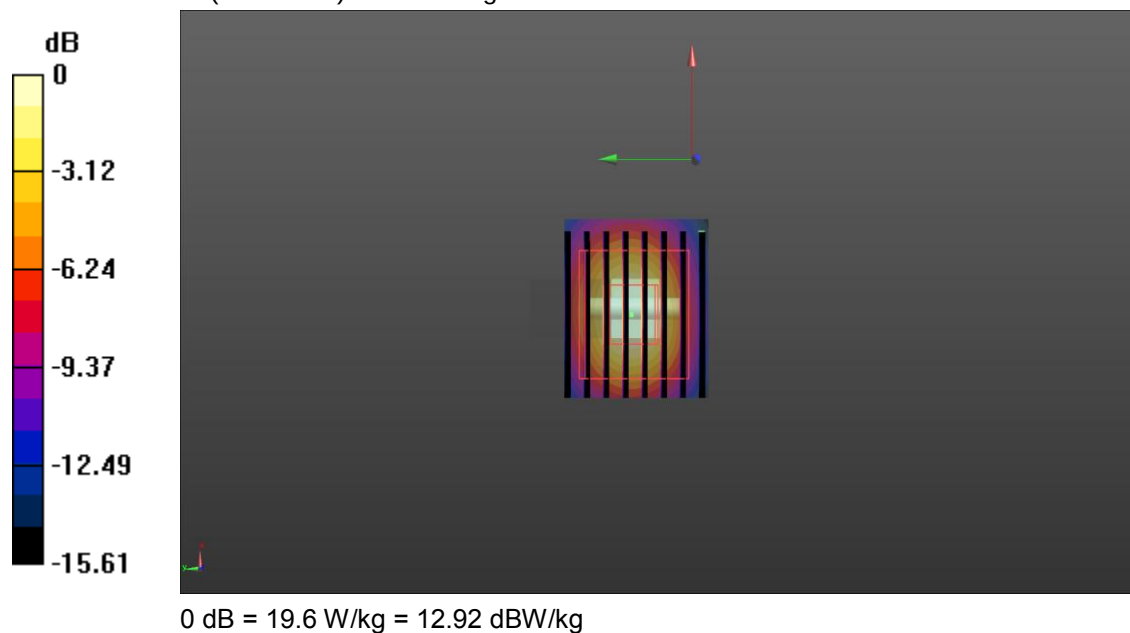

10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population/ Uncontrolled Exposure Environment	Occupational/ Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

11. Conducted Power Measurement Results

11.1. WCDMA

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of the setting are illustrated below:

HSDPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
 - ii. Set RMC 12.2Kbps + HSDPA mode
 - iii. Set Cell Power=-86dBm
 - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - v. Select HSDPA uplink parameters
 - vi. Set Delta ACK, Delta NACK and Delta CQI=8
 - vii. Set Ack-Nack repetition Factor to 3
 - viii. Set CQI Feedback Cycle (K) to 4ms
 - ix. Set CQI repetition factor to 2
 - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
 - ii. Set Gain Factors (β_c and β_d) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
 - iii. Set Cell Power=-86dBm
 - iv. Set channel type= 12.2Kbps + HSPA mode
 - v. Set UE Target power
 - vi. Set Ctrl mode=Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal the target E-TFCI of 75 for Sub-test 1, and other subtest's E-TFCI
- d) The transmitter maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
- Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
- Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
- Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
- Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

General Note:

- Per KDB 941225 D01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
- Per KDB 941225 D01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

Mode		WCDMA Band II			WCDMA Band IV		
		Conducted Power (dBm)			Conducted Power (dBm)		
		CH9262	CH9400	CH9538	CH1312	CH1413	CH1513
		1852.4MHz	1880MHz	1907.6MHz	1712.4MHz	1732.6MHz	1752.6MHz
AMR 12.2K		21.93	22.15	22.19	22.07	22.19	22.37
RMC 12.2K		21.96	22.18	22.22	22.10	22.22	22.40
HSDPA	Subtest-1	21.39	21.53	21.52	21.14	21.27	21.47
	Subtest-2	20.85	21.02	21.02	20.60	20.75	20.93
	Subtest-3	20.86	21.05	21.05	20.60	20.75	20.94
	Subtest-4	20.83	21.01	21.02	20.59	20.75	20.91
HSUPA	Subtest-1	19.36	19.57	19.67	19.15	19.32	19.57
	Subtest-2	19.89	20.12	20.14	19.64	19.89	20.03
	Subtest-3	20.42	20.62	20.68	20.17	20.38	20.54
	Subtest-4	19.48	19.62	19.69	19.18	19.41	19.56
	Subtest-5	21.37	21.55	21.54	21.18	21.33	21.56

Mode		WCDMA Band V		
		Conducted Power (dBm)		
		CH4132	CH4183	CH4233
		826.4MHz	836.6MHz	846.6MHz
AMR 12.2K		22.01	22.26	22.10
RMC 12.2K		22.04	22.29	22.13
HSDPA	Subtest-1	21.08	21.29	21.15
	Subtest-2	20.53	20.78	20.65
	Subtest-3	20.57	20.81	20.65
	Subtest-4	20.56	20.79	20.62
HSUPA	Subtest-1	18.99	19.19	18.98
	Subtest-2	19.43	19.58	19.45
	Subtest-3	19.94	20.14	19.99
	Subtest-4	18.99	19.15	19.07
	Subtest-5	20.95	21.15	21.00

11.2. LTE

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18607	18900	19193
				1850.7MHz	1880MHz	1909.3MHz
1.4MHz	QPSK	1	0	22.73	22.99	22.52
			2	22.91	23.14	22.66
			5	22.75	23.05	22.54
		3	0	22.88	23.17	22.73
			1	22.91	23.18	22.71
			3	22.92	23.18	22.70
		6	0	21.82	22.00	21.62
	16QAM	1	0	21.89	22.18	21.65
			2	22.09	22.23	21.82
			5	21.86	22.15	21.61
		3	0	21.82	22.09	21.65
			1	21.81	21.97	21.64
			3	21.77	21.94	21.60
		6	0	20.93	20.96	20.52
	64QAM	1	0	21.69	21.97	21.72
			2	21.92	22.15	21.89
			5	21.67	22.00	21.70
		3	0	21.61	21.88	21.86
			1	21.63	21.86	21.84
			3	21.62	21.91	21.82
		6	0	20.78	20.84	20.95

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18615	18900	19185
				1851.5MHz	1880MHz	1908.5MHz
3MHz	QPSK	1	0	22.35	22.96	22.90
			8	22.33	22.58	22.50
			14	22.28	22.53	22.46
		8	0	21.27	21.55	21.51
			4	21.28	21.56	21.52
			7	21.30	21.57	21.58
		15	0	21.29	21.56	21.57
	16QAM	1	0	21.56	21.65	21.74
			8	21.49	21.54	21.69
			14	21.43	21.51	21.63
		8	0	20.38	20.64	20.70
			4	20.35	20.65	20.70
			7	20.39	20.66	20.66
		15	0	20.29	20.56	20.73
	64QAM	1	0	21.83	21.83	22.10
			8	21.86	21.90	22.09
			14	21.79	21.85	21.99
		8	0	20.75	20.99	21.02
			4	20.74	20.99	21.02
			7	20.75	20.99	21.00
		15	0	20.67	20.89	21.04

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18625	18900	19175
				1852.5MHz	1880MHz	1907.5MHz
5MHz	QPSK	1	0	22.37	22.87	22.60
			12	22.44	22.64	22.63
			24	22.27	22.50	22.43
		12	0	21.25	21.52	21.58
			7	21.30	21.45	21.59
			13	21.39	21.55	21.57
		25	0	21.36	21.56	21.61
	16QAM	1	0	21.51	21.50	21.53
			12	21.65	21.70	21.70
			24	21.51	21.53	21.41
		12	0	20.36	20.63	20.68
			7	20.33	20.59	20.66
			13	20.44	20.67	20.67
		25	0	20.41	20.70	20.74
	64QAM	1	0	21.85	21.86	21.78
			12	22.04	22.05	21.98
			24	21.84	21.87	21.80
		12	0	20.72	20.97	20.98
			6	20.78	21.00	20.95
			13	20.89	21.00	20.95
		25	0	20.77	21.06	21.06

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18650	18900	19150
				1855MHz	1880MHz	1905MHz
10MHz	QPSK	1	0	22.20	22.40	22.43
			24	22.40	22.60	22.58
			49	22.33	22.50	22.38
		25	0	21.32	21.53	21.62
			24	21.27	21.56	21.57
			49	21.39	21.62	21.56
		50	0	21.26	21.58	21.58
	16QAM	1	0	21.47	21.38	21.51
			24	21.61	21.58	21.85
			49	21.42	21.43	21.61
		25	0	20.41	20.65	20.67
			24	20.41	20.68	20.65
			49	20.48	20.78	20.72
		50	0	20.40	20.64	20.66
	64QAM	1	0	21.90	21.95	21.75
			24	22.04	22.19	22.01
			49	21.83	22.09	21.75
		25	0	20.78	21.05	21.04
			12	20.76	21.04	21.00
			25	20.84	21.14	21.12
		50	0	20.81	21.06	21.01

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18675	18900	19125
				1857.5MHz	1880MHz	1902.5MHz
15MHz	QPSK	1	0	22.14	22.22	22.34
			38	22.26	22.42	22.38
			74	22.29	22.33	22.17
		38	0	21.38	21.18	21.39
			18	21.51	21.36	21.55
			37	21.35	21.25	21.44
		75	0	21.33	21.48	21.55
	16QAM	1	0	21.42	21.18	21.38
			38	21.51	21.32	21.54
			74	21.36	21.26	21.45
		38	0	21.39	21.21	21.36
			18	21.50	21.36	21.54
			37	21.35	21.28	21.44
		75	0	20.29	20.54	20.50
	64QAM	1	0	21.96	21.72	21.87
			38	22.04	21.92	22.00
			74	21.91	21.78	21.96
		38	0	21.95	21.72	21.90
			18	22.03	21.90	22.01
			37	21.91	21.73	21.98
		75	0	20.87	21.05	21.00

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18700	18900	19100
				1860MHz	1880MHz	1900MHz
20MHz	QPSK	1	0	22.12	22.67	22.38
			49	22.50	22.85	22.69
			99	22.34	22.16	22.29
		50	0	21.15	21.39	21.55
			25	21.17	21.41	21.49
			50	21.11	21.53	21.43
		100	0	21.08	21.49	21.56
	16QAM	1	0	21.37	21.37	21.35
			49	21.56	21.61	21.58
			99	21.30	21.38	21.35
		50	0	20.26	20.50	20.50
			25	20.22	20.48	20.50
			50	20.09	20.66	20.50
		100	0	20.12	20.50	20.52
	64QAM	1	0	21.93	21.73	21.88
			49	22.11	22.10	22.03
			99	21.89	21.87	21.88
		50	0	20.79	21.04	20.99
			25	20.80	21.02	20.97
			50	20.69	21.18	20.97
		100	0	20.70	21.04	20.97

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19957	20175	20393
				1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	21.60	21.95	21.91
			2	21.68	21.99	21.73
			5	21.37	21.95	21.77
		3	0	21.43	21.99	21.83
			1	21.43	21.95	21.67
			3	21.47	21.97	21.69
		6	0	20.41	20.97	20.64
	16QAM	1	0	20.61	21.00	21.09
			2	20.73	21.11	21.04
			5	20.57	20.98	20.84
		3	0	20.43	20.90	20.69
			1	20.46	20.82	20.65
			3	20.42	20.70	20.66
		6	0	19.49	19.90	19.59
	64QAM	1	0	20.82	20.89	20.80
			2	21.02	21.04	21.00
			5	20.80	20.89	20.82
		3	0	20.74	20.78	20.88
			1	20.71	20.77	20.88
			3	20.70	20.78	20.86
		6	0	19.80	19.75	20.00

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19965	20175	20385
				1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	21.54	21.91	21.96
			8	21.47	21.48	21.64
			14	21.37	21.44	21.54
		8	0	20.37	20.52	20.55
			4	20.38	20.65	20.57
			7	20.38	20.48	20.55
		15	0	20.39	20.65	20.68
	16QAM	1	0	20.68	20.42	21.24
			8	20.61	20.36	20.86
			14	20.58	20.41	20.80
		8	0	19.45	19.63	19.67
			4	19.47	19.57	19.67
			7	19.41	19.65	19.65
		15	0	19.37	19.47	19.70
	64QAM	1	0	20.93	20.72	21.11
			8	20.91	20.66	21.06
			14	20.94	20.70	21.12
		8	0	19.78	19.87	20.08
			4	19.79	19.87	20.04
			7	19.77	19.87	20.03
		15	0	19.68	19.72	19.97

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19975	20175	20375
				1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	21.33	21.48	21.84
			12	21.51	21.51	21.59
			24	21.36	21.39	21.51
		12	0	20.37	20.43	20.58
			6	20.40	20.42	20.58
			13	20.42	20.44	20.54
		25	0	20.40	20.45	20.62
	16QAM	1	0	20.58	20.42	20.55
			12	20.74	20.52	20.67
			24	20.61	20.42	20.59
		12	0	19.44	19.45	19.59
			6	19.46	19.45	19.58
			13	19.47	19.46	19.57
		25	0	19.44	19.53	19.64
	64QAM	1	0	20.89	20.74	20.89
			12	20.97	20.86	21.01
			24	20.89	20.76	20.88
		12	0	19.80	19.80	19.97
			6	19.78	19.81	19.93
			13	19.80	19.83	19.99
		25	0	19.79	19.92	20.09

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20000	20175	20350
				1715MHz	1732.5MHz	1750MHz
10MHz	QPSK	1	0	21.81	21.91	21.94
			24	21.92	21.72	22.15
			49	21.52	21.46	22.08
		25	0	20.57	20.89	20.92
			12	20.59	20.67	21.13
			25	20.53	20.77	21.14
		50	0	20.60	20.97	21.08
	16QAM	1	0	20.94	20.57	21.12
			24	20.85	20.71	21.33
			49	20.69	20.52	21.17
		25	0	19.62	19.88	20.04
			12	19.60	19.88	20.16
			25	19.62	20.00	20.21
		50	0	19.59	20.07	20.17
	64QAM	1	0	21.59	21.64	21.82
			24	21.78	21.86	22.01
			49	21.61	21.70	21.93
		25	0	20.72	20.76	20.94
			12	20.73	20.77	20.91
			25	20.72	20.79	20.92
		50	0	20.76	20.78	20.91

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20025	20175	20325
				1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	21.80	21.91	21.93
			38	21.88	21.89	22.10
			74	21.83	21.63	21.63
		38	0	20.74	20.81	21.12
			18	20.99	20.73	21.31
			37	20.70	20.43	21.26
		75	0	20.67	21.11	21.18
	16QAM	1	0	21.10	20.57	21.12
			38	21.10	20.63	21.33
			74	21.04	20.71	21.28
		38	0	20.98	20.64	21.09
			18	20.82	20.78	21.33
			37	20.71	20.63	21.28
		75	0	19.67	20.05	20.15
	64QAM	1	0	21.50	21.66	21.66
			38	21.64	21.77	21.86
			74	21.55	21.69	21.77
		38	0	21.53	21.66	21.66
			18	21.66	21.76	21.84
			37	21.58	21.71	21.75
		75	0	20.78	20.86	20.89

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20050	20175	20300
				1720MHz	1732.5MHz	1745MHz
20MHz	QPSK	1	0	21.78	21.68	21.85
			49	22.05	21.71	22.26
			99	21.68	21.55	22.07
		50	0	20.95	20.86	20.99
			25	20.62	20.83	21.00
			50	20.70	20.85	21.07
		100	0	20.73	20.90	20.98
	16QAM	1	0	21.02	20.76	20.76
			49	21.21	20.89	20.89
			99	20.89	20.76	20.76
		50	0	19.83	19.99	19.99
			25	19.83	20.05	20.05
			50	19.80	20.05	20.05
		100	0	19.70	19.99	19.99
	64QAM	1	0	21.45	21.40	21.63
			49	21.76	21.65	22.01
			99	21.58	21.55	21.84
		50	0	20.65	20.66	20.73
			25	20.64	20.66	20.72
			50	20.66	20.70	20.81
		100	0	20.65	20.68	20.77

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20407	20525	20643
				8.4.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	22.61	22.73	22.73
			2	22.85	22.84	22.86
			5	22.66	22.70	22.43
		3	0	22.74	22.81	22.41
			1	22.76	22.80	22.41
			3	22.77	22.85	22.42
		6	0	21.68	21.80	21.33
	16QAM	1	0	21.76	21.86	21.87
			2	21.96	22.04	22.09
			5	21.78	21.83	21.46
		3	0	21.67	21.73	21.33
			1	21.69	21.71	21.31
			3	21.56	21.74	21.33
		6	0	20.75	20.69	20.41
	64QAM	1	0	21.89	21.99	21.60
			2	22.08	22.15	21.88
			5	21.91	21.97	21.64
		3	0	21.78	21.85	21.56
			1	21.78	21.83	21.55
			3	21.73	21.86	21.53
		6	0	20.88	20.80	20.64

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20415	20525	20635
				825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	22.88	22.90	22.79
			8	22.83	22.79	22.74
			14	22.67	22.49	22.33
		8	0	21.56	21.46	21.36
			4	21.65	21.73	21.40
			7	21.57	21.67	21.38
		15	0	21.60	21.66	21.41
	16QAM	1	0	22.10	21.73	22.09
			8	22.00	21.54	21.75
			14	21.68	21.27	21.59
		8	0	20.49	20.45	20.46
			4	20.60	20.66	20.45
			7	20.61	20.62	20.42
		15	0	20.41	20.59	20.43
	64QAM	1	0	22.09	22.03	21.79
			8	22.01	21.99	21.74
			14	22.06	21.99	21.81
		8	0	20.87	20.84	20.65
			4	20.92	20.86	20.63
			7	20.90	20.87	20.61
		15	0	20.77	20.78	20.62

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20425	20525	20625
				826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	22.61	22.73	22.78
			12	22.70	22.46	22.66
			24	22.20	22.29	22.28
		12	0	21.29	21.26	21.32
			6	21.45	21.31	21.30
			13	21.27	21.39	21.18
		25	0	21.46	21.30	21.26
	16QAM	1	0	21.64	21.46	21.78
			12	21.62	21.37	21.40
			24	21.40	21.25	21.31
		12	0	20.30	20.29	20.26
			6	20.31	20.24	20.27
			13	20.49	20.28	20.18
		25	0	20.26	20.33	20.33
	64QAM	1	0	22.03	21.87	21.62
			12	22.20	21.99	21.69
			24	22.12	21.81	21.56
		12	0	20.85	20.95	20.60
			6	20.89	20.90	20.60
			13	20.94	20.85	20.48
		25	0	20.89	20.96	20.57

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20450	20525	20600
				829MHz	836.5MHz	844MHz
10MHz	QPSK	1	0	22.30	22.71	22.69
			24	22.29	22.68	22.42
			49	22.19	22.26	22.28
		25	0	21.30	21.36	21.35
			12	21.20	21.36	21.32
			25	21.42	21.28	21.30
		50	0	21.36	21.35	21.33
	16QAM	1	0	21.37	21.45	21.69
			24	21.51	21.31	21.60
			49	21.38	21.13	21.53
		25	0	20.42	20.42	20.37
			12	20.31	20.39	20.35
			25	20.47	20.29	20.32
		50	0	20.32	20.32	20.31
	64QAM	1	0	22.78	22.85	22.48
			24	23.02	23.05	22.64
			49	22.84	22.90	22.52
		25	0	21.90	22.03	21.63
			12	21.89	22.02	21.64
			25	22.00	21.89	21.58
		50	0	21.94	21.95	21.63

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20775	21100	21425
				2502.5MHz	2535MHz	2567.5MHz
5MHz	QPSK	1	0	21.64	21.50	21.65
			12	21.47	21.69	21.86
			24	21.17	21.51	21.72
		12	0	20.19	20.43	20.75
			6	20.20	20.43	20.72
			13	20.24	20.47	20.76
		25	0	20.22	20.44	20.71
	16QAM	1	0	20.55	20.35	20.58
			12	20.46	20.55	20.80
			24	20.29	20.42	20.69
		12	0	19.18	19.31	19.65
			6	19.16	19.31	19.66
			13	19.20	19.39	19.71
		25	0	19.20	19.40	19.71
	64QAM	1	0	20.70	20.96	21.10
			12	20.80	21.13	21.28
			24	20.66	20.98	21.15
		12	0	19.67	19.78	20.14
			6	19.67	19.79	20.17
			13	19.73	19.85	20.13
		25	0	19.72	19.79	20.17

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20800	21100	21400
				2505MHz	2535MHz	2565MHz
10MHz	QPSK	1	0	21.22	21.49	21.66
			24	21.29	21.62	21.85
			49	21.32	21.58	21.80
		25	0	20.22	20.43	20.78
			12	20.21	20.41	20.78
			25	20.27	20.60	20.78
		50	0	20.21	20.49	20.72
	16QAM	1	0	20.36	20.36	20.75
			24	20.44	20.47	20.90
			49	20.37	20.46	20.92
		25	0	19.24	19.34	19.70
			12	19.25	19.38	19.71
			25	19.26	19.57	19.74
		50	0	19.21	19.42	19.68
	64QAM	1	0	21.81	21.99	22.17
			24	21.83	22.08	22.22
			49	21.84	22.03	22.23
		25	0	20.74	20.92	21.22
			12	20.77	20.90	21.23
			25	20.80	21.04	21.21
		50	0	20.77	20.91	21.18

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20825	21100	21375
				2507.5MHz	2535MHz	2562.5MHz
15MHz	QPSK	1	0	21.15	21.41	21.53
			38	21.33	21.54	21.72
			74	21.24	21.48	21.68
		38	0	20.38	20.26	20.66
			18	20.50	20.43	20.80
			37	20.37	20.37	20.79
		75	0	20.31	20.62	20.86
	16QAM	1	0	20.39	20.28	20.62
			38	20.49	20.39	20.82
			74	20.37	20.35	20.78
		38	0	20.43	20.27	20.63
			18	20.52	20.42	20.82
			37	20.37	20.36	20.81
		75	0	19.24	19.52	19.72
	64QAM	1	0	21.77	21.91	22.08
			38	21.85	22.03	22.24
			74	21.76	21.97	22.19
		38	0	21.79	21.90	22.10
			18	21.86	22.02	22.27
			37	21.77	21.98	22.18
		75	0	20.85	21.10	21.31

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20850	21100	21350
				2510MHz	2535MHz	2560MHz
20MHz	QPSK	1	0	21.16	21.29	21.58
			49	21.46	21.63	21.80
			99	21.26	21.42	21.75
		50	0	20.18	20.31	20.70
			25	20.22	20.31	20.71
			50	19.98	20.61	20.64
		100	0	20.12	20.49	20.67
	16QAM	1	0	20.27	20.23	20.55
			49	20.57	20.55	20.82
			99	20.26	20.49	20.71
		50	0	19.18	19.23	19.67
			25	19.18	19.24	19.65
			50	18.99	19.62	19.57
		100	0	19.06	19.42	19.60
	64QAM	1	0	21.77	21.80	22.11
			49	22.13	22.05	22.40
			99	21.91	21.93	22.26
		50	0	20.78	20.78	21.22
			25	20.78	20.80	21.21
			50	20.60	21.05	21.08
		100	0	20.67	20.95	21.15

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23017	23095	23173
				699.7MHz	707.5MHz	715.3MHz
1.4MHz	QPSK	1	0	23.09	22.60	22.57
			2	23.19	22.70	22.66
			5	23.08	22.55	22.52
		3	0	23.02	22.67	22.57
			1	23.03	22.62	22.57
			3	23.04	22.67	22.64
		6	0	22.25	21.63	21.68
	16QAM	1	0	22.02	21.77	21.58
			2	22.22	21.86	21.81
			5	22.04	21.72	21.68
		3	0	21.84	21.55	21.45
			1	21.85	21.56	21.45
			3	21.88	21.60	21.49
		6	0	21.01	20.54	20.52
	64QAM	1	0	22.02	21.86	21.93
			2	22.23	22.03	22.05
			5	22.00	21.86	21.91
		3	0	21.83	21.90	21.76
			1	21.83	21.88	21.76
			3	21.85	21.83	21.76
		6	0	20.97	21.08	21.04

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23025	23095	23165
				700.5MHz	707.5MHz	714.5MHz
3MHz	QPSK	1	0	23.12	23.10	23.05
			8	23.14	23.10	23.14
			14	23.07	23.07	23.07
		8	0	22.16	22.05	22.16
			4	22.15	22.07	22.15
			7	22.10	22.10	22.10
		15	0	22.04	22.10	22.04
	16QAM	1	0	22.15	22.00	22.11
			8	22.07	22.03	22.07
			14	22.05	21.97	21.89
		8	0	21.08	21.16	20.93
			4	21.08	21.17	21.09
			7	21.07	21.16	21.06
		15	0	20.92	21.00	21.03
	64QAM	1	0	22.01	21.90	21.99
			8	22.02	21.89	22.03
			14	21.99	21.87	21.96
		8	0	21.02	21.04	21.02
			4	21.02	21.03	21.00
			7	20.98	21.07	20.97
		15	0	20.87	20.94	20.86

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23035	23095	23155
				701.5MHz	707.5MHz	713.5MHz
5MHz	QPSK	1	0	23.01	23.03	23.03
			12	23.15	23.14	23.15
			24	23.06	23.03	22.90
		12	0	22.04	22.07	22.06
			6	22.05	22.03	22.18
			13	22.07	22.08	21.96
		25	0	22.00	22.07	22.05
	16QAM	1	0	22.06	22.01	21.88
			12	22.21	22.12	22.03
			24	22.18	21.97	21.75
		12	0	21.01	21.13	20.97
			6	21.02	21.07	21.05
			13	21.06	21.15	20.88
		25	0	20.98	21.15	20.98
	64QAM	1	0	21.99	21.94	21.80
			12	22.11	22.06	21.88
			24	22.09	21.89	21.80
		12	0	20.93	21.01	20.97
			6	20.95	20.99	20.94
			13	20.93	21.02	20.74
		25	0	20.92	21.05	20.85

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23060	23095	23130
				704MHz	707.5MHz	711MHz
10MHz	QPSK	1	0	23.08	23.07	23.01
			24	23.17	23.20	23.15
			49	23.06	23.18	22.92
		25	0	22.09	22.09	21.79
			12	22.12	22.09	21.97
			25	22.21	22.12	21.79
		50	0	22.14	22.11	22.02
	16QAM	1	0	22.05	21.95	22.24
			24	22.35	22.08	22.16
			49	22.17	21.98	21.79
		25	0	21.15	21.15	20.91
			12	21.11	21.16	21.01
			25	21.27	21.17	20.54
		50	0	21.17	21.12	20.96
	64QAM	1	0	23.03	22.99	22.92
			24	23.16	23.06	23.06
			49	22.91	23.04	22.91
		25	0	22.02	21.95	21.98
			12	22.00	21.97	21.96
			25	22.10	22.05	21.77
		50	0	22.07	22.02	21.87

LTE-FDD Band 17				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23755	23790	23825
				706.5MHz	710MHz	713.5MHz
5MHz	QPSK	1	0	23.25	23.31	23.30
			12	23.38	23.23	23.17
			24	23.26	22.95	22.78
		12	0	22.30	22.12	21.94
			6	22.29	22.25	21.36
			13	22.24	21.99	21.63
		25	0	22.16	22.21	21.33
	16QAM	1	0	22.36	22.17	21.92
			12	22.55	22.00	21.84
			24	22.38	21.83	21.75
		12	0	21.29	21.30	20.80
			6	21.26	21.15	20.33
			13	21.30	21.00	20.63
		25	0	21.03	21.16	20.69
	64QAM	1	0	22.34	22.24	22.05
			12	22.53	22.27	22.20
			24	22.37	22.14	22.09
		12	0	21.24	21.24	21.20
			6	21.29	21.26	21.33
			13	21.35	21.13	21.26
		25	0	21.28	21.22	20.69

LTE-FDD Band 17				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23780	23790	23800
				709MHz	710MHz	711MHz
10MHz	QPSK	1	0	23.24	23.34	23.31
			24	23.44	23.26	22.99
			49	23.37	22.89	22.77
		25	0	22.29	22.17	21.88
			12	22.30	21.92	21.93
			25	22.15	21.78	21.71
		50	0	22.17	22.07	21.79
	16QAM	1	0	22.38	22.05	22.25
			24	22.48	22.01	21.96
			49	22.22	21.74	21.94
		25	0	21.35	21.13	20.89
			12	21.36	20.95	21.03
			25	21.19	20.78	20.56
		50	0	21.10	21.09	21.02
	64QAM	1	0	23.21	23.25	23.22
			24	23.31	23.36	23.36
			49	23.27	23.28	23.20
		25	0	22.19	22.23	22.23
			12	22.23	22.24	22.23
			25	22.12	22.11	22.02
		50	0	22.17	22.11	22.13

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26047	26365	26683
				1850.7MHz	1882.5MHz	1914.3MHz
1.4MHz	QPSK	1	0	22.65	22.96	22.74
			2	22.84	23.07	22.36
			5	22.65	22.95	22.41
		3	0	22.79	23.11	22.96
			1	22.79	23.12	22.74
			3	22.86	23.16	22.84
		6	0	22.36	22.05	22.17
	16QAM	1	0	21.83	21.15	21.59
			2	21.03	21.35	21.10
			5	21.86	21.24	21.41
		3	0	21.81	21.18	21.20
			1	21.71	21.36	21.18
			3	21.76	21.41	21.57
		6	0	20.74	21.03	20.75
	64QAM	1	0	22.21	21.97	22.24
			2	22.01	21.94	22.41
			5	22.26	21.89	22.03
		3	0	22.14	21.18	22.09
			1	22.14	21.36	21.98
			3	22.13	21.41	21.57
		6	0	21.25	21.32	21.44

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26055	26365	26675
				1851.5MHz	1882.5MHz	1913.5MHz
3MHz	QPSK	1	0	22.73	22.58	22.66
			8	22.76	22.36	22.30
			14	22.77	22.51	22.53
		8	0	21.73	22.03	22.11
			4	21.76	22.05	22.25
			7	21.77	22.03	21.86
		15	0	21.75	22.03	21.98
	16QAM	1	0	21.93	21.94	21.34
			8	21.88	21.99	21.90
			14	21.96	21.06	21.22
		8	0	21.36	21.13	21.86
			4	21.81	21.14	21.12
			7	21.58	21.14	21.15
		15	0	20.71	21.05	21.46
	64QAM	1	0	22.34	22.30	22.01
			8	22.24	22.29	21.90
			14	22.29	22.14	21.97
		8	0	21.36	21.43	21.54
			4	21.81	21.40	21.34
			7	21.58	21.43	21.27
		15	0	21.09	21.34	21.20

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26065	26365	26665
				1852.5MHz	1882.5MHz	1912.5MHz
5MHz	QPSK	1	0	22.69	22.90	22.99
			12	22.85	23.04	22.45
			24	22.74	22.91	22.84
		12	0	21.65	21.91	22.15
			6	21.71	21.92	22.14
			13	21.79	22.00	21.85
		25	0	21.78	22.02	21.95
	16QAM	1	0	21.92	21.97	21.83
			12	21.14	21.18	21.98
			24	21.85	21.36	21.48
		12	0	20.81	21.04	20.98
			6	20.75	21.02	20.97
			13	20.84	21.12	20.70
		25	0	20.83	21.13	20.84
	64QAM	1	0	22.30	22.36	22.20
			12	21.96	21.92	22.26
			24	22.33	22.07	22.02
		12	0	21.18	21.38	21.30
			6	21.19	21.43	21.29
			13	21.24	21.46	21.02
		25	0	21.15	21.49	21.17

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26090	26365	26640
				1855MHz	1882.5MHz	1910MHz
10MHz	QPSK	1	0	22.67	22.92	22.84
			24	22.87	22.58	22.22
			49	22.78	22.93	22.39
		25	0	21.76	21.99	22.11
			12	21.72	21.98	22.07
			25	21.85	22.08	21.76
		50	0	21.78	22.04	21.90
	16QAM	1	0	21.88	21.83	21.13
			24	21.99	21.05	21.16
			49	21.84	21.87	21.81
		25	0	20.82	21.13	21.13
			12	20.86	21.14	21.14
			25	20.88	21.22	20.66
		50	0	20.84	21.12	20.96
	64QAM	1	0	23.14	23.36	22.99
			24	23.33	23.01	22.87
			49	23.26	23.33	22.94
		25	0	22.20	22.45	22.80
			12	22.24	22.43	22.42
			25	22.29	22.49	22.15
		50	0	22.21	22.46	22.31

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26115	26365	26615
				1857.5MHz	1882.5MHz	1907.5MHz
15MHz	QPSK	1	0	22.65	22.82	22.92
			38	22.84	22.97	22.91
			74	22.85	22.86	22.79
		38	0	21.92	21.77	21.77
			18	21.16	21.92	21.17
			37	21.84	21.76	21.61
		75	0	21.87	22.06	22.25
	16QAM	1	0	21.95	21.75	21.93
			38	22.02	21.90	22.17
			74	21.86	21.77	21.26
		38	0	21.90	21.76	21.97
			18	21.99	21.93	21.19
			37	21.87	21.75	21.16
		75	0	20.85	21.09	21.16
	64QAM	1	0	23.13	23.33	23.39
			38	23.32	23.41	23.31
			74	23.34	23.29	22.73
		38	0	23.14	23.34	23.75
			18	23.32	23.43	23.03
			37	23.33	23.32	22.97
		75	0	22.36	22.52	23.23

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26140	26365	26590
				1860MHz	1882.5MHz	1905MHz
20MHz	QPSK	1	0	22.65	22.66	22.99
			49	22.89	22.93	22.84
			99	22.87	22.74	22.12
		50	0	21.67	21.89	22.01
			25	21.70	21.90	21.96
			50	21.59	21.94	21.78
		100	0	21.57	21.90	21.91
	16QAM	1	0	21.85	21.72	21.79
			49	22.01	22.07	22.17
			99	21.78	21.77	21.60
		50	0	20.72	21.02	21.00
			25	20.76	21.02	21.02
			50	20.55	21.09	20.90
		100	0	20.58	20.98	20.98
	64QAM	1	0	23.08	23.15	23.45
			49	23.48	23.38	23.55
			99	23.32	23.22	23.04
		50	0	22.14	22.35	22.91
			25	22.15	22.37	22.40
			50	22.04	22.33	22.22
		100	0	22.00	22.34	22.34

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26697	26865	27033
				814.7MHz	831.5MHz	848.3MHz
1.4MHz	QPSK	1	0	22.74	22.81	22.78
			2	22.96	22.87	22.91
			5	22.68	22.78	22.72
		3	0	22.84	22.90	22.98
			1	22.86	22.88	22.98
			3	22.86	22.92	22.98
		6	0	21.80	21.87	21.87
	16QAM	1	0	21.88	21.95	21.92
			2	22.08	22.13	22.18
			5	21.90	21.94	21.96
		3	0	21.76	21.78	21.85
			1	21.81	21.80	21.88
			3	21.79	21.80	21.89
		6	0	20.86	20.76	20.96
	64QAM	1	0	22.55	22.62	22.22
			2	22.75	22.77	22.45
			5	22.56	22.60	22.25
		3	0	22.48	22.46	22.16
			1	22.48	22.48	22.16
			3	22.45	22.48	22.12
		6	0	21.53	21.43	21.25

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26705	26865	27025
				815.5MHz	831.5MHz	847.5MHz
3MHz	QPSK	1	0	22.85	22.91	22.84
			8	22.86	22.85	22.84
			14	22.82	22.89	22.82
		8	0	21.77	21.86	21.94
			4	21.80	21.87	21.91
			7	21.83	21.85	21.90
		15	0	21.78	21.84	21.86
	16QAM	1	0	22.04	21.77	22.12
			8	22.02	21.76	22.11
			14	22.00	21.80	22.11
		8	0	20.84	20.87	20.98
			4	20.83	20.86	20.98
			7	20.84	20.87	20.95
		15	0	20.73	20.79	20.90
	64QAM	1	0	22.67	22.38	22.35
			8	22.63	22.39	22.31
			14	22.64	22.42	22.34
		8	0	21.48	21.51	21.24
			4	21.48	21.50	21.25
			7	21.49	21.50	21.20
		15	0	21.39	21.41	21.16

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26715	26865	27015
				816.5MHz	831.5MHz	846.5MHz
5MHz	QPSK	1	0	22.79	22.80	22.87
			12	22.96	23.00	22.94
			24	22.86	22.87	22.82
		12	0	21.83	21.91	21.90
			6	21.86	21.92	21.90
			13	21.89	21.83	21.75
		25	0	21.88	21.91	21.87
	16QAM	1	0	22.05	21.82	21.92
			12	22.15	21.99	21.96
			24	22.11	21.89	21.91
		12	0	20.89	20.94	20.88
			6	20.83	20.96	20.90
			13	20.91	20.83	20.74
		25	0	20.87	20.95	20.91
	64QAM	1	0	22.66	22.44	22.16
			12	22.79	22.57	22.22
			24	22.74	22.46	22.17
		12	0	21.48	21.55	21.16
			6	21.48	21.53	21.16
			13	21.54	21.47	21.03
		25	0	21.58	21.58	21.17

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26740	26865	26990
				819MHz	831.5MHz	844MHz
10MHz	QPSK	1	0	22.83	22.77	22.81
			24	22.95	22.91	22.98
			49	22.82	22.79	22.82
		25	0	21.85	22.00	21.96
			12	21.85	22.00	21.95
			25	21.91	21.80	21.81
		50	0	21.88	21.93	21.87
	16QAM	1	0	22.05	21.94	22.02
			24	22.18	22.16	22.23
			49	22.02	22.01	22.11
		25	0	20.85	20.99	20.97
			12	20.88	21.01	21.00
			25	20.93	20.89	20.86
		50	0	20.87	20.95	20.87
	64QAM	1	0	23.44	23.45	23.09
			24	23.61	23.50	23.28
			49	23.44	23.49	23.10
		25	0	22.48	22.63	22.25
			12	22.47	22.64	22.25
			25	22.60	22.53	22.11
		50	0	22.54	22.58	22.14

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26765	26865	26965
				821.5MHz	831.5MHz	841.5MHz
15MHz	QPSK	1	0	22.02	22.88	22.75
			38	22.23	22.92	22.86
			74	22.11	22.87	22.51
		38	0	20.97	21.76	21.99
			18	21.00	21.82	22.11
			37	20.86	21.72	22.01
		75	0	20.87	21.95	21.91
	16QAM	1	0	22.08	21.78	21.97
			38	22.18	21.86	22.12
			74	22.05	21.73	22.00
		38	0	22.11	21.79	21.98
			18	22.15	21.83	22.16
			37	22.03	21.69	22.03
		75	0	20.87	20.94	20.94
	64QAM	1	0	23.34	23.44	23.40
			38	23.48	23.53	23.51
			74	23.38	23.47	23.41
		38	0	23.35	23.50	23.42
			18	23.48	23.55	23.52
			37	23.40	23.48	23.41
		75	0	22.54	22.56	22.63

LTE-TDD Band 41				Conducted Power(dBm)				
Band-width	Modulation	RB allocation	RB offset	39750	40185	40620	41055	41490
				2506MHz	2549.5MHz	2593MHz	2636.5MHz	2680MHz
5MHz	QPSK	1	0	22.26	22.10	22.36	22.25	22.16
			12	22.36	22.13	22.42	22.24	22.28
			24	22.30	22.15	22.38	22.15	22.19
		12	0	21.33	21.17	21.41	21.30	21.24
			6	21.32	21.09	21.39	21.21	21.22
			13	21.32	21.11	21.41	21.18	21.19
		25	0	21.29	21.13	21.42	21.31	21.22
	16QAM	1	0	21.45	21.22	21.39	21.21	21.13
			12	21.54	21.24	21.48	21.25	21.26
			24	21.52	21.36	21.40	21.29	21.16
		12	0	20.34	20.11	20.44	20.26	20.21
			6	20.31	20.13	20.42	20.19	20.18
			13	20.32	20.16	20.46	20.35	20.17
		25	0	20.32	20.09	20.48	20.30	20.24
	64QAM	1	0	21.59	20.11	21.12	20.89	20.92
			12	21.68	21.52	21.42	21.31	21.05
			24	21.59	21.36	21.32	21.14	20.94
		12	0	20.45	21.38	20.37	20.14	19.96
			6	20.46	20.30	20.36	20.25	19.99
			13	20.46	20.23	20.34	20.16	19.96
		25	0	20.44	20.25	20.42	20.19	20.04

LTE-TDD Band 41				Conducted Power(dBm)				
Band-width	Modulation	RB allocation	RB offset	39750	40185	40620	41055	41490
				2506MHz	2549.5MHz	2593MHz	2636.5MHz	2680MHz
10MHz	QPSK	1	0	22.43	22.27	22.52	22.41	22.24
			24	22.79	22.56	22.73	22.55	22.49
			49	22.56	22.58	22.49	22.26	22.30
		25	0	21.48	21.32	21.55	21.44	21.31
			12	21.47	21.24	21.55	21.37	21.29
			25	21.49	21.26	21.51	21.28	21.28
		50	0	21.44	21.28	21.53	21.42	21.24
	16QAM	1	0	21.48	21.25	21.44	21.26	21.40
			24	21.80	21.27	21.62	21.39	21.67
			49	21.59	21.43	21.39	21.28	21.47
		25	0	21.52	21.29	21.58	21.40	21.69
			12	21.47	21.31	21.62	21.39	21.67
			25	21.36	21.20	21.52	21.41	21.63
		50	0	20.47	20.24	20.53	20.35	20.23
	64QAM	1	0	22.47	20.26	22.13	21.90	21.99
			24	22.78	22.62	22.63	22.52	22.24
			49	22.54	22.31	22.39	22.21	22.02
		25	0	21.52	22.33	21.46	21.23	21.69
			12	21.53	21.37	21.47	21.36	21.67
			25	21.50	21.27	21.52	21.34	21.63
		50	0	21.49	21.29	21.42	21.19	20.97

LTE-TDD Band 41				Conducted Power(dBm)				
Band-width	Modulation	RB allocation	RB offset	39750	40185	40620	41055	41490
				2506MHz	2549.5MHz	2593MHz	2636.5MHz	2680MHz
15MHz	QPSK	1	0	22.43	22.27	22.52	22.41	22.19
			38	22.58	22.35	22.56	22.38	22.29
			74	22.44	22.37	22.34	22.11	22.18
		38	0	21.53	21.37	21.44	21.33	21.32
			18	21.72	21.49	21.47	21.29	21.47
			37	21.63	21.51	21.28	21.05	21.35
		75	0	21.45	21.29	21.58	21.47	21.29
	16QAM	1	0	21.52	21.29	21.41	21.23	21.35
			38	21.71	21.31	21.45	21.22	21.46
			74	21.66	21.50	21.28	21.17	21.36
		38	0	21.52	21.29	21.43	21.25	21.33
			18	21.72	21.31	21.45	21.22	21.44
			37	21.64	21.48	21.26	21.15	21.36
		75	0	20.46	20.23	20.52	20.34	20.23
	64QAM	1	0	22.39	20.25	22.05	21.82	21.95
			38	22.54	22.38	22.42	22.31	22.03
			74	22.44	22.21	22.25	22.07	21.92
		38	0	22.43	22.23	22.42	22.19	21.96
			18	22.58	22.42	22.41	22.30	22.03
			37	22.45	22.22	22.26	22.08	21.94
		75	0	21.49	22.24	21.47	21.24	21.01

LTE-TDD Band 41				Conducted Power(dBm)				
Band-width	Modulation	RB allocation	RB offset	39750	40185	40620	41055	41490
				2506MHz	2549.5MHz	2593MHz	2636.5MHz	2680MHz
20MHz	QPSK	1	0	22.33	22.17	22.45	22.34	22.45
			49	22.83	22.60	22.74	22.56	22.74
			99	22.49	22.62	22.37	22.14	22.37
		50	0	21.37	21.21	21.54	21.43	21.54
			25	21.41	21.18	21.56	21.38	21.56
			50	21.40	21.20	21.46	21.23	21.46
		100	0	21.44	21.28	21.55	21.44	21.55
	16QAM	1	0	21.49	21.26	21.43	21.25	21.28
			49	22.02	21.28	21.76	21.53	21.67
			99	21.69	21.53	21.35	21.24	21.32
		50	0	20.43	20.20	20.62	20.44	20.29
			25	20.68	20.22	20.59	20.36	20.31
			50	20.68	20.52	20.54	20.43	20.26
		100	0	20.46	20.23	20.57	20.39	20.31
	64QAM	1	0	22.38	20.25	22.29	22.06	21.93
			49	22.80	22.64	22.69	22.58	22.27
			99	22.44	22.21	22.25	22.07	21.89
		50	0	21.47	22.23	21.40	21.17	20.99
			25	20.68	20.52	21.43	21.32	20.98
			50	20.68	20.45	21.27	21.09	20.95
		100	0	21.46	20.47	21.35	21.12	21.00

11.3. LTE Up-Link Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in

subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two EUTRA

bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum

output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 1
QPSK	> 25	> 50	> 75	> 100	≤ 2
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 2
16 QAM	> 25	> 50	> 75	> 100	≤ 3
64 QAM	≤ 8 and allocation wholly contained within a single CC	≤ 12 and allocation wholly contained within a single CC	≤ 16 and allocation wholly contained within a single CC	≤ 18 and allocation wholly contained within a single CC	≤ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	≤ 3
256 QAM	≥ 1				≤ 5

LTE Intra-Band Contiguous Carrier Aggregation

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for each antennas at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power, which is in accordance with the tune-up limits in table below.

According to November 2017 TCB workshop, Uplink CA SAR Test Guidance as follows:

- a) When the maximum output for UL CA is $\leq$ standalone LTE mode (without CA)
 - PCC is configured according to the highest standalone SAR configuration tested
 - SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC
- b) When the Reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels(PCC based)
- c) UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level Output Power for LTE UL Carrier Aggregation

LTE-FDD Band CA_7C								
Bandwidth (MHz)	Modulation	PCC		SCC1		Conducted Power (dBm)		
		RB allocation	RB offset	RB allocation	RB offset	Low	Middle	High
20+20	QPSK	1	0	1	99	10.12	10.56	11.08
		1	99	1	0	18.82	19.10	19.15
		100	0	100	0	16.72	17.47	17.44
	16QAM	1	0	1	99	10.72	10.88	11.69
		1	99	1	0	18.49	18.45	18.84
		100	0	100	0	15.73	16.41	16.40
	64QAM	1	0	1	99	9.50	9.66	10.47
		1	99	1	0	17.27	17.23	17.62
		100	0	100	0	14.51	15.19	15.18

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

11.4. Wi-Fi

For 2.4GHz Wi-Fi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Wi-Fi 2.4G				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
802.11b	1	2412	18.30	15.91
	6	2437	17.86	15.42
	11	2462	18.65	16.21
802.11g	1	2412	21.19	18.63
	6	2437	21.04	18.58
	11	2462	21.50	18.92
802.11n (HT20)	1	2412	21.11	18.68
	6	2437	21.00	18.56
	11	2462	21.42	18.84
802.11n (HT40)	3	2422	20.23	17.54
	6	2437	20.44	17.84
	9	2452	21.67	19.05

Wi-Fi 5G U-NII-1			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11ac (VHT20)	36	5180	12.31
	40	5200	12.35
	48	5240	13.07
802.11n (HT20)	36	5180	12.29
	40	5200	12.81
	48	5240	13.25
802.11a	36	5180	12.79
	40	5200	12.08
	48	5240	13.02
802.11ac (VHT40)	38	5190	12.47
	46	5230	13.00
802.11n (HT40)	38	5190	12.29
	46	5230	12.97
802.11ac (VHT80)	42	5210	13.10

Wi-Fi 5G U-NII-3			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11ac (VHT20)	149	5745	12.92
	157	5785	12.19
	165	5825	12.04
802.11n (HT20)	149	5745	13.48
	157	5785	12.72
	165	5825	12.69
802.11a	149	5745	13.11
	157	5785	12.37
	165	5825	12.23
802.11ac (VHT40)	151	5755	12.90
	159	5795	12.44
802.11n (HT40)	151	5755	13.07
	159	5795	12.55
802.11ac (VHT80)	155	5775	13.07

11.5. Bluetooth

Bluetooth				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
GFSK	0	2402	7.60	7.58
	39	2441	6.89	6.87
	78	2480	7.70	7.69
$\pi/4$ QPSK	0	2402	7.85	7.77
	39	2441	7.10	7.00
	78	2480	7.70	7.63
8DPSK	0	2402	7.86	7.76
	39	2441	7.08	6.99
	78	2480	7.58	7.50
BLE	0	2402	-5.05	-5.12
	19	2440	-5.38	-5.48
	39	2480	-3.65	-3.73

12. Maximum Tune-up Limit

WCDMA			
Mode	Maximum Tune-up (dBm)		
	FDD Band II	FDD Band IV	FDD Band V
AMR 12.2Kbps	22.50	22.50	22.50
RMC 12.2Kbps	22.50	22.50	22.50
HSDPA Subtest-1	22.00	21.50	21.50
HSDPA Subtest-2	21.50	21.00	21.00
HSDPA Subtest-3	21.50	21.00	21.00
HSDPA Subtest-4	21.50	21.00	21.00
HSUPA Subtest-1	20.00	20.00	19.50
HSUPA Subtest-2	20.50	20.50	20.00
HSUPA Subtest-3	21.00	21.00	20.50
HSUPA Subtest-4	20.00	20.00	19.50
HSUPA Subtest-5	22.00	22.00	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 2	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	22.50
			3	22.50
			6	21.00
		64QAM	1	22.50
			3	22.00
			6	21.00
	3	QPSK	1	23.00
			8	22.00
			15	22.00
		16QAM	1	22.00
			8	21.00
			15	21.00
		64QAM	1	22.50
			8	21.50
			15	21.50
	5	QPSK	1	23.00
			12	22.00
			25	22.00
		16QAM	1	22.00
			12	21.00
			25	21.00
		64QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.00
			25	22.00
			50	22.00
		16QAM	1	22.00
			25	21.00
			50	21.00
		64QAM	1	22.50
			25	21.50
			50	21.50

FDD Band 2	15	QPSK	1	22.50
			38	22.00
			75	22.00
		16QAM	1	22.00
			38	22.00
			75	21.00
		64QAM	1	22.50
			38	22.50
			75	21.50
	20	QPSK	1	23.00
			50	22.00
			100	22.00
		16QAM	1	22.00
			50	21.00
			100	21.00
		64QAM	1	22.50
			50	21.50
			100	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 4	1.4	QPSK	1	22.00
			3	22.00
			6	21.00
		16QAM	1	21.50
			3	21.00
			6	20.00
		64QAM	1	21.50
			3	21.00
			6	20.50
	3	QPSK	1	22.00
			8	21.00
			15	21.00
		16QAM	1	21.50
			8	20.00
			15	20.00
		64QAM	1	21.50
			8	20.50
			15	20.00
	5	QPSK	1	22.00
			12	21.00
			25	21.00
		16QAM	1	21.00
			12	20.00
			25	20.00
		64QAM	1	21.50
			12	20.00
			25	20.50
	10	QPSK	1	22.50
			25	21.50
			50	21.50
		16QAM	1	21.50
			25	20.50
			50	20.50
		64QAM	1	22.50
			25	21.00
			50	21.00

FDD Band 4	15	QPSK	1	22.50
			38	21.50
			75	21.50
		16QAM	1	21.50
			38	21.50
			75	20.50
		64QAM	1	22.00
			38	22.00
			75	21.00
	20	QPSK	1	22.50
			50	21.50
			100	21.00
		16QAM	1	21.50
			50	20.50
			100	20.00
		64QAM	1	22.50
			50	21.00
			100	21.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 5	1.4	QPSK	1	23.00
			3	23.00
			6	22.00
		16QAM	1	22.50
			3	22.00
			6	21.00
		64QAM	1	22.50
			3	22.00
			6	21.00
	3	QPSK	1	23.00
			8	22.00
			15	22.00
		16QAM	1	22.50
			8	21.00
			15	21.00
		64QAM	1	22.50
			8	21.00
			15	21.00
	5	QPSK	1	23.00
			12	21.50
			25	21.50
		16QAM	1	22.00
			12	20.50
			25	20.50
		64QAM	1	22.50
			12	21.00
			25	21.00
	10	QPSK	1	23.00
			25	21.50
			50	21.50
		16QAM	1	22.00
			25	20.50
			50	20.50
		64QAM	1	23.50
			25	22.50
			50	22.00

LTE-FDD Band CA_7C						
Bandwidth (MHz)	Modulation	PCC		SCC1		Tune-up Limit(dBm)
		RB allocation	RB offset	RB allocation	RB offset	
20+20	QPSK	1	0	1	99	11.50
		1	99	1	0	19.50
		100	0	100	0	17.50
	16QAM	1	0	1	99	12.00
		1	99	1	0	19.00
		100	0	100	0	16.50
	64QAM	1	0	1	99	10.50
		1	99	1	0	18.00
		100	0	100	0	15.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 7	5	QPSK	1	22.00
			12	21.00
			25	21.00
		16QAM	1	21.00
			12	20.00
			25	20.00
		64QAM	1	21.50
			12	20.50
			25	20.50
	10	QPSK	1	22.00
			25	21.00
			50	21.00
		16QAM	1	21.00
			25	20.00
			50	20.00
		64QAM	1	22.50
			25	21.50
			50	21.50
	15	QPSK	1	22.00
			38	21.00
			75	21.00
		16QAM	1	21.00
			38	21.00
			75	20.00
		64QAM	1	22.50
			38	22.50
			75	21.50
	20	QPSK	1	22.00
			50	21.00
			100	21.00
		16QAM	1	21.00
			50	20.00
			100	20.00
		64QAM	1	22.50
			50	21.50
			100	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 12	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	22.50
			3	22.00
			6	21.50
		64QAM	1	22.50
			3	22.00
			6	21.50
	3	QPSK	1	23.50
			8	22.50
			15	22.50
		16QAM	1	22.50
			8	21.50
			15	21.50
		64QAM	1	22.50
			8	21.50
			15	21.00
	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
		64QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50
		64QAM	1	23.50
			25	22.50
			50	22.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 17	5	QPSK	12	22.50
			25	22.50
			1	23.00
		16QAM	12	21.50
			25	21.50
			1	23.00
		64QAM	12	21.50
			25	21.50
			1	23.50
	10	QPSK	25	22.50
			50	22.50
			1	22.50
		16QAM	25	21.50
			50	21.50
			1	23.50
		64QAM	25	22.50
			50	22.50
			12	22.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 25	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	22.00
			3	22.00
			6	21.50
		64QAM	1	22.50
			3	22.50
			6	21.50
	3	QPSK	1	23.00
			8	22.50
			15	22.50
		16QAM	1	22.00
			8	22.00
			15	21.50
		64QAM	1	22.50
			8	22.00
			15	21.50
	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.00
			12	21.50
			25	21.50
		64QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.00
			25	22.50
			50	22.50
		16QAM	1	22.00
			25	21.50
			50	21.50
		64QAM	1	23.50
			25	23.00
			50	22.50
	15	QPSK	1	23.00
			38	22.00
			75	22.50
		16QAM	1	22.50
			38	22.00
			75	21.50
		64QAM	1	23.50
			38	24.00
			75	23.50
	20	QPSK	1	23.00
			50	22.50
			100	22.00
		16QAM	1	22.50
			50	21.50
			100	21.00
		64QAM	1	24.00
			50	23.00
			100	22.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 26	1.4	QPSK	1	23.00
			3	23.00
			6	22.00
		16QAM	1	22.50
			3	22.00
			6	21.00
		64QAM	1	23.00
			3	22.50
			6	22.00
	3	QPSK	1	23.00
			8	22.00
			15	22.00
		16QAM	1	22.50
			8	21.00
			15	21.00
		64QAM	1	23.00
			8	22.00
			15	21.50
	5	QPSK	1	23.50
			12	22.00
			25	22.00
		16QAM	1	22.50
			12	21.00
			25	21.00
		64QAM	1	23.00
			12	22.00
			25	22.00
	10	QPSK	1	23.00
			25	22.50
			50	22.00
		16QAM	1	22.50
			25	21.50
			50	21.00
		64QAM	1	24.00
			25	23.00
			50	23.00
	15	QPSK	1	23.00
			38	22.50
			75	22.00
		16QAM	1	22.50
			38	22.50
			75	21.00
		64QAM	1	24.00
			38	24.00
			75	23.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
	5	QPSK	1	22.50
			12	21.50
			25	21.50
		16QAM	1	22.00
			12	20.50
			25	20.50
		64QAM	1	22.00
			12	20.50
			25	20.50
	10	QPSK	1	23.00
			25	22.00
			50	22.00
		16QAM	1	22.00
			25	22.00
			50	21.00
		64QAM	1	23.00
			25	22.00
			50	21.50
	15	QPSK	1	23.00
			38	22.00
			75	22.00
		16QAM	1	22.00
			38	22.00
			75	21.00
		64QAM	1	23.00
			38	23.00
			75	21.50
	20	QPSK	1	23.00
			50	22.00
			100	22.00
		16QAM	1	22.50
			50	21.00
			100	21.00
		64QAM	1	23.00
			50	21.50
			100	21.50

The allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

Wi-Fi 2.4G		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11b	1	16.00
	6	15.50
	11	16.50
802.11g	1	19.00
	6	19.00
	11	19.00
802.11n(HT20)	1	19.00
	6	19.00
	11	19.00
802.11n(HT40)	3	18.00
	6	18.00
	9	19.50

Wi-Fi 5G U-NII-1		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11ac (VHT20)	36	12.50
	40	12.50
	48	13.50
802.11n (HT20)	36	12.50
	40	13.00
	48	13.50
802.11a	36	13.00
	40	12.50
	48	13.50
802.11ac (VHT40)	38	12.50
	46	13.00
802.11n (HT40)	38	12.50
	46	13.00
802.11ac (VHT80)	42	13.50

Wi-Fi 5G U-NII-3		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11ac (VHT20)	149	13.00
	157	12.50
	165	12.50
802.11n (HT20)	149	13.50
	157	13.00
	165	13.00
802.11a	149	13.50
	157	12.50
	165	12.50
802.11ac (VHT40)	151	13.00
	159	12.50
802.11n (HT40)	151	13.50
	159	13.00
802.11ac (VHT80)	155	13.50

Bluetooth		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
GFSK	0	8.00
	39	7.00
	78	8.00
$\pi/4$ QPSK	0	8.00
	39	7.00
	78	8.00
8DPSK	0	8.00
	39	7.00
	78	7.50
BLE	0	-5.00
	19	-5.00
	39	-3.50

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances ≤ 50 mm are determined by:


$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

Band/Mode	F(GHz)	Position	Separation Distance (mm)	Exclusion Thresholds	SAR test exclusion
Bluetooth	2.45	Hotspot	10	1.0	Yes

Per KDB 447498 D01, when the minimum test separation distance is <5mm, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

13. Antenna Location

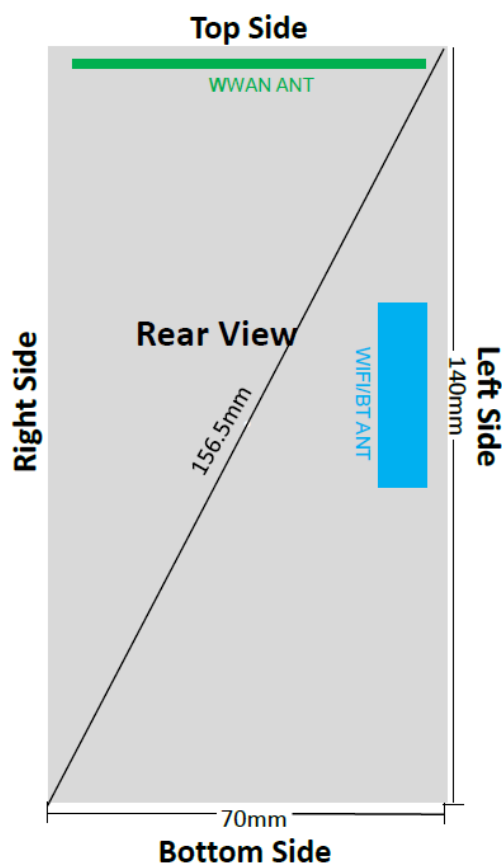

Distance of the Antenna to the EUT surface/edge(mm)						
Antenna	Rear	Front	Top side	Bottom side	Right side	Left side
WWAN	5	5	3	137	3	3
WiFi/BT	5	10	52	60	58	3

Positions for SAR tests; Hotspot mode						
Antenna	Rear	Front	Top side	Bottom side	Right side	Left side
WWAN	Yes	Yes	Yes	No	Yes	Yes
Wi-Fi/BT	Yes	Yes	No	No	No	Yes

General note:

Referring to KDB941225 D06, when the overall device length and width are >9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

14. Measured and Reported SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G SAR Test Reduction Procedure:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

GSM Guidance

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Please refer to section 9. for GSM power verification.

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq \frac{1}{4}$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

W-CDMA Guidance

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC (Head) and other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC (Body-Worn Accessory) as the primary mode.

SAR measurement is not required for the HSDPA, HSUPA, DC-HSDPA and HSPA+. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM and 64-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.

- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11:

When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2K	Front	9262	1852.4	21.96	22.50	1.132	-	-	-	-
		9400	1880.0	22.18	22.50	1.076	-	-	-	-
		9538	1907.6	22.22	22.50	1.066	0.00	0.472	0.503	-
	Rear	9262	1852.4	21.96	22.50	1.132	-	-	-	-
		9400	1880.0	22.18	22.50	1.076	-	-	-	-
		9538	1907.6	22.22	22.50	1.066	-0.01	0.663	0.707	1
	Left	9262	1852.4	21.96	22.50	1.132	-	-	-	-
		9400	1880.0	22.18	22.50	1.076	-	-	-	-
		9538	1907.6	22.22	22.50	1.066	-0.05	0.465	0.496	-
	Right	9262	1852.4	21.96	22.50	1.132	-	-	-	-
		9400	1880.0	22.18	22.50	1.076	-	-	-	-
		9538	1907.6	22.22	22.50	1.066	-0.06	0.212	0.226	-
	Top	9262	1852.4	21.96	22.50	1.132	-	-	-	-
		9400	1880.0	22.18	22.50	1.076	-	-	-	-
		9538	1907.6	22.22	22.50	1.066	-0.10	0.451	0.481	-
	Bottom	9262	1852.4	21.96	22.50	1.132	-	-	-	-
		9400	1880.0	22.18	22.50	1.076	-	-	-	-
		9538	1907.6	22.22	22.50	1.066	-	-	-	-

WCDMA Band IV										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2K	Front	1312	1712.4	22.10	22.50	1.096	-	-	-	-
		1413	1732.6	22.22	22.50	1.067	-	-	-	-
		1513	1752.6	22.40	22.50	1.023	0.01	0.676	0.692	-
	Rear	1312	1712.4	22.10	22.50	1.096	-0.09	0.825	0.905	-
		1413	1732.6	22.22	22.50	1.067	-0.05	0.867	0.925	-
		1513	1752.6	22.40	22.50	1.023	-0.03	0.950	0.972	2
	Left	1312	1712.4	22.10	22.50	1.096	-	-	-	-
		1413	1732.6	22.22	22.50	1.067	-	-	-	-
		1513	1752.6	22.40	22.50	1.023	-0.03	0.587	0.601	-
	Right	1312	1712.4	22.10	22.50	1.096	-	-	-	-
		1413	1732.6	22.22	22.50	1.067	-	-	-	-
		1513	1752.6	22.40	22.50	1.023	-0.11	0.345	0.353	-
	Top	1312	1712.4	22.10	22.50	1.096	-	-	-	-
		1413	1732.6	22.22	22.50	1.067	-	-	-	-
		1513	1752.6	22.40	22.50	1.023	0.08	0.554	0.567	-
	Bottom	1312	1712.4	22.10	22.50	1.096	-	-	-	-
		1413	1732.6	22.22	22.50	1.067	-	-	-	-
		1513	1752.6	22.40	22.50	1.023	-	-	-	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2K	Front	4132	826.4	22.04	22.50	1.112	0.03	0.886	0.985	-
		4183	836.6	22.29	22.50	1.050	0.05	0.960	1.008	3
		4233	846.6	22.13	22.50	1.089	0.08	0.854	0.930	-
	Rear	4132	826.4	22.04	22.50	1.112	-	-	-	-
		4183	836.6	22.29	22.50	1.050	-0.02	0.634	0.665	-
		4233	846.6	22.13	22.50	1.089	-	-	-	-
	Left	4132	826.4	22.04	22.50	1.112	-	-	-	-
		4183	836.6	22.29	22.50	1.050	0.06	0.615	0.645	-
		4233	846.6	22.13	22.50	1.089	-	-	-	-
	Right	4132	826.4	22.04	22.50	1.112	-	-	-	-
		4183	836.6	22.29	22.50	1.050	-0.08	0.589	0.618	-
		4233	846.6	22.13	22.50	1.089	-	-	-	-
	Top	4132	826.4	22.04	22.50	1.112	-	-	-	-
		4183	836.6	22.29	22.50	1.050	-0.03	0.376	0.395	-
		4233	846.6	22.13	22.50	1.089	-	-	-	-
	Bottom	4132	826.4	22.04	22.50	1.112	-	-	-	-
		4183	836.6	22.29	22.50	1.050	-	-	-	-
		4233	846.6	22.13	22.50	1.089	-	-	-	-

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M QPSK 1RB	Front	18700	1860	22.50	23.00	1.122	-	-	-	-
		18900	1880	22.85	23.00	1.035	0.03	0.533	0.552	-
		19100	1900	22.69	23.00	1.074	-	-	-	-
	Rear	18700	1860	22.50	23.00	1.122	-	-	-	-
		18900	1880	22.85	23.00	1.035	-0.08	0.749	0.775	4
		19100	1900	22.69	23.00	1.074	-	-	-	-
	Left	18700	1860	22.50	23.00	1.122	-	-	-	-
		18900	1880	22.85	23.00	1.035	0.06	0.510	0.528	-
		19100	1900	22.69	23.00	1.074	-	-	-	-
	Right	18700	1860	22.50	23.00	1.122	-	-	-	-
		18900	1880	22.85	23.00	1.035	-0.03	0.271	0.281	-
		19100	1900	22.69	23.00	1.074	-	-	-	-
	Top	18700	1860	22.50	23.00	1.122	-	-	-	-
		18900	1880	22.85	23.00	1.035	0.07	0.443	0.459	-
		19100	1900	22.69	23.00	1.074	-	-	-	-
	Bottom	18700	1860	22.50	23.00	1.122	-	-	-	-
		18900	1880	22.85	23.00	1.035	-	-	-	-
		19100	1900	22.69	23.00	1.074	-	-	-	-
20M QPSK 50RB	Front	18700	1860	21.15	22.00	1.216	-	-	-	-
		18900	1880	21.39	22.00	1.151	0.04	0.465	0.535	-
		19100	1900	21.55	22.00	1.109	-	-	-	-
	Rear	18700	1860	21.15	22.00	1.216	-	-	-	-
		18900	1880	21.39	22.00	1.151	-0.11	0.654	0.753	-
		19100	1900	21.55	22.00	1.109	-	-	-	-
	Left	18700	1860	21.15	22.00	1.216	-	-	-	-
		18900	1880	21.39	22.00	1.151	0.05	0.432	0.497	-
		19100	1900	21.55	22.00	1.109	-	-	-	-
	Right	18700	1860	21.15	22.00	1.216	-	-	-	-
		18900	1880	21.39	22.00	1.151	-0.06	0.199	0.229	-
		19100	1900	21.55	22.00	1.109	-	-	-	-
	Top	18700	1860	21.15	22.00	1.216	-	-	-	-
		18900	1880	21.39	22.00	1.151	0.08	0.385	0.443	-
		19100	1900	21.55	22.00	1.109	-	-	-	-
	Bottom	18700	1860	21.15	22.00	1.216	-	-	-	-
		18900	1880	21.39	22.00	1.151	-	-	-	-
		19100	1900	21.55	22.00	1.109	-	-	-	-

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M QPSK 1RB	Front	20050	1720	22.05	22.50	1.109	-	-	-	-
		20175	1732.5	21.71	22.50	1.199	-	-	-	-
		20300	1745	22.26	22.50	1.057	0.03	0.584	0.617	-
	Rear	20050	1720	22.05	22.50	1.109	-0.11	0.739	0.820	-
		20175	1732.5	21.71	22.50	1.199	0.02	0.715	0.858	-
		20300	1745	22.26	22.50	1.057	-0.07	0.821	0.868	5
	Left	20050	1720	22.05	22.50	1.109	-	-	-	-
		20175	1732.5	21.71	22.50	1.199	-	-	-	-
		20300	1745	22.26	22.50	1.057	-0.05	0.489	0.517	-
	Right	20050	1720	22.05	22.50	1.109	-	-	-	-
		20175	1732.5	21.71	22.50	1.199	-	-	-	-
		20300	1745	22.26	22.50	1.057	-0.09	0.276	0.292	-
	Top	20050	1720	22.05	22.50	1.109	-	-	-	-
		20175	1732.5	21.71	22.50	1.199	-	-	-	-
		20300	1745	22.26	22.50	1.057	-0.13	0.467	0.494	-
	Bottom	20050	1720	22.05	22.50	1.109	-	-	-	-
		20175	1732.5	21.71	22.50	1.199	-	-	-	-
		20300	1745	22.26	22.50	1.057	-	-	-	-
20M QPSK 50RB	Front	20050	1720	20.70	21.50	1.202	-	-	-	-
		20175	1732.5	20.85	21.50	1.161	-	-	-	-
		20300	1745	21.07	21.50	1.104	0.03	0.507	0.560	-
	Rear	20050	1720	20.70	21.50	1.202	-	-	-	-
		20175	1732.5	20.85	21.50	1.161	-	-	-	-
		20300	1745	21.07	21.50	1.104	-0.09	0.712	0.786	-
	Left	20050	1720	20.70	21.50	1.202	-	-	-	-
		20175	1732.5	20.85	21.50	1.161	-	-	-	-
		20300	1745	21.07	21.50	1.104	0.03	0.405	0.447	-
	Right	20050	1720	20.70	21.50	1.202	-	-	-	-
		20175	1732.5	20.85	21.50	1.161	-	-	-	-
		20300	1745	21.07	21.50	1.104	-0.06	0.236	0.261	-
	Top	20050	1720	20.70	21.50	1.202	-	-	-	-
		20175	1732.5	20.85	21.50	1.161	-	-	-	-
		20300	1745	21.07	21.50	1.104	-0.12	0.368	0.406	-
	Bottom	20050	1720	20.70	21.50	1.202	-	-	-	-
		20175	1732.5	20.85	21.50	1.161	-	-	-	-
		20300	1745	21.07	21.50	1.104	-	-	-	-
20M QPSK 100RB	Rear	20050	1720	20.73	21.00	1.064	-	-	-	-
		20175	1732.5	20.90	21.00	1.023	-	-	-	-
		20300	1745	20.98	21.00	1.005	0.15	0.511	0.513	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M QPSK 1RB	Front	20450	829	22.30	23.00	1.175	0.06	0.823	0.967	-
		20525	836.5	22.71	23.00	1.069	0.01	0.939	1.004	6
		20600	844	22.69	23.00	1.074	-0.08	0.865	0.929	-
	Rear	20450	829	22.30	23.00	1.175	-	-	-	-
		20525	836.5	22.71	23.00	1.069	-0.04	0.723	0.773	-
		20600	844	22.69	23.00	1.074	-	-	-	-
	Left	20450	829	22.30	23.00	1.175	-	-	-	-
		20525	836.5	22.71	23.00	1.069	0.08	0.548	0.586	-
		20600	844	22.69	23.00	1.074	-	-	-	-
	Right	20450	829	22.30	23.00	1.175	-	-	-	-
		20525	836.5	22.71	23.00	1.069	-0.05	0.591	0.632	-
		20600	844	22.69	23.00	1.074	-	-	-	-
	Top	20450	829	22.30	23.00	1.175	-	-	-	-
		20525	836.5	22.71	23.00	1.069	0.13	0.442	0.473	-
		20600	844	22.69	23.00	1.074	-	-	-	-
	Bottom	20450	829	22.30	23.00	1.175	-	-	-	-
		20525	836.5	22.71	23.00	1.069	-	-	-	-
		20600	844	22.69	23.00	1.074	-	-	-	-
10M QPSK 25RB	Front	20450	829	21.42	21.50	1.019	-	-	-	-
		20525	836.5	21.28	21.50	1.052	-0.06	0.746	0.785	-
		20600	844	21.30	21.50	1.047	-	-	-	-
	Rear	20450	829	21.42	21.50	1.019	-	-	-	-
		20525	836.5	21.28	21.50	1.052	-0.02	0.715	0.752	-
		20600	844	21.30	21.50	1.047	-	-	-	-
	Left	20450	829	21.42	21.50	1.019	-	-	-	-
		20525	836.5	21.28	21.50	1.052	-0.05	0.686	0.722	-
		20600	844	21.30	21.50	1.047	-	-	-	-
	Right	20450	829	21.42	21.50	1.019	-	-	-	-
		20525	836.5	21.28	21.50	1.052	0.08	0.654	0.688	-
		20600	844	21.30	21.50	1.047	-	-	-	-
	Top	20450	829	21.42	21.50	1.019	-	-	-	-
		20525	836.5	21.28	21.50	1.052	-0.06	0.511	0.538	-
		20600	844	21.30	21.50	1.047	-	-	-	-
	Bottom	20450	829	21.42	21.50	1.019	-	-	-	-
		20525	836.5	21.28	21.50	1.052	-	-	-	-
		20600	844	21.30	21.50	1.047	-	-	-	-
10M QPSK 50RB	Front	20450	829	21.36	21.50	1.033	0.17	0.711	0.734	-
		20525	836.5	21.35	0.00	0.007	-	-	-	-
		20600	844	21.33	0.00	0.007	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M QPSK 1RB	Front	20850	2510	21.46	22.00	1.132	-	-	-	-
		21100	2535	21.63	22.00	1.089	-	-	-	-
		21350	2560	21.80	22.00	1.047	0.02	0.510	0.534	-
	Rear	20850	2510	21.46	22.00	1.132	-	-	-	-
		21100	2535	21.63	22.00	1.089	-	-	-	-
		21350	2560	21.80	22.00	1.047	-0.06	0.716	0.750	7
	Left	20850	2510	21.46	22.00	1.132	-	-	-	-
		21100	2535	21.63	22.00	1.089	-	-	-	-
		21350	2560	21.80	22.00	1.047	-0.08	0.425	0.445	-
	Right	20850	2510	21.46	22.00	1.132	-	-	-	-
		21100	2535	21.63	22.00	1.089	-	-	-	-
		21350	2560	21.80	22.00	1.047	0.05	0.211	0.221	-
	Top	20850	2510	21.46	22.00	1.132	-	-	-	-
		21100	2535	21.63	22.00	1.089	-	-	-	-
		21350	2560	21.80	22.00	1.047	-0.10	0.398	0.417	-
	Bottom	20850	2510	21.46	22.00	1.132	-	-	-	-
		21100	2535	21.63	22.00	1.089	-	-	-	-
		21350	2560	21.80	22.00	1.047	-	-	-	-
20M QPSK 50RB	Front	20850	2510	20.22	21.00	1.197	-	-	-	-
		21100	2535	20.31	21.00	1.172	-	-	-	-
		21350	2560	20.71	21.00	1.069	0.03	0.445	0.476	-
	Rear	20850	2510	20.22	21.00	1.197	-	-	-	-
		21100	2535	20.31	21.00	1.172	-	-	-	-
		21350	2560	20.71	21.00	1.069	-0.09	0.625	0.668	-
	Left	20850	2510	20.22	21.00	1.197	-	-	-	-
		21100	2535	20.31	21.00	1.172	-	-	-	-
		21350	2560	20.71	21.00	1.069	-0.12	0.385	0.412	-
	Right	20850	2510	20.22	21.00	1.197	-	-	-	-
		21100	2535	20.31	21.00	1.172	-	-	-	-
		21350	2560	20.71	21.00	1.069	0.05	0.204	0.218	-
	Top	20850	2510	20.22	21.00	1.197	-	-	-	-
		21100	2535	20.31	21.00	1.172	-	-	-	-
		21350	2560	20.71	21.00	1.069	0.07	0.339	0.362	-
	Bottom	20850	2510	20.22	21.00	1.197	-	-	-	-
		21100	2535	20.31	21.00	1.172	-	-	-	-
		21350	2560	20.71	21.00	1.069	-	-	-	-

UL CA 7C

LTE Band CA_7C												
Mode	Test Position	PCC Frequency		SCC1 Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz	CH	MHz					(W/kg)	(W/kg)	
20M+20M QPSK	Rear	20850	2510.0	21048	2529.8	18.82	19.50	1.169	-	-	-	-
		21001	2525.1	21199	2544.9	19.10	19.50	1.096	-	-	-	-
		21152	2540.2	21350	2560.0	19.15	19.50	1.084	-0.19	0.679	0.736	-

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

LTE Band 12										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M QPSK 1RB	Front	23060	704	23.17	23.50	1.079	0.05	0.768	0.829	-
		23095	707.5	23.20	23.50	1.072	-0.01	0.806	0.864	8
		23130	711	23.15	23.50	1.084	-0.04	0.722	0.783	-
	Rear	23060	704	23.17	23.50	1.079	-	-	-	-
		23095	707.5	23.20	23.50	1.072	0.00	0.644	0.690	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Left	23060	704	23.17	23.50	1.079	-	-	-	-
		23095	707.5	23.20	23.50	1.072	-0.05	0.548	0.587	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Right	23060	704	23.17	23.50	1.079	-	-	-	-
		23095	707.5	23.20	23.50	1.072	-0.08	0.527	0.565	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Top	23060	704	23.17	23.50	1.079	-	-	-	-
		23095	707.5	23.20	23.50	1.072	0.03	0.454	0.486	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Bottom	23060	704	23.17	23.50	1.079	-	-	-	-
		23095	707.5	23.20	23.50	1.072	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
10M QPSK 25RB	Front	23060	704	22.21	22.50	1.069	-	-	-	-
		23095	707.5	22.12	22.50	1.091	-0.06	0.724	0.790	-
		23130	711	21.79	22.50	1.178	-	-	-	-
	Rear	23060	704	22.21	22.50	1.069	-	-	-	-
		23095	707.5	22.12	22.50	1.091	0.02	0.515	0.562	-
		23130	711	21.79	22.50	1.178	-	-	-	-
	Left	23060	704	22.21	22.50	1.069	-	-	-	-
		23095	707.5	22.12	22.50	1.091	-0.11	0.504	0.550	-
		23130	711	21.79	22.50	1.178	-	-	-	-
	Right	23060	704	22.21	22.50	1.069	-	-	-	-
		23095	707.5	22.12	22.50	1.091	0.08	0.486	0.530	-
		23130	711	21.79	22.50	1.178	-	-	-	-
	Top	23060	704	22.21	22.50	1.069	-	-	-	-
		23095	707.5	22.12	22.50	1.091	0.12	0.401	0.438	-
		23130	711	21.79	22.50	1.178	-	-	-	-
	Bottom	23060	704	22.21	22.50	1.069	-	-	-	-
		23095	707.5	22.12	22.50	1.091	-	-	-	-
		23130	711	21.79	22.50	1.178	-	-	-	-
10M QPSK 50RB	Front	23060	704	22.14	22.50	1.086	0.09	0.707	0.768	-
		23095	707.5	22.11	22.50	1.094	-	-	-	-
		23130	711	22.02	22.50	1.117	-	-	-	-

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M QPSK 1RB	Front	23780	709	23.44	23.50	1.014	0.01	0.842	0.854	9
		23790	710	23.26	23.50	1.057	-0.09	0.785	0.830	-
		23800	711	22.99	23.50	1.125	0.05	0.729	0.820	-
	Rear	23780	709	23.44	23.50	1.014	-0.05	0.725	0.735	-
		23790	710	23.26	23.50	1.057	-	-	-	-
		23800	711	22.99	23.50	1.125	-	-	-	-
	Left	23780	709	23.44	23.50	1.014	0.05	0.706	0.716	-
		23790	710	23.26	23.50	1.057	-	-	-	-
		23800	711	22.99	23.50	1.125	-	-	-	-
	Right	23780	709	23.44	23.50	1.014	-0.02	0.668	0.677	-
		23790	710	23.26	23.50	1.057	-	-	-	-
		23800	711	22.99	23.50	1.125	-	-	-	-
	Top	23780	709	23.44	23.50	1.014	0.04	0.652	0.661	-
		23790	710	23.26	23.50	1.057	-	-	-	-
		23800	711	22.99	23.50	1.125	-	-	-	-
	Bottom	23780	709	23.44	23.50	1.014	-	-	-	-
		23790	710	23.26	23.50	1.057	-	-	-	-
		23800	711	22.99	23.50	1.125	-	-	-	-
10M QPSK 25RB	Front	23780	709	22.30	22.50	1.047	-0.08	0.746	0.781	-
		23790	710	21.92	22.50	1.143	-	-	-	-
		23800	711	21.93	22.50	1.140	-	-	-	-
	Rear	23780	709	22.30	22.50	1.047	-0.02	0.685	0.717	-
		23790	710	21.92	22.50	1.143	-	-	-	-
		23800	711	21.93	22.50	1.140	-	-	-	-
	Left	23780	709	22.30	22.50	1.047	0.03	0.674	0.706	-
		23790	710	21.92	22.50	1.143	-	-	-	-
		23800	711	21.93	22.50	1.140	-	-	-	-
	Right	23780	709	22.30	22.50	1.047	0.05	0.658	0.689	-
		23790	710	21.92	22.50	1.143	-	-	-	-
		23800	711	21.93	22.50	1.140	-	-	-	-
	Top	23780	709	22.30	22.50	1.047	-0.06	0.632	0.662	-
		23790	710	21.92	22.50	1.143	-	-	-	-
		23800	711	21.93	22.50	1.140	-	-	-	-
	Bottom	23780	709	22.30	22.50	1.047	-	-	-	-
		23790	710	21.92	22.50	1.143	-	-	-	-
		23800	711	21.93	22.50	1.140	-	-	-	-
10M QPSK 50RB	Front	23780	709	22.17	22.50	1.079	0.02	0.702	0.757	-
		23790	710	22.07	22.50	1.104	-	-	-	-
		23800	711	21.79	22.50	1.178	-	-	-	-

LTE Band 25										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M QPSK 1RB	Front	26140	1860	22.65	23.00	1.084	-	-	-	-
		26365	1882.5	22.66	23.00	1.081	-	-	-	-
		26590	1905	22.99	23.00	1.002	0.03	0.592	0.593	-
	Rear	26140	1860	22.65	23.00	1.084	-0.02	0.686	0.744	-
		26365	1882.5	22.66	23.00	1.081	-0.05	0.725	0.784	-
		26590	1905	22.99	23.00	1.002	-0.09	0.832	0.834	10
	Left	26140	1860	22.65	23.00	1.084	-	-	-	-
		26365	1882.5	22.66	23.00	1.081	-	-	-	-
		26590	1905	22.99	23.00	1.002	-0.15	0.515	0.516	-
	Right	26140	1860	22.65	23.00	1.084	-	-	-	-
		26365	1882.5	22.66	23.00	1.081	-	-	-	-
		26590	1905	22.99	23.00	1.002	-0.08	0.311	0.312	-
	Top	26140	1860	22.65	23.00	1.084	-	-	-	-
		26365	1882.5	22.66	23.00	1.081	-	-	-	-
		26590	1905	22.99	23.00	1.002	0.04	0.487	0.488	-
	Bottom	26140	1860	22.65	23.00	1.084	-	-	-	-
		26365	1882.5	22.66	23.00	1.081	-	-	-	-
		26590	1905	22.99	23.00	1.002	-	-	-	-
20M QPSK 50RB	Front	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	-0.02	0.490	0.549	-
	Rear	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	0.05	0.688	0.770	-
	Left	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	-0.07	0.438	0.490	-
	Right	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	-0.12	0.274	0.307	-
	Top	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	0.08	0.418	0.468	-
	Bottom	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	-	-	-	-
20M QPSK 100RB	Rear	26140	1860	21.67	22.50	1.211	-	-	-	-
		26365	1882.5	21.89	22.50	1.151	-	-	-	-
		26590	1905	22.01	22.50	1.119	0.12	0.675	0.756	-

LTE Band 26										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M QPSK 1RB	Front	26765	821.5	22.23	23.00	1.194	-0.04	0.658	0.786	-
		26865	831.5	22.92	23.00	1.019	-0.08	0.841	0.857	11
		26965	841.5	22.86	23.00	1.033	-0.11	0.765	0.790	-
	Rear	26765	821.5	22.23	23.00	1.194	-	-	-	-
		26865	831.5	22.92	23.00	1.019	0.03	0.599	0.610	-
		26965	841.5	22.86	23.00	1.033	-	-	-	-
	Left	26765	821.5	22.23	23.00	1.194	-	-	-	-
		26865	831.5	22.92	23.00	1.019	0.05	0.574	0.585	-
		26965	841.5	22.86	23.00	1.033	-	-	-	-
	Right	26765	821.5	22.23	23.00	1.194	-	-	-	-
		26865	831.5	22.92	23.00	1.019	0.08	0.553	0.563	-
		26965	841.5	22.86	23.00	1.033	-	-	-	-
	Top	26765	821.5	22.23	23.00	1.194	-	-	-	-
		26865	831.5	22.92	23.00	1.019	0.06	0.527	0.537	-
		26965	841.5	22.86	23.00	1.033	-	-	-	-
	Bottom	26765	821.5	22.23	23.00	1.194	-	-	-	-
		26865	831.5	22.92	23.00	1.019	-	-	-	-
		26965	841.5	22.86	23.00	1.033	-	-	-	-
20M QPSK 50RB	Front	26765	821.5	21.00	22.50	1.413	-	-	-	-
		26865	831.5	21.82	22.50	1.169	-0.11	0.665	0.778	-
		26965	841.5	22.11	22.50	1.094	-	-	-	-
	Rear	26765	821.5	21.00	22.50	1.413	-	-	-	-
		26865	831.5	21.82	22.50	1.169	0.04	0.473	0.553	-
		26965	841.5	22.11	22.50	1.094	-	-	-	-
	Left	26765	821.5	21.00	22.50	1.413	-	-	-	-
		26865	831.5	21.82	22.50	1.169	-0.09	0.471	0.551	-
		26965	841.5	22.11	22.50	1.094	-	-	-	-
	Right	26765	821.5	21.00	22.50	1.413	-	-	-	-
		26865	831.5	21.82	22.50	1.169	-0.12	0.459	0.537	-
		26965	841.5	22.11	22.50	1.094	-	-	-	-
	Top	26765	821.5	21.00	22.50	1.413	-	-	-	-
		26865	831.5	21.82	22.50	1.169	0.07	0.432	0.505	-
		26965	841.5	22.11	22.50	1.094	-	-	-	-
	Bottom	26765	821.5	21.00	22.50	1.413	-	-	-	-
		26865	831.5	21.82	22.50	1.169	-	-	-	-
		26965	841.5	22.11	22.50	1.094	-	-	-	-
20M QPSK 100RB	Front	26765	821.5	20.87	22.00	1.297	-	-	-	-
		26865	831.5	21.95	22.00	1.012	-0.18	0.647	0.654	-
		26965	841.5	21.91	22.00	1.021	-	-	-	-

LTE Band 41										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M QPSK 1RB	Front	40240	2555	22.83	23.00	1.040	1.006	0.03	0.199	0.208
		40740	2605	22.74	23.00	1.062	1.006	-	-	-
		41240	2655	22.74	23.00	1.062	1.006	-	-	-
	Rear	40240	2555	22.83	23.00	1.040	1.006	-0.07	0.280	0.293
		40740	2605	22.74	23.00	1.062	1.006	-	-	-
		41240	2655	22.74	23.00	1.062	1.006	-	-	-
	Left	40240	2555	22.83	23.00	1.040	1.006	0.03	0.158	0.165
		40740	2605	22.74	23.00	1.062	1.006	-	-	-
		41240	2655	22.74	23.00	1.062	1.006	-	-	-
	Right	40240	2555	22.83	23.00	1.040	1.006	0.11	0.074	0.077
		40740	2605	22.74	23.00	1.062	1.006	-	-	-
		41240	2655	22.74	23.00	1.062	1.006	-	-	-
	Top	40240	2555	22.83	23.00	1.040	1.006	0.09	0.150	0.157
		40740	2605	22.74	23.00	1.062	1.006	-	-	-
		41240	2655	22.74	23.00	1.062	1.006	-	-	-
	Bottom	40240	2555	22.83	23.00	1.040	1.006	-	-	-
		40740	2605	22.74	23.00	1.062	1.006	-	-	-
		41240	2655	22.74	23.00	1.062	1.006	-	-	-
20M QPSK 50RB	Front	40240	2555	21.41	22.00	1.146	1.006	0.05	0.159	0.183
		40740	2605	21.56	22.00	1.107	1.006	-	-	-
		41240	2655	21.56	22.00	1.107	1.006	-	-	-
	Rear	40240	2555	21.41	22.00	1.146	1.006	-0.12	0.224	0.258
		40740	2605	21.56	22.00	1.107	1.006	-	-	-
		41240	2655	21.56	22.00	1.107	1.006	-	-	-
	Left	40240	2555	21.41	22.00	1.146	1.006	0.17	0.132	0.152
		40740	2605	21.56	22.00	1.107	1.006	-	-	-
		41240	2655	21.56	22.00	1.107	1.006	-	-	-
	Right	40240	2555	21.41	22.00	1.146	1.006	-0.13	0.059	0.068
		40740	2605	21.56	22.00	1.107	1.006	-	-	-
		41240	2655	21.56	22.00	1.107	1.006	-	-	-
	Top	40240	2555	21.41	22.00	1.146	1.006	-0.16	0.127	0.146
		40740	2605	21.56	22.00	1.107	1.006	-	-	-
		41240	2655	21.56	22.00	1.107	1.006	-	-	-
	Bottom	40240	2555	21.41	22.00	1.146	1.006	-	-	-
		40740	2605	21.56	22.00	1.107	1.006	-	-	-
		41240	2655	21.56	22.00	1.107	1.006	-	-	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

Wi-Fi 2.4G												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz									
802.11b	Front	1	2412	15.91	16.00	1.021	99.50%	1.01	-	-	-	-
		6	2437	15.42	15.50	1.019	99.50%	1.01	-	-	-	-
		11	2462	16.21	16.50	1.069	99.50%	1.01	-0.10	0.038	0.041	-
	Rear	1	2412	15.91	16.00	1.021	99.50%	1.01	-	-	-	-
		6	2437	15.42	15.50	1.019	99.50%	1.01	-	-	-	-
		11	2462	16.21	16.50	1.069	99.50%	1.01	-0.13	0.046	0.049	13
	Left	1	2412	15.91	16.00	1.021	99.50%	1.01	-	-	-	-
		6	2437	15.42	15.50	1.019	99.50%	1.01	-	-	-	-
		11	2462	16.21	16.50	1.069	99.50%	1.01	-0.03	0.035	0.038	-
	Right	1	2412	15.91	16.00	1.021	99.50%	1.01	-	-	-	-
		6	2437	15.42	15.50	1.019	99.50%	1.01	-	-	-	-
		11	2462	16.21	16.50	1.069	99.50%	1.01	-	-	-	-
	Top	1	2412	15.91	16.00	1.021	99.50%	1.01	-	-	-	-
		6	2437	15.42	15.50	1.019	99.50%	1.01	-	-	-	-
		11	2462	16.21	16.50	1.069	99.50%	1.01	-	-	-	-
	Bottom	1	2412	15.91	16.00	1.021	99.50%	1.01	-	-	-	-
		6	2437	15.42	15.50	1.019	99.50%	1.01	-	-	-	-
		11	2462	16.21	16.50	1.069	99.50%	1.01	-	-	-	-

Wi-Fi 5G U-NII-1												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz									
802.11a	Front	36	5180	12.79	13.00	1.050	96.77%	1.03	-	-	-	-
		44	5220	12.08	12.50	1.102	96.77%	1.03	-	-	-	-
		48	5240	13.02	13.50	1.117	96.77%	1.03	-0.10	0.312	0.360	-
	Rear	36	5180	12.79	13.00	1.050	96.77%	1.03	-	-	-	-
		44	5220	12.08	12.50	1.102	96.77%	1.03	-	-	-	-
		48	5240	13.02	13.50	1.117	96.77%	1.03	-0.07	0.336	0.388	14
	Left	36	5180	12.79	13.00	1.050	96.77%	1.03	-	-	-	-
		44	5220	12.08	12.50	1.102	96.77%	1.03	-	-	-	-
		48	5240	13.02	13.50	1.117	96.77%	1.03	0.08	0.289	0.334	-
	Right	36	5180	12.79	13.00	1.050	96.77%	1.03	-	-	-	-
		44	5220	12.08	12.50	1.102	96.77%	1.03	-	-	-	-
		48	5240	13.02	13.50	1.117	96.77%	1.03	-	-	-	-
	Top	36	5180	12.79	13.00	1.050	96.77%	1.03	-	-	-	-
		44	5220	12.08	12.50	1.102	96.77%	1.03	-	-	-	-
		48	5240	13.02	13.50	1.117	96.77%	1.03	-	-	-	-
	Bottom	36	5180	12.79	13.00	1.050	96.77%	1.03	-	-	-	-
		44	5220	12.08	12.50	1.102	96.77%	1.03	-	-	-	-
		48	5240	13.02	13.50	1.117	96.77%	1.03	-	-	-	-

Wi-Fi 5G U-NII-3												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz									
802.11a	Front	149	5745	13.11	13.50	1.094	96.77%	1.03	-0.12	0.095	0.107	-
		157	5785	12.37	12.50	1.030	96.77%	1.03	-	-	-	-
		165	5825	12.23	12.50	1.064	96.77%	1.03	-	-	-	-
	Rear	149	5745	13.11	13.50	1.094	96.77%	1.03	-0.08	0.102	0.115	15
		157	5785	12.37	12.50	1.030	96.77%	1.03	-	-	-	-
		165	5825	12.23	12.50	1.064	96.77%	1.03	-	-	-	-
	Left	149	5745	13.11	13.50	1.094	96.77%	1.03	0.02	0.076	0.086	-
		157	5785	12.37	12.50	1.030	96.77%	1.03	-	-	-	-
		165	5825	12.23	12.50	1.064	96.77%	1.03	-	-	-	-
	Right	149	5745	13.11	13.50	1.094	96.77%	1.03	-	-	-	-
		157	5785	12.37	12.50	1.030	96.77%	1.03	-	-	-	-
		165	5825	12.23	12.50	1.064	96.77%	1.03	-	-	-	-
	Top	149	5745	13.11	13.50	1.094	96.77%	1.03	-	-	-	-
		157	5785	12.37	12.50	1.030	96.77%	1.03	-	-	-	-
		165	5825	12.23	12.50	1.064	96.77%	1.03	-	-	-	-
	Bottom	149	5745	13.11	13.50	1.094	96.77%	1.03	-	-	-	-
		157	5785	12.37	12.50	1.030	96.77%	1.03	-	-	-	-
		165	5825	12.23	12.50	1.064	96.77%	1.03	-	-	-	-

SAR Test Data Plots to the Appendix A.

15. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Frequency		Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
		CH	MHz		Measured SAR(W/kg)	Largest to Smallest SAR Ratio	Measured SAR(W/kg)	Largest to Smallest SAR Ratio
WCDMA Band IV	Rear	1513	1752.6	0.950	0.931	1.020	N/A	N/A
WCDMA Band V	Front	4183	836.6	0.960	0.939	1.022	N/A	N/A
LTE Band 4	Rear	20300	1745	0.821	0.809	1.015	N/A	N/A
LTE Band 5	Front	20525	836.5	0.939	0.917	1.024	N/A	N/A
LTE Band 12	Front	23095	707.5	0.806	0.778	1.036	N/A	N/A
LTE Band 17	Front	23780	709	0.842	0.813	1.036	N/A	N/A
LTE Band 25	Rear	26590	1905	0.832	0.819	1.016	N/A	N/A
LTE Band 26	Front	26865	831.5	0.841	0.826	1.018	N/A	N/A

16. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Hotspot	Note
1	WCDMA (data) + Bluetooth (data)	NA	
2	WCDMA (data) + WLAN (data)	Yes	
3	LTE + Bluetooth (data)	NA	
4	LTE + WLAN (data)	Yes	

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})/x}] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Hotspot
	Test separation	10mm
8.00dBm	Estimated SAR (W/kg)	6.31

PCB + WLAN DTS					
WWAN Band		Exposure Position	Standalone SAR (W/kg)		Σ 1-g SAR
			PCB	WLAN DTS	(W/kg)
WCDMA	Band II	Front	0.503	0.041	0.544
		Rear	0.707	0.049	0.756
		Left side	0.496	0.038	0.534
		Right side	0.226	-	0.226
		Top side	0.481	-	0.481
		Bottom side	-	-	-
	Band IV	Front	0.692	0.041	0.733
		Rear	0.972	0.049	1.021
		Left side	0.601	0.038	0.639
		Right side	0.353	-	0.353
		Top side	0.567	-	0.567
		Bottom side	-	-	-
	Band V	Front	1.008	0.041	1.049
		Rear	0.665	0.049	0.714
		Left side	0.645	0.038	0.683
		Right side	0.618	-	0.618
		Top side	0.395	-	0.395
		Bottom side	-	-	-

LTE	B2 1RB	Front	0.552	0.041	0.593
		Rear	0.775	0.049	0.824
		Left side	0.528	0.038	0.566
		Right side	0.281	-	0.281
		Top side	0.459	-	0.459
		Bottom side	-	-	-
	B2 50RB	Front	0.535	0.041	0.576
		Rear	0.753	0.049	0.802
		Left side	0.497	0.038	0.535
		Right side	0.229	-	0.229
		Top side	0.443	-	0.443
		Bottom side	-	-	-
	B4 1RB	Front	0.617	0.041	0.658
		Rear	0.868	0.049	0.917
		Left side	0.517	0.038	0.555
		Right side	0.292	-	0.292
		Top side	0.494	-	0.494
		Bottom side	-	-	-
	B4 50RB	Front	0.560	0.041	0.601
		Rear	0.786	0.049	0.835
		Left side	0.447	0.038	0.485
		Right side	0.261	-	0.261
		Top side	0.406	-	0.406
		Bottom side	-	-	-
	B5 1RB	Front	1.004	0.041	1.045
		Rear	0.773	0.049	0.822
		Left side	0.586	0.038	0.624
		Right side	0.632	-	0.632
		Top side	0.473	-	0.473
		Bottom side	-	-	-
	B5 25RB	Front	0.785	0.041	0.826
		Rear	0.752	0.049	0.801
		Left side	0.722	0.038	0.760
		Right side	0.688	-	0.688
		Top side	0.538	-	0.538
		Bottom side	-	-	-

LTE	B7 1RB	Front	0.534	0.041	0.575
		Rear	0.750	0.049	0.799
		Left side	0.445	0.038	0.483
		Right side	0.221	-	0.221
		Top side	0.417	-	0.417
		Bottom side	-	-	-
	B7 50RB	Front	0.476	0.041	0.517
		Rear	0.668	0.049	0.717
		Left side	0.412	0.038	0.450
		Right side	0.218	-	0.218
		Top side	0.362	-	0.362
		Bottom side	-	-	-
	B12 1RB	Front	0.864	0.041	0.905
		Rear	0.690	0.049	0.739
		Left side	0.587	0.038	0.625
		Right side	0.565	-	0.565
		Top side	0.486	-	0.486
		Bottom side	-	-	-
	B12 25RB	Front	0.790	0.041	0.831
		Rear	0.562	0.049	0.611
		Left side	0.550	0.038	0.588
		Right side	0.530	-	0.530
		Top side	0.438	-	0.438
		Bottom side	-	-	-
	B17 1RB	Front	0.854	0.041	0.895
		Rear	0.735	0.049	0.784
		Left side	0.716	0.038	0.754
		Right side	0.677	-	0.677
		Top side	0.661	-	0.661
		Bottom side	-	-	-
	B17 25RB	Front	0.781	0.041	0.822
		Rear	0.717	0.049	0.766
		Left side	0.706	0.038	0.744
		Right side	0.689	-	0.689
		Top side	0.662	-	0.662
		Bottom side	-	-	-

LTE	B25 1RB	Front	0.593	0.041	0.634
		Rear	0.834	0.049	0.883
		Left side	0.516	0.038	0.554
		Right side	0.312	-	0.312
		Top side	0.488	-	0.488
		Bottom side	-	-	-
	B25 50RB	Front	0.549	0.041	0.590
		Rear	0.770	0.049	0.819
		Left side	0.490	0.038	0.528
		Right side	0.307	-	0.307
		Top side	0.468	-	0.468
		Bottom side	-	-	-
	B26 1RB	Front	0.857	0.041	0.898
		Rear	0.610	0.049	0.659
		Left side	0.585	0.038	0.623
		Right side	0.563	-	0.563
		Top side	0.537	-	0.537
		Bottom side	-	-	-
	B26 38RB	Front	0.778	0.041	0.819
		Rear	0.553	0.049	0.602
		Left side	0.551	0.038	0.589
		Right side	0.537	-	0.537
		Top side	0.505	-	0.505
		Bottom side	-	-	-
	B41 1RB	Front	0.208	0.041	0.249
		Rear	0.293	0.049	0.342
		Left side	0.165	0.038	0.203
		Right side	0.077	-	0.077
		Top side	0.157	-	0.157
		Bottom side	-	-	-
	B41 50RB	Front	0.183	0.041	0.224
		Rear	0.258	0.049	0.307
		Left side	0.152	0.038	0.190
		Right side	0.068	-	0.068
		Top side	0.146	-	0.146
		Bottom side	-	-	-


PCB + WLAN U-NII					
WWAN Band		Exposure Position	Standalone SAR (W/kg)		Σ 1-g SAR (W/kg)
			PCB	WLAN DTS	
WCDMA	Band II	Front	0.503	0.360	0.863
		Rear	0.707	0.388	1.095
		Left side	0.496	0.334	0.830
		Right side	0.226	-	0.226
		Top side	0.481	-	0.481
		Bottom side	-	-	-
	Band IV	Front	0.692	0.360	1.052
		Rear	0.972	0.388	1.360
		Left side	0.601	0.334	0.935
		Right side	0.353	-	0.353
		Top side	0.567	-	0.567
		Bottom side	-	-	-
	Band V	Front	1.008	0.360	1.368
		Rear	0.665	0.388	1.053
		Left side	0.645	0.334	0.979
		Right side	0.618	-	0.618
		Top side	0.395	-	0.395
		Bottom side	-	-	-

LTE	B2 1RB	Front	0.552	0.360	0.912
		Rear	0.775	0.388	1.163
		Left side	0.528	0.334	0.862
		Right side	0.281	-	0.281
		Top side	0.459	-	0.459
		Bottom side	-	-	-
	B2 50RB	Front	0.535	0.360	0.895
		Rear	0.753	0.388	1.141
		Left side	0.497	0.334	0.831
		Right side	0.229	-	0.229
		Top side	0.443	-	0.443
		Bottom side	-	-	-
	B4 1RB	Front	0.617	0.360	0.977
		Rear	0.868	0.388	1.256
		Left side	0.517	0.334	0.851
		Right side	0.292	-	0.292
		Top side	0.494	-	0.494
		Bottom side	-	-	-
	B4 50RB	Front	0.560	0.360	0.920
		Rear	0.786	0.388	1.174
		Left side	0.447	0.334	0.781
		Right side	0.261	-	0.261
		Top side	0.406	-	0.406
		Bottom side	-	-	-
	B5 1RB	Front	1.004	0.360	1.364
		Rear	0.773	0.388	1.161
		Left side	0.586	0.334	0.920
		Right side	0.632	-	0.632
		Top side	0.473	-	0.473
		Bottom side	-	-	-
	B5 25RB	Front	0.785	0.360	1.145
		Rear	0.752	0.388	1.140
		Left side	0.722	0.334	1.056
		Right side	0.688	-	0.688
		Top side	0.538	-	0.538
		Bottom side	-	-	-

LTE	B7 1RB	Front	0.534	0.360	0.894
		Rear	0.750	0.388	1.138
		Left side	0.445	0.334	0.779
		Right side	0.221	-	0.221
		Top side	0.417	-	0.417
		Bottom side	-	-	-
	B7 50RB	Front	0.476	0.360	0.836
		Rear	0.668	0.388	1.056
		Left side	0.412	0.334	0.746
		Right side	0.218	-	0.218
		Top side	0.362	-	0.362
		Bottom side	-	-	-
	B12 1RB	Front	0.864	0.360	1.224
		Rear	0.690	0.388	1.078
		Left side	0.587	0.334	0.921
		Right side	0.565	-	0.565
		Top side	0.486	-	0.486
		Bottom side	-	-	-
	B12 25RB	Front	0.790	0.360	1.150
		Rear	0.562	0.388	0.950
		Left side	0.550	0.334	0.884
		Right side	0.530	-	0.530
		Top side	0.438	-	0.438
		Bottom side	-	-	-
	B17 1RB	Front	0.854	0.360	1.214
		Rear	0.735	0.388	1.123
		Left side	0.716	0.334	1.050
		Right side	0.677	-	0.677
		Top side	0.661	-	0.661
		Bottom side	-	-	-
	B17 25RB	Front	0.781	0.360	1.141
		Rear	0.717	0.388	1.105
		Left side	0.706	0.334	1.040
		Right side	0.689	-	0.689
		Top side	0.662	-	0.662
		Bottom side	-	-	-

LTE	B25 1RB	Front	0.593	0.360	0.953
		Rear	0.834	0.388	1.222
		Left side	0.516	0.334	0.850
		Right side	0.312	-	0.312
		Top side	0.488	-	0.488
		Bottom side	-	-	-
	B25 50RB	Front	0.549	0.360	0.909
		Rear	0.770	0.388	1.158
		Left side	0.490	0.334	0.824
		Right side	0.307	-	0.307
		Top side	0.468	-	0.468
		Bottom side	-	-	-
	B26 1RB	Front	0.857	0.360	1.217
		Rear	0.610	0.388	0.998
		Left side	0.585	0.334	0.919
		Right side	0.563	-	0.563
		Top side	0.537	-	0.537
		Bottom side	-	-	-
	B26 38RB	Front	0.778	0.360	1.138
		Rear	0.553	0.388	0.941
		Left side	0.551	0.334	0.885
		Right side	0.537	-	0.537
		Top side	0.505	-	0.505
		Bottom side	-	-	-
	B41 1RB	Front	0.208	0.360	0.568
		Rear	0.293	0.388	0.681
		Left side	0.165	0.334	0.499
		Right side	0.077	-	0.077
		Top side	0.157	-	0.157
		Bottom side	-	-	-
	B41 50RB	Front	0.183	0.360	0.543
		Rear	0.258	0.388	0.646
		Left side	0.152	0.334	0.486
		Right side	0.068	-	0.068
		Top side	0.146	-	0.146
		Bottom side	-	-	-

17. TestSetup Photos

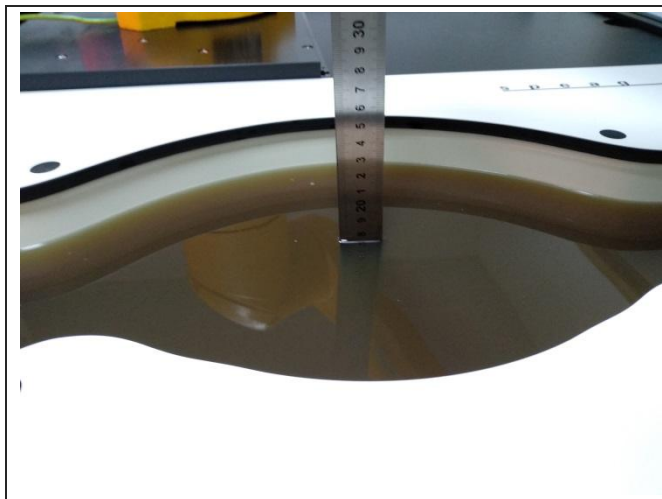

Liquid depth in the Body phantom




Front (10mm)




Rear (10mm)



Left Side (10mm)

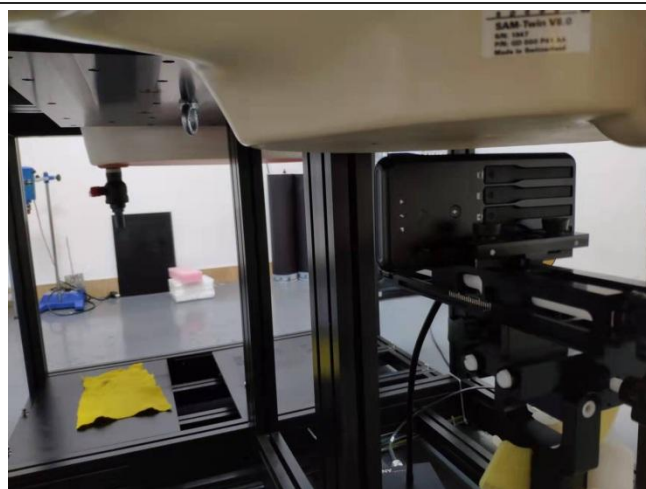

Right Side (10mm)

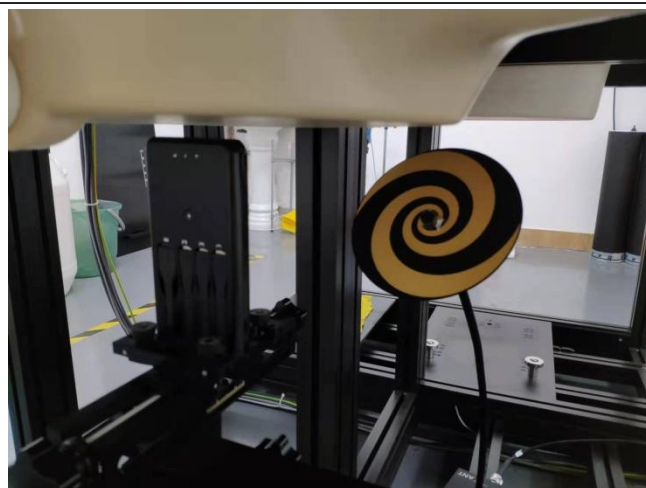

Top Side (10mm)

18. External and Internal Photos of the EUT

Please reference to the report No.: CHTEW21120120

-----End of Report-----