

Operation and ports explained

the screen first if it is locked)

use of the Play Store;

perfect sound and ease of use;

connections are detected).

Power on/off, restart, screen locking / unlocking

1. Power on: press and hold power button for two second

2.Power off / restart: hold power button while R5 is powered

 $power \, button \, briefly \, or \, double-tap \, the \, screen \, to \, turn \, it \, on.$ 

**3.5mm line out**Auto line out mode switch: the device automatically detects when

it is connected to an amplifier rather than headphones and

Coaxial digital audio output

The R5 includes a coaxial digital output in its type-C USB port,

which may be utilized using the including the type-C to RCA

HiBy Music Q

HiBy Music Q

HiBy官方直营店

官方天猫店 Tmall

www.hiby.com

HiBy Official Online Store

https://hibysm.tmall.com

官方直营京东店 JD.com

https://mall.jd.com/index-852084.html

操作及接口说明

大简单易用: 2、应用市场

3.5mm LO线路输出

COAX同轴输出

操作及介面說明

開機/關機、重啟/鎖屏/亮屏

1、開機: 長按電源鍵兩秒即可開機;

2、關機、重啟: 開機狀態下長按電源鍵, 即可彈出關機/重啟

同轴输出。

开机/关机、重启/锁屏/亮屏

3、锁屏: 开机状态下, 点击电源键即可锁屏;

内置酷安应用市场,可以搜索下载任何APP。

4、亮屏:点击电源键或双击屏幕。

1、开机: 长按电源键两秒即可开机; 2、关机、重启: 开机状态下长按电源键, 即可弹出关机/重启

HiBy R5内置安卓8.1系统,与日常安卓系统手机操作系统一致,可随意安装第三方APP等;

1、音乐播放APP 内置海贝音乐APP专业版,专为HiFi设计的音乐播放器,功能强

LO线路输出:使用时,相关接口检测到设备接入自动切换LO模

COAX同轴输出:R5同轴输出使用TYPE-C口,使用配件内TYPE-C转RCA线即可;未检测到耳机接入或者LO接入,即为

1、R5 电源键上的LED灯能作为当前播放音频的格式,分别显

2、不播放——淡蓝色、≤48kHz蓝色、64kHz~192kHz绿色、

3、充电时——红色,快充时5秒闪烁一次,慢充10秒闪烁一次

Type-C功能

2、数字转盘

3、传输数字音频信号:

DAC使用方法.pdf

无线连接功能

b.打开蓝牙开关;

DLNA/局域网等。

Type-C功能

檔案傳輸/數字轉盤/傳輸數字音頻信號

通過USB口,使用R5外接解碼放大器

先和該藍牙設備進行配對, 步驟如下

c.點擊"與新設備配對",將會自動搜索可用設備;

a.下拉框中點擊設置-藍牙介面;

3、傳輸數字音頻信號:

DAC使用方法.pdf

無線連接功能

b.打開藍牙開關;

DLNA/局域網等。

1、檔案傳輸:數據線連接機器與電腦,連接成功後,需要**在機** 

器上把狀態欄拉下,選擇USB接入功能資訊條,在彈出窗口中

選擇傳輸檔案,即可在電腦中操作將檔案拉入本機記憶體或外

置SD卡中; Mac OS的机器需先另外安装支援程序Android File

a. 即作為電腦USB DAC, 使用USB數據線與電腦連接後, 下 拉狀態欄, 把USB狀態改為音頻輸入; b. 並需要安裝驅動程式, 請前往www.hiby.com進入產品服務

→產品支持→USB DAC IN驅動,**下載並詳細閱讀內附的USB** 

R5連接到新的藍牙設備(如藍牙耳機、藍牙音箱等)時,需要

d.點擊連接到相應設備,連接成功的設備將顯示在"已配對的設

. R5支持2.4G/5G 雙頻WiFi,日常使用外,亦可以通過海貝音樂

APP,進行WiFi傳歌、使用WiFi下的HiByLink、使用私有雲

文件传输/数字转盘/传输数字音频信号

通过USB口,使用R5外接解码放大器.

拉状态栏,把USB状态改为音频输入;

先和该蓝牙设备进行配对,步骤如下 a.下拉框中点击设置-蓝牙界面;

c.点击"与新设备配对",将会自动搜索可用设备;

1、文件传输:数据线连接机器与电脑,连接成功后,需要**在机器上把状态栏拉下**,选择USB接入功能信息条,在弹出窗口中

**选择传输文件**,即可在电脑中操作将文件拉入本机内存或外置

a. 即作为电脑USB DAC,使用USB数据线与电脑连接后,下

b. 并需要安装驱动程序,请前往www.hiby.com进入产品服务


→产品支持→USB DAC IN驱动,下载并**详细阅读内附的USB** 

R5连接到新的蓝牙设备(如蓝牙耳机、蓝牙音箱等)时,需要

d.点击连接到相应设备,连接成功的设备将显示在"已配对的设

R5支持2.4G/5G 双频WiFi,日常使用外,亦可以通过海贝音乐

APP,进行WiFi传歌、使用WiFi下的HiByLink、使用私有云

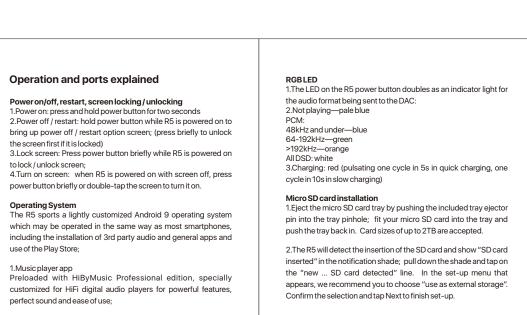



also be used for music transfer, remote control via HiByLink and/or

I.Connect to the Internet; WiFi connection is recommended to

2.The R5 will automatically detect new firmware versions online

and prompt you to update via notifications; tap the notification to

3. You may also manually check for, download and install updates

using the FOTA Update app; 4.Please note that roll-back to old firmware versions is not

playing music from network resources via DLNA / LAN etc.

Fireware update

Over-the-air online update

supported on Android devices.

固件更新

OTA在线升级

1、建议连接WiFi进行升级;

4、R5不支持滚回旧版本。

相应采样率的歌曲。

特殊辅助功能

除,请谨慎!)。

DTA安卓全局无损输出架构

2、R5会自动检测版本,如果检测到更新版本的固件,将在状

3、可通过系统升级APP(FOTA Update APP)下载并安装更新

1、DTA(Direct Transport Audio)安卓全局无损输出系统,通过软件层面绕过安卓系统中重采样SRC,直接输出原汁原味的

2、R5内置海贝音乐APP可以直接输出包含DSD256以下所有音

频格式;部分第三方APP,会受限于自身,导致无法直接输出

**双清** 1. 关机; 2. 先按住上一曲键,再按电源键开机,等待出现机器人界面;

3. 在机器人界面,按住电源键不放的同时按一下上一曲;

4. 上一曲/下一曲为选择按钮,电源键为确认按钮,这个时候就可以进入选择列表中的 wipe 开头的选项进行双清(全部数据清

强制关机:开机状态下,机器出现卡死状态或其他异常情况无

computer via the provided USB type-C cable. After this, pull down

the notification shade on the R6, scroll down to the bottom and tap

twice on "USB for charging", then select "File transfer" in the

menu. Now the R5 will function as an MTP storage device for file

transfer. On a Mac it is necessary to also install Android File

a.Connect USB DAC / amps to the R5 USB type-C port; bit-perfect

b.Third party apps without special USB drivers will have resample

USB audio output—96kHz for UAC1 USB devices and 192kHz for

a.connect the R5 to the computer via the provided USB type-C

cable. After this, pull down the notification shade on the R5, scroll

down to the bottom and tap twice on "USB for charging", then

b.On windows 7 it would be necessary to install the USB audio

driver for this; go to store.hiby.com -> Scroll to bottom -> Click "download" under Support -> "USB DAC Driver & Guidance" ->

"HiBy R6 USB DAC Driver Download and Installation Guide"

output is supported via HiByMusic up to DSD256.

Transfer to enable MTP file transfer.

2.USB Digital audio output


UAC2 USB devices.


3.Acting as USB DAC

select "USB DAC in" in the menu.

Wireless connectivity

法正常关机或重启,可以长按电源键15秒,进行强制关机。

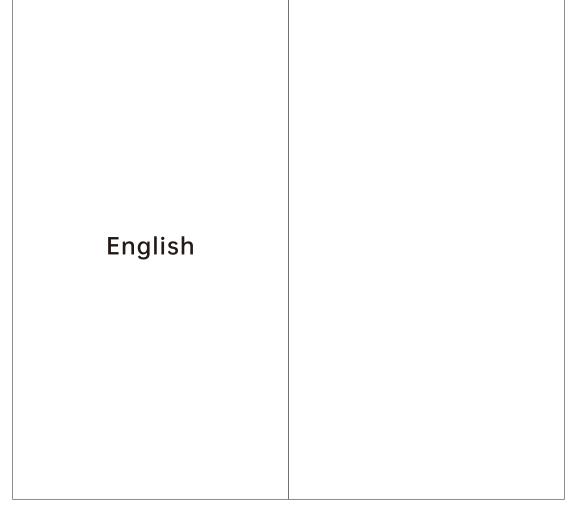

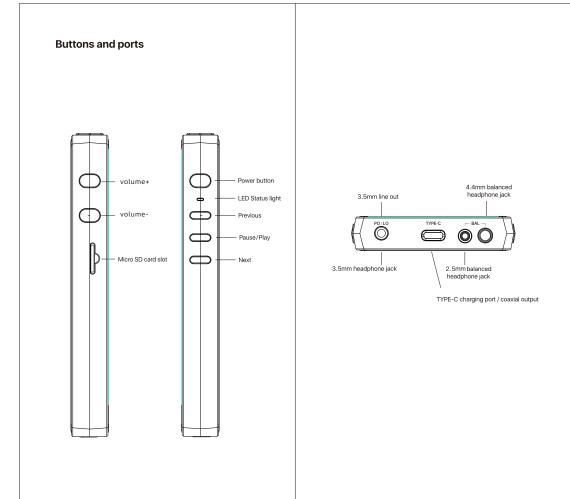



FCC Radiation Exposure Statement:
The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.




东莞市敏动电子科技有限公司

电话:400-8820-032 网址:www.hiby.com 地址:东莞市南城街道宏伟三路39号联景大厦12楼

DONGGUAN SMARTACTION TECHNOLOGY CO., LTD.

TEL: 0086-769-23182216 Website: www.hiby.com Email: sarvice@hiby.com Address: Room1201, Lianjing Commercial Building, No.39, Hongwel 3rd Road, Nancheng District, Dongguan, Quangdong, China

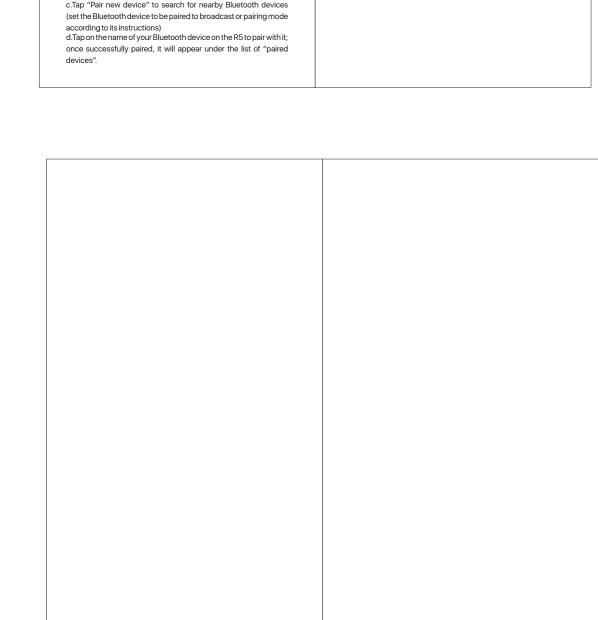

## **Special operations**

Factory reset

1. Turn off the HiBy R5;

2. Press and hold the volume + button and then the power button at the same time for a few seconds. The HiBy R5will power on but then an Android lying on its back will appear: 3. Now press and hold the power button and then press the

4. Use volume +/- buttons to move the selection and the Power

简体中文

繁体中文

button to activate it. Move the selection to "Wipe data / factory reset" and activate it. (Please back up all data on your device before doing this as all data on the HiBy R5 will be deleted). While the R5 is powered on, if there is any software malfunction

previous track button at the same time;

blocking usual access to the power off / reset menu, you may press and hold the power button for 15 seconds to perform a forced power-off. For further in-depth operation instructions, please visit (URL) or scan the following QR code:



全国售后 Global after-sales service 请拨打4008 8200 32,或直接咨询您购买的店铺

注意事项 Notes and precautions ·不可擅自维修、拆卸和将产品放在有水的地方。 ·当长期没有使用本产品时,需要定期给产品充电,以保证电池 ·当您使用耳机时,会因此听不清外界环境声,为了您的安全, 请避免在危险环境中使用耳机。 ·搭配电压过高的充电器充电可能会损坏机器,请选择推荐使用

contact the store you purchased.

使用的充电器进行充电。 Do not repair, disassemble, or place the product in a place When the product is not used for a long time, it is necessary to periodically charge the product to ensure battery life. When you use the headphones, you will not be able to hear the external environment. For your safety, please avoid using the headphones in a dangerous environment. Charging with a charger with too high voltage may damage the machine. Please choose to use the charger to charge.



WeChat 微信公众号