



1.6dB Bandwidth

Test Mode	Test Channel	Ant	EBW[MHz]	Limit	Verdict
GFSK	2402	Ant1	0.6904	0.5	PASS
GFSK	2440	Ant1	0.6972	0.5	PASS
GFSK	2480	Ant1	0.6906	0.5	PASS


6dB Bandwidth_GFSK_2402_Ant1

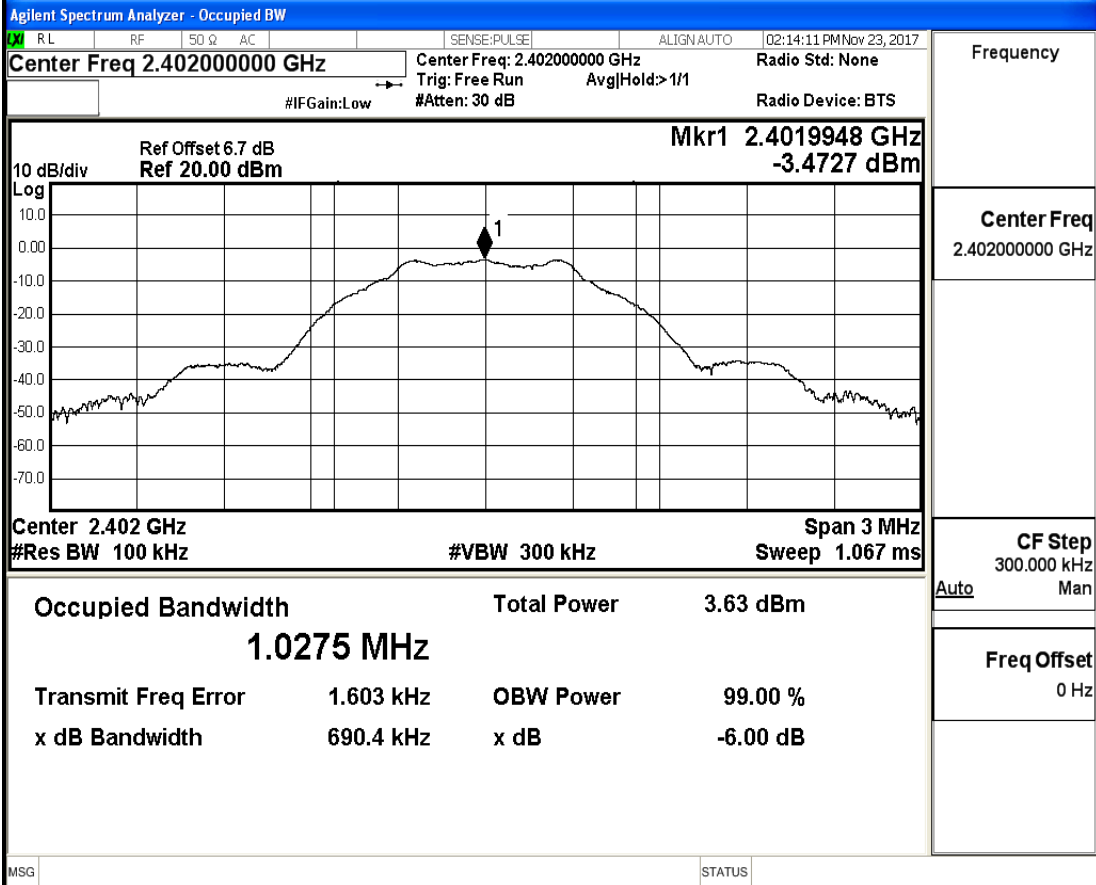

6dB Bandwidth_GFSK_2440_Ant1

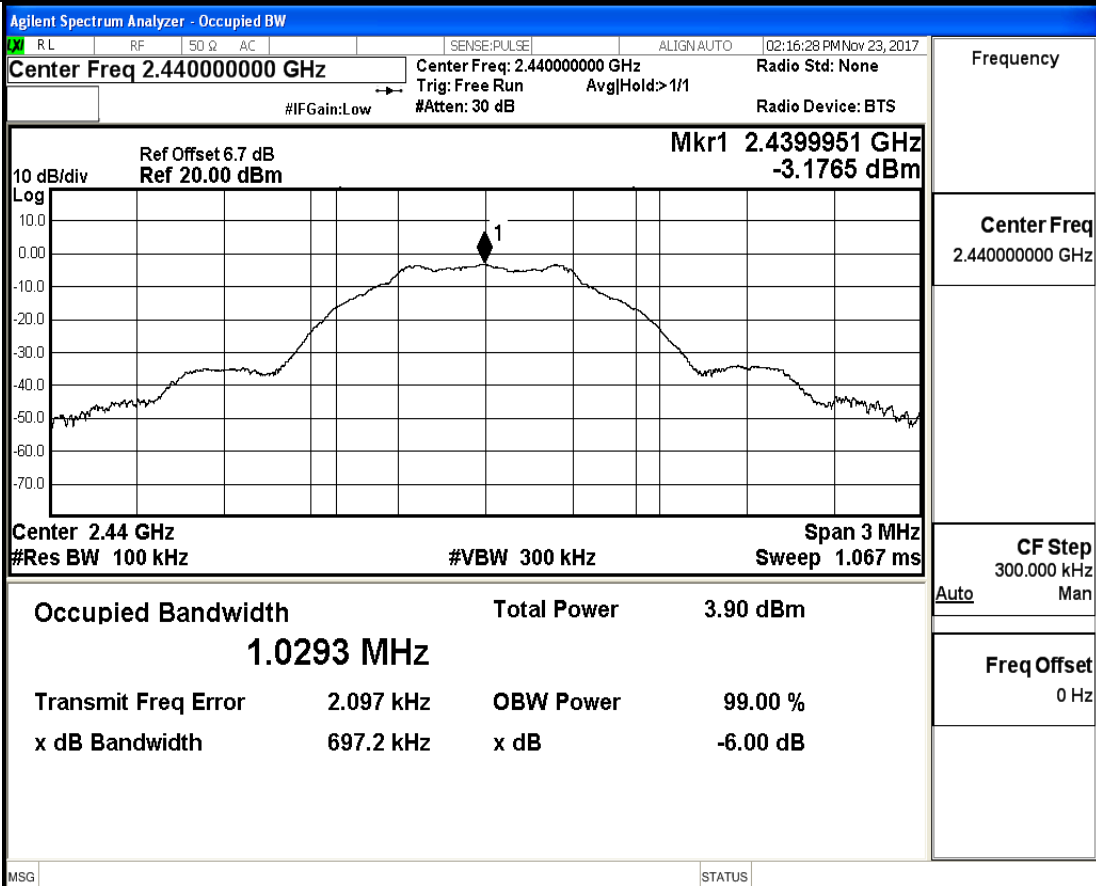

6dB Bandwidth_GFSK_2480_Ant1

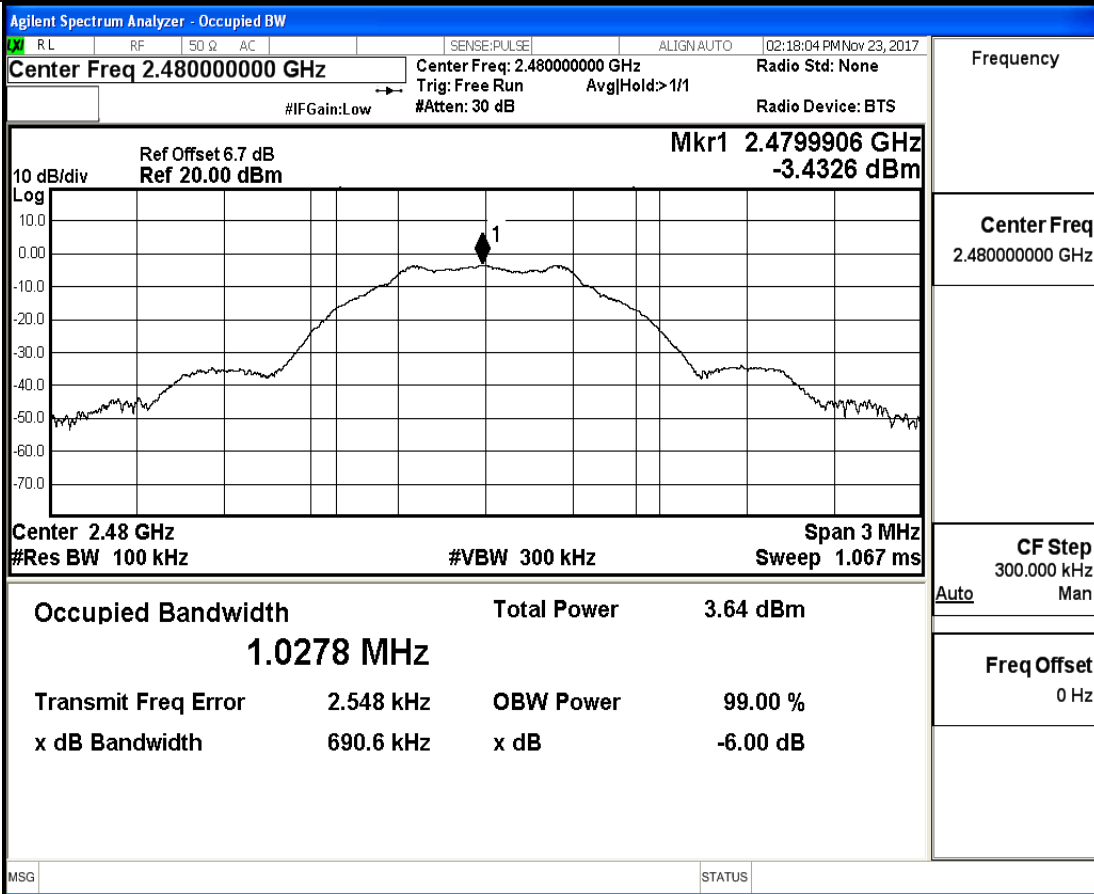


2.Occupied Bandwidth

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
-----------	--------------	-----	----------	------------	---------


3.Maximum peak conducted output power

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
GFSK	2402	Ant1	-2.315	30	PASS
GFSK	2440	Ant1	-2.247	30	PASS
GFSK	2480	Ant1	-2.482	30	PASS


Maximum peak conducted output power_GFSK_2402_Ant1

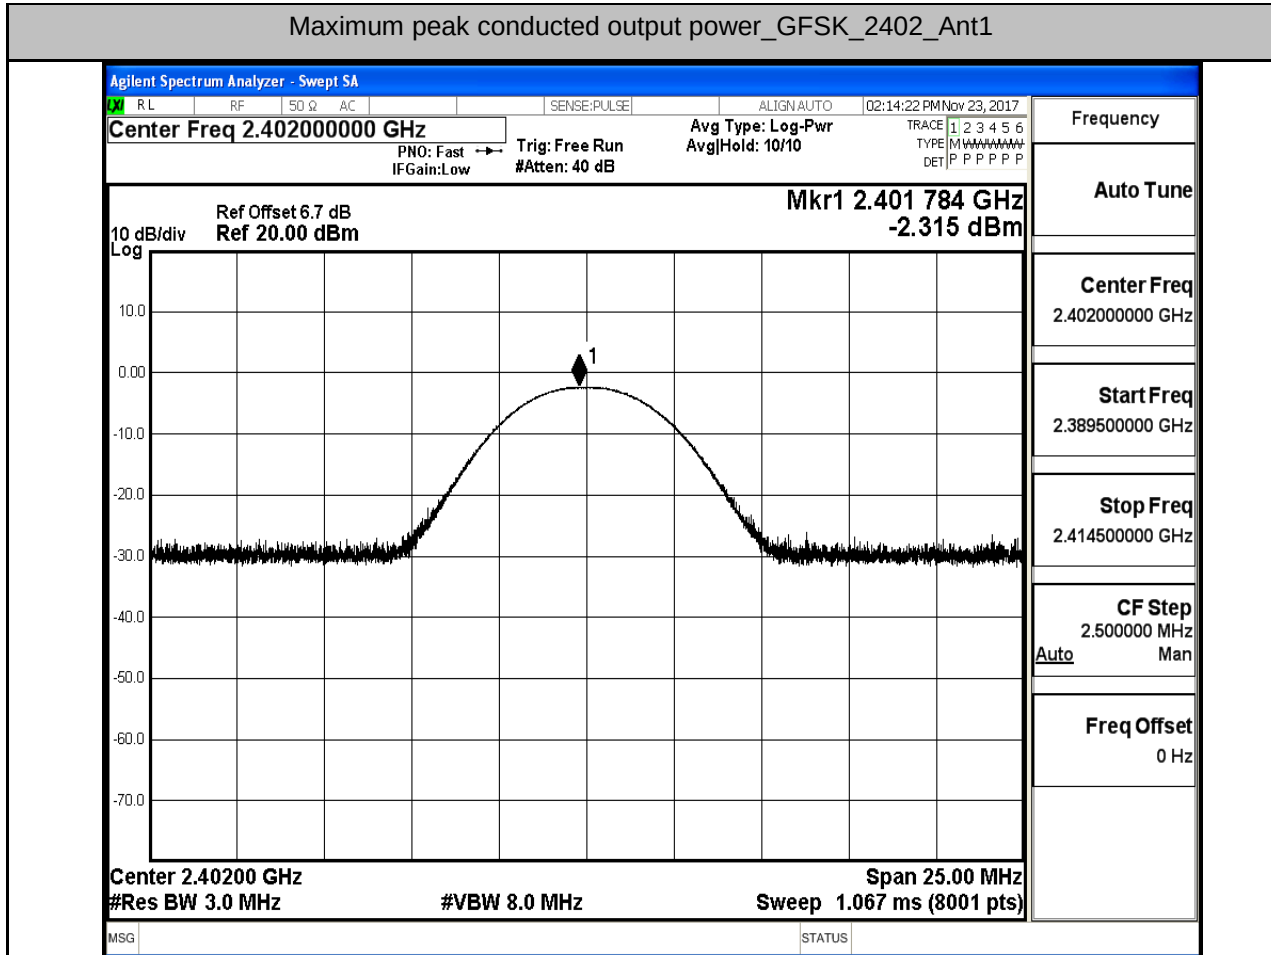

Maximum peak conducted output power_GFSK_2440_Ant1

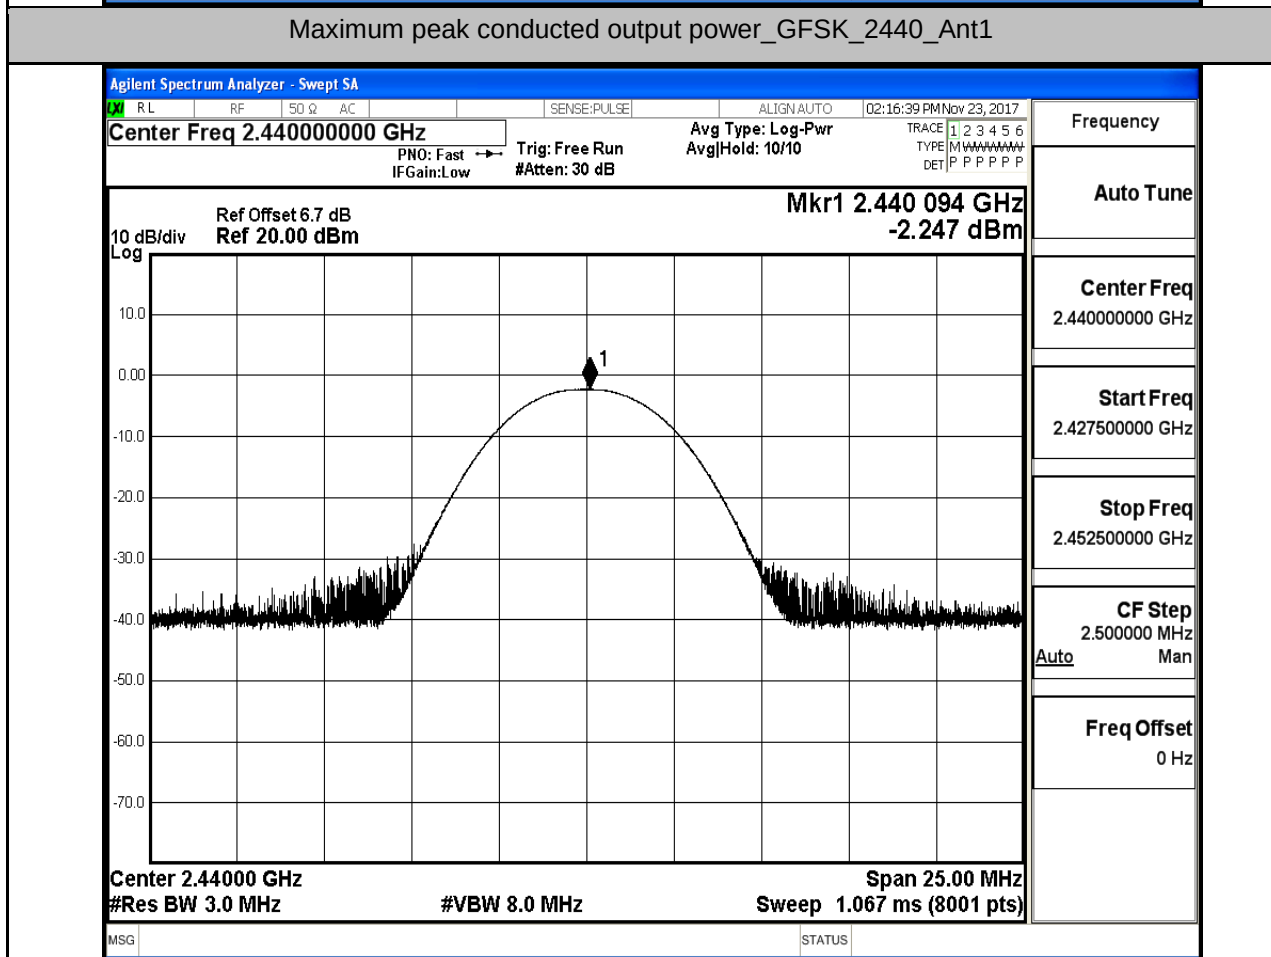


Maximum peak conducted output power_GFSK_2480_Ant1

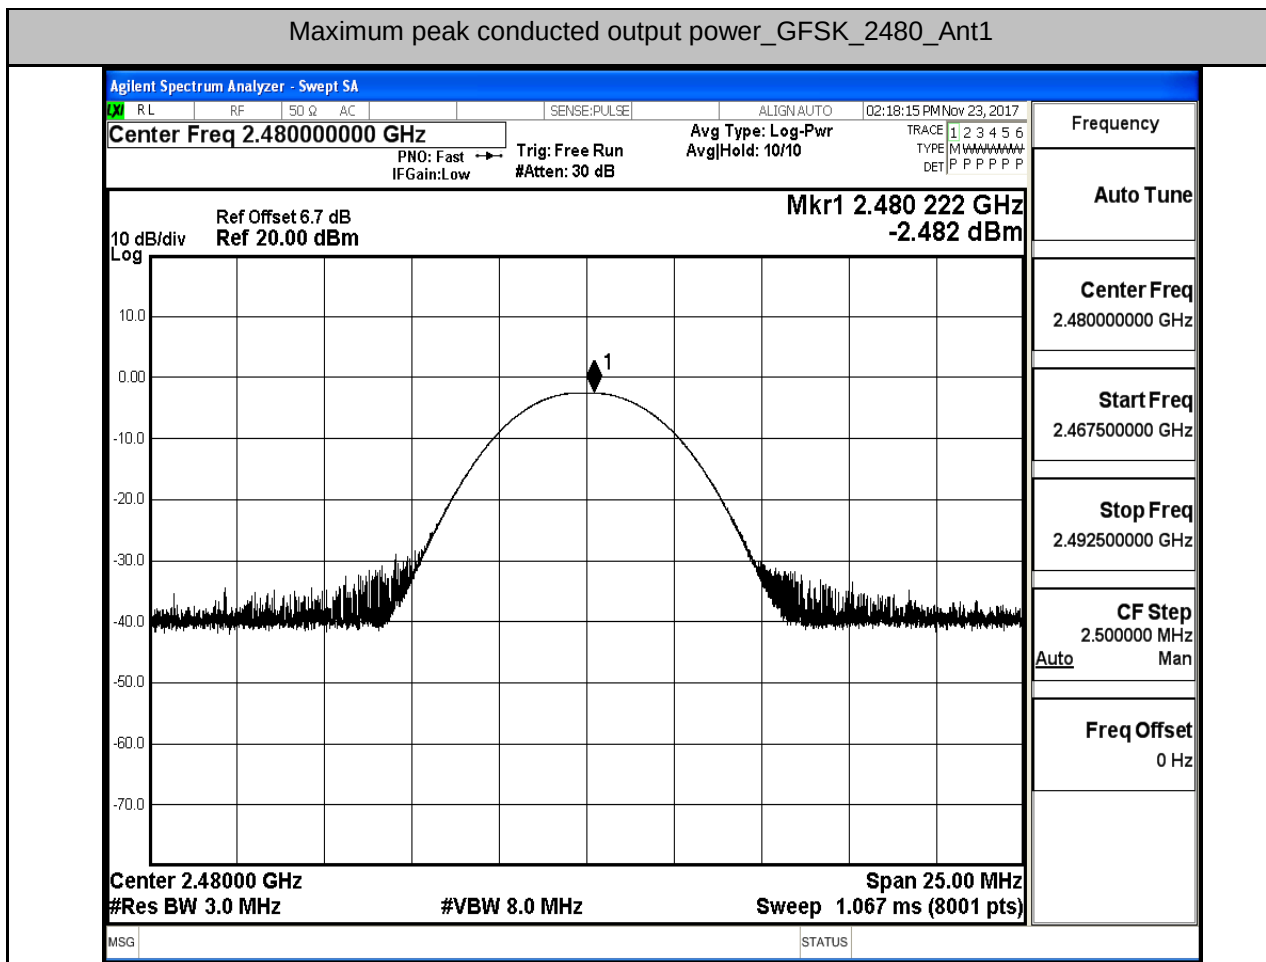


4.Maximum Peak power spectral density

Test Mode	Test Channel	Ant	PSD[dBm/3KHz]	Limit[dBm/3KHz]	Verdict
GFSK	2402	Ant1	-18.072	8.00	PASS
GFSK	2440	Ant1	-17.823	8.00	PASS
GFSK	2480	Ant1	-18.301	8.00	PASS


Maximum Peak power spectral density_GFSK_2402_Ant1

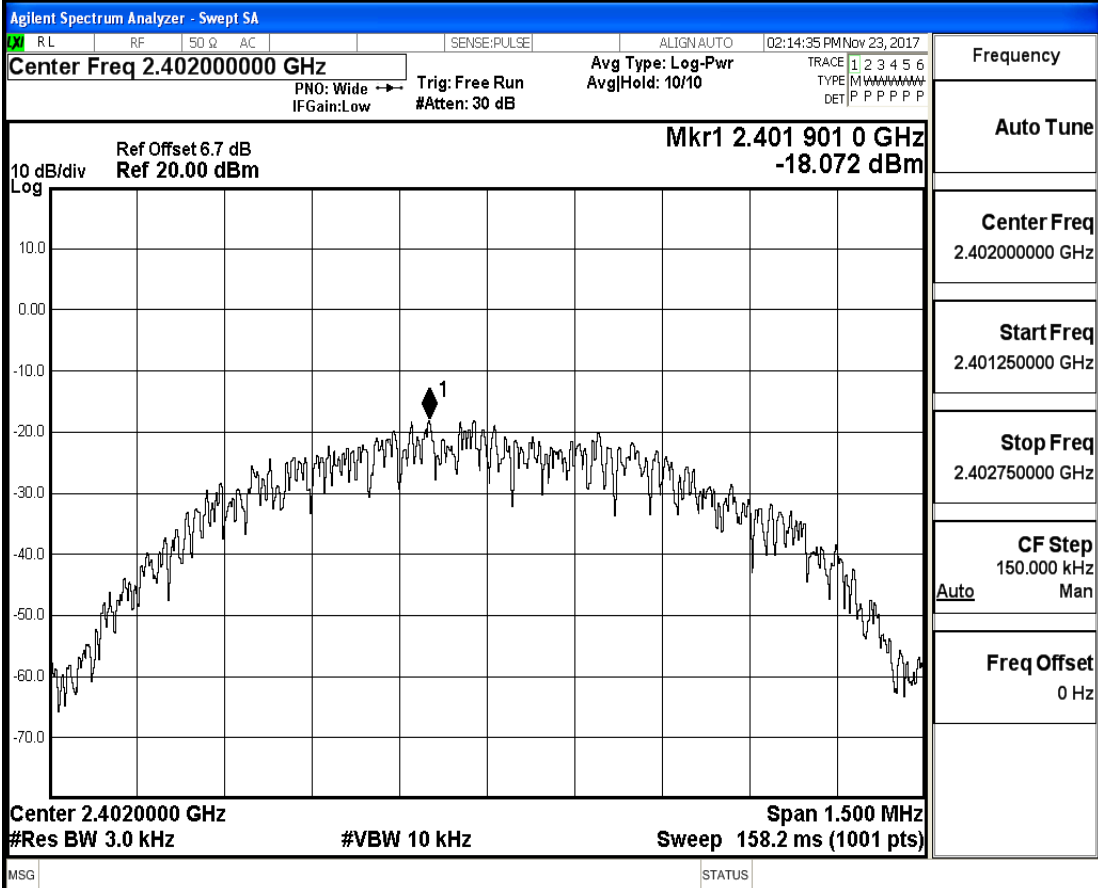

Maximum Peak power spectral density_GFSK_2440_Ant1

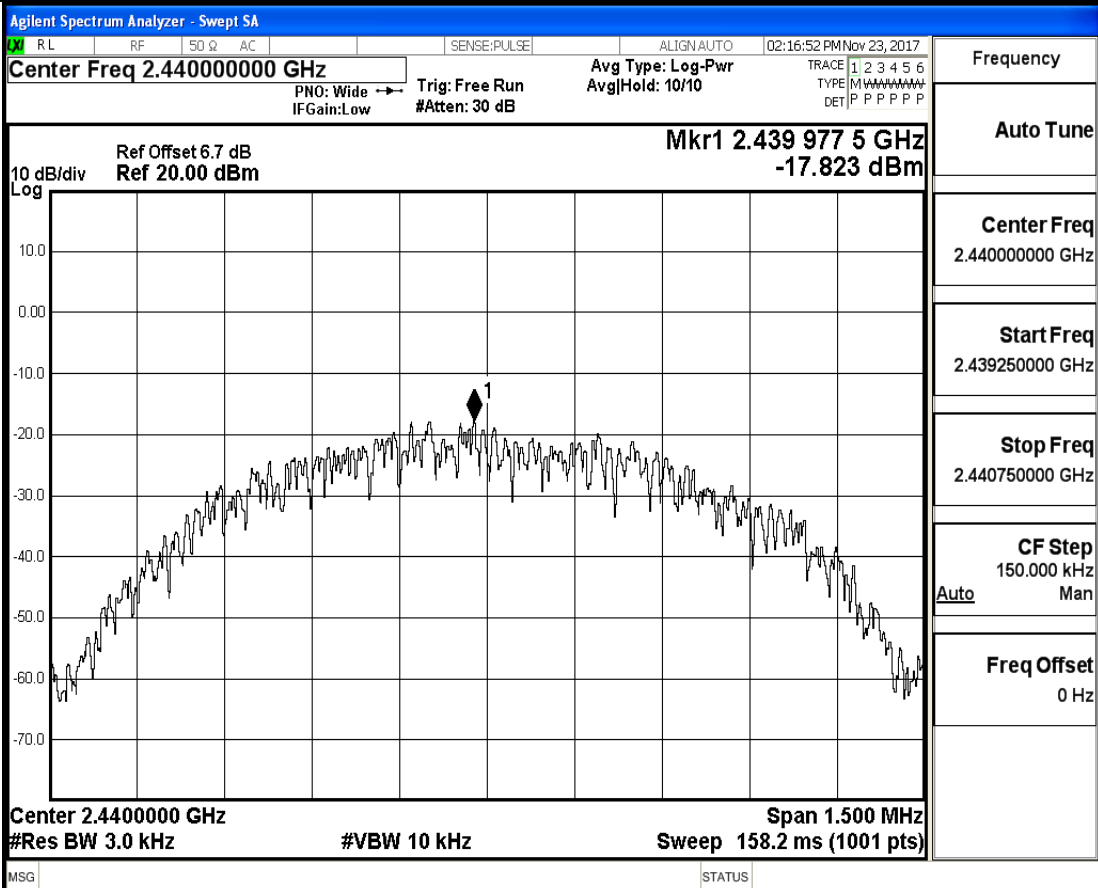


Maximum Peak power spectral density_GFSK_2480_Ant1

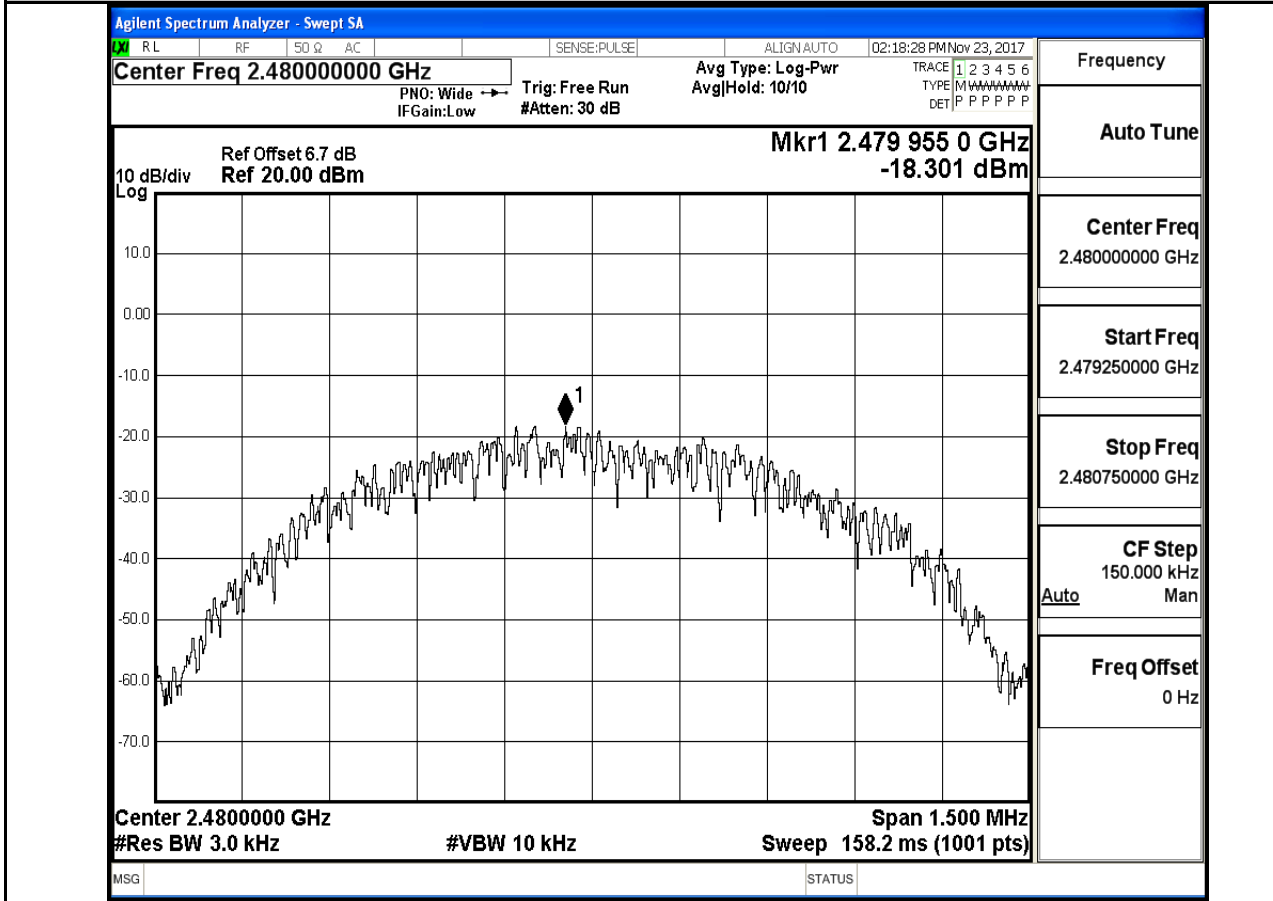

5.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	2402	Ant1	-3.349	-51.731	-23.35	PASS
GFSK	2480	Ant1	-3.293	-51.637	-23.29	PASS

Band-edge for RF Conducted Emissions_GFSK_2402_Ant1

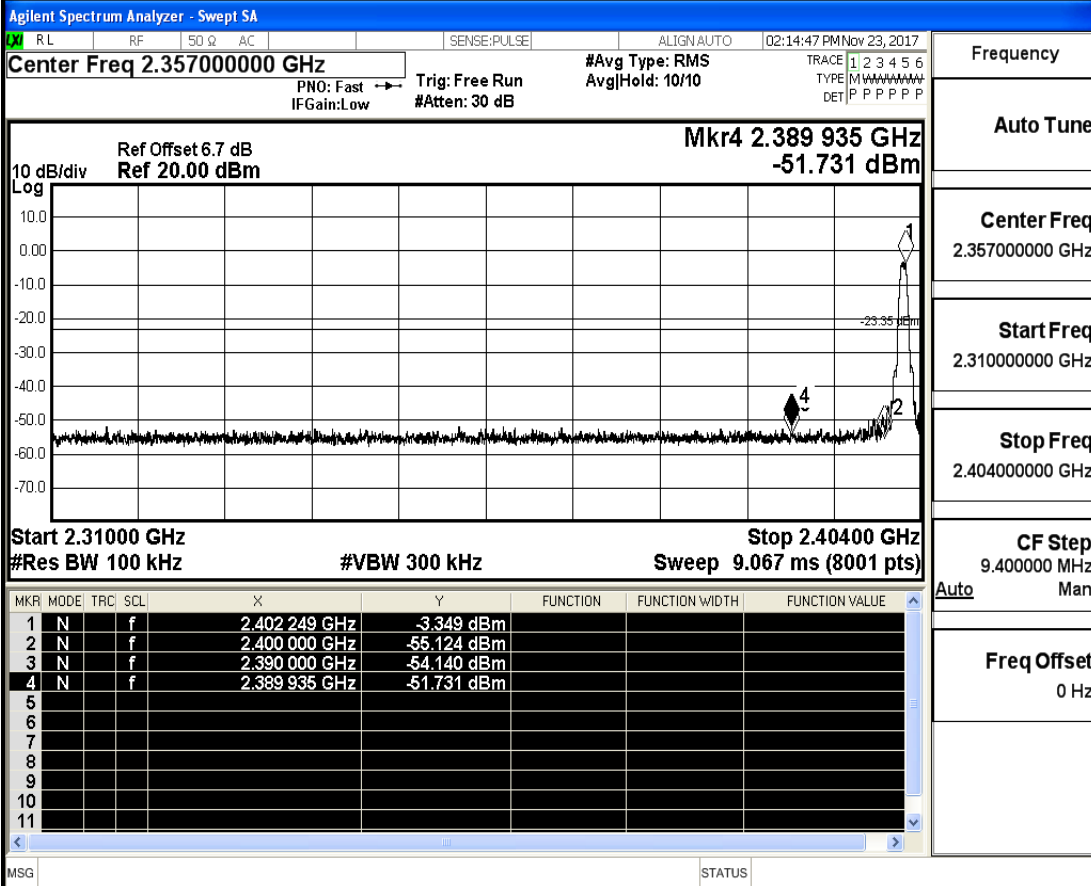

Frequency

Auto Tune

Center Freq
2.357000000 GHz


Start Freq
2.310000000 GHz

Stop Freq
2.404000000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

Band-edge for RF Conducted Emissions_GFSK_2480_Ant1

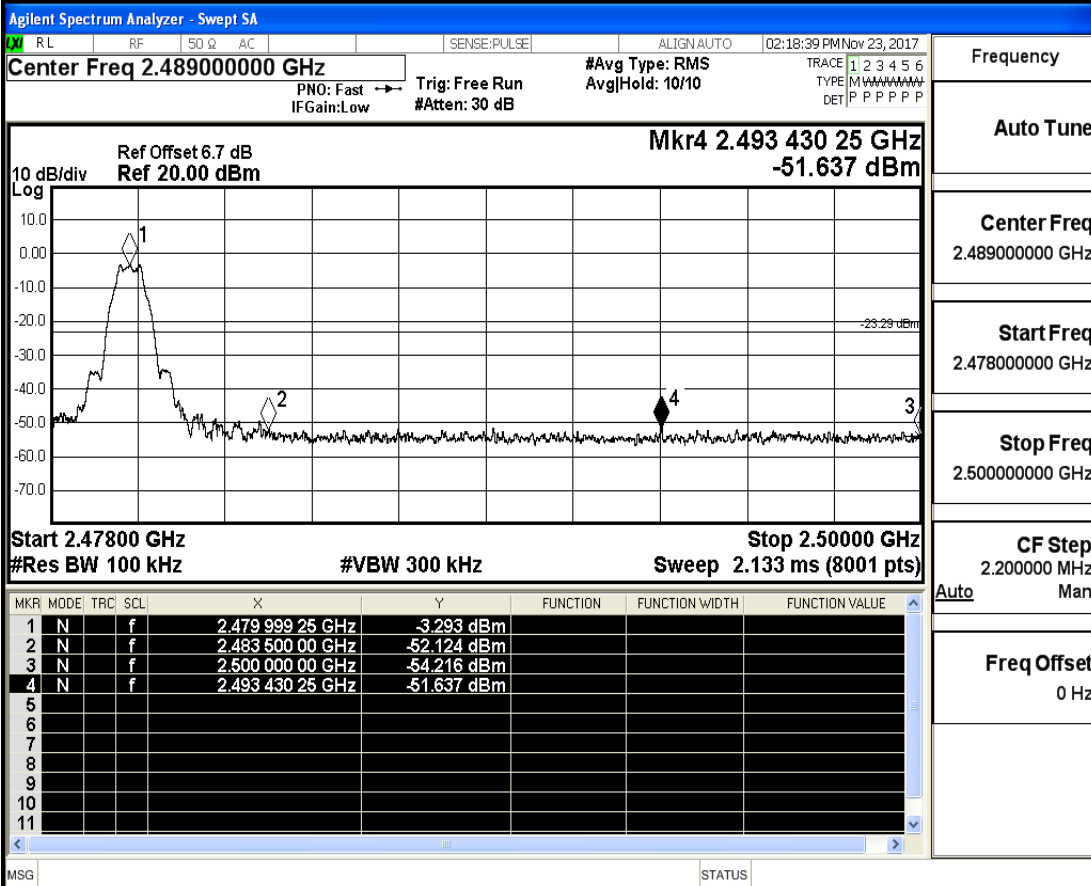

Frequency

Auto Tune

Center Freq
2.489000000 GHz

Start Freq
2.478000000 GHz

Stop Freq
2.500000000 GHz


CF Step
2.200000 MHz

Freq Offset
0 Hz



6.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
GFSK	2402	Ant1	30	25000	100	300	-3.511	-45.511	<-23.511	PASS
GFSK	2440	Ant1	30	25000	100	300	-3.184	-44.796	<-23.184	PASS
GFSK	2480	Ant1	30	25000	100	300	-3.432	-45.241	<-23.432	PASS



RF Conducted Spurious Emissions_GFSK_2402_Ant1

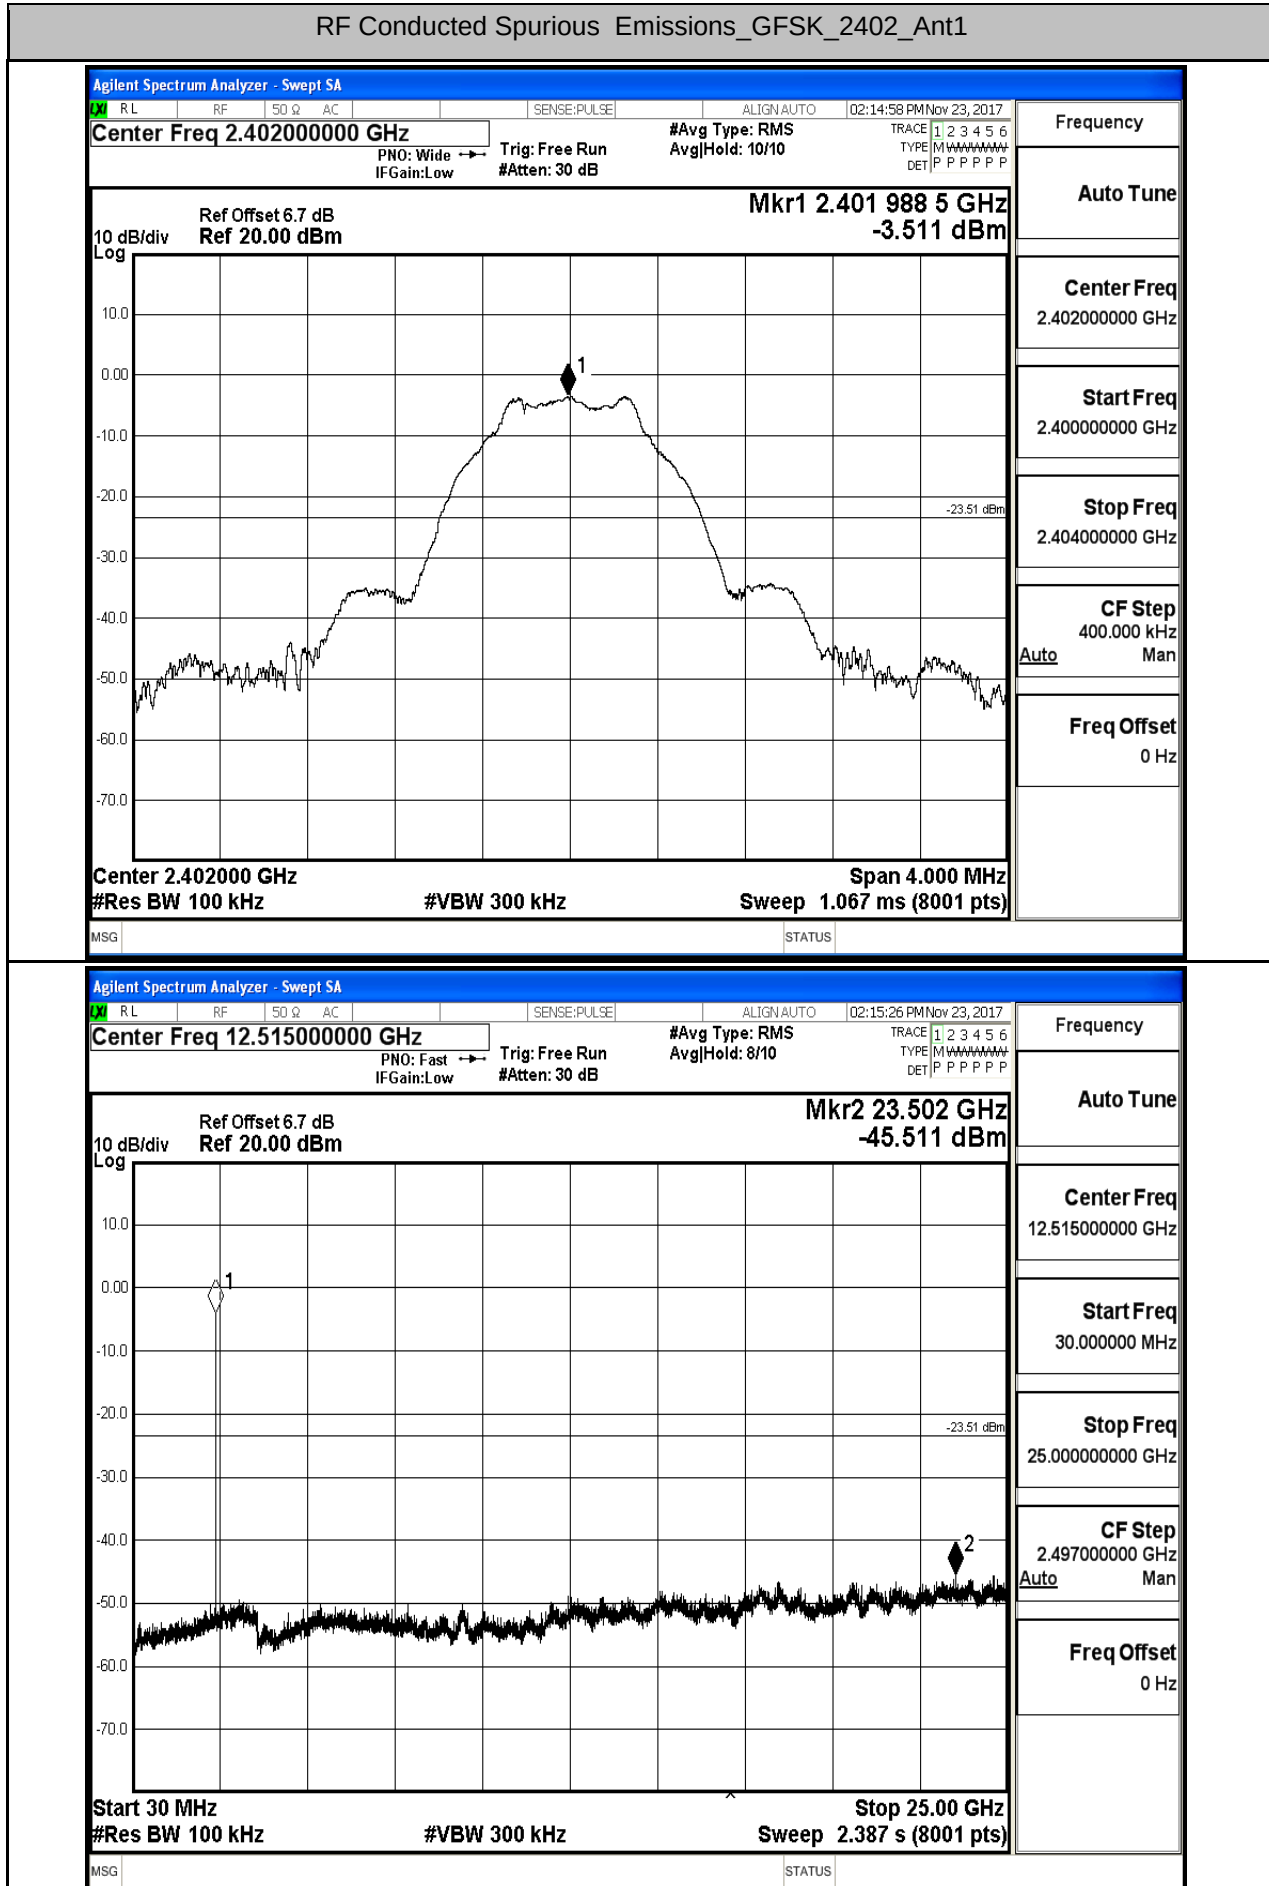

RF Conducted Spurious Emissions_GFSK_2440_Ant1

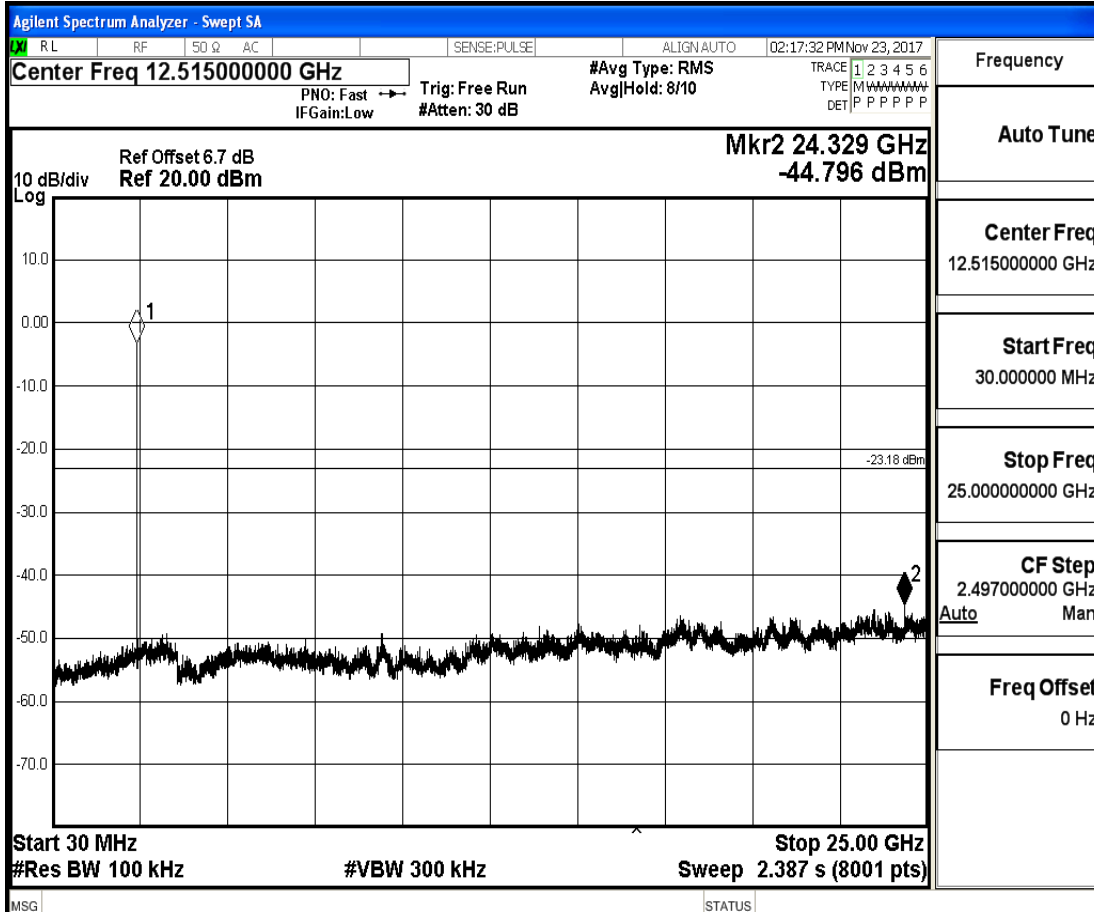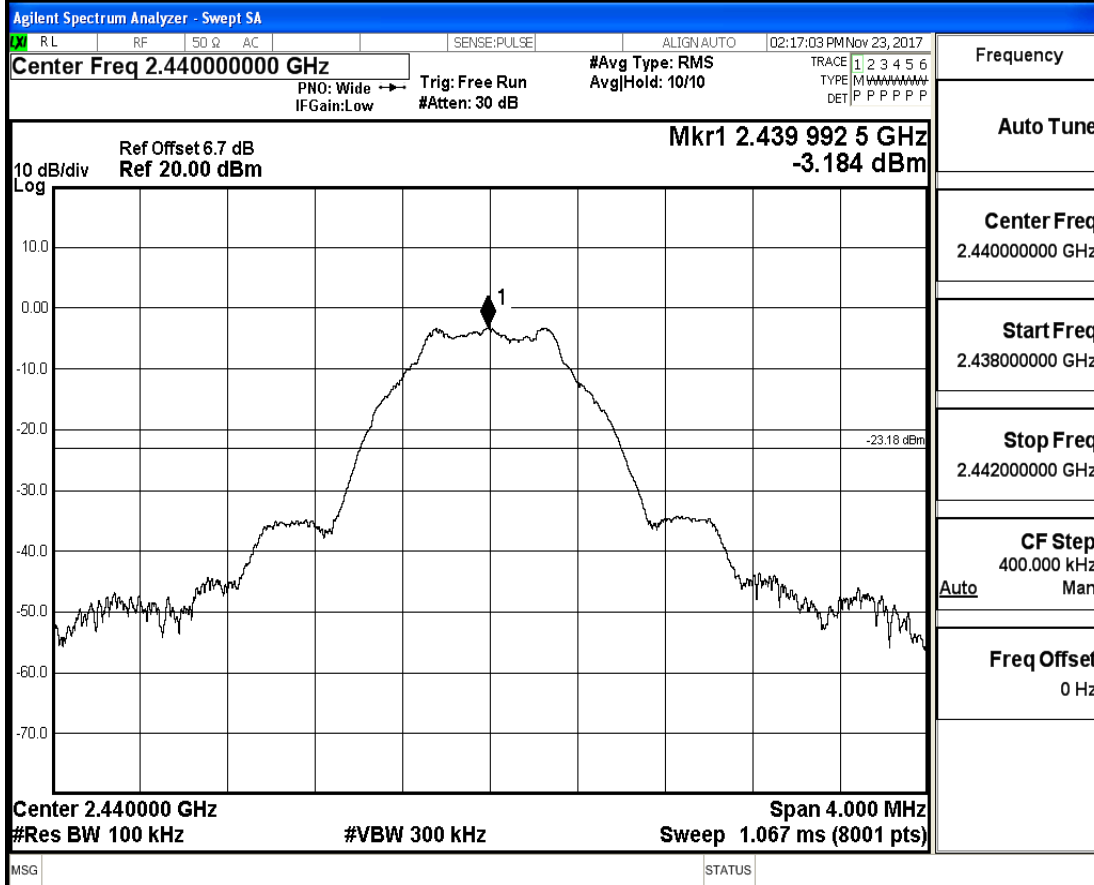


RF Conducted Spurious Emissions_GFSK_2480_Ant1

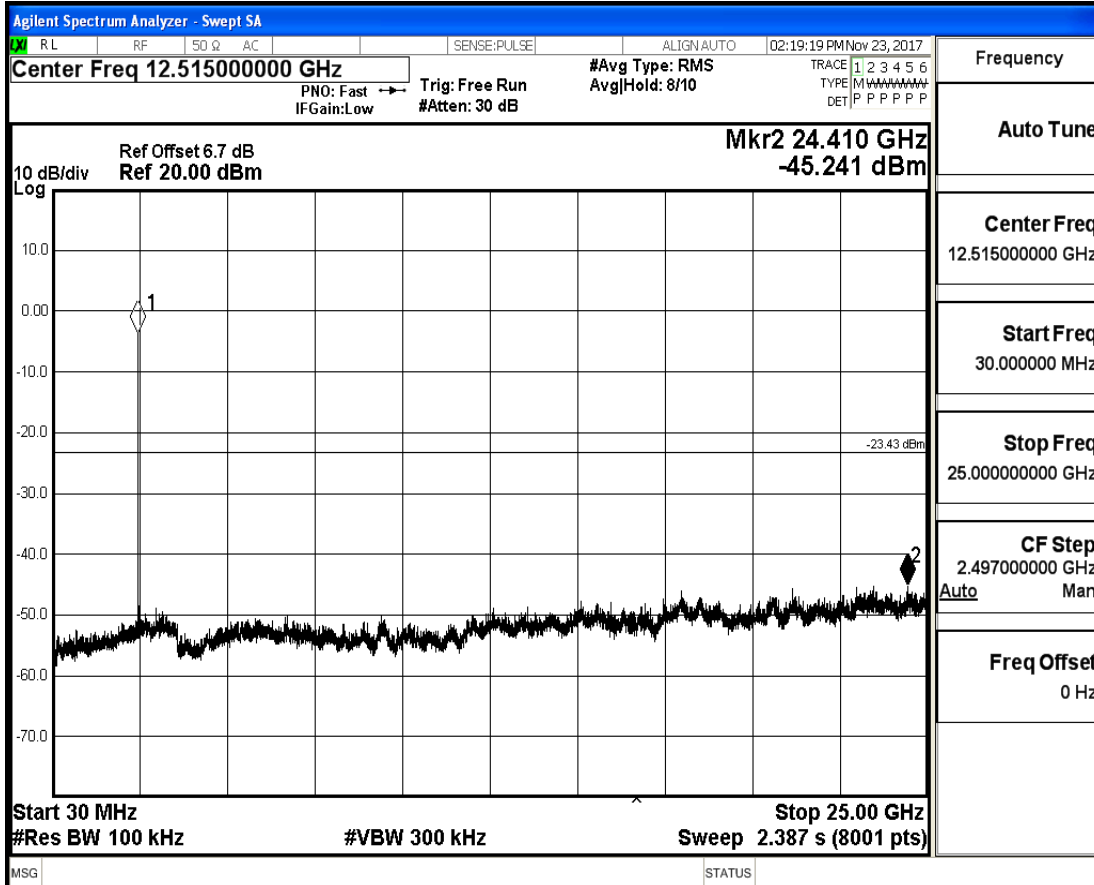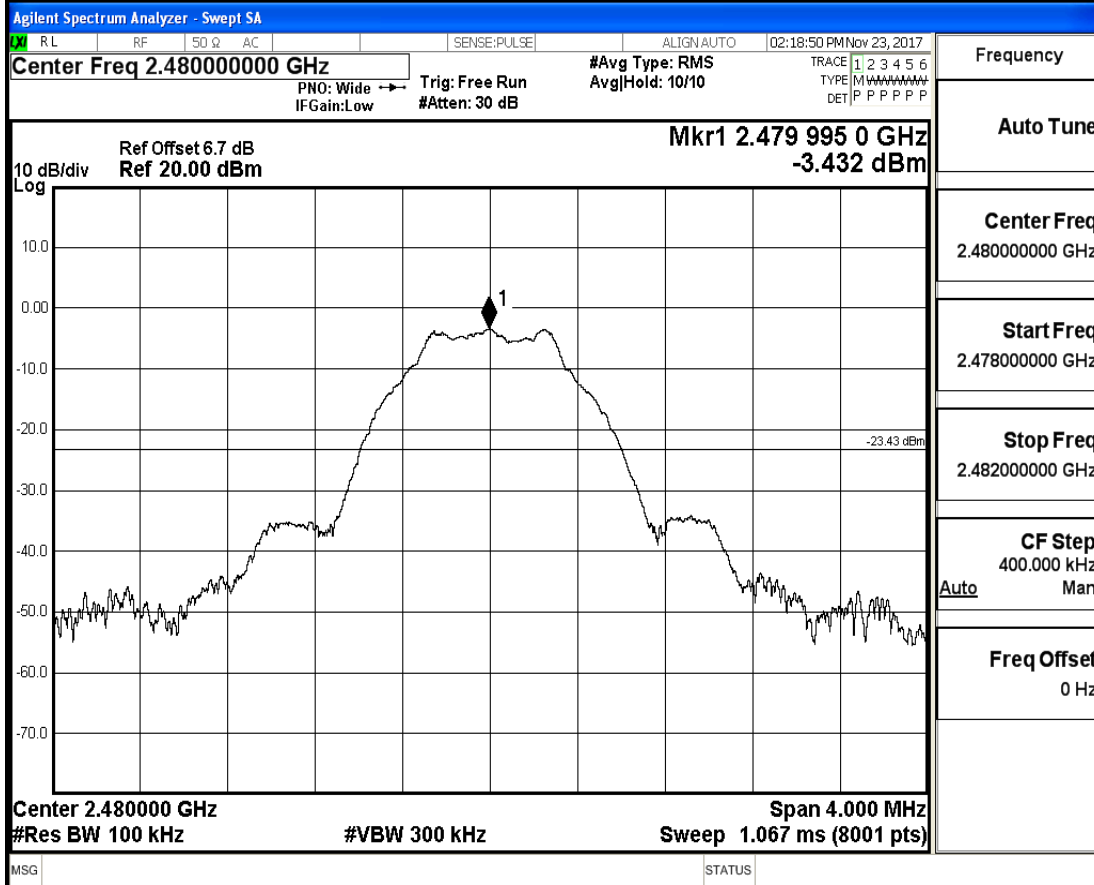


7.Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
GFSK	2402	Ant1	2310.0	-45.40	0	0	49.86	PEAK	74	PASS
GFSK	2402	Ant1	2310.0	-55.43	0	0	39.83	AV	54	PASS
GFSK	2402	Ant1	2390.0	-44.62	0	0	50.64	PEAK	74	PASS
GFSK	2402	Ant1	2390.0	-55.18	0	0	40.08	AV	54	PASS
GFSK	2480	Ant1	2483.5	-36.90	0	0	58.35	PEAK	74	PASS
GFSK	2480	Ant1	2483.5	-54.91	0	0	40.35	AV	54	PASS
GFSK	2480	Ant1	2500.0	-44.75	0	0	50.51	PEAK	74	PASS
GFSK	2480	Ant1	2500.0	-54.81	0	0	40.45	AV	54	PASS


Restrict-band band-edge measurements_GFSK_2402_Ant1_PEAK

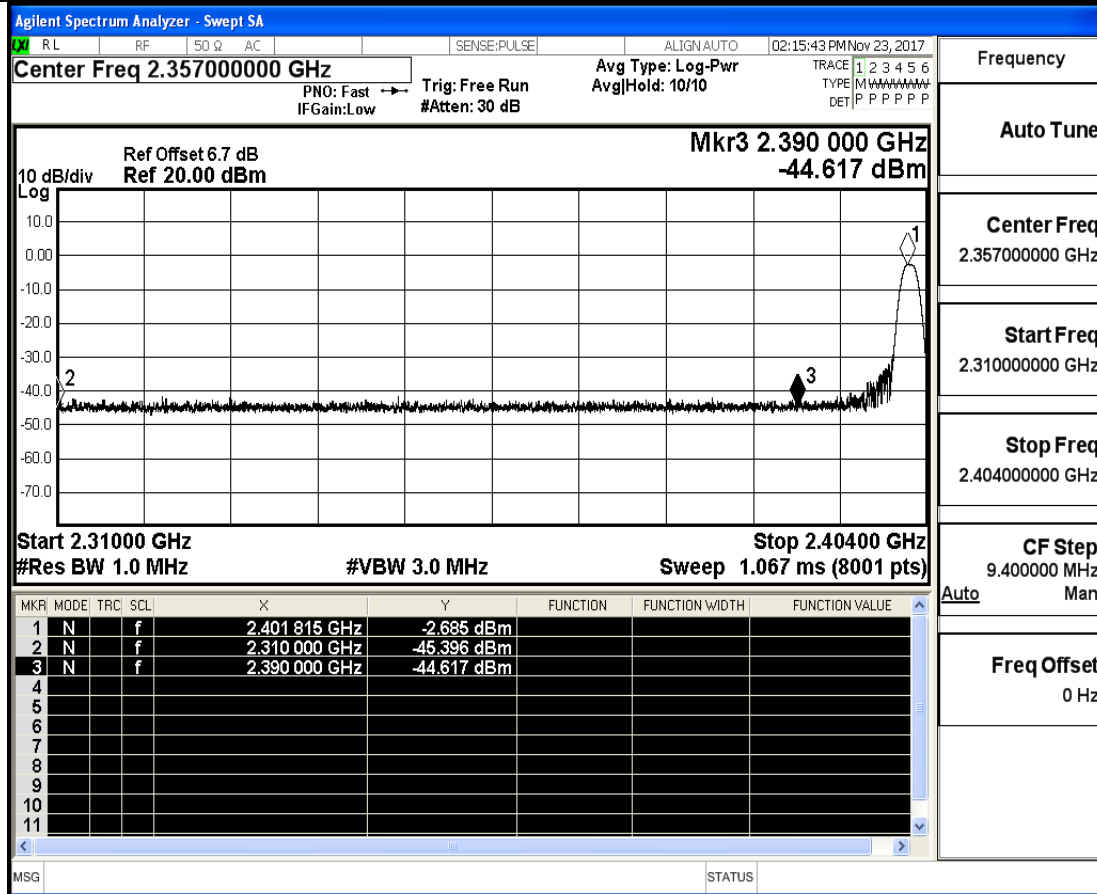


Restrict-band band-edge measurements_GFSK_2402_Ant1_AV

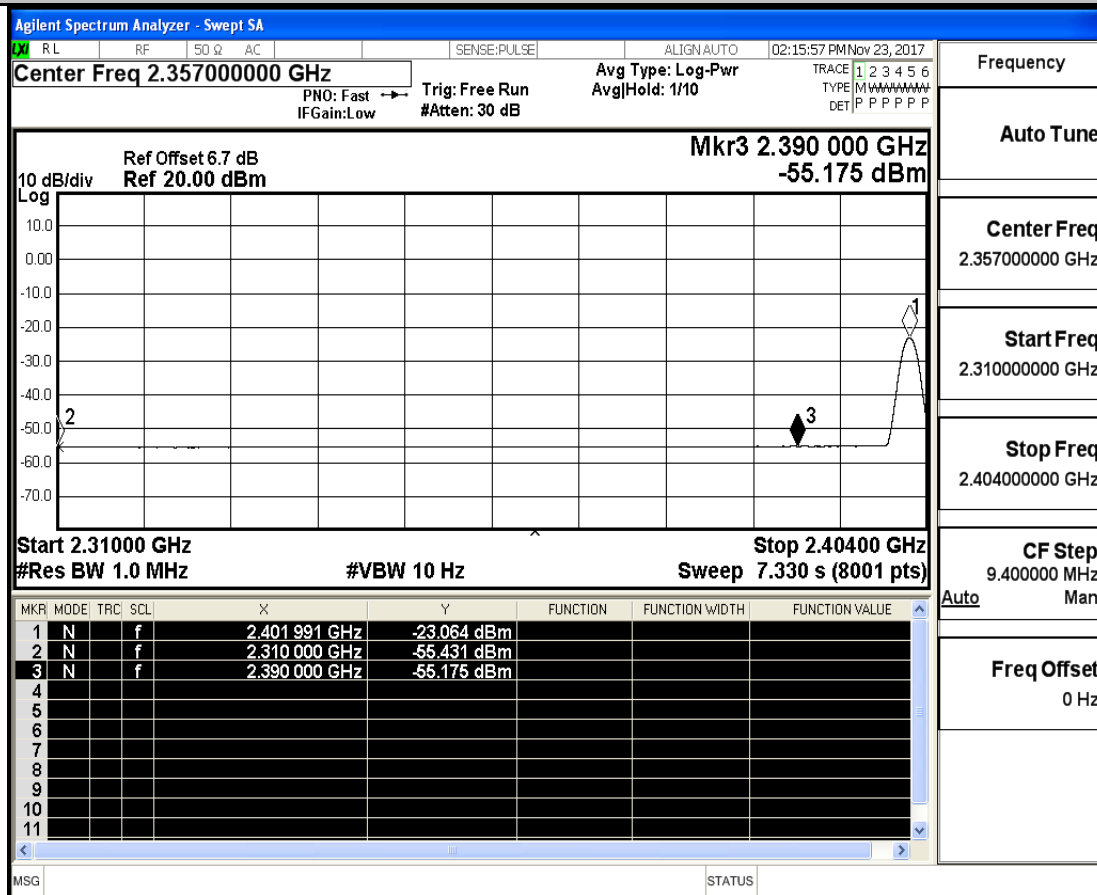

Restrict-band band-edge measurements_GFSK_2480_Ant1_PEAK

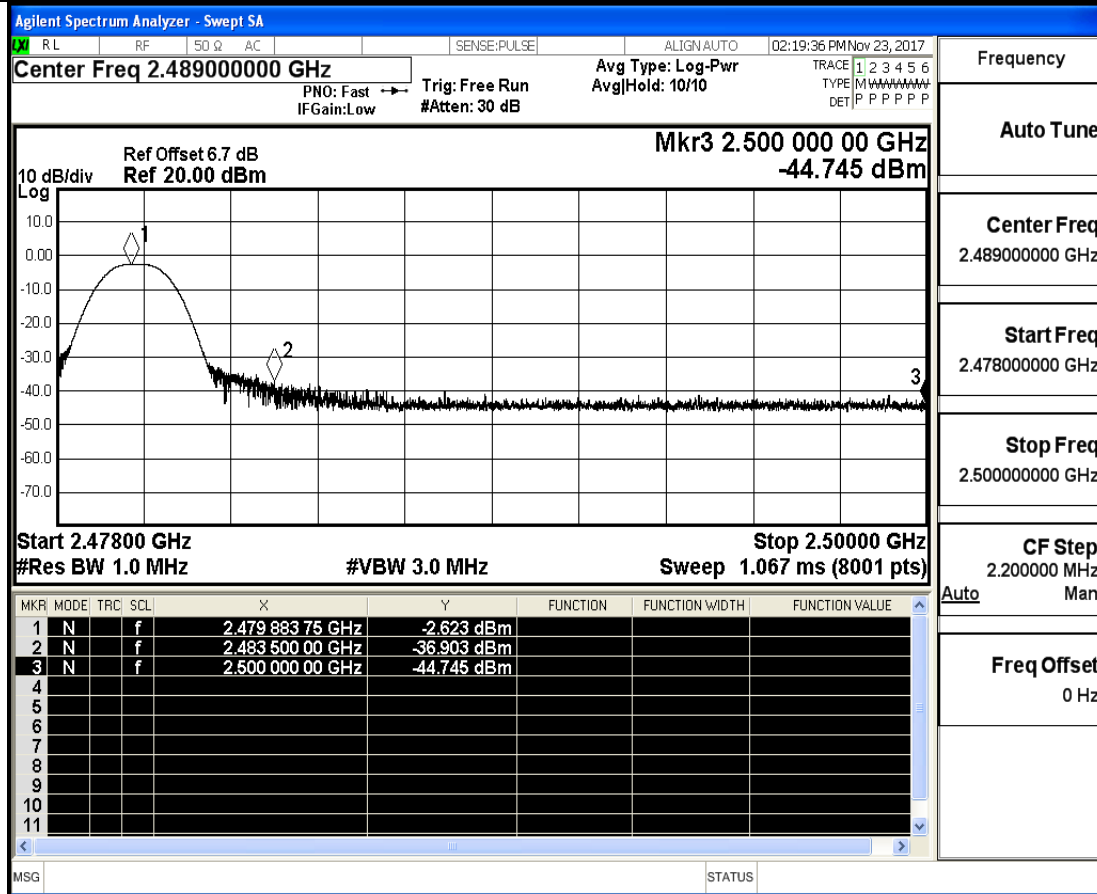

Restrict-band band-edge measurements_GFSK_2480_Ant1_AV

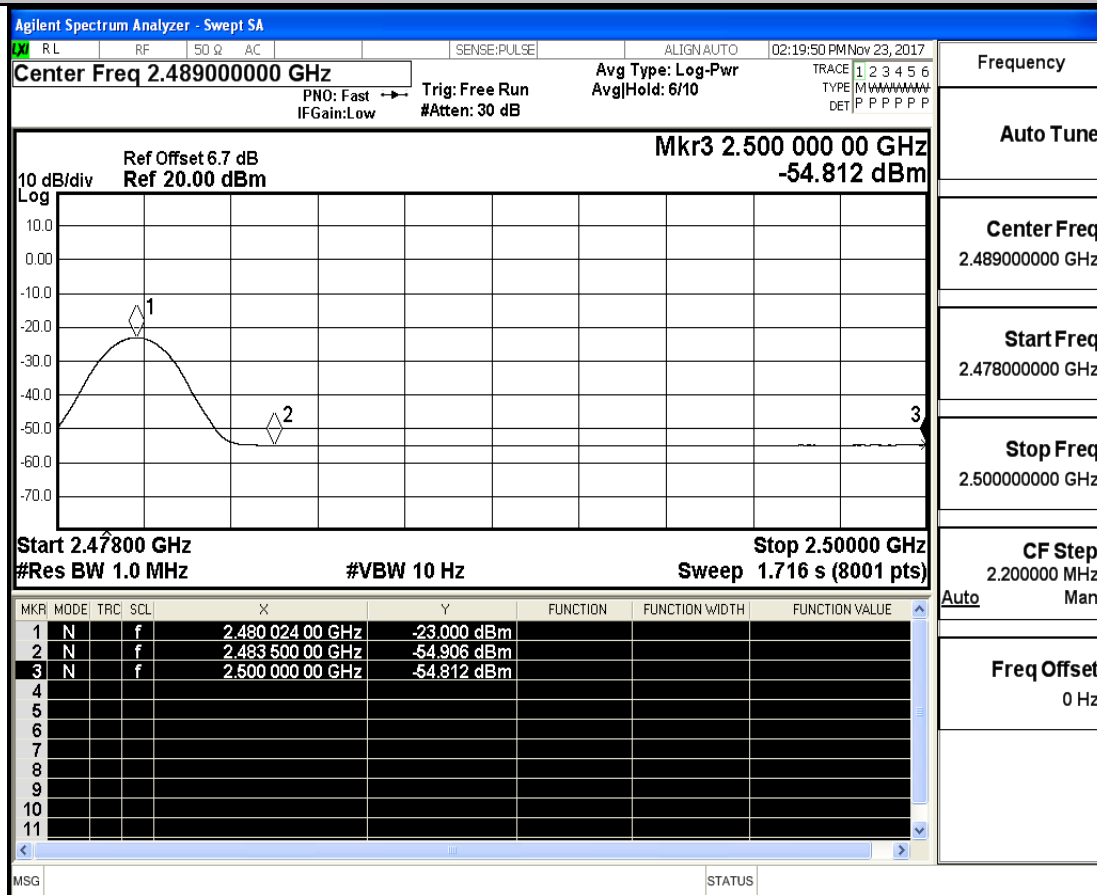

8.Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
GFSK	2440	Ant1	60.9	PASS

