

STS

LAB



## RADIO TEST REPORT

Report No.: STS2106306W01

Issued for


SOURCENEXT CORPORATION

Shiodome City Center 33F, 1-5-2 Higashi Shinbashi  
Minato-ku, Tokyo 105-7133, Japan

<b>Product Name:</b>	POCKETALK W
<b>Brand Name:</b>	POCKETALK
<b>Model Name:</b>	W1PGK
<b>Series Model:</b>	W1PGG,W1PGW,W1PWG,W1PWK, W1PWW,W1PGR,W1PGP
<b>FCC ID:</b>	2AOJA-W1P
<b>Test Standard:</b>	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.  
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,  
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





## TEST RESULT CERTIFICATION

Applicant's Name .....: SOURCENEXT CORPORATION  
Address .....: Shiodome City Center 33F, 1-5-2 Higashi Shinbashi Minato-ku, Tokyo 105-7133, Japan  
Manufacturer's Name .....: JENESIS(SHENZHEN)CO.,LTD  
Address .....: No.401-1, Building2, Runheng High-Tech Industrial Park, Liuxian 3rd Road No.1, XingDong, Xinan Avenue, Bao'an District, Shenzhen, China

### Product Description

Product Name .....: POCKETALK W  
Brand Name .....: POCKETALK  
Model Name .....: W1PGK  
Series Model .....: W1PGG,W1PGW,W1PWG,W1PWK,W1PWW,W1PGR,W1PGP  
Test Standards .....: FCC Part 22H and 24E  
Test Procedure .....: KDB 971168 D01 v03r01, ANSI C63.26 (2015)

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

### Date of Test.....:

Date of receipt of test item.....: 02 June 2021  
Date (s) of performance of tests.: 02 June 2021 ~ 06 Aug. 2021  
Date of Issue .....: 06 Aug. 2021  
Test Result .....: Pass

Testing Engineer : 

(Chris Chen)

Technical Manager : 

(Sean she)

Authorized Signatory : 

(Vita Li)





Table of Contents	Page
<b>1 INTRODUCTION</b>	<b>5</b>
1.1 SUMMARY OF TEST RESULTS	5
1.2 TEST FACTORY	6
1.3 MEASUREMENT UNCERTAINTY	6
<b>2 PRODUCT INFORMATION</b>	<b>7</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>8</b>
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>9</b>
<b>5 TEST ITEMS</b>	<b>10</b>
5.1 CONDUCTED OUTPUT POWER	10
5.2 PEAK TO AVERAGE RATIO	11
5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)	12
5.4 OCCUPIED BANDWIDTH	13
5.5 FREQUENCY STABILITY	14
5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	15
5.7 BAND EDGE	16
5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	17
<b>APPENDIX A. TESTRESULT</b>	<b>19</b>
A1. CONDUCTED OUTPUT POWER	19
A2. PEAK-TO-AVERAGE RATIO	21
A3. TRANSMITTER RADIATED POWER (EIRP/ERP)	24
A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)	25
A5. FREQUENCY STABILITY	28
A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	30
A7. BAND EDGE	32
A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	34
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>38</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	06 Aug. 2021	STS2106306W01	ALL	Initial Issue





## 1 INTRODUCTION

### 1.1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26 (2015)

FCC Rules	Test Description	Test Limit	Test Result	Reference
2.1049	Conducted Output Power	Reporting Only	PASS	
2.0146 24.232	Peak-to-Average Ratio	< 13 dB	PASS	
2.1046 22.913 24.232	Effective Radiated Power/Equivalent Isotropic Radiated Power	< 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24)	PASS	
2.1049 22.917 24.238	Occupied Bandwidth	Reporting Only	PASS	
2.1055 22.355 24.235	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)	PASS	
2.1051 22.917 24.238	Spurious Emission at Antenna Terminals	< 43+10log10(P[Watts])	PASS	
2.1053 22.917 24.238	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	
2.1051 22.917 24.238	Band Edge	< 43+10log10(P[Watts])	PASS	



## 1.2 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

## 1.3 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown here in meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$



## 2 PRODUCT INFORMATION

Product Name:	POCKETALK W
Trade Name:	POCKETALK
Model Name:	W1PGK
Series Model:	W1PGG,W1PGW,W1PWG,W1PWK,W1PWW,W1PGR,W1PGP
Model Difference:	The structure of the circuit is the same, only the name of the model is different
Tx Frequency:	GPRS/EDGE: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz
Rx Frequency:	GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz
Max RF Output Power:	GPRS850(1-Slot):22.42dBm, GPRS1900(1-Slot):19.74dBm GPRS850(2-Slot):22.00dBm, GPRS1900(2-Slot):19.33dBm GPRS850(3-Slot):21.50dBm, GPRS1900(3-Slot):18.92dBm GPRS850(4-Slot):21.04dBm, GPRS1900(4-Slot):18.51dBm EDGE 850(1-Slot):22.02dBm, EDGE 1900(1-Slot):19.89dBm EDGE 850(2-Slot):21.26dBm, EDGE 1900(2-Slot):19.19dBm EDGE 850(3-Slot):20.53dBm, EDGE 1900(3-Slot):18.45dBm EDGE 850(4-Slot):19.82dBm, EDGE 1900(4-Slot):17.75dBm
Type of Emission:	GPRS(850): 250KGXW; GPRS(1900): 250KGXW EDGE(850): 242KG7W; EDGE(1900): 244KG7W
SIM Card:	Only support single SIM Card.
Antenna:	PIFA
Antenna gain:	GSM 850: 0dBi ,PCS 1900: 0dBi
Battery parameter:	Rated Voltage: 3.7V Charge Limit: 4.2V Capacity :2200mAh
GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC 3.33 V to 4.07 V (Nominal DC3.7V )
Extreme Temp. Tolerance:	-30°C to +50°C
Hardware version number:	PT2_MB_V1.0
Software version number:	3.1.2

\*\* Note: The High Voltage 4.07V and Low Voltage 3.33V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.



### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850.
2. 30 MHz to 10th harmonic for GSM1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

<b>TEST MODES</b>		
BAND	RADIATED TCS	CONDUCTED TCS
GSM 850	GPRS/EDGE CLASS 12 LINK	GPRS/EDGE CLASS 12 LINK
GSM 1900	GPRS/EDGE CLASS 12 LINK	GPRS/EDGE CLASS 12 LINK



## 4 MEASUREMENT INSTRUMENTS

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
Signal Analyzer	R&S	FSV 40-N	101823	2020.10.10	2021.10.09
Signal Generator	Agilent	83752A	3610A02740	2020.10.10	2021.10.09
Wireless Communications Test Set	R&S	CMW 500	133884	2021.03.04	2022.03.03
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2019.10.15	2021.10.14
Bilog Antenna	TESEQ	CBL6111D	45873	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1343	2020.10.12	2022.10.11
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2020.10.12	2021.10.11
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2020.10.12	2021.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2020.10.10	2021.10.09
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	BALUN		BL410-E/18.905		

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Universal Radio communication tester	R&S	CMU200	119907	2020.10.12	2021.10.11
Wireless Communications Test Set	R&S	CMW 500	133884	2021.03.04	2022.03.03
Signal Analyzer	Agilent	N9020A	MY52440124	2021.03.04	2022.03.03
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2021.03.04	2022.03.03
Programmable power supply	Agilent	E3642A	MY40002025	2020.10.12	2021.10.11
Temperature & Humidity	SW-108	SuWei	N/A	2021.03.04	2022.03.03
Universal Radio communication tester	R&S	CMU200	119907	2020.10.12	2021.10.11
Test SW	FARAD		LZ-RF /LzRf-3A3		

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.

## 5 TEST ITEMS

### 5.1 CONDUCTED OUTPUT POWER


#### TEST OVERVIEW

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### TEST PROCEDURES

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### TEST SETUP

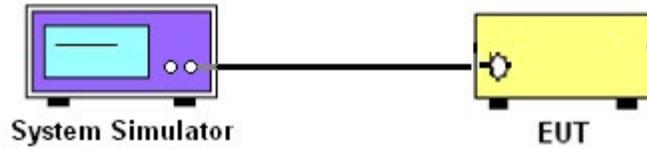

#### TEST RESULT

Note: Test data See Appendix 1.

## 5.2 PEAK TO AVERAGE RATIO


### TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

### TEST PROCEDURES

1. The testing follows FCC KDB 971168 v03r01 section.
2. The eut was connected to the peak and av system simulator& spectrum analyzer.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis

### TEST SETUP

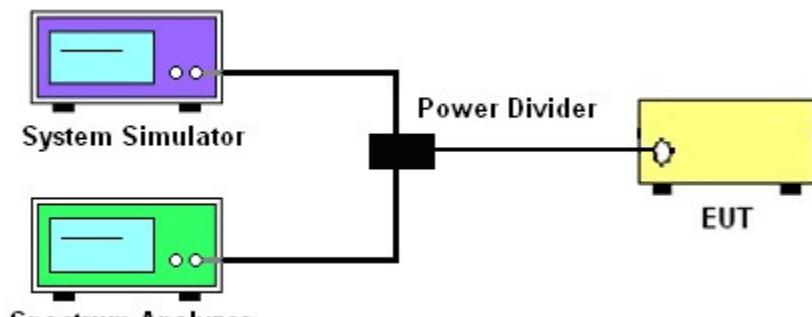

### TEST RESULT

Note: Test data See Appendix 2.



### 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

#### TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26 2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

#### TEST PROCEDURE

1. The testing follows FCC KDB 971168 D01 Section 5.2.2 (for GSM/GPRS/EDGE) and ANSI C63.26-2015 Section 5.2.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26-2015. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.  
EIRP=S.G Level+ Gain-Cable loss; ERP=S.G Level+ Gain-Cable loss-2.15.

#### TEST RESULT

Note: Test data See Appendix 3.

## 5.4 OCCUPIED BANDWIDTH

### TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

### TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### TEST SETUP

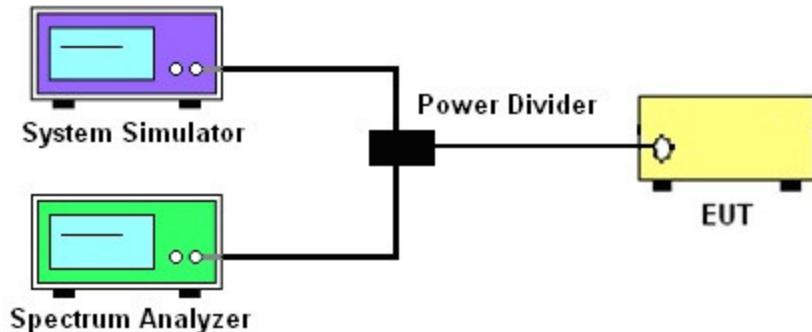

### TEST RESULT

Note: Test data See Appendix 4.

## 5.5 FREQUENCY STABILITY

### TEST OVERVIEW

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015.

The frequency stability of the transmitter is measured by:

a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal, value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### TEST PROCEDURE


#### Temperature Variation

1. The testing follows FCC KDB 971168 D01 section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^\circ\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### TEST SETUP

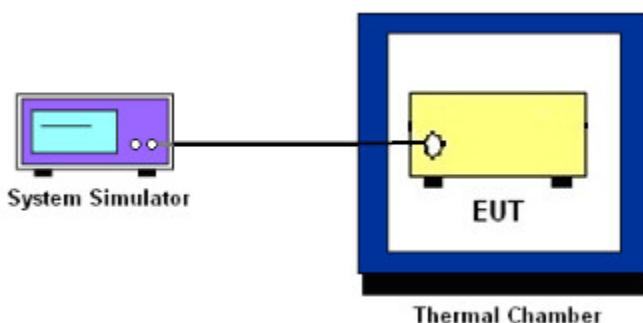

### TEST RESULT

Note: Test data See Appendix 5.

## 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### TEST OVERVIEW


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26-2015-Section 5.5.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.

### TEST SETUP

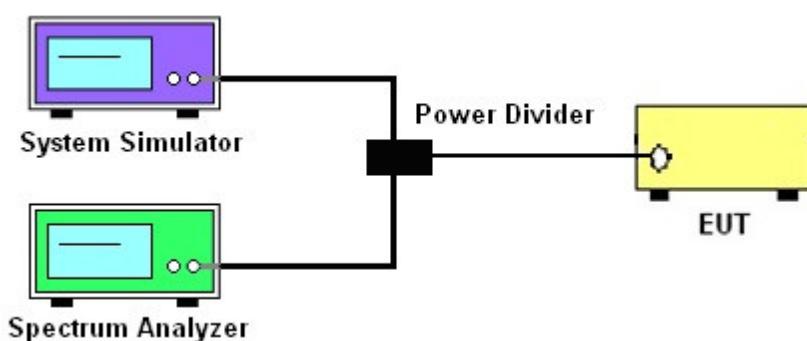

### TEST RESULT

Note: Test data See Appendix 6.

## 5.7 BAND EDGE

### TEST OVERVIEW


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(\text{W}) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}$ .

### TEST SETUP

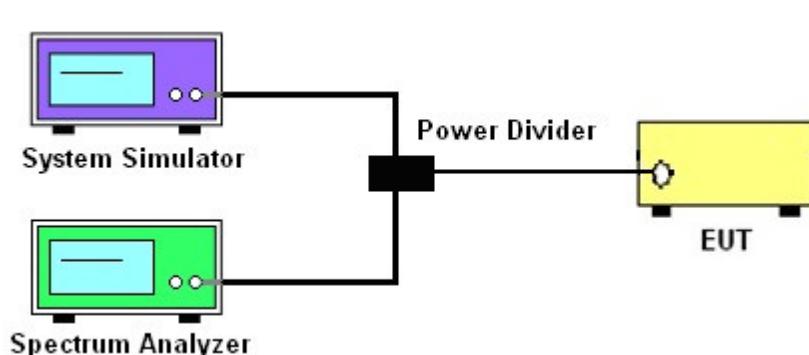

### TEST RESULT

Note: Test data See Appendix 7.



## 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### TEST OVERVIEW

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### TEST PROCEDURE


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-E. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.  
The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  $ERP/EIRP = P.SG + GT - LC$   
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);  
P.SG = measured transmitter output power or PSD, in dBm or dBW;  
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

## TEST SETUP

For radiated test from 30MHz to 1GHz

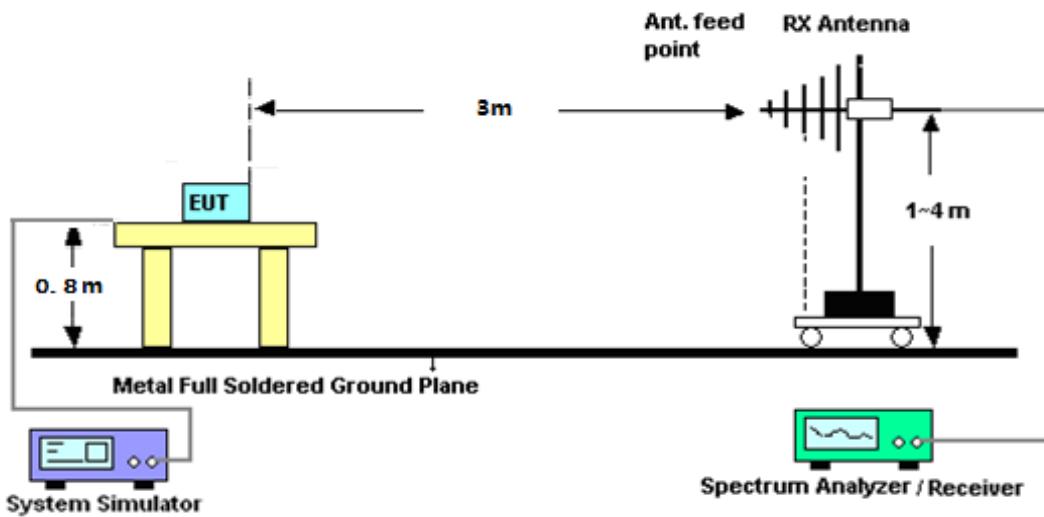

For radiated test from above 1GHz

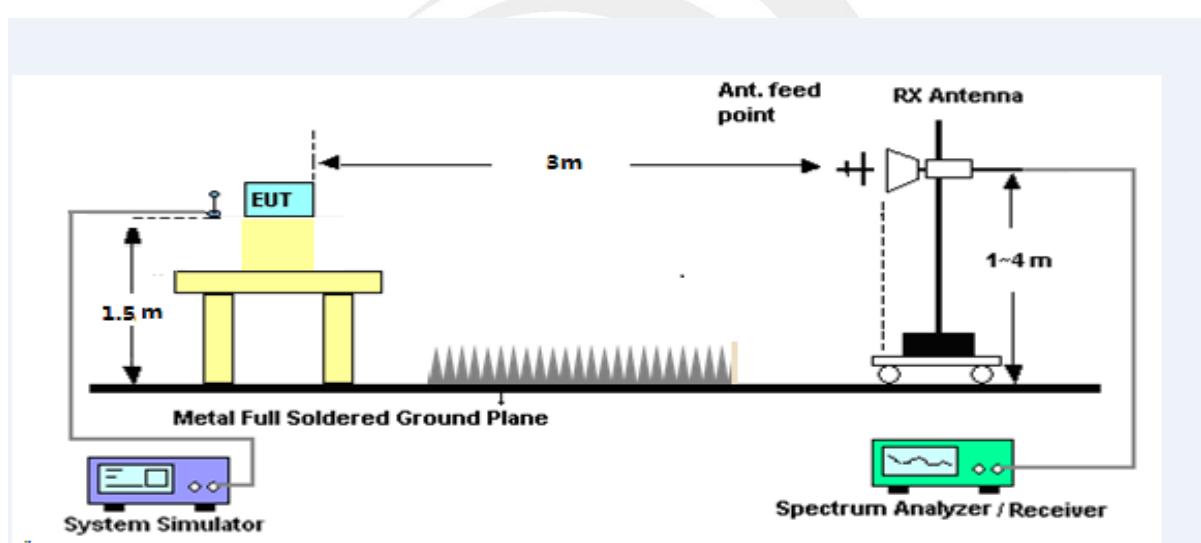

## TEST RESULT

Note: Test data See Appendix 8.



## APPENDIX A.TESTRESULT

## A1. CONDUCTED OUTPUT POWER

GSM 850:

GSM 850		
Mode	Frequency (MHz)	AVG Power(dBm)
GPRS (GMSK,1-Slot)	824.2	22.42
	836.6	22.14
	848.8	21.94
GPRS (GMSK,2-Slot)	824.2	22.00
	836.6	21.73
	848.8	21.49
GPRS (GMSK,3-Slot)	824.2	21.50
	836.6	21.23
	848.8	21.05
GPRS (GMSK,4-Slot)	824.2	21.04
	836.6	20.81
	848.8	20.57
EGPRS (8PSK,1-Slot)	824.2	20.63
	836.6	22.02
	848.8	20.94
EGPRS (8PSK,2-Slot)	824.2	19.91
	836.6	21.26
	848.8	20.22
EGPRS (8PSK,3-Slot)	824.2	19.15
	836.6	20.53
	848.8	19.52
EGPRS (8PSK,4-Slot)	824.2	18.36
	836.6	19.82
	848.8	18.81





PCS 1900:

PCS 1900		
Mode	Frequency (MHz)	AVG Power(dBm)
GPRS (GMSK,1-Slot)	1850.2	19.74
	1880.0	19.45
	1909.8	19.09
GPRS (GMSK,2-Slot)	1850.2	19.33
	1880.0	18.97
	1909.8	18.62
GPRS (GMSK,3-Slot)	1850.2	18.92
	1880.0	18.52
	1909.8	18.14
GPRS (GMSK,4-Slot)	1850.2	18.51
	1880.0	18.06
	1909.8	17.65
EGPRS (8PSK,1-Slot)	1850.2	19.11
	1880.0	19.89
	1909.8	19.60
EGPRS (8PSK,2-Slot)	1850.2	18.41
	1880.0	19.19
	1909.8	18.89
EGPRS (8PSK,3-Slot)	1850.2	17.61
	1880.0	18.45
	1909.8	18.12
EGPRS (8PSK,4-Slot)	1850.2	16.83
	1880.0	17.75
	1909.8	17.34





## A2. PEAK-TO-AVERAGE RADIO



GSM 850		
Mode	Frequency (MHz)	PAR
GPRS 850	824.2	4.28
	836.6	4.74
	848.8	4.29
EGPRS 850	824.2	3.29
	836.6	6.72
	848.8	2.86
PCS 1900		
Mode	Frequency (MHz)	PAR
GPRS1900	1850.2	3.52
	1880	4.74
	1909.8	4.73
EGPRS1900	1850.2	5.85
	1880	7.67
	1909.8	7.26

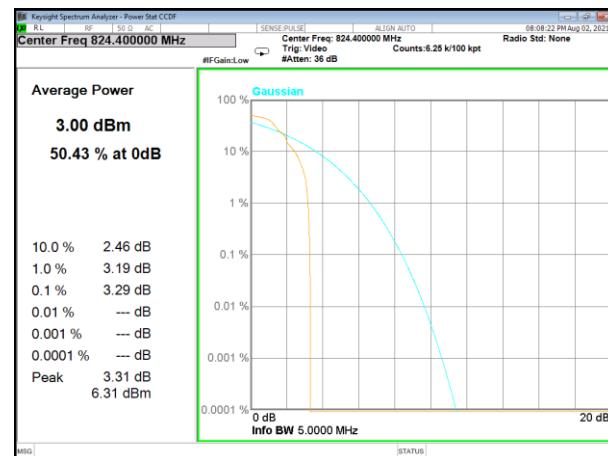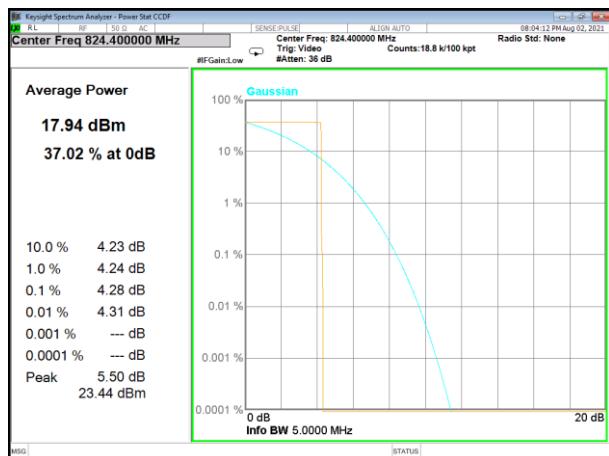

GPRS850\_Lower

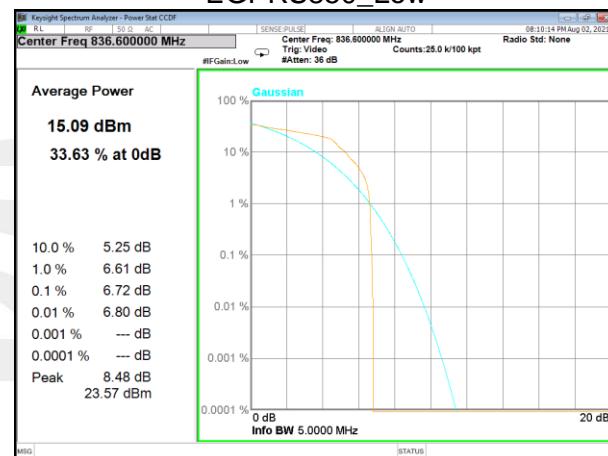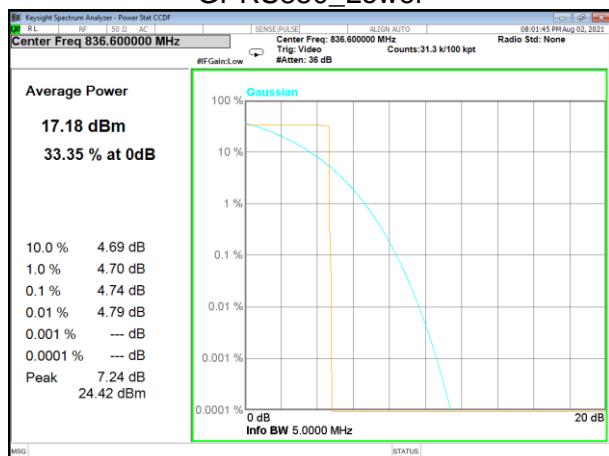


GPRS850\_Middle

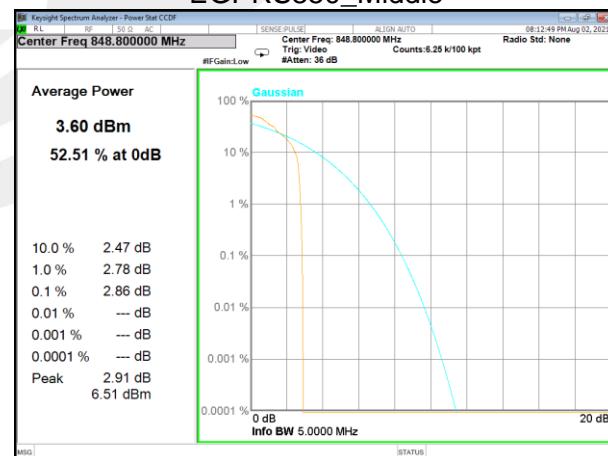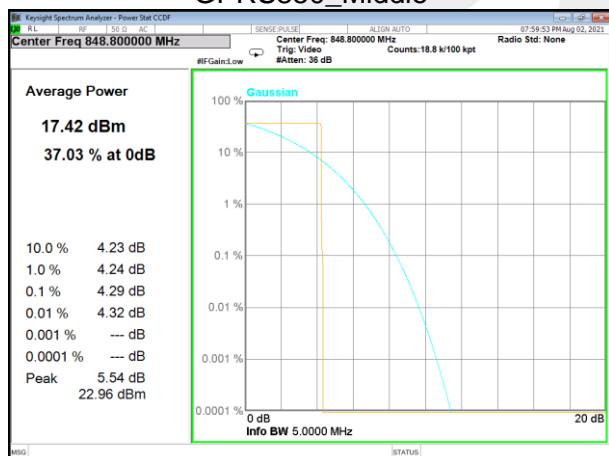


GPRS850\_Higher


EGPRS850\_High

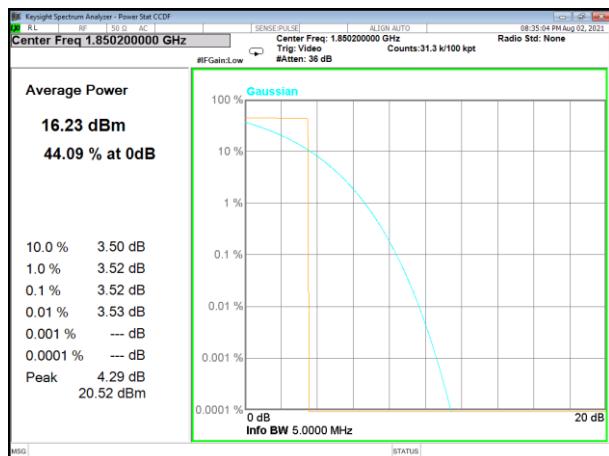


GPRS1900\_Lower

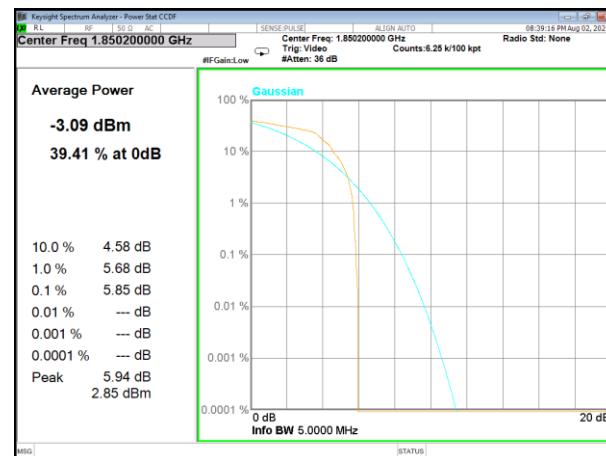


EGPRS1900\_Low

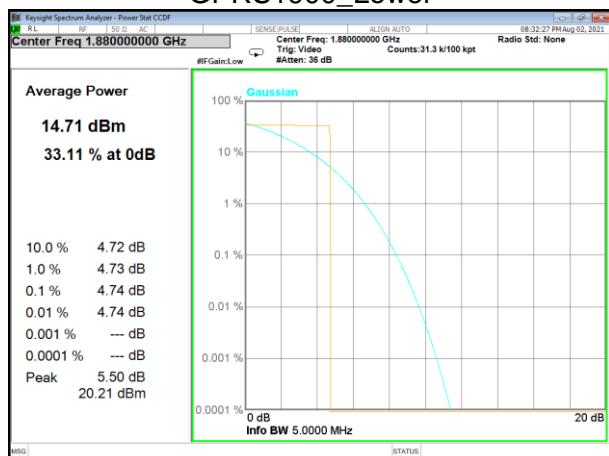


GPRS1900\_Middle

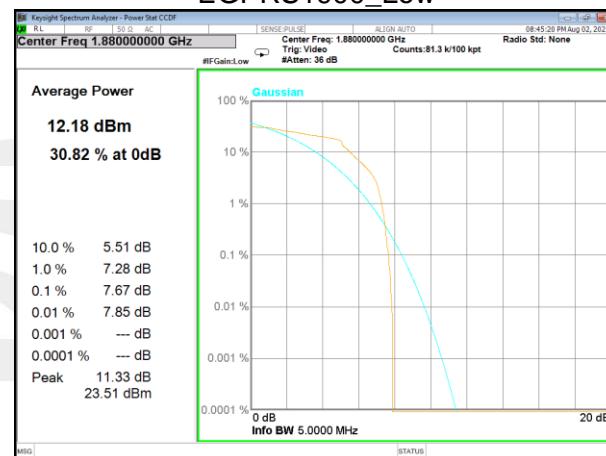

EGPRS1900\_Middle

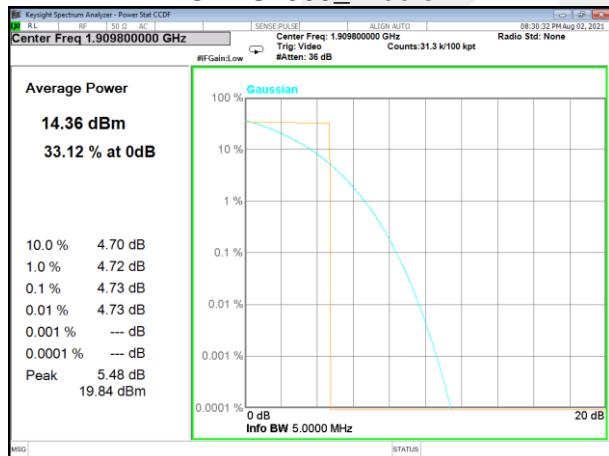

GPRS1900\_Higher

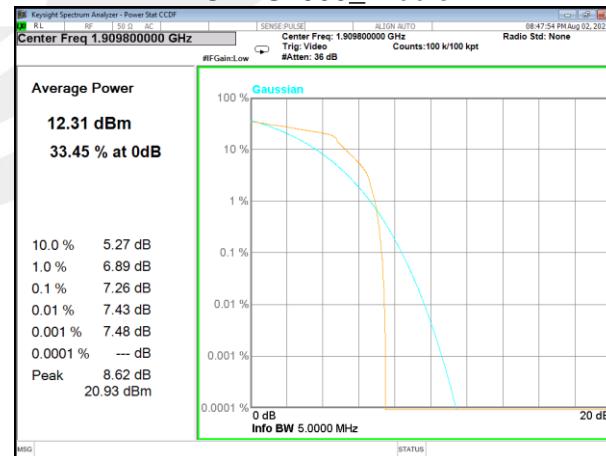

EGPRS1900\_High



## A3. TRANSMITTER RADIATED POWER (EIRP/ERP)

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst.

Radiated Power (ERP) for GSM 850 MHZ								
Mode	Frequency	Result						Conclusion
		S G.Level (dBm)	Cable loss	Gain(dBi)	correction factor(dB)	PMeas E.R.P(dBm)	Polarization	
GPRS850	824.2	15.60	0.44	6.5	2.15	19.51	Horizontal	Pass
	824.2	17.89	0.44	6.5	2.15	21.80	Vertical	Pass
	836.6	15.28	0.45	6.5	2.15	19.18	Horizontal	Pass
	836.6	17.52	0.45	6.5	2.15	21.42	Vertical	Pass
	848.8	15.11	0.46	6.5	2.15	19.00	Horizontal	Pass
	848.8	17.45	0.46	6.5	2.15	21.34	Vertical	Pass
EGPRS850	824.2	13.60	0.44	6.5	2.15	17.51	Horizontal	Pass
	824.2	15.95	0.44	6.5	2.15	19.86	Vertical	Pass
	836.6	15.19	0.45	6.5	2.15	19.09	Horizontal	Pass
	836.6	17.43	0.45	6.5	2.15	21.33	Vertical	Pass
	848.8	14.26	0.46	6.5	2.15	18.15	Horizontal	Pass
	848.8	16.50	0.46	6.5	2.15	20.39	Vertical	Pass
Limit	ERP<7W=38.45dBm							


Radiated Power (EIRP) for PCS 1900 MHZ							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization	
GPRS1900	1850.2	8.46	2.41	10.35	16.40	Horizontal	Pass
	1850.2	10.69	2.41	10.35	18.63	Vertical	Pass
	1880	8.07	2.42	10.35	16.00	Horizontal	Pass
	1880	10.36	2.42	10.35	18.29	Vertical	Pass
	1909.8	7.81	2.43	10.35	15.73	Horizontal	Pass
	1909.8	10.11	2.43	10.35	18.03	Vertical	Pass
EGPRS1900	1850.2	7.94	2.41	10.35	15.88	Horizontal	Pass
	1850.2	10.44	2.41	10.35	18.38	Vertical	Pass
	1880	8.99	2.42	10.35	16.92	Horizontal	Pass
	1880	11.28	2.42	10.35	19.21	Vertical	Pass
	1909.8	8.61	2.43	10.35	16.53	Horizontal	Pass
	1909.8	10.91	2.43	10.35	18.83	Vertical	Pass
Limit	EIRP<2W=33dBm						




## A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26dB BANDWIDTH)

Mode	GSM Bandwidth [KHz]					
	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
GPRS850	249.5	317.9	245.22	316.1	248.74	317.3
EGPRS850	241.72	307.4	238.26	311.6	241.98	307.5


Mode	GSM Bandwidth [KHz]					
	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
GPRS1900	244.51	319	246.06	316.9	250.25	319.9
EGPRS1900	240.67	304.6	243.56	311.2	241.72	314.3

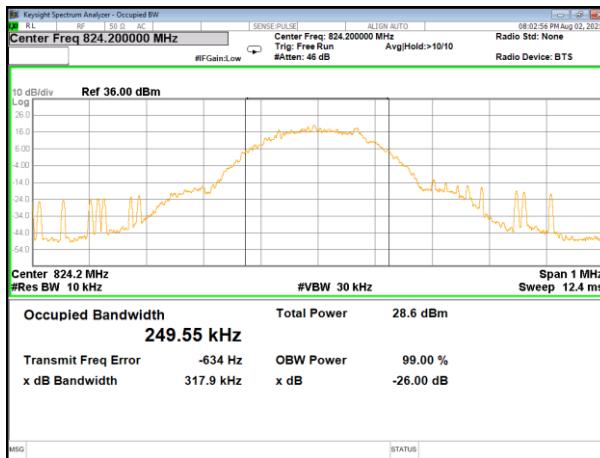


### GPRS850\_Low

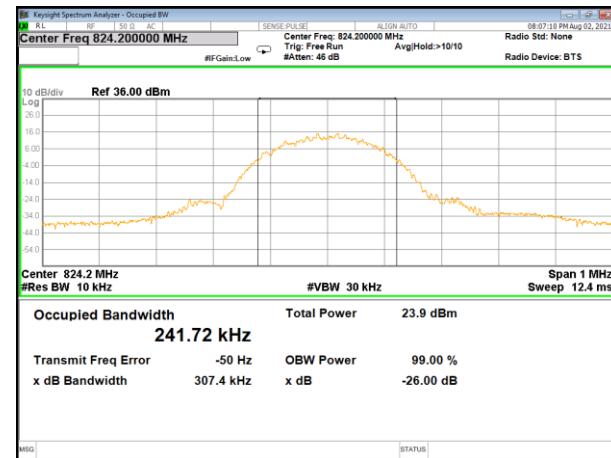


### EGPRS850\_Low

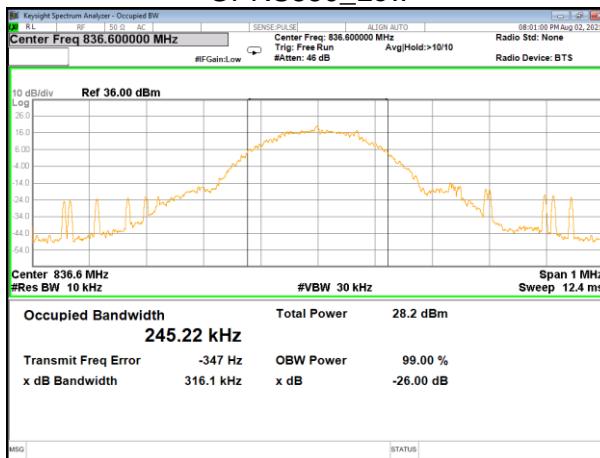


### GPRS850\_Middle

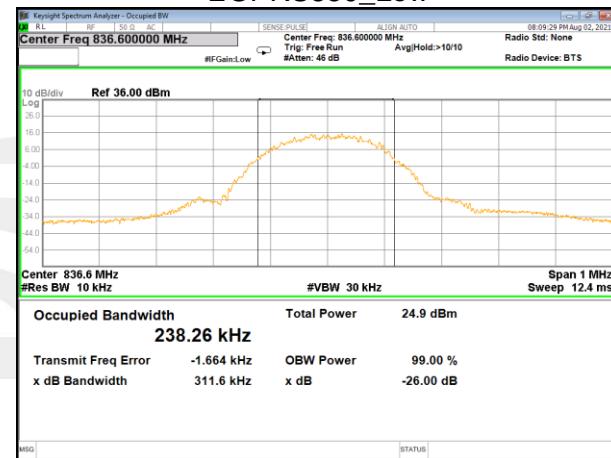


### EGPRS850\_Middle

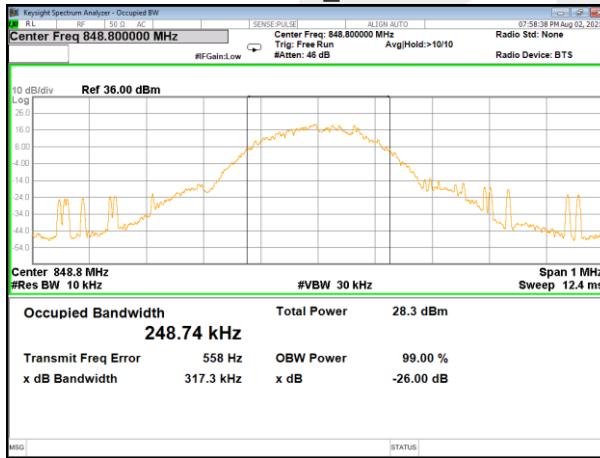


### GPRS850\_High

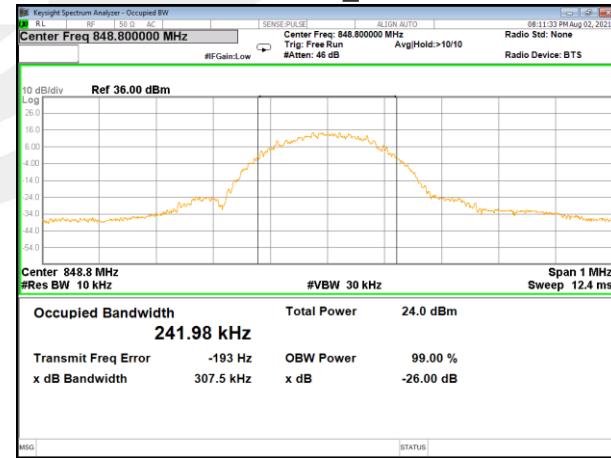


### EGPRS850\_High

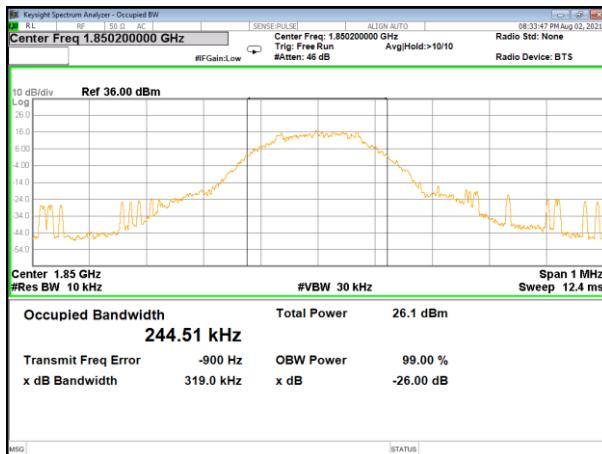


GPRS1900\_Low

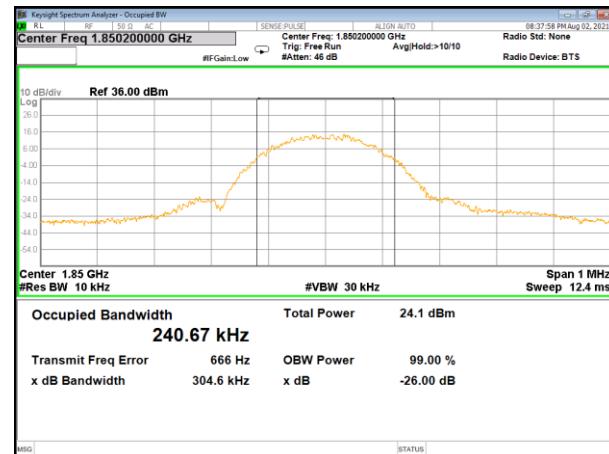


EGPRS1900\_Low

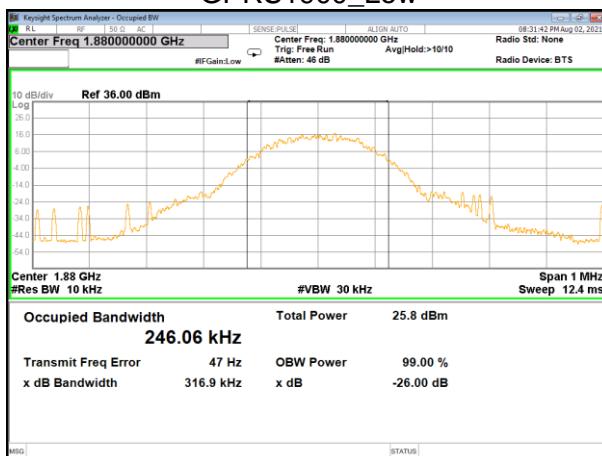


GPRS1900\_Middle

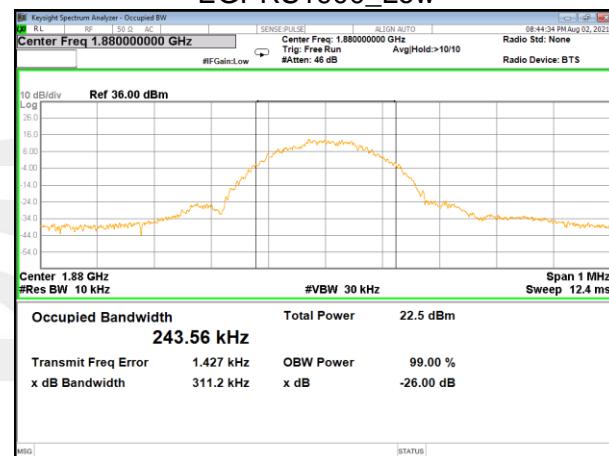

EGPRS1900\_Middle

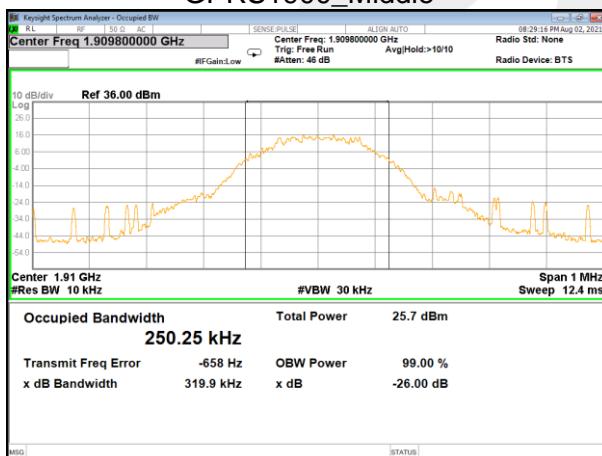

GPRS1900\_High

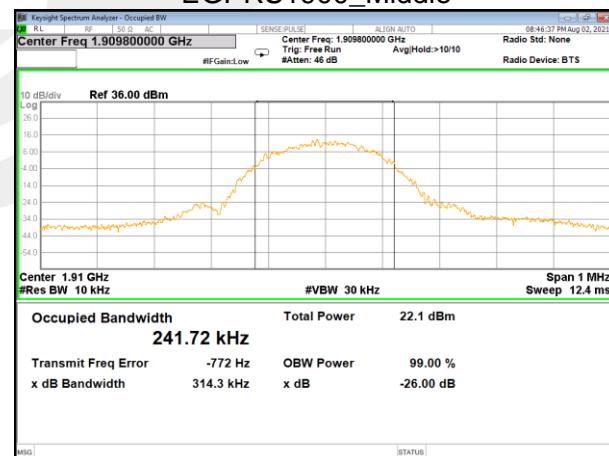

EGPRS1900\_High



## A5. FREQUENCY STABILITY

Normal Voltage =3.7V; Battery End Point (BEP) = 3.33V; Maximum Voltage =4.07V

GPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.01	0.038	2.5ppm	PASS
40		31.27	0.037		
30		12.01	0.014		
20		31.86	0.038		
10		33.59	0.040		
0		20.99	0.025		
-10		25.67	0.031		
-20		20.22	0.024		
-30		25.23	0.030		
20	Maximum Voltage	23.96	0.029		
20	BEP	21.15	0.025		

EGPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	12.66	0.015	2.5ppm	PASS
40		23.37	0.028		
30		14.85	0.018		
20		23.82	0.028		
10		18.21	0.022		
0		14.09	0.017		
-10		30.10	0.036		
-20		23.99	0.029		
-30		31.08	0.037		
20	Maximum Voltage	19.87	0.024		
20	BEP	34.38	0.041		




GPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.45	0.019	Within Authorized Band	PASS
40		30.52	0.016		
30		30.60	0.016		
20		21.49	0.011		
10		27.23	0.014		
0		14.84	0.008		
-10		28.93	0.015		
-20		19.96	0.011		
-30		13.83	0.007		
20	Maximum Voltage	36.48	0.019		
20	BEP	26.82	0.014		

EGPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	28.01	0.015	Within Authorized Band	PASS
40		15.28	0.008		
30		26.60	0.014		
20		31.61	0.017		
10		19.70	0.010		
0		29.74	0.016		
-10		14.26	0.008		
-20		22.11	0.012		
-30		24.71	0.013		
20	Maximum Voltage	11.58	0.006		
20	BEP	23.94	0.013		

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.




## A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

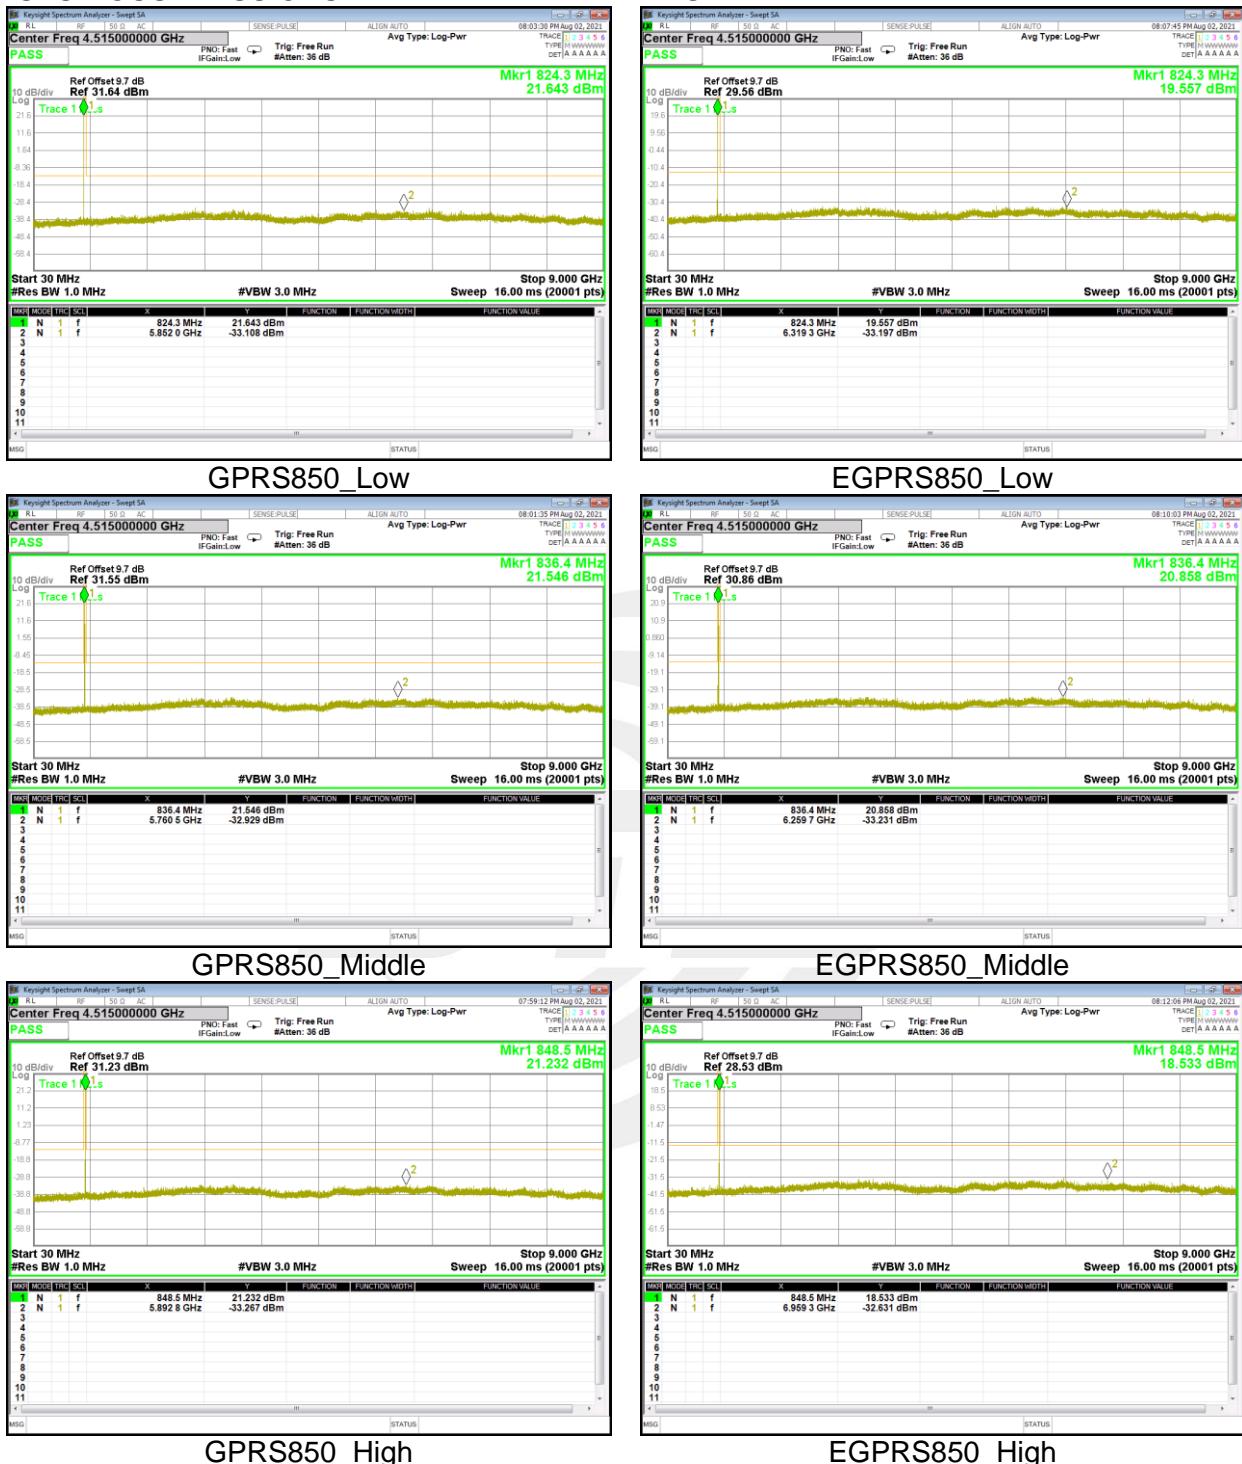




GPRS1900\_Low

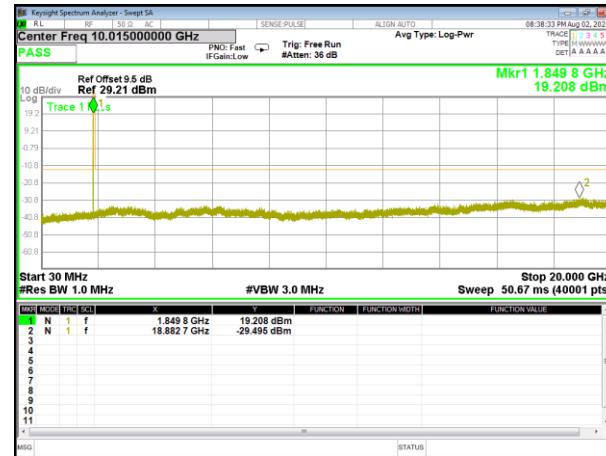

EGPRS1900\_Low




GPRS1900\_Middle

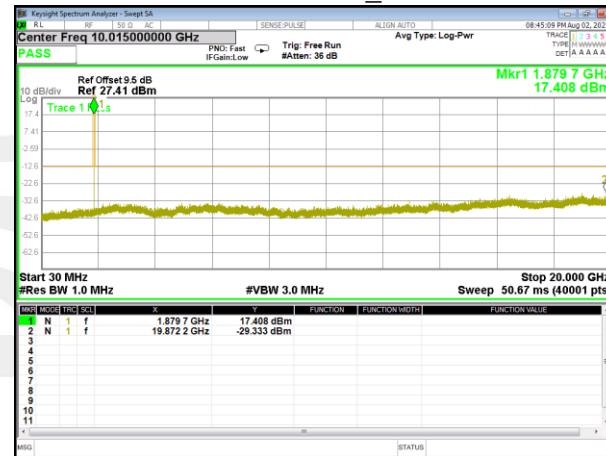

EGPRS1900\_Middle




GPRS1900\_High

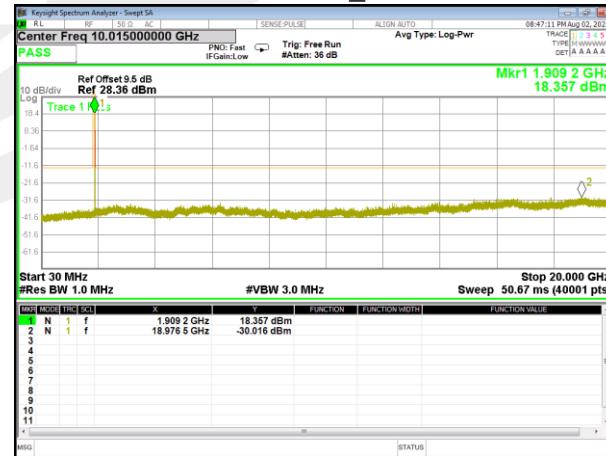

EGPRS1900\_High



## A7. BAND EDGE

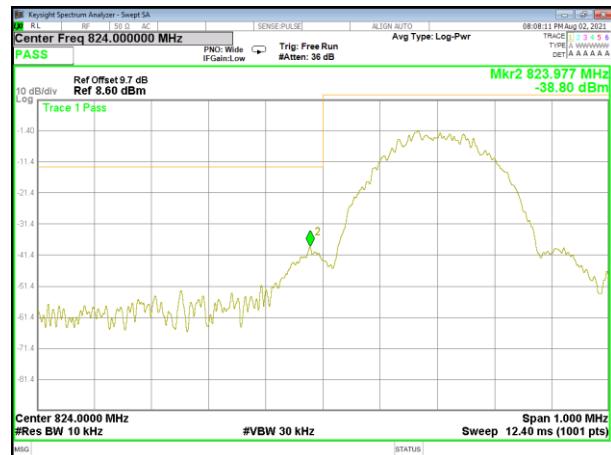


GPRS850\_Low




GPRS850\_High

EGPRS850\_Low

EGPRS850\_High

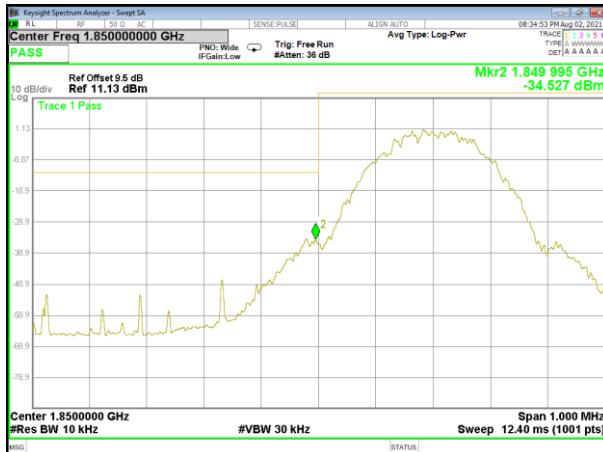

GPRS1900 Low

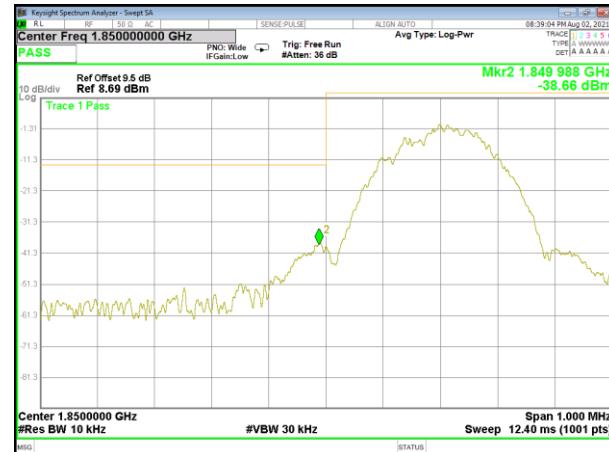

## EGPRS1900 Low



## GPRS1900 High



EGPRS1900 High



## A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

**Note:** (1) Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value.

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.

GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Leve (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.07	-41.37	9.40	4.75	-36.72	-13.00	-23.72	H
2472.56	-39.37	10.60	8.39	-37.16	-13.00	-24.16	H
3296.50	-31.01	12.00	11.79	-30.80	-13.00	-17.80	H
1648.28	-43.90	9.40	4.75	-39.25	-13.00	-26.25	V
2472.26	-44.82	10.60	8.39	-42.61	-13.00	-29.61	V
3296.73	-43.56	12.00	11.79	-43.35	-13.00	-30.35	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Leve (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.79	-41.58	9.50	4.76	-36.84	-13.00	-23.84	H
2509.73	-40.42	10.70	8.40	-38.12	-13.00	-25.12	H
3346.24	-31.57	12.20	11.80	-31.17	-13.00	-18.17	H
1673.10	-43.50	9.40	4.75	-38.85	-13.00	-25.85	V
2509.54	-44.24	10.60	8.39	-42.03	-13.00	-29.03	V
3345.95	-43.13	12.20	11.82	-42.75	-13.00	-29.75	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Leve (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.24	-40.58	9.60	4.77	-35.75	-13.00	-22.75	H
2546.54	-40.53	10.80	8.50	-38.23	-13.00	-25.23	H
3395.23	-31.03	12.50	11.90	-30.43	-13.00	-17.43	H
1697.66	-44.47	9.60	4.77	-39.64	-13.00	-26.64	V
2546.11	-45.10	10.80	8.50	-42.80	-13.00	-29.80	V
3395.16	-43.14	12.50	11.90	-42.54	-13.00	-29.54	V



EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.31	-41.18	9.40	4.75	-36.53	-13.00	-23.53	H
2472.36	-40.64	10.60	8.39	-38.43	-13.00	-25.43	H
3296.43	-31.24	12.00	11.79	-31.03	-13.00	-18.03	H
1648.18	-43.42	9.40	4.75	-38.77	-13.00	-25.77	V
2472.59	-44.32	10.60	8.39	-42.11	-13.00	-29.11	V
3296.49	-43.62	12.00	11.79	-43.41	-13.00	-30.41	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.99	-41.49	9.50	4.76	-36.75	-13.00	-23.75	H
2509.75	-40.20	10.70	8.40	-37.90	-13.00	-24.90	H
3346.02	-31.42	12.20	11.80	-31.02	-13.00	-18.02	H
1672.84	-43.34	9.40	4.75	-38.69	-13.00	-25.69	V
2509.90	-45.16	10.60	8.39	-42.95	-13.00	-29.95	V
3346.19	-43.13	12.20	11.82	-42.75	-13.00	-29.75	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.33	-40.77	9.60	4.77	-35.94	-13.00	-22.94	H
2546.39	-39.67	10.80	8.50	-37.37	-13.00	-24.37	H
3395.09	-32.15	12.50	11.90	-31.55	-13.00	-18.55	H
1697.49	-43.47	9.60	4.77	-38.64	-13.00	-25.64	V
2546.10	-44.44	10.80	8.50	-42.14	-13.00	-29.14	V
3395.30	-42.90	12.50	11.90	-42.30	-13.00	-29.30	V



GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.49	-34.52	12.60	12.93	-34.85	-13.00	-21.85	H
5550.47	-34.87	13.10	17.11	-38.88	-13.00	-25.88	H
7400.51	-32.28	11.50	22.20	-42.98	-13.00	-29.98	H
3700.42	-35.94	12.60	12.93	-36.27	-13.00	-23.27	V
5550.37	-34.89	13.10	17.11	-38.90	-13.00	-25.90	V
7400.63	-32.54	11.50	22.20	-43.24	-13.00	-30.24	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.97	-34.28	12.60	12.93	-34.61	-13.00	-21.61	H
5640.08	-34.55	13.10	17.11	-38.56	-13.00	-25.56	H
7520.09	-33.62	11.50	22.20	-44.32	-13.00	-31.32	H
3759.95	-35.07	12.60	12.93	-35.40	-13.00	-22.40	V
5640.22	-34.88	13.10	17.11	-38.89	-13.00	-25.89	V
7520.28	-32.20	11.50	22.20	-42.90	-13.00	-29.90	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.46	-34.75	12.60	12.93	-35.08	-13.00	-22.08	H
5729.40	-35.23	13.10	17.11	-39.24	-13.00	-26.24	H
7639.17	-32.33	11.50	22.20	-43.03	-13.00	-30.03	H
3819.75	-35.71	12.60	12.93	-36.04	-13.00	-23.04	V
5729.25	-34.20	13.10	17.11	-38.21	-13.00	-25.21	V
7638.91	-31.88	11.50	22.20	-42.58	-13.00	-29.58	V



EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.24	-34.85	12.60	12.93	-35.18	-13.00	-22.18	H
5550.22	-34.30	13.10	17.11	-38.31	-13.00	-25.31	H
7400.92	-33.43	11.50	22.20	-44.13	-13.00	-31.13	H
3700.46	-34.97	12.60	12.93	-35.30	-13.00	-22.30	V
5550.23	-34.35	13.10	17.11	-38.36	-13.00	-25.36	V
7400.67	-32.25	11.50	22.20	-42.95	-13.00	-29.95	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.91	-33.79	12.60	12.93	-34.12	-13.00	-21.12	H
5640.26	-34.23	13.10	17.11	-38.24	-13.00	-25.24	H
7519.90	-32.63	11.50	22.20	-43.33	-13.00	-30.33	H
3760.27	-35.37	12.60	12.93	-35.70	-13.00	-22.70	V
5639.85	-34.02	13.10	17.11	-38.03	-13.00	-25.03	V
7520.29	-32.18	11.50	22.20	-42.88	-13.00	-29.88	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.47	-34.57	12.60	12.93	-34.90	-13.00	-21.90	H
5729.25	-34.40	13.10	17.11	-38.41	-13.00	-25.41	H
7639.26	-32.85	11.50	22.20	-43.55	-13.00	-30.55	H
3819.36	-34.91	12.60	12.93	-35.24	-13.00	-22.24	V
5729.49	-34.94	13.10	17.11	-38.95	-13.00	-25.95	V
7639.22	-33.10	11.50	22.20	-43.80	-13.00	-30.80	V



## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

