





#### 四. 结构图纸structural drawings:



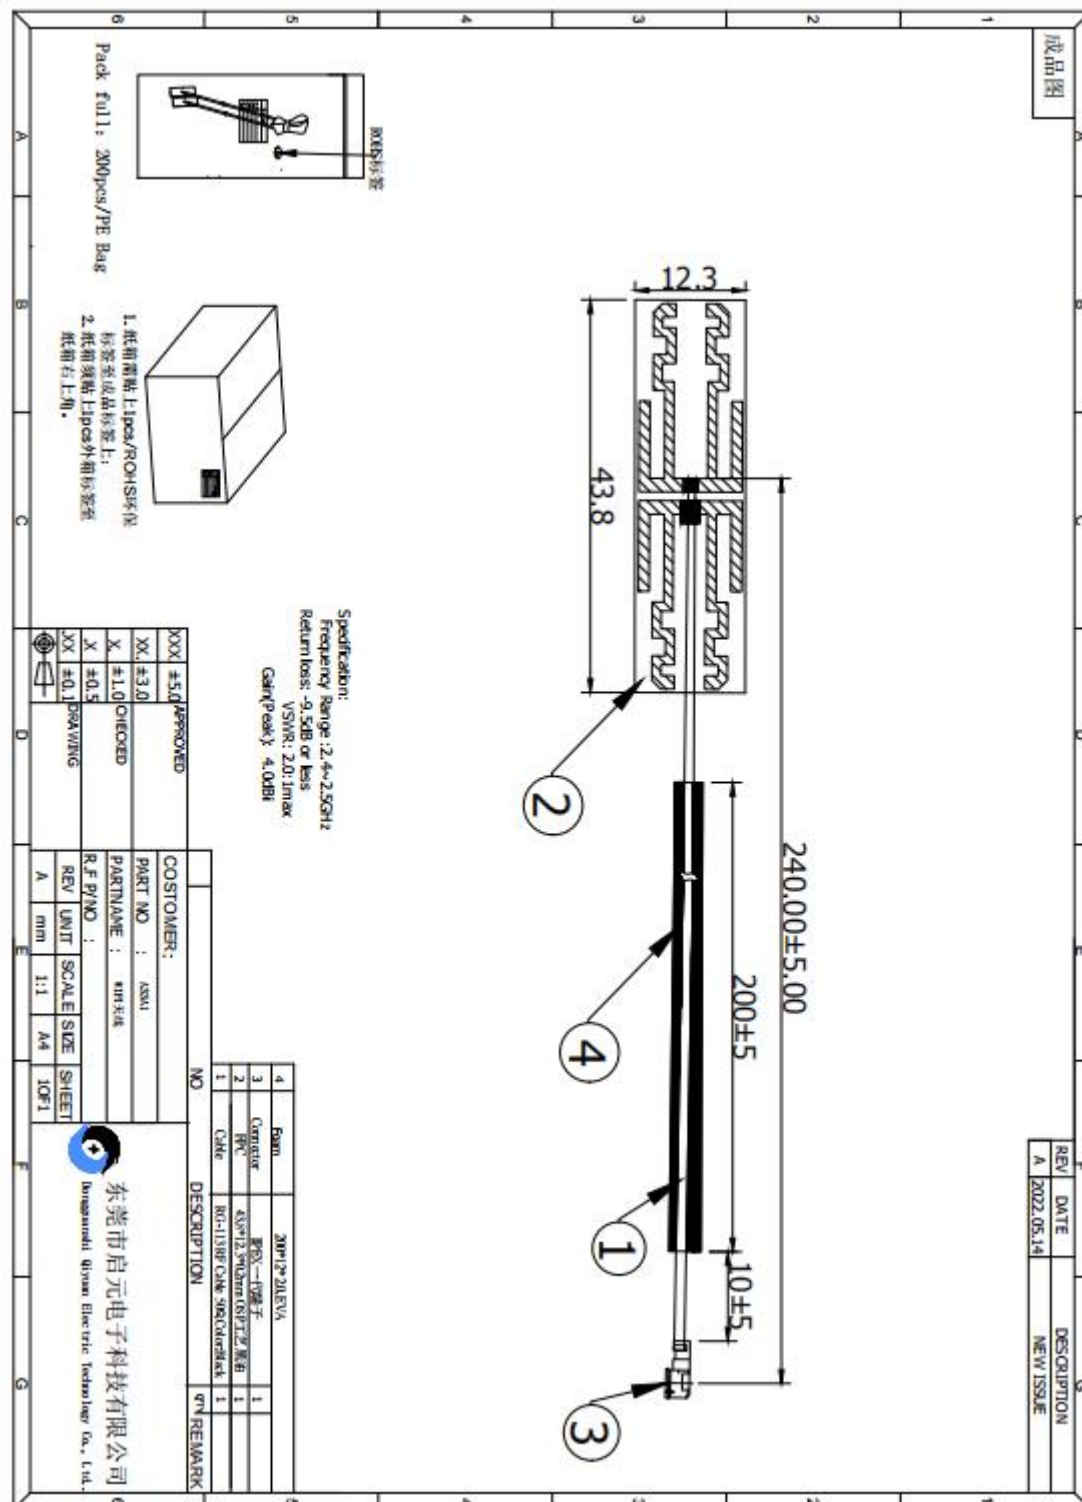

## 五. 测试参数 Test parameters

### 1, V.S.W.R&Return Loss

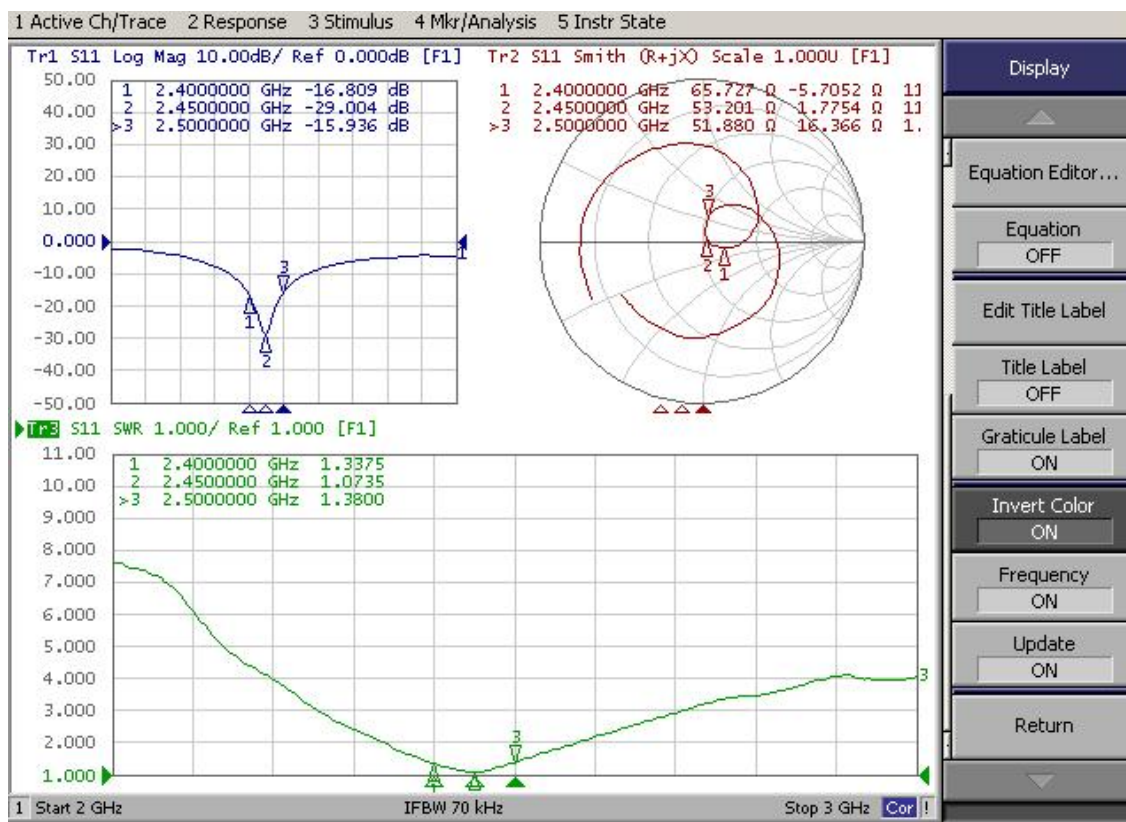

### 2.增益&效率 Gain & efficiency

| FEITUKEJI        |        |        |        |        |        |        |        |        |        |        |        |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Frequency ID     | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | 11     |
| Frequency (MHz)  | 2400.0 | 2410.0 | 2420.0 | 2430.0 | 2440.0 | 2450.0 | 2460.0 | 2470.0 | 2480.0 | 2490.0 | 2500.0 |
| Efficiency (dBi) | -2.04  | -2.95  | -3.13  | -3.02  | -2.59  | -2.97  | -2.99  | -2.50  | -2.84  | -2.63  | -2.88  |
| Gain (dBi)       | 3.61   | 3.76   | 3.60   | 4.65   | 4.56   | 4.74   | 4.52   | 4.53   | 4.36   | 4.54   | 4.38   |
| Efficiency (%)   | 49.63  | 50.84  | 47.90  | 49.90  | 51.14  | 50.33  | 49.85  | 50.65  | 52.06  | 54.60  | 50.47  |



3, 场形图Field charts

