


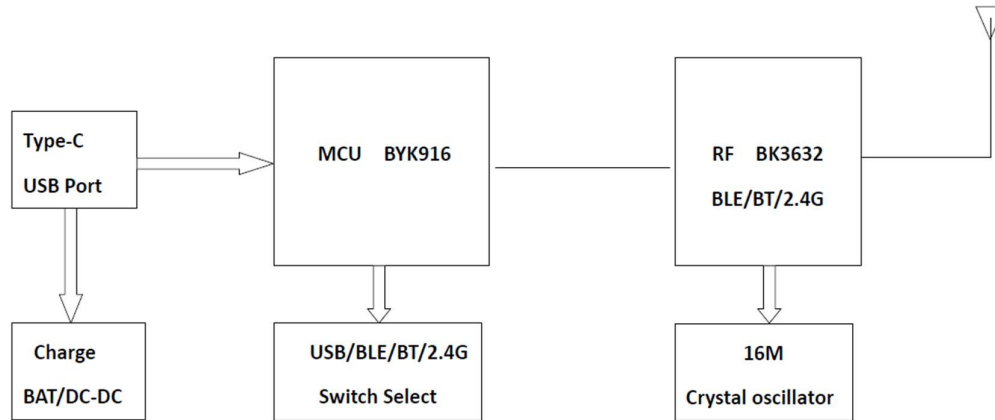

1. Cable mode 1-1, the wire mode USB-Type-C data cable from the host, the keyboard connected to a keyboard MCU BYK916 is to be sent when the USB-C data cable from the host command to send . 1-2, USB connection—Type-C data can also be charged to the battery .

2. 2.4G model form 2-1 MCU BYK916 a through RF BK3632 on by processing and antenna through are sent 2.4G receiver by being treated in the host by is completed .

3. Bluetooth mode 3-1the command MCU BYK916 an over a host and transmitted RF BK3632 is , and processing the antenna through being transmitted Bluetooth will be processed .