



Compact Wireless Keyboard

User Manual

Important Safety Instructions



This keyboard is not a toy. Keep away from children. Read and follow all instructions and warnings before use.

- Check the keyboard and charging cable before use. If any parts are damaged, contact Technical Support before resuming use.
- Do not open, disassemble, modify, drop, crush, puncture, incinerate, or shred the Bluetooth® keyboard.
- The keyboard is not serviceable. Do not attempt to open, repair, or modify.
- To prevent a short circuit or other potential hazards, do not insert foreign metal objects into the keyboard or its ports.
- Keep the keyboard away from moisture and do not use it with wet hands. Moisture in or on the keyboard may lead to electrical shock. If exposed to moisture during use, turn off and unplug the charging cable immediately. Contact Technical Support before resuming use.
- The keyboard contains a lithium-ion battery. Keep away from heat sources and open flames.
- It is normal for the keyboard to become warm during operation. To prevent overheating, keep the area around the keyboard ventilated. Do not place anything on or around the keyboard during operation.
- Do not operate the keyboard near a heat source or in direct sunlight. Recommended for use in temperatures between -5°C and 50°C. NEVER use in temperatures outside the range of -5°C to 50°C.
- If the keyboard begins to emit a strong odor, becomes hot to the touch, swells or expands, turn it off and unplug the keyboard immediately and contact Technical Support.

► 01

- If the battery inside the keyboard leaks for any reason, turn off and unplug the keyboard immediately.
- Do not allow the contents of the battery to contact your skin or eyes. In the event of contact, wash the affected area with large amounts of water and seek medical attention immediately.

► 02

CARE AND STORAGE

- Do not store your keyboard in areas of high temperatures (such as in your car) or high humidity.
- Do not place heavy objects on top of the keyboard.
- Keep the keyboard away from oil, chemicals, and liquids.
- Clean the keyboard with a damp clean cloth.

DISPOSAL



- Do not burn or dispose of your keyboard in a fire or incinerator.
- Do not throw your keyboard away in the trash. The keyboard contains a lithiumion battery. Contact your local electronics recycler to recycle the keyboard.

What's in the Box

- Compact Wireless Keyboard
- AAA Battery x 2

► 03

At a Glance

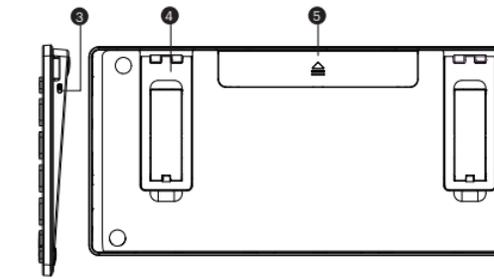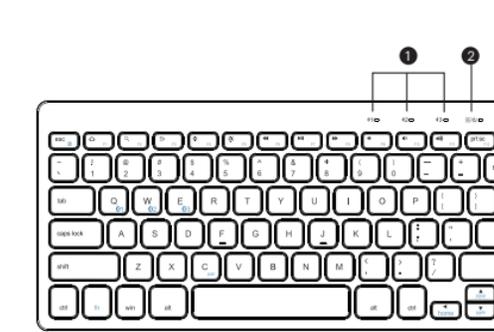

1. Bluetooth Status Indicators
2. Power / Caps Lock Indicator
3. Power Switch
4. Stand
5. Battery Compartment

► 04

Keys and Functions

Key	Fn	Functionality on Android	Functionality on iOS	Functionality on Windows
ESC Key		N/A	N/A	N/A
F1		Home	Home	Open Browser Window
F2		Search	Search	Search
F3		N/A	Back	N/A
F4		Brightness -	Brightness -	N/A
F5		Brightness +	Brightness +	N/A

► 05

Keys and Functions

Key	Fn	Functionality on Android	Functionality on iOS	Functionality on Windows
F6		Previous Track	Previous Track	Previous Track
F7		Play/Pause	Play/Pause	Play/Pause
F8		Next Track	Next Track	Next Track
F9		Mute	Mute	Mute
F10		Volume -	Volume -	Volume -
F11		Volume +	Volume +	Volume +
F12		N/A	N/A	Screenshot

► 06


LED Indicator Guide

Indicator	LED Status	Description
Power / Caps Lock Indicator	Solid green	Powered on
	Solid blue	Caps function enabled
	Flashes red	Low battery
Bluetooth1/2/3 Indicator	Flashes blue	Ready for pairing
	Solid blue	Paired successfully

► 07

Powering On Your Keyboard

1. Insert the provided AAA batteries into the battery compartment on the back panel of the keyboard.

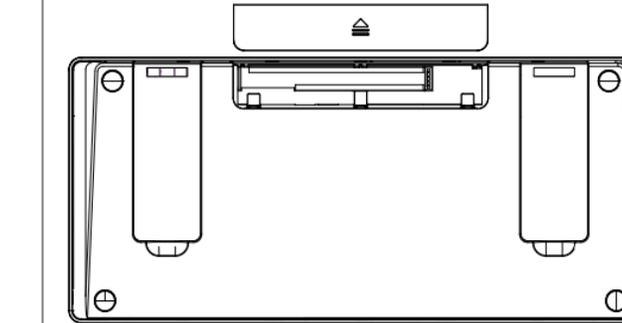

2. Slide the power switch down to power on the keyboard. The power indicator will turn solid green and turn off after 3 seconds.

Note: The keyboard will enter sleep mode after being idle for 30 minutes.

► 08

Need help?

We're here for you every day from 7 a.m. - 9 p.m. CST.

Give us a call at 1-888-516-2630

We'd love to hear from you. Scan with your Walmart app and let us know what you think

TAAKYB100042338



Pairing Your Wireless Keyboard with Your Devices

Pair your keyboard with the first device

1. Power on your keyboard.
2. Select a Bluetooth channel (*1 / *2 / *3) to pair with. For example, if channel 1 is selected, press Fn + Q (*1) simultaneously. The indicator *1 will flash blue, indicating the keyboard is ready for pairing.
3. Enable your device's Bluetooth function.

A list of available Bluetooth devices will display.

4. Select "Compact Wireless Keyboard" to pair.

The indicator will turn solid blue after the first device is successfully paired with your keyboard.

Pairing Your Wireless Keyboard with Your Devices

Pair your keyboard with a second or third device

To pair your keyboard with a second device:

1. Press Fn + W. The indicator *2 will flash blue, indicating the keyboard is ready for pairing.
2. Repeat the Steps 3 and 4 in the "Pair your keyboard with the first device" section to pair your keyboard with the second device.

To pair your keyboard with a third device:



1. Press Fn + E. The indicator *3 will flash blue, indicating the keyboard is ready for pairing.
2. Repeat the Steps 3 and 4 in the "Pair your keyboard with the first device" section to pair your keyboard with the third device.

Note: To switch between the first / second / third paired device, press Fn + Q (*1) / W (*2) / E (*3) simultaneously. Your paired device will automatically connect to the corresponding channel.

To remove the paired memory and pair a new device, press Fn + Q (*1) / W (*2) / E (*3). Then press Fn + C to enter pairing status again.

Using the Stand

Open the cover and pull the stand out until it sits on your desk.

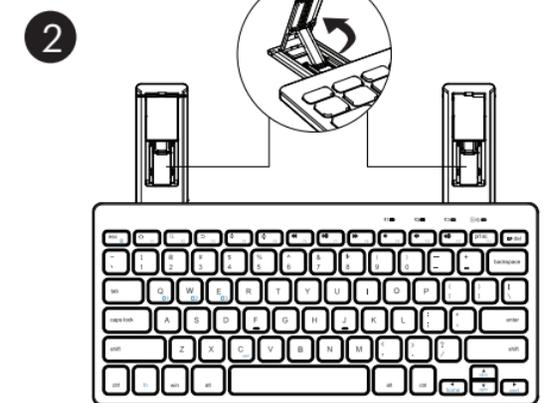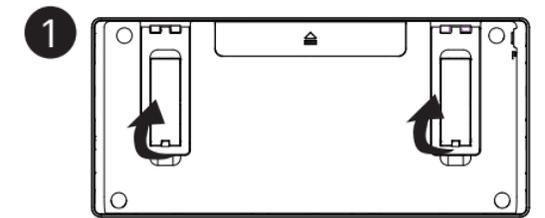

Specifications

Operating Voltage	2.0V - 3.2V
Operating Current	4mA
Standby Current	47 uA
Operating Range	< 7.3 m
Sleep Time	< 30 min
Wakeup Time	3 sec
Operating Temperature	-5°C to 50°C

Notice

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Notice

- (1) Reorient or relocate the receiving antenna.
- (2) Increase the separation between the equipment and receiver.
- (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- (4) Consult the dealer or an experienced radio / TV technician for help.

CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

Anker Innovations Limited

Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

The following importer is the responsible party.

Company Name: Fantasia Trading LLC

Address: 5350 Ontario Mills Pkwy, Suite 100, Ontario, CA 91764

Telephone: +1-800-988-7973

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth

SIG, Inc. and any use of such marks by Anker Innovations Limited. is under license.

