

FCC RADIO TEST REPORT

FCC ID: 2AOKUHYPER7PRO

Product: Smartphone

Trade Mark: HOTWAV

Model No.: Hyper 7 Pro

Family Model: Hyper 7S, Hyper 7E, Hyper 7, Hyper 7 Plus, Hyper 7 Pro+, Hyper 7 Ultra, Hyper 8S, Hyper 8E, Hyper 8, Hyper 8 Plus, Hyper 8 Pro+, Hyper 8 Ultra

Report No.: S24042202607005

Issue Date: Jun 12, 2024

Prepared for

SHENZHEN TUGAO INTELLIGENT CO.,LTD
8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,
Bao'an District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	9
6.2	SUPPORT EQUIPMENT.....	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
7	TEST REQUIREMENTS.....	12
7.1	FIELD STRENGTH OF SPURIOUS RADIATION	12
7.2	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER.....	23
7.3	CONDUCTED OUTPUT POWER.....	29
7.4	FREQUENCY STABILITY	31
7.5	PEAK-TO-AVERAGE RATIO	38
7.6	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	40
7.7	CONDUCTED BAND EDGE	42
7.8	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	43

1 TEST RESULT CERTIFICATION

Applicant's name	SHENZHEN TUGAO INTELLIGENT CO.,LTD
Address	8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong, Bao'an District, Shenzhen, China
Manufacturer's Name	SHENZHEN TUGAO INTELLIGENT CO.,LTD
Address	8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong, Bao'an District, Shenzhen, China
Product description	
Product name	Smartphone
Model and/or type reference	Hyper 7 Pro
Family Model	Hyper 7S, Hyper 7E, Hyper 7, Hyper 7 Plus, Hyper 7 Pro+, Hyper 7 Ultra, Hyper 8S, Hyper 8E, Hyper 8, Hyper 8 Plus, Hyper 8 Pro+, Hyper 8 Ultra
Sample number	S240422026007
Date of Test	May 13, 2024 ~ Jun 12, 2024

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
47 CFR Part 2, Part 22H, Part 24E, Part 27 ANSI/TIA-603-E-2016 FCC KDB 971168 D01 Power Meas License Digital Systems v03 ANSI C63.26:2015	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Prepared By: Allen Liu
Allen Liu
(Project Engineer)

Reviewed By: Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By: Alex Li
Alex Li
(Manager)

2 SUMMARY OF TEST RESULTS
**FCC Part22H / FCC Part24E / FCC Part 27
& ANSI C63.26-2015**

FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
Sub clause 5.2.3.4 of ANSI C63.26-2015	Peak-to-Average Ratio	PASS	
2.1049 22.917	Occupied Bandwidth	PASS	
2.1051 22.917 24.238 27.53	Band Edge	PASS	
22.913	Effective Radiated Power	PASS	
2.1053 22.917 24.238 27.53	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917 24.238 27.53	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.

: The Certificate Registration Number is L5516.

IC-Registration

The Certificate Registration Number is 9270A.

FCC- Accredited

Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab.

The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm

: Shenzhen NTEK Testing Technology Co., Ltd.

Site Location

: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Smartphone
Trade Mark	HOTWAV
FCC ID	2AOKUHYPER7PRO
Model No.	Hyper 7 Pro
Family Model	Hyper 7S, Hyper 7E, Hyper 7, Hyper 7 Plus, Hyper 7 Pro+, Hyper 7 Ultra, Hyper 8S, Hyper 8E, Hyper 8, Hyper 8 Plus, Hyper 8 Pro+, Hyper 8 Ultra
Model Difference	All the model are the same circuit and RF module, except the model names.
Operating Frequency	☒ GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; ☒ UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; ☒ PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; ☒ UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz; ☒ UMTS-FDD Band IV:TX1710MHz~1755MHz /RX2110MHz~2155MHz
Modulation	☒ GMSK for GSM/GPRS; ☒ 8PSK for EGPRS; ☒ QPSK for UMTS bands;
Power Class	4, tested with power level 5(GSM 850) 1, tested with power level 0(GSM 1900) 3, tested with power control "all 1"(WCDMA Band II/IV/V)
GPRS Class	☒ Multi-Class12 ☒ Only 4 timeslots are used for GPRS
SIM CARD	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna Type	LDS Antenna
Antenna Gain	GSM850:-0.65dBi; GSM1900:1.65dBi; WCDMA B2:1.65dBi; WCDMA B4:1.88dBi; WCDMA B5:-0.65dBi;
Adapter	Model: HJ-C6-33-US Input:100-240V~50/60Hz 0.8A Output:(PD) 5.0V--- 3.0A 15.0W or 9.0V---3.0A 27.0W or 12.0V---2.5A 30.0W or 15.0V--- 2.0A 30.0W or 20.0V---1.5A 30.0W (PPS)3.3V-11.0V---3.0A(33.0W MAX)
Battery	DC 3.87V, 10800mAh, 41.796Wh
Power supply	DC 3.87V from battery or DC 5V from adapter
HW Version	N/A
SW Version	N/A

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
The High Voltage 8.9V and Low Voltage 6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Revision History

Report No.	Version	Description	Issued Date
S24042202607005	Rev.01	Initial issue of report	Jun 12, 2024

5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on, GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV frequency band.

Note: GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV modes have been tested during the test. the worst condition (GSM850, RMC 12.2k,) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V/ UMTS FDD Band IV
- 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	For Conducted Test Cases	For Radiated Test Cases
GSM 850/1900	GSM Link	GSM Link
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band IV	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Test Frequency and Channels:


Frequency Band	☒ GSM 850		☒ GSM 1900		☒ UMTS Band II		☒ UMTS Band V	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	189	836.4	661	1880.0	9400	1880.0	4182	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4

Frequency Band	☒ UMTS Band IV	
	Channel	Frequency (MHz)
CH_H	1513	1752.6
CH_M	1412	1732.4
CH_L	1312	1712.4


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For Radiated Test Cases

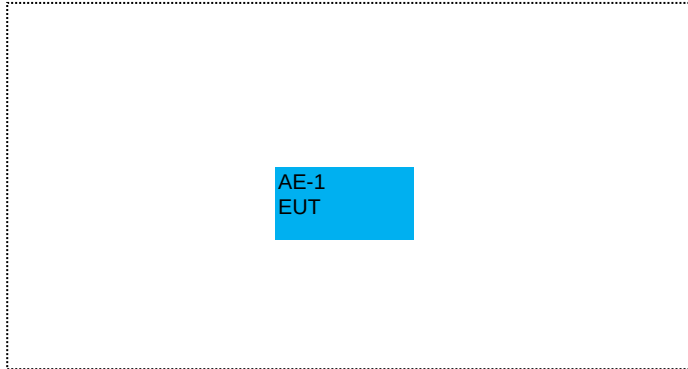


For Conducted Output Power

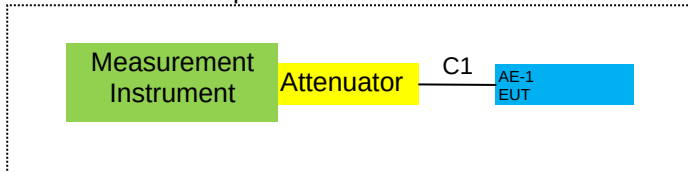

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

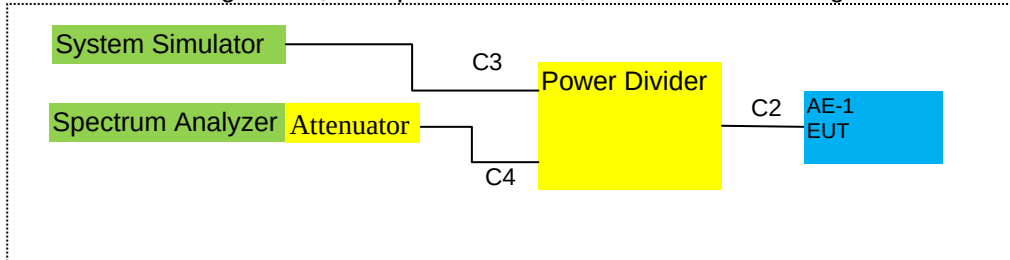

For Frequency Stability

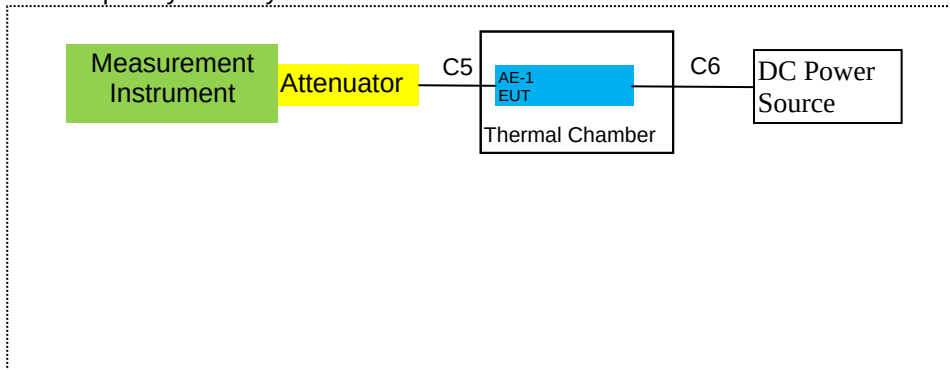

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
AE-1	Smartphone	HOTWAV	Hyper 7 Pro	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	0.1m
C-2	RF Cable	YES	NO	0.1m
C-3	RF Cable	YES	NO	0.1m
C-4	RF Cable	YES	NO	0.2m
C-5	RF Cable	YES	NO	0.2m
C-6	DC Cable	NO	NO	1.0m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2024.04.26	2025.04.25	1 year
2	Test Receiver	R&S	ESPI	101318	2024.03.12	2025.03.11	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2024.03.11	2025.03.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
7	Amplifier	EM	EM-30180	060538	2024.04.26	2025.04.25	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2024.03.12	2025.03.11	1 year
9	Power Meter	R&S	NRVS	100696	2024.04.26	2025.04.25	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2024.03.12	2025.03.11	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2024.03.12	2025.03.11	1 year
15	LISN	R&S	ENV216	101313	2024.03.12	2025.03.11	1 year
16	LISN	EMCO	3816/2	00042990	2024.03.12	2025.03.11	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2024.03.12	2025.03.11	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2024.03.12	2025.03.11	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Spectrum Analyzer	agilent	e4440a	us44300399	2024.03.12	2025.03.11	1 year
23	test receiver	R&S	ESCI	a0304218	2024.03.12	2025.03.11	1 year
24	Communication Tester	R&S	CMU200	A0304247	2024.03.12	2025.03.11	1 year
25	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2024.03.12	2025.03.11	1 year
26	DC Power Source	N/A	PS-6005D	20170402923	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 FIELD STRENGTH OF SPURIOUS RADIATION

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.8 and ANSI/TIA-603-E-2016 Section 2.2.12

7.1.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.1.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II/IV/V, GSM 850/1900, CDMA BC0/1.

TEST CONFIGURATION

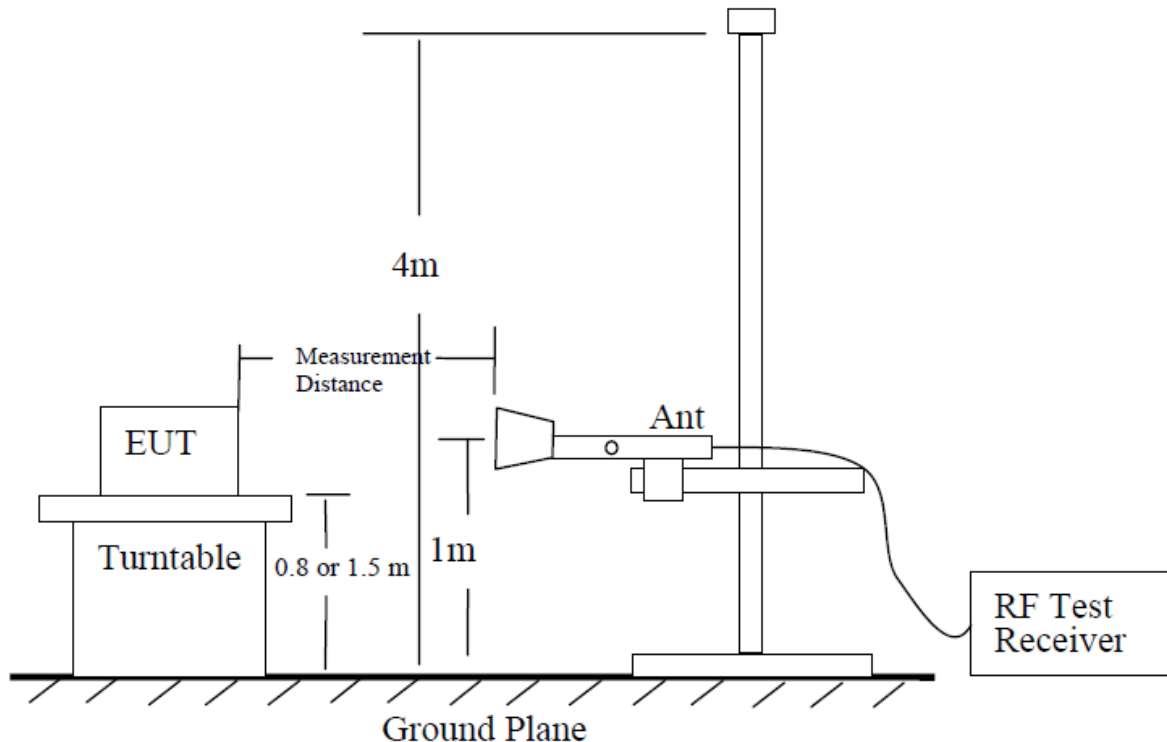

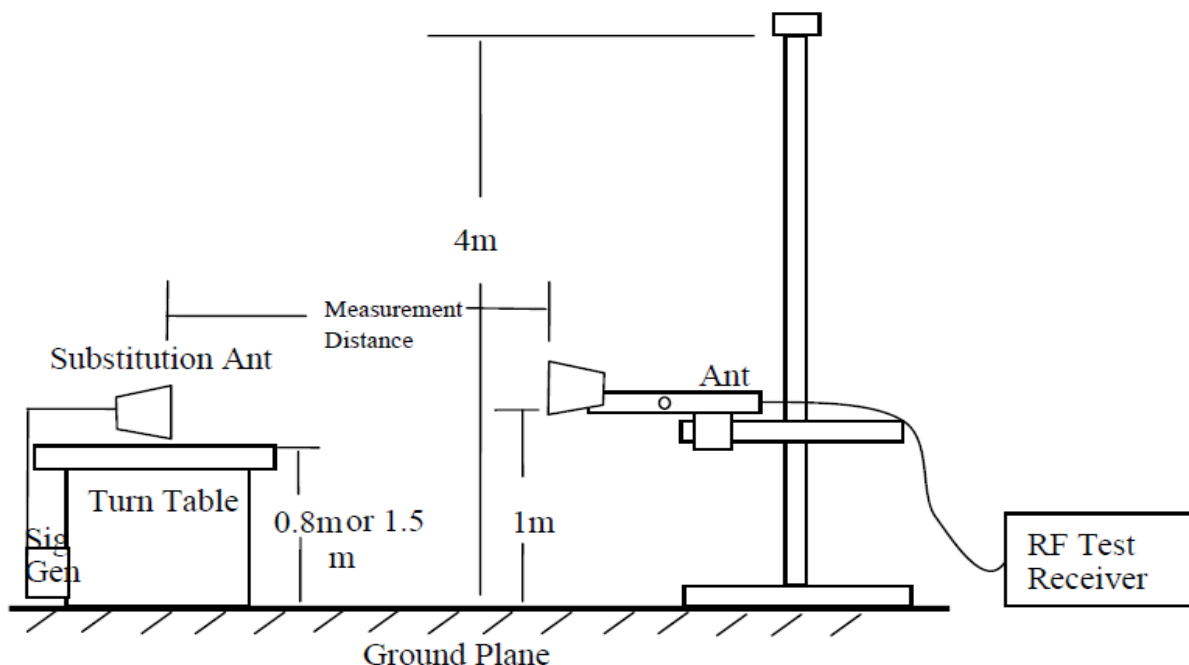

7.1.5 Test Procedure

1. EUT was placed on a 0.8 meter (For frequency above 1G, EUT should be placed on 1.5m) high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (SG Level) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (SG Level) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Cable Loss), the Substitution Antenna Gain should be recorded after test.
The measurement results are obtained as described below:
 $\text{Power(EIRP)} = \text{SG Level} - \text{Cable Loss} + \text{Antenna Gain}$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

7.1.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

■ Radiated Spurious Emission

GSM 850							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-51.37	2.80	27.50	-26.67	-13	-13.67	Vertical
1648.4	-44.15	2.80	27.50	-19.45	-13	-6.45	Horizontal
2472.6	-49.88	2.91	27.80	-24.99	-13	-11.99	Vertical
2472.6	-53.34	2.91	27.80	-28.45	-13	-15.45	Horizontal
3296.8	-51.34	4.02	29.87	-25.49	-13	-12.49	Vertical
3296.8	-44.13	4.02	29.87	-18.28	-13	-5.28	Horizontal
131.2	-46.84	1.35	17.77	-30.42	-13	-17.42	Vertical
116.8	-52.54	1.77	17.83	-36.48	-13	-23.48	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-46.56	2.80	27.48	-21.88	-13	-8.88	Vertical
1673.2	-50	2.80	27.48	-25.32	-13	-12.32	Horizontal
2509.8	-51.7	2.91	27.70	-26.91	-13	-13.91	Vertical
2509.8	-47.01	2.91	27.70	-22.22	-13	-9.22	Horizontal
3346.4	-50.33	4.02	29.82	-24.53	-13	-11.53	Vertical
3346.4	-51.61	4.02	29.82	-25.81	-13	-12.81	Horizontal
208.8	-45.12	1.44	15.26	-31.31	-13	-18.31	Vertical
131.6	-49.99	1.51	17.23	-34.27	-13	-21.27	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-44.31	2.80	27.42	-19.69	-13	-6.69	Vertical
1697.6	-51.94	2.80	27.42	-27.32	-13	-14.32	Horizontal
2546.4	-53.02	2.91	27.68	-28.25	-13	-15.25	Vertical
2546.4	-53.95	2.91	27.68	-29.18	-13	-16.18	Horizontal
3395.2	-51.63	4.02	29.80	-25.85	-13	-12.85	Vertical
3395.2	-51.61	4.02	29.80	-25.83	-13	-12.83	Horizontal
95.0	-52.69	1.74	16.46	-37.97	-13	-24.97	Vertical
208.3	-45.53	1.68	16.21	-31.00	-13	-18.00	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

GPRS 850

Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-46.66	2.80	27.50	-21.96	-13	-8.96	Vertical
1648.4	-46.59	2.80	27.50	-21.89	-13	-8.89	Horizontal
2472.6	-53.24	2.91	27.80	-28.35	-13	-15.35	Vertical
2472.6	-52.38	2.91	27.80	-27.49	-13	-14.49	Horizontal
3296.8	-49.14	4.02	29.87	-23.29	-13	-10.29	Vertical
3296.8	-51.27	4.02	29.87	-25.42	-13	-12.42	Horizontal
154.8	-44.94	1.35	16.91	-29.38	-13	-16.38	Vertical
238.4	-50.43	1.59	17.39	-34.62	-13	-21.62	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-51.79	2.80	27.48	-27.11	-13	-14.11	Vertical
1673.2	-44.69	2.80	27.48	-20.01	-13	-7.01	Horizontal
2509.8	-51.12	2.91	27.70	-26.33	-13	-13.33	Vertical
2509.8	-50.97	2.91	27.70	-26.18	-13	-13.18	Horizontal
3346.4	-51.75	4.02	29.82	-25.95	-13	-12.95	Vertical
3346.4	-52.66	4.02	29.82	-26.86	-13	-13.86	Horizontal
110.1	-51.18	1.36	17.36	-35.18	-13	-22.18	Vertical
148.2	-50.29	1.32	15.19	-36.43	-13	-23.43	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-52.45	2.80	27.42	-27.83	-13	-14.83	Vertical
1697.6	-47.88	2.80	27.42	-23.26	-13	-10.26	Horizontal
2546.4	-50.68	2.91	27.68	-25.91	-13	-12.91	Vertical
2546.4	-52.94	2.91	27.68	-28.17	-13	-15.17	Horizontal
3395.2	-53.11	4.02	29.80	-27.33	-13	-14.33	Vertical
3395.2	-52.74	4.02	29.80	-26.96	-13	-13.96	Horizontal
198.1	-46.11	1.46	17.68	-29.89	-13	-16.89	Vertical
220.2	-45.83	1.31	15.79	-31.35	-13	-18.35	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

EGPRS 850

Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-50.84	2.80	27.50	-26.14	-13	-13.14	Vertical
1648.4	-52.07	2.80	27.50	-27.37	-13	-14.37	Horizontal
2472.6	-44.66	2.91	27.80	-19.77	-13	-6.77	Vertical
2472.6	-49.69	2.91	27.80	-24.80	-13	-11.80	Horizontal
3296.8	-51.89	4.02	29.87	-26.04	-13	-13.04	Vertical
3296.8	-44.96	4.02	29.87	-19.11	-13	-6.11	Horizontal
116.4	-50.34	1.69	16.60	-35.43	-13	-22.43	Vertical
166.1	-50.64	1.44	17.78	-34.29	-13	-21.29	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-50.26	2.80	27.48	-25.58	-13	-12.58	Vertical
1673.2	-46.23	2.80	27.48	-21.55	-13	-8.55	Horizontal
2509.8	-50.64	2.91	27.70	-25.85	-13	-12.85	Vertical
2509.8	-50.79	2.91	27.70	-26.00	-13	-13.00	Horizontal
3346.4	-51.23	4.02	29.82	-25.43	-13	-12.43	Vertical
3346.4	-48.78	4.02	29.82	-22.98	-13	-9.98	Horizontal
160.1	-53.41	1.54	16.14	-38.82	-13	-25.82	Vertical
246.5	-48.49	1.31	17.24	-32.56	-13	-19.56	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-51.33	2.80	27.42	-26.71	-13	-13.71	Vertical
1697.6	-44.26	2.80	27.42	-19.64	-13	-6.64	Horizontal
2546.4	-50.43	2.91	27.68	-25.66	-13	-12.66	Vertical
2546.4	-46.48	2.91	27.68	-21.71	-13	-8.71	Horizontal
3395.2	-47.53	4.02	29.80	-21.75	-13	-8.75	Vertical
3395.2	-50.99	4.02	29.80	-25.21	-13	-12.21	Horizontal
272.1	-44.77	1.73	15.96	-30.54	-13	-17.54	Vertical
163.9	-44.4	1.35	17.53	-28.22	-13	-15.22	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

WCDMA Band V							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 4233/846.6MHz							
1693.2	-52.2	2.80	27.50	-27.50	-13	-14.50	Vertical
1693.2	-51.26	2.80	27.50	-26.56	-13	-13.56	Horizontal
2539.8	-53.45	2.91	27.80	-28.56	-13	-15.56	Vertical
2539.8	-46.7	2.91	27.80	-21.81	-13	-8.81	Horizontal
3386.4	-46.04	4.02	29.87	-20.19	-13	-7.19	Vertical
3386.4	-52.04	4.02	29.87	-26.19	-13	-13.19	Horizontal
264.3	-45.91	1.75	15.49	-32.17	-13	-19.17	Vertical
209.9	-48.96	1.37	16.58	-33.75	-13	-20.75	Horizontal
Test Results for Channel 4182/836.4MHz							
1672.8	-52.72	2.80	27.48	-28.04	-13	-15.04	Vertical
1672.8	-48.96	2.80	27.48	-24.28	-13	-11.28	Horizontal
2509.2	-46.25	2.91	27.70	-21.46	-13	-8.46	Vertical
2509.2	-47.03	2.91	27.70	-22.24	-13	-9.24	Horizontal
3345.6	-51.14	4.02	29.82	-25.34	-13	-12.34	Vertical
3345.6	-48.88	4.02	29.82	-23.08	-13	-10.08	Horizontal
255.8	-47.67	1.68	17.84	-31.51	-13	-18.51	Vertical
129.8	-47.17	1.49	16.34	-32.31	-13	-19.31	Horizontal
Test Results for Channel 4132/826.4MHz							
1652.8	-50.9	2.80	27.42	-26.28	-13	-13.28	Vertical
1652.8	-46.43	2.80	27.42	-21.81	-13	-8.81	Horizontal
2479.2	-50.34	2.91	27.68	-25.57	-13	-12.57	Vertical
2479.2	-48.21	2.91	27.68	-23.44	-13	-10.44	Horizontal
3305.6	-52.32	4.02	29.80	-26.54	-13	-13.54	Vertical
3305.6	-52.3	4.02	29.80	-26.52	-13	-13.52	Horizontal
135.6	-48.17	1.36	17.52	-32.01	-13	-19.01	Vertical
190.6	-51.76	1.63	15.02	-38.37	-13	-25.37	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

GSM 1900

Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-54.47	4.04	33.51	-25.00	-13	-12.00	Vertical
3700.4	-54.93	4.04	33.51	-25.46	-13	-12.46	Horizontal
5550.6	-55.9	5.24	35.84	-25.30	-13	-12.30	Vertical
5550.6	-59.99	5.24	35.84	-29.39	-13	-16.39	Horizontal
105.3	-54.53	1.40	15.14	-40.79	-13	-27.79	Vertical
247.6	-58.09	1.45	17.54	-42.00	-13	-29.00	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-48.58	4.04	33.56	-19.06	-13	-6.06	Vertical
3760	-56.42	4.04	33.56	-26.90	-13	-13.90	Horizontal
5640	-57.87	5.24	35.91	-27.20	-13	-14.20	Vertical
5640	-58.69	5.24	35.91	-28.02	-13	-15.02	Horizontal
187.9	-50.66	1.74	16.40	-36.00	-13	-23.00	Vertical
86.7	-48.62	1.42	15.72	-34.31	-13	-21.31	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-58.76	4.04	34.00	-28.80	-13	-15.80	Vertical
3819.6	-57.36	4.04	34.00	-27.40	-13	-14.40	Horizontal
5729.4	-57.3	5.24	36.04	-26.50	-13	-13.50	Vertical
5729.4	-55.32	5.24	36.04	-24.52	-13	-11.52	Horizontal
217.3	-47.14	1.67	17.51	-31.30	-13	-18.30	Vertical
112.7	-46.67	1.58	17.73	-30.52	-13	-17.52	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

GPRS 1900

Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-56.99	4.04	33.51	-27.52	-13	-14.52	Vertical
3700.4	-57.98	4.04	33.51	-28.51	-13	-15.51	Horizontal
5550.6	-55.88	5.24	35.84	-25.28	-13	-12.28	Vertical
5550.6	-54.39	5.24	35.84	-23.79	-13	-10.79	Horizontal
249.9	-53.93	1.66	17.06	-38.54	-13	-25.54	Vertical
237.9	-47.93	1.34	15.54	-33.73	-13	-20.73	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-56.56	4.04	33.56	-27.04	-13	-14.04	Vertical
3760	-56.05	4.04	33.56	-26.53	-13	-13.53	Horizontal
5640	-56.02	5.24	35.91	-25.35	-13	-12.35	Vertical
5640	-52.56	5.24	35.91	-21.89	-13	-8.89	Horizontal
168.5	-51.01	1.33	16.18	-36.16	-13	-23.16	Vertical
249.4	-53.16	1.60	17.99	-36.77	-13	-23.77	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-57.64	4.04	34.00	-27.68	-13	-14.68	Vertical
3819.6	-55.18	4.04	34.00	-25.22	-13	-12.22	Horizontal
5729.4	-56.18	5.24	36.04	-25.38	-13	-12.38	Vertical
5729.4	-54.44	5.24	36.04	-23.64	-13	-10.64	Horizontal
206.6	-51.73	1.65	17.27	-36.12	-13	-23.12	Vertical
227.8	-48.01	1.39	15.49	-33.92	-13	-20.92	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

EGPRS 1900

Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-56.81	4.04	33.51	-27.34	-13	-14.34	Vertical
3700.4	-57.5	4.04	33.51	-28.03	-13	-15.03	Horizontal
5550.6	-57.9	5.24	35.84	-27.30	-13	-14.30	Vertical
5550.6	-57.94	5.24	35.84	-27.34	-13	-14.34	Horizontal
224.9	-44.45	1.41	17.87	-27.99	-13	-14.99	Vertical
105.4	-53.43	1.47	17.45	-37.46	-13	-24.46	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-56.88	4.04	33.56	-27.36	-13	-14.36	Vertical
3760	-56.97	4.04	33.56	-27.45	-13	-14.45	Horizontal
5640	-54.26	5.24	35.91	-23.59	-13	-10.59	Vertical
5640	-57.22	5.24	35.91	-26.55	-13	-13.55	Horizontal
110.0	-47.79	1.35	15.31	-33.84	-13	-20.84	Vertical
231.5	-49.23	1.48	17.05	-33.66	-13	-20.66	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-56.31	4.04	34.00	-26.35	-13	-13.35	Vertical
3819.6	-54.2	4.04	34.00	-24.24	-13	-11.24	Horizontal
5729.4	-58.23	5.24	36.04	-27.43	-13	-14.43	Vertical
5729.4	-57	5.24	36.04	-26.20	-13	-13.20	Horizontal
156.0	-47.3	1.49	17.71	-31.08	-13	-18.08	Vertical
144.9	-53.74	1.55	15.08	-40.21	-13	-27.21	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

WCDMA Band II							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 9262/1852.4MHz							
3704.8	-57.96	4.04	33.51	-28.49	-13	-15.49	Vertical
3704.8	-56.13	4.04	33.51	-26.66	-13	-13.66	Horizontal
5557.2	-57.05	5.24	35.84	-26.45	-13	-13.45	Vertical
5557.2	-54.88	5.24	35.84	-24.28	-13	-11.28	Horizontal
91.6	-45.01	1.66	17.47	-29.20	-13	-16.20	Vertical
104.4	-48.74	1.38	16.18	-33.94	-13	-20.94	Horizontal
Test Results for Channel 9400/1880MHz							
3760	-54.43	4.04	33.56	-24.91	-13	-11.91	Vertical
3760	-54.74	4.04	33.56	-25.22	-13	-12.22	Horizontal
5640	-55.14	5.24	35.91	-24.47	-13	-11.47	Vertical
5640	-56.84	5.24	35.91	-26.17	-13	-13.17	Horizontal
121.2	-50.52	1.38	16.34	-35.56	-13	-22.56	Vertical
167.8	-48.14	1.34	16.03	-33.45	-13	-20.45	Horizontal
Test Results for Channel 9538/1907.6MHz							
3815.2	-57.18	4.04	34.00	-27.22	-13	-14.22	Vertical
3815.2	-56.25	4.04	34.00	-26.29	-13	-13.29	Horizontal
5722.8	-57.93	5.24	36.04	-27.13	-13	-14.13	Vertical
5722.8	-55.39	5.24	36.04	-24.59	-13	-11.59	Horizontal
135.9	-52.95	1.51	15.52	-38.94	-13	-25.94	Vertical
247.5	-46.46	1.32	17.18	-30.61	-13	-17.61	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

WCDMA Band IV							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 1312/1712.4MHz							
3424.8	-53.91	4.02	29.80	-28.13	-13	-15.13	Vertical
3424.8	-51.26	4.02	29.80	-25.48	-13	-12.48	Horizontal
5137.2	-51.23	5.24	35.84	-20.63	-13	-7.63	Vertical
5137.2	-51.25	5.24	35.84	-20.65	-13	-7.65	Horizontal
81.8	-46.92	1.66	15.00	-33.58	-13	-20.58	Vertical
115.1	-44.66	1.58	16.20	-30.04	-13	-17.04	Horizontal
Test Results for Channel 1412/1732.4MHz							
3464.8	-51.62	4.03	30.00	-25.65	-13	-12.65	Vertical
3464.8	-51.58	4.03	30.00	-25.61	-13	-12.61	Horizontal
5197.2	-52.44	5.25	35.86	-21.83	-13	-8.83	Vertical
5197.2	-51.14	5.25	35.86	-20.53	-13	-7.53	Horizontal
246.8	-52.2	1.55	16.39	-37.35	-13	-24.35	Vertical
101.0	-45.59	1.32	16.25	-30.66	-13	-17.66	Horizontal
Test Results for Channel 1513/1752.6MHz							
3505.2	-49.8	2.91	27.68	-25.03	-13	-12.03	Vertical
3505.2	-53.42	2.91	27.68	-28.65	-13	-15.65	Horizontal
5257.8	-53.25	5.26	35.86	-22.65	-13	-9.65	Vertical
5257.8	-52.45	5.26	35.86	-21.85	-13	-8.85	Horizontal
199.0	-49.44	1.33	15.78	-34.99	-13	-21.99	Vertical
193.1	-47.89	1.47	17.42	-31.94	-13	-18.94	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Emission Level= SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Emission Level(dBm)-Limit(dBm)

7.2 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.2.1/ Section 5.2.2.2 and ANSI/TIA-603-E-2016 Section 2.2.17

7.2.2 Conformance Limit

The substitution method, in ANSI/TIA-603-E-2016, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements
Please refer to the section 7.1.4 in this report.

7.2.5 Test Procedure

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.
In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$ERP/EIRP = SGLevel - P_{cl} + G_a$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

G_a = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

P_{cl} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

	GSM/GPRS/EGPRS	UMTS band
Span	500KHz	10MHz
RBW	10KHz	300KHz
VBW	30KHz	1MHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

7.2.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/UMTS band IV	Test By:	Allen Liu

■ Effective Radiated Power

Radiated Power (ERP) for GSM850							
Frequency	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	13.28	2.11	23.84	2.15	32.86	1.931968
836.6	H	14.29	2.13	23.15	2.15	33.16	2.070141
848.8	H	14.47	2.13	23.06	2.15	33.25	2.113489
824.2	V	14.18	2.11	23.11	2.15	33.03	2.009093
836.6	V	14.08	2.13	23.07	2.15	32.87	1.936422
848.8	V	14.35	2.13	23.25	2.15	33.32	2.147830

Radiated Power (ERP) for GPRS850							
Frequency	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	13.28	2.11	23.84	2.15	32.86	1.931968
836.6	H	14.84	2.13	23.15	2.15	33.71	2.349633
848.8	H	14.37	2.13	23.06	2.15	33.15	2.065380
824.2	V	14.20	2.11	23.11	2.15	33.05	2.018366
836.6	V	14.19	2.13	23.07	2.15	32.98	1.986095
848.8	V	14.06	2.13	23.25	2.15	33.03	2.009093

Radiated Power (ERP) for EGPRS850							
Frequency	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	8.37	2.11	23.84	2.15	27.95	0.623735
836.6	H	10.44	2.13	23.15	2.15	29.31	0.853100
848.8	H	9.35	2.13	23.06	2.15	28.13	0.650130
824.2	V	10.55	2.11	23.11	2.15	29.40	0.870964
836.6	V	10.82	2.13	23.07	2.15	29.61	0.914113
848.8	V	9.19	2.13	23.25	2.15	28.16	0.654636

Radiated Power (ERP) for UMTS band V							
Frequency	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
826.4	H	5.34	2.11	23.84	2.15	24.92	0.310456
835	H	5.96	2.13	23.15	2.15	24.83	0.304089
846.6	H	5.78	2.13	23.06	2.15	24.56	0.285759
826.4	V	5.00	2.11	23.11	2.15	23.85	0.242661
835	V	6.31	2.13	23.07	2.15	25.10	0.323594
846.6	V	5.42	2.13	23.25	2.15	24.39	0.274789

Radiated Power (E.I.R.P) for GSM1900

Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	8.07	3.76	28.24	32.55	1.798871
1880	H	7.79	3.91	28.22	32.10	1.621810
1909.8	H	8.17	3.93	28.20	32.44	1.753881
1850.2	V	9.21	3.76	27.32	32.77	1.892344
1880	V	9.35	3.91	27.33	32.77	1.892344
1909.8	V	9.10	3.93	27.31	32.48	1.770109

Radiated Power (E.I.R.P) for GPRS1900

Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	7.73	3.76	28.24	32.21	1.663413
1880	H	7.75	3.91	28.22	32.06	1.606941
1909.8	H	8.06	3.93	28.20	32.33	1.710015
1850.2	V	8.50	3.76	27.32	32.06	1.606941
1880	V	8.86	3.91	27.33	32.28	1.690441
1909.8	V	9.37	3.93	27.31	32.75	1.883649

Radiated Power (E.I.R.P) for EGPRS1900

Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	3.59	3.76	28.24	28.07	0.641210
1880	H	3.69	3.91	28.22	28.00	0.630957
1909.8	H	4.35	3.93	28.20	28.62	0.727780
1850.2	V	4.52	3.76	27.32	28.08	0.642688
1880	V	4.59	3.91	27.33	28.01	0.632412
1909.8	V	5.04	3.93	27.31	28.42	0.695024

Radiated Power (E.I.R.P) for UMTS band II						
Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1852.4	H	1.22	3.76	28.24	25.70	0.371535
1880	H	1.87	3.91	28.22	26.18	0.414954
1907.6	H	0.78	3.93	28.20	25.05	0.319890
1852.4	V	2.64	3.76	27.32	26.20	0.416869
1880	V	2.05	3.91	27.33	25.47	0.352371
1907.6	V	2.29	3.93	27.31	25.67	0.368978

Radiated Power (E.I.R.P) for UMTS band IV						
Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1712.4	H	0.06	3.13	27.63	24.56	0.285759
1732.4	H	0.26	3.27	27.61	24.60	0.288403
1752.6	H	0.36	3.30	27.60	24.66	0.292415
1712.4	V	0.57	3.13	27.63	25.07	0.321366
1732.4	V	-0.09	3.27	27.61	24.25	0.266073
1752.6	V	0.79	3.30	27.60	25.09	0.322849

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Factor

Peak EIRP(dBm)= SGLevel -Pcl +Ga

ERP(dBm)=EIRP-2.15

7.3 CONDUCTED OUTPUT POWER

7.3.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2)) and FCC KDB 971168 D01 v03 Section 5.2

7.3.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

For CDMA2000 Power: Maximum output power is verified on the Low,Middle and High channels according to procedures in section 4.4.5.2.of 3GPP2 C.S0011/TIA-98-E for 1Xrtt, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel.0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev.A.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

7.3.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

Test data reference attachment

7.4 FREQUENCY STABILITY

7.4.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC KDB 971168 D01 Section 9.0

7.4.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

7.4.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band VI/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Frequency Error Against Voltage for GSM 850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	8.19	0.009792
3.87	6.59	0.007879
4.45	6.84	0.008178

Frequency Error Against Temperature for GSM 850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	8.59	0.010270
-20	7.03	0.008405
-10	8.65	0.010342
0	6.79	0.008118
10	6.7	0.008011
20	7.74	0.009254
30	6.46	0.007724
40	8.47	0.010127
50	12.82	0.015328

Frequency Error Against Voltage for GPRS850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	7.62	0.009110
3.87	9.74	0.011645
4.45	9.49	0.011346

Frequency Error Against Temperature for GPRS850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	8.98	0.010736
-20	6.37	0.007616
-10	7.9	0.009445
0	6.86	0.008202
10	9.17	0.010964
20	9.9	0.011836
30	7.32	0.008752
40	8.93	0.010677
50	12.79	0.015292

Frequency Error Against Voltage for EGPRS850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	8.81	0.010533
3.87	9.94	0.011884
4.45	6.73	0.008046

Frequency Error Against Temperature for EGPRS850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	5.32	0.006361
-20	7.41	0.008859
-10	7.75	0.009266
0	6.36	0.007604
10	6.97	0.008333
20	9.56	0.011430
30	6.9	0.008250
40	8.09	0.009672
50	11.62	0.013893

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band V(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	-16.34	-0.019536
3.87	-19.61	-0.023446
4.45	-15.7	-0.018771

Frequency Error Against Temperature for UMTS band V (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-17.86	-0.021353
-20	-19.72	-0.023577
-10	-17.52	-0.020947
0	-17.27	-0.020648
10	-15.67	-0.018735
20	-17.46	-0.020875
30	-16.12	-0.019273
40	-17.06	-0.020397
50	-23.11	-0.027630

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for PCS 1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	16.18	0.008606
3.87	18.37	0.009771
4.45	17.29	0.009197

Frequency Error Against Temperature for PCS 1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	20.91	0.011122
-20	18.87	0.010037
-10	18.6	0.009894
0	20.99	0.011165
10	17.58	0.009351
20	17.77	0.009452
30	20.2	0.010745
40	19.41	0.010324
50	22.02	0.011713

Frequency Error Against Voltage for GPRS1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	16.17	0.008601
3.87	19.74	0.010500
4.45	18.91	0.010059

Frequency Error Against Temperature for GPRS1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	18.52	0.009851
-20	16.22	0.008628
-10	17.06	0.009074
0	20.84	0.011085
10	17.82	0.009479
20	18.6	0.009894
30	20.82	0.011074
40	19.02	0.010117
50	25.97	0.013814

Frequency Error Against Voltage for EGPRS1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	19.36	0.010298
3.87	16.53	0.008793
4.45	20.87	0.011101

Frequency Error Against Temperature for EGPRS1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	17.58	0.009351
-20	17.75	0.009441
-10	20.99	0.011165
0	16.23	0.008633
10	16.01	0.008516
20	20.33	0.010814
30	17.9	0.009521
40	18.12	0.009638
50	21.13	0.011239

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band II (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	-19.99	-0.010633
3.87	-18.24	-0.009702
4.45	-18.77	-0.009984

Frequency Error Against Temperature for UMTS band II (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-17.42	-0.009266
-20	-17.7	-0.009415
-10	-17.19	-0.009144
0	-16.2	-0.008617
10	-18.34	-0.009755
20	-17.75	-0.009441
30	-17.34	-0.009223
40	-19.68	-0.010468
50	-24.13	-0.012835

Frequency Error Against Voltage for UMTS band IV (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	-15.79	-0.009115
3.87	-11.49	-0.006632
4.45	-18.05	-0.010419

Frequency Error Against Temperature for UMTS band IV (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-6.73	-0.003885
-20	-13.47	-0.007775
-10	-11.76	-0.006788
0	-9.82	-0.005668
10	-15.72	-0.009074
20	-16.72	-0.009651
30	-18.77	-0.010835
40	-20.04	-0.011568
50	-19.41	-0.011204

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

7.5 PEAK-TO-AVERAGE RATIO

7.5.1 Applicable Standard

According to Subclause 5.2.3.4 of ANSI C63.26-2015 and FCC KDB 971168 D01 Section 5.7.1

7.5.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

7.5.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band VI/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

7.6 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.6.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC KDB 971168 D01 Section 4

7.6.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 4.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.6.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

7.7 CONDUCTED BAND EDGE

7.7.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Section6.

7.7.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm.}$$

7.7.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

7.8 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Section6.

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

7.8.6 Test Results

EUT:	Smartphone	Model No.:	Hyper 7 Pro
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

END OF REPORT