

# TEST REPORT

<b>FCC ID.</b> .....	2AOS9-0805	
<b>Test Report No.</b> .....	TCT210820E019	
<b>Date of issue.</b> .....	Aug. 31, 2021	
<b>Testing laboratory</b> .....	SHENZHEN TONGCE TESTING LAB	
<b>Testing location/ address:</b>	TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China	
<b>Applicant's name</b> .....	Dongguan Goldstep Electronics Co., LTD.	
<b>Address</b> .....	Puxin Industrial Zone, Shipai Town, Dongguan City, Guangdong, China	
<b>Manufacturer's name</b> ...	Dongguan Goldstep Electronics Co., LTD.	
<b>Address</b> .....	Puxin Industrial Zone, Shipai Town, Dongguan City, Guangdong, China	
<b>Standard(s)</b> .....	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013	
<b>Test item description</b> .....	Bluetooth Earphone	
<b>Trade Mark</b> .....	N/A	
<b>Model/Type reference</b> .....	0805, T2, 0619, 0622, 6006, 0810, 1028, 1023, 1008, 1009, 1306, 1402, S1, S6, T08, XY50, X14, BT-001, BT-002, BT-003, BT-004, BT-005, BT-006, BT-007, BT-008, BT-009	
<b>Rating(s)</b> .....	Rechargeable Li-ion Battery DC 3.7V	
<b>Date of receipt of test item</b> .....	Aug. 20, 2021	
<b>Date (s) of performance of test</b> .....	See dates for each test case	
<b>Tested by (+signature)</b> ...	Brews Xu	<i>Brews Xu</i>
<b>Check by (+signature)</b> ....	Beryl Zhao	<i>Beryl Zhao</i>
<b>Approved by (+signature):</b>	Tomsin	<i>Tomsin</i>

## General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## Table of Contents

<b>1. General Product Information .....</b>	<b>3</b>
1.1. EUT description .....	3
1.2. Model(s) list.....	3
1.3. Operation Frequency .....	4
<b>2. Test Result Summary .....</b>	<b>5</b>
<b>3. General Information.....</b>	<b>6</b>
3.1. Test environment and mode.....	6
3.2. Description of Support Units.....	6
<b>4. Facilities and Accreditations .....</b>	<b>7</b>
4.1. Facilities .....	7
4.2. Location .....	7
4.3. Measurement Uncertainty.....	7
<b>5. Test Results and Measurement Data .....</b>	<b>8</b>
5.1. Antenna requirement .....	8
5.2. Conducted Emission.....	9
5.3. Conducted Output Power .....	13
5.4. 20dB Occupy Bandwidth .....	14
5.5. Carrier Frequencies Separation .....	15
5.6. Hopping Channel Number .....	16
5.7. Dwell Time.....	17
5.8. Pseudorandom Frequency Hopping Sequence.....	18
5.9. Conducted Band Edge Measurement .....	19
5.10. Conducted Spurious Emission Measurement.....	20
5.11. Radiated Spurious Emission Measurement .....	21

**Appendix A: Test Result of Conducted Test**

**Appendix B: Photographs of Test Setup**

**Appendix C: Photographs of EUT**

## 1. General Product Information

### 1.1. EUT description

Test item description .....	Bluetooth Earphone
Model/Type reference.....	0805
Sample Number.....	TCT210820E019-0101
Bluetooth Version .....	V5.0
Operation Frequency .....	2402MHz~2480MHz
Transfer Rate .....	1/2 Mbits/s
Number of Channel .....	79
Modulation Type.....	GFSK, π/4-DQPSK
Modulation Technology .....	FHSS
Antenna Type.....	PCB Antenna
Antenna Gain.....	-0.32dBi
Rating(s) .....	Rechargeable Li-ion Battery DC 3.7V
Remark.....	/

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

No.	Model No.	Tested with
1	0805	<input checked="" type="checkbox"/>
Other models	T2, 0619, 0622, 6006, 0810, 1028, 1023, 1008, 1009, 1306, 1402, S1, S6, T08, XY50, X14, BT-001, BT-002, BT-003, BT-004, BT-005, BT-006, BT-007, BT-008, BT-009	<input type="checkbox"/>

Note: 0805 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of 0805 can represent the remaining models.

### 1.3. Operation Frequency

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...	...	...	...	...	...	...	...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...	...	...	...	...	...	...	...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		-

Remark: Channel 0, 39 & 78 have been tested for GFSK,  $\pi/4$ -DQPSK modulation mode.

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(1)	PASS
20dB Occupied Bandwidth	§15.247 (a)(1)	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209	PASS
Band Edge	§15.247(d)	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.0 °C	25.0 °C
Humidity:	55 % RH	55 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Software:		
Software Information:	FCC_assist_1.0.2.2	
Power Level:	10	
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery	
<p>The sample was placed 0.8m &amp; 1.5m for the measurement below &amp; above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case( Z axis) are shown in Test Results of the following pages. DH1 DH3 DH5 all have been tested , only worse case DH1 is reported.</p>		

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	JD-050200	2012010907576735	/	JD

##### Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339


### 4.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB

## 5. Test Results and Measurement Data

### 5.1. Antenna requirement
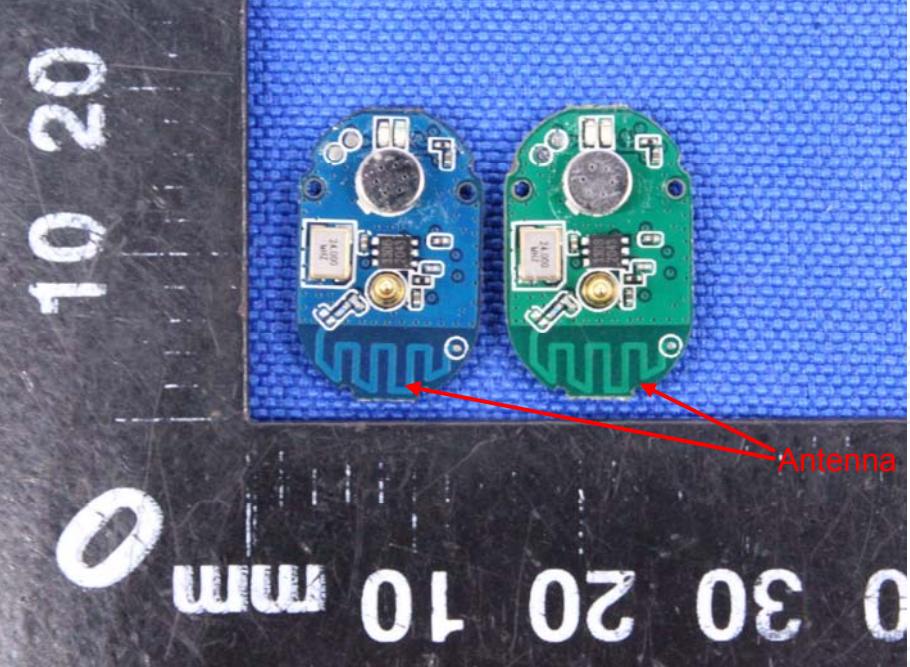
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>E.U.T Antenna:</b>	
<p>The Bluetooth antenna is PCB antenna which permanently attached, and the best case gain of the antenna is -0.32dBi.</p>	
	

## 5.2. Conducted Emission

### 5.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p>Reference Plane</p>  <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Charging														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														


**5.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 07, 2022
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Mar. 11, 2022
Line-5	TCT	CE-05	N/A	Jul. 07, 2022
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

### 5.2.3. Test data

Please refer to following diagram for individual

#### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

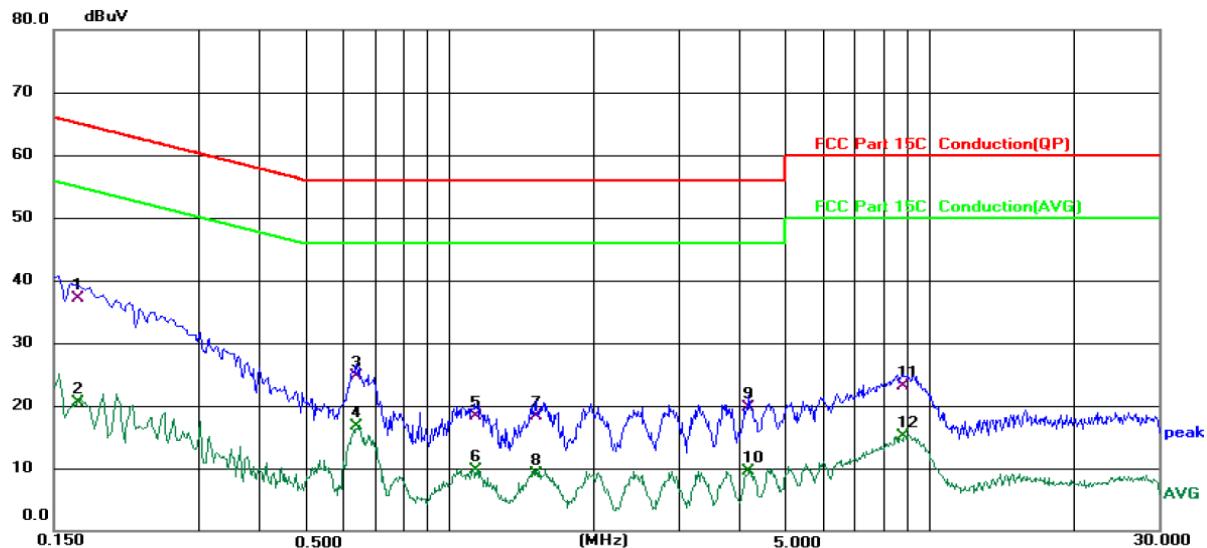

Site 844 Shielding Room			Phase: L1		Temperature: 25.6 (°C)		Humidity: 54 %	
Limit: FCC Part 15C Conduction(QP)			Power: DC 5 V(Adapter Input AC 120 V/60 Hz)					
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1	*	0.1677	27.63	9.57	37.20	65.07	-27.87	QP
2		0.1677	10.92	9.57	20.49	55.07	-34.58	AVG
3		0.6419	15.50	9.21	24.71	56.00	-31.29	QP
4		0.6419	7.40	9.21	16.61	46.00	-29.39	AVG
5		1.1340	8.93	9.32	18.25	56.00	-37.75	QP
6		1.1340	0.43	9.32	9.75	46.00	-36.25	AVG
7		1.5140	8.90	9.35	18.25	56.00	-37.75	QP
8		1.5140	-0.21	9.35	9.14	46.00	-36.86	AVG
9		4.2100	10.30	9.45	19.75	56.00	-36.25	QP
10		4.2100	0.05	9.45	9.50	46.00	-36.50	AVG
11		8.8260	13.47	9.59	23.06	60.00	-36.94	QP
12		8.8260	5.49	9.59	15.08	50.00	-34.92	AVG

**Note:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) - Limits (dB $\mu$ V)

Q.P. = Quasi-Peak

AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

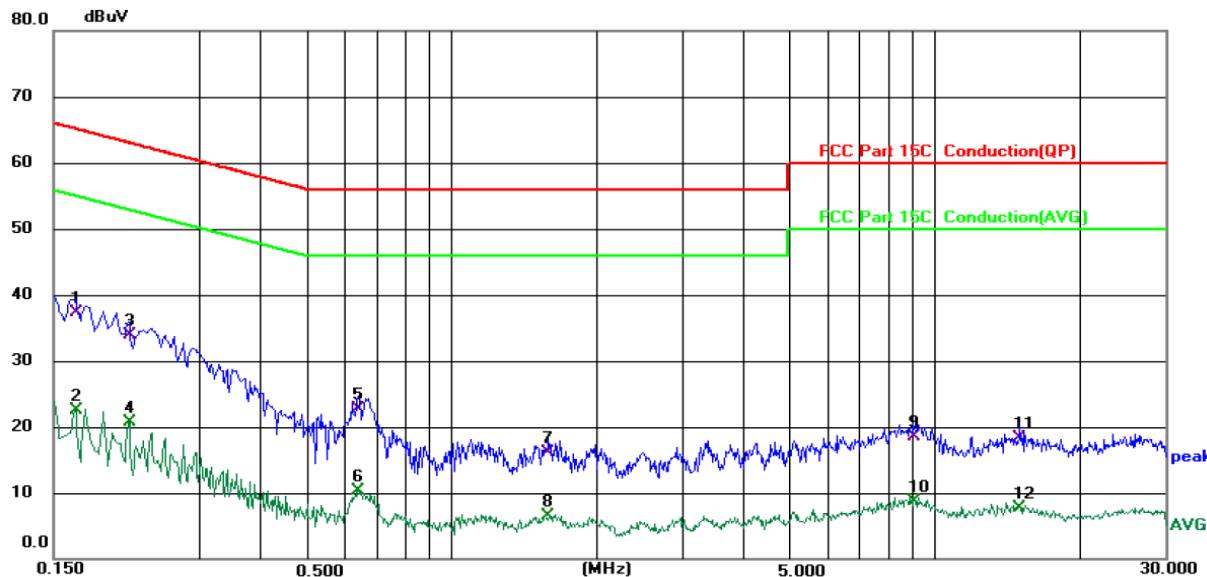

Site 844 Shielding Room

Phase: **N** Temperature: 25.6 (°C) Humidity: 54 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1 *	0.1660	27.68	9.58	37.26	65.16	-27.90	QP	
2	0.1660	12.91	9.58	22.49	55.16	-32.67	AVG	
3	0.2140	24.65	9.31	33.96	63.05	-29.09	QP	
4	0.2140	11.45	9.31	20.76	53.05	-32.29	AVG	
5	0.6419	13.43	9.21	22.64	56.00	-33.36	QP	
6	0.6419	1.19	9.21	10.40	46.00	-35.60	AVG	
7	1.5859	6.67	9.35	16.02	56.00	-39.98	QP	
8	1.5859	-2.92	9.35	6.43	46.00	-39.57	AVG	
9	9.0580	8.91	9.59	18.50	60.00	-41.50	QP	
10	9.0580	-0.85	9.59	8.74	50.00	-41.26	AVG	
11	15.0340	8.57	9.67	18.24	60.00	-41.76	QP	
12	15.0340	-2.00	9.67	7.67	50.00	-42.33	AVG	

**Note1:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard

Margin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

Q.P. =Quasi-Peak AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**Note2:**

Measurements were conducted in all three channels (high, middle, low) and two modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Highest channel and Pi/4 DQPSK) was submitted only.

### 5.3. Conducted Output Power

### 5.3.1. Test Specification

### 5.3.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.4. 20dB Occupy Bandwidth

### 5.4.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(1)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	N/A
<b>Test Setup:</b>	<p style="text-align: center;"><b>Spectrum Analyzer</b>   <b>EUT</b></p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; <math>1\% \leq RBW \leq 5\%</math> of the 20 dB bandwidth; <math>VBW \geq 3RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### 5.4.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.5. Carrier Frequencies Separation

### 5.5.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(1)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
<b>Test Setup:</b>	
<b>Test Mode:</b>	Hopping mode
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Enable the EUT hopping function.</li> <li>4. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.</li> </ol>
<b>Test Result:</b>	PASS

### 5.5.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.6. Hopping Channel Number

### 5.6.1. Test Specification

## 5.6.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.7. Dwell Time

### 5.7.1. Test Specification

## 5.7.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.8. Pseudorandom Frequency Hopping Sequence

<b>Test Requirement:</b>	<b>FCC Part15 C Section 15.247 (a)(1) requirement:</b>
--------------------------	--


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

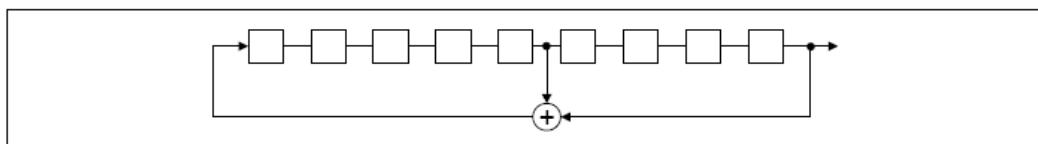

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

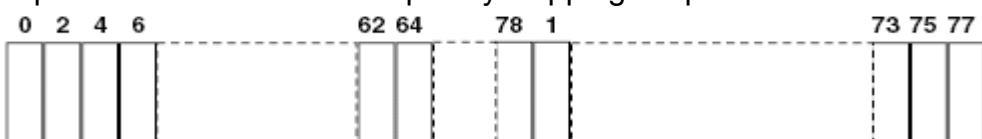


Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 5.9. Conducted Band Edge Measurement

### 5.9.1. Test Specification

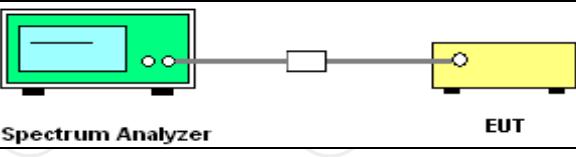
<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
<b>Test Setup:</b>	 <p><b>Spectrum Analyzer</b>                                    <b>EUT</b></p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>Set RBW = 100 kHz (<math>\geq 1\%</math> span=10MHz), VBW = 300 kHz (<math>\geq</math>RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.</li> <li>Enable hopping function of the EUT and then repeat step 2 and 3.</li> <li>Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### 5.9.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.10. Conducted Spurious Emission Measurement

### 5.10.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
<b>Test Setup:</b>	 <p>Spectrum Analyzer      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.</li> <li>4. Measure and record the results in the test report.</li> <li>5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
<b>Test Result:</b>	PASS



### 5.10.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 07, 2022

## 5.11. Radiated Spurious Emission Measurement

### 5.11.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.209																																							
<b>Test Method:</b>	ANSI C63.10:2013																																							
<b>Frequency Range:</b>	9 kHz to 25 GHz																																							
<b>Measurement Distance:</b>	3 m																																							
<b>Antenna Polarization:</b>	Horizontal & Vertical																																							
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value						
Frequency	Detector	RBW	VBW	Remark																																				
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																				
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																				
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																				
	Peak	1MHz	10Hz	Average Value																																				
<b>Limit:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>3</td> <td>Average</td> </tr> <tr> <td>5000</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	Above 1GHz	500	3	Average	5000	3	Peak
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																						
0.009-0.490	2400/F(KHz)	300																																						
0.490-1.705	24000/F(KHz)	30																																						
1.705-30	30	30																																						
30-88	100	3																																						
88-216	150	3																																						
216-960	200	3																																						
Above 960	500	3																																						
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector																																					
Above 1GHz	500	3	Average																																					
	5000	3	Peak																																					
<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>30MHz to 1GHz</p>																																							

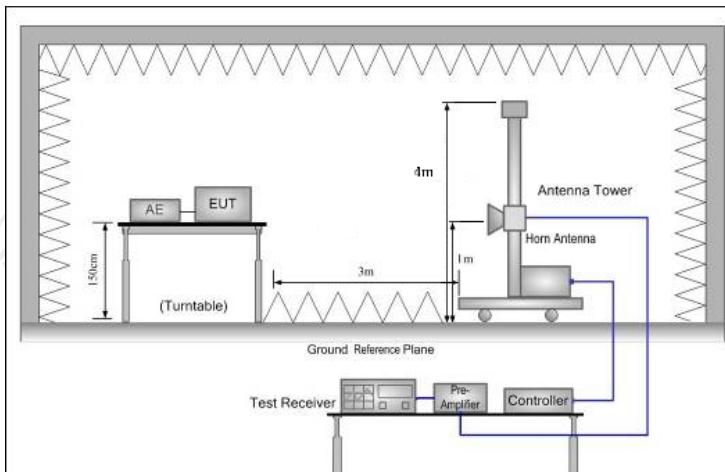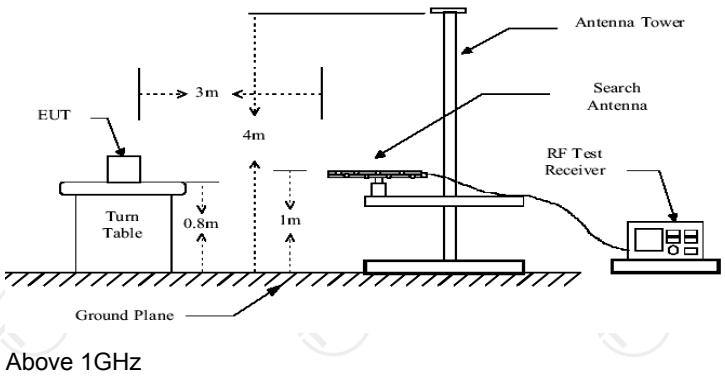

<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<p>1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2013 Measurement Guidelines.</p> <p>2. For the radiated emission test below 1GHz:          The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.</p> <p>For the radiated emission test above 1GHz:          Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission</p>

	<p>and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Use the following spectrum analyzer settings:             <ol style="list-style-type: none"> <li>(1) Span shall wide enough to fully capture the emission being measured;</li> <li>(2) Set RBW=120 kHz for <math>f &lt; 1</math> GHz, RBW=1MHz for <math>f &gt; 1</math> GHz ; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold for peak</li> <li>(3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = <math>N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n</math> Where <math>N_1</math> is number of type 1 pulses, <math>L_1</math> is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + <math>20 \cdot \log(\text{Duty cycle})</math> Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</li> </ol> </li> </ol>
<b>Test results:</b>	PASS

### 5.11.2. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jul. 07, 2022
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 07, 2022
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012 102	Mar. 11, 2022
Pre-amplifier	SKET	LNPA_1840G-50	SK2021092 03500	Apr. 08, 2022
Pre-amplifier	HP	8447D	2727A05017	Jul. 07, 2022
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 05, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Apr. 10, 2023
Antenna Mast	Keleto	RE-AM	N/A	N/A
Coaxial cable	SKET	RC_DC18G-N	N/A	Apr. 08, 2022
Coaxial cable	SKET	RC-DC18G-N	N/A	Apr. 08, 2022
Coaxial cable	SKET	RC-DC40G-N	N/A	Jul. 07, 2022
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

### 5.11.3. Test Data

Please refer to following diagram for individual

Below 1GHz

Horizontal:

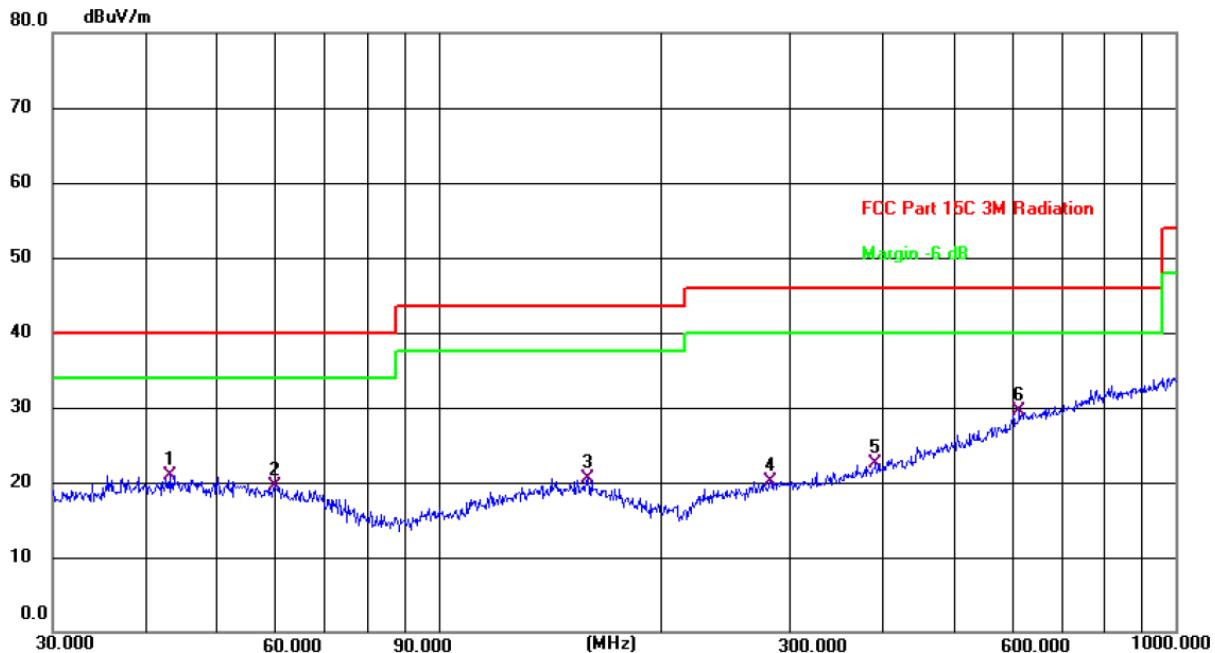

Site

Polarization: **Horizontal**

Temperature: 24.3(C)


Limit: FCC Part 15C 3M Radiation

Power: DC 3.7 V

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	43.2014	6.95	13.92	20.87	40.00	-19.13	QP	P	
2	60.0690	6.97	12.52	19.49	40.00	-20.51	QP	P	
3	159.7844	6.61	13.88	20.49	43.50	-23.01	QP	P	
4	281.9945	6.42	13.63	20.05	46.00	-25.95	QP	P	
5	392.0950	6.20	16.37	22.57	46.00	-23.43	QP	P	
6 *	614.2142	7.99	21.54	29.53	46.00	-16.47	QP	P	

Vertical:

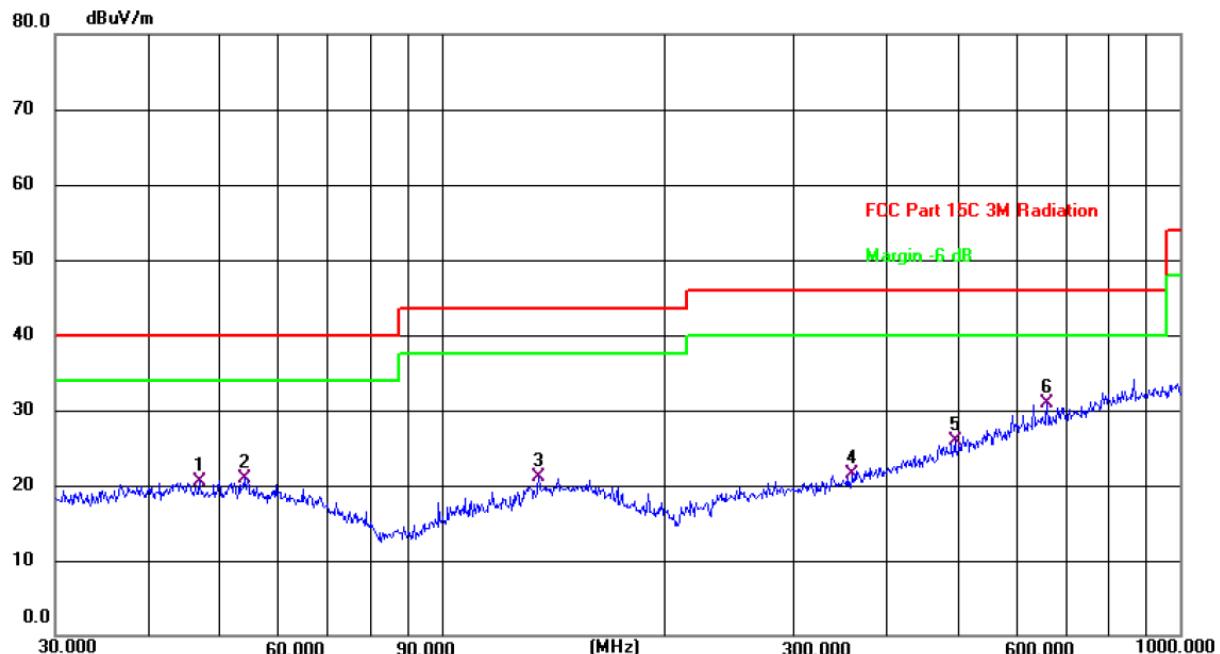

Site

 Polarization: **Vertical**

Temperature: 24.3(C)

Limit: FCC Part 15C 3M Radiation

Power: DC 3.7 V

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	46.9947	6.71	13.83	20.54	40.00	-19.46	QP	P	
2	54.0709	7.56	13.26	20.82	40.00	-19.18	QP	P	
3	135.5061	8.11	12.94	21.05	43.50	-22.45	QP	P	
4	360.4476	5.91	15.56	21.47	46.00	-24.53	QP	P	
5	495.9343	6.93	18.93	25.86	46.00	-20.14	QP	P	
6 *	661.1503	8.83	22.04	30.87	46.00	-15.13	QP	P	

**Note:** 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

2. Measurements were conducted in all three channels (high, middle, low) and two modulation (GFSK, Pi/4 DQPSK) and the worst case Mode (Highest channel and Pi/4 DQPSK) was submitted only.

3. Freq. = Emission frequency in MHz

Measurement (dB $\mu$ V/m) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Limit (dB $\mu$ V/m) = Limit stated in standard


Over (dB) = Measurement (dB $\mu$ V/m) – Limits (dB $\mu$ V/m)

\* is meaning the worst frequency has been tested in the test frequency range.

**Test Result of Radiated Spurious at Band edges**

Lowest channel 2402:


Horizontal:

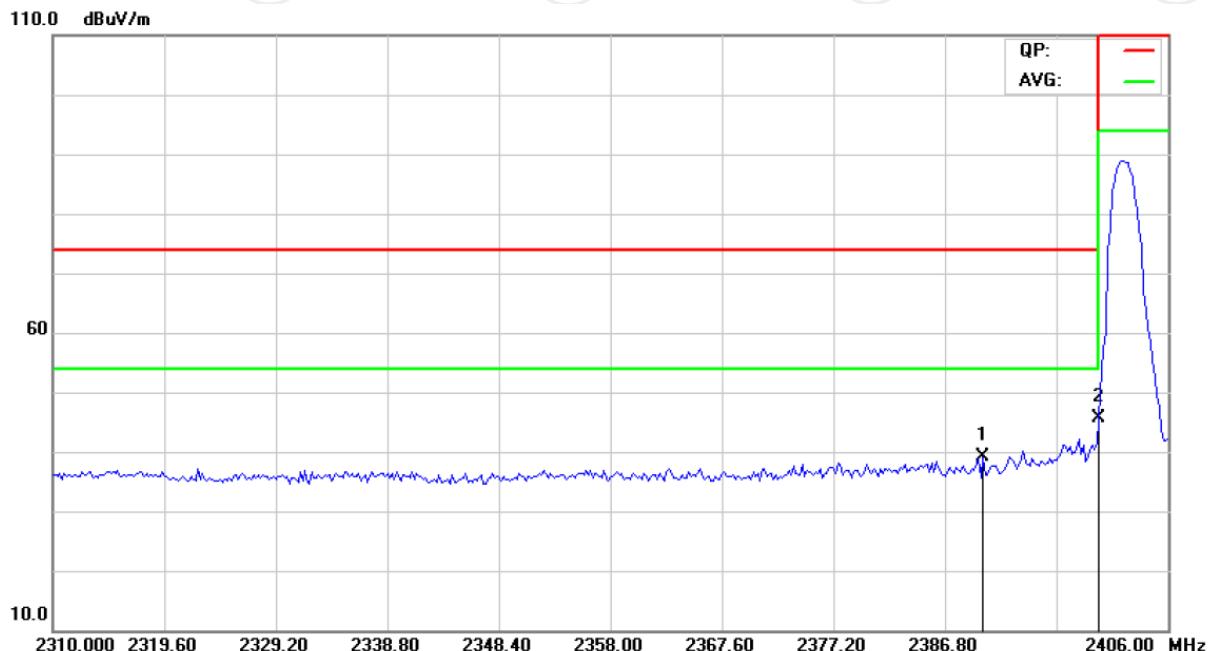

Site Polarization: **Horizontal** Temperature: (C)  
Limit: FCC part 15.247 bandedge(peak) Power: DC 3.7 V Humidity: %

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	57.86	-18.69	39.17	74.00	-34.83	peak	
2	*	2400.000	64.24	-18.66	45.58	74.00	-28.42	peak	


Vertical:

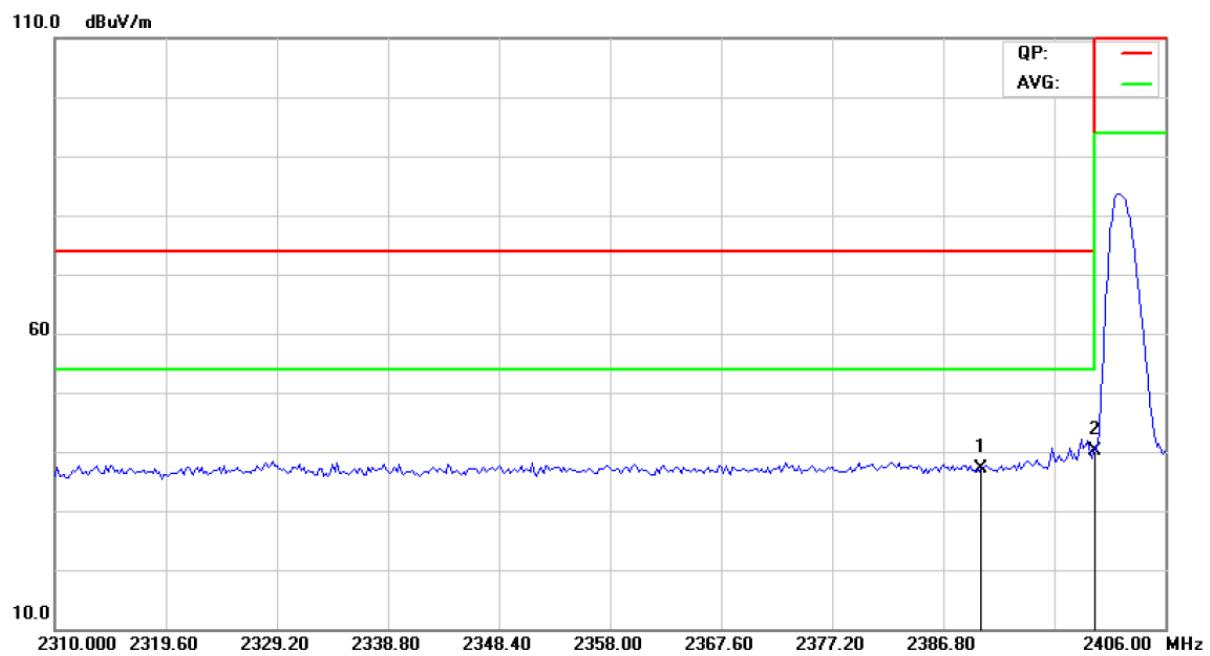

Site			Polarization: <i>Vertical</i>			Temperature: (C)	
Limit: FCC part 15.247 bandedge(peak)			Power: DC 3.7 V			Humidity: %	
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		2390.000	55.75	-18.69	37.06	74.00	-36.94
2	*	2400.000	58.80	-18.66	40.14	74.00	-33.86


Highest channel 2480:

Horizontal:

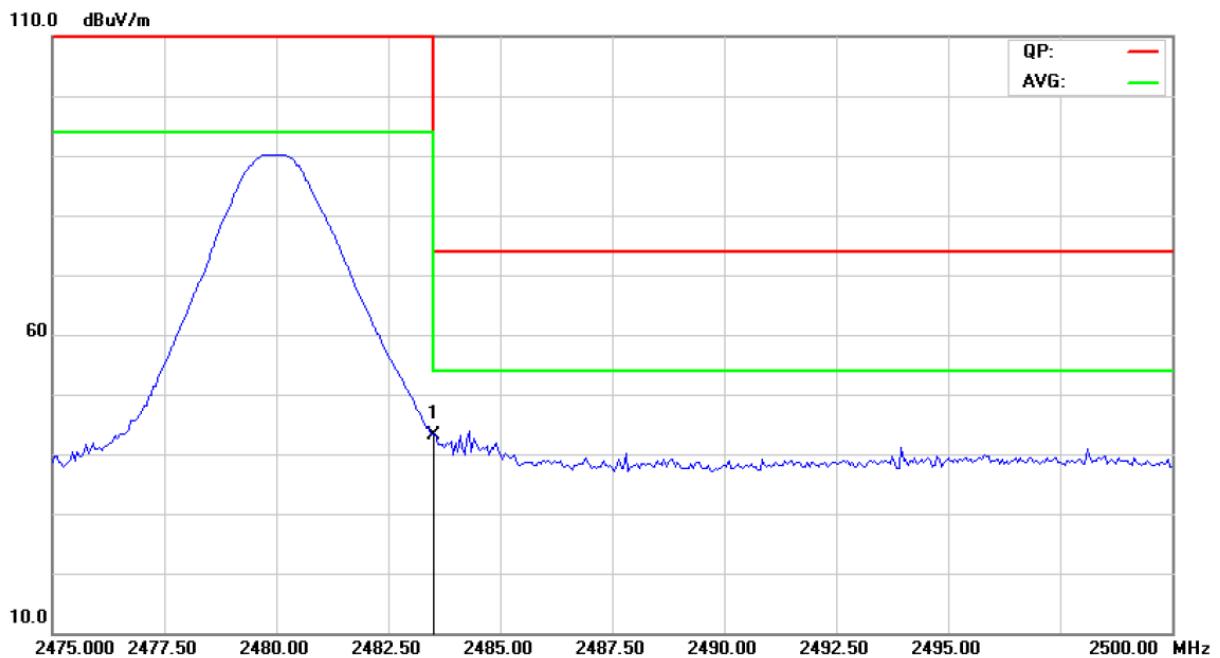

Site				Polarization: <b>Horizontal</b>		Temperature: (C)	
Limit: FCC part 15.247 bandedge(peak)				Power: DC 3.7 V		Humidity: %	
No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB	Detector
1	*	2483.500	61.56	-18.40	43.16	74.00	-30.84
							peak

Vertical:

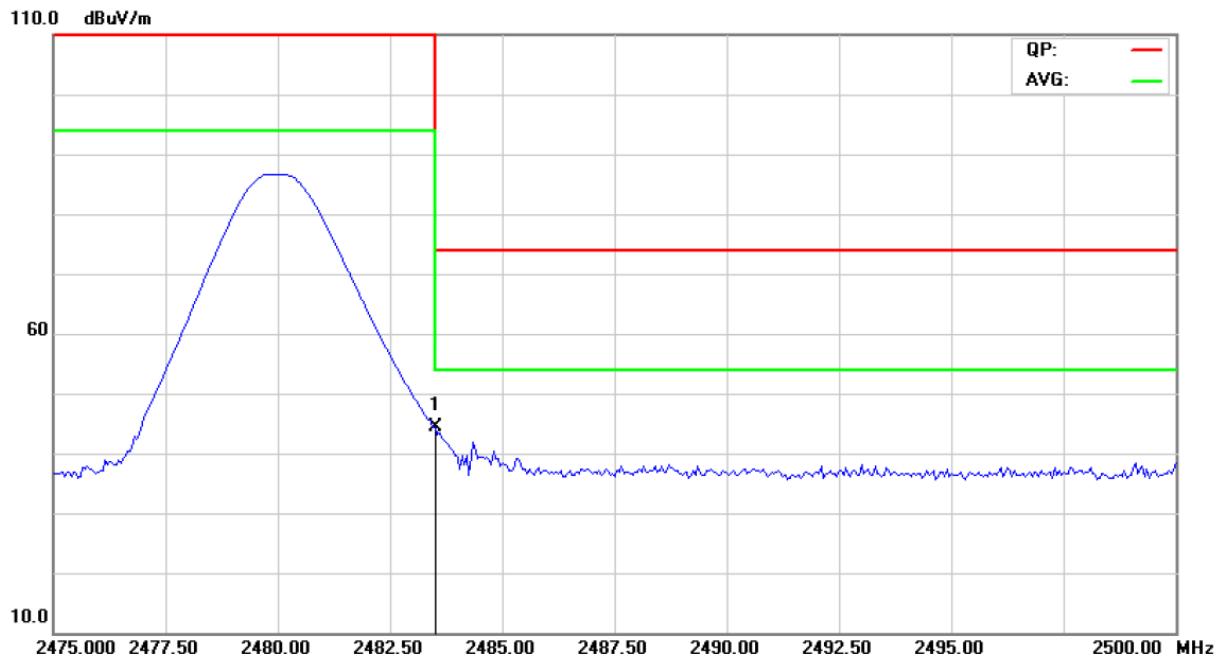

Site	Polarization: <b>Vertical</b>			Temperature: (C)
Limit: FCC part 15.247 bandedge(peak)		Power: DC 3.7 V		Humidity: %
<hr/>				
No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment Limit Over
	MHz	dBuV	dB	dBuV/m dB Detector Comment
1 *	2483.500	62.82	-18.40	44.42 74.00 -29.58 peak

**Note:** Measurements were conducted in all two modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (GFSK) was submitted only.

**Above 1GHz**

Modulation Type: Pi/4 DQPSK									
Low channel: 2402 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
4804	H	45.55	---	0.66	46.21	---	74	54	-7.79
7206	H	35.74	---	9.50	45.24	---	74	54	-8.76
---	H	---	---	---	---	---	---	---	---
4804	V	45.36	---	0.66	46.02	---	74	54	-7.98
7206	V	36.89	---	9.50	46.39	---	74	54	-7.61
---	V	---	---	---	---	---	---	---	---

Middle channel: 2441 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
4882	H	46.11	---	0.99	47.10	---	74	54	-6.90
7323	H	36.46	---	9.87	46.33	---	74	54	-7.67
---	H	---	---	---	---	---	---	---	---
4882	V	43.82	---	0.99	44.81	---	74	54	-9.19
7323	V	35.29	---	9.87	45.16	---	74	54	-8.84
---	V	---	---	---	---	---	---	---	---

High channel: 2480 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
4960	H	45.78	---	1.33	47.11	---	74	54	-6.89
7440	H	37.05	---	10.22	47.27	---	74	54	-6.73
---	H	---	---	---	---	---	---	---	---
4960	V	47.33	---	1.33	48.66	---	74	54	-5.34
7440	V	38.42	---	10.22	48.64	---	74	54	-5.36
---	V	---	---	---	---	---	---	---	---

**Note:**


1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB $\mu$ V/m)-Average limit (dB $\mu$ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. Measurements were conducted in all two modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Pi/4 DQPSK) was submitted only.
7. All the restriction bands are compliance with the limit of 15.209.

## Appendix A: Test Result of Conducted Test


### Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	3.046	0	3.046	30	Pass
NVNT	1-DH1	2441	4.455	0	4.455	30	Pass
NVNT	1-DH1	2480	5.238	0	5.238	30	Pass
NVNT	2-DH1	2402	3.806	0	3.806	21	Pass
NVNT	2-DH1	2441	5.166	0	5.166	21	Pass
NVNT	2-DH1	2480	5.907	0	5.907	21	Pass

### Power NVNT 1-DH1 2402MHz

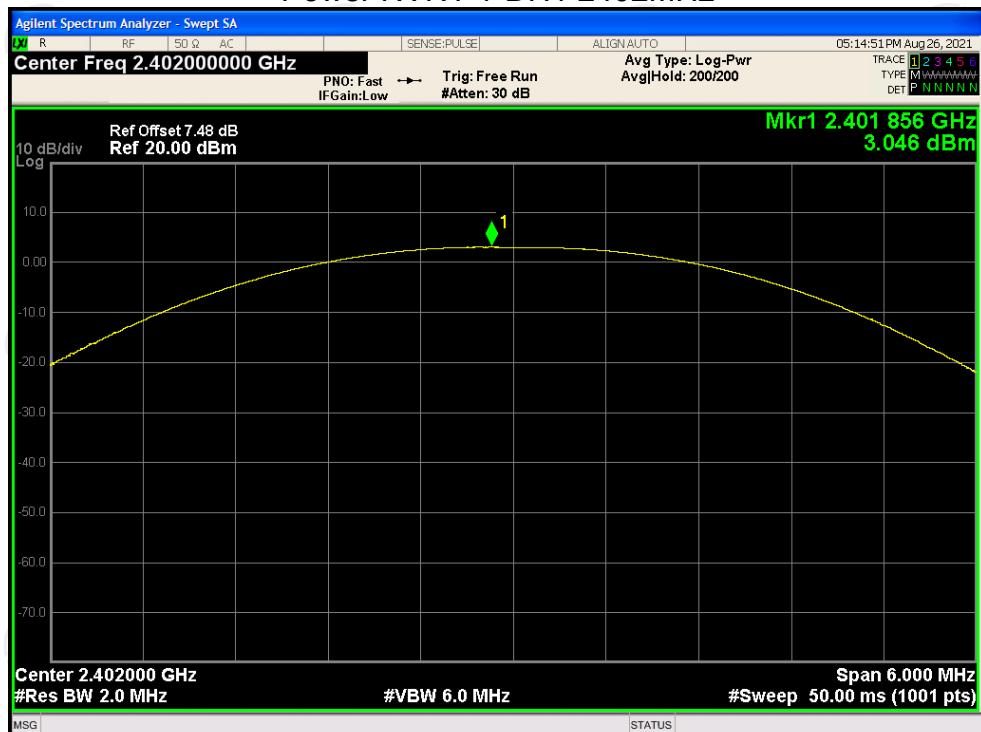


## Power NVNT 1-DH1 2441MHz

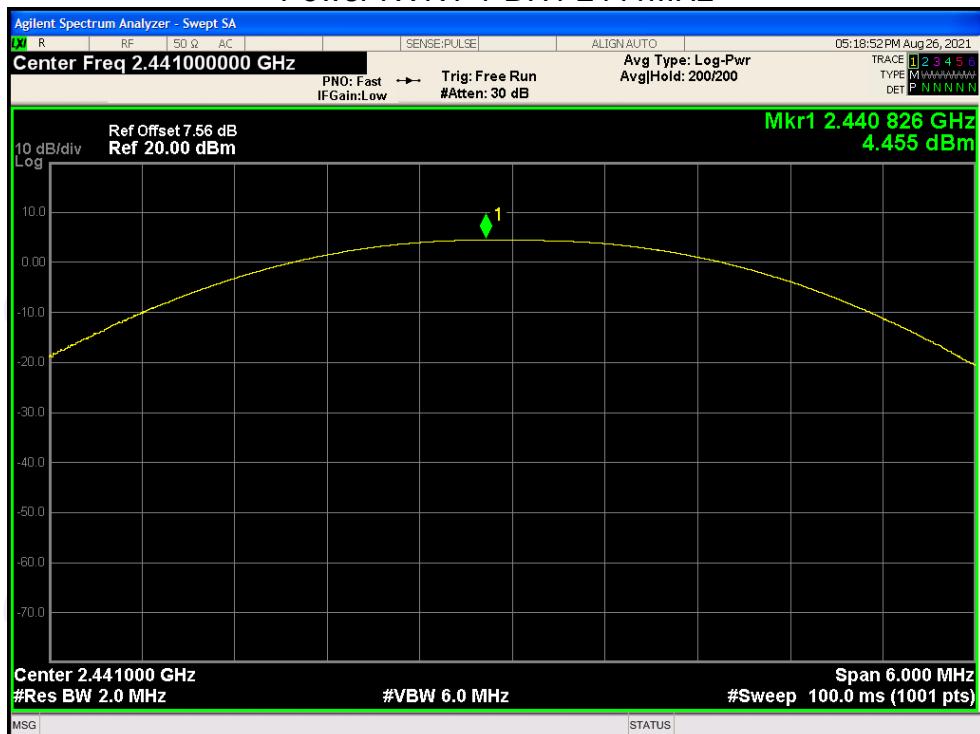


## Power NVNT 1-DH1 2480MHz




## Power NVNT 2-DH1 2402MHz

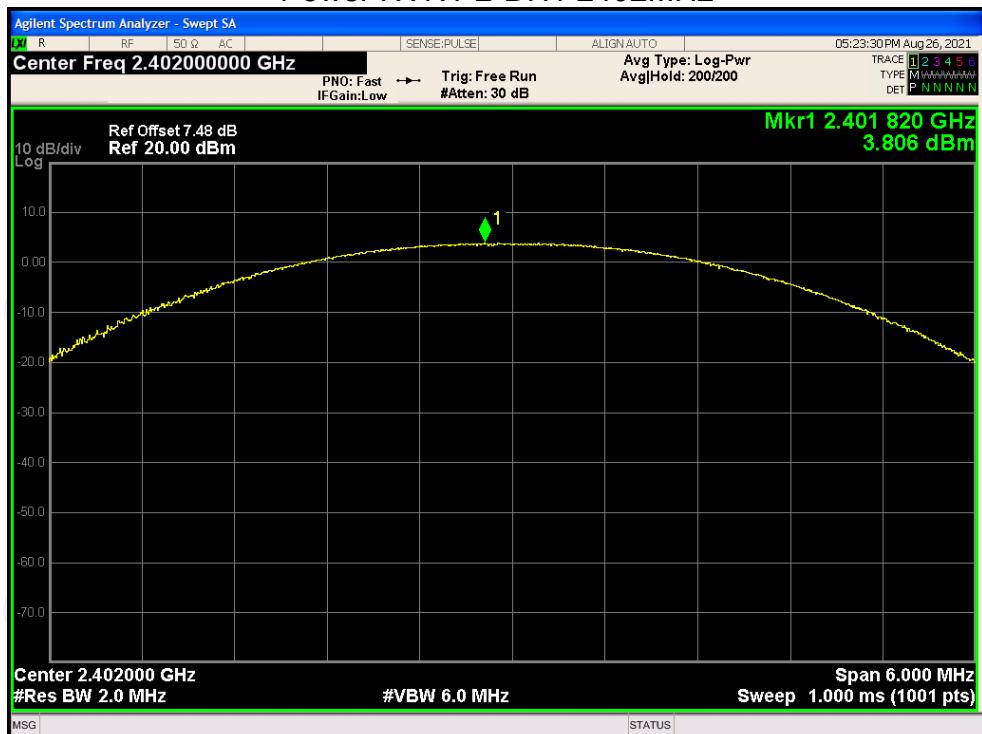

## Power NVNT 2-DH1 2441MHz

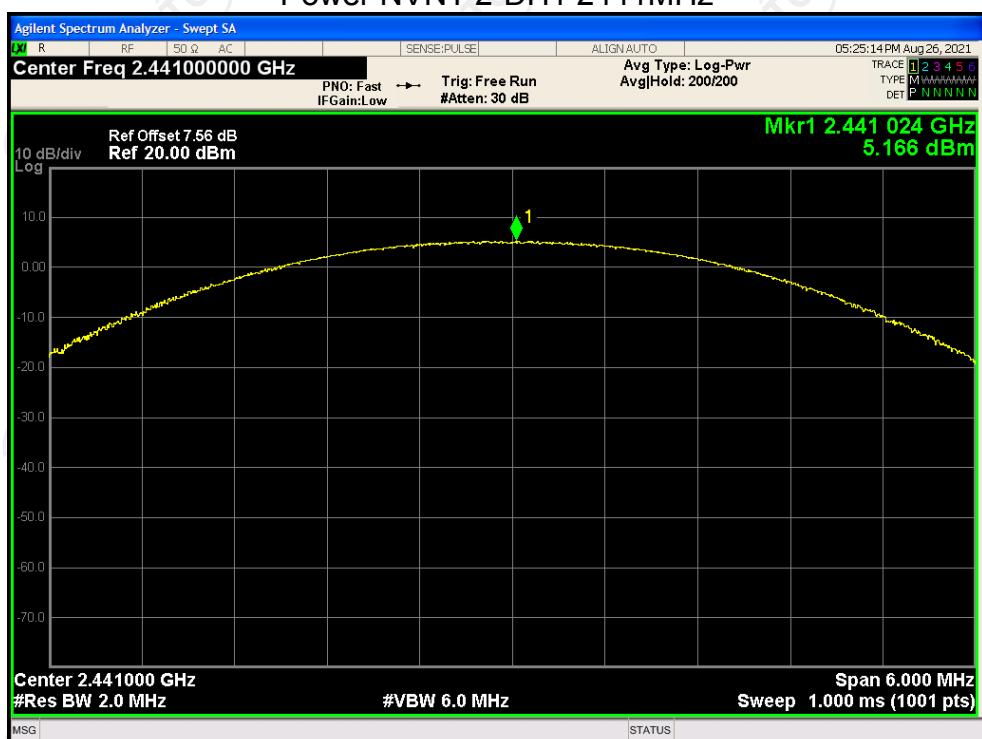

## Power NVNT 2-DH1 2480MHz

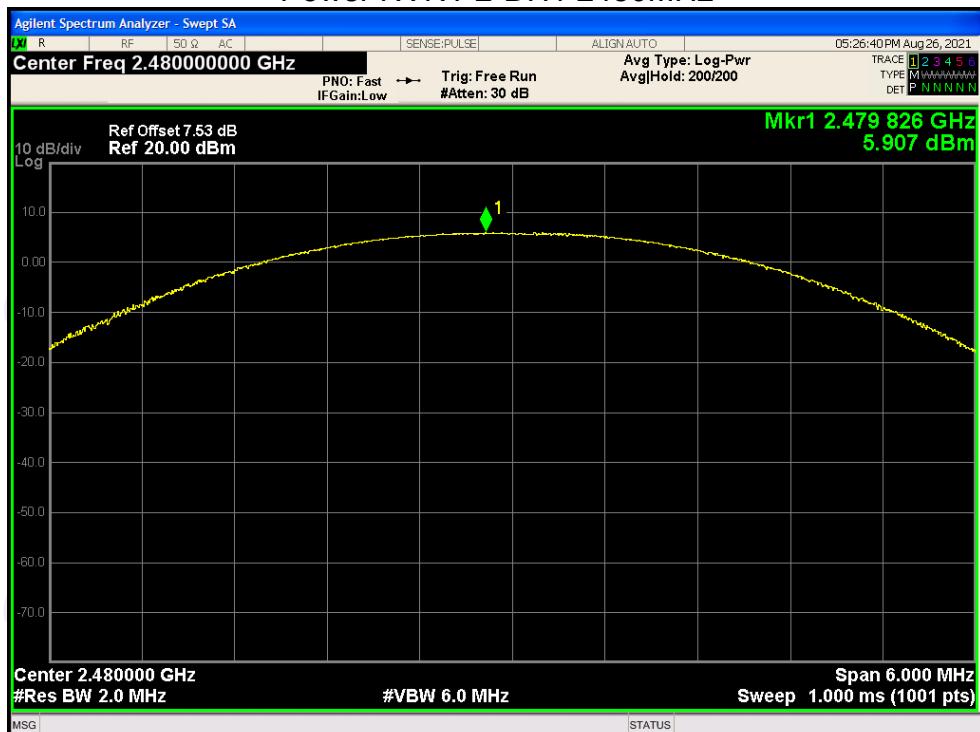

## -20dB Bandwidth

Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	0.876	Pass
NVNT	1-DH1	2441	0.872	Pass
NVNT	1-DH1	2480	0.875	Pass
NVNT	2-DH1	2402	1.249	Pass
NVNT	2-DH1	2441	1.253	Pass
NVNT	2-DH1	2480	1.254	Pass

### -20dB Bandwidth NVNT 1-DH1 2402MHz



## -20dB Bandwidth NVNT 1-DH1 2441MHz




## -20dB Bandwidth NVNT 1-DH1 2480MHz



-20dB Bandwidth NVNT 2-DH1 2402MHz



-20dB Bandwidth NVNT 2-DH1 2441MHz

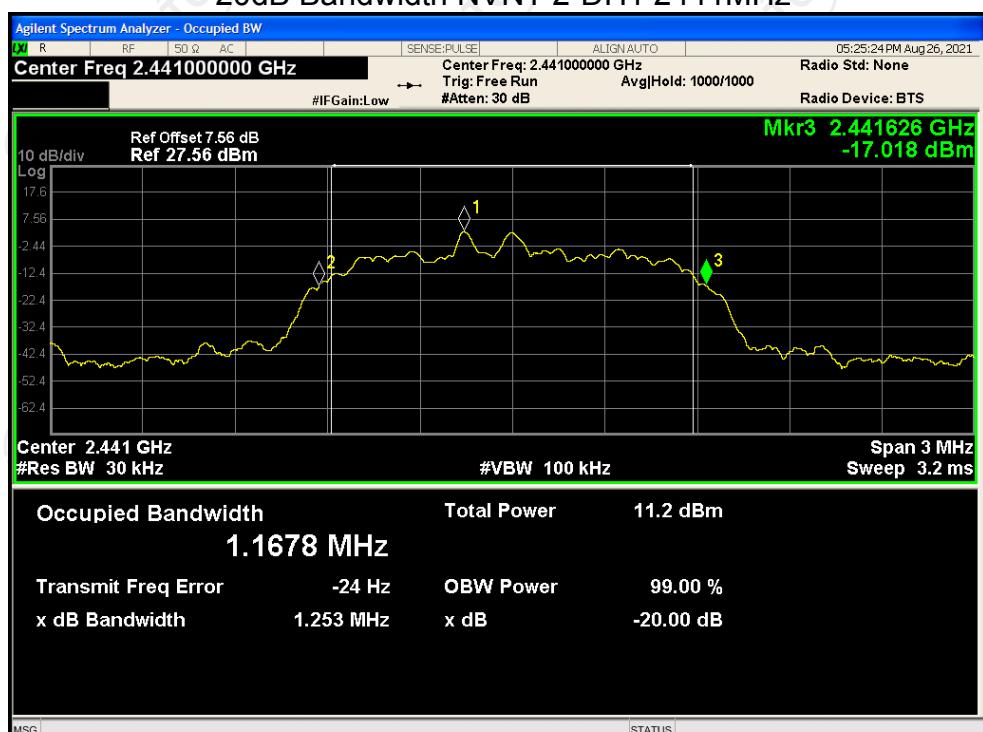


## -20dB Bandwidth NVNT 2-DH1 2480MHz




## Carrier Frequencies Separation

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2402.008	2403.004	0.996	0.876	Pass
NVNT	1-DH1	2440.846	2441.845	0.999	0.872	Pass
NVNT	1-DH1	2478.843	2479.845	1.002	0.875	Pass
NVNT	2-DH1	2401.846	2402.845	0.999	0.833	Pass
NVNT	2-DH1	2440.843	2441.845	1.002	0.835	Pass
NVNT	2-DH1	2478.846	2479.845	0.999	0.836	Pass

### CFS NVNT 1-DH1 2402MHz

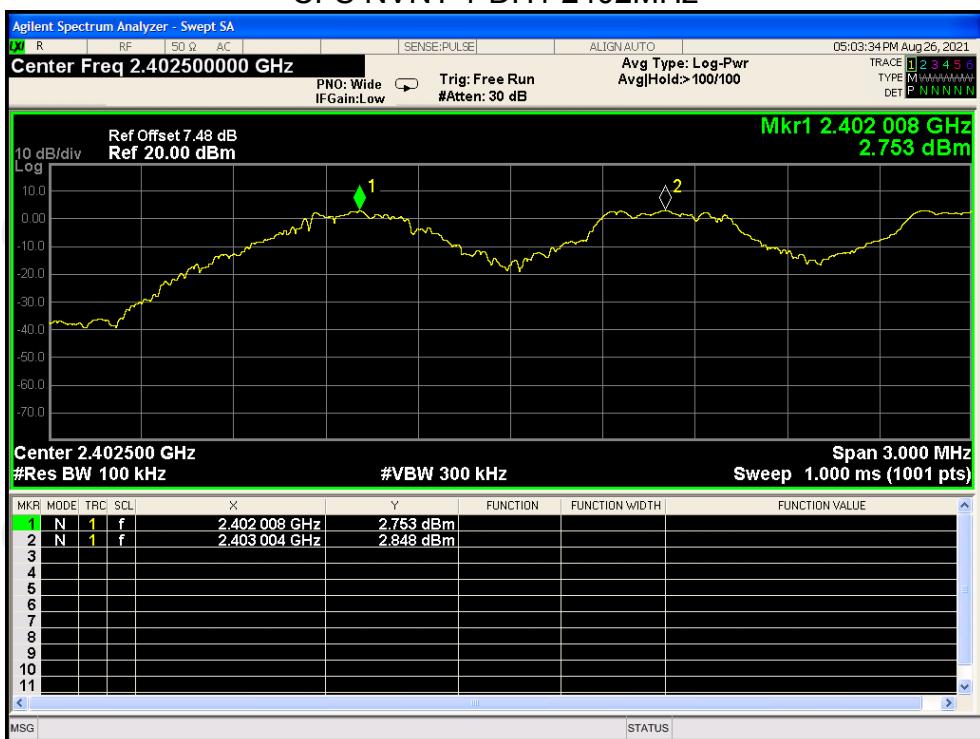

## CFS NVNT 1-DH1 2441MHz

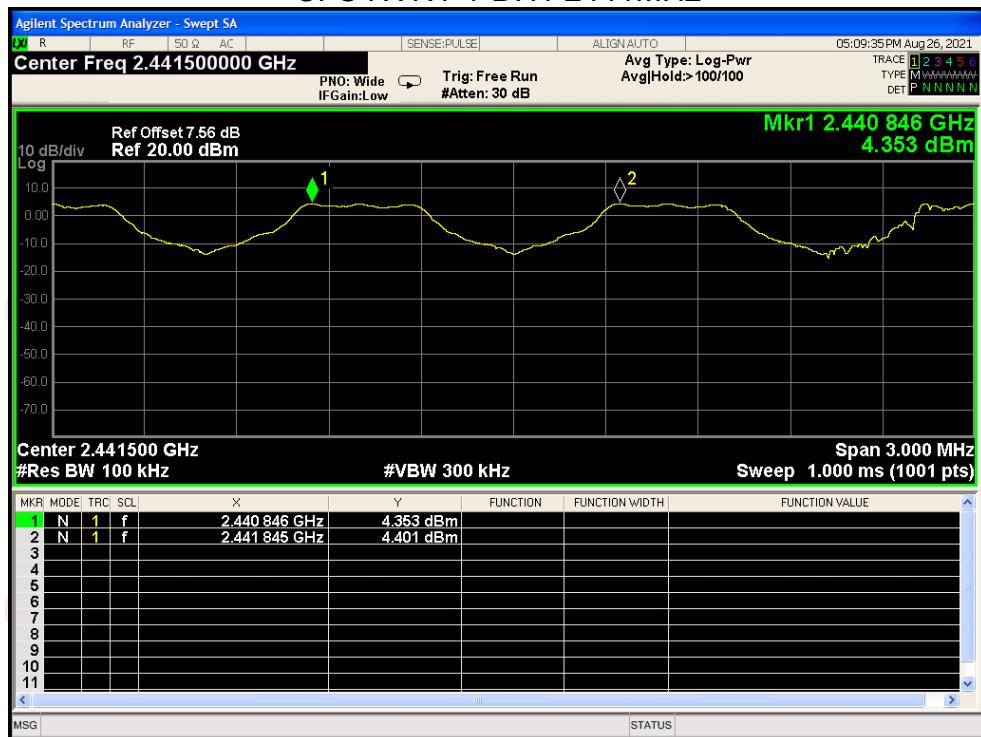

## CFS NVNT 1-DH1 2480MHz




## CFS NVNT 2-DH1 2402MHz



## CFS NVNT 2-DH1 2441MHz




## CFS NVNT 2-DH1 2480MHz

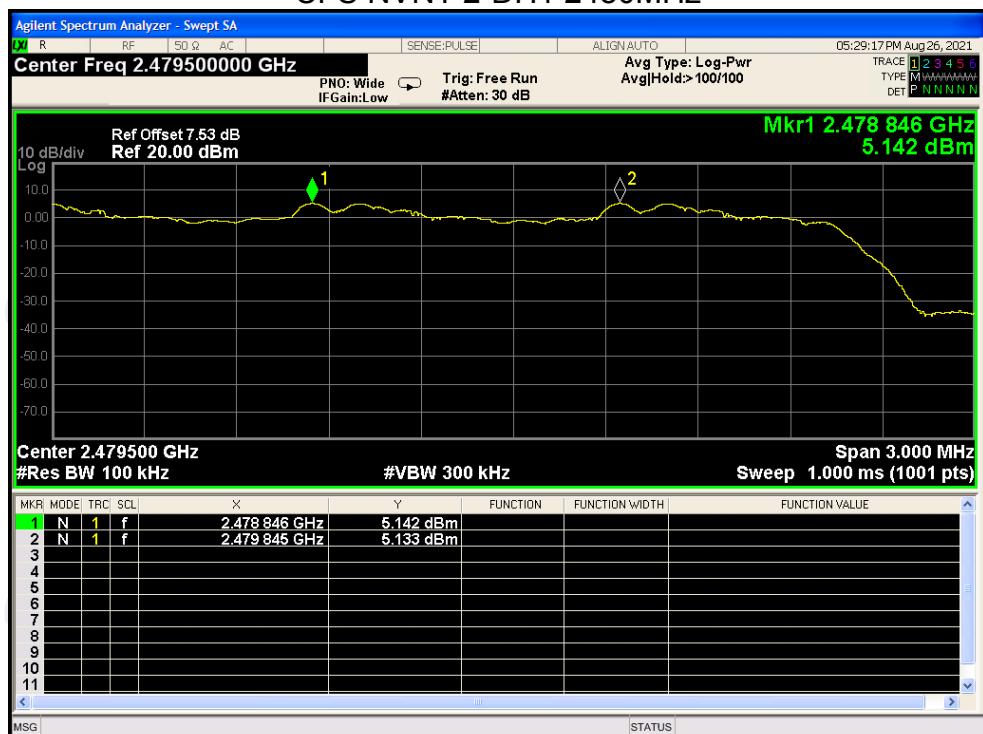


### Number of Hopping Channel

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2402MHz

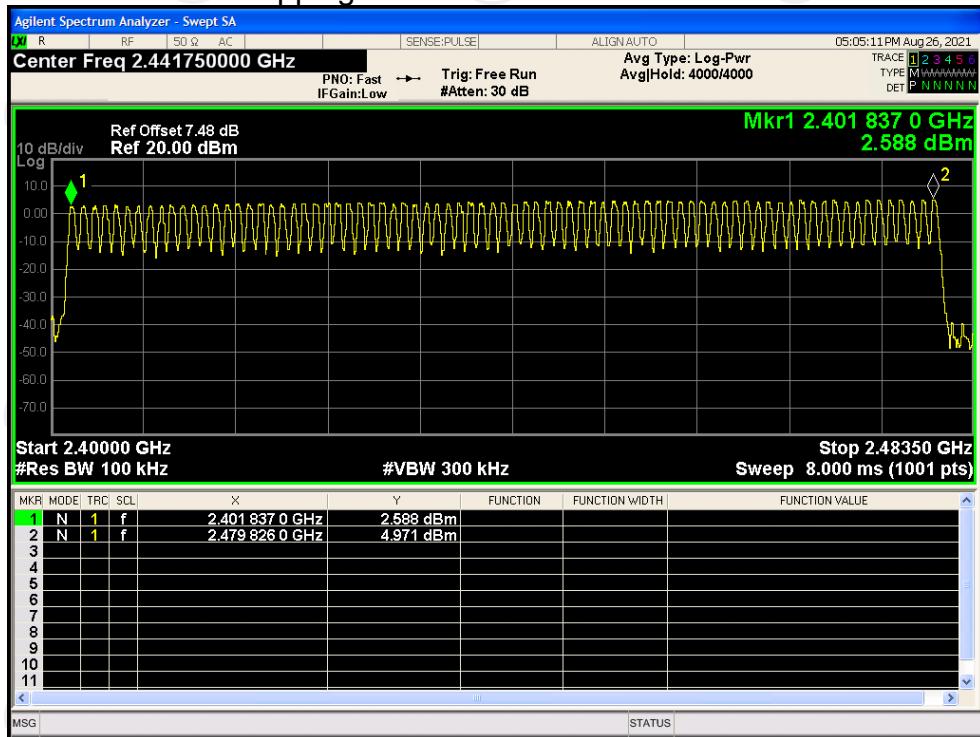


Hopping No. NVNT 2-DH1 2402MHz

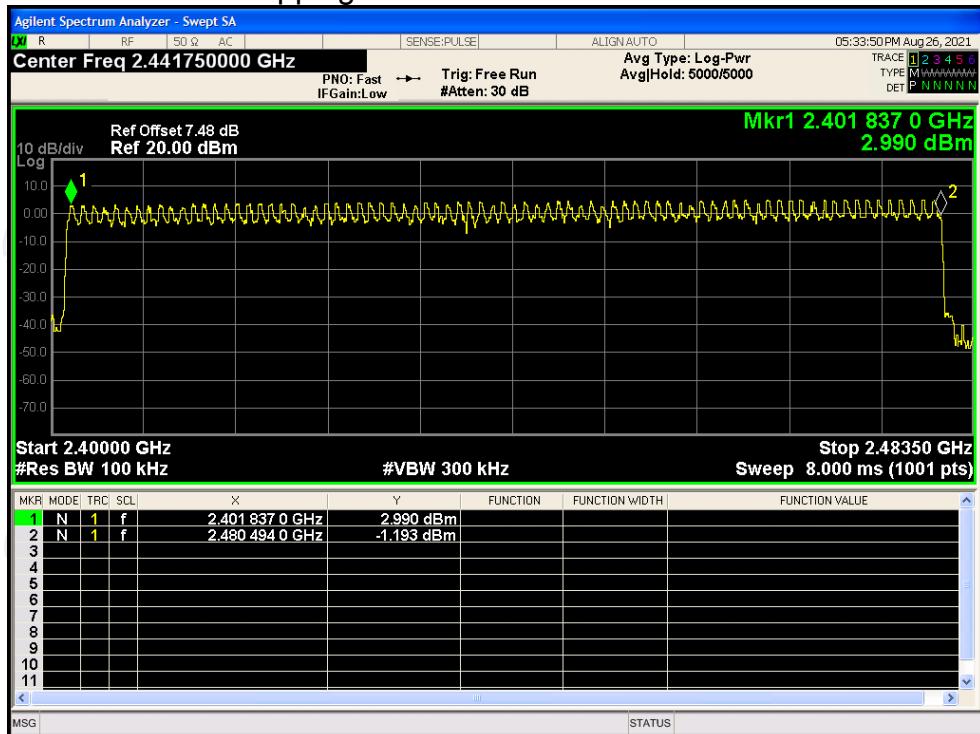


## Dwell Time

Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	0.383	122.56	31600	400	Pass
NVNT	1-DH3	2402	1.639	262.24	31600	400	Pass
NVNT	1-DH5	2402	2.886	307.84	31600	400	Pass
NVNT	2-DH1	2402	0.392	125.44	31600	400	Pass
NVNT	2-DH3	2402	1.644	263.04	31600	400	Pass
NVNT	2-DH5	2402	2.892	308.48	31600	400	Pass


### Dwell NVNT 1-DH1 2402MHz

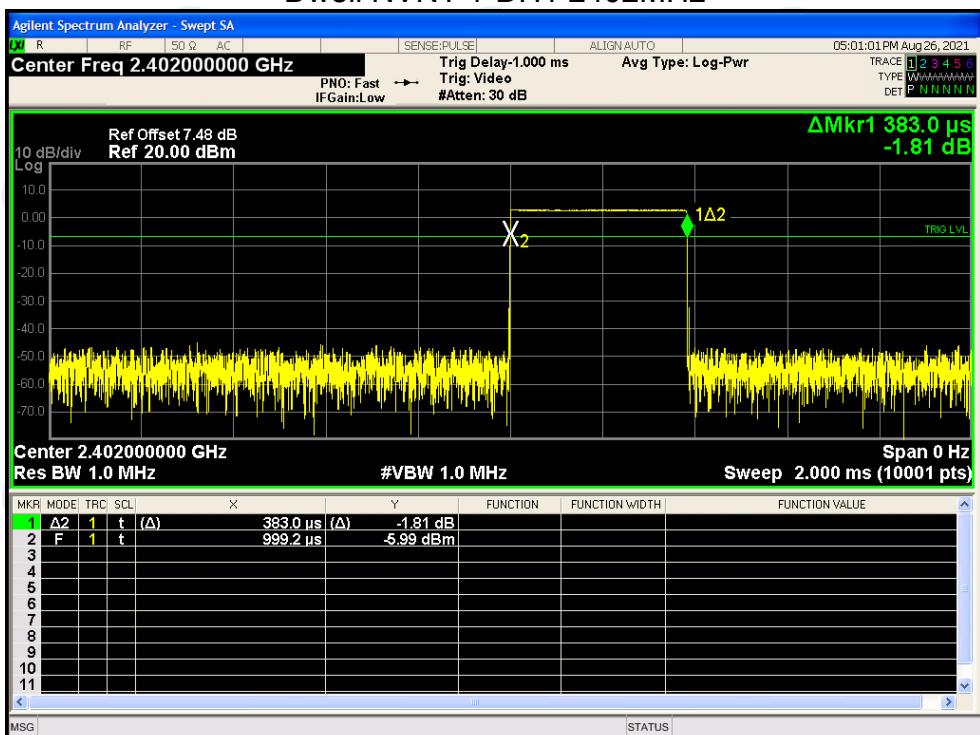


## Dwell NVNT 1-DH3 2402MHz

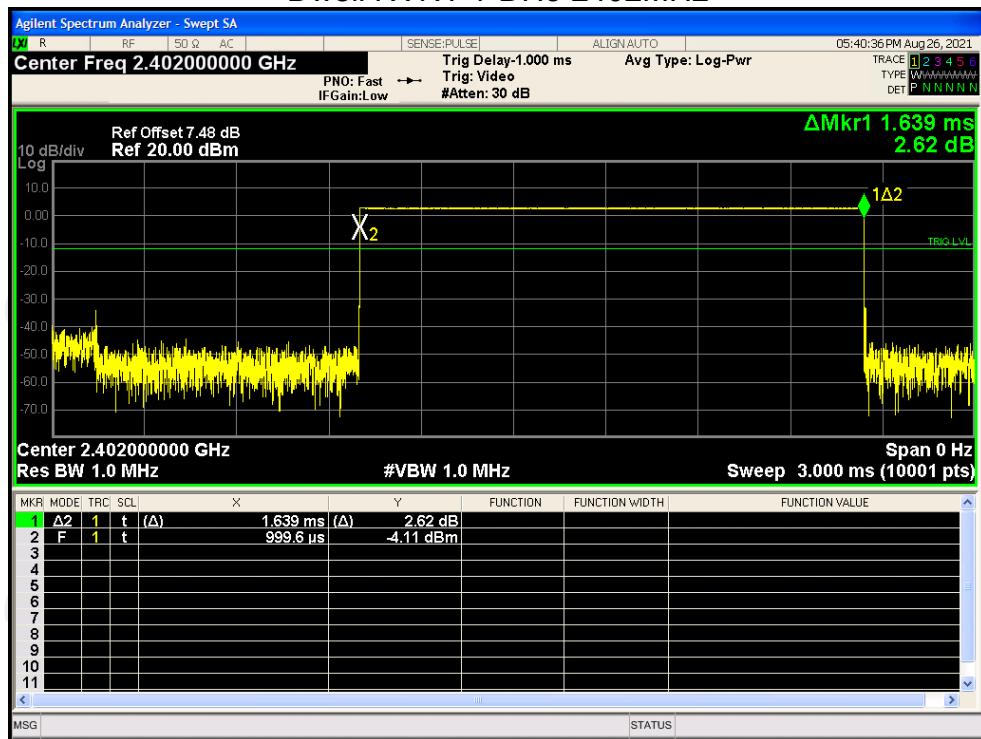


## Dwell NVNT 1-DH5 2402MHz

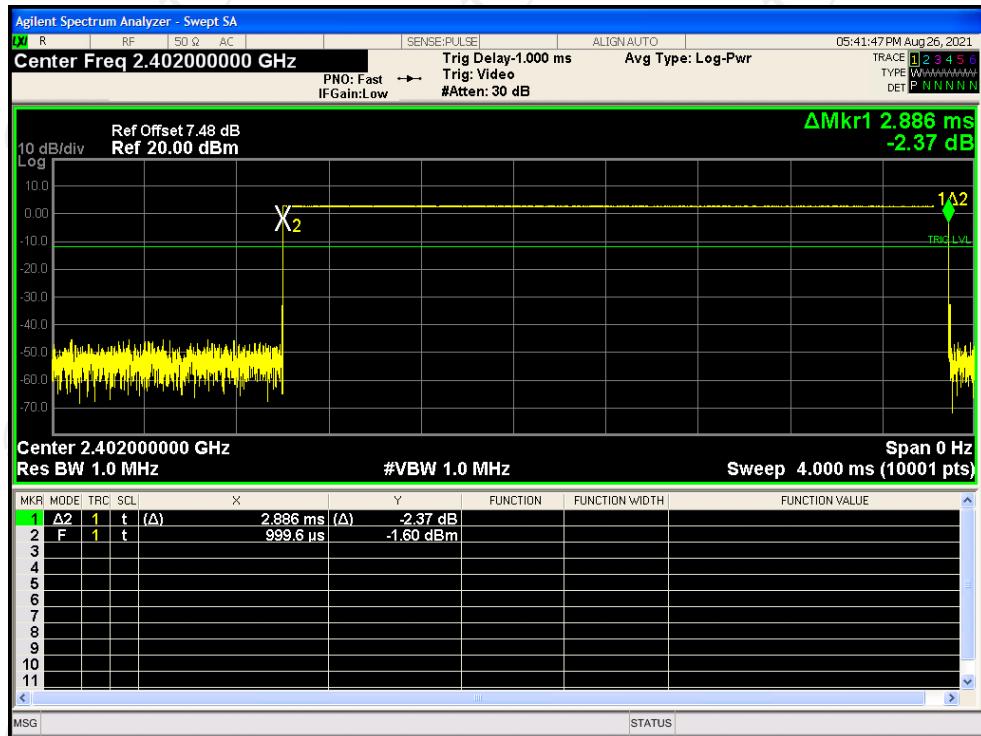


## Dwell NVNT 2-DH1 2402MHz

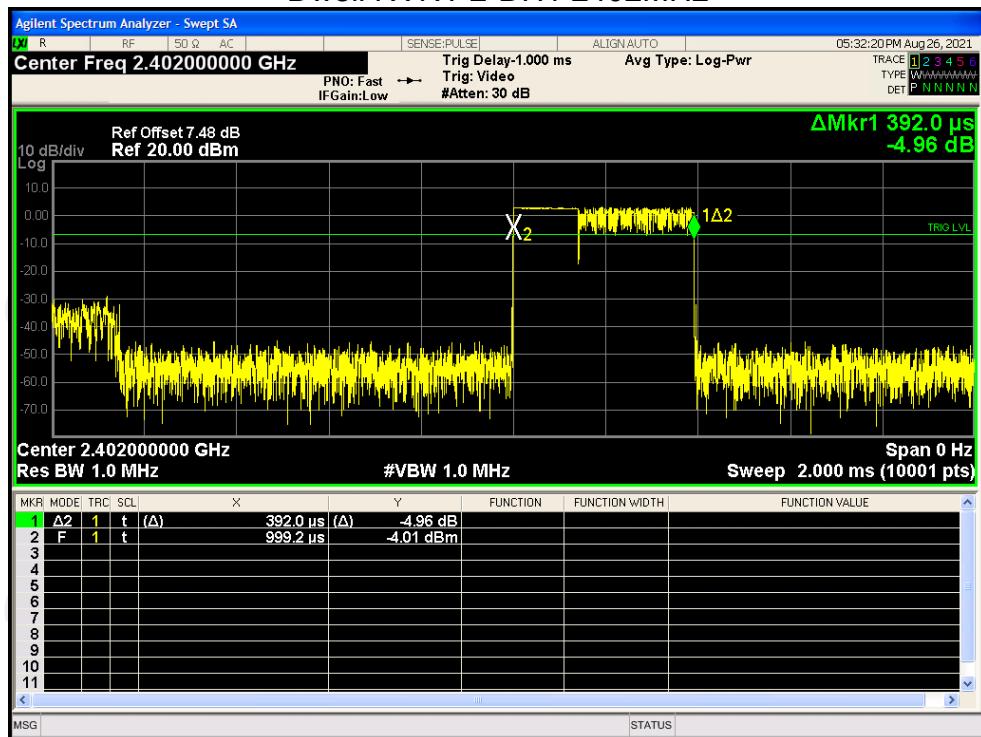

## Dwell NVNT 2-DH3 2402MHz

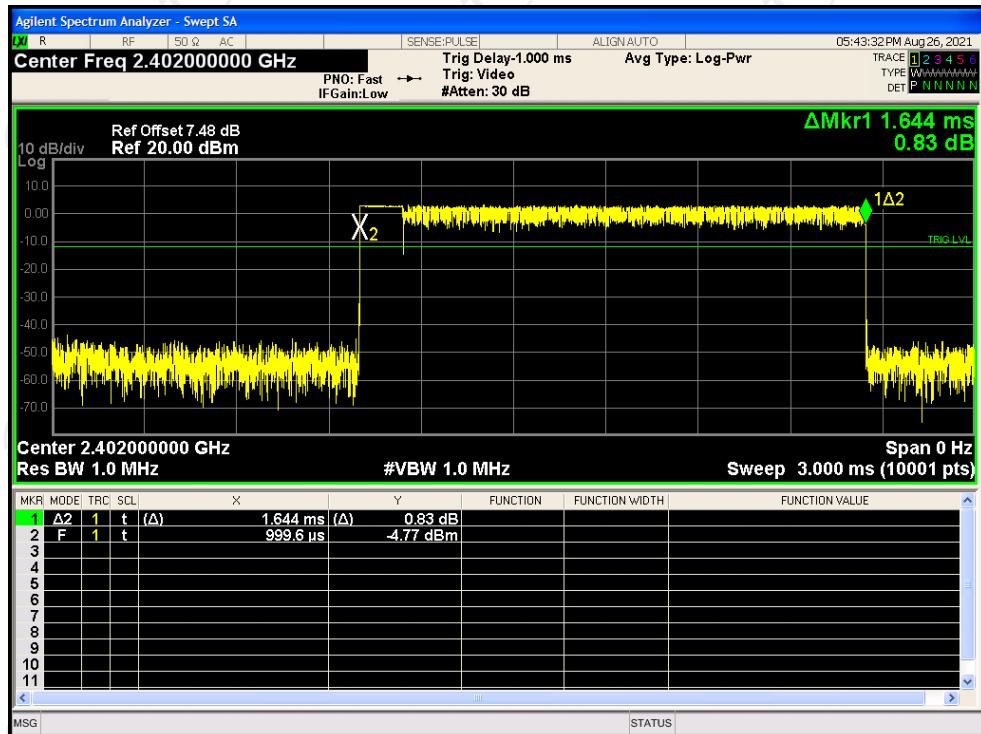

## Dwell NVNT 2-DH5 2402MHz

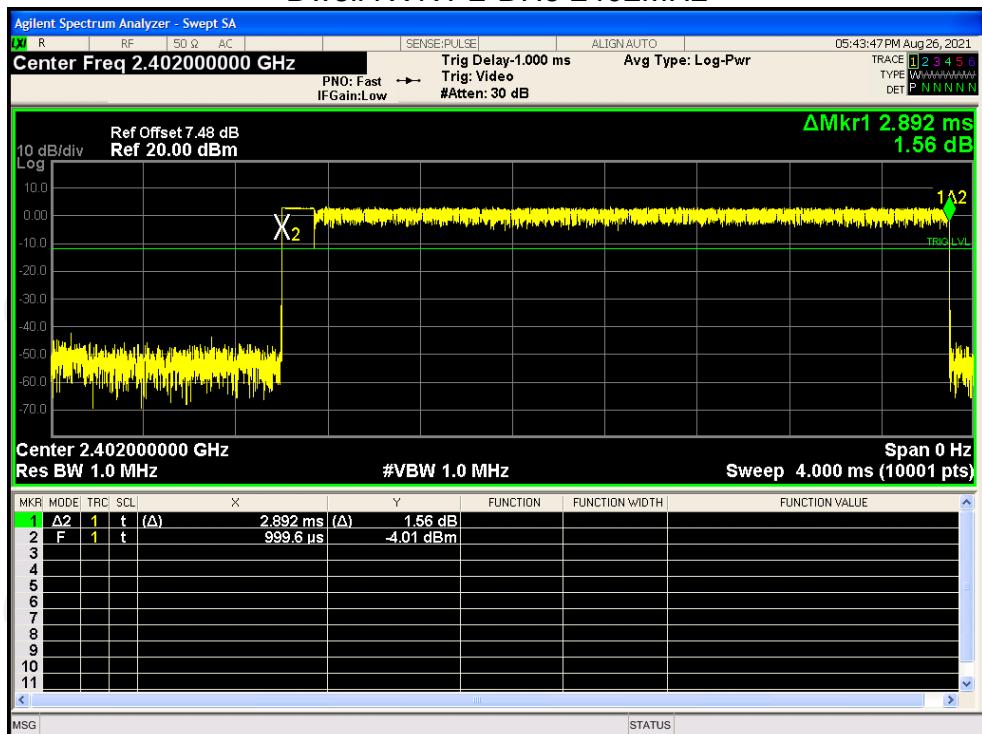


**Band Edge**

Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	No-Hopping	-52.00	-20	Pass
NVNT	1-DH1	2480	No-Hopping	-47.96	-20	Pass
NVNT	2-DH1	2402	No-Hopping	-52.26	-20	Pass
NVNT	2-DH1	2480	No-Hopping	-48.80	-20	Pass

**Band Edge NVNT 1-DH1 2402MHz No-Hopping Ref**




**Band Edge NVNT 1-DH1 2402MHz No-Hopping Emission**

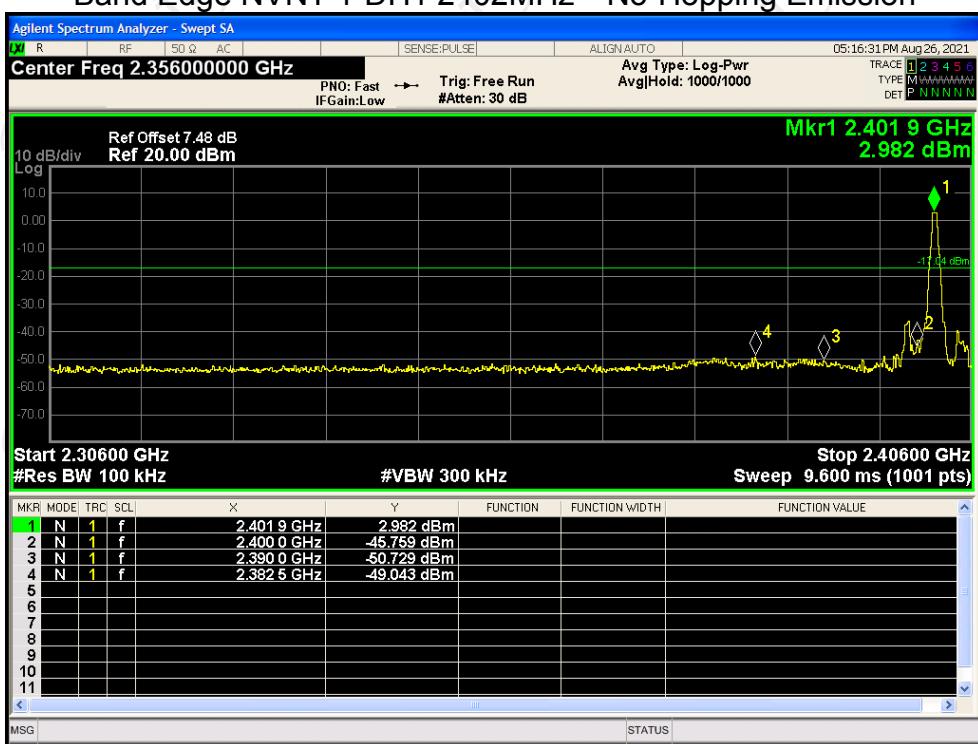

## Band Edge NVNT 1-DH1 2480MHz No-Hopping Ref




## Band Edge NVNT 1-DH1 2480MHz No-Hopping Emission

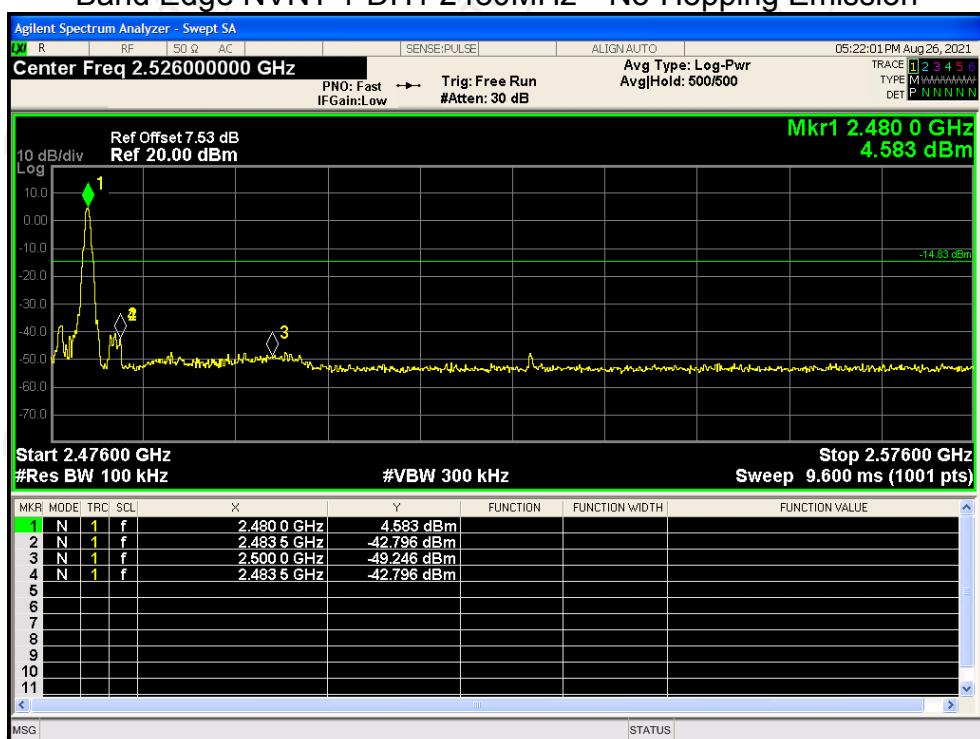

## Band Edge NVNT 2-DH1 2402MHz No-Hopping Ref




## Band Edge NVNT 2-DH1 2402MHz No-Hopping Emission

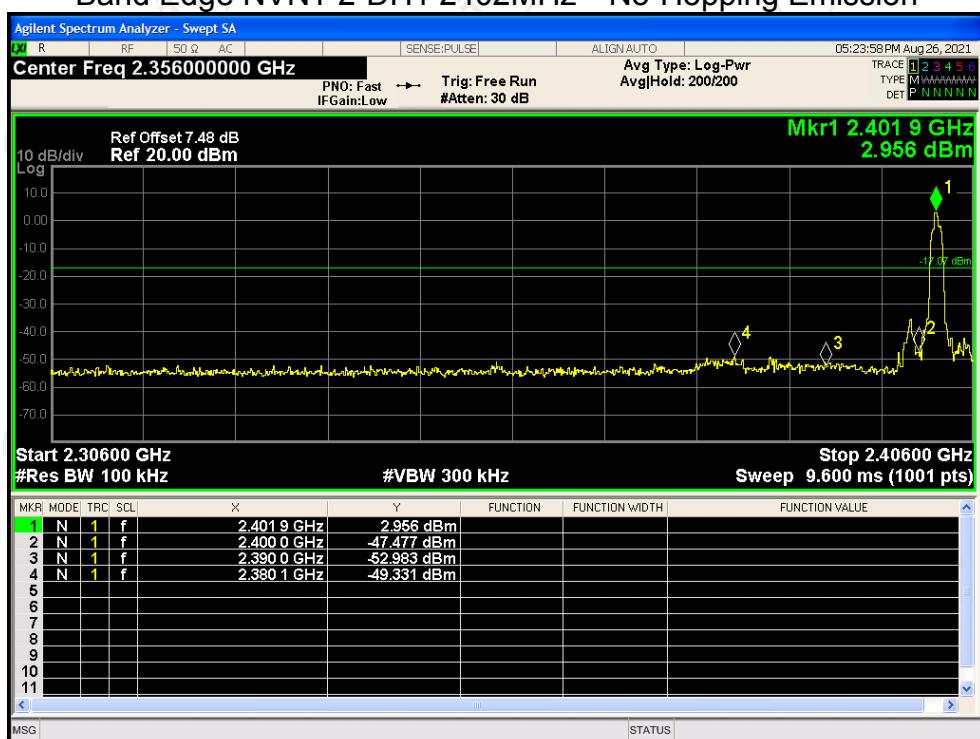

## Band Edge NVNT 2-DH1 2480MHz No-Hopping Ref



## Band Edge NVNT 2-DH1 2480MHz No-Hopping Emission

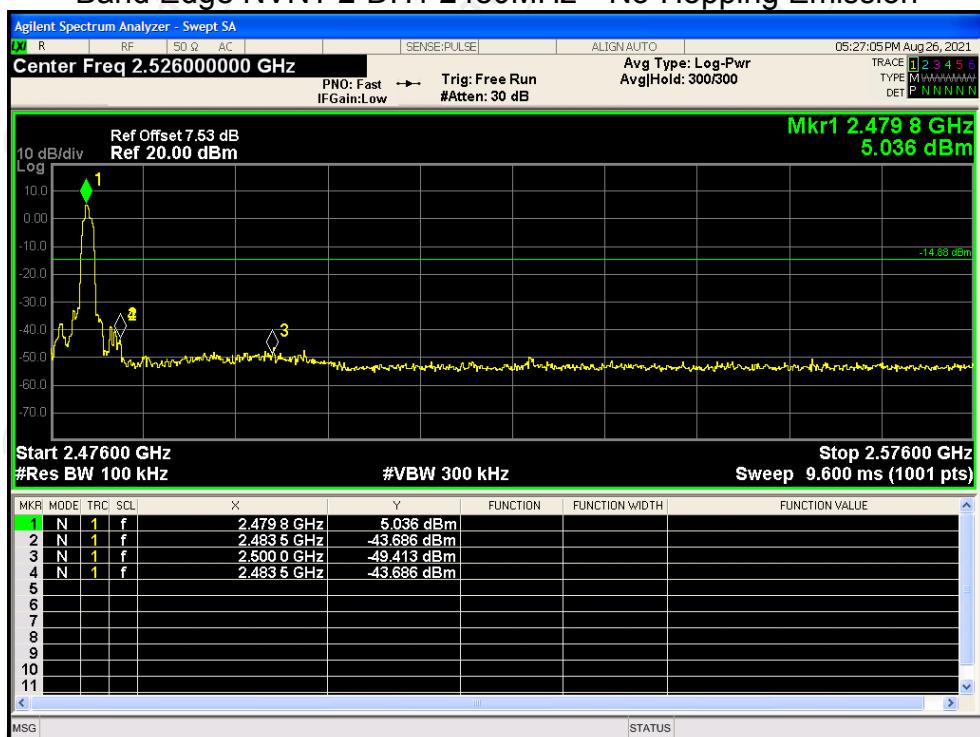


## Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Hopping	-51.86	-20	Pass
NVNT	1-DH1	2480	Hopping	-48.44	-20	Pass
NVNT	2-DH1	2402	Hopping	-52.12	-20	Pass
NVNT	2-DH1	2480	Hopping	-51.97	-20	Pass

### Band Edge(Hopping) NVNT 1-DH1 2402MHz Hopping Ref




### Band Edge(Hopping) NVNT 1-DH1 2402MHz Hopping Emission

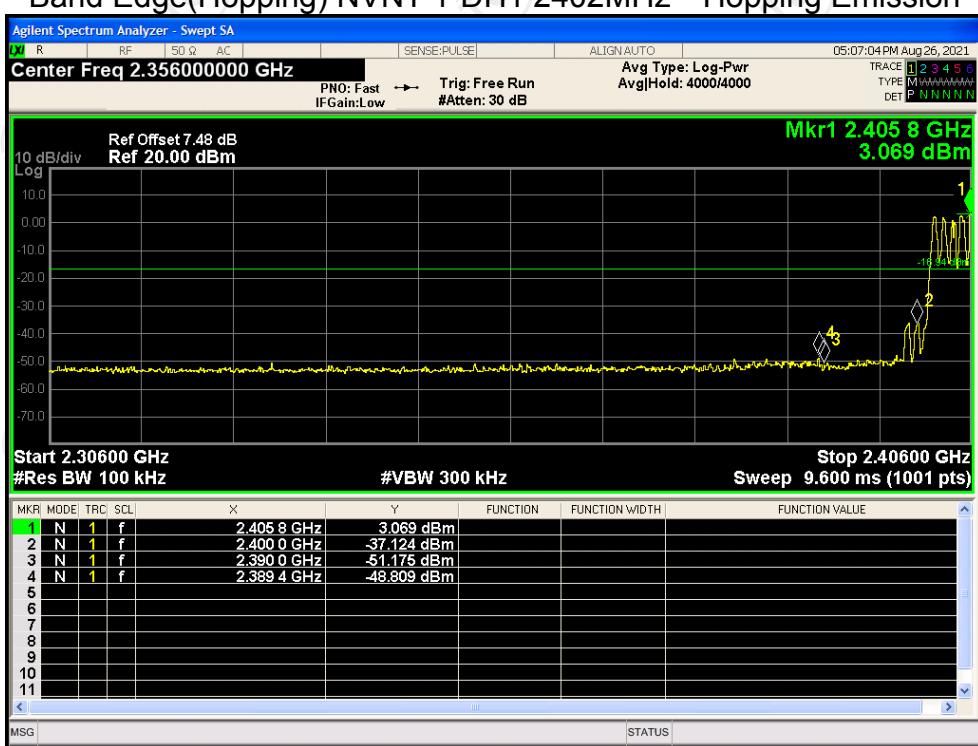

## Band Edge(Hopping) NVNT 1-DH1 2480MHz Hopping Ref




## Band Edge(Hopping) NVNT 1-DH1 2480MHz Hopping Emission

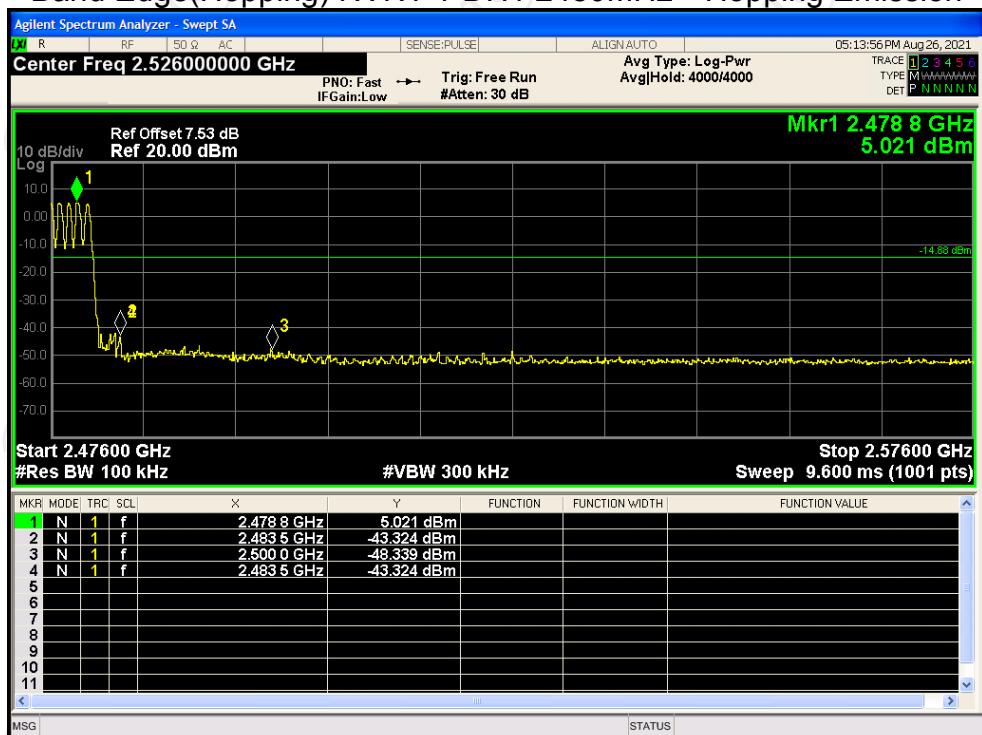

## Band Edge(Hopping) NVNT 2-DH1 2402MHz Hopping Ref




## Band Edge(Hopping) NVNT 2-DH1 2402MHz Hopping Emission

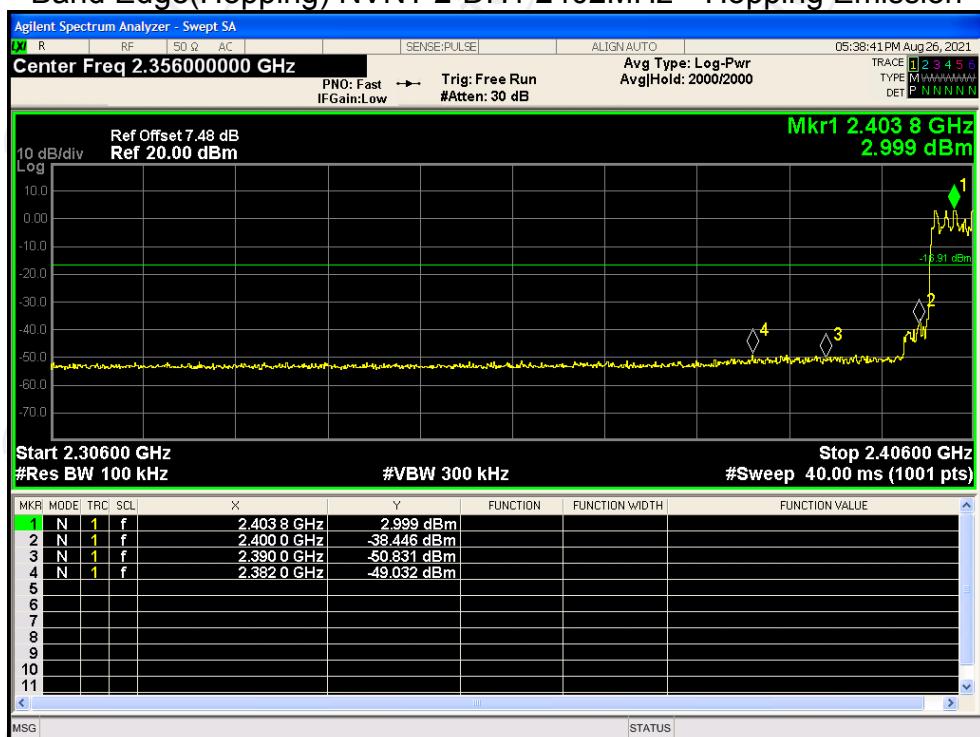

## Band Edge(Hopping) NVNT 2-DH1 2480MHz Hopping Ref



## Band Edge(Hopping) NVNT 2-DH1 2480MHz Hopping Emission

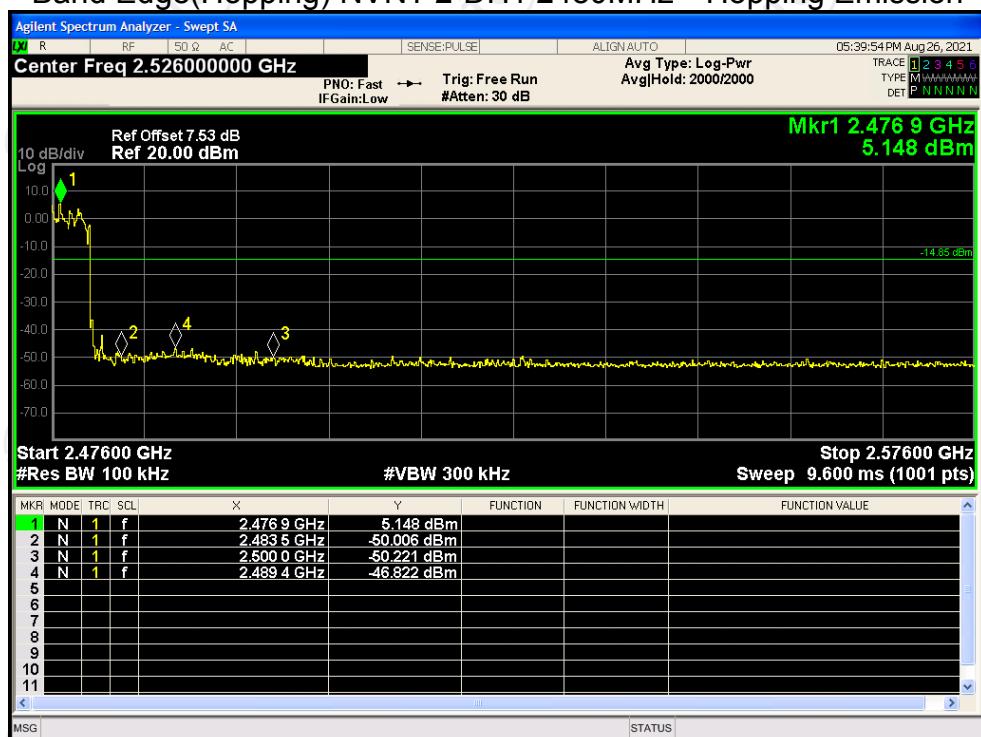


**Conducted RF Spurious Emission**

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	-42.44	-20	Pass
NVNT	1-DH1	2441	-44.26	-20	Pass
NVNT	1-DH1	2480	-44.72	-20	Pass
NVNT	2-DH1	2402	-42.91	-20	Pass
NVNT	2-DH1	2441	-43.77	-20	Pass
NVNT	2-DH1	2480	-44.36	-20	Pass

Tx. Spurious NVNT 1-DH1 2402MHz Ref




## Tx. Spurious NVNT 1-DH1 2402MHz Emission

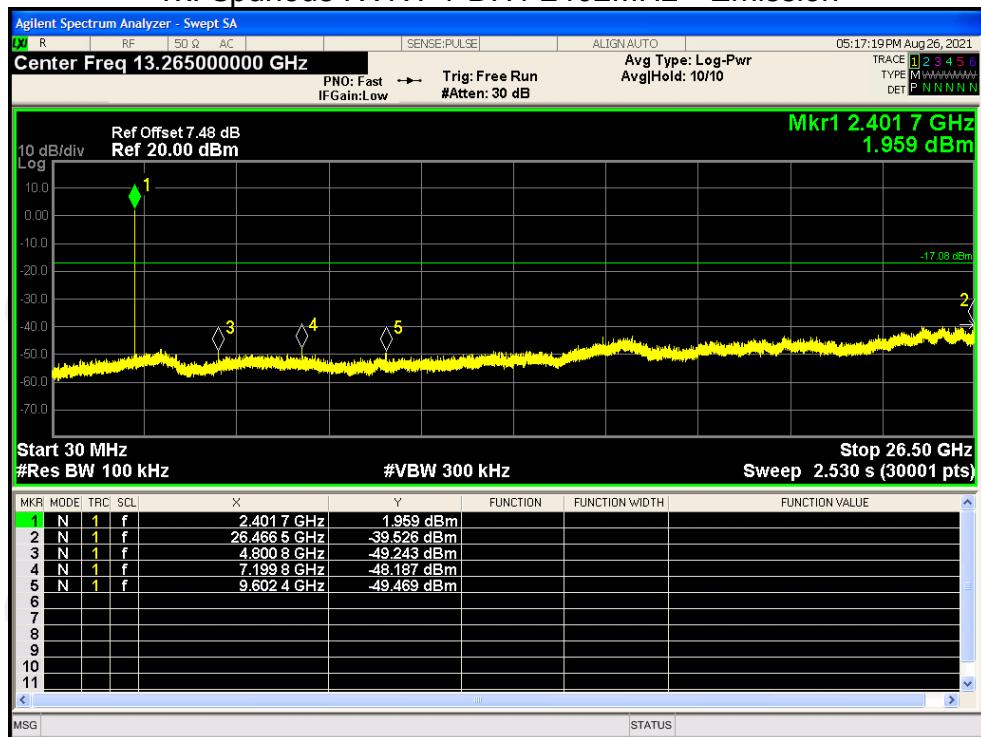

## Tx. Spurious NVNT 1-DH1 2441MHz Ref




## Tx. Spurious NVNT 1-DH1 2441MHz Emission

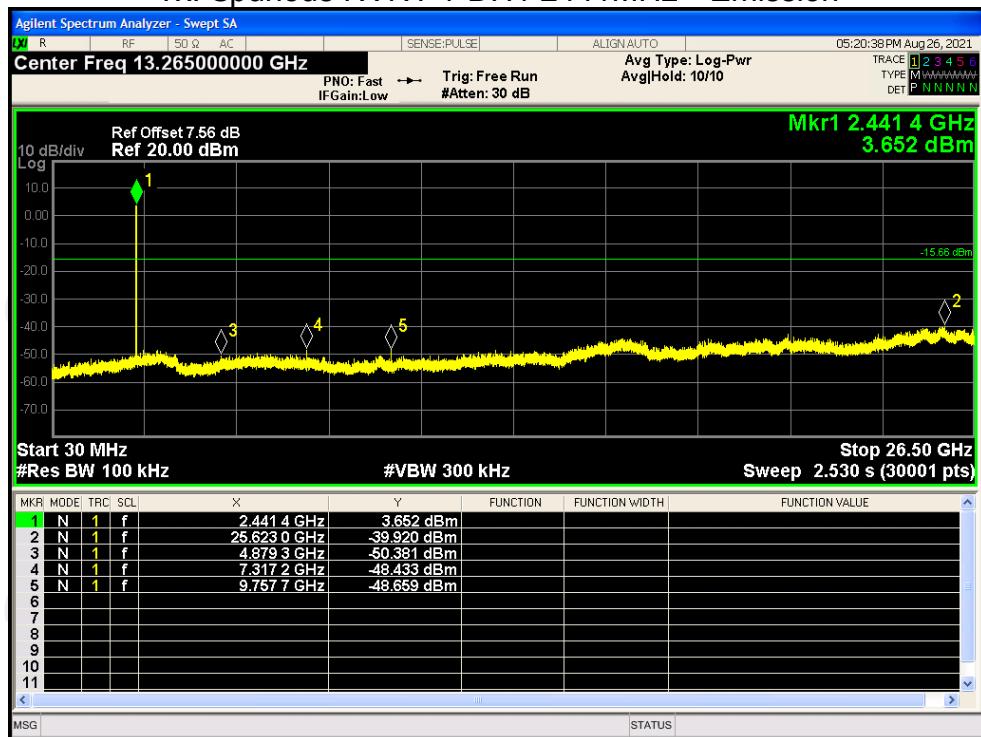

## Tx. Spurious NVNT 1-DH1 2480MHz Ref




## Tx. Spurious NVNT 1-DH1 2480MHz Emission

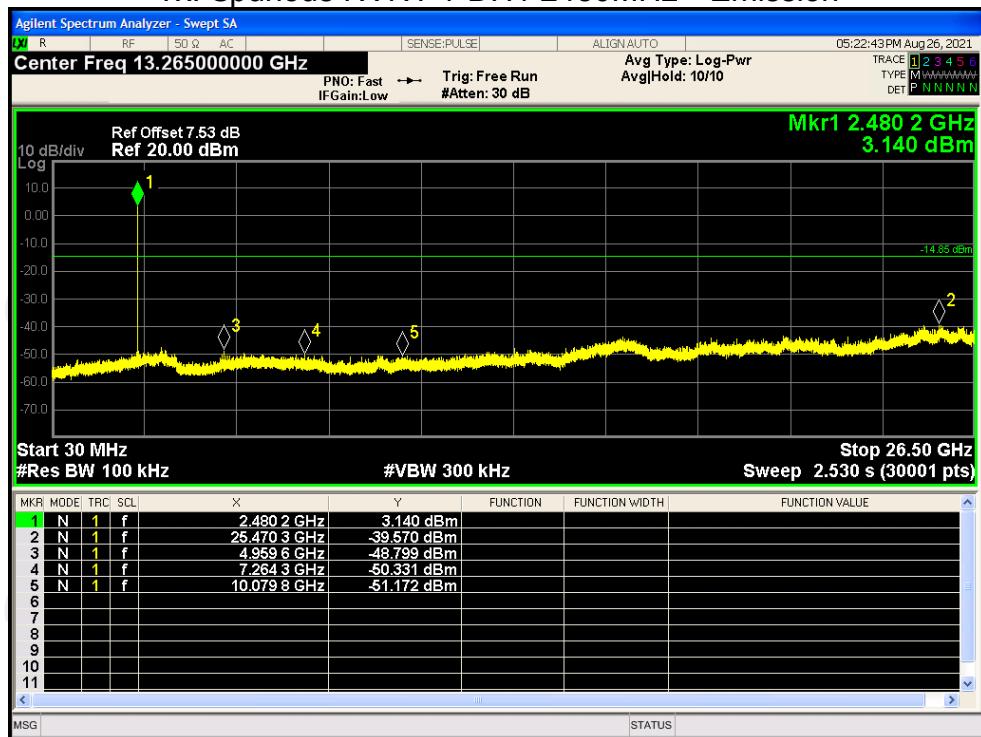

## Tx. Spurious NVNT 2-DH1 2402MHz Ref




## Tx. Spurious NVNT 2-DH1 2402MHz Emission

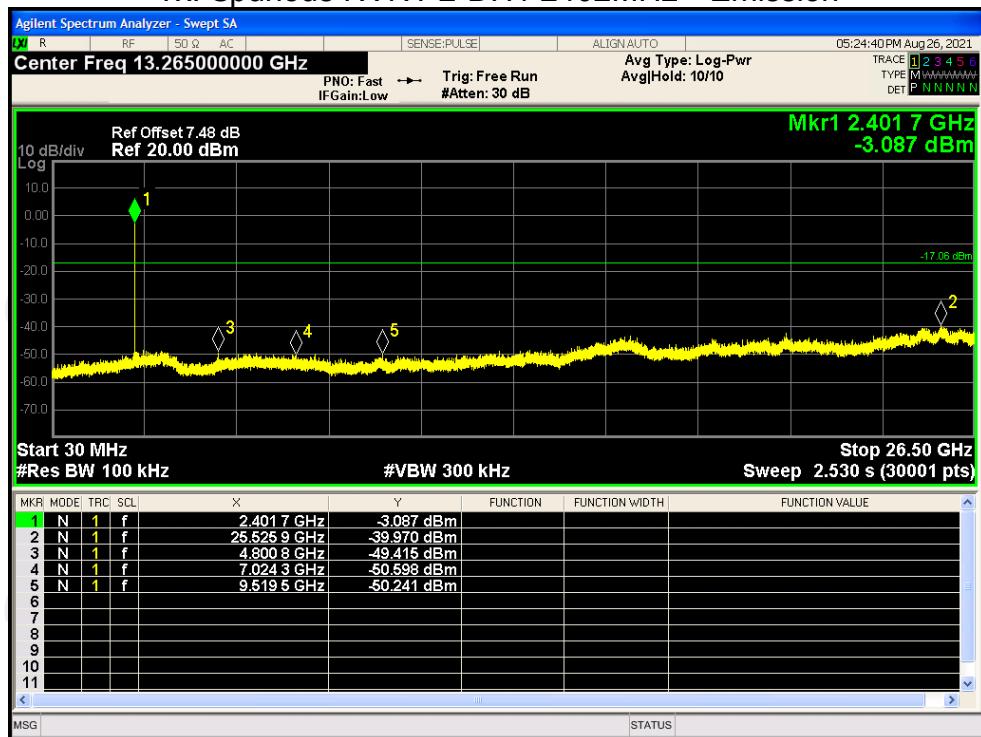

## Tx. Spurious NVNT 2-DH1 2441MHz Ref




## Tx. Spurious NVNT 2-DH1 2441MHz Emission

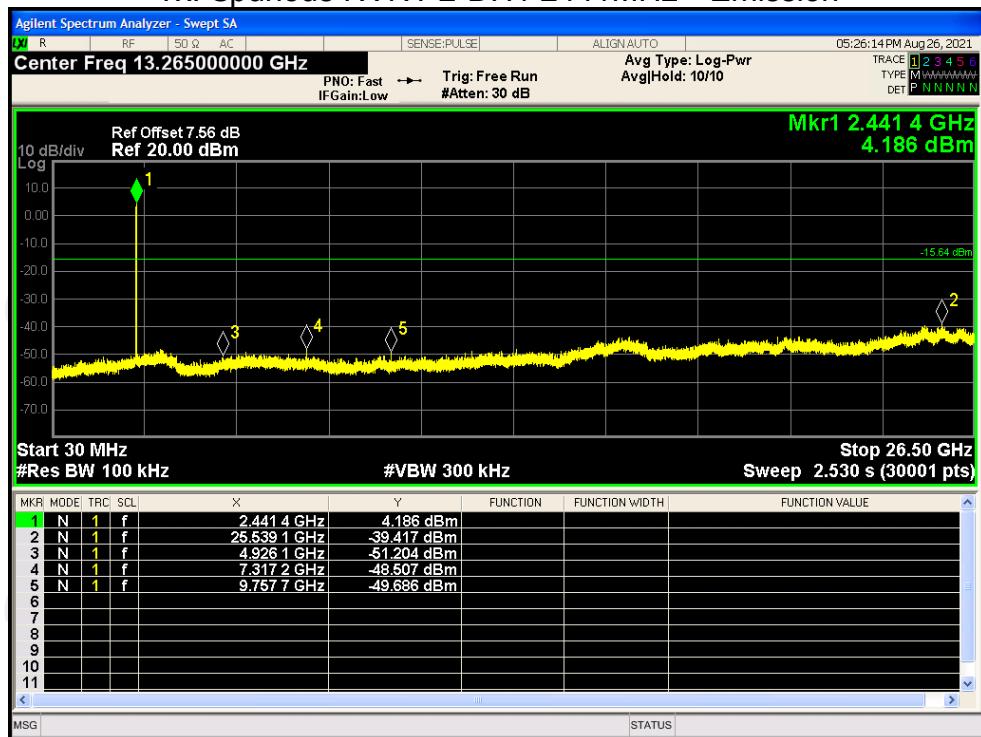

## Tx. Spurious NVNT 2-DH1 2480MHz Ref



## Tx. Spurious NVNT 2-DH1 2480MHz Emission

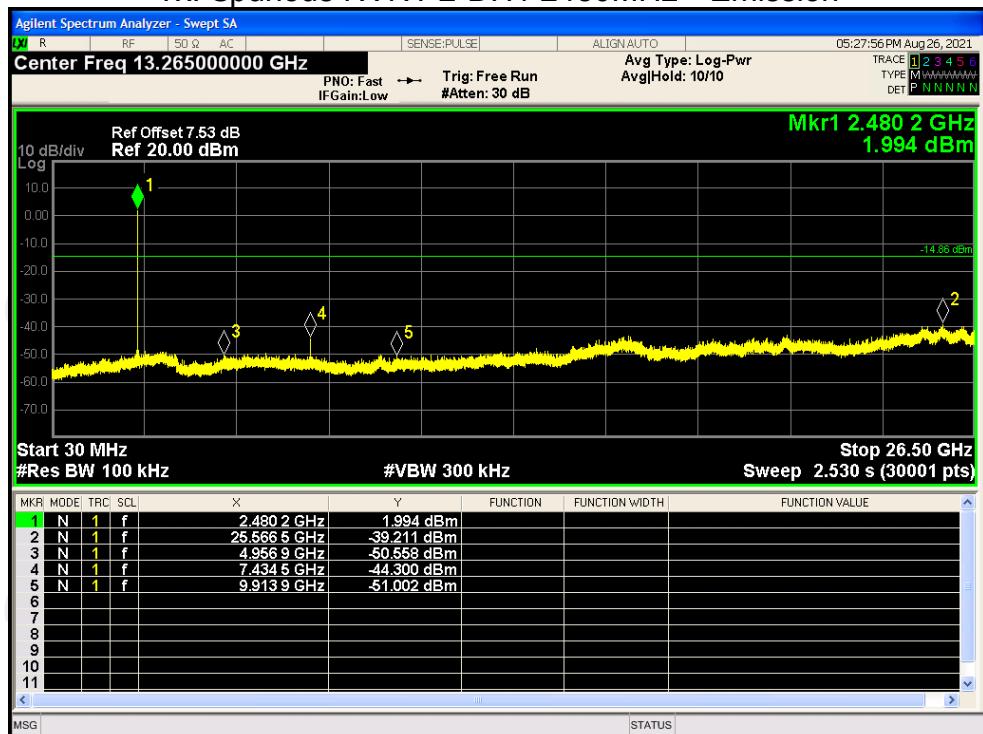

## Appendix B: Photographs of Test Setup


Product: Bluetooth Earphone

Model: 0805

Radiated Emission



Conducted Emission

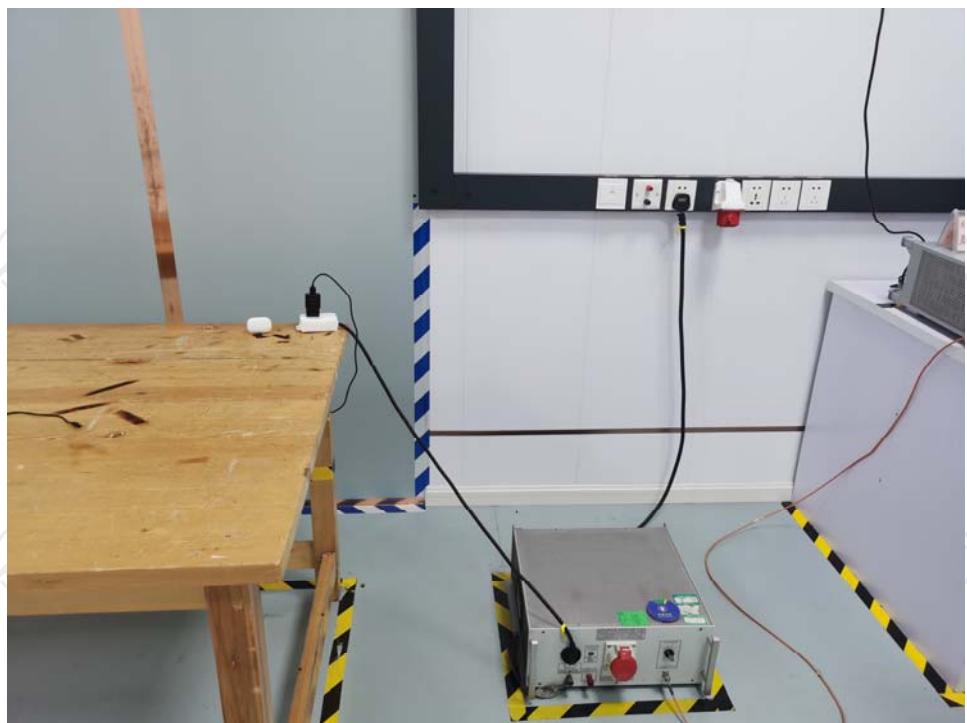



**Appendix C: Photographs of EUT**

**Product: Bluetooth Earphone**

**Model: 0805**

**External Photos**


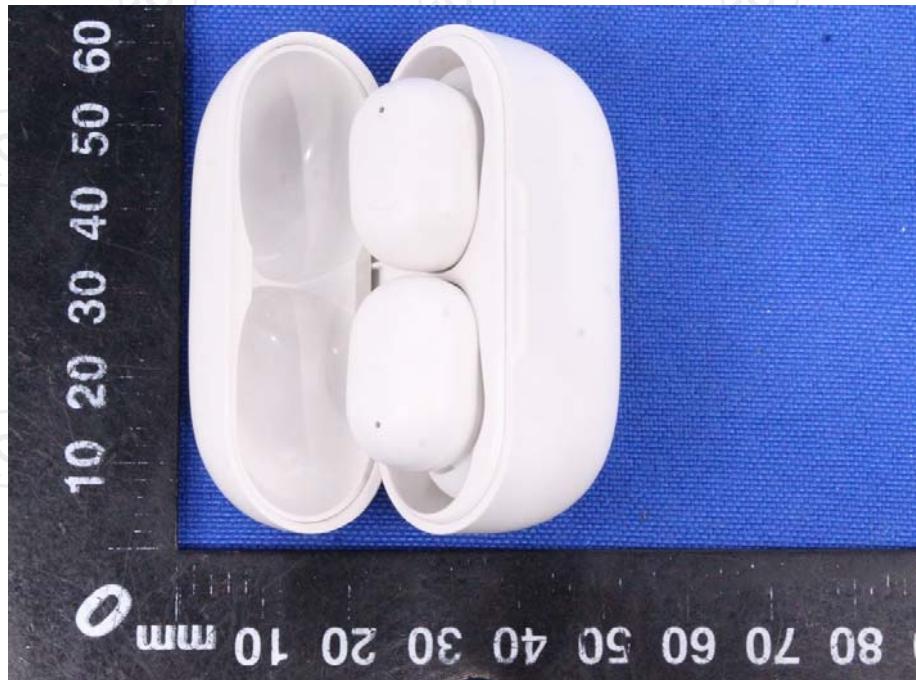



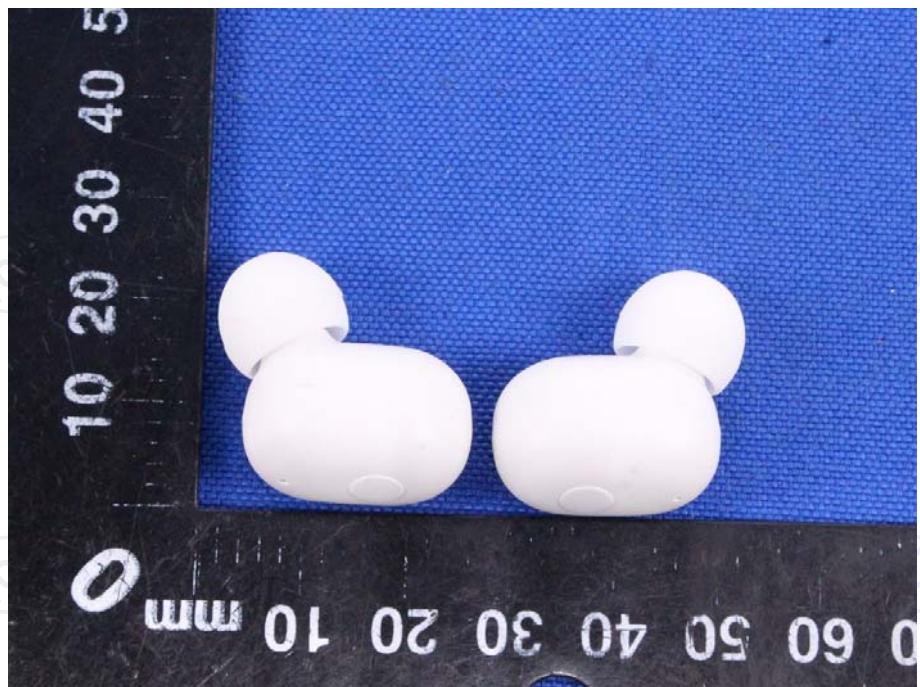








**Product: Bluetooth Earphone**  
**Model: 0805**  
**Internal Photos**

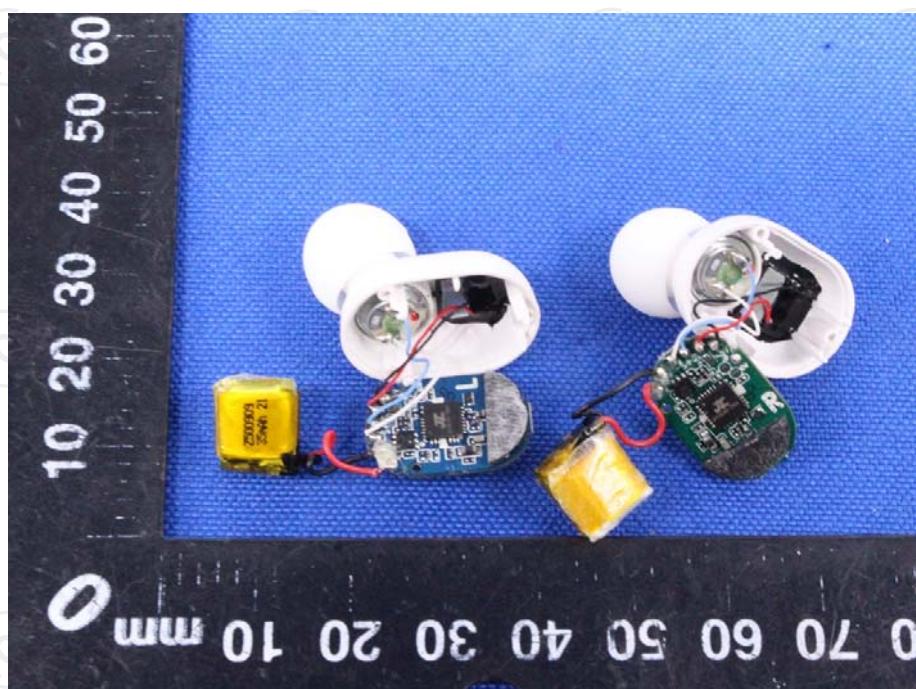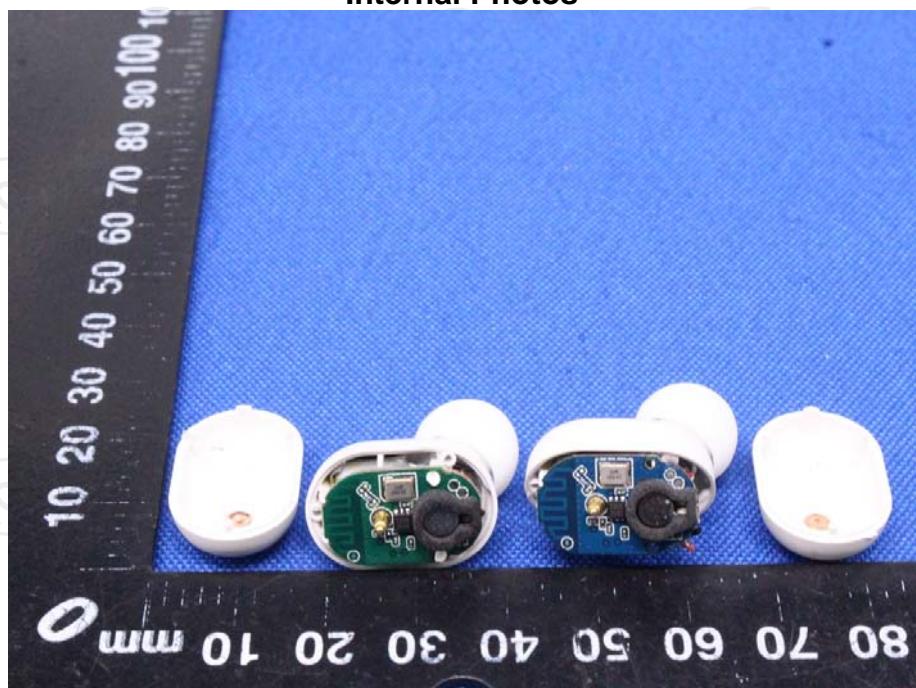

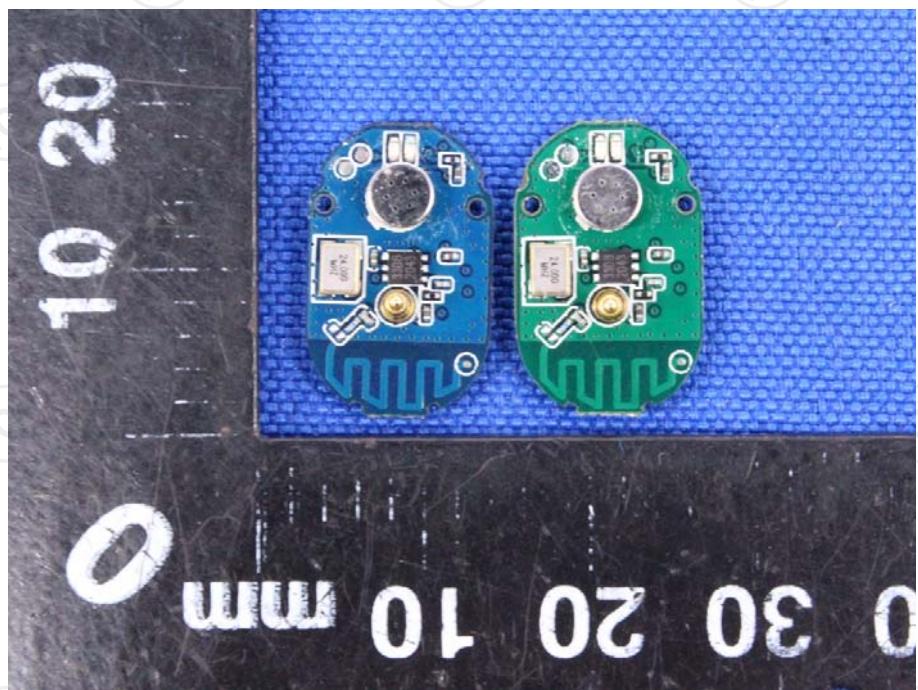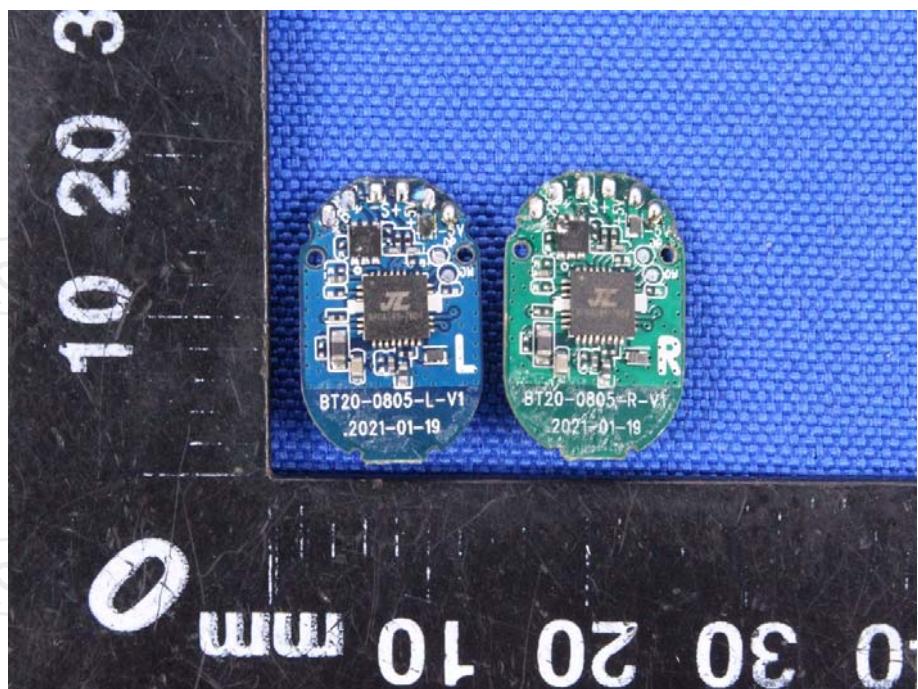

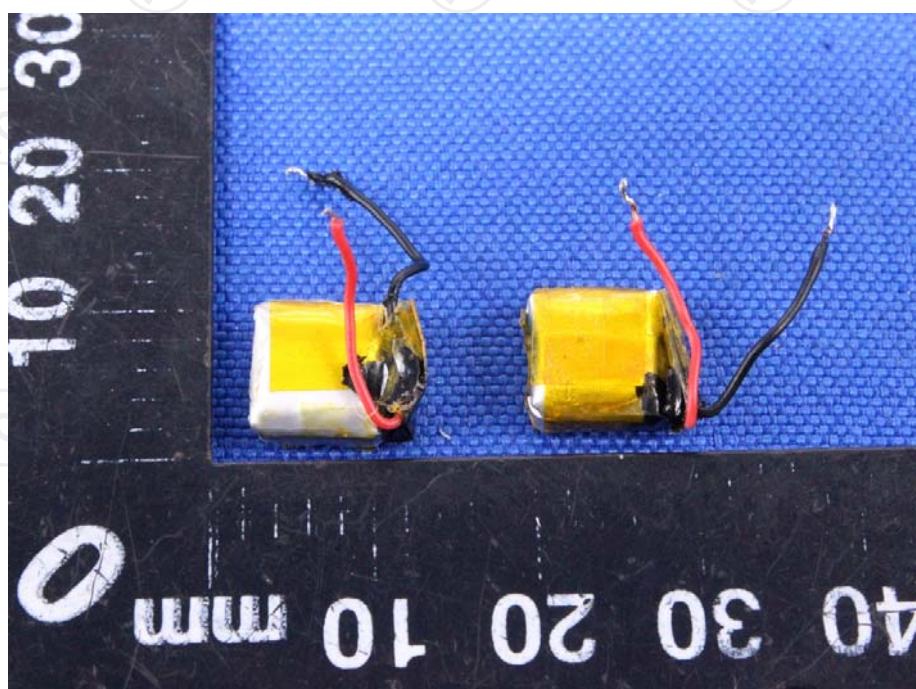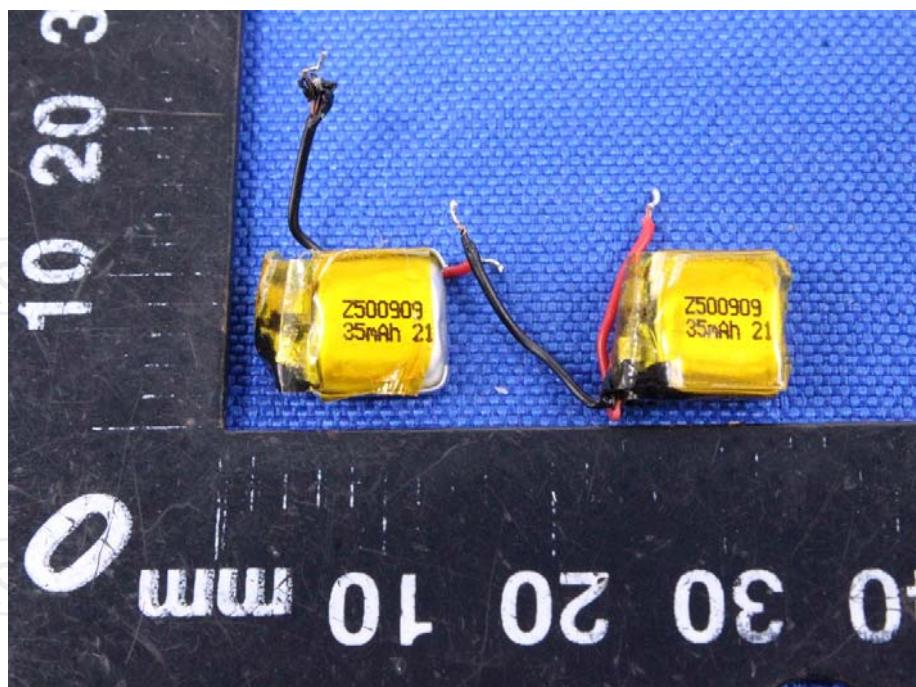

\*\*\*\*\*END OF REPORT\*\*\*\*\*