



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM180100012605  
Page: 1 of 381

# TEST REPORT

**Application No.:** SZEM1801000126CR  
**Applicant:** Centurion Electronics LTD  
**Address of Applicant:** Unit 10, Devonshire Court, Fountain Dr., Hertford, United Kingdom,  
SG13 7UB  
**Manufacturer:** AERO VISION INC  
**Address of Manufacturer:** 2F,30 R&D 2ND RD.,SCIENCE-BASED INDUSTRIAL PARK,HSIN-  
CHU,TAIWAN,300  
**Factory:** AERO VISION INC  
**Address of Factory:** 2F,30 R&D 2ND RD.,SCIENCE-BASED INDUSTRIAL PARK,HSIN-  
CHU,TAIWAN,300

**Equipment Under Test (EUT):**

**EUT Name:** MBA NEXTGEN TABLET  
**Model No.:** A213 820 43 03  
**FCC ID:** 2AOUH264-271-NG  
**Trade mark:** Mercedes-Benz  
**Standard(s) :** 47 CFR Part 15, Subpart E 15.407  
**Date of Receipt:** 2018-01-05  
**Date of Test:** 2018-01-31 to 2018-02-01  
**Date of Issue:** 2018-04-03

<b>Test Result:</b>	Pass*
---------------------	-------

\* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-04-03		Original

Authorized for issue by:			
		 _____ Leo Lai /Project Engineer	
		 _____ Eric Fu /Reviewer	

## 2 Test Summary

<b>Radio Spectrum Technical Requirement</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass

N/A: Not applicable

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Duty Cycle	47 CFR Part 15, Subpart E 15.407	KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
99% Bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 II D	N/A	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band )	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
DFS: Non-occupancy period	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
DFS: Channel Move Time	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
DFS: Channel Closing Transmission Time	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Radiated Emissions	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass

N/A: Not applicable

### 3 Contents

	Page
1 COVER PAGE .....	1
2 TEST SUMMARY .....	3
3 CONTENTS .....	4
4 GENERAL INFORMATION .....	6
4.1 DETAILS OF E.U.T .....	6
4.2 DESCRIPTION OF SUPPORT UNITS .....	6
4.3 MEASUREMENT UNCERTAINTY .....	7
4.4 TEST LOCATION .....	8
4.5 TEST FACILITY .....	8
4.6 DEVIATION FROM STANDARDS .....	8
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
5 EQUIPMENT LIST .....	9
6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....	14
6.1 ANTENNA REQUIREMENT .....	14
6.1.1 <i>Test Requirement</i> .....	14
6.1.2 <i>Conclusion</i> .....	14
6.2 TRANSMISSION IN THE ABSENCE OF DATA .....	15
6.2.1 <i>Test Requirement</i> .....	15
6.2.2 <i>Conclusion</i> .....	15
7 RADIO SPECTRUM MATTER TEST RESULTS .....	16
7.1 DUTY CYCLE .....	16
7.1.1 <i>E.U.T. Operation</i> .....	16
7.1.2 <i>Test Setup Diagram</i> .....	16
7.1.3 <i>Measurement Procedure and Data</i> .....	16
7.2 99% BANDWIDTH .....	17
7.2.1 <i>E.U.T. Operation</i> .....	17
7.2.2 <i>Test Setup Diagram</i> .....	18
7.2.3 <i>Measurement Procedure and Data</i> .....	18
7.3 26dB EMISSION BANDWIDTH .....	19
7.3.1 <i>E.U.T. Operation</i> .....	19
7.3.2 <i>Test Setup Diagram</i> .....	20
7.3.3 <i>Measurement Procedure and Data</i> .....	20
7.4 MINIMUM 6 dB BANDWIDTH (5.725-5.85 GHz BAND) .....	21
7.4.1 <i>E.U.T. Operation</i> .....	21
7.4.2 <i>Test Setup Diagram</i> .....	21
7.4.3 <i>Measurement Procedure and Data</i> .....	21
7.5 MAXIMUM CONDUCTED OUTPUT POWER .....	22
7.5.1 <i>E.U.T. Operation</i> .....	23
7.5.2 <i>Test Setup Diagram</i> .....	24
7.5.3 <i>Measurement Procedure and Data</i> .....	24
7.6 PEAK POWER SPECTRUM DENSITY .....	25
7.6.1 <i>E.U.T. Operation</i> .....	26
7.6.2 <i>Test Setup Diagram</i> .....	27
7.6.3 <i>Measurement Procedure and Data</i> .....	27

7.7	DFS: NON-OCCUPANCY PERIOD .....	28
7.7.1	<i>E.U.T. Operation</i> .....	29
7.7.2	<i>Test Setup Diagram</i> .....	30
7.7.3	<i>Measurement Procedure and Data</i> .....	31
7.8	DFS: CHANNEL MOVE TIME .....	32
7.8.1	<i>E.U.T. Operation</i> .....	33
7.8.2	<i>Test Setup Diagram</i> .....	34
7.8.3	<i>Measurement Procedure and Data</i> .....	35
7.9	DFS: CHANNEL CLOSING TRANSMISSION TIME .....	36
7.9.1	<i>E.U.T. Operation</i> .....	37
7.9.2	<i>Test Setup Diagram</i> .....	38
7.9.3	<i>Measurement Procedure and Data</i> .....	39
7.10	RADIATED EMISSIONS .....	40
7.10.1	<i>E.U.T. Operation</i> .....	40
7.10.2	<i>Test Setup Diagram</i> .....	41
7.10.3	<i>Measurement Procedure and Data</i> .....	42
7.11	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....	112
7.11.1	<i>E.U.T. Operation</i> .....	113
7.11.2	<i>Test Setup Diagram</i> .....	114
7.11.3	<i>Measurement Procedure and Data</i> .....	115
7.12	FREQUENCY STABILITY .....	194
7.12.1	<i>E.U.T. Operation</i> .....	195
7.12.2	<i>Test Setup Diagram</i> .....	196
7.12.3	<i>Measurement Procedure and Data</i> .....	196
8	<b>APPENDIX</b> .....	<b>197-381</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 12V																																																											
Cable:	100cm DC line																																																											
Operation Frequency:	<table border="1"><thead><tr><th>Band</th><th>Mode</th><th>Frequency Range(MHz)</th><th>Number of channels</th></tr></thead><tbody><tr><td rowspan="4">UNII Band I</td><td>IEEE 802.11a</td><td>5180-5240</td><td>4</td></tr><tr><td>IEEE 802.11n20MHz</td><td>5180-5240</td><td>4</td></tr><tr><td>IEEE 802.11n40MHz</td><td>5190-5230</td><td>2</td></tr><tr><td></td><td></td><td></td></tr><tr><td rowspan="4">UNII Band II-A</td><td>IEEE 802.11a</td><td>5260-5320</td><td>4</td></tr><tr><td>IEEE 802.11n20MHz</td><td>5260-5320</td><td>4</td></tr><tr><td>IEEE 802.11n40MHz</td><td>5270-5310</td><td>2</td></tr><tr><td></td><td></td><td></td></tr><tr><td rowspan="4">UNII Band II-C</td><td>IEEE 802.11a</td><td>5500-5700</td><td>11</td></tr><tr><td>IEEE 802.11n20MHz</td><td>5500-5700</td><td>11</td></tr><tr><td>IEEE 802.11n40MHz</td><td>5510-5670</td><td>5</td></tr><tr><td></td><td></td><td></td></tr><tr><td rowspan="4">UNII Band III</td><td>IEEE 802.11a</td><td>5745-5825</td><td>5</td></tr><tr><td>IEEE 802.11n20MHz</td><td>5745-5825</td><td>5</td></tr><tr><td>IEEE 802.11n40MHz</td><td>5755-5795</td><td>2</td></tr><tr><td></td><td></td><td></td></tr></tbody></table>				Band	Mode	Frequency Range(MHz)	Number of channels	UNII Band I	IEEE 802.11a	5180-5240	4	IEEE 802.11n20MHz	5180-5240	4	IEEE 802.11n40MHz	5190-5230	2				UNII Band II-A	IEEE 802.11a	5260-5320	4	IEEE 802.11n20MHz	5260-5320	4	IEEE 802.11n40MHz	5270-5310	2				UNII Band II-C	IEEE 802.11a	5500-5700	11	IEEE 802.11n20MHz	5500-5700	11	IEEE 802.11n40MHz	5510-5670	5				UNII Band III	IEEE 802.11a	5745-5825	5	IEEE 802.11n20MHz	5745-5825	5	IEEE 802.11n40MHz	5755-5795	2			
Band	Mode	Frequency Range(MHz)	Number of channels																																																									
UNII Band I	IEEE 802.11a	5180-5240	4																																																									
	IEEE 802.11n20MHz	5180-5240	4																																																									
	IEEE 802.11n40MHz	5190-5230	2																																																									
UNII Band II-A	IEEE 802.11a	5260-5320	4																																																									
	IEEE 802.11n20MHz	5260-5320	4																																																									
	IEEE 802.11n40MHz	5270-5310	2																																																									
UNII Band II-C	IEEE 802.11a	5500-5700	11																																																									
	IEEE 802.11n20MHz	5500-5700	11																																																									
	IEEE 802.11n40MHz	5510-5670	5																																																									
UNII Band III	IEEE 802.11a	5745-5825	5																																																									
	IEEE 802.11n20MHz	5745-5825	5																																																									
	IEEE 802.11n40MHz	5755-5795	2																																																									

Type of Modulation:	IEEE 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE 802.11n: OFDM(BPSK/QPSK/16QAM/64QAM)
---------------------	--

DFS mode:	Slave without radar detection
-----------	-------------------------------

Antenna type:	FPCB
---------------	------

Antenna gain:	2dBi
---------------	------

### 4.2 Description of Support Units

The EUT has been tested as an independent unit.

#### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.25 \times 10^{-8}$
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz) 4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (Below 1GHz) 4.8dB (Above 1GHz)
9	Temperature test	1°C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%

#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053      Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None

## 5 Equipment List

<b>Duty Cycle</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26

<b>99% Bandwidth</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26

<b>26dB Emission bandwidth</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26

<b>Minimum 6 dB bandwidth (5.725-5.85 GHz band )</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100012605  
Page: 10 of 381

Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26
-------------	-----------------	------	-----------	------------	------------

<b>Maximum Conducted output power</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26

<b>Peak Power spectrum density</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100012605  
Page: 11 of 381

<b>Radiated Emissions</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-13
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2017-12-04	2018-12-03
Pre-amplifier(26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100012605  
Page: 12 of 381

<b>Radiated Emissions which fall in the restricted bands</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-13
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier (18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2017-12-04	2018-12-03
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

<b>Frequency Stability</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100012605  
Page: 13 of 381

<b>General used equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-17

## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.203

#### **6.1.2 Conclusion**

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

## **6.2 Transmission in the Absence of Data**

### **6.2.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.407 (c)

### **6.2.2 Conclusion**

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip (AP6212) support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

## 7 Radio Spectrum Matter Test Results

### 7.1 Duty Cycle

Test Requirement KDB 789033 D02 II B 1

Test Method: KDB 789033 II B 1


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 17.9 °C Humidity: 36.1 % RH Atmospheric Pressure: 1015 mbar

Test mode g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

#### 7.1.2 Test Setup Diagram

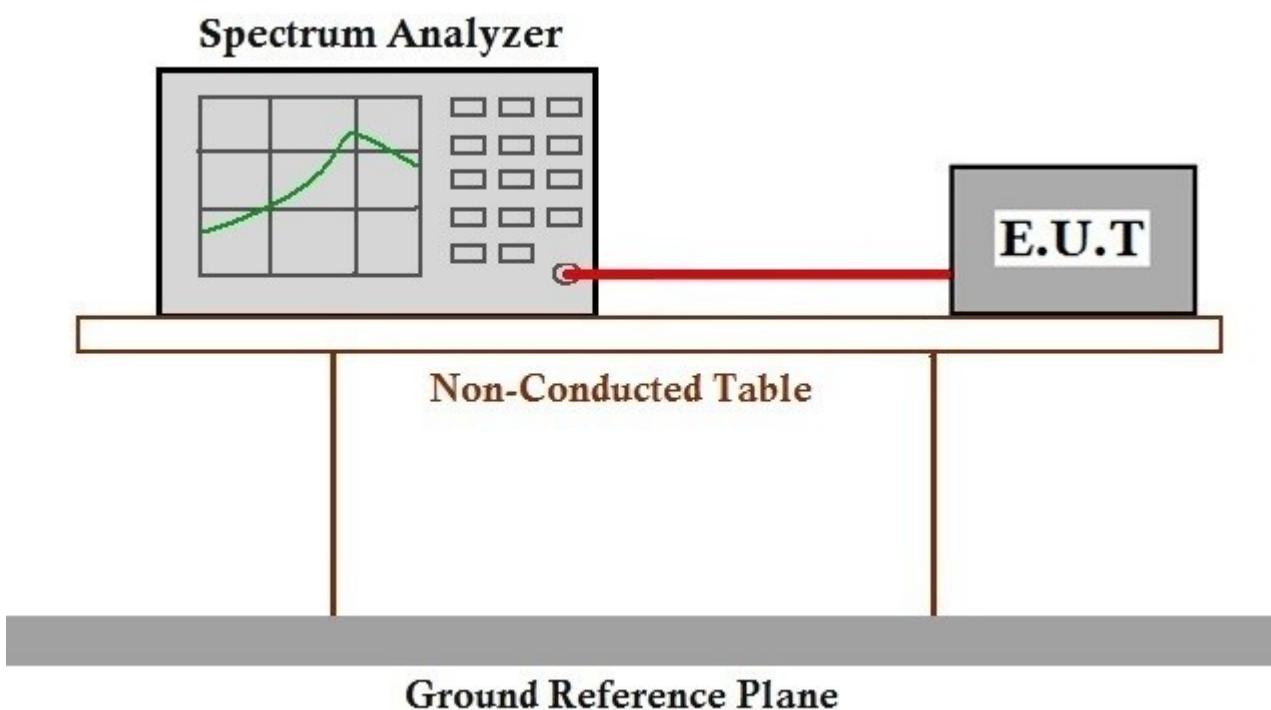

#### 7.1.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.407

## 7.2 99% Bandwidth

Test Requirement N/A

Test Method: KDB 789033 II D

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 17.9 °C Humidity: 36.1 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

The worst case for final test:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst

case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

### 7.2.2 Test Setup Diagram

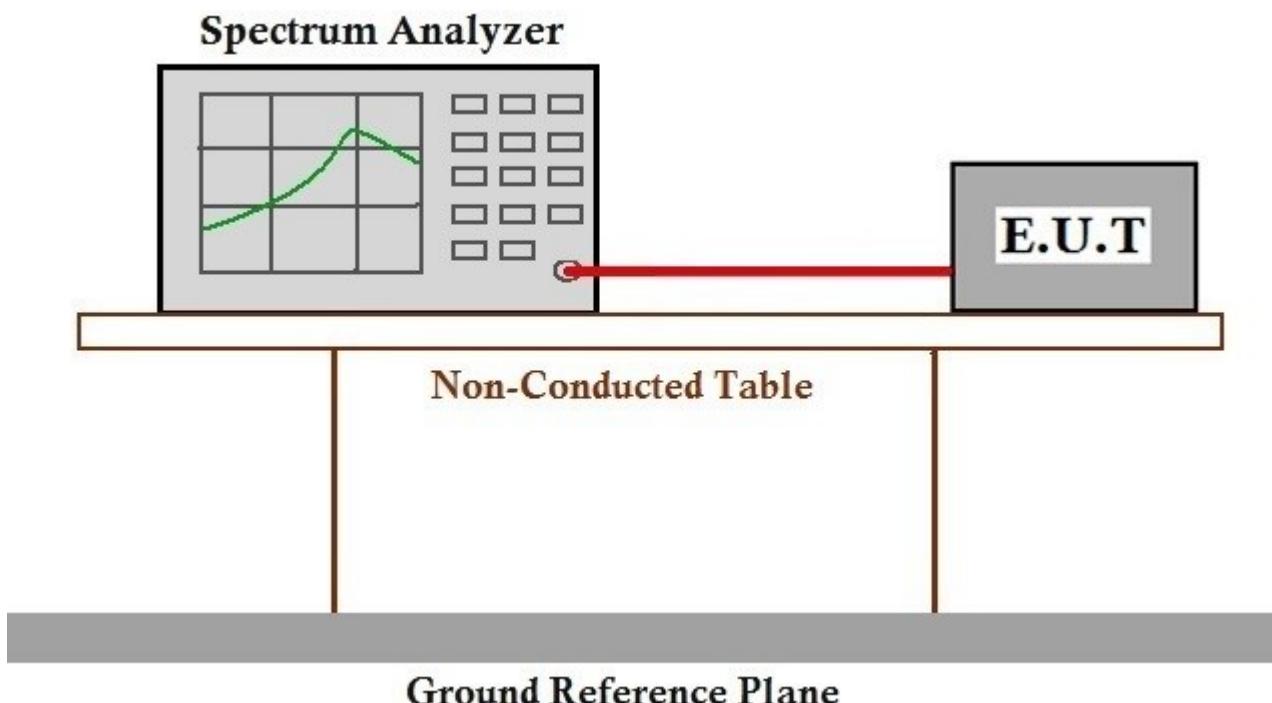

### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.407

### 7.3 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II C 1

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 17.9 °C Humidity: 36.1 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case:  
f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

The worst case for final test:  
f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

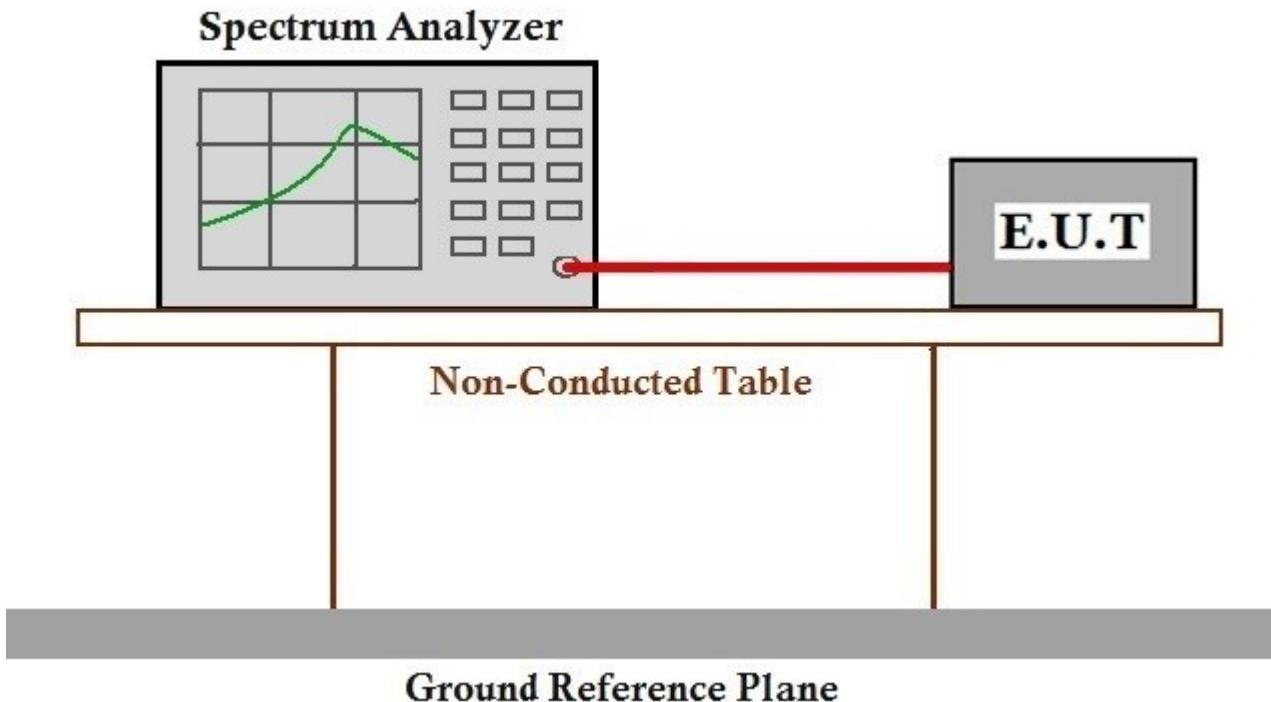**7.3.2 Test Setup Diagram****7.3.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407


**7.4 Minimum 6 dB bandwidth (5.725-5.85 GHz band )**

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)  
Test Method: KDB 789033 D02 II C 2  
Limit:  $\geq 500$  kHz

**7.4.1 E.U.T. Operation**

Operating Environment:

Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar  
Test mode h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

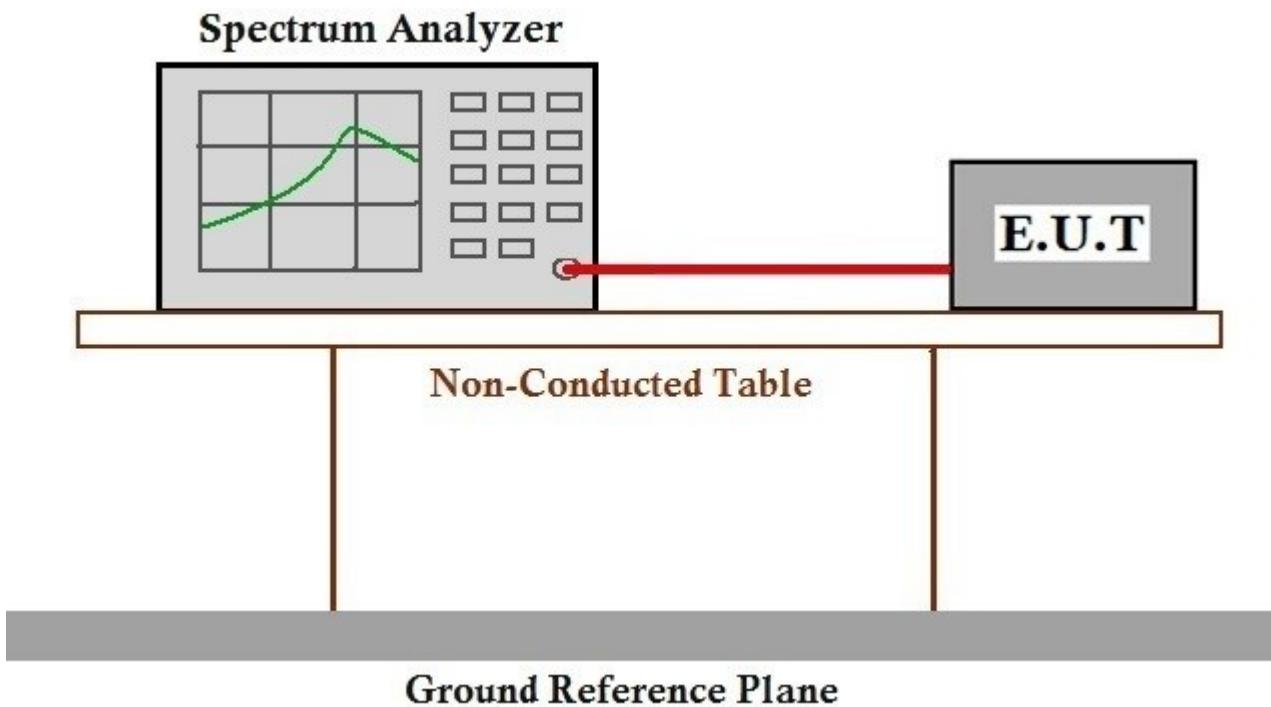**7.4.2 Test Setup Diagram****7.4.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

## 7.5 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

### 7.5.1 E.U.T. Operation

#### Operating Environment:

Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

The worst case for final test:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

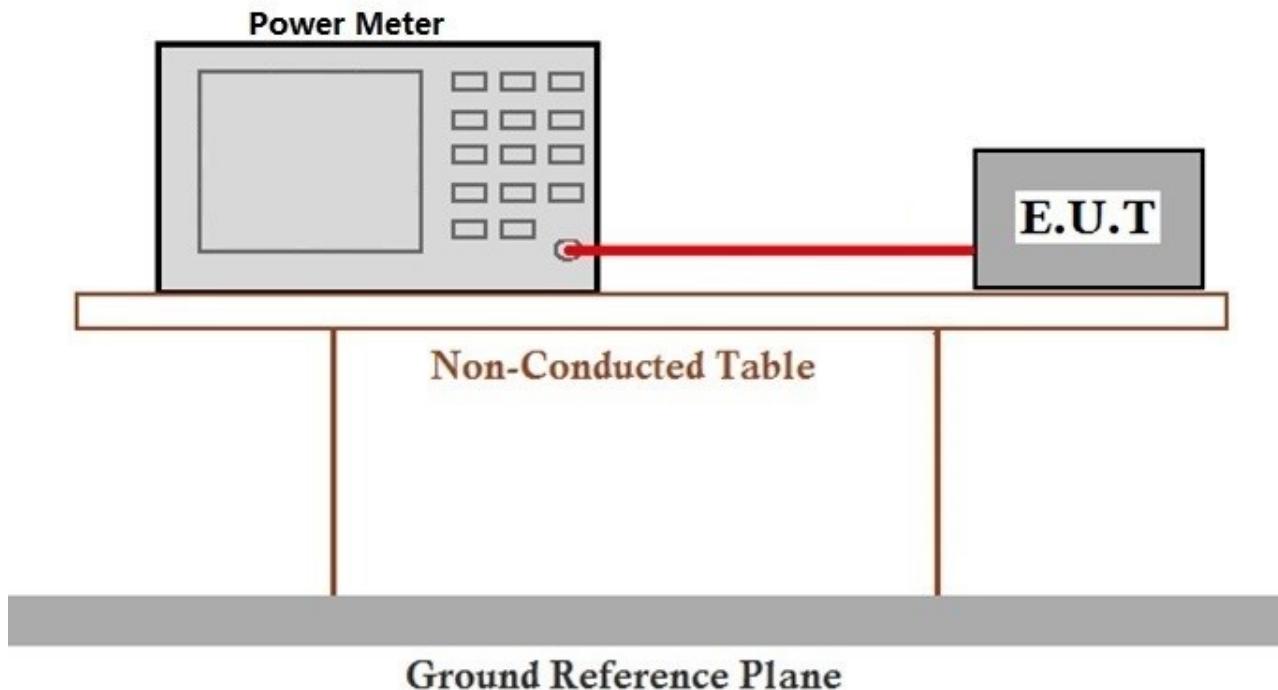**7.5.2 Test Setup Diagram****7.5.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

## 7.6 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

### 7.6.1 E.U.T. Operation

#### Operating Environment:

Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

The worst case for final test:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

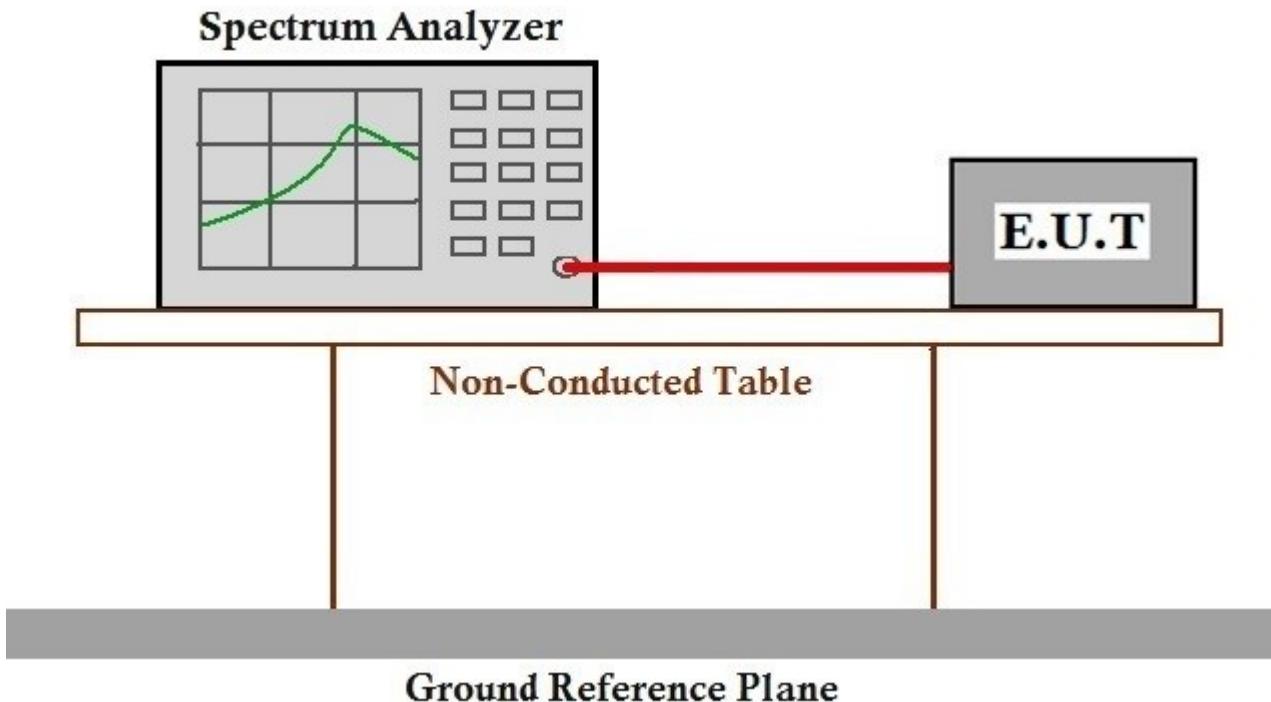**7.6.2 Test Setup Diagram****7.6.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

### **7.7 DFS: Non-occupancy period**

Test Requirement      KDB 905462 D02 Section 5.1  
Test Method:      KDB 905462 D02 Section 7.8.3  
Limit:      Minimum 30 minutes


### **7.7.1 E.U.T. Operation**

Operating Environment:


Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar

Test mode g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


## 7.7.2 Test Setup Diagram

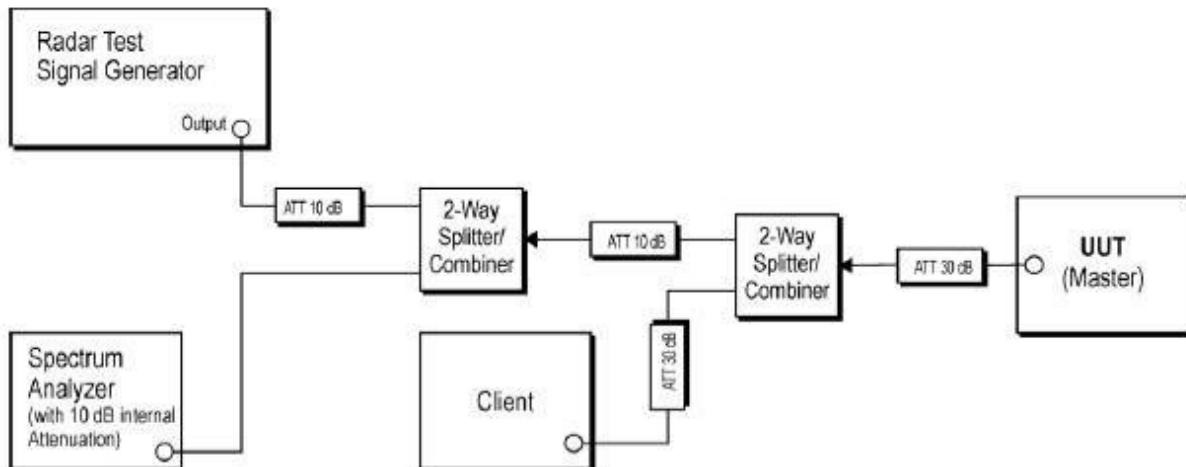

DFS master

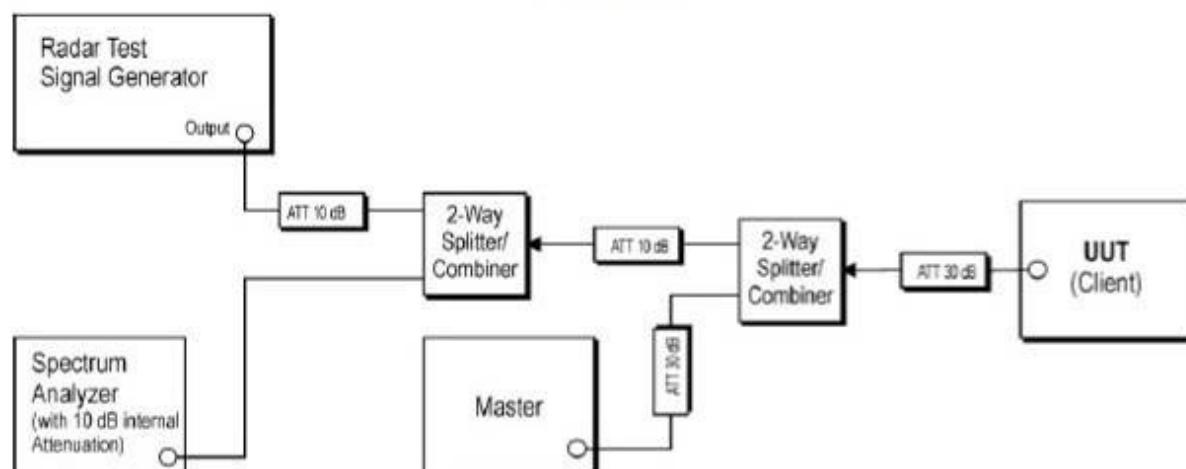

DFS slave with radar detection

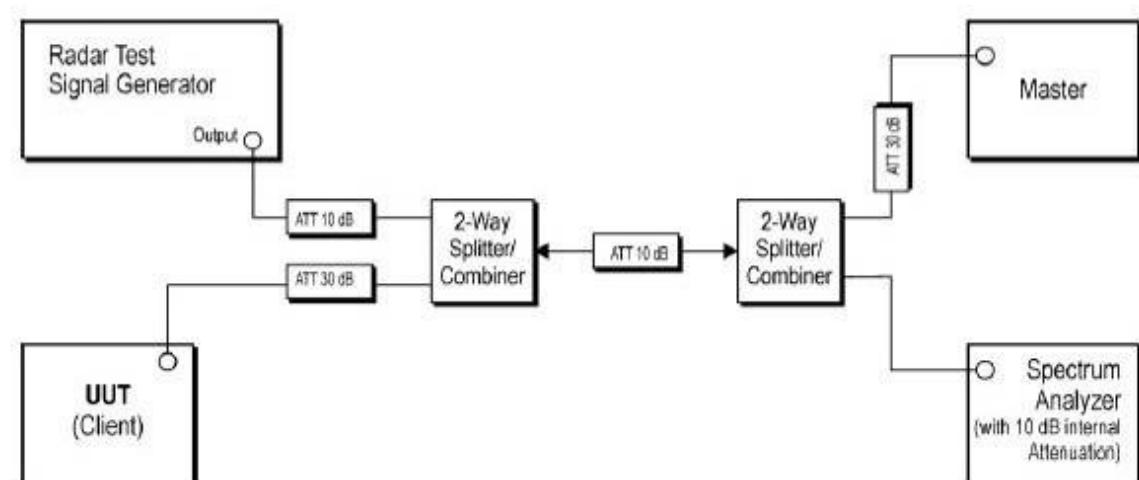

DFS slave without radar detection

### **7.7.3 Measurement Procedure and Data**

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) =  $S$  (12000ms) /  $B$  (4000); where Dwell is the dwell time per spectrum analyzer sampling bin,  $S$  is sweep time and  $B$  is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C$  (ms) =  $N$  X Dwell (0.3ms); where  $C$  is the Closing Time,  $N$  is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

The detailed test data see: Appendix 15.407

## **7.8 DFS: Channel Move Time**

Test Requirement

KDB 905462 D02 Section 5.1

Test Method:

KDB 905462 D02 Section 7.8.3

Limit:

10 seconds(should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst)

### **7.8.1 E.U.T. Operation**

Operating Environment:

Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar


Pretest these modes to find the worst case:  
f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


The worst case for final test:  
f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


## 7.8.2 Test Setup Diagram

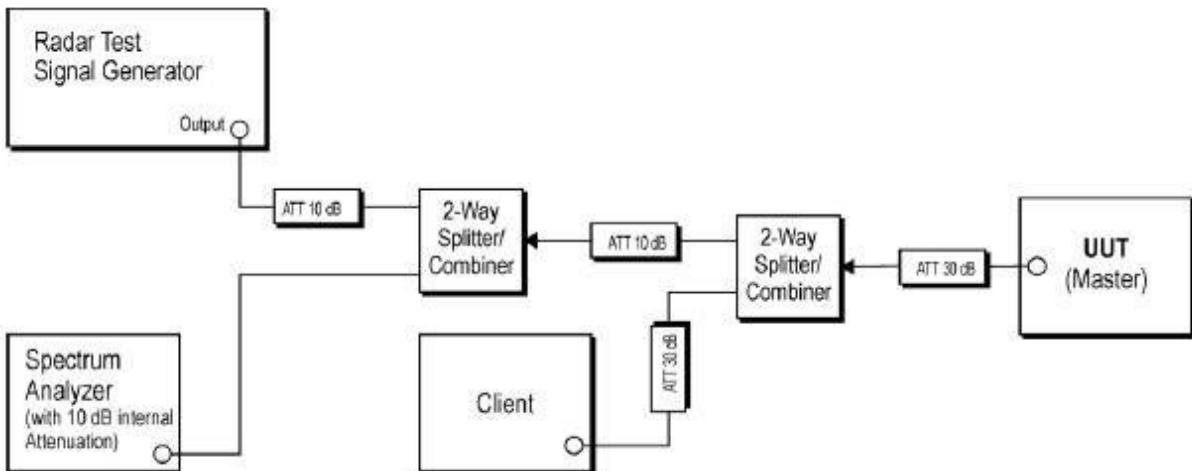

DFS master

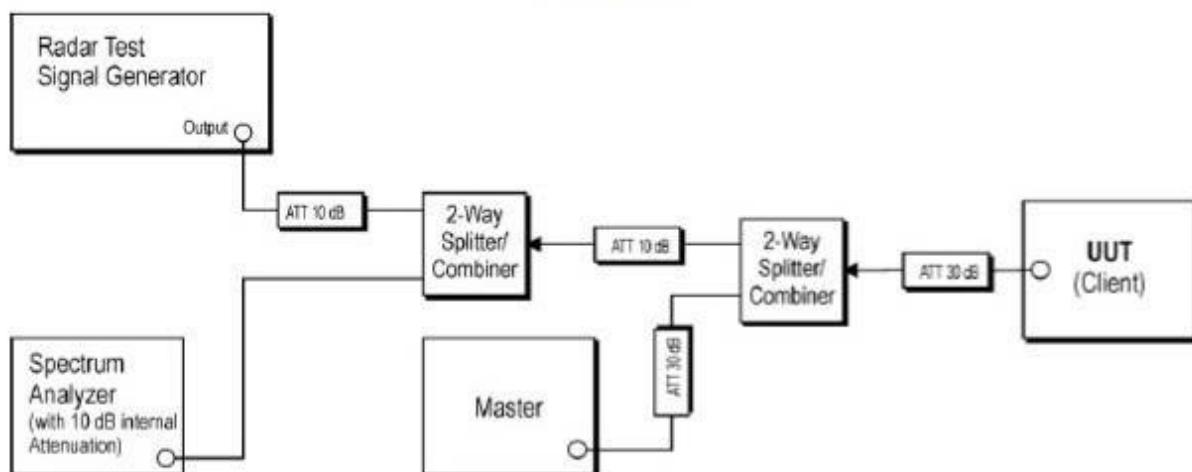

DFS slave with radar detection

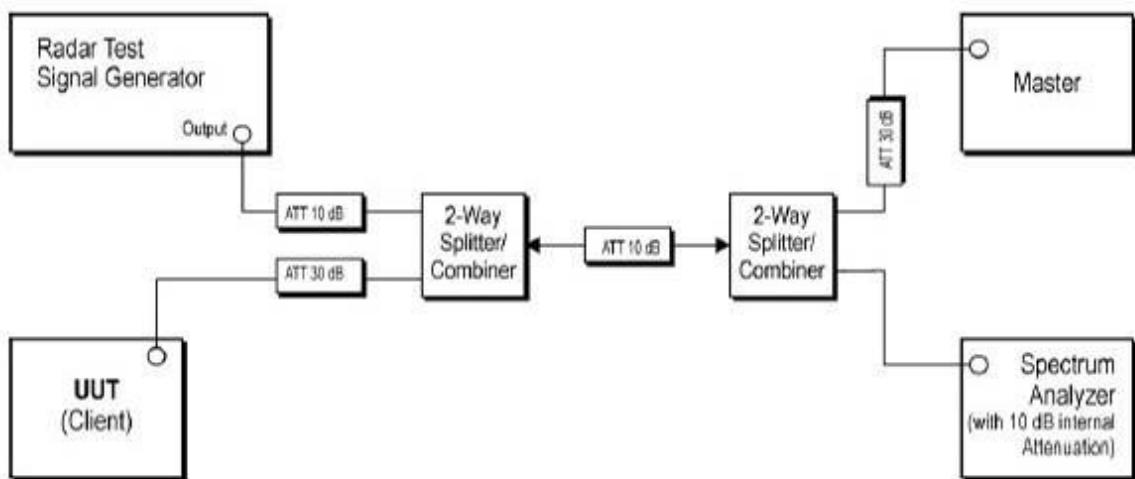

DFS slave without radar detection

### **7.8.3 Measurement Procedure and Data**

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file “iperf.exe” specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) =  $S$  (12000ms) /  $B$  (4000); where Dwell is the dwell time per spectrum analyzer sampling bin,  $S$  is sweep time and  $B$  is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C$  (ms) =  $N$  X Dwell (0.3ms); where  $C$  is the Closing Time,  $N$  is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

The detailed test data see: Appendix 15.407

## **7.9 DFS: Channel Closing Transmission Time**

Test Requirement	KDB 905462 D02 Section 5.1
Test Method:	KDB 905462 D02 Section 7.8.3
Limit:	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period(should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. It is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions)

### **7.9.1 E.U.T. Operation**

Operating Environment:

Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar


Pretest these modes to find the worst case:  
f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


The worst case for final test:  
f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


### 7.9.2 Test Setup Diagram

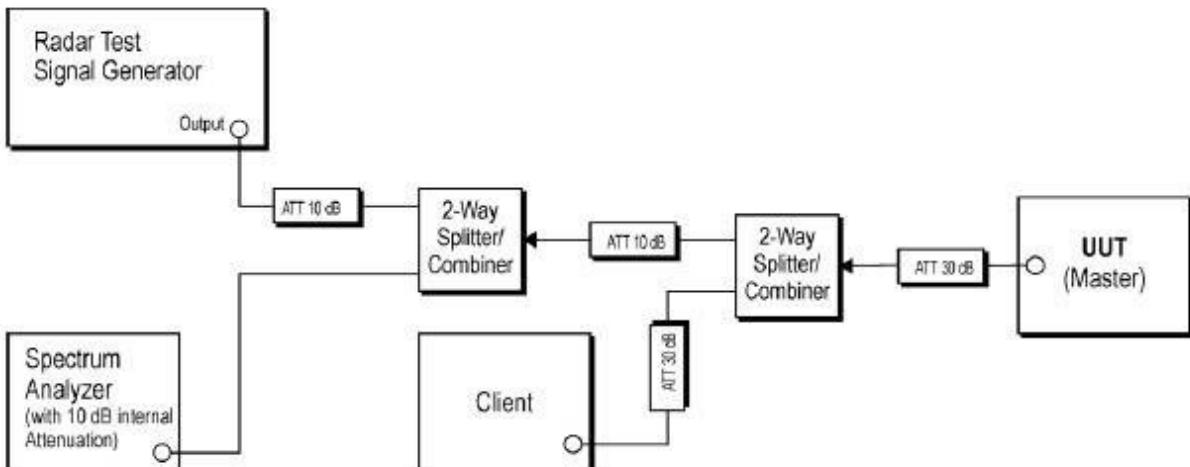

DFS master

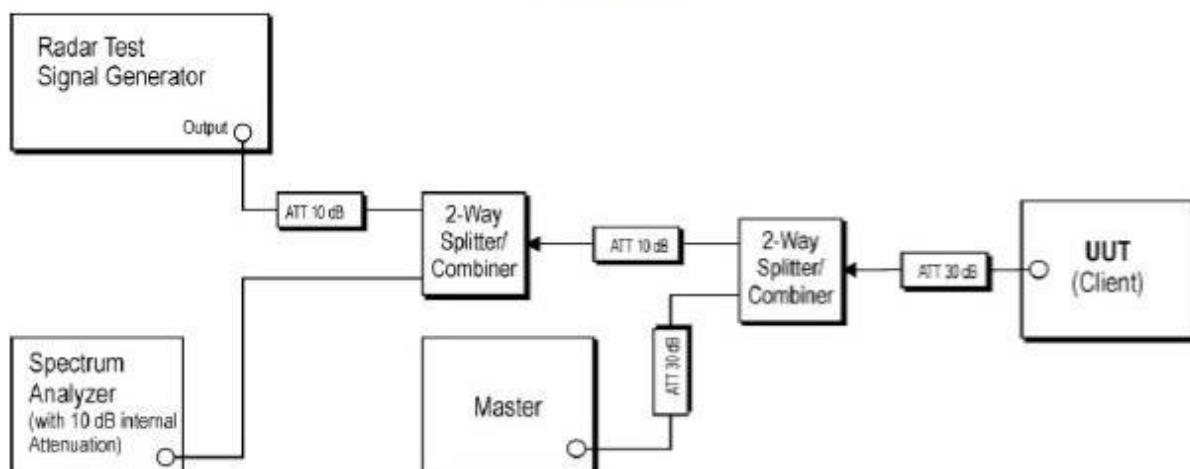

DFS slave with radar detection

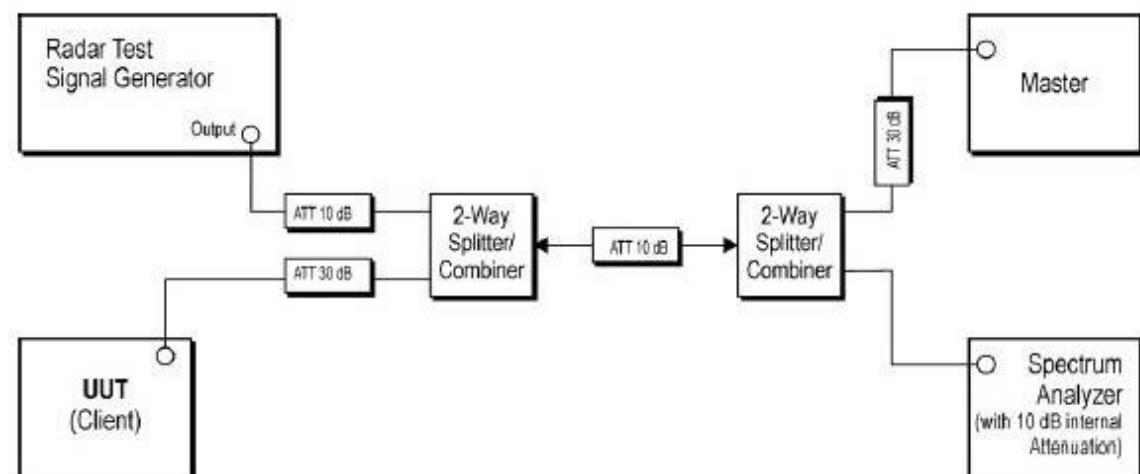

DFS slave without radar detection

### **7.9.3 Measurement Procedure and Data**

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) =  $S$  (12000ms) /  $B$  (4000); where Dwell is the dwell time per spectrum analyzer sampling bin,  $S$  is sweep time and  $B$  is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C$  (ms) =  $N$  X Dwell (0.3ms); where  $C$  is the Closing Time,  $N$  is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

The detailed test data see: Appendix 15.407

## 7.10 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 17.3 °C Humidity: 40.9 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case: e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

The worst case for final test:

e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @

MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

### 7.10.2 Test Setup Diagram

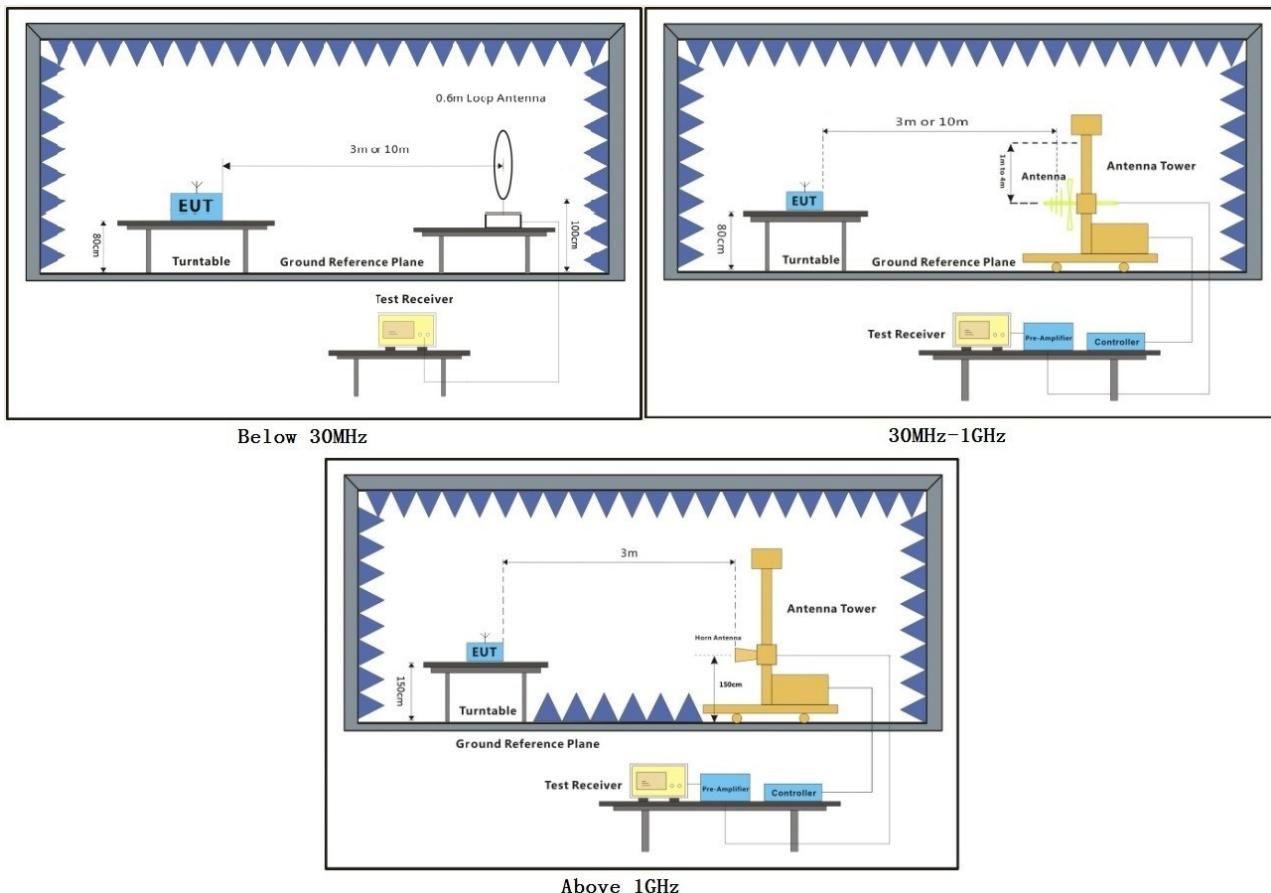

### **7.10.3 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

**30MHz~1GHz**

QP value:

Mode:e; Polarization:Horizontal;

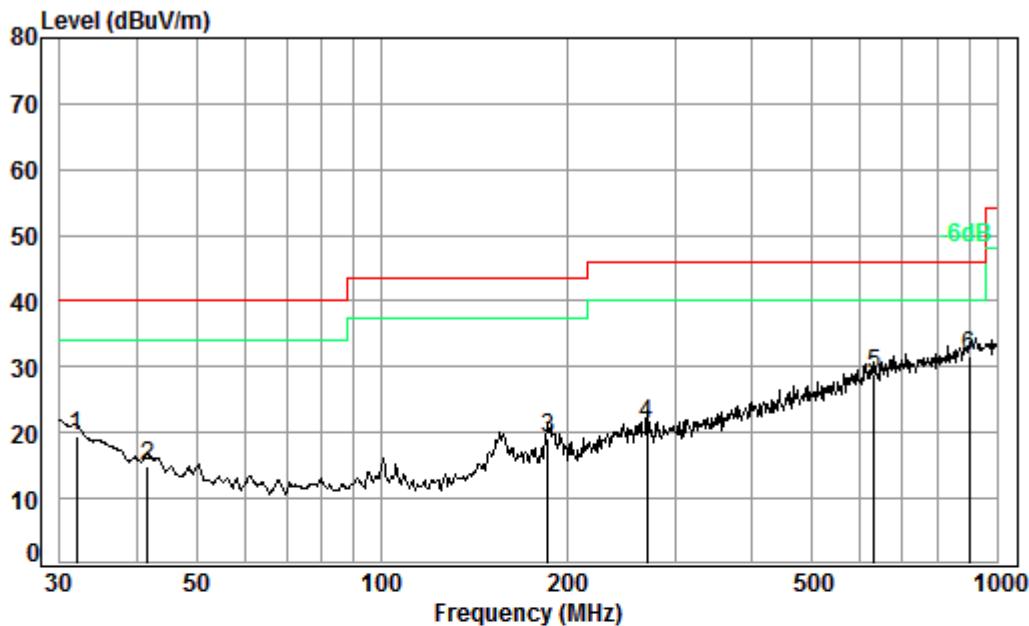


Condition: 3m HORIZONTAL

Job No. : 00126CR

Test Mode: e

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	21.40	27.35	24.72	19.37	40.00	-20.63
2	41.71	0.64	16.88	27.31	24.70	14.91	40.00	-25.09
3	186.44	1.38	16.10	26.75	28.47	19.20	43.50	-24.30
4	269.43	1.77	18.96	26.48	27.12	21.37	46.00	-24.63
5	631.69	2.77	27.03	27.50	26.51	28.81	46.00	-17.19
6 pp	900.15	3.60	29.80	26.78	25.07	31.69	46.00	-14.31

Mode:e; Polarization:Vertical

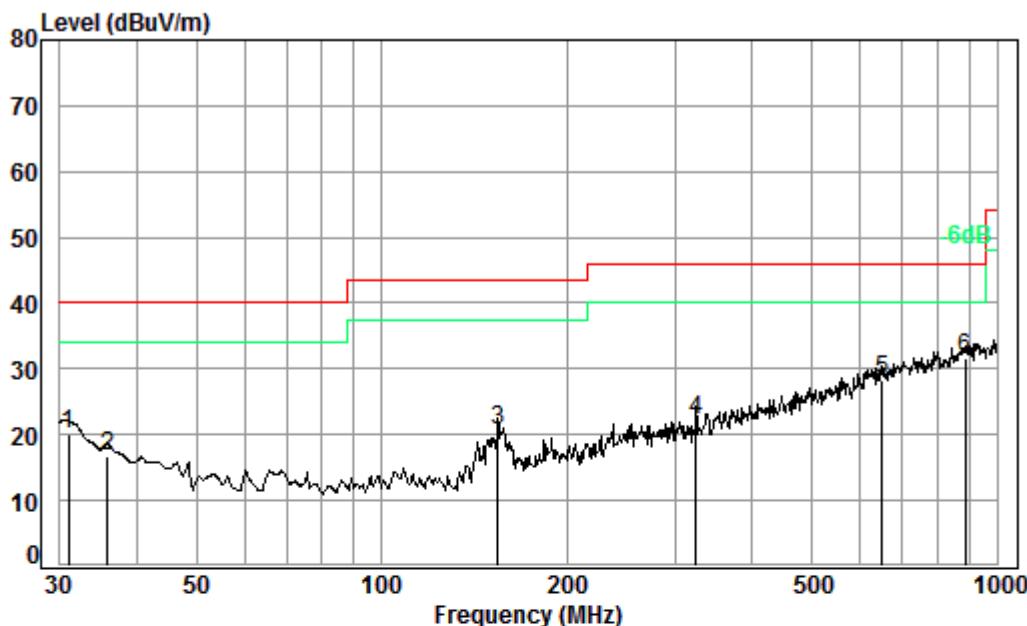

Condition: 3m VERTICAL


Job No. : 00126CR

Test Mode: e

Freq	Cable	Ant	Preamp	Read	Limit		Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	30.96	0.60	21.95	27.35	24.90	20.10	40.00	-19.90
2	35.87	0.60	19.39	27.33	24.17	16.83	40.00	-23.17
3	154.28	1.33	15.01	26.89	31.20	20.65	43.50	-22.85
4	324.46	1.98	20.36	26.58	26.50	22.26	46.00	-23.74
5	649.66	2.80	27.27	27.47	25.70	28.30	46.00	-17.70
6 pp	887.61	3.55	29.65	26.85	25.23	31.58	46.00	-14.42

**Above 1GHz**

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

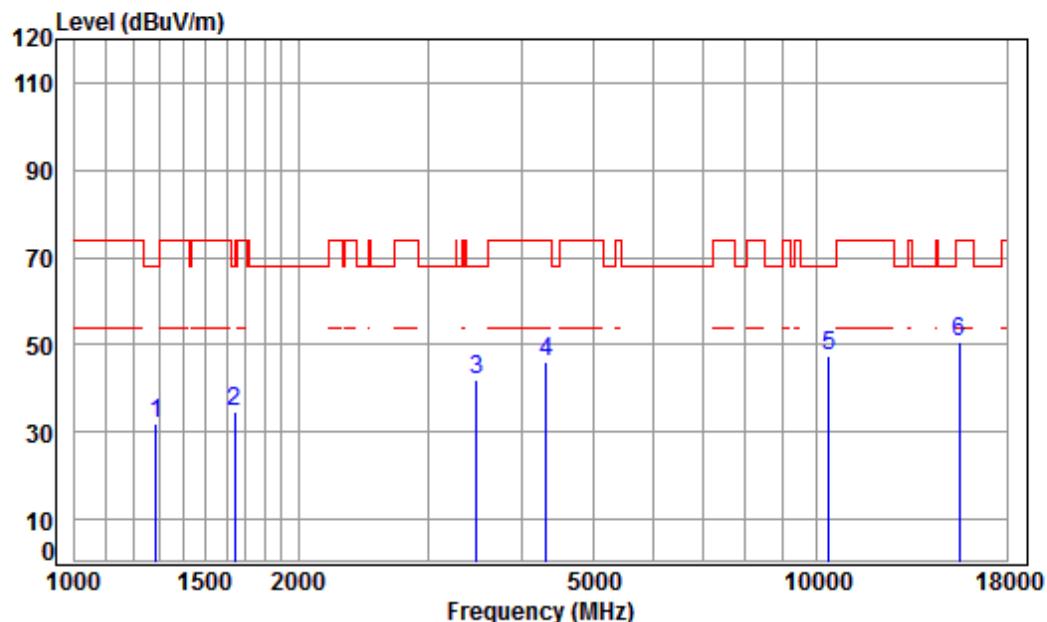

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5180 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	4.75	24.89	41.25	43.70	32.09	68.20	-36.11	peak
2	1644.019	5.30	26.44	41.50	44.31	34.55	68.20	-33.65	peak
3	3475.541	6.44	32.16	42.22	45.75	42.13	68.20	-26.07	peak
4	4316.859	7.36	33.60	42.38	47.40	45.98	74.00	-28.02	peak
5	pp10360.000	11.19	37.24	37.45	36.60	47.58	68.20	-20.62	peak
6	15540.000	14.30	41.38	39.00	33.89	50.57	74.00	-23.43	peak

Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

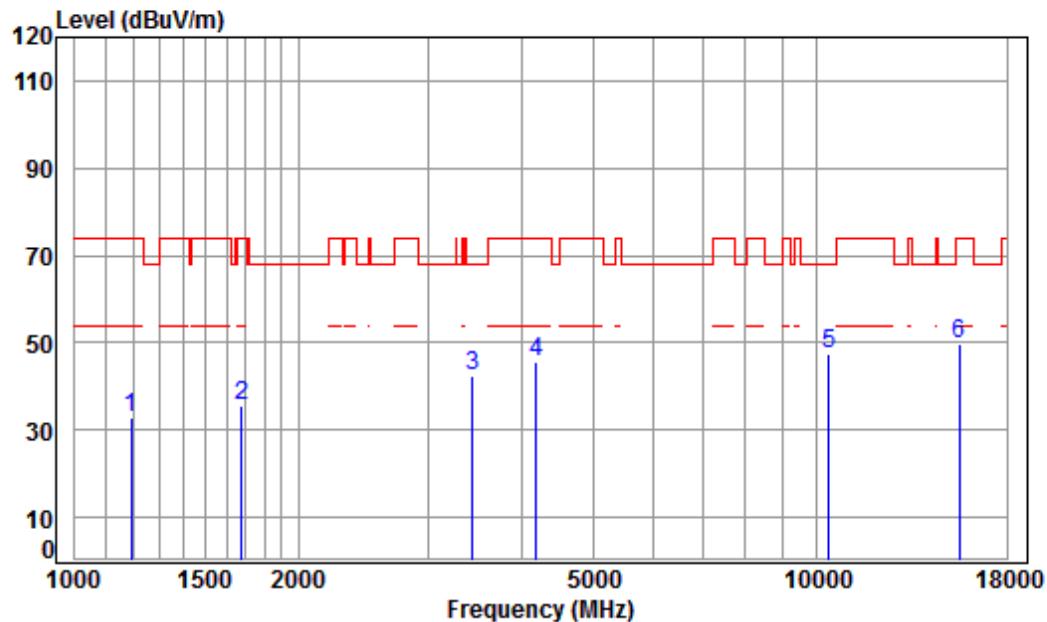

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5180 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1192.811	4.39	24.44	41.18	45.33	32.98	74.00	-41.02	peak
2	1677.621	5.25	26.58	41.52	45.10	35.41	74.00	-38.59	peak
3	3435.590	6.40	32.09	42.21	46.23	42.51	68.20	-25.69	peak
4	4181.768	7.20	33.60	42.36	47.15	45.59	74.00	-28.41	peak
5	pp10360.000	11.19	37.24	37.45	36.33	47.31	68.20	-20.89	peak
6	15540.000	14.30	41.38	39.00	32.87	49.55	74.00	-24.45	peak

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:middle

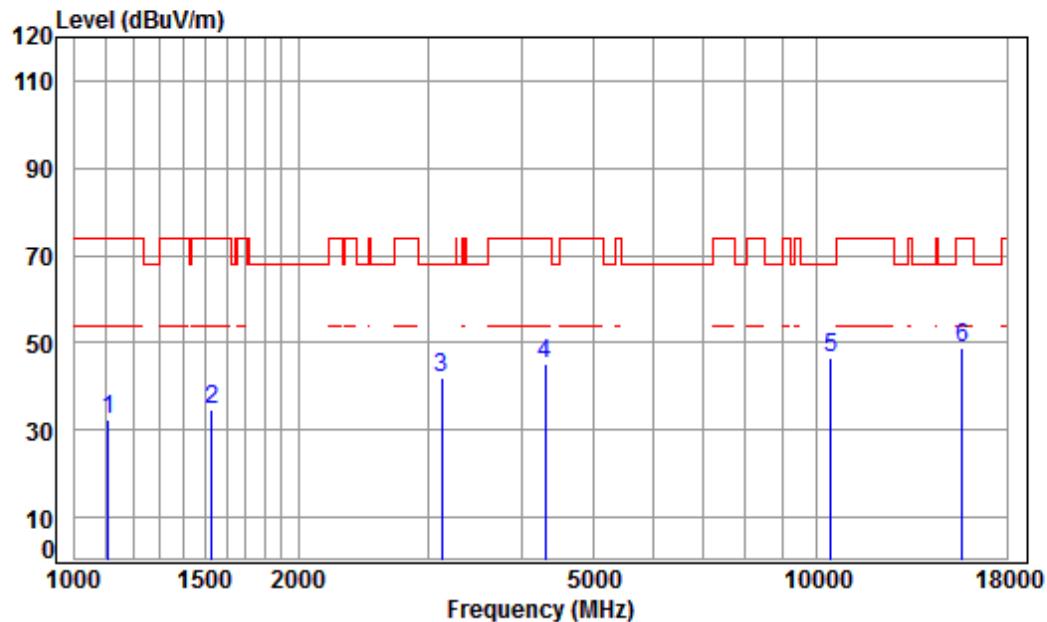

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5220 TX RSE

Note : 5G WIFI 11A


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1109.660	4.05	24.02	41.10	45.22	32.19	74.00	-41.81	peak
2	1529.414	5.44	25.94	41.43	44.72	34.67	74.00	-39.33	peak
3	3123.039	6.11	31.53	42.13	46.24	41.75	68.20	-26.45	peak
4	4304.400	7.34	33.60	42.38	46.81	45.37	74.00	-28.63	peak
5	pp10440.000	11.25	37.16	37.51	35.54	46.44	68.20	-21.76	peak
6	15660.000	14.48	41.34	39.11	32.02	48.73	74.00	-25.27	peak

Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:middle

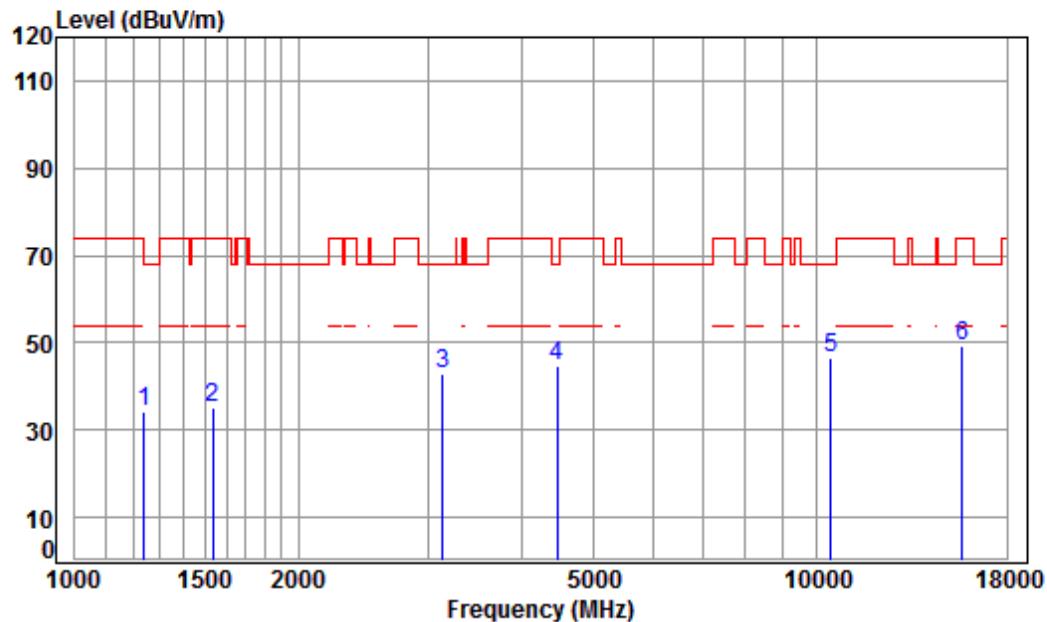

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1238.483	4.57	24.67	41.21	46.09	34.12	74.00	-39.88	peak
2	1533.841	5.44	25.96	41.43	45.11	35.08	74.00	-38.92	peak
3	3132.079	6.11	31.55	42.13	47.41	42.94	68.20	-25.26	peak
4	4469.214	7.53	33.60	42.41	45.77	44.49	68.20	-23.71	peak
5	pp10440.000	11.25	37.16	37.51	35.61	46.51	68.20	-21.69	peak
6	15660.000	14.48	41.34	39.11	32.58	49.29	74.00	-24.71	peak

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

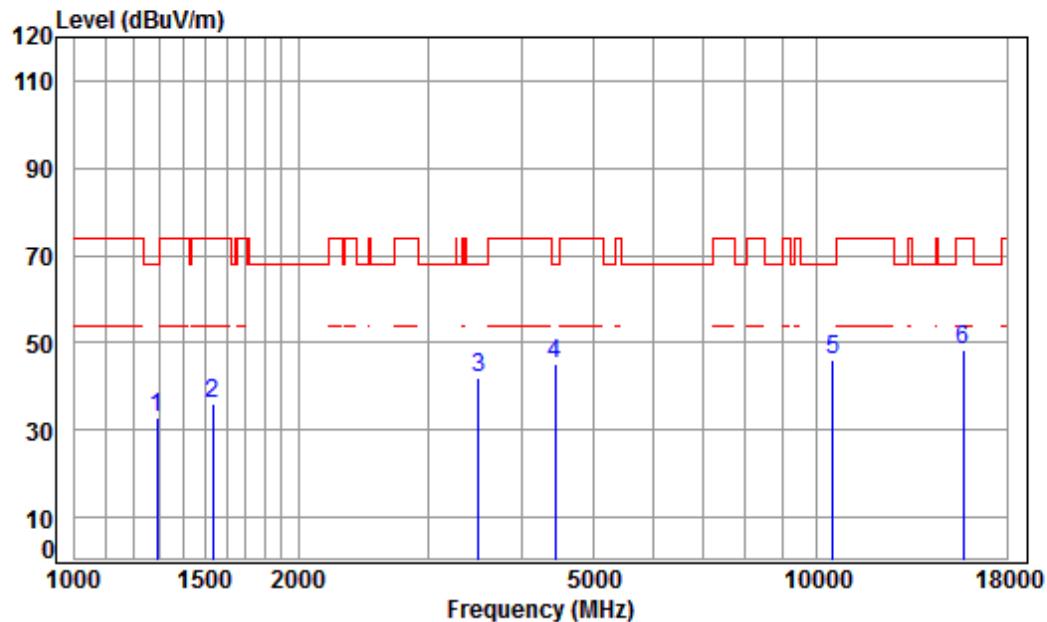

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5240 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1289.627	4.76	24.91	41.25	44.40	32.82	68.20	-35.38	peak
2	1533.841	5.44	25.96	41.43	46.28	36.25	74.00	-37.75	peak
3	3495.691	6.46	32.19	42.22	45.77	42.20	68.20	-26.00	peak
4	4443.453	7.50	33.60	42.41	46.61	45.30	68.20	-22.90	peak
5	pp10480.000	11.28	37.12	37.53	35.40	46.27	68.20	-21.93	peak
6	15720.000	14.57	41.31	39.17	31.78	48.49	74.00	-25.51	peak

Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

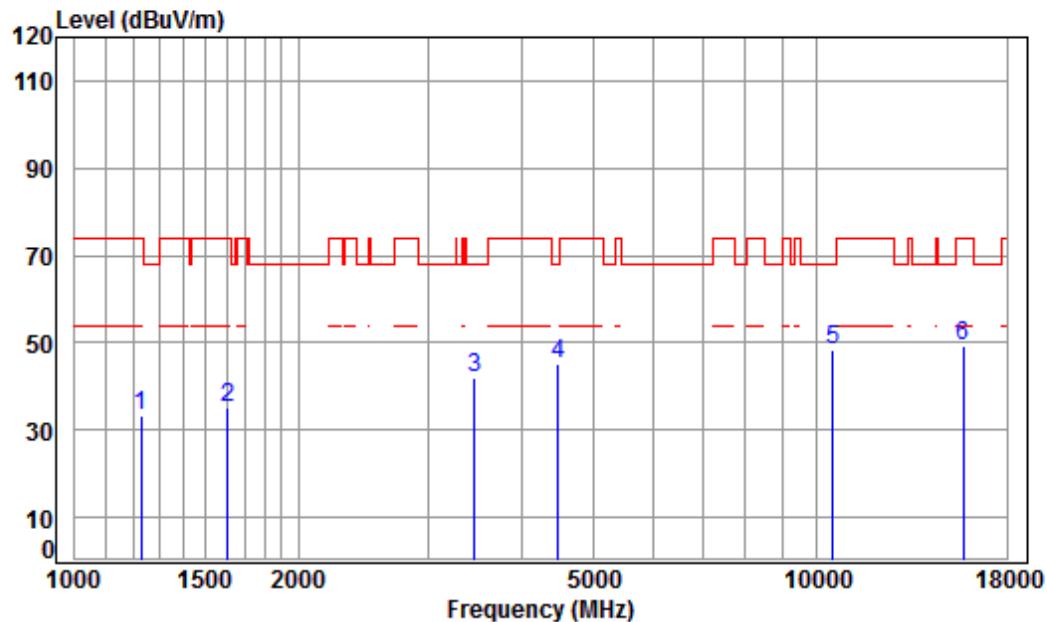

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5240 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1227.791	4.53	24.61	41.21	45.53	33.46	74.00	-40.54	peak	
2	1606.441	5.34	26.28	41.47	44.86	35.01	74.00	-38.99	peak	
3	3455.508	6.42	32.13	42.21	45.62	41.96	68.20	-26.24	peak	
4	4482.150	7.54	33.60	42.41	46.34	45.07	68.20	-23.13	peak	
5	pp10480.000	11.28	37.12	37.53	37.45	48.32	68.20	-19.88	peak	
6	15720.000	14.57	41.31	39.17	32.76	49.47	74.00	-24.53	peak	

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

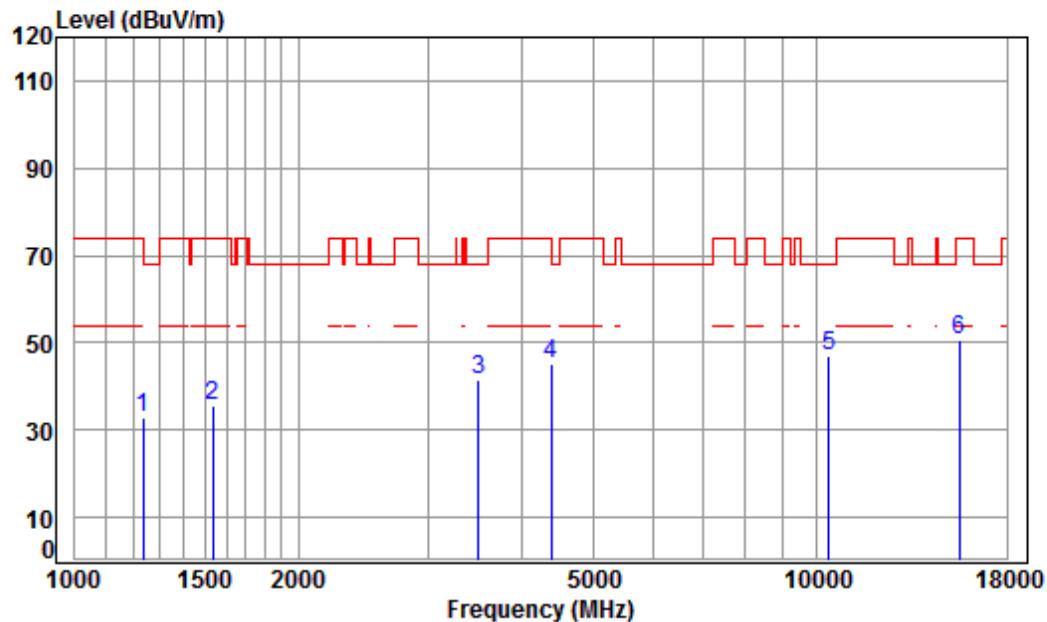

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5180 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1234.909	4.55	24.65	41.21	44.76	32.75	74.00	-41.25	peak
2	1533.841	5.44	25.96	41.43	45.69	35.66	74.00	-38.34	peak
3	3495.691	6.46	32.19	42.22	45.24	41.67	68.20	-26.53	peak
4	4379.699	7.43	33.60	42.40	46.56	45.19	74.00	-28.81	peak
5	pp10360.000	11.19	37.24	37.45	35.90	46.88	68.20	-21.32	peak
6	15540.000	14.30	41.38	39.00	33.89	50.57	74.00	-23.43	peak

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

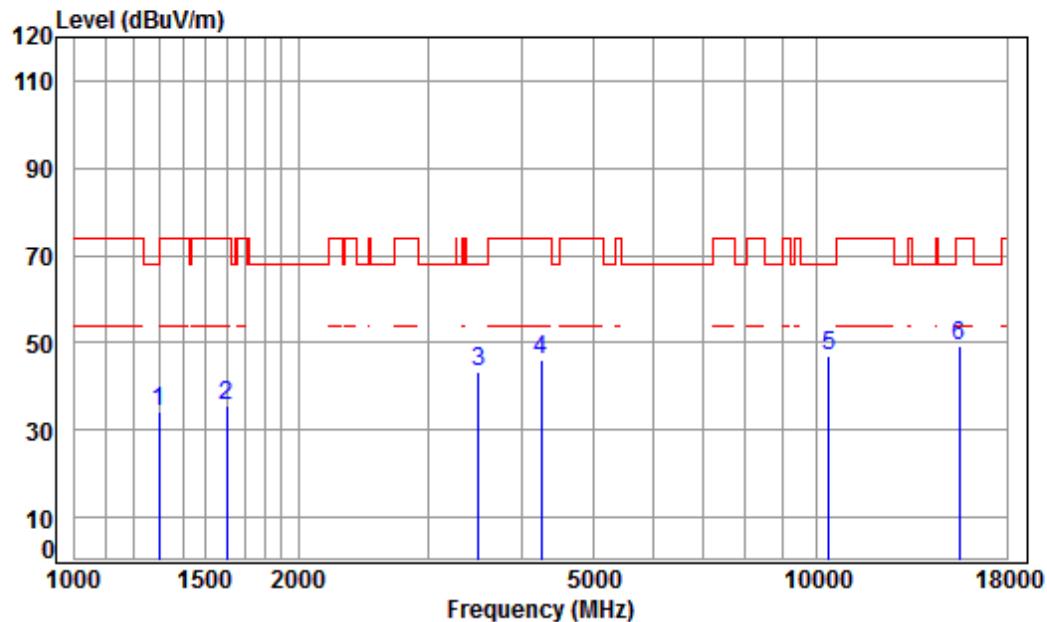

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5180 TX RSE

Note : 5G WIFI 11N20


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	41.26	45.63	34.13	74.00	-39.87	peak	
2	1601.804	5.35	26.26	41.47	45.55	35.69	74.00	-38.31	peak	
3	3495.691	6.46	32.19	42.22	46.91	43.34	68.20	-24.86	peak	
4	4242.641	7.27	33.60	42.37	47.42	45.92	74.00	-28.08	peak	
5	pp10360.000	11.19	37.24	37.45	36.08	47.06	68.20	-21.14	peak	
6	15540.000	14.30	41.38	39.00	32.77	49.45	74.00	-24.55	peak	

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

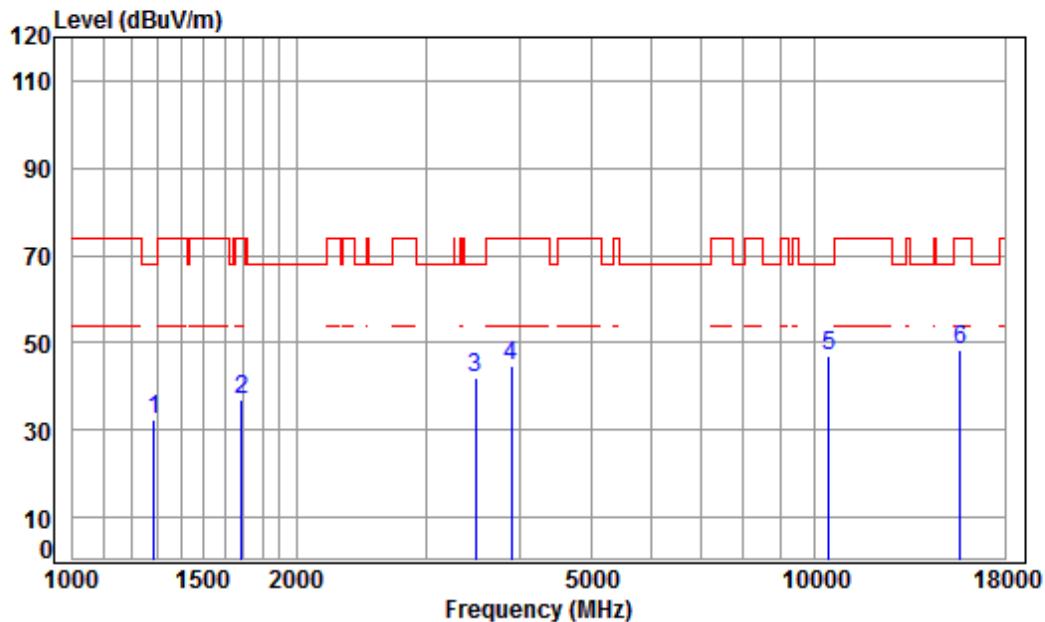

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	4.75	24.89	41.25	44.14	32.53	68.20	-35.67	peak
2	1687.347	5.24	26.62	41.52	46.40	36.74	74.00	-37.26	peak
3	3485.601	6.45	32.18	42.22	45.51	41.92	68.20	-26.28	peak
4	3901.516	6.88	33.34	42.31	46.99	44.90	74.00	-29.10	peak
5	pp10440.000	11.25	37.16	37.51	35.95	46.85	68.20	-21.35	peak
6	15660.000	14.48	41.34	39.11	31.66	48.37	74.00	-25.63	peak

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

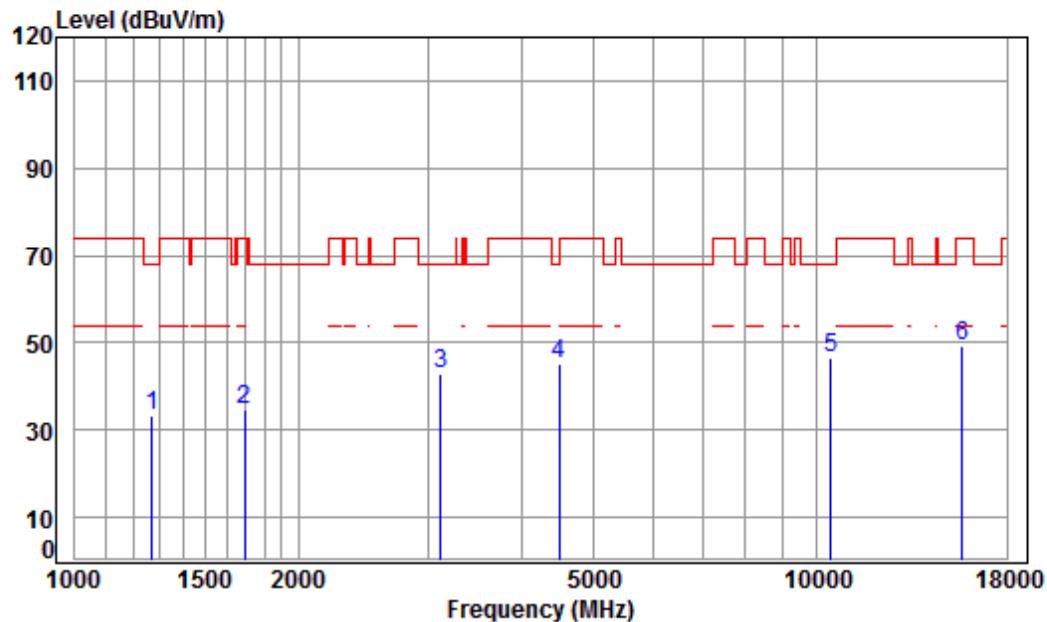

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5220 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1271.123	4.69	24.82	41.24	45.14	33.41	68.20	-34.79	peak
2	1692.231	5.24	26.64	41.53	44.37	34.72	74.00	-39.28	peak
3	3114.025	6.10	31.52	42.13	47.49	42.98	68.20	-25.22	peak
4	4495.125	7.55	33.60	42.42	46.55	45.28	68.20	-22.92	peak
5	pp10440.000	11.25	37.16	37.51	35.61	46.51	68.20	-21.69	peak
6	15660.000	14.48	41.34	39.11	32.53	49.24	74.00	-24.76	peak

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

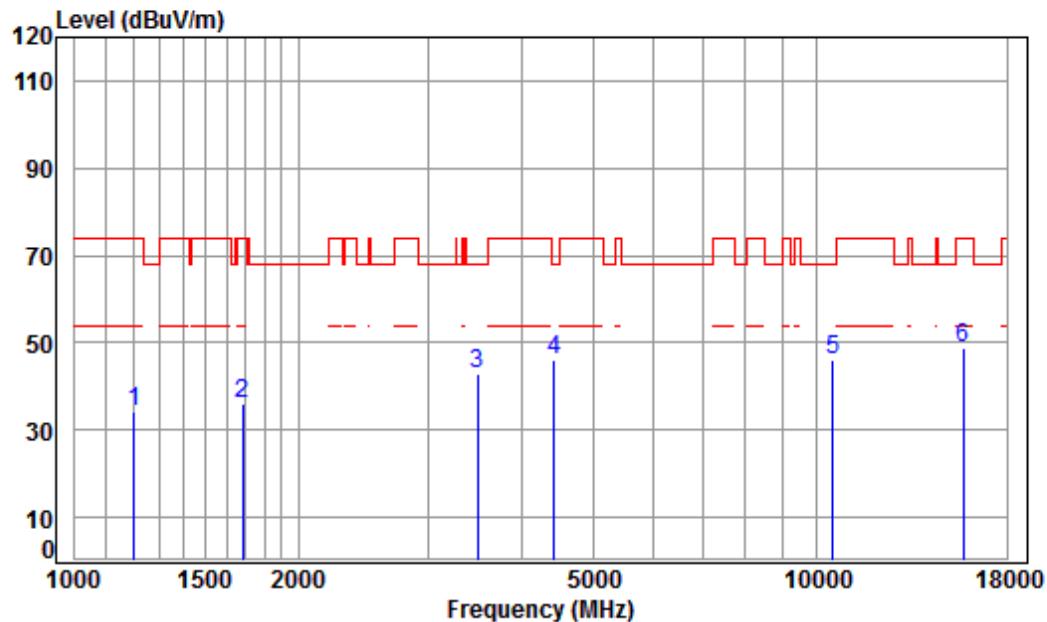

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5240 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	46.40	34.13	74.00	-39.87	peak
2	1682.477	5.25	26.60	41.52	45.75	36.08	74.00	-37.92	peak
3	3485.601	6.45	32.18	42.22	46.25	42.66	68.20	-25.54	peak
4	4417.841	7.47	33.60	42.40	47.22	45.89	68.20	-22.31	peak
5	pp10480.000	11.28	37.12	37.53	35.22	46.09	68.20	-22.11	peak
6	15720.000	14.57	41.31	39.17	32.24	48.95	74.00	-25.05	peak

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

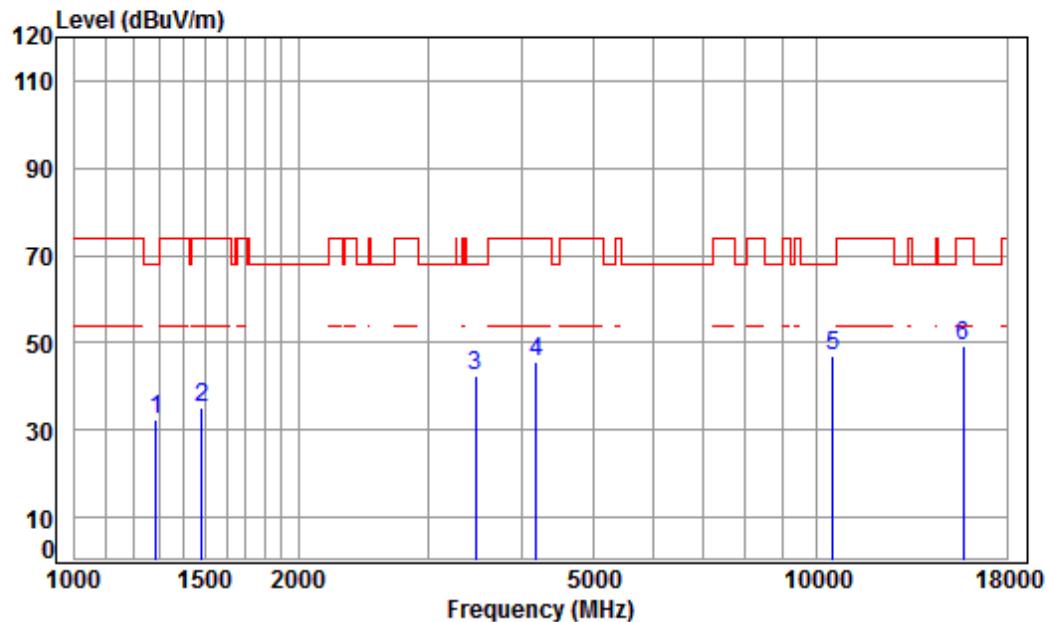

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5240 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	4.75	24.89	41.25	44.01	32.40	68.20	-35.80	peak
2	1481.553	5.42	25.73	41.39	45.24	35.00	74.00	-39.00	peak
3	3465.510	6.43	32.14	42.21	45.93	42.29	68.20	-25.91	peak
4	4181.768	7.20	33.60	42.36	47.11	45.55	74.00	-28.45	peak
5	pp10480.000	11.28	37.12	37.53	36.04	46.91	68.20	-21.29	peak
6	15720.000	14.57	41.31	39.17	32.73	49.44	74.00	-24.56	peak

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

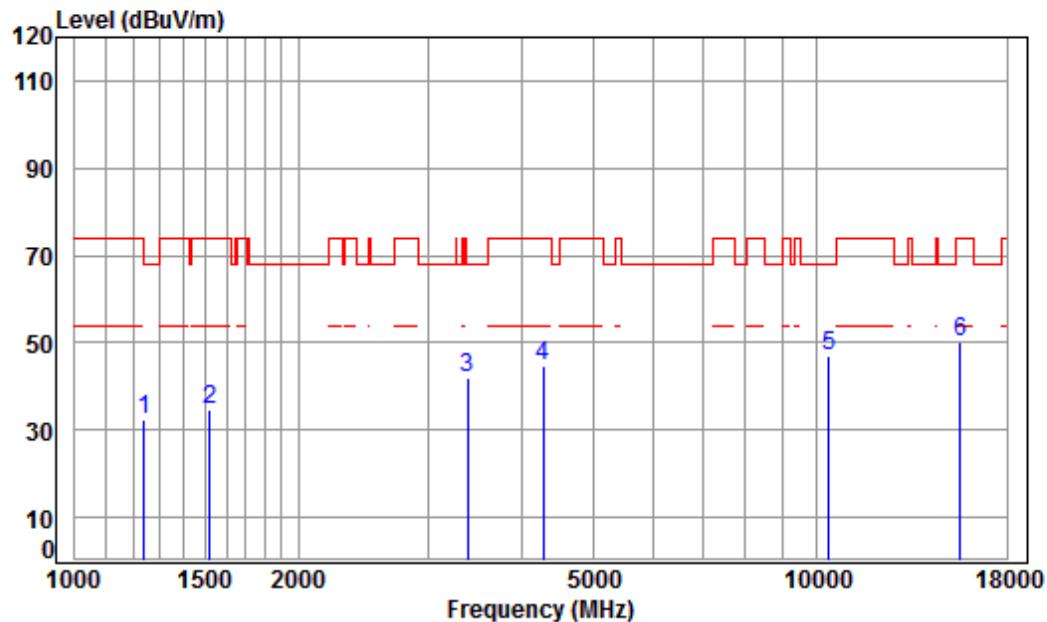

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5190 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	4.58	24.68	41.22	44.47	32.51	68.20	-35.69	peak	
2	1520.598	5.45	25.89	41.42	44.74	34.66	74.00	-39.34	peak	
3	3376.523	6.35	31.99	42.19	45.65	41.80	68.20	-26.40	peak	
4	4279.589	7.31	33.60	42.38	45.98	44.51	74.00	-29.49	peak	
5	pp10380.000	11.21	37.22	37.47	36.04	47.00	68.20	-21.20	peak	
6	15570.000	14.35	41.37	39.03	33.31	50.00	74.00	-24.00	peak	

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

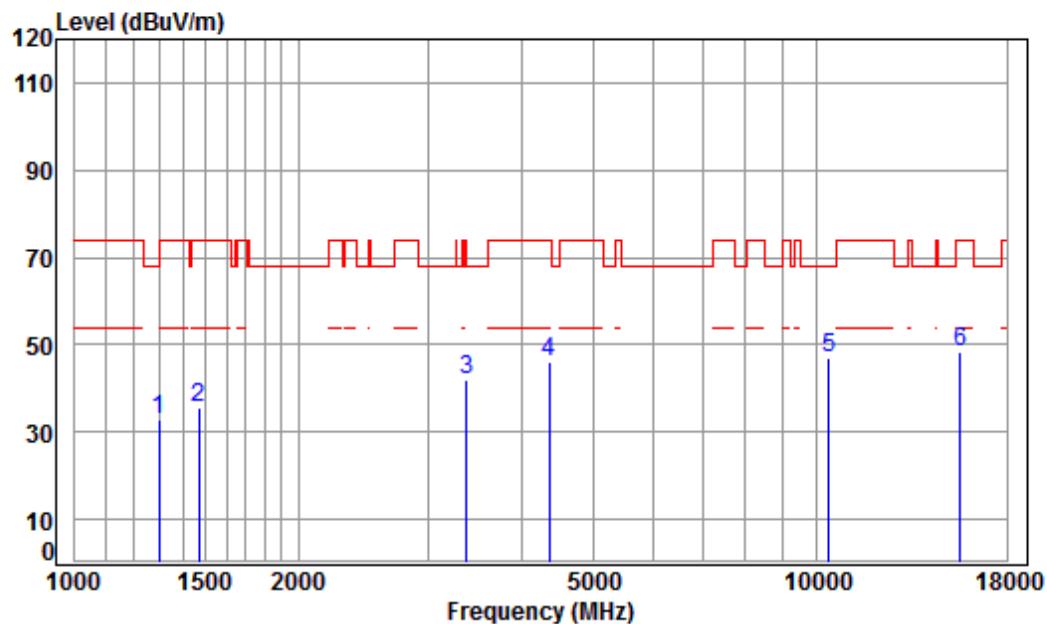

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5190 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	4.79	24.94	41.26	44.31	32.78	68.20	-35.42	peak
2	1468.761	5.38	25.68	41.38	45.72	35.40	74.00	-38.60	peak
3	3366.778	6.34	31.97	42.19	45.94	42.06	68.20	-26.14	peak
4	4354.454	7.40	33.60	42.39	47.30	45.91	74.00	-28.09	peak
5	pp10380.000	11.21	37.22	37.47	36.15	47.11	68.20	-21.09	peak
6	15570.000	14.35	41.37	39.03	31.89	48.58	74.00	-25.42	peak

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

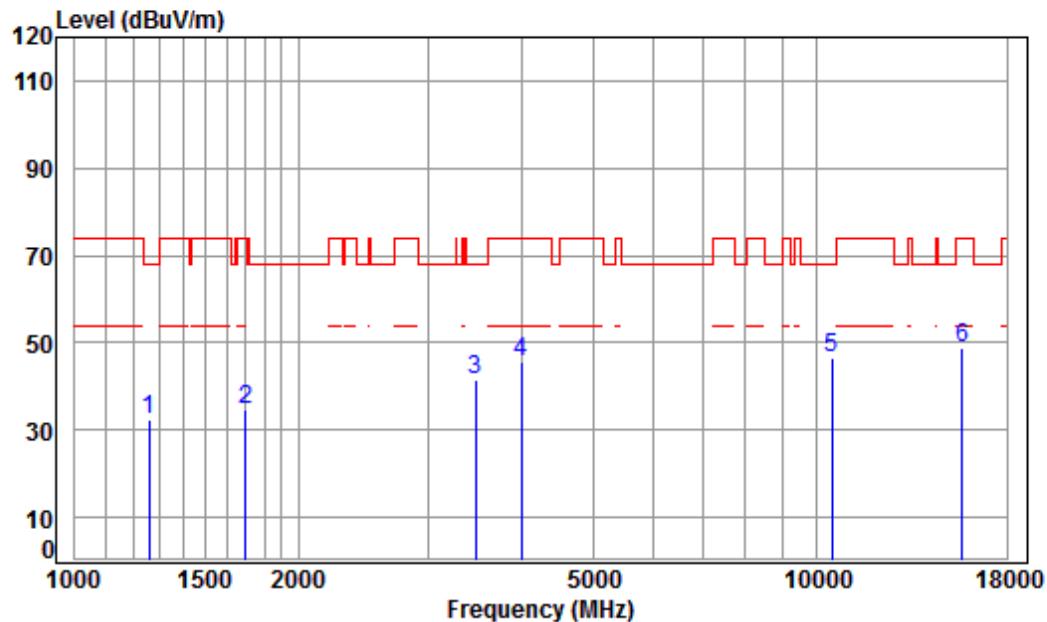

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5230 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1260.149	4.65	24.77	41.23	44.41	32.60	68.20	-35.60	peak	
2	1697.129	5.23	26.66	41.53	44.47	34.83	74.00	-39.17	peak	
3	3465.510	6.43	32.14	42.21	45.35	41.71	68.20	-26.49	peak	
4	3992.781	6.97	33.58	42.32	47.61	45.84	74.00	-28.16	peak	
5	pp10460.000	11.26	37.14	37.52	35.62	46.50	68.20	-21.70	peak	
6	15690.000	14.53	41.32	39.14	32.30	49.01	74.00	-24.99	peak	

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

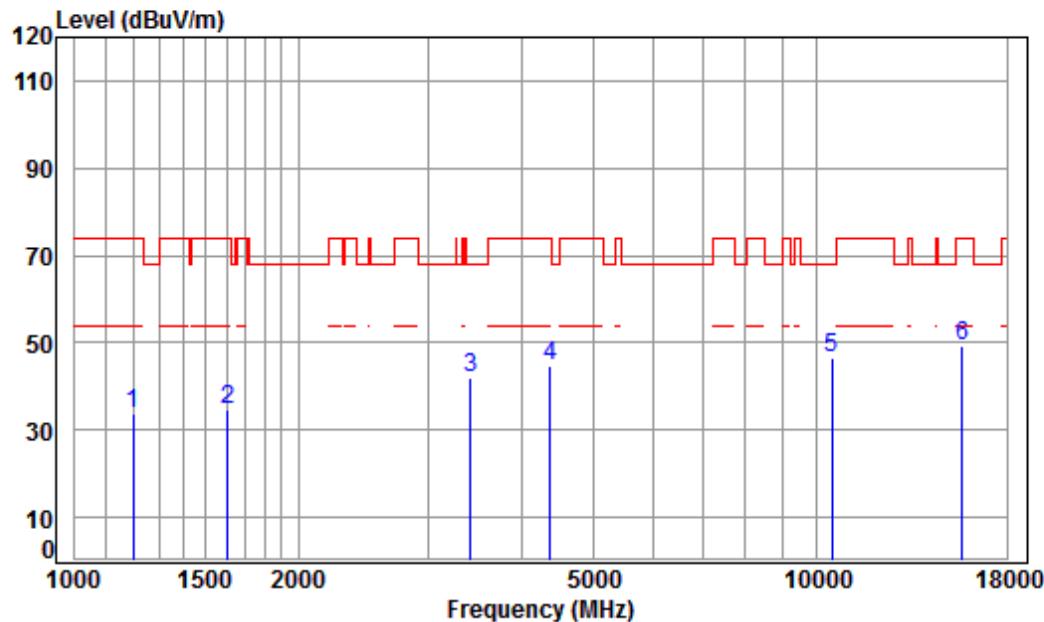

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5230 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	46.16	33.88	74.00	-40.12	peak	
2	1606.441	5.34	26.28	41.47	44.40	34.55	74.00	-39.45	peak	
3	3415.787	6.38	32.06	42.20	45.91	42.15	68.20	-26.05	peak	
4	4367.058	7.41	33.60	42.39	46.06	44.68	74.00	-29.32	peak	
5	pp10460.000	11.26	37.14	37.52	35.88	46.76	68.20	-21.44	peak	
6	15690.000	14.53	41.32	39.14	32.61	49.32	74.00	-24.68	peak	

Mode:h; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

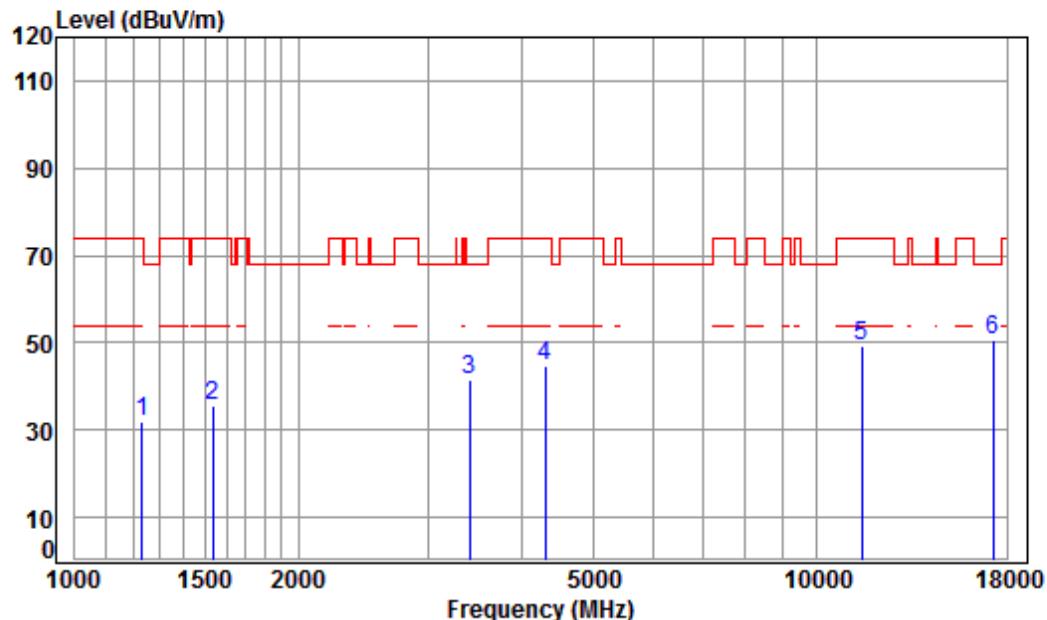

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5745 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1231.345	4.54	24.63	41.21	44.19	32.15	74.00	-41.85	peak
2	1533.841	5.44	25.96	41.43	45.41	35.38	74.00	-38.62	peak
3	3405.929	6.38	32.04	42.20	45.25	41.47	68.20	-26.73	peak
4	4304.400	7.34	33.60	42.38	46.16	44.72	74.00	-29.28	peak
5	11490.000	12.13	38.09	38.19	37.40	49.43	74.00	-24.57	peak
6	pp17235.000	16.18	43.08	40.48	31.90	50.68	68.20	-17.52	peak

Mode:h; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

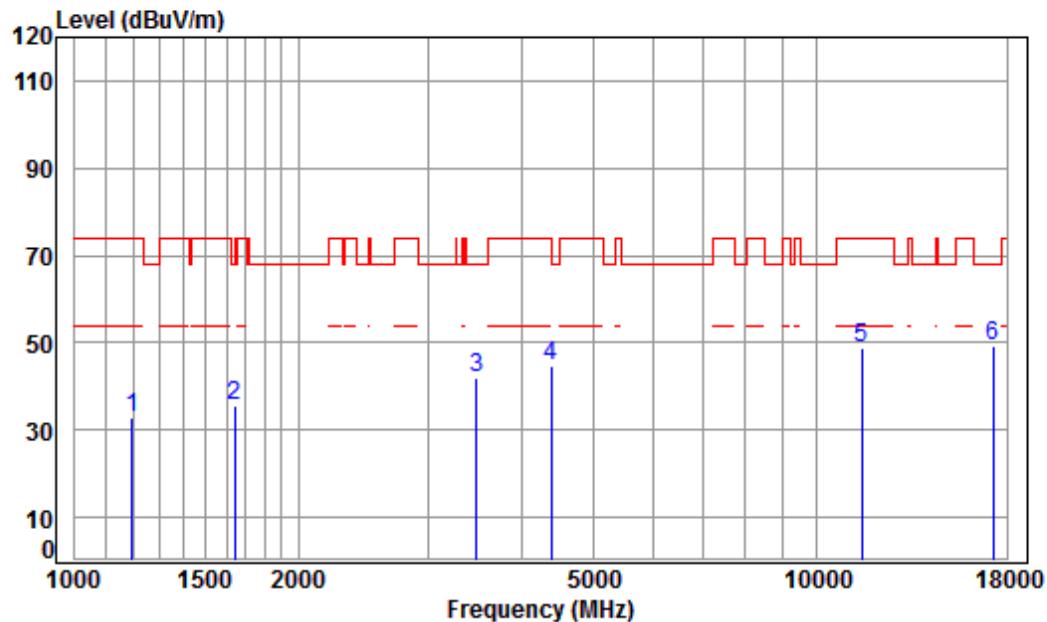

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5745 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	45.30	32.98	74.00	-41.02	peak
2	1644.019	5.30	26.44	41.50	45.20	35.44	68.20	-32.76	peak
3	3475.541	6.44	32.16	42.22	45.45	41.83	68.20	-26.37	peak
4	4379.699	7.43	33.60	42.40	46.27	44.90	74.00	-29.10	peak
5	11490.000	12.13	38.09	38.19	36.67	48.70	74.00	-25.30	peak
6	pp17235.000	16.18	43.08	40.48	30.33	49.11	68.20	-19.09	peak

Mode:h; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:middle

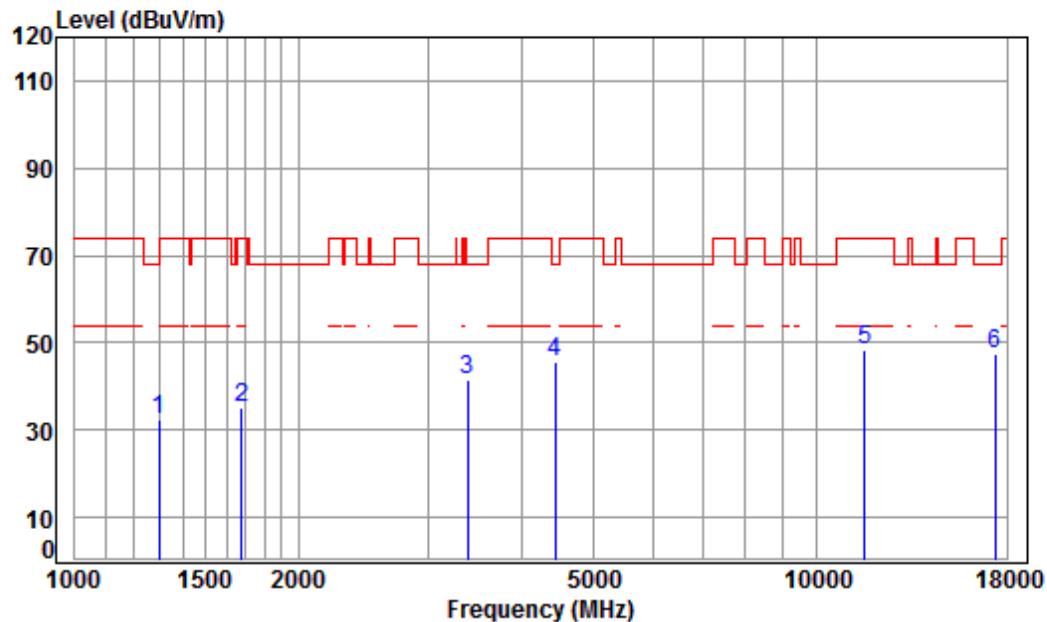

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5785 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	24.96	41.26	44.10	32.60	74.00	-41.40	peak
2	1677.621	5.25	26.58	41.52	44.93	35.24	74.00	-38.76	peak
3	3376.523	6.35	31.99	42.19	45.45	41.60	68.20	-26.60	peak
4	4443.453	7.50	33.60	42.41	46.91	45.60	68.20	-22.60	peak
5	11570.000	12.17	38.17	38.24	36.26	48.36	74.00	-25.64	peak
6	pp17355.000	15.92	43.23	40.58	29.08	47.65	68.20	-20.55	peak

Mode:h; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:middle

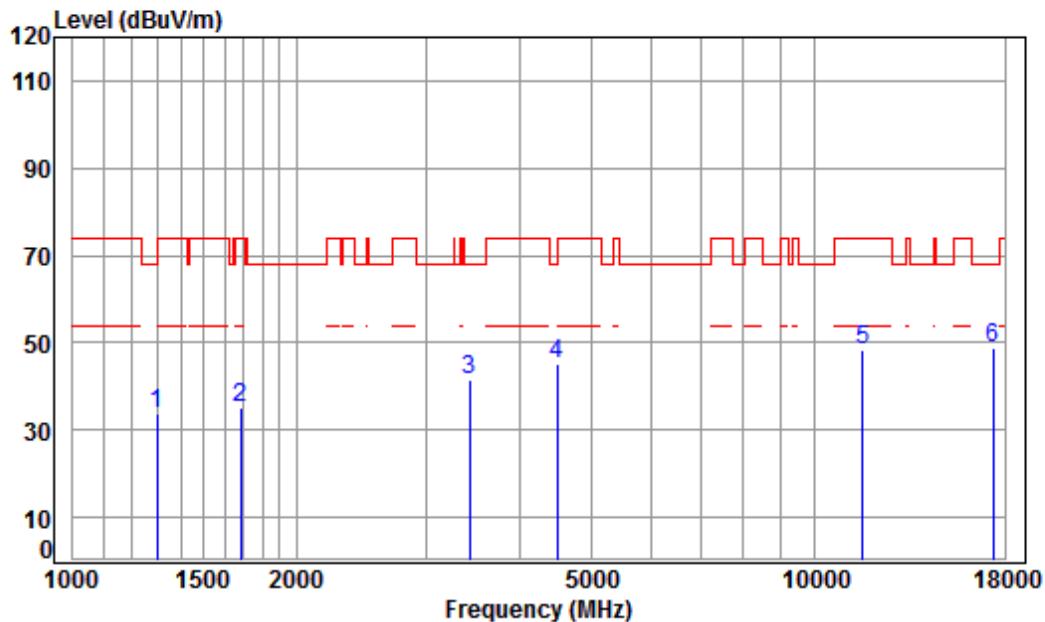

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5785 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	24.96	41.26	45.26	33.76	74.00	-40.24	peak
2	1682.477	5.25	26.60	41.52	45.00	35.33	74.00	-38.67	peak
3	3425.675	6.39	32.07	42.20	45.34	41.60	68.20	-26.60	peak
4	4495.125	7.55	33.60	42.42	46.48	45.21	68.20	-22.99	peak
5	11570.000	12.17	38.17	38.24	36.38	48.48	74.00	-25.52	peak
6	pp17355.000	15.92	43.23	40.58	30.43	49.00	68.20	-19.20	peak

Mode:h; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

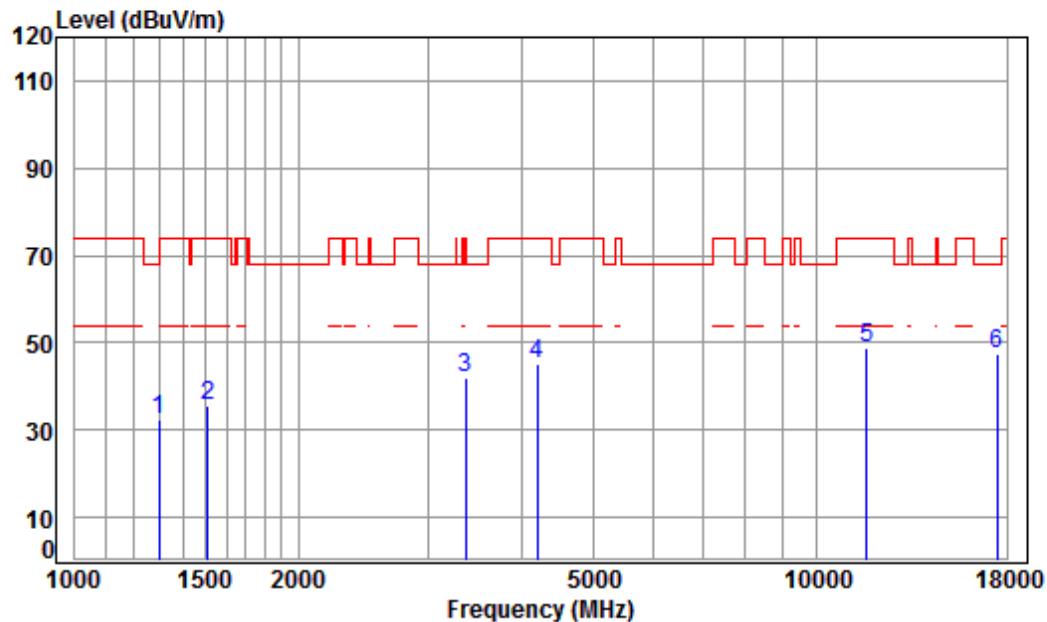

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5825 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	4.79	24.94	41.26	43.70	32.17	68.20	-36.03	peak
2	1511.833	5.46	25.85	41.41	45.89	35.79	74.00	-38.21	peak
3	3357.061	6.33	31.96	42.19	46.07	42.17	74.00	-31.83	peak
4	4193.872	7.21	33.60	42.36	46.73	45.18	74.00	-28.82	peak
5	11650.000	12.20	38.25	38.29	36.78	48.94	74.00	-25.06	peak
6	pp17475.000	15.65	43.37	40.68	29.22	47.56	68.20	-20.64	peak

Mode:h; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

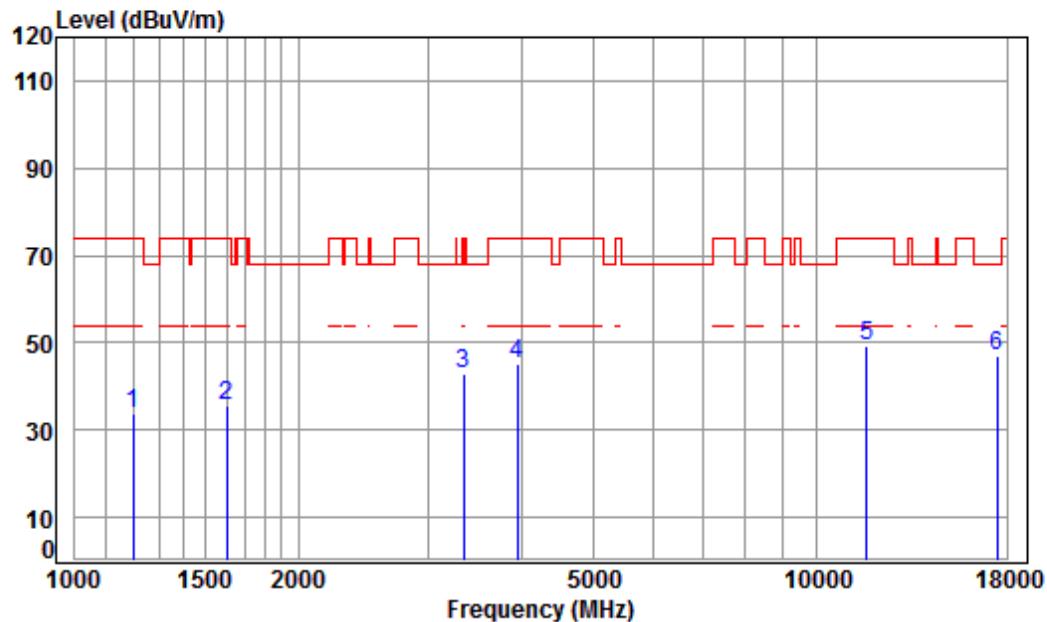

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5825 TX RSE

Note : 5G WIFI 11A


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1199.726	4.42	24.48	41.18	45.89	33.61	74.00	-40.39	peak
2	1601.804	5.35	26.26	41.47	45.34	35.48	74.00	-38.52	peak
3	3337.710	6.31	31.92	42.18	46.79	42.84	74.00	-31.16	peak
4	3946.885	6.93	33.46	42.31	47.10	45.18	74.00	-28.82	peak
5	11650.000	12.20	38.25	38.29	37.05	49.21	74.00	-24.79	peak
6	pp17475.000	15.65	43.37	40.68	28.72	47.06	68.20	-21.14	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

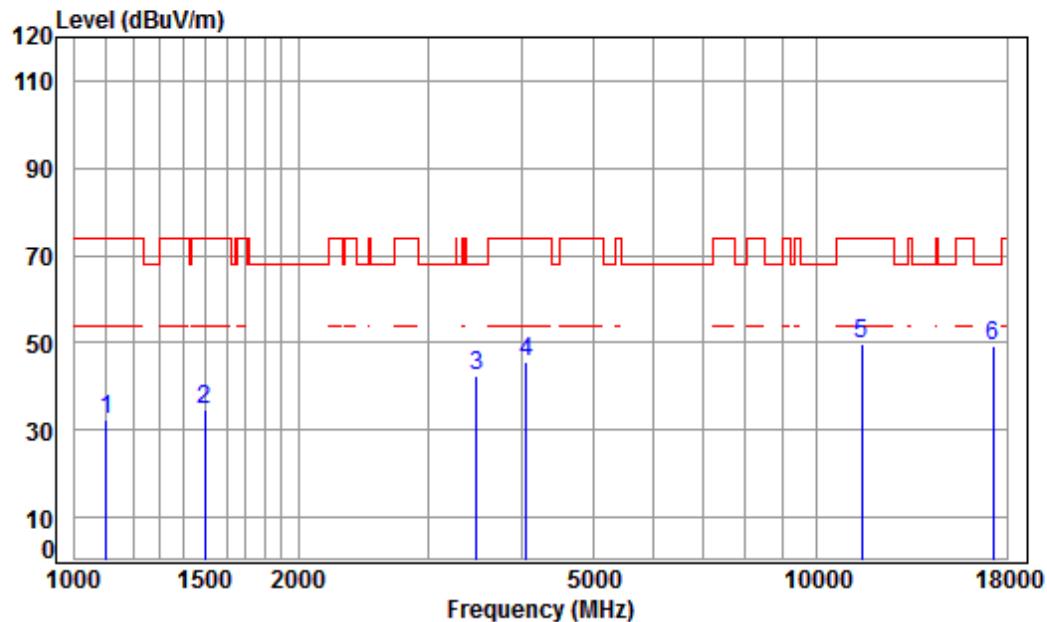

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1103.264	4.02	23.98	41.10	45.72	32.62	74.00	-41.38	peak
2	1498.781	5.48	25.80	41.41	44.99	34.86	74.00	-39.14	peak
3	3475.541	6.44	32.16	42.22	46.14	42.52	68.20	-25.68	peak
4	4050.904	7.04	33.60	42.34	47.41	45.71	74.00	-28.29	peak
5	11490.000	12.13	38.09	38.19	37.87	49.90	74.00	-24.10	peak
6	pp17235.000	16.18	43.08	40.48	30.34	49.12	68.20	-19.08	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

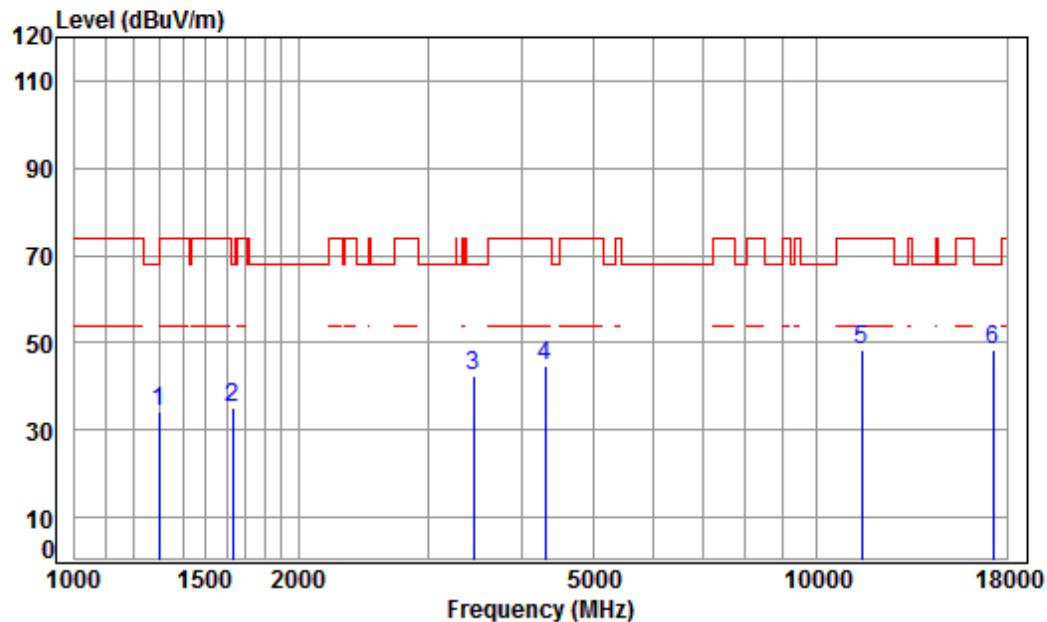

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5745 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	4.79	24.94	41.26	45.65	34.12	68.20	-34.08	peak
2	1634.543	5.31	26.40	41.49	45.08	35.30	68.20	-32.90	peak
3	3445.535	6.41	32.11	42.21	46.11	42.42	68.20	-25.78	peak
4	4304.400	7.34	33.60	42.38	46.10	44.66	74.00	-29.34	peak
5	11490.000	12.13	38.09	38.19	36.21	48.24	74.00	-25.76	peak
6	pp17235.000	16.18	43.08	40.48	29.65	48.43	68.20	-19.77	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

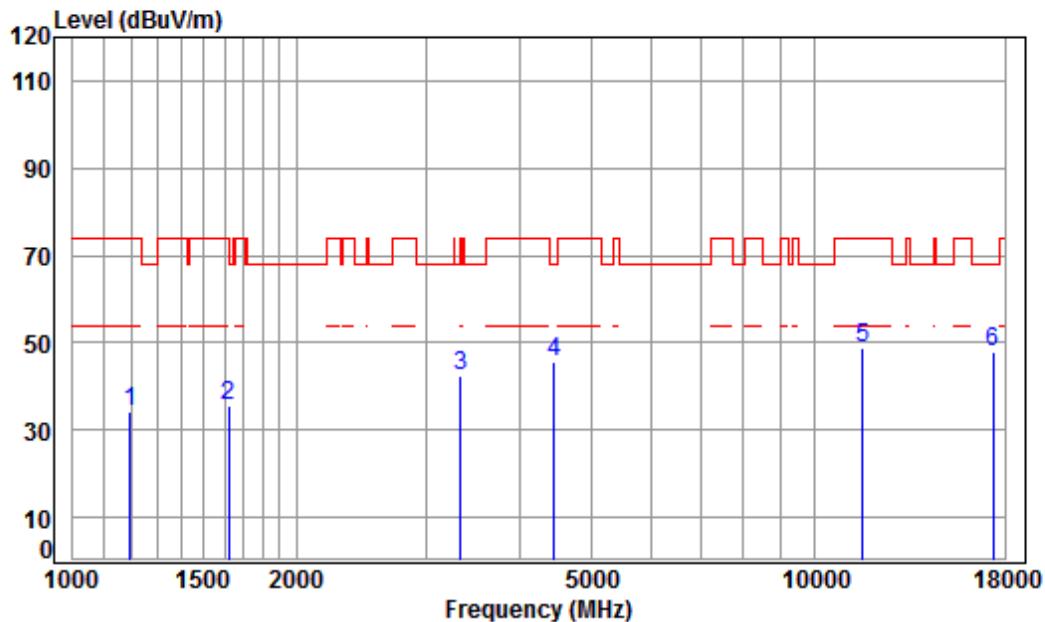

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5785 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	46.49	34.17	74.00	-39.83	peak
2	1620.431	5.32	26.34	41.48	45.49	35.67	74.00	-38.33	peak
3	3328.077	6.30	31.91	42.18	46.58	42.61	68.20	-25.59	peak
4	4456.315	7.51	33.60	42.41	46.83	45.53	68.20	-22.67	peak
5	11570.000	12.17	38.17	38.24	36.60	48.70	74.00	-25.30	peak
6	pp17355.000	15.92	43.23	40.58	29.38	47.95	68.20	-20.25	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

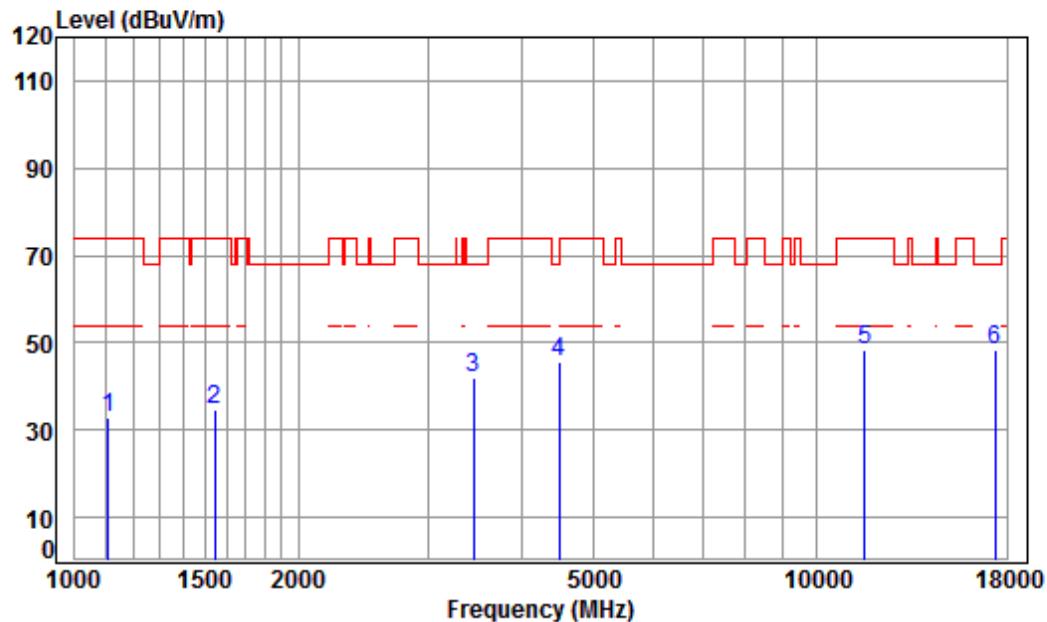

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5785 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1109.660	4.05	24.02	41.10	45.73	32.70	74.00	-41.30	peak
2	1542.733	5.42	26.00	41.43	44.82	34.81	74.00	-39.19	peak
3	3445.535	6.41	32.11	42.21	45.68	41.99	68.20	-26.21	peak
4	4495.125	7.55	33.60	42.42	47.08	45.81	68.20	-22.39	peak
5	11570.000	12.17	38.17	38.24	36.41	48.51	74.00	-25.49	peak
6	pp17355.000	15.92	43.23	40.58	29.64	48.21	68.20	-19.99	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

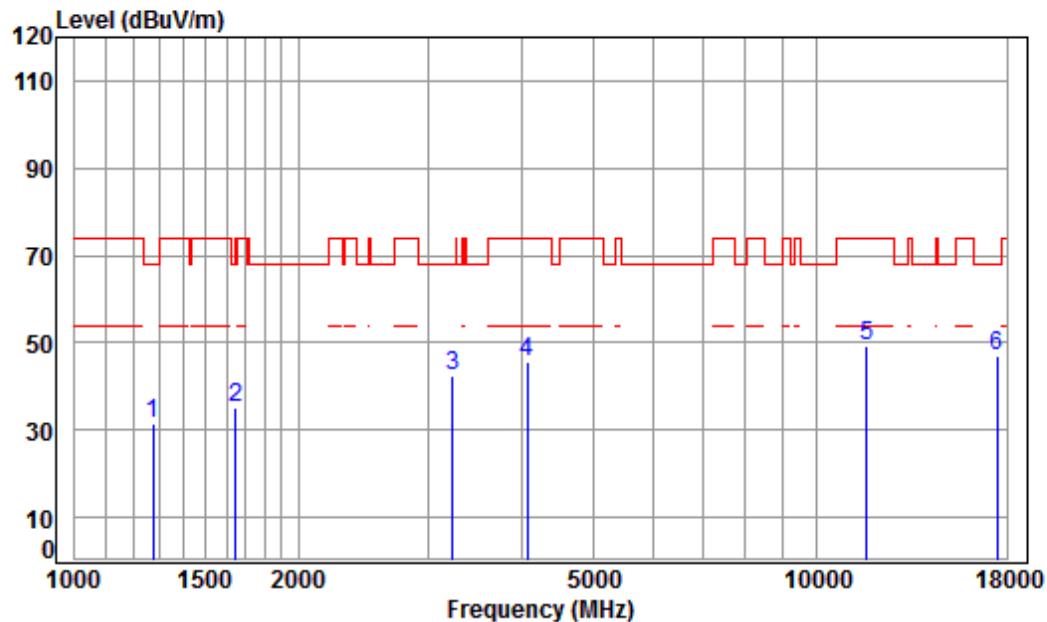

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5825 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1274.802	4.71	24.84	41.24	43.14	31.45	68.20	-36.75	peak
2	1648.778	5.29	26.46	41.50	44.69	34.94	68.20	-33.26	peak
3	3233.260	6.21	31.74	42.16	46.54	42.33	68.20	-25.87	peak
4	4074.388	7.07	33.60	42.34	47.46	45.79	74.00	-28.21	peak
5	11650.000	12.20	38.25	38.29	37.34	49.50	74.00	-24.50	peak
6	pp17475.000	15.65	43.37	40.68	28.88	47.22	68.20	-20.98	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

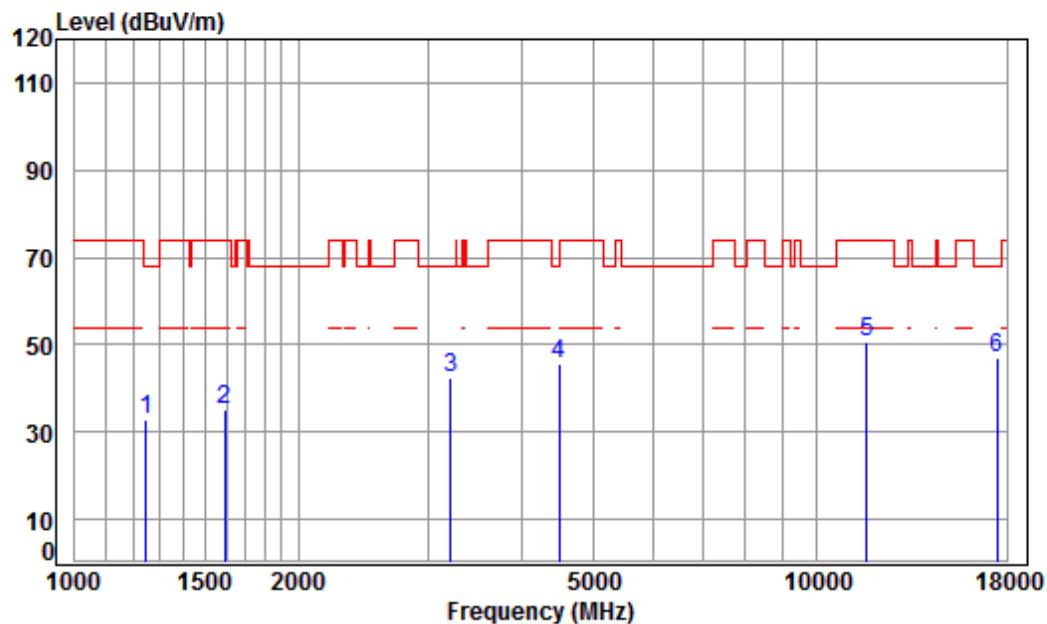

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5825 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1249.269	4.61	24.72	41.22	44.67	32.78	68.20	-35.42	peak
2	1592.571	5.36	26.22	41.47	45.14	35.25	74.00	-38.75	peak
3	3205.345	6.19	31.69	42.15	46.68	42.41	68.20	-25.79	peak
4	4495.125	7.55	33.60	42.42	46.78	45.51	68.20	-22.69	peak
5	11650.000	12.20	38.25	38.29	38.32	50.48	74.00	-23.52	peak
6	pp17475.000	15.65	43.37	40.68	28.68	47.02	68.20	-21.18	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

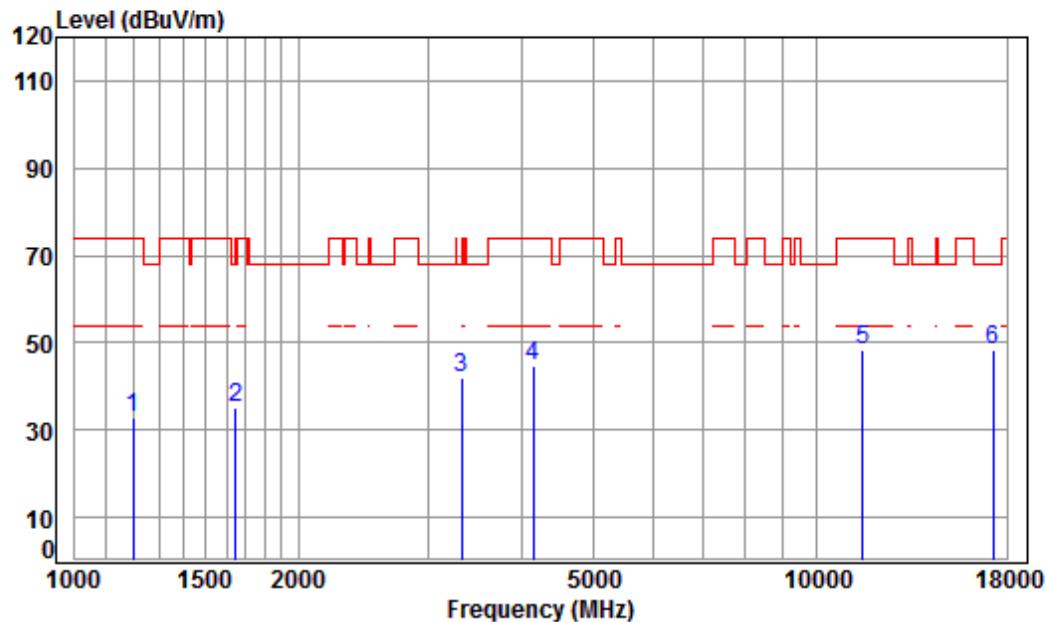

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5755 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	45.18	32.90	74.00	-41.10	peak	
2	1648.778	5.29	26.46	41.50	45.05	35.30	68.20	-32.90	peak	
3	3318.471	6.29	31.89	42.18	46.03	42.03	68.20	-26.17	peak	
4	4145.664	7.16	33.60	42.35	46.08	44.49	74.00	-29.51	peak	
5	11510.000	12.14	38.11	38.20	36.53	48.58	74.00	-25.42	peak	
6	pp17265.000	16.12	43.12	40.51	29.83	48.56	68.20	-19.64	peak	

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

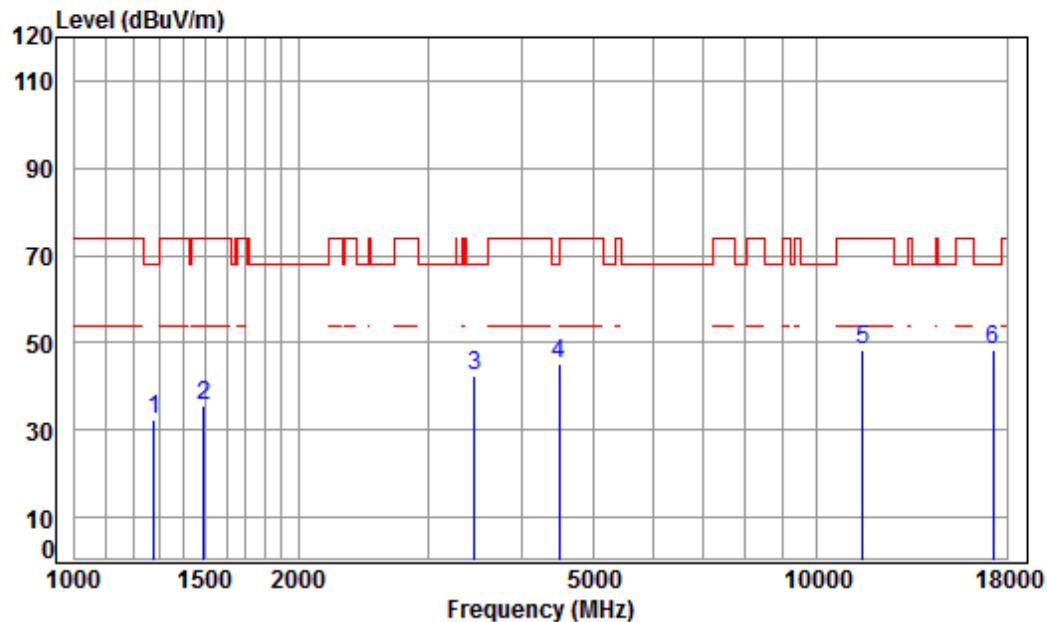

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5755 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	4.72	24.85	41.25	43.86	32.18	68.20	-36.02	peak
2	1494.455	5.46	25.78	41.40	45.73	35.57	74.00	-38.43	peak
3	3455.508	6.42	32.13	42.21	46.15	42.49	68.20	-25.71	peak
4	4495.125	7.55	33.60	42.42	46.51	45.24	68.20	-22.96	peak
5	11510.000	12.14	38.11	38.20	36.42	48.47	74.00	-25.53	peak
6	pp17265.000	16.12	43.12	40.51	29.55	48.28	68.20	-19.92	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

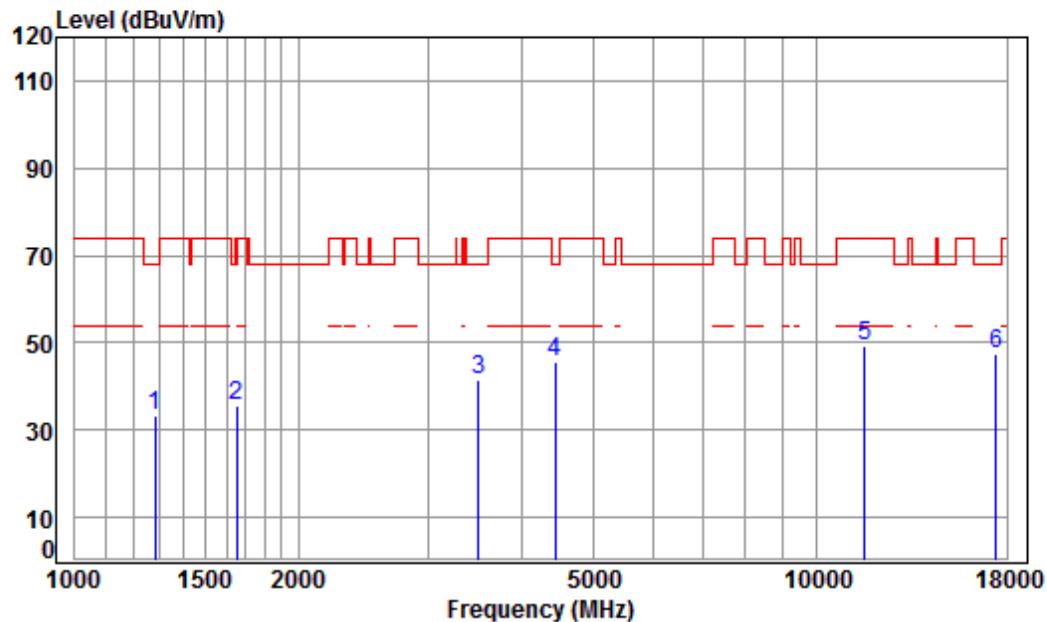

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5795 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1282.193	4.73	24.87	41.25	44.89	33.24	68.20	-34.96	peak
2	1653.550	5.28	26.48	41.50	45.23	35.49	68.20	-32.71	peak
3	3495.691	6.46	32.19	42.22	45.06	41.49	68.20	-26.71	peak
4	4430.628	7.48	33.60	42.41	46.75	45.42	68.20	-22.78	peak
5	11590.000	12.17	38.19	38.25	37.18	49.29	74.00	-24.71	peak
6	pp17385.000	15.85	43.26	40.60	29.09	47.60	68.20	-20.60	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

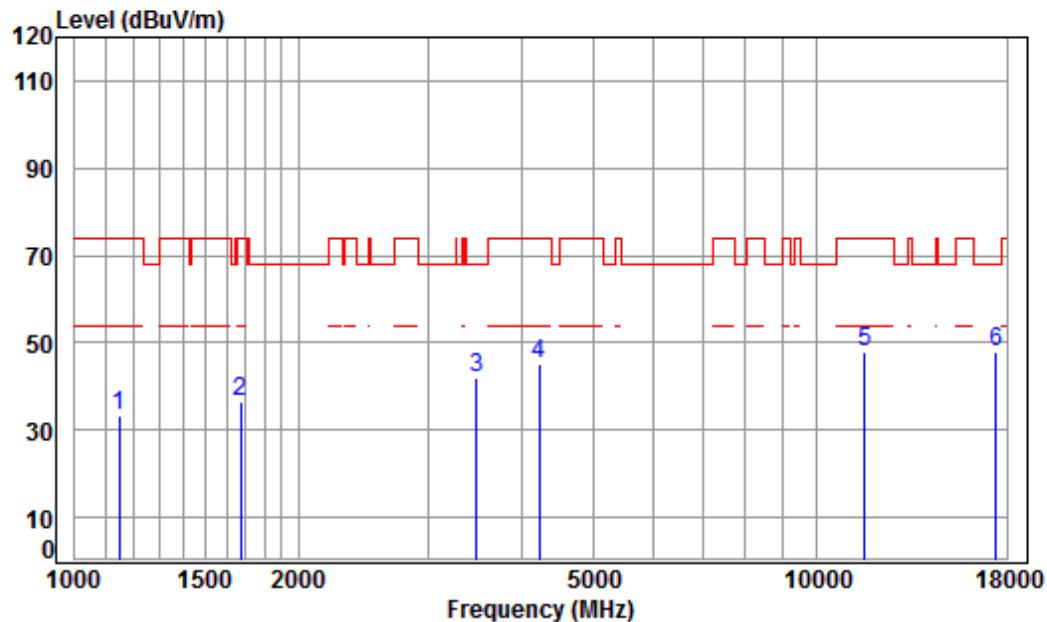

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5795 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1148.823	4.21	24.22	41.14	45.83	33.12	74.00	-40.88	peak	
2	1672.779	5.26	26.56	41.52	46.39	36.69	74.00	-37.31	peak	
3	3475.541	6.44	32.16	42.22	45.76	42.14	68.20	-26.06	peak	
4	4218.186	7.24	33.60	42.37	46.66	45.13	74.00	-28.87	peak	
5	11590.000	12.17	38.19	38.25	35.83	47.94	74.00	-26.06	peak	
6	pp17385.000	15.85	43.26	40.60	29.35	47.86	68.20	-20.34	peak	

Mode:g; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

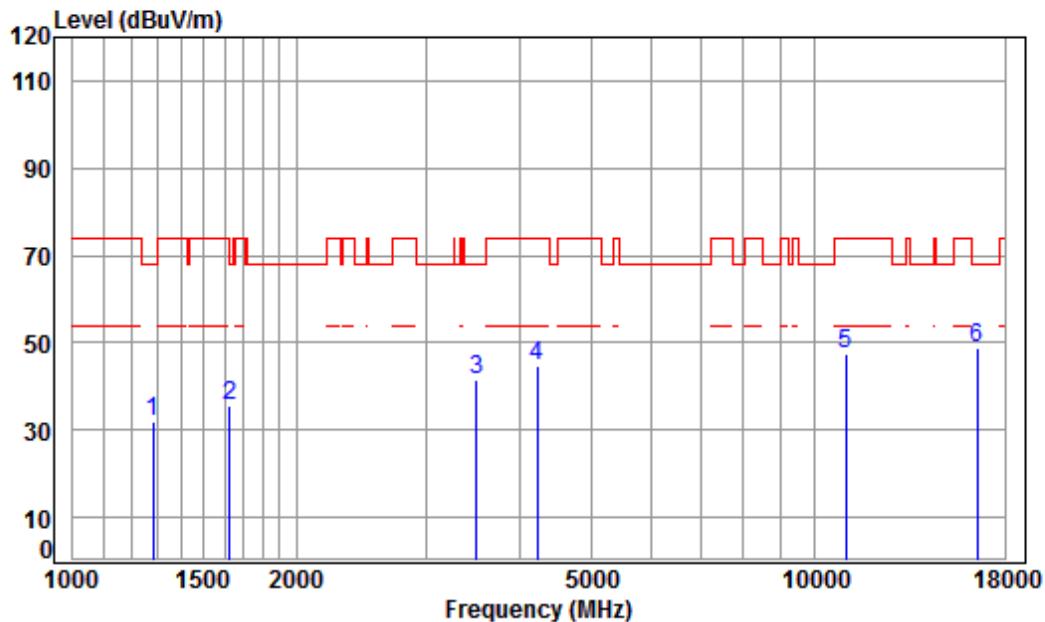

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5500 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1282.193	4.73	24.87	41.25	43.51	31.86	68.20	-36.34	peak	
2	1625.121	5.32	26.36	41.49	45.22	35.41	74.00	-38.59	peak	
3	3495.691	6.46	32.19	42.22	44.96	41.39	68.20	-26.81	peak	
4	4218.186	7.24	33.60	42.37	46.08	44.55	74.00	-29.45	peak	
5	11000.000	11.63	37.70	37.88	36.04	47.49	74.00	-26.51	peak	
6	pp16500.000	14.50	42.70	39.86	31.30	48.64	68.20	-19.56	peak	

Mode:g; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

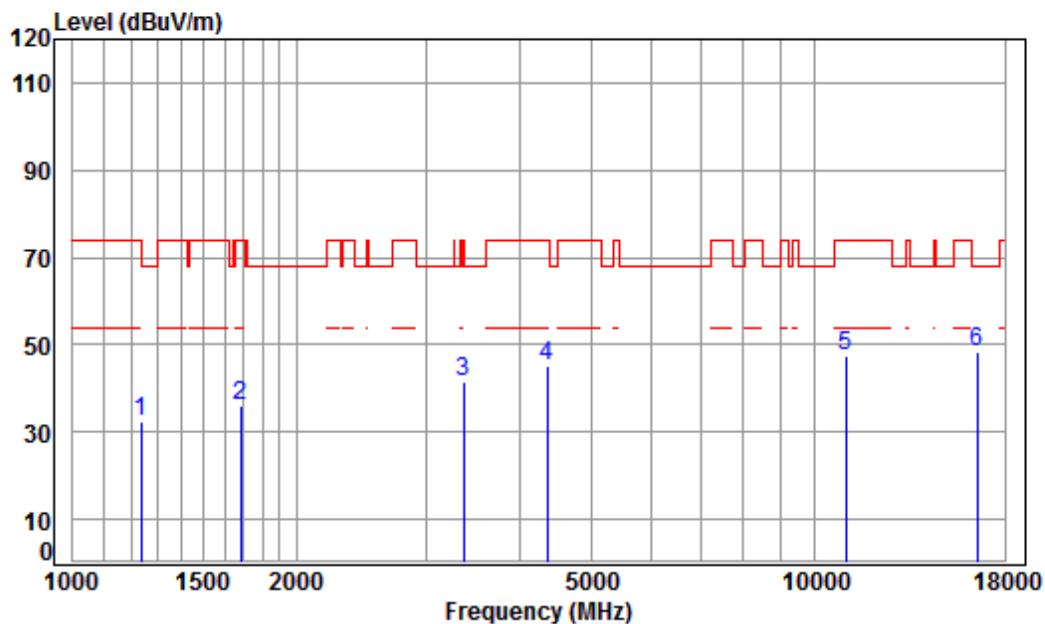

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5500 TX RSE

Note : 5G WIFI 11A


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1234.909	4.55	24.65	41.21	44.22	32.21	74.00	-41.79	peak
2	1682.477	5.25	26.60	41.52	45.90	36.23	74.00	-37.77	peak
3	3357.061	6.33	31.96	42.19	45.59	41.69	74.00	-32.31	peak
4	4354.454	7.40	33.60	42.39	46.72	45.33	74.00	-28.67	peak
5	11000.000	11.63	37.70	37.88	35.81	47.26	74.00	-26.74	peak
6	pp16500.000	14.50	42.70	39.86	30.97	48.31	68.20	-19.89	peak

Mode:g; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:middle

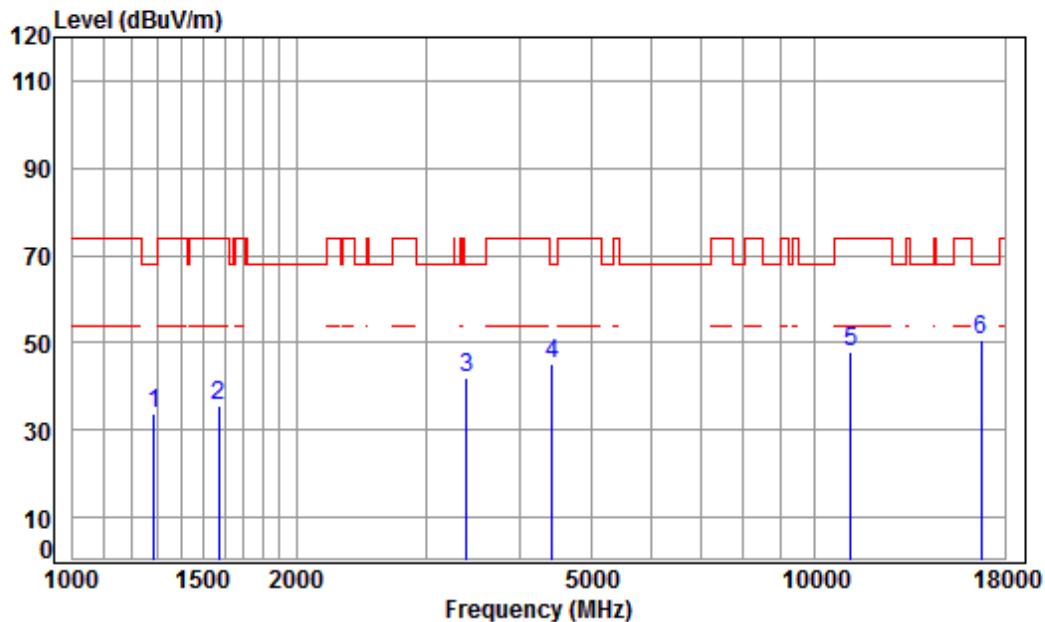

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.89	41.25	45.23	33.62	68.20	-34.58	peak
2	1574.265	5.38	26.14	41.45	45.53	35.60	74.00	-38.40	peak
3	3396.098	6.37	32.02	42.20	45.56	41.75	68.20	-26.45	peak
4	4417.841	7.47	33.60	42.40	46.55	45.22	68.20	-22.98	peak
5	11160.000	11.80	37.83	37.98	36.17	47.82	74.00	-26.18	peak
6	pp16740.000	15.57	42.75	40.07	32.43	50.68	68.20	-17.52	peak

Mode:g; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:middle

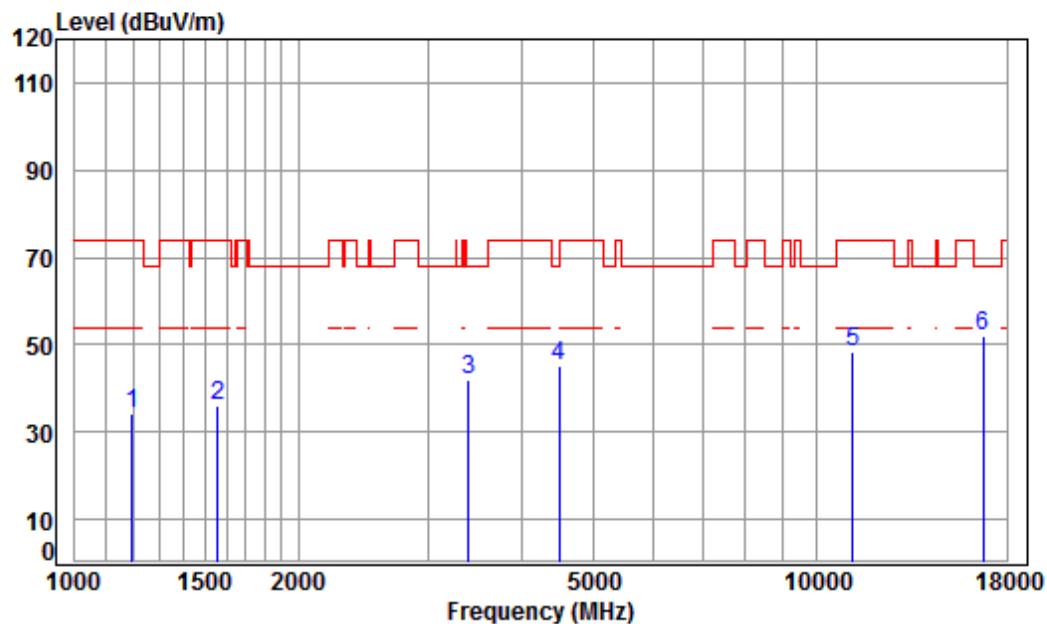

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5580 TX RSE

Note : 5G WIFI 11A


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	46.45	34.13	74.00	-39.87	peak
2	1556.169	5.41	26.06	41.44	45.98	36.01	74.00	-37.99	peak
3	3396.098	6.37	32.02	42.20	45.65	41.84	68.20	-26.36	peak
4	4495.125	7.55	33.60	42.42	46.22	44.95	68.20	-23.25	peak
5	11160.000	11.80	37.83	37.98	36.83	48.48	74.00	-25.52	peak
6	pp16740.000	15.57	42.75	40.07	33.71	51.96	68.20	-16.24	peak

Mode:g; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

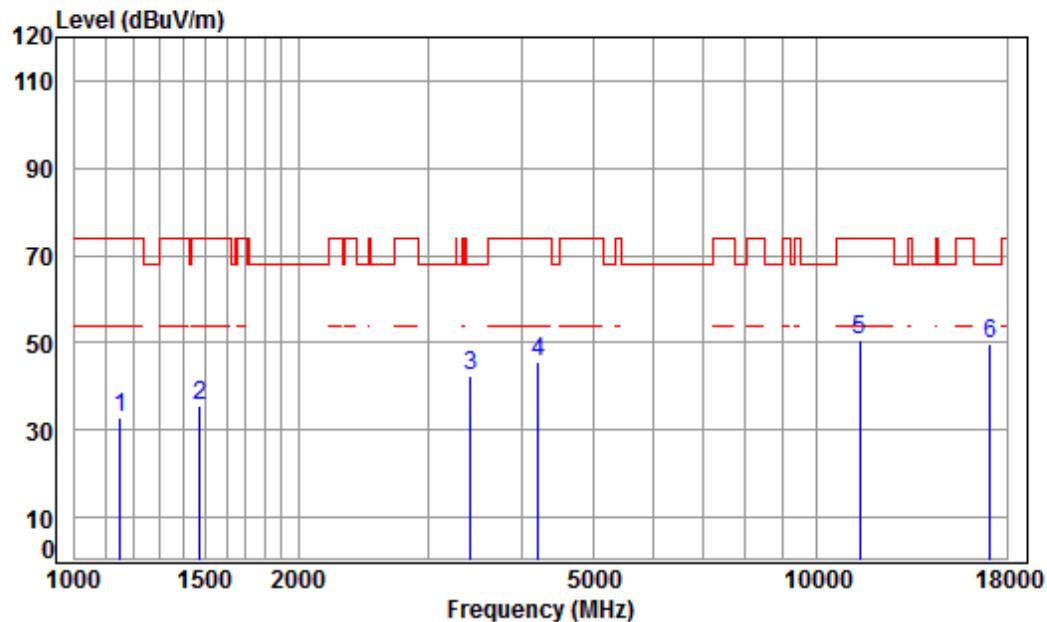

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.24	41.14	45.38	32.70	74.00	-41.30	peak
2	1473.013	5.39	25.69	41.39	45.72	35.41	74.00	-38.59	peak
3	3415.787	6.38	32.06	42.20	46.16	42.40	68.20	-25.80	peak
4	4206.011	7.23	33.60	42.36	47.22	45.69	74.00	-28.31	peak
5	11400.000	12.04	38.02	38.13	38.54	50.47	74.00	-23.53	peak
6	pp17100.000	16.49	42.92	40.37	30.52	49.56	68.20	-18.64	peak

Mode:g; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

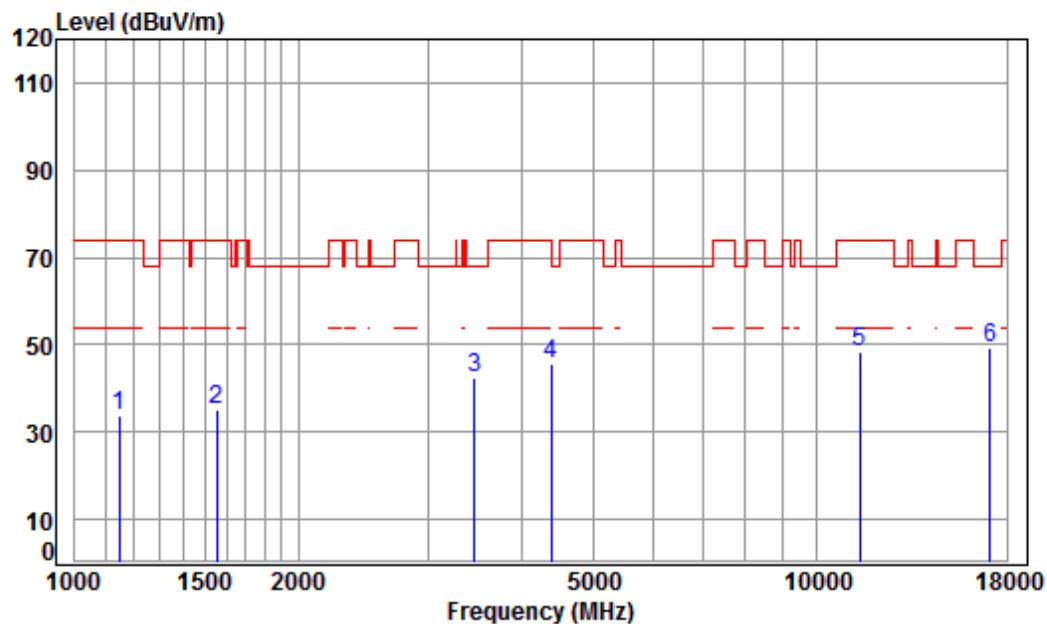

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5700 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1148.823	4.21	24.22	41.14	46.41	33.70	74.00	-40.30	peak
2	1551.677	5.41	26.04	41.44	44.91	34.92	74.00	-39.08	peak
3	3455.508	6.42	32.13	42.21	45.91	42.25	68.20	-25.95	peak
4	4379.699	7.43	33.60	42.40	46.78	45.41	74.00	-28.59	peak
5	11400.000	12.04	38.02	38.13	36.50	48.43	74.00	-25.57	peak
6	pp17100.000	16.49	42.92	40.37	30.15	49.19	68.20	-19.01	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

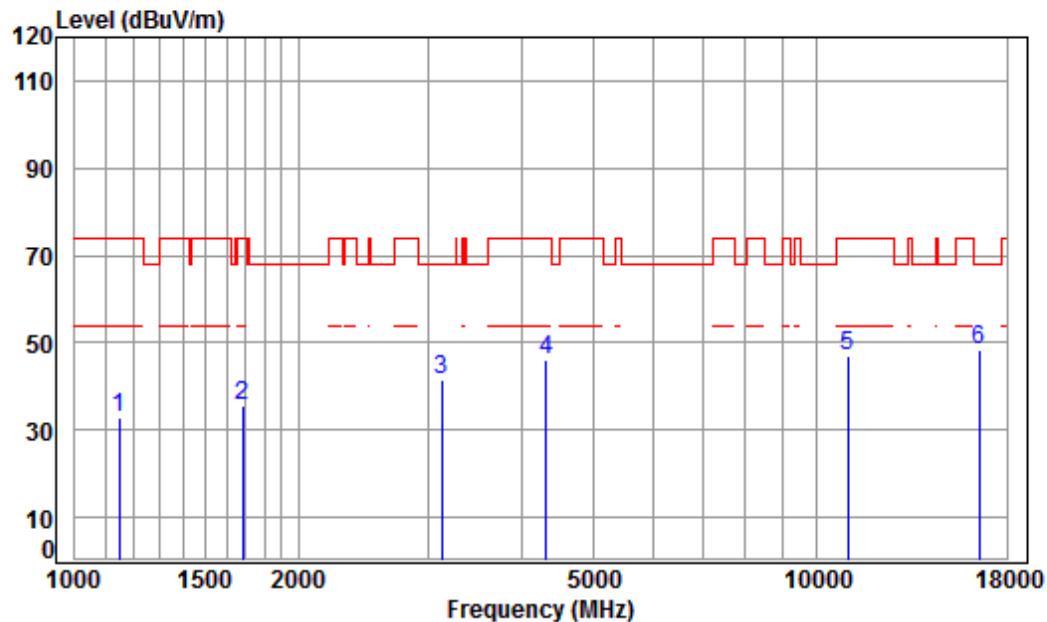

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5500 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1148.823	4.21	24.22	41.14	45.44	32.73	74.00	-41.27	peak	
2	1682.477	5.25	26.60	41.52	45.09	35.42	74.00	-38.58	peak	
3	3123.039	6.11	31.53	42.13	46.04	41.55	68.20	-26.65	peak	
4	4316.859	7.36	33.60	42.38	47.60	46.18	74.00	-27.82	peak	
5	11000.000	11.63	37.70	37.88	35.40	46.85	74.00	-27.15	peak	
6	pp16500.000	14.50	42.70	39.86	31.09	48.43	68.20	-19.77	peak	

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

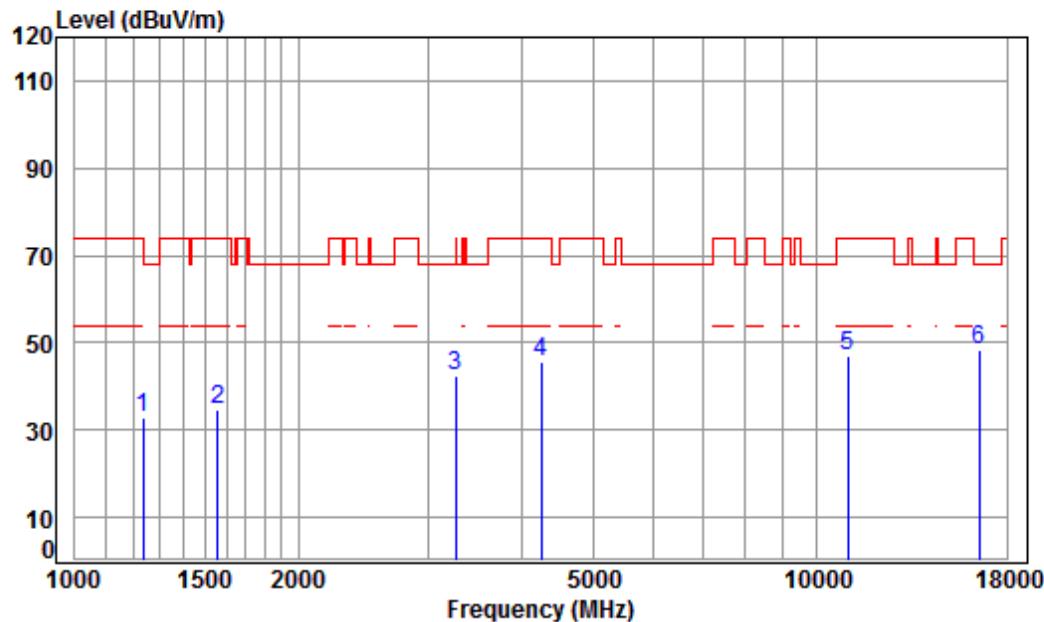

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5500 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	41.21	44.93	32.92	74.00	-41.08	peak	
2	1556.169	5.41	26.06	41.44	44.78	34.81	74.00	-39.19	peak	
3	3261.418	6.24	31.79	42.17	46.70	42.56	74.00	-31.44	peak	
4	4242.641	7.27	33.60	42.37	47.21	45.71	74.00	-28.29	peak	
5	11000.000	11.63	37.70	37.88	35.73	47.18	74.00	-26.82	peak	
6	pp16500.000	14.50	42.70	39.86	31.12	48.46	68.20	-19.74	peak	

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

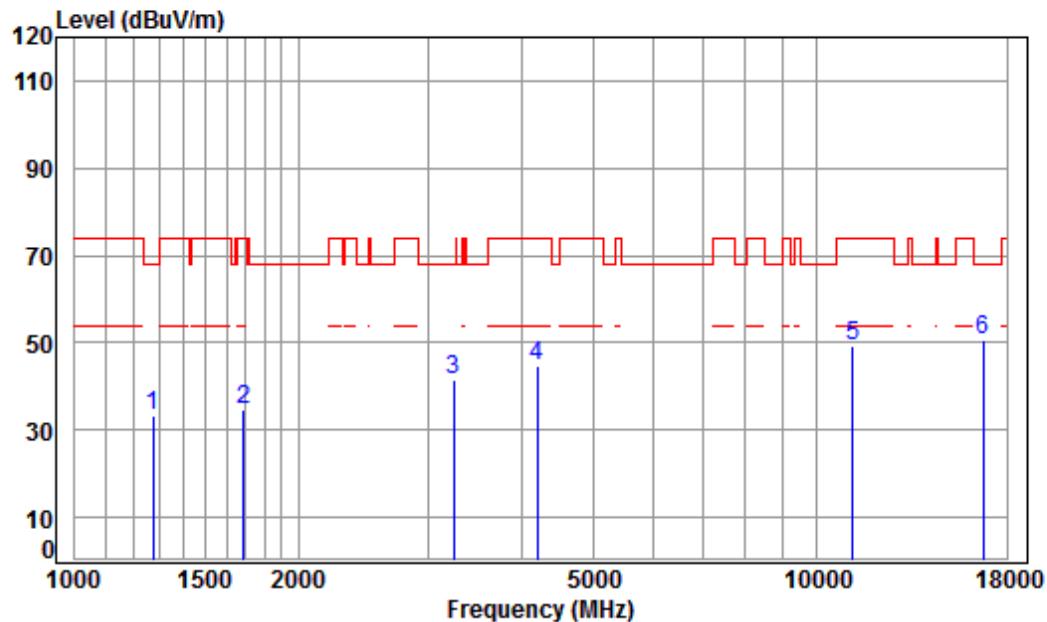

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5580 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1274.802	4.71	24.84	41.24	44.82	33.13	68.20	-35.07	peak
2	1687.347	5.24	26.62	41.52	44.45	34.79	74.00	-39.21	peak
3	3242.619	6.22	31.75	42.16	45.93	41.74	68.20	-26.46	peak
4	4193.872	7.21	33.60	42.36	46.27	44.72	74.00	-29.28	peak
5	11160.000	11.80	37.83	37.98	37.77	49.42	74.00	-24.58	peak
6	pp16740.000	15.57	42.75	40.07	32.49	50.74	68.20	-17.46	peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

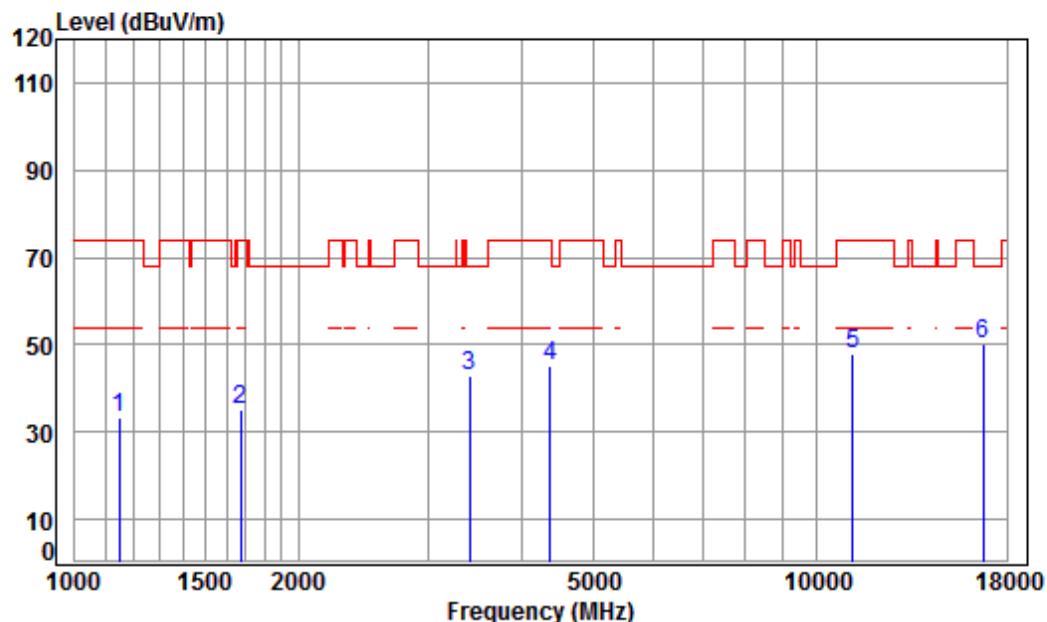

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5580 TX RSE

Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1148.823	4.21	24.22	41.14	46.00	33.29	74.00	-40.71	peak
2	1672.779	5.26	26.56	41.52	44.69	34.99	74.00	-39.01	peak
3	3405.929	6.38	32.04	42.20	46.62	42.84	68.20	-25.36	peak
4	4367.058	7.41	33.60	42.39	46.64	45.26	74.00	-28.74	peak
5	11160.000	11.80	37.83	37.98	36.29	47.94	74.00	-26.06	peak
6	pp16740.000	15.57	42.75	40.07	31.98	50.23	68.20	-17.97	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

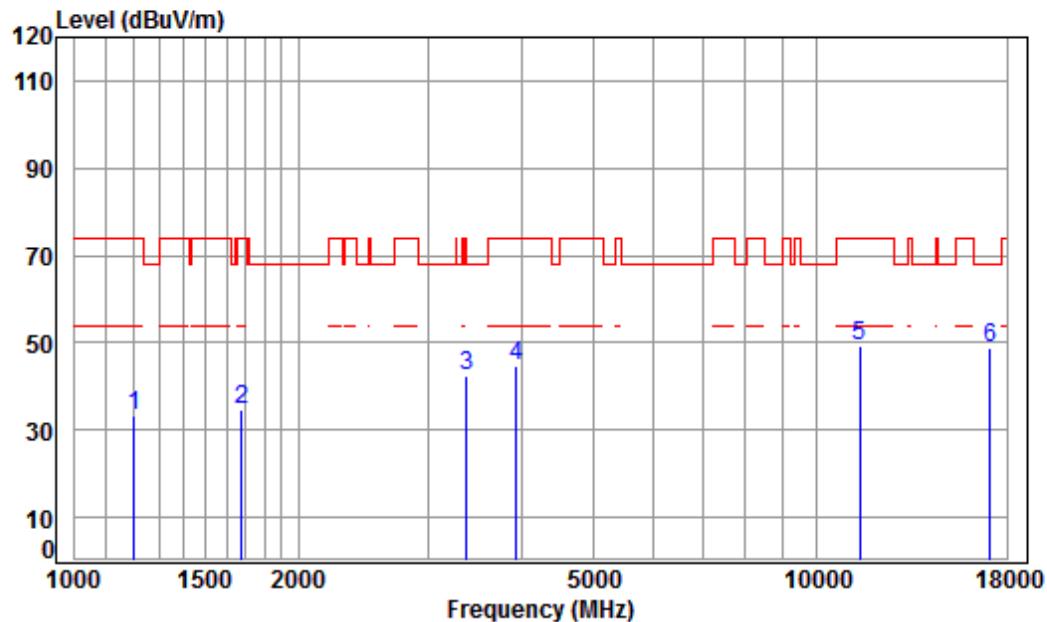

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5700 TX RSE

Note : 5G WIFI 11N20


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	45.51	33.24	74.00	-40.76	peak
2	1677.621	5.25	26.58	41.52	44.36	34.67	74.00	-39.33	peak
3	3366.778	6.34	31.97	42.19	46.20	42.32	68.20	-25.88	peak
4	3935.493	6.92	33.43	42.31	46.88	44.92	74.00	-29.08	peak
5	11400.000	12.04	38.02	38.13	37.14	49.07	74.00	-24.93	peak
6	pp17100.000	16.49	42.92	40.37	29.86	48.90	68.20	-19.30	peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

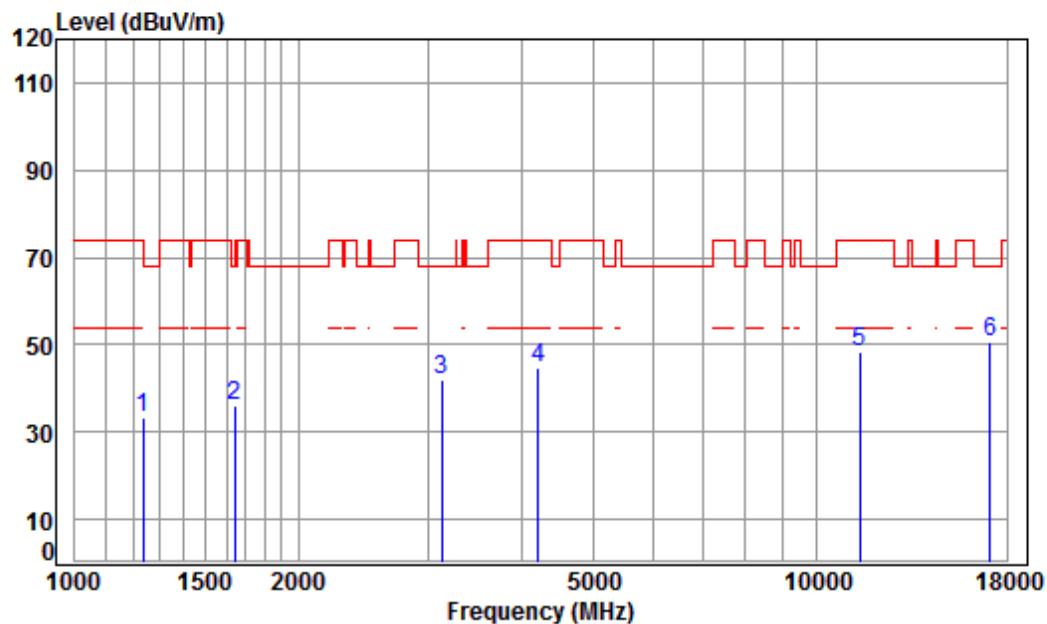

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	41.21	45.46	33.45	74.00	-40.55	peak
2	1644.019	5.30	26.44	41.50	45.85	36.09	68.20	-32.11	peak
3	3123.039	6.11	31.53	42.13	46.52	42.03	68.20	-26.17	peak
4	4206.011	7.23	33.60	42.36	46.23	44.70	74.00	-29.30	peak
5	11400.000	12.04	38.02	38.13	36.32	48.25	74.00	-25.75	peak
6	pp17100.000	16.49	42.92	40.37	31.45	50.49	68.20	-17.71	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

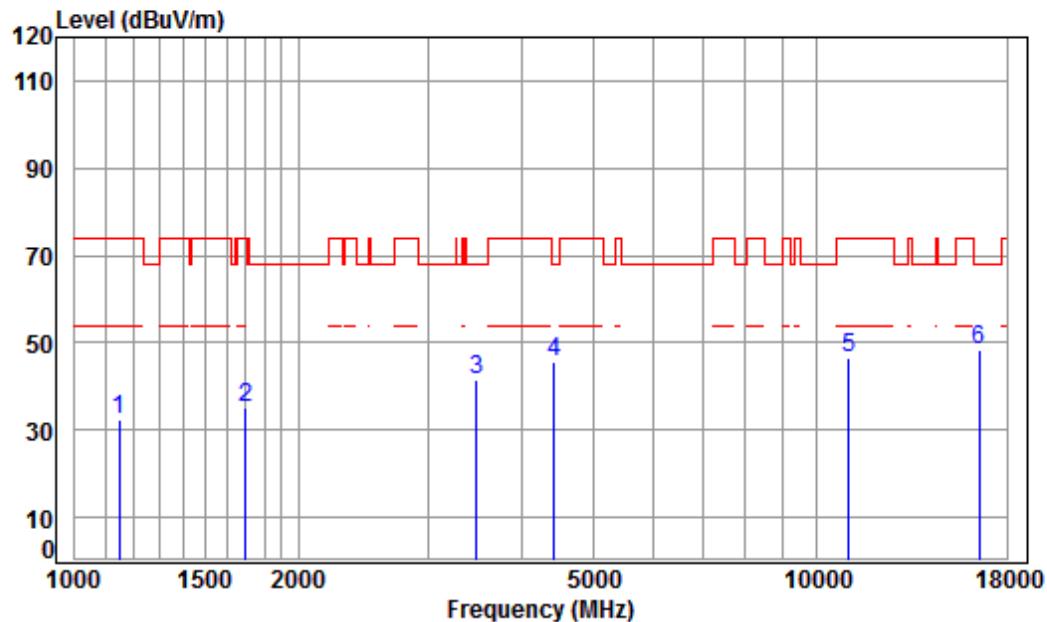

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5510 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1148.823	4.21	24.22	41.14	45.03	32.32	74.00	-41.68	peak
2	1697.129	5.23	26.66	41.53	44.94	35.30	74.00	-38.70	peak
3	3475.541	6.44	32.16	42.22	45.20	41.58	68.20	-26.62	peak
4	4417.841	7.47	33.60	42.40	47.07	45.74	68.20	-22.46	peak
5	11020.000	11.65	37.72	37.89	35.22	46.70	74.00	-27.30	peak
6	pp16530.000	14.63	42.71	39.89	30.97	48.42	68.20	-19.78	peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

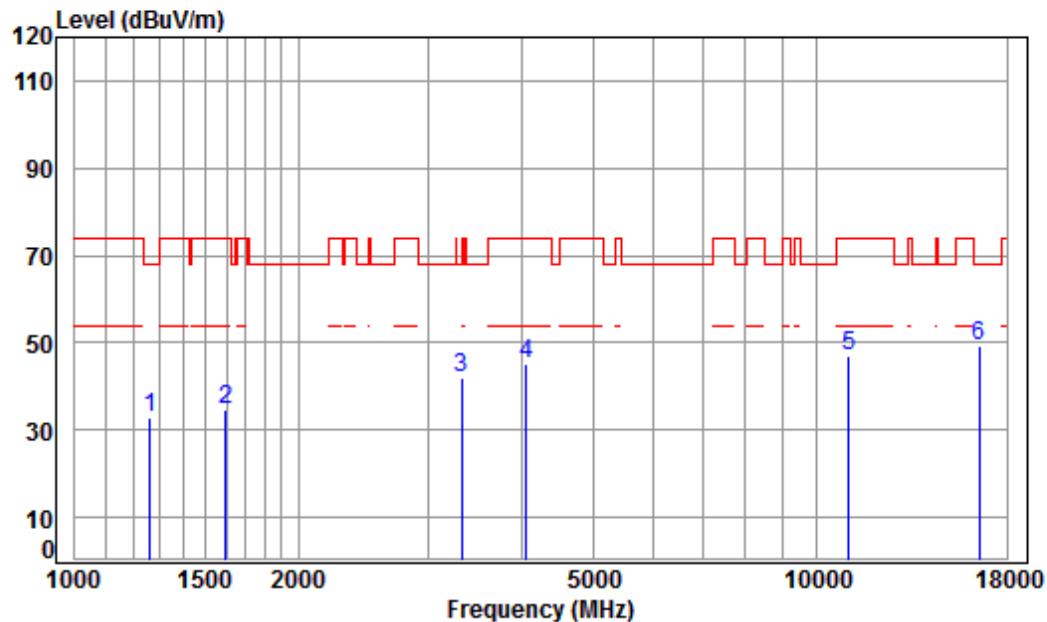

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5510 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1263.796	4.66	24.79	41.23	44.49	32.71	68.20	-35.49	peak
2	1597.181	5.35	26.24	41.47	44.72	34.84	74.00	-39.16	peak
3	3318.471	6.29	31.89	42.18	45.88	41.88	68.20	-26.32	peak
4	4050.904	7.04	33.60	42.34	46.65	44.95	74.00	-29.05	peak
5	11020.000	11.65	37.72	37.89	35.49	46.97	74.00	-27.03	peak
6	pp16530.000	14.63	42.71	39.89	31.85	49.30	68.20	-18.90	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:middle

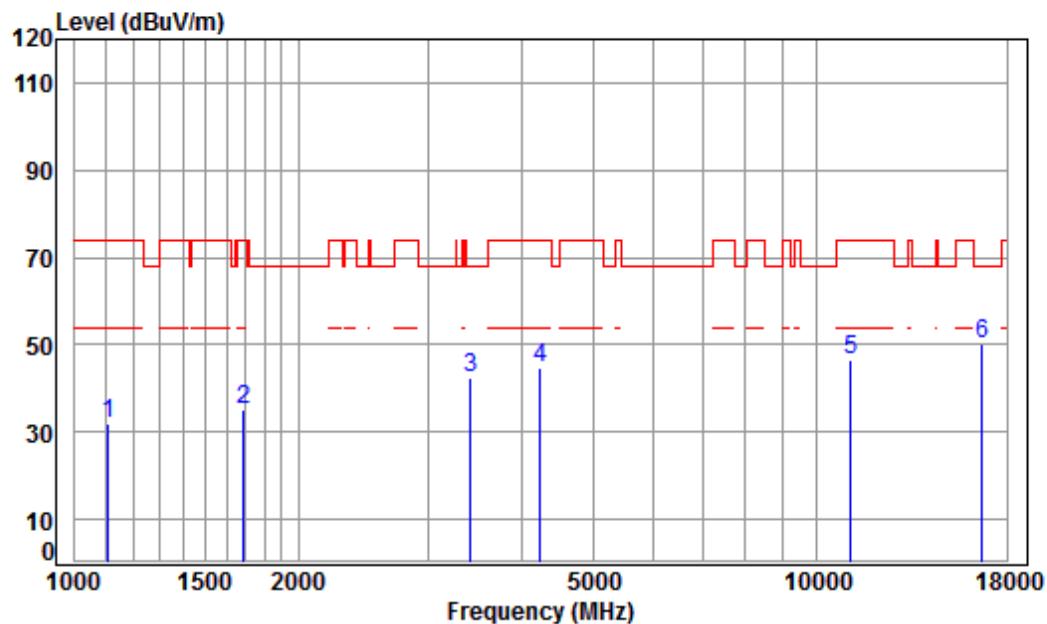

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5550 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1109.660	4.05	24.02	41.10	44.81	31.78	74.00	-42.22	peak
2	1687.347	5.24	26.62	41.52	44.87	35.21	74.00	-38.79	peak
3	3415.787	6.38	32.06	42.20	46.01	42.25	68.20	-25.95	peak
4	4230.396	7.26	33.60	42.37	46.32	44.81	74.00	-29.19	peak
5	11100.000	11.73	37.78	37.94	35.16	46.73	74.00	-27.27	peak
6	pp16650.000	15.17	42.73	39.99	32.31	50.22	68.20	-17.98	peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:middle

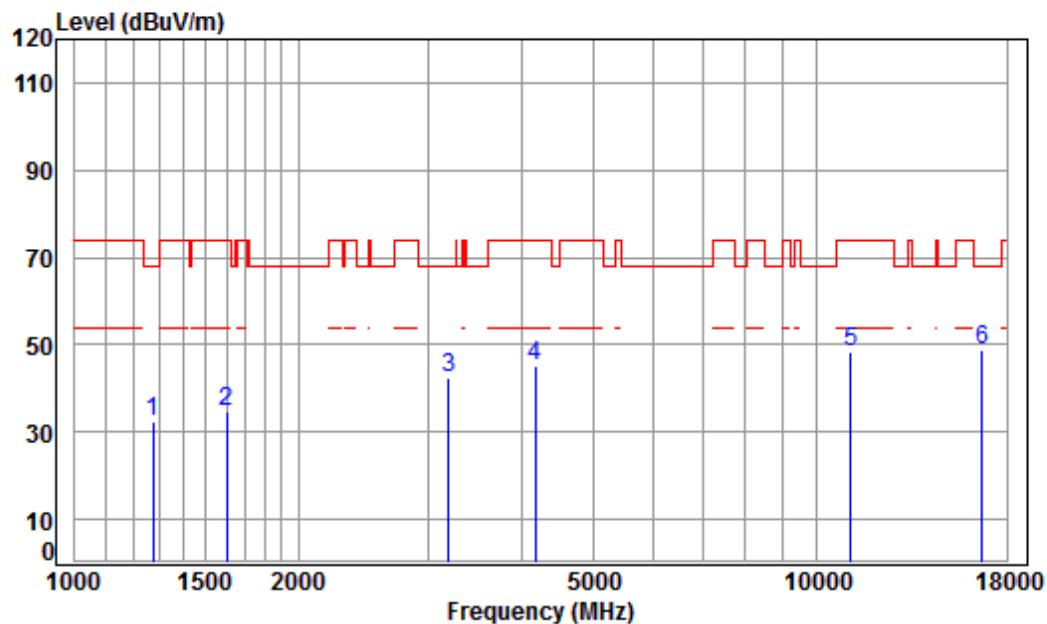

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5550 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1274.802	4.71	24.84	41.24	43.87	32.18	68.20	-36.02	peak
2	1601.804	5.35	26.26	41.47	44.57	34.71	74.00	-39.29	peak
3	3186.869	6.17	31.65	42.15	46.76	42.43	68.20	-25.77	peak
4	4169.698	7.18	33.60	42.36	46.77	45.19	74.00	-28.81	peak
5	11100.000	11.73	37.78	37.94	36.63	48.20	74.00	-25.80	peak
6	pp16650.000	15.17	42.73	39.99	31.06	48.97	68.20	-19.23	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

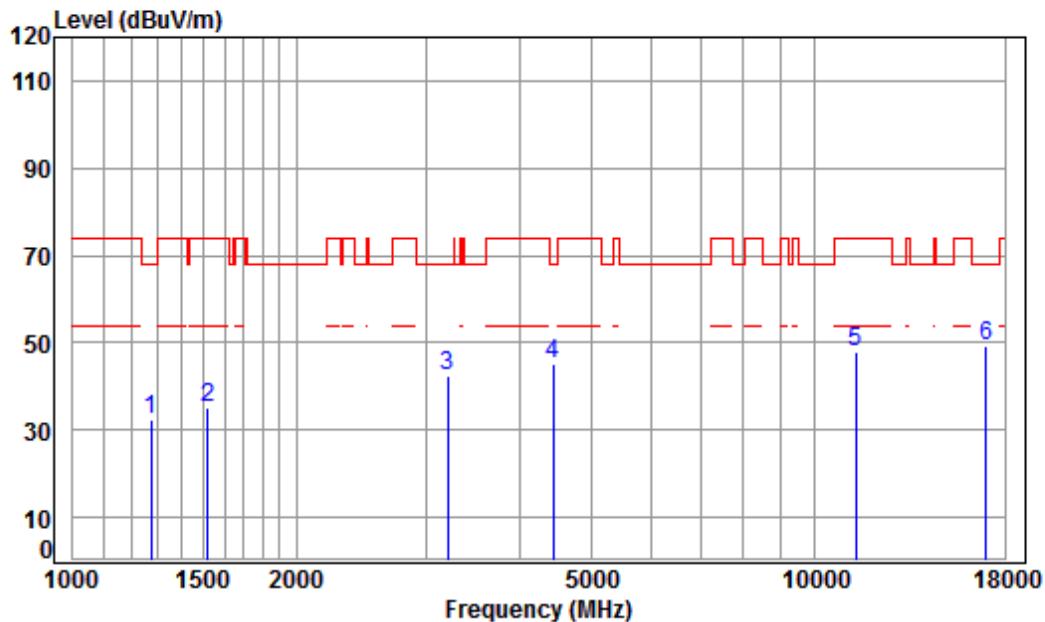

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5670 TX RSE

Note : 5G WIFI 11N40


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1274.802	4.71	24.84	41.24	44.26	32.57	68.20	-35.63	peak	
2	1520.598	5.45	25.89	41.42	45.20	35.12	74.00	-38.88	peak	
3	3196.094	6.18	31.67	42.15	46.64	42.34	68.20	-25.86	peak	
4	4430.628	7.48	33.60	42.41	46.59	45.26	68.20	-22.94	peak	
5	11340.000	11.98	37.97	38.10	36.01	47.86	74.00	-26.14	peak	
6	pp17010.000	16.69	42.81	40.29	30.13	49.34	68.20	-18.86	peak	

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

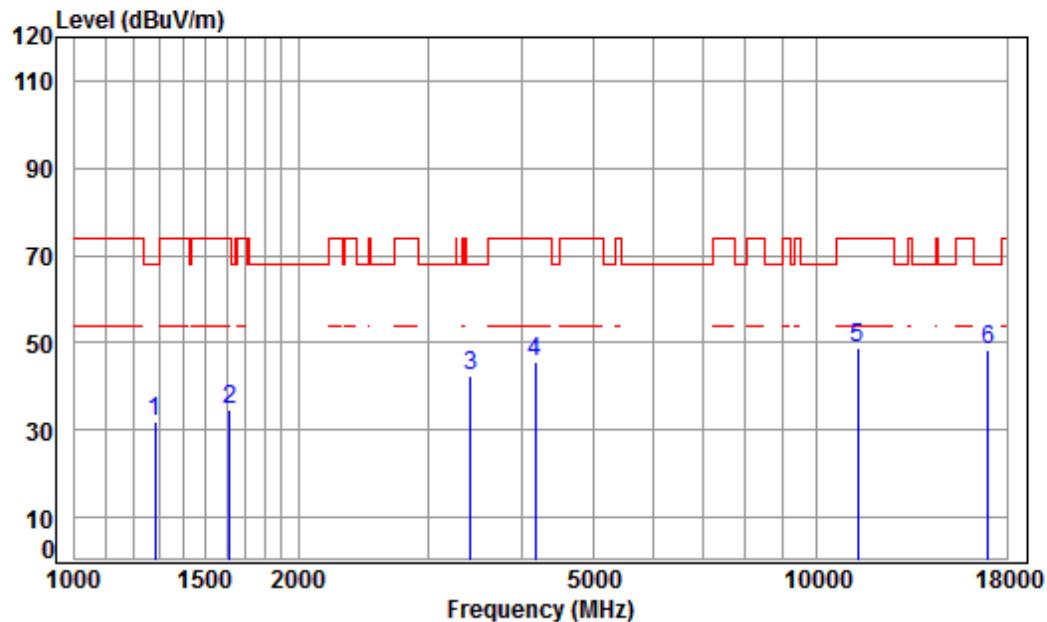

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	41.25	43.55	31.90	68.20	-36.30	peak
2	1615.754	5.33	26.32	41.48	44.65	34.82	74.00	-39.18	peak
3	3415.787	6.38	32.06	42.20	46.31	42.55	68.20	-25.65	peak
4	4169.698	7.18	33.60	42.36	47.37	45.79	74.00	-28.21	peak
5	11340.000	11.98	37.97	38.10	37.11	48.96	74.00	-25.04	peak
6	pp17010.000	16.69	42.81	40.29	29.11	48.32	68.20	-19.88	peak

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

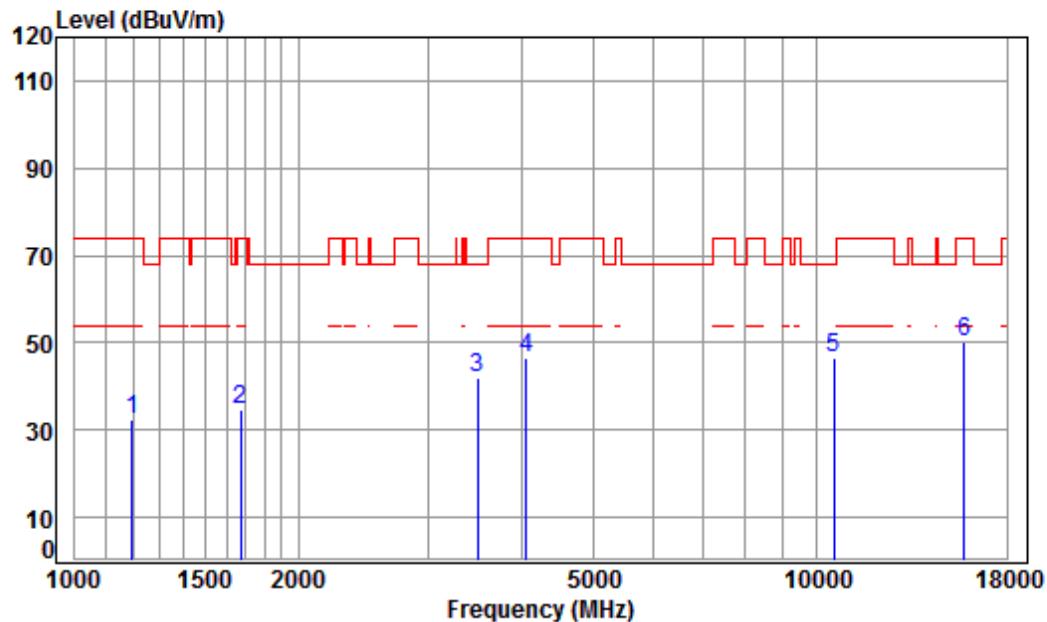

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5260 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	44.77	32.45	74.00	-41.55	peak
2	1672.779	5.26	26.56	41.52	44.40	34.70	74.00	-39.30	peak
3	3485.601	6.45	32.18	42.22	45.67	42.08	68.20	-26.12	peak
4	4050.904	7.04	33.60	42.34	48.05	46.35	74.00	-27.65	peak
5	pp10520.000	11.30	37.12	37.56	35.51	46.37	68.20	-21.83	peak
6	15780.000	14.66	41.29	39.22	33.33	50.06	74.00	-23.94	peak

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

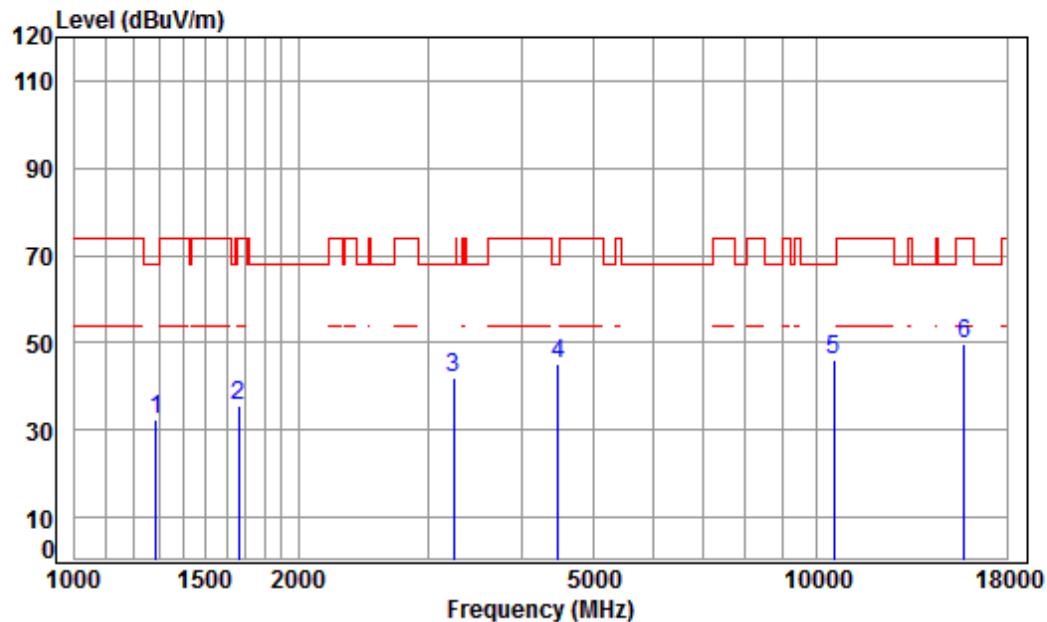

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5260 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	4.75	24.89	41.25	44.02	32.41	68.20	-35.79	peak
2	1663.137	5.27	26.52	41.51	45.41	35.69	74.00	-38.31	peak
3	3242.619	6.22	31.75	42.16	45.97	41.78	68.20	-26.42	peak
4	4482.150	7.54	33.60	42.41	46.45	45.18	68.20	-23.02	peak
5	pp10520.000	11.30	37.12	37.56	35.36	46.22	68.20	-21.98	peak
6	15780.000	14.66	41.29	39.22	32.85	49.58	74.00	-24.42	peak

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:middle

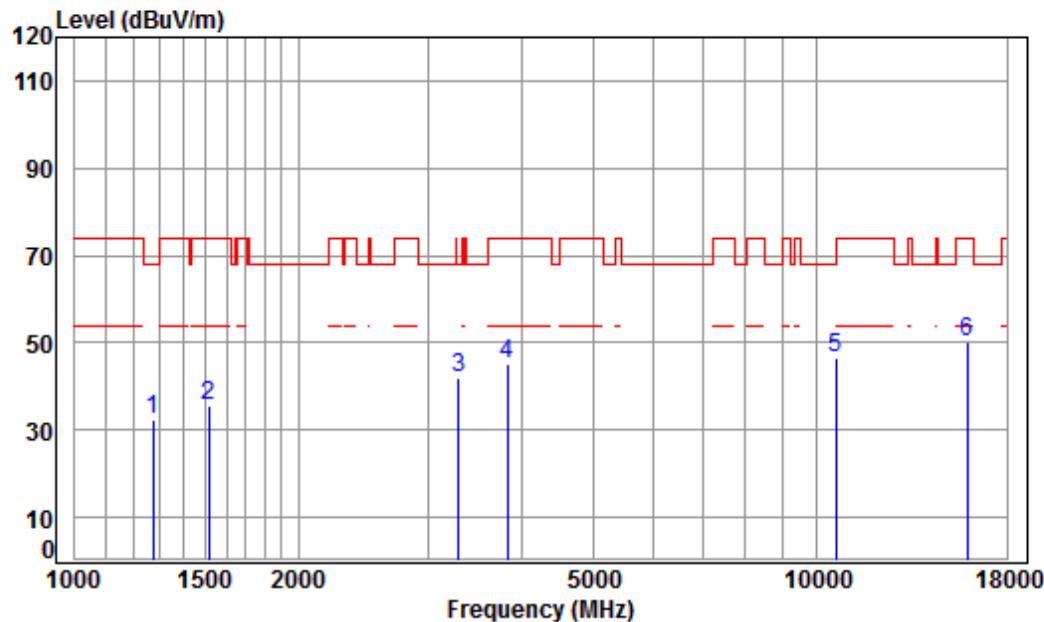

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5300 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	1274.802	4.71	24.84	41.24	44.21	32.52	68.20	-35.68	peak	
2	1516.210	5.46	25.87	41.42	45.57	35.48	74.00	-38.52	peak	
3	3289.821	6.27	31.84	42.17	46.04	41.98	68.20	-26.22	peak	
4	3823.371	6.80	33.13	42.29	47.61	45.25	74.00	-28.75	peak	
5	pp10600.000	11.36	37.22	37.62	35.68	46.64	68.20	-21.56	peak	
6	15900.000	14.84	41.24	39.33	33.33	50.08	74.00	-23.92	peak	

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:middle

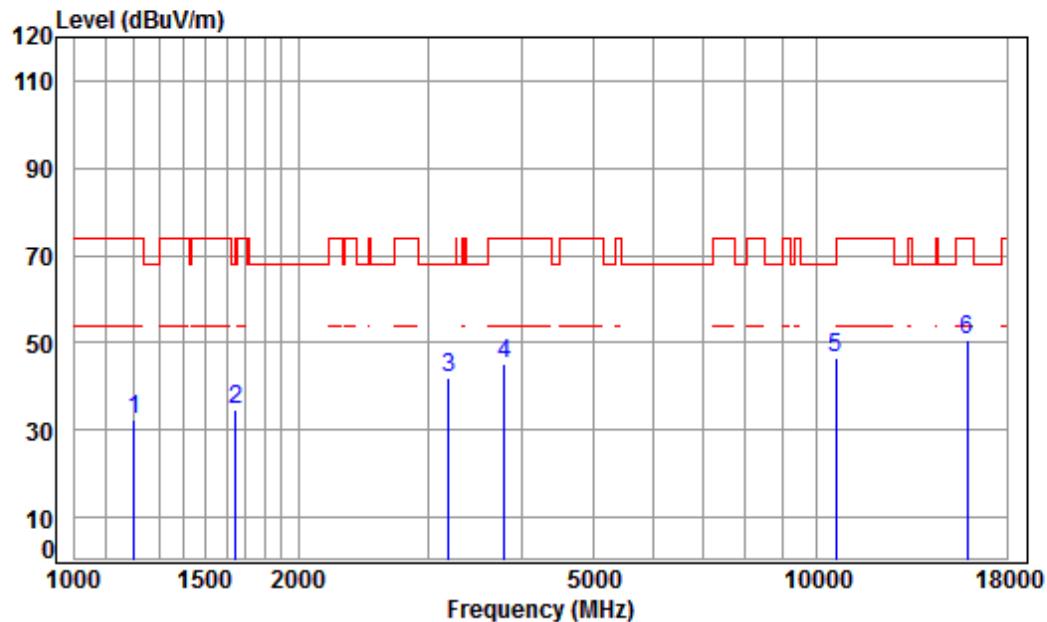

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5300 TX RSE

Note : 5G WIFI 11A


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	44.71	32.44	74.00	-41.56	peak
2	1648.778	5.29	26.46	41.50	44.65	34.90	68.20	-33.30	peak
3	3186.869	6.17	31.65	42.15	46.25	41.92	68.20	-26.28	peak
4	3790.361	6.77	33.04	42.28	47.46	44.99	74.00	-29.01	peak
5	pp10600.000	11.36	37.22	37.62	35.60	46.56	68.20	-21.64	peak
6	15900.000	14.84	41.24	39.33	33.91	50.66	74.00	-23.34	peak

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

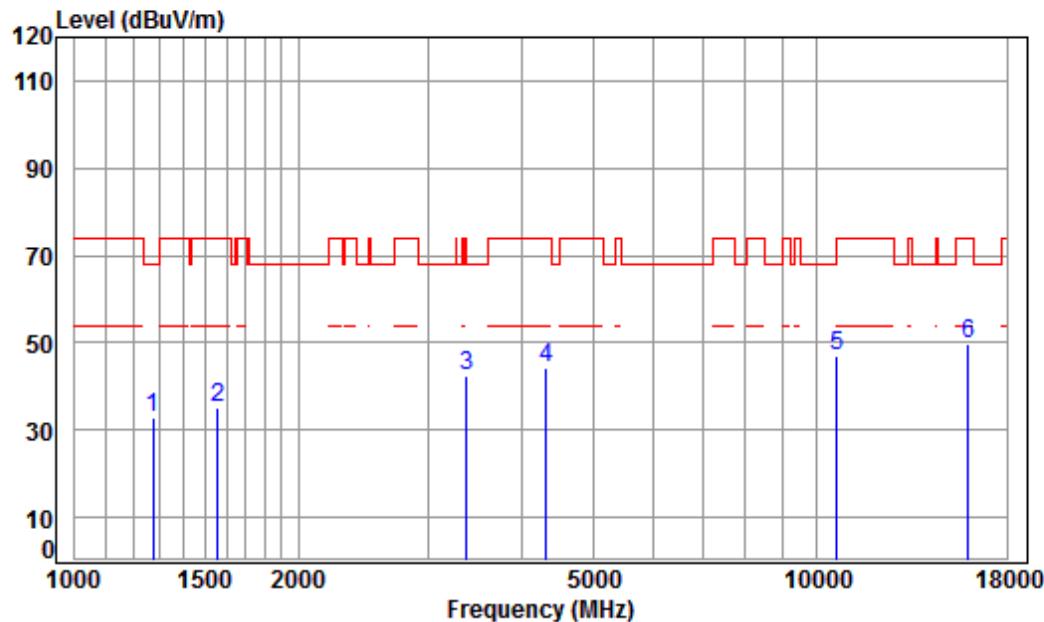

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	4.71	24.84	41.24	44.77	33.08	68.20	-35.12	peak
2	1560.673	5.40	26.08	41.45	45.16	35.19	74.00	-38.81	peak
3	3366.778	6.34	31.97	42.19	46.36	42.48	68.20	-25.72	peak
4	4316.859	7.36	33.60	42.38	45.89	44.47	74.00	-29.53	peak
5	10640.000	11.39	37.27	37.64	35.82	46.84	74.00	-27.16	peak
6	pp15960.000	14.93	41.22	39.38	32.77	49.54	74.00	-24.46	peak

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

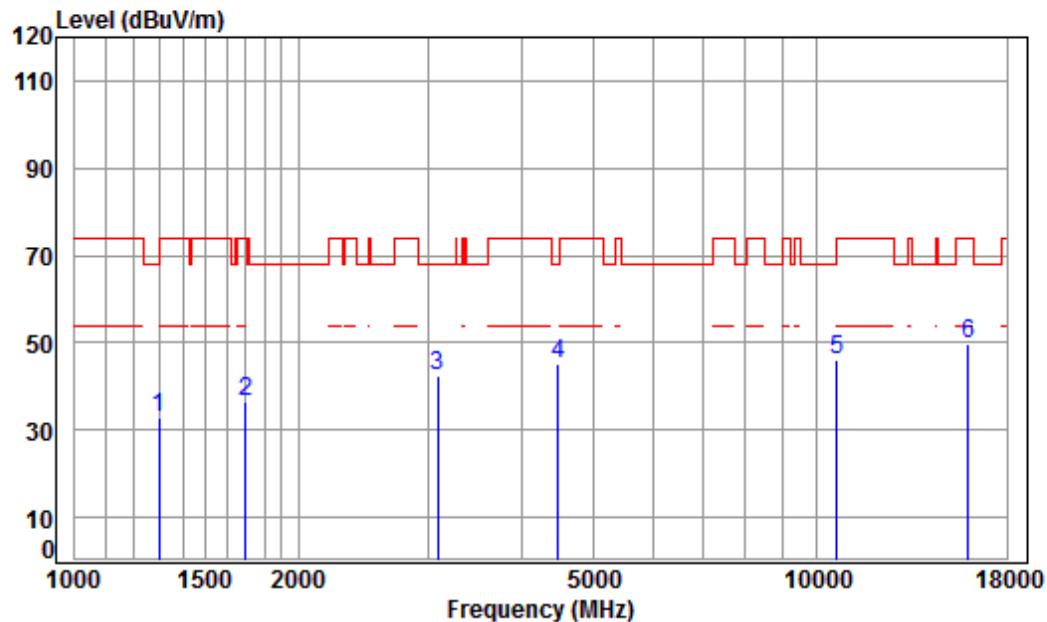

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5320 TX RSE

Note : 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	24.96	41.26	44.42	32.92	74.00	-41.08	peak
2	1697.129	5.23	26.66	41.53	45.99	36.35	74.00	-37.65	peak
3	3078.229	6.06	31.45	42.12	46.97	42.36	68.20	-25.84	peak
4 pp	4482.150	7.54	33.60	42.41	46.44	45.17	68.20	-23.03	peak
5	10640.000	11.39	37.27	37.64	34.95	45.97	74.00	-28.03	peak
6	15960.000	14.93	41.22	39.38	33.16	49.93	74.00	-24.07	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

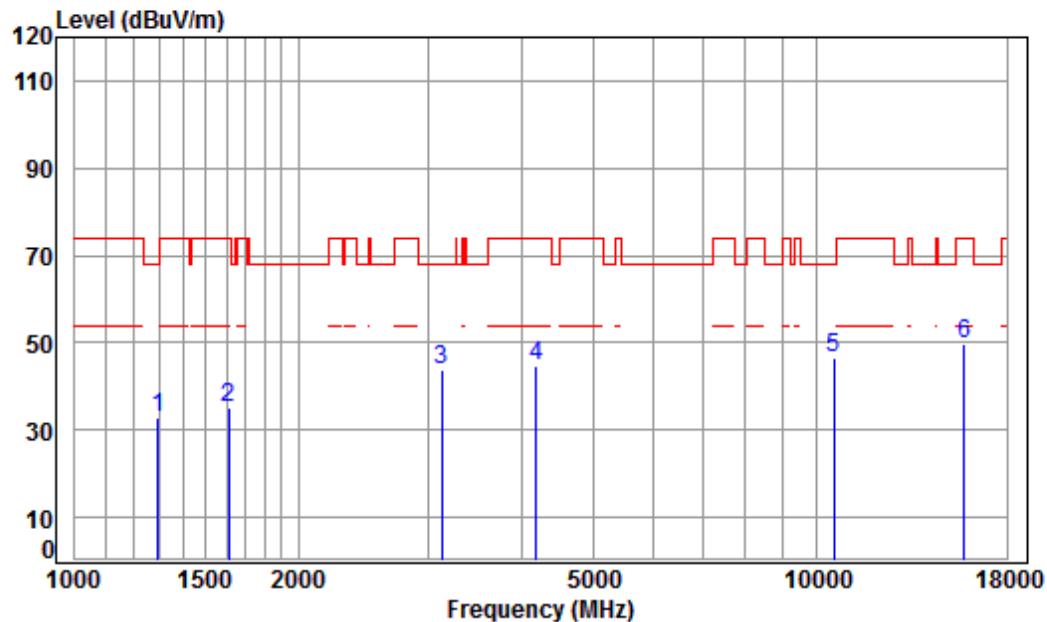

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5260 TX RSE


Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1293.359	4.77	24.92	41.26	44.35	32.78	68.20	-35.42	peak
2	1611.091	5.34	26.30	41.48	45.05	35.21	74.00	-38.79	peak
3	3123.039	6.11	31.53	42.13	48.15	43.66	68.20	-24.54	peak
4	4181.768	7.20	33.60	42.36	46.24	44.68	74.00	-29.32	peak
5	pp10520.000	11.30	37.12	37.56	35.62	46.48	68.20	-21.72	peak
6	15780.000	14.66	41.29	39.22	33.17	49.90	74.00	-24.10	peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

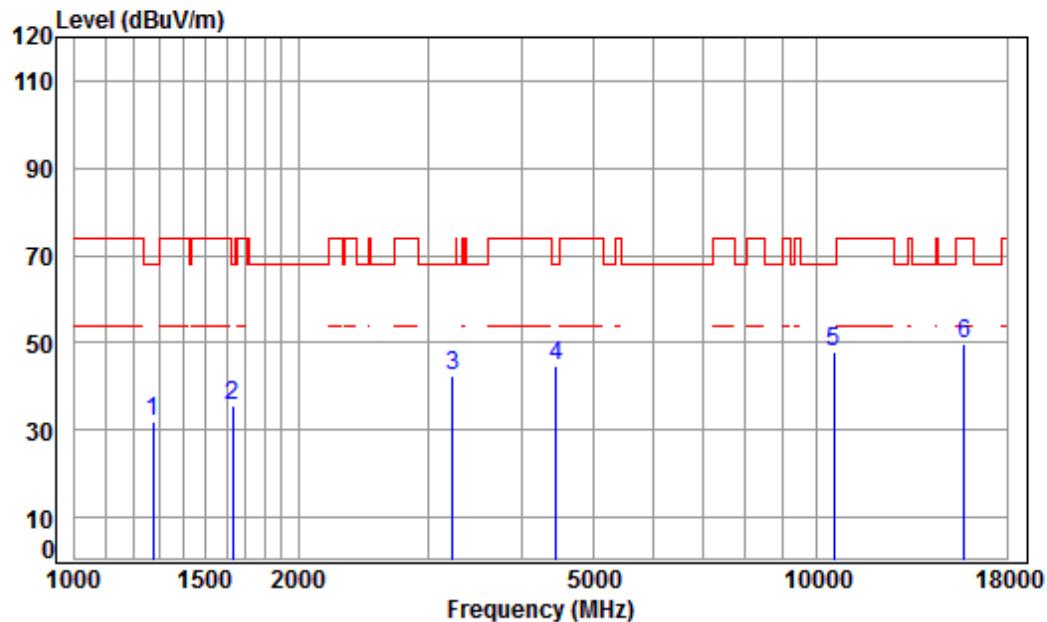


Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

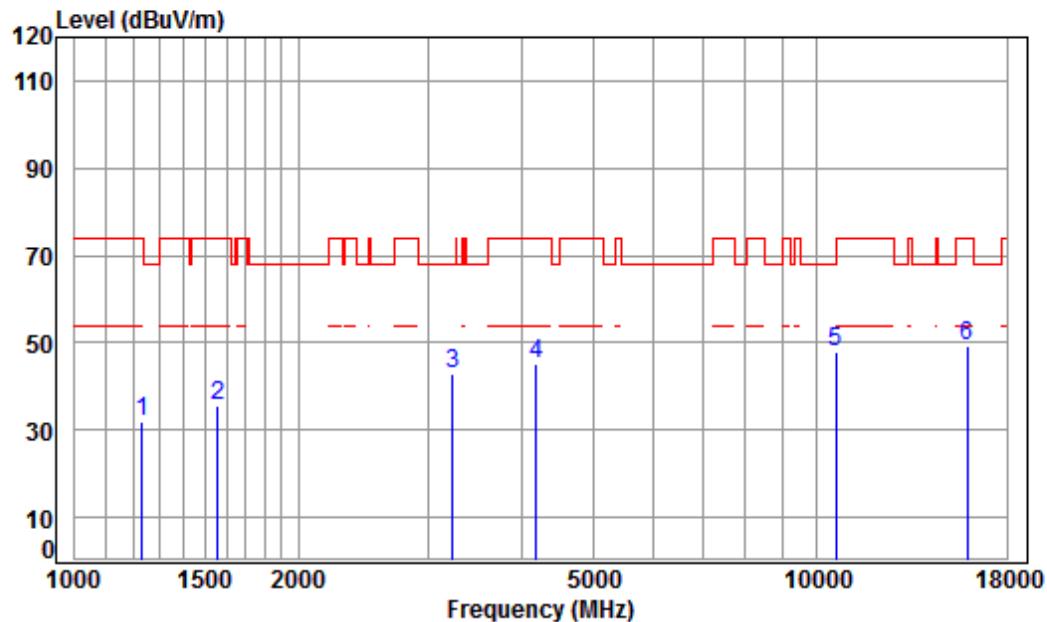

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1231.345	4.54	24.63	41.21	43.77	31.73	74.00	-42.27	peak
2	1560.673	5.40	26.08	41.45	45.61	35.64	74.00	-38.36	peak
3	3233.260	6.21	31.74	42.16	47.30	43.09	68.20	-25.11	peak
4	4181.768	7.20	33.60	42.36	46.88	45.32	74.00	-28.68	peak
5	pp10600.000	11.36	37.22	37.62	36.81	47.77	68.20	-20.43	peak
6	15900.000	14.84	41.24	39.33	32.69	49.44	74.00	-24.56	peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

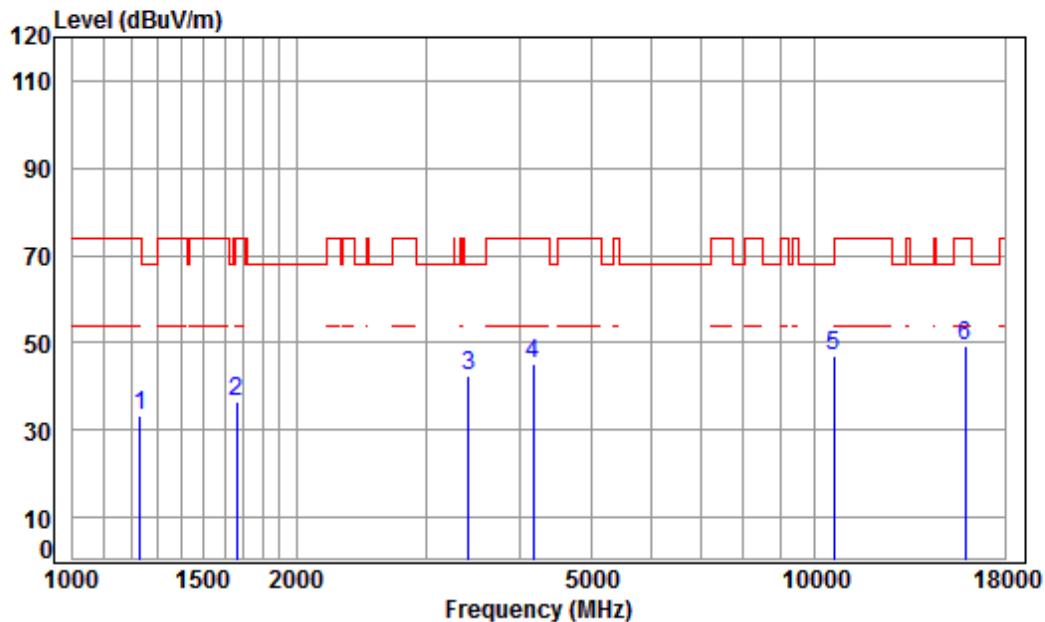

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5300 TX RSE

Note : 5G WIFI 11N20


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1231.345	4.54	24.63	41.21	45.16	33.12	74.00	-40.88	peak
2	1663.137	5.27	26.52	41.51	46.31	36.59	74.00	-37.41	peak
3	3415.787	6.38	32.06	42.20	46.39	42.63	68.20	-25.57	peak
4	4169.698	7.18	33.60	42.36	46.59	45.01	74.00	-28.99	peak
5	pp10600.000	11.36	37.22	37.62	36.01	46.97	68.20	-21.23	peak
6	15900.000	14.84	41.24	39.33	32.71	49.46	74.00	-24.54	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

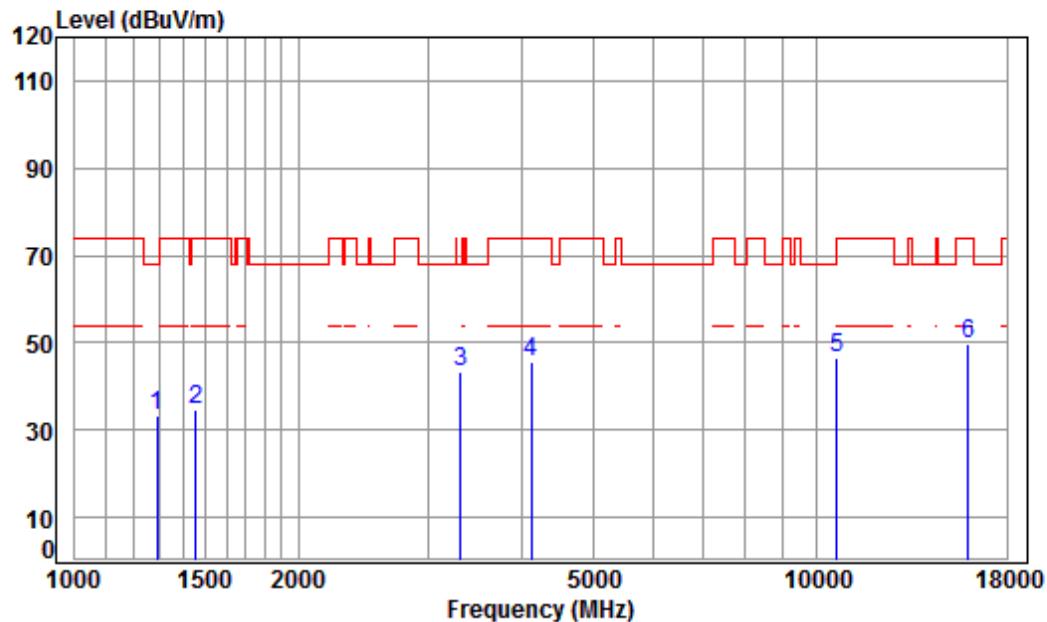


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	4.76	24.91	41.25	44.70	33.12	68.20	-35.08	peak
2	1456.081	5.34	25.62	41.38	45.10	34.68	74.00	-39.32	peak
3	3308.894	6.29	31.87	42.18	47.43	43.41	68.20	-24.79	peak
4	4121.768	7.13	33.60	42.35	47.13	45.51	74.00	-28.49	peak
5	10640.000	11.39	37.27	37.64	35.59	46.61	74.00	-27.39	peak
6	pp15960.000	14.93	41.22	39.38	32.96	49.73	74.00	-24.27	peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

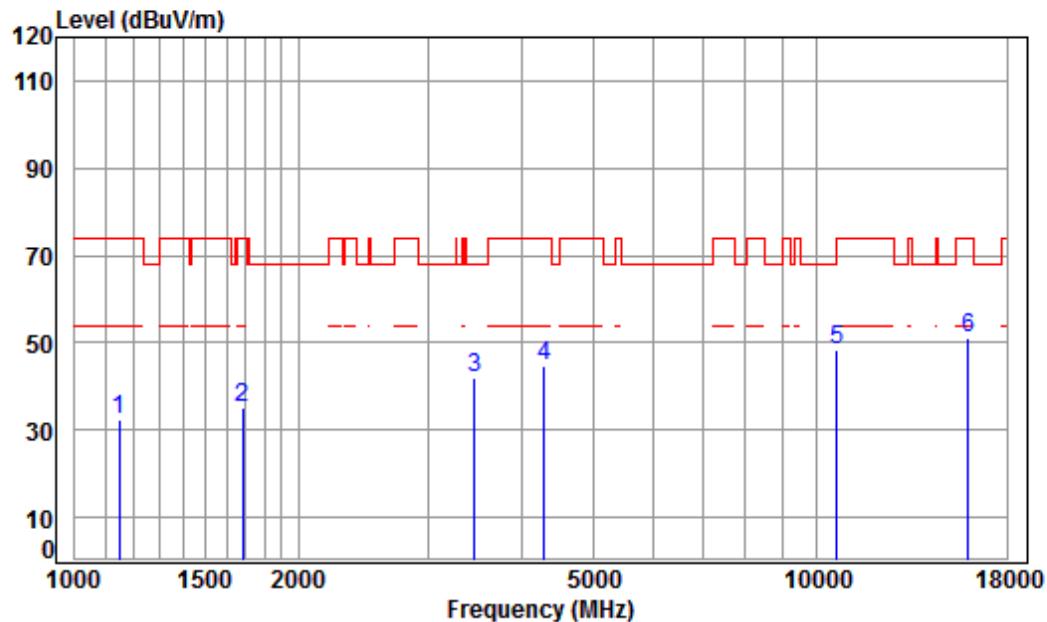

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.22	41.14	45.27	32.56	74.00	-41.44	peak
2	1682.477	5.25	26.60	41.52	44.83	35.16	74.00	-38.84	peak
3	3455.508	6.42	32.13	42.21	45.65	41.99	68.20	-26.21	peak
4	4291.977	7.33	33.60	42.38	46.38	44.93	74.00	-29.07	peak
5	10640.000	11.39	37.27	37.64	37.17	48.19	74.00	-25.81	peak
6	pp15960.000	14.93	41.22	39.38	34.39	51.16	74.00	-22.84	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

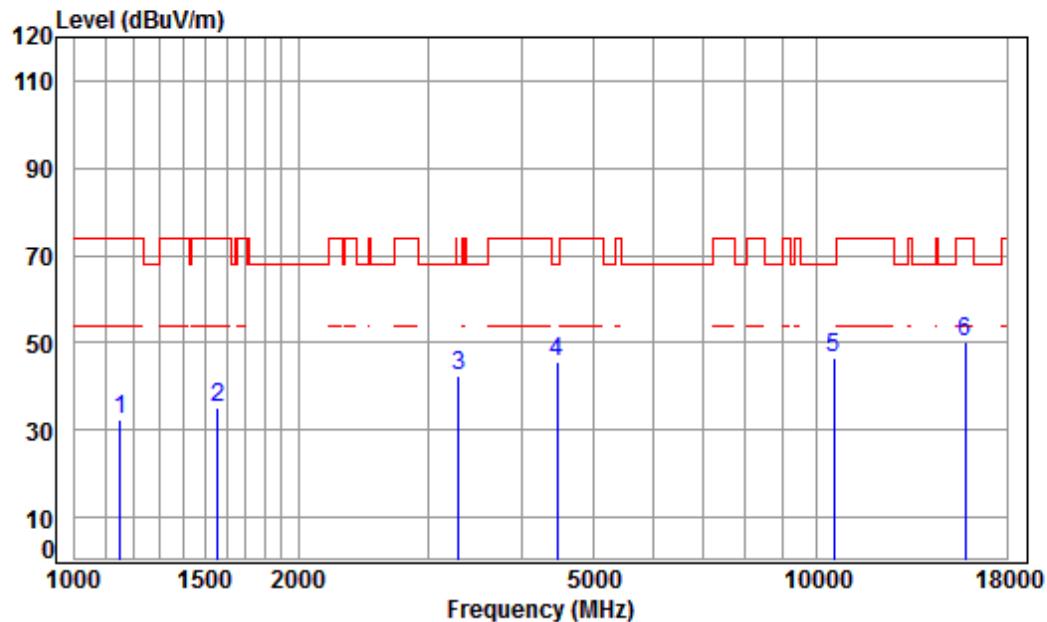

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5270 TX RSE

Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.24	41.14	45.28	32.60	74.00	-41.40	peak
2	1560.673	5.40	26.08	41.45	45.15	35.18	74.00	-38.82	peak
3	3289.821	6.27	31.84	42.17	46.34	42.28	68.20	-25.92	peak
4	4469.214	7.53	33.60	42.41	46.97	45.69	68.20	-22.51	peak
5	pp10540.000	11.32	37.15	37.57	35.85	46.75	68.20	-21.45	peak
6	15810.000	14.71	41.28	39.25	33.50	50.24	74.00	-23.76	peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

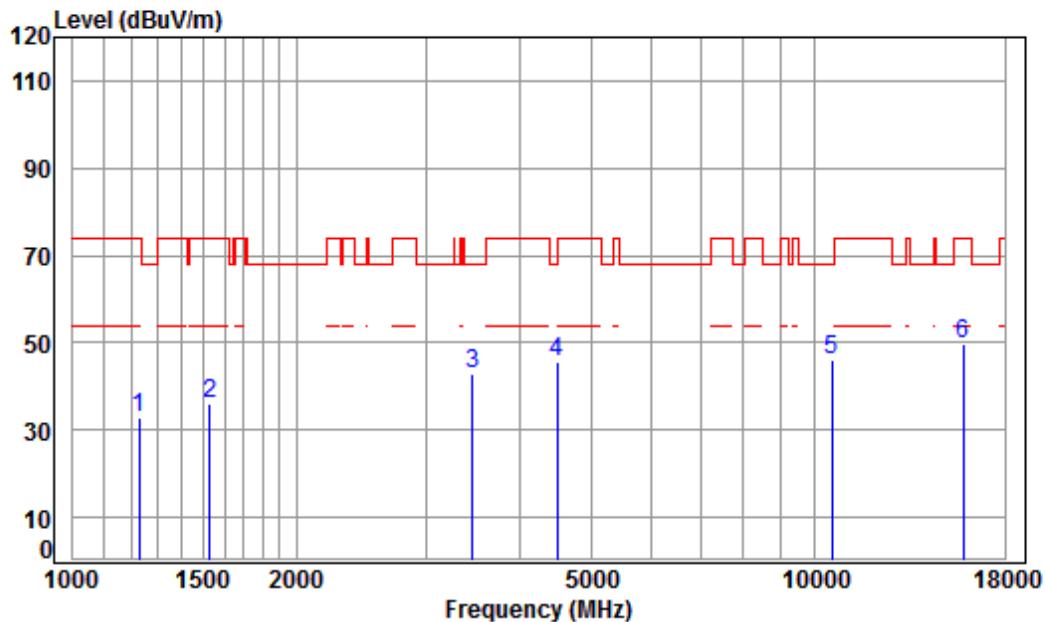

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5270 TX RSE

Note : 5G WIFI 11N40


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1227.791	4.53	24.61	41.21	45.06	32.99	74.00	-41.01	peak
2	1529.414	5.44	25.94	41.43	45.90	35.85	74.00	-38.15	peak
3	3455.508	6.42	32.13	42.21	46.40	42.74	68.20	-25.46	peak
4	4495.125	7.55	33.60	42.42	46.81	45.54	68.20	-22.66	peak
5	pp10540.000	11.32	37.15	37.57	35.29	46.19	68.20	-22.01	peak
6	15810.000	14.71	41.28	39.25	32.97	49.71	74.00	-24.29	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

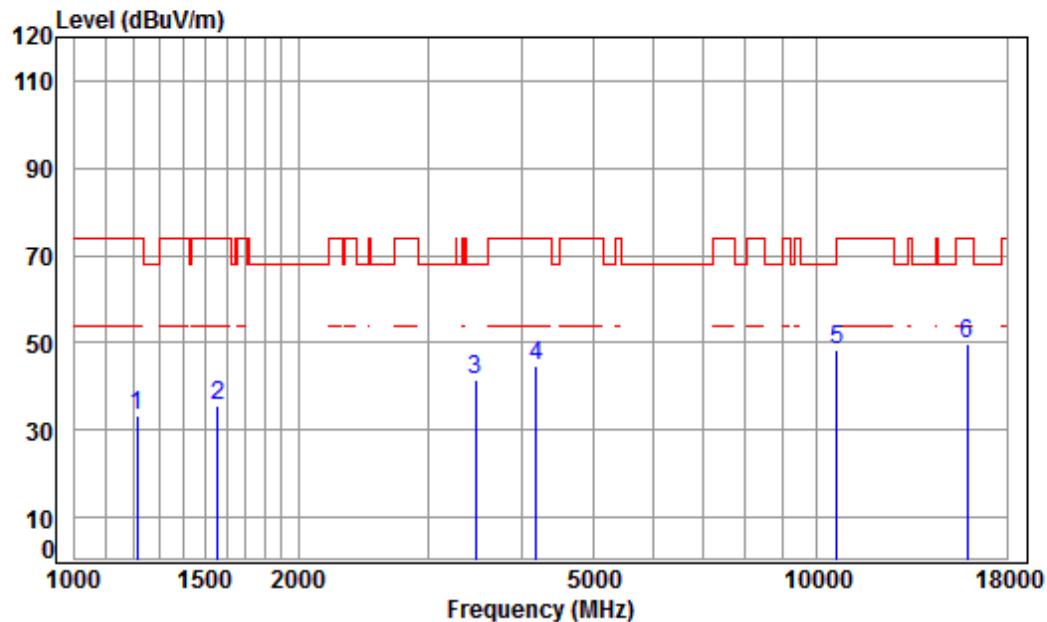

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	4.47	24.55	41.19	45.41	33.24	74.00	-40.76	peak	
2	1560.673	5.40	26.08	41.45	45.39	35.42	74.00	-38.58	peak	
3	3465.510	6.43	32.14	42.21	45.23	41.59	68.20	-26.61	peak	
4	4181.768	7.20	33.60	42.36	46.37	44.81	74.00	-29.19	peak	
5	10620.000	11.37	37.25	37.63	37.38	48.37	74.00	-25.63	peak	
6	pp15930.000	14.89	41.23	39.36	32.91	49.67	74.00	-24.33	peak	

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

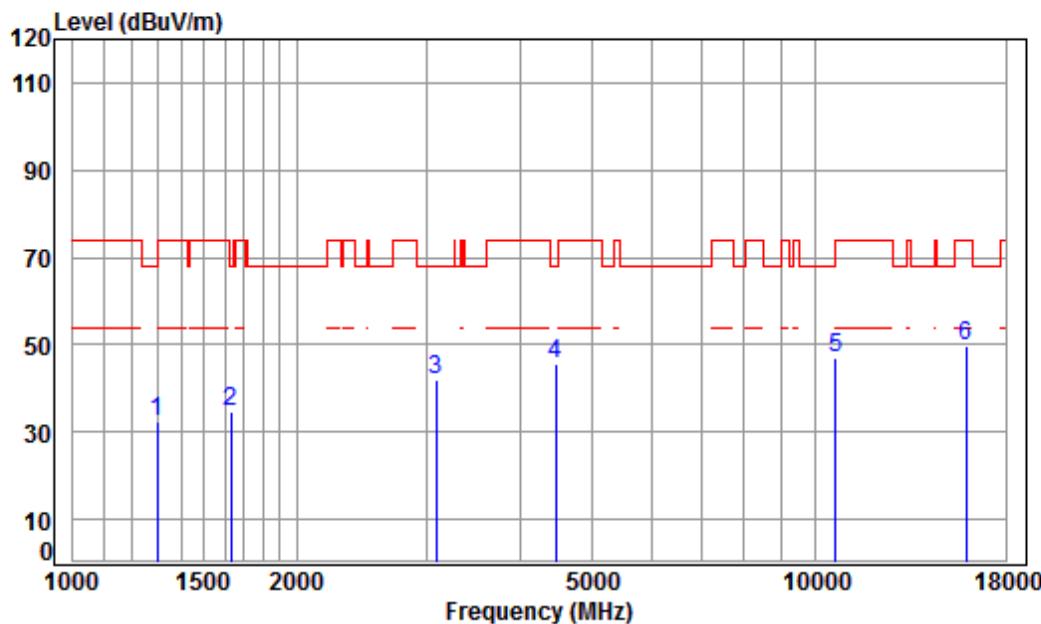

Condition: 3m VERTICAL  
Job No : 00126CR/00127CR  
Mode : 5310 TX RSE  
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	41.26	43.90	32.40	74.00	-41.60	peak
2	1629.825	5.31	26.38	41.49	44.52	34.72	68.20	-33.48	peak
3	3078.229	6.06	31.45	42.12	46.53	41.92	68.20	-26.28	peak
4 pp	4469.214	7.53	33.60	42.41	46.75	45.47	68.20	-22.73	peak
5	10620.000	11.37	37.25	37.63	36.12	47.11	74.00	-26.89	peak
6	15930.000	14.89	41.23	39.36	33.01	49.77	74.00	-24.23	peak

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

### **7.11 Radiated Emissions which fall in the restricted bands**

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.11.1 E.U.T. Operation

#### Operating Environment:

Temperature: 19.1 °C      Humidity: 35.6 % RH      Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


The worst case for final test:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

### 7.11.2 Test Setup Diagram

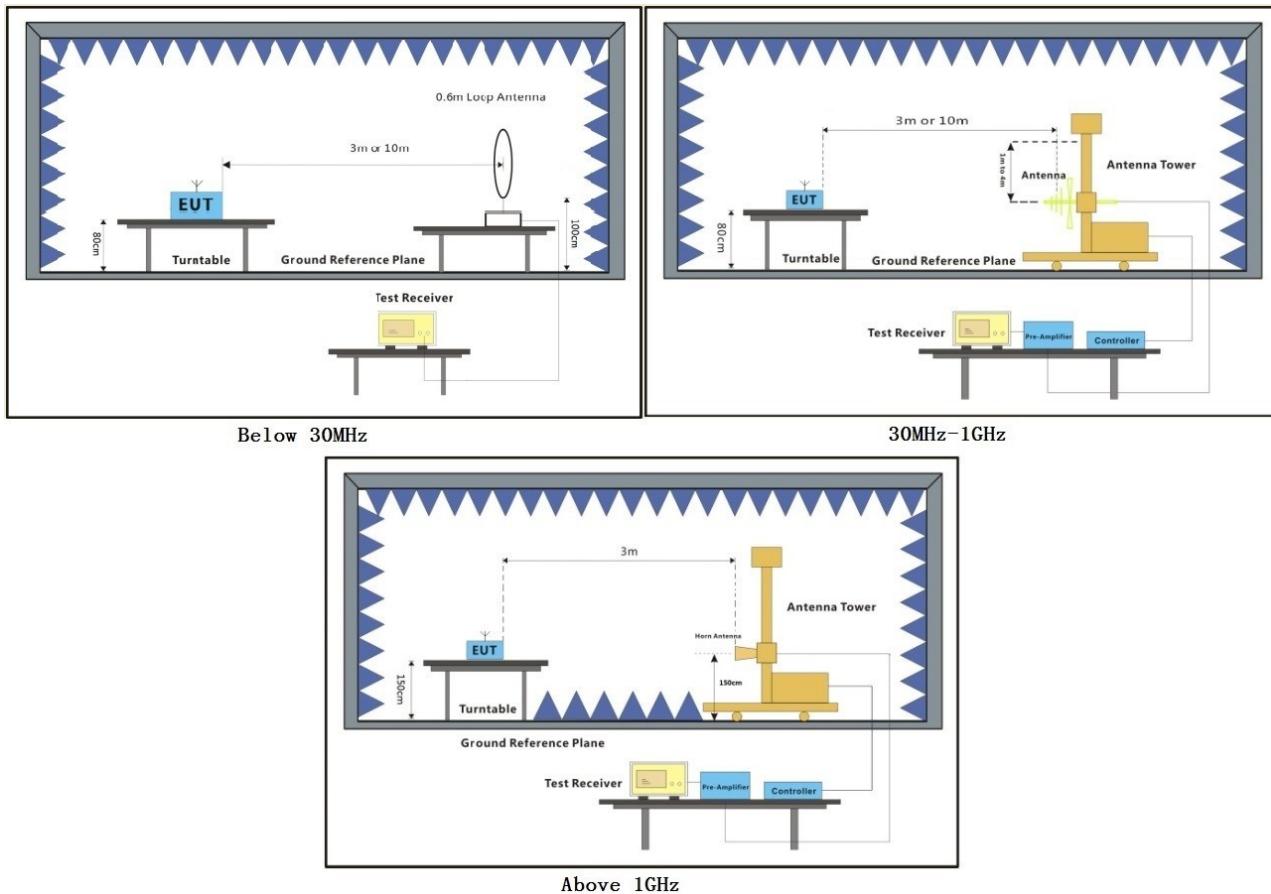


### **7.11.3 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

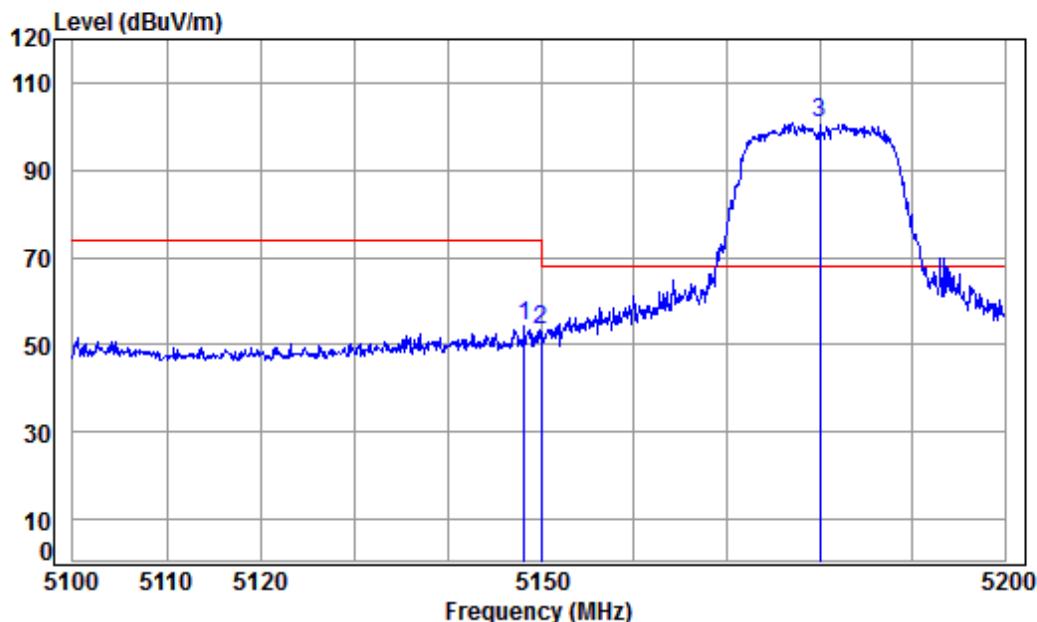


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.158	8.32	34.47	42.36	53.73	54.16	74.00	-19.84	peak
2	5149.980	8.33	34.47	42.36	52.95	53.39	74.00	-20.61	peak
3 pp	5180.000	8.37	34.46	42.33	100.49	100.99	68.20	32.79	peak

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

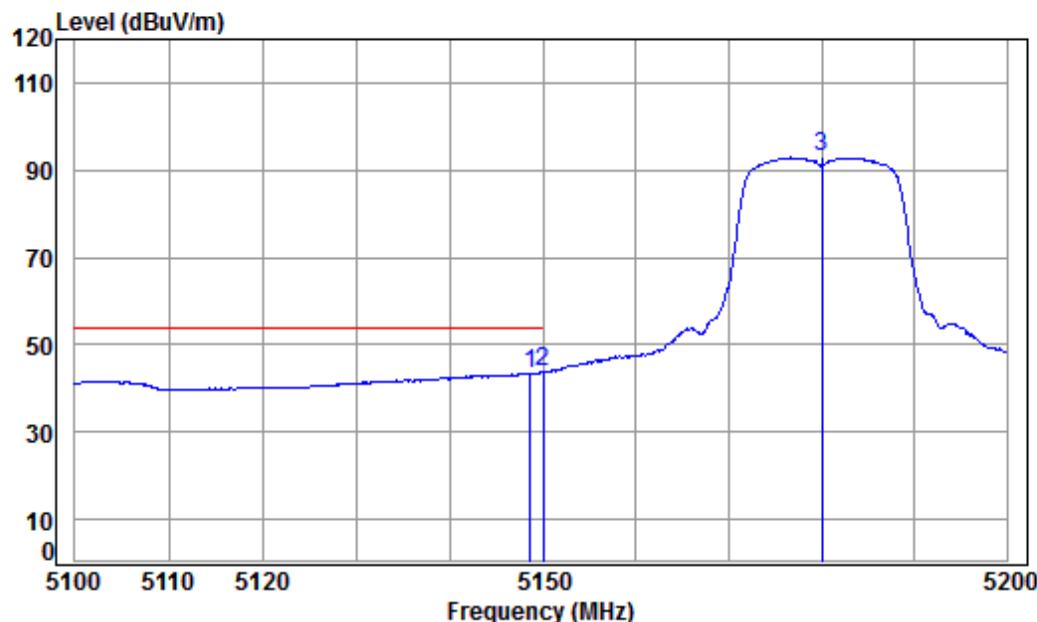


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		5148.657	8.32	34.47	42.36	43.13	43.56	54.00	-10.44	Average
2 pp		5149.980	8.33	34.47	42.36	43.27	43.71	54.00	-10.29	Average
3		5180.000	8.37	34.46	42.33	92.37	92.87	-----	-----	Average

Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

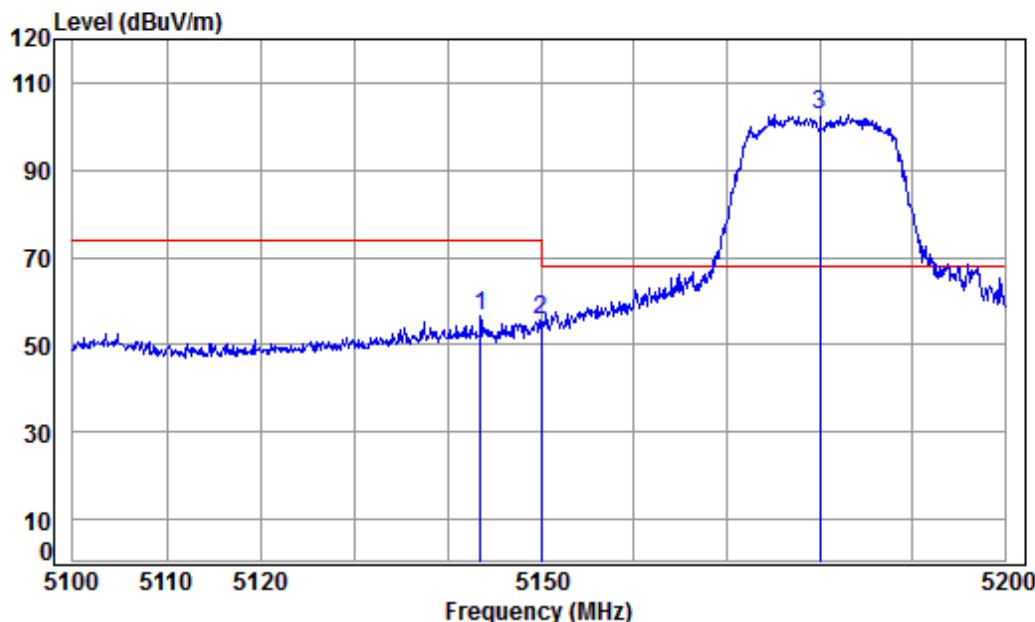


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		5143.561	8.32	34.47	42.36	56.12	56.55	74.00	-17.45 Peak
2		5149.980	8.33	34.47	42.36	55.23	55.67	74.00	-18.33 Peak
3 pp		5180.000	8.37	34.46	42.33	102.06	102.56	68.20	34.36 Peak

Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

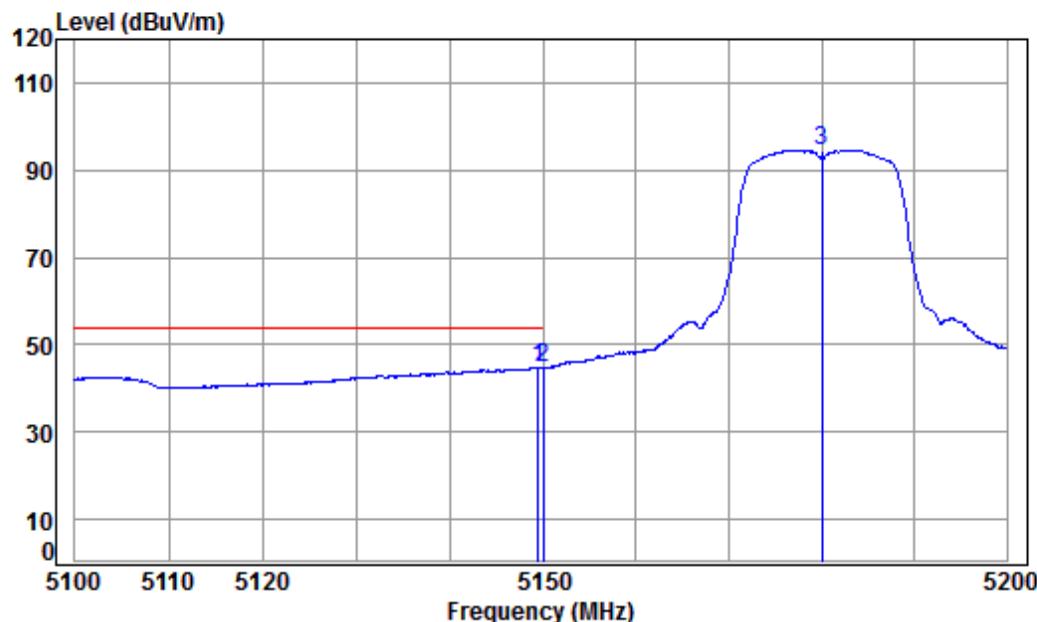


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		5149.458	8.32	34.47	42.36	44.30	44.73	54.00	-9.27	Average
2	pp	5149.980	8.33	34.47	42.36	44.39	44.83	54.00	-9.17	Average
3		5180.000	8.37	34.46	42.33	94.11	94.61	-----	-----	Average

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

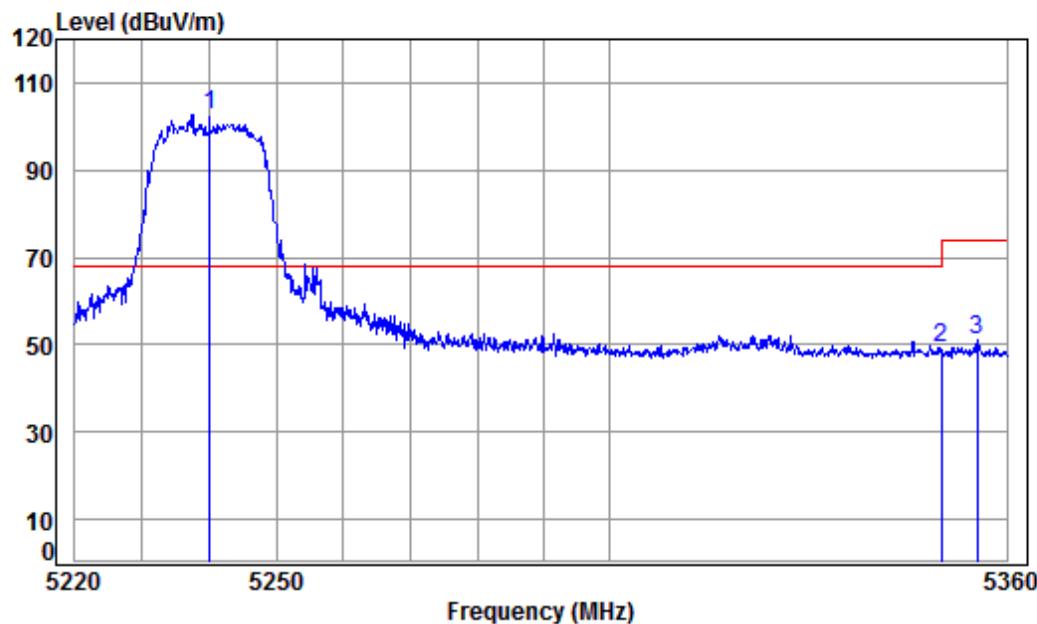


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5240 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5240.000	8.46	34.45	42.27	102.16	102.80	68.20	34.60 peak
2		5350.020	8.63	34.43	42.17	48.55	49.44	74.00	-24.56 peak
3		5355.462	8.64	34.43	42.16	50.12	51.03	74.00	-22.97 peak

Mode:e; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

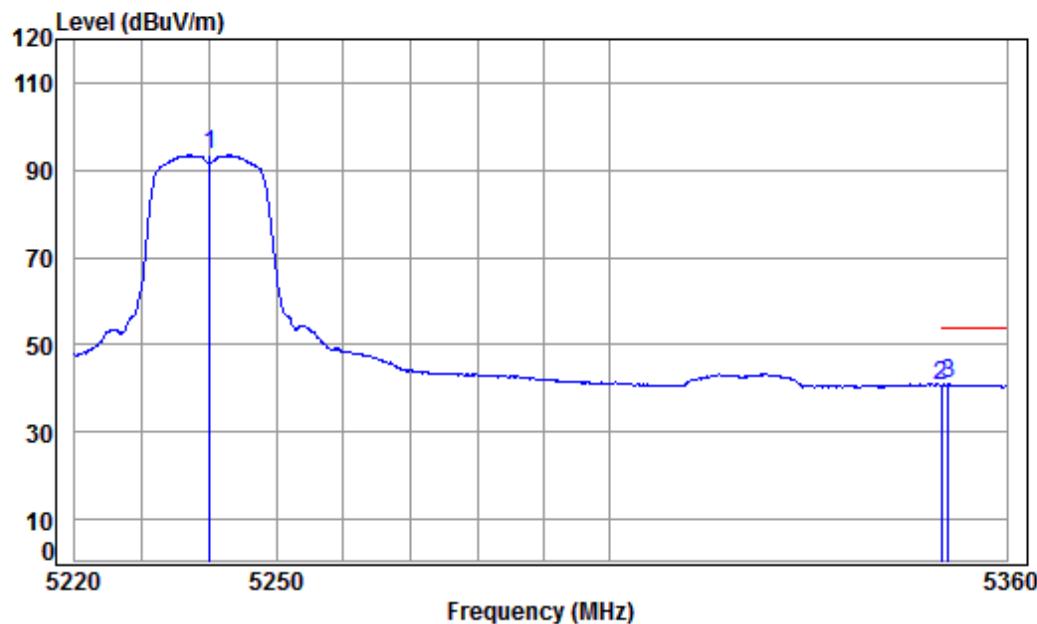


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR


Mode : 5240 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	42.27	92.78	93.42	-----	-----	Average
2	5350.020	8.63	34.43	42.17	39.91	40.80	54.00	-13.20	Average
3 pp	5351.070	8.63	34.43	42.17	40.04	40.93	54.00	-13.07	Average

Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

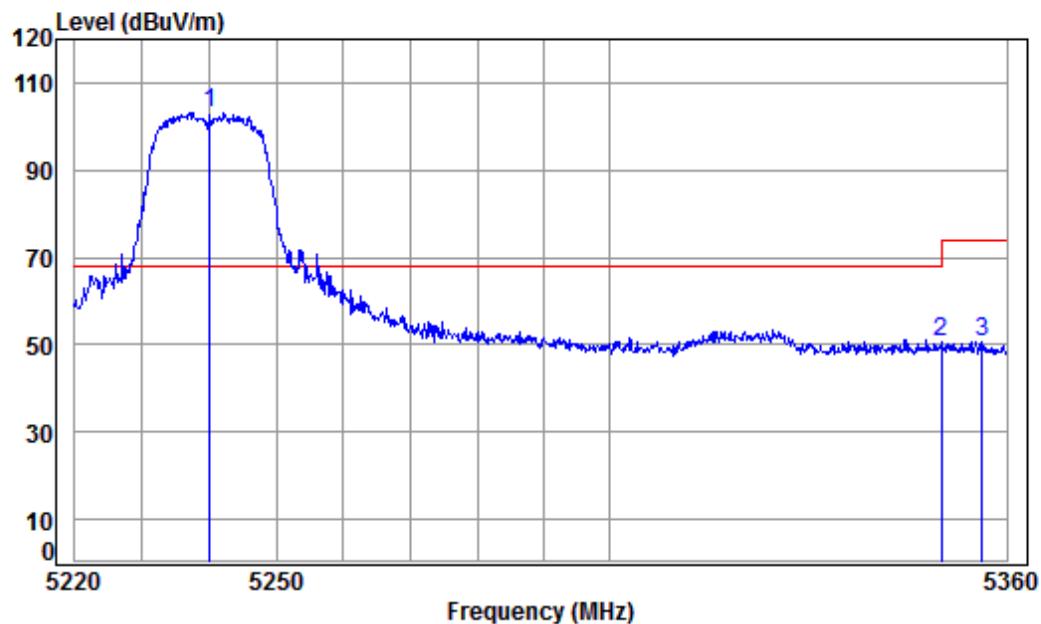


Mode:e; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

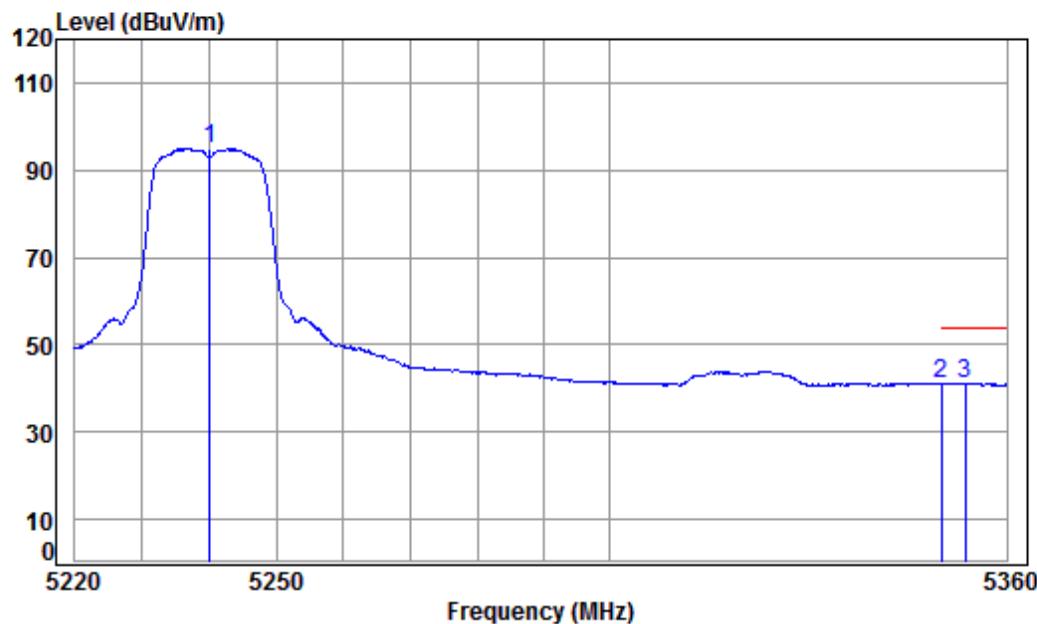

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	8.46	34.45	42.27	94.21	94.85	-----	-----	Average
2	5350.020	8.63	34.43	42.17	40.19	41.08	54.00	-12.92	Average
3 pp	5353.620	8.63	34.43	42.17	40.34	41.23	54.00	-12.77	Average

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

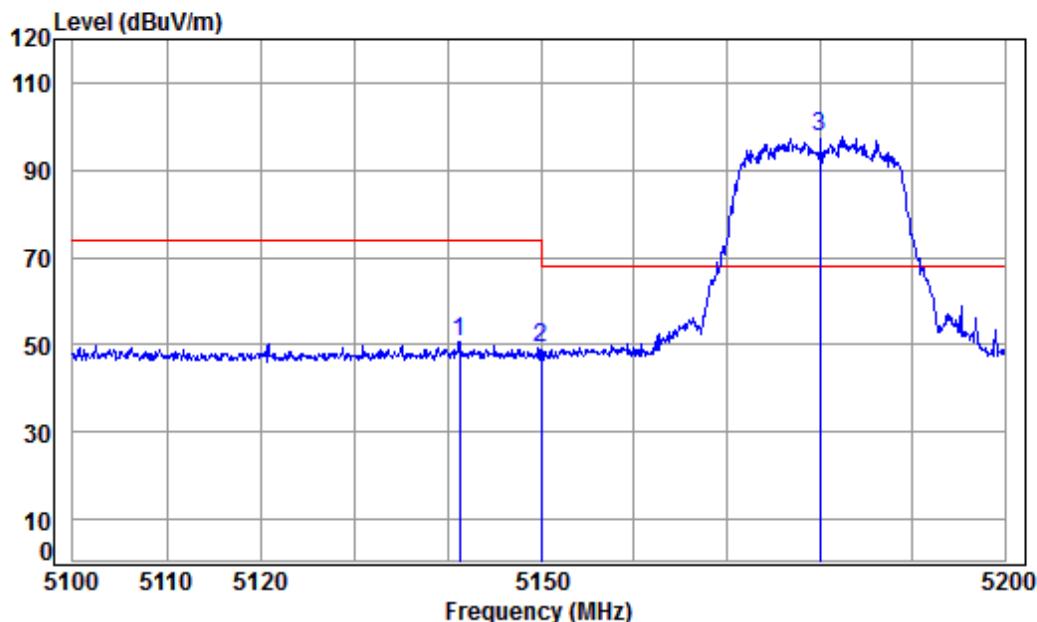


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	5141.265	8.31	34.47	42.36	50.20	50.62	74.00	-23.38	peak	
2	5149.980	8.33	34.47	42.36	48.98	49.42	74.00	-24.58	peak	
3 pp	5180.000	8.37	34.46	42.33	97.26	97.76	68.20	29.56	peak	

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

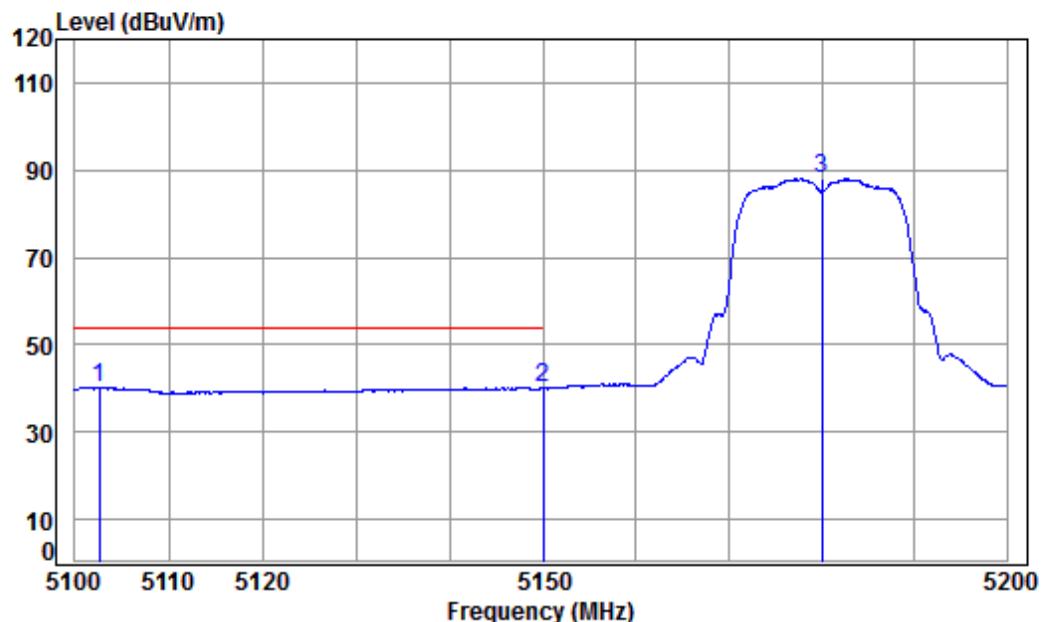


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5102.576	8.25	34.48	42.40	39.81	40.14	54.00	-13.86 Average
2		5149.980	8.33	34.47	42.36	39.66	40.10	54.00	-13.90 Average
3		5180.000	8.37	34.46	42.33	87.42	87.92	-----	----- Average

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

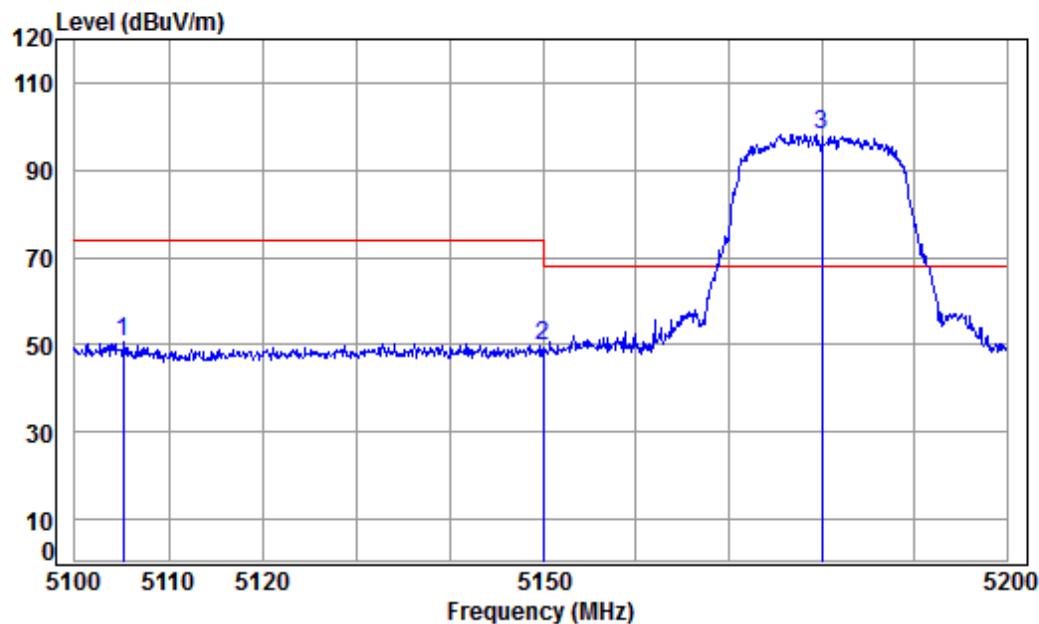


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		5105.152	8.26	34.48	42.40	50.22	50.56	74.00	-23.44 Peak
2		5149.980	8.33	34.47	42.36	49.13	49.57	74.00	-24.43 Peak
3	pp	5180.000	8.37	34.46	42.33	97.75	98.25	68.20	30.05 Peak

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

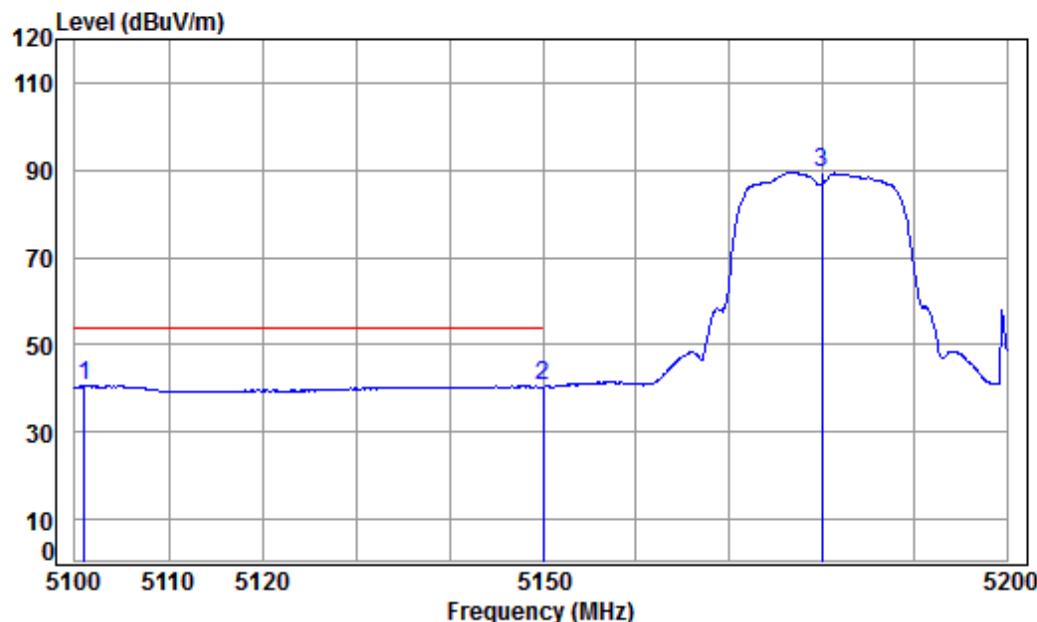


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5180 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5100.990	8.25	34.48	42.40	40.25	40.58	54.00	-13.42	Average
2 pp	5149.980	8.33	34.47	42.36	40.16	40.60	54.00	-13.40	Average
3	5180.000	8.37	34.46	42.33	88.85	89.35	-----	-----	Average

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

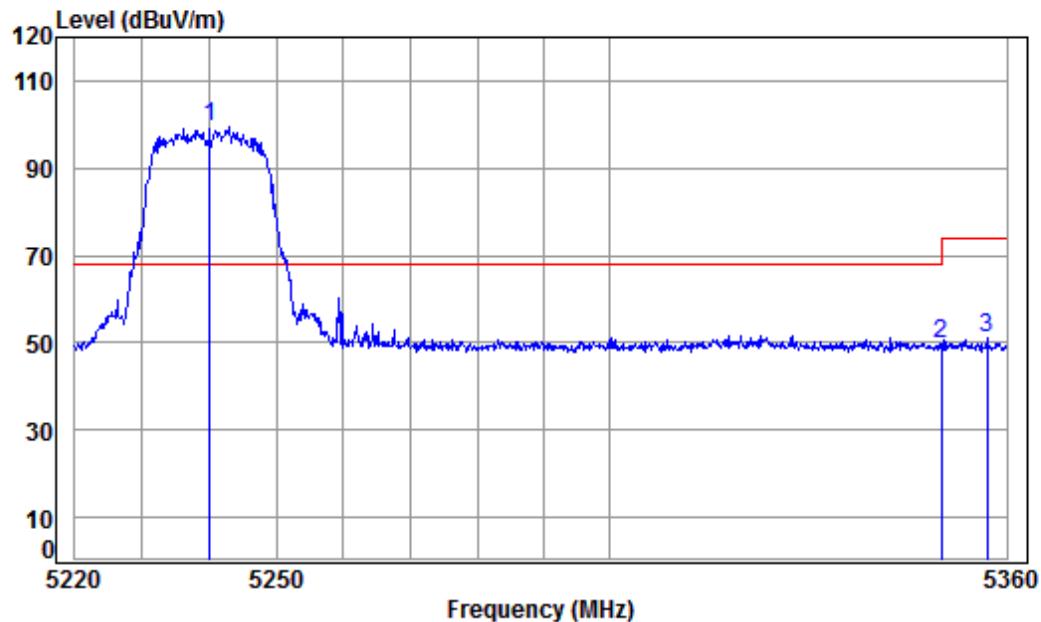


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5240 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5240.000	8.46	34.45	42.27	98.87	99.51	68.20	31.31 peak
2		5350.020	8.63	34.43	42.17	48.96	49.85	74.00	-24.15 peak
3		5357.022	8.64	34.43	42.16	50.12	51.03	74.00	-22.97 peak

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

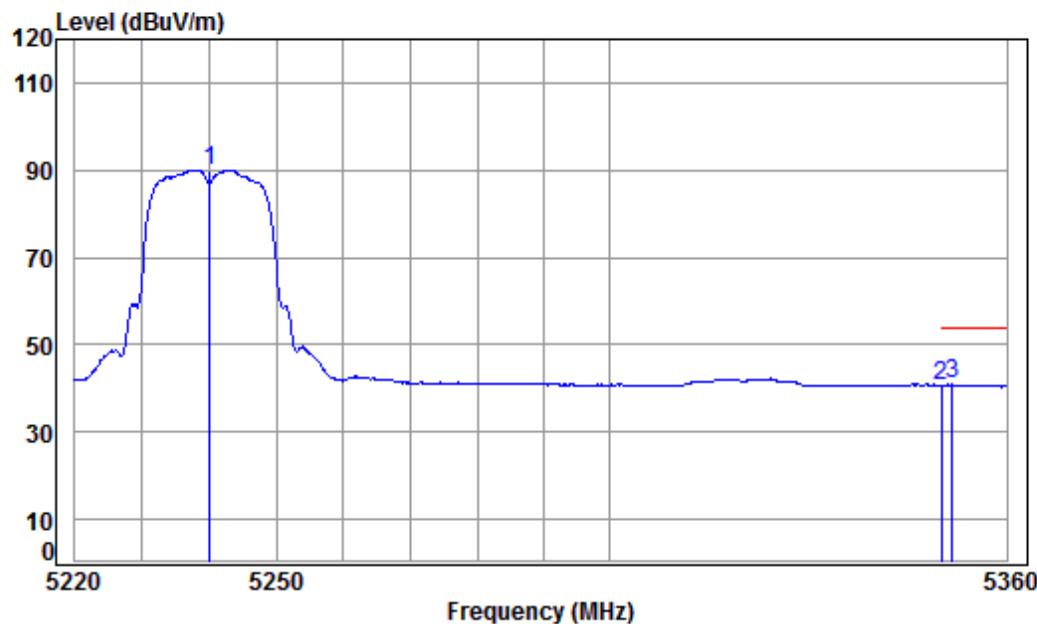


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5240 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	42.27	89.43	90.07	-----	-----	Average
2	5350.020	8.63	34.43	42.17	39.89	40.78	54.00	-13.22	Average
3 pp	5351.778	8.63	34.43	42.17	39.97	40.86	54.00	-13.14	Average

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

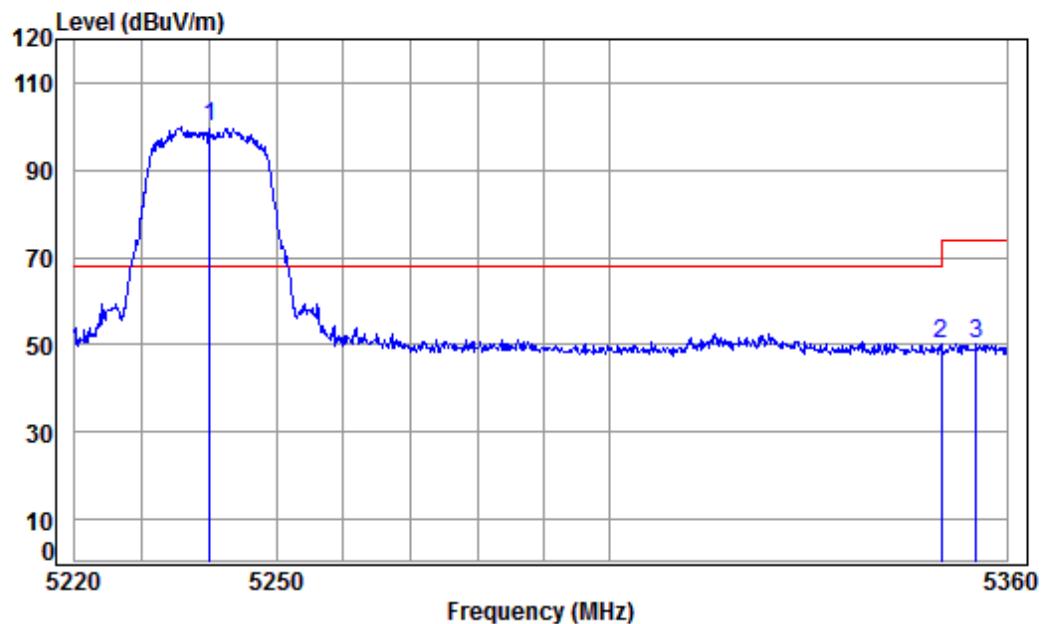


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5240 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5240.000	8.46	34.45	42.27	99.35	99.99	68.20	31.79 Peak
2		5350.020	8.63	34.43	42.17	49.36	50.25	74.00	-23.75 Peak
3		5355.321	8.64	34.43	42.16	49.38	50.29	74.00	-23.71 Peak

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

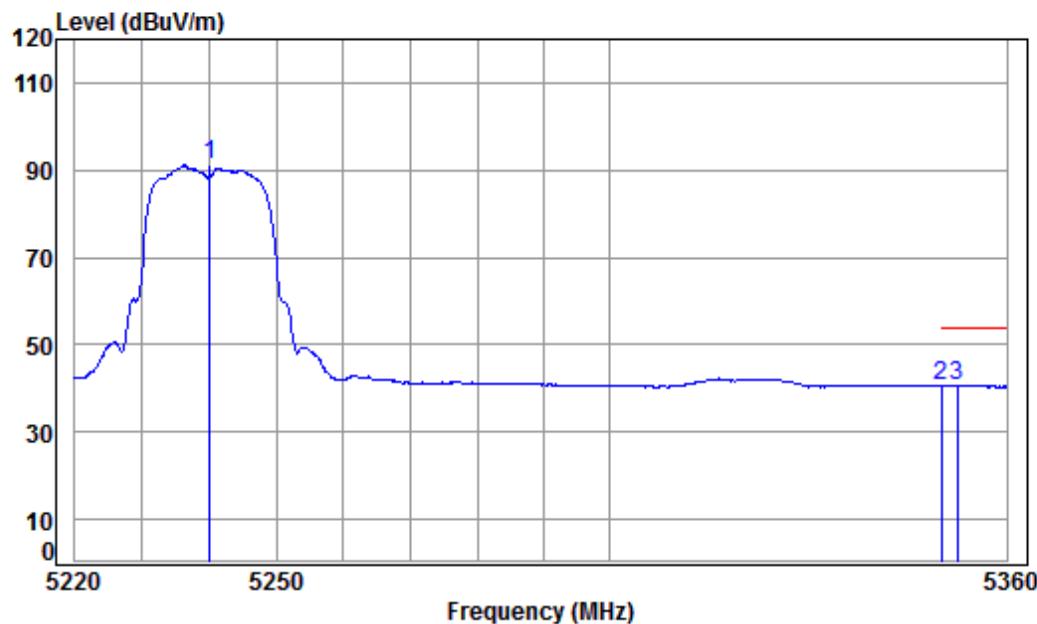


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5240 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	42.27	90.41	91.05	-----	-----	Average
2	5350.020	8.63	34.43	42.17	39.79	40.68	54.00	-13.32	Average
3 pp	5352.487	8.63	34.43	42.17	39.82	40.71	54.00	-13.29	Average

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

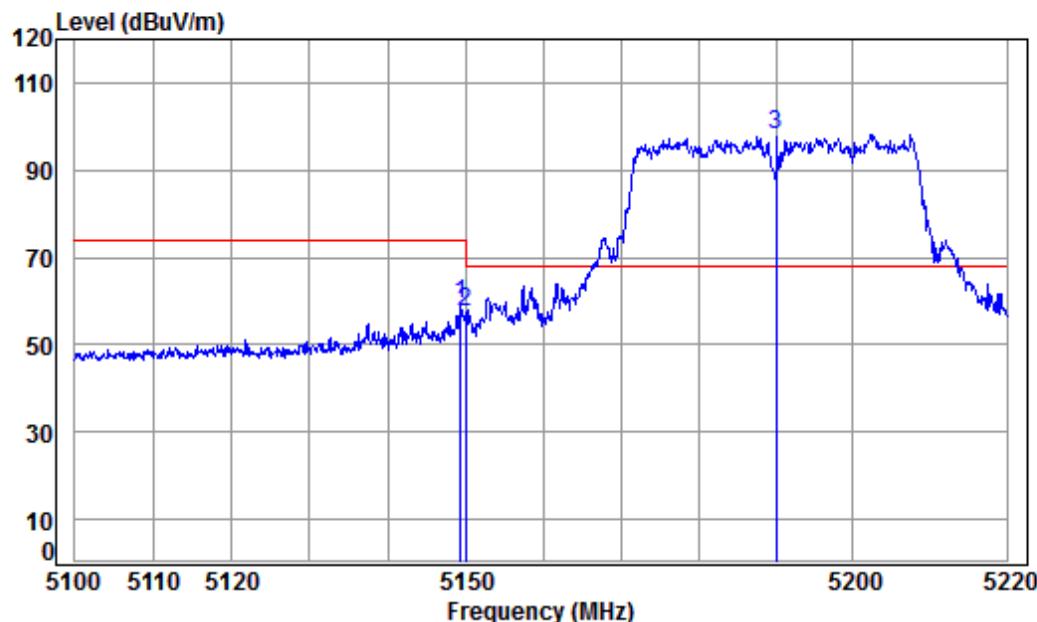


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5190 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	5149.342	8.32	34.47	42.36	58.95	59.38	74.00	-14.62	peak	
2	5149.980	8.33	34.47	42.36	57.26	57.70	74.00	-16.30	peak	
3 pp	5190.000	8.39	34.46	42.32	97.55	98.08	68.20	29.88	peak	

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

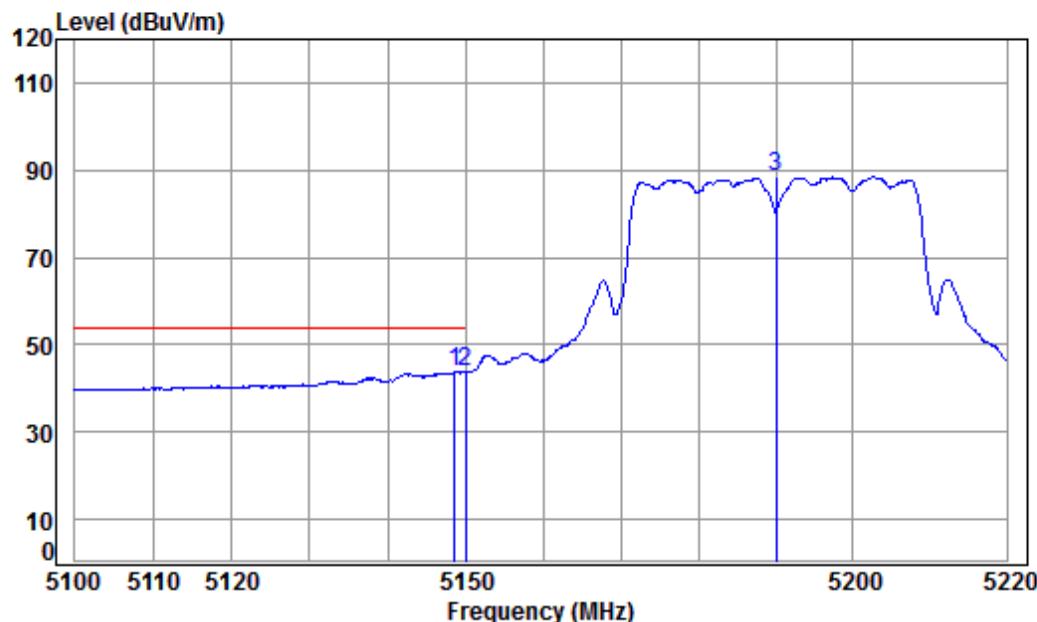


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5190 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5148.623	8.32	34.47	42.36	43.35	43.78	54.00	-10.22 Average
2		5149.980	8.33	34.47	42.36	43.20	43.64	54.00	-10.36 Average
3		5190.000	8.39	34.46	42.32	87.82	88.35	-----	----- Average

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

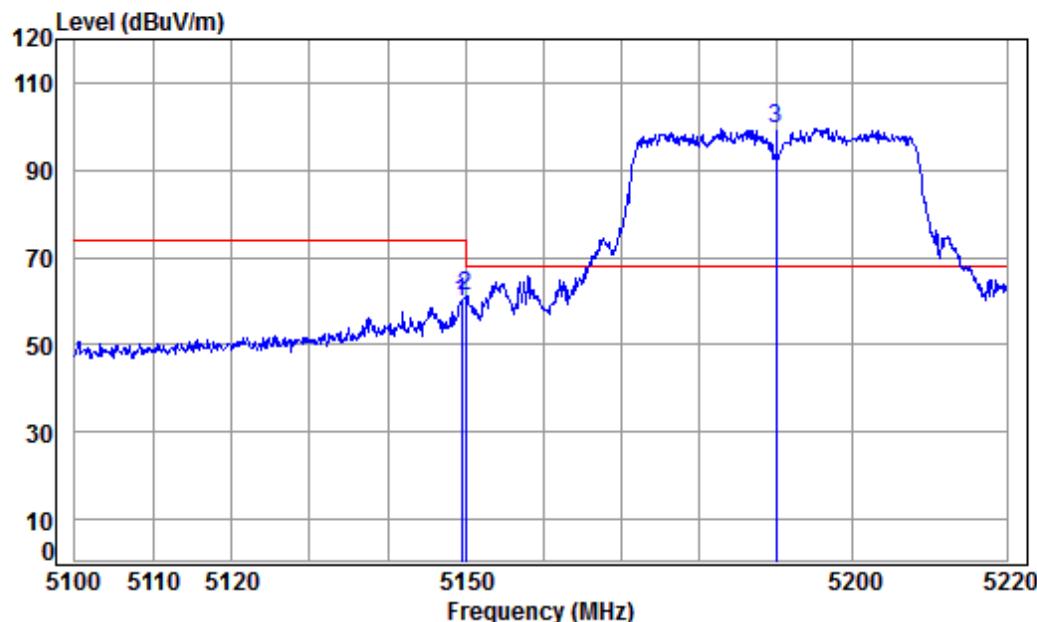


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5190 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	5149.461	8.32	34.47	42.36	59.45	59.88	74.00	-14.12	Peak	
2	5149.980	8.33	34.47	42.36	60.62	61.06	74.00	-12.94	Peak	
3 pp	5190.000	8.39	34.46	42.32	99.01	99.54	68.20	31.34	Peak	

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

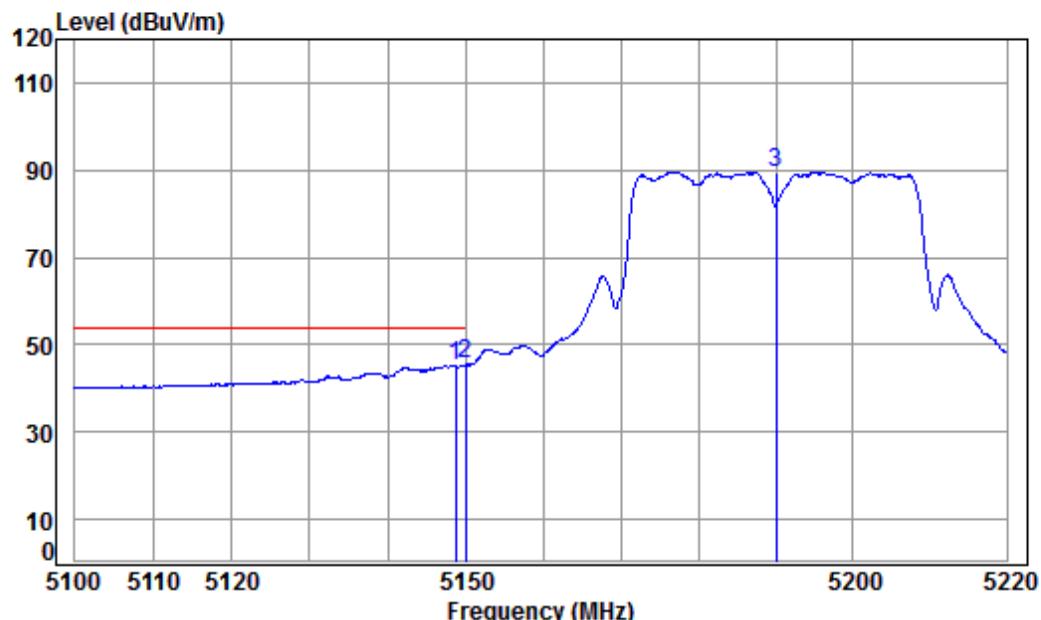


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5190 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		5148.743	8.32	34.47	42.36	44.73	45.16	54.00	-8.84	Average
2 pp		5149.980	8.33	34.47	42.36	45.02	45.46	54.00	-8.54	Average
3		5190.000	8.39	34.46	42.32	89.07	89.60	-----	-----	Average

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

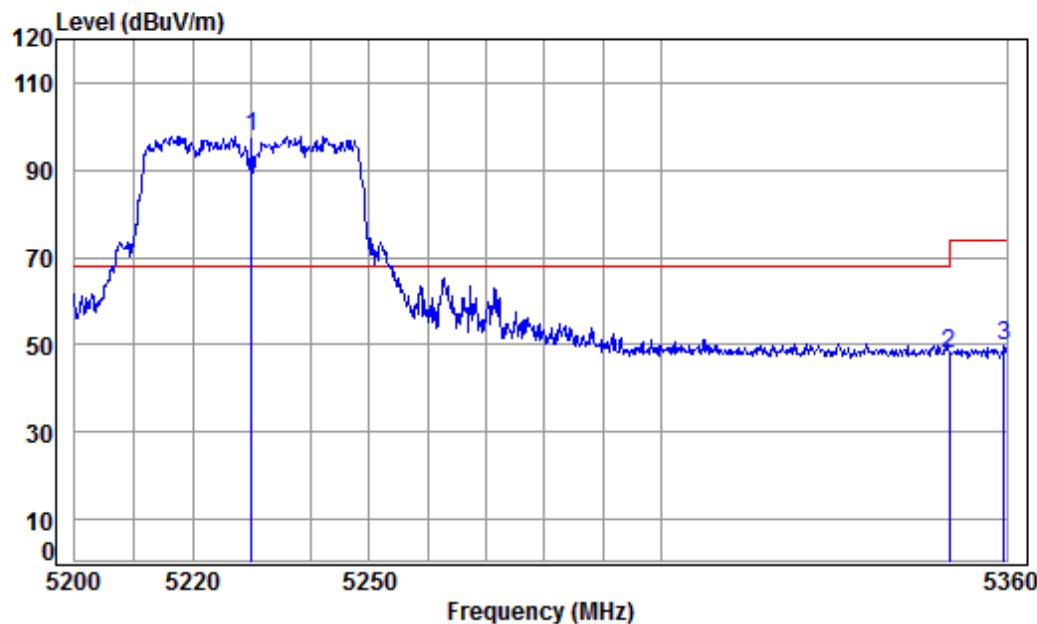


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5230 Band edge  
: 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	Freq	Loss	Factor	Factor	Level	Line			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	5230.000	8.45	34.45	42.28	97.18	97.80	68.20	29.60 peak
2		5350.020	8.63	34.43	42.17	47.17	48.06	74.00	-25.94 peak
3		5359.513	8.64	34.43	42.16	48.91	49.82	74.00	-24.18 peak

Mode:e; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

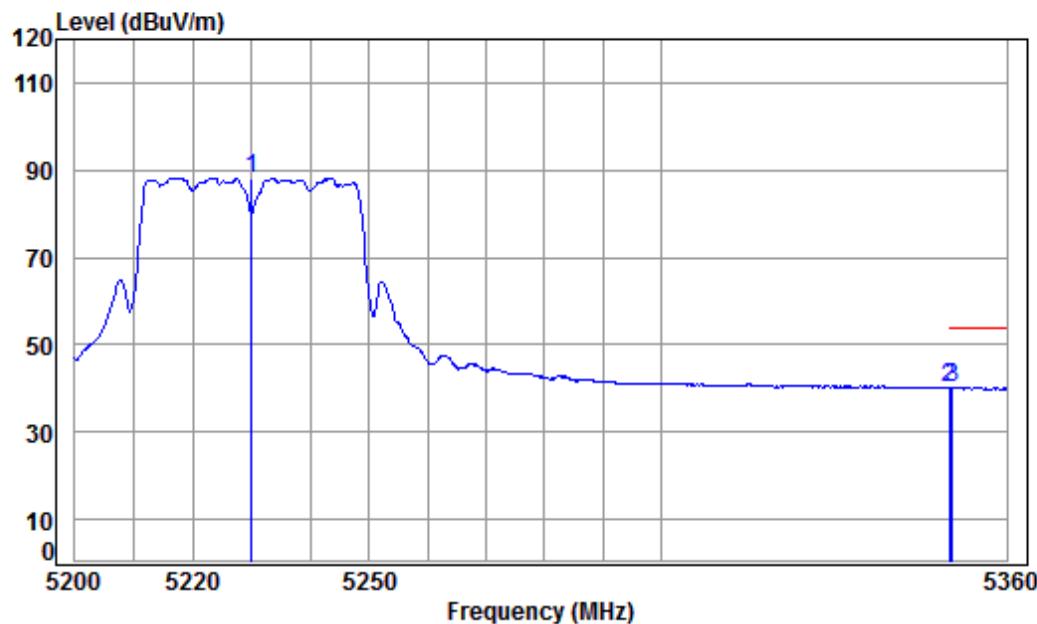


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5230 Band edge  
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	8.45	34.45	42.28	87.62	88.24	-----	-----	Average
2	5350.020	8.63	34.43	42.17	39.39	40.28	54.00	-13.72	Average
3 pp	5350.587	8.63	34.43	42.17	39.47	40.36	54.00	-13.64	Average

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

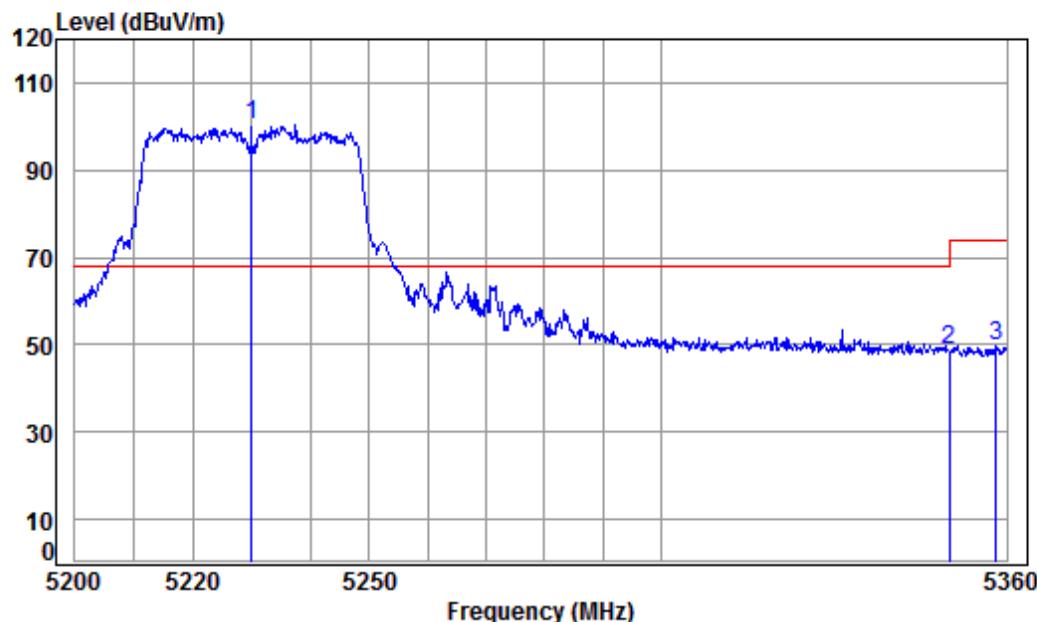


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5230 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5230.000	8.45	34.45	42.28	99.93	100.55	68.20	32.35 Peak
2		5350.020	8.63	34.43	42.17	47.80	48.69	74.00	-25.31 Peak
3		5358.051	8.64	34.43	42.16	48.90	49.81	74.00	-24.19 Peak

Mode:e; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

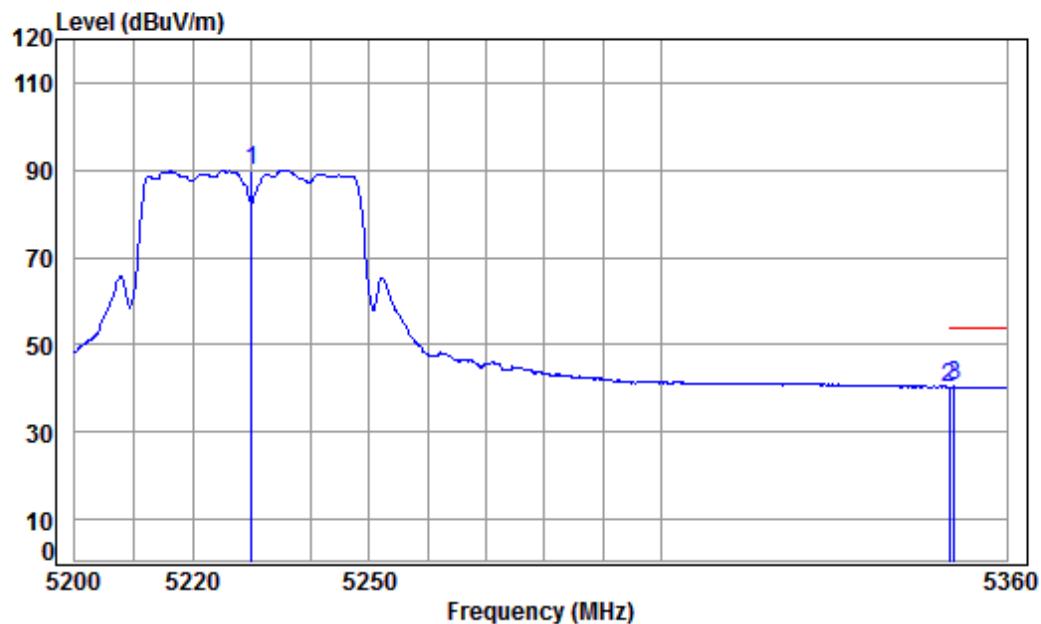


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5230 Band edge  
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	8.45	34.45	42.28	89.34	89.96	-----	-----	Average
2	5350.020	8.63	34.43	42.17	39.45	40.34	54.00	-13.66	Average
3 pp	5350.911	8.63	34.43	42.17	39.58	40.47	54.00	-13.53	Average

Mode:h; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

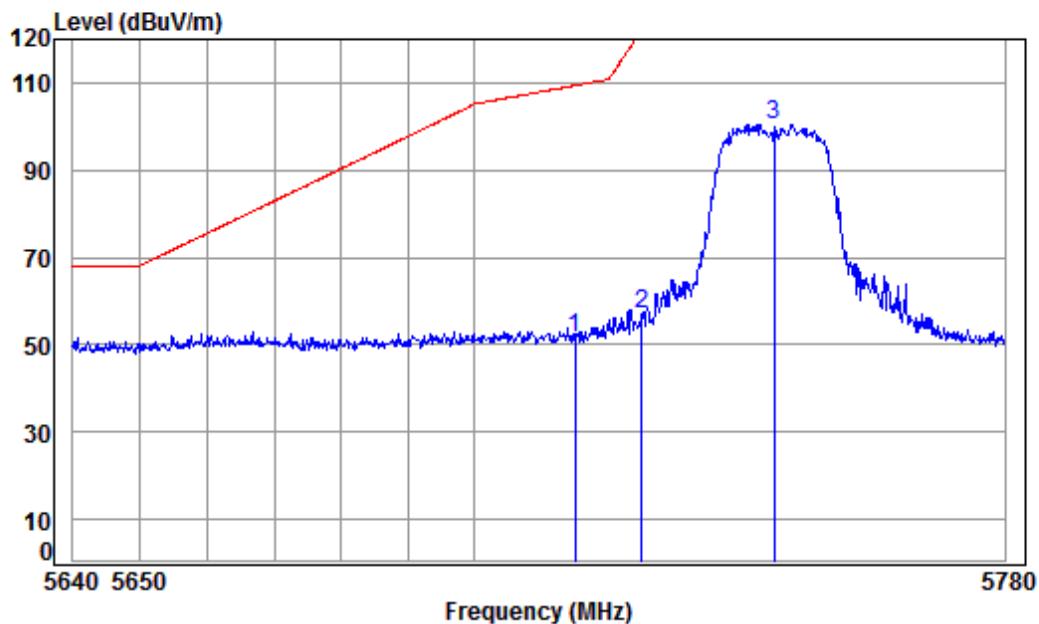


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5745 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	41.85	49.12	51.41	109.40	-57.99	peak
2	5725.000	9.64	34.54	41.84	54.65	56.99	122.20	-65.21	peak
3 pp	5745.000	9.71	34.55	41.82	98.14	100.58	125.20	-24.62	peak

Mode:h; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

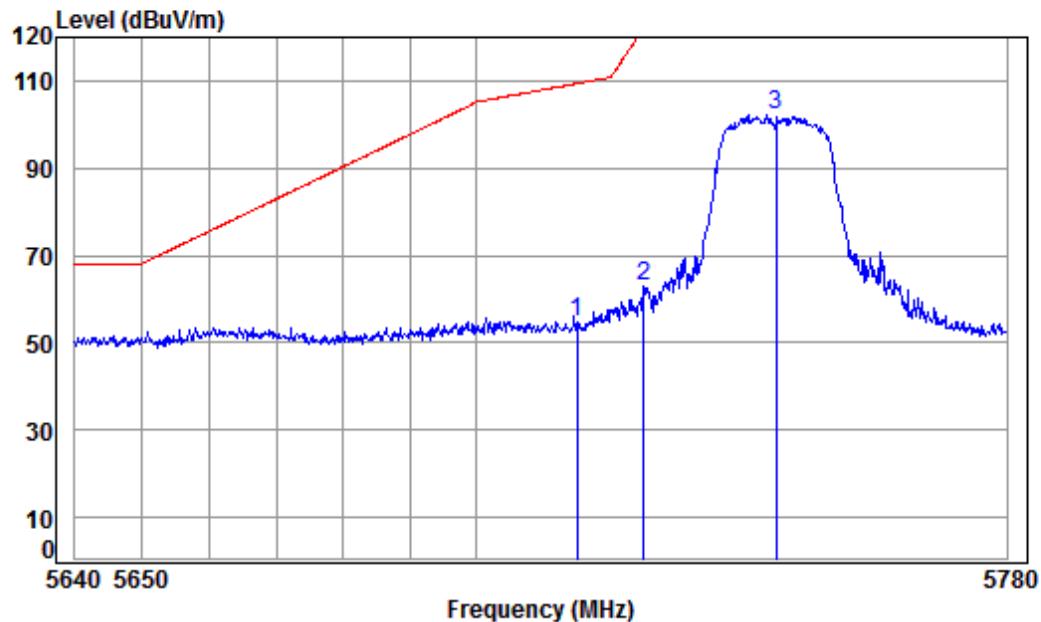


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5745 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	41.85	52.29	54.58	109.40	-54.82	peak
2	5725.000	9.64	34.54	41.84	60.46	62.80	122.20	-59.40	peak
3 pp	5745.000	9.71	34.55	41.82	99.82	102.26	125.20	-22.94	peak

Mode:h; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

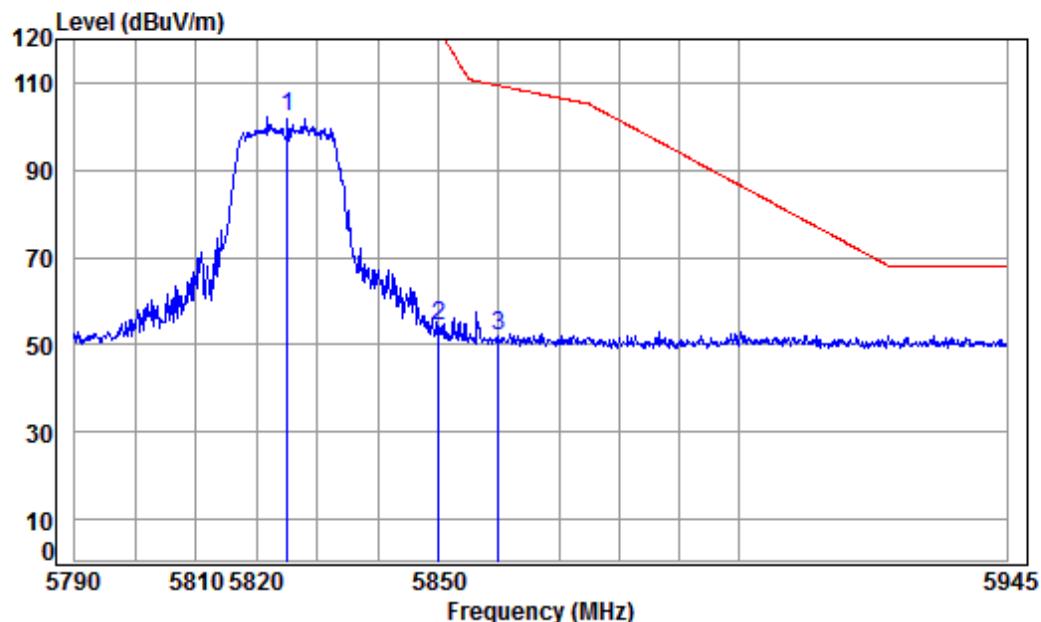


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5825 Band edge  
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over				
Freq	Loss	Factor	Factor	Level	Level	Line	Limit			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB			
1	pp	5825.000	9.98	34.60	41.75	99.28	102.11	125.20	-23.09	peak
2		5850.000	10.07	34.61	41.73	51.13	54.08	122.20	-68.12	peak
3		5860.000	10.10	34.62	41.72	48.90	51.90	109.40	-57.50	peak

Mode:h; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

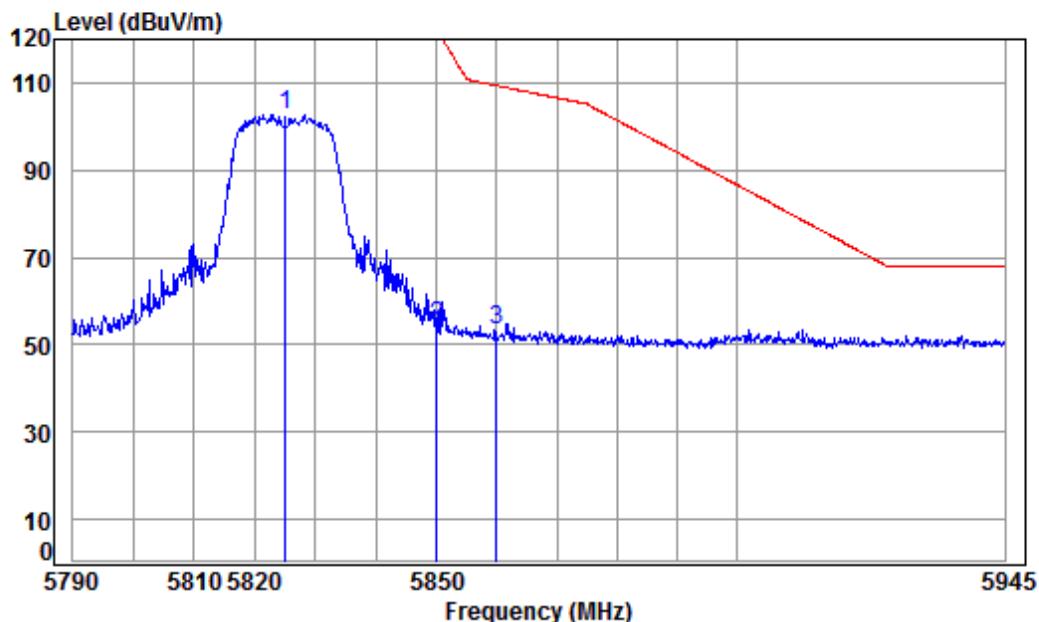


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5825 Band edge  
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over				
Freq	Loss	Factor	Factor	Level	Level	Line	Limit			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB			
1	pp	5825.000	9.98	34.60	41.75	99.88	102.71	125.20	-22.49	peak
2		5850.000	10.07	34.61	41.73	51.44	54.39	122.20	-67.81	peak
3		5860.000	10.10	34.62	41.72	50.31	53.31	109.40	-56.09	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

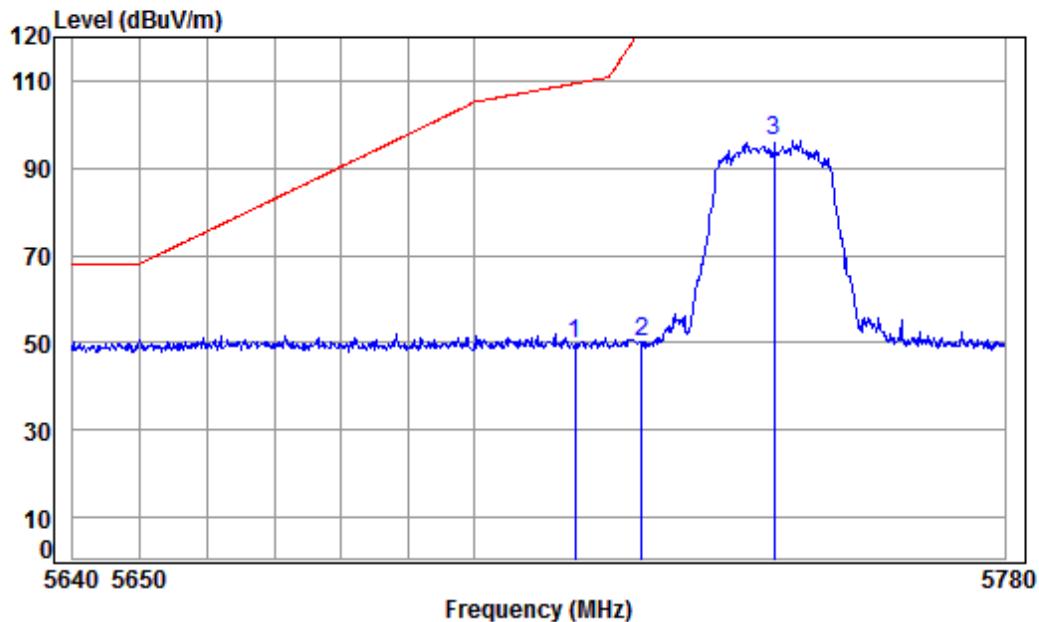


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5745 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	41.85	47.43	49.72	109.40	-59.68	peak
2	5725.000	9.64	34.54	41.84	47.69	50.03	122.20	-72.17	peak
3 pp	5745.000	9.71	34.55	41.82	93.99	96.43	125.20	-28.77	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

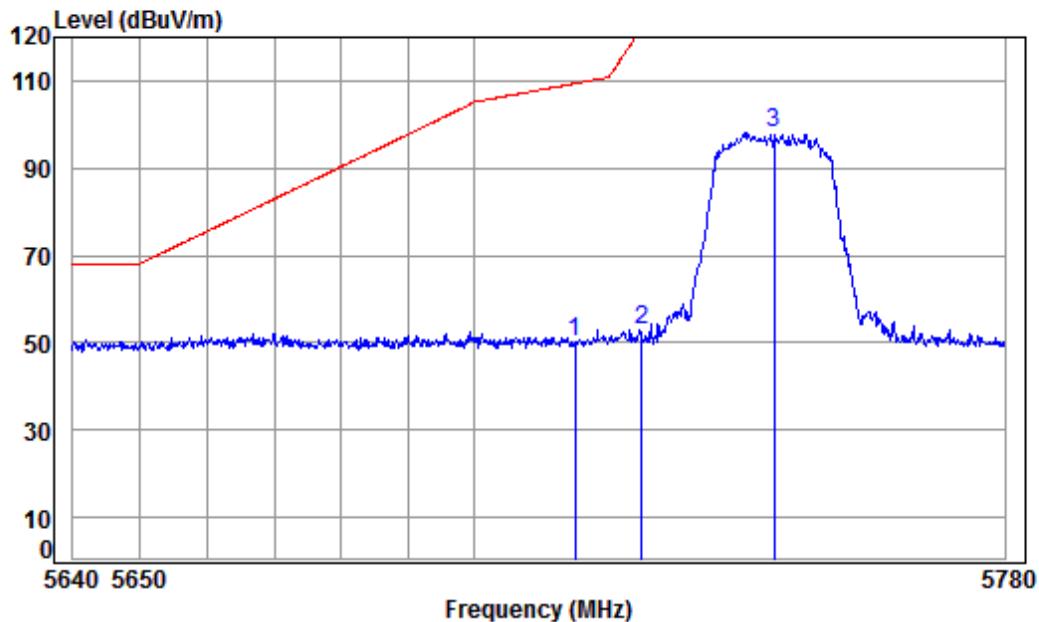


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5745 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	41.85	47.84	50.13	109.40	-59.27	peak
2	5725.000	9.64	34.54	41.84	50.47	52.81	122.20	-69.39	peak
3 pp	5745.000	9.71	34.55	41.82	95.87	98.31	125.20	-26.89	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

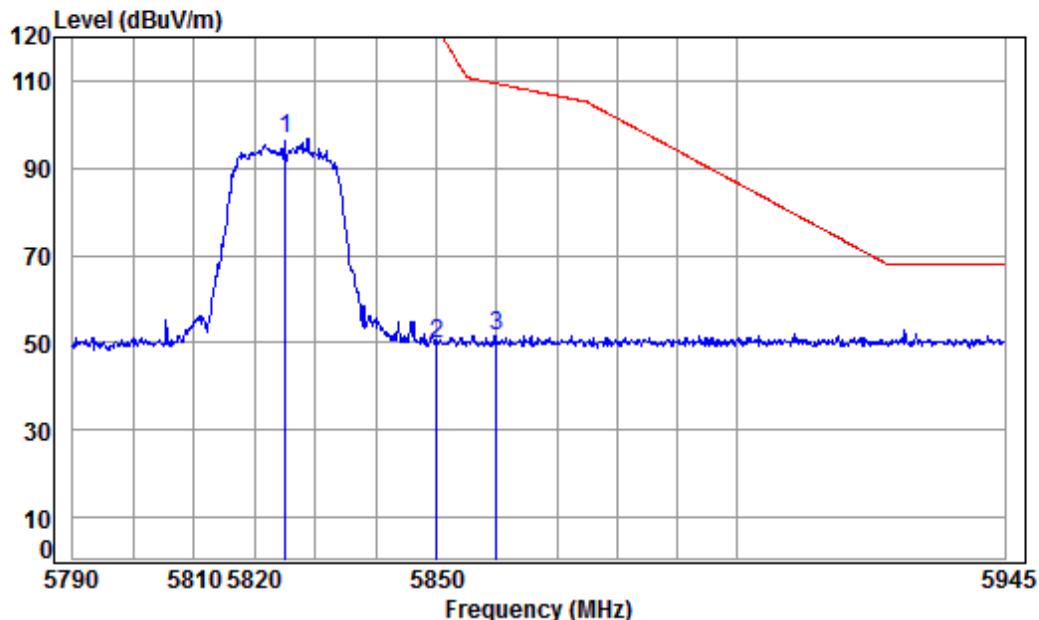

Condition: 3m HORIZONTAL


Job No : 00126CR/00127CR

Mode : 5825 Band edge  
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5825.000	9.98	34.60	41.75	93.76	96.59	125.20	-28.61 peak
2	5850.000	10.07	34.61	41.73	46.97	49.92	122.20	-72.28 peak
3	5860.000	10.10	34.62	41.72	48.69	51.69	109.40	-57.71 peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

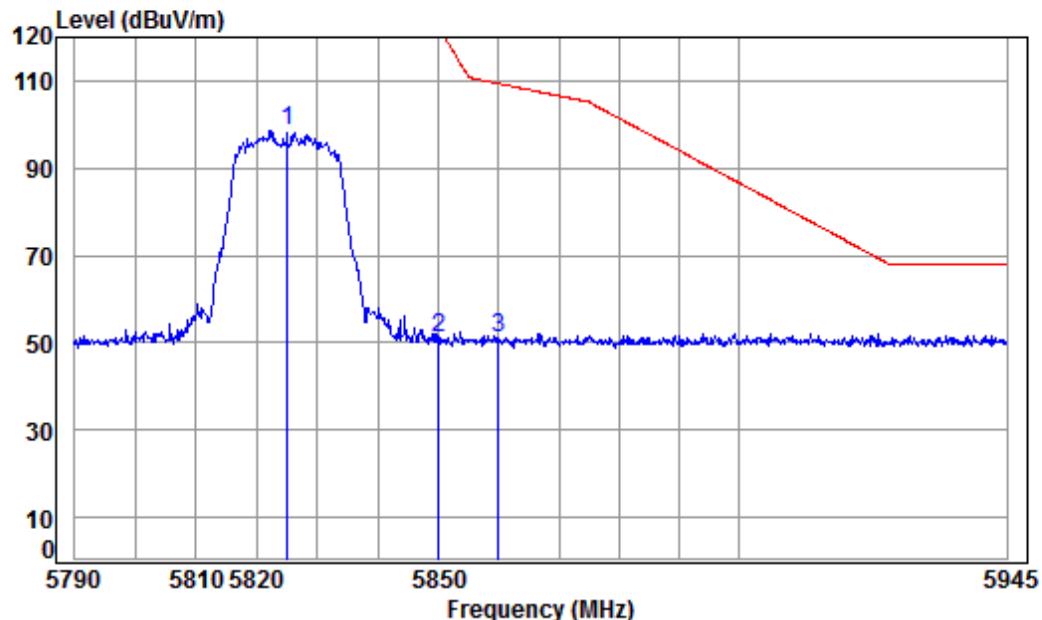


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5825 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5825.000	9.98	34.60	41.75	95.93	98.76	125.20	-26.44 peak
2		5850.000	10.07	34.61	41.73	48.35	51.30	122.20	-70.90 peak
3		5860.000	10.10	34.62	41.72	48.06	51.06	109.40	-58.34 peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

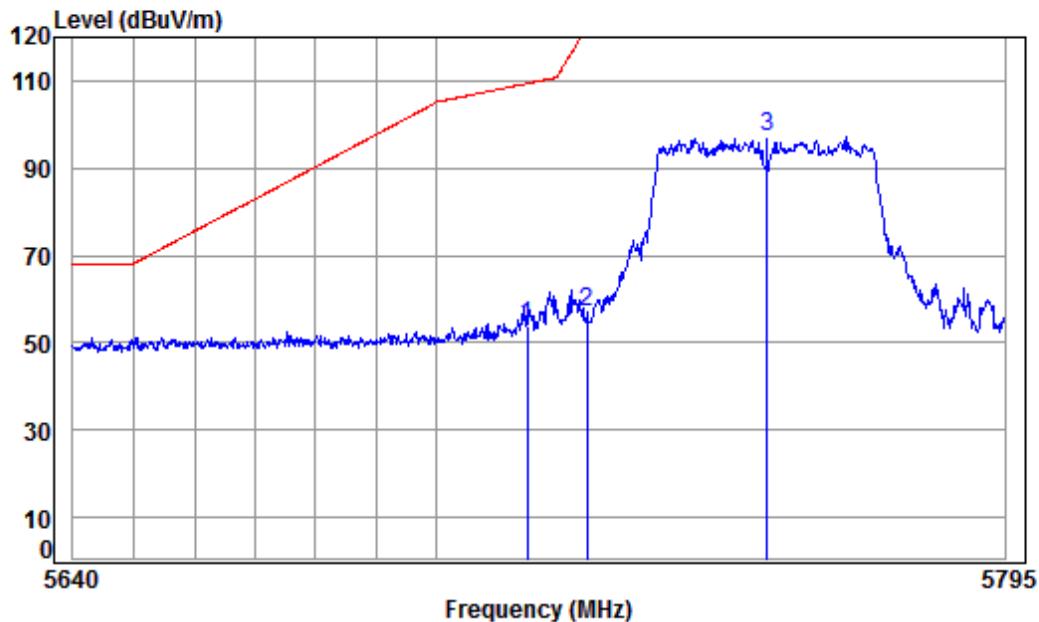


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5755 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	41.85	51.63	53.92	109.40	-55.48	peak
2	5725.000	9.64	34.54	41.84	54.66	57.00	122.20	-65.20	peak
3 pp	5755.000	9.75	34.56	41.81	94.54	97.04	125.20	-28.16	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

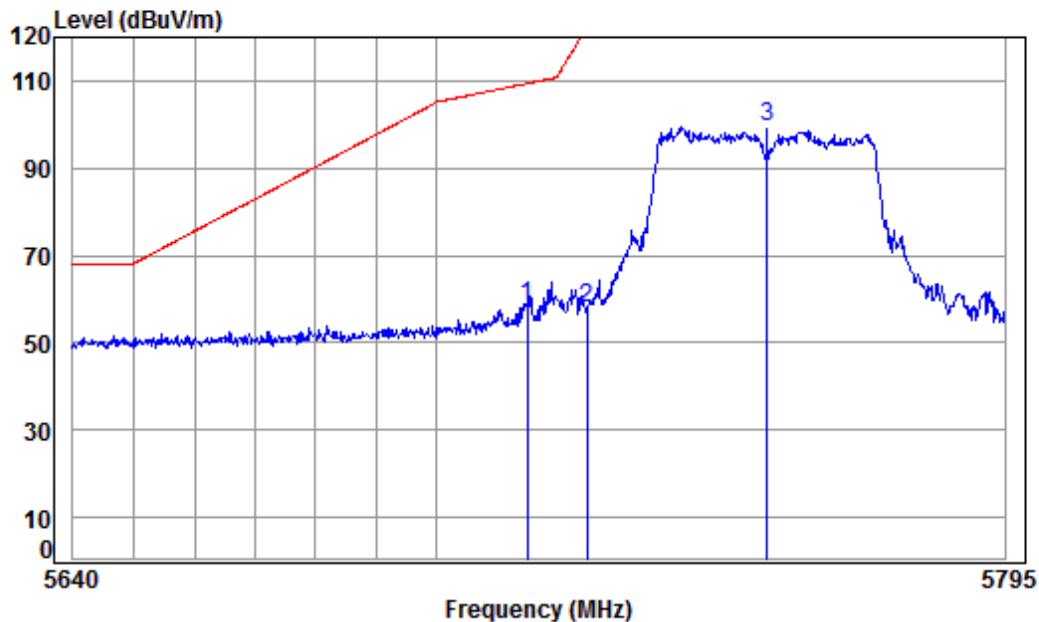


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5755 Band edge  
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	41.85	56.22	58.51	109.40	-50.89	peak
2	5725.000	9.64	34.54	41.84	55.46	57.80	122.20	-64.40	peak
3 pp	5755.000	9.75	34.56	41.81	96.84	99.34	125.20	-25.86	peak

Mode:h; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

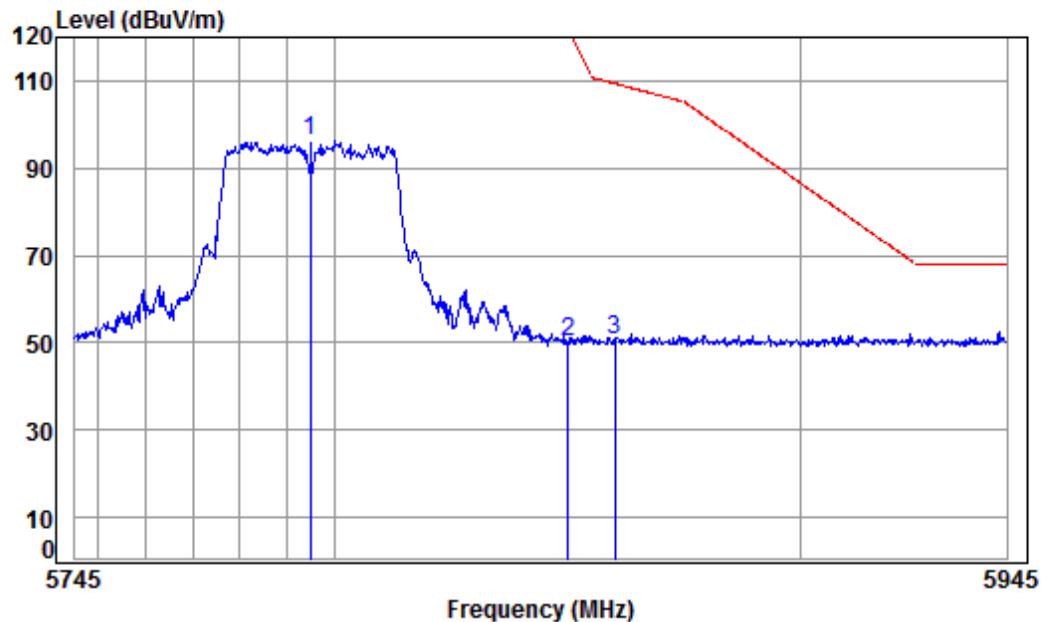


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5795 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	pp	5795.000	9.88	34.58	41.78	93.64	96.32	125.20	-28.88	peak
2		5850.000	10.07	34.61	41.73	47.12	50.07	122.20	-72.13	peak
3		5860.000	10.10	34.62	41.72	47.59	50.59	109.40	-58.81	peak

Mode:h; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

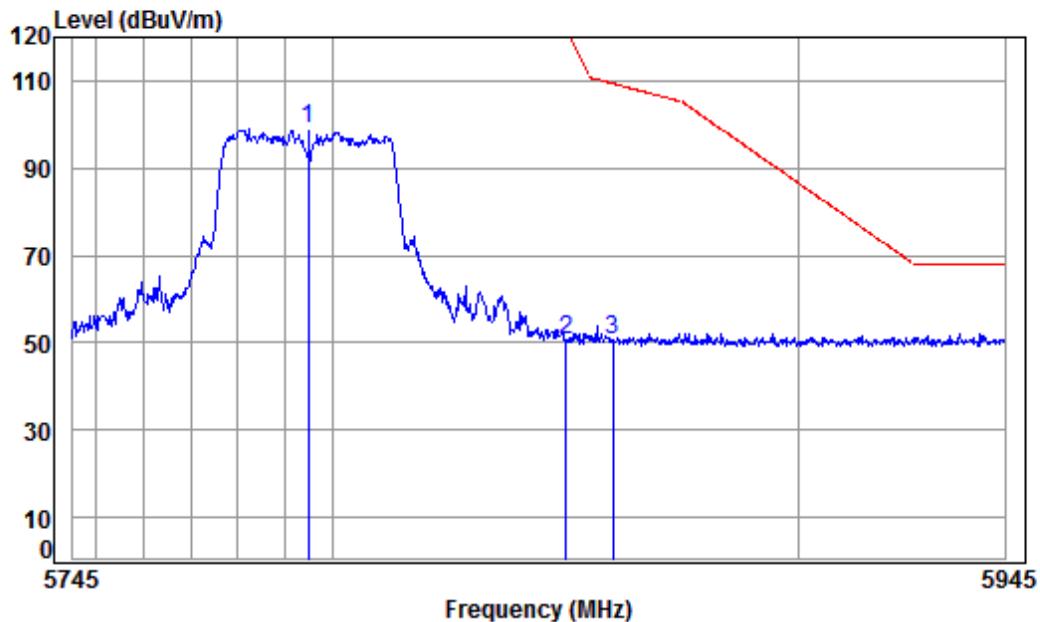


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5795 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	pp	5795.000	9.88	34.58	41.78	96.13	98.81	125.20	-26.39	peak
2		5850.000	10.07	34.61	41.73	47.61	50.56	122.20	-71.64	peak
3		5860.000	10.10	34.62	41.72	47.73	50.73	109.40	-58.67	peak

Mode:g; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

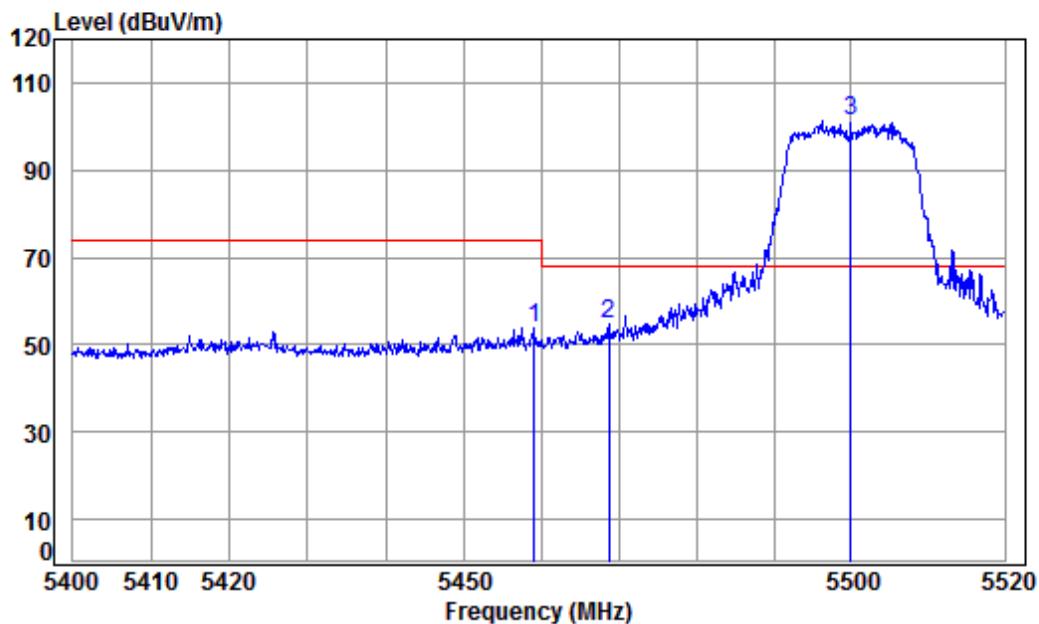


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5459.070	8.79	34.41	42.07	52.60	53.73	74.00	-20.27	peak
2	5468.678	8.80	34.41	42.06	53.49	54.64	68.20	-13.56	peak
3 pp	5500.000	8.85	34.40	42.03	100.09	101.31	68.20	33.11	peak

Mode:g; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

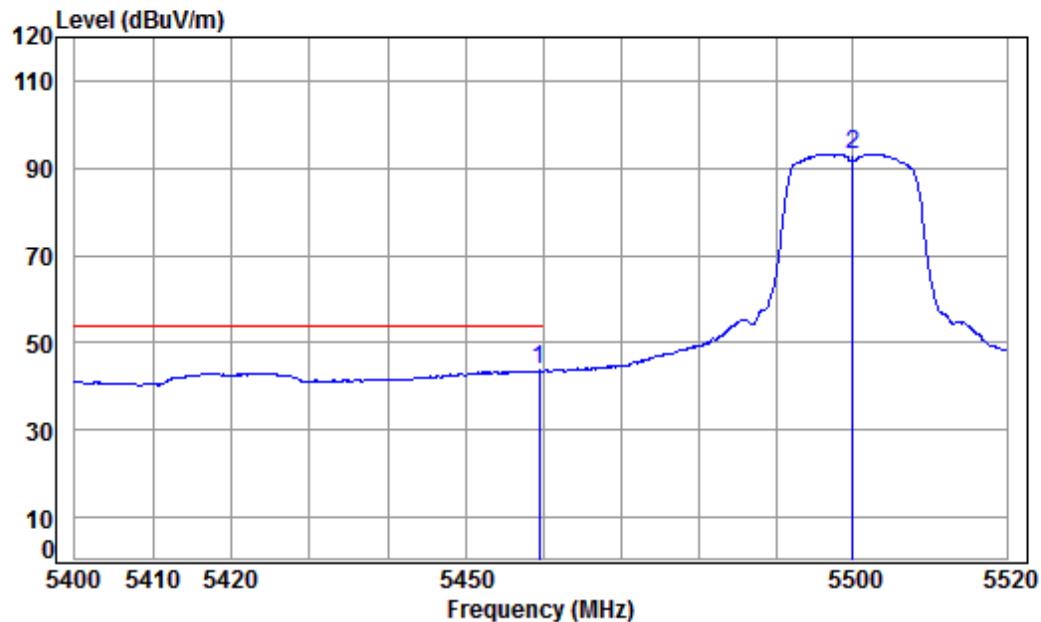


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5459.430	8.79	34.41	42.07	42.49	43.62	54.00	-10.38 Average
2		5500.000	8.85	34.40	42.03	91.99	93.21	-----	----- Average

Mode:g; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

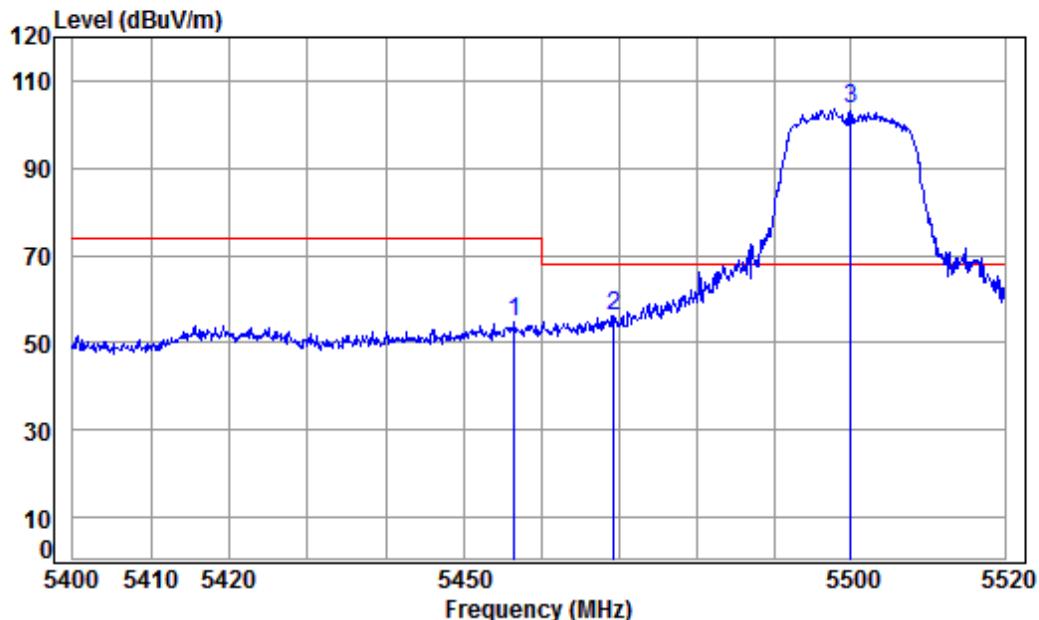


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5456.551	8.79	34.41	42.07	53.55	54.68	74.00	-19.32	Peak
2	5469.399	8.81	34.41	42.06	55.16	56.32	68.20	-11.88	peak
3 pp	5500.000	8.85	34.40	42.03	102.46	103.68	68.20	35.48	Peak

Mode:g; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

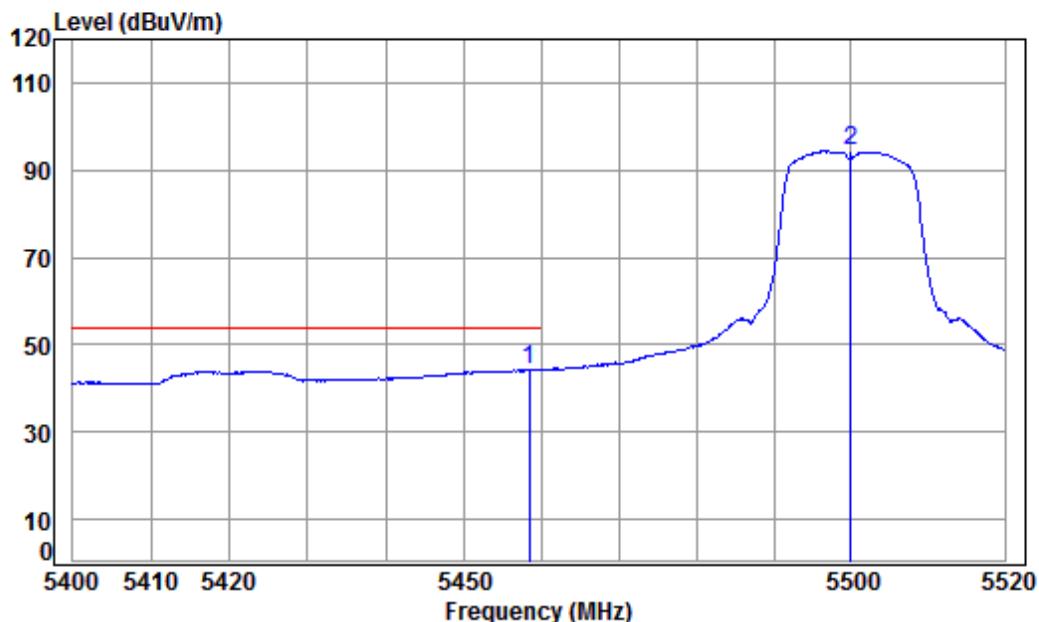


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11A

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5458.471	8.79	34.41	42.07	43.18	44.31	54.00	-9.69 Average
2	5500.000	8.85	34.40	42.03	93.12	94.34	-----	----- Average

Mode:g; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

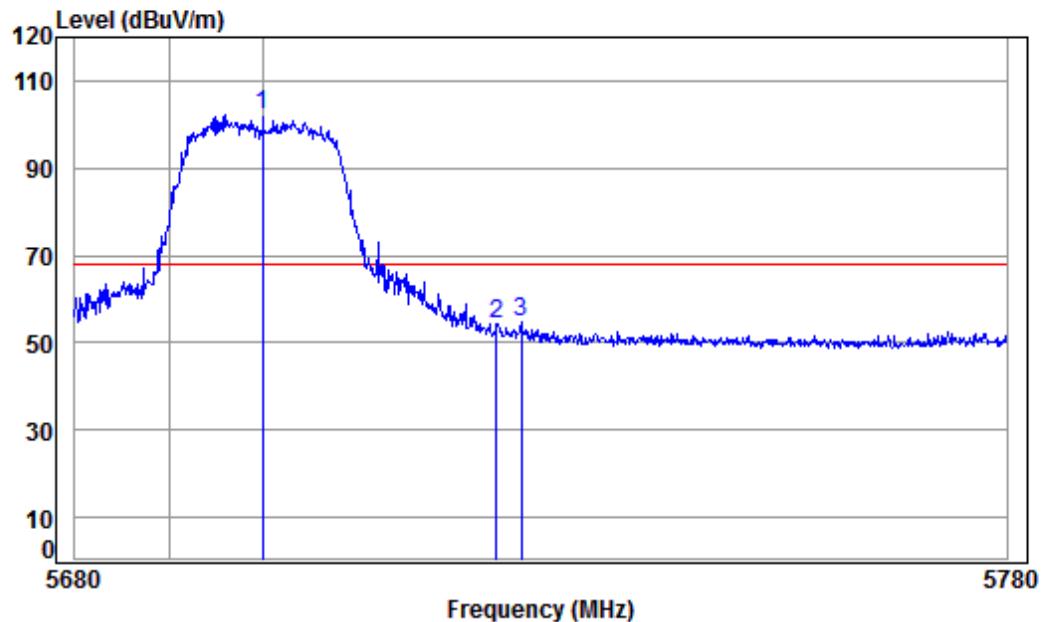


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5700 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	9.56	34.52	41.86	99.84	102.06	68.20	33.86	peak
2	5725.000	9.64	34.54	41.84	52.15	54.49	68.20	-13.71	peak
3	5727.682	9.65	34.54	41.84	52.36	54.71	68.20	-13.49	peak

Mode:g; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

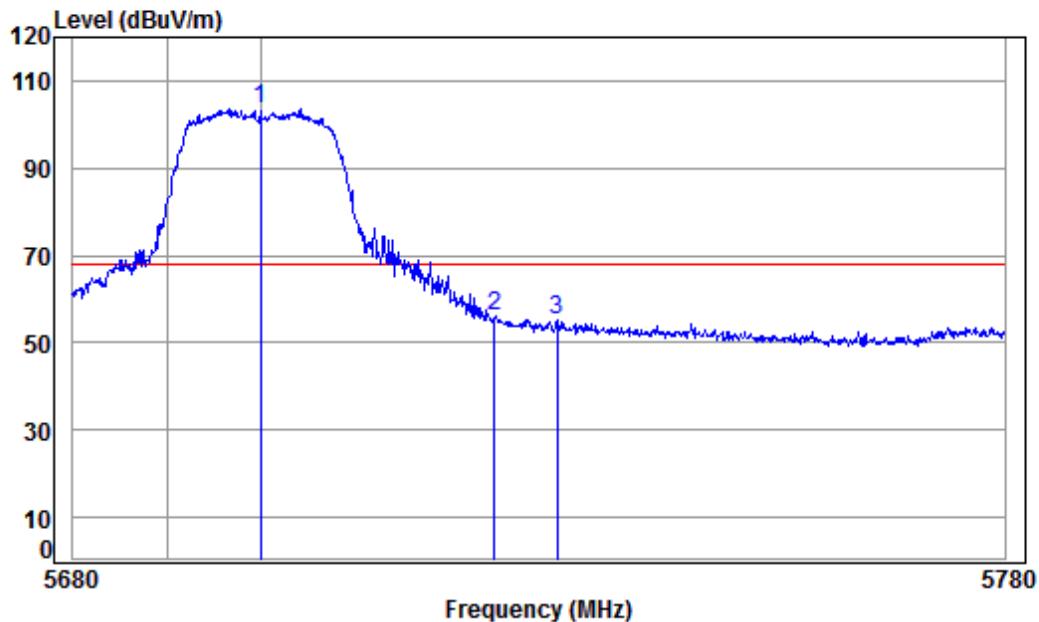


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5700 Band edge  
: 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5700.000	9.56	34.52	41.86	101.37	103.59	68.20	35.39	Peak
2		5725.000	9.64	34.54	41.84	53.95	56.29	68.20	-11.91	Peak
3		5731.782	9.67	34.54	41.83	52.99	55.37	68.20	-12.83	Peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

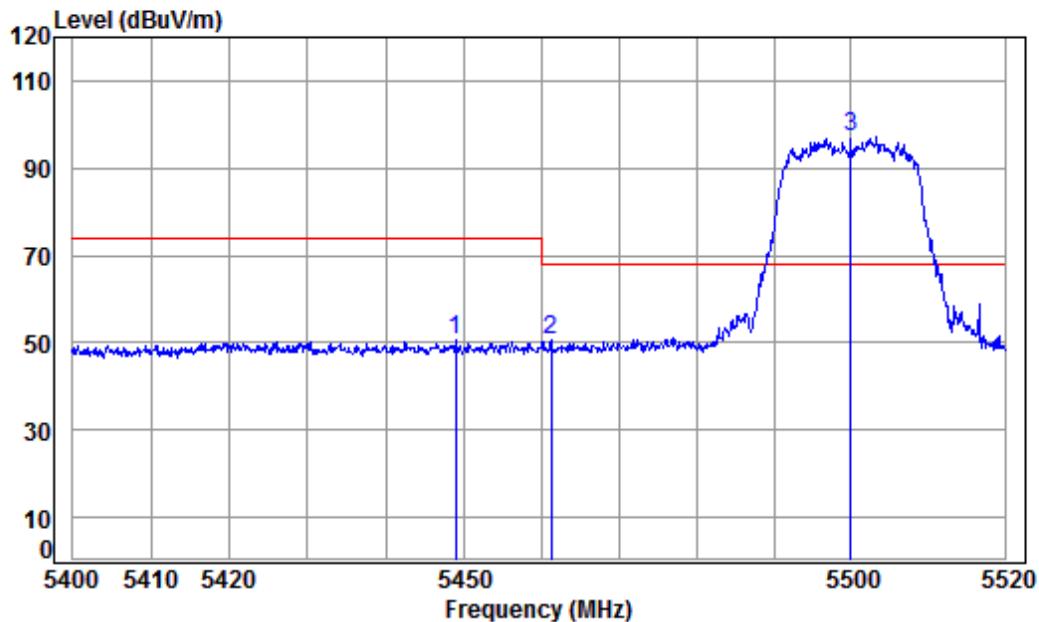


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5449.001	8.78	34.41	42.08	49.35	50.46	74.00	-23.54	peak
2	5461.230	8.79	34.41	42.07	49.56	50.69	68.20	-17.51	peak
3 pp	5500.000	8.85	34.40	42.03	96.08	97.30	68.20	29.10	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

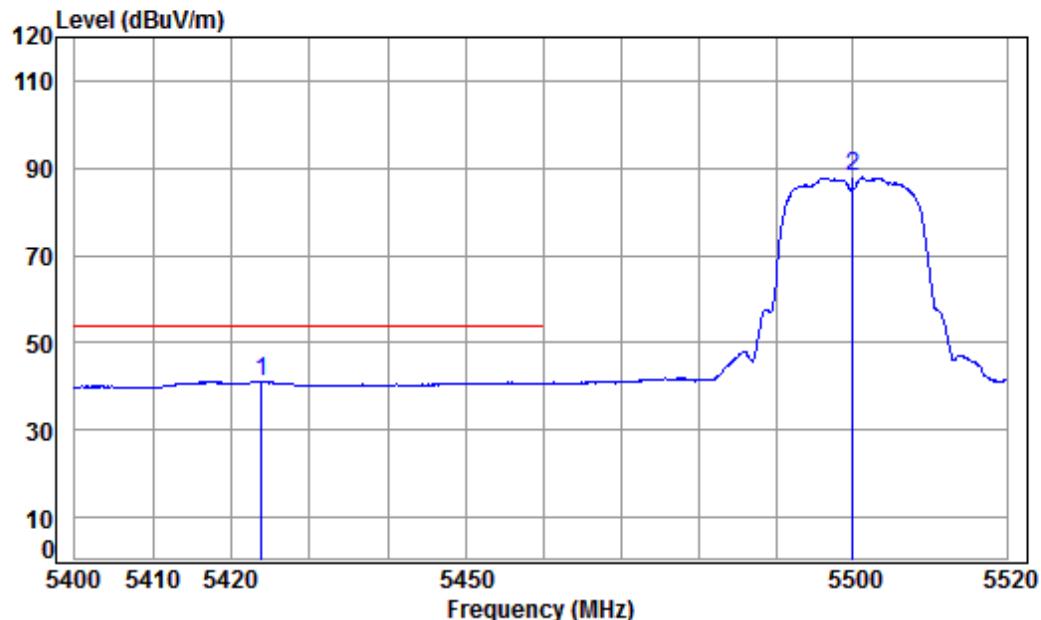


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
1	pp	5423.909	8.74	34.41	42.10	40.13	41.18	54.00	-12.82	Average
2		5500.000	8.85	34.40	42.03	86.66	87.88	-----	-----	Average

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

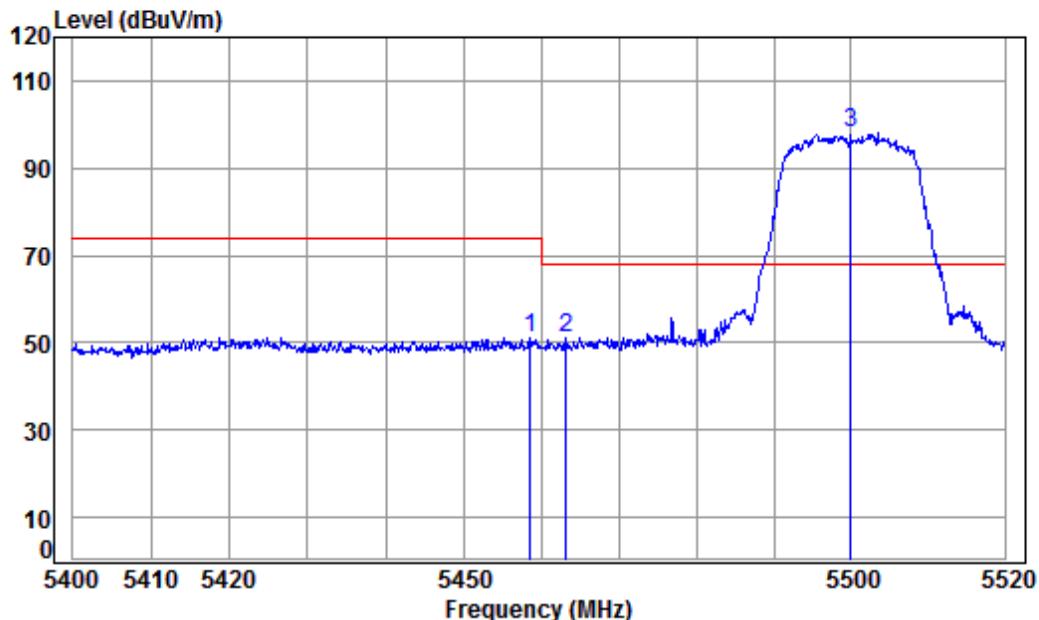


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	5458.590	8.79	34.41	42.07	50.09	51.22	74.00	-22.78	Peak	
2	5463.151	8.80	34.41	42.07	50.03	51.17	68.20	-17.03	peak	
3 pp	5500.000	8.85	34.40	42.03	96.93	98.15	68.20	29.95	Peak	

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

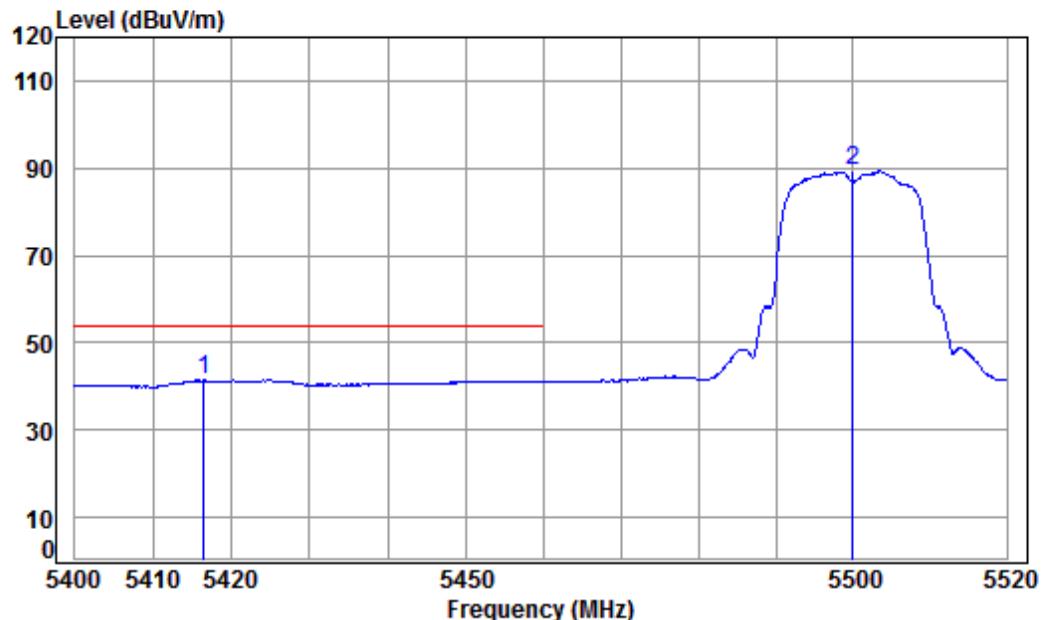


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5500 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5416.522	8.73	34.42	42.11	40.36	41.40	54.00	-12.60 Average
2		5500.000	8.85	34.40	42.03	88.08	89.30	-----	----- Average

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

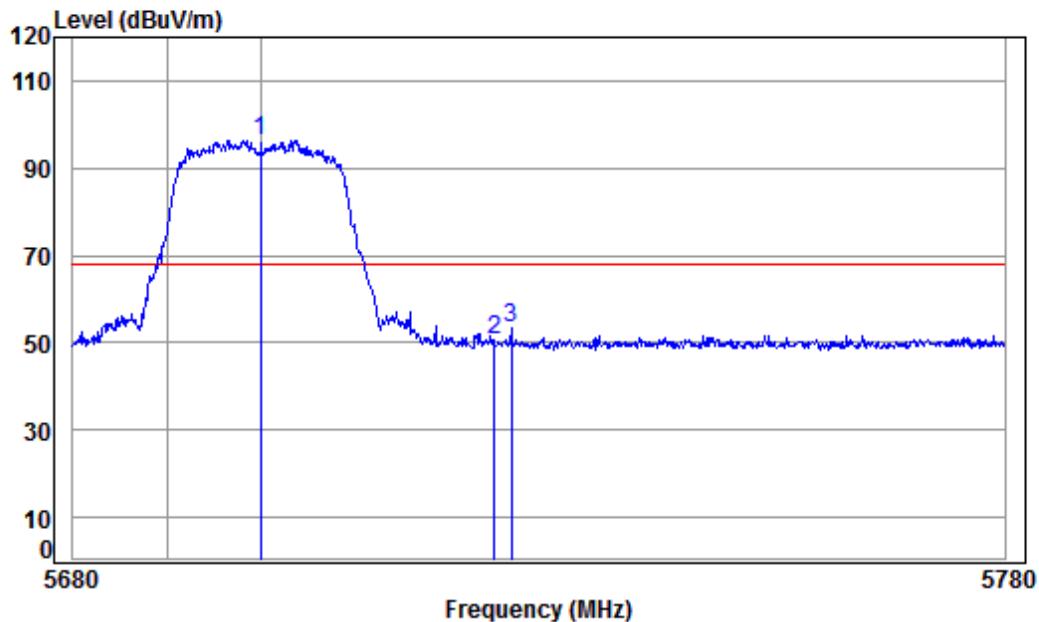


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5700 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	pp	5700.000	9.56	34.52	41.86	94.26	96.48	68.20	28.28	peak
2		5725.000	9.64	34.54	41.84	48.48	50.82	68.20	-17.38	peak
3		5726.883	9.65	34.54	41.84	50.84	53.19	68.20	-15.01	peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

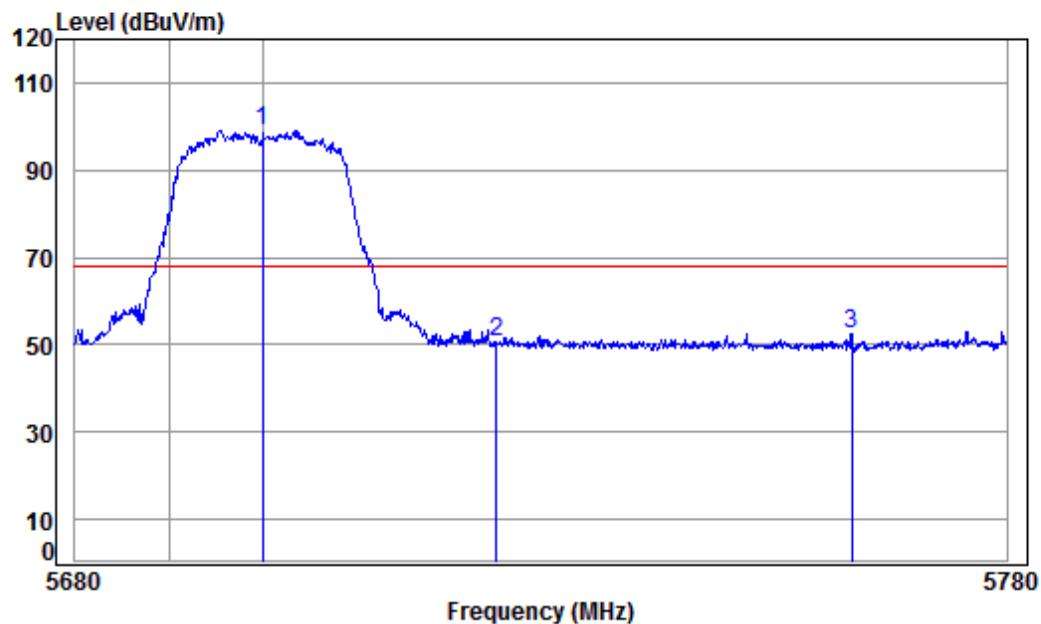


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5700 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5700.000	9.56	34.52	41.86	96.80	99.02	68.20	30.82 Peak
2		5725.000	9.64	34.54	41.84	48.16	50.50	68.20	-17.70 Peak
3		5763.279	9.77	34.56	41.80	49.93	52.46	68.20	-15.74 Peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

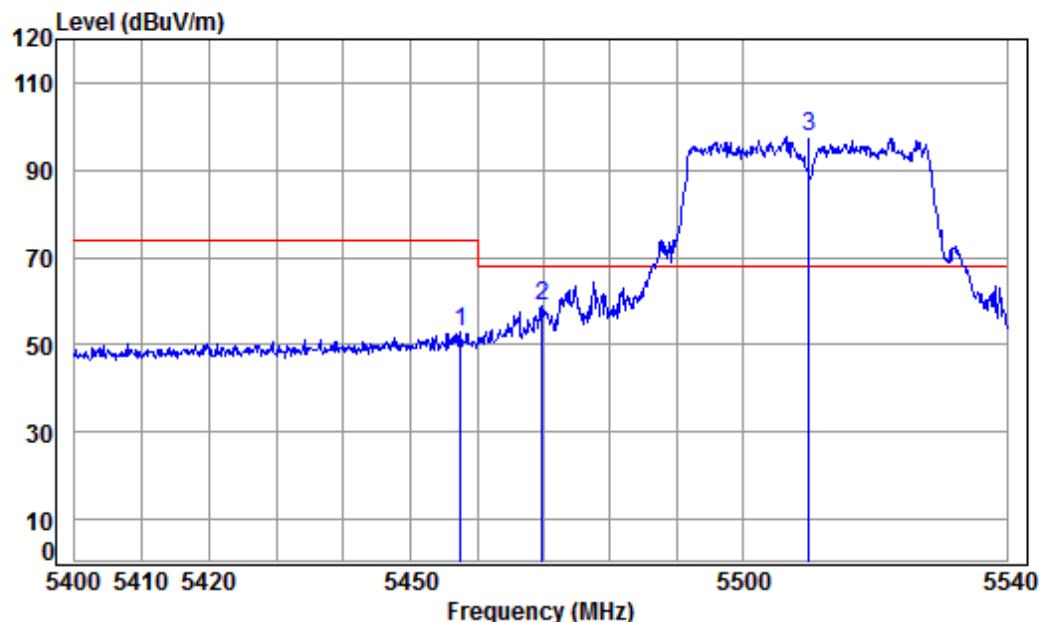


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5510 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5457.526	8.79	34.41	42.07	51.63	52.76	74.00	-21.24	peak
2	5469.832	8.81	34.41	42.06	57.70	58.86	68.20	-9.34	peak
3 pp	5510.000	8.89	34.41	42.02	96.30	97.58	68.20	29.38	peak

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

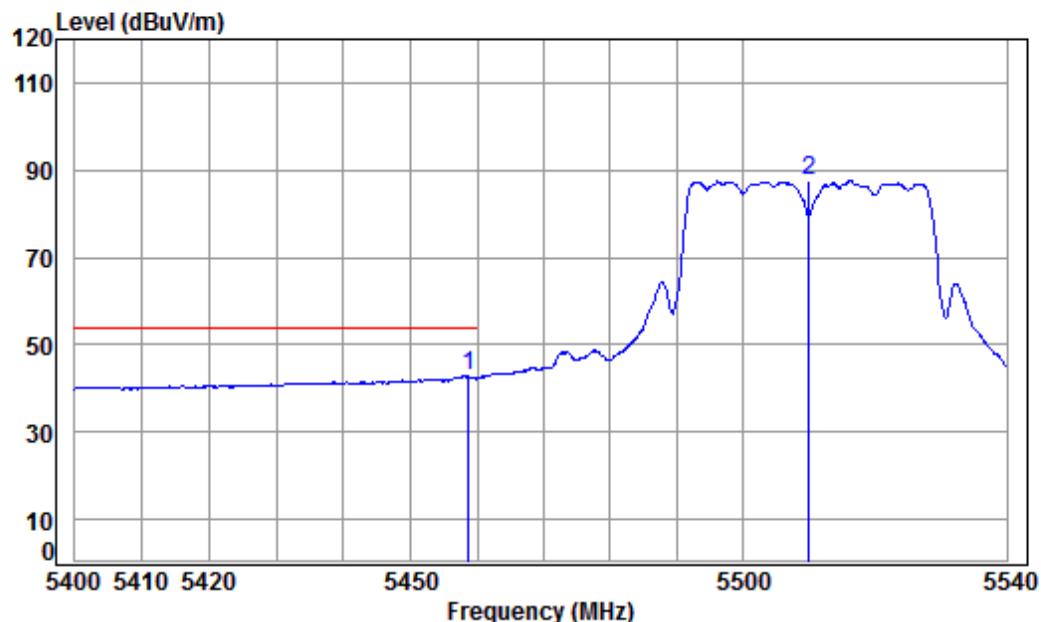


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5510 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5458.783	8.79	34.41	42.07	41.78	42.91	54.00	-11.09 Average
2		5510.000	8.89	34.41	42.02	86.14	87.42	-----	----- Average

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

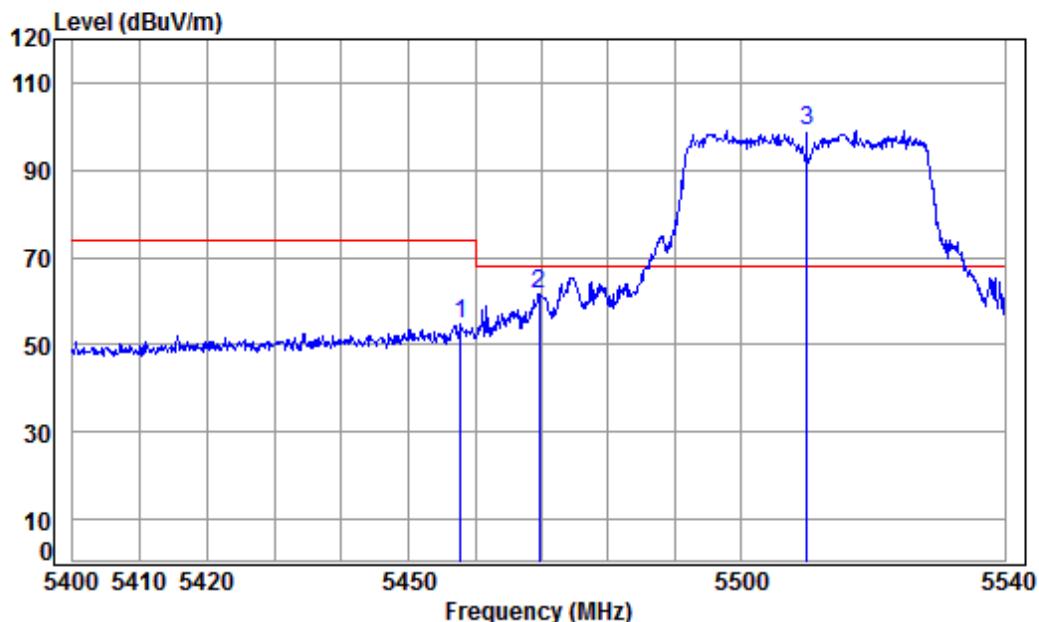


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5510 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		5457.805	8.79	34.41	42.07	53.48	54.61	74.00	-19.39 Peak
2		5469.692	8.81	34.41	42.06	60.57	61.73	68.20	-6.47 peak
3 pp		5510.000	8.89	34.41	42.02	97.68	98.96	68.20	30.76 Peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

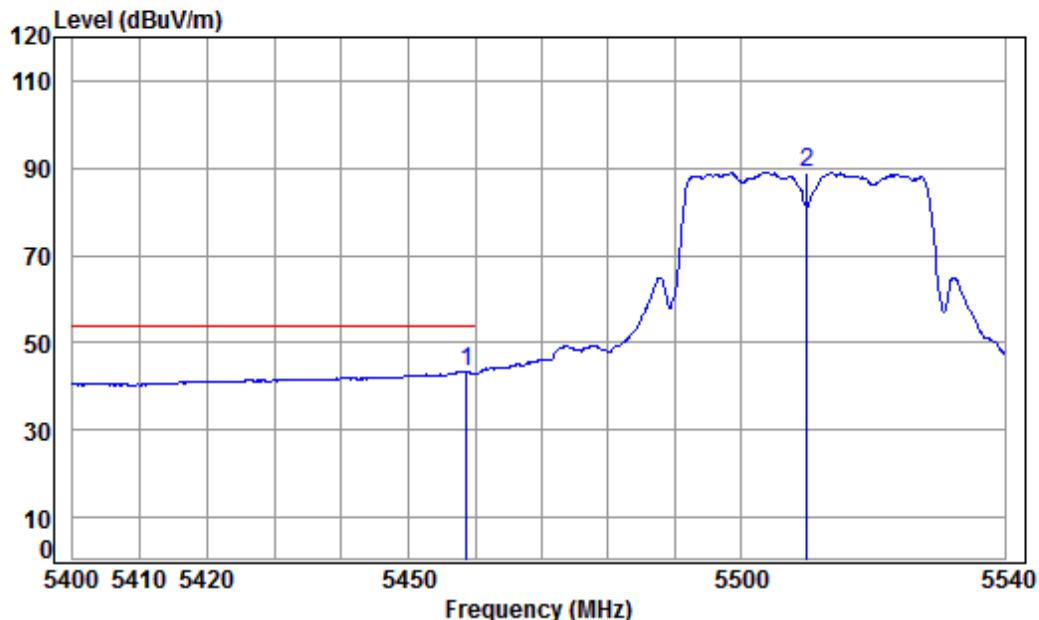


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5510 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5458.783	8.79	34.41	42.07	42.40	43.53	54.00	-10.47 Average
2		5510.000	8.89	34.41	42.02	87.85	89.13	-----	----- Average

Mode:g; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

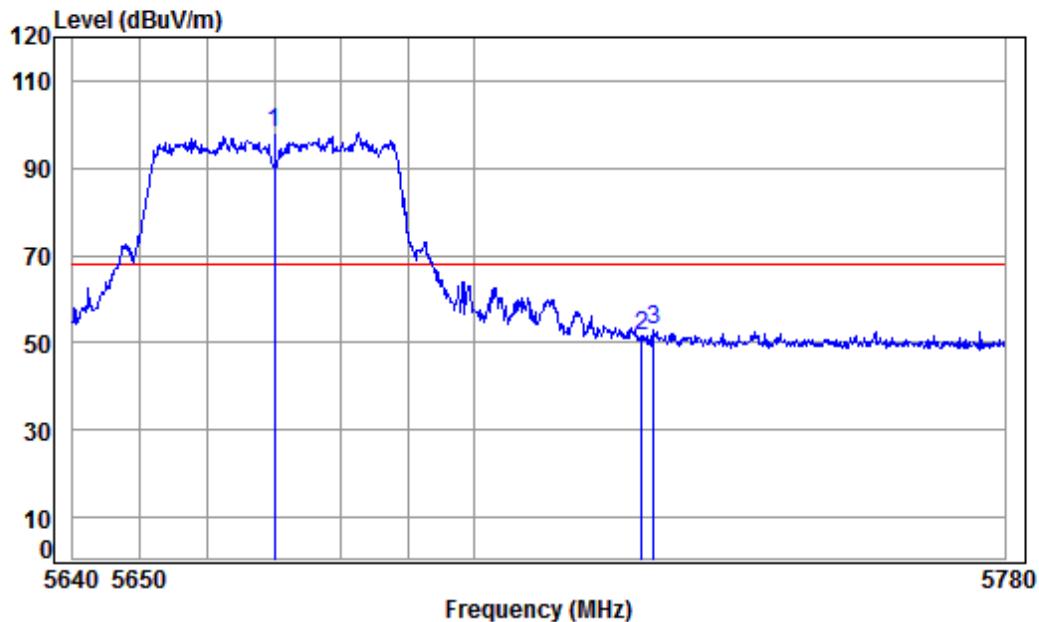


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5670 Band edge  
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5670.000	9.45	34.50	41.88	95.84	97.91	68.20	29.71	peak
2	5725.000	9.64	34.54	41.84	49.33	51.67	68.20	-16.53	peak
3	5726.816	9.65	34.54	41.84	50.36	52.71	68.20	-15.49	peak

Mode:g; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

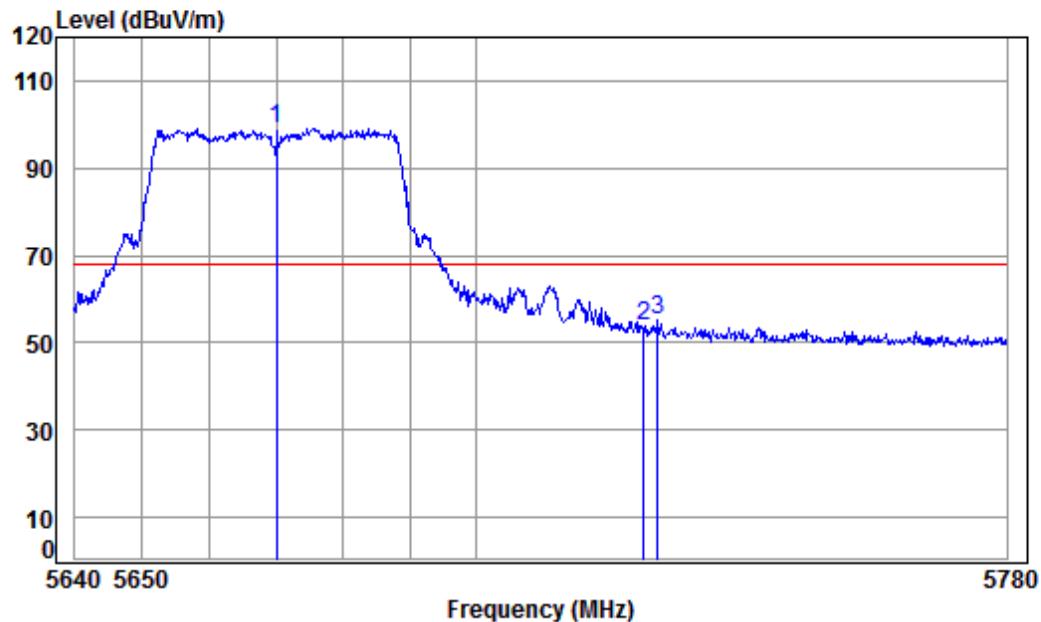


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5670 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5670.000	9.45	34.50	41.88	97.11	99.18	68.20	30.98 Peak
2		5725.000	9.64	34.54	41.84	51.28	53.62	68.20	-14.58 Peak
3		5727.097	9.65	34.54	41.84	52.68	55.03	68.20	-13.17 Peak

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

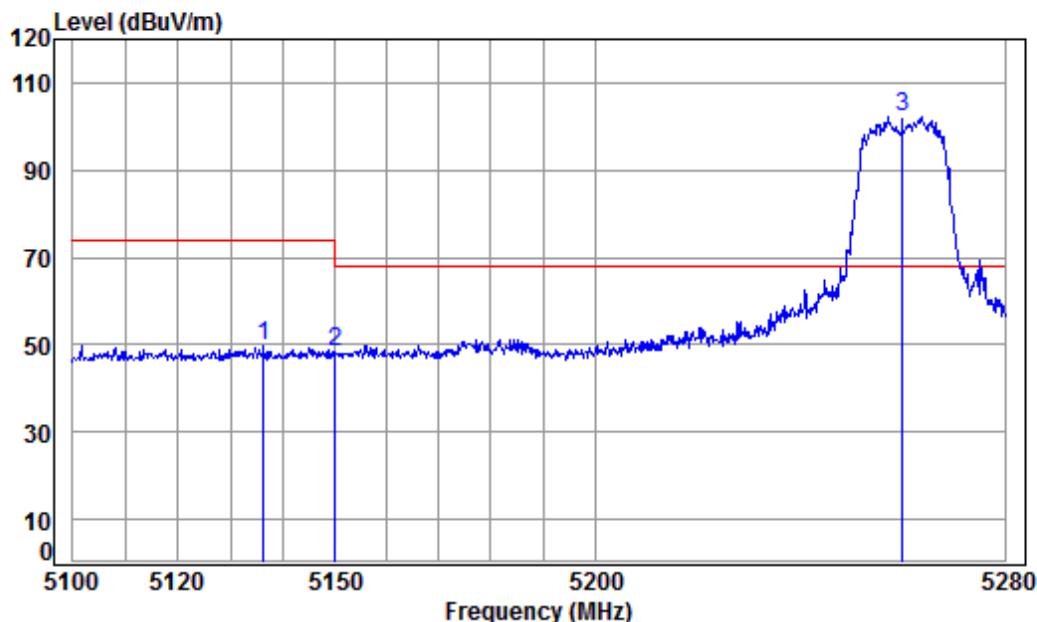


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	5136.393	8.30	34.47	42.37	49.29	49.69	74.00	-24.31	peak	
2	5149.980	8.33	34.47	42.36	48.03	48.47	74.00	-25.53	peak	
3 pp	5260.000	8.49	34.45	42.25	101.51	102.20	68.20	34.00	peak	

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

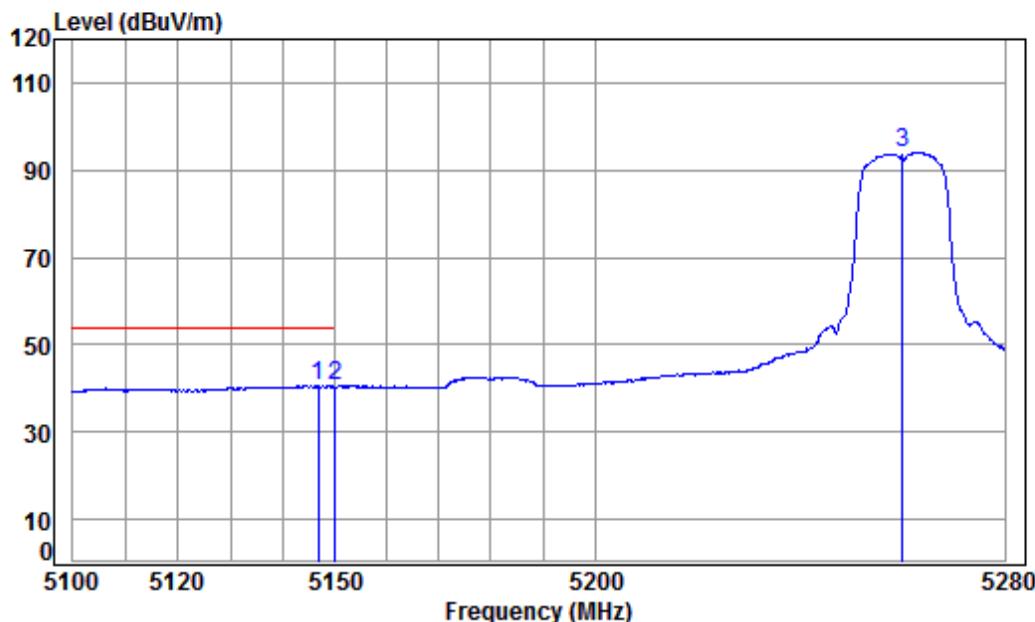


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5146.915	8.32	34.47	42.36	40.12	40.55	54.00	-13.45	Average
2	5149.980	8.33	34.47	42.36	40.03	40.47	54.00	-13.53	Average
3	5260.000	8.49	34.45	42.25	93.53	94.22	-----	-----	Average

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

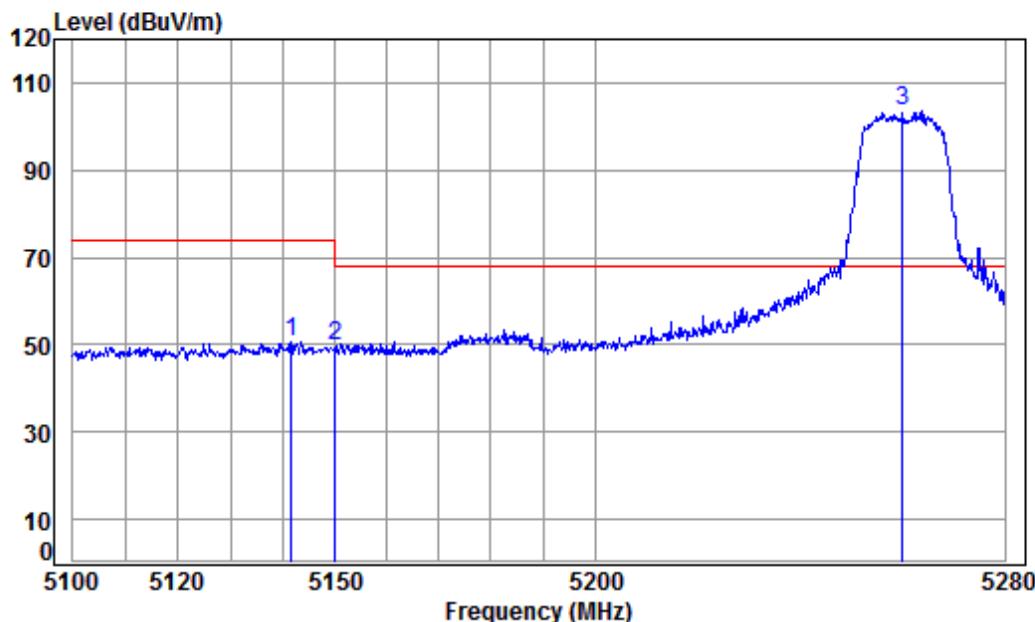


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5141.741	8.31	34.47	42.36	50.45	50.87	74.00	-23.13	Peak
2	5149.980	8.33	34.47	42.36	49.45	49.89	74.00	-24.11	Peak
3 pp	5260.000	8.49	34.45	42.25	102.69	103.38	68.20	35.18	Peak

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

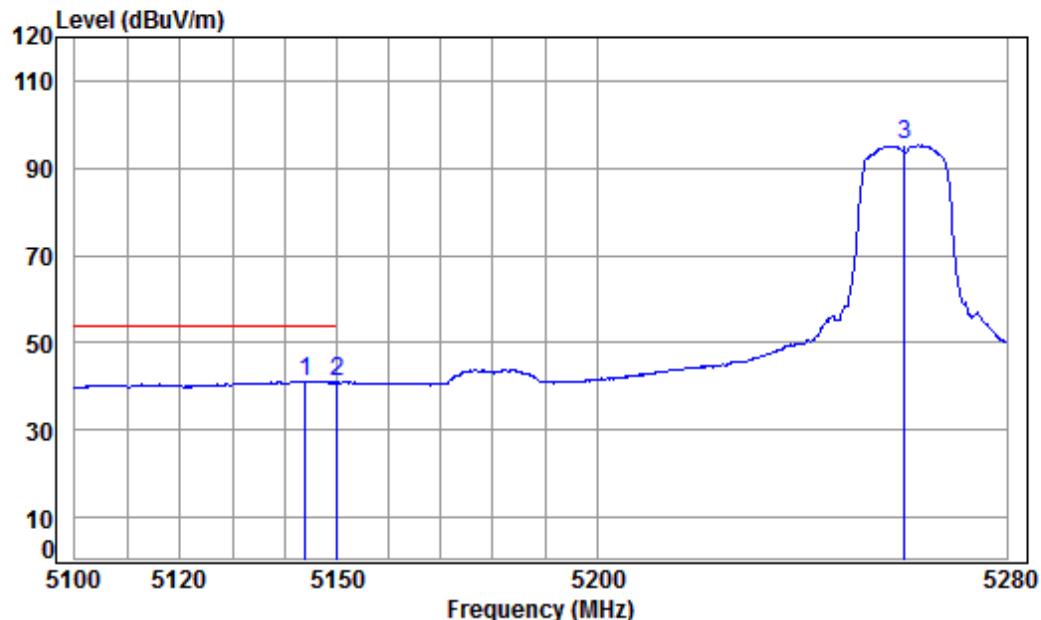


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5144.060	8.32	34.47	42.36	40.73	41.16	54.00	-12.84 Average
2		5149.980	8.33	34.47	42.36	40.58	41.02	54.00	-12.98 Average
3		5260.000	8.49	34.45	42.25	94.65	95.34	-----	----- Average

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

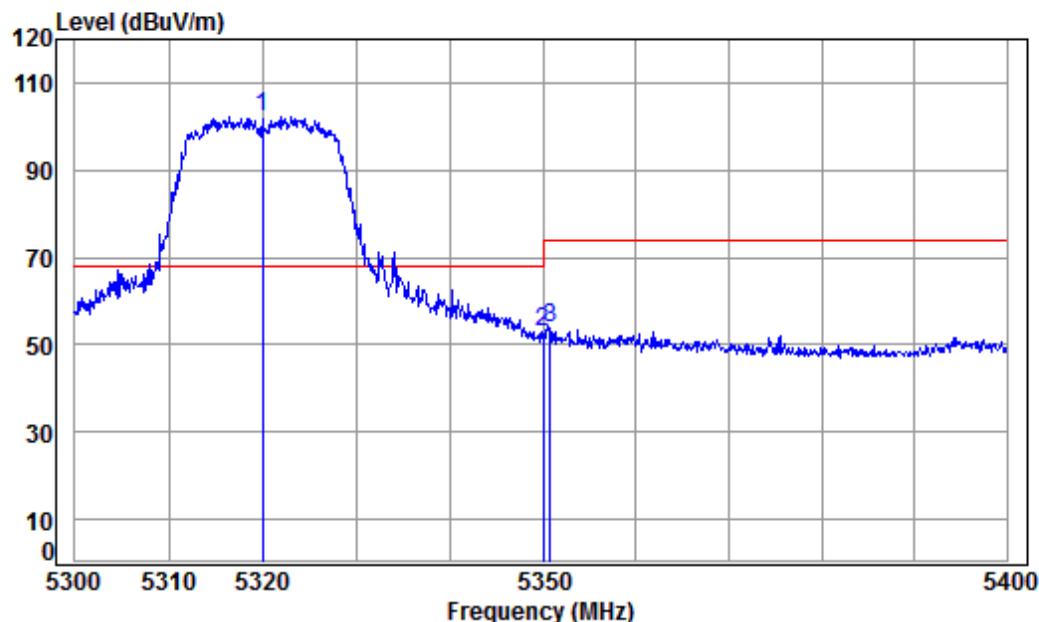


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	42.20	101.54	102.35	68.20	34.15	peak
2	5350.020	8.63	34.43	42.17	51.85	52.74	74.00	-21.26	peak
3	5350.767	8.63	34.43	42.17	52.79	53.68	74.00	-20.32	peak

Mode:f; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

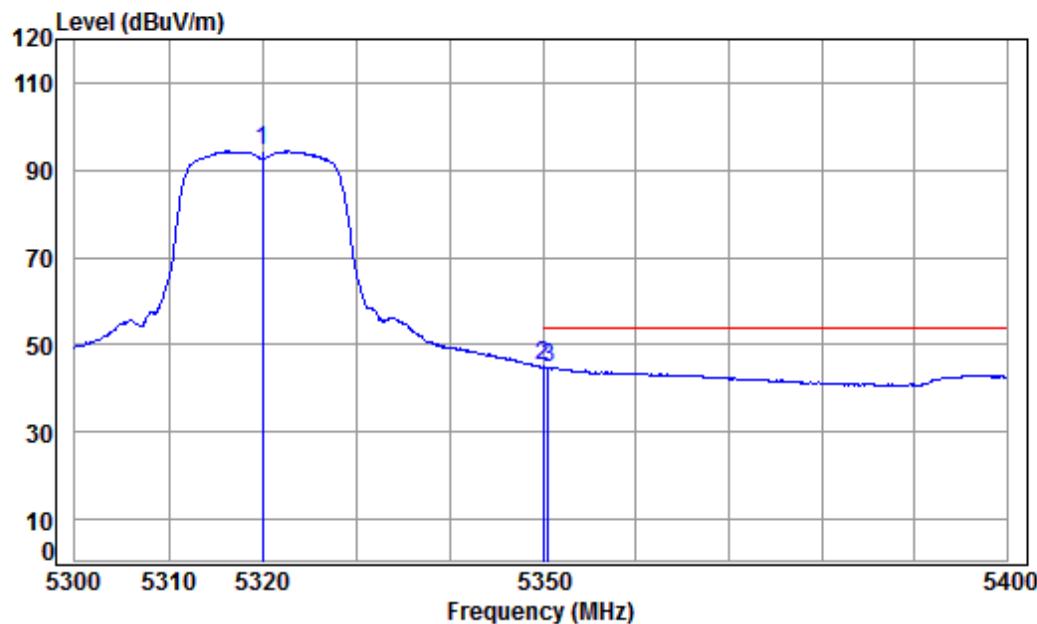


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	42.20	93.56	94.37	-----	-----	Average
2 pp	5350.020	8.63	34.43	42.17	44.17	45.06	54.00	-8.94	Average
3	5350.566	8.63	34.43	42.17	43.76	44.65	54.00	-9.35	Average

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

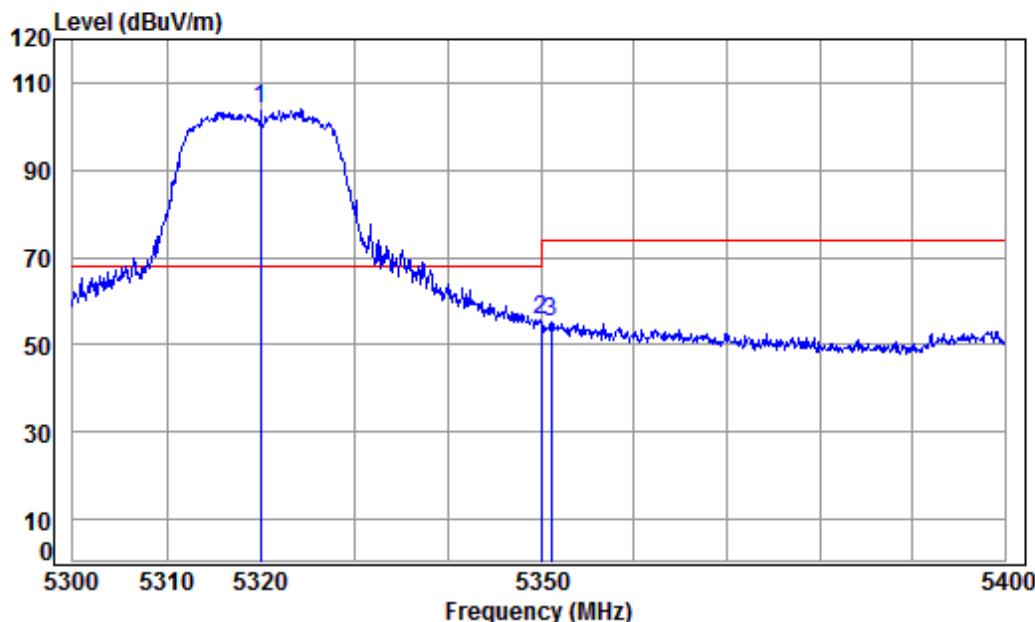


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5320.000	8.58	34.43	42.20	103.10	103.91	68.20	35.71	Peak
2		5350.020	8.63	34.43	42.17	54.56	55.45	74.00	-18.55	Peak
3		5351.066	8.63	34.43	42.17	54.10	54.99	74.00	-19.01	Peak

Mode:f; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

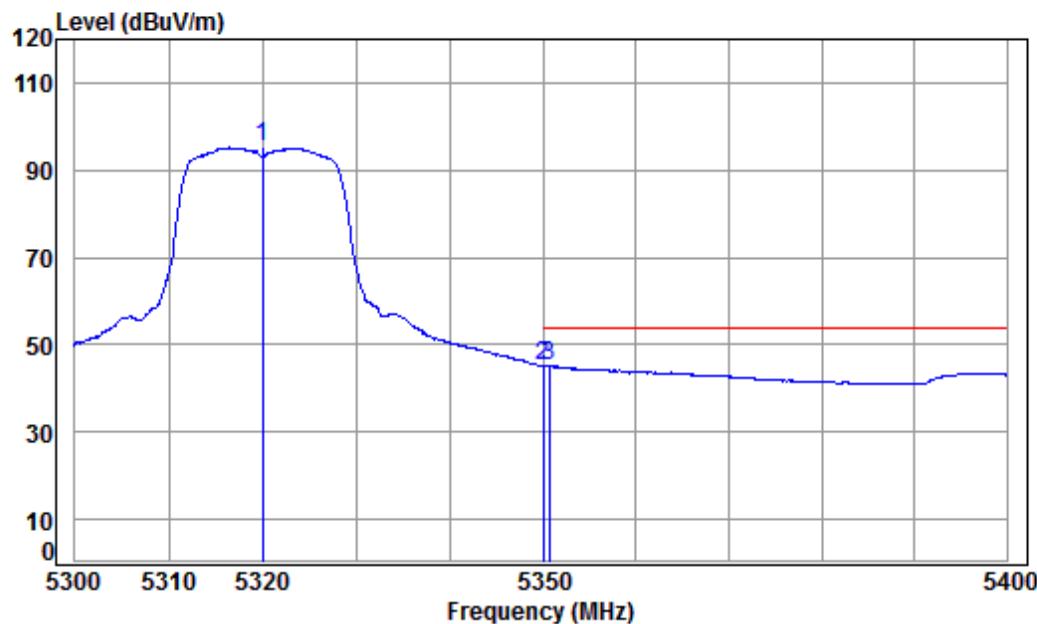


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11A

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		5320.000	8.58	34.43	42.20	94.33	95.14	-----	Average
2 pp		5350.020	8.63	34.43	42.17	44.37	45.26	54.00	-8.74 Average
3		5350.667	8.63	34.43	42.17	44.36	45.25	54.00	-8.75 Average

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

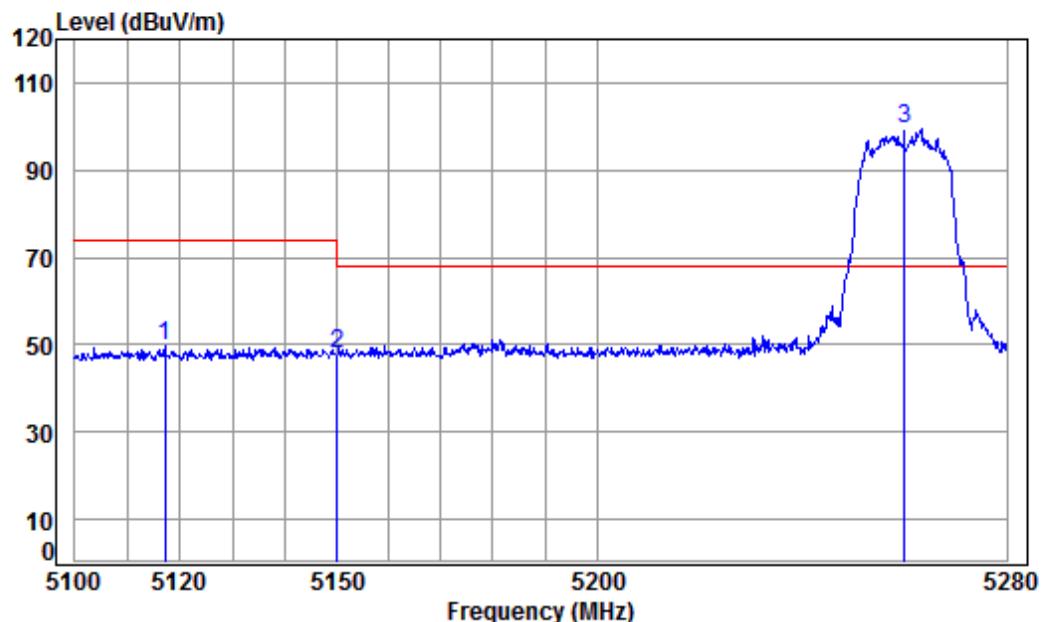


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5117.188	8.27	34.48	42.39	49.23	49.59	74.00	-24.41	peak
2	5149.980	8.33	34.47	42.36	47.60	48.04	74.00	-25.96	peak
3 pp	5260.000	8.49	34.45	42.25	98.60	99.29	68.20	31.09	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

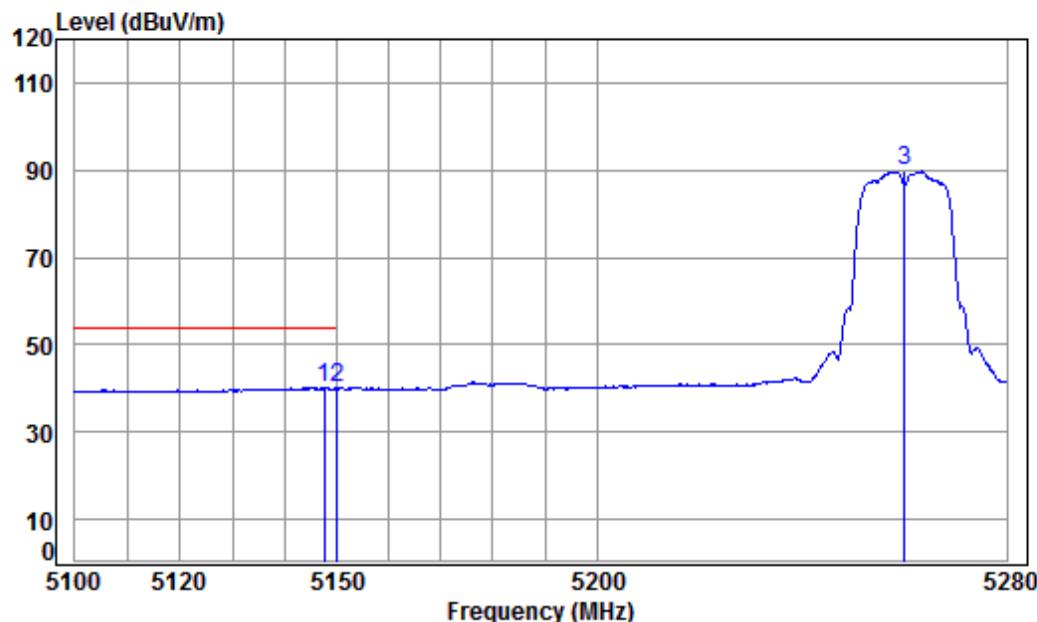


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5147.629	8.32	34.47	42.36	39.66	40.09	54.00	-13.91 Average
2		5149.980	8.33	34.47	42.36	39.63	40.07	54.00	-13.93 Average
3		5260.000	8.49	34.45	42.25	89.00	89.69	-----	----- Average

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

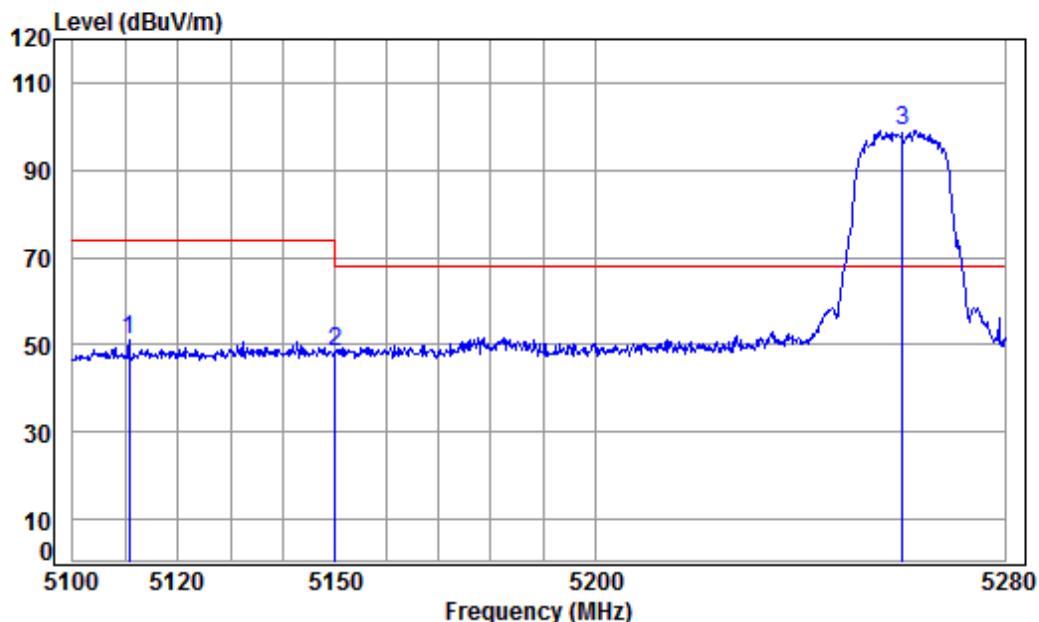

Condition: 3m VERTICAL


Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11N20

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
--	---------------	-------------	------------------	---------------	----------------	---------------	---------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5110.802	8.26	34.48	42.39	50.54	50.89	74.00	-23.11 Peak
2	5149.980	8.33	34.47	42.36	47.81	48.25	74.00	-25.75 Peak
3 pp	5260.000	8.49	34.45	42.25	98.24	98.93	68.20	30.73 Peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

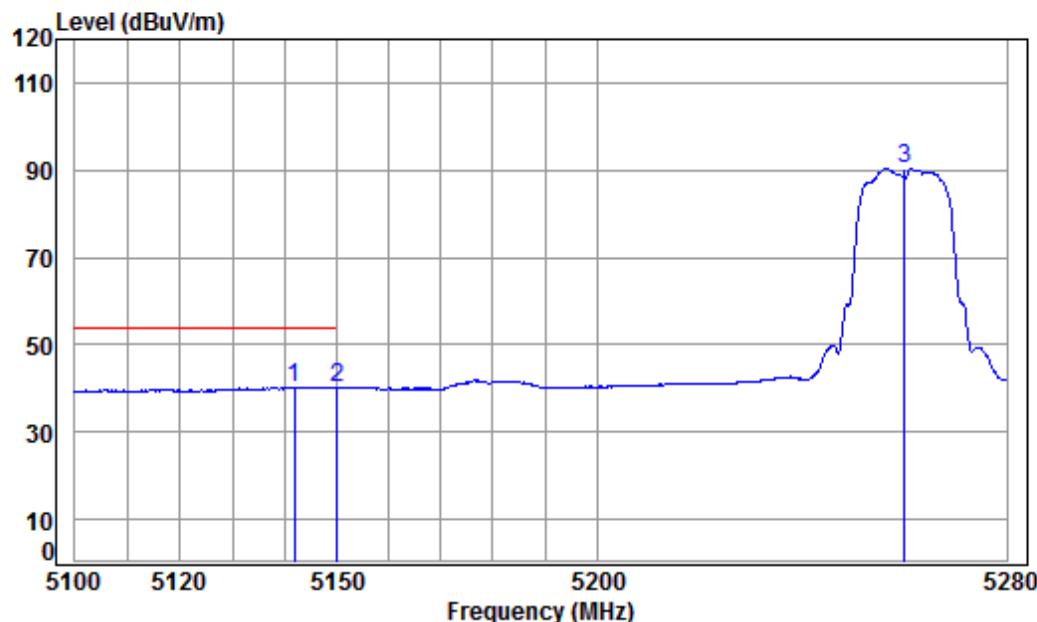


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5260 Band edge  
: 5G WIFI 11N20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit	Remark
				Level			
1 pp	5141.919	8.31	34.47	42.36	39.82	40.24	54.00 -13.76 Average
2	5149.980	8.33	34.47	42.36	39.72	40.16	54.00 -13.84 Average
3	5260.000	8.49	34.45	42.25	89.71	90.40	----- ----- Average

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

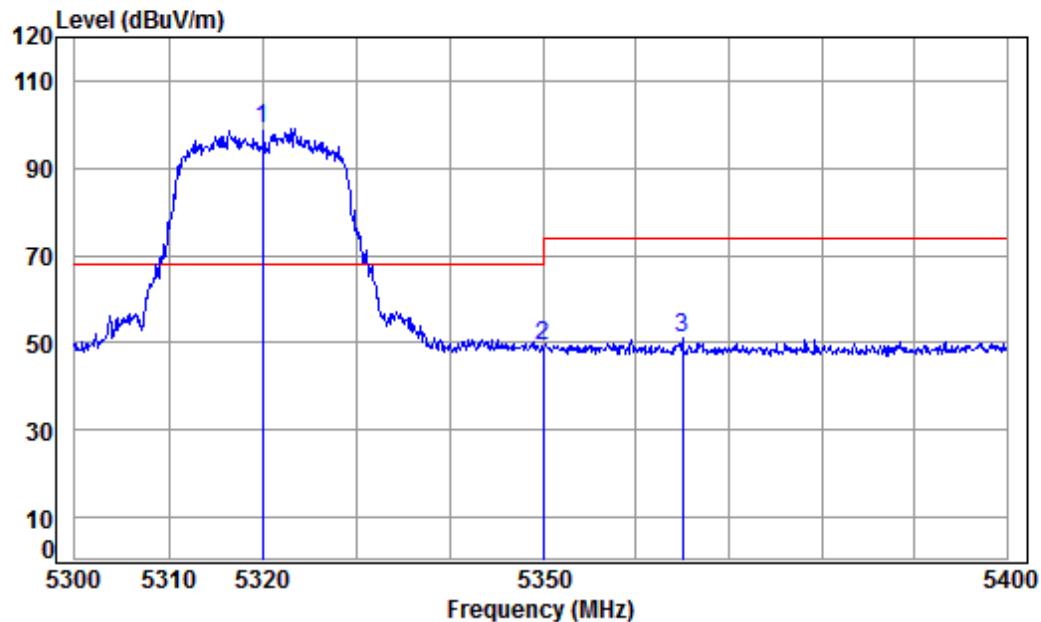


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5320.000	8.58	34.43	42.20	98.41	99.22	68.20	31.02 peak
2		5350.020	8.63	34.43	42.17	48.45	49.34	74.00	-24.66 peak
3		5364.988	8.65	34.43	42.16	50.31	51.23	74.00	-22.77 peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

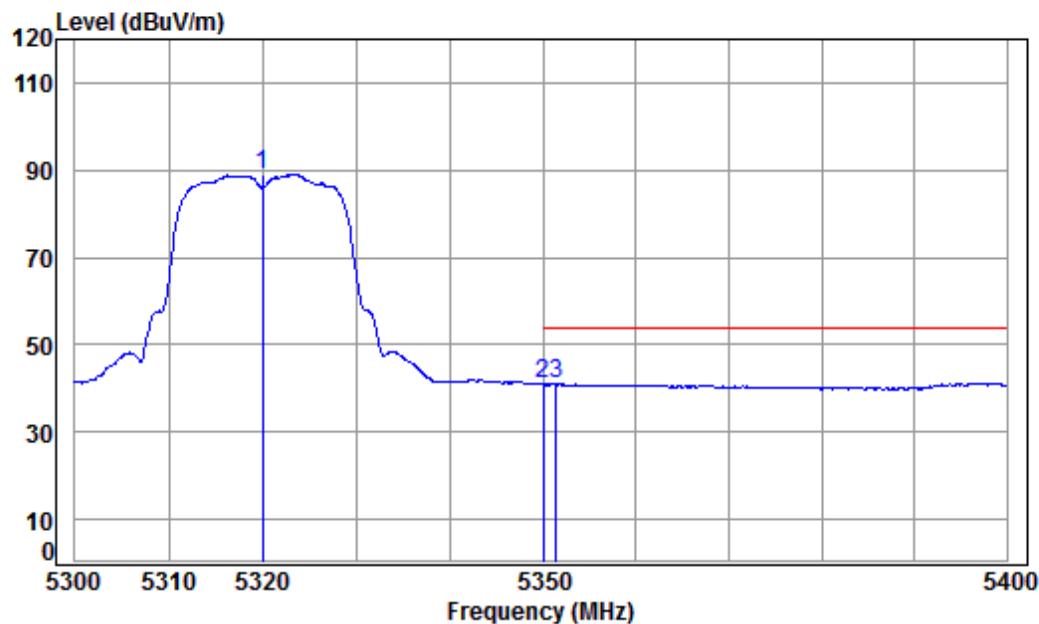


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	42.20	88.24	89.05	-----	-----	Average
2	5350.020	8.63	34.43	42.17	39.99	40.88	54.00	-13.12	Average
3 pp	5351.467	8.63	34.43	42.17	40.15	41.04	54.00	-12.96	Average

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

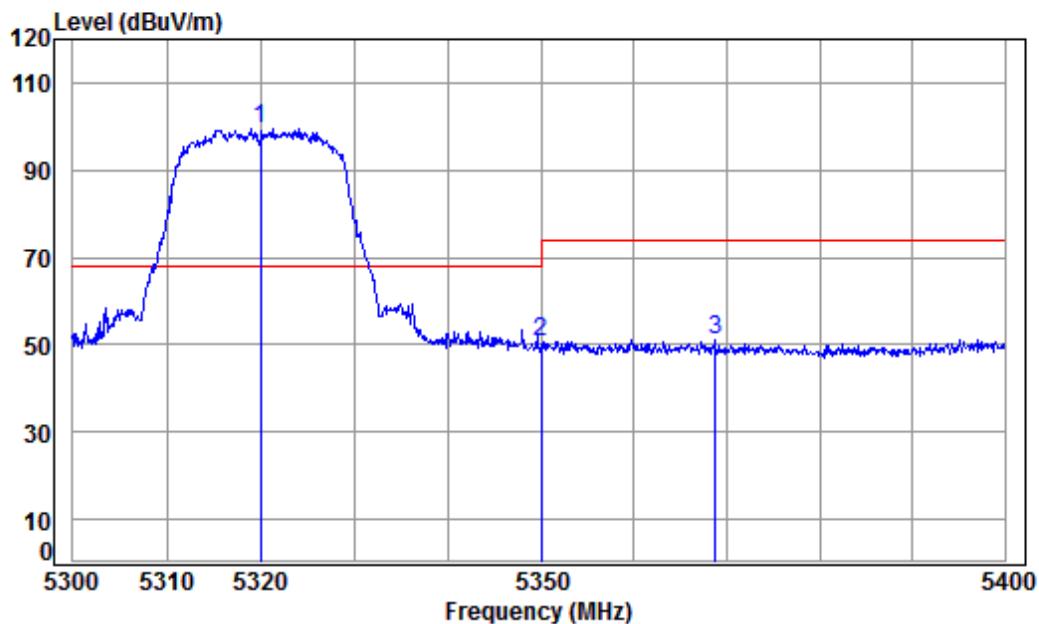

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5320.000	8.58	34.43	42.20	98.67	99.48	68.20	31.28 Peak
2		5350.020	8.63	34.43	42.17	49.93	50.82	74.00	-23.18 Peak
3		5368.700	8.66	34.43	42.15	50.32	51.26	74.00	-22.74 Peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

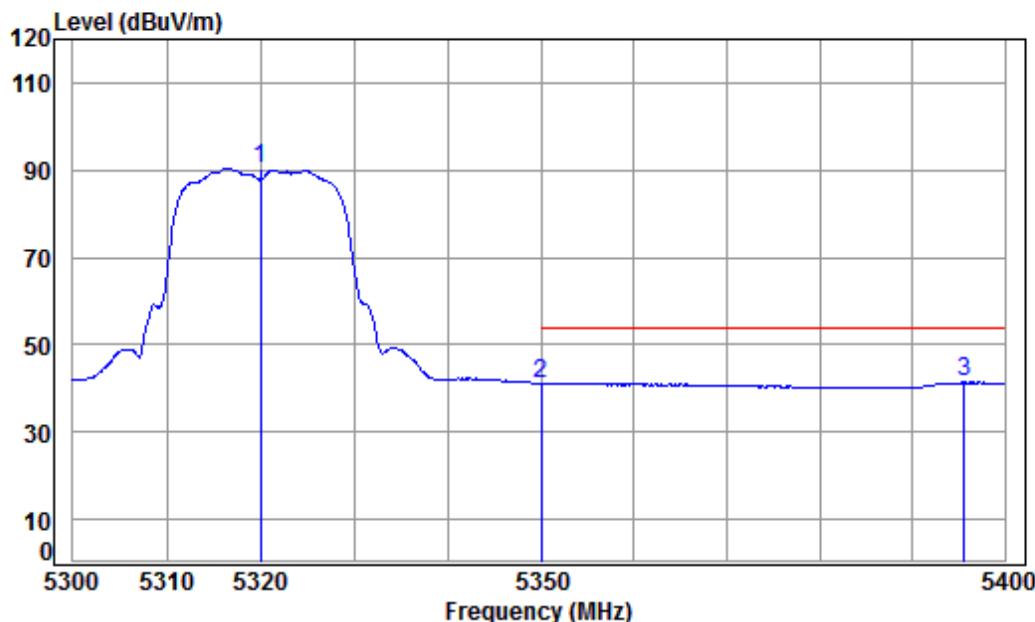


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5320 Band edge  
: 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	42.20	89.44	90.25	-----	-----	Average
2	5350.020	8.63	34.43	42.17	40.28	41.17	54.00	-12.83	Average
3 pp	5395.561	8.70	34.42	42.13	40.47	41.46	54.00	-12.54	Average

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

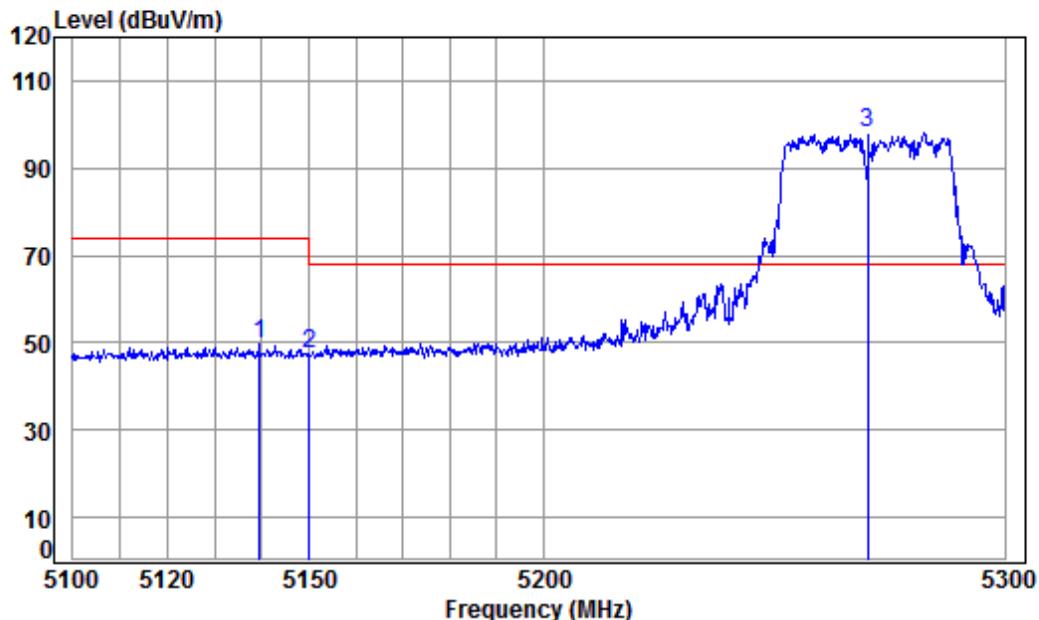


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5270 Band edge  
: 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5139.387	8.31	34.47	42.37	49.26	49.67	74.00	-24.33	peak
2	5149.980	8.33	34.47	42.36	47.18	47.62	74.00	-26.38	peak
3 pp	5270.000	8.51	34.44	42.24	97.19	97.90	68.20	29.70	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

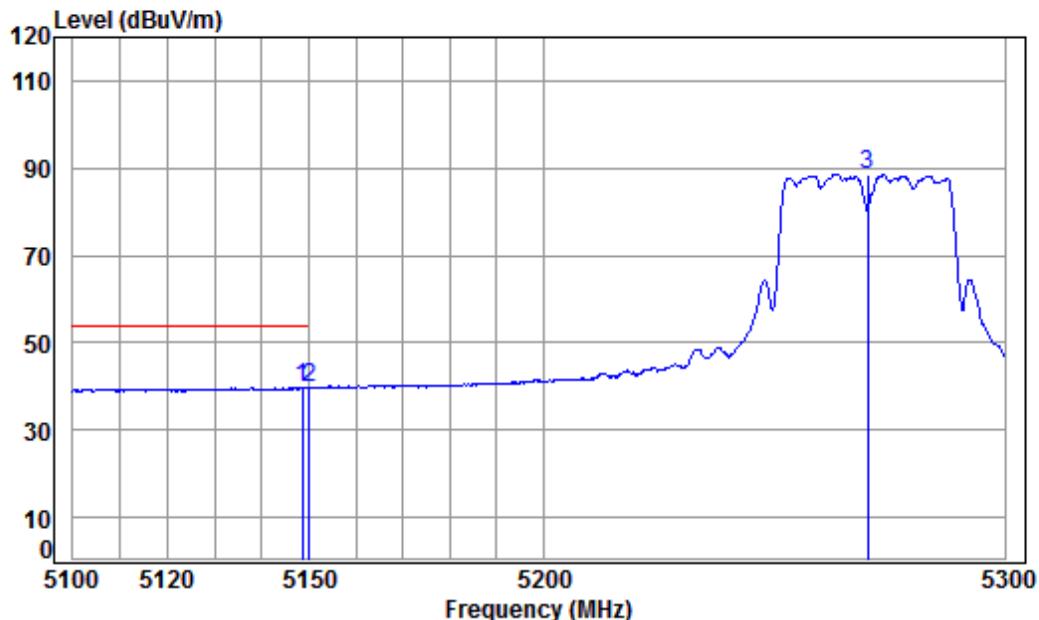

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit	Remark	
				Level				
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5148.489	8.32	34.47	42.36	39.30	39.73	54.00	-14.27 Average
2	5149.980	8.33	34.47	42.36	39.14	39.58	54.00	-14.42 Average
3	5270.000	8.51	34.44	42.24	87.97	88.68	-----	----- Average

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

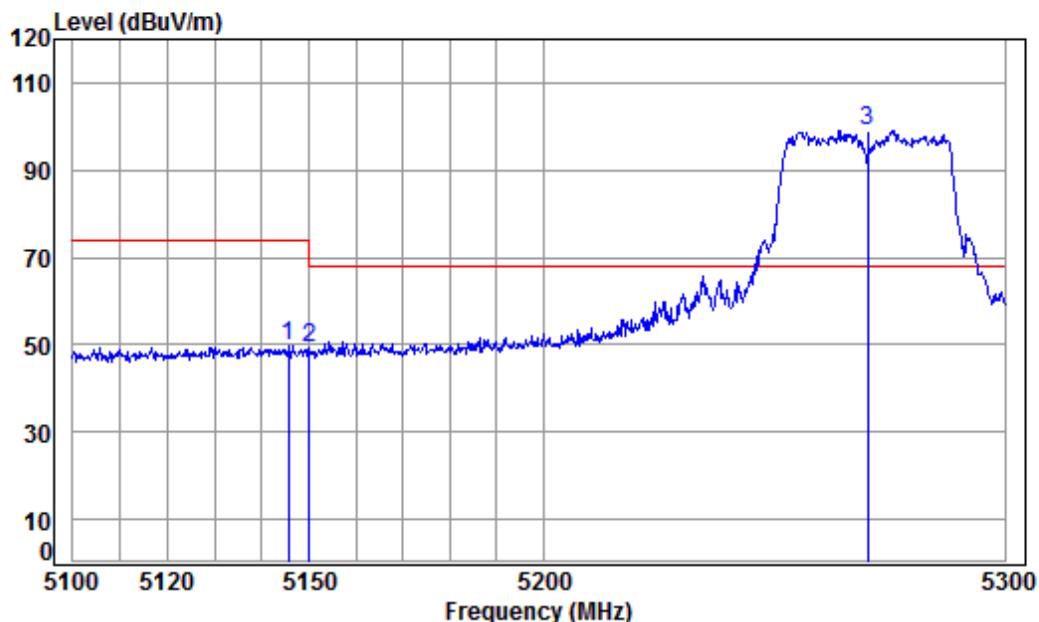


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5270 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	5145.519	8.32	34.47	42.36	49.35	49.78	74.00	-24.22	Peak	
2	5149.980	8.33	34.47	42.36	48.73	49.17	74.00	-24.83	Peak	
3 pp	5270.000	8.51	34.44	42.24	98.41	99.12	68.20	30.92	Peak	

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

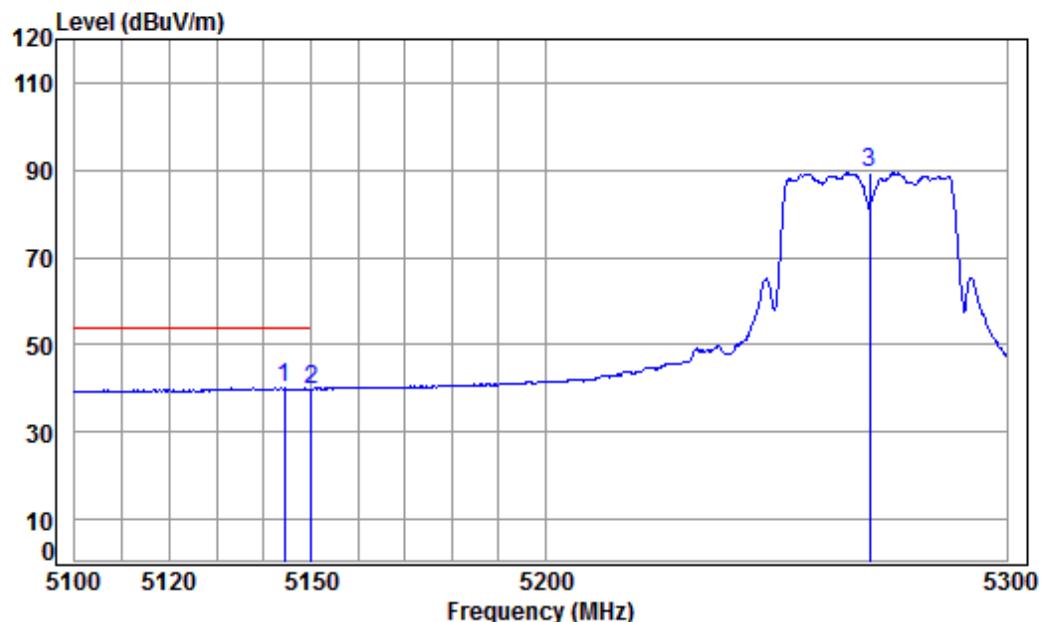


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5270 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5144.332	8.32	34.47	42.36	39.69	40.12	54.00	-13.88 Average
2		5149.980	8.33	34.47	42.36	39.48	39.92	54.00	-14.08 Average
3		5270.000	8.51	34.44	42.24	88.64	89.35	-----	----- Average

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

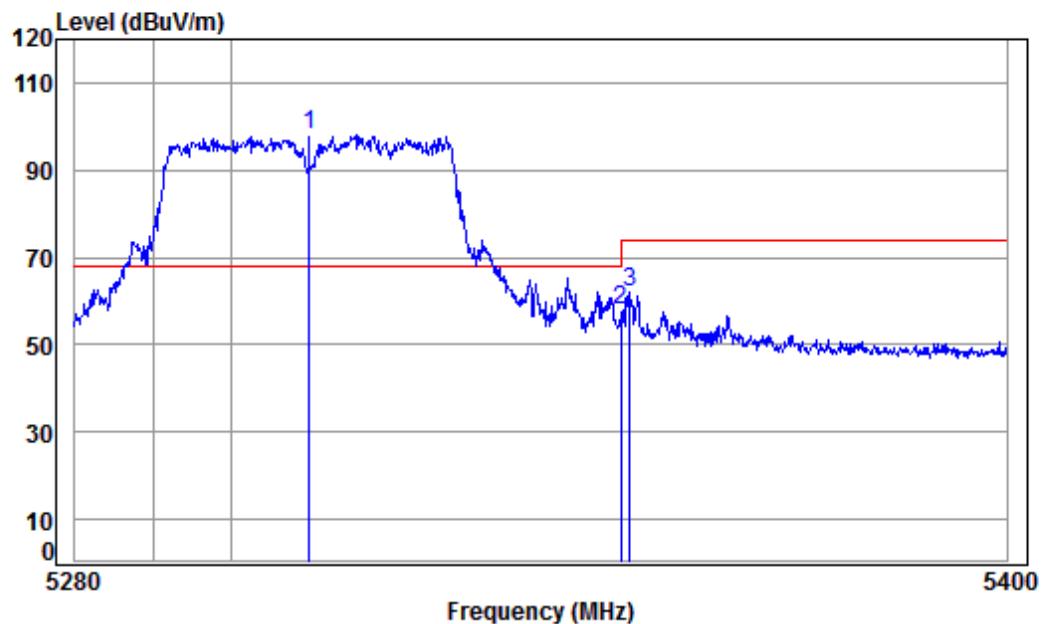


Condition: 3m HORIZONTAL

Job No : 00126CR/00127CR

Mode : 5310 Band edge  
: 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5310.000	8.57	34.44	42.21	97.14	97.94	68.20	29.74	peak
2	5350.020	8.63	34.43	42.17	57.05	57.94	74.00	-16.06	peak
3	5351.195	8.63	34.43	42.17	61.34	62.23	74.00	-11.77	peak

Mode:f; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

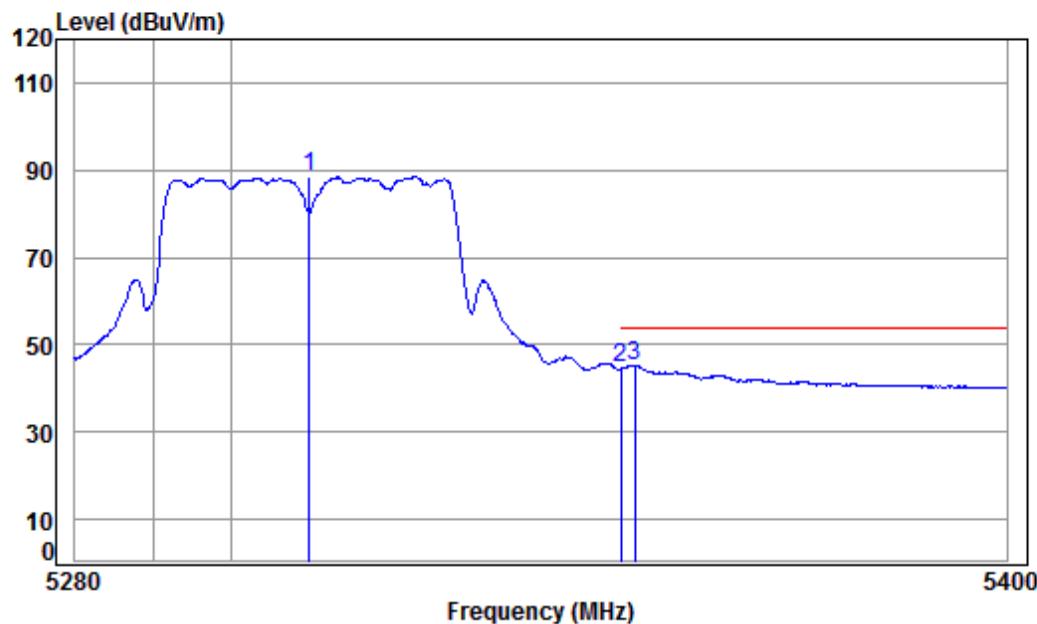

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	8.57	34.44	42.21	87.66	88.46	-----	-----	Average
2	5350.020	8.63	34.43	42.17	43.75	44.64	54.00	-9.36	Average
3 pp	5351.796	8.63	34.43	42.17	44.30	45.19	54.00	-8.81	Average

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

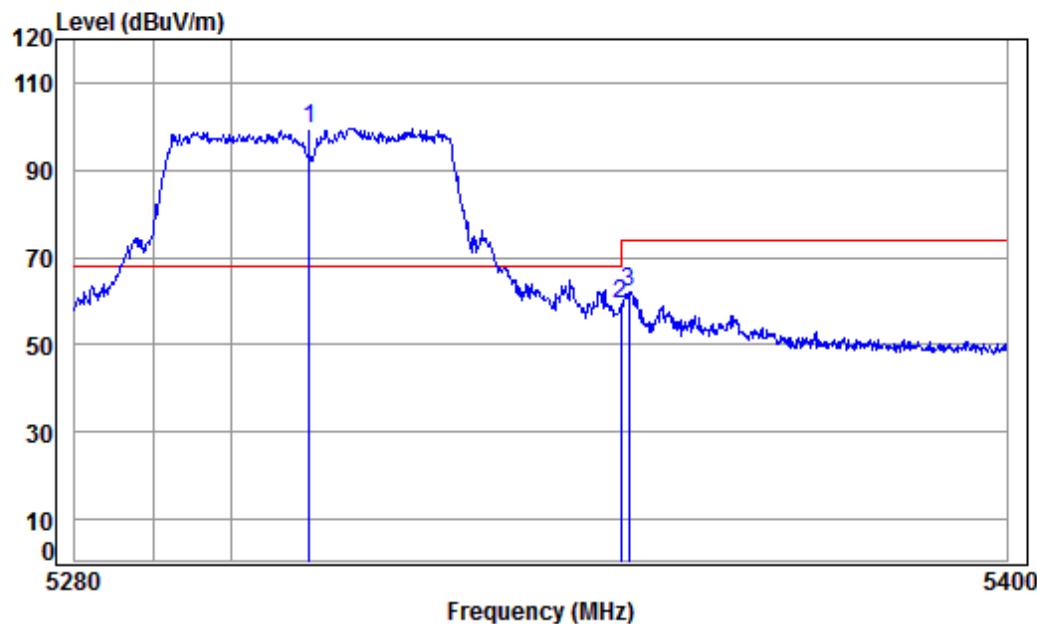


Condition: 3m VERTICAL

Job No : 00126CR/00127CR

Mode : 5310 Band edge  
: 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	5310.000	8.57	34.44	42.21	98.87	99.67	68.20	31.47 Peak
2		5350.020	8.63	34.43	42.17	58.22	59.11	74.00	-14.89 Peak
3		5350.955	8.63	34.43	42.17	61.27	62.16	74.00	-11.84 Peak

Mode:f; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

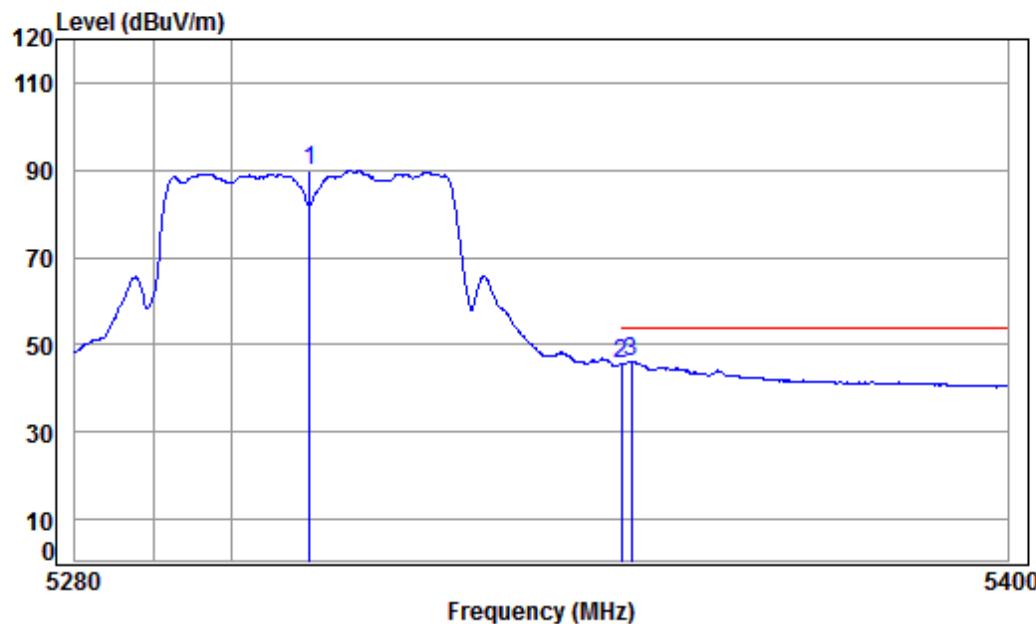

Condition: 3m VERTICAL  
Job No : 00126CR/00127CR  
Mode : 5310 Band edge  
: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	8.57	34.44	42.21	89.10	89.90	-----	-----	Average
2	5350.020	8.63	34.43	42.17	44.89	45.78	54.00	-8.22	Average
3 pp	5351.315	8.63	34.43	42.17	45.30	46.19	54.00	-7.81	Average

## **7.12 Frequency Stability**

Test Requirement	47 CFR Part 15, Subpart C 15.407 (g)
Test Method:	ANSI C63.10 (2013) Section 6.8
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 7.12.1 E.U.T. Operation

#### Operating Environment:

Temperature: 17.9 °C      Humidity: 36.1 % RH      Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.


f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

The worst case for final test:  
e:TX mode (Band 1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

h:TX mode (Band 3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

g:TX mode (Band 2C)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

f:TX mode (Band 2A)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); Only the data of worst case is recorded in the report.

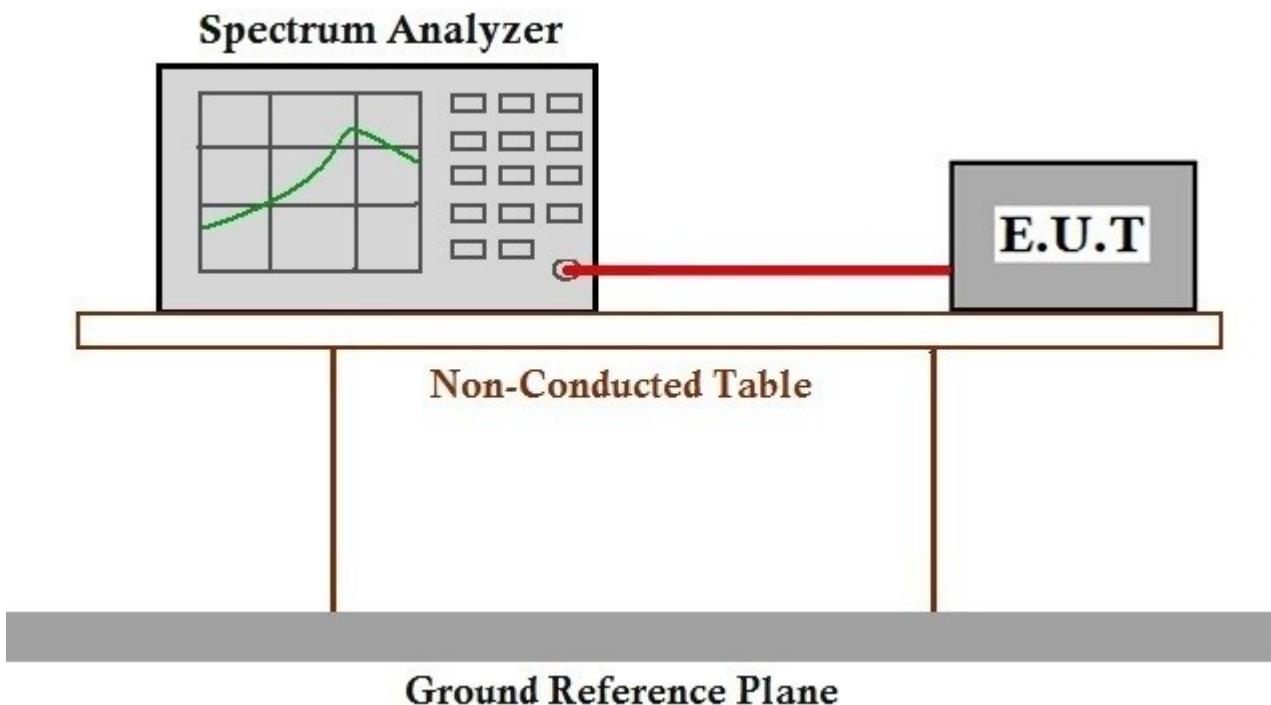**7.12.2 Test Setup Diagram****7.12.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

## 8 Appendix

### Appendix 15.407

#### 1. Emission Bandwidth Measurement

Test Mode	Test Channel	Ant	EBW[MHz]	Limit[MHz]	Verdict
11A	5180	Ant 1	19.860	---	PASS
11A	5180	Ant 2	19.920	---	PASS
11A	5220	Ant 1	19.830	---	PASS
11A	5220	Ant 2	19.650	---	PASS
11A	5240	Ant 1	19.980	---	PASS
11A	5240	Ant 2	19.680	---	PASS
11A	5260	Ant 1	19.860	---	PASS
11A	5260	Ant 2	19.860	---	PASS
11A	5300	Ant 1	19.800	---	PASS
11A	5300	Ant 2	19.470	---	PASS
11A	5320	Ant 1	19.680	---	PASS
11A	5320	Ant 2	19.860	---	PASS
11A	5500	Ant 1	19.800	---	PASS
11A	5500	Ant 2	19.830	---	PASS
11A	5580	Ant 1	19.830	---	PASS
11A	5580	Ant 2	20.100	---	PASS
11A	5700	Ant 1	19.890	---	PASS
11A	5700	Ant 2	19.830	---	PASS
11A	5745	Ant 1	16.380	>=0.5	PASS
11A	5745	Ant 2	16.410	>=0.5	PASS
11A	5785	Ant 1	16.470	>=0.5	PASS
11A	5785	Ant 2	16.350	>=0.5	PASS
11A	5825	Ant 1	16.350	>=0.5	PASS
11A	5825	Ant 2	16.350	>=0.5	PASS
11N20	5180	Ant 1	20.070	---	PASS
11N20	5180	Ant 2	20.010	---	PASS
11N20	5220	Ant 1	20.100	---	PASS
11N20	5220	Ant 2	20.010	---	PASS
11N20	5240	Ant 1	20.100	---	PASS


11N20	5240	Ant 2	20.040	---	PASS
11N20	5260	Ant 1	20.040	---	PASS
11N20	5260	Ant 2	20.040	---	PASS
11N20	5300	Ant 1	20.220	---	PASS
11N20	5300	Ant 2	20.160	---	PASS
11N20	5320	Ant 1	20.130	---	PASS
11N20	5320	Ant 2	20.160	---	PASS
11N20	5500	Ant 1	20.100	---	PASS
11N20	5500	Ant 2	20.190	---	PASS
11N20	5580	Ant 1	19.950	---	PASS
11N20	5580	Ant 2	20.070	---	PASS
11N20	5700	Ant 1	20.010	---	PASS
11N20	5700	Ant 2	20.130	---	PASS
11N20	5745	Ant 1	17.280	$\geq 0.5$	PASS
11N20	5745	Ant 2	16.710	$\geq 0.5$	PASS
11N20	5785	Ant 1	16.710	$\geq 0.5$	PASS
11N20	5785	Ant 2	17.010	$\geq 0.5$	PASS
11N20	5825	Ant 1	17.010	$\geq 0.5$	PASS
11N20	5825	Ant 2	16.980	$\geq 0.5$	PASS
11N40	5190	Ant 1	45.300	---	PASS
11N40	5190	Ant 2	45.300	---	PASS
11N40	5230	Ant 1	45.540	---	PASS
11N40	5230	Ant 2	45.120	---	PASS
11N40	5270	Ant 1	45.300	---	PASS
11N40	5270	Ant 2	44.880	---	PASS
11N40	5310	Ant 1	45.360	---	PASS
11N40	5310	Ant 2	45.360	---	PASS
11N40	5510	Ant 1	45.660	---	PASS
11N40	5510	Ant 2	45.240	---	PASS
11N40	5550	Ant 1	45.480	---	PASS
11N40	5550	Ant 2	45.780	---	PASS
11N40	5670	Ant 1	45.420	---	PASS
11N40	5670	Ant 2	45.360	---	PASS
11N40	5755	Ant 1	36.540	$\geq 0.5$	PASS





**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**


Report No.: SZEM180100012605  
Page: 199 of 381


11N40	5755	Ant 2	36.540	>=0.5	PASS
11N40	5795	Ant 1	36.600	>=0.5	PASS
11N40	5795	Ant 2	36.540	>=0.5	PASS

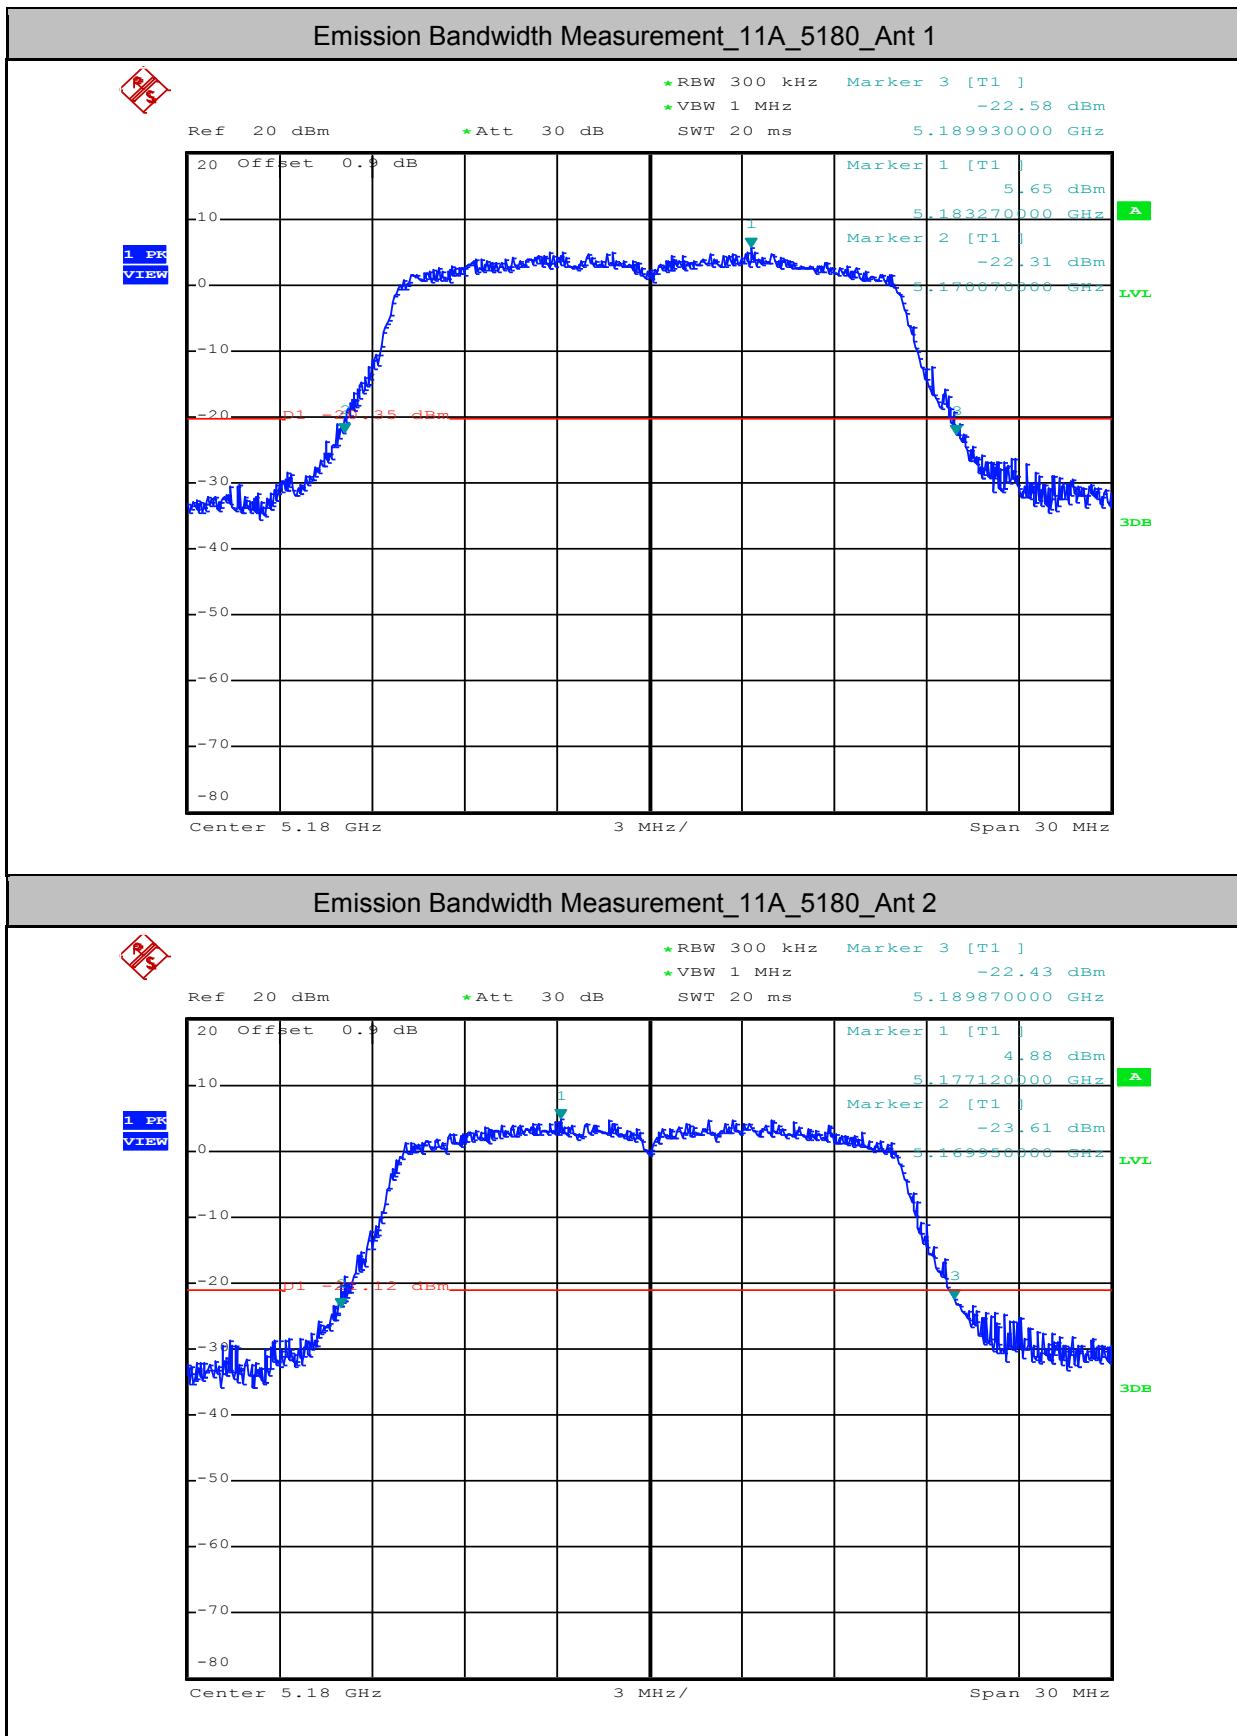


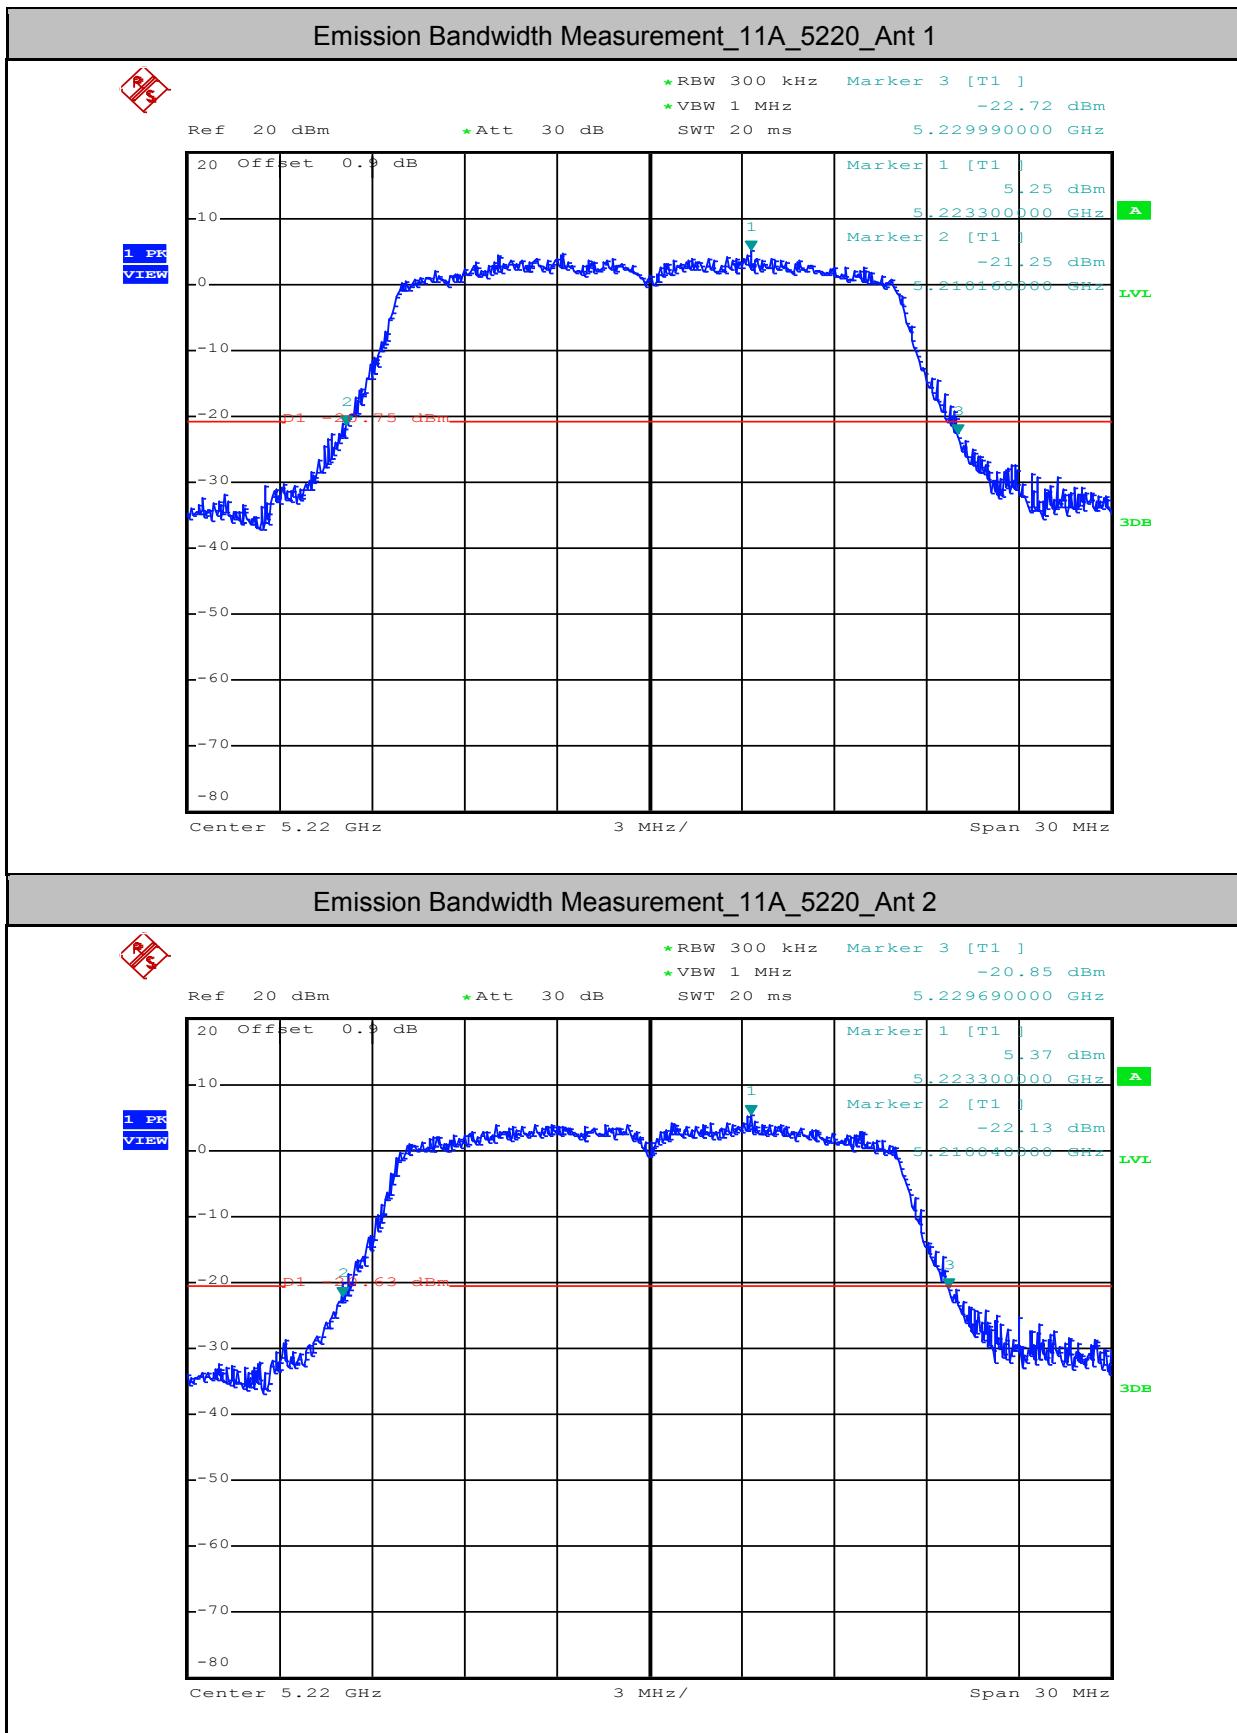


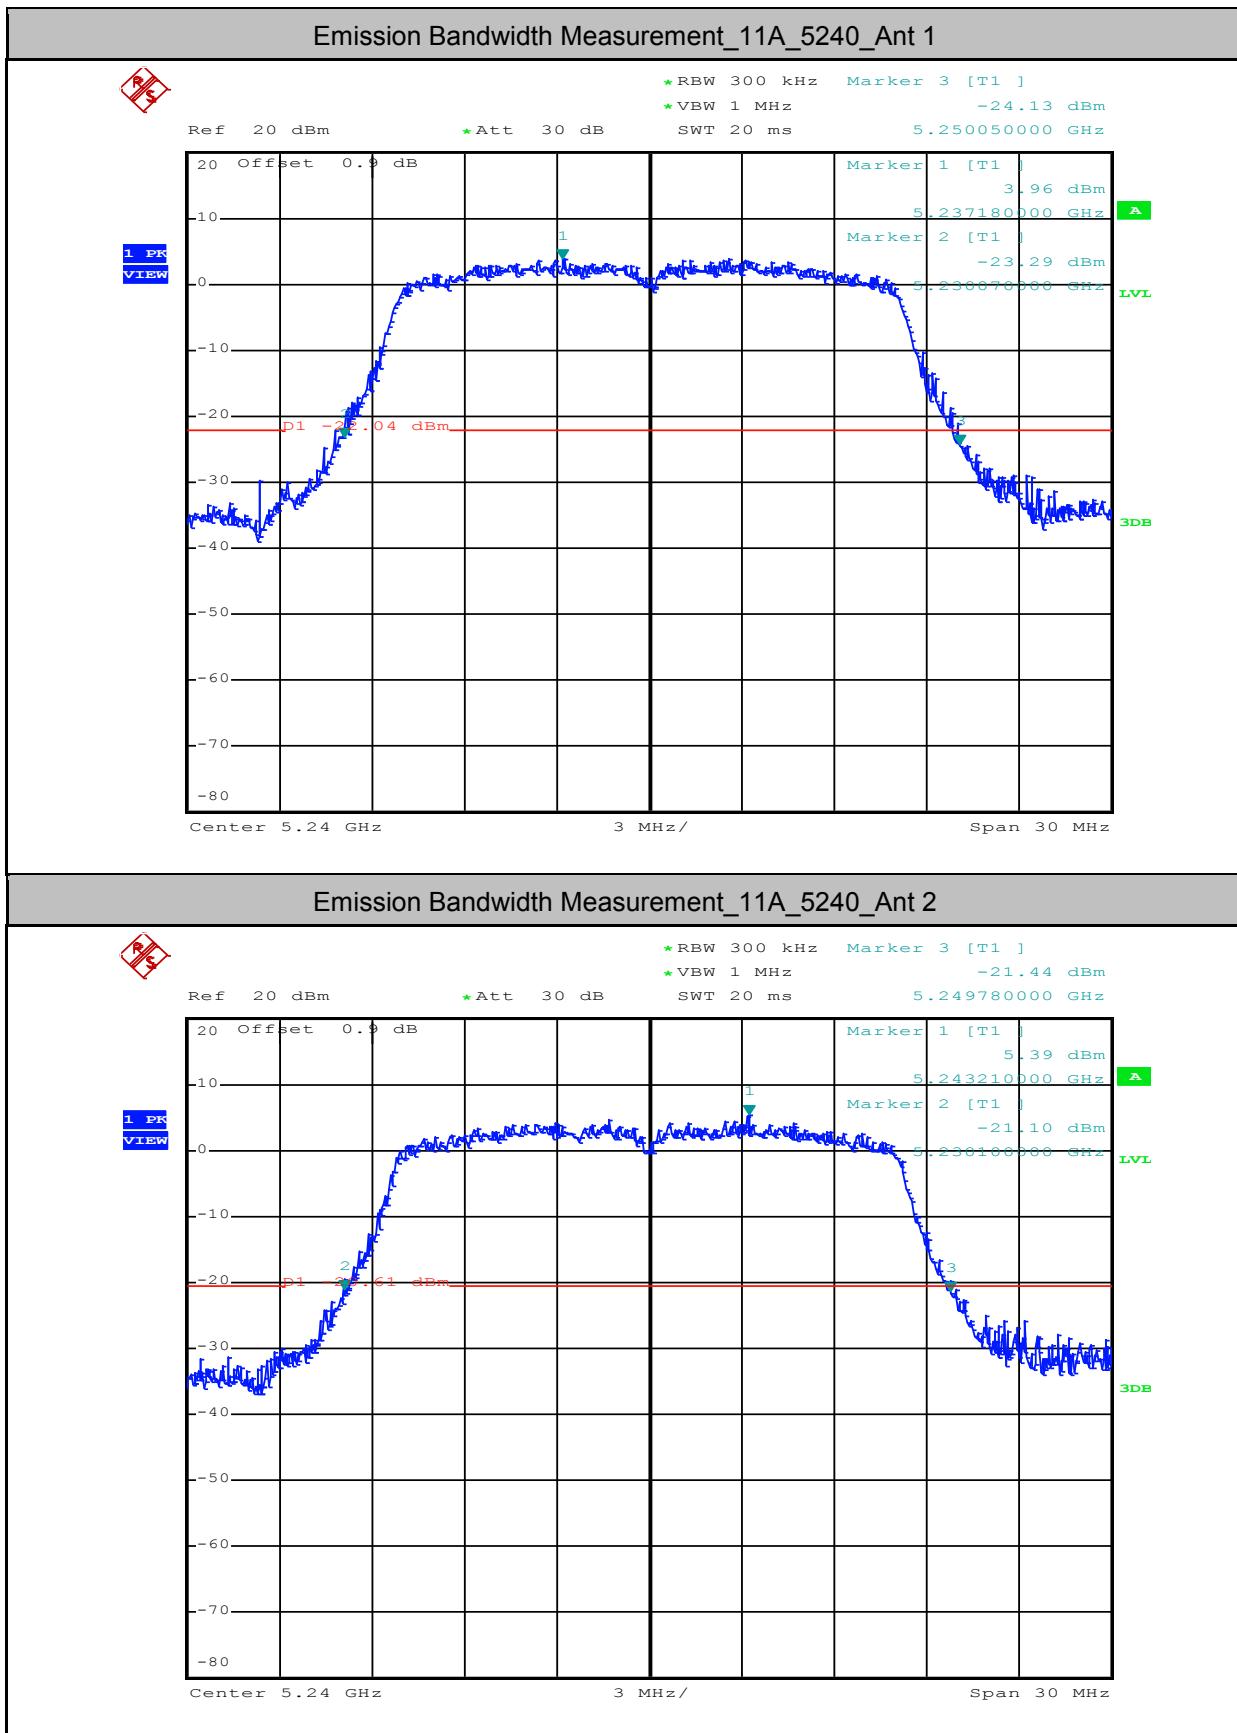


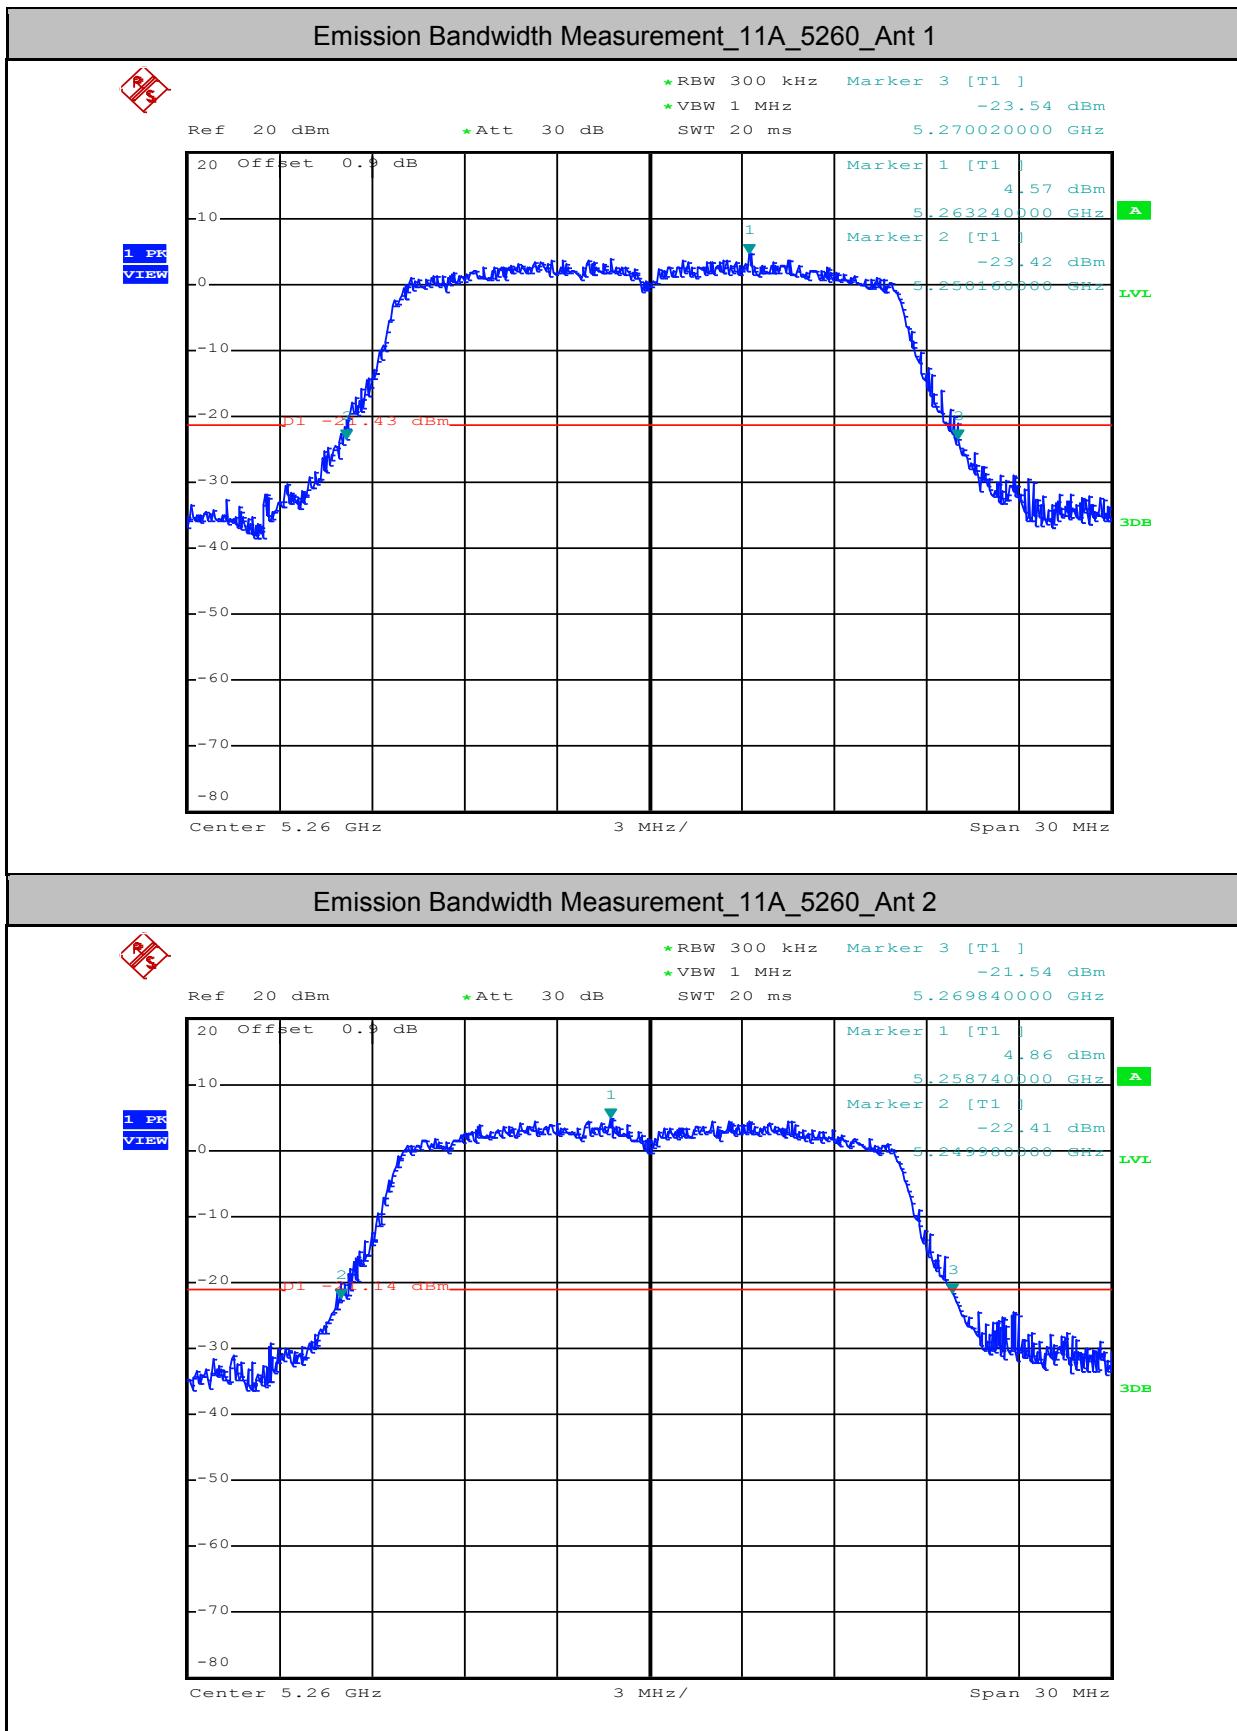


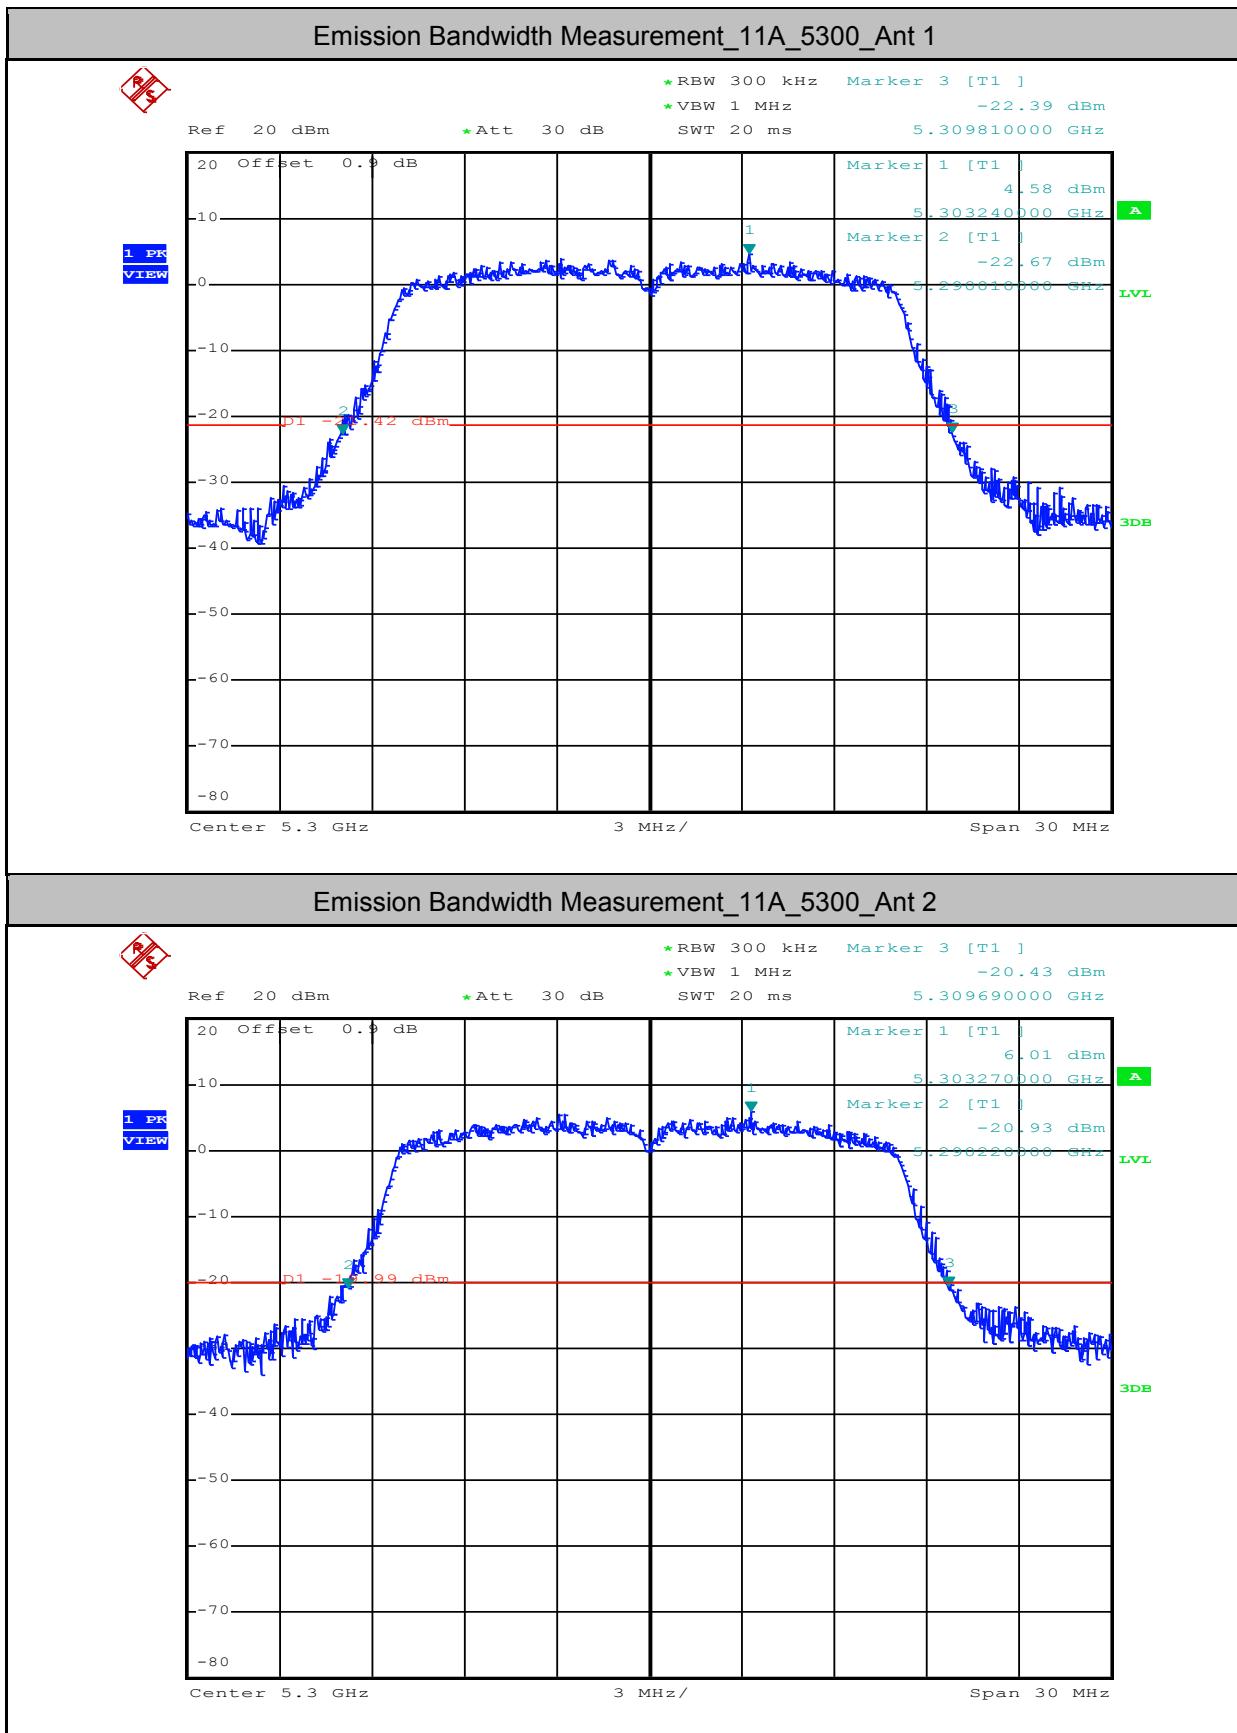


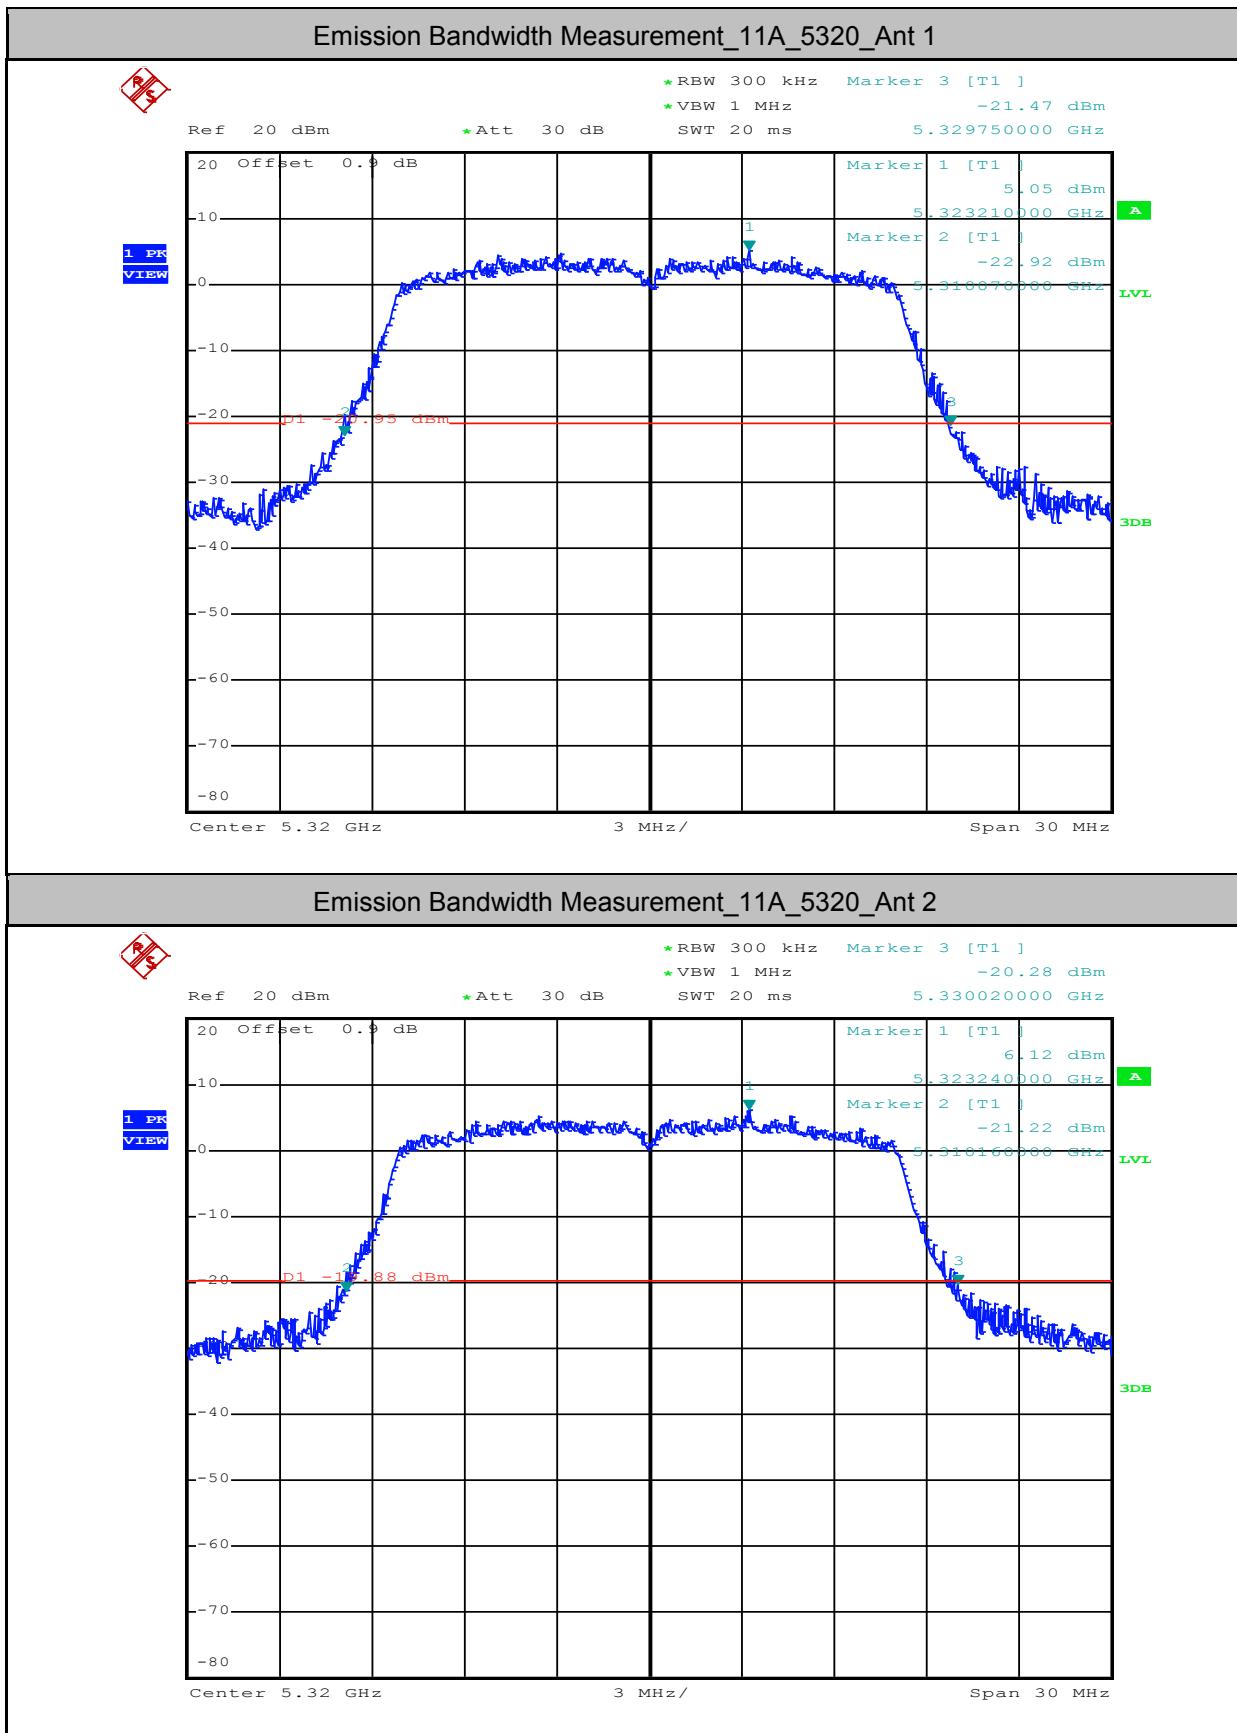


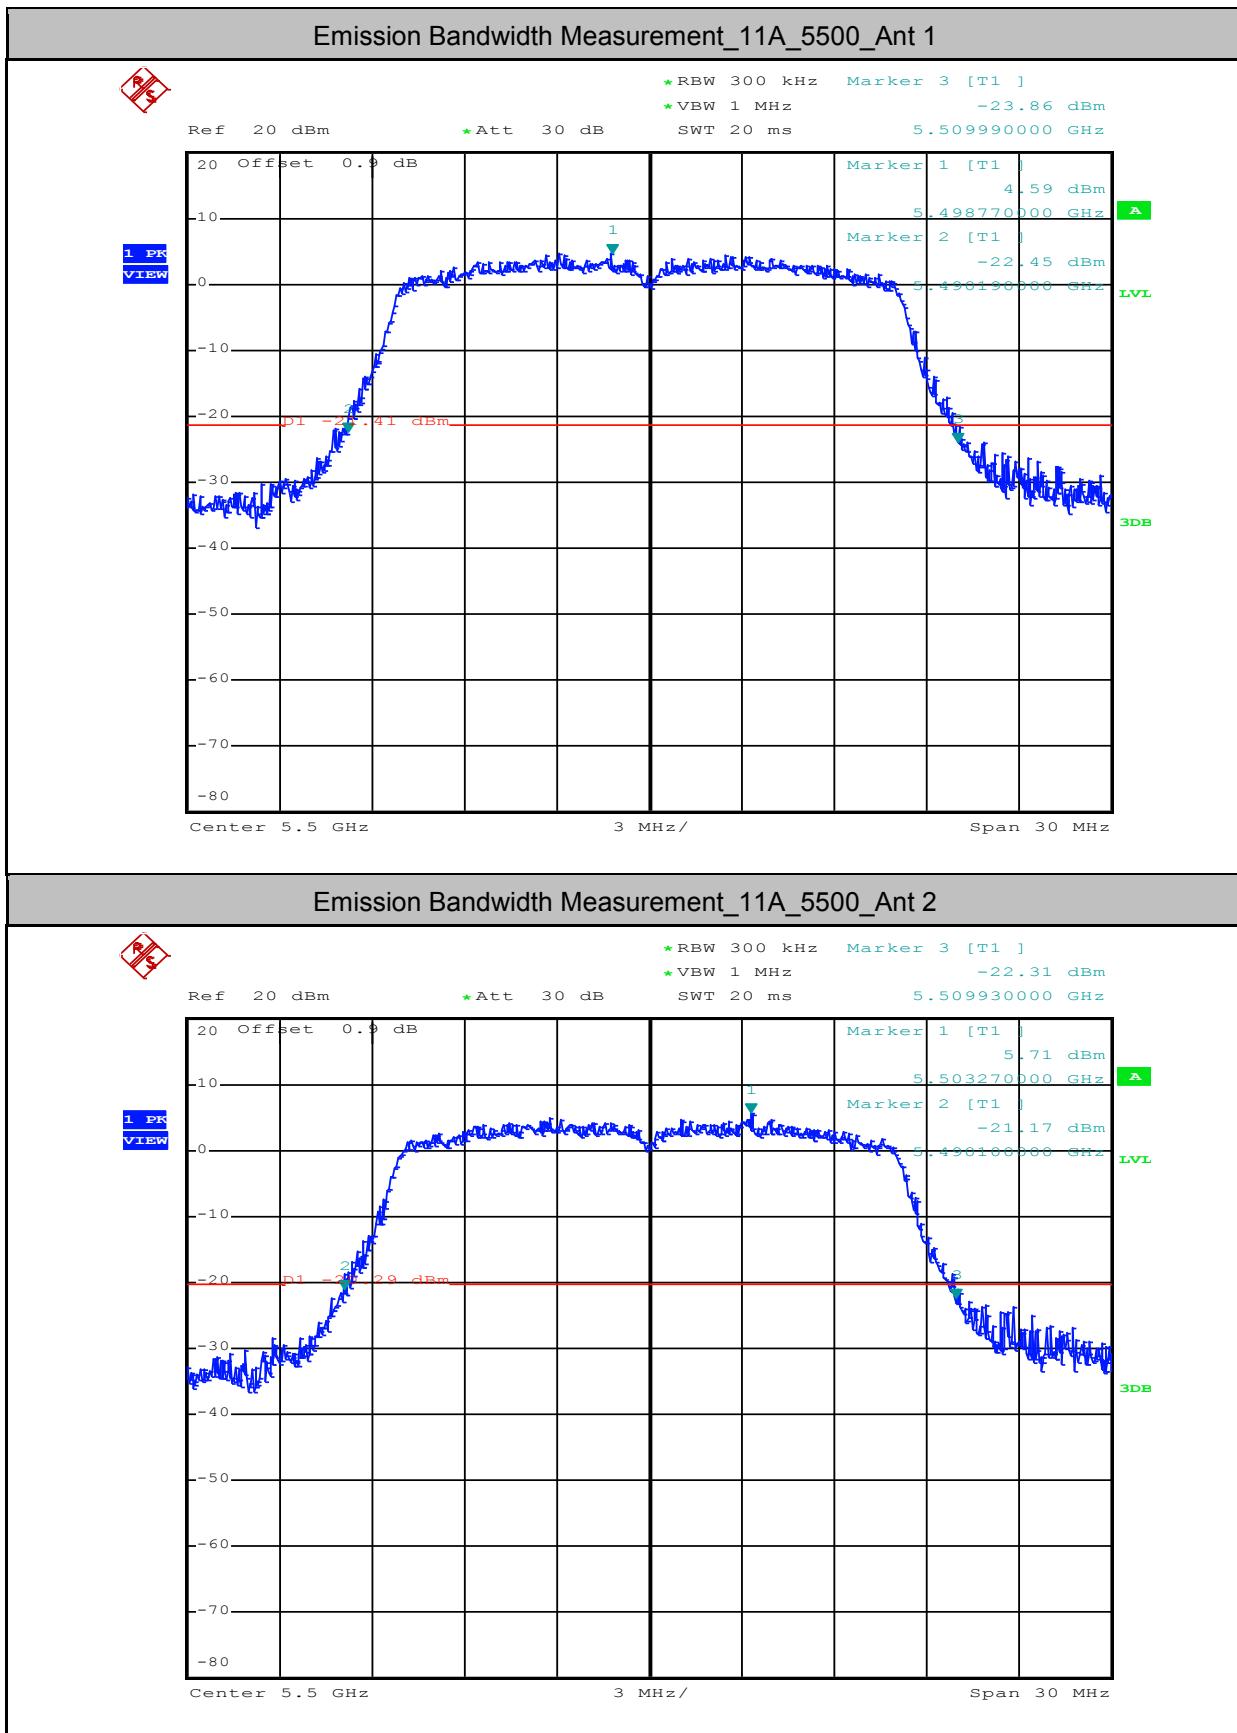


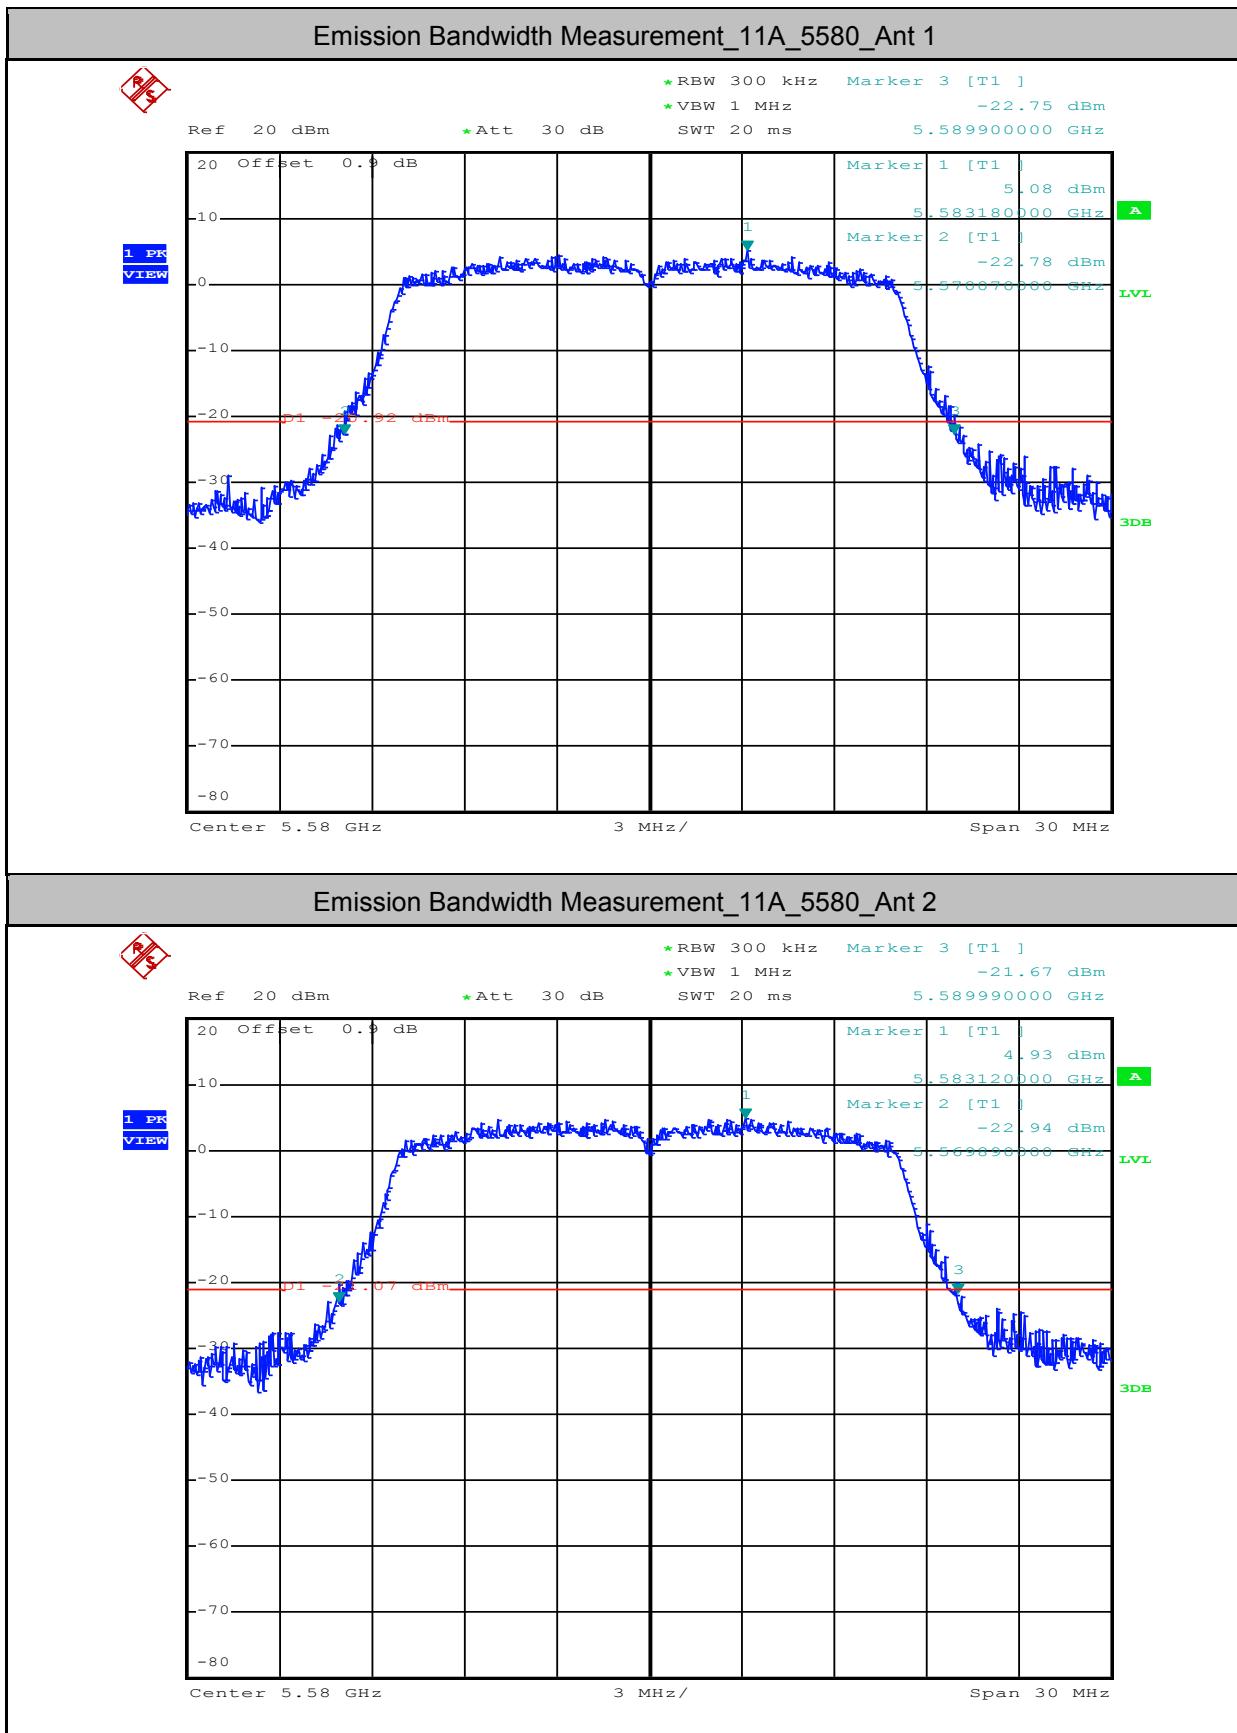


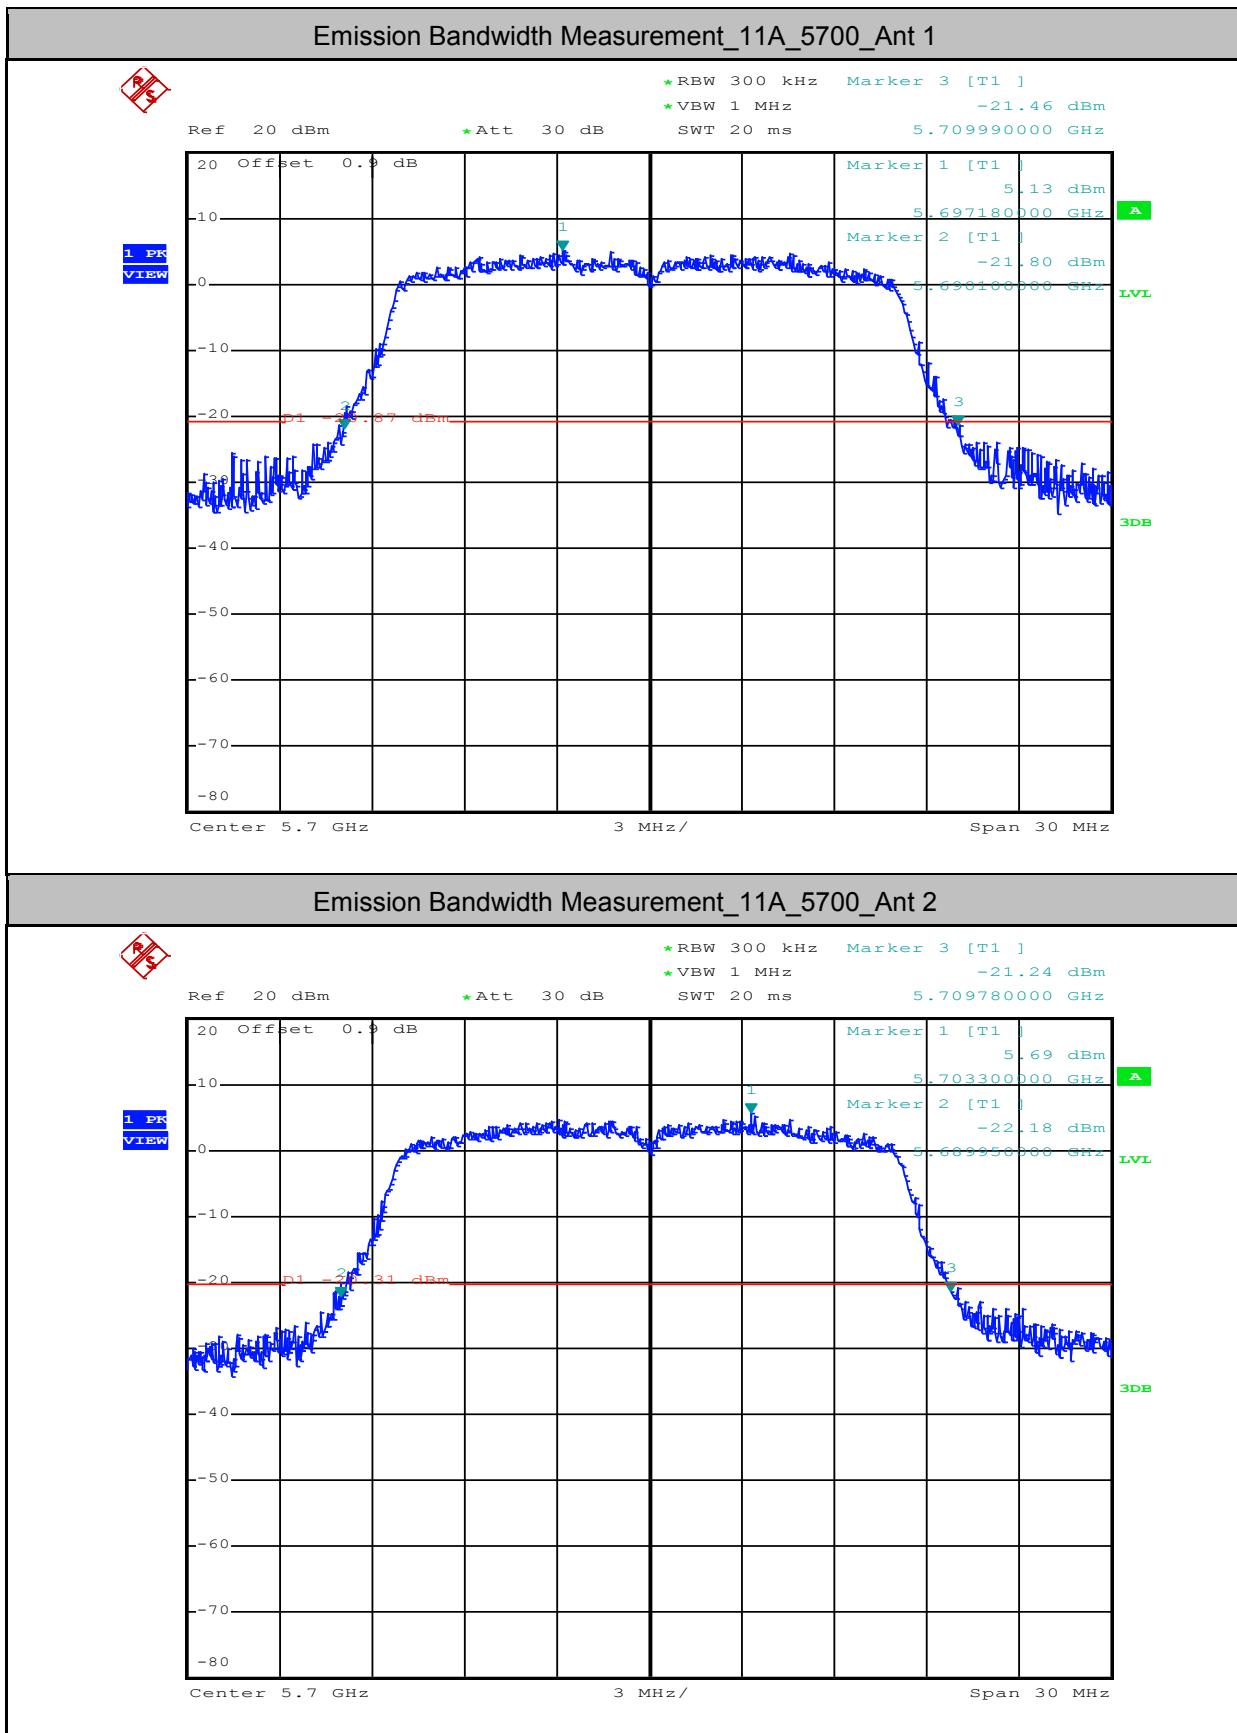


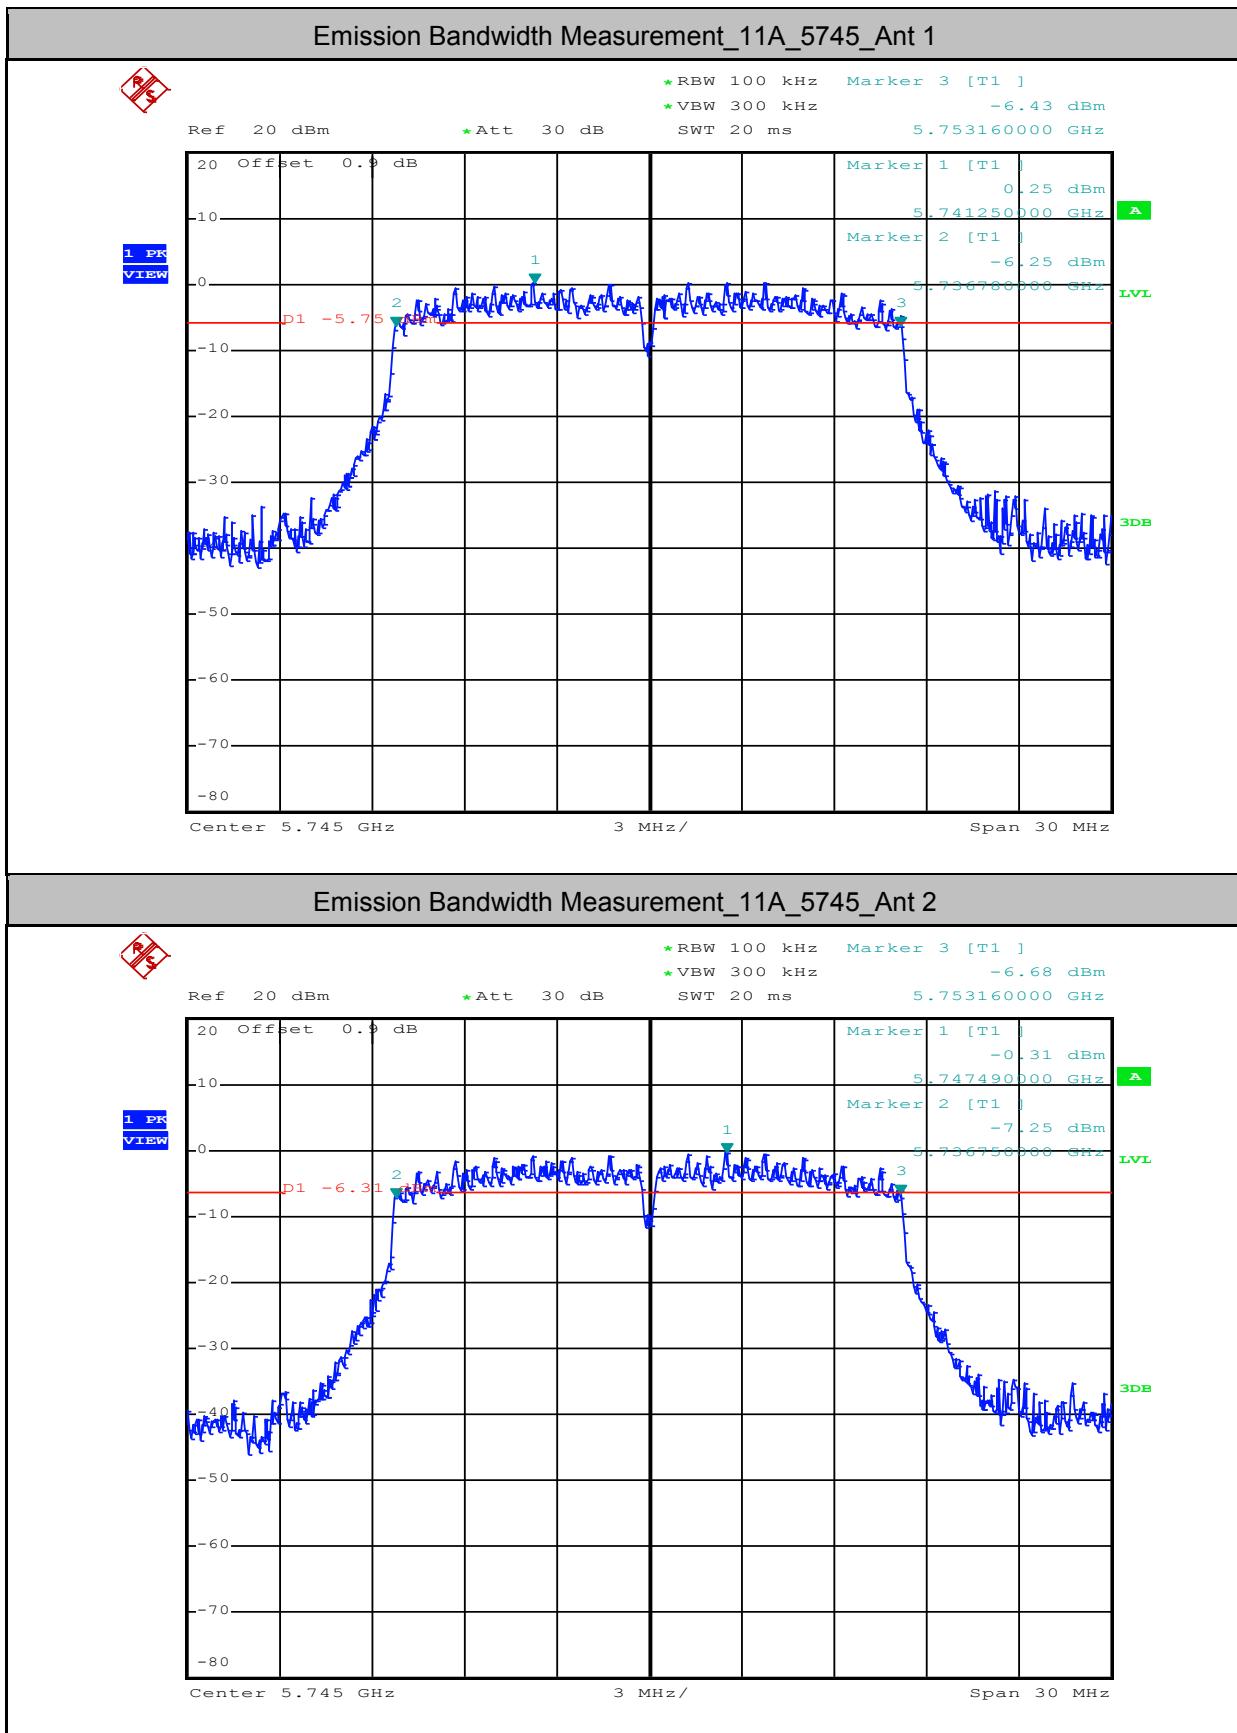


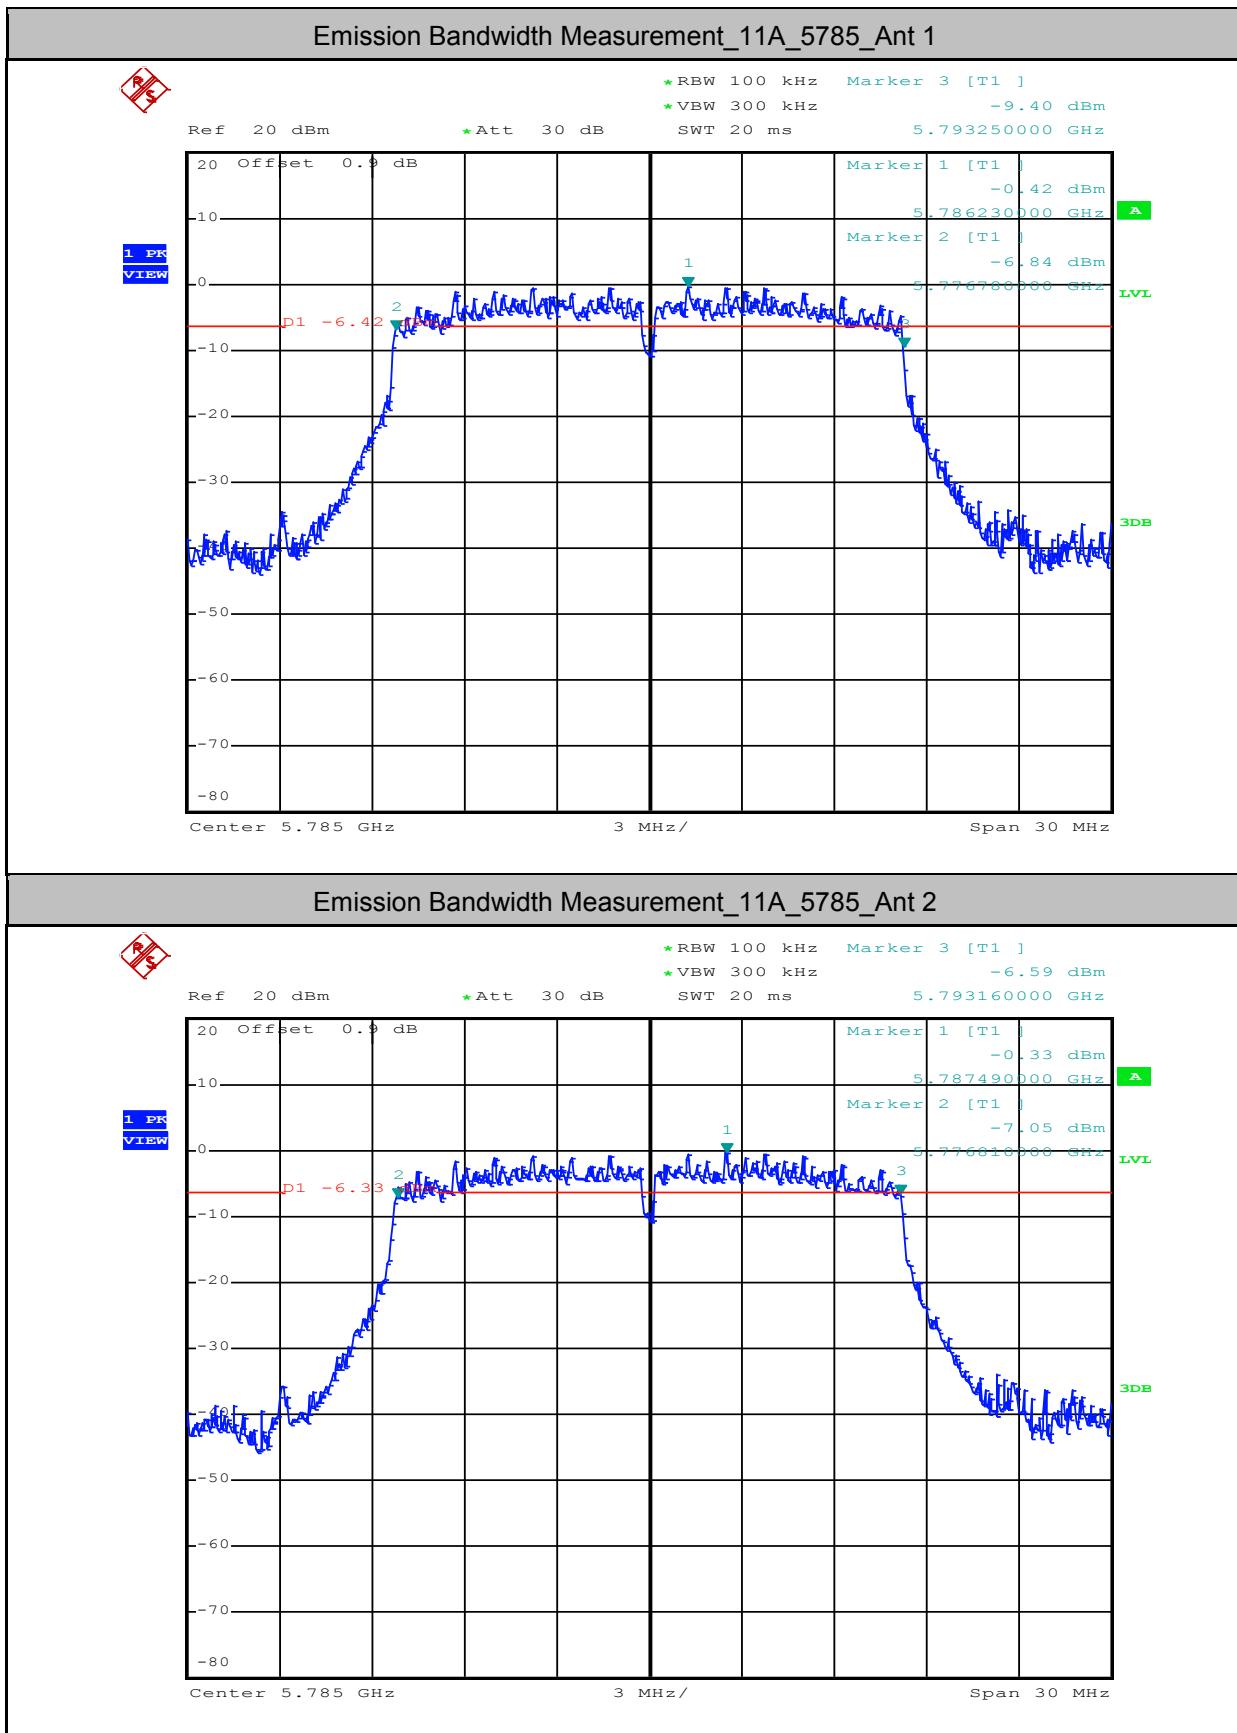


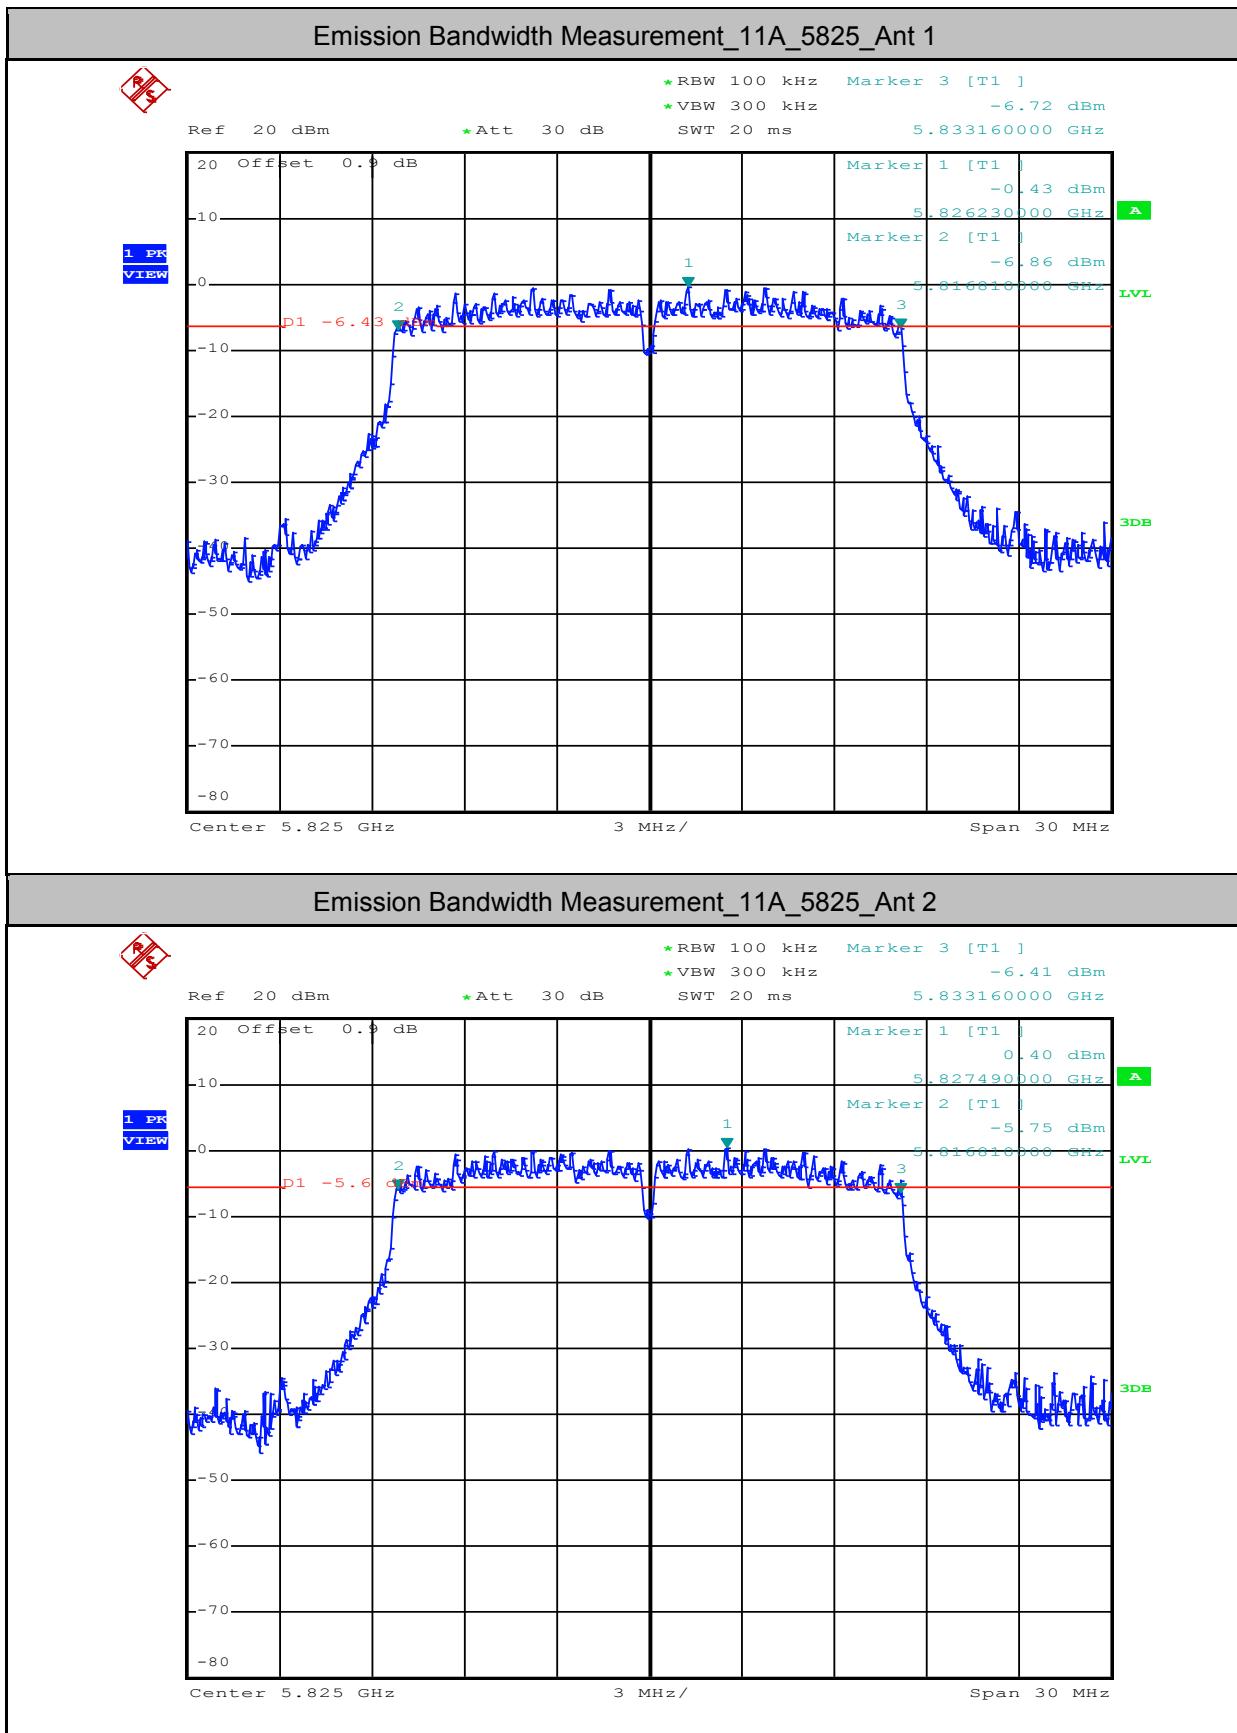


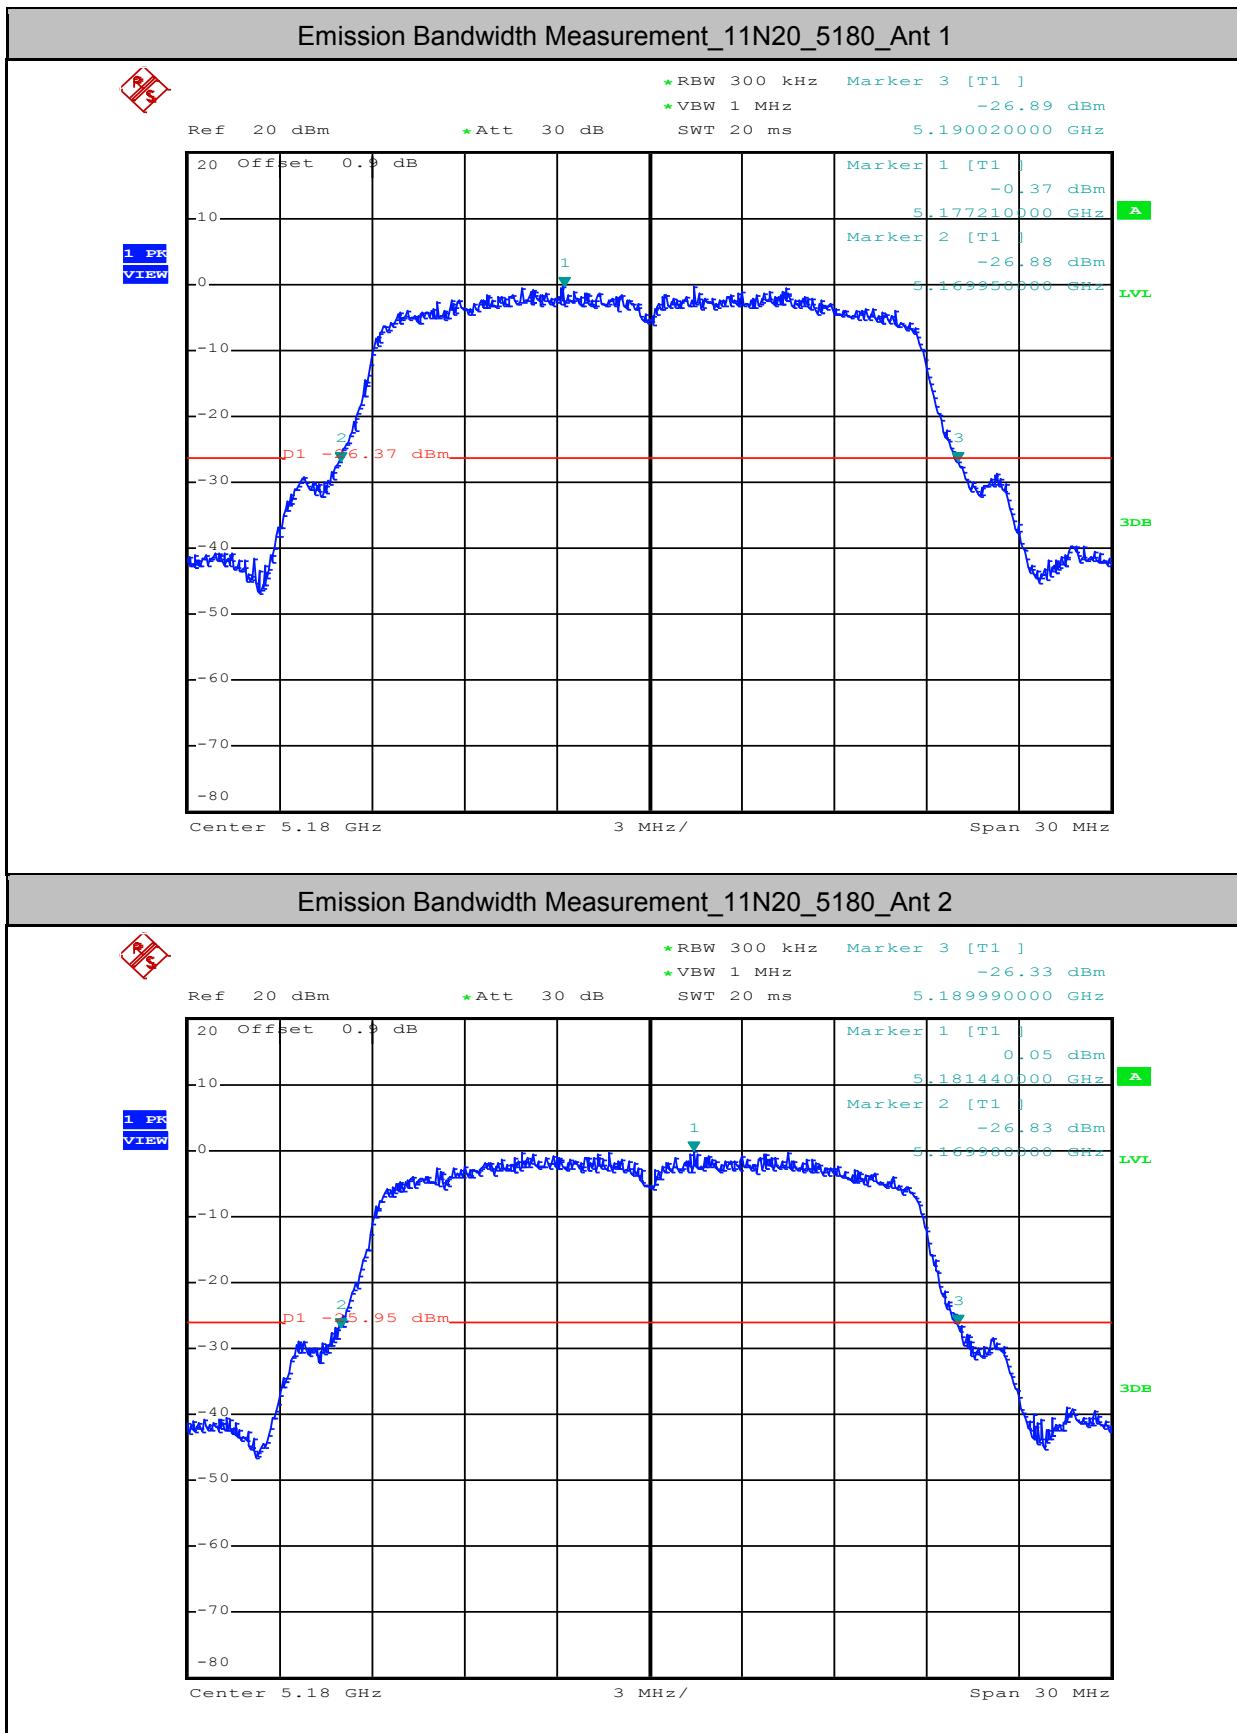


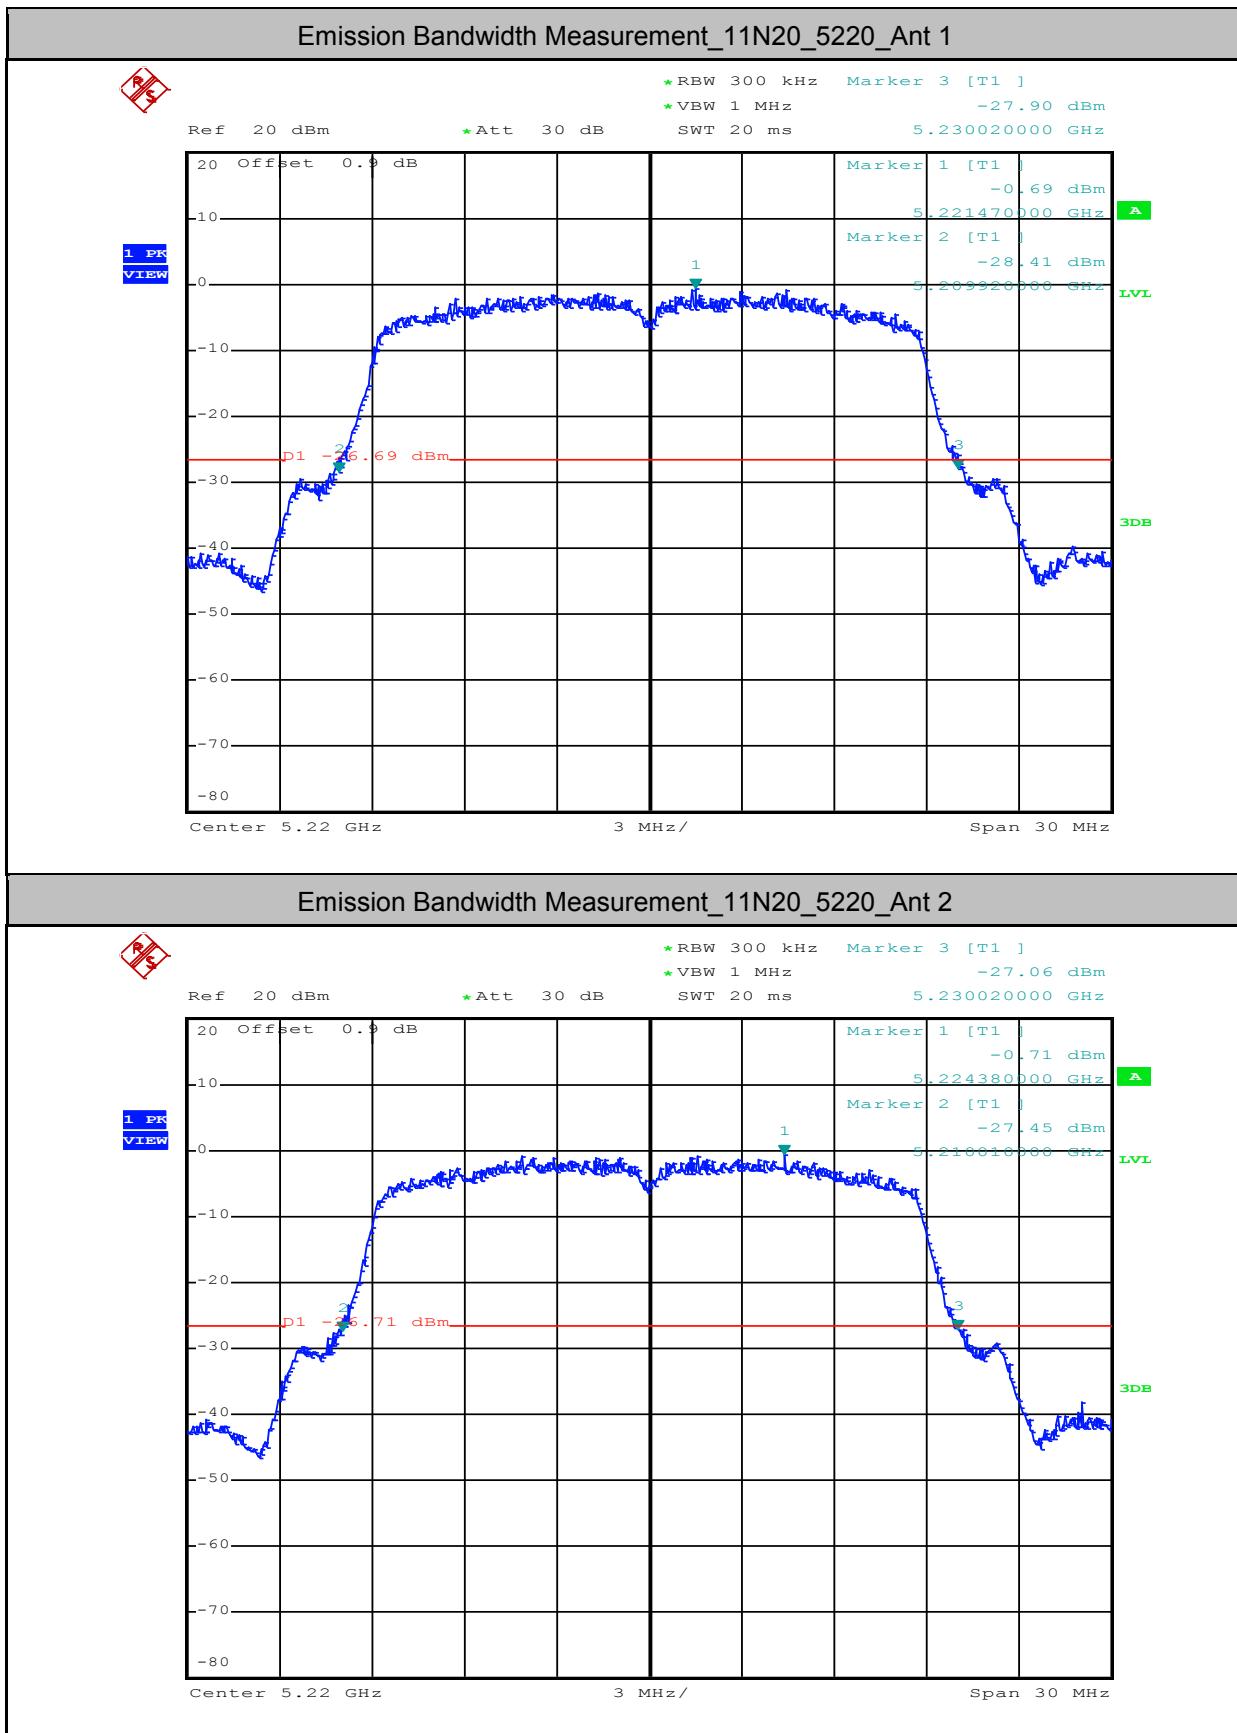


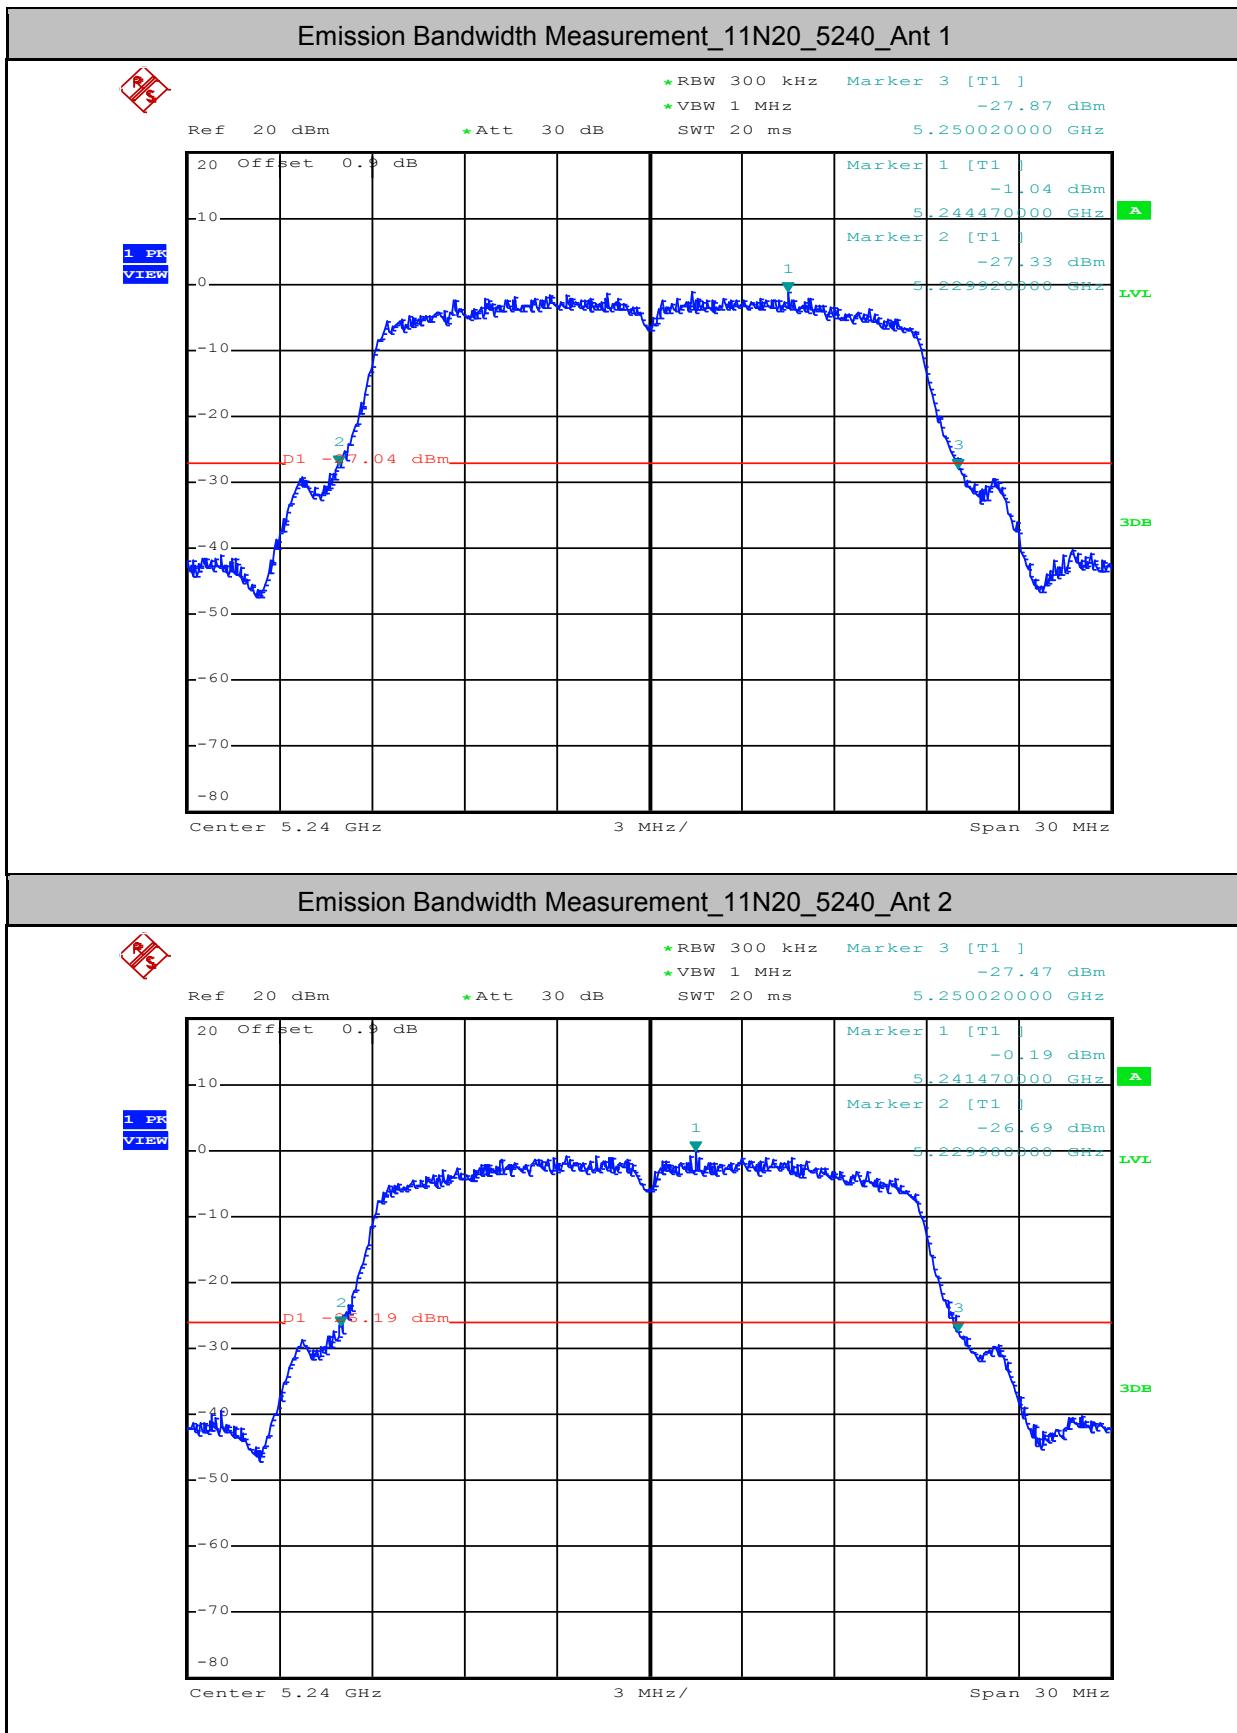


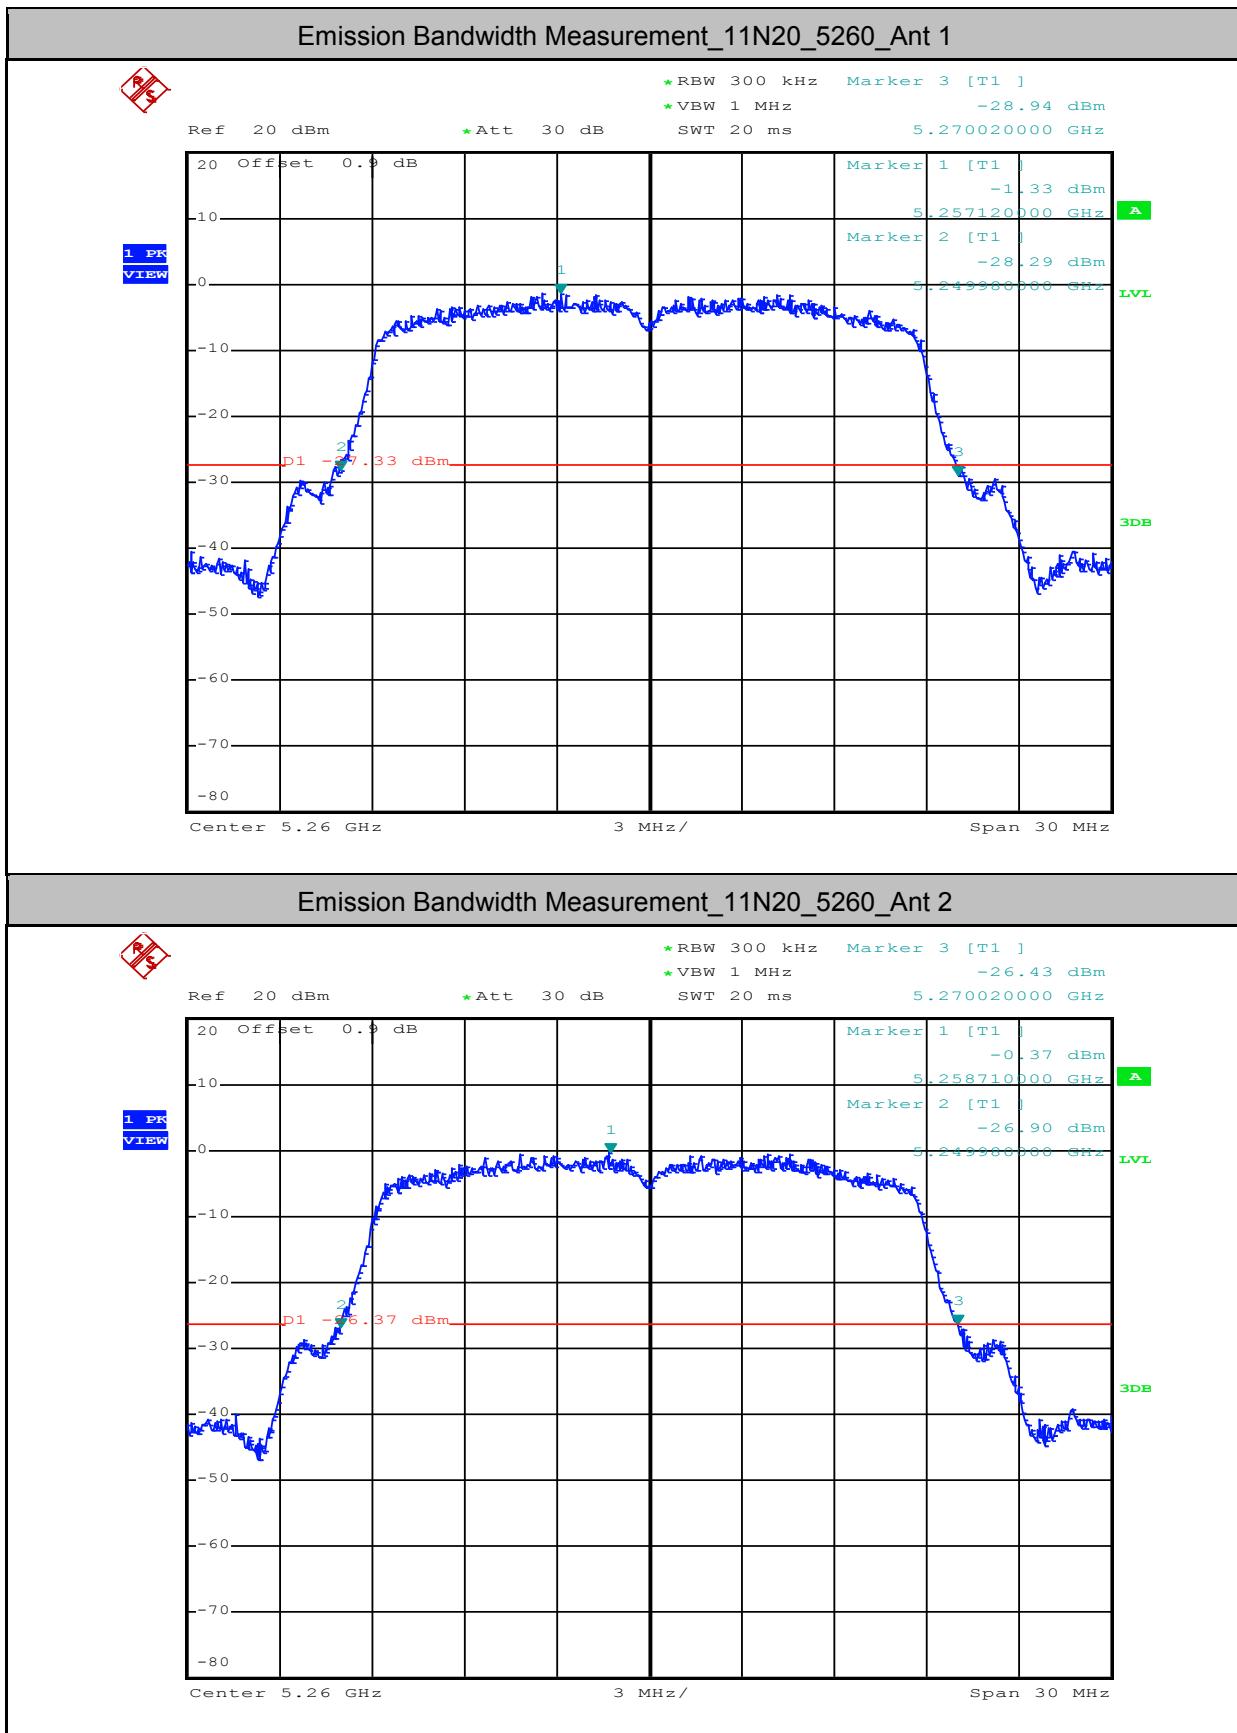


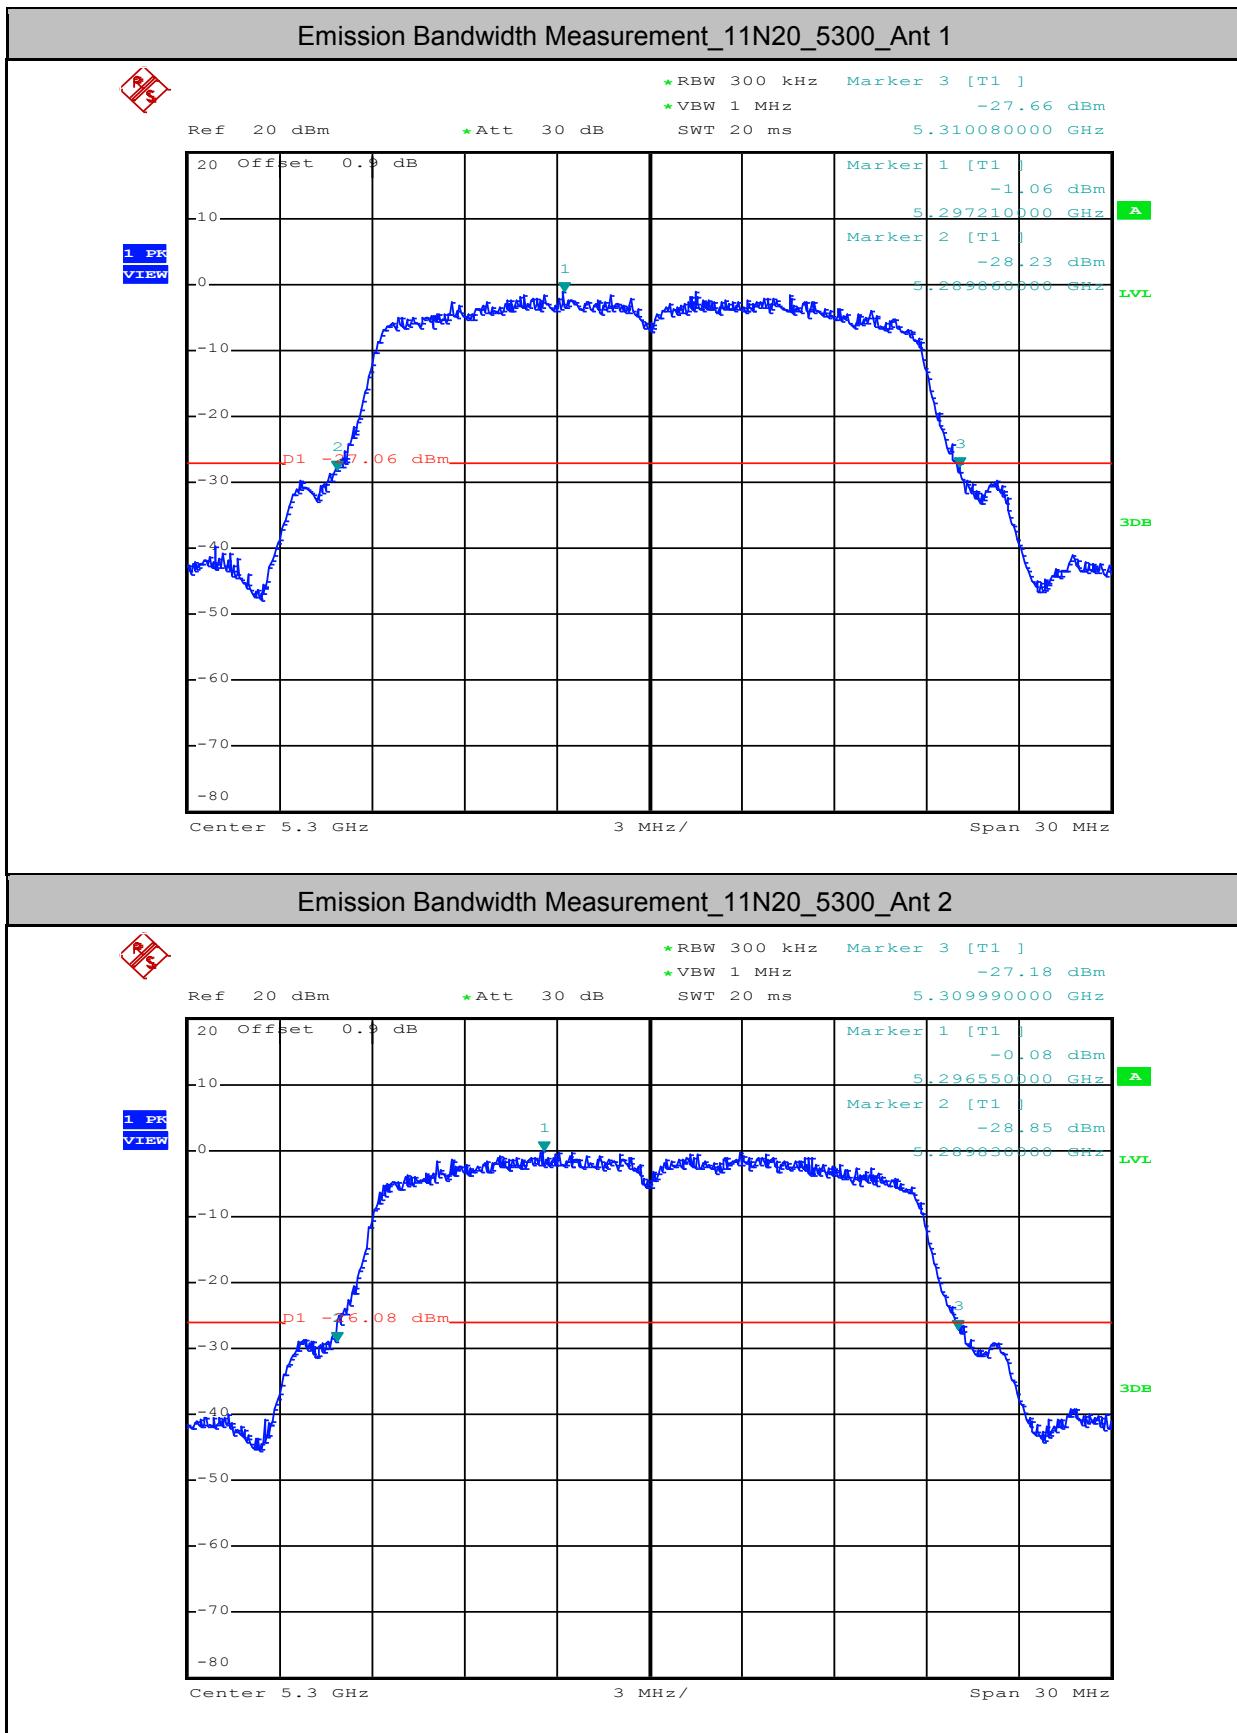


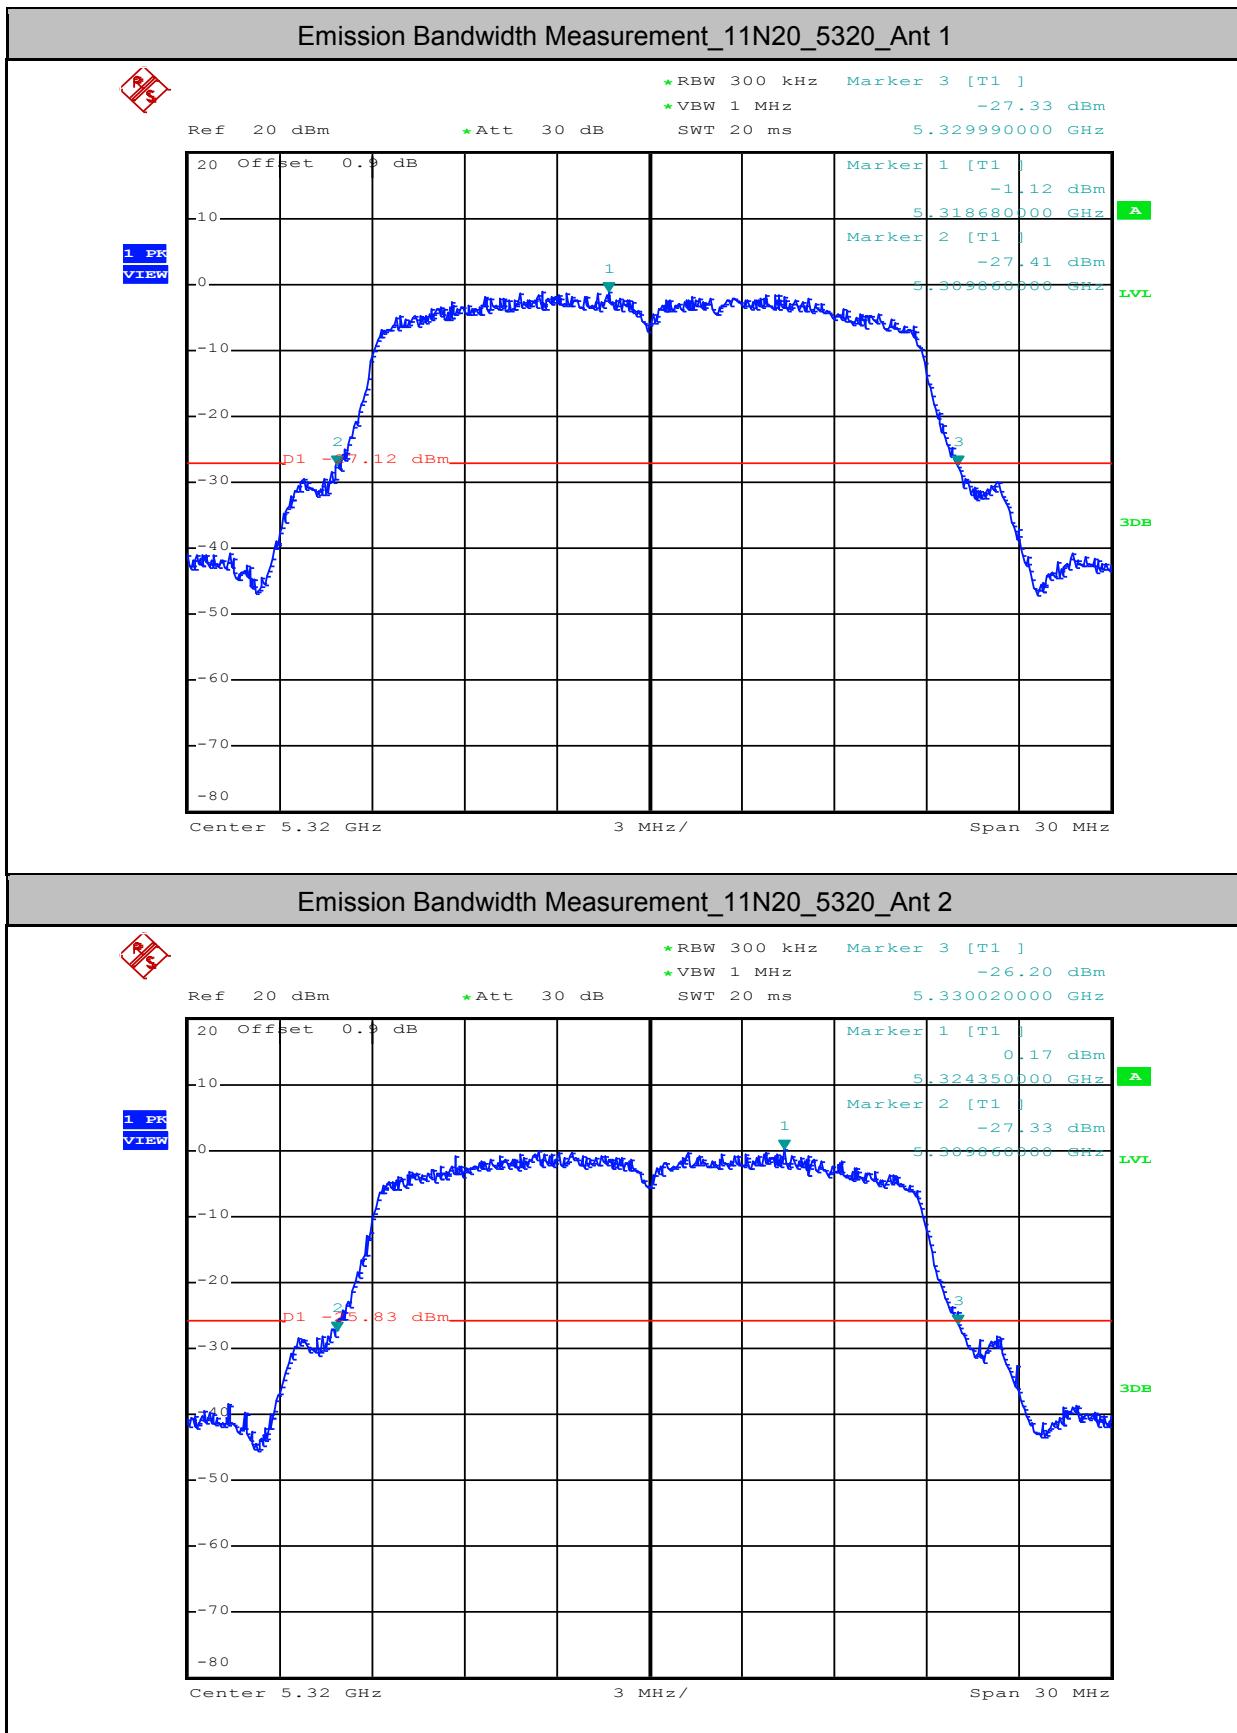


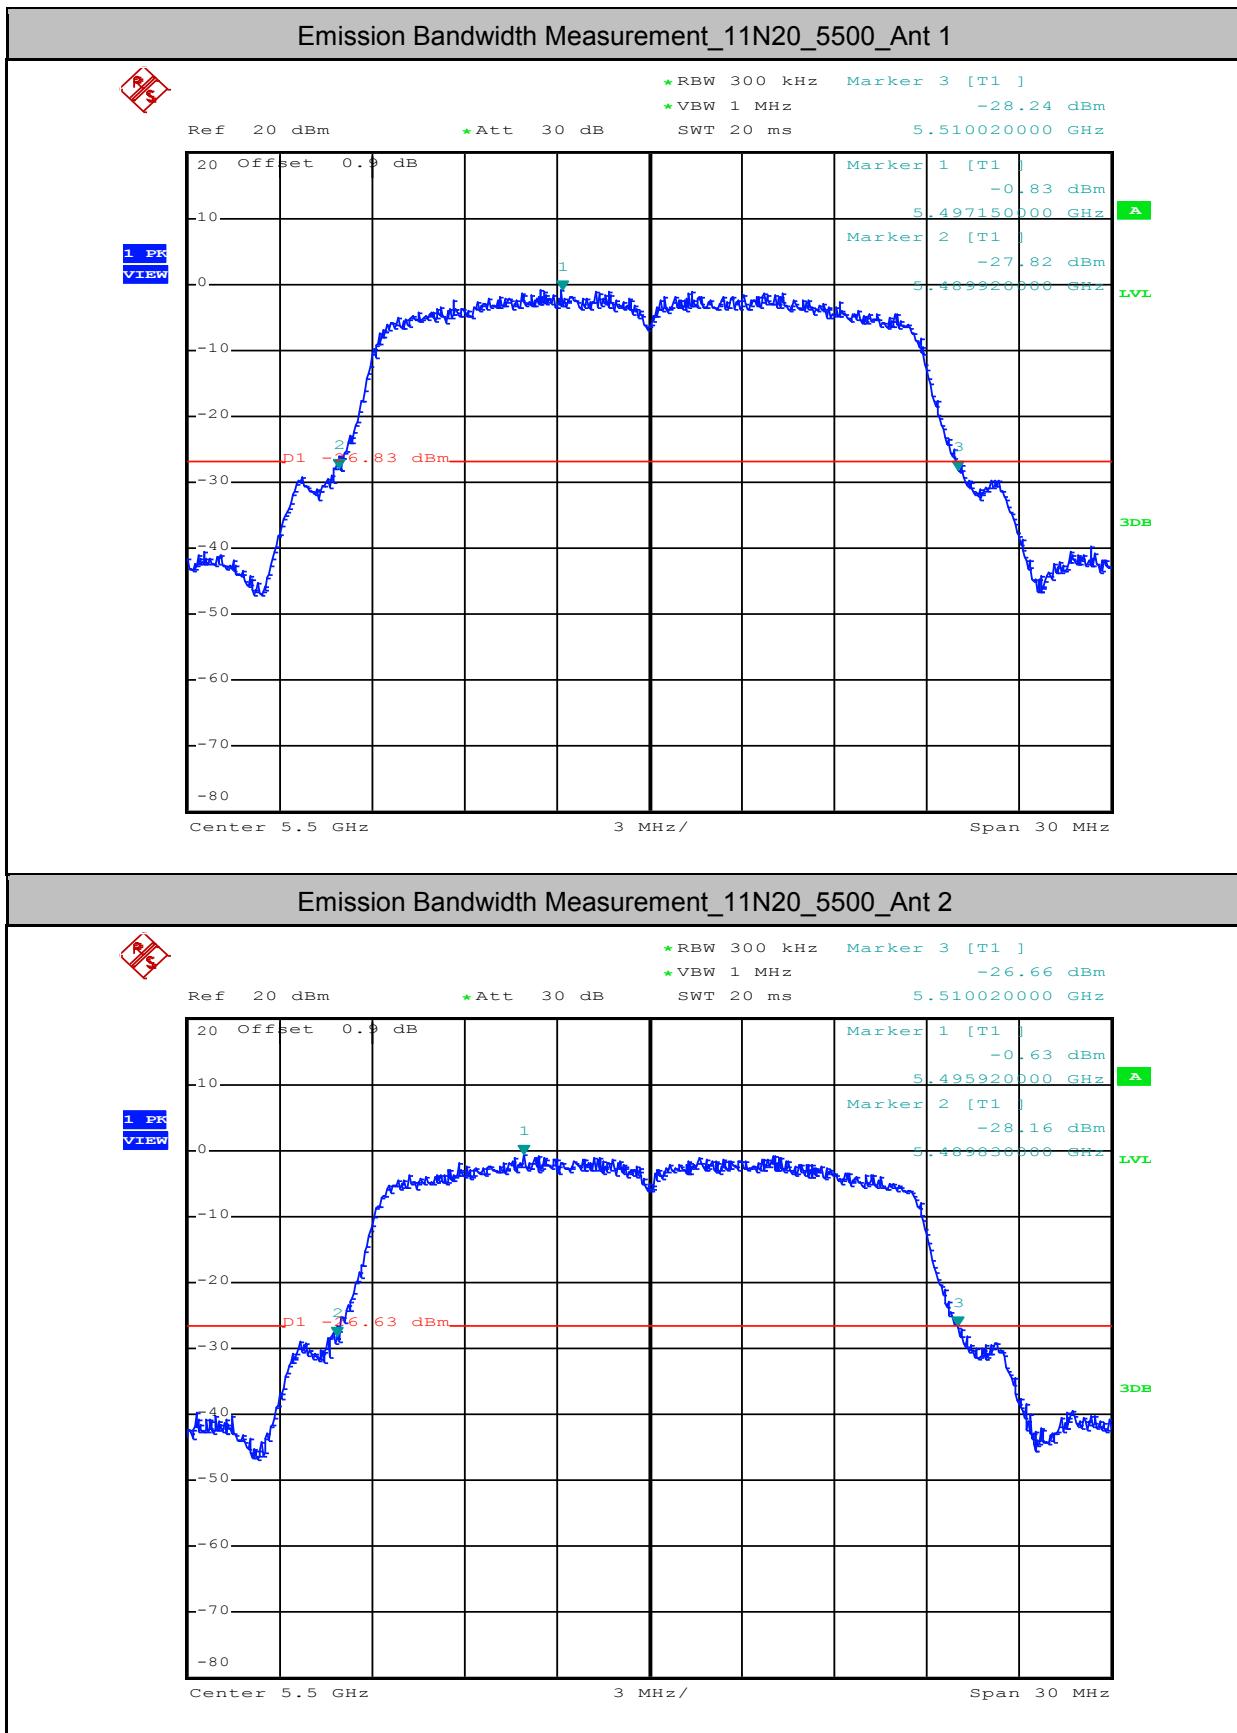


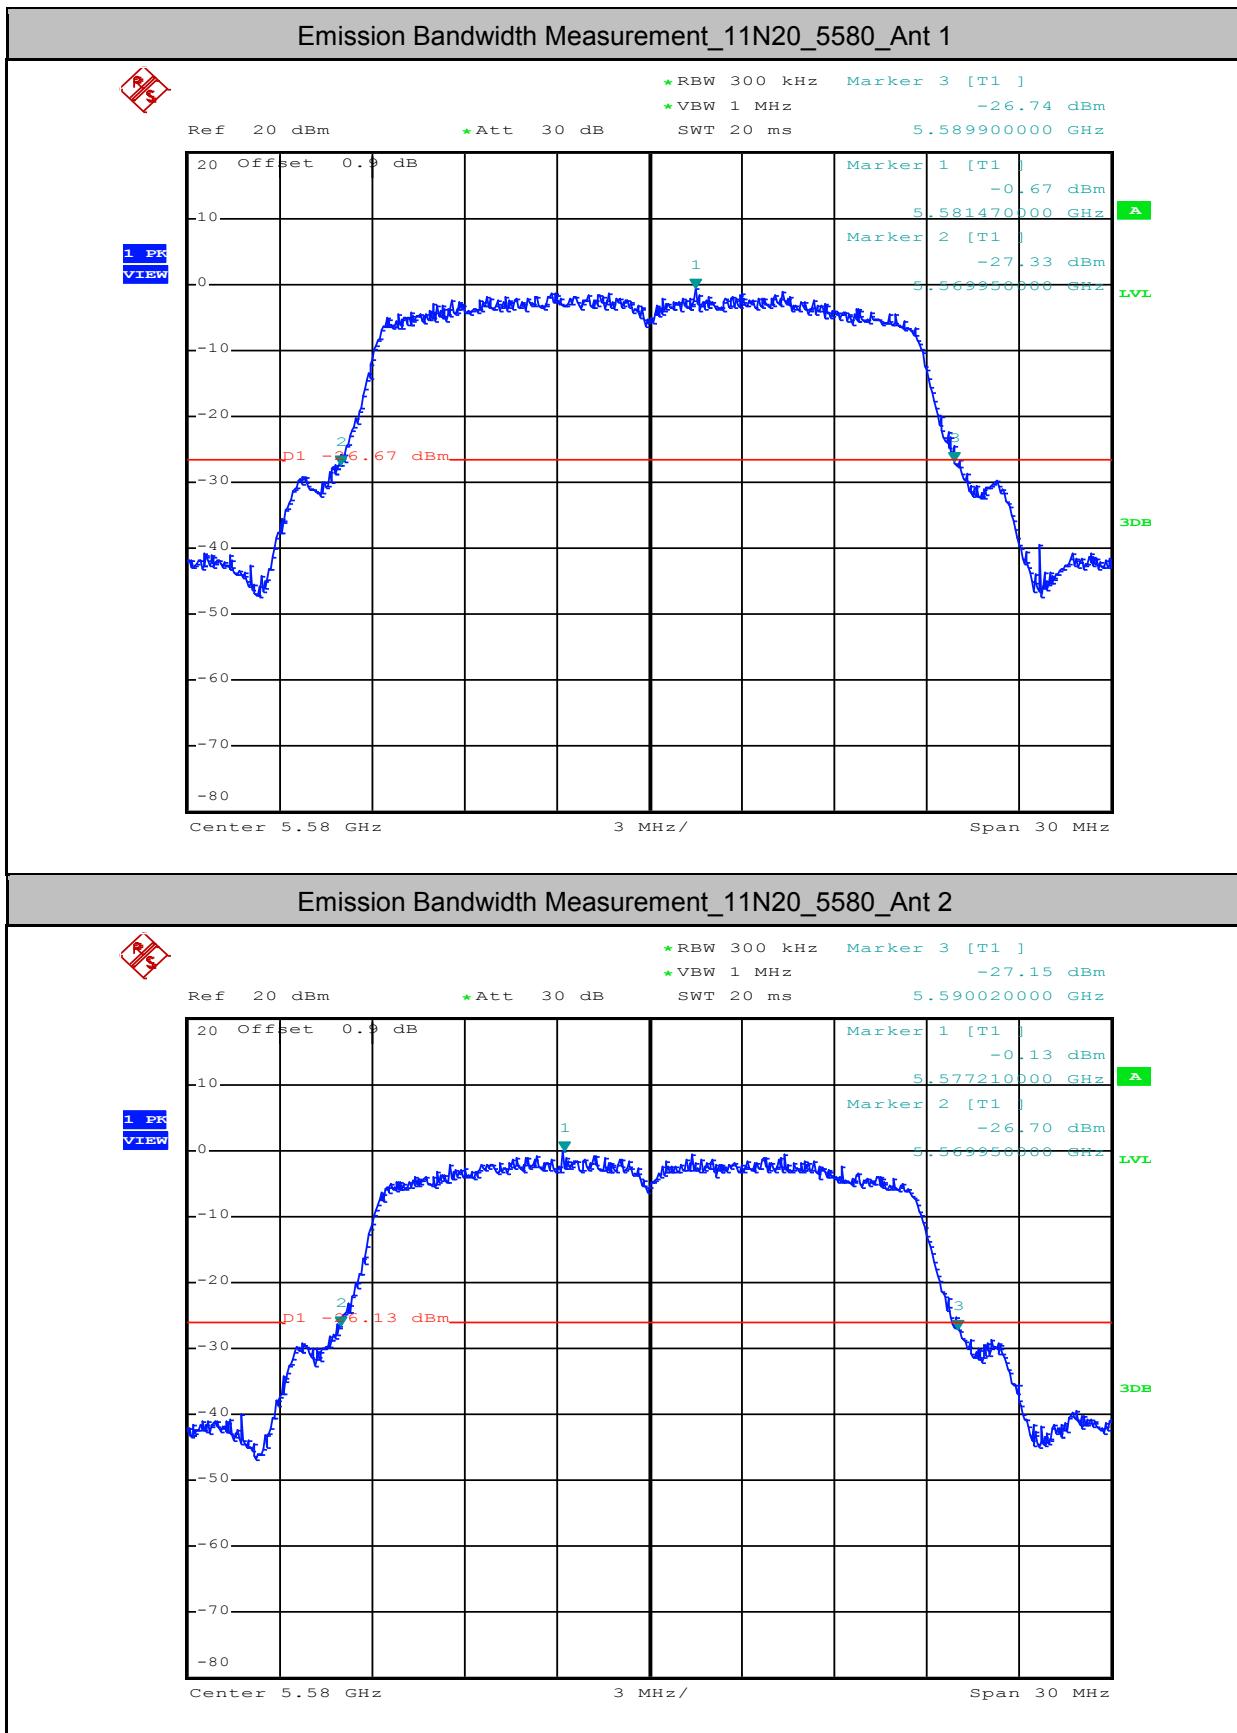


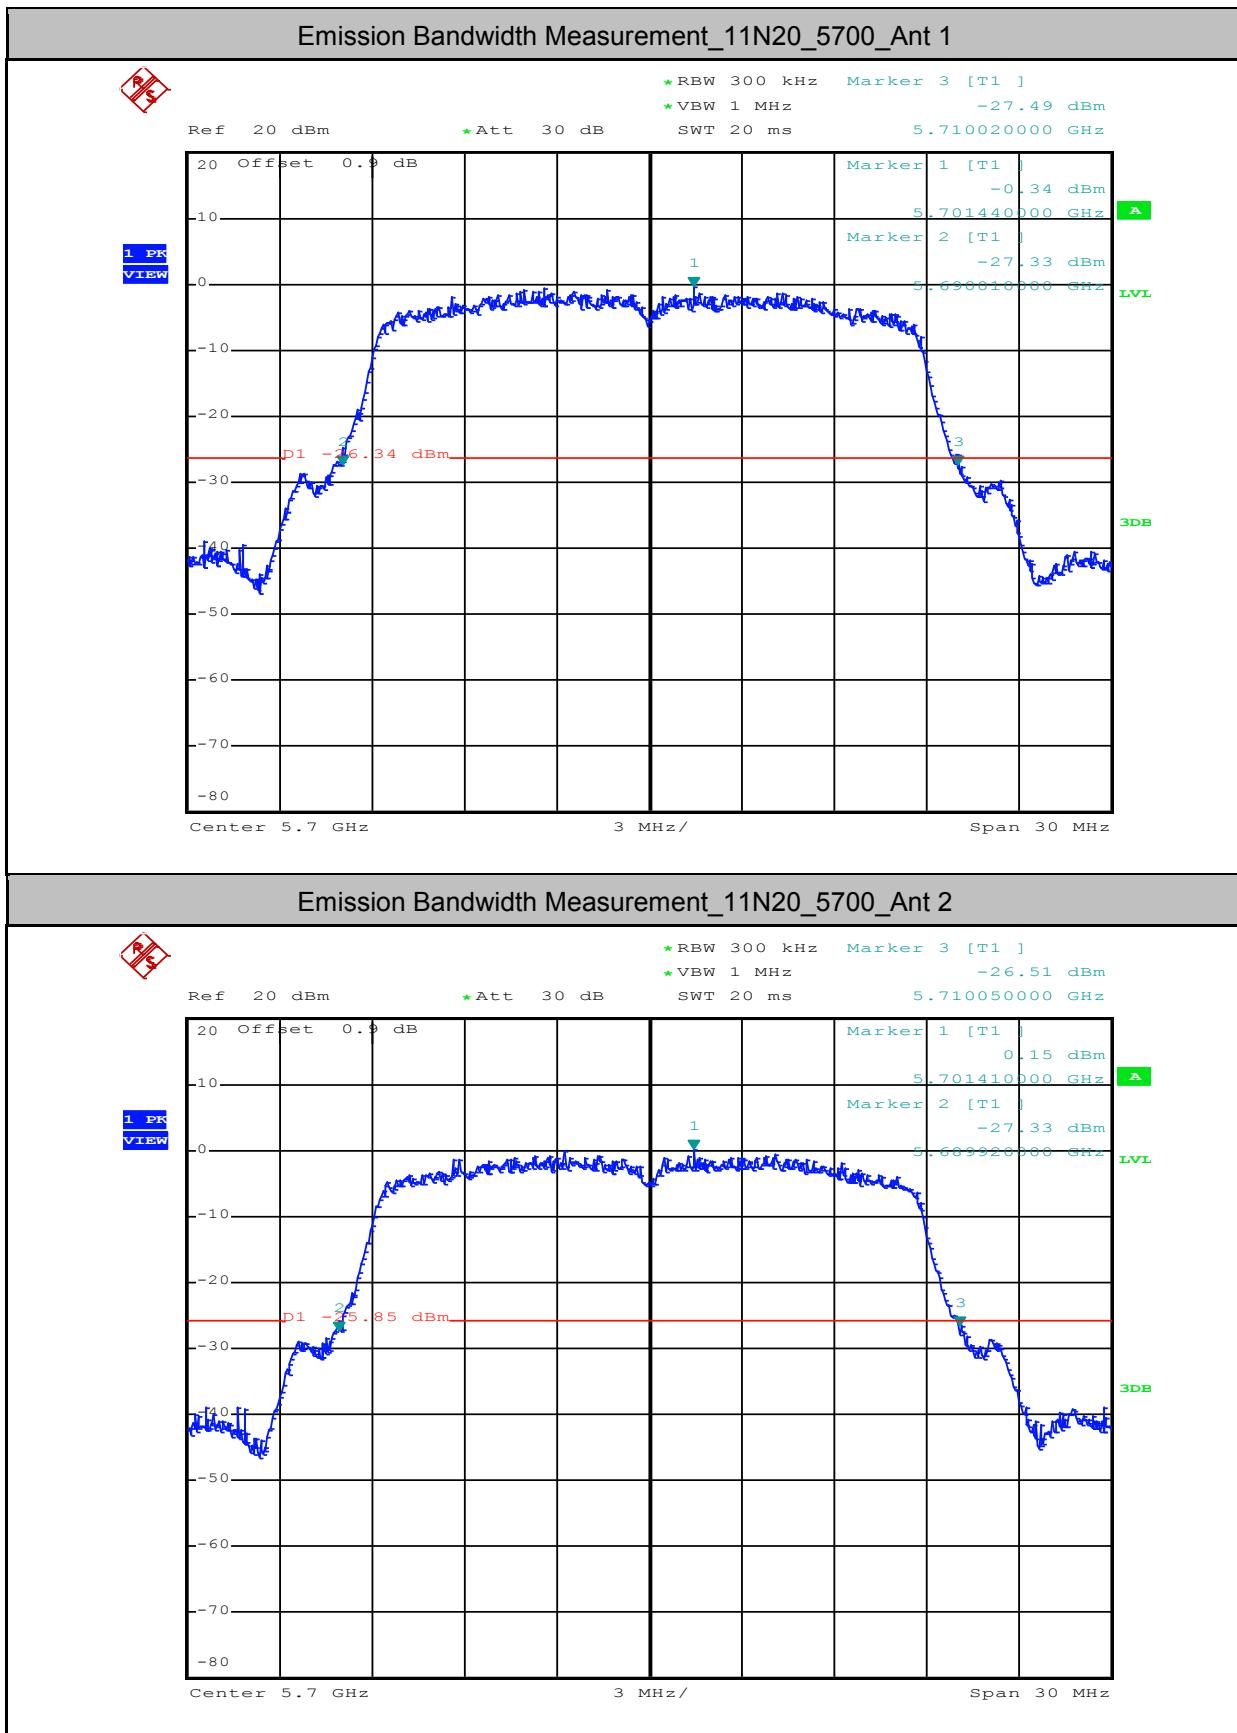


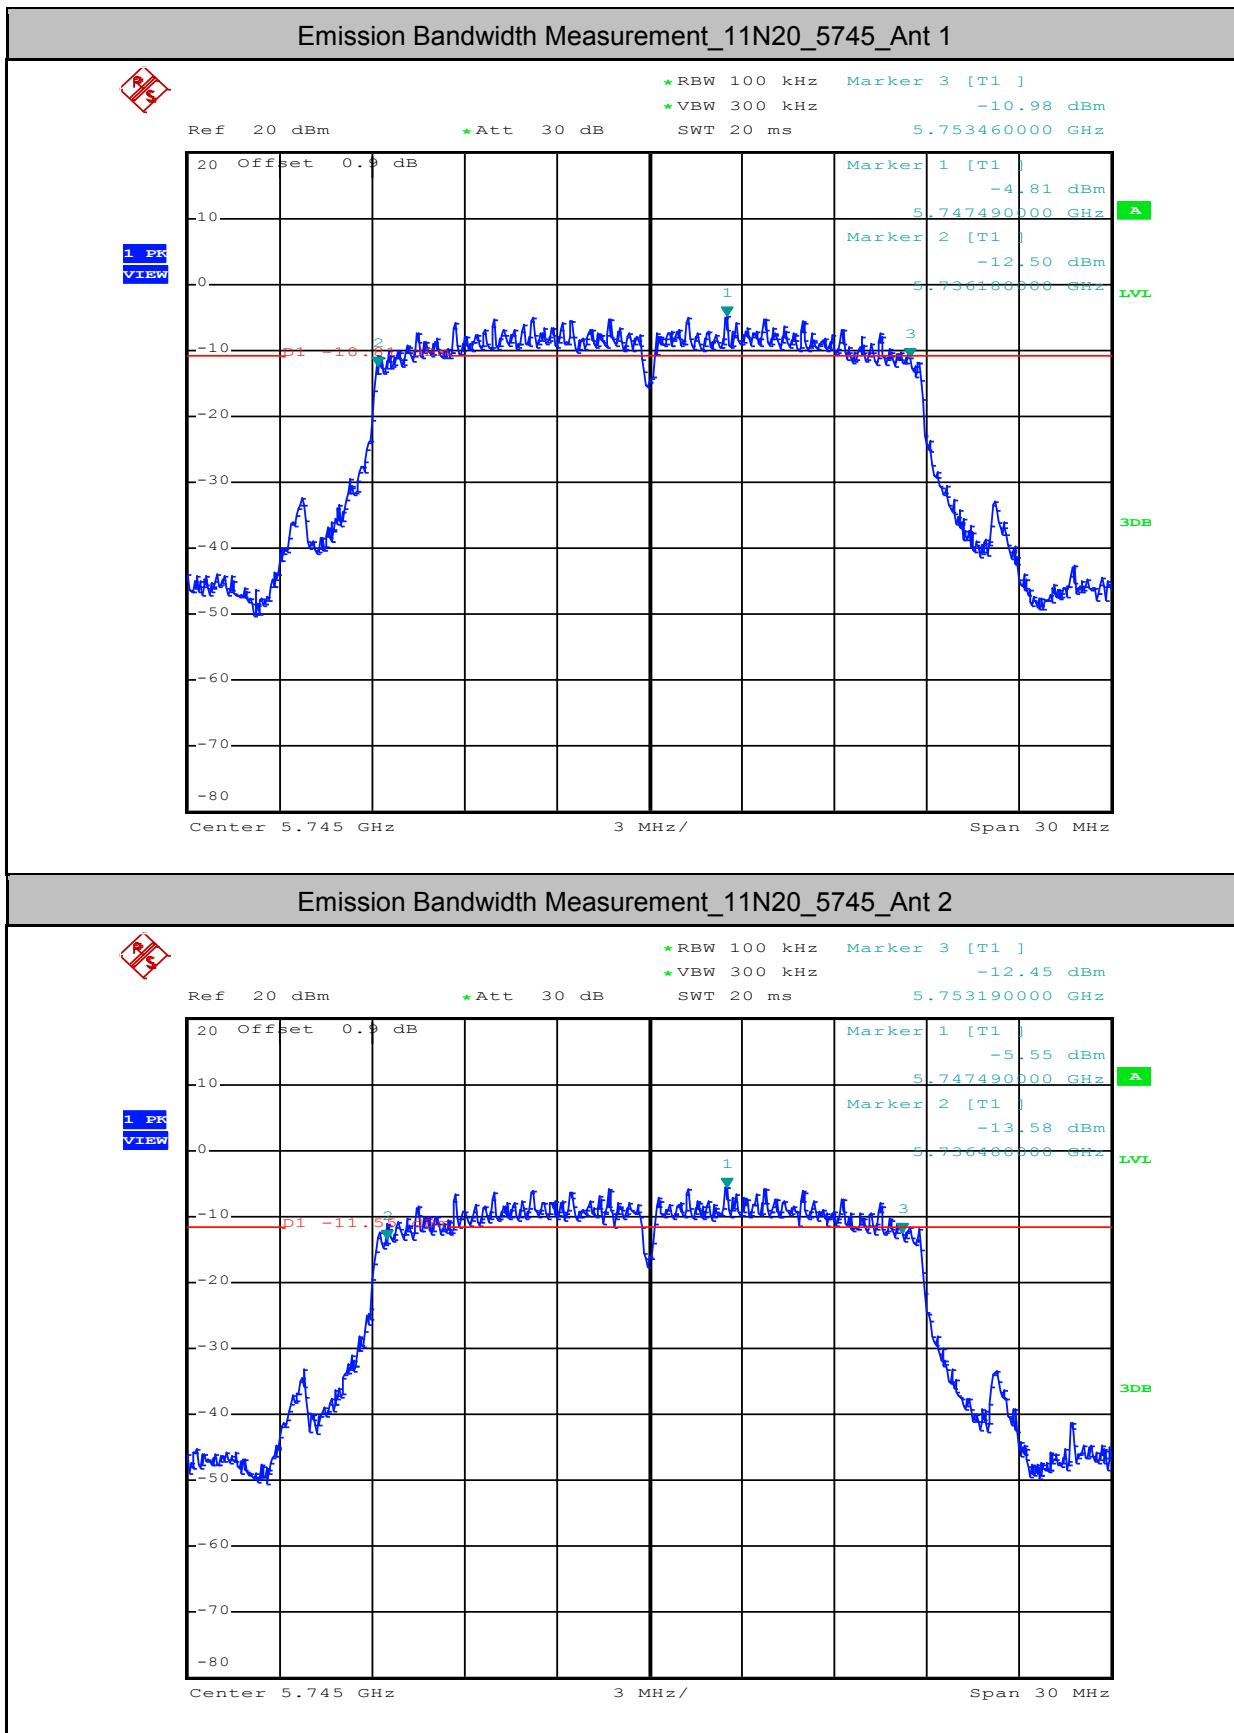


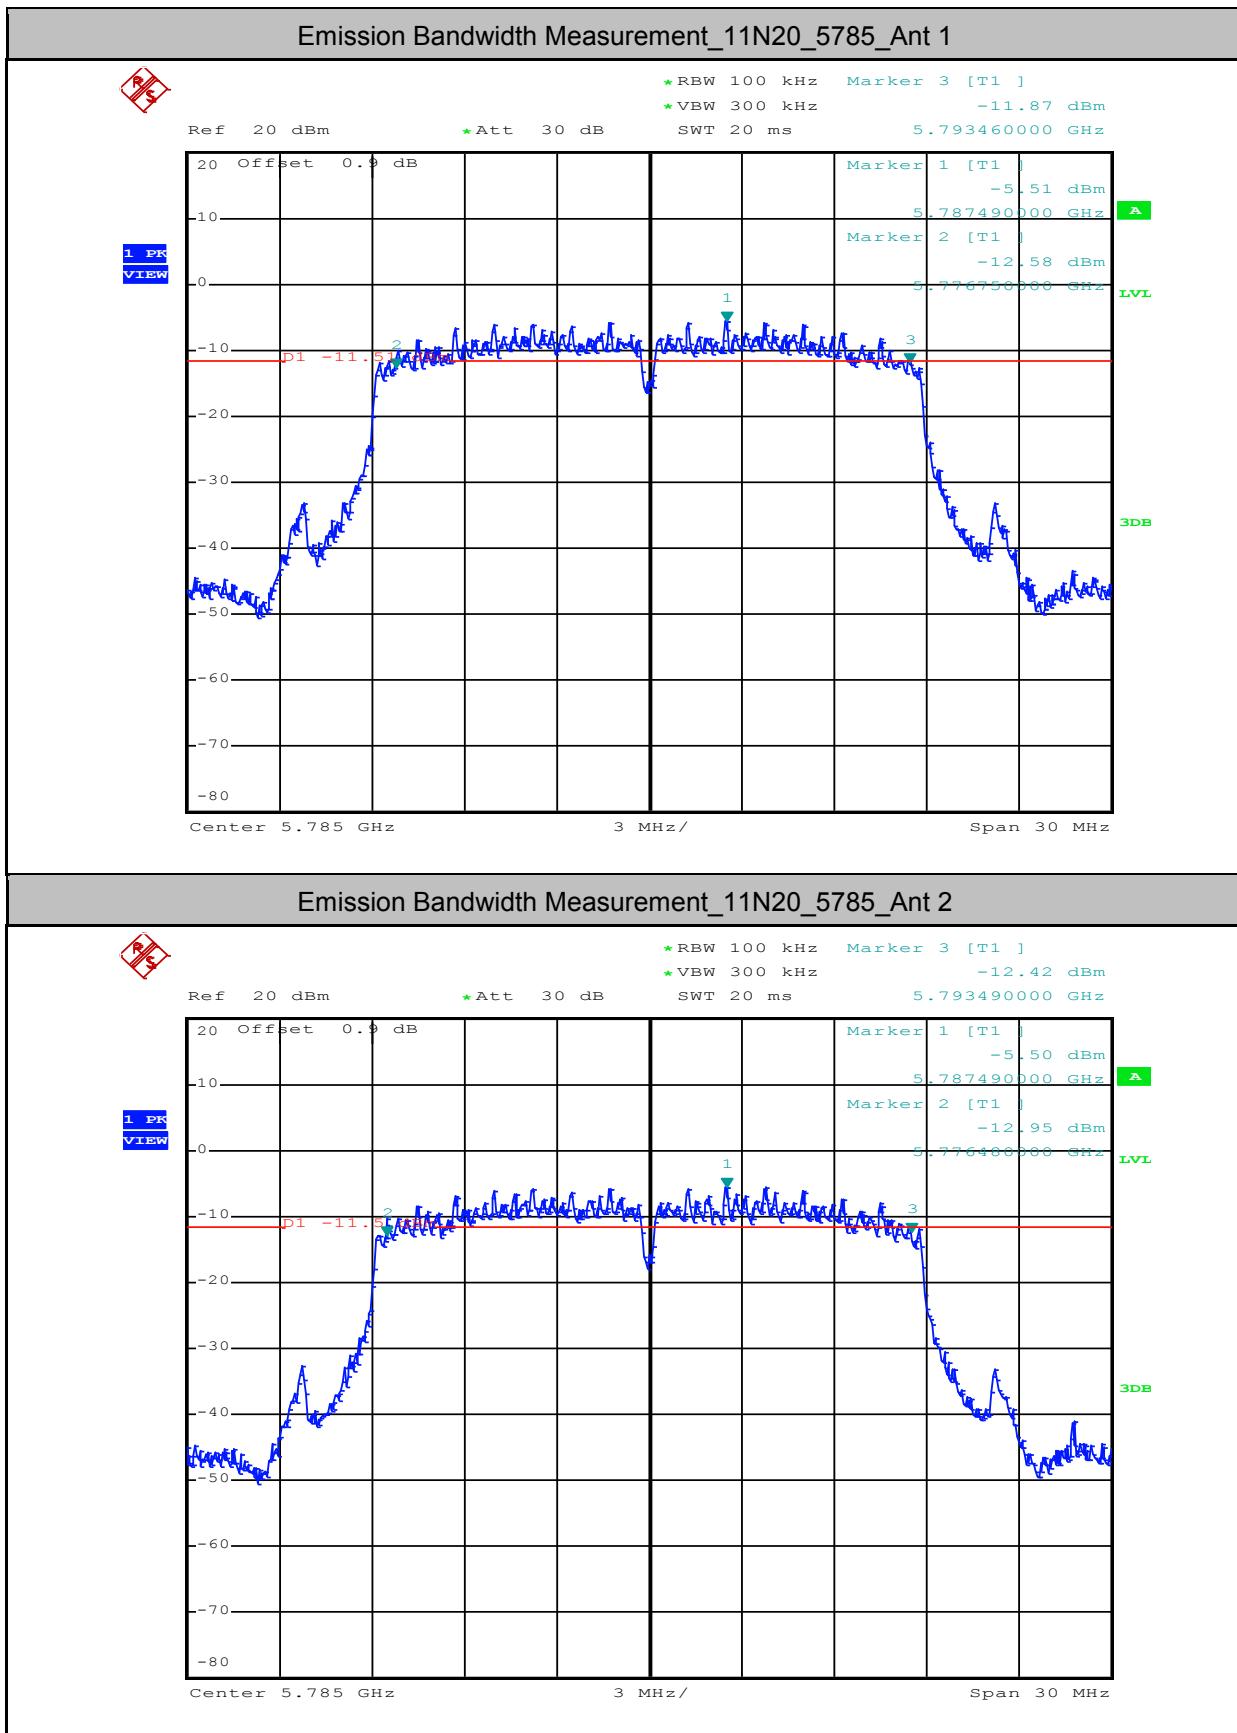


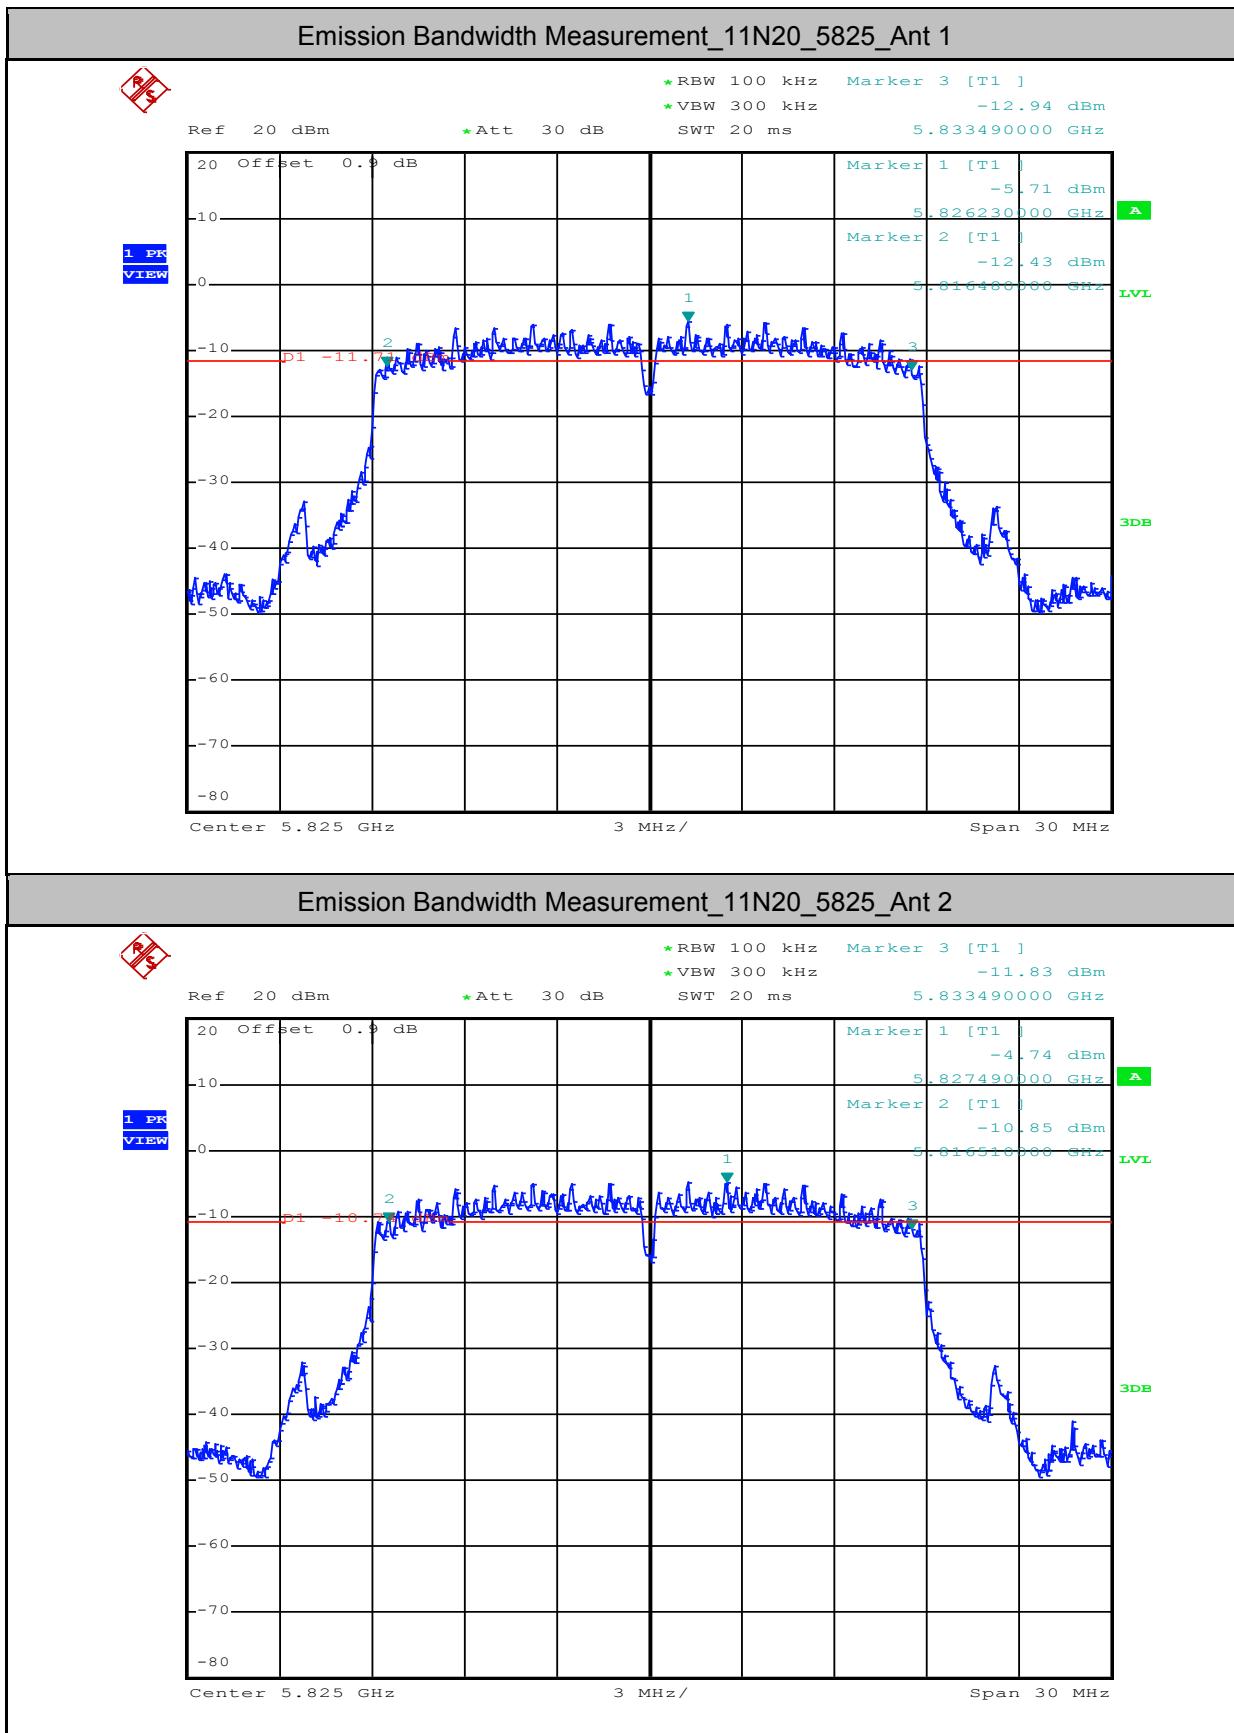


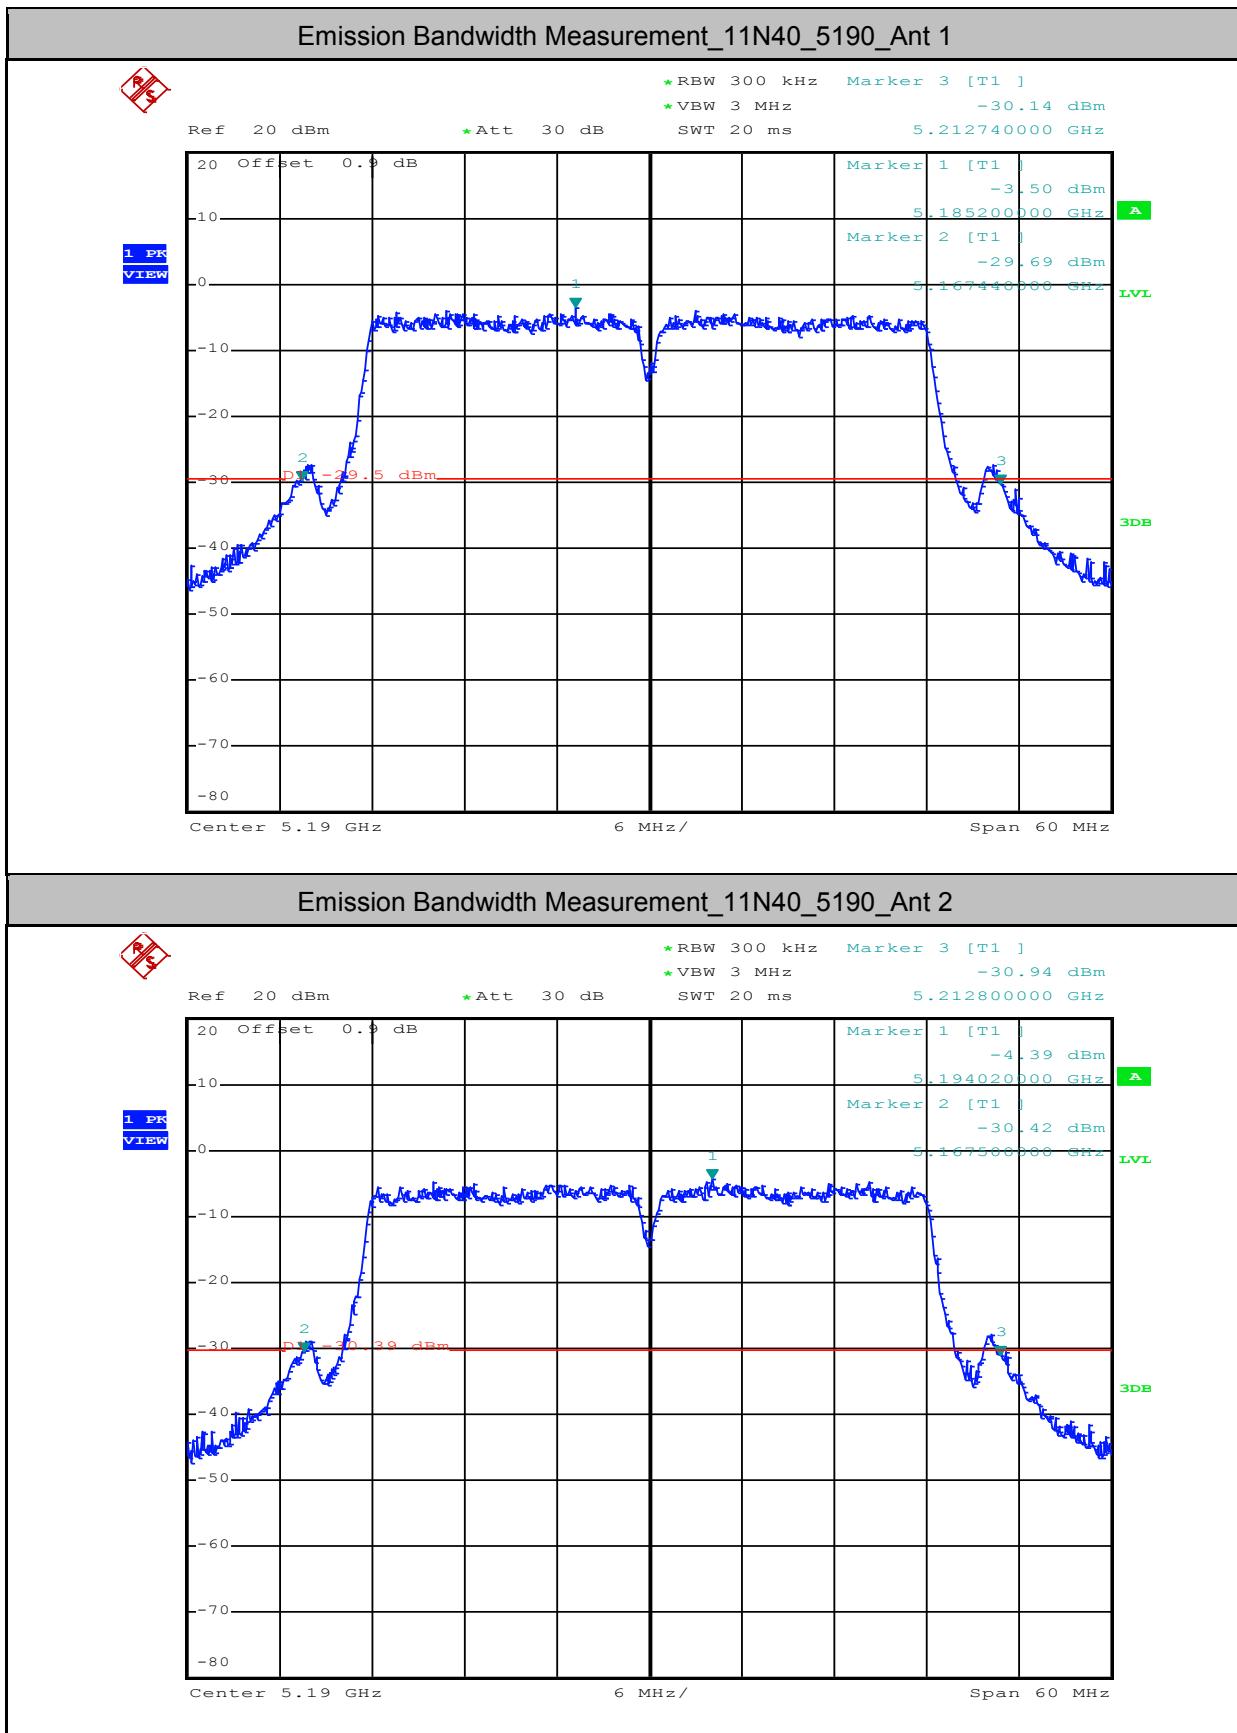


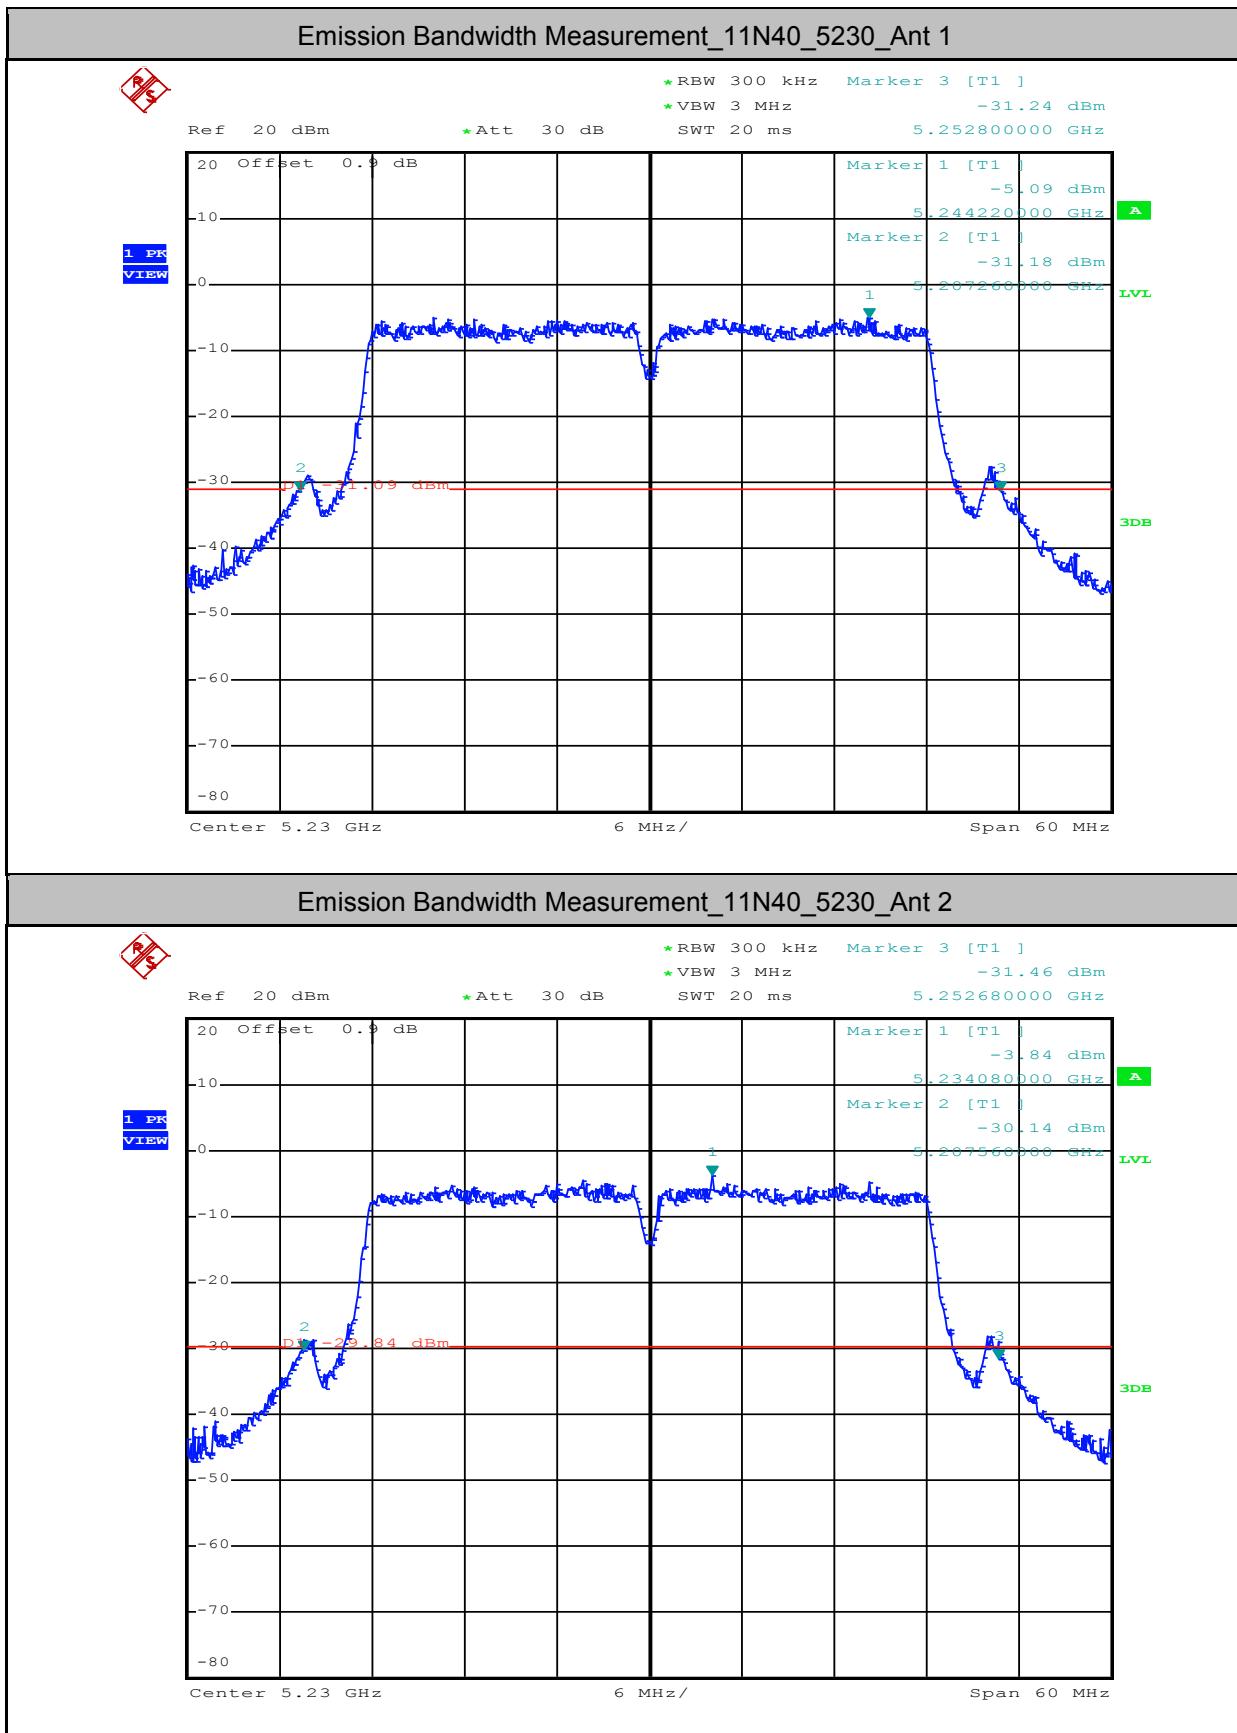


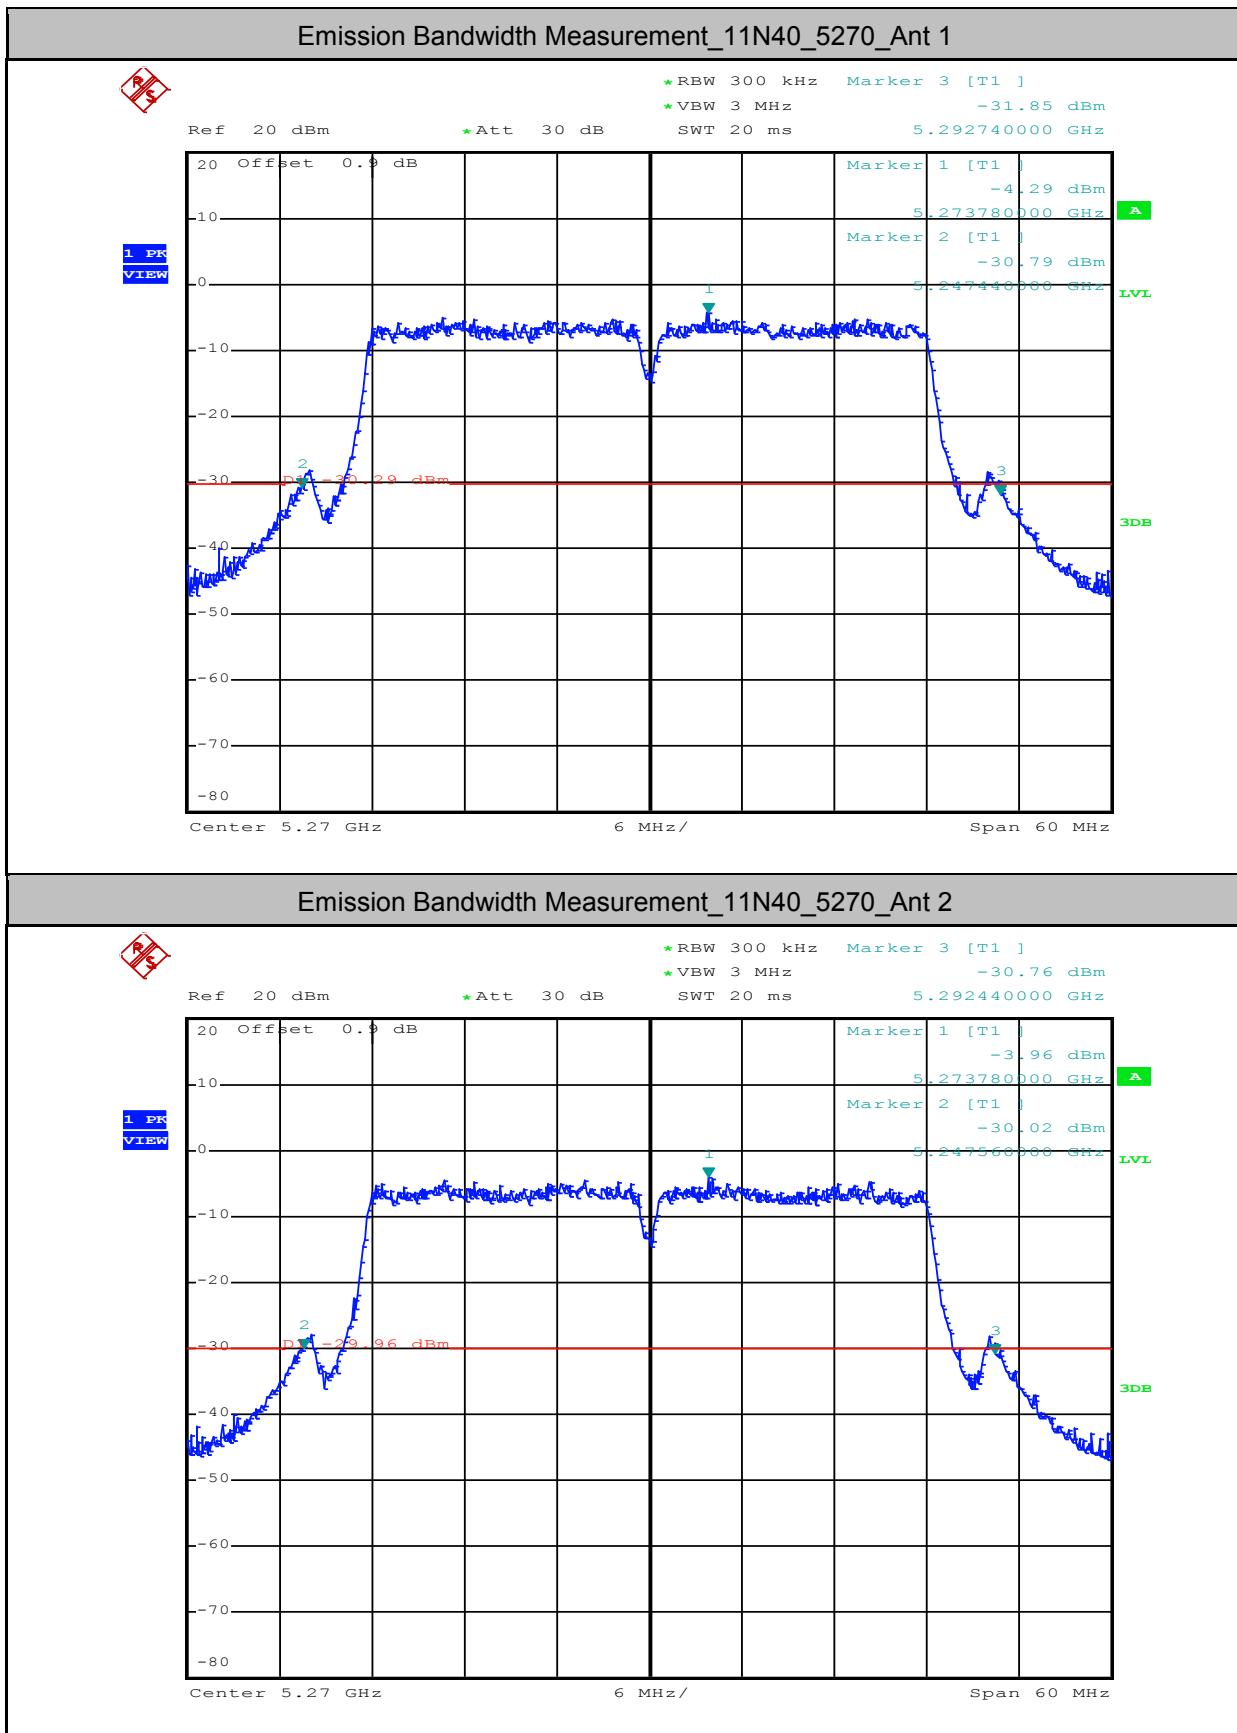


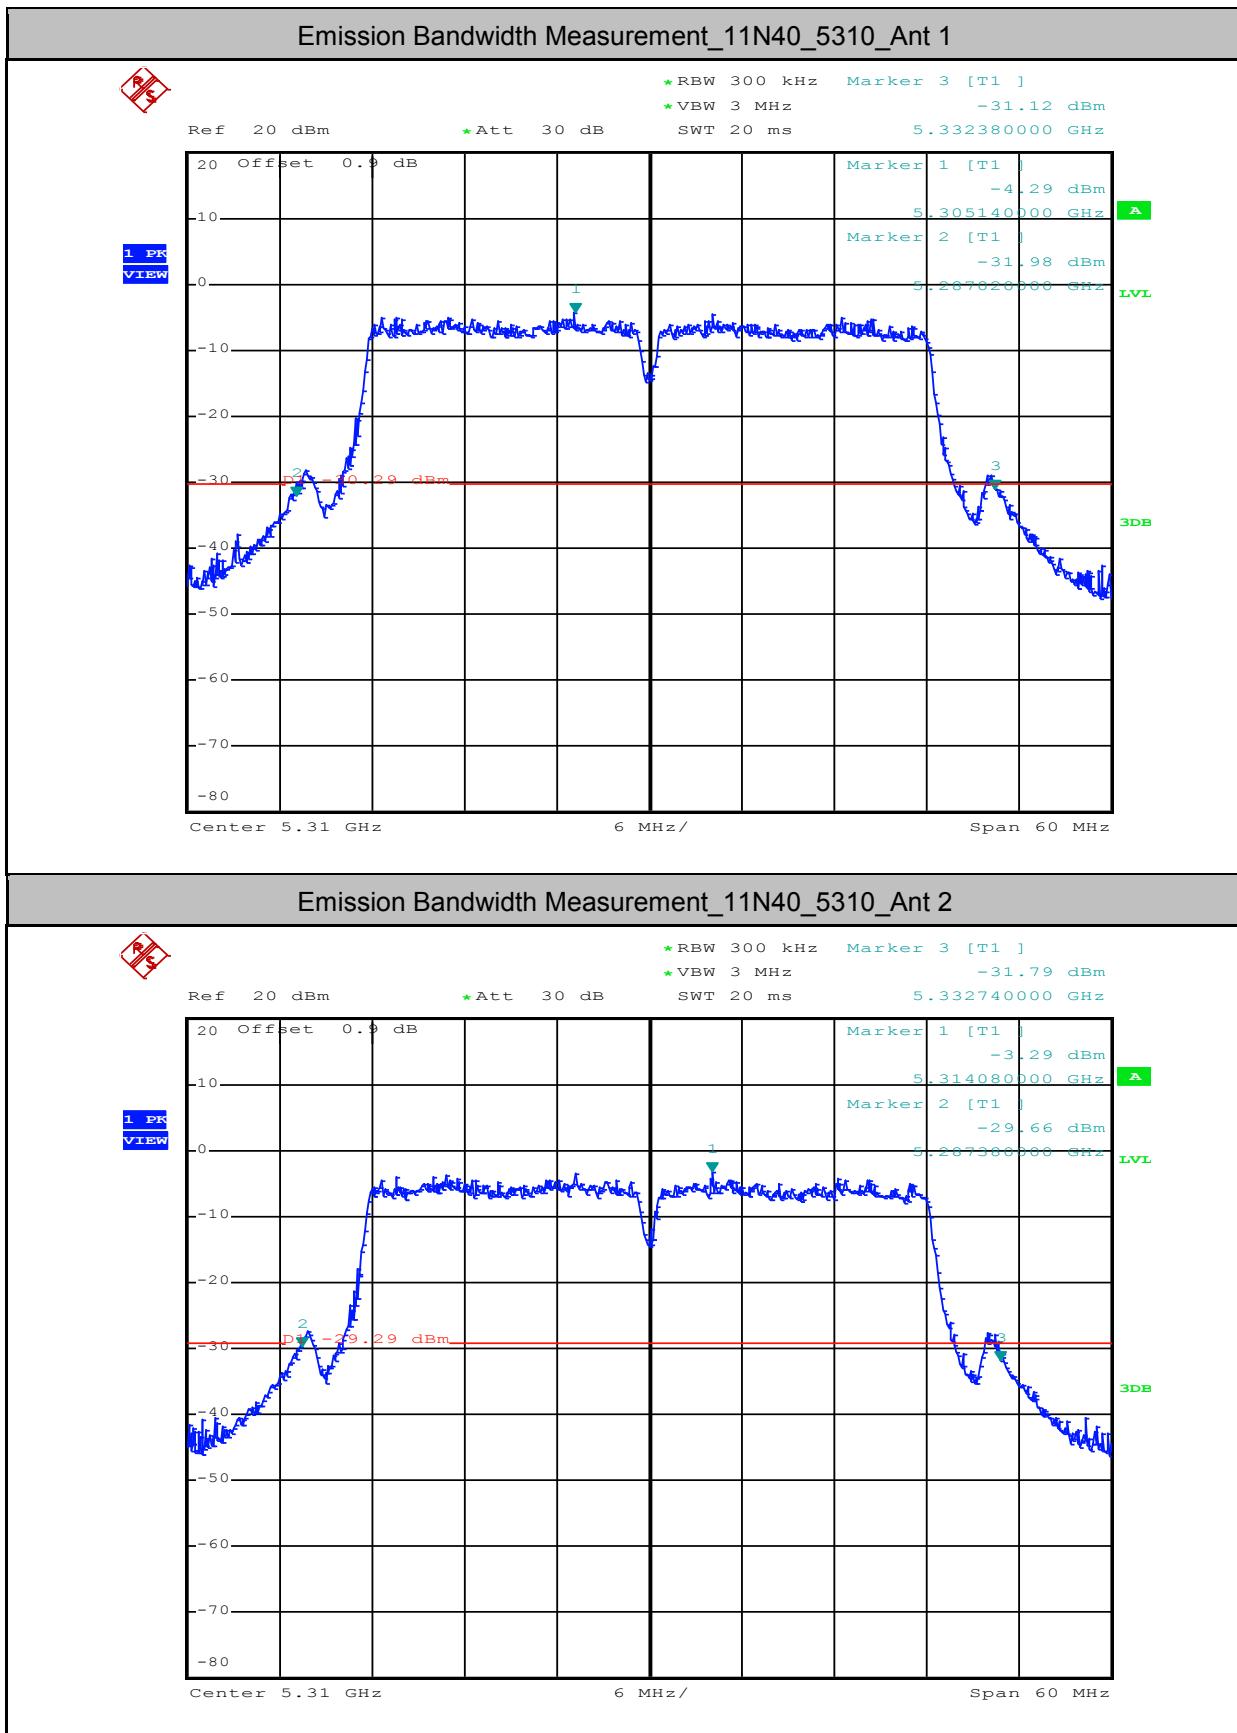


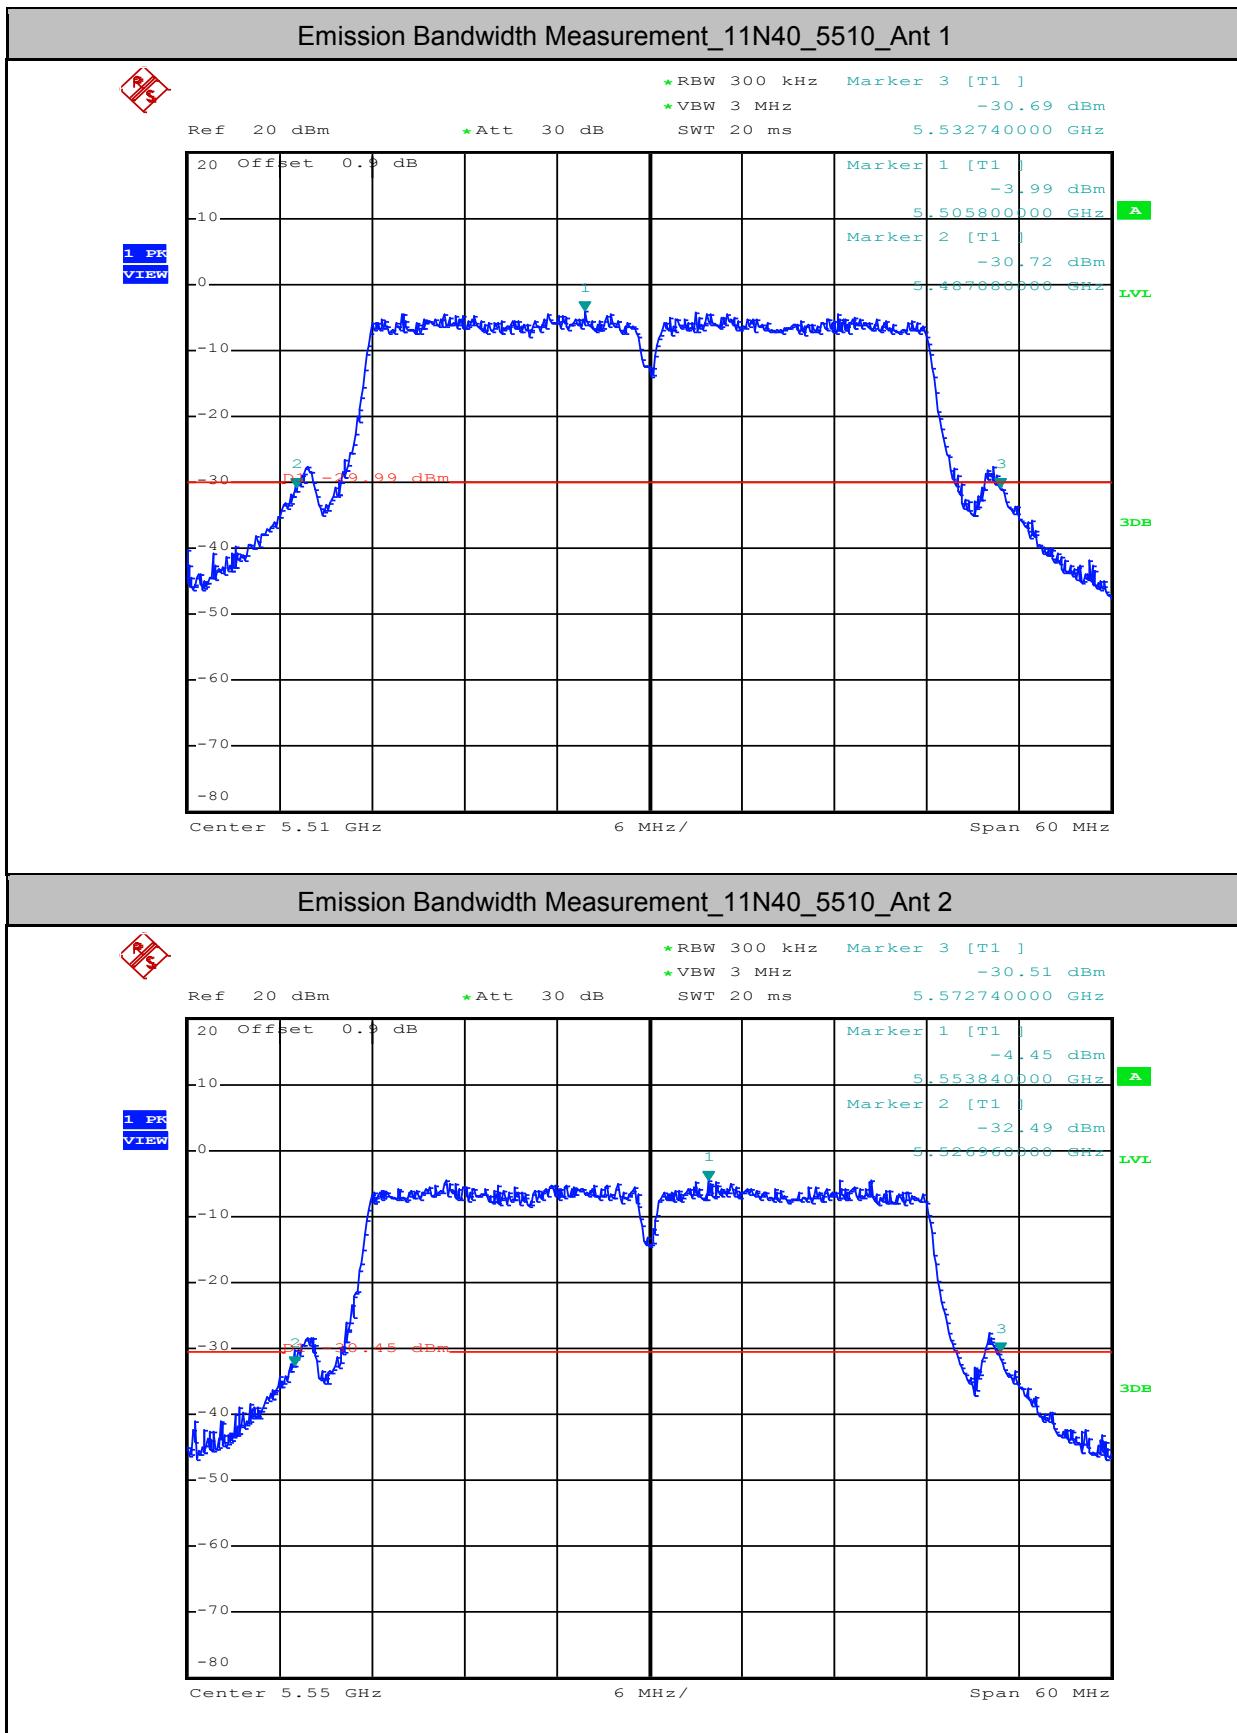

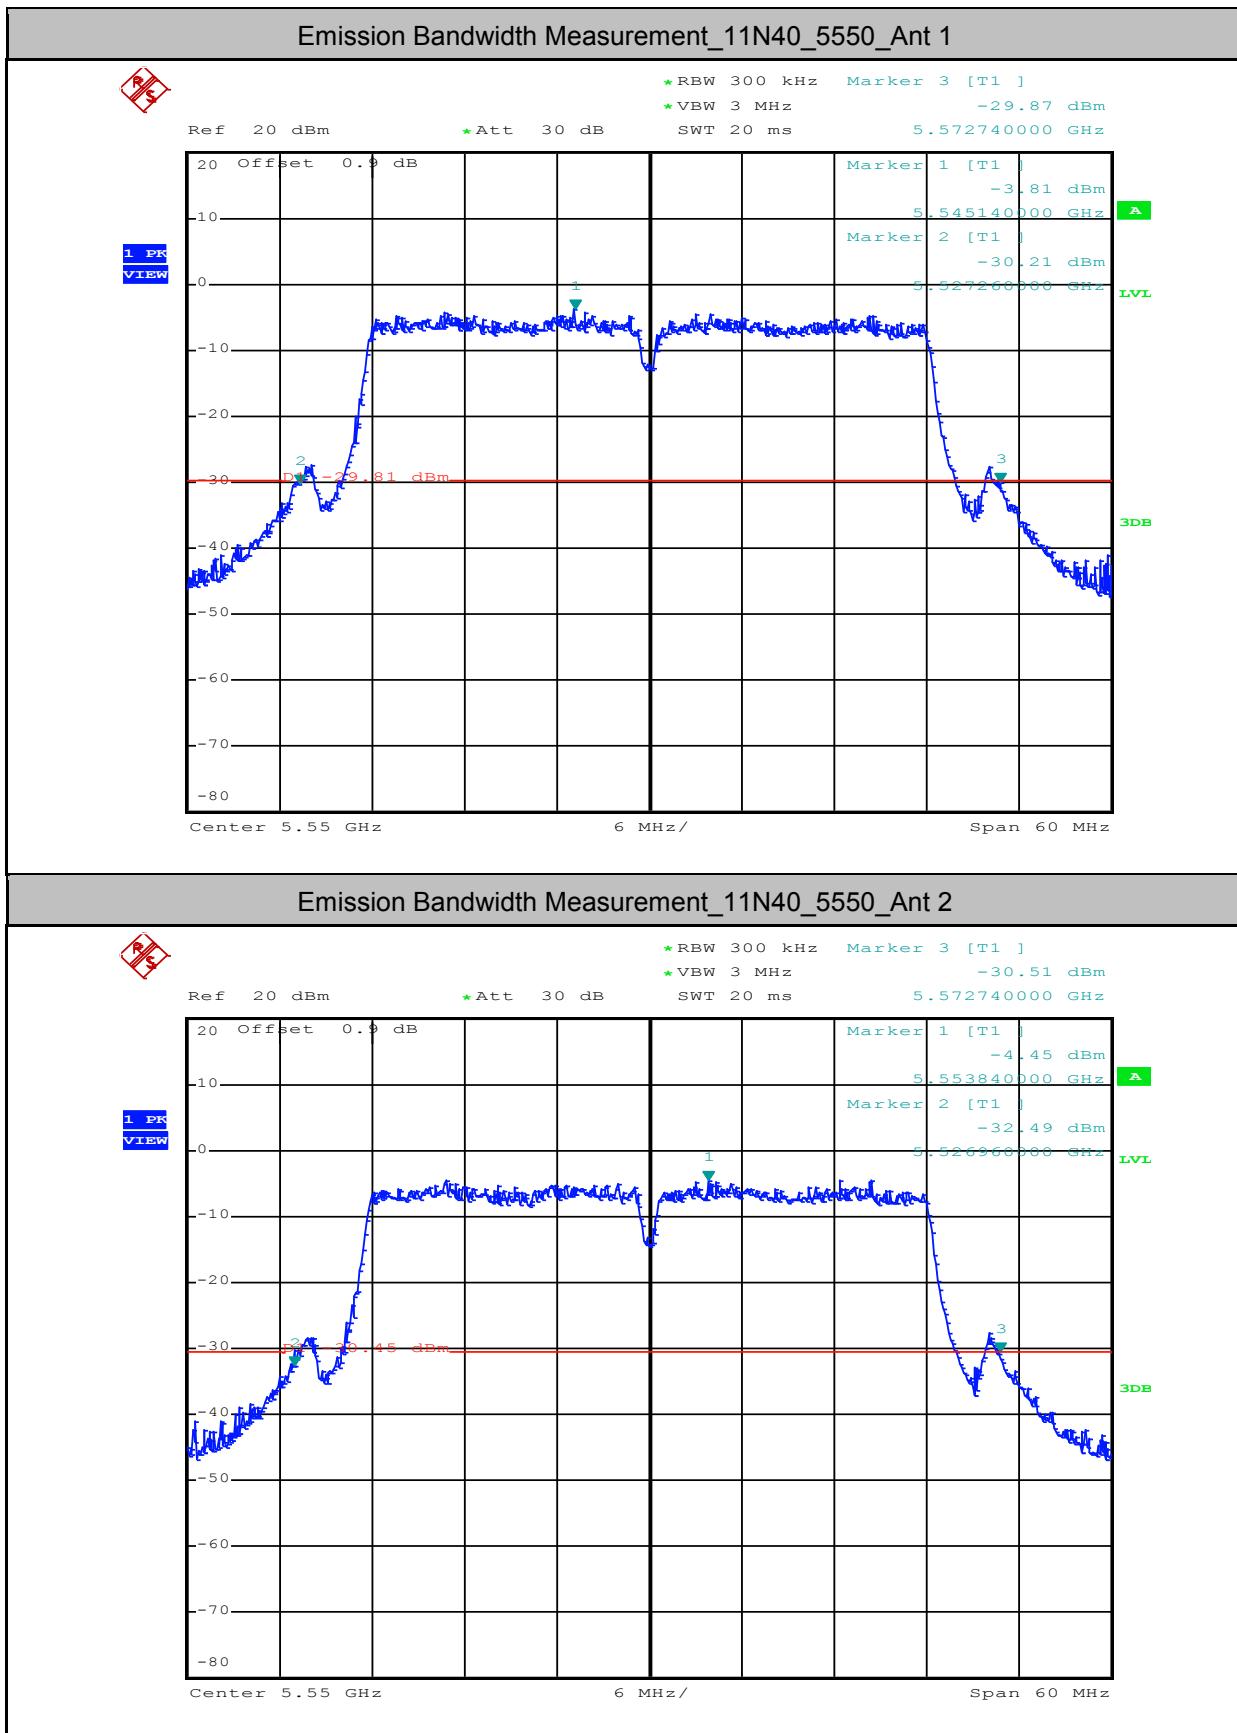

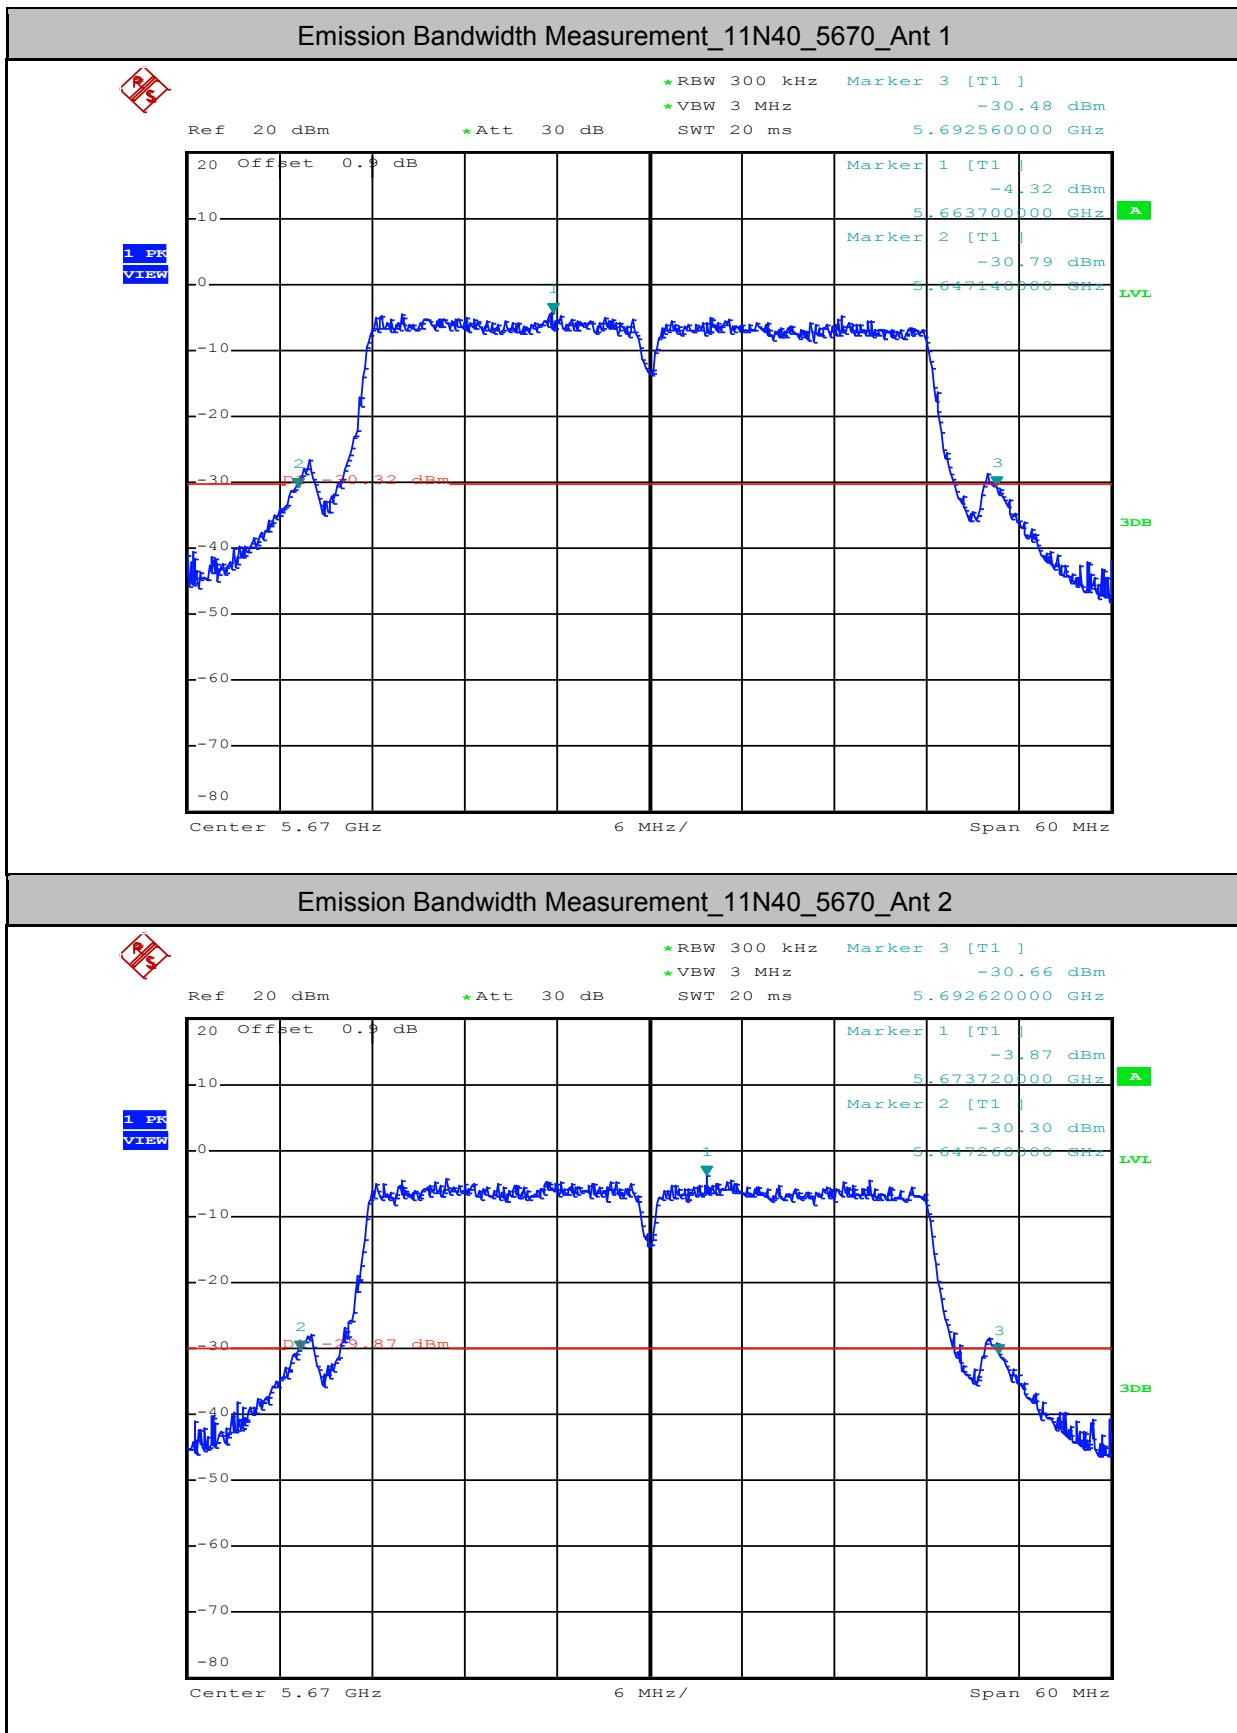

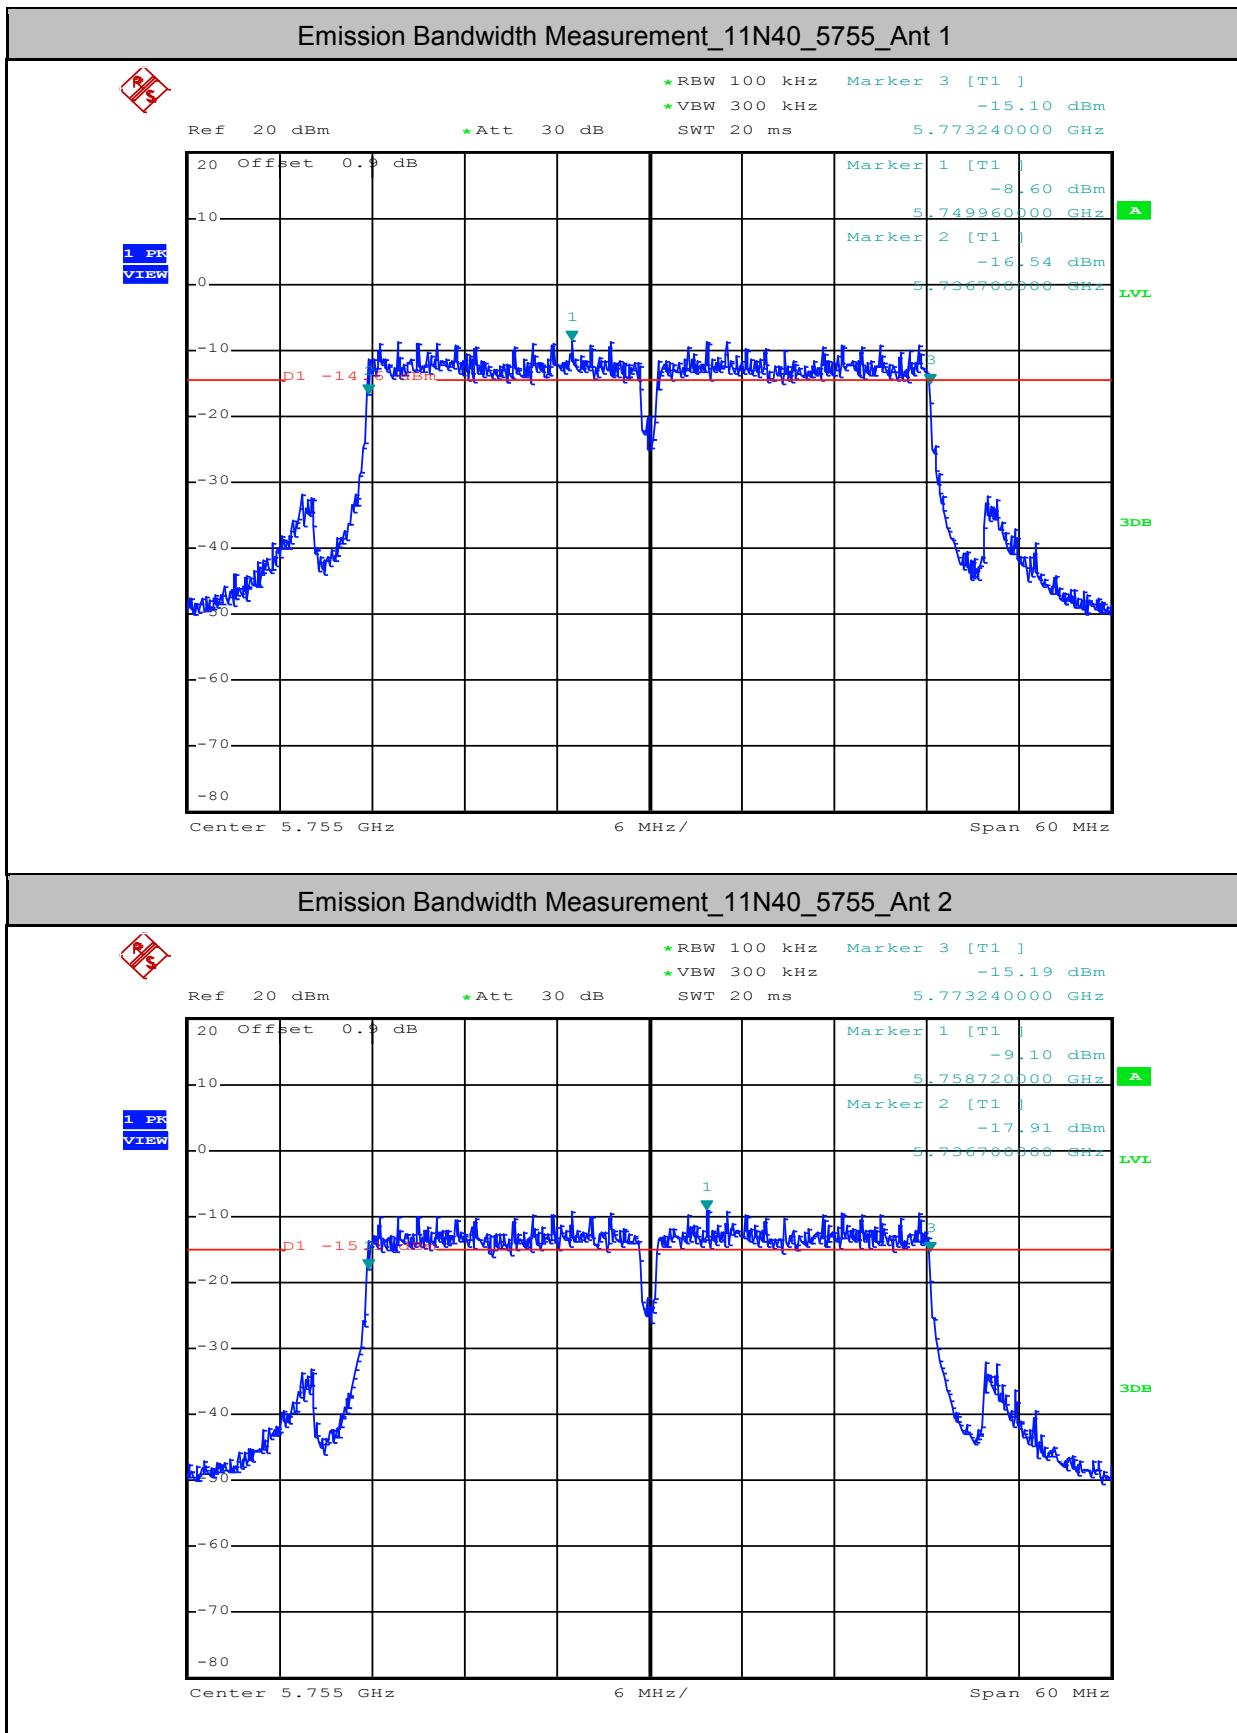

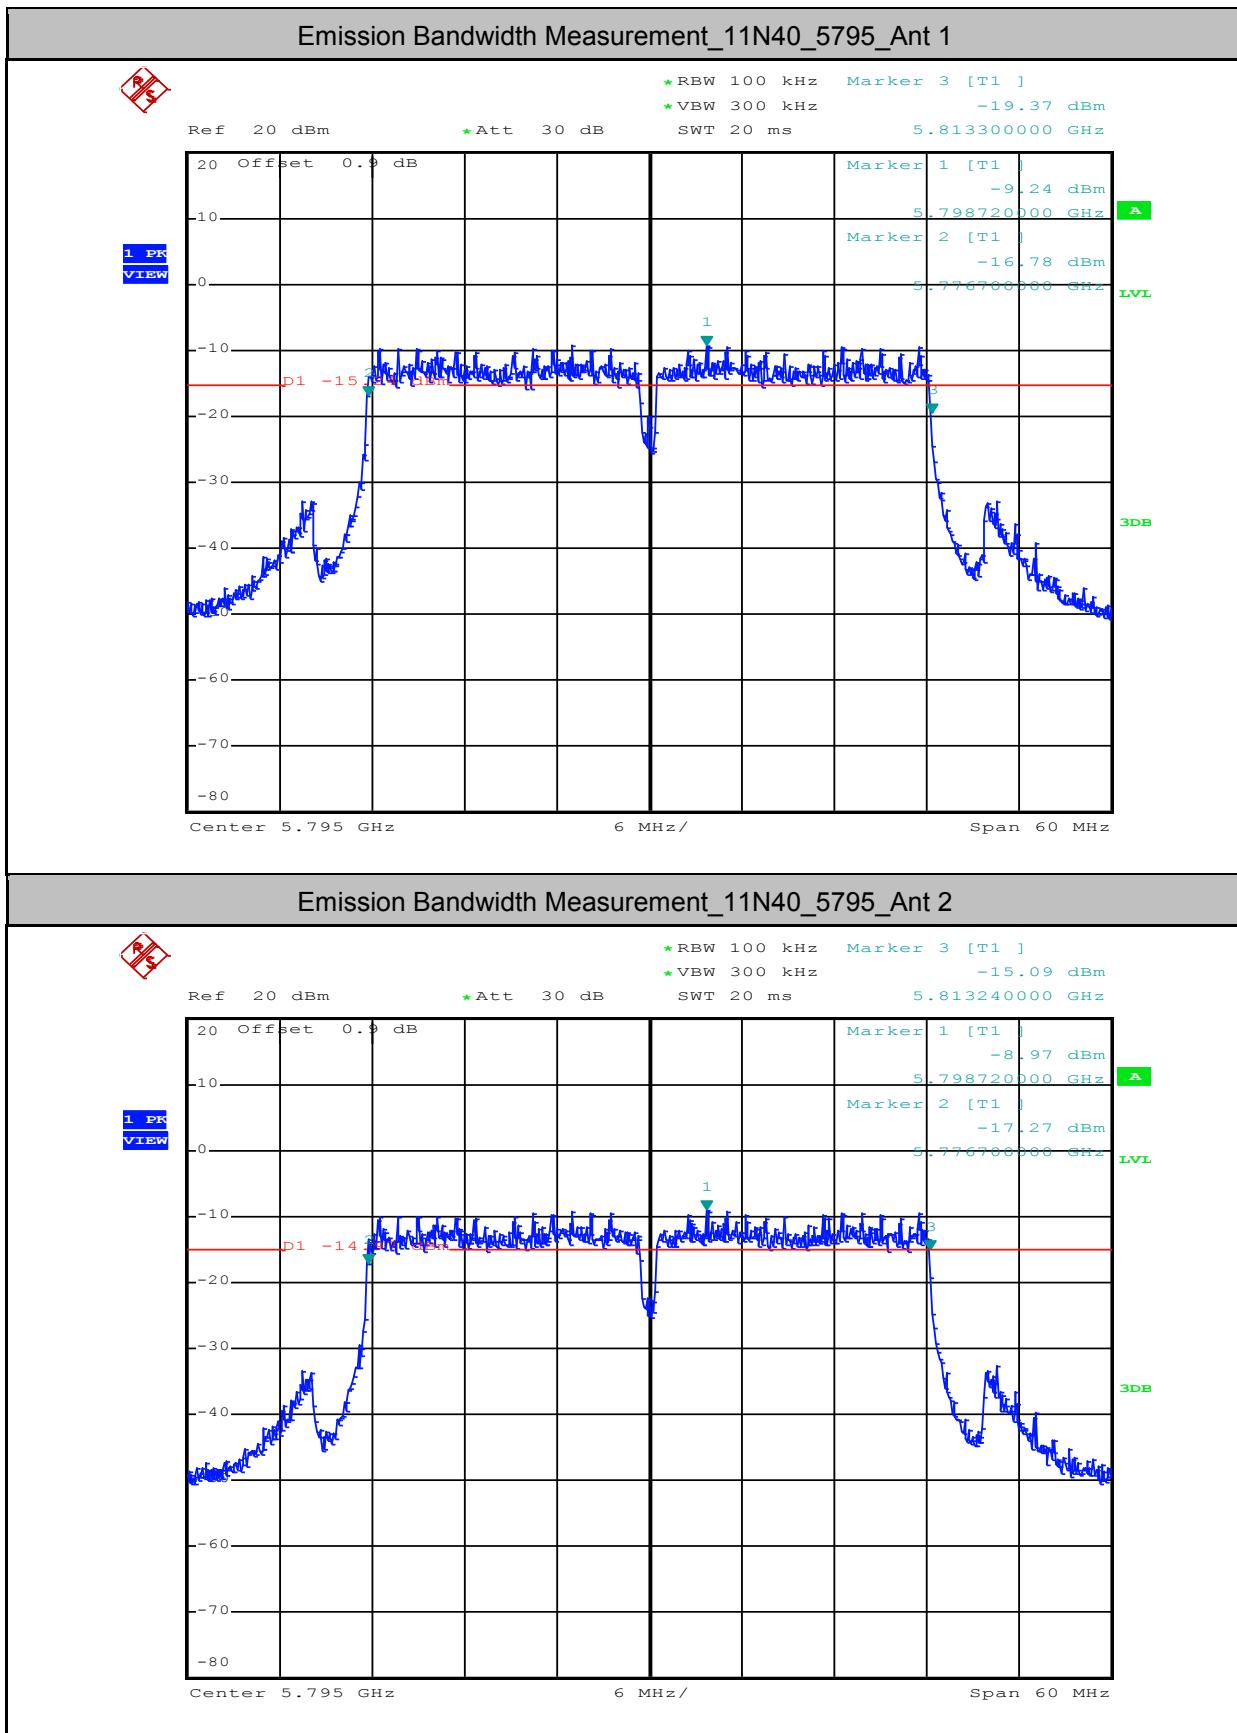

**2.Occupied Bandwidth Measurement**

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
11A	5180	Ant 1	16.560	---	PASS
11A	5180	Ant 2	16.50	---	PASS
11A	5220	Ant 1	16.530	---	PASS
11A	5220	Ant 2	16.530	---	PASS
11A	5240	Ant 1	16.560	---	PASS
11A	5240	Ant 2	16.560	---	PASS
11A	5260	Ant 1	16.530	---	PASS
11A	5260	Ant 2	16.530	---	PASS
11A	5300	Ant 1	16.560	---	PASS
11A	5300	Ant 2	16.590	---	PASS
11A	5320	Ant 1	16.560	---	PASS
11A	5320	Ant 2	16.560	---	PASS
11A	5500	Ant 1	16.530	---	PASS
11A	5500	Ant 2	16.530	---	PASS
11A	5580	Ant 1	16.500	---	PASS
11A	5580	Ant 2	16.530	---	PASS
11A	5700	Ant 1	16.560	---	PASS
11A	5700	Ant 2	16.560	---	PASS
11A	5745	Ant 1	16.530	---	PASS
11A	5745	Ant 2	16.500	---	PASS
11A	5785	Ant 1	16.530	---	PASS
11A	5785	Ant 2	16.530	---	PASS
11A	5825	Ant 1	16.560	---	PASS
11A	5825	Ant 2	16.530	---	PASS
11N20	5180	Ant 1	17.520	---	PASS
11N20	5180	Ant 2	17.490	---	PASS
11N20	5220	Ant 1	17.520	---	PASS
11N20	5220	Ant 2	17.520	---	PASS
11N20	5240	Ant 1	17.550	---	PASS
11N20	5240	Ant 2	17.490	---	PASS
11N20	5260	Ant 1	17.550	---	PASS
11N20	5260	Ant 2	17.520	---	PASS



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

Report No.: SZEM180100012605  
Page: 234 of 381

11N20	5300	Ant 1	17.550	---	PASS
11N20	5300	Ant 2	17.520	---	PASS
11N20	5320	Ant 1	17.520	---	PASS
11N20	5320	Ant 2	17.520	---	PASS
11N20	5500	Ant 1	17.550	---	PASS
11N20	5500	Ant 2	17.490	---	PASS
11N20	5580	Ant 1	17.520	---	PASS
11N20	5580	Ant 2	17.490	---	PASS
11N20	5700	Ant 1	17.520	---	PASS
11N20	5700	Ant 2	17.520	---	PASS
11N20	5745	Ant 1	17.520	---	PASS
11N20	5745	Ant 2	17.520	---	PASS
11N20	5785	Ant 1	17.550	---	PASS
11N20	5785	Ant 2	17.520	---	PASS
11N20	5825	Ant 1	17.550	---	PASS
11N20	5825	Ant 2	17.520	---	PASS
11N40	5190	Ant 1	36.360	---	PASS
11N40	5190	Ant 2	36.240	---	PASS
11N40	5230	Ant 1	36.360	---	PASS
11N40	5230	Ant 2	36.360	---	PASS
11N40	5270	Ant 1	36.360	---	PASS
11N40	5270	Ant 2	36.300	---	PASS
11N40	5310	Ant 1	36.30	---	PASS
11N40	5310	Ant 2	36.360	---	PASS
11N40	5510	Ant 1	36.300	---	PASS
11N40	5510	Ant 2	36.240	---	PASS
11N40	5550	Ant 1	36.300	---	PASS
11N40	5550	Ant 2	36.300	---	PASS
11N40	5670	Ant 1	36.300	---	PASS
11N40	5670	Ant 2	36.300	---	PASS
11N40	5755	Ant 1	36.300	---	PASS
11N40	5755	Ant 2	36.300	---	PASS
11N40	5795	Ant 1	36.360	---	PASS
11N40	5795	Ant 2	36.300	---	PASS

