

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	24.77	PASS
EGPRS1900 1 Slot	661	1880	25.32	PASS
EGPRS1900 1 Slot	810	1909.8	25.80	PASS
EGPRS1900 2 Slot	512	1850.2	24.45	PASS
EGPRS1900 2 Slot	661	1880	23.97	PASS
EGPRS1900 2 Slot	810	1909.8	24.40	PASS
EGPRS1900 3 Slot	512	1850.2	21.67	PASS
EGPRS1900 3 Slot	661	1880	21.61	PASS
EGPRS1900 3 Slot	810	1909.8	21.91	PASS
EGPRS1900 4 Slot	512	1850.2	20.04	PASS
EGPRS1900 4 Slot	661	1880	20.10	PASS
EGPRS1900 4 Slot	810	1909.8	20.60	PASS
EGPRS850 1 Slot	128	824.2	25.61	PASS
EGPRS850 1 Slot	189	836.4	26.26	PASS
EGPRS850 1 Slot	251	848.8	25.98	PASS
EGPRS850 2 Slot	128	824.2	25.17	PASS
EGPRS850 2 Slot	189	836.4	25.56	PASS
EGPRS850 2 Slot	251	848.8	25.19	PASS
EGPRS850 3 Slot	128	824.2	23.19	PASS
EGPRS850 3 Slot	189	836.4	23.54	PASS
EGPRS850 3 Slot	251	848.8	23.00	PASS
EGPRS850 4 Slot	128	824.2	21.94	PASS
EGPRS850 4 Slot	189	836.4	22.34	PASS
EGPRS850 4 Slot	251	848.8	22.02	PASS
GPRS1900 1 Slot	512	1850.2	29.84	PASS
GPRS1900 1 Slot	661	1880	29.62	PASS
GPRS1900 1 Slot	810	1909.8	29.14	PASS
GPRS1900 2 Slot	512	1850.2	28.91	PASS
GPRS1900 2 Slot	661	1880	28.74	PASS
GPRS1900 2 Slot	810	1909.8	28.32	PASS
GPRS1900 3 Slot	512	1850.2	26.69	PASS
GPRS1900 3 Slot	661	1880	26.66	PASS
GPRS1900 3 Slot	810	1909.8	26.40	PASS
GPRS1900 4 Slot	512	1850.2	25.66	PASS
GPRS1900 4 Slot	661	1880	25.61	PASS
GPRS1900 4 Slot	810	1909.8	25.38	PASS
GPRS850 1 Slot	128	824.2	33.02	PASS
GPRS850 1 Slot	189	836.4	32.99	PASS
GPRS850 1 Slot	251	848.8	32.91	PASS
GPRS850 2 Slot	128	824.2	32.03	PASS
GPRS850 2 Slot	189	836.4	32.01	PASS

GPRS850 2 Slot	251	848.8	31.93	PASS
GPRS850 3 Slot	128	824.2	29.95	PASS
GPRS850 3 Slot	189	836.4	29.97	PASS
GPRS850 3 Slot	251	848.8	29.89	PASS
GPRS850 4 Slot	128	824.2	28.79	PASS
GPRS850 4 Slot	189	836.4	28.84	PASS
GPRS850 4 Slot	251	848.8	28.79	PASS
GSM1900	512	1850.2	29.88	PASS
GSM1900	661	1880	29.68	PASS
GSM1900	810	1909.8	29.19	PASS
GSM850	128	824.2	33.02	PASS
GSM850	189	836.4	33.04	PASS
GSM850	251	848.8	32.96	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	7.43	13	PASS
EGPRS1900	661	1880	7.27	13	PASS
EGPRS1900	810	1909.8	6.03	13	PASS
EGPRS850	128	824.2	9.01	13	PASS
EGPRS850	189	836.4	8.79	13	PASS
EGPRS850	251	848.8	8.90	13	PASS


EGPRS1900 Channel=512

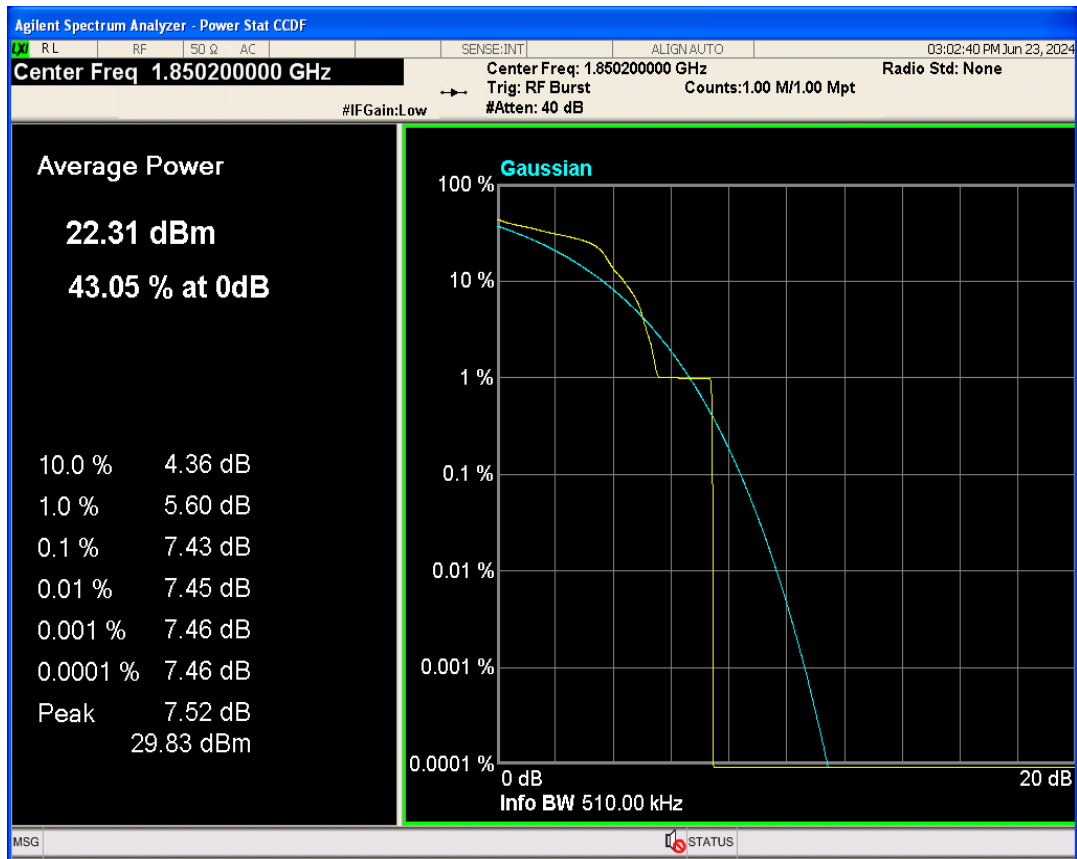


EGPRS1900 Channel=810

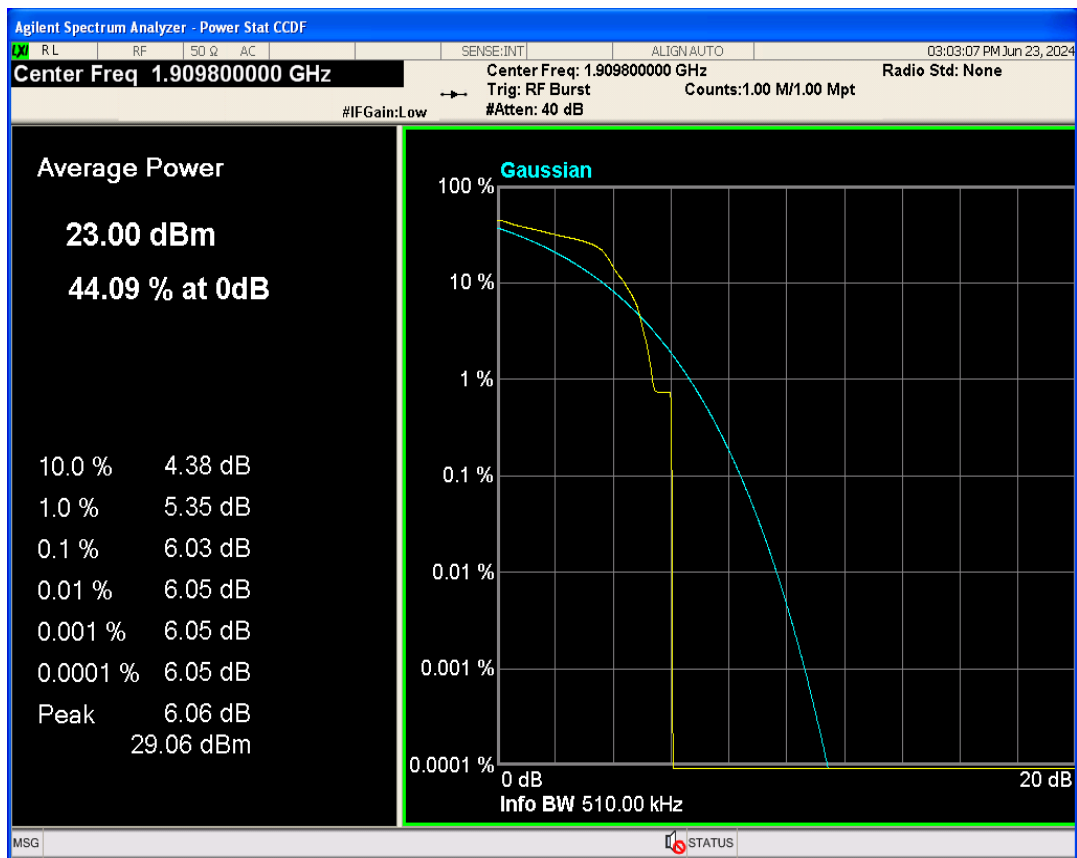

EGPRS1900 Channel=661

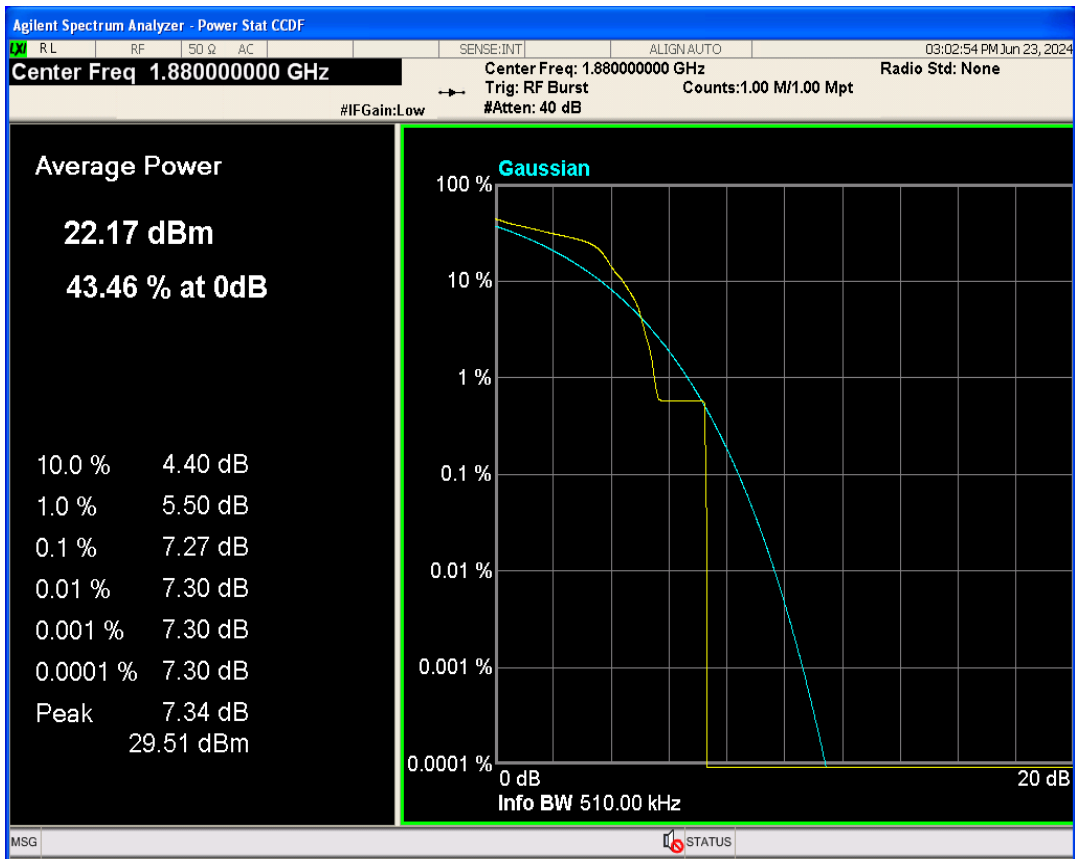


EGPRS850 Channel=128

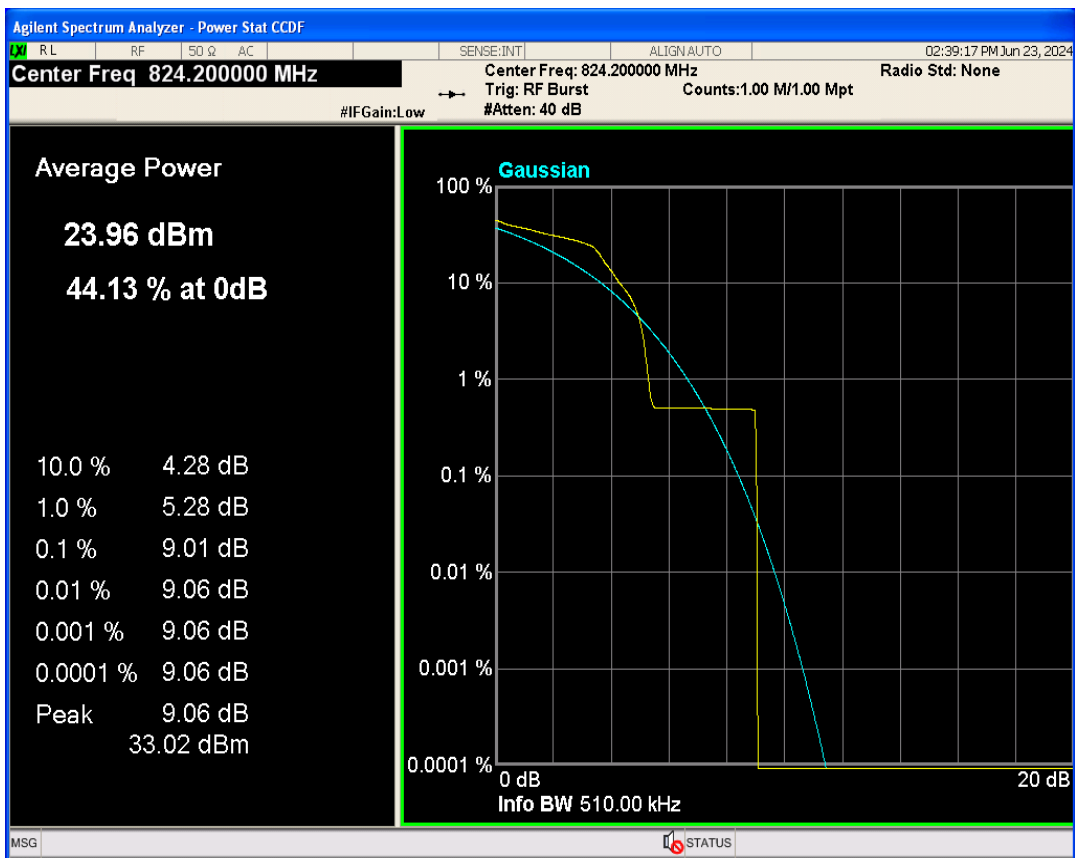

EGPRS850 Channel=189




EGPRS850 Channel=251

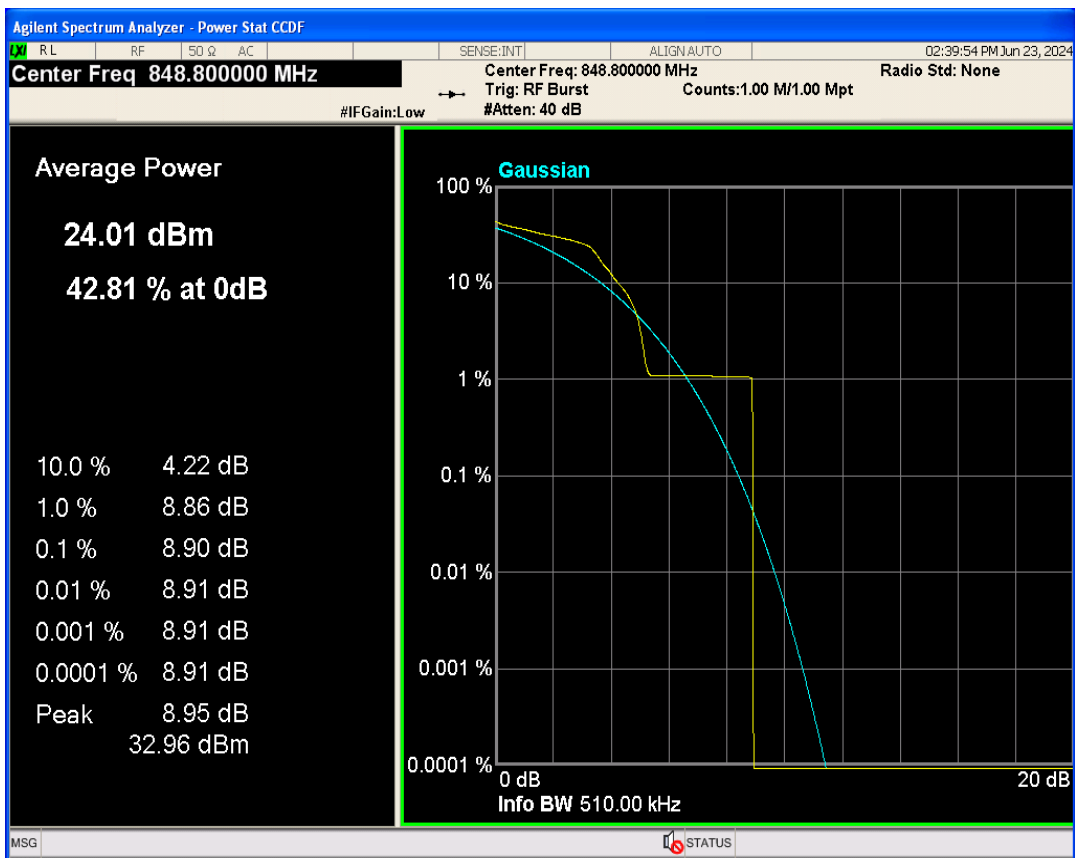


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	251.758	320.224	PASS
EGPRS1900	661	1880	245.600	311.099	PASS
EGPRS1900	810	1909.8	251.051	314.658	PASS
EGPRS850	128	824.2	246.870	297.375	PASS
EGPRS850	189	836.4	246.633	327.877	PASS
EGPRS850	251	848.8	246.641	303.457	PASS


EGPRS1900 Channel=512

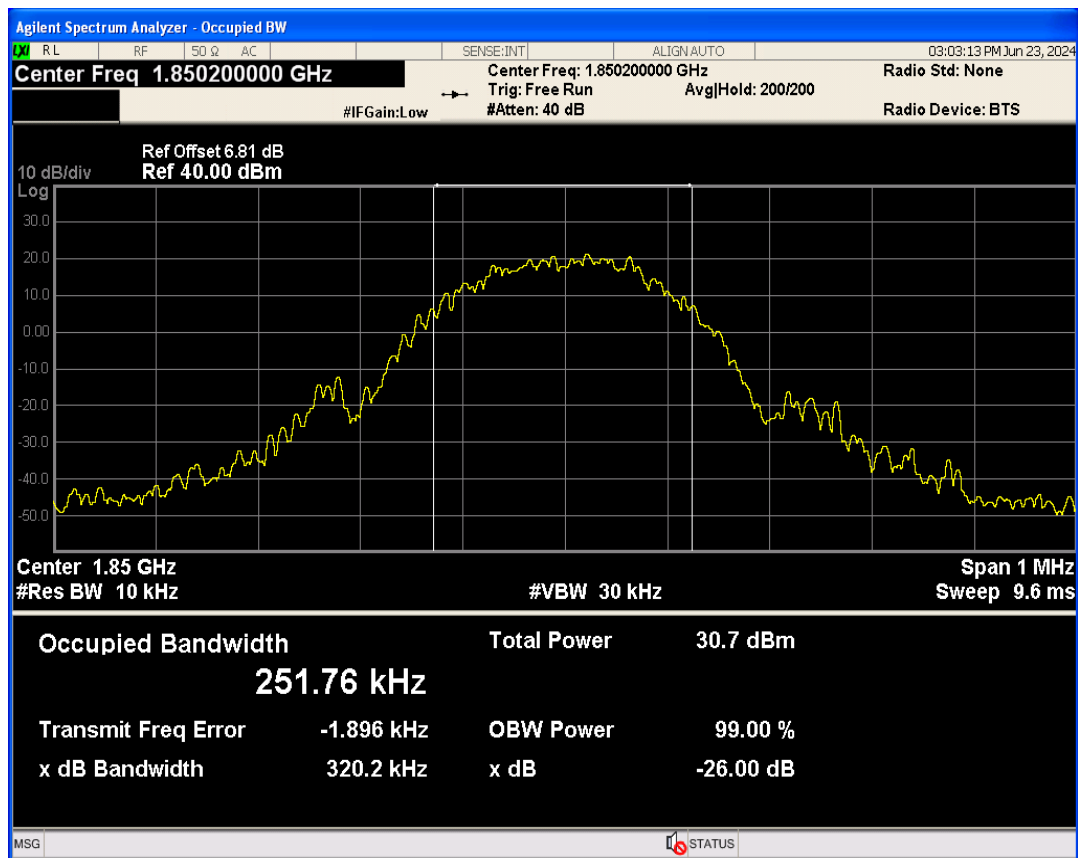


EGPRS1900 Channel=661

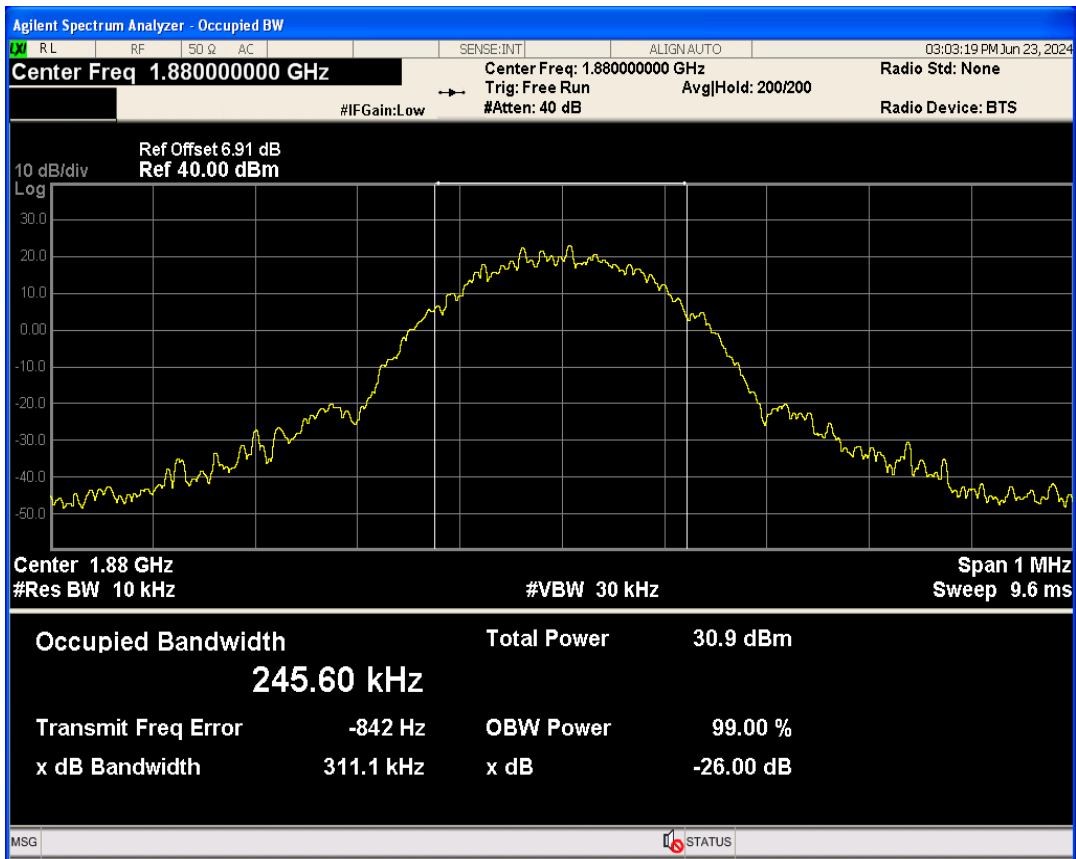


EGPRS1900 Channel=810

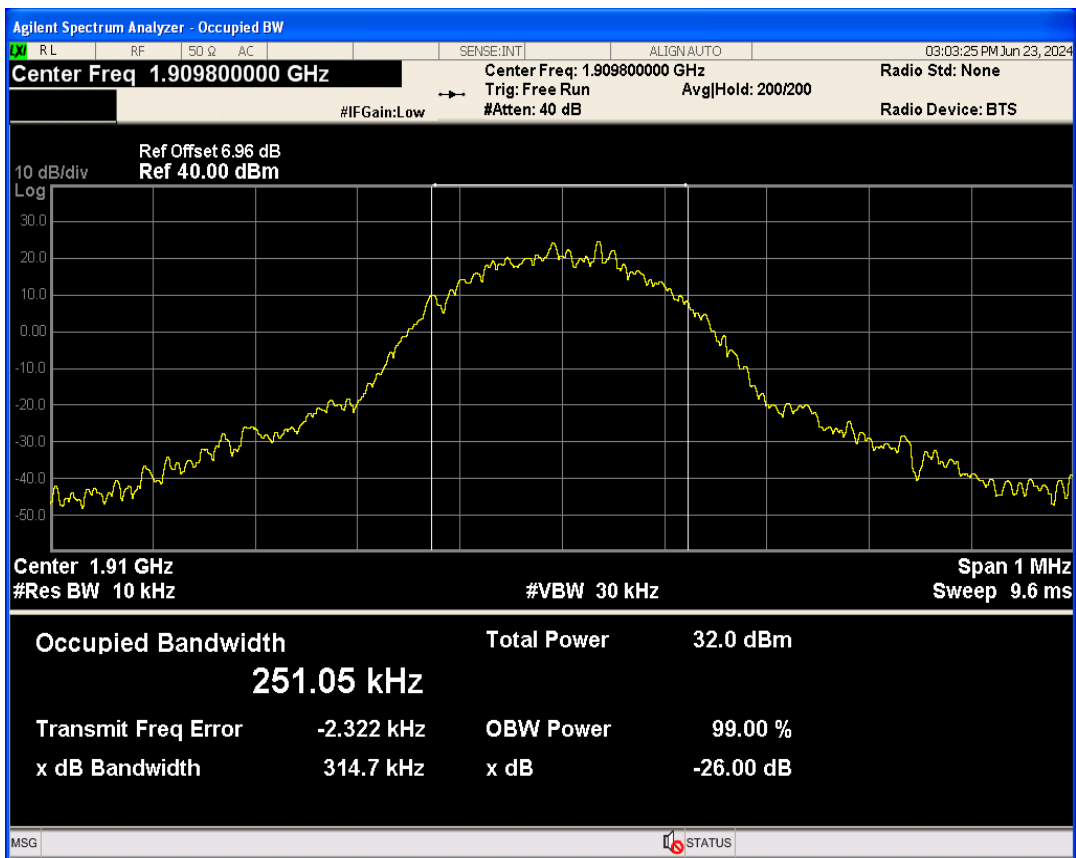


EGPRS850 Channel=128

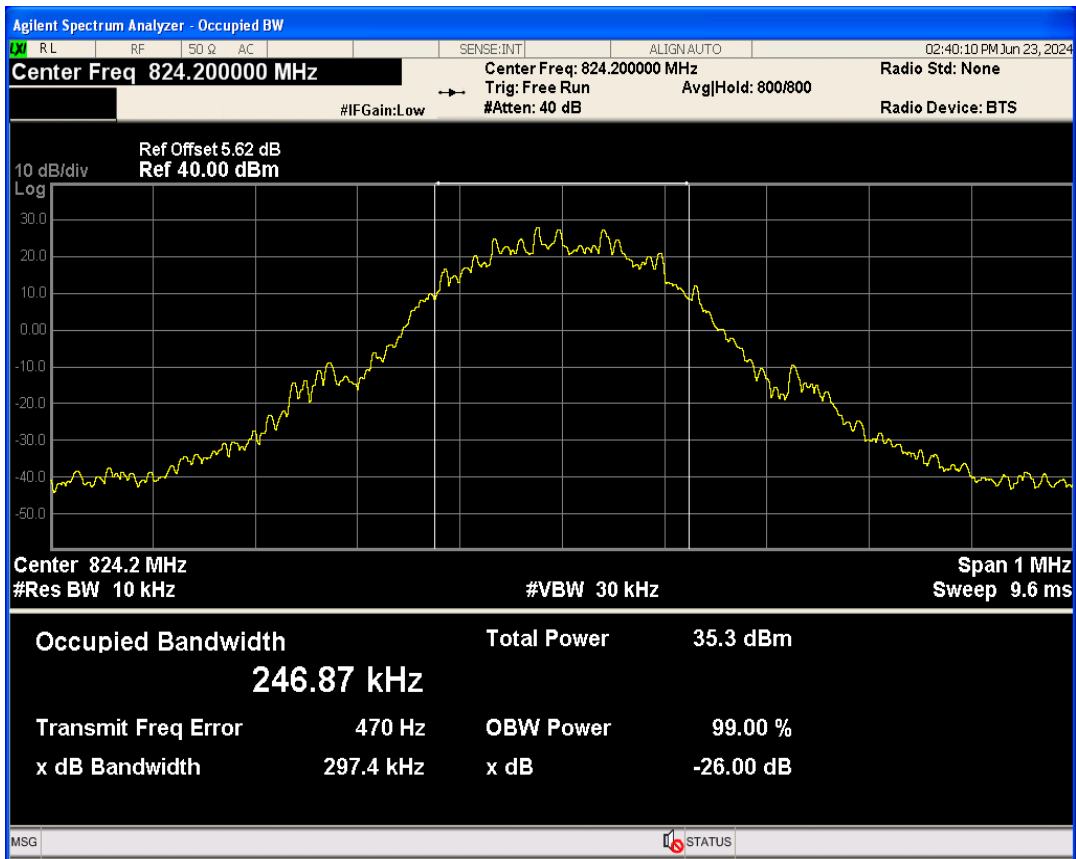

EGPRS850 Channel=189

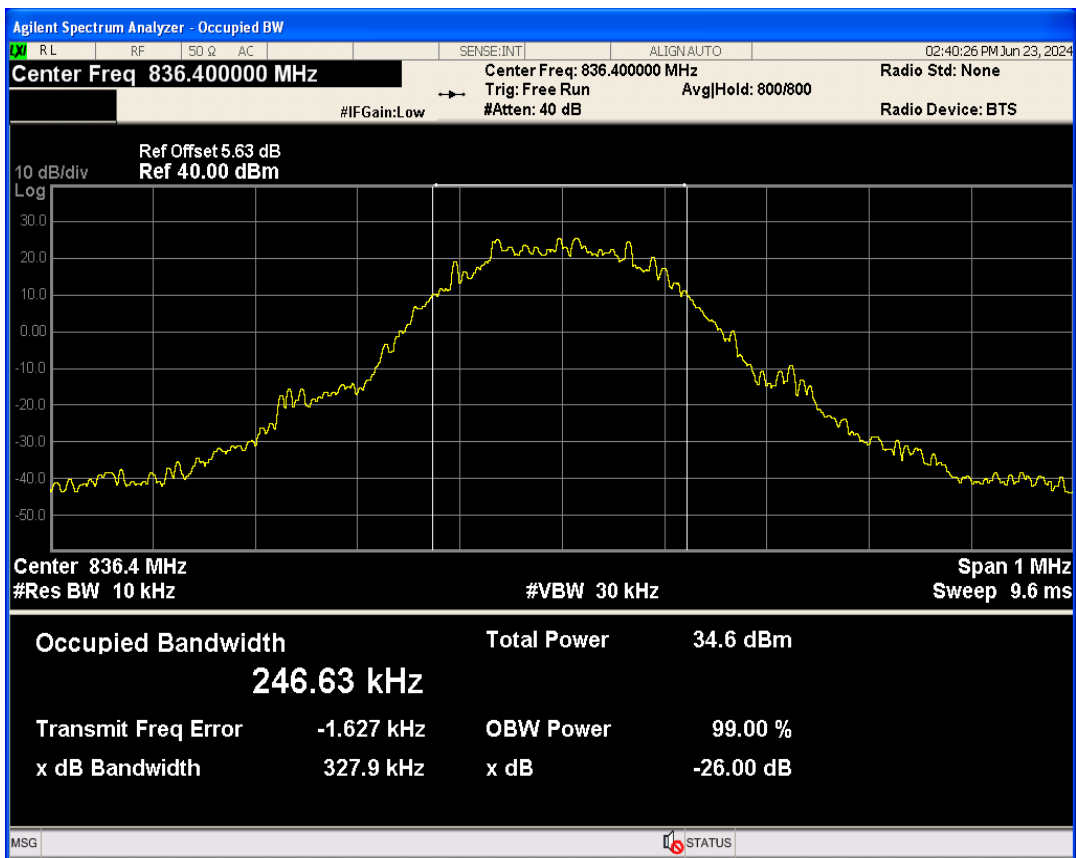


EGPRS850 Channel=251

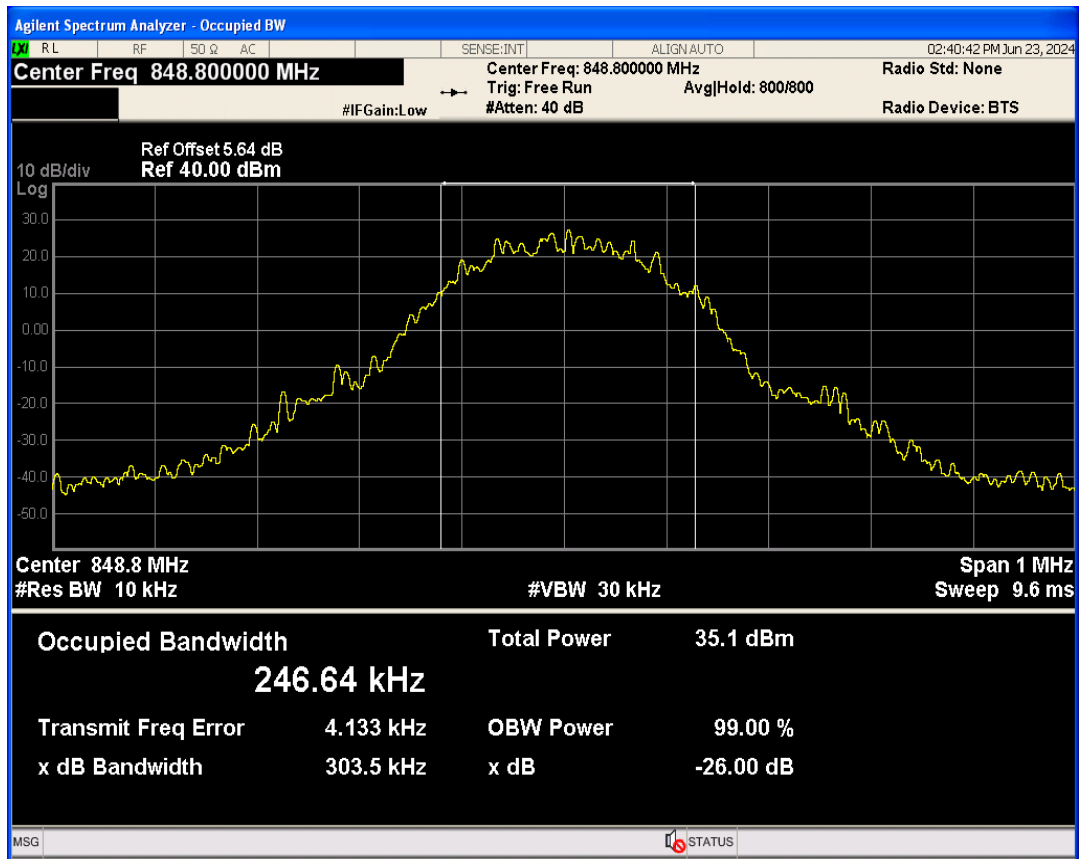


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-38.47	-13	PASS
EGPRS1900	810	1909.8	1910.01	-39.02	-13	PASS
EGPRS850	128	824.2	823.99	-36.21	-13	PASS
EGPRS850	251	848.8	849.01	-34.98	-13	PASS


EGPRS1900 Channel=512

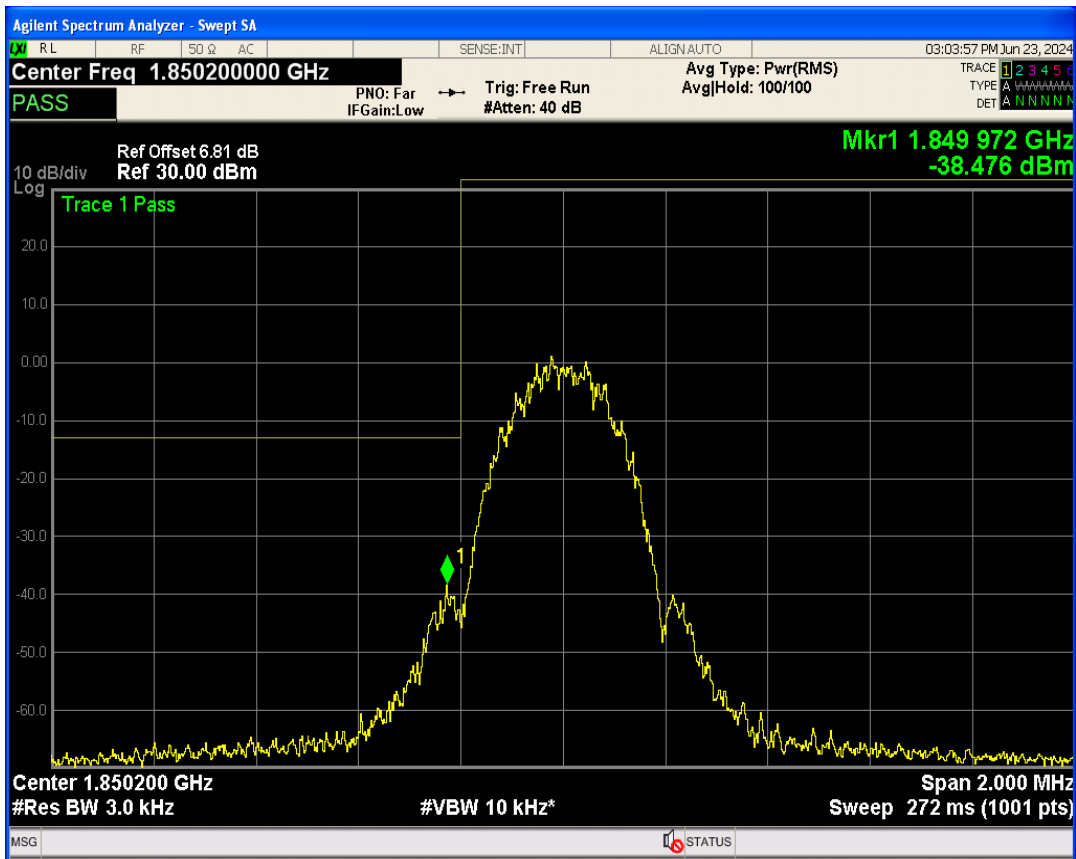


EGPRS1900 Channel=810

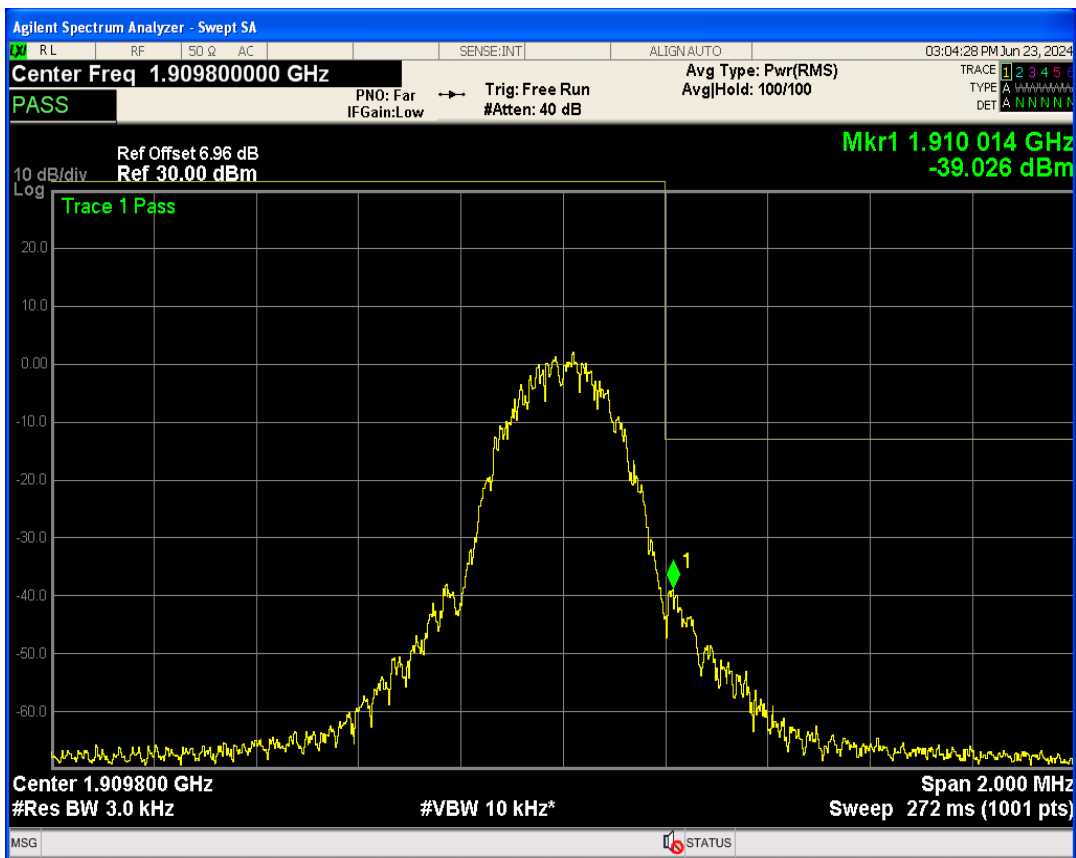

EGPRS850 Channel=128

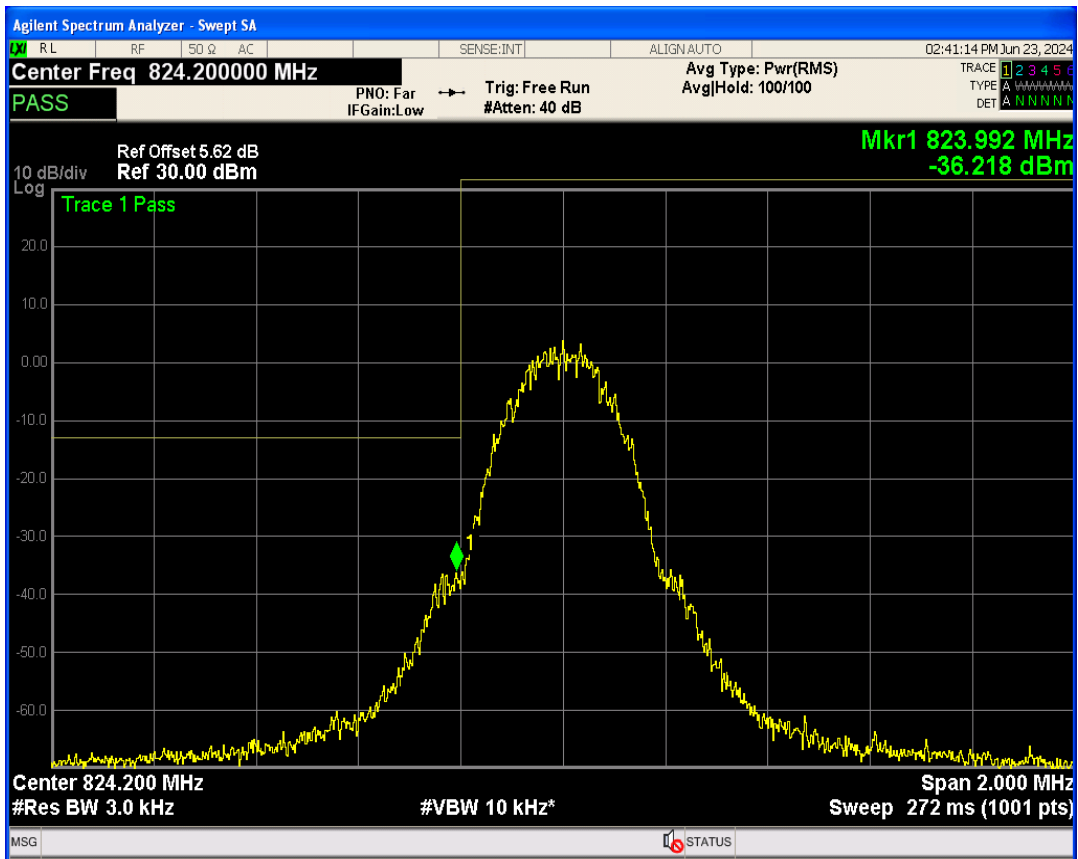


EGPRS850 Channel=251

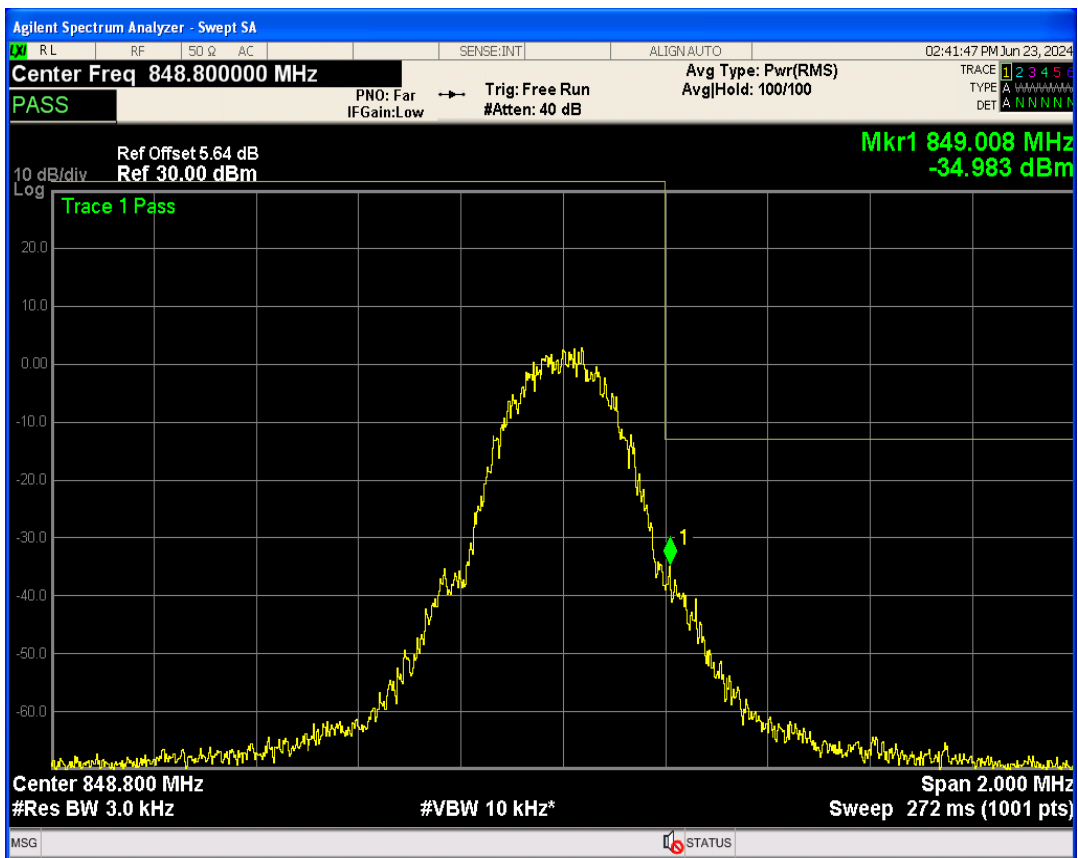


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	26015.60	-19.61	-13	PASS
EGPRS1900	661	1880	25504.07	-19.55	-13	PASS
EGPRS1900	810	1909.8	26018.25	-18.62	-13	PASS
EGPRS850	128	824.2	26020.23	-20.84	-13	PASS
EGPRS850	189	836.4	25948.10	-20.56	-13	PASS
EGPRS850	251	848.8	25449.80	-20.86	-13	PASS


EGPRS1900 Channel=661

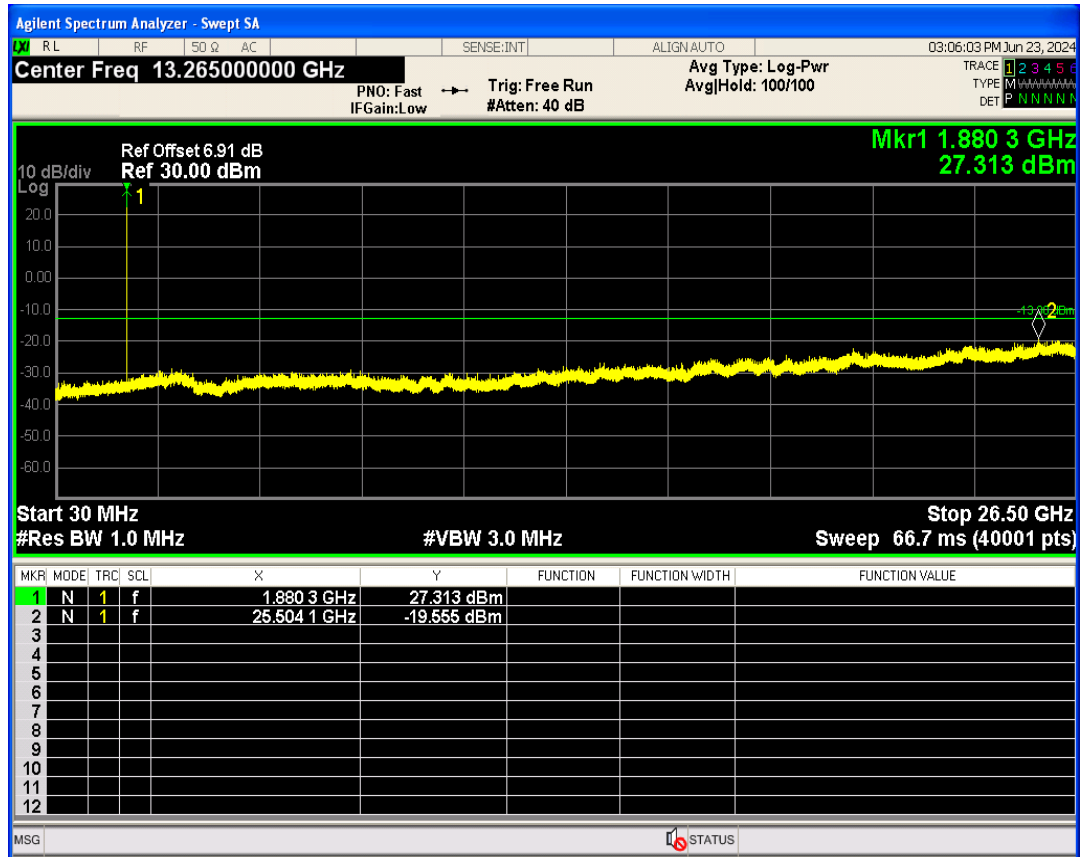


EGPRS1900 Channel=512

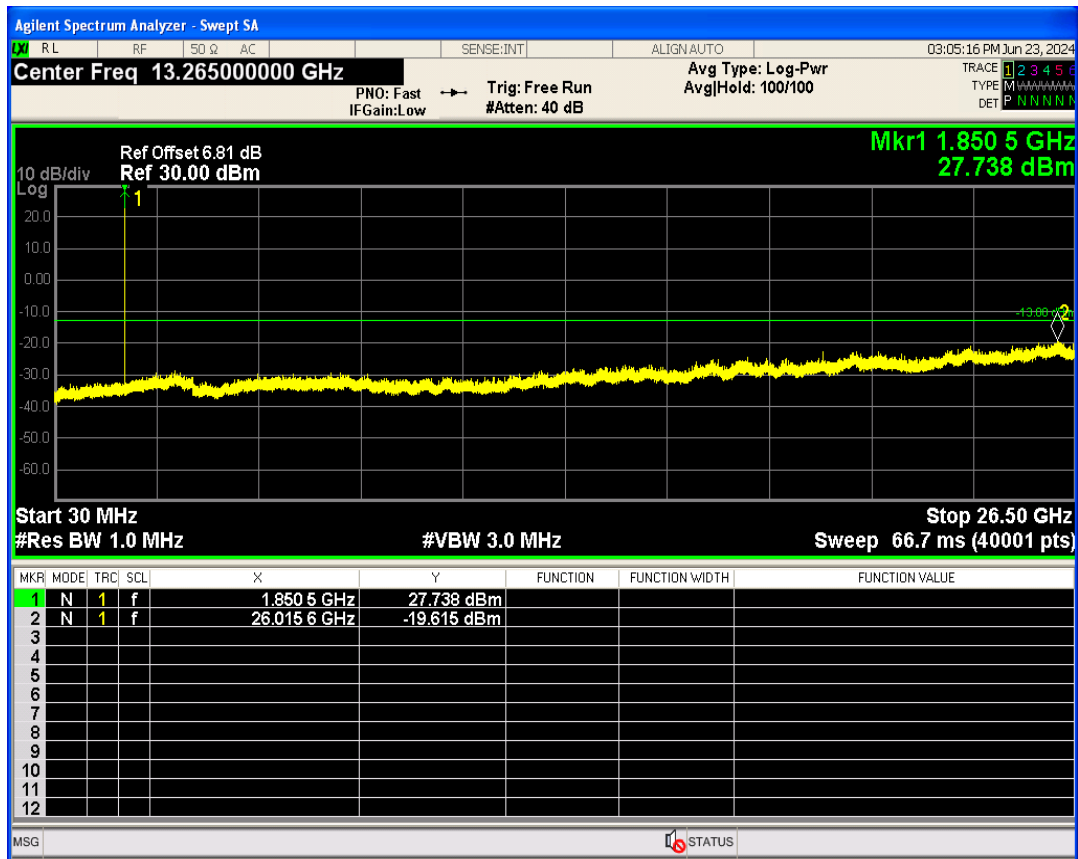


EGPRS1900 Channel=810

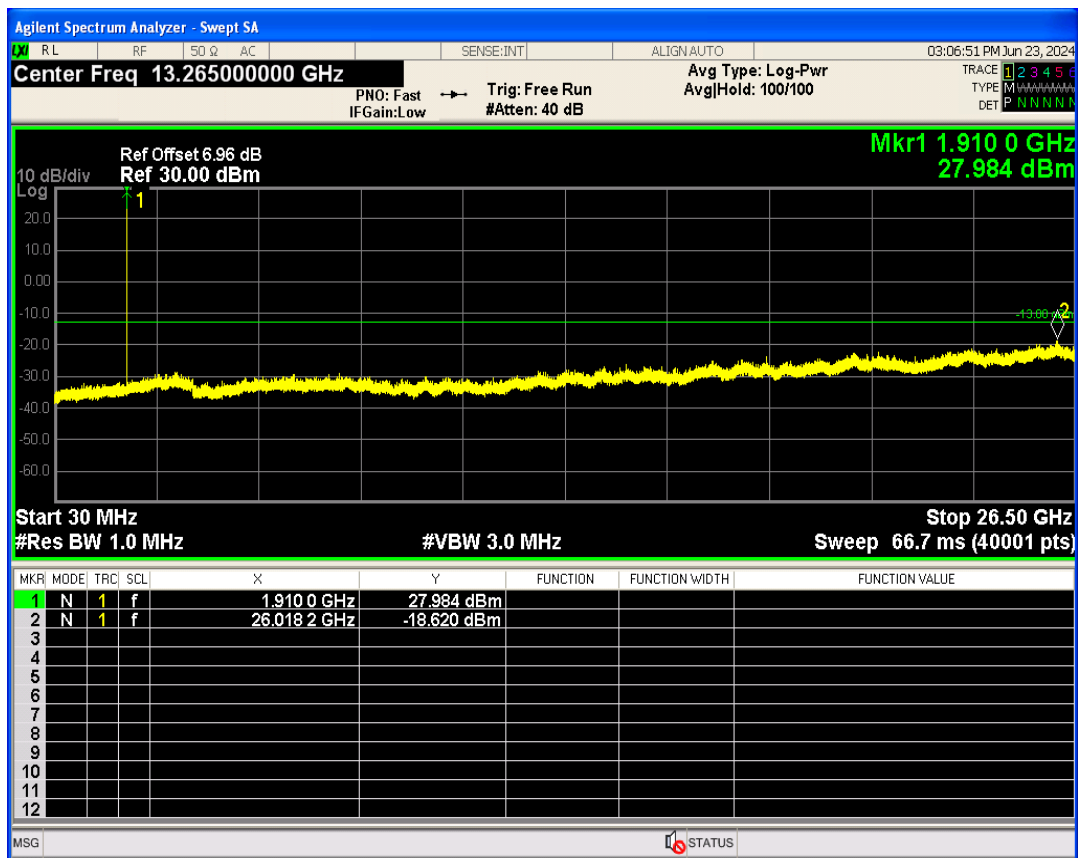


EGPRS850 Channel=128

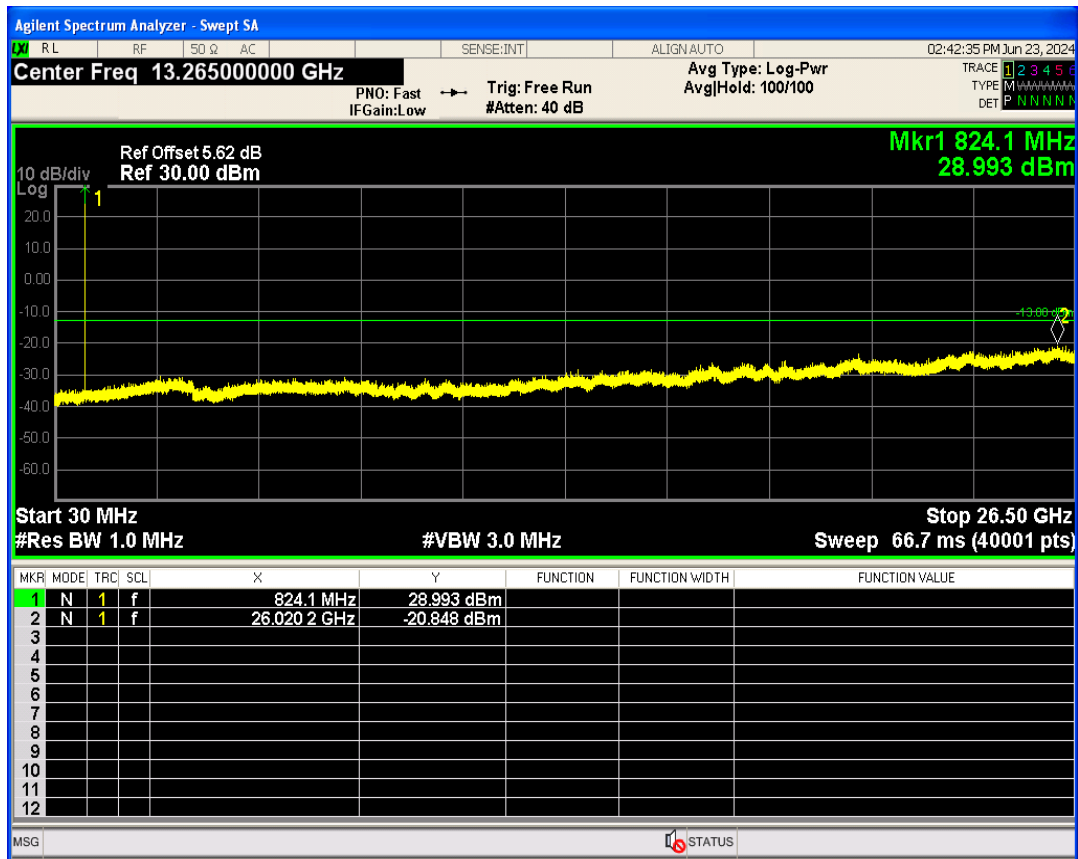

EGPRS850 Channel=189

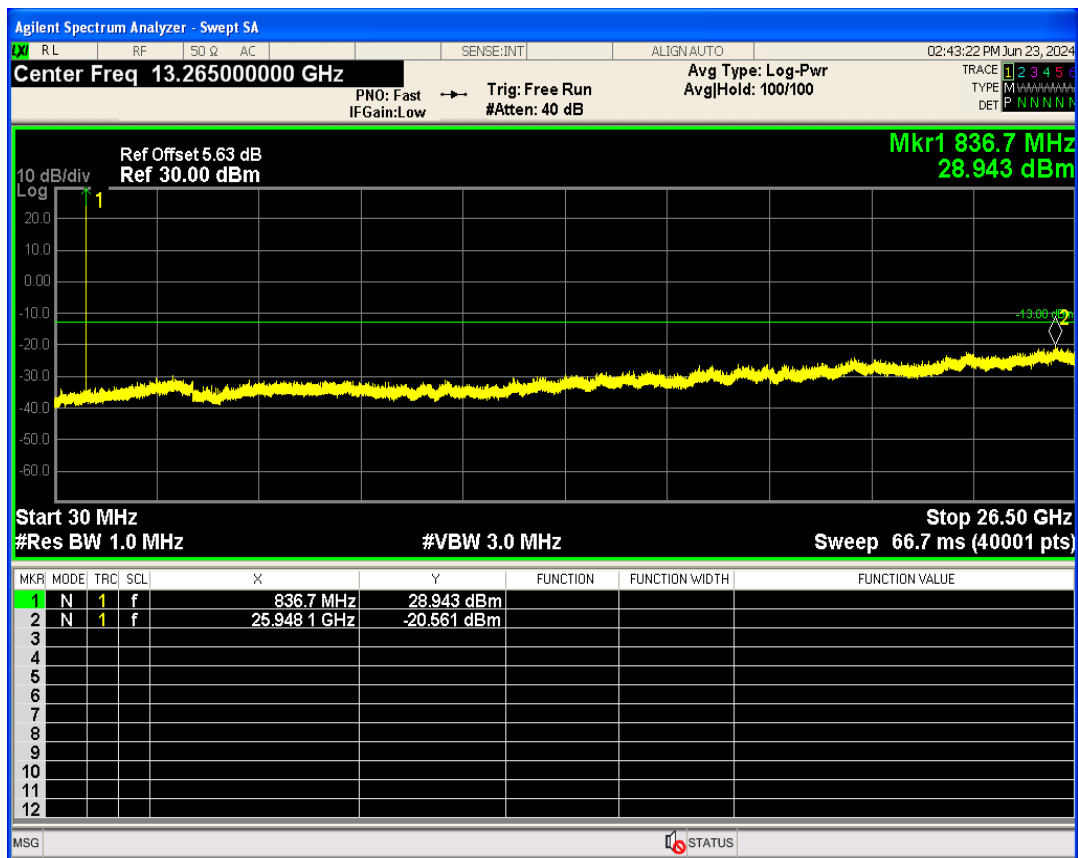


EGPRS850 Channel=251

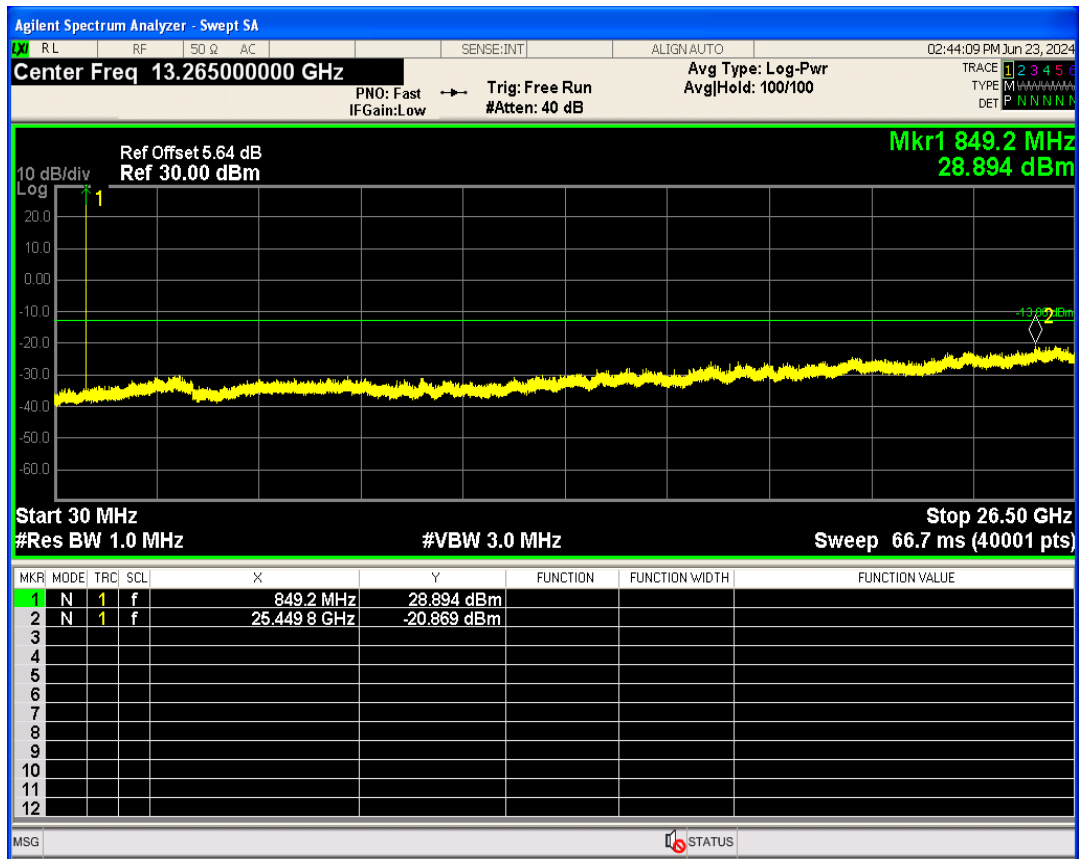


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.67	13	PASS
GPRS1900	661	1880	2.68	13	PASS
GPRS1900	810	1909.8	2.67	13	PASS
GPRS850	128	824.2	2.64	13	PASS
GPRS850	189	836.4	2.63	13	PASS
GPRS850	251	848.8	2.65	13	PASS


GPRS1900 Channel=661

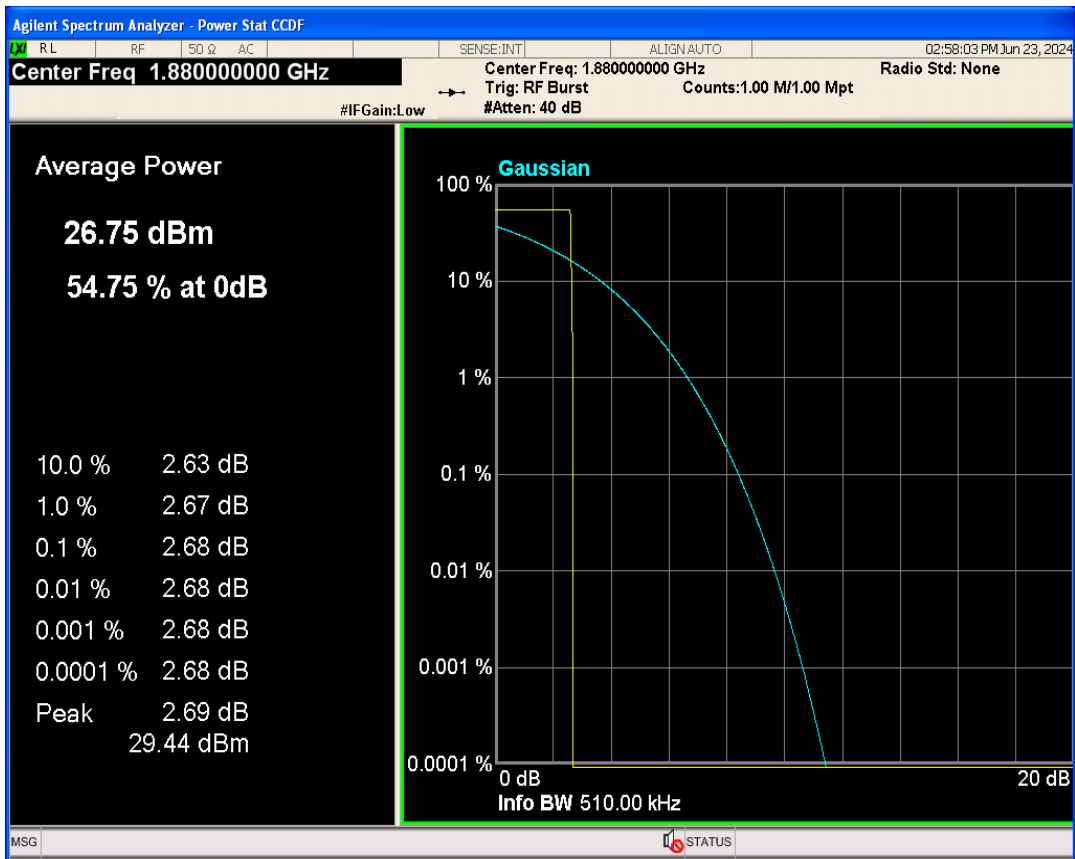


GPRS1900 Channel=512

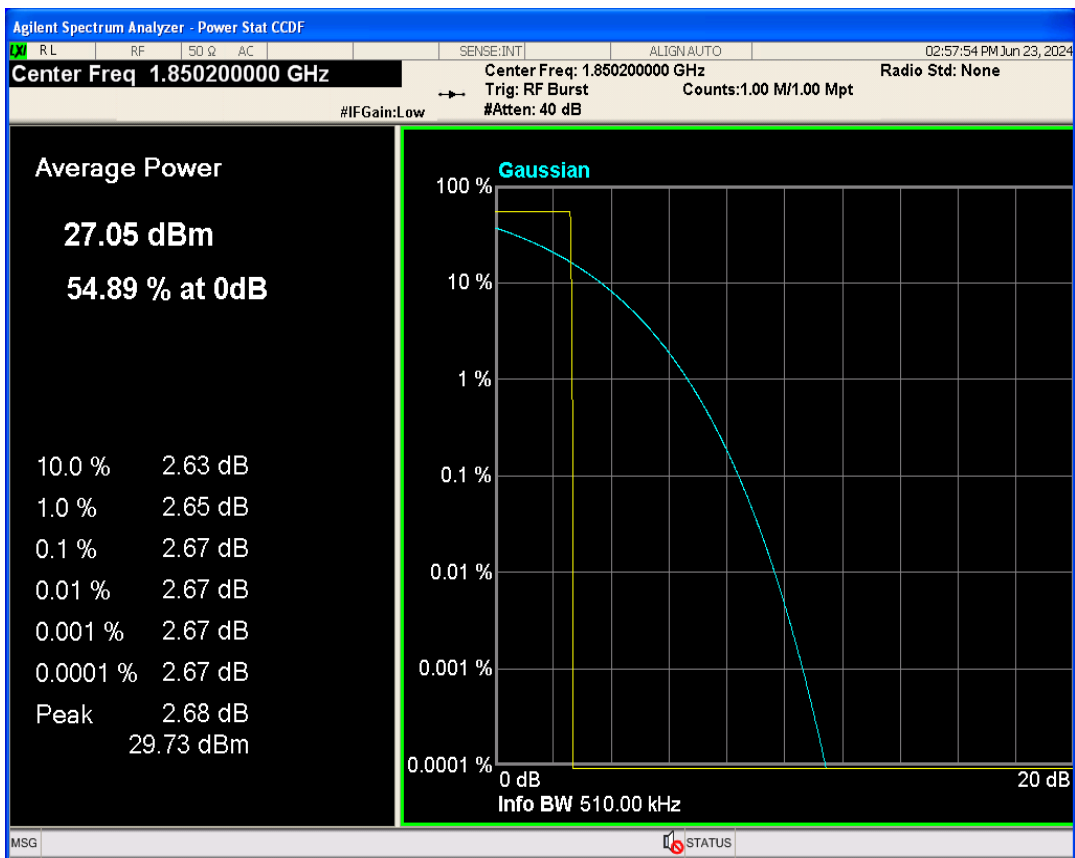


GPRS1900 Channel=810

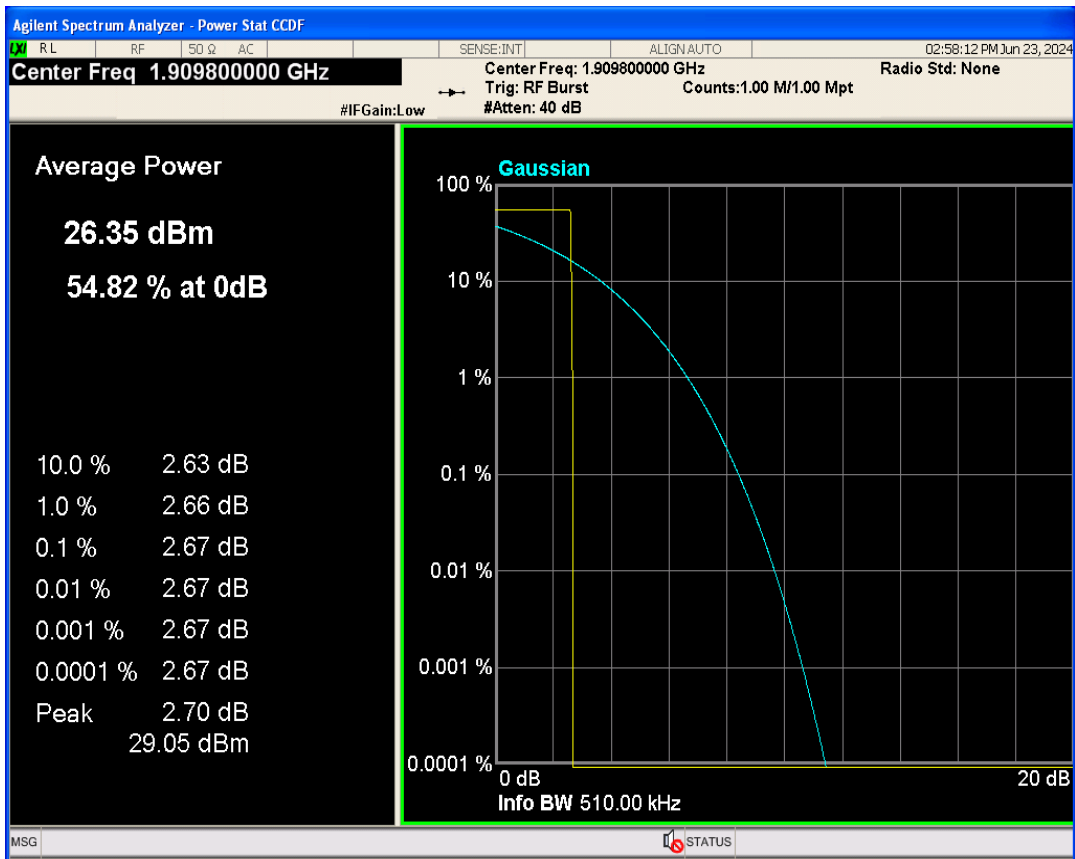


GPRS850 Channel=128

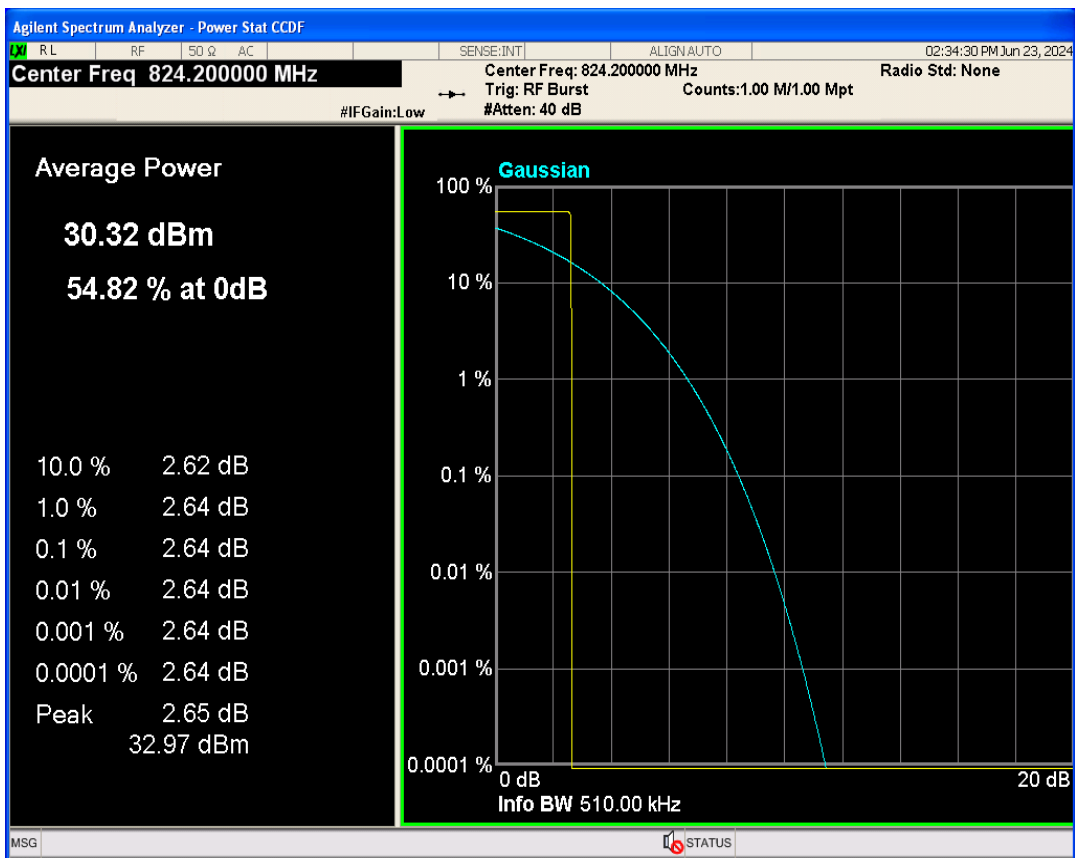

GPRS850 Channel=251

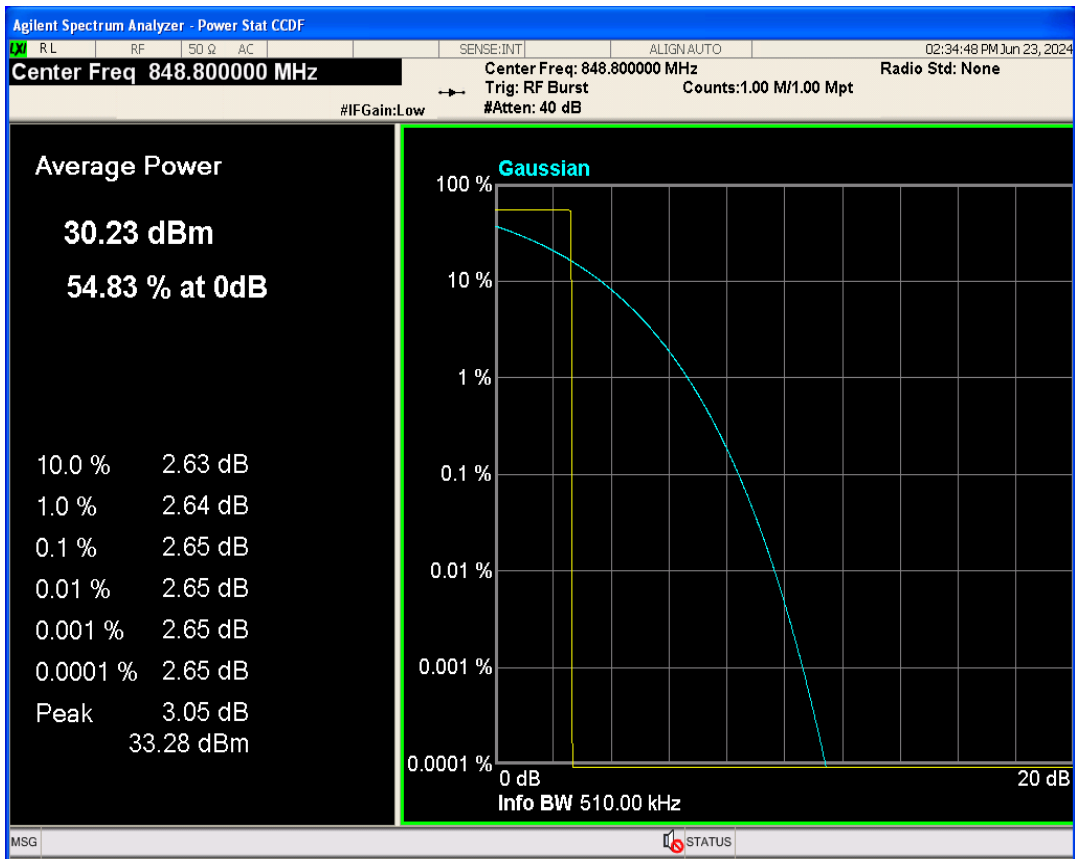


GPRS850 Channel=189

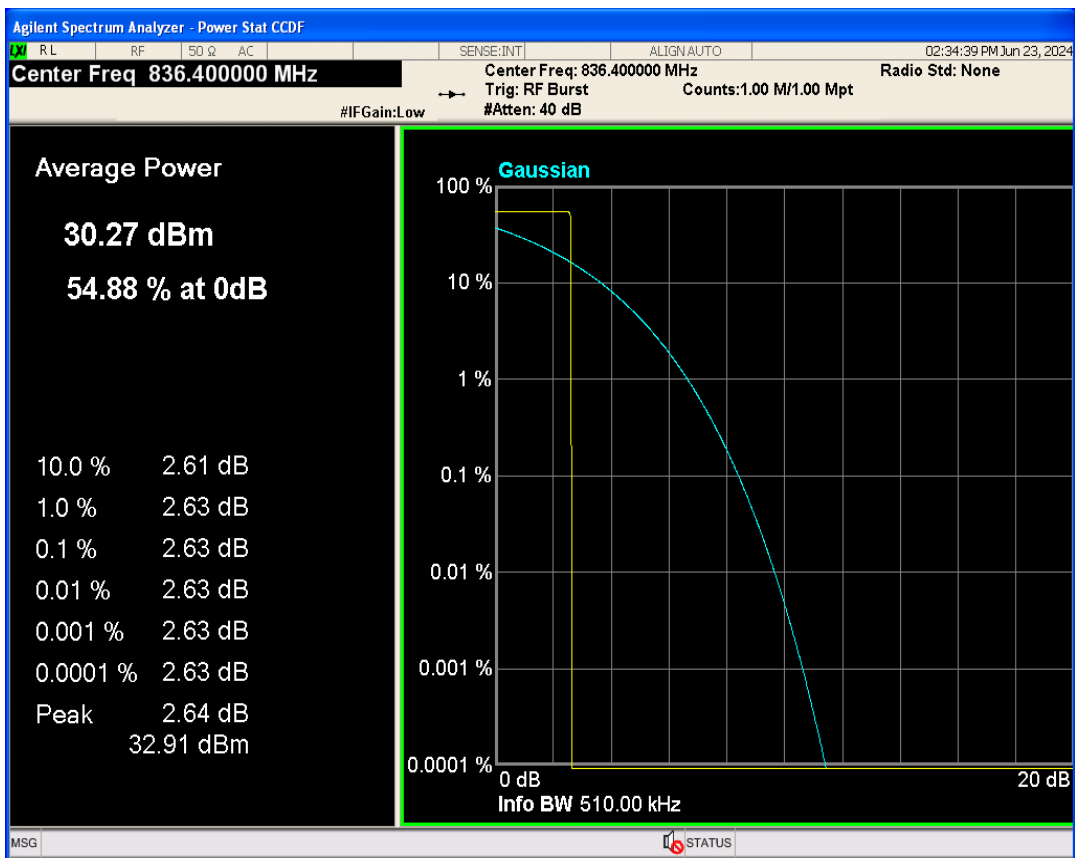


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	248.145	317.878	PASS
GPRS1900	661	1880	243.364	306.962	PASS
GPRS1900	810	1909.8	243.423	308.435	PASS
GPRS850	128	824.2	246.408	315.329	PASS
GPRS850	189	836.4	243.616	318.966	PASS
GPRS850	251	848.8	248.996	320.439	PASS


GPRS1900 Channel=661

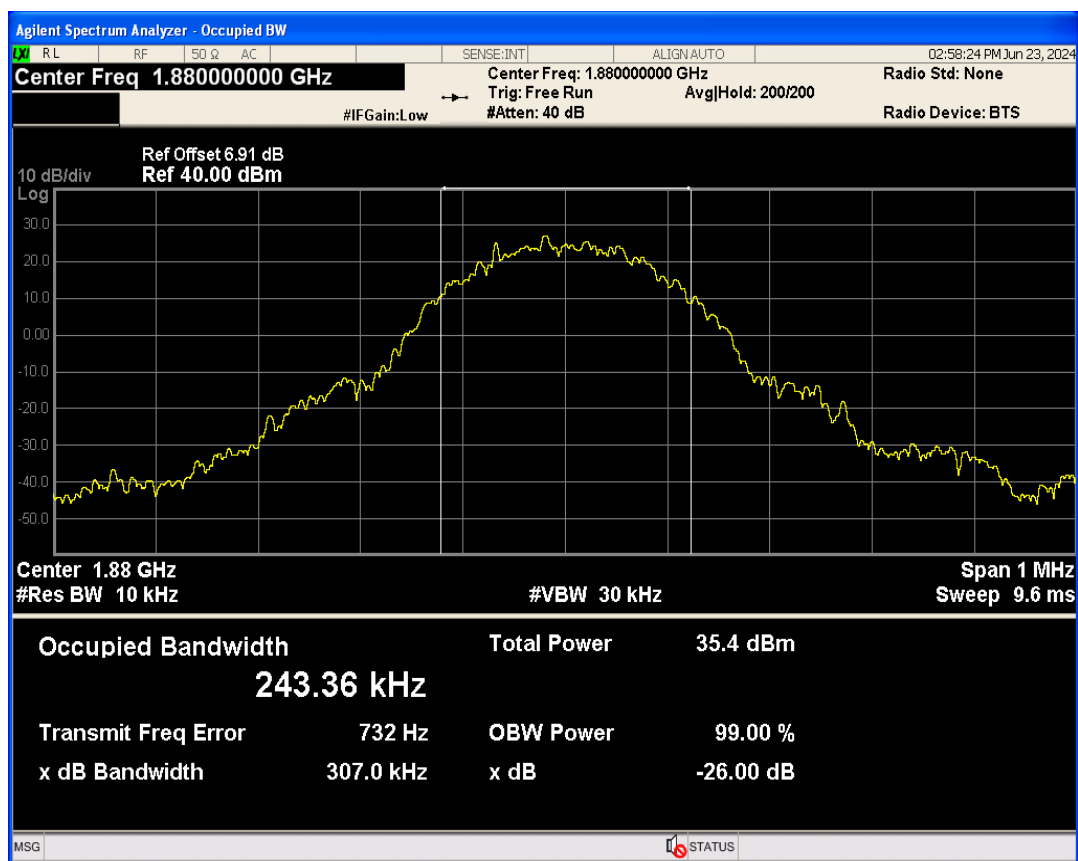


GPRS1900 Channel=512

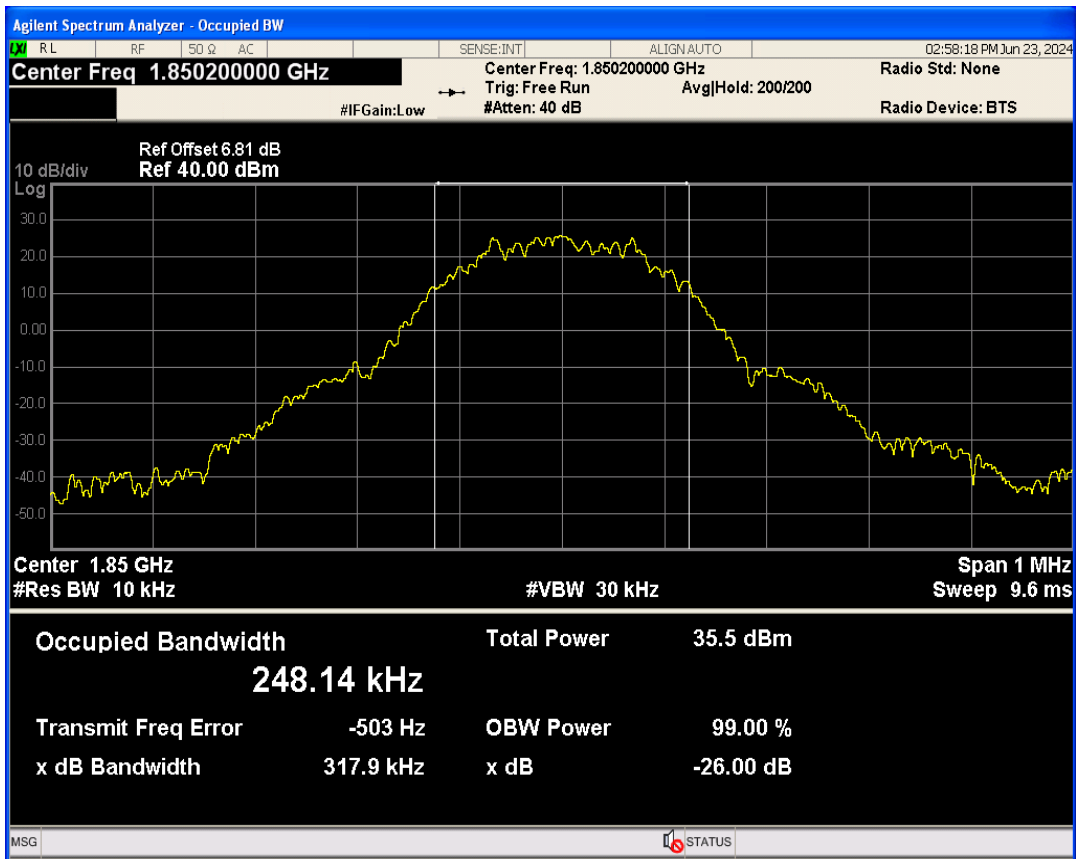


GPRS1900 Channel=810

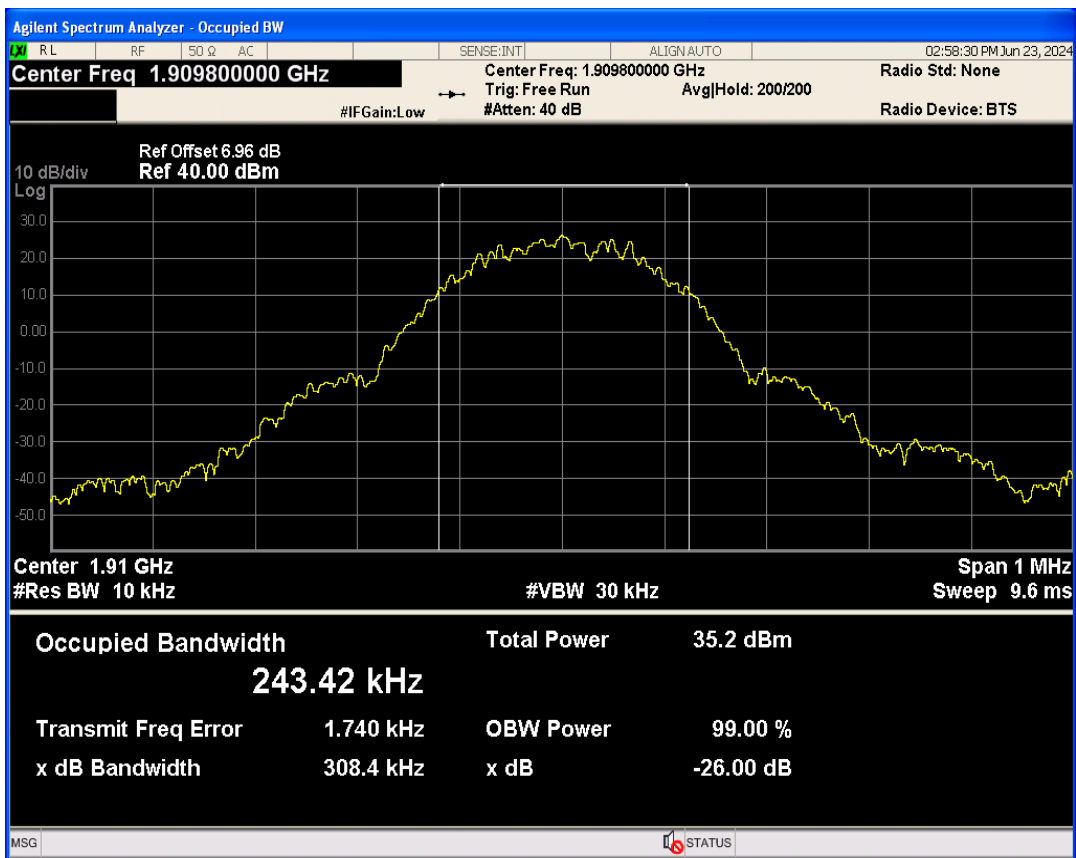


GPRS850 Channel=128

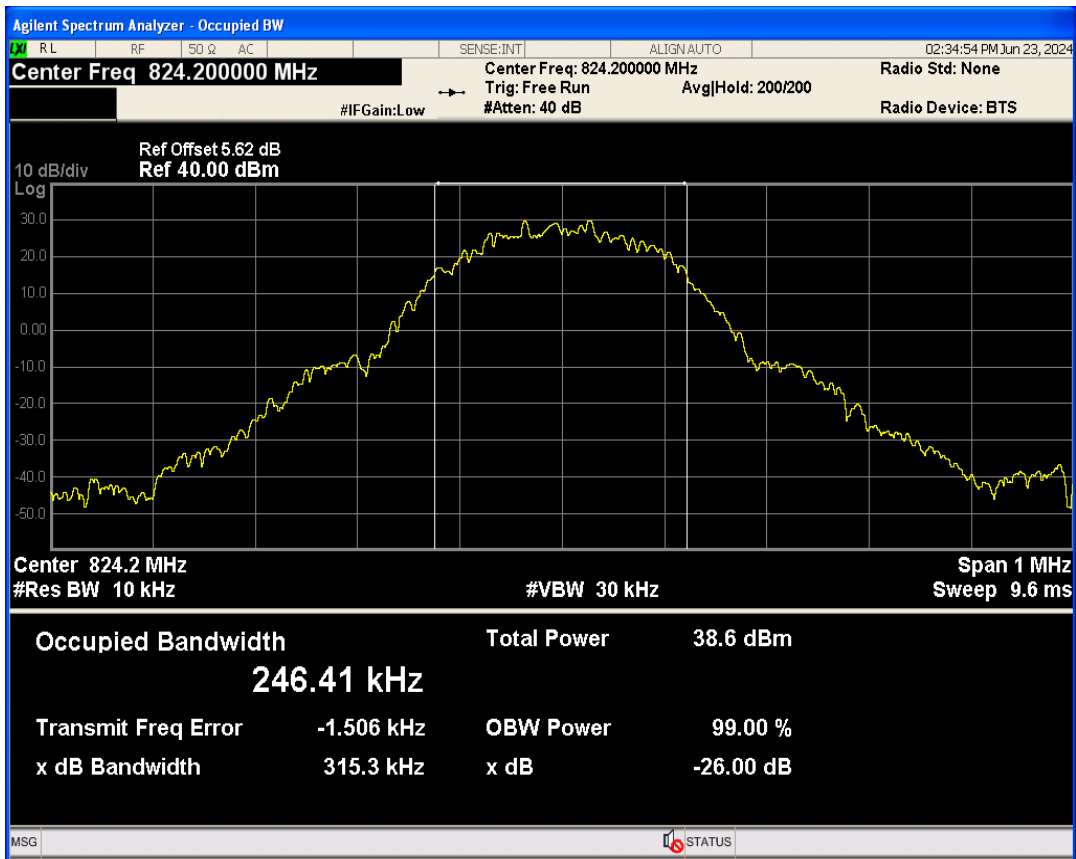

GPRS850 Channel=189

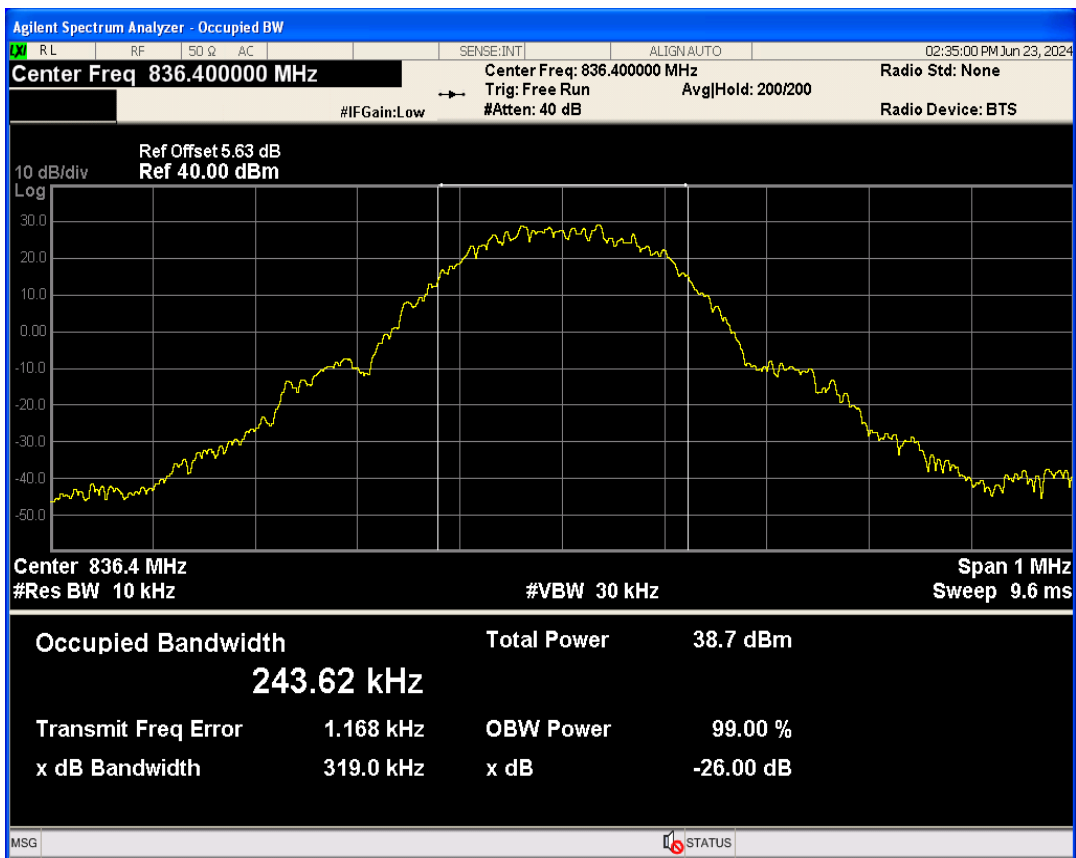


GPRS850 Channel=251

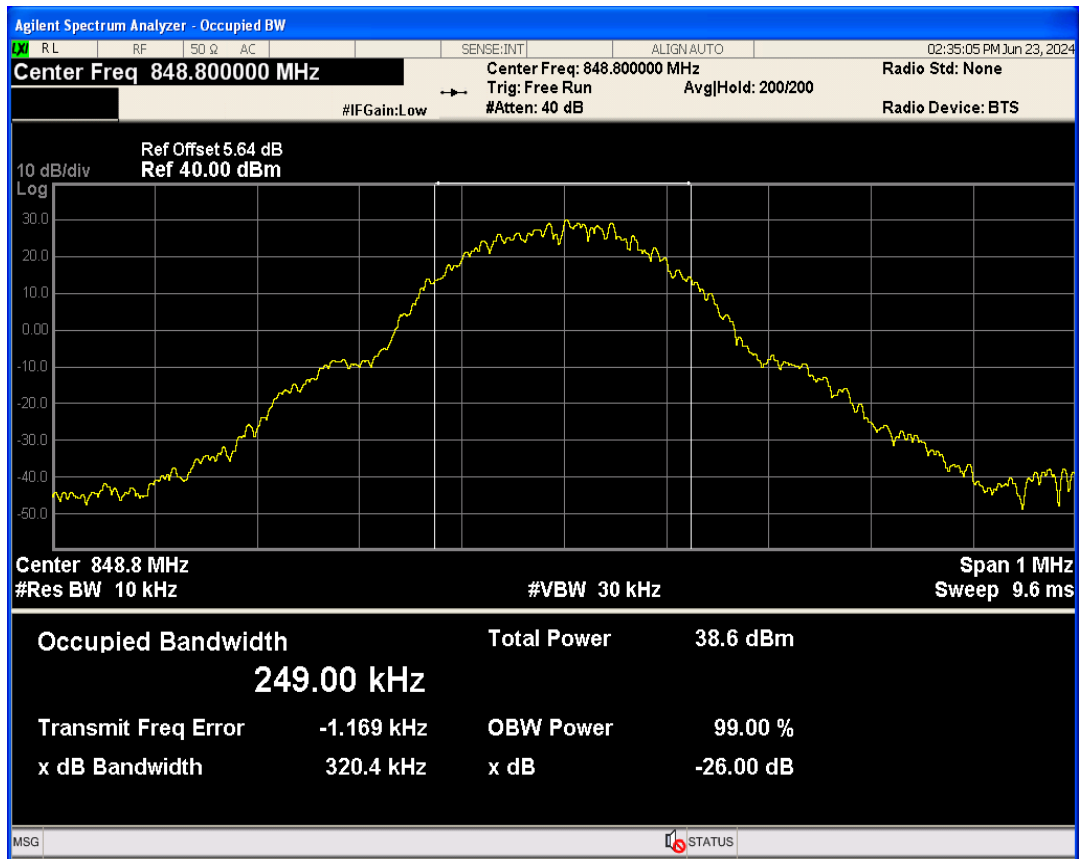


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.97	-30.95	-13	PASS
GPRS1900	810	1909.8	1910.02	-30.90	-13	PASS
GPRS850	128	824.2	823.98	-27.33	-13	PASS
GPRS850	251	848.8	849.03	-28.07	-13	PASS


GPRS1900 Channel=512

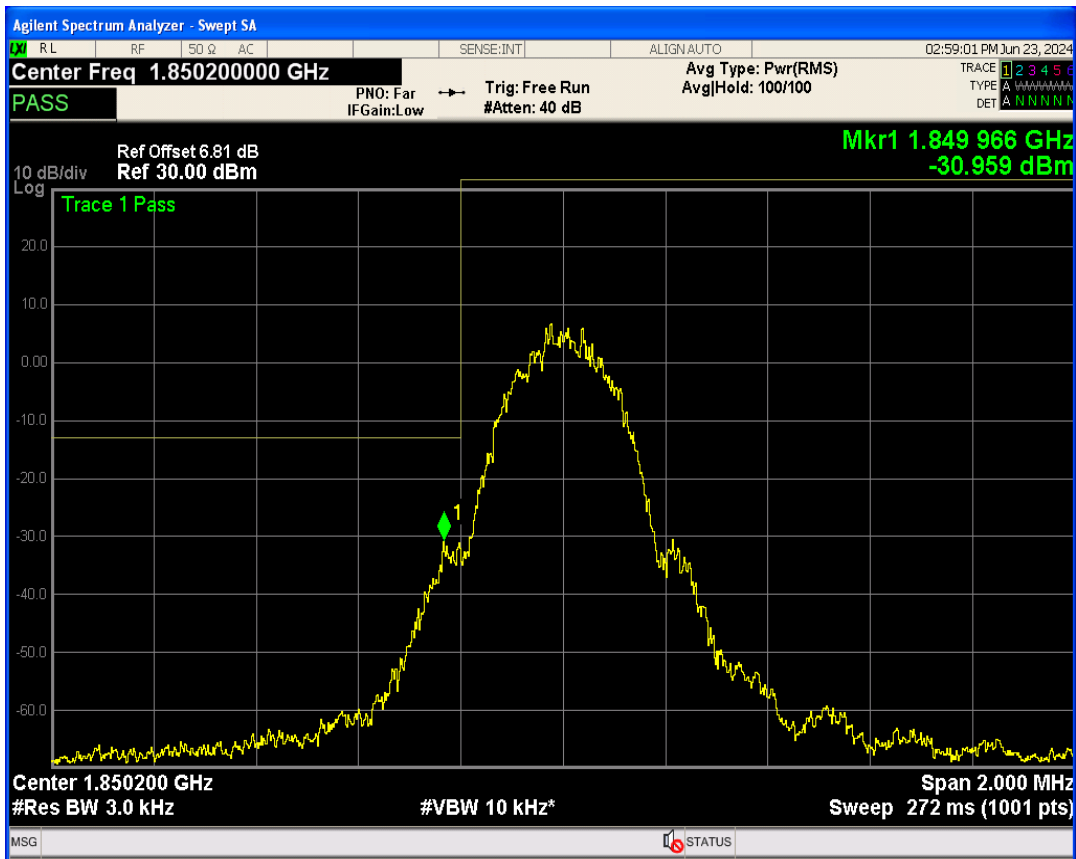


GPRS1900 Channel=810

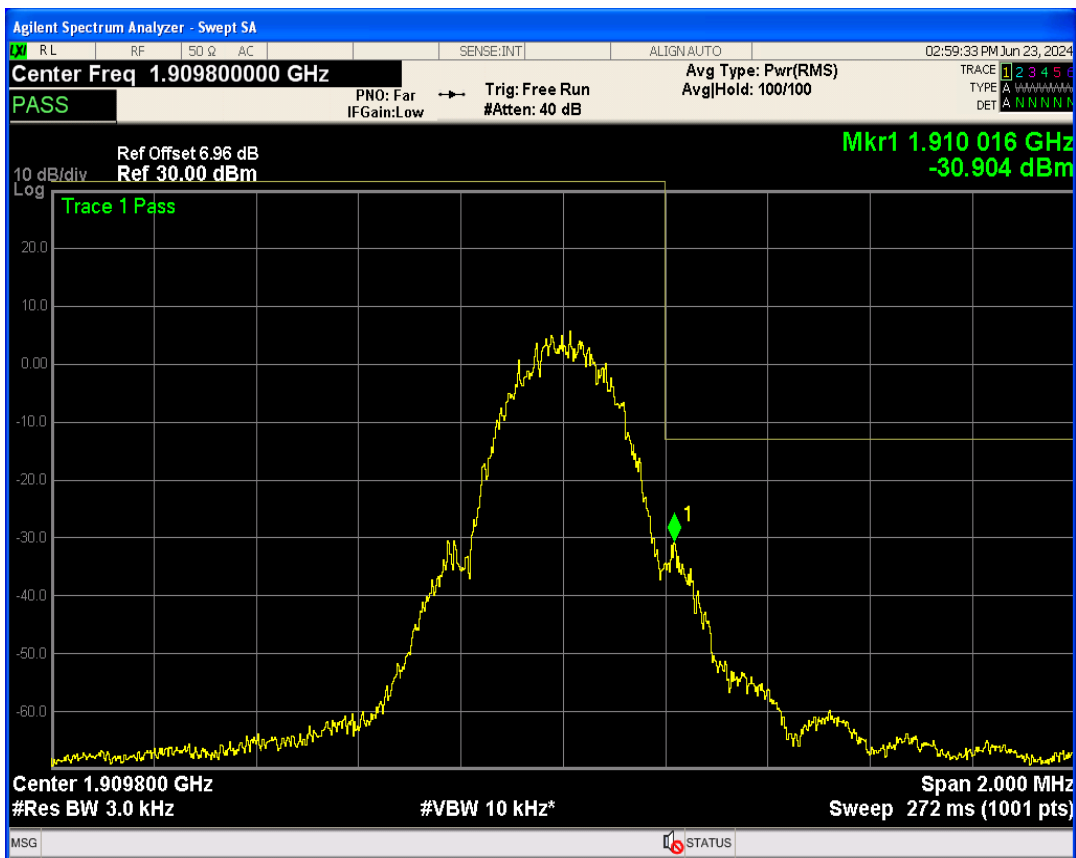

GPRS850 Channel=128

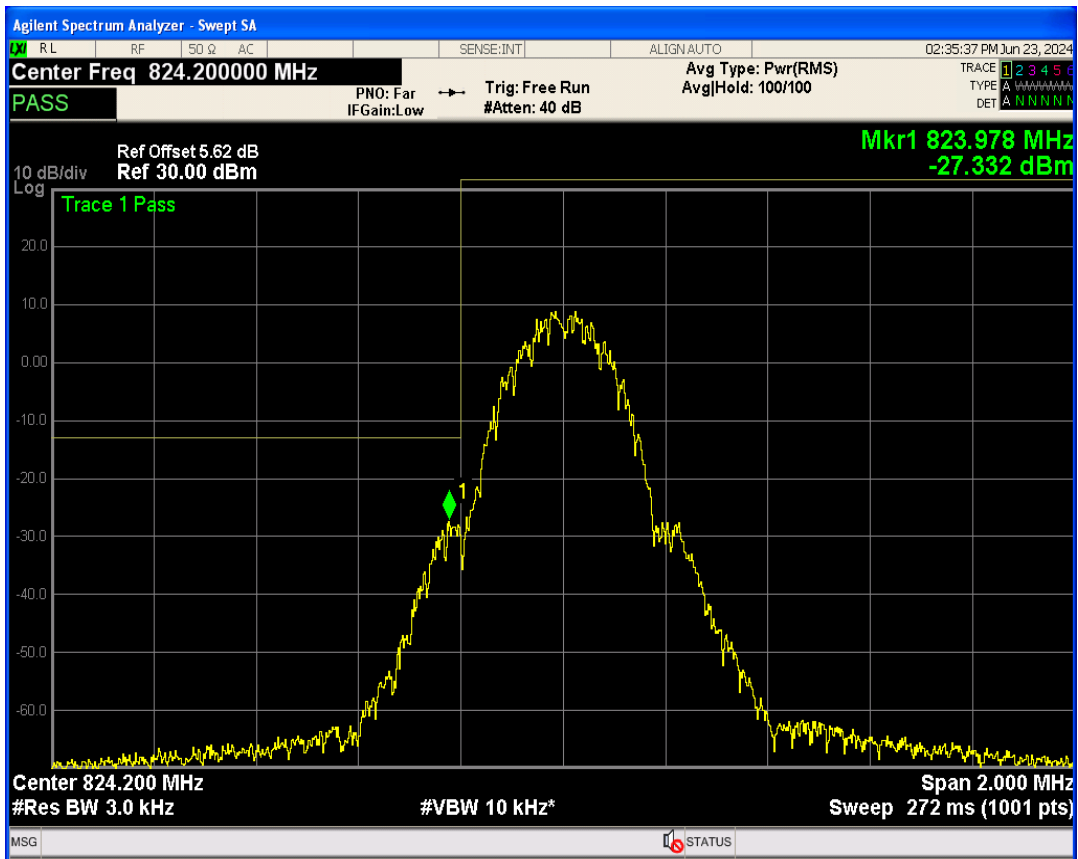


GPRS850 Channel=251

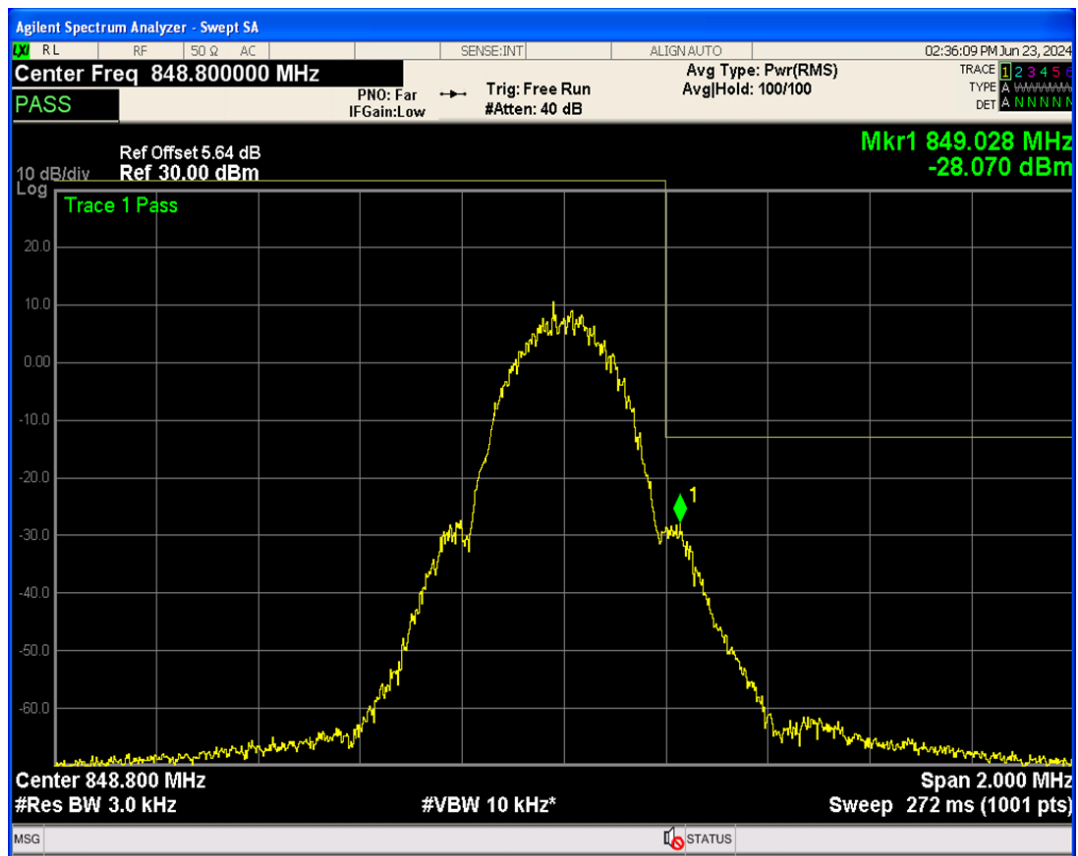


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	26050.01	-19.23	-13	PASS
GPRS1900	661	1880	25863.40	-17.95	-13	PASS
GPRS1900	810	1909.8	26041.41	-19.68	-13	PASS
GPRS850	128	824.2	25934.20	-19.65	-13	PASS
GPRS850	189	836.4	26122.14	-20.93	-13	PASS
GPRS850	251	848.8	25564.95	-20.74	-13	PASS


GPRS1900 Channel=512

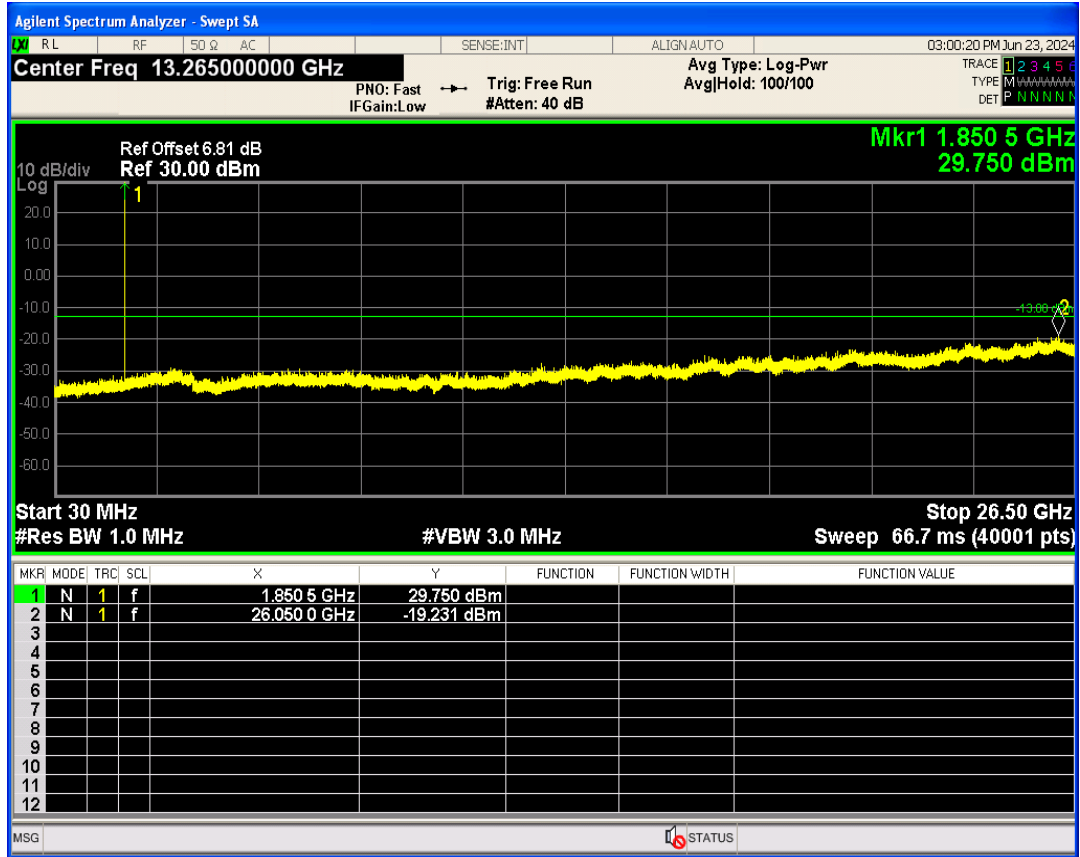


GPRS1900 Channel=661

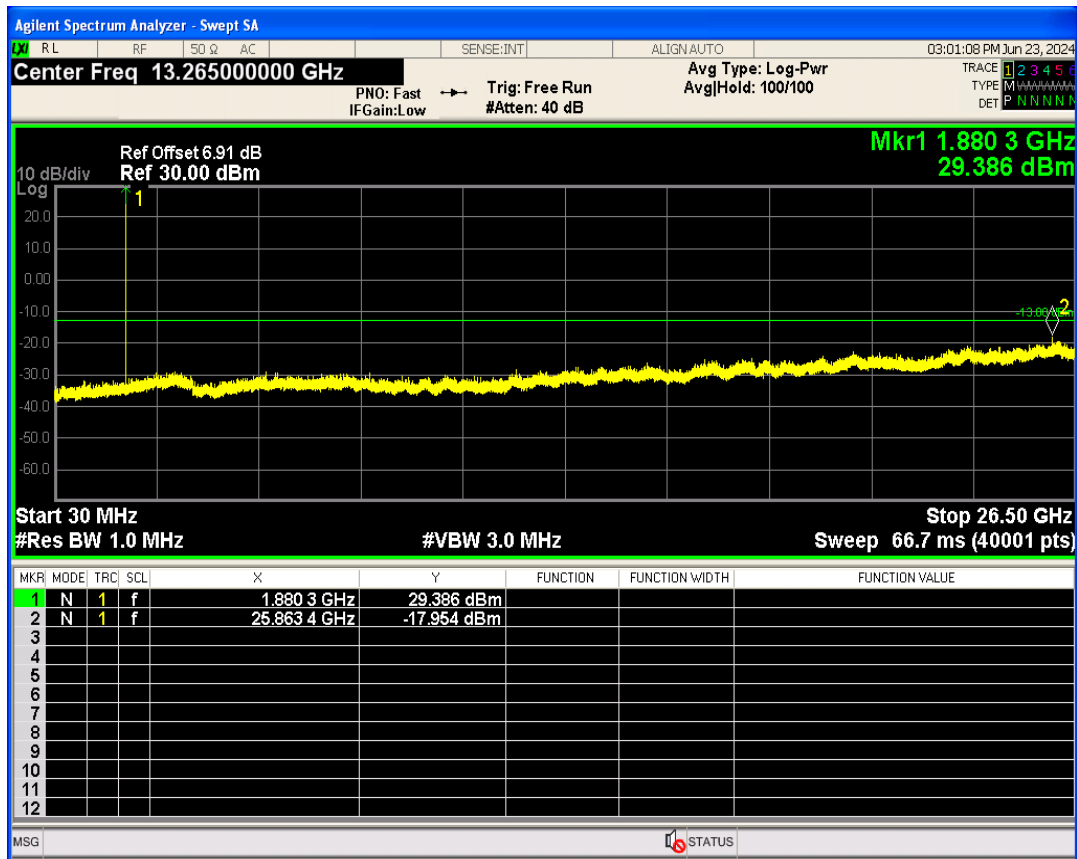


GPRS1900 Channel=810

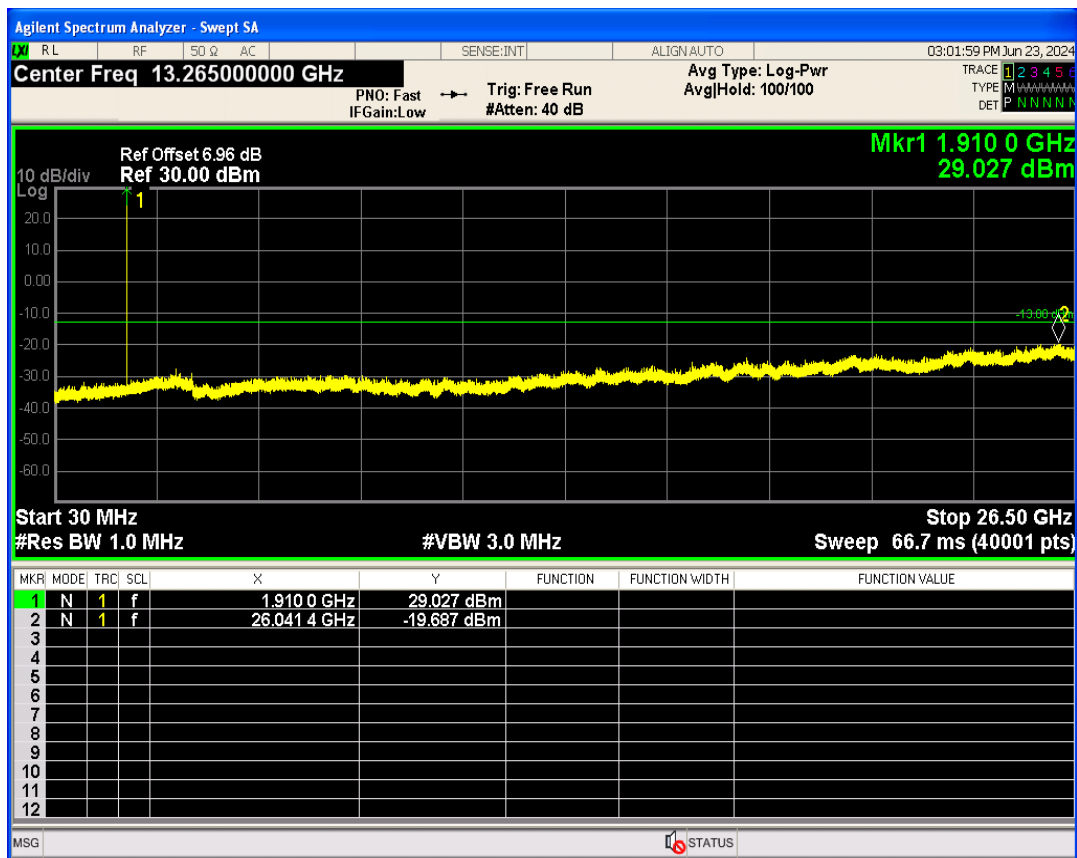


GPRS850 Channel=128

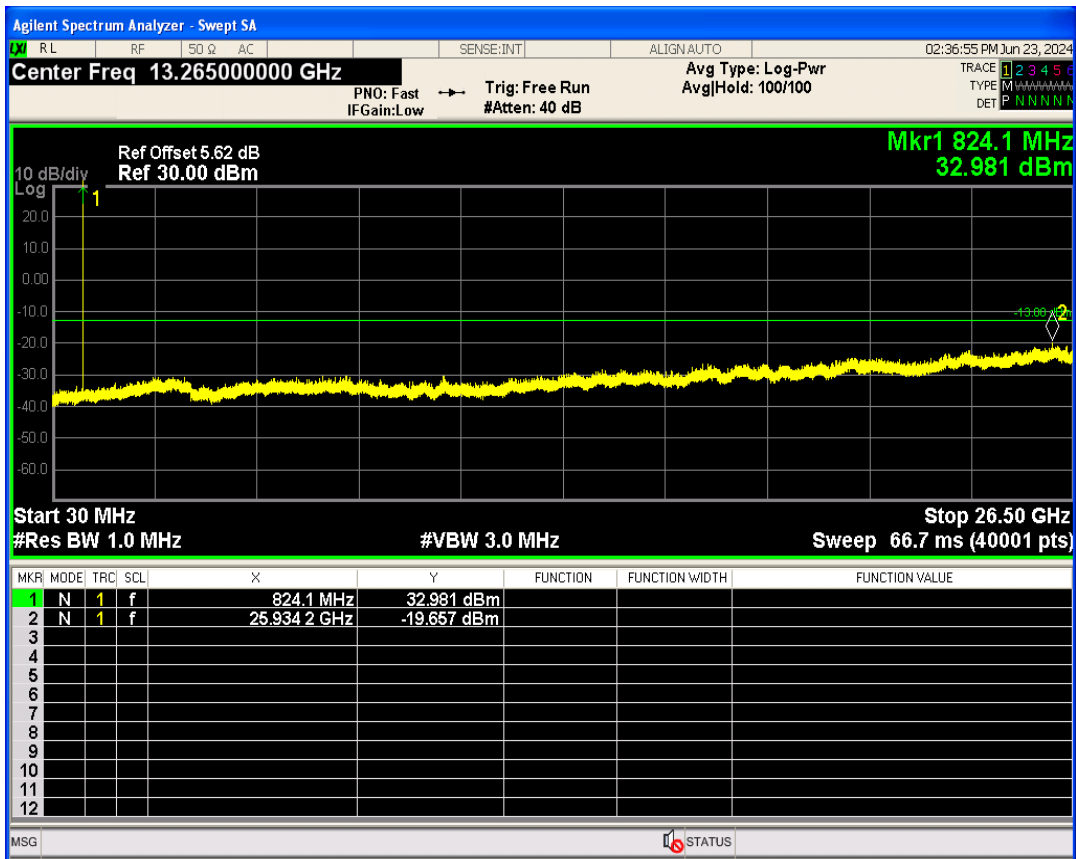

GPRS850 Channel=189

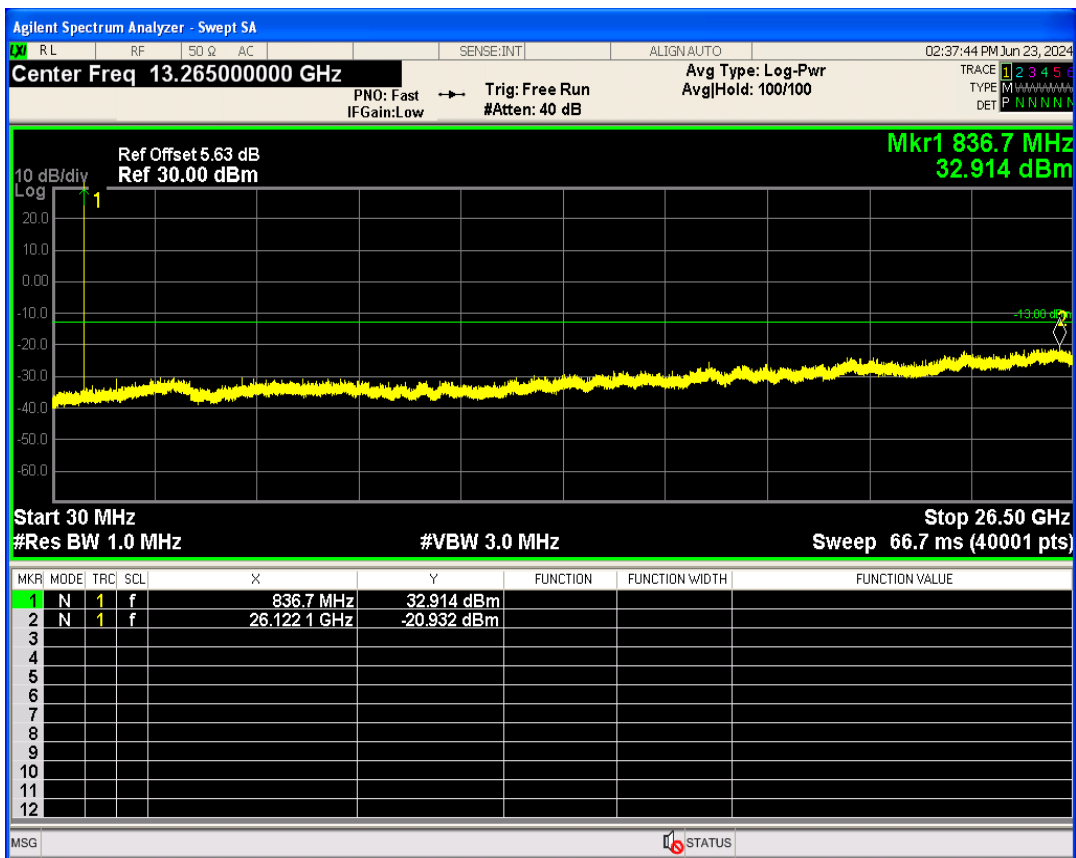


GPRS850 Channel=251

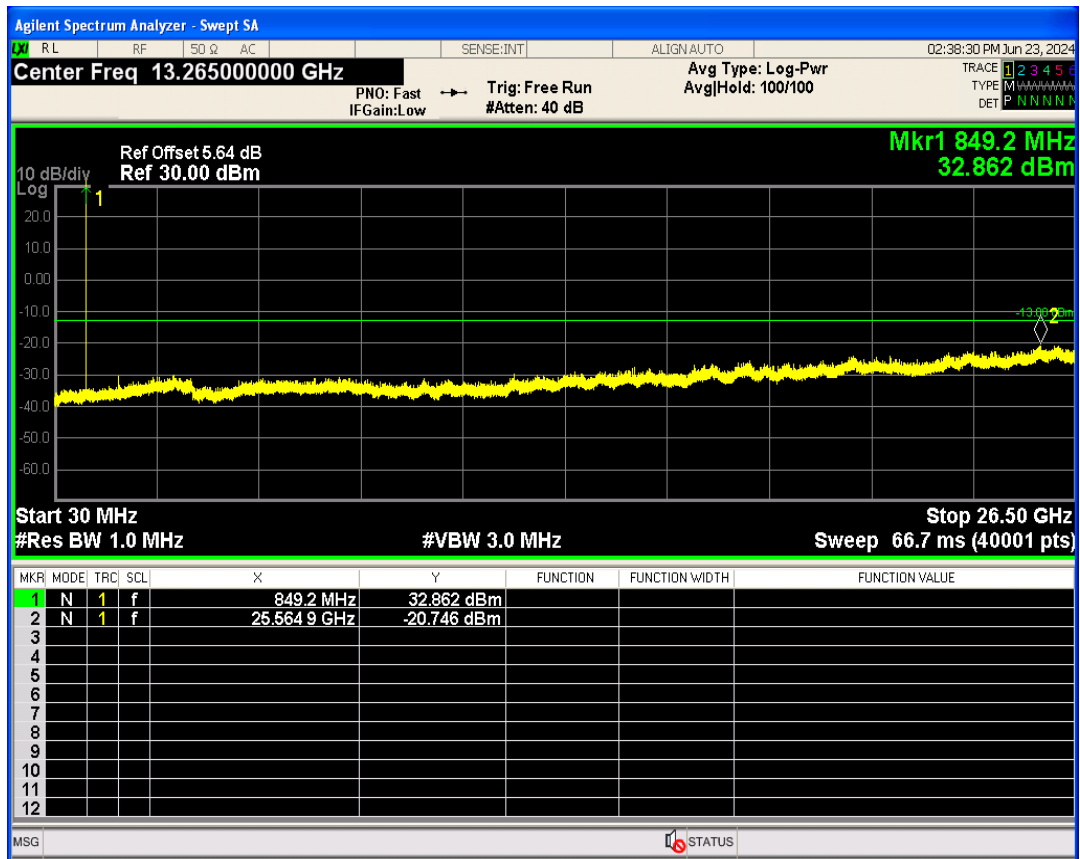


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.62	13	PASS
GSM1900	661	1880	2.64	13	PASS
GSM1900	810	1909.8	2.63	13	PASS
GSM850	128	824.2	2.59	13	PASS
GSM850	189	836.4	2.60	13	PASS
GSM850	251	848.8	2.60	13	PASS


GSM1900 Channel=512

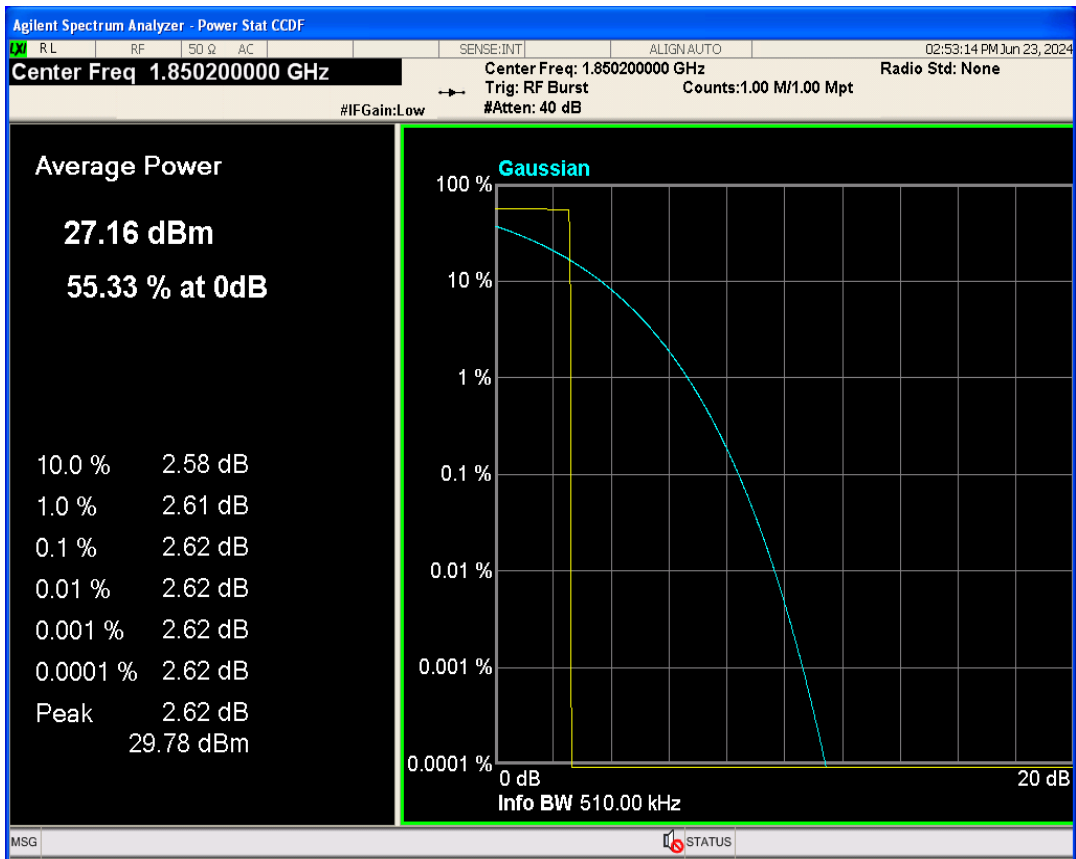


GSM1900 Channel=661

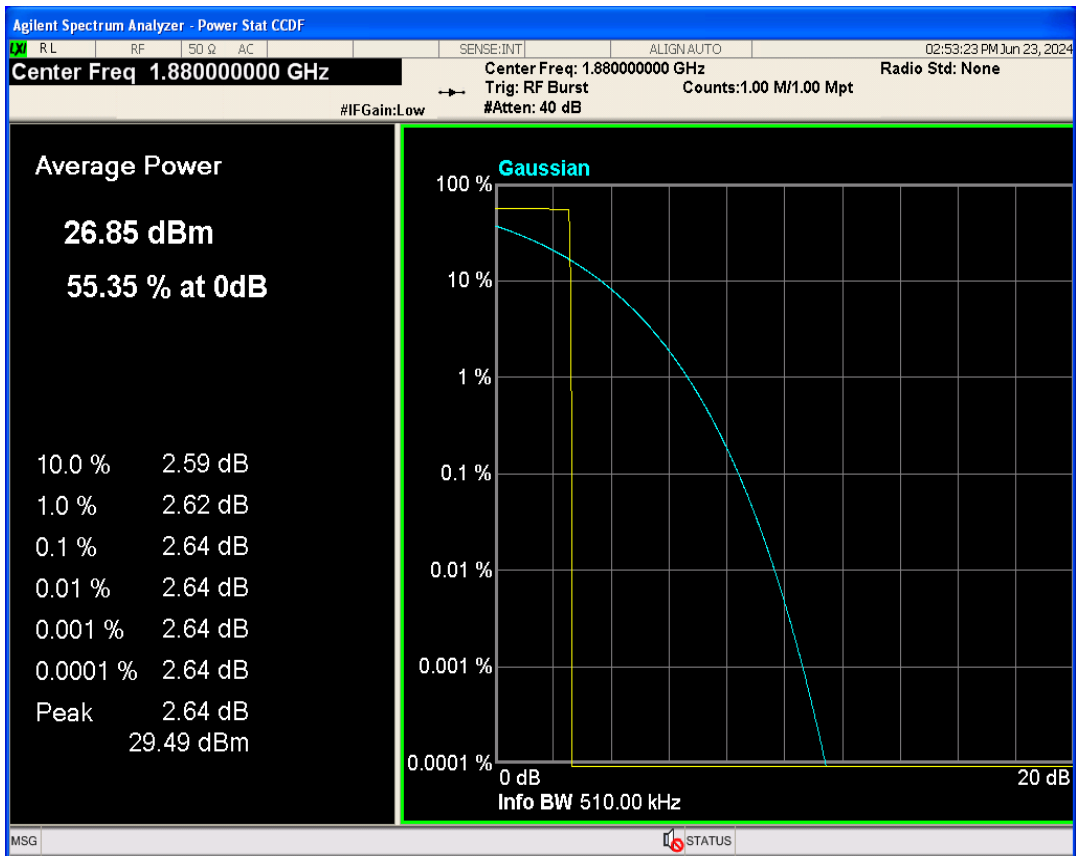


GSM1900 Channel=810

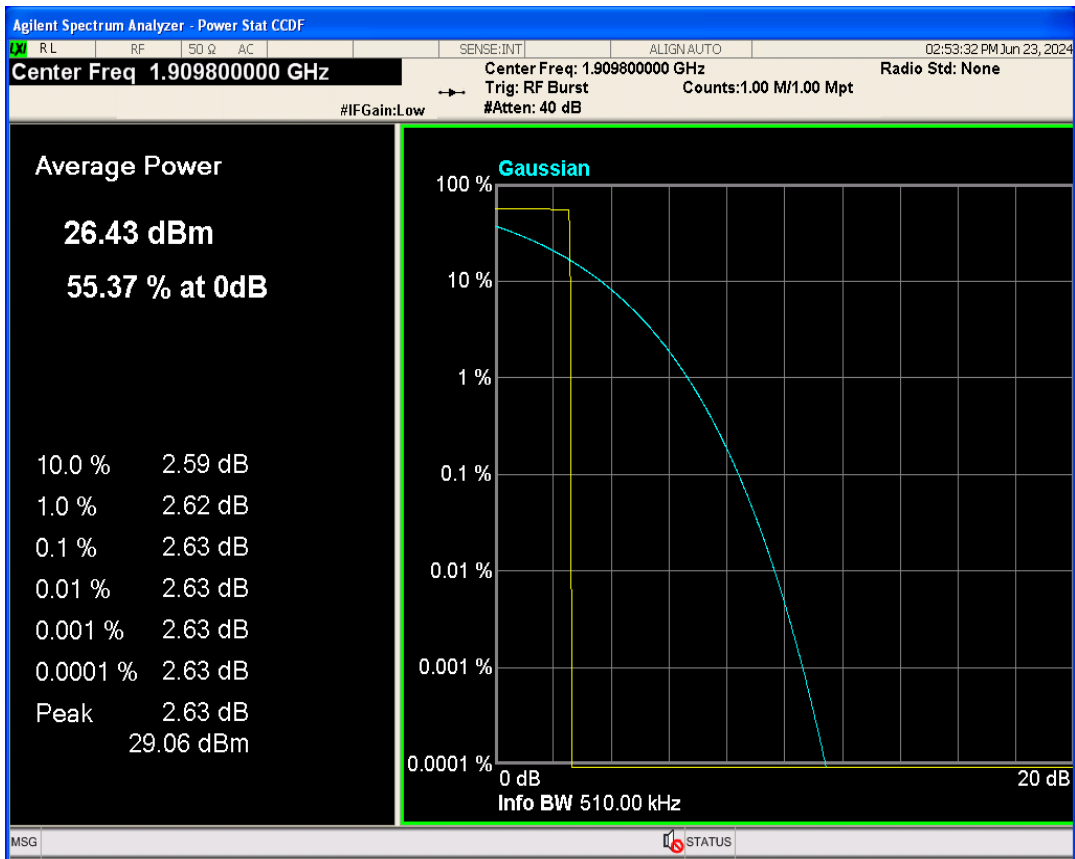


GSM850 Channel=128

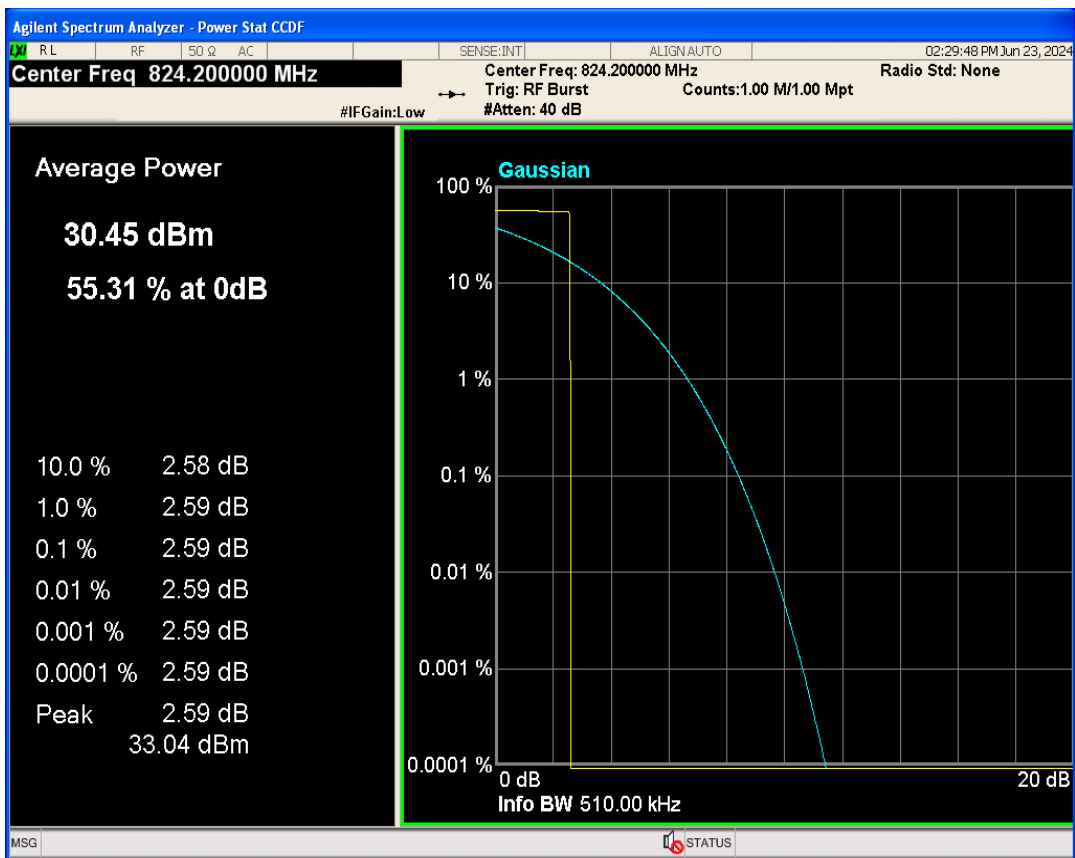

GSM850 Channel=251

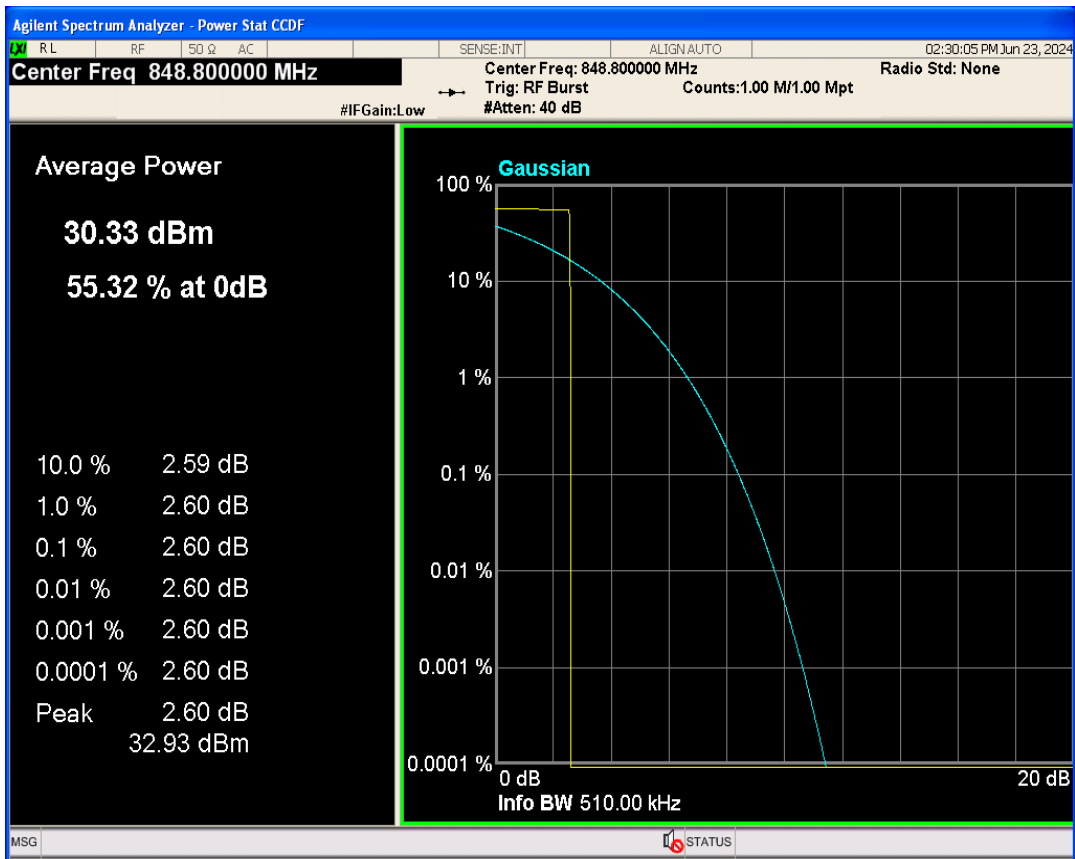


GSM850 Channel=189

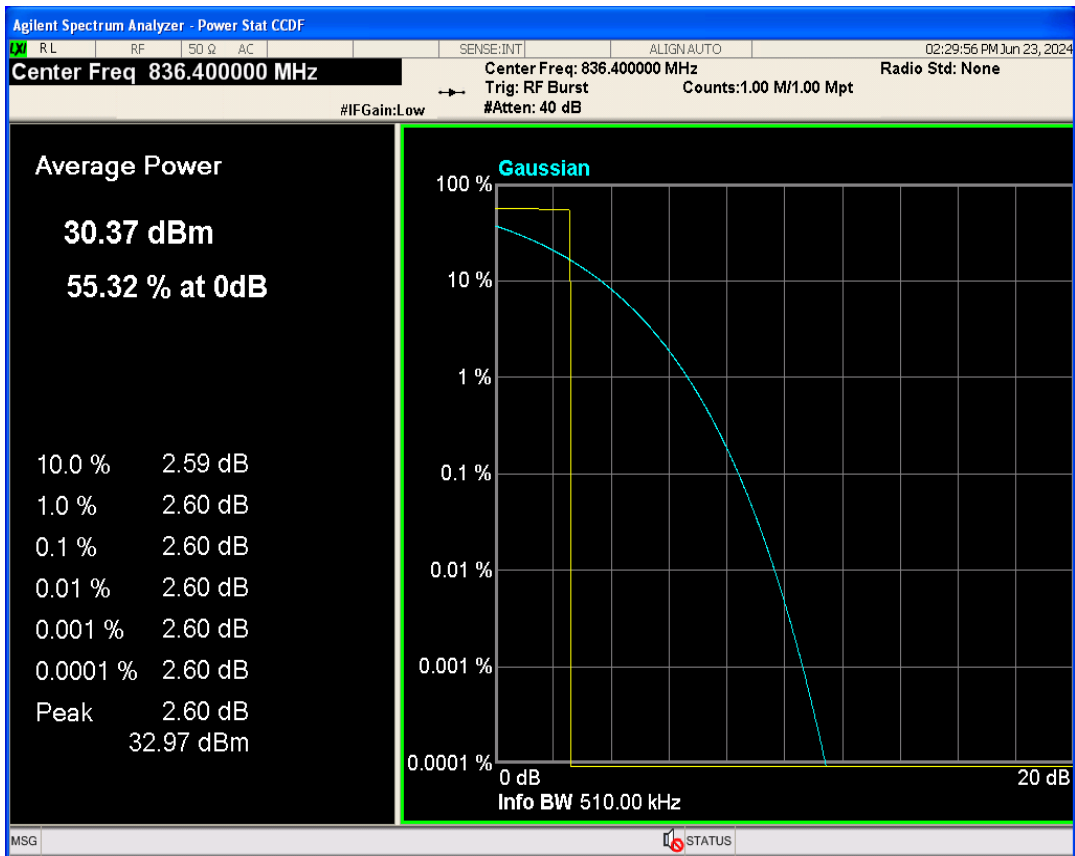


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	244.306	321.144	PASS
GSM1900	661	1880	245.841	312.634	PASS
GSM1900	810	1909.8	253.117	317.957	PASS
GSM850	128	824.2	244.303	310.092	PASS
GSM850	189	836.4	249.986	320.427	PASS
GSM850	251	848.8	245.557	316.870	PASS


GSM1900 Channel=512

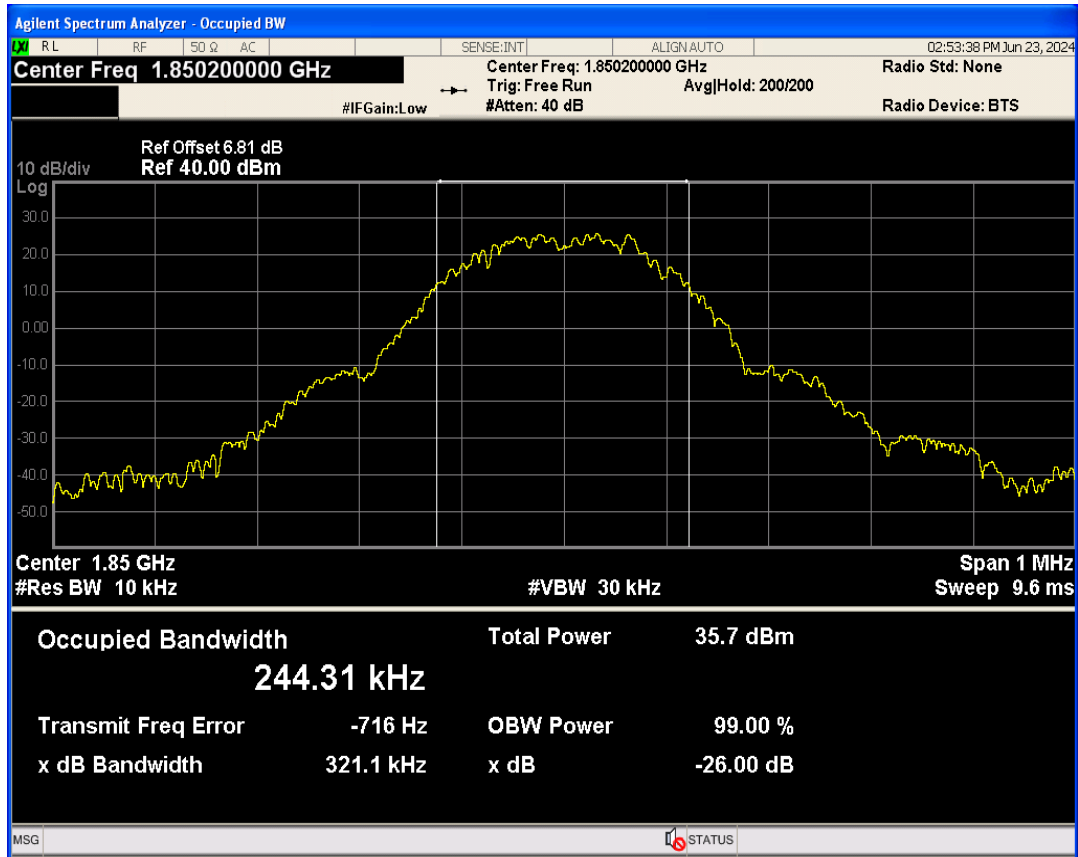


GSM1900 Channel=661

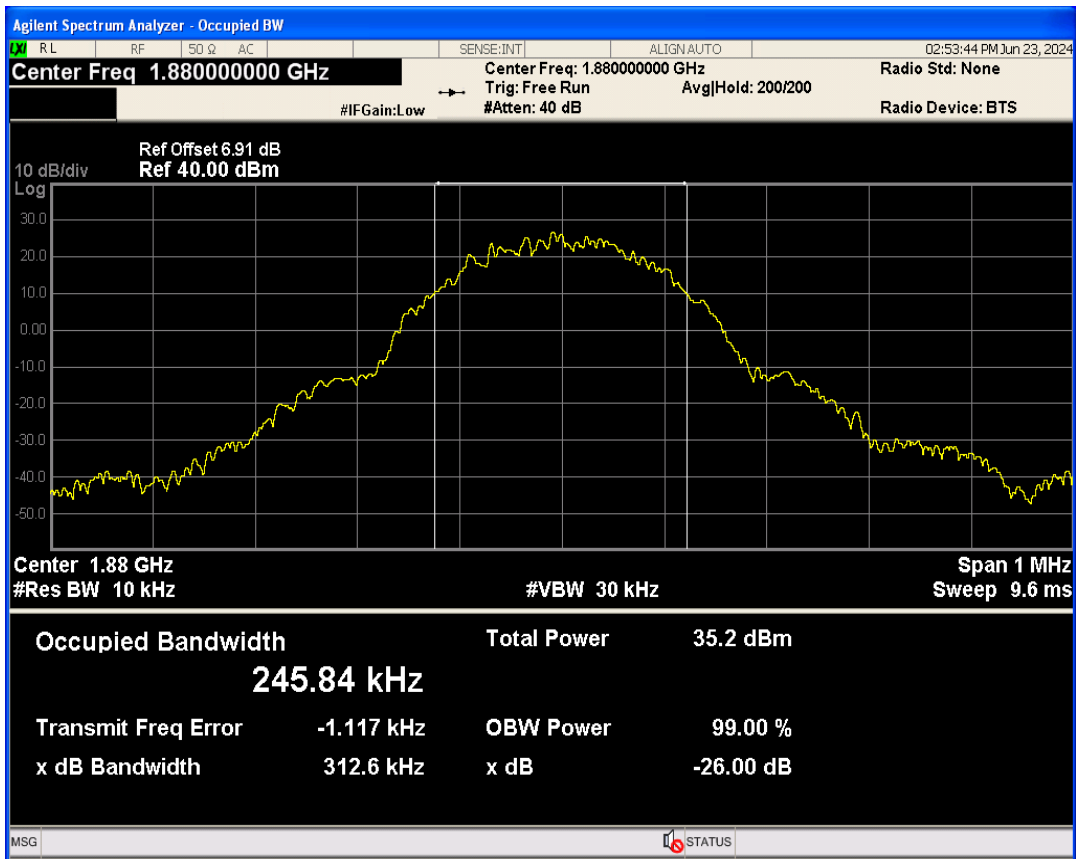


GSM1900 Channel=810

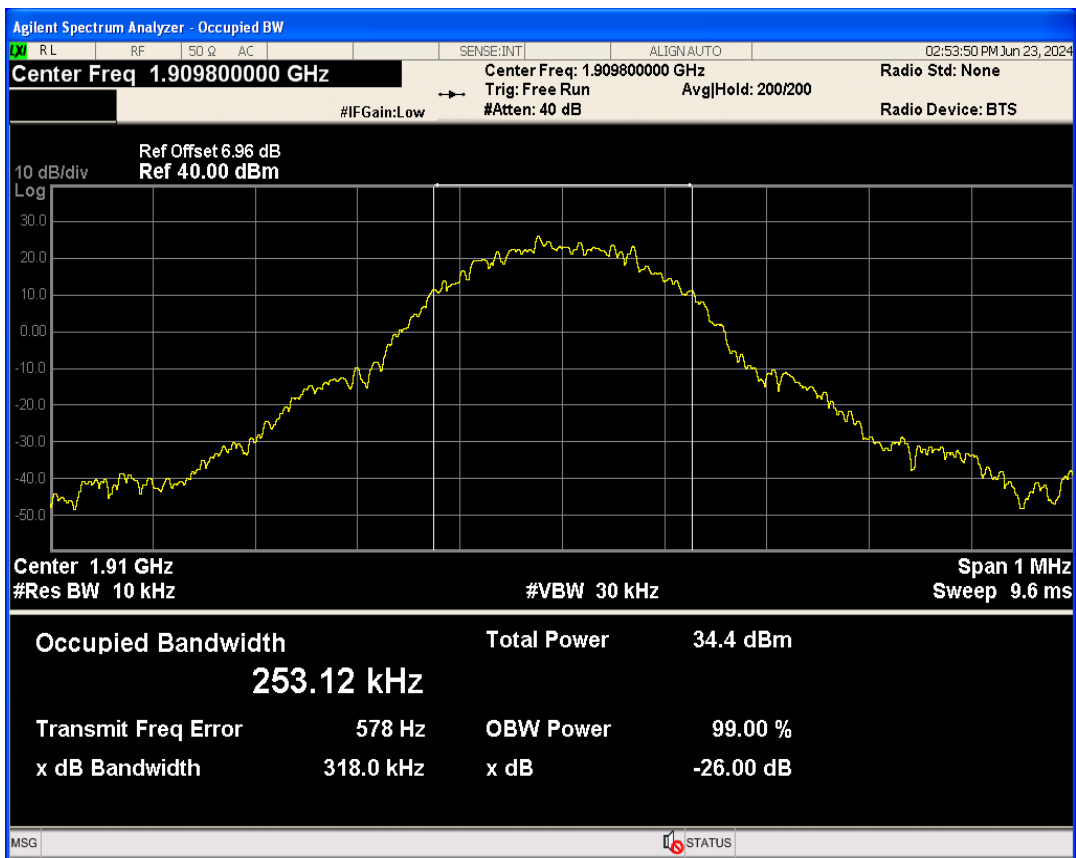


GSM850 Channel=128

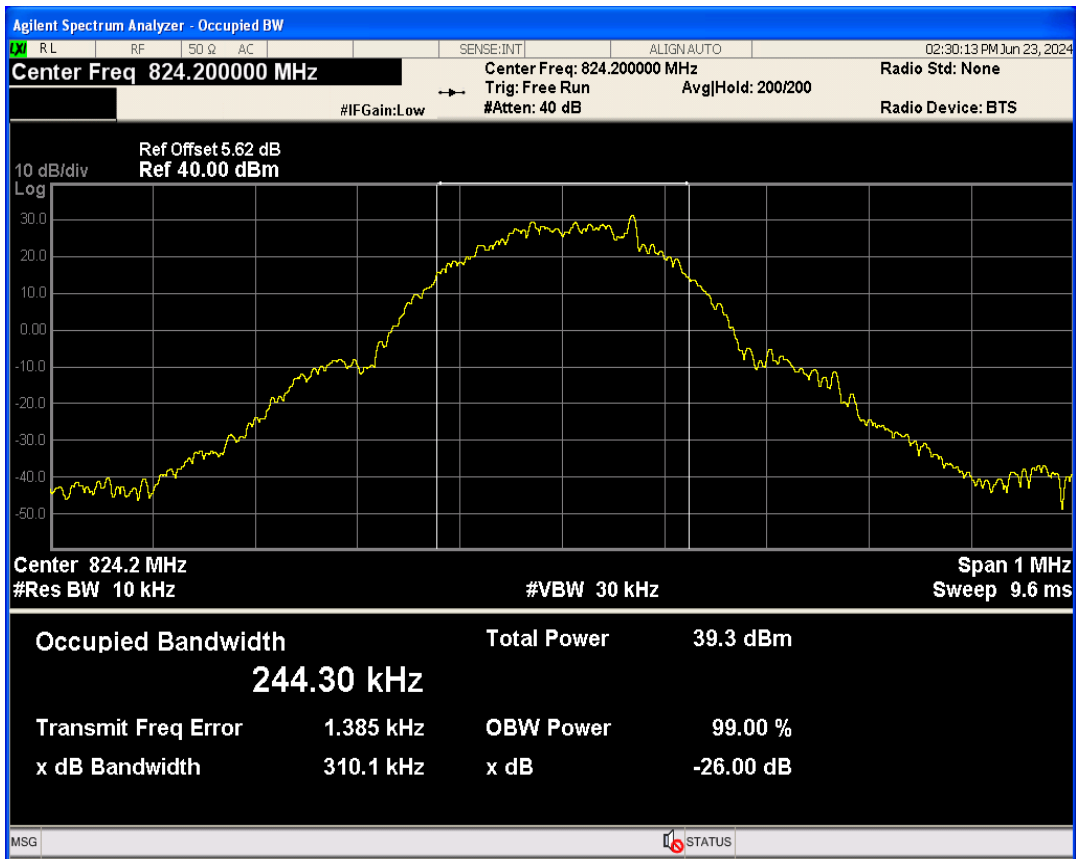

GSM850 Channel=189

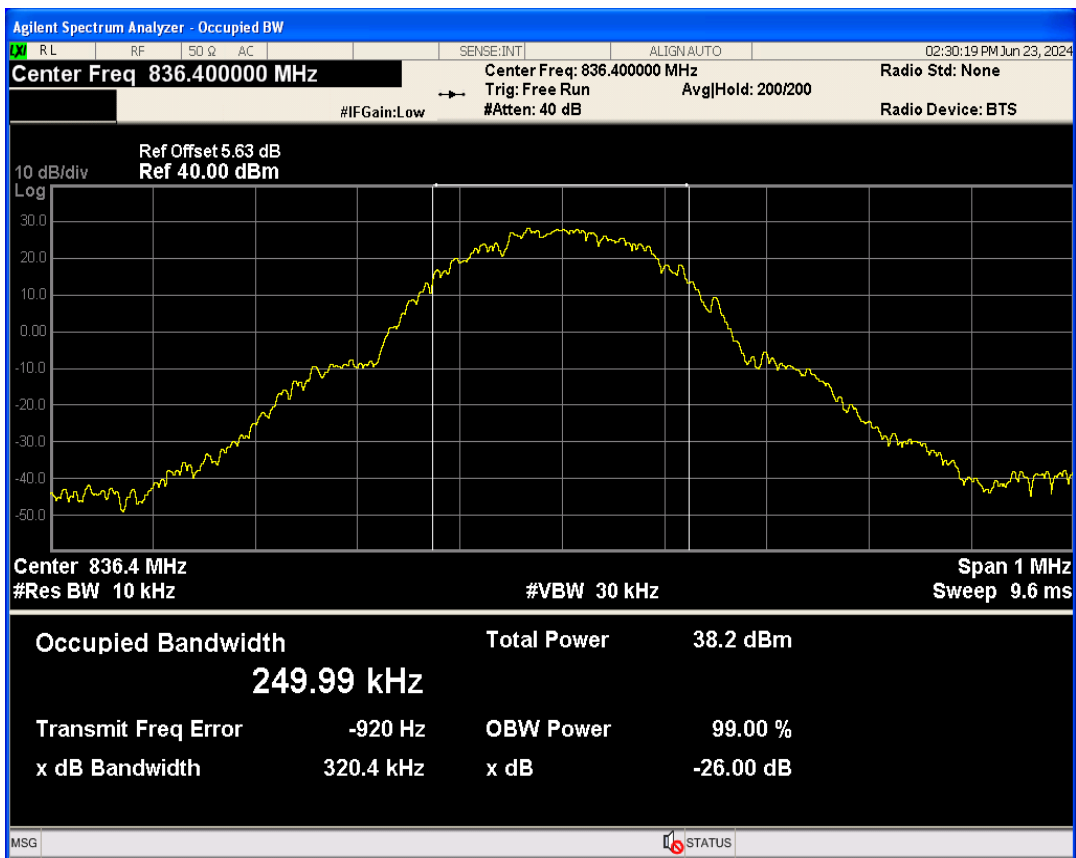


GSM850 Channel=251

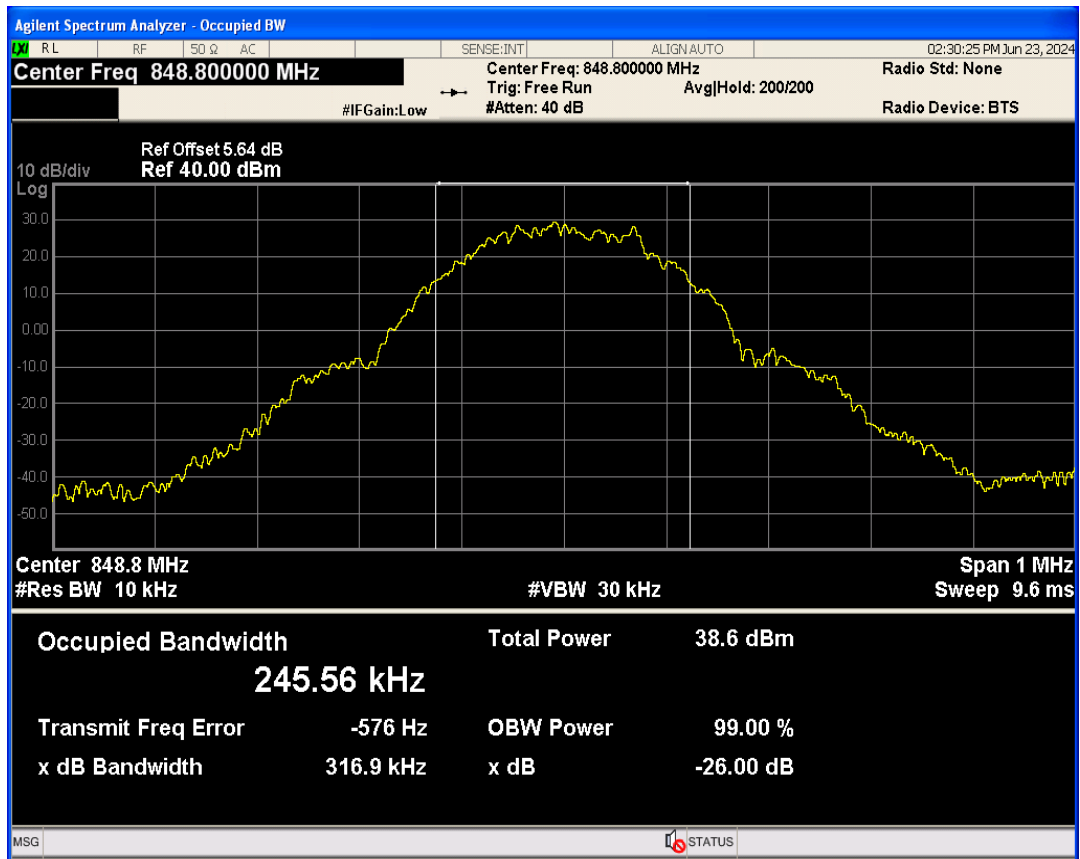


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-29.90	-13	PASS
GSM1900	810	1909.8	1910.02	-29.78	-13	PASS
GSM850	128	824.2	823.98	-26.85	-13	PASS
GSM850	251	848.8	849.02	-25.61	-13	PASS


GSM1900 Channel=512

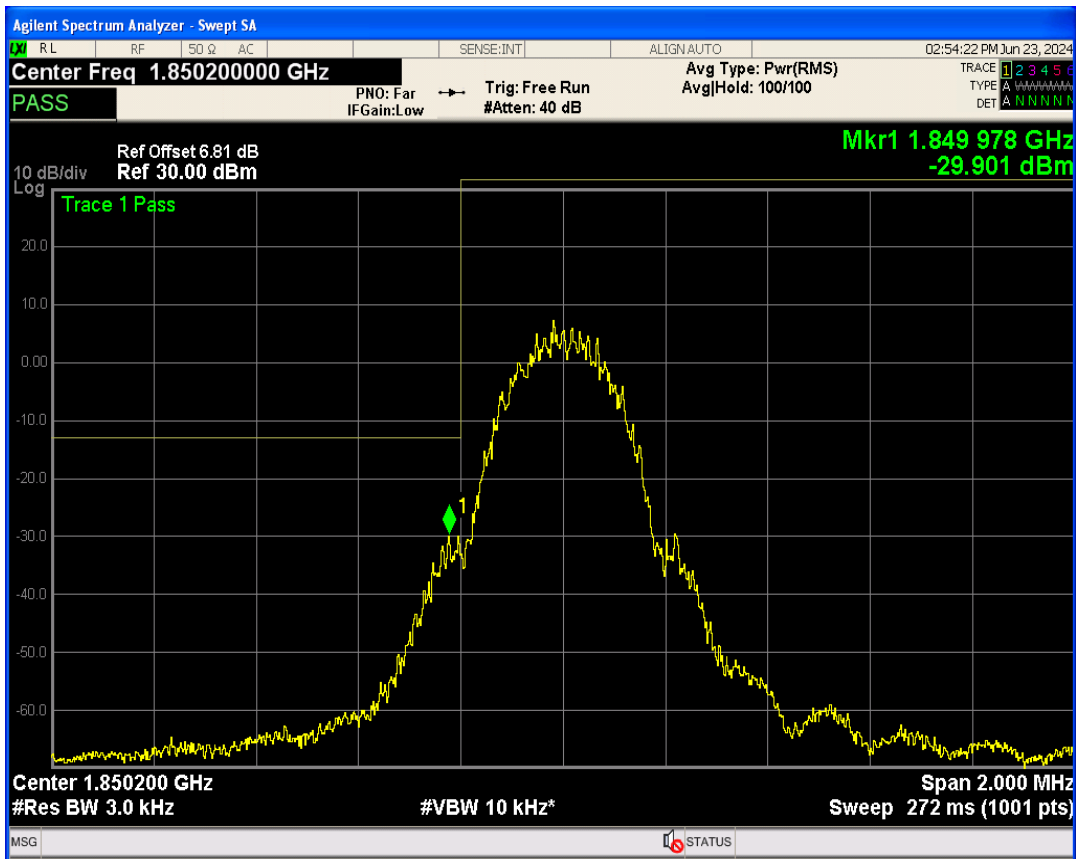


GSM1900 Channel=810

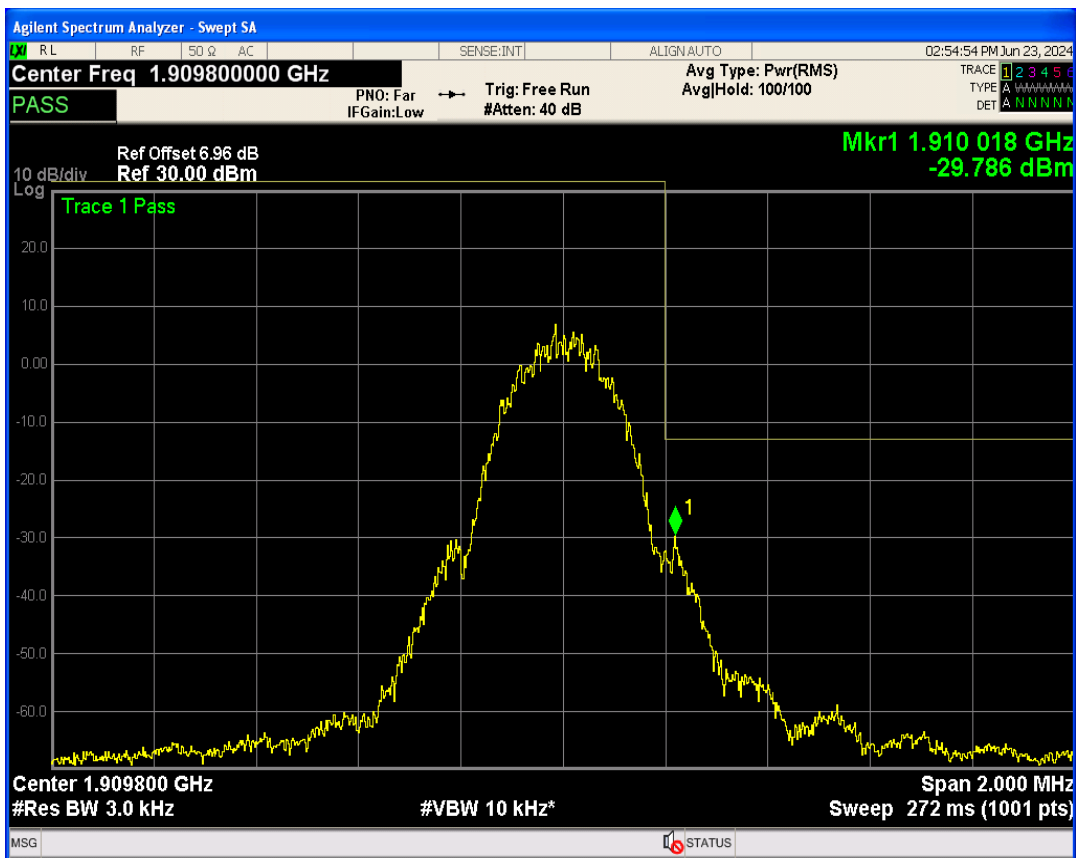

GSM850 Channel=128

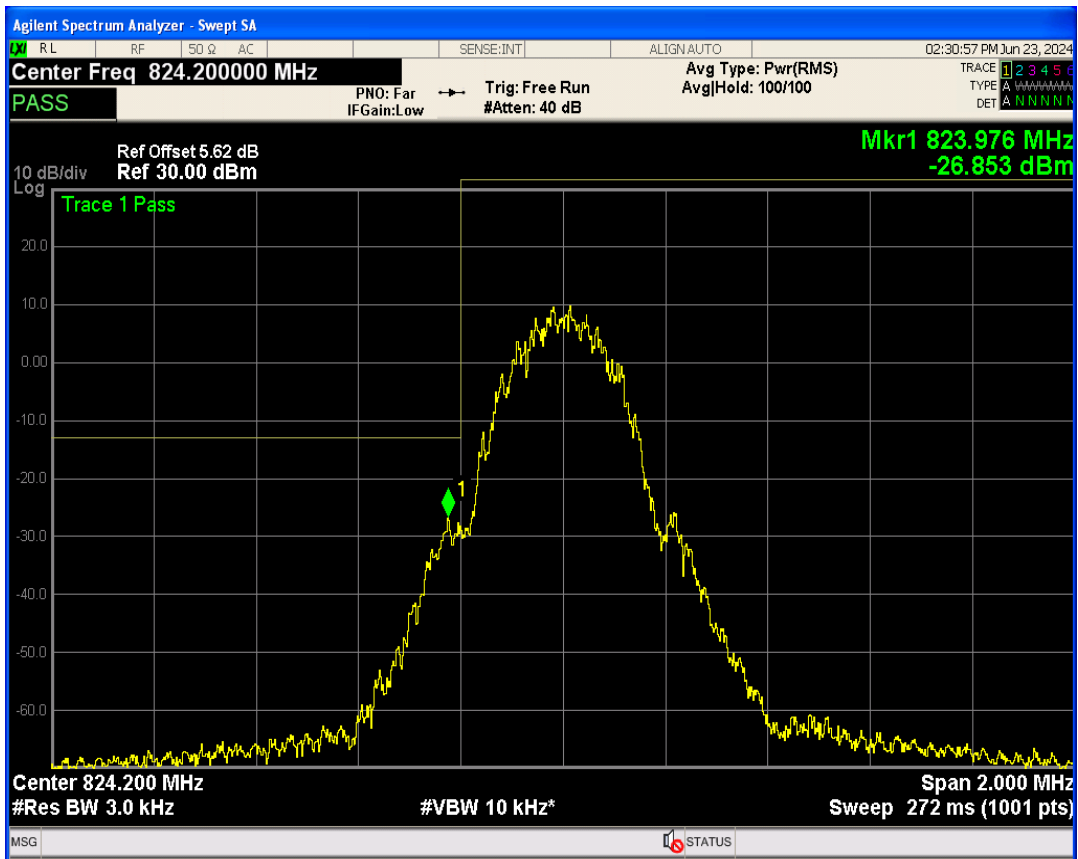


GSM850 Channel=251

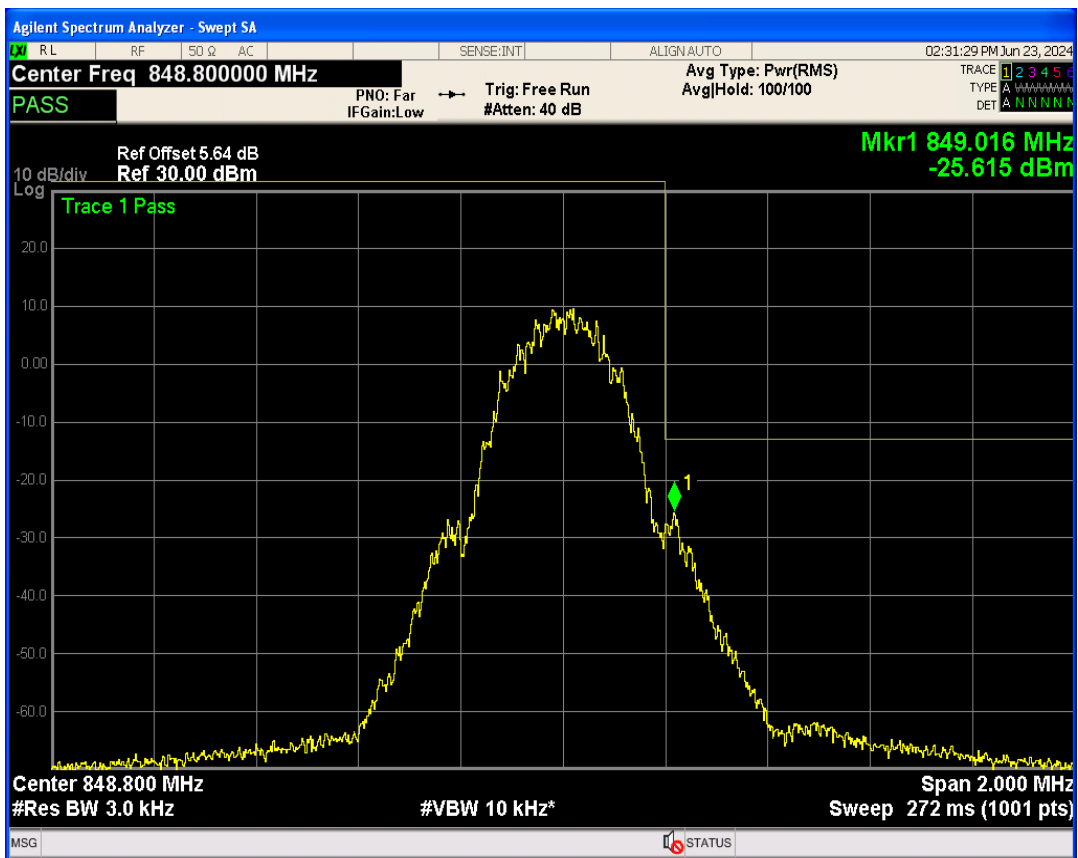


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	26000.38	-19.49	-13	PASS
GSM1900	661	1880	25993.76	-19.37	-13	PASS
GSM1900	810	1909.8	25948.10	-19.66	-13	PASS
GSM850	128	824.2	26212.14	-20.61	-13	PASS
GSM850	189	836.4	26024.86	-21.03	-13	PASS
GSM850	251	848.8	25508.04	-21.02	-13	PASS


GSM1900 Channel=512

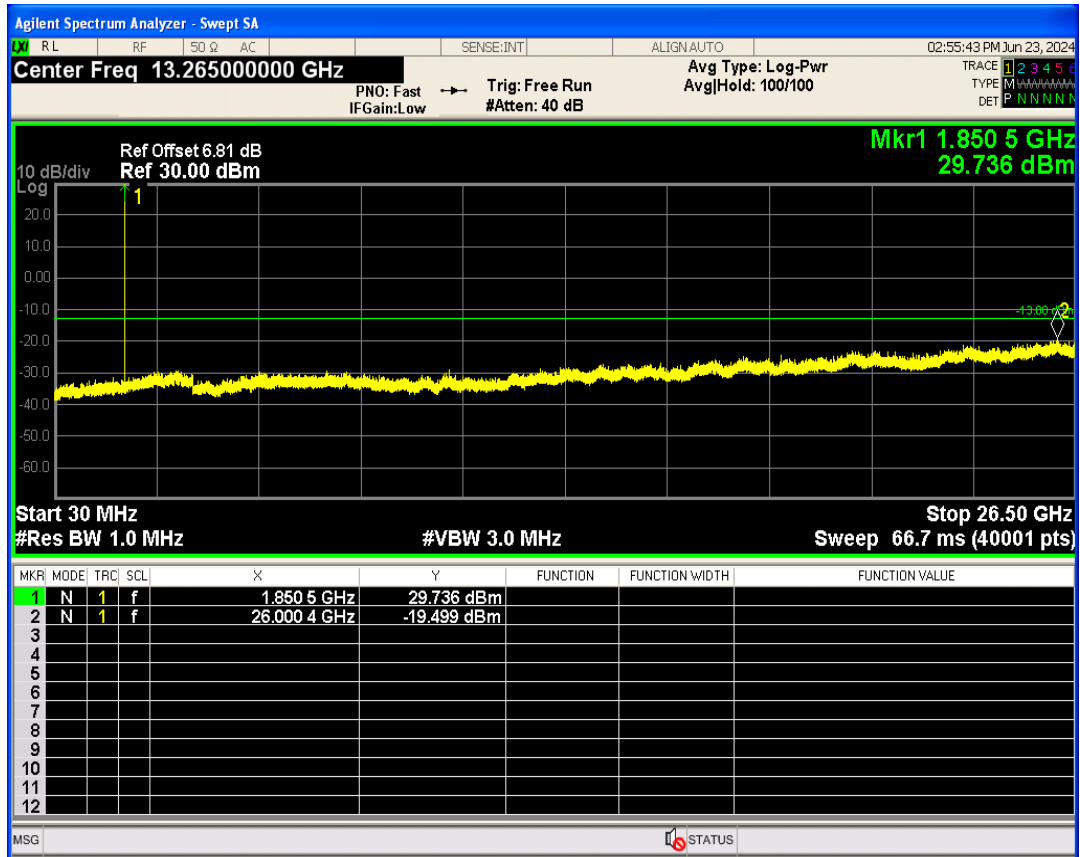


GSM1900 Channel=810

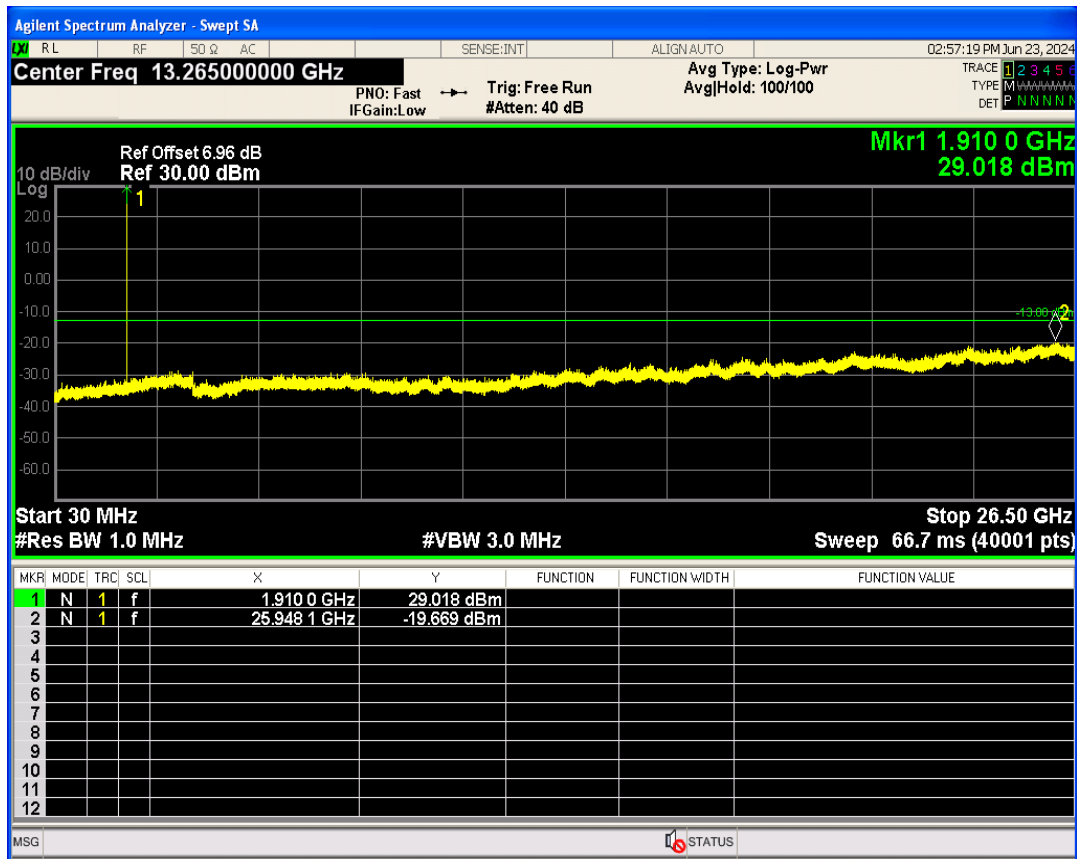


GSM1900 Channel=661

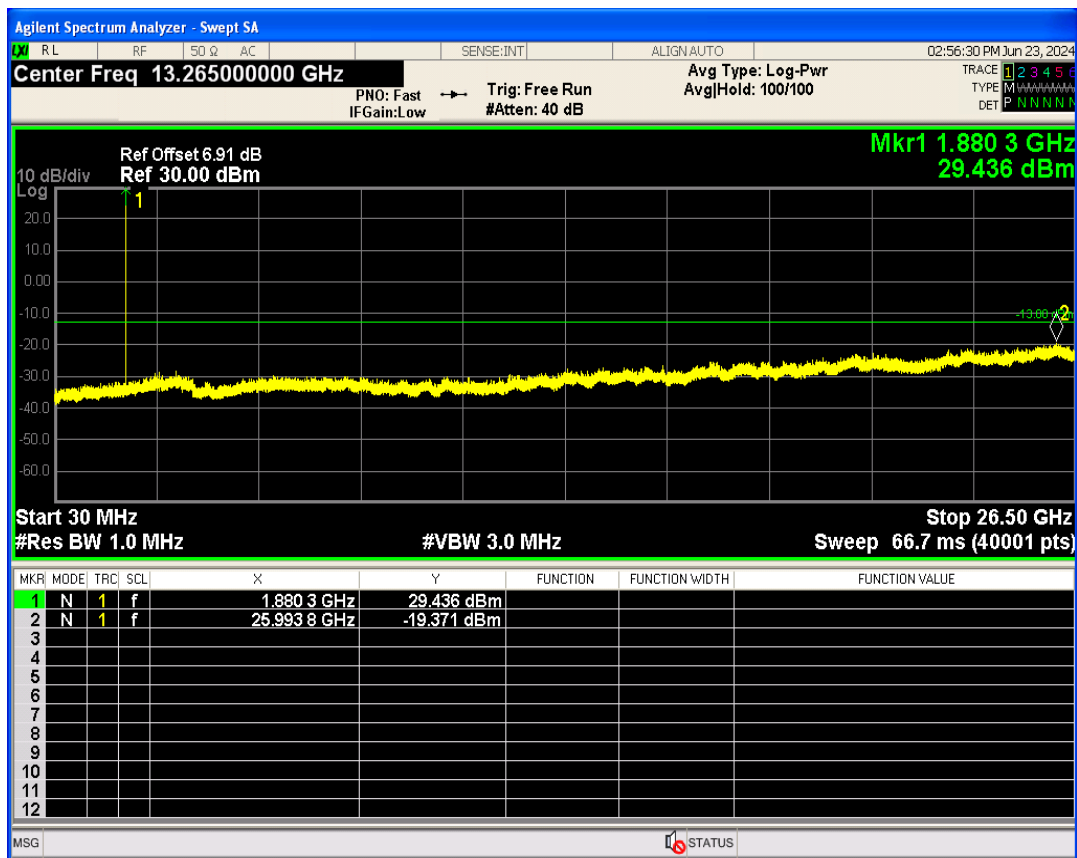

GSM850 Channel=128

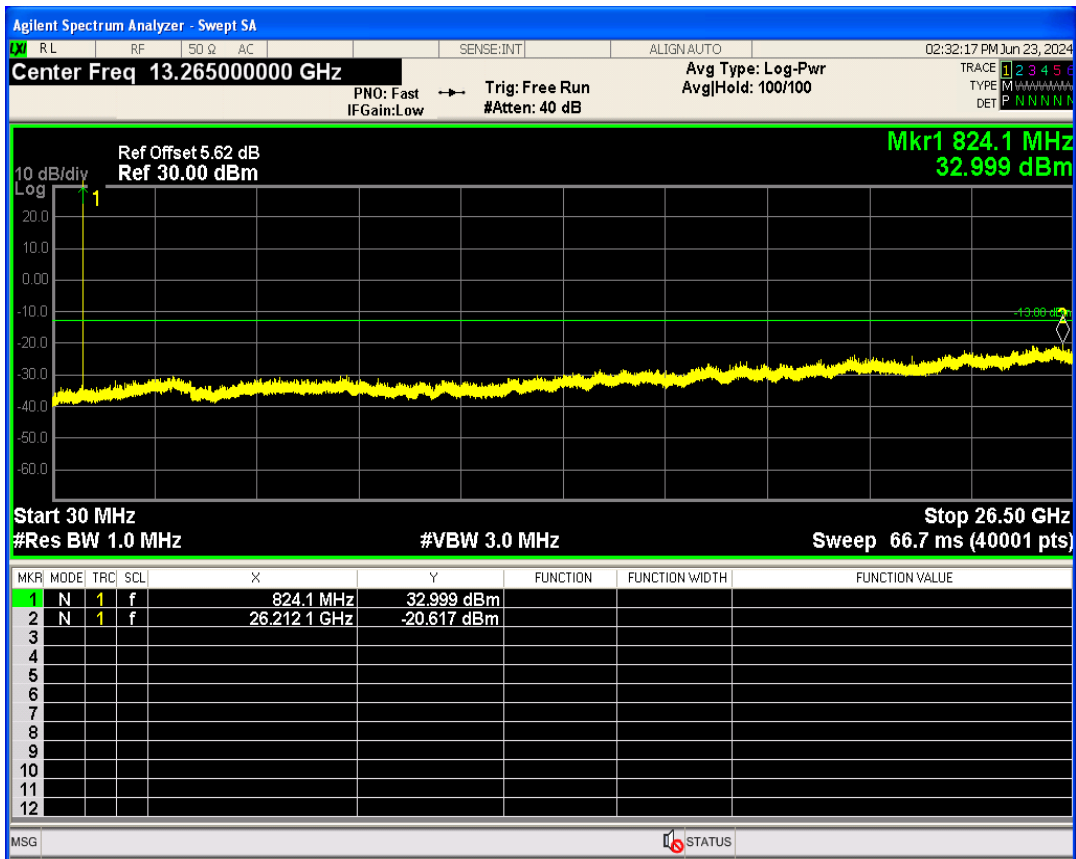

GSM850 Channel=189

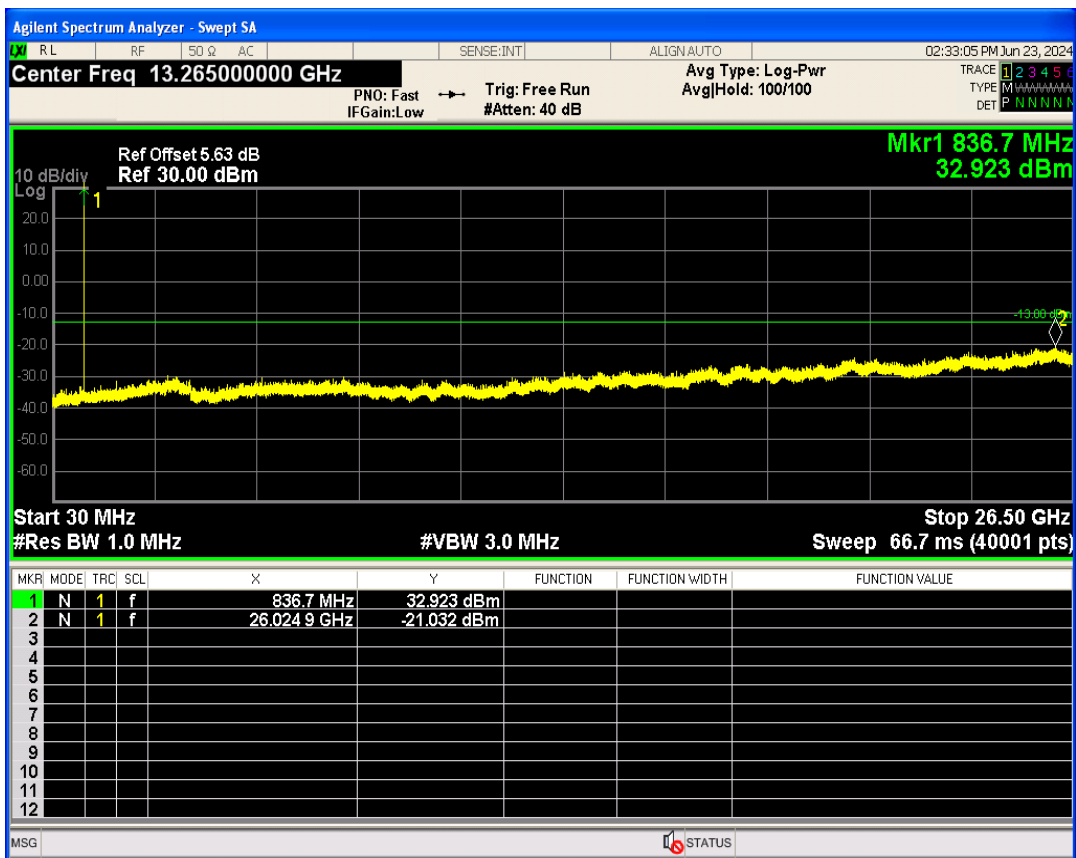

GSM850 Channel=251

