

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093) and
IEEE Std 1528-2013**

Product Name: Smart Phone

Model No.: GQ5012

Armor 29 Pro, Armor 29 Ultra, Armor 29,
Serial Model: Armor 29T Ultra, Armor 29T Pro,
Armor 29 Lite, Armor 29s, Armor 29s Pro

Brand Name: ulefone

Report No.: AiTSZ-250227029FW1

FCC ID: 2AOWK-5012

Prepared for

Shenzhen Gotron Electronic CO.,LTD.
7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City,
Guangdong Province China

Prepared by

Guangdong Asia Hongke Test Technology Limited
B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China
Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Gotron Electronic CO.,LTD.
Address : 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua
 District, Shenzhen City, Guangdong Province China
Manufacturer's Name : Shenzhen Gotron Electronic CO.,LTD.
Address : 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua
 District, Shenzhen City, Guangdong Province China

Product description

Product name : Smart Phone
Trademark : ulefone
Model and/or type reference : GQ5012
 Armor 29 Pro, Armor 29 Ultra, Armor 29,
Serial Model..... : Armor 29T Ultra, Armor 29T Pro,
 Armor 29 Lite, Armor 29s, Armor 29s Pro
 FCC 47 CFR Part 2(2.1093)

Standards : IEEE Std 1528-2013
 Published RF exposure KDB procedures

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093). The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... : Mar. 17, 2025 ~ Apr. 17, 2025
Date of Issue..... : May 12, 2025
Test Result..... : **Pass**

Reviewed by: 
 Simba Huang

Approved by: 
 Sean She

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	May 12, 2025	Sean She

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits	6
1.2. Statement of Compliance.....	7
1.3. EUT Description	8
1.4. Test specification(s)	10
1.5. Ambient Condition	10
2. SAR Measurement System	11
2.1. SATIMO SAR Measurement Set-up Diagram	11
2.2. Robot	12
2.3. Probe	13
2.3.1. E-Field Probe Calibration.....	13
2.4. Phantoms	14
2.5. Technical Data	15
2.6. Device Holder	16
2.7. Test Equipment List	17
3. SAR Measurement Procedures	19
3.1. Power Reference.....	19
3.2. Area scan & Zoom scan	19
3.3. Description of interpolation/extrapolation scheme	21
3.4. Volumetric Scan	21
3.5. Power Drift	21
4. System Verification Procedure.....	22
4.1. Tissue Verification.....	22
4.1.1. Tissue Dielectric Parameter Check Results	23
4.2. System Verification Procedure	24
4.2.1. System Verification Results	25
5. SAR measurement variability.....	26
6. SAR Measurement Uncertainty.....	27
7. RF Exposure Positions	28
7.1. Ear and handset reference point	28
7.2. Definition of the cheek position	28
7.3. Definition of the tilt position	30
7.4. Body Worn Accessory.....	30
7.5. Wireless Router Devices	31
8. RF Output Power	32
8.1. GSM Conducted Power	32
8.2. WCDMA Conducted Power.....	33
8.3. LTE Conducted Power.....	36
8.4. NR Output Power	49

8.5. Wi-Fi & BT Output Power	75
8.6. NFC	76
9. Antenna Location.....	77
10. Stand-alone SAR test exclusion	78
11. SAR Measurement Results.....	79
12. Simultaneous Transmission Analysis.....	100
Appendix A. Photo documentation	102
Appendix B. System Check Plots	103
Appendix C. SAR Test Plots.....	120
Appendix D. Calibration Certificate	193
Appendix E. Justification of the extended calibration	262

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing as follows.

Band	Max SAR Value Reported(W/kg)		
	1-g Head (Separation distance of 0mm)	1-g Body&Hotspot (Separation distance of 5mm)	Max SAR Summation
GSM850	0.232	0.504	Head: 1.121 Body: 1.359 Hotspot: 1.359
GSM1900	0.323	0.685	
WCDMA Band II	0.328	0.577	
WCDMA Band IV	0.357	0.541	
WCDMA Band V	0.226	0.313	
LTE band 2	0.329	0.520	
LTE band 4	0.330	0.564	
LTE band 5	0.245	0.352	
LTE band 12	0.232	0.386	
LTE band 17	0.221	0.418	
LTE band 41	0.556	0.410	
LTE band 66	0.374	0.636	
LTE band 71	0.241	0.454	
NR n66	0.319	0.357	
NR n71	0.234	0.237	
2.4GHz WLAN	0.565	0.212	
5.2GHz WLAN	0.551	0.618	
5.8GHz WLAN	0.509	0.674	

NOTE: The Max SAR Summation is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093), and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	Smart Phone		
Model Name	GQ5012		
Family Model	Armor 29 Pro, Armor 29 Ultra, Armor 29, Armor 29T Ultra, Armor 29T Pro, Armor 29 Lite, Armor 29s, Armor 29s Pro		
Model Difference	All the model are the same circuit and RF module, except the model names.		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna Type	Internal Antenna		
Power rating:	DC 7.74V, 10600mAh, 82.044Wh		
Hardware version	N/A		
Software version	N/A		
Device Operating Configurations			
Supporting Mode(s)	GSM850/1900,WCDMABand2/4/5,LTEBand2/4/5/12/17/41/66/71, NR SA n66/n71, WLAN 2.4G/5.2G/5.8G, Bluetooth, NFC		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), NR(DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM) , WLAN(DSSS/OFDM), Bluetooth(GFSK, π /4-DQPSK, 8DPSK) , NFC(ASK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 41	2496-2690	
	LTE Band 66	1710-1780	2110-2200
	LTE Band 71	663-698	617-652
	NR n66	1710-1780	2110-2200
	NR n71	663-698	617-652
	WLAN 2.4G	2412-2462	

	WLAN 5.2G	5180-5240
	WLAN 5.8G	5745-5825
	NFC	13.56
	Bluetooth	2402-2480
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink	4
	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink	4
	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
Power Class	4, tested with power level 5(GSM 850)	
	1, tested with power level 0(GSM 1900)	
	3, tested with power control "all 1"(WCDMA Band 2)	
	3, tested with power control "all 1"(WCDMA Band 4)	
	3, tested with power control "all 1"(WCDMA Band 5)	
	3, tested with power control all Max.(LTE Band 2)	
	3, tested with power control all Max.(LTE Band 4)	
	3, tested with power control all Max.(LTE Band 5)	
	3, tested with power control all Max.(LTE Band 12)	
	3, tested with power control all Max.(LTE Band 17)	
	3, tested with power control all Max.(LTE Band 41)	
	3, tested with power control all Max.(LTE Band 66)	
	3, tested with power control all Max.(LTE Band 71)	
	3, tested with power control all Max.(NR n66)	
	3, tested with power control all Max.(NR n71)	

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

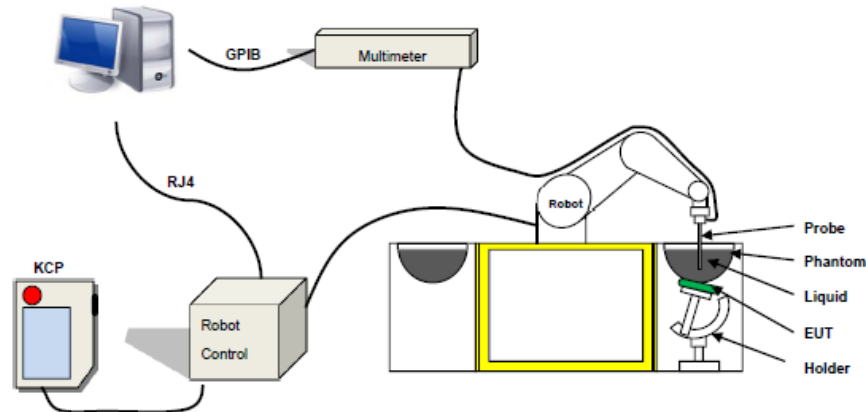

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe EPGO 0523-403 with following specifications is used.



- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within $\pm 0.25\text{dB}$. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.


2.4. Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM


2.5. Technical Data

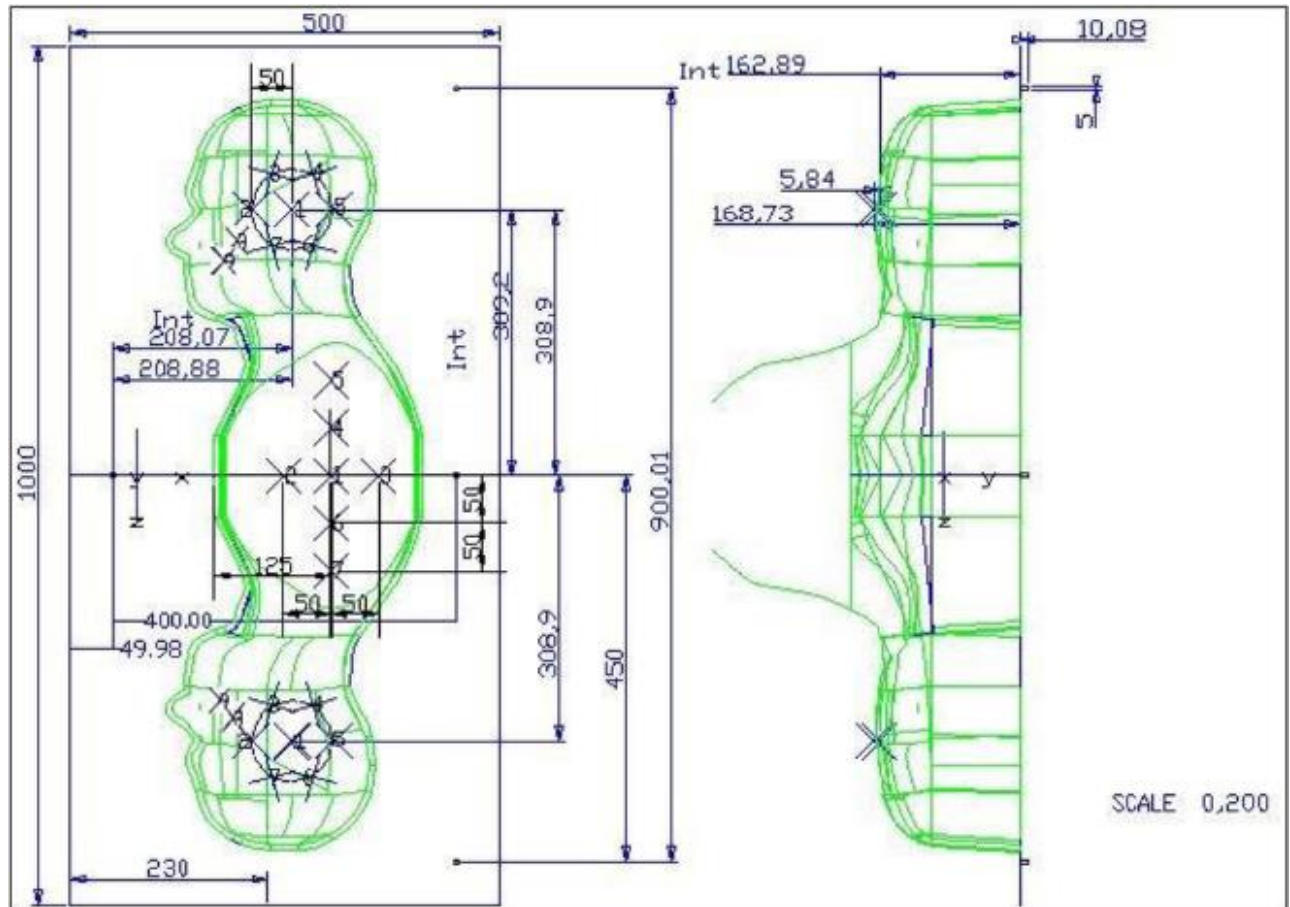

Left Head(mm)		Right Head(mm)		Flat Part(mm)	
2	2.02	2	2.08	1	2.09
3	2.05	3	2.06	2	2.06
4	2.07	4	2.07	3	2.08
5	2.08	5	2.08	4	2.10
6	2.05	6	2.07	5	2.10
7	2.05	7	2.05	6	2.07
8	2.07	8	2.06	7	2.07
9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

2.6. Device Holder

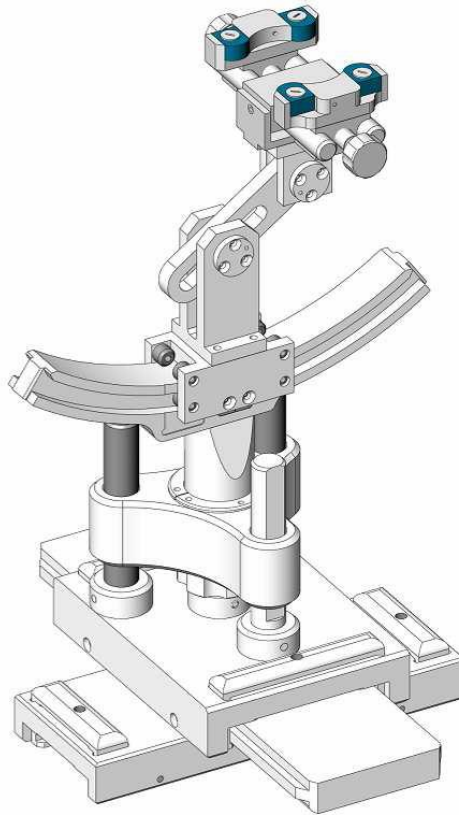

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

2.7. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	EPGO 0523-403	Sep. 11, 2024	Sep. 10, 2025
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DI P 0G900-348	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	Jul. 01, 2024	Jun. 30, 2025
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	Jul. 01, 2024	Jun. 30, 2025
☒	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2024	Jun. 30, 2025
☒	R&S	Wideband radio communication tester	CMW500	116581	Jul. 01, 2024	Jun. 30, 2025
☒	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2024	Jun. 30, 2025

☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power meter	E4419B	MY45102140	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power meter	E4419B	MY45102215	Jul. 01, 2024	Jun. 30, 2025
☒	JFW	attenuator	50FPE-006	4360846-494-4	Jul. 01, 2024	Jun. 30, 2025
☒	JFW	attenuator	50FPE-006	4360846-492-1	Jul. 01, 2024	Jun. 30, 2025
☒	JFW	attenuator	50FPE-006	4360846-490-6	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2024	Jun. 30, 2025
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2024	Jul. 16, 2027
☒	MVG	SAR Phantom	SSM2	SN 24/11 SAM87	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 24/11 MSH73	NCR	NCR
☒	Keysight	UXM 5G Wireless Test Platform	E7515B	MY58120285	Sep. 23, 2024	Sep. 22, 2025

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.



4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r (\pm 5\%)$	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	42.56	0.91	21.4 °C	Mar. 17, 2025
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.01	0.94	21.3 °C	Mar. 20, 2025
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.61	1.41	21.1 °C	Mar. 24, 2025
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	41.42	1.39	21.7 °C	Mar. 27, 2025
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.41	1.82	21.6 °C	Apr. 07, 2025
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.43	1.99	21.5 °C	Apr. 10, 2025
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	37.40	4.51	21.1 °C	Apr. 14, 2025
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	35.30	5.27	21.0 °C	Apr. 17, 2025

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

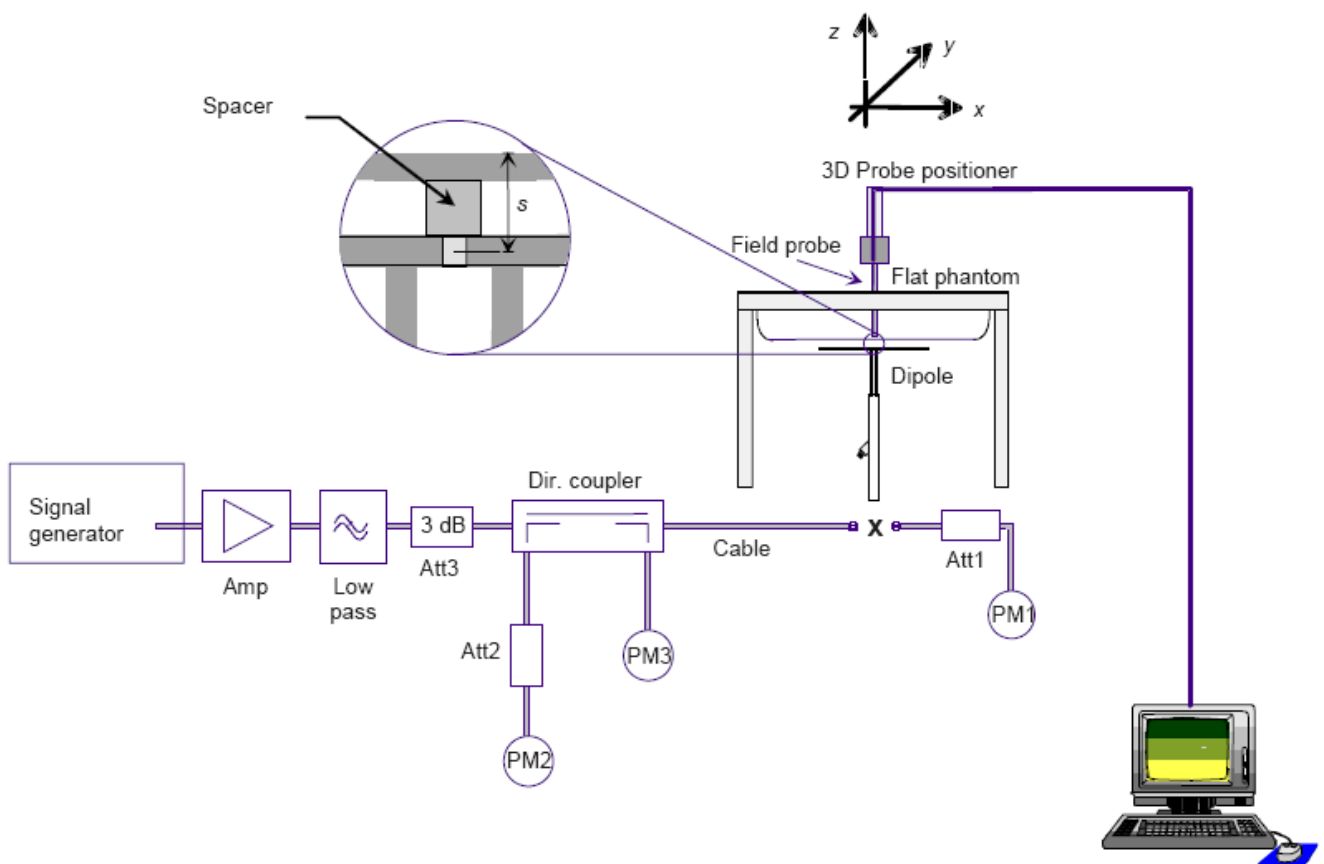

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Power fed to reference dipole (mW)	Measured SAR Value		Measured SAR (Normalized to 1W)		Target SAR Value (1W)		Deviation (%)		Test Date
		1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)	
750MHz	100	0.930	0.621	9.30	6.21	8.60	5.78	8.14%	7.44%	Mar. 17, 2025
835MHz	100	1.011	0.612	10.11	6.12	9.40	6.28	7.55%	-2.55%	Mar. 20, 2025
1800MHz	100	3.832	2.025	38.32	20.25	37.06	20.01	3.40%	1.20%	Mar. 24, 2025
1900MHz	100	4.154	2.153	41.54	21.53	39.69	20.92	4.66%	2.92%	Mar. 27, 2025
2450MHz	100	5.184	2.359	51.84	23.59	50.05	23.80	3.58%	-0.88%	Apr. 07, 2025
2600MHz	100	5.433	2.523	54.33	25.23	54.16	24.85	0.31%	1.53%	Apr. 10, 2025
5200MHz	100	14.712	5.212	147.12	52.12	162.59	56.21	-9.51%	-7.28%	Apr. 14, 2025
5800MHz	100	16.421	5.623	164.21	56.23	182.2	61.32	-9.87%	-8.30%	Apr. 17, 2025

5. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6. SAR Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

7. RF Exposure Positions

7.1. Ear and handset reference point

Figure 7.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 7.1.1 Front, back, and side views of SAM phantom

7.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 7.2.1 and Figure 7.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 7.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 7.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line

passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 7.2.3. The actual rotation angles should be documented in the test report.

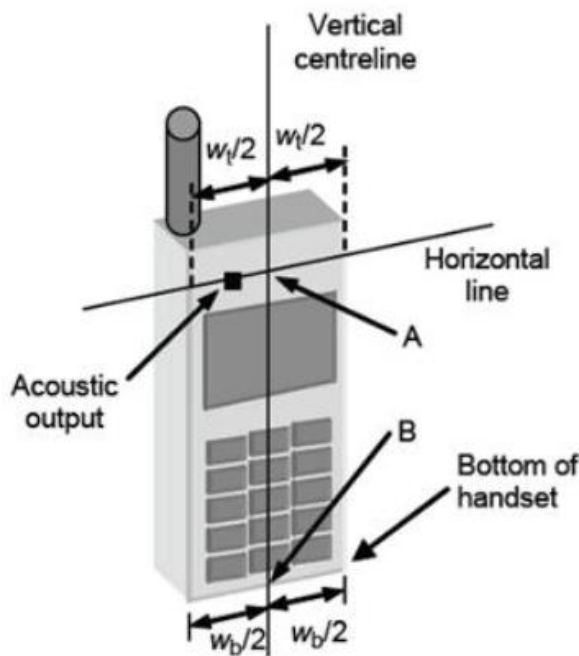


Fig 7.2.1 Handset vertical and horizontal reference lines—fixed case

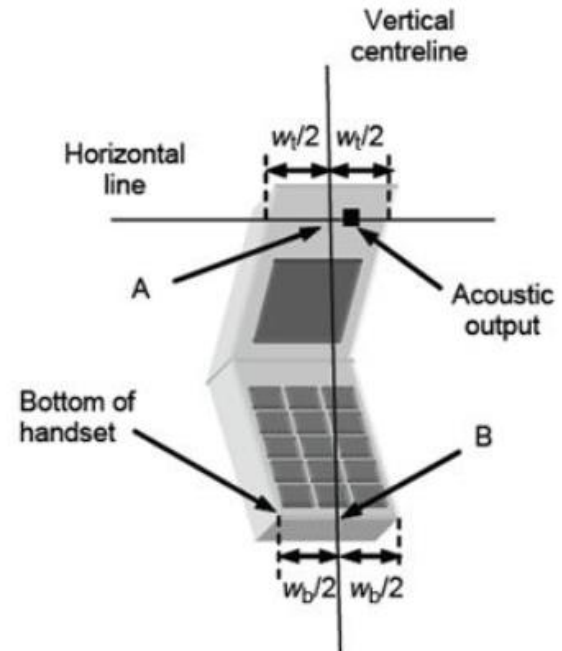


Fig 7.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

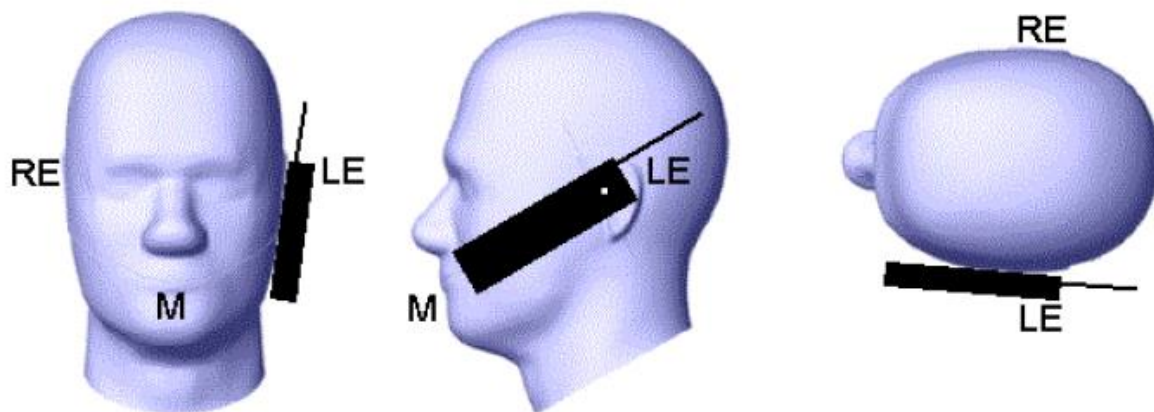


Fig 7.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

7.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 7.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

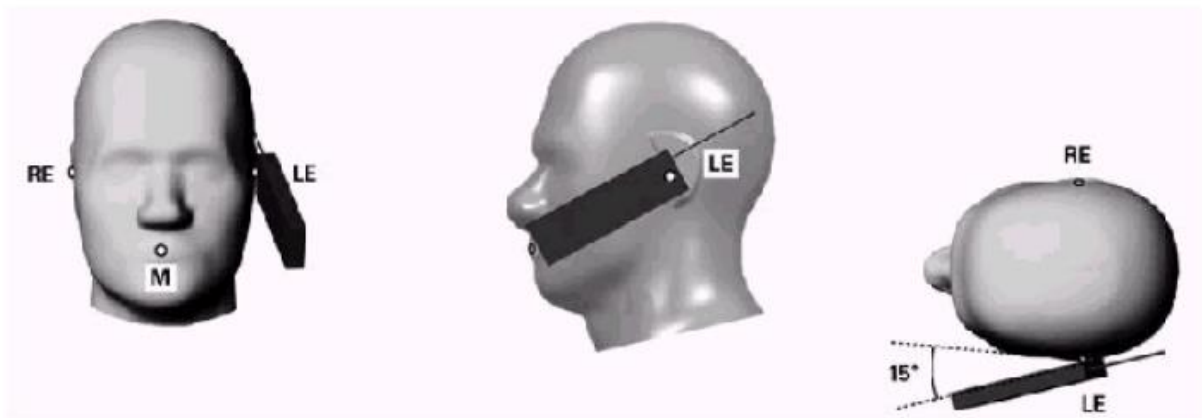


Figure 7.3.1 – Tilt position of the wireless device on the left side of SAM

7.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do

not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

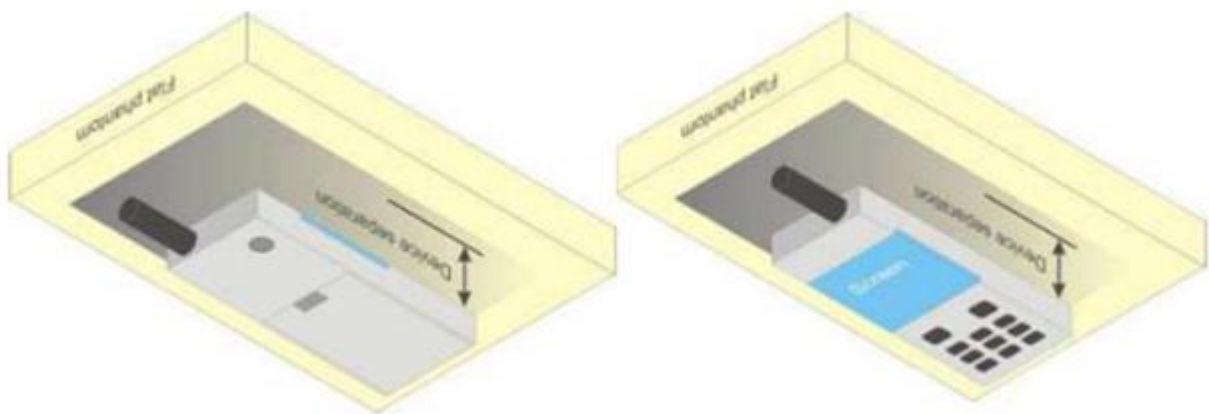


Figure 7.4.1 – Test positions for body-worn devices

7.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The —Portable Hotspot|| feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

8. RF Output Power

8.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Factor	Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	128	189	251		Tune-up	128	189	251
Frequency (MHz)		824.2	836.4	848.8			824.2	836.4	848.8
GSM (GMSK)	33.00	32.86	32.81	32.78	/	/	/	/	/
GPRS(GMSK,1 Tx slot)	34.00	33.54	33.18	33.07	-9.03	24.97	24.51	24.15	24.04
GPRS(GMSK,2 Tx slot)	33.00	32.47	32.59	32.96	-6.02	26.98	26.45	26.57	26.94
GPRS(GMSK,3 Tx slot)	31.50	30.86	30.99	31.36	-4.26	27.24	26.60	26.73	27.10
GPRS(GMSK,4 Tx slot)	30.50	29.63	29.75	30.11	-3.01	27.49	26.62	26.74	27.10
GPRS(EDGE,1 Tx slot)	28.50	28.21	28.08	28.39	-9.03	19.47	19.18	19.05	19.36
GPRS(EDGE,2 Tx slot)	28.00	27.67	27.54	27.90	-6.02	21.98	21.65	21.52	21.88
GPRS(EDGE,3 Tx slot)	25.50	24.97	24.79	25.19	-4.26	21.24	20.71	20.53	20.93
GPRS(EDGE,4 Tx slot)	24.00	23.55	23.42	23.80	-3.01	20.99	20.54	20.41	20.79

Band GSM1900	Burst-Averaged output Power (dBm)				Factor	Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	512	661	810		Tune-up	512	661	810
Frequency (MHz)		1850.2	1880	1909.8			1850.2	1880	1909.8
GSM (GMSK)	29.50	29.47	29.10	29.33	/	/	/	/	/
GPRS(GMSK,1 Tx slot)	30.50	30.22	30.34	30.04	-9.03	21.47	21.19	21.31	21.01
GPRS(GMSK,2 Tx slot)	30.00	29.51	29.77	29.68	-6.02	23.98	23.49	23.75	23.66
GPRS(GMSK,3 Tx slot)	28.50	28.04	28.30	28.20	-4.26	24.24	23.78	24.04	23.94
GPRS(GMSK,4 Tx slot)	27.50	26.92	27.17	27.07	-3.01	24.49	23.91	24.16	24.06
GPRS(EDGE,1 Tx slot)	27.00	27.00	26.40	26.44	-9.03	17.97	17.97	17.37	17.41
GPRS(EDGE,2 Tx slot)	27.00	26.14	25.95	26.51	-6.02	20.98	20.12	19.93	20.49
GPRS(EDGE,3 Tx slot)	24.00	23.59	23.45	23.93	-4.26	19.74	19.33	19.19	19.67
GPRS(EDGE,4 Tx slot)	23.00	22.24	22.17	22.55	-3.01	19.99	19.23	19.16	19.54

Note:

Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme.

Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link

Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link

Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link

SAR testing was performed on the maximum frame-averaged power mode.

The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum

Burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB

Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB

Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB

Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB

8.2. WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

1. Release99 Setup Configuration

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm1
	β_c/β_d	8/15

2. HSDPA Setup Configuration

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

3. HSUPA Setup Configuration

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm1				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
HSDPA Specific Settings	D_{ACK}	8				
	D_{NAK}	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				

HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9

4. WCDMA Conducted Power Results

Choose the highest output power mode RMC 12.2Kbps for Band VIII/I at middle channel to test SAR and determine the worst configuration for further high/low channel test.

WCDMA Band II	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC12.2K	23.50	23.27	23.17	23.03
HSDPA Sub 1	22.50	22.27	22.20	22.05
HSDPA Sub 2	22.50	22.26	22.17	22.01
HSDPA Sub 3	22.00	21.85	21.74	21.57
HSDPA Sub 4	22.00	21.81	21.70	21.54
HSUPA Sub 1	22.00	21.77	21.61	21.49
HSUPA Sub 2	22.50	22.30	22.21	22.04
HSUPA Sub 3	21.50	21.35	21.22	21.08
HSUPA Sub 4	22.50	22.29	22.18	22.02
HSUPA Sub 5	21.50	21.32	21.22	21.05

WCDMA Band IV	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC12.2K	23.50	23.30	23.29	23.27
HSDPA Sub 1	22.50	22.28	22.28	22.28
HSDPA Sub 2	22.50	22.20	22.18	22.19
HSDPA Sub 3	22.00	21.83	21.82	21.84
HSDPA Sub 4	22.00	21.80	21.77	21.78
HSUPA Sub 1	22.00	21.67	21.58	21.70
HSUPA Sub 2	22.50	22.29	22.28	22.30
HSUPA Sub 3	21.50	21.33	21.32	21.33
HSUPA Sub 4	22.50	22.26	22.27	22.29
HSUPA Sub 5	21.50	21.30	21.28	21.32

WCDMA Band V	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	24.00	23.78	23.78	23.76
HSDPA Sub 1	23.00	22.82	22.82	22.75
HSDPA Sub 2	23.00	22.79	22.72	22.70
HSDPA Sub 3	22.50	22.38	22.34	22.28
HSDPA Sub 4	22.50	22.35	22.29	22.25
HSUPA Sub 1	22.50	22.23	22.16	22.13
HSUPA Sub 2	23.00	22.82	22.80	22.76
HSUPA Sub 3	22.00	21.86	21.82	21.77
HSUPA Sub 4	23.00	22.80	22.80	22.75
HSUPA Sub 5	22.00	21.84	21.82	21.75

8.3. LTE Conducted Power

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 36.521-1 specification. A summary of these configurations are illustrated below:

Test Parameters for Channel Bandwidths				
Ch BW	Downlink Configuration	Mod'n	Uplink Configuration	
	N/A for Max UE output power testing		RB allocation	
			FDD	TDD
1.4MHz		QPSK	1	1
1.4MHz		QPSK	5	5
3MHz		QPSK	1	1
3MHz		QPSK	4	4
5MHz		QPSK	1	1
5MHz		QPSK	8	8
10MHz		QPSK	1	1
10MHz		QPSK	12	12
15MHz		QPSK	1	1
15MHz		QPSK	16	16
20MHz		QPSK	1	1
20MHz		QPSK	18	18

Note 1: Test Channel Bandwidths are checked separately for each E-UTRA band, the applicable channel bandwidths are specified in Table 5.4.2.1-1.

Note 2: For E-UTRA bands not applied with Note 2 in Table 6.2.2.3-1:

- The 1 RB allocation shall be tested at RB#0 for low and mid range, RB #max for high range test frequency.
- The RBstart of non-1RB allocation shall be RB #0 for low and mid range, RB# (max +1 - RB allocation) for high range test frequency.

Note 3: For E-UTRA bands applied with Note 2 in Table 6.2.2.3-1:

- If the test channel bandwidth is larger than 4MHz, then the 1 RB allocation shall be tested at both RB #0 and RB #max.
- If the test channel bandwidth is smaller or equal to 4MHz, then the 1 RB allocation shall be tested at RB #0.
- If the test channel bandwidth = (FUL_high - FUL_low) specified by the operating band, then only one frequency range shall be tested and the 1 RB allocation shall be tested at RB #0, RB # $\left\lceil N_{RB}^{UL} / 2 \right\rceil$ and RB #max.
- For non-1RB allocation, test frequency is middle range, and the RBstart shall be RB #0.

2. LTE Conducted Power Results

LTE output list

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	23.00	22.72	22.75	22.82
			1	2	23.00	22.75	22.73	22.76
			1	5	23.00	22.74	22.75	22.84
			3	0	23.00	22.69	22.79	22.87
			3	1	23.00	22.75	22.80	22.84
			3	2	23.00	22.75	22.81	22.84
			6	0	22.00	21.70	21.83	21.86
		16QAM	1	0	22.00	21.49	21.66	21.97
			1	2	22.00	21.49	21.72	21.91
			1	5	22.00	21.50	21.60	21.98
			3	0	22.00	21.74	21.88	21.90
			3	1	22.00	21.81	21.81	21.97
			3	2	22.00	21.81	21.85	21.89
			6	0	21.00	20.77	20.84	20.87
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	23.00	22.76	22.90	22.79
			1	7	23.00	22.70	22.80	22.73
			1	14	23.00	22.72	22.86	22.81
			8	0	22.00	21.76	21.85	21.85
			8	4	22.00	21.84	21.84	21.86
			8	7	22.00	21.76	21.82	21.94
			15	0	22.00	21.77	21.82	21.86
		16QAM	1	0	22.50	21.44	22.30	21.96
			1	7	22.50	21.44	22.22	21.91
			1	14	22.50	21.51	22.21	21.91
			8	0	21.50	20.96	20.96	20.88
			8	4	21.50	20.93	21.03	20.82
			8	7	21.50	20.91	20.88	20.89
			15	0	21.00	20.75	20.86	20.88
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	23.50	22.86	22.91	22.98
			1	12	23.50	22.75	22.87	22.95
			1	24	23.50	22.80	22.96	23.09
			12	0	22.00	21.82	21.86	21.93
			12	6	22.00	21.82	21.88	21.92
			12	11	22.00	21.81	21.88	21.93
			25	0	22.00	21.84	21.86	21.98
		16QAM	1	0	22.50	21.92	21.58	22.29
			1	12	22.50	21.88	21.55	22.30
			1	24	22.50	21.98	21.64	22.47
			12	0	21.00	20.85	20.95	20.86

			12	6	21.00	20.86	20.92	20.88
			12	11	21.00	20.83	20.90	20.89
			25	0	21.00	20.86	20.93	20.89
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	23.00	22.80	22.94	22.80
			1	24	23.00	22.85	22.92	22.88
			1	49	23.00	22.85	22.86	22.78
			25	0	22.00	21.85	21.91	21.89
			25	12	22.00	21.88	21.91	21.90
			25	24	22.00	21.87	21.92	21.90
			50	0	22.00	21.83	21.91	21.94
		16QAM	1	0	22.50	21.49	22.36	21.97
			1	24	22.50	21.49	22.35	22.08
			1	49	22.50	21.57	22.24	21.96
			25	0	21.00	20.89	20.87	20.94
			25	12	21.00	20.88	20.88	20.98
			25	24	21.00	20.93	20.91	20.97
			50	0	21.00	20.84	20.84	20.90
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	23.00	22.84	22.85	22.80
			1	37	23.00	22.87	22.99	22.87
			1	74	23.00	22.83	22.86	22.83
			36	0	22.00	21.82	21.94	21.96
			36	18	22.00	21.88	21.89	21.95
			36	37	22.00	21.87	21.93	21.95
			75	0	22.00	21.86	21.96	21.98
		16QAM	1	0	22.50	21.94	22.35	21.95
			1	37	22.50	22.06	22.44	22.09
			1	74	22.50	22.01	22.29	22.02
			36	0	21.00	20.86	20.93	20.95
			36	18	21.00	20.88	20.95	21.00
			36	37	21.00	20.90	20.95	20.99
			75	0	21.00	20.86	20.97	20.98
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	23.50	22.83	22.95	22.86
			1	49	23.50	22.89	23.05	22.97
			1	99	23.50	22.88	23.04	22.87
			50	0	22.00	21.91	21.95	21.95
			50	24	22.00	21.90	21.97	21.98
			50	49	22.00	21.90	21.98	21.98
			100	0	22.00	21.89	21.91	21.98
		16QAM	1	0	23.00	22.59	22.44	22.09
			1	49	23.00	22.49	22.43	22.09
			1	99	23.00	22.57	22.39	22.07
			50	0	21.50	20.89	20.96	21.00

			50	24	21.50	20.91	20.94	21.01
			50	49	21.50	20.94	20.92	20.95
			100	0	21.00	20.89	20.96	20.97

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	23.00	22.85	22.79	22.67
			1	2	23.00	22.74	22.75	22.76
			1	5	23.00	22.84	22.74	22.77
			3	0	23.00	22.87	22.76	22.71
			3	1	23.00	22.75	22.81	22.73
			3	2	23.00	22.84	22.81	22.81
			6	0	22.00	21.84	21.81	21.80
		16QAM	1	0	22.00	21.56	21.61	21.43
			1	2	22.00	21.56	21.70	21.42
			1	5	22.00	21.63	21.76	21.56
			3	0	22.00	21.92	21.94	21.91
			3	1	22.00	21.90	21.87	21.86
			3	2	22.00	21.91	21.89	21.95
			6	0	21.00	20.91	20.84	20.86
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	23.00	22.76	22.87	22.78
			1	7	23.00	22.68	22.74	22.63
			1	14	23.00	22.74	22.79	22.71
			8	0	22.00	21.86	21.77	21.74
			8	4	22.00	21.84	21.80	21.79
			8	7	22.00	21.83	21.81	21.83
			15	0	22.00	21.85	21.77	21.73
		16QAM	1	0	22.50	21.90	22.30	21.80
			1	7	22.50	21.87	22.17	21.74
			1	14	22.50	21.99	22.33	21.91
			8	0	21.00	20.87	20.93	20.76
			8	4	21.00	20.82	20.86	20.78
			8	7	21.00	20.74	20.93	20.74
			15	0	21.00	20.88	20.86	20.80
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	23.50	23.03	22.96	22.86
			1	12	23.50	22.91	22.99	22.77
			1	24	23.50	22.89	23.01	22.91
			12	0	22.00	21.97	21.85	21.87
			12	6	22.00	21.92	21.84	21.79
			12	11	22.00	21.91	21.86	21.78
			25	0	22.00	21.93	21.90	21.85
		16QAM	1	0	22.50	21.53	22.42	21.96
			1	12	22.50	21.63	22.37	21.91
			1	24	22.50	21.65	22.34	22.04

			12	0	21.00	20.94	20.83	20.79
			12	6	21.00	20.93	20.80	20.79
			12	11	21.00	20.96	20.81	20.76
			25	0	21.00	20.97	20.83	20.87
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	23.00	22.72	22.82	22.88
			1	24	23.00	22.78	22.86	22.85
			1	49	23.00	22.78	22.87	22.88
			25	0	22.00	21.85	21.87	21.76
			25	12	22.00	21.84	21.81	21.74
			25	24	22.00	21.85	21.84	21.78
			50	0	22.00	21.87	21.89	21.88
		16QAM	1	0	22.50	21.88	21.53	22.22
			1	24	22.50	22.03	21.60	22.31
			1	49	22.50	21.99	21.64	22.38
			25	0	21.00	20.94	20.93	20.73
			25	12	21.00	20.87	20.90	20.80
			25	24	21.00	20.83	20.89	20.82
			50	0	21.00	20.87	20.88	20.85
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	23.00	22.84	22.83	22.91
			1	37	23.00	22.86	22.87	22.92
			1	74	23.00	22.89	22.90	22.89
			36	0	22.00	21.85	21.88	21.84
			36	18	22.00	21.84	21.86	21.84
			36	37	22.00	21.86	21.84	21.84
			75	0	22.00	21.92	21.91	21.88
		16QAM	1	0	22.50	22.02	21.87	22.41
			1	37	22.50	22.10	21.99	22.41
			1	74	22.50	22.11	22.08	22.36
			36	0	21.00	20.85	20.88	20.88
			36	18	21.00	20.88	20.88	20.84
			36	37	21.00	20.87	20.88	20.85
			75	0	21.00	20.95	20.95	20.88
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	23.50	22.92	22.92	22.74
			1	49	23.50	22.90	23.04	22.96
			1	99	23.50	22.99	23.00	22.95
			50	0	22.00	21.85	21.91	21.87
			50	24	22.00	21.85	21.90	21.87
			50	49	22.00	21.86	21.91	21.91
			100	0	22.00	21.93	21.99	21.92
		16QAM	1	0	23.00	22.44	22.32	21.98
			1	49	23.00	22.51	22.34	22.07
			1	99	23.00	22.54	22.35	22.21

			50	0	21.00	20.84	20.90	20.84
			50	24	21.00	20.83	20.91	20.85
			50	49	21.00	20.88	20.93	20.95
			100	0	21.00	20.92	20.96	20.90

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.00	23.35	23.32	23.30
			1	2	24.00	23.32	23.51	23.35
			1	5	24.00	23.39	23.41	23.41
			3	0	23.50	23.36	23.37	23.39
			3	1	23.50	23.32	23.38	23.40
			3	2	23.50	23.37	23.39	23.39
		16QAM	6	0	22.50	22.40	22.41	22.39
			1	0	23.00	22.10	22.18	22.43
			1	2	23.00	22.06	22.31	22.46
			1	5	23.00	22.13	22.24	22.50
			3	0	23.00	22.46	22.47	22.44
			3	1	23.00	22.38	22.38	22.54
			3	2	23.00	22.45	22.48	22.47
			6	0	22.00	21.50	21.40	21.38
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	23.50	23.41	23.37	23.35
			1	7	23.50	23.35	23.44	23.48
			1	14	23.50	23.34	23.37	23.40
			8	0	23.00	22.41	22.41	22.45
			8	4	23.00	22.36	22.46	22.42
			8	7	23.00	22.36	22.43	22.52
			15	0	22.50	22.49	22.40	22.47
		16QAM	1	0	23.00	22.83	22.45	22.15
			1	7	23.00	22.78	22.51	22.18
			1	14	23.00	22.75	22.50	22.24
			8	0	22.00	21.50	21.43	21.59
			8	4	22.00	21.62	21.38	21.61
			8	7	22.00	21.49	21.37	21.61
			15	0	21.50	21.46	21.45	21.44
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	24.00	23.41	23.45	23.49
			1	12	24.00	23.36	23.51	23.59
			1	24	24.00	23.44	23.55	23.63
			12	0	23.00	22.42	22.45	22.49
			12	6	23.00	22.43	22.49	22.51
			12	11	23.00	22.44	22.46	22.51
			25	0	23.00	22.45	22.47	22.54
		16QAM	1	0	23.00	22.56	22.12	22.84
			1	12	23.00	22.50	22.21	22.92
			1	24	23.00	22.56	22.21	22.89

			12	0	22.00	21.49	21.52	21.45
			12	6	22.00	21.45	21.52	21.49
			12	11	22.00	21.48	21.55	21.47
			25	0	22.00	21.39	21.53	21.46
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	24.00	23.48	23.44	23.41
			1	24	24.00	23.41	23.42	23.41
			1	49	24.00	23.40	23.44	23.52
			25	0	22.50	22.44	22.46	22.48
			25	12	22.50	22.38	22.47	22.46
			25	24	22.50	22.44	22.47	22.44
			50	0	23.00	22.41	22.46	22.50
		16QAM	1	0	23.00	22.95	22.56	22.11
			1	24	23.00	22.83	22.50	22.18
			1	49	23.00	22.91	22.59	22.22
			25	0	22.00	21.48	21.52	21.50
			25	12	22.00	21.47	21.52	21.49
			25	24	22.00	21.46	21.54	21.50
			50	0	21.50	21.40	21.41	21.49

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	23.50	23.29	23.34	23.35
			1	2	23.50	23.35	23.38	23.44
			1	5	23.50	23.30	23.40	23.49
			3	0	23.50	23.31	23.42	23.34
			3	1	23.50	23.31	23.45	23.42
			3	2	23.50	23.30	23.45	23.35
			6	0	22.50	22.36	22.38	22.41
		16QAM	1	0	23.00	22.18	22.51	22.10
			1	2	23.00	22.28	22.54	22.17
			1	5	23.00	22.08	22.52	22.22
			3	0	23.00	22.38	22.50	22.46
			3	1	23.00	22.39	22.46	22.48
			3	2	23.00	22.41	22.45	22.46
			6	0	21.50	21.38	21.40	21.48
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	23.50	23.43	23.38	23.33
			1	7	23.50	23.30	23.41	23.34
			1	14	23.50	23.37	23.47	23.34
			8	0	23.00	22.39	22.44	22.49
			8	4	23.00	22.46	22.43	22.45
			8	7	23.00	22.37	22.41	22.53
			15	0	22.50	22.43	22.46	22.46
		16QAM	1	0	23.00	22.16	22.84	22.47
			1	7	23.00	22.06	22.88	22.49

			1	14	23.00	22.16	22.91	22.50
			8	0	22.00	21.57	21.61	21.47
			8	4	22.00	21.62	21.56	21.41
			8	7	22.00	21.52	21.53	21.50
			15	0	22.00	21.39	21.50	21.47
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.00	23.47	23.50	23.57
			1	12	24.00	23.45	23.60	23.52
			1	24	24.00	23.53	23.51	23.59
			12	0	23.00	22.51	22.47	22.51
			12	6	23.00	22.48	22.47	22.52
			12	11	23.00	22.47	22.47	22.51
			25	0	22.50	22.49	22.47	22.49
		16QAM	1	0	23.00	22.56	22.17	22.82
			1	12	23.00	22.54	22.20	22.83
			1	24	23.00	22.57	22.27	22.85
			12	0	22.00	21.52	21.53	21.46
			12	6	22.00	21.51	21.53	21.46
			12	11	22.00	21.51	21.53	21.44
			25	0	22.00	21.56	21.52	21.46
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.00	23.42	23.39	23.42
			1	24	24.00	23.45	23.41	23.28
			1	49	24.00	23.42	23.51	23.46
			25	0	22.50	22.48	22.41	22.44
			25	12	22.50	22.49	22.42	22.46
			25	24	22.50	22.46	22.42	22.41
			50	0	22.50	22.45	22.46	22.47
		16QAM	1	0	23.00	22.13	22.83	22.61
			1	24	23.00	22.17	22.94	22.46
			1	49	23.00	22.17	22.90	22.66
			25	0	22.00	21.52	21.47	21.46
			25	12	22.00	21.54	21.42	21.53
			25	24	22.00	21.49	21.46	21.48
			50	0	21.50	21.46	21.48	21.47

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	24.00	23.48	23.58	23.37
			1	12	24.00	23.63	23.48	23.53
			1	24	24.00	23.65	23.59	23.57
			12	0	23.00	22.46	22.55	22.42
			12	6	23.00	22.44	22.49	22.38
			12	11	23.00	22.51	22.51	22.39
			25	0	23.00	22.46	22.50	22.51
		16QAM	1	0	23.00	22.10	22.91	22.54

			1	12	23.00	22.15	22.81	22.52
			1	24	23.00	22.21	22.81	22.63
			12	0	22.00	21.49	21.46	21.47
			12	6	22.00	21.49	21.51	21.44
			12	11	22.00	21.47	21.48	21.43
			25	0	22.00	21.55	21.45	21.52
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	24.00	23.42	23.40	23.36
			1	24	24.00	23.38	23.37	23.41
			1	49	24.00	23.52	23.45	23.42
			25	0	23.00	22.50	22.47	22.47
			25	12	23.00	22.48	22.48	22.43
			25	24	23.00	22.48	22.46	22.43
			50	0	22.50	22.45	22.41	22.43
		16QAM	1	0	23.00	22.16	22.81	22.51
			1	24	23.00	22.10	22.88	22.55
			1	49	23.00	22.25	22.97	22.62
			25	0	22.00	21.53	21.49	21.47
			25	12	22.00	21.51	21.50	21.48
			25	24	22.00	21.54	21.44	21.48
			50	0	21.50	21.48	21.44	21.44

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		39675/2498.5	40620/2593	41565/2687.5
LTE Band 41	5MHz	QPSK	1	0	23.00	22.56	22.66	22.64
			1	12	23.00	21.42	21.60	21.79
			1	24	23.00	21.45	21.60	21.79
			12	0	22.00	21.30	21.54	21.52
			12	6	22.00	21.25	21.50	21.46
			12	11	22.00	21.42	21.47	21.48
			25	0	22.00	21.34	21.39	21.50
		16QAM	1	0	22.00	21.62	21.61	21.94
			1	12	22.00	20.48	20.63	20.83
			1	24	22.00	20.36	20.54	20.76
			12	0	21.00	20.54	20.31	20.24
			12	6	21.00	20.36	20.34	20.28
			12	11	21.00	20.28	20.38	20.22
			25	0	20.50	20.32	20.27	20.29
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		39700/2501	40620/2593	41540/2685
LTE Band 41	10MHz	QPSK	1	0	23.00	22.44	22.62	22.62
			1	24	23.00	21.36	21.52	21.68
			1	49	23.00	21.42	21.52	21.77
			25	0	22.00	21.38	21.36	21.60
			25	12	22.00	21.36	21.40	21.58
			25	24	22.00	21.30	21.45	21.53
			50	0	22.00	21.28	21.42	21.54
		16QAM	1	0	21.50	21.33	21.08	21.43

			1	24	21.50	20.45	20.47	20.68
			1	49	21.50	20.48	20.50	20.86
			25	0	20.50	20.45	20.24	20.31
			25	12	20.50	20.41	20.28	20.28
			25	24	20.50	20.37	20.21	20.27
			50	0	20.50	20.30	20.27	20.22
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		39725/2503.5	40620/2593	41515/2682.5
LTE Band 41	15MHz	QPSK	1	0	23.00	22.57	22.63	22.58
			1	37	23.00	21.47	21.58	21.76
			1	74	23.00	21.53	21.61	21.84
			36	0	21.50	21.48	21.38	21.29
			36	18	21.50	21.45	21.39	21.30
			36	37	21.50	21.43	21.40	21.32
			75	0	21.50	21.37	21.33	21.28
		16QAM	1	0	22.50	21.70	22.04	21.46
			1	37	22.50	20.54	20.56	20.79
			1	74	22.50	20.54	20.55	20.87
			36	0	21.00	20.50	20.36	20.35
			36	18	21.00	20.52	20.41	20.37
			36	37	21.00	20.47	20.44	20.31
			75	0	20.50	20.42	20.38	20.27
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		39750/2506	40620/2593	41490/2680
LTE Band 41	20MHz	QPSK	1	0	23.00	22.51	22.52	22.65
			1	49	23.00	21.50	21.63	21.81
			1	99	23.00	21.48	21.60	21.84
			50	0	22.00	21.40	21.54	21.36
			50	24	22.00	21.38	21.50	21.28
			50	49	22.00	21.30	21.47	21.22
			100	0	21.50	21.28	21.30	21.20
		16QAM	1	0	22.00	21.70	21.92	21.52
			1	49	22.00	20.51	20.62	20.85
			1	99	22.00	20.46	20.59	20.79
			50	0	20.50	20.37	20.26	20.28
			50	24	20.50	20.30	20.27	20.34
			50	49	20.50	20.27	20.25	20.30
			100	0	20.50	20.25	20.23	20.25

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	23.00	22.85	22.85	22.75
			1	2	23.00	22.74	22.73	22.73
			1	5	23.00	22.89	22.80	22.73
			3	0	23.00	22.75	22.82	22.80
			3	1	23.00	22.84	22.81	22.76
			3	2	23.00	22.87	22.78	22.80
			6	0	22.00	21.82	21.79	21.72
		16QAM	1	0	22.50	21.83	22.03	21.51

			1	2	22.50	21.83	22.03	21.58
			1	5	22.50	21.84	21.96	21.52
			3	0	22.00	21.81	21.65	21.56
			3	1	22.00	21.85	21.68	21.80
			3	2	22.00	21.78	21.68	21.77
			6	0	21.00	20.87	20.94	20.72
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	23.00	22.85	22.88	22.74
			1	7	23.00	22.81	22.85	22.68
			1	14	23.00	22.88	22.96	22.73
			8	0	22.00	21.82	21.85	21.81
			8	4	22.00	21.87	21.82	21.85
			8	7	22.00	21.82	21.84	21.96
			15	0	22.00	21.87	21.82	21.78
		16QAM	1	0	22.50	21.80	22.30	21.47
			1	7	22.50	21.79	22.21	21.51
			1	14	22.50	21.81	22.26	21.56
			8	0	21.00	20.99	20.90	20.76
			8	4	21.00	20.95	20.83	20.75
			8	7	21.00	20.99	20.97	20.79
			15	0	21.00	20.87	20.91	20.74
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	23.50	23.03	23.09	23.01
			1	12	23.50	23.05	22.98	23.02
			1	24	23.50	23.03	23.01	23.03
			12	0	22.00	21.89	21.85	21.77
			12	6	22.00	21.89	21.85	21.84
			12	11	22.00	21.89	21.93	21.80
			25	0	22.00	21.94	21.90	21.88
		16QAM	1	0	22.50	22.14	21.97	22.18
			1	12	22.50	22.09	21.92	22.23
			1	24	22.50	22.12	21.98	22.26
			12	0	21.00	20.93	20.98	20.89
			12	6	21.00	20.97	20.98	20.92
			12	11	21.00	20.98	20.93	20.86
			25	0	21.00	20.93	20.93	20.85
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	23.00	22.89	22.99	22.74
			1	24	23.00	22.80	22.94	22.71
			1	49	23.00	22.92	22.99	22.80
			25	0	22.00	21.90	21.83	21.74
			25	12	22.00	21.89	21.90	21.77
			25	24	22.00	21.92	21.90	21.80
			50	0	22.00	21.92	21.89	21.88
		16QAM	1	0	22.50	21.93	22.47	21.60

			1	24	22.50	21.88	22.36	21.66
			1	49	22.50	21.93	22.43	21.62
			25	0	21.00	20.86	20.83	20.75
			25	12	21.00	20.89	20.76	20.88
			25	24	21.00	20.88	20.80	20.84
			50	0	21.00	20.92	20.89	20.87
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	23.50	22.91	22.95	22.79
			1	37	23.50	22.94	23.01	22.87
			1	74	23.50	22.89	22.98	22.91
			36	0	22.00	21.98	21.91	21.86
			36	18	22.00	21.93	21.91	21.86
			36	37	22.00	21.96	21.93	21.83
			75	0	22.00	21.97	21.94	21.89
		16QAM	1	0	22.50	22.15	22.38	21.57
			1	37	22.50	22.26	22.42	21.80
			1	74	22.50	22.21	22.35	21.71
			36	0	21.50	21.04	20.88	20.72
			36	18	21.50	20.98	20.90	20.76
			36	37	21.50	21.04	20.92	20.82
			75	0	21.00	21.00	20.91	20.93
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	23.50	22.90	22.94	22.80
			1	49	23.50	23.06	23.09	22.86
			1	99	23.50	23.00	23.11	22.96
			50	0	22.00	21.96	21.92	21.88
			50	24	22.00	21.95	21.92	21.85
			50	49	22.00	21.96	21.92	21.85
			100	0	22.00	21.97	21.92	21.83
		16QAM	1	0	22.50	22.08	22.15	21.65
			1	49	22.50	22.21	22.30	21.86
			1	99	22.50	22.15	22.39	21.76
			50	0	21.00	20.96	20.89	20.99
			50	24	21.00	20.95	20.86	20.90
			50	49	21.00	20.95	20.85	20.88
			100	0	21.00	20.94	20.93	20.85

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		133147/665.5	133297/680.5	133447/695.5
LTE Band 71	5MHz	QPSK	1	0	24.00	23.57	23.65	23.50
			1	12	24.00	23.55	23.62	23.51
			1	24	24.00	23.56	23.60	23.51
			12	0	23.00	22.46	22.51	22.43
			12	6	23.00	22.48	22.46	22.44
			12	11	23.00	22.45	22.49	22.44
			25	0	22.50	22.49	22.48	22.49

		16QAM	1	0	23.00	22.70	22.72	22.55
			1	12	23.00	22.75	22.69	22.54
			1	24	23.00	22.76	22.69	22.56
			12	0	22.00	21.51	21.49	21.56
			12	6	22.00	21.50	21.49	21.54
			12	11	22.00	21.49	21.53	21.54
			25	0	22.00	21.44	21.42	21.55
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		133172/668	133297/680.5	133422/693
LTE Band 71	10MHz	QPSK	1	0	24.00	23.46	23.48	23.40
			1	24	24.00	23.38	23.38	23.51
			1	49	24.00	23.50	23.41	23.58
			25	0	23.00	22.47	22.47	22.43
			25	12	23.00	22.44	22.49	22.49
			25	24	23.00	22.43	22.51	22.51
			50	0	22.50	22.42	22.46	22.49
		16QAM	1	0	23.00	22.84	22.35	22.45
			1	24	23.00	22.84	22.25	22.48
			1	49	23.00	22.94	22.27	22.56
			25	0	22.00	21.36	21.51	21.41
			25	12	22.00	21.32	21.49	21.41
			25	24	22.00	21.36	21.51	21.43
			50	0	22.00	21.36	21.53	21.50
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		133197/670.5	133297/680.5	133397/690.5
LTE Band 71	15MHz	QPSK	1	0	24.00	23.46	23.58	23.34
			1	37	24.00	23.45	23.52	23.41
			1	74	24.00	23.47	23.47	23.57
			36	0	22.50	22.34	22.45	22.46
			36	18	22.50	22.34	22.46	22.45
			36	37	22.50	22.35	22.47	22.43
			75	0	23.00	22.42	22.49	22.50
		16QAM	1	0	23.00	22.60	22.99	22.15
			1	37	23.00	22.69	22.94	22.23
			1	74	23.00	22.72	22.86	22.39
			36	0	21.50	21.43	21.48	21.39
			36	18	21.50	21.44	21.48	21.44
			36	37	21.50	21.43	21.48	21.39
			75	0	22.00	21.45	21.43	21.55
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		133222/673	133322/683	133372/688
LTE Band 71	20MHz	QPSK	1	0	24.00	23.51	23.62	23.33
			1	49	24.00	23.42	23.57	23.52
			1	99	24.00	23.54	23.64	23.49
			50	0	23.00	22.45	22.50	22.47
			50	24	23.00	22.39	22.53	22.50
			50	49	23.00	22.43	22.49	22.45
			100	0	23.00	22.46	22.50	22.52

			1	0	23.00	22.71	22.90	22.29
			1	49	23.00	22.70	22.86	22.46
			1	99	23.00	22.74	22.91	22.44
		16QAM	50	0	22.00	21.44	21.49	21.56
			50	24	22.00	21.44	21.50	21.51
			50	49	22.00	21.41	21.50	21.50
			100	0	22.00	21.39	21.55	21.46

8.4. NR Output Power

Band	Bandwidth	SCS	Channel	TestID	TestConfig	Value	Tune-Up
n71	5MHz	15kHz	123900	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.80	22.00
n71	5MHz	15kHz	123900	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.63	22.00
n71	5MHz	15kHz	123900	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.85	22.00
n71	5MHz	15kHz	123900	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.31	22.00
n71	5MHz	15kHz	123900	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.13	22.00
n71	5MHz	15kHz	123900	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.30	22.00
n71	5MHz	15kHz	123900	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.79	22.00
n71	5MHz	15kHz	123900	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.60	22.00
n71	5MHz	15kHz	123900	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.86	22.00
n71	5MHz	15kHz	123900	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.80	21.00
n71	5MHz	15kHz	123900	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.60	21.00
n71	5MHz	15kHz	123900	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.82	21.00
n71	5MHz	15kHz	123900	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.93	21.00
n71	5MHz	15kHz	123900	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.64	21.00
n71	5MHz	15kHz	123900	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.80	21.00
n71	5MHz	15kHz	123900	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.46	20.00
n71	5MHz	15kHz	123900	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.28	20.00
n71	5MHz	15kHz	123900	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.39	20.00
n71	5MHz	15kHz	123900	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.23	18.00
n71	5MHz	15kHz	123900	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.17	18.00
n71	5MHz	15kHz	123900	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.35	18.00
n71	5MHz	15kHz	123900	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.16	21.00
n71	5MHz	15kHz	123900	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.01	21.00
n71	5MHz	15kHz	123900	24	CP-OFDM QPSK^Inner_Full:PC3	20.29	21.00
n71	5MHz	15kHz	123900	25	CP-OFDM	19.87	20.00

					16QAM^Inner_1RB_Left:PC3		
n71	5MHz	15kHz	123900	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.75	20.00
n71	5MHz	15kHz	123900	27	CP-OFDM 16QAM^Inner_Full:PC3	19.78	20.00
n71	5MHz	15kHz	123900	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.38	19.00
n71	5MHz	15kHz	123900	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.29	19.00
n71	5MHz	15kHz	123900	30	CP-OFDM 64QAM^Inner_Full:PC3	18.27	19.00
n71	5MHz	15kHz	123900	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.43	16.00
n71	5MHz	15kHz	123900	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.34	16.00
n71	5MHz	15kHz	123900	33	CP-OFDM 256QAM^Inner_Full:PC3	15.28	16.00
n71	5MHz	15kHz	126900	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.89	22.00
n71	5MHz	15kHz	126900	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.94	22.00
n71	5MHz	15kHz	126900	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	22.09	23.00
n71	5MHz	15kHz	126900	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.37	22.00
n71	5MHz	15kHz	126900	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.44	22.00
n71	5MHz	15kHz	126900	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.48	22.00
n71	5MHz	15kHz	126900	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.86	22.00
n71	5MHz	15kHz	126900	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.99	22.00
n71	5MHz	15kHz	126900	9	DFT-s-OFDM QPSK^Inner_Full:PC3	22.06	23.00
n71	5MHz	15kHz	126900	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.85	21.00
n71	5MHz	15kHz	126900	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.93	21.00
n71	5MHz	15kHz	126900	12	DFT-s-OFDM QPSK^Outer_Full:PC3	21.05	22.00
n71	5MHz	15kHz	126900	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.96	21.00
n71	5MHz	15kHz	126900	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.05	22.00
n71	5MHz	15kHz	126900	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.97	21.00
n71	5MHz	15kHz	126900	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.50	20.00
n71	5MHz	15kHz	126900	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.58	20.00
n71	5MHz	15kHz	126900	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.54	20.00
n71	5MHz	15kHz	126900	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.37	18.00
n71	5MHz	15kHz	126900	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.48	18.00
n71	5MHz	15kHz	126900	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.60	18.00
n71	5MHz	15kHz	126900	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.27	21.00
n71	5MHz	15kHz	126900	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.38	21.00

n71	5MHz	15kHz	126900	24	CP-OFDM QPSK^Inner_Full:PC3	20.49	21.00
n71	5MHz	15kHz	126900	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	20.01	21.00
n71	5MHz	15kHz	126900	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	20.09	21.00
n71	5MHz	15kHz	126900	27	CP-OFDM 16QAM^Inner_Full:PC3	19.98	20.00
n71	5MHz	15kHz	126900	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.43	19.00
n71	5MHz	15kHz	126900	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.62	19.00
n71	5MHz	15kHz	126900	30	CP-OFDM 64QAM^Inner_Full:PC3	18.42	19.00
n71	5MHz	15kHz	126900	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.56	16.00
n71	5MHz	15kHz	126900	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.68	16.00
n71	5MHz	15kHz	126900	33	CP-OFDM 256QAM^Inner_Full:PC3	15.52	16.00
n71	5MHz	15kHz	129900	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.73	22.00
n71	5MHz	15kHz	129900	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.63	22.00
n71	5MHz	15kHz	129900	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.78	22.00
n71	5MHz	15kHz	129900	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.21	22.00
n71	5MHz	15kHz	129900	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.09	22.00
n71	5MHz	15kHz	129900	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.31	22.00
n71	5MHz	15kHz	129900	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.71	22.00
n71	5MHz	15kHz	129900	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.61	22.00
n71	5MHz	15kHz	129900	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.83	22.00
n71	5MHz	15kHz	129900	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.73	21.00
n71	5MHz	15kHz	129900	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.59	21.00
n71	5MHz	15kHz	129900	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.80	21.00
n71	5MHz	15kHz	129900	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.80	21.00
n71	5MHz	15kHz	129900	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.72	21.00
n71	5MHz	15kHz	129900	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.74	21.00
n71	5MHz	15kHz	129900	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.23	20.00
n71	5MHz	15kHz	129900	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.22	20.00
n71	5MHz	15kHz	129900	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.32	20.00
n71	5MHz	15kHz	129900	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.29	18.00
n71	5MHz	15kHz	129900	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.10	18.00
n71	5MHz	15kHz	129900	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.35	18.00
n71	5MHz	15kHz	129900	22	CP-OFDM	20.26	21.00

					QPSK^Inner_1RB_Left:PC3		
n71	5MHz	15kHz	129900	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.18	21.00
n71	5MHz	15kHz	129900	24	CP-OFDM QPSK^Inner_Full:PC3	20.34	21.00
n71	5MHz	15kHz	129900	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.90	20.00
n71	5MHz	15kHz	129900	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.72	20.00
n71	5MHz	15kHz	129900	27	CP-OFDM 16QAM^Inner_Full:PC3	19.76	20.00
n71	5MHz	15kHz	129900	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.33	19.00
n71	5MHz	15kHz	129900	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.21	19.00
n71	5MHz	15kHz	129900	30	CP-OFDM 64QAM^Inner_Full:PC3	18.28	19.00
n71	5MHz	15kHz	129900	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.40	16.00
n71	5MHz	15kHz	129900	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.23	16.00
n71	5MHz	15kHz	129900	33	CP-OFDM 256QAM^Inner_Full:PC3	15.28	16.00
n71	10MHz	15kHz	124400	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.84	22.00
n71	10MHz	15kHz	124400	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.66	22.00
n71	10MHz	15kHz	124400	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.73	22.00
n71	10MHz	15kHz	124400	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.34	22.00
n71	10MHz	15kHz	124400	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.21	22.00
n71	10MHz	15kHz	124400	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.20	22.00
n71	10MHz	15kHz	124400	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.78	22.00
n71	10MHz	15kHz	124400	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.68	22.00
n71	10MHz	15kHz	124400	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.77	22.00
n71	10MHz	15kHz	124400	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.79	21.00
n71	10MHz	15kHz	124400	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.66	21.00
n71	10MHz	15kHz	124400	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.73	21.00
n71	10MHz	15kHz	124400	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.93	21.00
n71	10MHz	15kHz	124400	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.77	21.00
n71	10MHz	15kHz	124400	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.72	21.00
n71	10MHz	15kHz	124400	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.45	20.00
n71	10MHz	15kHz	124400	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.26	20.00
n71	10MHz	15kHz	124400	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.29	20.00
n71	10MHz	15kHz	124400	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.28	18.00
n71	10MHz	15kHz	124400	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.13	18.00

n71	10MHz	15kHz	124400	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.18	18.00
n71	10MHz	15kHz	124400	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.18	21.00
n71	10MHz	15kHz	124400	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.08	21.00
n71	10MHz	15kHz	124400	24	CP-OFDM QPSK^Inner_Full:PC3	20.17	21.00
n71	10MHz	15kHz	124400	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.93	20.00
n71	10MHz	15kHz	124400	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.81	20.00
n71	10MHz	15kHz	124400	27	CP-OFDM 16QAM^Inner_Full:PC3	19.68	20.00
n71	10MHz	15kHz	124400	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.38	19.00
n71	10MHz	15kHz	124400	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.22	19.00
n71	10MHz	15kHz	124400	30	CP-OFDM 64QAM^Inner_Full:PC3	18.19	19.00
n71	10MHz	15kHz	124400	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.36	16.00
n71	10MHz	15kHz	124400	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.30	16.00
n71	10MHz	15kHz	124400	33	CP-OFDM 256QAM^Inner_Full:PC3	15.23	16.00
n71	10MHz	15kHz	126900	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.74	22.00
n71	10MHz	15kHz	126900	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	22.01	23.00
n71	10MHz	15kHz	126900	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.95	22.00
n71	10MHz	15kHz	126900	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.22	22.00
n71	10MHz	15kHz	126900	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.50	22.00
n71	10MHz	15kHz	126900	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.41	22.00
n71	10MHz	15kHz	126900	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.74	22.00
n71	10MHz	15kHz	126900	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	22.02	23.00
n71	10MHz	15kHz	126900	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.97	22.00
n71	10MHz	15kHz	126900	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.69	21.00
n71	10MHz	15kHz	126900	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	21.00	22.00
n71	10MHz	15kHz	126900	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.95	21.00
n71	10MHz	15kHz	126900	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.85	21.00
n71	10MHz	15kHz	126900	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.11	22.00
n71	10MHz	15kHz	126900	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.95	21.00
n71	10MHz	15kHz	126900	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.36	20.00
n71	10MHz	15kHz	126900	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.62	20.00
n71	10MHz	15kHz	126900	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.49	20.00
n71	10MHz	15kHz	126900	19	DFT-s-OFDM	17.26	18.00

					256QAM^Inner_1RB_Left:PC3		
n71	10MHz	15kHz	126900	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.49	18.00
n71	10MHz	15kHz	126900	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.50	18.00
n71	10MHz	15kHz	126900	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.20	21.00
n71	10MHz	15kHz	126900	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.49	21.00
n71	10MHz	15kHz	126900	24	CP-OFDM QPSK^Inner_Full:PC3	20.47	21.00
n71	10MHz	15kHz	126900	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.88	20.00
n71	10MHz	15kHz	126900	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	20.16	21.00
n71	10MHz	15kHz	126900	27	CP-OFDM 16QAM^Inner_Full:PC3	19.97	20.00
n71	10MHz	15kHz	126900	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.31	19.00
n71	10MHz	15kHz	126900	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.65	19.00
n71	10MHz	15kHz	126900	30	CP-OFDM 64QAM^Inner_Full:PC3	18.49	19.00
n71	10MHz	15kHz	126900	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.42	16.00
n71	10MHz	15kHz	126900	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.67	16.00
n71	10MHz	15kHz	126900	33	CP-OFDM 256QAM^Inner_Full:PC3	15.55	16.00
n71	10MHz	15kHz	129400	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.99	22.00
n71	10MHz	15kHz	129400	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.61	22.00
n71	10MHz	15kHz	129400	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.84	22.00
n71	10MHz	15kHz	129400	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.46	22.00
n71	10MHz	15kHz	129400	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.10	22.00
n71	10MHz	15kHz	129400	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.39	22.00
n71	10MHz	15kHz	129400	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	22.01	23.00
n71	10MHz	15kHz	129400	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.60	22.00
n71	10MHz	15kHz	129400	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.84	22.00
n71	10MHz	15kHz	129400	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.97	21.00
n71	10MHz	15kHz	129400	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.57	21.00
n71	10MHz	15kHz	129400	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.85	21.00
n71	10MHz	15kHz	129400	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	21.08	22.00
n71	10MHz	15kHz	129400	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.75	21.00
n71	10MHz	15kHz	129400	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.82	21.00
n71	10MHz	15kHz	129400	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.52	20.00
n71	10MHz	15kHz	129400	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.22	20.00

n71	10MHz	15kHz	129400	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.34	20.00
n71	10MHz	15kHz	129400	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.42	18.00
n71	10MHz	15kHz	129400	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.04	18.00
n71	10MHz	15kHz	129400	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.32	18.00
n71	10MHz	15kHz	129400	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.38	21.00
n71	10MHz	15kHz	129400	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.04	21.00
n71	10MHz	15kHz	129400	24	CP-OFDM QPSK^Inner_Full:PC3	20.32	21.00
n71	10MHz	15kHz	129400	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	20.16	21.00
n71	10MHz	15kHz	129400	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.68	20.00
n71	10MHz	15kHz	129400	27	CP-OFDM 16QAM^Inner_Full:PC3	19.81	20.00
n71	10MHz	15kHz	129400	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.61	19.00
n71	10MHz	15kHz	129400	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.20	19.00
n71	10MHz	15kHz	129400	30	CP-OFDM 64QAM^Inner_Full:PC3	18.34	19.00
n71	10MHz	15kHz	129400	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.66	16.00
n71	10MHz	15kHz	129400	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.20	16.00
n71	10MHz	15kHz	129400	33	CP-OFDM 256QAM^Inner_Full:PC3	15.37	16.00
n71	20MHz	15kHz	125400	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.78	22.00
n71	20MHz	15kHz	125400	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.94	22.00
n71	20MHz	15kHz	125400	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.77	22.00
n71	20MHz	15kHz	125400	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.31	22.00
n71	20MHz	15kHz	125400	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.47	22.00
n71	20MHz	15kHz	125400	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.28	22.00
n71	20MHz	15kHz	125400	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.73	22.00
n71	20MHz	15kHz	125400	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.91	22.00
n71	20MHz	15kHz	125400	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.76	22.00
n71	20MHz	15kHz	125400	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.78	21.00
n71	20MHz	15kHz	125400	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.93	21.00
n71	20MHz	15kHz	125400	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.80	21.00
n71	20MHz	15kHz	125400	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.88	21.00
n71	20MHz	15kHz	125400	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.08	22.00
n71	20MHz	15kHz	125400	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.75	21.00
n71	20MHz	15kHz	125400	16	DFT-s-OFDM	19.47	20.00

					64QAM^Inner_1RB_Left:PC3		
n71	20MHz	15kHz	125400	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.46	20.00
n71	20MHz	15kHz	125400	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.28	20.00
n71	20MHz	15kHz	125400	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.24	18.00
n71	20MHz	15kHz	125400	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.44	18.00
n71	20MHz	15kHz	125400	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.24	18.00
n71	20MHz	15kHz	125400	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.15	21.00
n71	20MHz	15kHz	125400	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.31	21.00
n71	20MHz	15kHz	125400	24	CP-OFDM QPSK^Inner_Full:PC3	20.28	21.00
n71	20MHz	15kHz	125400	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.88	20.00
n71	20MHz	15kHz	125400	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	20.05	21.00
n71	20MHz	15kHz	125400	27	CP-OFDM 16QAM^Inner_Full:PC3	19.73	20.00
n71	20MHz	15kHz	125400	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.37	19.00
n71	20MHz	15kHz	125400	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.54	19.00
n71	20MHz	15kHz	125400	30	CP-OFDM 64QAM^Inner_Full:PC3	18.28	19.00
n71	20MHz	15kHz	125400	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.34	16.00
n71	20MHz	15kHz	125400	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.60	16.00
n71	20MHz	15kHz	125400	33	CP-OFDM 256QAM^Inner_Full:PC3	15.23	16.00
n71	20MHz	15kHz	126900	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.65	22.00
n71	20MHz	15kHz	126900	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.94	22.00
n71	20MHz	15kHz	126900	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.99	22.00
n71	20MHz	15kHz	126900	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.20	22.00
n71	20MHz	15kHz	126900	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.44	22.00
n71	20MHz	15kHz	126900	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.42	22.00
n71	20MHz	15kHz	126900	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.67	22.00
n71	20MHz	15kHz	126900	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.96	22.00
n71	20MHz	15kHz	126900	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.98	22.00
n71	20MHz	15kHz	126900	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.61	21.00
n71	20MHz	15kHz	126900	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.95	21.00
n71	20MHz	15kHz	126900	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.92	21.00
n71	20MHz	15kHz	126900	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.89	21.00
n71	20MHz	15kHz	126900	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.08	22.00

n71	20MHz	15kHz	126900	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.98	21.00
n71	20MHz	15kHz	126900	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.25	20.00
n71	20MHz	15kHz	126900	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.63	20.00
n71	20MHz	15kHz	126900	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.47	20.00
n71	20MHz	15kHz	126900	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.10	18.00
n71	20MHz	15kHz	126900	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.36	18.00
n71	20MHz	15kHz	126900	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.48	18.00
n71	20MHz	15kHz	126900	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.12	21.00
n71	20MHz	15kHz	126900	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.35	21.00
n71	20MHz	15kHz	126900	24	CP-OFDM QPSK^Inner_Full:PC3	20.48	21.00
n71	20MHz	15kHz	126900	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.83	20.00
n71	20MHz	15kHz	126900	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	20.13	21.00
n71	20MHz	15kHz	126900	27	CP-OFDM 16QAM^Inner_Full:PC3	19.97	20.00
n71	20MHz	15kHz	126900	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.31	19.00
n71	20MHz	15kHz	126900	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.55	19.00
n71	20MHz	15kHz	126900	30	CP-OFDM 64QAM^Inner_Full:PC3	18.44	19.00
n71	20MHz	15kHz	126900	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.32	16.00
n71	20MHz	15kHz	126900	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.52	16.00
n71	20MHz	15kHz	126900	33	CP-OFDM 256QAM^Inner_Full:PC3	15.50	16.00
n71	20MHz	15kHz	128400	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.92	22.00
n71	20MHz	15kHz	128400	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.66	22.00
n71	20MHz	15kHz	128400	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	22.11	23.00
n71	20MHz	15kHz	128400	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.36	22.00
n71	20MHz	15kHz	128400	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.19	22.00
n71	20MHz	15kHz	128400	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.45	22.00
n71	20MHz	15kHz	128400	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.84	22.00
n71	20MHz	15kHz	128400	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.60	22.00
n71	20MHz	15kHz	128400	9	DFT-s-OFDM QPSK^Inner_Full:PC3	22.08	23.00
n71	20MHz	15kHz	128400	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.92	21.00
n71	20MHz	15kHz	128400	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.59	21.00
n71	20MHz	15kHz	128400	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.96	21.00
n71	20MHz	15kHz	128400	13	DFT-s-OFDM	21.00	22.00

					16QAM^Inner_1RB_Left:PC3		
n71	20MHz	15kHz	128400	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.76	21.00
n71	20MHz	15kHz	128400	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	21.07	22.00
n71	20MHz	15kHz	128400	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.52	20.00
n71	20MHz	15kHz	128400	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.10	20.00
n71	20MHz	15kHz	128400	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.57	20.00
n71	20MHz	15kHz	128400	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.35	18.00
n71	20MHz	15kHz	128400	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.10	18.00
n71	20MHz	15kHz	128400	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.51	18.00
n71	20MHz	15kHz	128400	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.29	21.00
n71	20MHz	15kHz	128400	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.06	21.00
n71	20MHz	15kHz	128400	24	CP-OFDM QPSK^Inner_Full:PC3	20.55	21.00
n71	20MHz	15kHz	128400	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	20.01	21.00
n71	20MHz	15kHz	128400	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.76	20.00
n71	20MHz	15kHz	128400	27	CP-OFDM 16QAM^Inner_Full:PC3	20.07	21.00
n71	20MHz	15kHz	128400	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.51	19.00
n71	20MHz	15kHz	128400	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.25	19.00
n71	20MHz	15kHz	128400	30	CP-OFDM 64QAM^Inner_Full:PC3	18.54	19.00
n71	20MHz	15kHz	128400	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.60	16.00
n71	20MHz	15kHz	128400	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.27	16.00
n71	20MHz	15kHz	128400	33	CP-OFDM 256QAM^Inner_Full:PC3	15.51	16.00

Band	Bandwidth	SCS	Channel	TestID	TestConfig	Value	Tune-Up
n66	5MHz	15kHz	422500	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.53	22.00
n66	5MHz	15kHz	422500	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.59	22.00
n66	5MHz	15kHz	422500	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.61	22.00
n66	5MHz	15kHz	422500	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.04	22.00
n66	5MHz	15kHz	422500	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.10	22.00
n66	5MHz	15kHz	422500	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.12	22.00
n66	5MHz	15kHz	422500	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.48	22.00
n66	5MHz	15kHz	422500	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.48	22.00
n66	5MHz	15kHz	422500	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.69	22.00
n66	5MHz	15kHz	422500	10	DFT-s-OFDM	20.53	21.00

					QPSK^Edge_1RB_Left:PC3		
n66	5MHz	15kHz	422500	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.52	21.00
n66	5MHz	15kHz	422500	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.66	21.00
n66	5MHz	15kHz	422500	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.60	21.00
n66	5MHz	15kHz	422500	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.77	21.00
n66	5MHz	15kHz	422500	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.65	21.00
n66	5MHz	15kHz	422500	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.21	20.00
n66	5MHz	15kHz	422500	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.36	20.00
n66	5MHz	15kHz	422500	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.19	20.00
n66	5MHz	15kHz	422500	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.00	18.00
n66	5MHz	15kHz	422500	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.03	18.00
n66	5MHz	15kHz	422500	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.14	18.00
n66	5MHz	15kHz	422500	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	19.87	20.00
n66	5MHz	15kHz	422500	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	19.93	20.00
n66	5MHz	15kHz	422500	24	CP-OFDM QPSK^Inner_Full:PC3	20.08	21.00
n66	5MHz	15kHz	422500	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.62	20.00
n66	5MHz	15kHz	422500	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.60	20.00
n66	5MHz	15kHz	422500	27	CP-OFDM 16QAM^Inner_Full:PC3	19.58	20.00
n66	5MHz	15kHz	422500	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.16	19.00
n66	5MHz	15kHz	422500	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.15	19.00
n66	5MHz	15kHz	422500	30	CP-OFDM 64QAM^Inner_Full:PC3	18.19	19.00
n66	5MHz	15kHz	422500	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.32	16.00
n66	5MHz	15kHz	422500	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.24	16.00
n66	5MHz	15kHz	422500	33	CP-OFDM 256QAM^Inner_Full:PC3	15.06	16.00
n66	5MHz	15kHz	429000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.59	22.00
n66	5MHz	15kHz	429000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.69	22.00
n66	5MHz	15kHz	429000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.68	22.00
n66	5MHz	15kHz	429000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.13	22.00
n66	5MHz	15kHz	429000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.20	22.00
n66	5MHz	15kHz	429000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.23	22.00
n66	5MHz	15kHz	429000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.56	22.00
n66	5MHz	15kHz	429000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.53	22.00

n66	5MHz	15kHz	429000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.78	22.00
n66	5MHz	15kHz	429000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.63	21.00
n66	5MHz	15kHz	429000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.65	21.00
n66	5MHz	15kHz	429000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.74	21.00
n66	5MHz	15kHz	429000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.80	21.00
n66	5MHz	15kHz	429000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.93	21.00
n66	5MHz	15kHz	429000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.65	21.00
n66	5MHz	15kHz	429000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.32	20.00
n66	5MHz	15kHz	429000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.46	20.00
n66	5MHz	15kHz	429000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.27	20.00
n66	5MHz	15kHz	429000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.08	18.00
n66	5MHz	15kHz	429000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.23	18.00
n66	5MHz	15kHz	429000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.32	18.00
n66	5MHz	15kHz	429000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.00	21.00
n66	5MHz	15kHz	429000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.06	21.00
n66	5MHz	15kHz	429000	24	CP-OFDM QPSK^Inner_Full:PC3	20.17	21.00
n66	5MHz	15kHz	429000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.67	20.00
n66	5MHz	15kHz	429000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.71	20.00
n66	5MHz	15kHz	429000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.71	20.00
n66	5MHz	15kHz	429000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.20	19.00
n66	5MHz	15kHz	429000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.32	19.00
n66	5MHz	15kHz	429000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.27	19.00
n66	5MHz	15kHz	429000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.30	16.00
n66	5MHz	15kHz	429000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.41	16.00
n66	5MHz	15kHz	429000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.23	16.00
n66	5MHz	15kHz	435500	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.62	22.00
n66	5MHz	15kHz	435500	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.70	22.00
n66	5MHz	15kHz	435500	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.73	22.00
n66	5MHz	15kHz	435500	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.15	22.00
n66	5MHz	15kHz	435500	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.22	22.00
n66	5MHz	15kHz	435500	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.27	22.00
n66	5MHz	15kHz	435500	7	DFT-s-OFDM	21.56	22.00

					QPSK^Inner_1RB_Left:PC3		
n66	5MHz	15kHz	435500	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.60	22.00
n66	5MHz	15kHz	435500	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.82	22.00
n66	5MHz	15kHz	435500	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.62	21.00
n66	5MHz	15kHz	435500	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.64	21.00
n66	5MHz	15kHz	435500	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.77	21.00
n66	5MHz	15kHz	435500	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.90	21.00
n66	5MHz	15kHz	435500	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.89	21.00
n66	5MHz	15kHz	435500	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.73	21.00
n66	5MHz	15kHz	435500	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.48	20.00
n66	5MHz	15kHz	435500	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.52	20.00
n66	5MHz	15kHz	435500	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.32	20.00
n66	5MHz	15kHz	435500	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.18	18.00
n66	5MHz	15kHz	435500	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.21	18.00
n66	5MHz	15kHz	435500	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.39	18.00
n66	5MHz	15kHz	435500	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.03	21.00
n66	5MHz	15kHz	435500	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.05	21.00
n66	5MHz	15kHz	435500	24	CP-OFDM QPSK^Inner_Full:PC3	20.22	21.00
n66	5MHz	15kHz	435500	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.70	20.00
n66	5MHz	15kHz	435500	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.75	20.00
n66	5MHz	15kHz	435500	27	CP-OFDM 16QAM^Inner_Full:PC3	19.76	20.00
n66	5MHz	15kHz	435500	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.34	19.00
n66	5MHz	15kHz	435500	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.29	19.00
n66	5MHz	15kHz	435500	30	CP-OFDM 64QAM^Inner_Full:PC3	18.33	19.00
n66	5MHz	15kHz	435500	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.44	16.00
n66	5MHz	15kHz	435500	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.42	16.00
n66	5MHz	15kHz	435500	33	CP-OFDM 256QAM^Inner_Full:PC3	15.32	16.00
n66	10MHz	15kHz	423000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.59	22.00
n66	10MHz	15kHz	423000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.65	22.00
n66	10MHz	15kHz	423000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.60	22.00
n66	10MHz	15kHz	423000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.05	22.00
n66	10MHz	15kHz	423000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.13	22.00

n66	10MHz	15kHz	423000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.14	22.00
n66	10MHz	15kHz	423000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.51	22.00
n66	10MHz	15kHz	423000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.59	22.00
n66	10MHz	15kHz	423000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.60	22.00
n66	10MHz	15kHz	423000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.60	21.00
n66	10MHz	15kHz	423000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.65	21.00
n66	10MHz	15kHz	423000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.70	21.00
n66	10MHz	15kHz	423000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.66	21.00
n66	10MHz	15kHz	423000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.86	21.00
n66	10MHz	15kHz	423000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.65	21.00
n66	10MHz	15kHz	423000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.27	20.00
n66	10MHz	15kHz	423000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.45	20.00
n66	10MHz	15kHz	423000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.20	20.00
n66	10MHz	15kHz	423000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.99	17.00
n66	10MHz	15kHz	423000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.10	18.00
n66	10MHz	15kHz	423000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.00	18.00
n66	10MHz	15kHz	423000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	19.91	20.00
n66	10MHz	15kHz	423000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.04	21.00
n66	10MHz	15kHz	423000	24	CP-OFDM QPSK^Inner_Full:PC3	20.10	21.00
n66	10MHz	15kHz	423000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.62	20.00
n66	10MHz	15kHz	423000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.72	20.00
n66	10MHz	15kHz	423000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.63	20.00
n66	10MHz	15kHz	423000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.17	19.00
n66	10MHz	15kHz	423000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.26	19.00
n66	10MHz	15kHz	423000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.14	19.00
n66	10MHz	15kHz	423000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.31	16.00
n66	10MHz	15kHz	423000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.35	16.00
n66	10MHz	15kHz	423000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.08	16.00
n66	10MHz	15kHz	429000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.64	22.00
n66	10MHz	15kHz	429000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.74	22.00
n66	10MHz	15kHz	429000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.68	22.00
n66	10MHz	15kHz	429000	4	DFT-s-OFDM PI/2	21.16	22.00

					BPSK^Edge_1RB_Left:PC3		
n66	10MHz	15kHz	429000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.26	22.00
n66	10MHz	15kHz	429000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.19	22.00
n66	10MHz	15kHz	429000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.54	22.00
n66	10MHz	15kHz	429000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.64	22.00
n66	10MHz	15kHz	429000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.66	22.00
n66	10MHz	15kHz	429000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.64	21.00
n66	10MHz	15kHz	429000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.74	21.00
n66	10MHz	15kHz	429000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.70	21.00
n66	10MHz	15kHz	429000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.77	21.00
n66	10MHz	15kHz	429000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.95	21.00
n66	10MHz	15kHz	429000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.69	21.00
n66	10MHz	15kHz	429000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.39	20.00
n66	10MHz	15kHz	429000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.55	20.00
n66	10MHz	15kHz	429000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.21	20.00
n66	10MHz	15kHz	429000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.99	17.00
n66	10MHz	15kHz	429000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.27	18.00
n66	10MHz	15kHz	429000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.14	18.00
n66	10MHz	15kHz	429000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.02	21.00
n66	10MHz	15kHz	429000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.21	21.00
n66	10MHz	15kHz	429000	24	CP-OFDM QPSK^Inner_Full:PC3	20.12	21.00
n66	10MHz	15kHz	429000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.73	20.00
n66	10MHz	15kHz	429000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.80	20.00
n66	10MHz	15kHz	429000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.66	20.00
n66	10MHz	15kHz	429000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.14	19.00
n66	10MHz	15kHz	429000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.30	19.00
n66	10MHz	15kHz	429000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.23	19.00
n66	10MHz	15kHz	429000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.29	16.00
n66	10MHz	15kHz	429000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.43	16.00
n66	10MHz	15kHz	429000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.15	16.00
n66	10MHz	15kHz	435000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.70	22.00
n66	10MHz	15kHz	435000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.77	22.00

n66	10MHz	15kHz	435000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.71	22.00
n66	10MHz	15kHz	435000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.23	22.00
n66	10MHz	15kHz	435000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.24	22.00
n66	10MHz	15kHz	435000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.21	22.00
n66	10MHz	15kHz	435000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.68	22.00
n66	10MHz	15kHz	435000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.63	22.00
n66	10MHz	15kHz	435000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.76	22.00
n66	10MHz	15kHz	435000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.70	21.00
n66	10MHz	15kHz	435000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.69	21.00
n66	10MHz	15kHz	435000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.72	21.00
n66	10MHz	15kHz	435000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.88	21.00
n66	10MHz	15kHz	435000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.98	21.00
n66	10MHz	15kHz	435000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.77	21.00
n66	10MHz	15kHz	435000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.54	20.00
n66	10MHz	15kHz	435000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.52	20.00
n66	10MHz	15kHz	435000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.30	20.00
n66	10MHz	15kHz	435000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.21	18.00
n66	10MHz	15kHz	435000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.21	18.00
n66	10MHz	15kHz	435000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.26	18.00
n66	10MHz	15kHz	435000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.16	21.00
n66	10MHz	15kHz	435000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.14	21.00
n66	10MHz	15kHz	435000	24	CP-OFDM QPSK^Inner_Full:PC3	20.15	21.00
n66	10MHz	15kHz	435000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.79	20.00
n66	10MHz	15kHz	435000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.78	20.00
n66	10MHz	15kHz	435000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.70	20.00
n66	10MHz	15kHz	435000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.33	19.00
n66	10MHz	15kHz	435000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.38	19.00
n66	10MHz	15kHz	435000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.33	19.00
n66	10MHz	15kHz	435000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.36	16.00
n66	10MHz	15kHz	435000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.37	16.00
n66	10MHz	15kHz	435000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.31	16.00
n66	15MHz	15kHz	423500	1	DFT-s-OFDM PI/2	21.60	22.00

					BPSK^Inner_1RB_Left:PC3		
n66	15MHz	15kHz	423500	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.70	22.00
n66	15MHz	15kHz	423500	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.65	22.00
n66	15MHz	15kHz	423500	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.10	22.00
n66	15MHz	15kHz	423500	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.20	22.00
n66	15MHz	15kHz	423500	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.24	22.00
n66	15MHz	15kHz	423500	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.57	22.00
n66	15MHz	15kHz	423500	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.65	22.00
n66	15MHz	15kHz	423500	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.73	22.00
n66	15MHz	15kHz	423500	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.58	21.00
n66	15MHz	15kHz	423500	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.71	21.00
n66	15MHz	15kHz	423500	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.73	21.00
n66	15MHz	15kHz	423500	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.70	21.00
n66	15MHz	15kHz	423500	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.01	22.00
n66	15MHz	15kHz	423500	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.72	21.00
n66	15MHz	15kHz	423500	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.31	20.00
n66	15MHz	15kHz	423500	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.37	20.00
n66	15MHz	15kHz	423500	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.17	20.00
n66	15MHz	15kHz	423500	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.99	17.00
n66	15MHz	15kHz	423500	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.13	18.00
n66	15MHz	15kHz	423500	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.12	18.00
n66	15MHz	15kHz	423500	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	19.99	20.00
n66	15MHz	15kHz	423500	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.02	21.00
n66	15MHz	15kHz	423500	24	CP-OFDM QPSK^Inner_Full:PC3	20.17	21.00
n66	15MHz	15kHz	423500	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.65	20.00
n66	15MHz	15kHz	423500	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.76	20.00
n66	15MHz	15kHz	423500	27	CP-OFDM 16QAM^Inner_Full:PC3	19.69	20.00
n66	15MHz	15kHz	423500	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.21	19.00
n66	15MHz	15kHz	423500	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.33	19.00
n66	15MHz	15kHz	423500	30	CP-OFDM 64QAM^Inner_Full:PC3	18.24	19.00
n66	15MHz	15kHz	423500	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.33	16.00
n66	15MHz	15kHz	423500	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.39	16.00

n66	15MHz	15kHz	423500	33	CP-OFDM 256QAM^Inner_Full:PC3	15.15	16.00
n66	15MHz	15kHz	429000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.66	22.00
n66	15MHz	15kHz	429000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.78	22.00
n66	15MHz	15kHz	429000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.69	22.00
n66	15MHz	15kHz	429000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.18	22.00
n66	15MHz	15kHz	429000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.31	22.00
n66	15MHz	15kHz	429000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.26	22.00
n66	15MHz	15kHz	429000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.63	22.00
n66	15MHz	15kHz	429000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.68	22.00
n66	15MHz	15kHz	429000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.73	22.00
n66	15MHz	15kHz	429000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.67	21.00
n66	15MHz	15kHz	429000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.74	21.00
n66	15MHz	15kHz	429000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.71	21.00
n66	15MHz	15kHz	429000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.80	21.00
n66	15MHz	15kHz	429000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.98	21.00
n66	15MHz	15kHz	429000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.77	21.00
n66	15MHz	15kHz	429000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.39	20.00
n66	15MHz	15kHz	429000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.66	20.00
n66	15MHz	15kHz	429000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.21	20.00
n66	15MHz	15kHz	429000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.96	17.00
n66	15MHz	15kHz	429000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.28	18.00
n66	15MHz	15kHz	429000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.16	18.00
n66	15MHz	15kHz	429000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	19.98	20.00
n66	15MHz	15kHz	429000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.21	21.00
n66	15MHz	15kHz	429000	24	CP-OFDM QPSK^Inner_Full:PC3	20.23	21.00
n66	15MHz	15kHz	429000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.76	20.00
n66	15MHz	15kHz	429000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.85	20.00
n66	15MHz	15kHz	429000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.75	20.00
n66	15MHz	15kHz	429000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.13	19.00
n66	15MHz	15kHz	429000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.37	19.00
n66	15MHz	15kHz	429000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.28	19.00
n66	15MHz	15kHz	429000	31	CP-OFDM	15.28	16.00

					256QAM^Inner_1RB_Left:PC3		
n66	15MHz	15kHz	429000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.49	16.00
n66	15MHz	15kHz	429000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.21	16.00
n66	15MHz	15kHz	434500	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.70	22.00
n66	15MHz	15kHz	434500	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.75	22.00
n66	15MHz	15kHz	434500	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.75	22.00
n66	15MHz	15kHz	434500	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.20	22.00
n66	15MHz	15kHz	434500	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.28	22.00
n66	15MHz	15kHz	434500	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.28	22.00
n66	15MHz	15kHz	434500	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.66	22.00
n66	15MHz	15kHz	434500	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.64	22.00
n66	15MHz	15kHz	434500	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.78	22.00
n66	15MHz	15kHz	434500	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.71	21.00
n66	15MHz	15kHz	434500	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.72	21.00
n66	15MHz	15kHz	434500	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.79	21.00
n66	15MHz	15kHz	434500	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.78	21.00
n66	15MHz	15kHz	434500	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.05	22.00
n66	15MHz	15kHz	434500	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.79	21.00
n66	15MHz	15kHz	434500	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.42	20.00
n66	15MHz	15kHz	434500	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.58	20.00
n66	15MHz	15kHz	434500	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.27	20.00
n66	15MHz	15kHz	434500	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.07	18.00
n66	15MHz	15kHz	434500	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.22	18.00
n66	15MHz	15kHz	434500	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.29	18.00
n66	15MHz	15kHz	434500	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.06	21.00
n66	15MHz	15kHz	434500	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.16	21.00
n66	15MHz	15kHz	434500	24	CP-OFDM QPSK^Inner_Full:PC3	20.22	21.00
n66	15MHz	15kHz	434500	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.77	20.00
n66	15MHz	15kHz	434500	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.80	20.00
n66	15MHz	15kHz	434500	27	CP-OFDM 16QAM^Inner_Full:PC3	19.81	20.00
n66	15MHz	15kHz	434500	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.32	19.00
n66	15MHz	15kHz	434500	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.36	19.00

n66	15MHz	15kHz	434500	30	CP-OFDM 64QAM^Inner_Full:PC3	18.37	19.00
n66	15MHz	15kHz	434500	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.39	16.00
n66	15MHz	15kHz	434500	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.44	16.00
n66	15MHz	15kHz	434500	33	CP-OFDM 256QAM^Inner_Full:PC3	15.33	16.00
n66	20MHz	15kHz	424000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.62	22.00
n66	20MHz	15kHz	424000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.67	22.00
n66	20MHz	15kHz	424000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.72	22.00
n66	20MHz	15kHz	424000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.12	22.00
n66	20MHz	15kHz	424000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.18	22.00
n66	20MHz	15kHz	424000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.15	22.00
n66	20MHz	15kHz	424000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.54	22.00
n66	20MHz	15kHz	424000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.63	22.00
n66	20MHz	15kHz	424000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.73	22.00
n66	20MHz	15kHz	424000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.59	21.00
n66	20MHz	15kHz	424000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.67	21.00
n66	20MHz	15kHz	424000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.69	21.00
n66	20MHz	15kHz	424000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.68	21.00
n66	20MHz	15kHz	424000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.73	21.00
n66	20MHz	15kHz	424000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.73	21.00
n66	20MHz	15kHz	424000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.26	20.00
n66	20MHz	15kHz	424000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.39	20.00
n66	20MHz	15kHz	424000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.18	20.00
n66	20MHz	15kHz	424000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.00	18.00
n66	20MHz	15kHz	424000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.13	18.00
n66	20MHz	15kHz	424000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.13	18.00
n66	20MHz	15kHz	424000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	19.97	20.00
n66	20MHz	15kHz	424000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	19.98	20.00
n66	20MHz	15kHz	424000	24	CP-OFDM QPSK^Inner_Full:PC3	20.23	21.00
n66	20MHz	15kHz	424000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.66	20.00
n66	20MHz	15kHz	424000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.75	20.00
n66	20MHz	15kHz	424000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.70	20.00
n66	20MHz	15kHz	424000	28	CP-OFDM	18.21	19.00

					64QAM^Inner_1RB_Left:PC3		
n66	20MHz	15kHz	424000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.29	19.00
n66	20MHz	15kHz	424000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.19	19.00
n66	20MHz	15kHz	424000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.31	16.00
n66	20MHz	15kHz	424000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.33	16.00
n66	20MHz	15kHz	424000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.16	16.00
n66	20MHz	15kHz	429000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.70	22.00
n66	20MHz	15kHz	429000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.80	22.00
n66	20MHz	15kHz	429000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.76	22.00
n66	20MHz	15kHz	429000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.23	22.00
n66	20MHz	15kHz	429000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.35	22.00
n66	20MHz	15kHz	429000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.26	22.00
n66	20MHz	15kHz	429000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.66	22.00
n66	20MHz	15kHz	429000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.74	22.00
n66	20MHz	15kHz	429000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.74	22.00
n66	20MHz	15kHz	429000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.73	21.00
n66	20MHz	15kHz	429000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.89	21.00
n66	20MHz	15kHz	429000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.78	21.00
n66	20MHz	15kHz	429000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.72	21.00
n66	20MHz	15kHz	429000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.01	22.00
n66	20MHz	15kHz	429000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.77	21.00
n66	20MHz	15kHz	429000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.36	20.00
n66	20MHz	15kHz	429000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.56	20.00
n66	20MHz	15kHz	429000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.20	20.00
n66	20MHz	15kHz	429000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.98	17.00
n66	20MHz	15kHz	429000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.34	18.00
n66	20MHz	15kHz	429000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.18	18.00
n66	20MHz	15kHz	429000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.00	21.00
n66	20MHz	15kHz	429000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.14	21.00
n66	20MHz	15kHz	429000	24	CP-OFDM QPSK^Inner_Full:PC3	20.27	21.00
n66	20MHz	15kHz	429000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.75	20.00
n66	20MHz	15kHz	429000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.86	20.00

n66	20MHz	15kHz	429000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.76	20.00
n66	20MHz	15kHz	429000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.24	19.00
n66	20MHz	15kHz	429000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.42	19.00
n66	20MHz	15kHz	429000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.27	19.00
n66	20MHz	15kHz	429000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.32	16.00
n66	20MHz	15kHz	429000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.49	16.00
n66	20MHz	15kHz	429000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.18	16.00
n66	20MHz	15kHz	434000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.74	22.00
n66	20MHz	15kHz	434000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.71	22.00
n66	20MHz	15kHz	434000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.80	22.00
n66	20MHz	15kHz	434000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.24	22.00
n66	20MHz	15kHz	434000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.27	22.00
n66	20MHz	15kHz	434000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.35	22.00
n66	20MHz	15kHz	434000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.67	22.00
n66	20MHz	15kHz	434000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.68	22.00
n66	20MHz	15kHz	434000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.79	22.00
n66	20MHz	15kHz	434000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.75	21.00
n66	20MHz	15kHz	434000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.71	21.00
n66	20MHz	15kHz	434000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.80	21.00
n66	20MHz	15kHz	434000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.87	21.00
n66	20MHz	15kHz	434000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.99	21.00
n66	20MHz	15kHz	434000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.81	21.00
n66	20MHz	15kHz	434000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.45	20.00
n66	20MHz	15kHz	434000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.60	20.00
n66	20MHz	15kHz	434000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.26	20.00
n66	20MHz	15kHz	434000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.18	18.00
n66	20MHz	15kHz	434000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.22	18.00
n66	20MHz	15kHz	434000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.27	18.00
n66	20MHz	15kHz	434000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.20	21.00
n66	20MHz	15kHz	434000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.10	21.00
n66	20MHz	15kHz	434000	24	CP-OFDM QPSK^Inner_Full:PC3	20.30	21.00
n66	20MHz	15kHz	434000	25	CP-OFDM	19.79	20.00

					16QAM^Inner_1RB_Left:PC3		
n66	20MHz	15kHz	434000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.80	20.00
n66	20MHz	15kHz	434000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.80	20.00
n66	20MHz	15kHz	434000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.32	19.00
n66	20MHz	15kHz	434000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.40	19.00
n66	20MHz	15kHz	434000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.34	19.00
n66	20MHz	15kHz	434000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.42	16.00
n66	20MHz	15kHz	434000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.46	16.00
n66	20MHz	15kHz	434000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.25	16.00
n66	40MHz	15kHz	426000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.53	22.00
n66	40MHz	15kHz	426000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.81	22.00
n66	40MHz	15kHz	426000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.77	22.00
n66	40MHz	15kHz	426000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.05	22.00
n66	40MHz	15kHz	426000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.33	22.00
n66	40MHz	15kHz	426000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.24	22.00
n66	40MHz	15kHz	426000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.51	22.00
n66	40MHz	15kHz	426000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.72	22.00
n66	40MHz	15kHz	426000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.79	22.00
n66	40MHz	15kHz	426000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.54	21.00
n66	40MHz	15kHz	426000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.74	21.00
n66	40MHz	15kHz	426000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.74	21.00
n66	40MHz	15kHz	426000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.67	21.00
n66	40MHz	15kHz	426000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	21.08	22.00
n66	40MHz	15kHz	426000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.81	21.00
n66	40MHz	15kHz	426000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.25	20.00
n66	40MHz	15kHz	426000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.65	20.00
n66	40MHz	15kHz	426000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.28	20.00
n66	40MHz	15kHz	426000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.89	17.00
n66	40MHz	15kHz	426000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.28	18.00
n66	40MHz	15kHz	426000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.22	18.00
n66	40MHz	15kHz	426000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	19.91	20.00
n66	40MHz	15kHz	426000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.31	21.00

n66	40MHz	15kHz	426000	24	CP-OFDM QPSK^Inner_Full:PC3	20.26	21.00
n66	40MHz	15kHz	426000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.62	20.00
n66	40MHz	15kHz	426000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.96	20.00
n66	40MHz	15kHz	426000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.76	20.00
n66	40MHz	15kHz	426000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.13	19.00
n66	40MHz	15kHz	426000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.46	19.00
n66	40MHz	15kHz	426000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.31	19.00
n66	40MHz	15kHz	426000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.20	16.00
n66	40MHz	15kHz	426000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.55	16.00
n66	40MHz	15kHz	426000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.22	16.00
n66	40MHz	15kHz	429000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.59	22.00
n66	40MHz	15kHz	429000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.77	22.00
n66	40MHz	15kHz	429000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.83	22.00
n66	40MHz	15kHz	429000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.11	22.00
n66	40MHz	15kHz	429000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.24	22.00
n66	40MHz	15kHz	429000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.28	22.00
n66	40MHz	15kHz	429000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.52	22.00
n66	40MHz	15kHz	429000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.71	22.00
n66	40MHz	15kHz	429000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.86	22.00
n66	40MHz	15kHz	429000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.61	21.00
n66	40MHz	15kHz	429000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.73	21.00
n66	40MHz	15kHz	429000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.76	21.00
n66	40MHz	15kHz	429000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.70	21.00
n66	40MHz	15kHz	429000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.90	21.00
n66	40MHz	15kHz	429000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.77	21.00
n66	40MHz	15kHz	429000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.26	20.00
n66	40MHz	15kHz	429000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.46	20.00
n66	40MHz	15kHz	429000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.28	20.00
n66	40MHz	15kHz	429000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	16.95	17.00
n66	40MHz	15kHz	429000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.18	18.00
n66	40MHz	15kHz	429000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.21	18.00
n66	40MHz	15kHz	429000	22	CP-OFDM	19.87	20.00

					QPSK^Inner_1RB_Left:PC3		
n66	40MHz	15kHz	429000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.18	21.00
n66	40MHz	15kHz	429000	24	CP-OFDM QPSK^Inner_Full:PC3	20.27	21.00
n66	40MHz	15kHz	429000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.64	20.00
n66	40MHz	15kHz	429000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.88	20.00
n66	40MHz	15kHz	429000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.77	20.00
n66	40MHz	15kHz	429000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.17	19.00
n66	40MHz	15kHz	429000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.37	19.00
n66	40MHz	15kHz	429000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.27	19.00
n66	40MHz	15kHz	429000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.21	16.00
n66	40MHz	15kHz	429000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.45	16.00
n66	40MHz	15kHz	429000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.27	16.00
n66	40MHz	15kHz	432000	1	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Left:PC3	21.65	22.00
n66	40MHz	15kHz	432000	2	DFT-s-OFDM PI/2 BPSK^Inner_1RB_Right:PC3	21.77	22.00
n66	40MHz	15kHz	432000	3	DFT-s-OFDM PI/2 BPSK^Inner_Full:PC3	21.83	22.00
n66	40MHz	15kHz	432000	4	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Left:PC3	21.14	22.00
n66	40MHz	15kHz	432000	5	DFT-s-OFDM PI/2 BPSK^Edge_1RB_Right:PC3	21.27	22.00
n66	40MHz	15kHz	432000	6	DFT-s-OFDM PI/2 BPSK^Outer_Full:PC3	21.31	22.00
n66	40MHz	15kHz	432000	7	DFT-s-OFDM QPSK^Inner_1RB_Left:PC3	21.60	22.00
n66	40MHz	15kHz	432000	8	DFT-s-OFDM QPSK^Inner_1RB_Right:PC3	21.80	22.00
n66	40MHz	15kHz	432000	9	DFT-s-OFDM QPSK^Inner_Full:PC3	21.86	22.00
n66	40MHz	15kHz	432000	10	DFT-s-OFDM QPSK^Edge_1RB_Left:PC3	20.60	21.00
n66	40MHz	15kHz	432000	11	DFT-s-OFDM QPSK^Edge_1RB_Right:PC3	20.67	21.00
n66	40MHz	15kHz	432000	12	DFT-s-OFDM QPSK^Outer_Full:PC3	20.78	21.00
n66	40MHz	15kHz	432000	13	DFT-s-OFDM 16QAM^Inner_1RB_Left:PC3	20.79	21.00
n66	40MHz	15kHz	432000	14	DFT-s-OFDM 16QAM^Inner_1RB_Right:PC3	20.91	21.00
n66	40MHz	15kHz	432000	15	DFT-s-OFDM 16QAM^Inner_Full:PC3	20.88	21.00
n66	40MHz	15kHz	432000	16	DFT-s-OFDM 64QAM^Inner_1RB_Left:PC3	19.36	20.00
n66	40MHz	15kHz	432000	17	DFT-s-OFDM 64QAM^Inner_1RB_Right:PC3	19.63	20.00
n66	40MHz	15kHz	432000	18	DFT-s-OFDM 64QAM^Inner_Full:PC3	19.38	20.00
n66	40MHz	15kHz	432000	19	DFT-s-OFDM 256QAM^Inner_1RB_Left:PC3	17.02	18.00
n66	40MHz	15kHz	432000	20	DFT-s-OFDM 256QAM^Inner_1RB_Right:PC3	17.31	18.00

n66	40MHz	15kHz	432000	21	DFT-s-OFDM 256QAM^Inner_Full:PC3	17.32	18.00
n66	40MHz	15kHz	432000	22	CP-OFDM QPSK^Inner_1RB_Left:PC3	20.05	21.00
n66	40MHz	15kHz	432000	23	CP-OFDM QPSK^Inner_1RB_Right:PC3	20.26	21.00
n66	40MHz	15kHz	432000	24	CP-OFDM QPSK^Inner_Full:PC3	20.31	21.00
n66	40MHz	15kHz	432000	25	CP-OFDM 16QAM^Inner_1RB_Left:PC3	19.73	20.00
n66	40MHz	15kHz	432000	26	CP-OFDM 16QAM^Inner_1RB_Right:PC3	19.90	20.00
n66	40MHz	15kHz	432000	27	CP-OFDM 16QAM^Inner_Full:PC3	19.81	20.00
n66	40MHz	15kHz	432000	28	CP-OFDM 64QAM^Inner_1RB_Left:PC3	18.24	19.00
n66	40MHz	15kHz	432000	29	CP-OFDM 64QAM^Inner_1RB_Right:PC3	18.45	19.00
n66	40MHz	15kHz	432000	30	CP-OFDM 64QAM^Inner_Full:PC3	18.39	19.00
n66	40MHz	15kHz	432000	31	CP-OFDM 256QAM^Inner_1RB_Left:PC3	15.31	16.00
n66	40MHz	15kHz	432000	32	CP-OFDM 256QAM^Inner_1RB_Right:PC3	15.49	16.00
n66	40MHz	15kHz	432000	33	CP-OFDM 256QAM^Inner_Full:PC3	15.34	16.00

8.5. Wi-Fi & BT Output Power

Mode	Channel	Frequency (MHz)	Output Power (dBm)	Tune-Up
802.11b	1	2412	17.62	18.00
	6	2437	17.78	18.00
	11	2462	17.12	18.00
802.11g	1	2412	21.96	22.00
	6	2437	20.97	21.00
	11	2462	20.56	21.00
802.11n (HT20)	1	2412	21.11	22.00
	6	2437	20.84	21.00
	11	2462	20.12	21.00
802.11n (H40)	3	2422	21.38	22.00
	6	2437	20.97	21.00
	9	2452	20.92	21.00
ax20	1	2412	22.18	22.50
	6	2437	21.53	22.00
	11	2462	21.11	22.00
ax40	3	2422	21.89	22.00
	6	2437	21.80	22.00
	9	2452	21.57	22.00

Mode	Frequency (MHz)	Output Power (dBm)	Tune-Up
802.11A	5180	14.92	15.00
	5200	13.13	14.00
	5240	13.57	14.00
802.11N20SISO	5180	13.23	14.00
	5200	13.15	14.00
	5240	13.33	14.00
802.11N40SISO	5190	11.31	12.00
	5230	11.16	12.00
802.11AC20SISO	5180	13.83	14.00
	5200	13.15	14.00
	5240	13.31	14.00
802.11AC40SISO	5190	11.44	12.00
	5230	10.91	11.00
802.11AC80SISO	5210	12.71	13.00
802.11ax (20)	5180	12.09	13.00
	5200	13.30	14.00
	5240	13.70	14.00
802.11ax (40)	5190	11.20	12.00
	5230	12.65	13.00
802.11ax (80)	5210	13.08	14.00

Mode	Frequency (MHz)	Output Power (dBm)	Tune-Up
802.11A	5745	12.50	13.00
	5785	11.88	12.00
	5825	12.27	13.00
802.11N20SISO	5745	11.29	12.00
	5785	11.89	12.00
	5825	11.78	12.00

802.11N40SISO	5755	11.37	12.00
	5795	12.54	13.00
802.11AC20SISO	5745	11.29	12.00
	5785	11.89	12.00
	5825	11.77	12.00
802.11AC40SISO	5755	11.23	12.00
	5795	12.29	13.00
802.11AC80SISO	5775	11.72	12.00
802.11ax (20)	5745	11.55	12.00
	5785	11.87	12.00
	5825	11.85	12.00
802.11ax (40)	5755	12.12	13.00
	5795	13.06	14.00
802.11ax (80)	5775	11.82	12.00

BR+EDR	Output Power (dBm)				
	Channel	Tune-up (dBm)	Data Rates		
			1M	2M	3M
	0CH	2.00	1.80	0.90	1.08
	39CH	4.00	3.11	2.14	2.60
	78CH	3.00	2.24	1.18	1.73


Mode	Channel	Tune-up (dBm)	Output Power (dBm)
BLE1M	CH00	2.00	1.73
	CH19	3.00	2.44
	CH39	2.00	1.85

Mode	Channel	Tune-up (dBm)	Output Power (dBm)
BLE2M	CH00	2.00	1.53
	CH19	3.00	2.48
	CH39	3.00	2.18

8.6. NFC

The power is too low, so SAR testing is not necessary.

9. Antenna Location

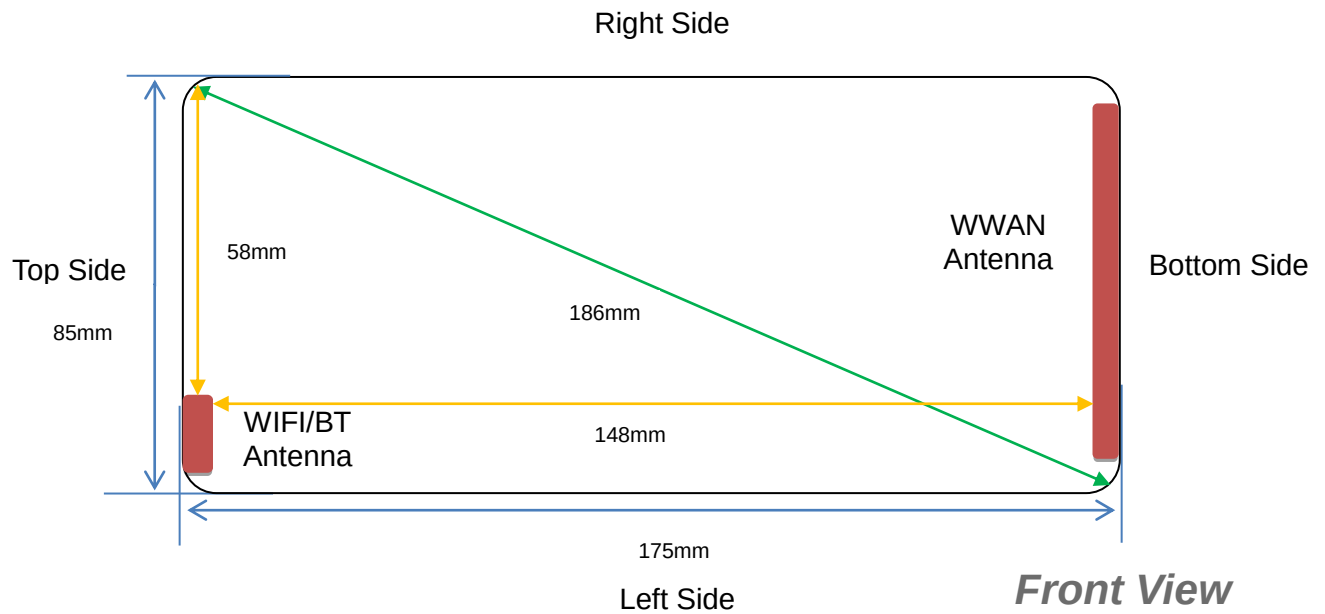

Antenna information:

Distance of The Antenna to the EUT surface and edge (mm)						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
BT/WLAN	≤25mm	≤25mm	≤25mm	>25mm	≤25mm	>25mm
WWAN	≤25mm	≤25mm	≤25mm	≤25mm	>25mm	≤25mm

Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
BT/WLAN	Yes	Yes	Yes	NO	Yes	NO
WWAN	Yes	Yes	Yes	Yes	NO	Yes

10. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Pmax (dBm)	Pmax (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	4.00	2.51	5	2.480	0.8	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}/x] \leq 7.5$ W/kg for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax (dBm)	Pmax (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/kg)
Bluetooth	Head	4.00	2.51	5	2.48	7.5	0.105
Bluetooth	Body	4.00	2.51	5	2.48	7.5	0.105
Bluetooth	Hotspot	4.00	2.51	5	2.48	7.5	0.105

NOTE: Estimated SAR calculation for Bluetooth

11. SAR Measurement Results

< GSM 850>

Test Position	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.195	0.124	-4.42	29.75	30.50	0.232	2025/3/20	1#
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.099	0.063	-2.58	29.75	30.50	0.118	2025/3/20	
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.183	0.111	-1.15	29.75	30.50	0.217	2025/3/20	
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.084	0.051	1.83	29.75	30.50	0.100	2025/3/20	

Test Position of Hotspot with 5mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	189/836.4	GPRS(GMSK 4TS)	0.276	0.145	-0.07	29.75	30.50	0.328	2025/3/20	
Back Side	189/836.4	GPRS(GMSK 4TS)	0.424	0.235	-0.27	29.75	30.50	0.504	2025/3/20	2#
Left Side	189/836.4	GPRS(GMSK 4TS)	0.135	0.072	2.04	29.75	30.50	0.160	2025/3/20	
Right Side	189/836.4	GPRS(GMSK 4TS)	0.132	0.070	3.37	29.75	30.50	0.157	2025/3/20	
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.235	0.124	-0.80	29.75	30.50	0.279	2025/3/20	

< GSM 1900>

[illegible]

								(W/Kg)		
Left Cheek	661/1880	GPRS(GMSK 4TS)	0.299	0.188	-0.90	27.17	27.50	0.323	2025/3/27	3#
Left Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.163	0.100	-3.64	27.17	27.50	0.176	2025/3/27	
Right Cheek	661/1880	GPRS(GMSK 4TS)	0.262	0.160	-1.68	27.17	27.50	0.283	2025/3/27	
Right Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.143	0.087	1.02	27.17	27.50	0.154	2025/3/27	

Test Position of Hotspot with 5mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	661/1880	GPRS(GMSK 4TS)	0.408	0.226	3.27	27.17	27.50	0.440	2025/3/27	
Back Side	661/1880	GPRS(GMSK 4TS)	0.635	0.352	-2.18	27.17	27.50	0.685	2025/3/27	4#
Left Side	661/1880	GPRS(GMSK 4TS)	0.195	0.103	-3.41	27.17	27.50	0.210	2025/3/27	
Right Side	661/1880	GPRS(GMSK 4TS)	0.204	0.113	-1.15	27.17	27.50	0.220	2025/3/27	
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.320	0.174	1.03	27.17	27.50	0.345	2025/3/27	

< WCDMA Band 2>

Test Position	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Left Cheek	9400/1880	RMC12.2K	0.304	0.197	-2.67	23.17	23.50	0.328	2025/3/27	5#
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.157	0.101	-0.89	23.17	23.50	0.169	2025/3/27	
Right	9400/1880	RMC12.2K	0.277	0.180	-0.67	23.17	23.50	0.299	2025/3/27	