

FCC RF Test Report

(BLE)

Report No.: JYTSZ-R12-2500921

Applicant: Shenzhen Gotron Electronic CO.,LTD

Address of Applicant: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China

Equipment Under Test (EUT)

Product Name: Smart Phone

Model No.: Xever 7 Pro, GR1000, Xever 7, Xever 7 Ultra, Xever 7 Lite, Xever 7S, Xever 7E

Trade Mark: RugOne

FCC ID: 2AOWK-GR1000

Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 30 Apr., 2025

Date of Test: 06 May, to 06 Aug., 2025

Date of Report Issued: 19 Aug., 2025

Test Result: PASS

Project by: Alan Chen
Project Engineer

Reviewed by: Victor Chang
Senior Engineer

Approved by: Janet Wei
Manager

Date: 19 Aug., 2025

Date: 19 Aug., 2025

Date: 19 Aug., 2025

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	06 Aug., 2025	Original
01	19 Aug., 2025	Update page 7

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Test Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions from the Method	5
3.7 Laboratory Facility	6
3.8 Laboratory Location.....	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	8
4.1 Test Channel	8
4.2 Test Setup	8
4.3 Test Procedure	10
5 Test Results.....	11
5.1 Summary	11
5.1.1 Clause and Data Summary.....	11
5.1.2 Test Limit.....	12
5.2 Antenna requirement.....	13
5.3 AC Power Line Conducted Emission	14
5.4 Emissions in Restricted Frequency Bands.....	16
5.5 Emissions in Non-restricted Frequency Bands	32

3 General Information

3.1 Client Information

Applicant:	Shenzhen Gotron Electronic CO.,LTD
Address:	7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China
Manufacturer/Factory:	Shenzhen Gotron Electronic CO.,LTD
Address:	7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China

3.2 General Description of E.U.T.

Product Name:	Smart Phone
Model No.:	Xever 7 Pro, GR1000, Xever 7, Xever 7 Ultra, Xever 7 Lite, Xever 7S, Xever 7E
Operation Frequency:	2402 MHz - 2480 MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Technology:	GFSK
Data Speed:	1 Mbps (LE 1M PHY), 2 Mbps (LE 2M PHY), 125 kbps (LE Coded PHY, S=8), 500 kbps (LE Coded PHY, S=2)
Antenna Type:	Internal Antenna
Antenna Gain:	2.6dBi (declare by applicant)
Antenna transmit mode:	SISO (1TX, 1RX)
Power Supply:	Rechargeable Li-ion Battery DC3.87V, 5550mAh
AC Adapter:	Model: HJ-C5-33-US Input: AC100-240V, 50/60Hz, 0.8A Output: PD: DC 5.0V, 3A 15.0W or DC 9.0V, 3A 27.0W or DC 12.0V, 2.5A 30.0W or DC 15.0V, 2A 30.0W or DC 20.0V, 1.5A 30.0W PPS: 3.3V-11.0V, 3.0A (33.0W Max) Base Model No.: RAS01 USB-C Input: 11V --- 3A Max Pogo Pin Output: 5V --- 2A, 9V --- 2A Battery Charging: 5V --- 2A, 5V --- 3A Pogo Pin + Battery Charging: 28W Max
Remark:	Xever 7 Pro, GR1000, Xever 7, Xever 7 Ultra, Xever 7 Lite, Xever 7S, Xever 7E were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode and Test Environment

Test Mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Remark: - For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan all data speed, found 1 Mbps (LE 1M PHY) was worse case mode. The report only reflects the test data of worst mode. - Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report. - During the test, the mobile phone dial interface is used to enter the EUT engineering mode, and the prototype transmission power level is 7.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.87 Vdc, Extreme: Low 3.00 Vdc, High 4.45 Vdc
Test Engineer:	Hopper Li (Conducted measurement) Robin Gu (Radiated measurement)

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.0 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.4 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	±4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	±5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	±4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	5.34 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	3.39 dB
Radiated Emission (1GHz ~ 18GHz) (3m FAR)	5.15 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.30 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-03-2025	01-02-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-16-2024	12-15-2025
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-16-2024	12-15-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	09-09-2024	09-08-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-15-2025	01-14-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-15-2025	01-14-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-15-2025	01-14-2026
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-01-2024	06-30-2025
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	06-16-2024	06-15-2025
				05-23-2025	05-22-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-21-2025	04-20-2026
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-21-2025	04-20-2026
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9020B	WXJ081-1	06-11-2024	06-10-2025
				05-08-2025	05-07-2026
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-30-2024	07-29-2025
				07-28-2025	07-27-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-30-2024	07-29-2025
				07-28-2025	07-27-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-30-2024	07-29-2025
				07-28-2025	07-27-2026
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	06-11-2024	06-10-2025
				05-08-2025	05-07-2026
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-17-2024	12-16-2025
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-17-2024	12-16-2025
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-15-2025	01-14-2026
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	09-10-2024	09-09-2025
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	12-17-2024	12-16-2026
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	09-10-2024	09-09-2025
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

4 Measurement Setup and Procedure

4.1 Test Channel


According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

LE 1M PHY/ LE Coded PHY, S=8/ LE Coded PHY, S=2:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	20	2442	39	2480
LE 2M PHY:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
4	2404	20	2442	38	2478

4.2 Test Setup


1) Conducted emission measurement:

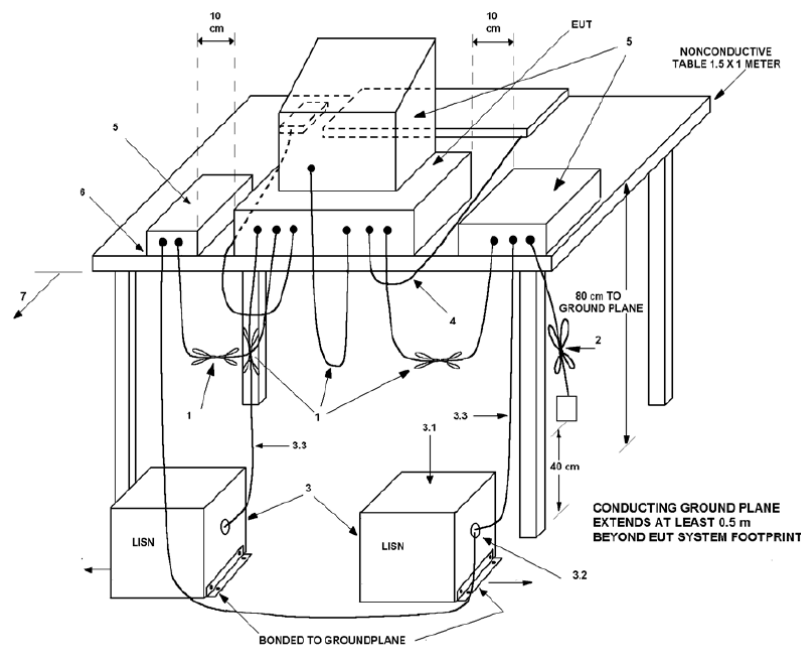


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:


Below 1GHz (3m SAC)

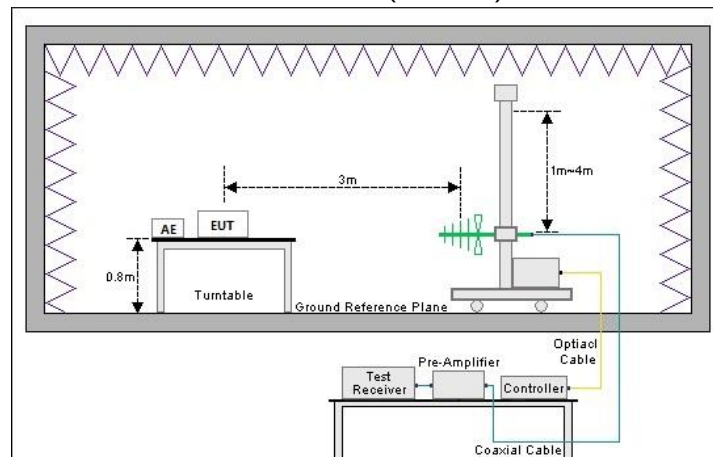

Above 1GHz (3m FAR)

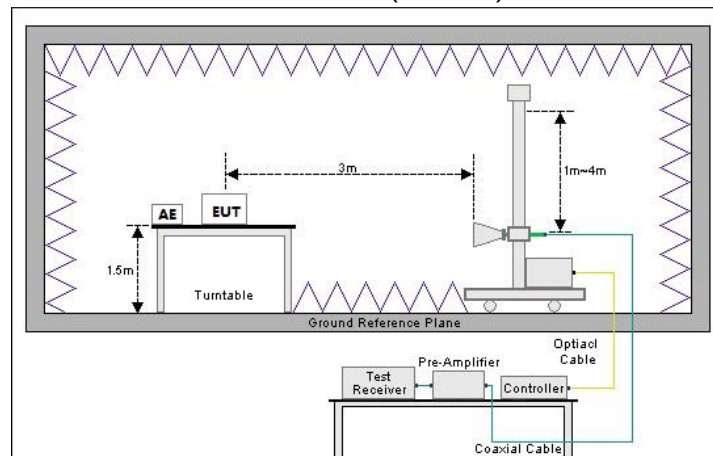

3) Conducted test method

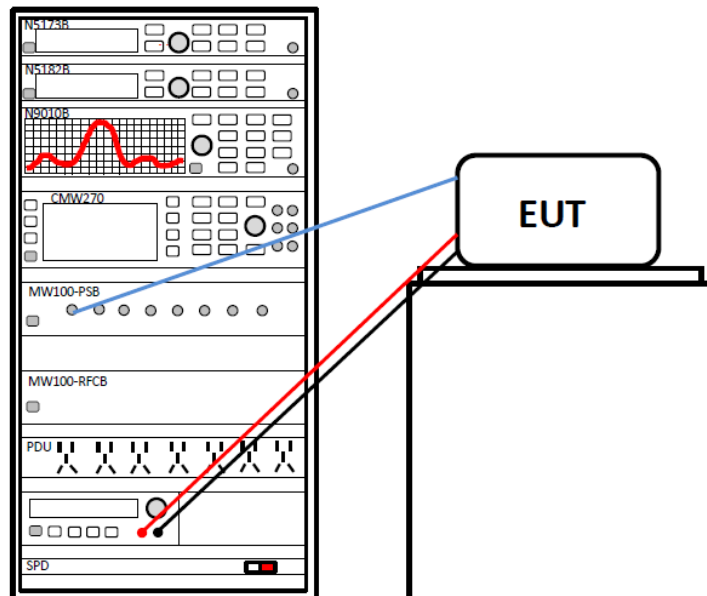

4.3 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m . 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The BLE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

Test items	Standard clause	Test Method	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	/	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	ANSI C63.10 clause 6.2	See Section 5.3	Pass
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 clause 11.9.1.2 Method PKPM1	Appendix A – LE 1M PHY Appendix A – LE 2M PHY Appendix A – LE Coded PHY, S=2 Appendix A – LE Coded PHY, S=8	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 clause 11.8.1, ANSI C63.10 clause 6.9.3	Appendix A – LE 1M PHY Appendix A – LE 2M PHY Appendix A – LE Coded PHY, S=2 Appendix A – LE Coded PHY, S=8	Pass
Power Spectral Density	15.247 (e)	ANSI C63.10 clause 11.10.2	Appendix A – LE 1M PHY Appendix A – LE 2M PHY Appendix A – LE Coded PHY, S=2 Appendix A – LE Coded PHY, S=8	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	ANSI C63.10 clause 6.10.4	Appendix A – LE 1M PHY Appendix A – LE 2M PHY Appendix A – LE Coded PHY, S=2 Appendix A – LE Coded PHY, S=8	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	ANSI C63.10 clause 6.10.5, 11.12.1 and 11.12.2.5.2	See Section 5.4	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	ANSI C63.10 clause 6.3, 6.5, 6.6 and 11.12.2.5.2	See Section 5.5	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).				
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02			

5.1.2 Test Limit


Test items	Limit																																								
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr><tr><td colspan="3">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Limit (dBμV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	56	46	5 – 30	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																									
Frequency (MHz)	Limit (dBμV)																																								
	Quasi-Peak	Average																																							
0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1																																							
0.5 – 5	56	46																																							
5 – 30	60	50																																							
Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																																									
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																																								
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																																								
99% Occupied Bandwidth	N/A																																								
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																																								
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																																								
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr><tr><td colspan="4">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBμV/m) @ 3m</th><th rowspan="2">Peake</th></tr><tr><th colspan="2">Average</th></tr><tr><td>Above 1 GHz</td><td colspan="2">54.0</td><td>74.0</td></tr><tr><td colspan="4">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Limit (dBμV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Note: The more stringent limit applies at transition frequencies.				Frequency	Limit (dBμV/m) @ 3m		Peake	Average		Above 1 GHz	54.0		74.0	Note: The measurement bandwidth shall be 1 MHz or greater.			
Frequency (MHz)	Limit (dBμV/m)		Detector																																						
	@ 3m	@ 10m																																							
30 – 88	40.0	30.0	Quasi-peak																																						
88 – 216	43.5	33.5	Quasi-peak																																						
216 – 960	46.0	36.0	Quasi-peak																																						
960 – 1000	54.0	44.0	Quasi-peak																																						
Note: The more stringent limit applies at transition frequencies.																																									
Frequency	Limit (dBμV/m) @ 3m		Peake																																						
	Average																																								
Above 1 GHz	54.0		74.0																																						
Note: The measurement bandwidth shall be 1 MHz or greater.																																									

5.2 Antenna requirement

Standard requirement:	FCC Part 15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The BLE antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 2.6 dBi. See product internal photos for details.	

5.3 AC Power Line Conducted Emission

Product name:	Smart Phone	Product model:	Xever 7 Pro
Test by:	Kiran Zeng	Test mode:	BLE Tx (LE 1M PHY)
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

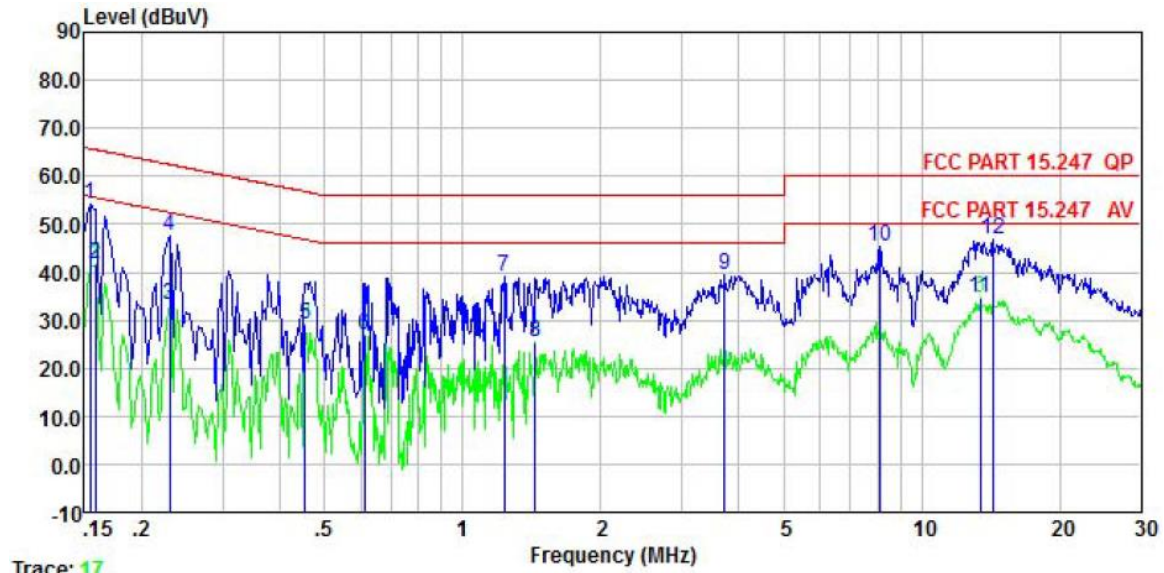


Trace: 17

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	34.08	10.19	0.00	9.88	0.01	54.16	65.78	-11.62	QP
2	0.158	21.45	10.18	0.00	9.88	0.01	41.52	55.56	-14.04	Average
3	0.230	13.15	10.10	0.00	9.88	0.02	33.15	52.44	-19.29	Average
4	0.230	27.46	10.10	0.00	9.88	0.02	47.46	62.44	-14.98	QP
5	0.454	8.97	10.13	0.00	9.88	0.03	29.01	46.80	-17.79	Average
6	0.611	6.92	10.19	0.00	9.88	0.02	27.01	46.00	-18.99	Average
7	1.229	18.84	10.17	0.00	9.88	0.10	38.99	56.00	-17.01	QP
8	1.441	5.19	10.15	0.00	9.88	0.13	25.35	46.00	-20.65	Average
9	3.720	19.23	10.15	0.00	9.89	0.08	39.35	56.00	-16.65	QP
10	8.105	25.12	10.36	0.00	9.90	0.10	45.48	60.00	-14.52	QP
11	13.408	13.87	10.66	0.00	9.92	0.11	34.56	50.00	-15.44	Average
12	14.288	25.90	10.74	0.00	9.93	0.13	46.70	60.00	-13.30	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Smart Phone	Product model:	Xever 7 Pro
Test by:	Kiran Zeng	Test mode:	BLE Tx (LE 1M PHY)
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

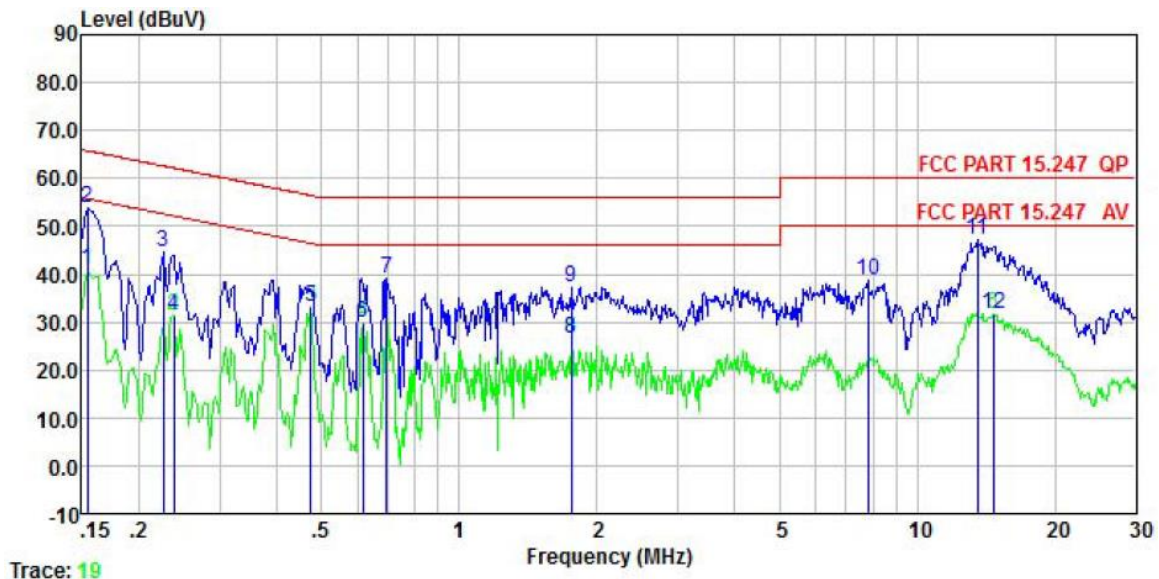


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	20.73	10.20	0.00	9.88	0.01	40.82	55.78	-14.96	Average
2	0.154	33.84	10.20	0.00	9.88	0.01	53.93	65.78	-11.85	QP
3	0.226	24.40	10.18	0.00	9.88	0.02	44.48	62.61	-18.13	QP
4	0.238	11.24	10.17	0.00	9.88	0.02	31.31	52.17	-20.86	Average
5	0.474	12.92	10.18	0.00	9.88	0.03	33.01	46.45	-13.44	Average
6	0.617	9.80	10.30	0.00	9.88	0.02	30.00	46.00	-16.00	Average
7	0.694	18.88	10.30	0.00	9.88	0.03	39.09	56.00	-16.91	QP
8	1.753	6.29	10.28	0.00	9.88	0.18	26.63	46.00	-19.37	Average
9	1.753	16.97	10.28	0.00	9.88	0.18	37.31	56.00	-18.69	QP
10	7.810	18.45	10.30	0.00	9.90	0.10	38.75	60.00	-21.25	QP
11	13.551	26.57	10.52	0.00	9.92	0.12	47.13	60.00	-12.87	QP
12	14.672	11.13	10.58	0.00	9.93	0.13	31.77	50.00	-18.23	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.4 Emissions in Restricted Frequency Bands

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

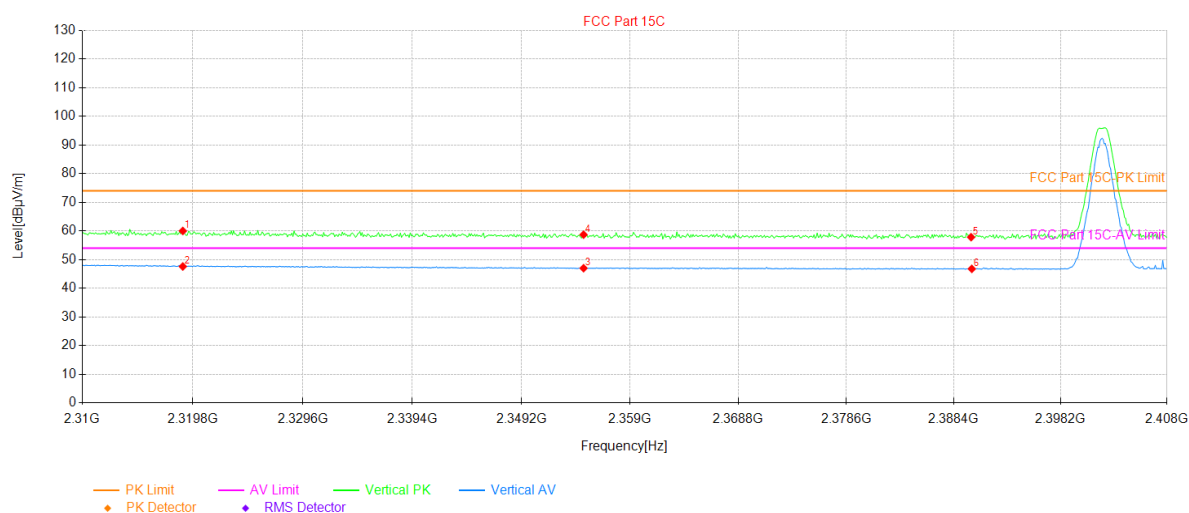


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2318.92	23.55	36.42	59.97	74.00	14.03	131	PK	PASS	Vertical
2	2318.92	11.16	36.42	47.58	54.00	6.42	50	AV	PASS	Vertical
3	2354.79	11.02	35.96	46.98	54.00	7.02	156	AV	PASS	Vertical
4	2354.79	22.72	35.96	58.68	74.00	15.32	226	PK	PASS	Vertical
5	2390.00	21.87	35.93	57.80	74.00	16.20	123	PK	PASS	Vertical
6	2390.07	10.82	35.93	46.75	54.00	7.25	82	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

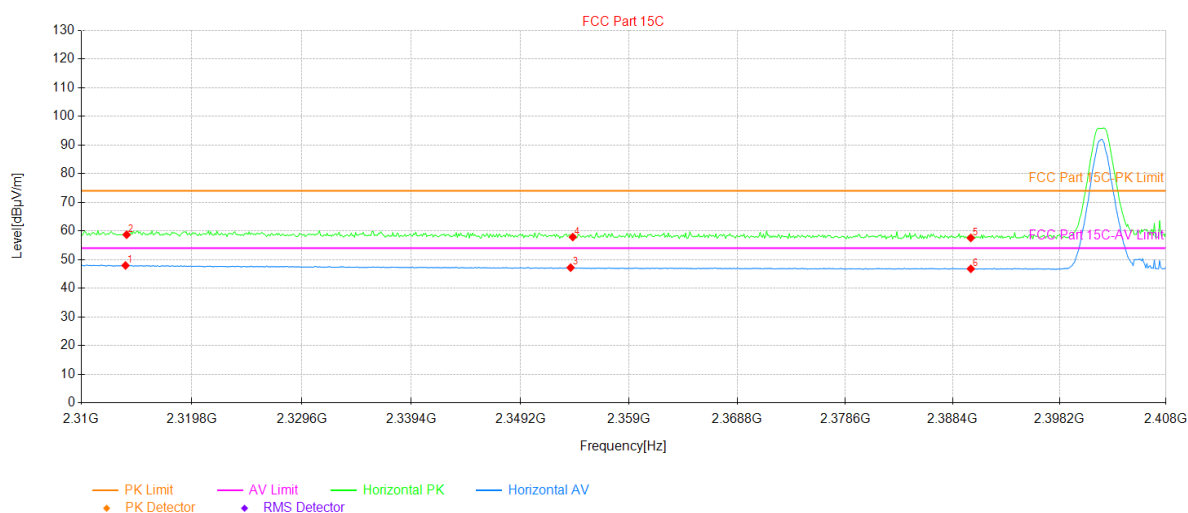


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2313.92	11.42	36.51	47.93	54.00	6.07	218	AV	PASS	Horizontal
2	2314.02	22.15	36.51	58.66	74.00	15.34	304	PK	PASS	Horizontal
3	2353.71	11.21	35.97	47.18	54.00	6.82	285	AV	PASS	Horizontal
4	2353.90	21.88	35.96	57.84	74.00	16.16	185	PK	PASS	Horizontal
5	2390.07	21.61	35.93	57.54	74.00	16.46	84	PK	PASS	Horizontal
6	2390.07	10.83	35.93	46.76	54.00	7.24	300	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

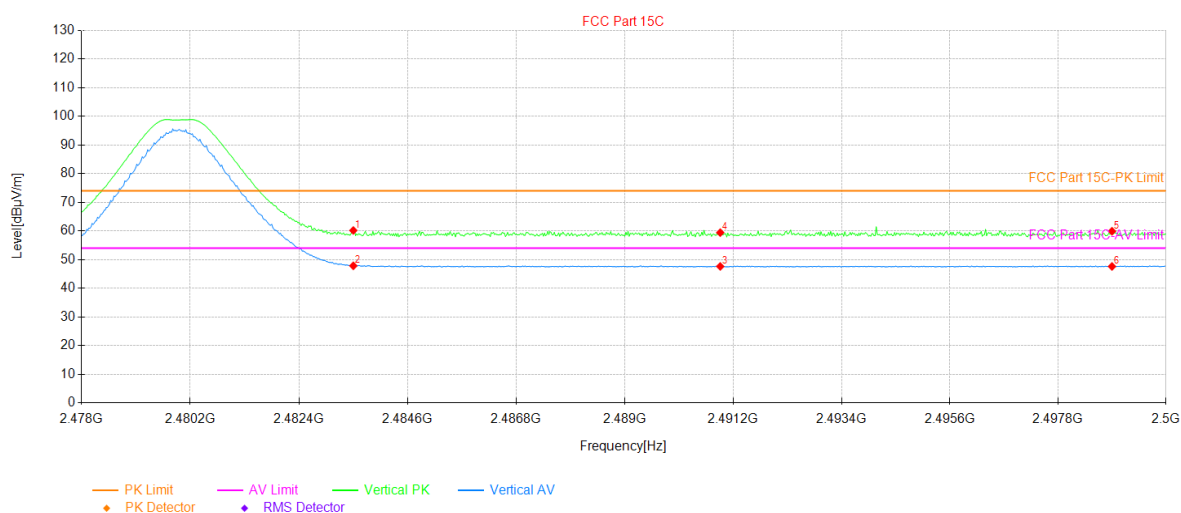


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	23.40	36.74	60.14	74.00	13.86	330	PK	PASS	Vertical
2	2483.50	11.08	36.74	47.82	54.00	6.18	356	AV	PASS	Vertical
3	2490.94	10.85	36.76	47.61	54.00	6.39	58	AV	PASS	Vertical
4	2490.94	22.63	36.76	59.39	74.00	14.61	319	PK	PASS	Vertical
5	2498.90	23.10	36.77	59.87	74.00	14.13	330	PK	PASS	Vertical
6	2498.90	10.82	36.77	47.59	54.00	6.41	77	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

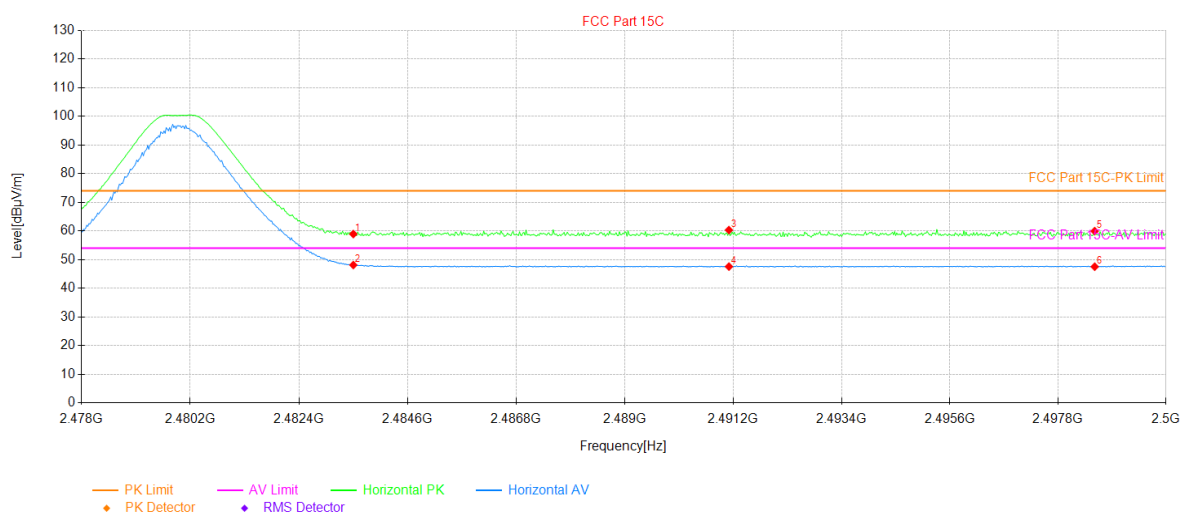


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.16	36.74	58.90	74.00	15.10	312	PK	PASS	Horizontal
2	2483.50	11.35	36.74	48.09	54.00	5.91	360	AV	PASS	Horizontal
3	2491.11	23.52	36.76	60.28	74.00	13.72	42	PK	PASS	Horizontal
4	2491.11	10.78	36.76	47.54	54.00	6.46	225	AV	PASS	Horizontal
5	2498.55	23.14	36.77	59.91	74.00	14.09	286	PK	PASS	Horizontal
6	2498.55	10.73	36.77	47.50	54.00	6.50	58	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

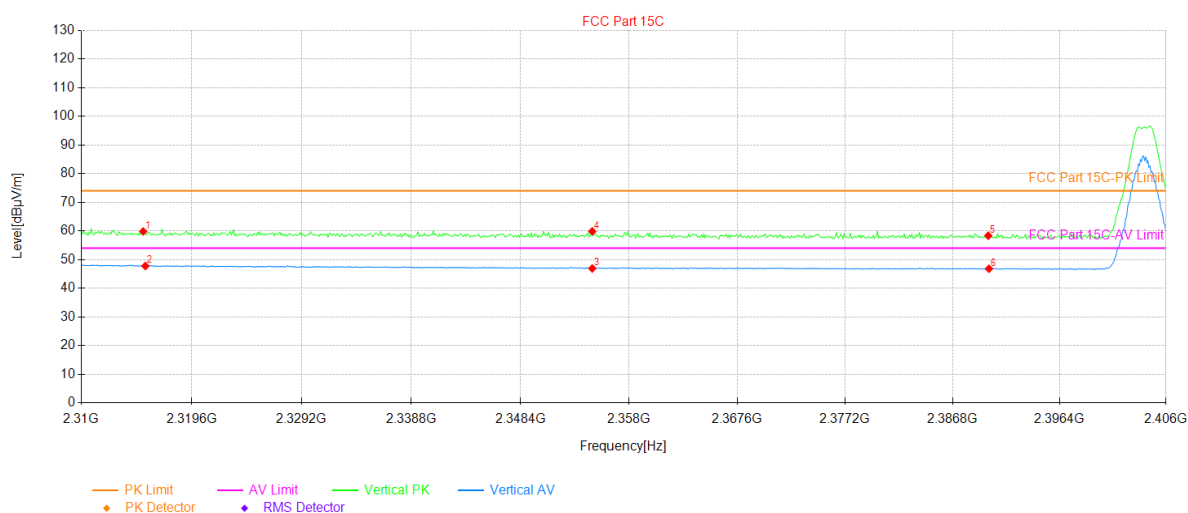


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2315.38	23.32	36.48	59.80	74.00	14.20	201	PK	PASS	Vertical
2	2315.57	11.26	36.48	47.74	54.00	6.26	346	AV	PASS	Vertical
3	2354.74	10.93	35.96	46.89	54.00	7.11	160	AV	PASS	Vertical
4	2354.74	23.87	35.96	59.83	74.00	14.17	316	PK	PASS	Vertical
5	2390.00	22.38	35.93	58.31	74.00	15.69	34	PK	PASS	Vertical
6	2390.06	10.87	35.93	46.80	54.00	7.20	324	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

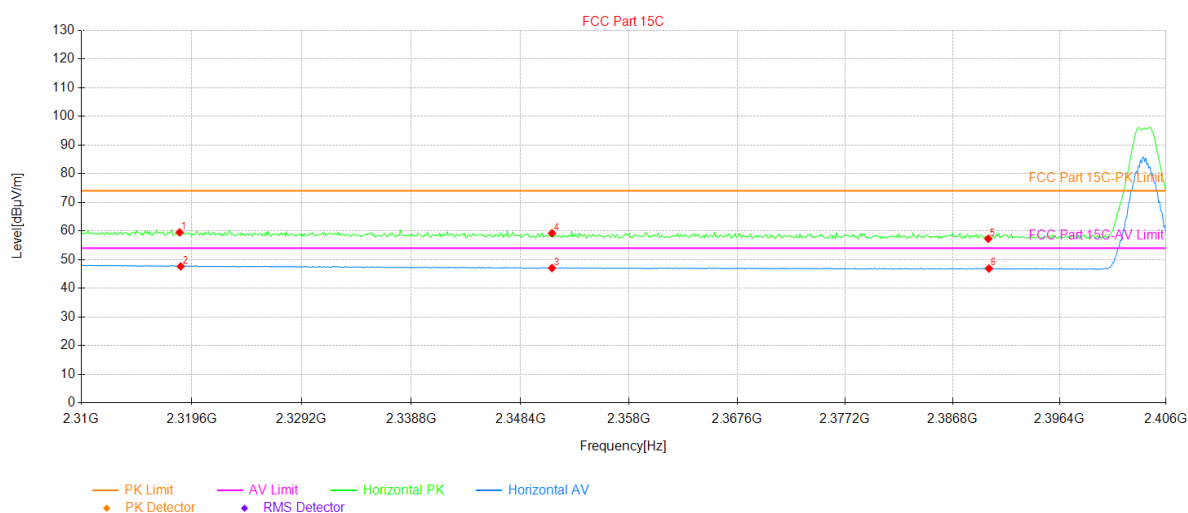


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2318.54	23.05	36.42	59.47	74.00	14.53	148	PK	PASS	Horizontal
2	2318.64	11.18	36.42	47.60	54.00	6.40	237	AV	PASS	Horizontal
3	2351.18	11.06	35.97	47.03	54.00	6.97	95	AV	PASS	Horizontal
4	2351.18	23.22	35.97	59.19	74.00	14.81	181	PK	PASS	Horizontal
5	2390.00	21.33	35.93	57.26	74.00	16.74	319	PK	PASS	Horizontal
6	2390.06	10.93	35.93	46.86	54.00	7.14	114	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

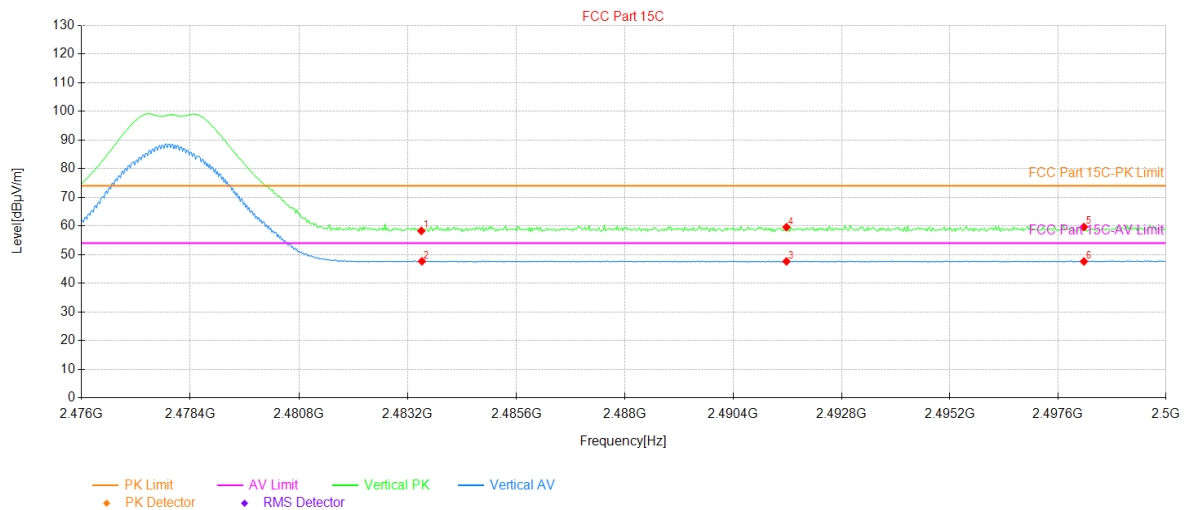


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.52	36.74	58.26	74.00	15.74	330	PK	PASS	Vertical
2	2483.51	10.90	36.74	47.64	54.00	6.36	241	AV	PASS	Vertical
3	2491.58	10.85	36.76	47.61	54.00	6.39	33	AV	PASS	Vertical
4	2491.58	22.78	36.76	59.54	74.00	14.46	241	PK	PASS	Vertical
5	2498.18	22.84	36.77	59.61	74.00	14.39	293	PK	PASS	Vertical
6	2498.18	10.82	36.77	47.59	54.00	6.41	144	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

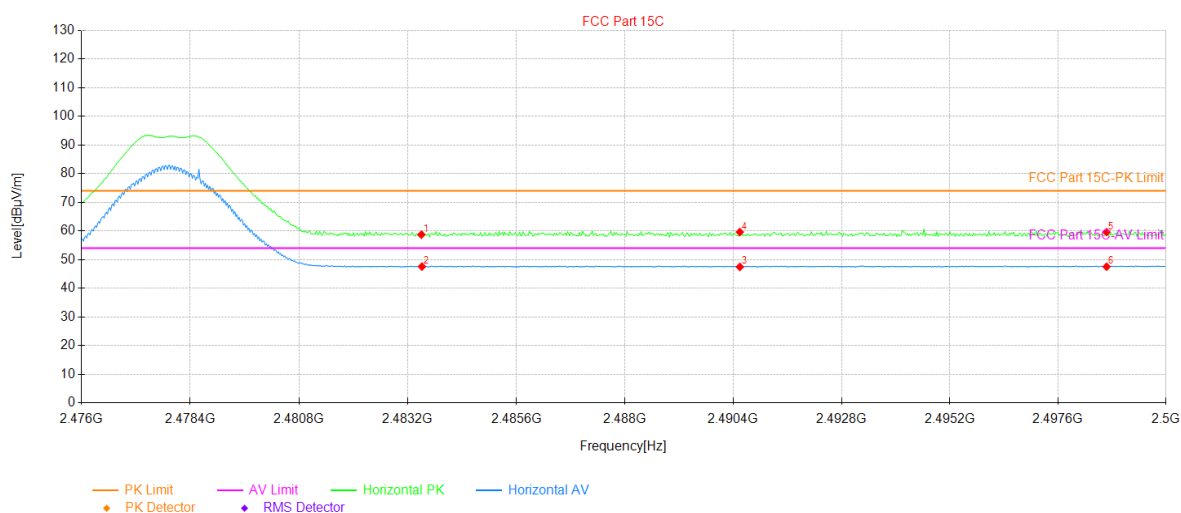


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.94	36.74	58.68	74.00	15.32	327	PK	PASS	Horizontal
2	2483.51	10.80	36.74	47.54	54.00	6.46	327	AV	PASS	Horizontal
3	2490.54	10.68	36.76	47.44	54.00	6.56	290	AV	PASS	Horizontal
4	2490.54	22.83	36.76	59.59	74.00	14.41	327	PK	PASS	Horizontal
5	2498.68	22.79	36.77	59.56	74.00	14.44	130	PK	PASS	Horizontal
6	2498.68	10.73	36.77	47.50	54.00	6.50	11	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

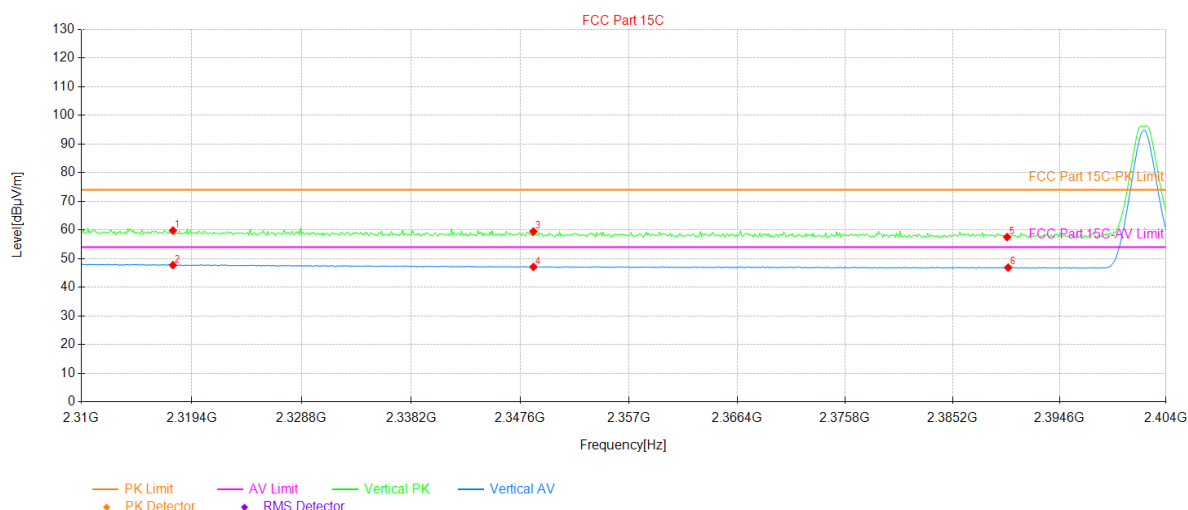


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2317.80	23.32	36.45	59.77	74.00	14.23	360	PK	PASS	Vertical
2	2317.80	11.25	36.45	47.70	54.00	6.30	8	AV	PASS	Vertical
3	2348.73	23.43	35.99	59.42	74.00	14.58	134	PK	PASS	Vertical
4	2348.73	11.08	35.99	47.07	54.00	6.93	12	AV	PASS	Vertical
5	2390.00	21.55	35.93	57.48	74.00	16.52	305	PK	PASS	Vertical
6	2390.09	10.92	35.93	46.85	54.00	7.15	19	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

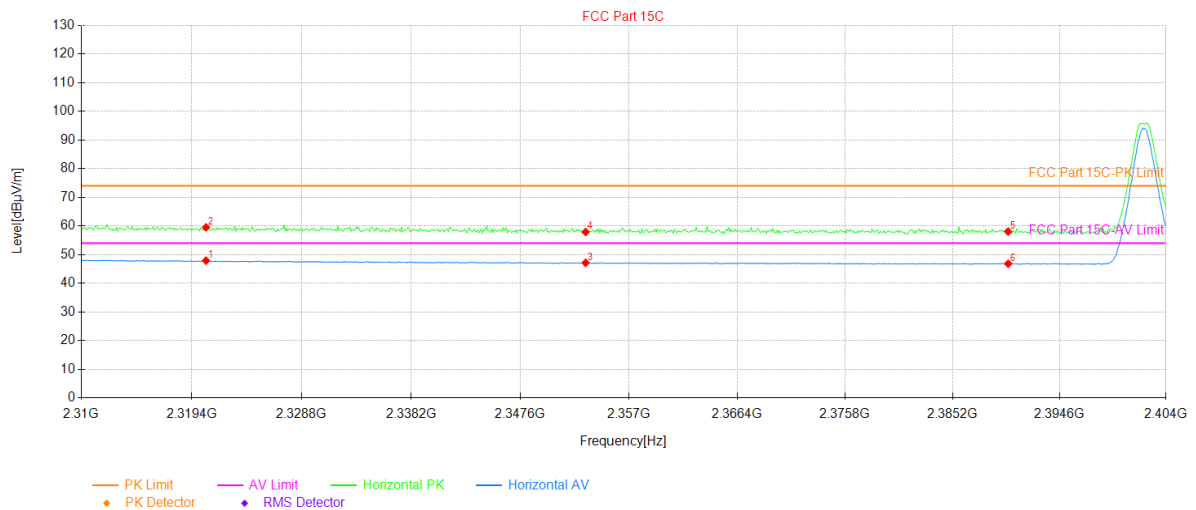


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2320.62	11.48	36.39	47.87	54.00	6.13	99	AV	PASS	Horizontal
2	2320.62	23.10	36.39	59.49	74.00	14.51	62	PK	PASS	Horizontal
3	2353.24	11.14	35.97	47.11	54.00	6.89	274	AV	PASS	Horizontal
4	2353.24	21.89	35.97	57.86	74.00	16.14	326	PK	PASS	Horizontal
5	2390.09	22.08	35.93	58.01	74.00	15.99	99	PK	PASS	Horizontal
6	2390.09	10.87	35.93	46.80	54.00	7.20	140	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

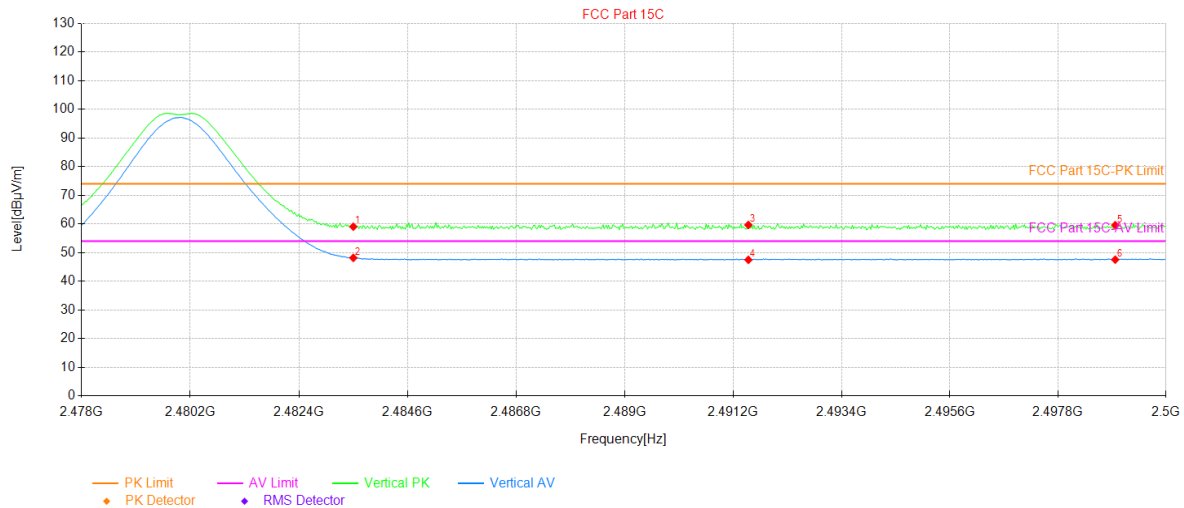


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.29	36.74	59.03	74.00	14.97	360	PK	PASS	Vertical
2	2483.50	11.40	36.74	48.14	54.00	5.86	2	AV	PASS	Vertical
3	2491.51	22.86	36.76	59.62	74.00	14.38	34	PK	PASS	Vertical
4	2491.51	10.70	36.76	47.46	54.00	6.54	246	AV	PASS	Vertical
5	2498.97	22.78	36.77	59.55	74.00	14.45	359	PK	PASS	Vertical
6	2498.97	10.76	36.77	47.53	54.00	6.47	49	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

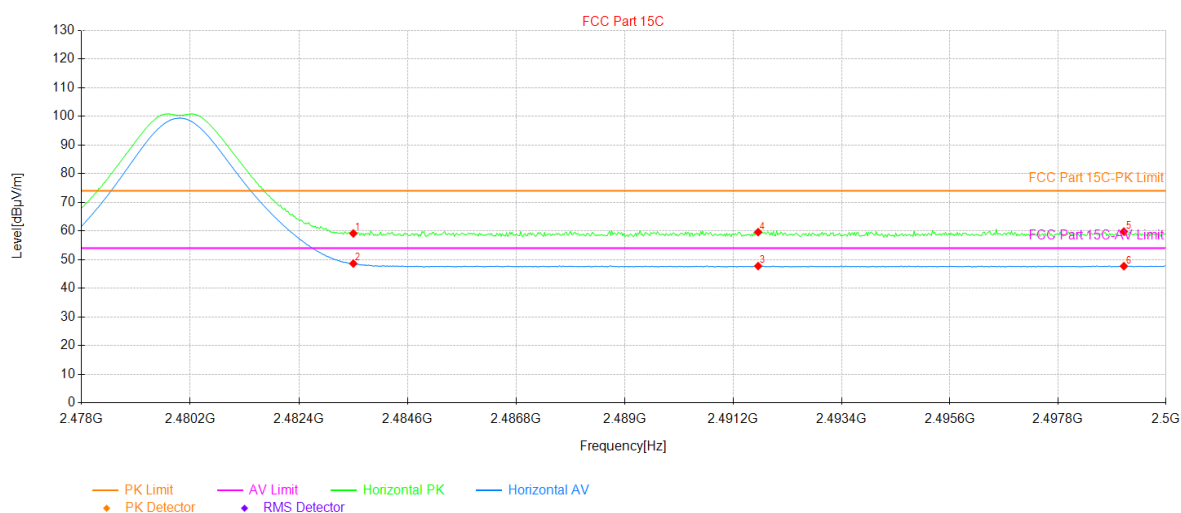


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.37	36.74	59.11	74.00	14.89	341	PK	PASS	Horizontal
2	2483.50	11.85	36.74	48.59	54.00	5.41	0	AV	PASS	Horizontal
3	2491.71	10.97	36.76	47.73	54.00	6.27	115	AV	PASS	Horizontal
4	2491.71	22.80	36.76	59.56	74.00	14.44	244	PK	PASS	Horizontal
5	2499.14	22.99	36.77	59.76	74.00	14.24	85	PK	PASS	Horizontal
6	2499.14	10.92	36.77	47.69	54.00	6.31	56	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

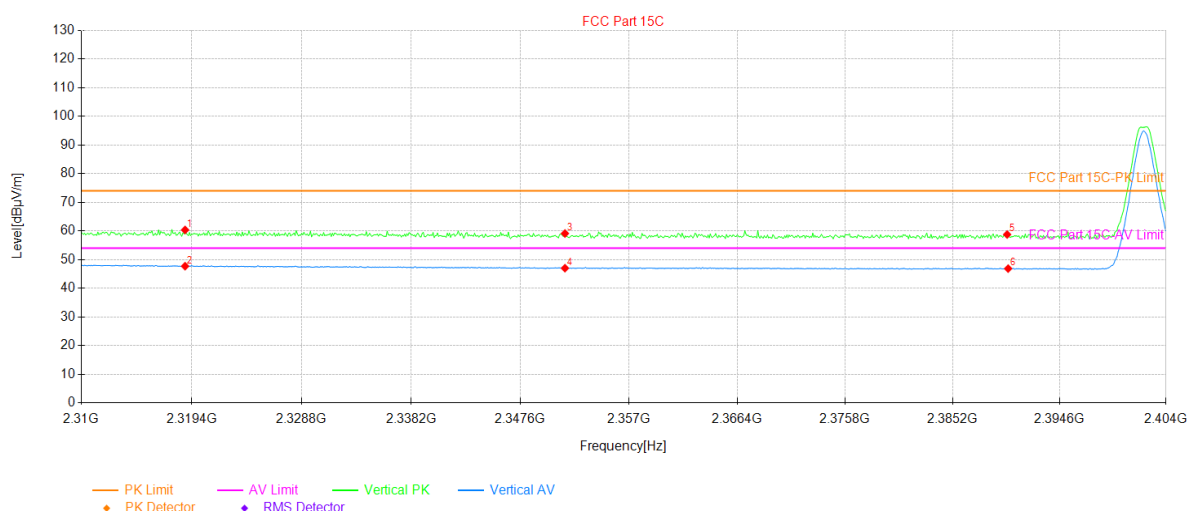


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2318.84	23.90	36.42	60.32	74.00	13.68	142	PK	PASS	Vertical
2	2318.84	11.26	36.42	47.68	54.00	6.32	48	AV	PASS	Vertical
3	2351.45	23.13	35.96	59.09	74.00	14.91	119	PK	PASS	Vertical
4	2351.45	11.03	35.96	46.99	54.00	7.01	52	AV	PASS	Vertical
5	2390.00	22.81	35.93	58.74	74.00	15.26	2	PK	PASS	Vertical
6	2390.09	10.92	35.93	46.85	54.00	7.15	305	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

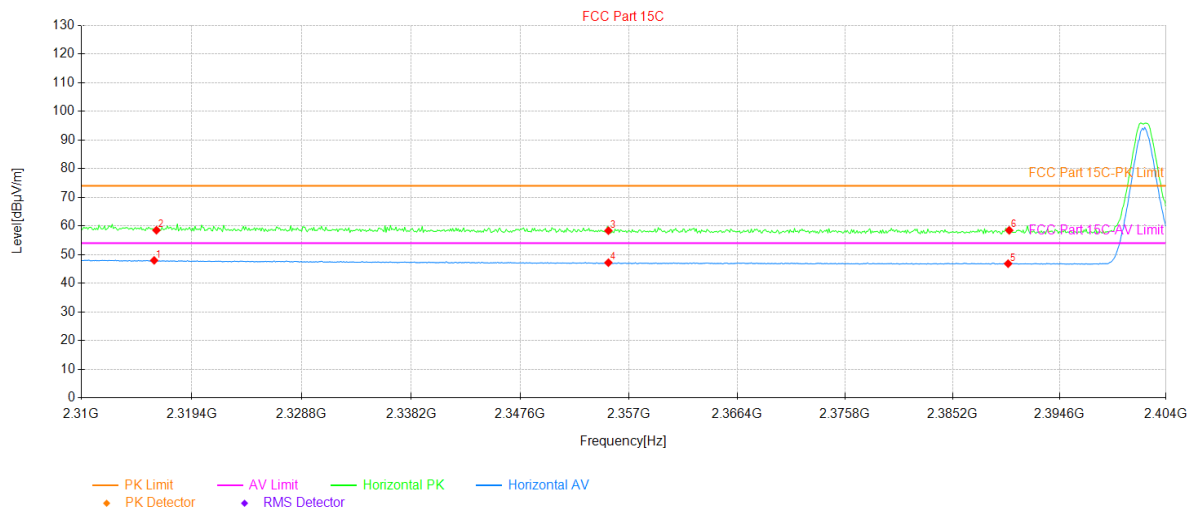


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2316.20	11.48	36.47	47.95	54.00	6.05	36	AV	PASS	Horizontal
2	2316.39	22.01	36.47	58.48	74.00	15.52	293	PK	PASS	Horizontal
3	2355.21	22.36	35.97	58.33	74.00	15.67	125	PK	PASS	Horizontal
4	2355.21	11.20	35.97	47.17	54.00	6.83	99	AV	PASS	Horizontal
5	2390.09	10.89	35.93	46.82	54.00	7.18	252	AV	PASS	Horizontal
6	2390.18	22.52	35.93	58.45	74.00	15.55	341	PK	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

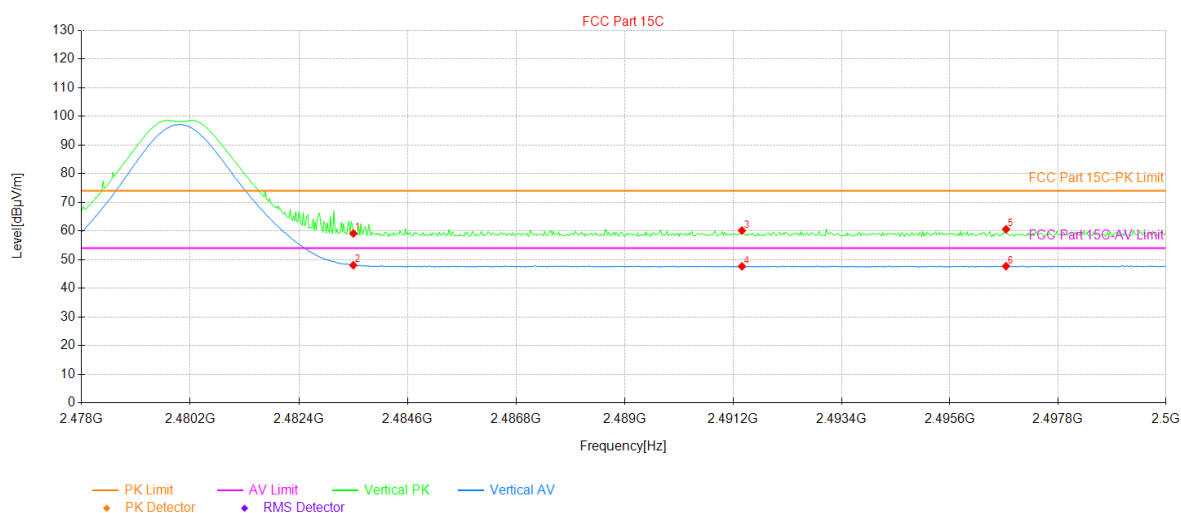


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.36	36.74	59.10	74.00	14.90	90	PK	PASS	Vertical
2	2483.50	11.27	36.74	48.01	54.00	5.99	2	AV	PASS	Vertical
3	2491.38	23.36	36.76	60.12	74.00	13.88	82	PK	PASS	Vertical
4	2491.38	10.86	36.76	47.62	54.00	6.38	353	AV	PASS	Vertical
5	2496.74	23.80	36.77	60.57	74.00	13.43	283	PK	PASS	Vertical
6	2496.74	10.92	36.77	47.69	54.00	6.31	350	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Robin Gu	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

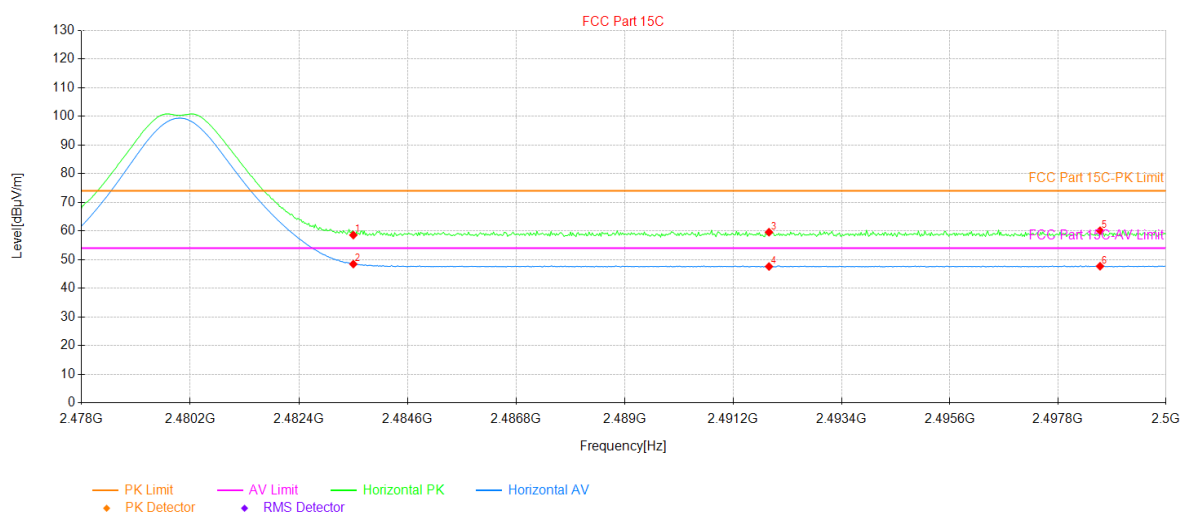

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.80	36.74	58.54	74.00	15.46	177	PK	PASS	Horizontal
2	2483.50	11.68	36.74	48.42	54.00	5.58	358	AV	PASS	Horizontal
3	2491.93	22.79	36.76	59.55	74.00	14.45	25	PK	PASS	Horizontal
4	2491.93	10.81	36.76	47.57	54.00	6.43	92	AV	PASS	Horizontal
5	2498.66	23.30	36.77	60.07	74.00	13.93	322	PK	PASS	Horizontal
6	2498.66	10.90	36.77	47.67	54.00	6.33	214	AV	PASS	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

5.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Kiran Zeng	Test mode:	BLE Tx (LE 1M PHY)
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 3.87V		

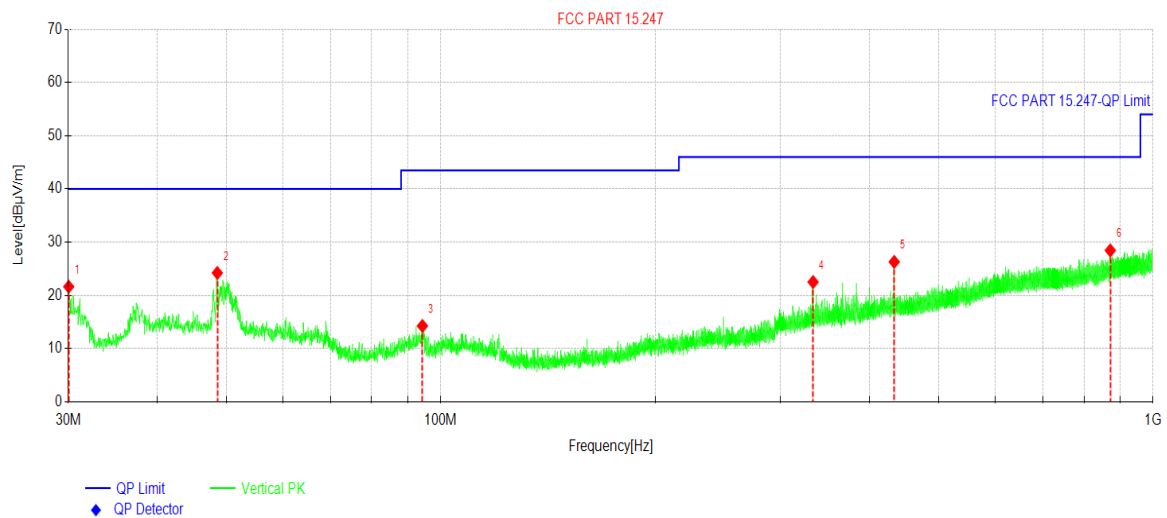


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	30.0485	36.91	-15.27	21.64	40.00	18.36	PK	Vertical
2	48.5764	36.65	-12.42	24.23	40.00	15.77	PK	Vertical
3	94.2657	29.49	-15.22	14.27	43.50	29.23	PK	Vertical
4	333.285	34.25	-11.73	22.52	46.00	23.48	PK	Vertical
5	433.249	36.13	-9.83	26.30	46.00	19.70	PK	Vertical
6	871.032	31.30	-2.85	28.45	46.00	17.55	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Smart Phone	Product Model:	Xever 7 Pro
Test By:	Kiran Zeng	Test mode:	BLE Tx (LE 1M PHY)
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

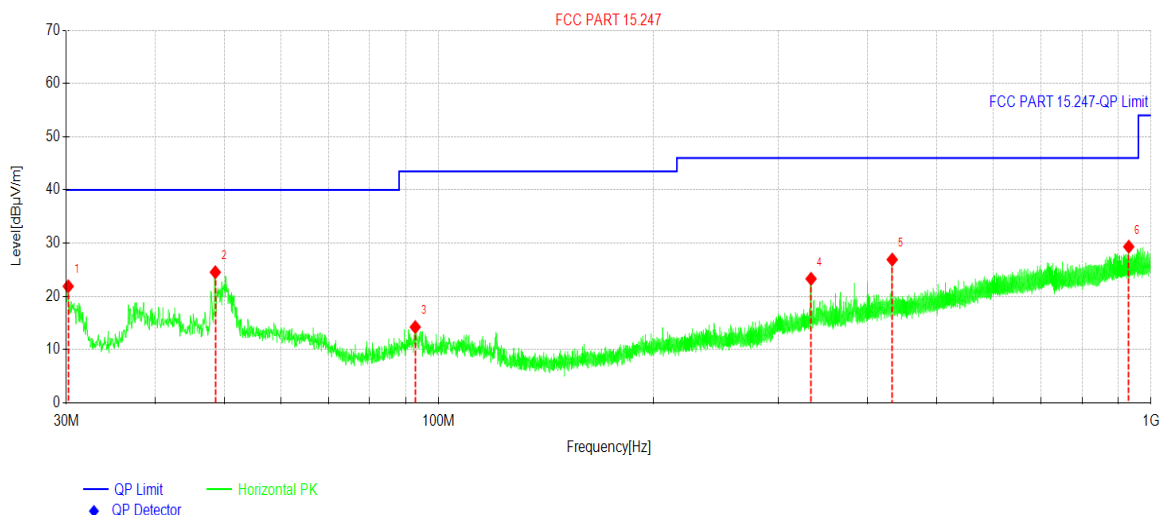

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	30.1940	37.22	-15.32	21.90	40.00	18.10	PK	Horizontal
2	48.5764	36.97	-12.42	24.55	40.00	15.45	PK	Horizontal
3	92.7136	29.78	-15.54	14.24	43.50	29.26	PK	Horizontal
4	333.237	35.03	-11.73	23.30	46.00	22.70	PK	Horizontal
5	433.249	36.75	-9.83	26.92	46.00	19.08	PK	Horizontal
6	930.593	31.51	-2.17	29.34	46.00	16.66	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

BLE Tx (LE 1M PHY)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	49.17	-7.98	41.19	74.00	32.81	Vertical
4804.00	49.30	-7.98	41.32	74.00	32.68	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.67	-7.98	31.69	54.00	22.31	Vertical
4804.00	40.23	-7.98	32.25	54.00	21.75	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	48.94	-7.46	41.48	74.00	32.52	Vertical
4884.00	49.07	-7.46	41.61	74.00	32.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.27	-7.46	31.81	54.00	22.19	Vertical
4884.00	40.21	-7.46	32.75	54.00	21.25	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	49.28	-7.00	42.28	74.00	31.72	Vertical
4960.00	49.54	-7.00	42.54	74.00	31.46	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	40.14	-7.00	33.14	54.00	20.86	Vertical
4960.00	39.87	-7.00	32.87	54.00	21.13	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

BLE Tx (LE 2M PHY)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	49.55	-7.98	41.57	74.00	32.43	Vertical
4804.00	49.03	-7.98	41.05	74.00	32.95	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	40.01	-7.98	32.03	54.00	21.97	Vertical
4804.00	40.35	-7.98	32.37	54.00	21.63	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	49.65	-7.46	42.19	74.00	31.81	Vertical
4884.00	48.81	-7.46	41.35	74.00	32.65	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.20	-7.46	31.74	54.00	22.26	Vertical
4884.00	40.23	-7.46	32.77	54.00	21.23	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	48.97	-7.00	41.97	74.00	32.03	Vertical
4960.00	49.12	-7.00	42.12	74.00	31.88	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	39.77	-7.00	32.77	54.00	21.23	Vertical
4960.00	40.40	-7.00	33.40	54.00	20.60	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

BEL Tx (LE Coded PHY, S=2)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	49.37	-7.98	41.39	74.00	32.61	Vertical
4804.00	49.62	-7.98	41.64	74.00	32.36	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.19	-7.98	31.21	54.00	22.79	Vertical
4804.00	40.29	-7.98	32.31	54.00	21.69	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	48.88	-7.46	41.42	74.00	32.58	Vertical
4884.00	49.71	-7.46	42.25	74.00	31.75	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.56	-7.46	32.10	54.00	21.90	Vertical
4884.00	39.99	-7.46	32.53	54.00	21.47	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	49.49	-7.00	42.49	74.00	31.51	Vertical
4960.00	49.58	-7.00	42.58	74.00	31.42	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	39.78	-7.00	32.78	54.00	21.22	Vertical
4960.00	39.75	-7.00	32.75	54.00	21.25	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

BEL Tx (LE Coded PHY, S=8)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	49.26	-7.98	41.28	74.00	32.72	Vertical
4804.00	49.71	-7.98	41.73	74.00	32.27	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.59	-7.98	31.61	54.00	22.39	Vertical
4804.00	39.91	-7.98	31.93	54.00	22.07	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	48.70	-7.46	41.24	74.00	32.76	Vertical
4884.00	49.38	-7.46	41.92	74.00	32.08	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.28	-7.46	31.82	54.00	22.18	Vertical
4884.00	39.85	-7.46	32.39	54.00	21.61	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	49.00	-7.00	42.00	74.00	32.00	Vertical
4960.00	48.85	-7.00	41.85	74.00	32.15	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	40.10	-7.00	33.10	54.00	20.90	Vertical
4960.00	40.21	-7.00	33.21	54.00	20.79	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----