

# FCC RADIO TEST REPORT

## FCC ID: 2A3RT-BRDB01

**Sample:** Bird Bar  
**Trade Name:** BirdAI  
**Main Model:** BRDB01  
**Additional Model:** BRDB02, BRDBLX01, BRDBLX02, BRDSK03,  
BRDSK04, KNGL01, KNETP06  
**Report No.:** UNIA21092217ER-62

### Prepared for

BIRDAI DYNAMICS PRIVATE LIMITED

B 1106, iThum Tower Plot No. A 40, Sector 62 Noida, Gautam Buddha  
Nagar, India

### Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang  
Community, XixiangStr, Bao'an District, Shenzhen, China

## TEST RESULT CERTIFICATION

**Applicant**.....: BIRDAI DYNAMICS PRIVATE LIMITED  
**Address**.....: B 1106, iThum Tower Plot No. A 40, Sector 62 Noida, Gautam Buddha Nagar, India  
**Manufacturer**.....: BIRDAI DYNAMICS PRIVATE LIMITED  
**Address**.....: B 1106, iThum Tower Plot No. A 40, Sector 62 Noida, Gautam Buddha Nagar, India  
**Product description**  
**Product**.....: Bird Bar  
**Trade Name**.....: BirdAI  
**Model Name**.....: BRDB01, BRDB02, BRDBLX01, BRDBLX02, BRDSK03, BRDSK04, KNGL01, KNETP06  
**Test Methods**.....: FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.


**Date (s) of performance of tests** .....: Sep. 22, 2021 ~ Nov. 18, 2021  
**Date of Issue** .....: Dec. 22, 2021  
**Test Result** .....: Pass

**kahn.yang**


Prepared by:

\_\_\_\_\_  
Kahn yang/Editor

Reviewer:

  
\_\_\_\_\_  
Sky dong/Supervisor

Approved & Authorized Signer:

  
\_\_\_\_\_  
Liuze/Manager

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION ..... 5**

1.1. PRODUCT DESCRIPTION .....5

1.2. TABLE OF CARRIER FREQUENCIES .....6

1.3. TEST METHODOLOGY .....7

1.4.SPECIAL ACCESSORIES .....7

1.5.EQUIPMENT MODIFICATIONS .....7

1.6.ANTENNA REQUIREMENT .....7

**2. MEASUREMENT UNCERTAINTY ..... 8**

**3. DESCRIPTION OF TEST MODES ..... 9**

**4. SYSTEM TEST CONFIGURATION ..... 10**

4.1.CONFIGURATION OF TESTED SYSTEM .....10

4.2.EQUIPMENT USED IN TESTED SYSTEM.....10

4.3.SUMMARY OF TEST RESULTS .....10

**5. TEST FACILITY ..... 11**

**6. PEAK OUTPUT POWER ..... 14**

6.1. MEASUREMENT PROCEDURE ..... 14

6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....14

6.3. LIMITS AND MEASUREMENT RESULT ..... 15

**7. 6 DB BANDWIDTH ..... 17**

7.1. MEASUREMENT PROCEDURE .....17

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....17

7.3. LIMITS AND MEASUREMENT RESULTS.....17

**8. CONDUCTED SPURIOUS EMISSION..... 19**

8.1. MEASUREMENT PROCEDURE ..... 19

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....19

8.3. MEASUREMENT EQUIPMENT USED .....19

8.4. LIMITS AND MEASUREMENT RESULT ..... 19

**9. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY ..... 27**

9.1. MEASUREMENT PROCEDURE .....27

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....27

|   |           |
|---|-----------|
| 9.3. MEASUREMENT EQUIPMENT USED .....                             | 27        |
| 9.4. LIMITS AND MEASUREMENT RESULT .....                          | 27        |
| <b>10. RADIATED EMISSION .....</b>                                | <b>29</b> |
| 10.1. MEASUREMENT PROCEDURE .....                                 | 29        |
| 10.2. TEST SETUP .....  | 30        |
| 10.3. LIMITS AND MEASUREMENT RESULT .....                         | 31        |
| 10.4. TEST RESULT .....   | 31        |
| <b>11. FCC LINE CONDUCTED EMISSION TEST .....</b>                 | <b>37</b> |
| 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....                | 37        |
| 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....         | 37        |
| 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... | 38        |
| 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....       | 38        |
| 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....           | 38        |
| <b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>                | <b>41</b> |

## 1. GENERAL INFORMATION

### 1.1. PRODUCT DESCRIPTION

The EUT is designed as a “Bird Bar”. It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

|                      |   |
|----------------------|---|
| Product:             | Bird Bar  |
| Trade Name:          | BirdAI  |
| Main Model:          | BRDB01  |
| Additional Model:    | BRDB02, BRDBLX01, BRDBLX02, BRDSK03, BRDSK04, KNGL01, KNETP06   |
| Model Difference:    | All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: BRDB01. |
| FCC ID:              | 2A3RT-BRDB01  |
| Operation Frequency: | 2402MHz~2480MHz   |
| Number of Channels:  | 40CH  |
| Modulation Type:     | GFSK  |
| Antenna Type:        | Internal Antenna  |
| Antenna Gain:        | 3dBi  |
| Battery:             | N/A   |
| Adapter:             | M/N: J151-0502500UU<br>Input: AC 100-240V, 50/60Hz, 0.6A<br>Output: DC 5.0V, 2.5A   |
| Power Source:        | DC 5.0V from adapter with AC 120(240)V/60Hz   |

**1.2. TABLE OF CARRIER FREQUENCIES**

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2400~2483.5MHz | 0              | 2402 MHz  |
|                | 1              | 2404 MHz  |
|                | :              | :         |
|                | 38             | 2478 MHz  |
|                | 39             | 2480 MHz  |

### 1.3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 1.4. SPECIAL ACCESSORIES

Refer to section 5.2.

### 1.5. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

### 1.6. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the PHOTOGRAPHS OF EUT.

## 2. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 150kHz               | 2.96    |      |
|           |        | 150kHz ~ 30MHz              | 2.44    |      |

### B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 30MHz                | 2.50    |      |
|           |        | 30MHz ~ 1000MHz             | 4.80    |      |
|           |        | Above 1000MHz               | 4.13    |      |



### 3. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------|
| 1   | Low channel TX        |
| 2   | Middle channel TX     |
| 3   | High channel TX       |

Note: 1. Only the result of the worst case was recorded in the report, if no other cases.


2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

## 4. SYSTEM TEST CONFIGURATION

### 4.1.CONFIGURATION OF TESTED SYSTEM

Operation of EUT during Conducted and Radiation testing:



### 4.2.EQUIPMENT USED IN TESTED SYSTEM

| Item | Equipment | Model No. | ID or Specification | Remark |
|------|-----------|-----------|---------------------|--------|
| 1    | Bird Bar  | BRDB01    | 2A3RT-BRDB01        | EUT    |
| 2    | N/A       | N/A       | N/A                 | N/A    |
| 3    | N/A       | N/A       | N/A                 | N/A    |
| 4    | N/A       | N/A       | N/A                 | N/A    |

### 4.3.SUMMARY OF TEST RESULTS

| FCC RULES     | DESCRIPTION OF TEST                    | RESULT    |
|---------------|--|-----------|
| 15.247 (b)(3) | Peak Output Power                      | Compliant |
| 15.247 (a)(2) | 6 dB Bandwidth                         | Compliant |
| 15.247 (d)    | Conducted Spurious Emission            | Compliant |
| 15.247 (e)    | Maximum Conducted Output Power Density | Compliant |
| 15.209        | Radiated Emission                      | Compliant |
| 15.207        | Conducted Emission                     | Compliant |

## 5. TEST FACILITY

**Test Laboratory :** Shenzhen United Testing Technology Co., Ltd.  
**Address :** 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

**TEST EQUIPMENT OF RADIATED EMISSION TEST**

| Item                             | Equipment                           | Manufacturer  | Model No.      | Serial No.    | Calibrated until |
|----------------------------------|-------------------------------------|---------------|----------------|---------------|------------------|
| Conduction Emissions Measurement |                                     |               |                |               |                  |
| 1                                | Conducted Emission Test Software    | EZ-EMC        | Ver.CCS-3A1-CE | N/A           | N/A              |
| 2                                | AMN                                 | Schwarzbeck   | NNLK8121       | 8121370       | 2022.09.22       |
| 3                                | AAN                                 | TESEQ         | T8-Cat6        | 38888         | 2022.09.22       |
| 4                                | Pulse Limiter                       | CYBRTEK       | EM5010         | E115010056    | 2022.05.17       |
| 5                                | EMI Test Receiver                   | Rohde&Schwarz | ESCI           | 101210        | 2022.09.22       |
| Radiated Emissions Measurement   |                                     |               |                |               |                  |
| 1                                | Radiated Emission Test Software     | EZ-EMC        | Ver.CCS-03A1   | N/A           | N/A              |
| 2                                | Horn Antenna                        | Sunol         | DRH-118        | A101415       | 2022.09.27       |
| 3                                | Broadband Hybrid Antenna            | Sunol         | JB1            | A090215       | 2022.03.01       |
| 4                                | PREAMP                              | HP            | 8449B          | 3008A00160    | 2022.09.22       |
| 5                                | PREAMP                              | HP            | 8447D          | 2944A07999    | 2022.05.17       |
| 6                                | EMI TEST RECEIVER                   | Rohde&Schwarz | ESR3           | 101891        | 2022.09.22       |
| 7                                | VECTOR Signal Generator             | Rohde&Schwarz | SMU200A        | 101521        | 2022.09.22       |
| 8                                | Signal Generator                    | Agilent       | E4421B         | MY4335105     | 2022.09.22       |
| 9                                | MXA Signal Analyzer                 | Agilent       | N9020A         | MY50510140    | 2022.09.22       |
| 10                               | MXA Signal Analyzer                 | Keysight      | N9020A         | MY51110104    | 2022.09.22       |
| 11                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO88 | 2022.05.17       |
| 12                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO89 | 2022.05.17       |
| 13                               | RF power divider                    | Anritsu       | K241B          | 992289        | 2022.09.22       |
| 14                               | Wideband radio communication tester | Rohde&Schwarz | CMW500         | 154987        | 2022.09.22       |
| 15                               | Active Loop Antenna                 | Com-Power     | AL-130R        | 10160009      | 2022.07.25       |
| 16                               | Broadband Hybrid Antennas           | Schwarzbeck   | VULB9163       | VULB9163#958  | 2022.09.22       |
| 17                               | Horn Antenna                        | Schwarzbeck   | BBHA9120D      | 9120D-1680    | 2022.05.23       |
| 18                               | Horn Antenna                        | A-INFOMW      | LB-180400-KF   | J211060660    | 2022.09.27       |
| 19                               | Microwave Broadband Preamplifier    | Schwarzbeck   | BBV 9721       | 100472        | 2022.09.22       |
| 20                               | Signal Generator                    | Agilent       | N5183A         | MY47420153    | 2022.09.22       |
| 21                               | Spectrum Analyzer                   | Rohde&Schwarz | FSP 40         | 100501        | 2022.09.22       |
| 22                               | Power Meter                         | KEYSIGHT      | N1911A         | MY50520168    | 2022.09.22       |

|    |                 |        |         |           |            |
|----|-----------------|--------|---------|-----------|------------|
| 23 | Frequency Meter | VICTOR | VC2000  | 997406086 | 2022.09.22 |
| 24 | DC Power Source | HYELEC | HY5020E | 055161818 | 2022.09.22 |

## 6. PEAK OUTPUT POWER


### 6.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2.  $RBW \geq DTS$  bandwidth
3.  $VBW \geq 3 * RBW$ .
4.  $SPAN \geq VBW$ .
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.


### 6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

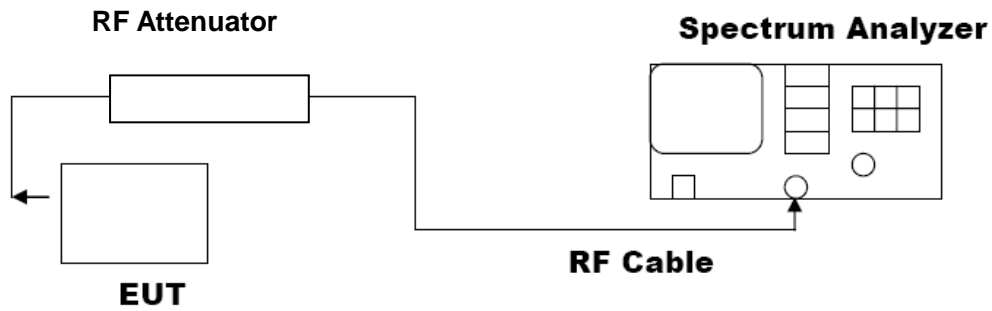


6.3. LIMITS AND MEASUREMENT RESULT

| PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION |                  |                         |              |
|---|------------------|-------------------------|--------------|
| Frequency (GHz)   | Peak Power (dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.402   | -1.051           | 30                      | Pass         |
| 2.440   | -1.194           | 30                      | Pass         |
| 2.480   | -1.650           | 30                      | Pass         |


CH0

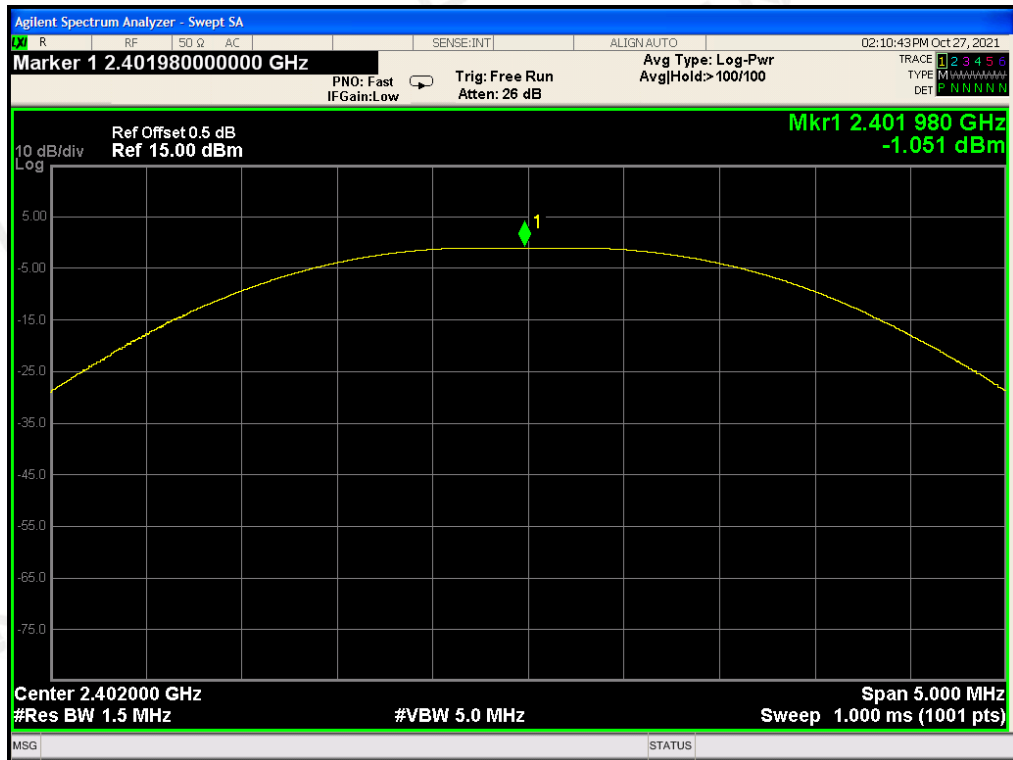

CH19

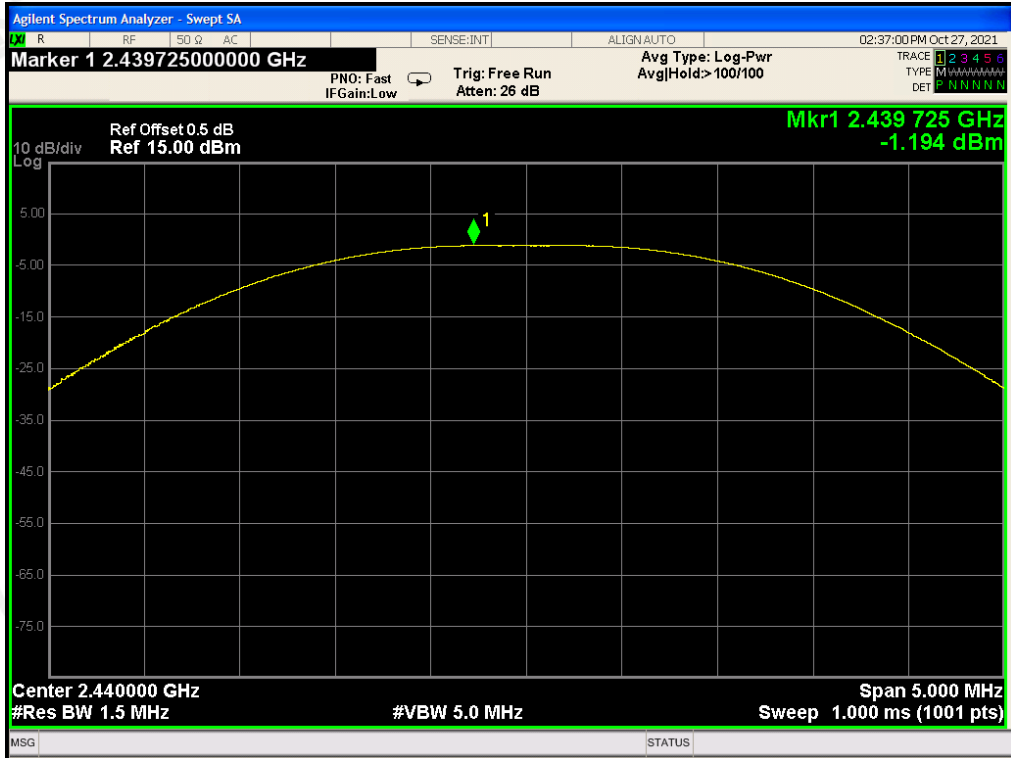

CH39

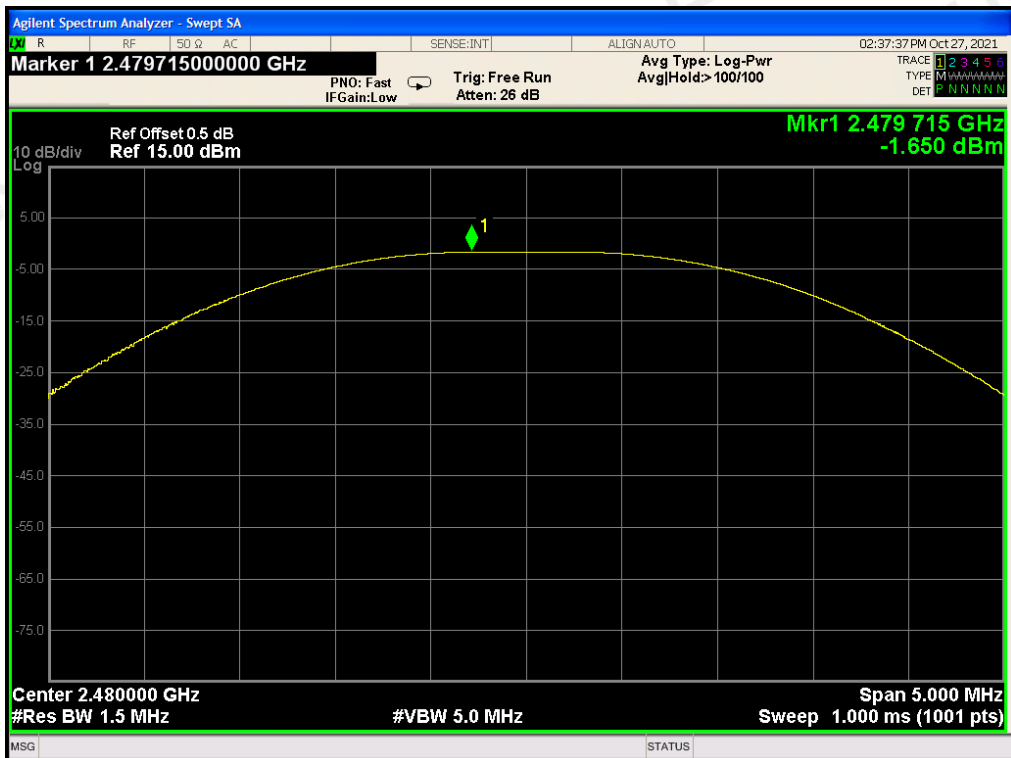



## 7. 6 DB BANDWIDTH

### 7.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz,VBW $\geq$ 3 $\times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.


### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


### 7.3. LIMITS AND MEASUREMENT RESULTS

| LIMITS AND MEASUREMENT RESULT |                   |       |          |
|-------------------------------|-------------------|-------|----------|
| Applicable Limits             | Applicable Limits |       |          |
|                               | Test Data (kHz)   |       | Criteria |
| >500KHZ                       | Low Channel       | 709.0 | PASS     |
|                               | Middle Channel    | 710.9 | PASS     |
|                               | High Channel      | 710.2 | PASS     |


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

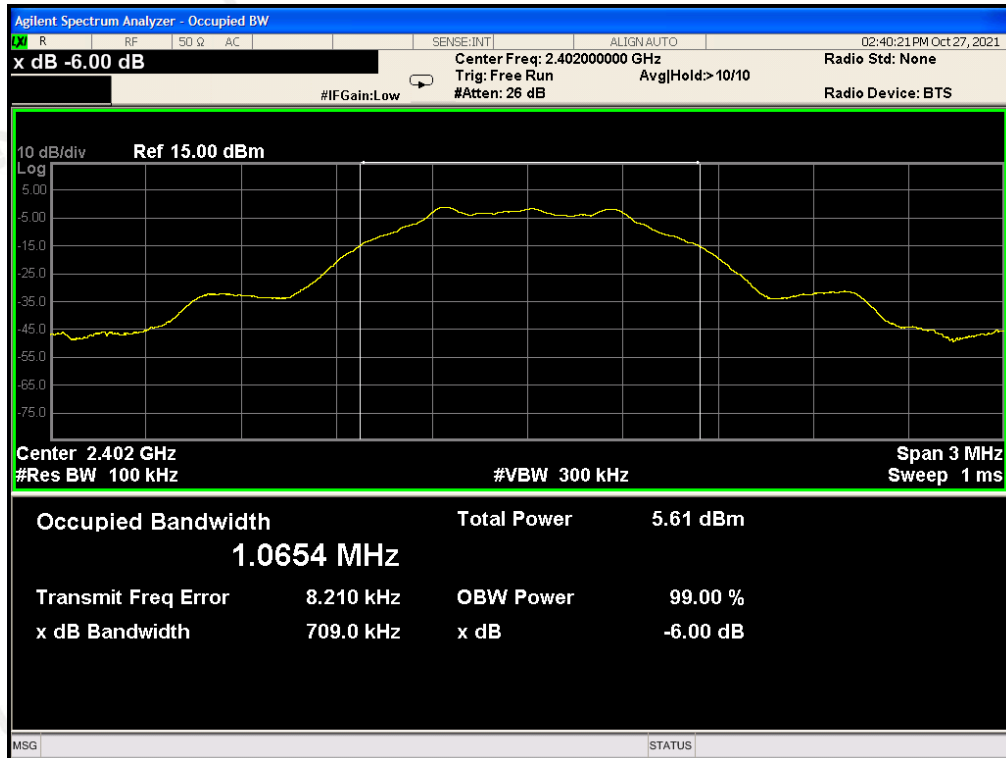

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

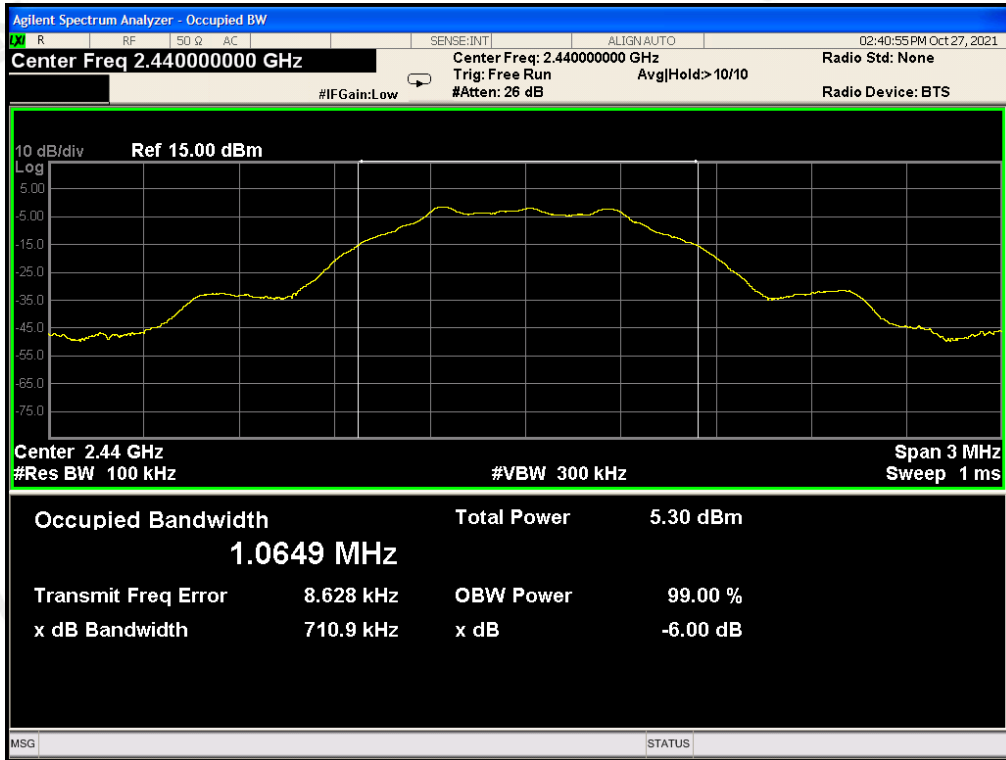

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

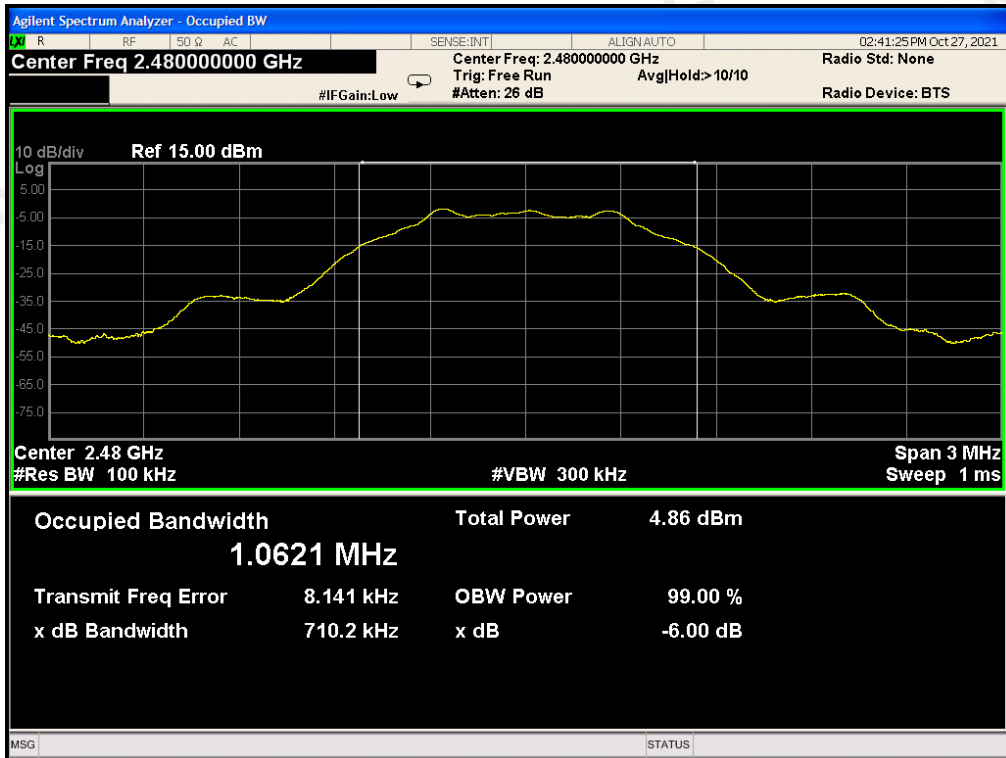

## 8. CONDUCTED SPURIOUS EMISSION

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


### 8.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.

### 8.4. LIMITS AND MEASUREMENT RESULT



| LIMITS AND MEASUREMENT RESULT  |  |          |
|--|--|----------|
| Applicable Limits  | Measurement Result                       |          |
|  | Test Data                                | Criteria |
| In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. | At least -20dBc than the reference level | PASS     |


### TEST RESULT FOR ENTIRE FREQUENCY RANGE LOW CHANNEL

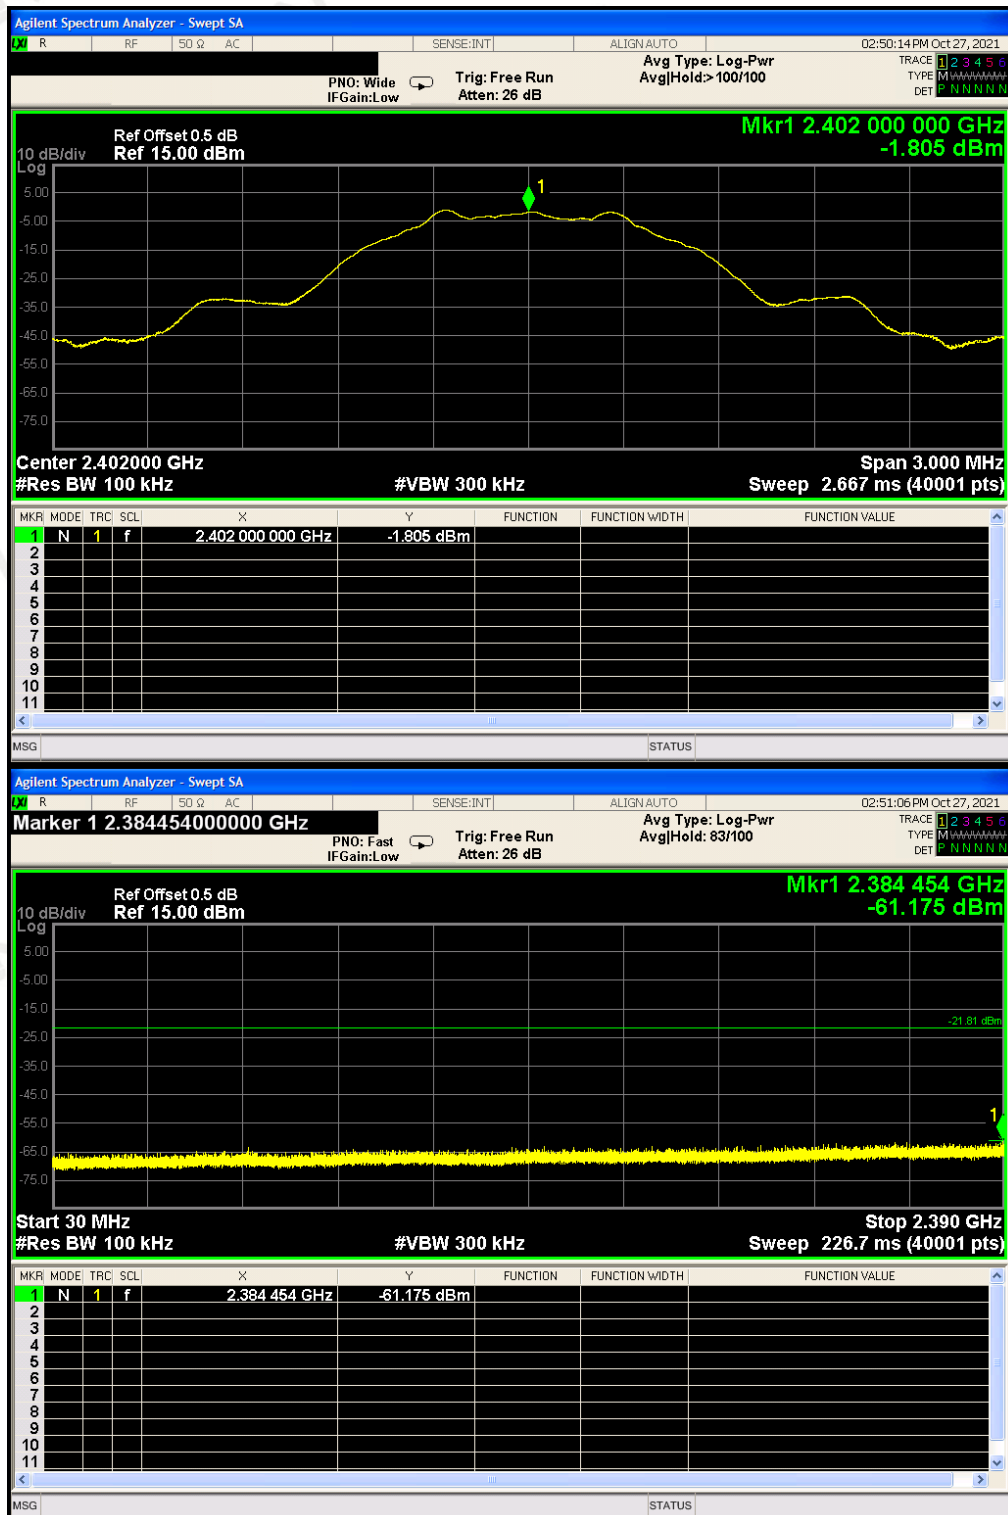

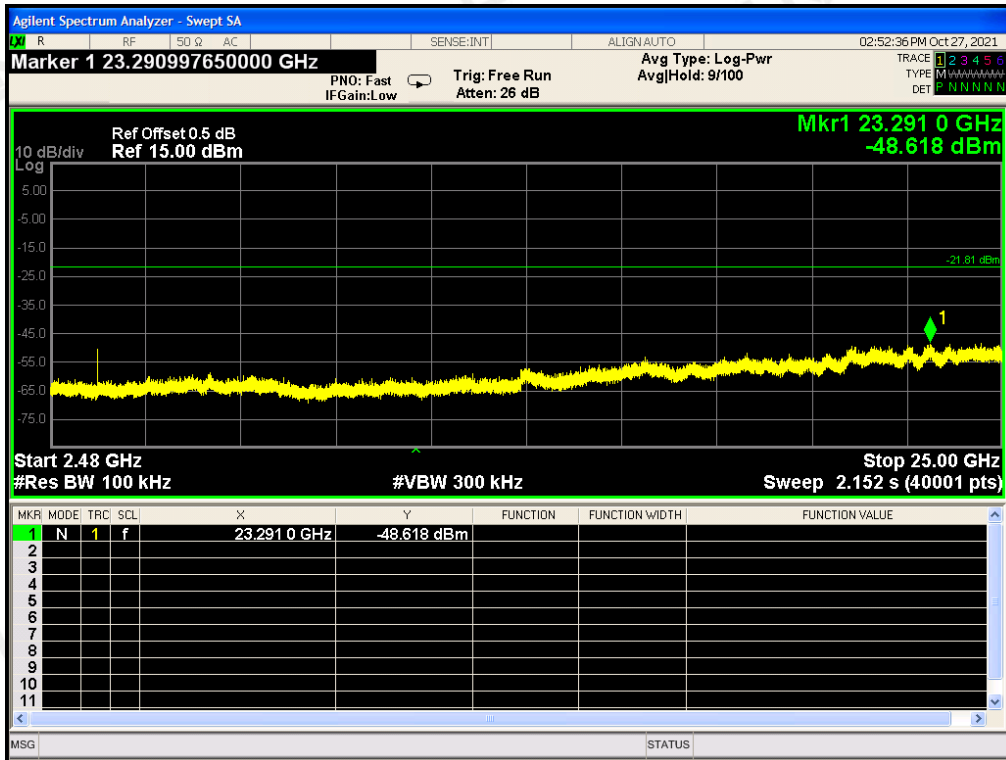


MIDDLE CHANNEL

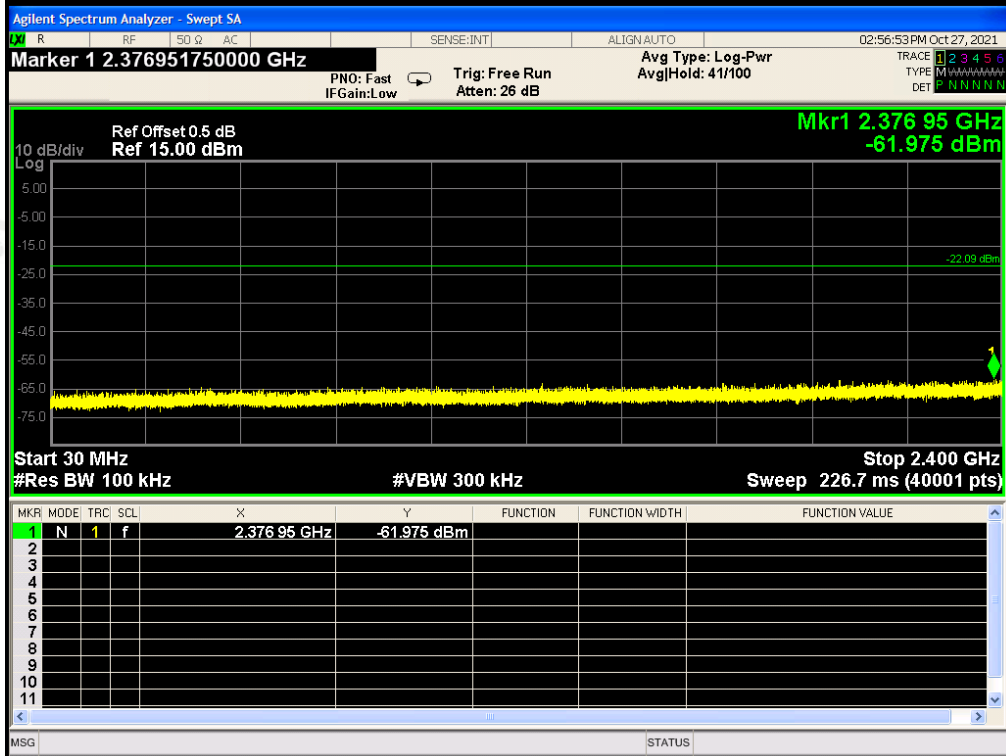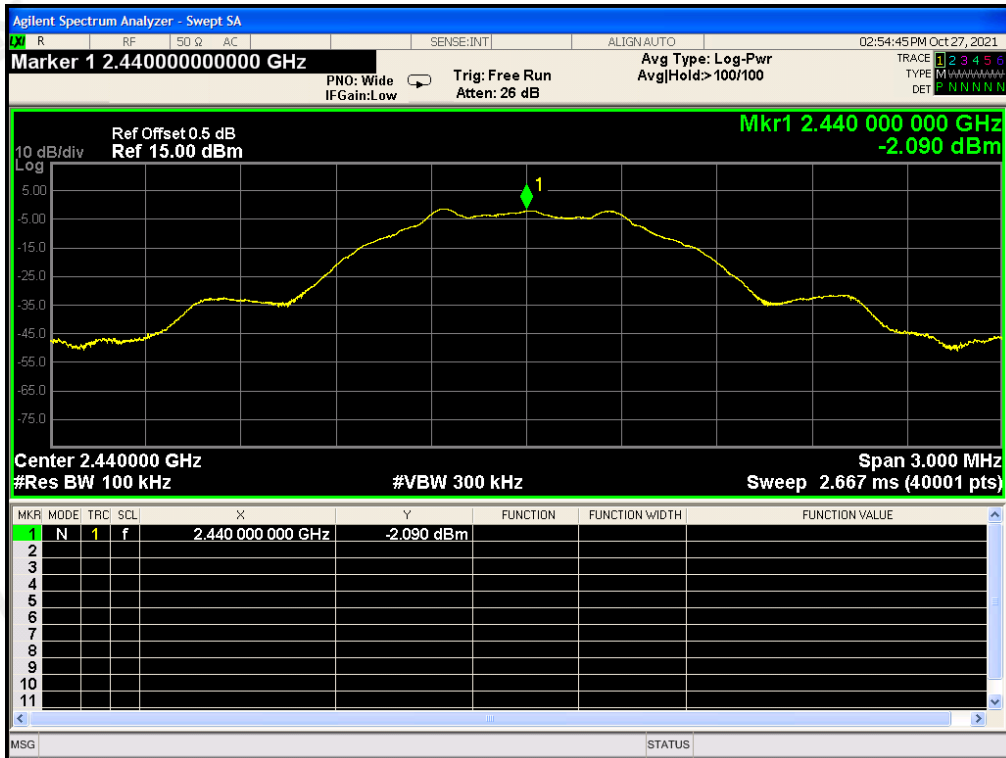


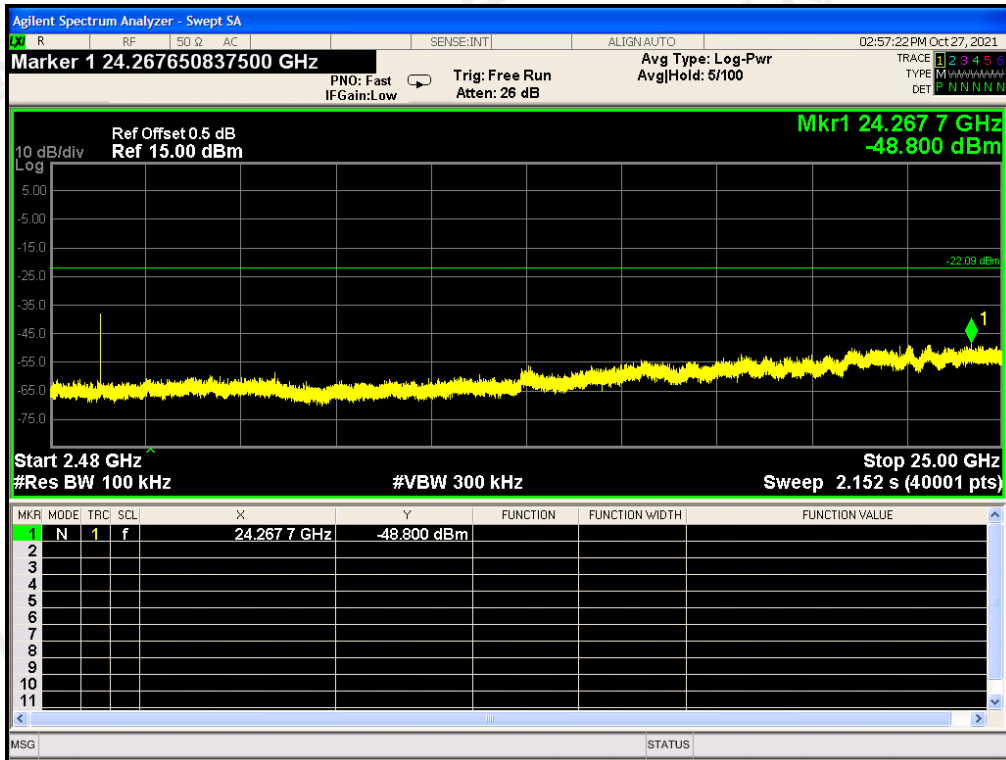


### HIGH CHANNEL

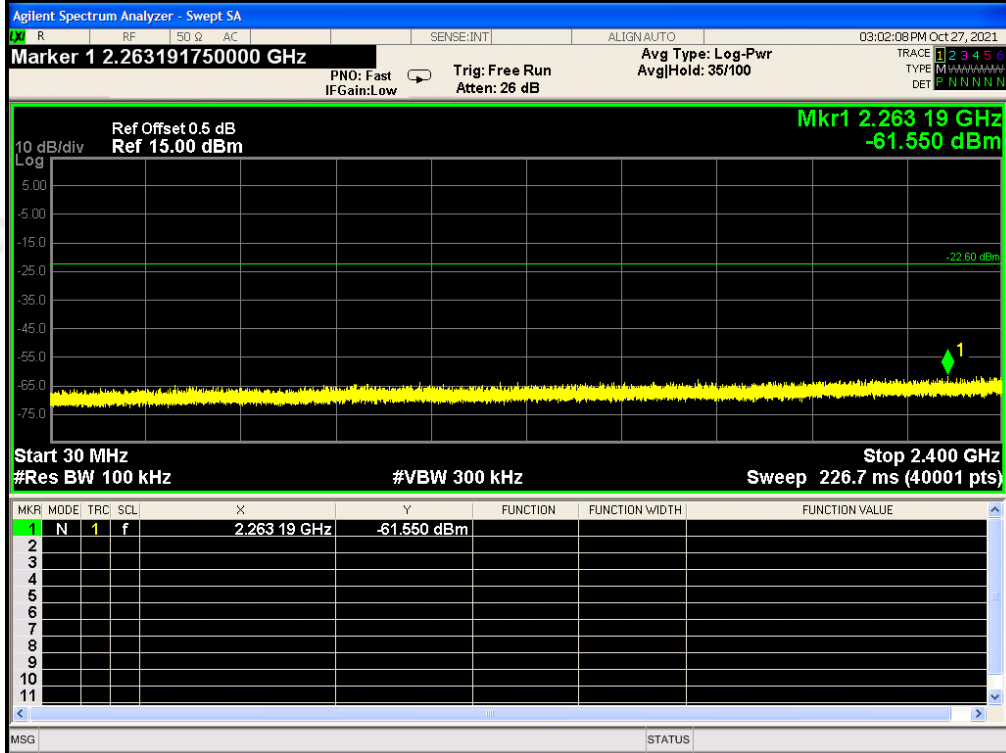




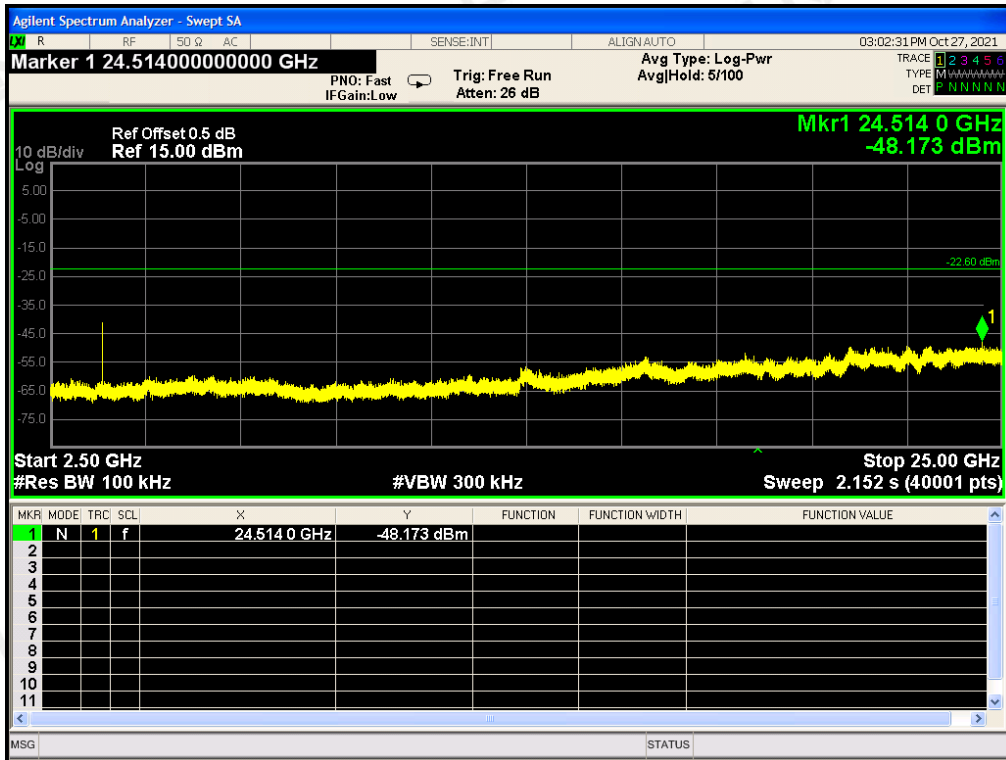

### TEST RESULT FOR BAND EDGE LOW CHANNEL

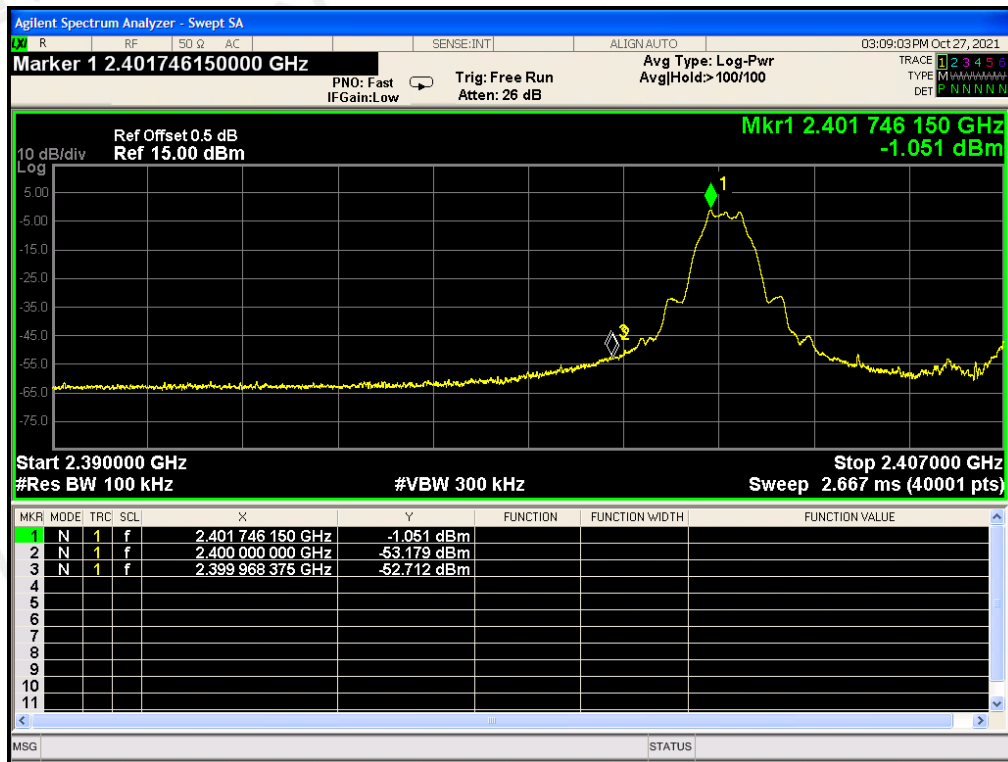

### HIGH CHANNEL

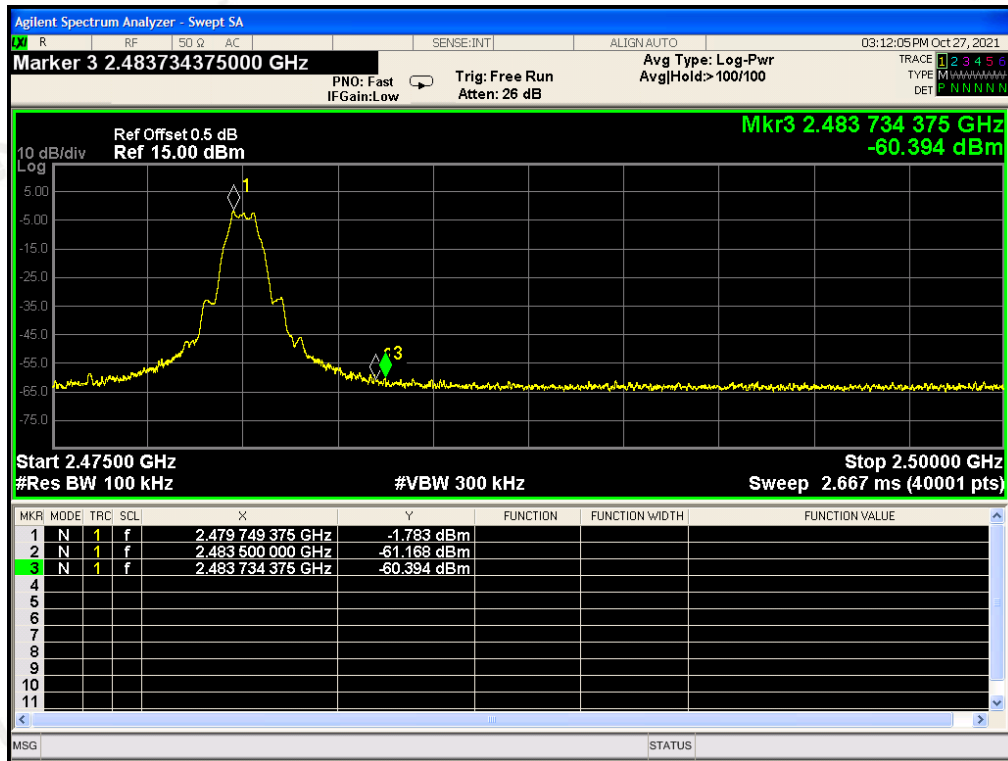

## 9. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### 9.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


### 9.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.


### 9.4. LIMITS AND MEASUREMENT RESULT

| Channel No.    | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|----------------|----------------|------------------|--------|
| Low Channel    | -16.539        | 8                | Pass   |
| Middle Channel | -16.733        | 8                | Pass   |
| High Channel   | -17.170        | 8                | Pass   |


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

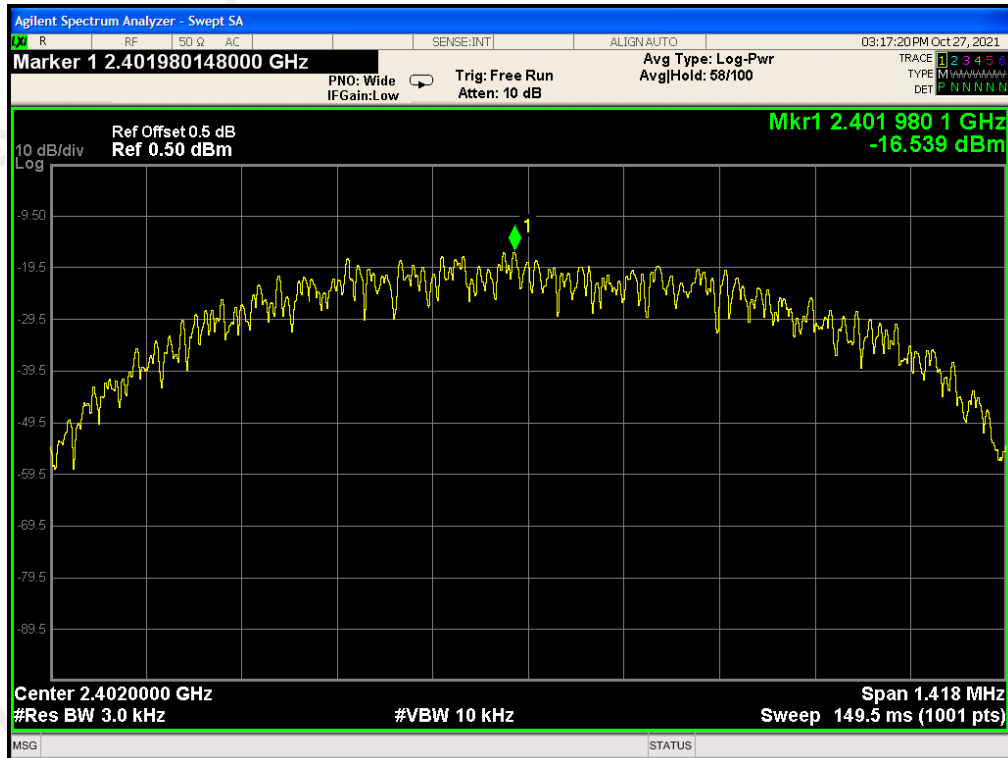

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

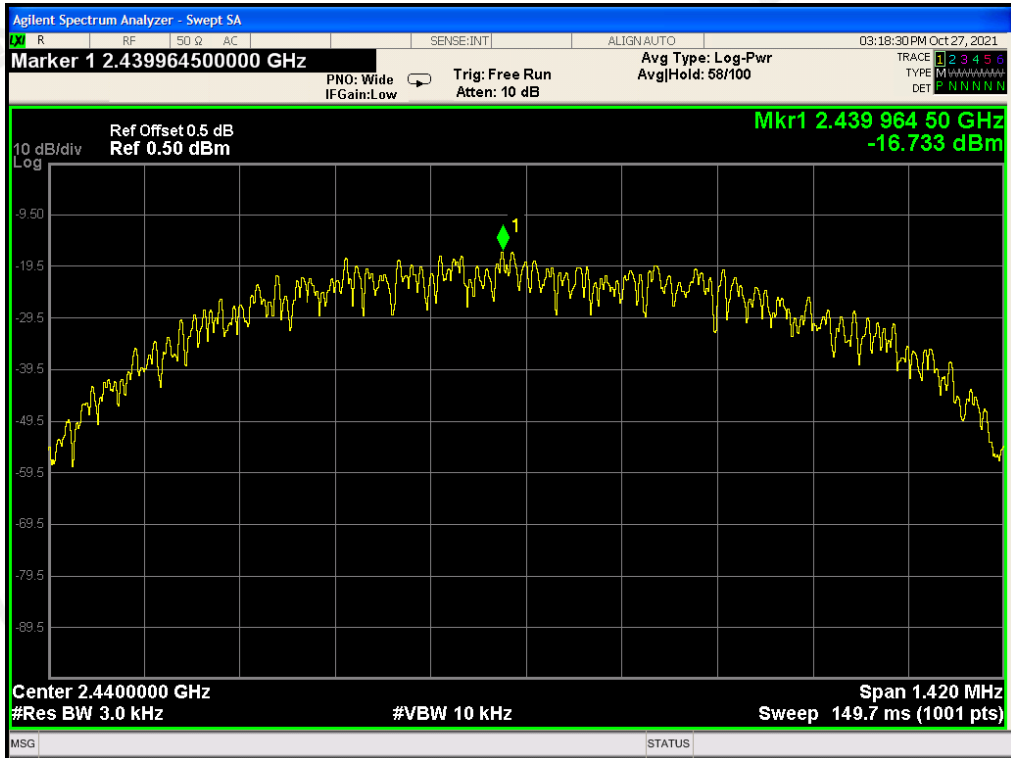

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

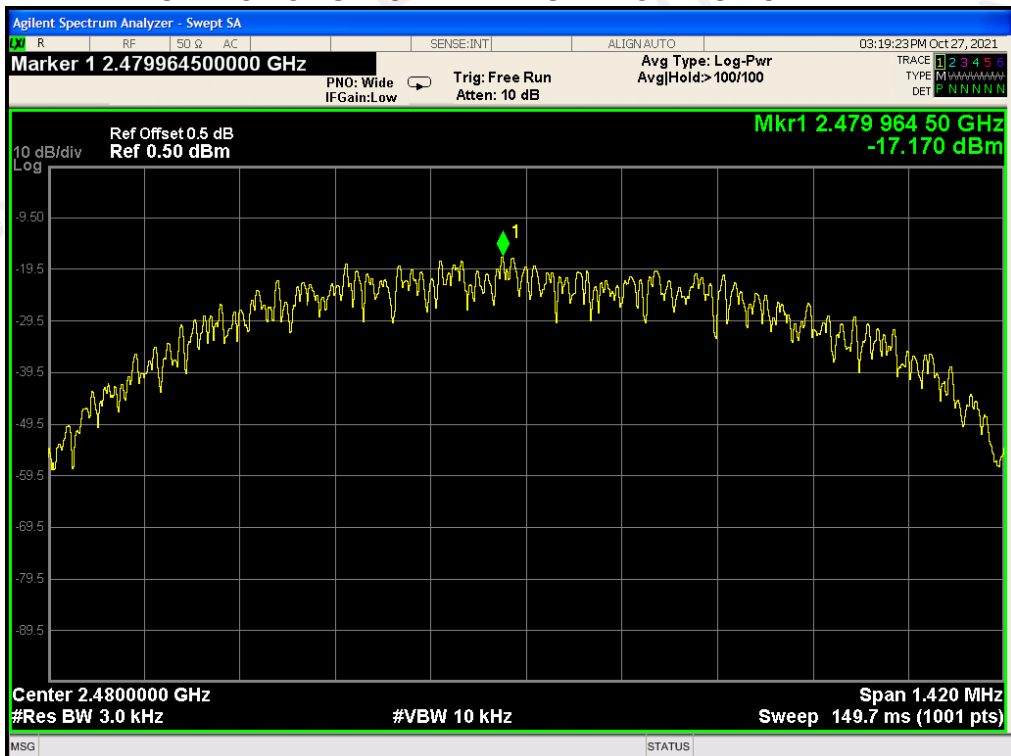


## 10. RADIATED EMISSION

### 10.1. MEASUREMENT PROCEDURE


1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

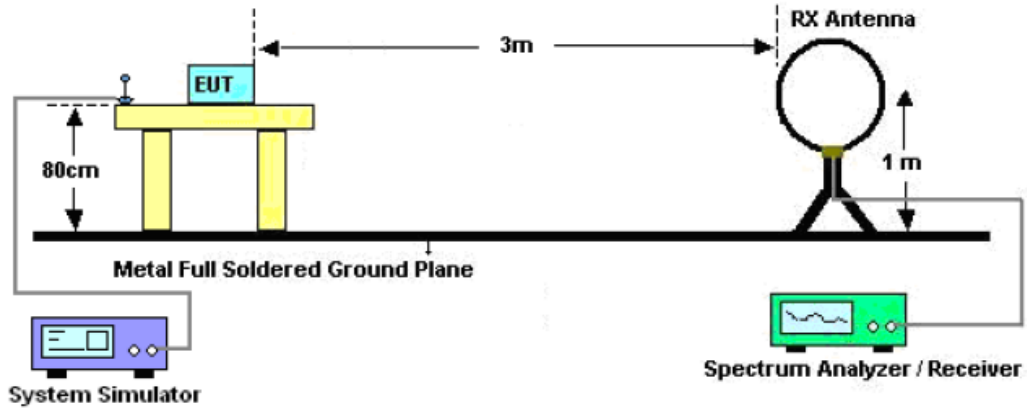

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

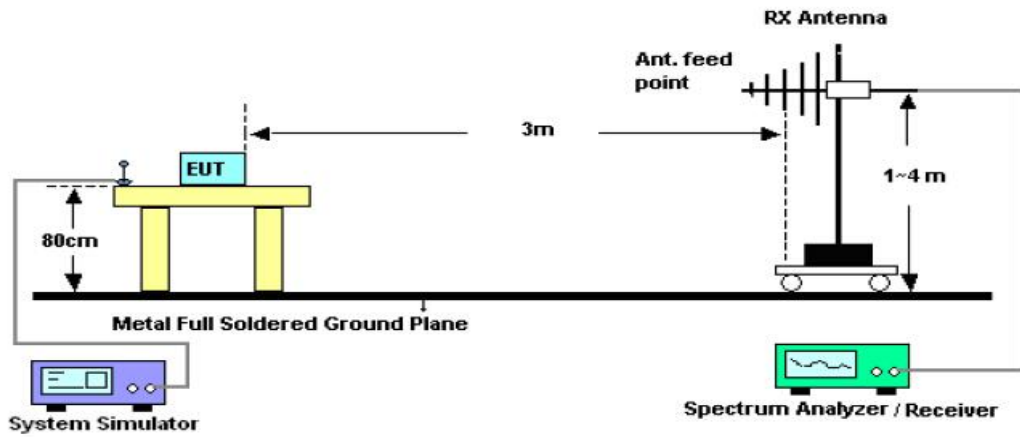

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

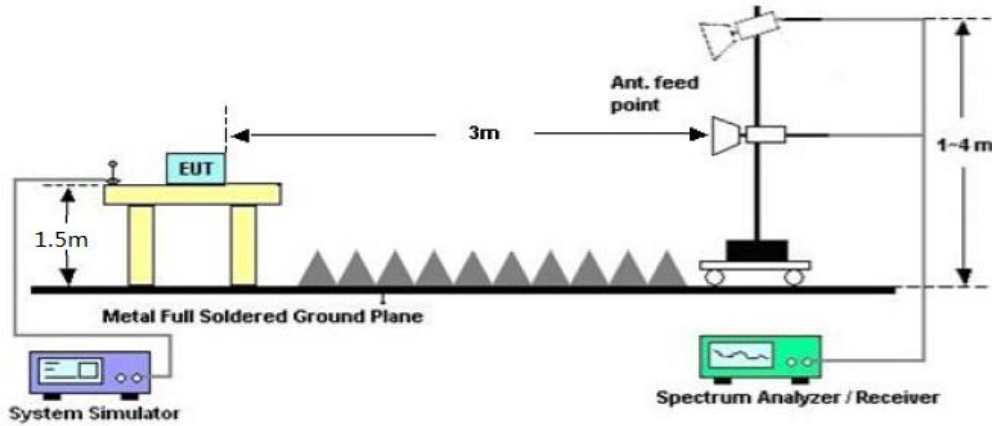

**10.3. LIMITS AND MEASUREMENT RESULT**

15.209 Limit in the below table has to be followed

| <b>Frequencies (MHz)</b> | <b>Field Strength (microvolts/meter)</b> | <b>Measurement Distance (meters)</b> |
|--------------------------|--|--------------------------------------|
| 0.009~0.490              | 2400/F(kHz)                              | 300                                  |
| 0.490~1.705              | 24000/F(kHz)                             | 30                                   |
| 1.705~30.0               | 30                                       | 30                                   |
| 30~88                    | 100                                      | 3                                    |
| 88~216                   | 150                                      | 3                                    |
| 216~960                  | 200                                      | 3                                    |
| Above 960                | 500                                      | 3                                    |

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.


**10.4. TEST RESULT**

**RADIATED EMISSION BELOW 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

**RADIATED EMISSION BELOW 1GHZ**


|               |                                   |                    |            |
|---------------|-----------------------------------|--------------------|------------|
| Temperature:  | 24°C                              | Relative Humidity: | 48%        |
| Test Date:    | Nov. 15, 2021                     | Pressure:          | 1010hPa    |
| Test Voltage: | AC 120V, 60Hz                     | Phase:             | Horizontal |
| Test Mode:    | Transmitting mode of GFSK 2402MHz |                    |            |

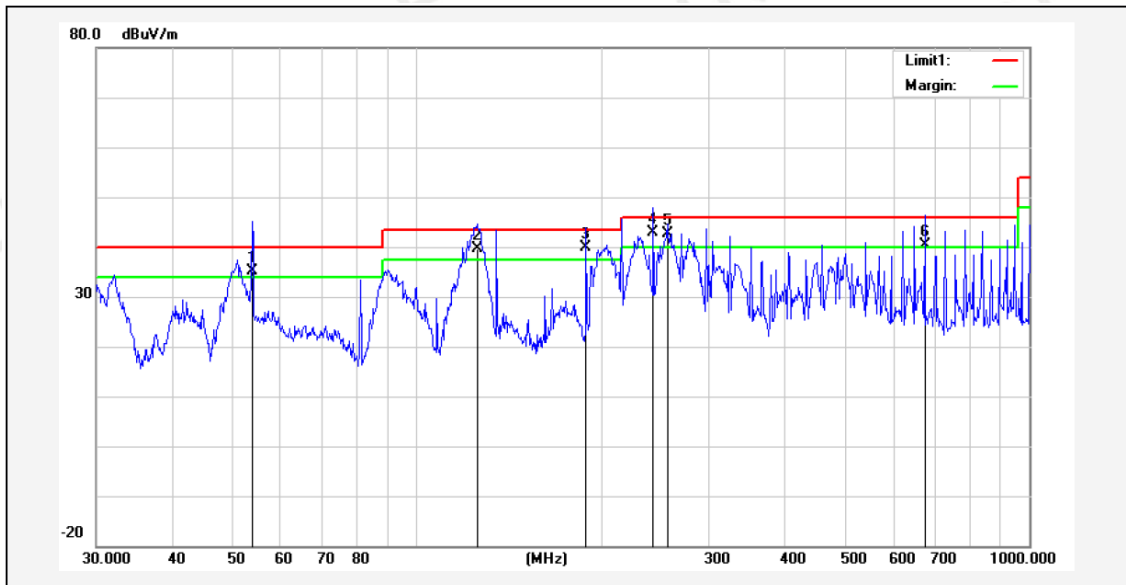

| No. | Frequency (MHz) | Reading (dBuV) | Correction factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (deg.) | Height (cm) | Remark |
|-----|-----------------|----------------|-------------------------|-----------------|----------------|-------------|---------------|-------------|--------|
| 1!  | 53.8818         | 55.35          | -20.23                  | 35.12           | 40.00          | -4.88       | 60            | 100         | QP     |
| 2!  | 125.4457        | 54.62          | -15.04                  | 39.58           | 43.50          | -3.92       | 70            | 100         | QP     |
| 3!  | 189.0743        | 56.07          | -16.26                  | 39.81           | 43.50          | -3.69       | 90            | 100         | QP     |
| 4*  | 243.3772        | 57.95          | -15.16                  | 42.79           | 46.00          | -3.21       | 120           | 100         | QP     |
| 5!  | 256.5211        | 56.99          | -14.33                  | 42.66           | 46.00          | -3.34       | 150           | 100         | QP     |
| 6!  | 675.2080        | 46.21          | -5.83                   | 40.38           | 46.00          | -5.62       | 160           | 100         | QP     |



|               |                                   |                    |          |
|---------------|-----------------------------------|--------------------|----------|
| Temperature:  | 24°C                              | Relative Humidity: | 48%      |
| Test Date:    | Nov. 15, 2021                     | Pressure:          | 1010hPa  |
| Test Voltage: | AC 120V, 60Hz                     | Phase:             | Vertical |
| Test Mode:    | Transmitting mode of GFSK 2402MHz |                    |          |

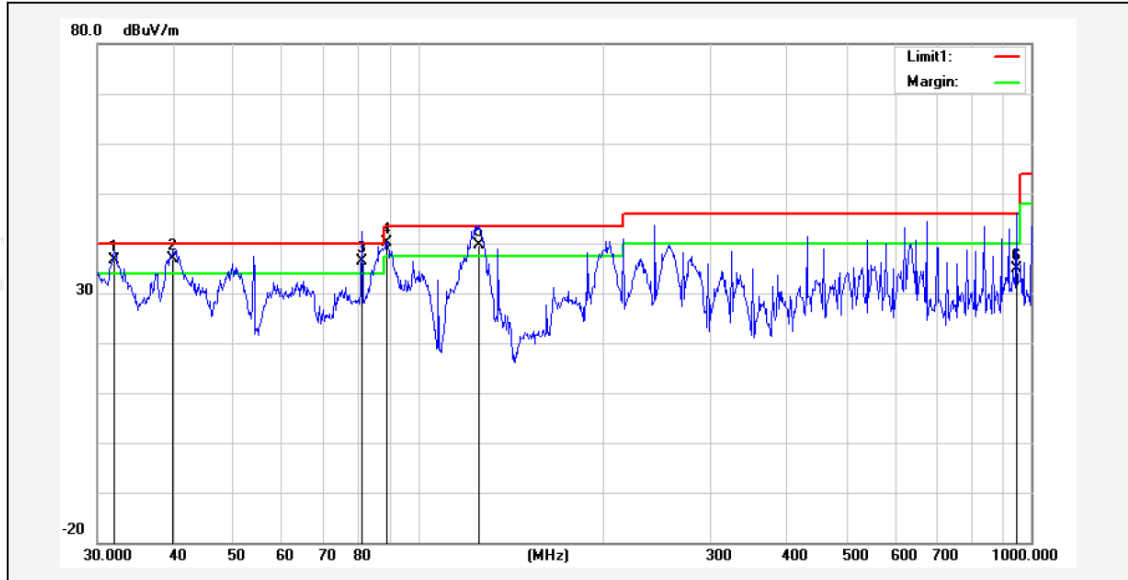

| No. | Frequency (MHz) | Reading (dBuV) | Correction factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (deg.) | Height (cm) | Remark |
|-----|-----------------|----------------|-------------------------|-----------------|----------------|-------------|---------------|-------------|--------|
| 1!  | 31.9546         | 47.66          | -10.94                  | 36.72           | 40.00          | -3.28       | 70            | 100         | QP     |
| 2*  | 39.8542         | 52.45          | -15.65                  | 36.80           | 40.00          | -3.20       | 90            | 100         | QP     |
| 3!  | 80.9275         | 56.32          | -19.91                  | 36.41           | 40.00          | -3.59       | 120           | 100         | QP     |
| 4!  | 88.9639         | 60.08          | -19.83                  | 40.25           | 43.50          | -3.25       | 150           | 100         | peak   |
| 5!  | 125.4457        | 54.69          | -15.04                  | 39.65           | 43.50          | -3.85       | 200           | 100         | QP     |
| 6   | 945.4399        | 36.74          | -1.74                   | 35.00           | 46.00          | -11.00      | 220           | 100         | QP     |

**RESULT: PASS**

**Note:**

1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.
2. All test modes had been tested. The mode of GFSK 2402MHz is the worst case and recorded in the report.

Above 1 GHz Test Results:

CH00 (2402MHz)

Horizontal:

| Frequency<br>(MHz) | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4804               | 60.20                    | -3.64          | 56.56                      | 74                 | -17.44         | PK            |
| 4804               | 49.55                    | -3.64          | 45.91                      | 54                 | -8.09          | AV            |
| 7206               | 56.81                    | -0.95          | 55.86                      | 74                 | -18.14         | PK            |
| 7206               | 46.12                    | -0.95          | 45.17                      | 54                 | -8.83          | AV            |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

| Frequency<br>(MHz) | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4804               | 60.30                    | -3.64          | 56.66                      | 74                 | -17.34         | PK            |
| 4804               | 49.67                    | -3.64          | 46.03                      | 54                 | -7.97          | AV            |
| 7206               | 56.74                    | -0.95          | 55.79                      | 74                 | -18.21         | PK            |
| 7206               | 46.24                    | -0.95          | 45.29                      | 54                 | -8.71          | AV            |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH19 (2440MHz)

Horizontal:

| Frequency<br>(MHz) | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4880               | 60.45                    | -3.51          | 56.94                      | 74                 | -17.06         | PK            |
| 4880               | 49.63                    | -3.51          | 46.12                      | 54                 | -7.88          | AV            |
| 7320               | 57.17                    | -0.82          | 56.35                      | 74                 | -17.65         | PK            |
| 7320               | 46.35                    | -0.82          | 45.53                      | 54                 | -8.47          | AV            |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

| Frequency<br>(MHz) | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4880               | 60.47                    | -3.51          | 56.96                      | 74                 | -17.04         | PK            |
| 4880               | 49.81                    | -3.51          | 46.30                      | 54                 | -7.70          | AV            |
| 7320               | 57.24                    | -0.82          | 56.42                      | 74                 | -17.58         | PK            |
| 7320               | 46.28                    | -0.82          | 45.46                      | 54                 | -8.54          | AV            |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH39 (2480MHz)

Horizontal:

| Frequency<br>(MHz) | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4960               | 59.46                    | -3.43          | 56.03                      | 74                 | -17.97         | PK            |
| 4960               | 48.95                    | -3.43          | 45.52                      | 54                 | -8.48          | AV            |
| 7440               | 56.18                    | -0.75          | 55.43                      | 74                 | -18.57         | PK            |
| 7440               | 45.93                    | -0.75          | 45.18                      | 54                 | -8.82          | AV            |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

| Frequency<br>(MHz) | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4960               | 59.50                    | -3.43          | 56.07                      | 74                 | -17.93         | PK            |
| 4960               | 48.92                    | -3.43          | 45.49                      | 54                 | -8.51          | AV            |
| 7440               | 56.25                    | -0.75          | 55.50                      | 74                 | -18.50         | PK            |
| 7440               | 45.95                    | -0.75          | 45.20                      | 54                 | -8.80          | AV            |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

**RESULT: PASS**

**Note:**

The amplitude of other spurious emissions from 1 to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

## 11. FCC LINE CONDUCTED EMISSION TEST


### 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Frequency     | Maximum RF Line Voltage |               |
|---------------|-------------------------|---------------|
|               | Q.P.( dBuV)             | Average(dBuV) |
| 150kHz~500kHz | 66-56                   | 56-46         |
| 500kHz~5MHz   | 56                      | 46            |
| 5MHz~30MHz    | 60                      | 50            |

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

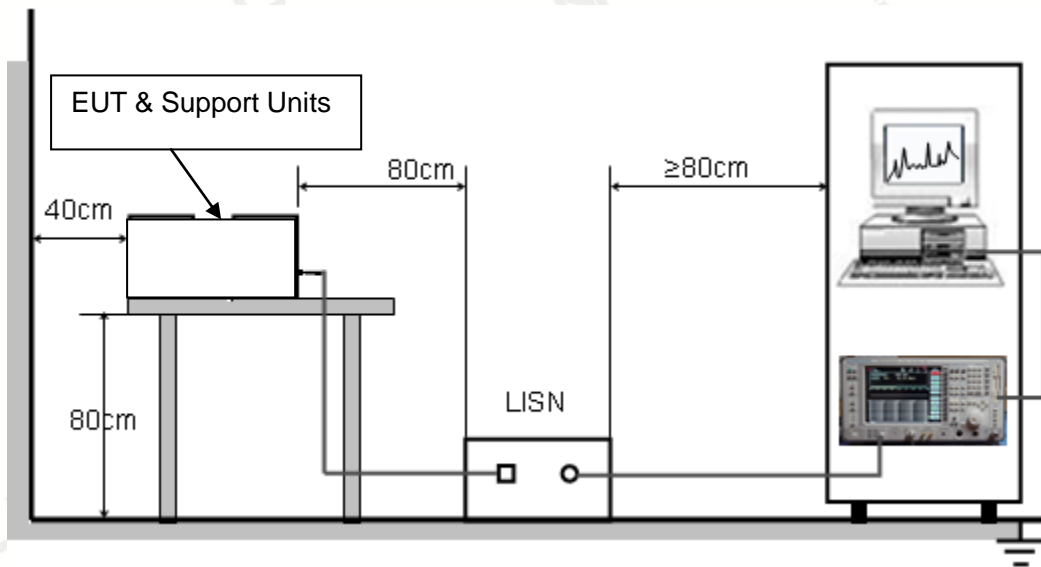

### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipment received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


### 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.


|               |                                   |                    |         |
|---------------|-----------------------------------|--------------------|---------|
| Temperature:  | 24°C                              | Relative Humidity: | 48%     |
| Test Date:    | Nov. 13, 2021                     | Pressure:          | 1010hPa |
| Test Voltage: | AC 120V, 60Hz                     | Phase:             | Line    |
| Test Mode:    | Transmitting mode of GFSK 2402MHz |                    |         |

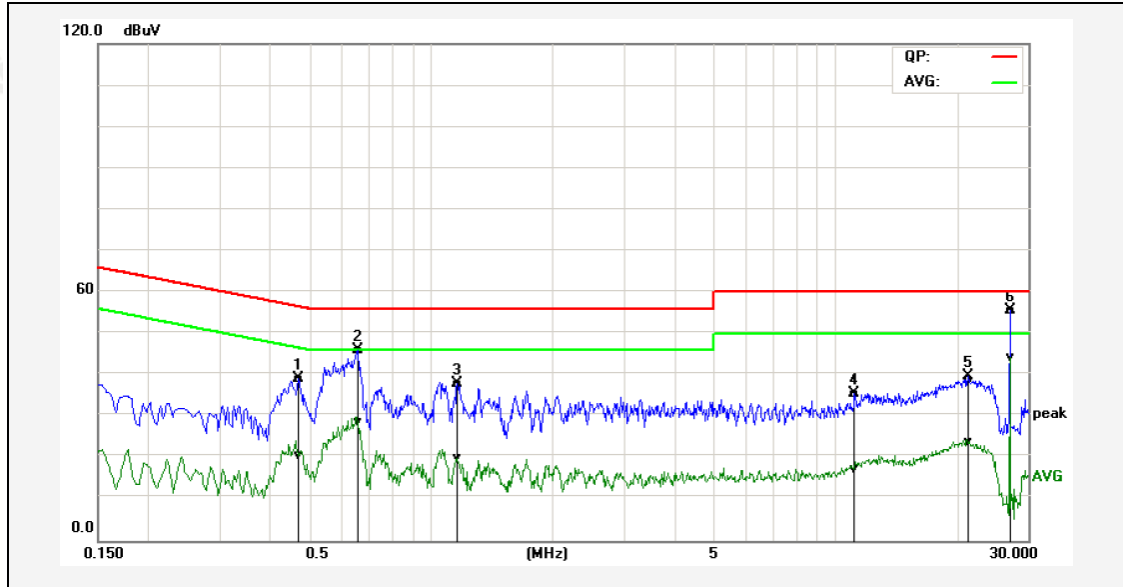

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1P  | 0.4700          | 29.25                    | 10.84                  | 9.80                   | 39.05                   | 20.64                 | 56.51                  | 46.51                | -17.46                | -25.87              | Pass   |
| 2P  | 0.6580          | 36.38                    | 18.93                  | 9.80                   | 46.18                   | 28.73                 | 56.00                  | 46.00                | -9.82                 | -17.27              | Pass   |
| 3P  | 1.1620          | 28.11                    | 10.15                  | 9.84                   | 37.95                   | 19.99                 | 56.00                  | 46.00                | -18.05                | -26.01              | Pass   |
| 4P  | 11.1500         | 25.75                    | 7.34                   | 9.93                   | 35.68                   | 17.27                 | 60.00                  | 50.00                | -24.32                | -32.73              | Pass   |
| 5P  | 21.1300         | 28.53                    | 13.49                  | 10.37                  | 38.90                   | 23.86                 | 60.00                  | 50.00                | -21.10                | -26.14              | Pass   |
| 6*  | 27.0020         | 45.01                    | 33.58                  | 10.57                  | 55.58                   | 44.15                 | 60.00                  | 50.00                | -4.42                 | -5.85               | Pass   |

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

|               |                                   |                    |         |
|---------------|-----------------------------------|--------------------|---------|
| Temperature:  | 24°C                              | Relative Humidity: | 48%     |
| Test Date:    | Nov. 13, 2021                     | Pressure:          | 1010hPa |
| Test Voltage: | AC 120V, 60Hz                     | Phase:             | Neutral |
| Test Mode:    | Transmitting mode of GFSK 2402MHz |                    |         |

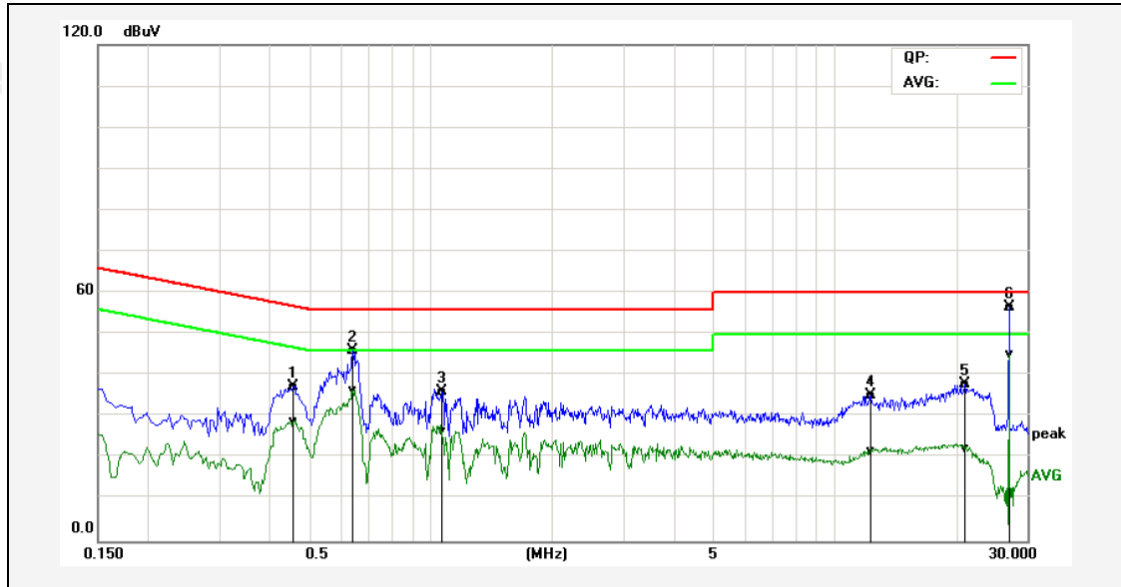

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1P  | 0.4580          | 27.59                    | 19.06                  | 9.80                   | 37.39                   | 28.86                 | 56.73                  | 46.73                | -19.34                | -17.87              | Pass   |
| 2P  | 0.6420          | 36.25                    | 26.73                  | 9.80                   | 46.05                   | 36.53                 | 56.00                  | 46.00                | -9.95                 | -9.47               | Pass   |
| 3P  | 1.0660          | 26.16                    | 16.69                  | 9.85                   | 36.01                   | 26.54                 | 56.00                  | 46.00                | -19.99                | -19.46              | Pass   |
| 4P  | 12.2900         | 25.43                    | 11.68                  | 9.95                   | 35.38                   | 21.63                 | 60.00                  | 50.00                | -24.62                | -28.37              | Pass   |
| 5P  | 21.1340         | 27.66                    | 11.90                  | 10.37                  | 38.03                   | 22.27                 | 60.00                  | 50.00                | -21.97                | -27.73              | Pass   |
| 6*  | 26.9980         | 46.01                    | 34.69                  | 10.57                  | 56.58                   | 45.26                 | 60.00                  | 50.00                | -3.42                 | -4.74               | Pass   |

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.



**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

**FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ**



**FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ**



FCC LINE CONDUCTED EMISSION TEST SETUP



----END OF REPORT----