

SAFETY INFORMATION

- IMPORTANT:** Read all safety precautions and installations carefully before installing or servicing this fixture.
- 5.5 ft power cord with plug, link up to 6 shoplight together.
 - Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
 - Assure that the fixture is mounted onto a structurally sound surface that will support the fixture.
 - The fixture is designed for use in a 120 VAC, 60Hz fused circuit. Do not use on a dimming circuit.
 - Do not look into the lights.
 - Product is intended for use in garages, basements, work areas, utility rooms and recreation rooms.
 - Maximum distance to the receptacle is determined by the length of the cord provided. (5.5ft, 3-prong, 120V grounded plug included)
 - Includes a protective sleeve, such as 0.010-inch (0.25-mm) thick fiberglass, where the path of cord travel to the ceiling-mounted receptacle is not between the two supporting chains.
 - The fixture is intended to be installed directly beneath a ceiling-mounted receptacle. Excess cord should be secured to one of the supporting chains with a cable tie to keep it out of the work space.
 - Use hook to support chain, not the electrical cord.
 - Do not install on radiant-heating type ceiling.

WARNING: Failure to comply with these instructions could result in a potentially fatal electric shock and/or property damage.

PRE-INSTALLATION

PLANNING INSTALLATION

- Carefully remove the fixture from the carton and check to make sure that all hardware is included.
- Be careful not to misplace any of the hardware needed for installing the fixture. If all hardware is not included, call customer service number.

HARDWARE INCLUDED



AA: 13.4 in. Hanging Chain (2)
Maximum Weight: 7 kgs.



BB: “S” Hook (4)
24 mm x 21 mm x 2 mm



CC: Ceiling Hook (2)
3.0 mm x 54.5 mm x 15.6 mm



EE: Audio cable (1)
Length 1.5m

INSTALLATION

NOTE: The unit is intended to be installed directly beneath a ceiling-mounted receptacle. If there is excess cord, bind with string or a cable tie to keep it out of work space.


ATTACH THE CEILING HOOKS

Choose desired location of light fixture making sure it is within reach of an outlet. Use a pencil to place a mark on the ceiling where each ceiling hook (Part CC) should go. Screw hooks in place until secure.




ATTACH THE “S” HOOKS

Insert the “S” hooks (Part BB) into each of the holes on both sides of the shop Light. (Figure 1)

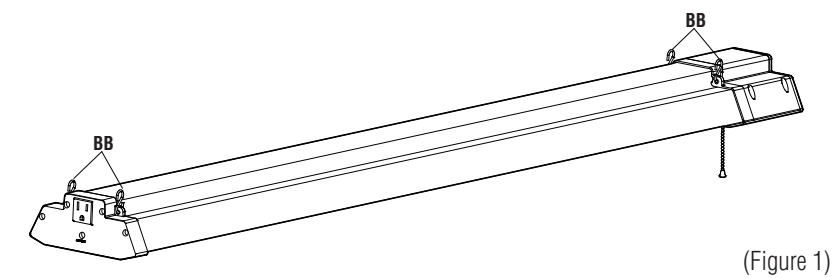


ATTACH THE HANGING CHAIN

1. Using hanging chains (Part AA) attach to the “S” hooks (Part BB) previously attached to each side of the light fixture. (Figure 2)
- NOTE:** The hanging chain must be bent in half in order to attach each side to an “S” hook.
2. Attach the center of each hanging chain to the ceiling hooks (Part CC) previously attached.
3. Determine whether a single or multiple units are to be installed. If multiple units will be installed follow steps in **CONNECTION OPTIONS** section. Connect lights per instructions and repeat steps 1-2 (under Attach the Hanging Chain) for each light connected.
4. Plug power cord into an outlet to use pull chain to power on.

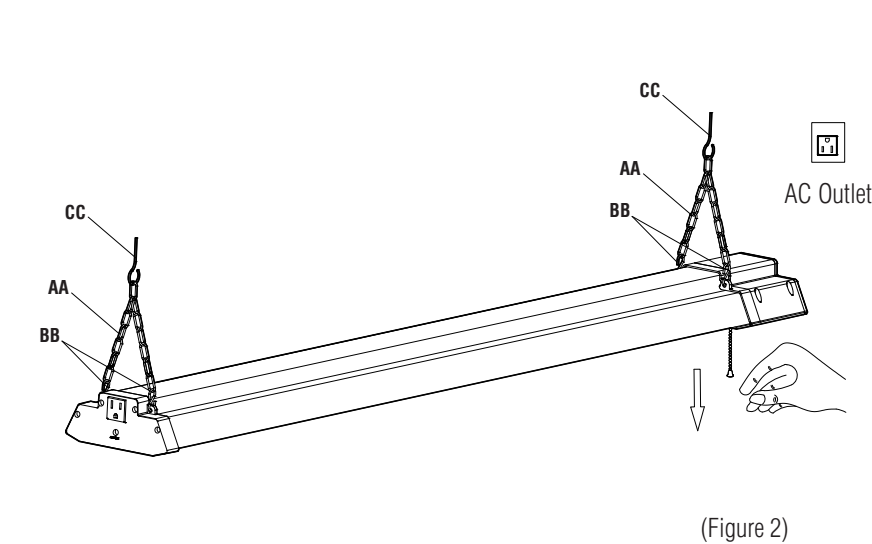

HOW TO OPERATE BLUETOOTH SPEAKER:

1. Bluetooth Speaker will enter pairing mode when you turn on the light. Activate bluetooth on your device and find device named BT0450DS0810. Press to pair.
2. The Bluetooth Speaker will turn off when the light is turned off.

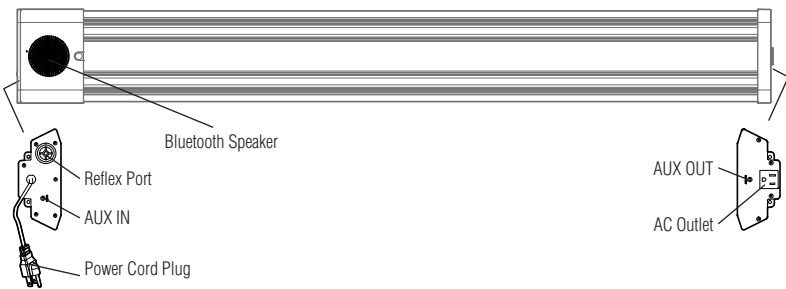

For better operation, the distance between Bluetooth device and the shop light had better less than 65.6 ft (20m) (It depends on the Bluetooth device and the environment).



CONNECTION OPTIONS

NOTE: A maximum of 6 lights can be connected off of a single circuit.

LINKING CABLE

1. Up to 6 units can be connected using the 5.5 ft power cord. Once installed, plug the power cord into the end of linked shop light and repeat up to 5 times.
2. To link the audio in up to 6 shop lights connect the audio cable (Part EE) from the aux out on first shop light and then into the aux in on second shop light. Repeat for up to 6 lights.

NOTE: When linking shop lights, you should pair your Bluetooth with the first one in the linking chain, then connect all linked lights with provided aux cables. Only 1 light will be able to paired from a single device.

