




Appendix B

RF Test Data for 5.2G WIFI (Conducted Measurement)

Product Name: WiFi Range Extender

Test Model: RE1800

Environmental Conditions

Temperature:	23.5 ° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	 Kay Hu
Supervised by:	 Li Huan




B.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	20.071	0.5	Pass
NVNT	a	5200	Ant0	20.127	0.5	Pass
NVNT	a	5240	Ant0	19.935	0.5	Pass
NVNT	n20	5180	Ant0	20.393	0.5	Pass
NVNT	n20	5200	Ant0	20.477	0.5	Pass
NVNT	n20	5240	Ant0	20.417	0.5	Pass
NVNT	n40	5190	Ant0	39.462	0.5	Pass
NVNT	n40	5230	Ant0	39.539	0.5	Pass
NVNT	ac20	5180	Ant0	20.544	0.5	Pass
NVNT	ac20	5200	Ant0	20.401	0.5	Pass
NVNT	ac20	5240	Ant0	20.337	0.5	Pass
NVNT	ac40	5190	Ant0	39.53	0.5	Pass
NVNT	ac40	5230	Ant0	39.351	0.5	Pass
NVNT	ac80	5210	Ant0	79.126	0.5	Pass
NVNT	ax20	5180	Ant0	23.056	0.5	Pass
NVNT	ax20	5200	Ant0	22.806	0.5	Pass
NVNT	ax20	5240	Ant0	19.84	0.5	Pass
NVNT	ax40	5190	Ant0	39.238	0.5	Pass
NVNT	ax40	5230	Ant0	39.117	0.5	Pass
NVNT	ax80	5210	Ant0	79.783	0.5	Pass




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

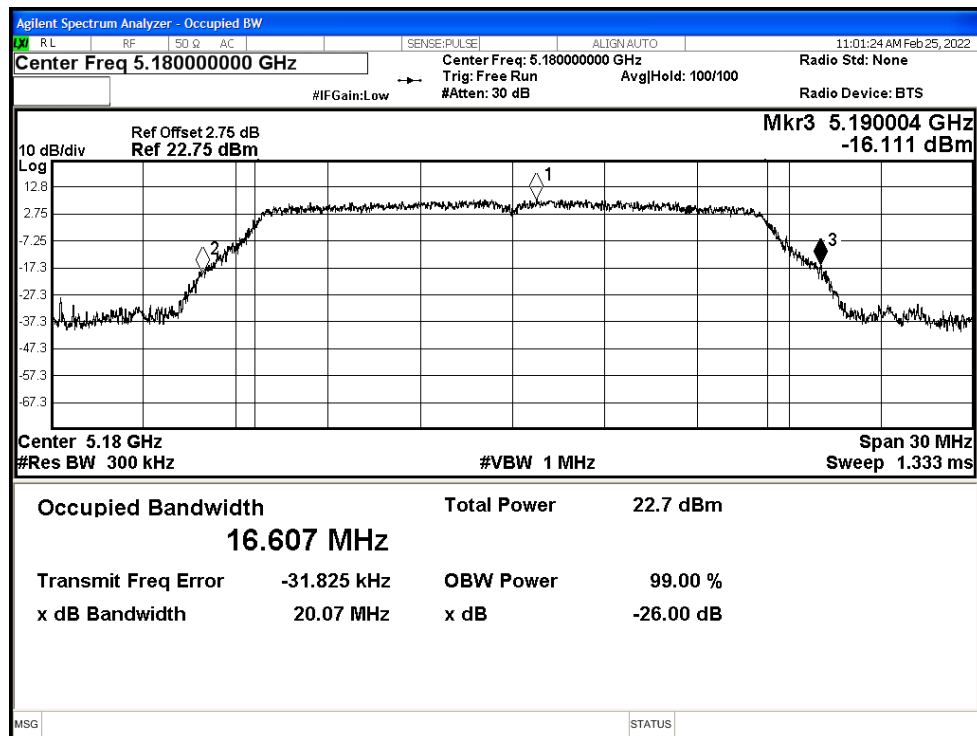

-26dB Bandwidth NVNT a 5200MHz Ant0

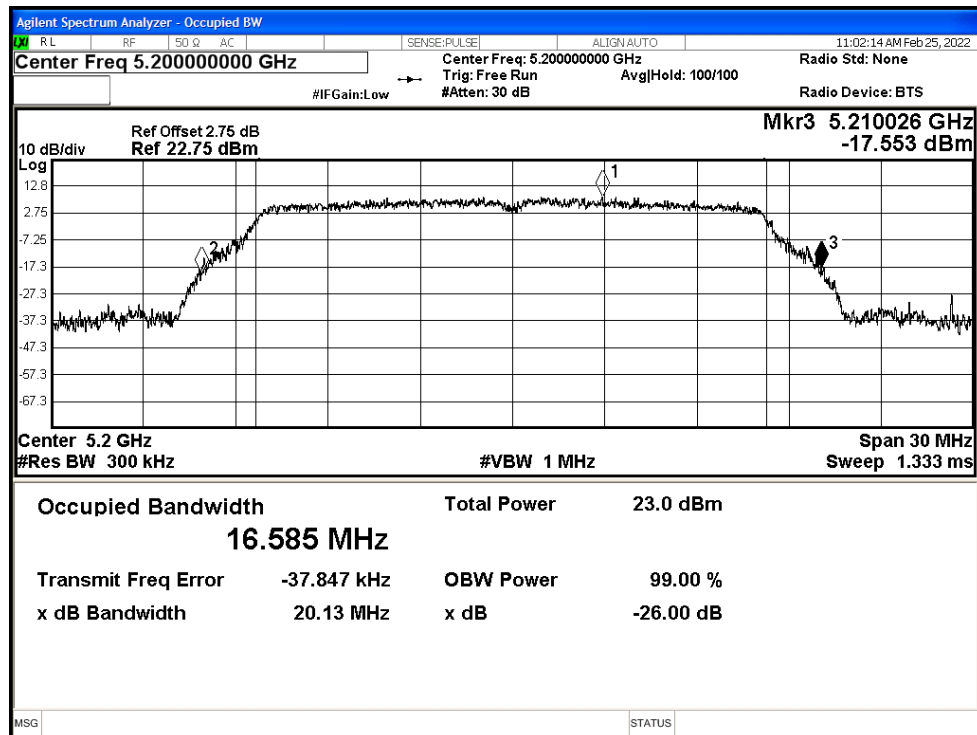



-26dB Bandwidth NVNT a 5240MHz Ant0




-26dB Bandwidth NVNT n20 5180MHz Ant0







-26dB Bandwidth NVNT n20 5200MHz Ant0

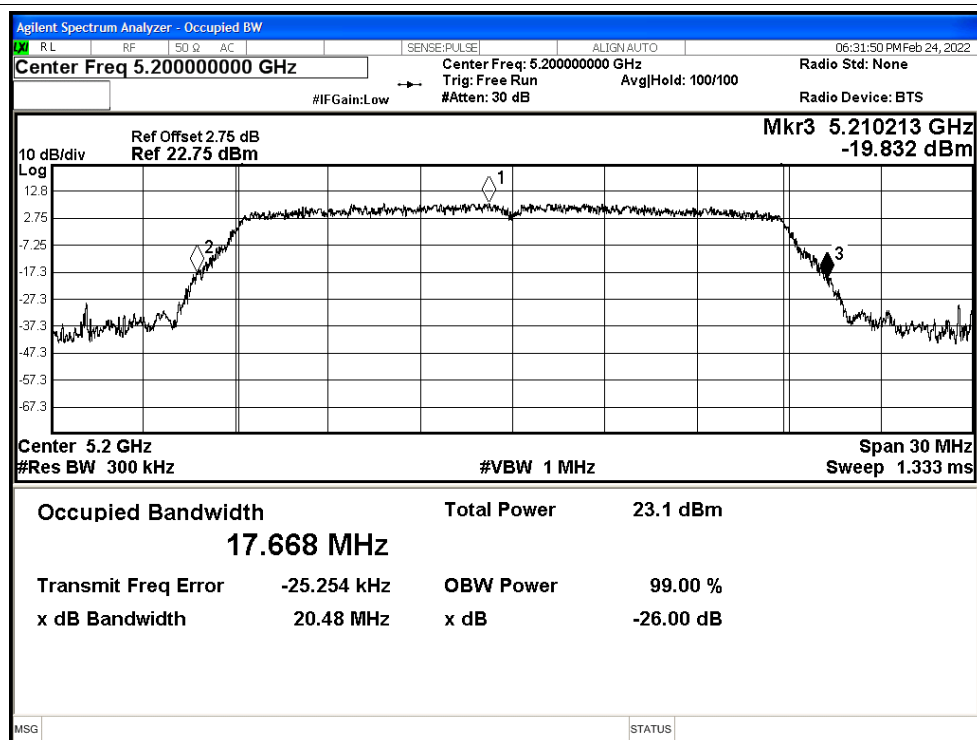


-26dB Bandwidth NVNT n20 5240MHz Ant0

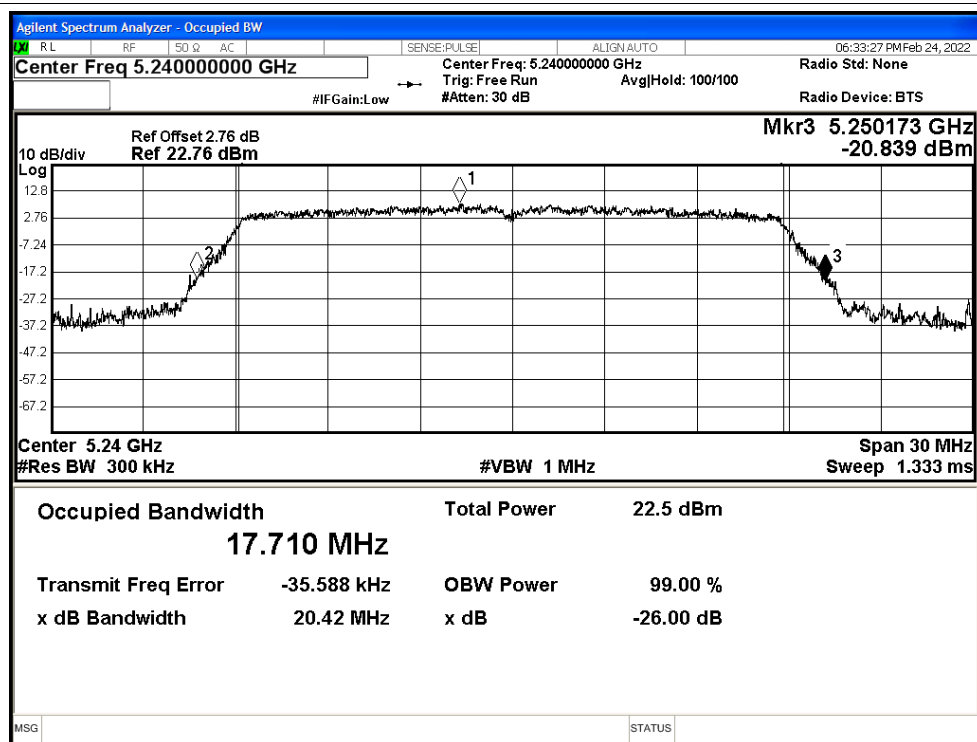

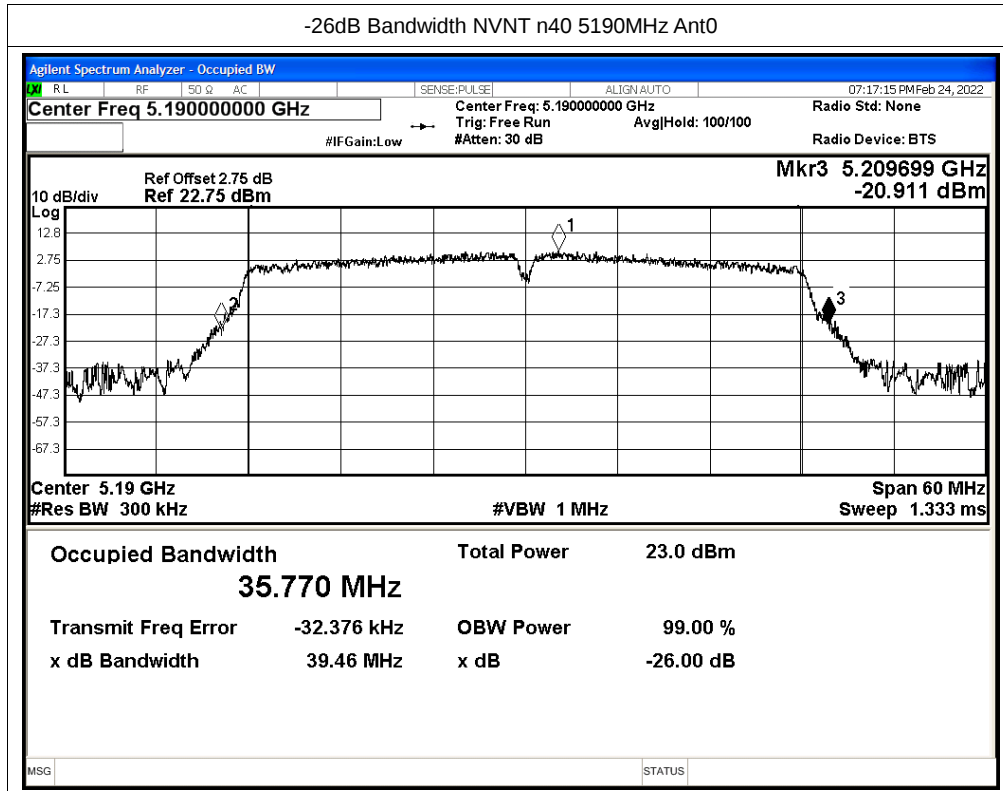



-26dB Bandwidth NVNT n40 5230MHz Ant0

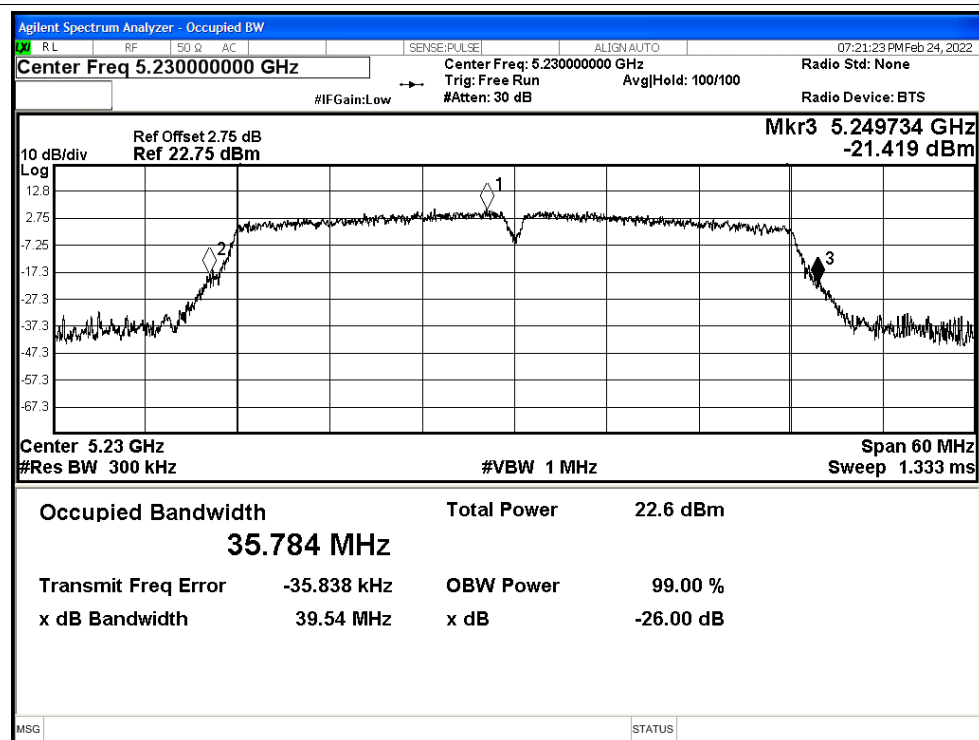


-26dB Bandwidth NVNT ac20 5180MHz Ant0





-26dB Bandwidth NVNT ac20 5200MHz Ant0

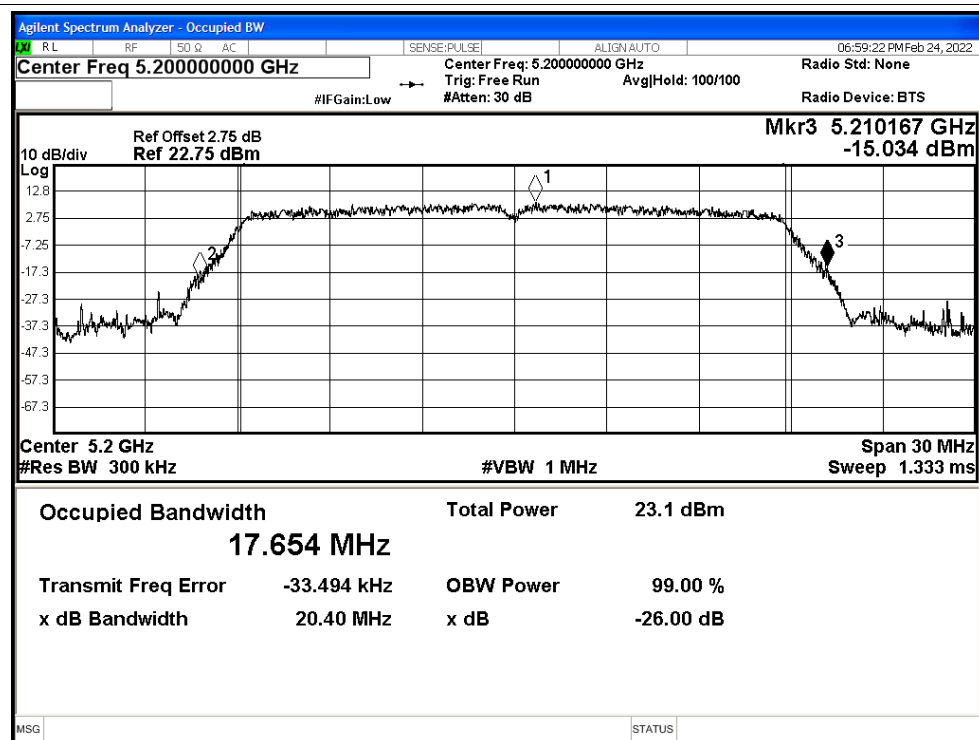


-26dB Bandwidth NVNT ac20 5240MHz Ant0







-26dB Bandwidth NVNT ac40 5190MHz Ant0

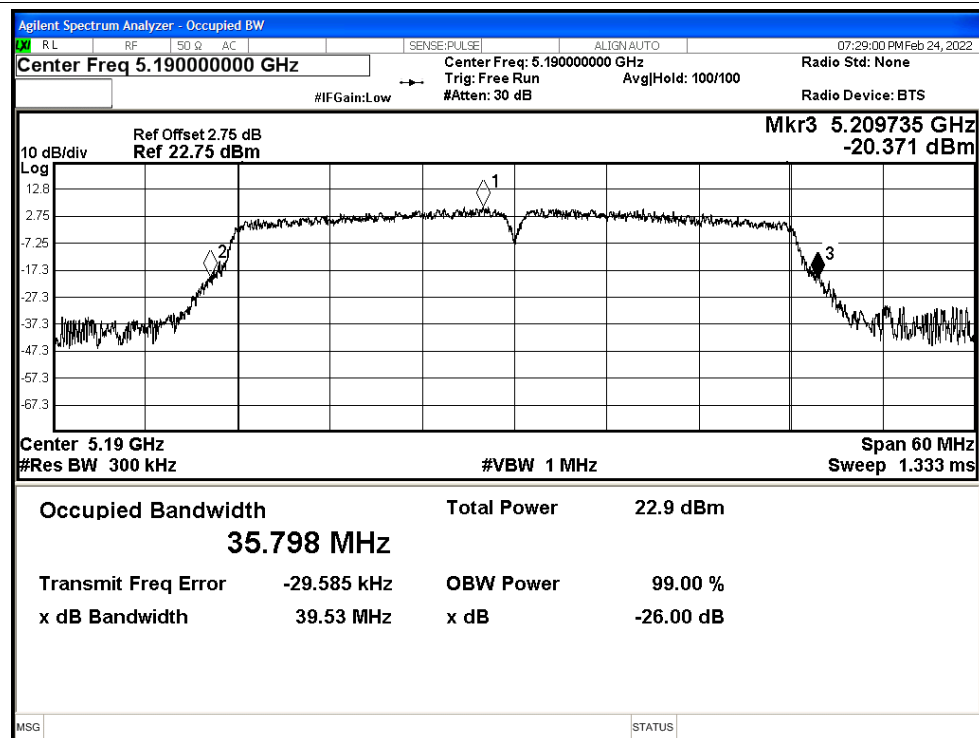


-26dB Bandwidth NVNT ac40 5230MHz Ant0

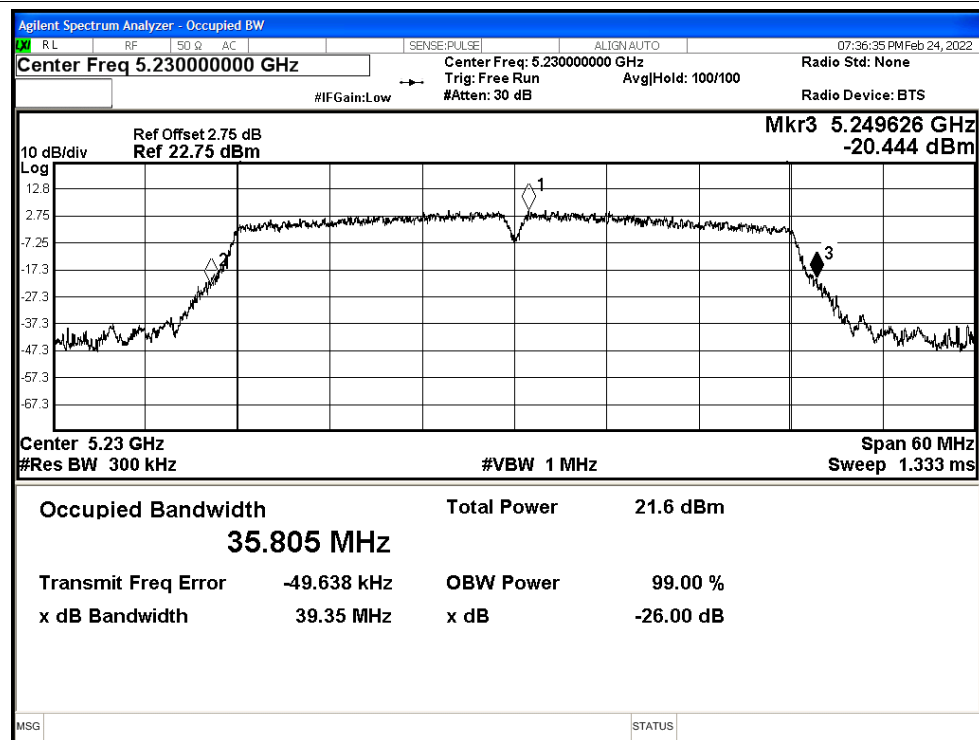

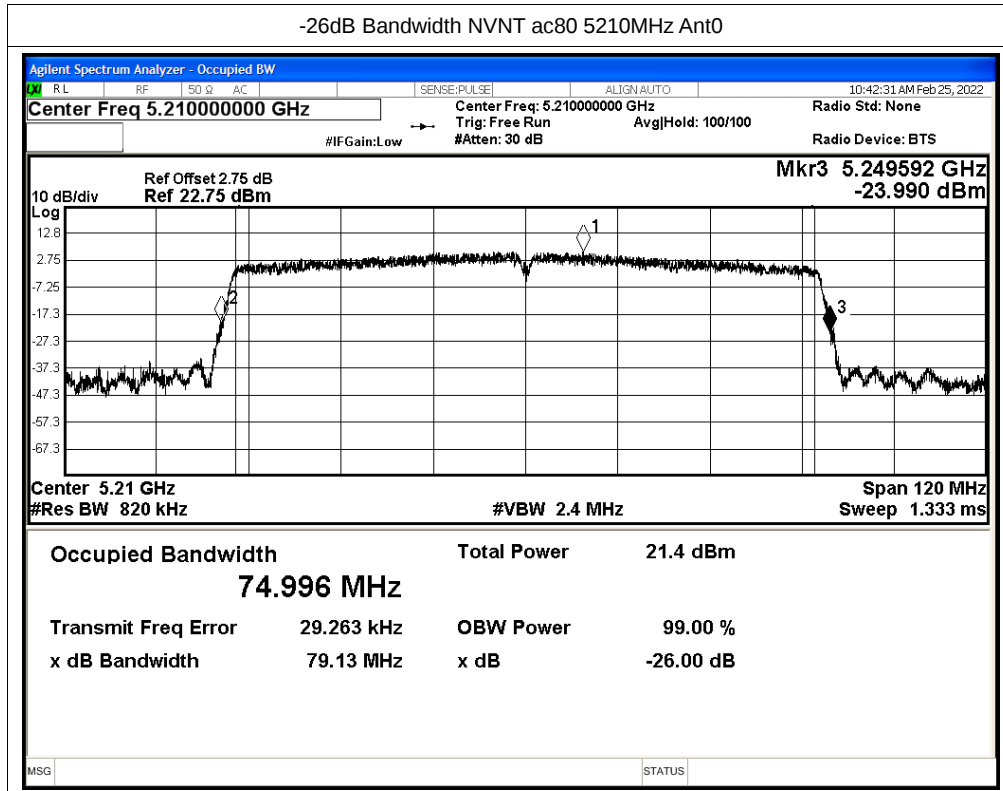




-26dB Bandwidth NVNT ax20 5180MHz Ant0

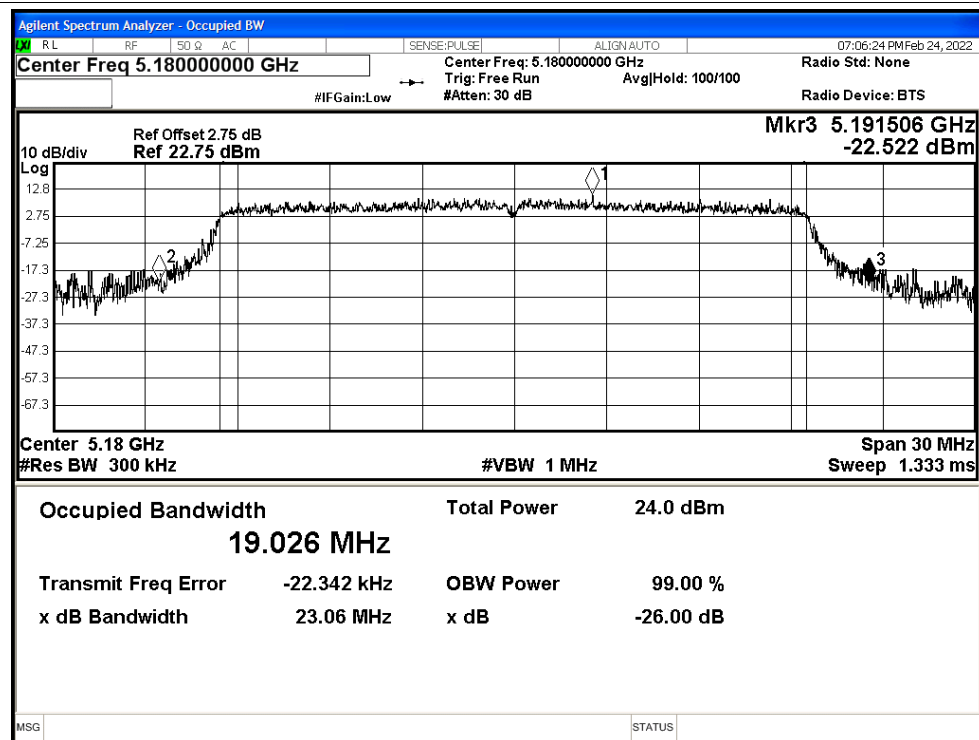


-26dB Bandwidth NVNT ax20 5200MHz Ant0

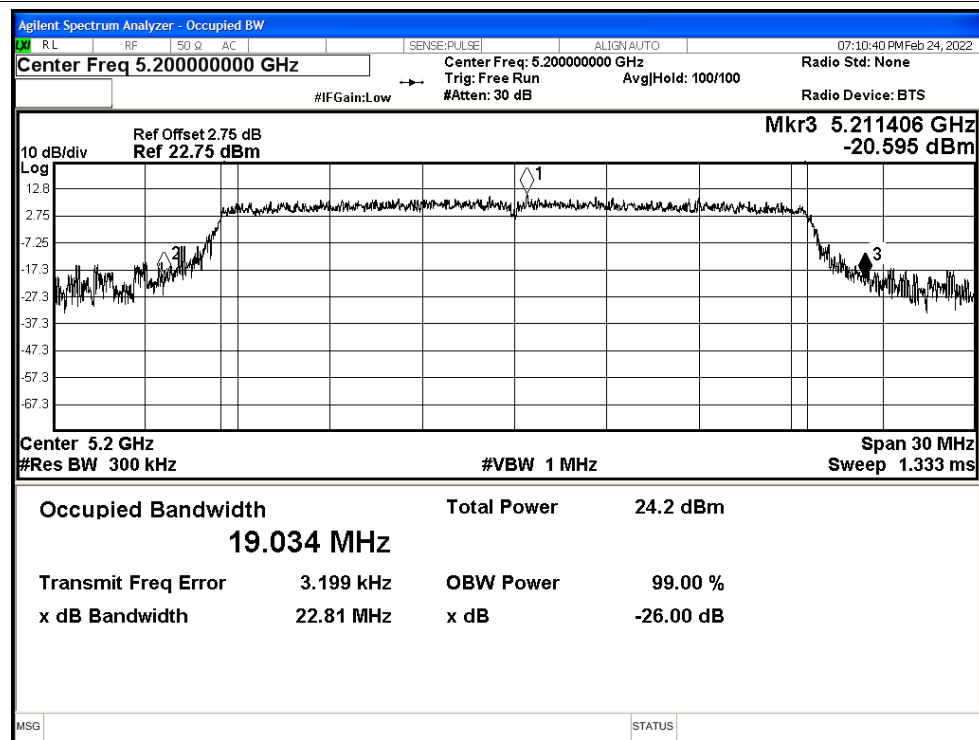




-26dB Bandwidth NVNT ax20 5240MHz Ant0

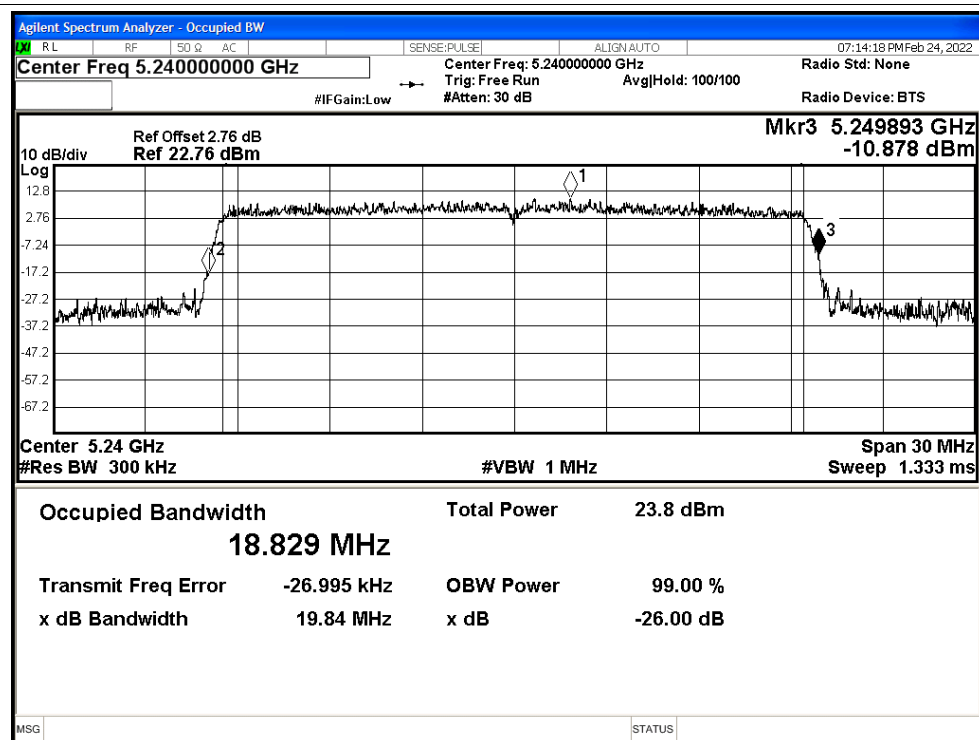


-26dB Bandwidth NVNT ax40 5190MHz Ant0

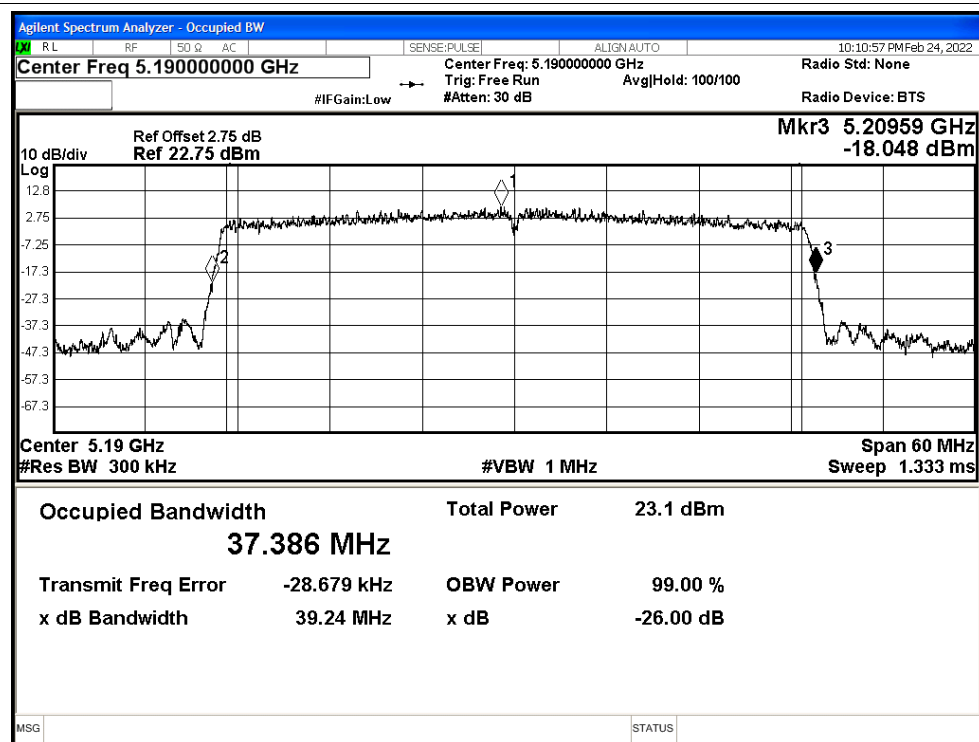




-26dB Bandwidth NVNT ax40 5230MHz Ant0

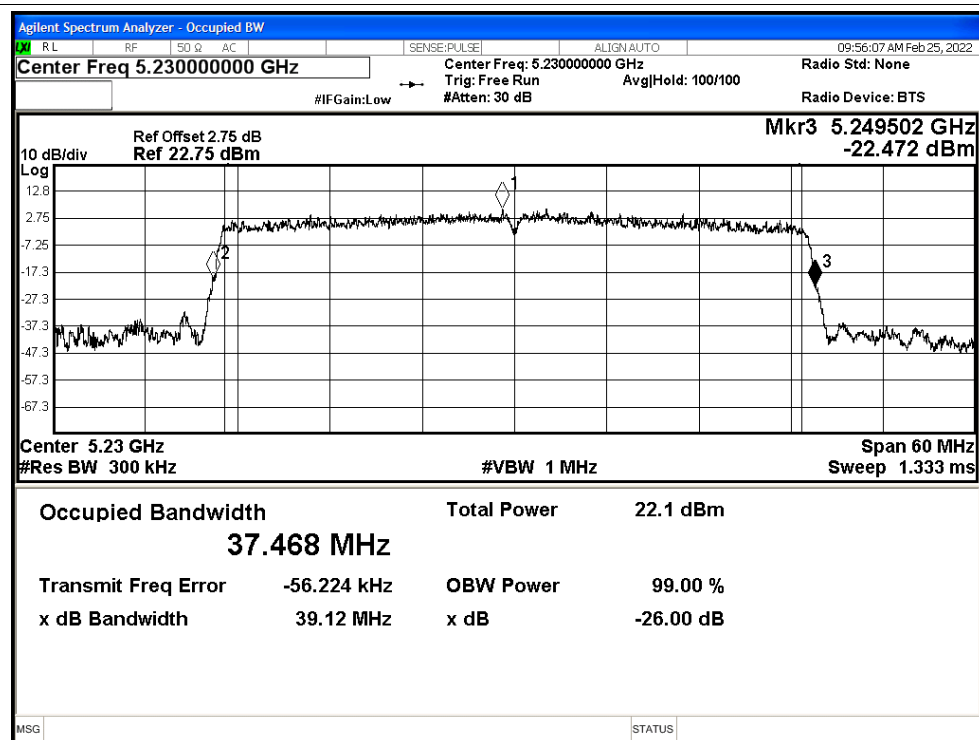

-26dB Bandwidth NVNT ax80 5210MHz Ant0

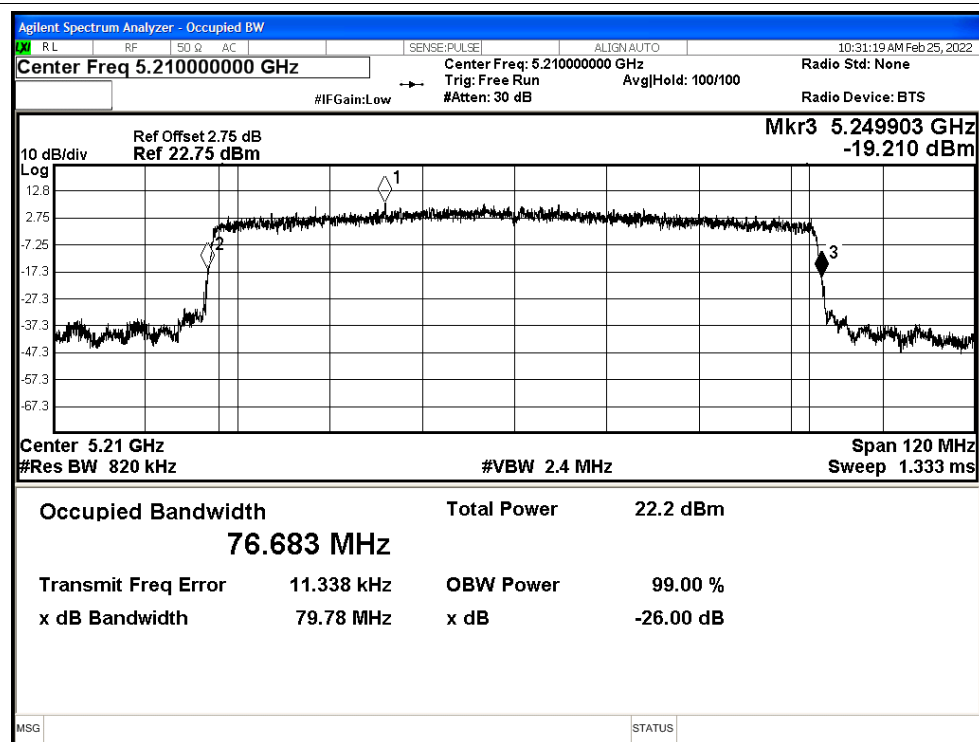




Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.015	0.5	Pass
NVNT	a	5200	Ant1	20.1	0.5	Pass
NVNT	a	5240	Ant1	20.068	0.5	Pass
NVNT	n20	5180	Ant1	20.114	0.5	Pass
NVNT	n20	5200	Ant1	20.563	0.5	Pass
NVNT	n20	5240	Ant1	20.428	0.5	Pass
NVNT	n40	5190	Ant1	39.31	0.5	Pass
NVNT	n40	5230	Ant1	39.218	0.5	Pass
NVNT	ac20	5180	Ant1	20.329	0.5	Pass
NVNT	ac20	5200	Ant1	20.498	0.5	Pass
NVNT	ac20	5240	Ant1	20.486	0.5	Pass
NVNT	ac40	5190	Ant1	39.753	0.5	Pass
NVNT	ac40	5230	Ant1	39.51	0.5	Pass
NVNT	ac80	5210	Ant1	79.309	0.5	Pass
NVNT	ax20	5180	Ant1	25.868	0.5	Pass
NVNT	ax20	5200	Ant1	21.909	0.5	Pass
NVNT	ax20	5240	Ant1	19.913	0.5	Pass
NVNT	ax40	5190	Ant1	39.272	0.5	Pass
NVNT	ax40	5230	Ant1	39.2	0.5	Pass
NVNT	ax80	5210	Ant1	79.737	0.5	Pass




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

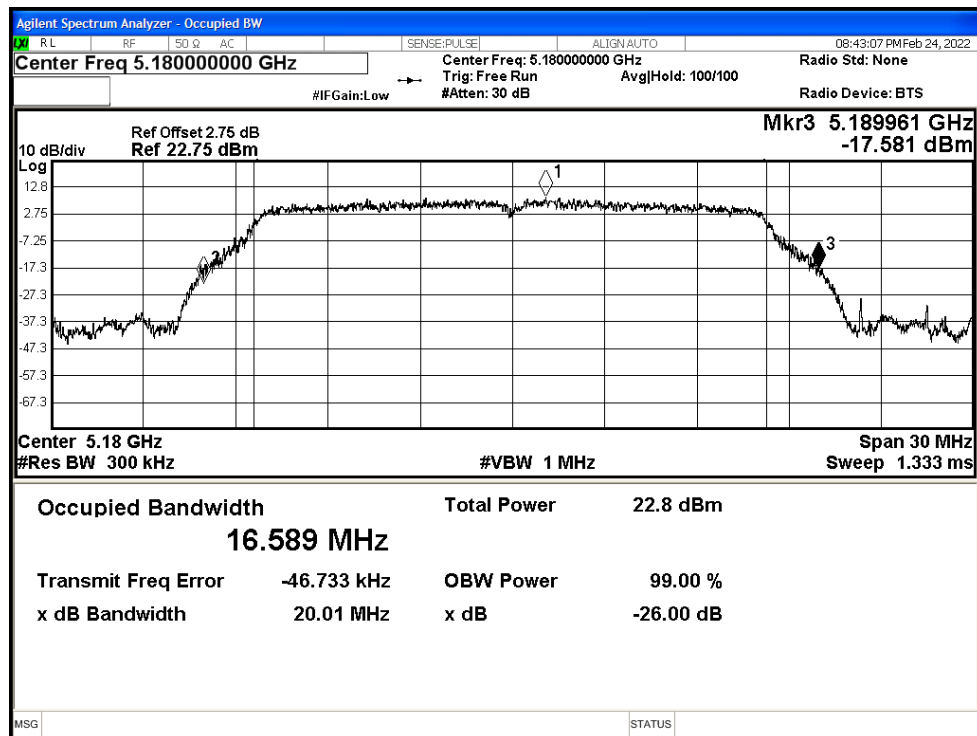


-26dB Bandwidth NVNT a 5200MHz Ant1

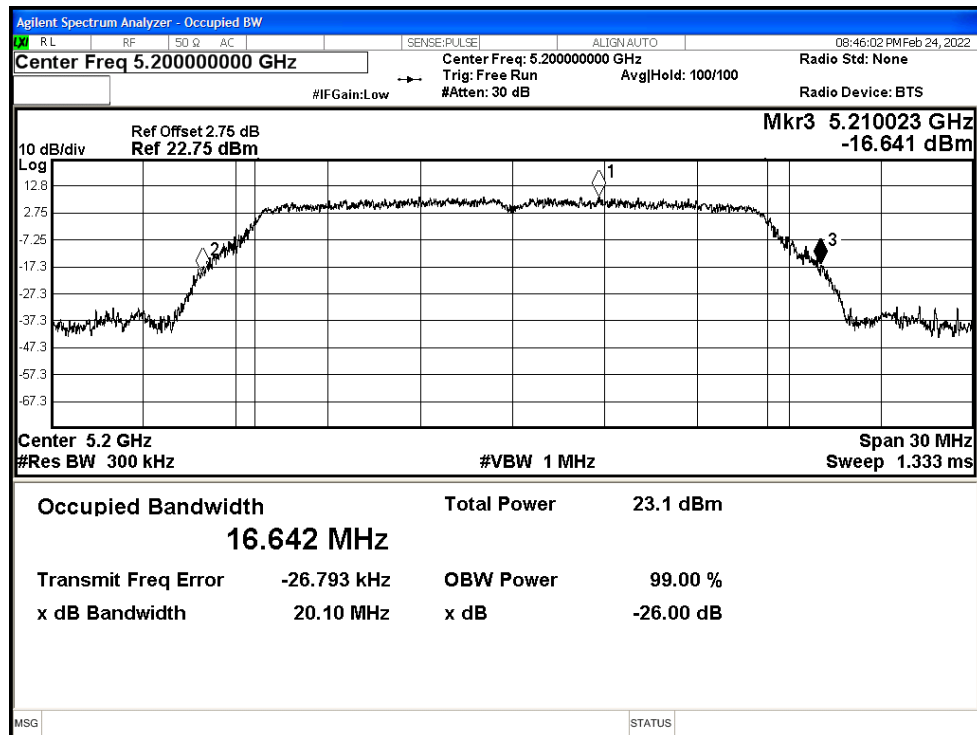




-26dB Bandwidth NVNT a 5240MHz Ant1

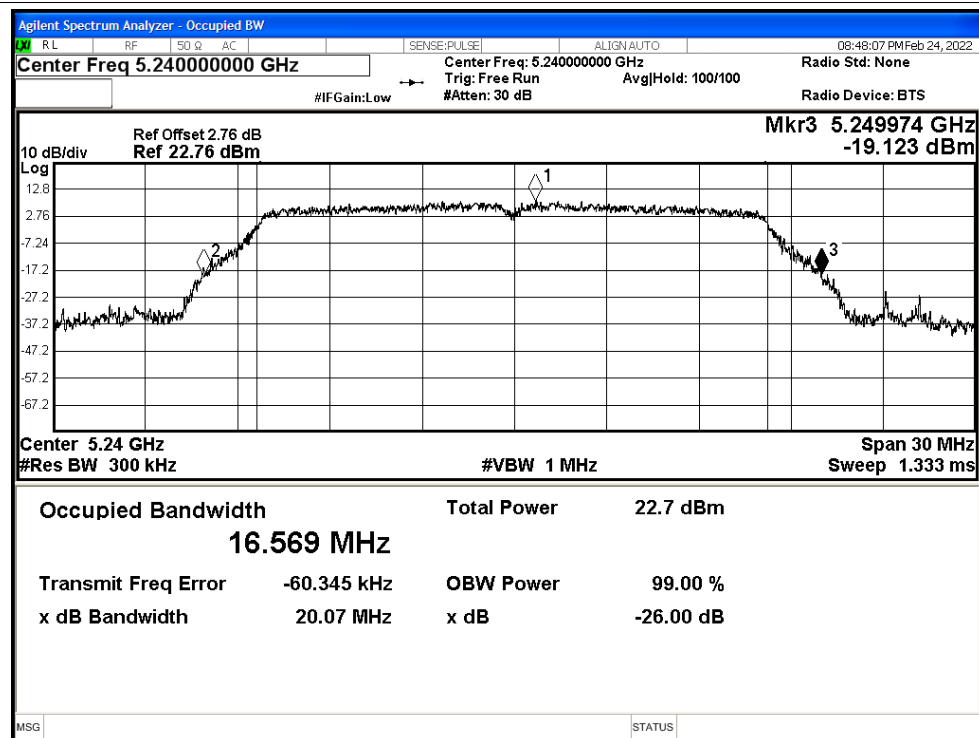


-26dB Bandwidth NVNT n20 5180MHz Ant1

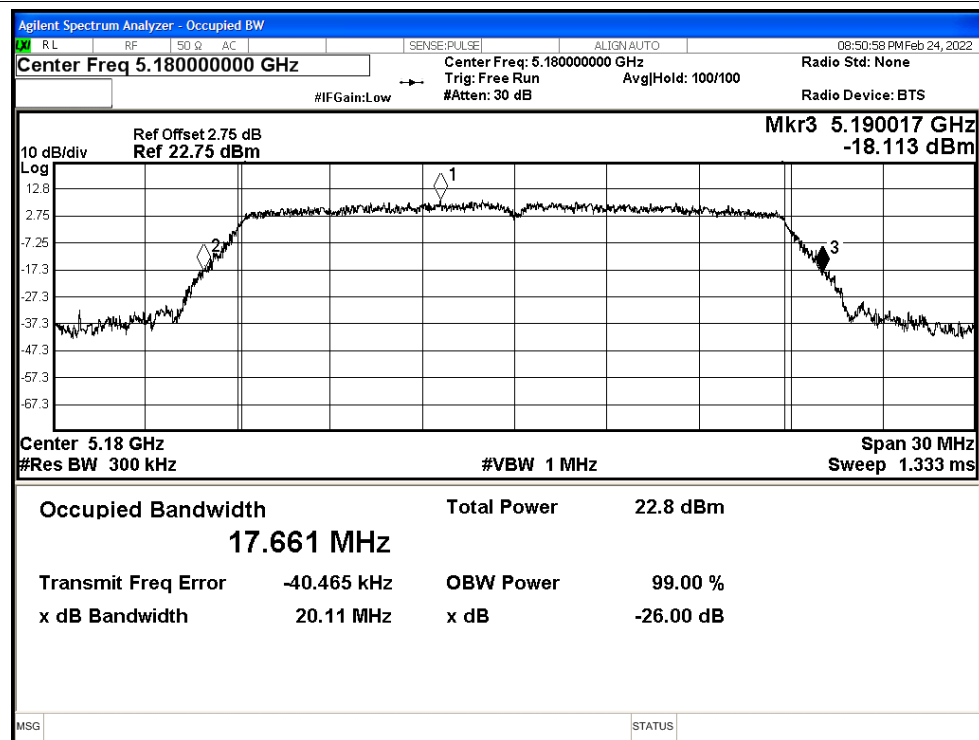




-26dB Bandwidth NVNT n20 5200MHz Ant1

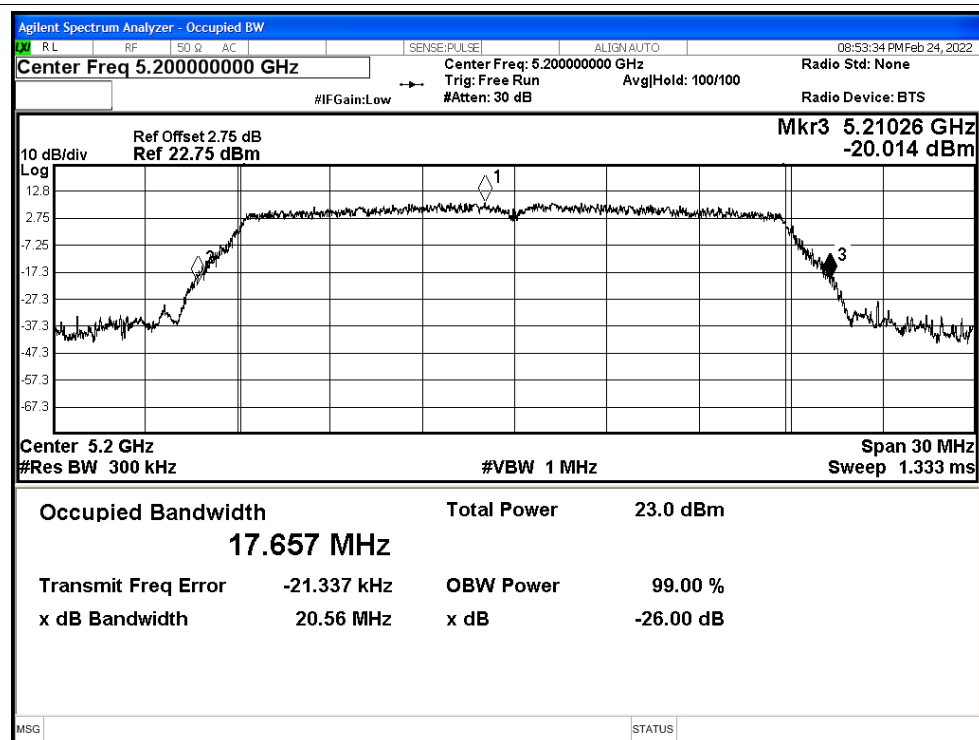


-26dB Bandwidth NVNT n20 5240MHz Ant1

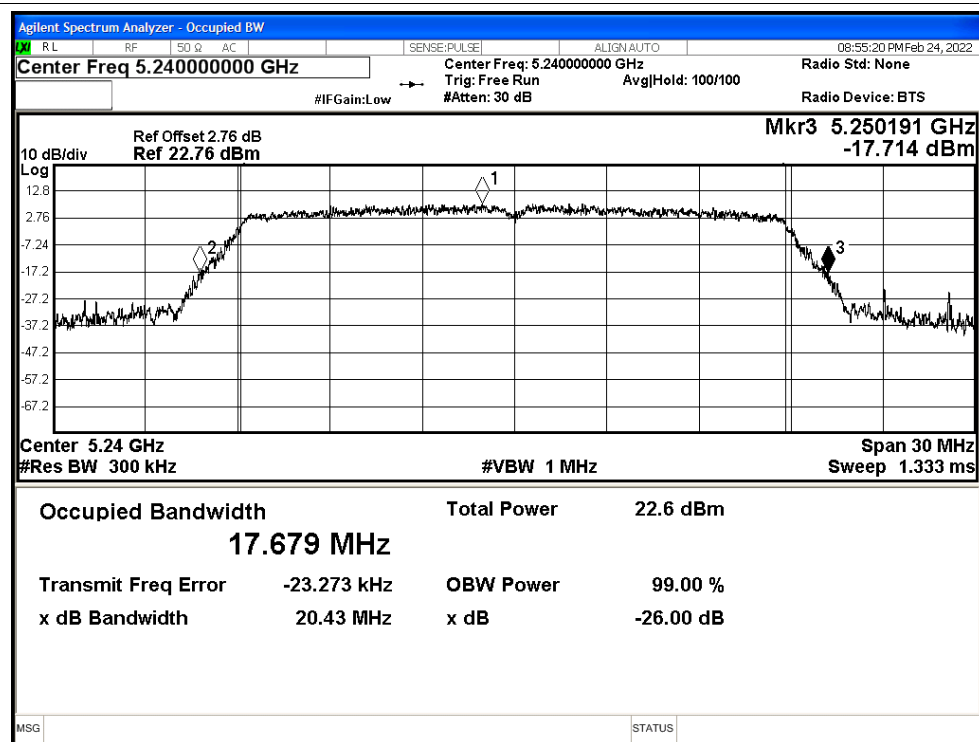




-26dB Bandwidth NVNT n40 5190MHz Ant1

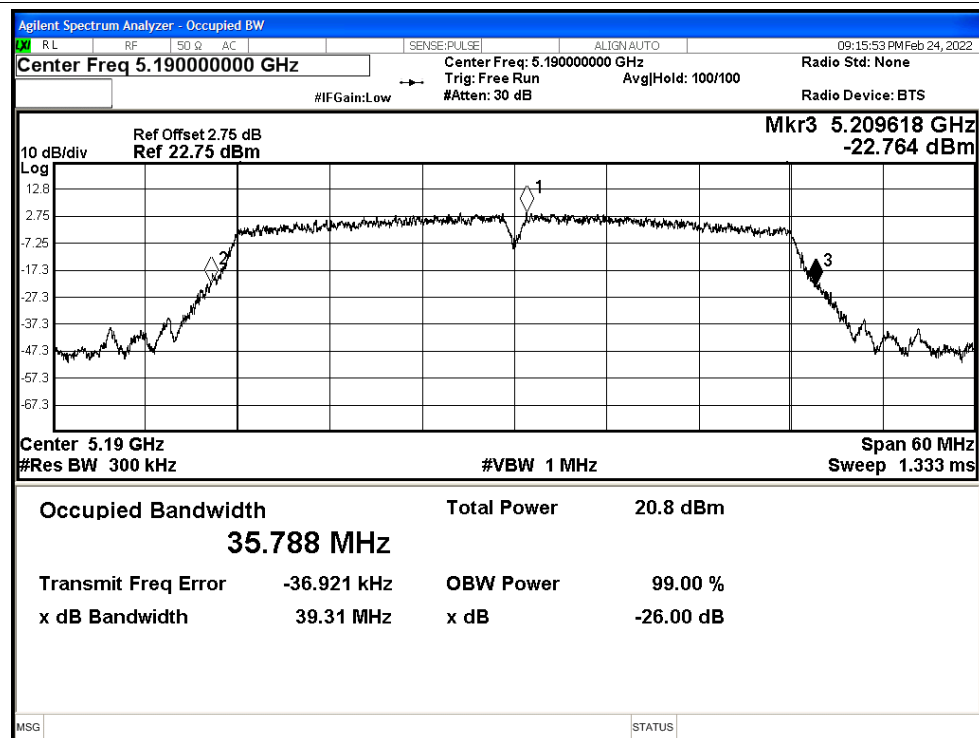


-26dB Bandwidth NVNT n40 5230MHz Ant1

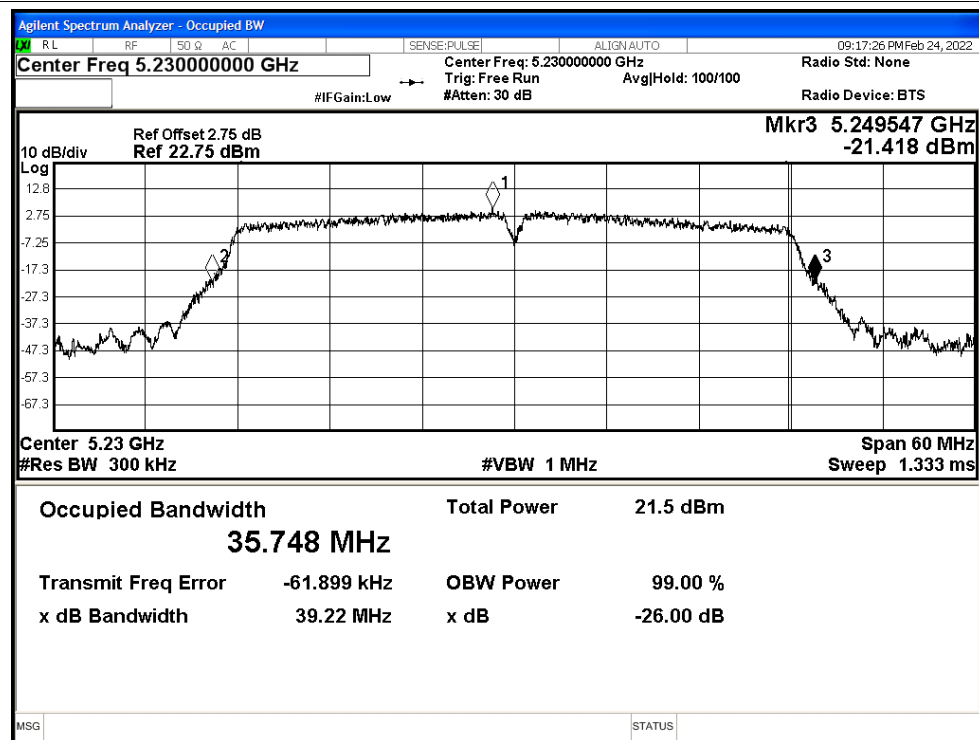



-26dB Bandwidth NVNT ac20 5180MHz Ant1

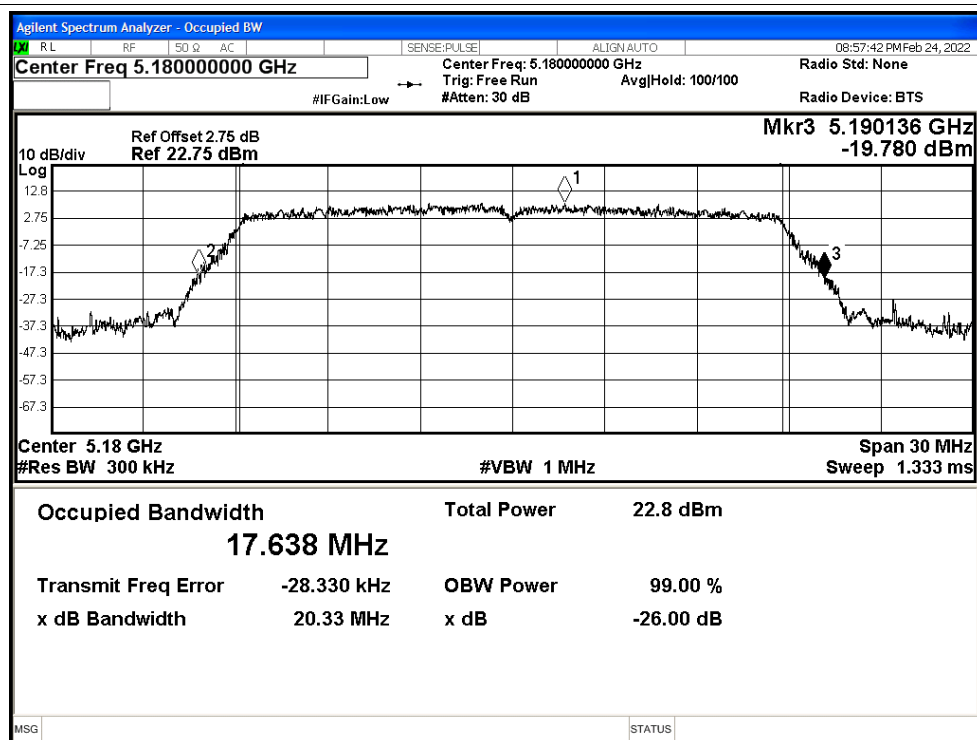


-26dB Bandwidth NVNT ac20 5200MHz Ant1






-26dB Bandwidth NVNT ac20 5240MHz Ant1

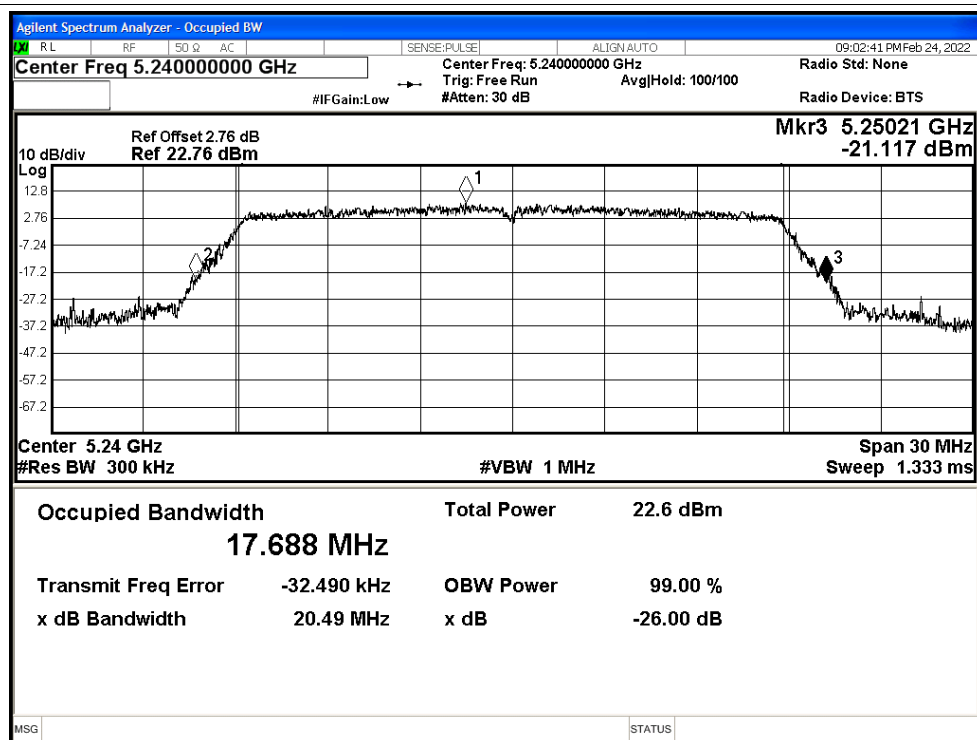


-26dB Bandwidth NVNT ac40 5190MHz Ant1

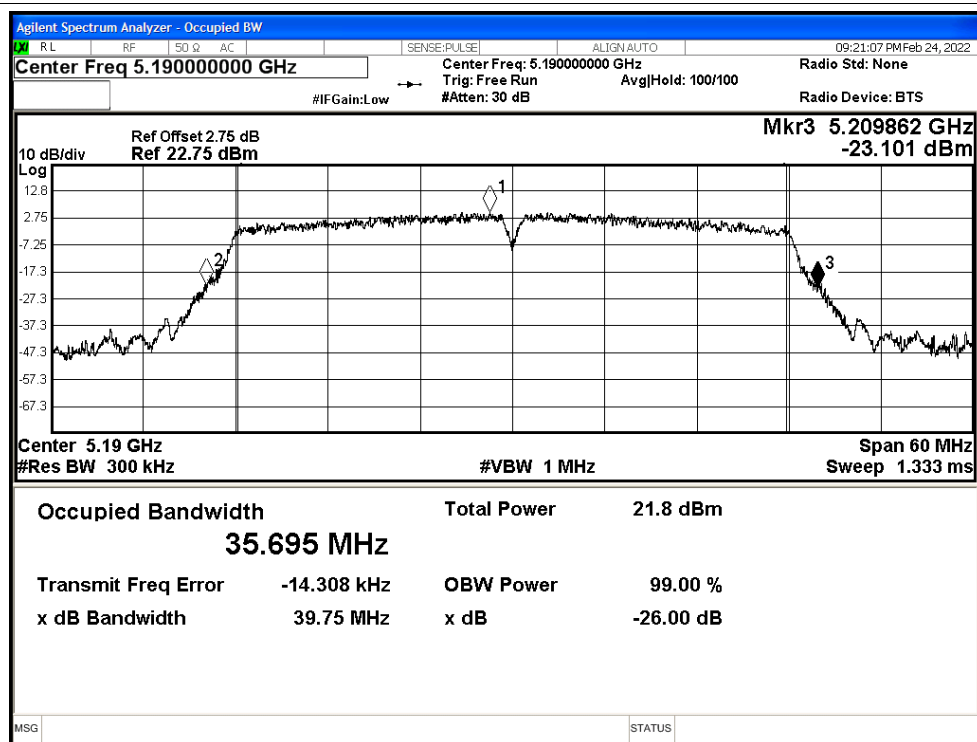




-26dB Bandwidth NVNT ac40 5230MHz Ant1

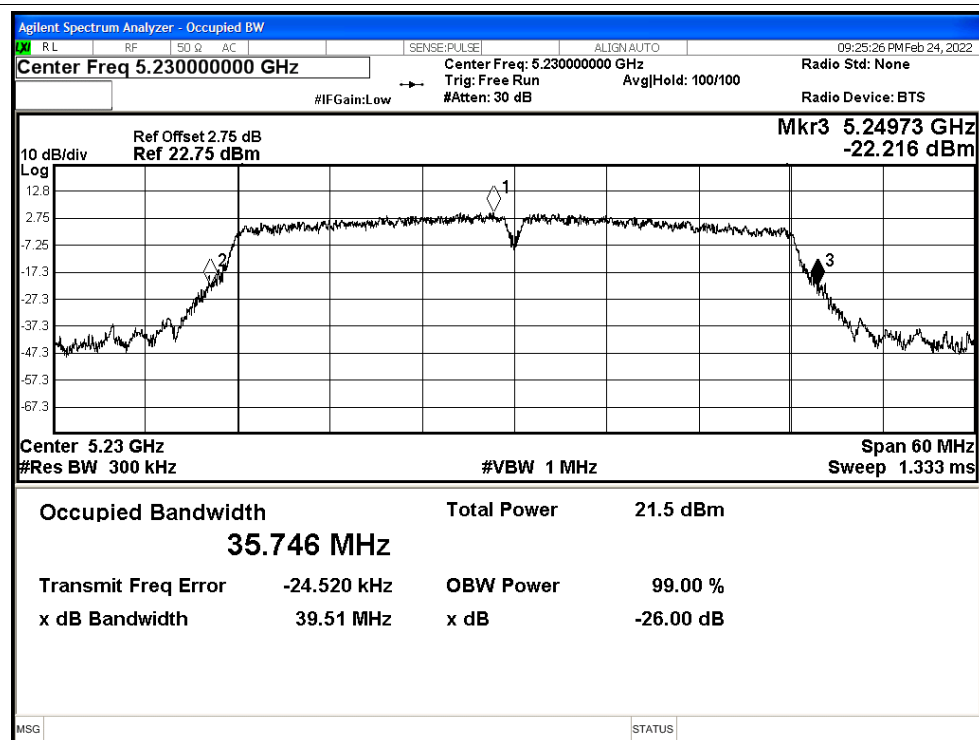


-26dB Bandwidth NVNT ac80 5210MHz Ant1

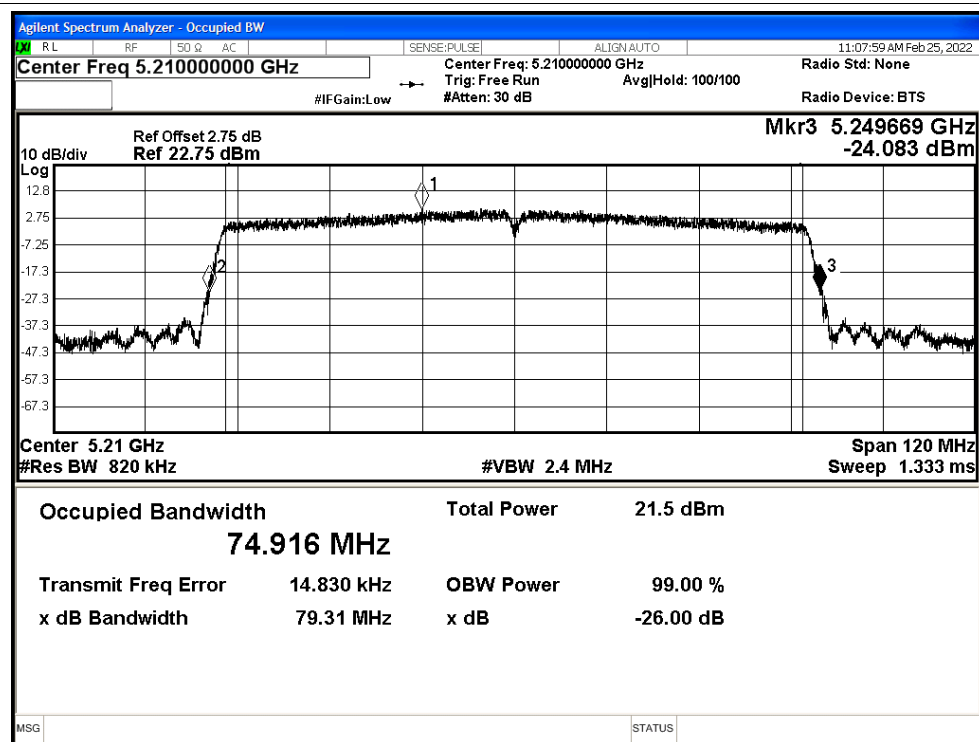




-26dB Bandwidth NVNT ax20 5180MHz Ant1

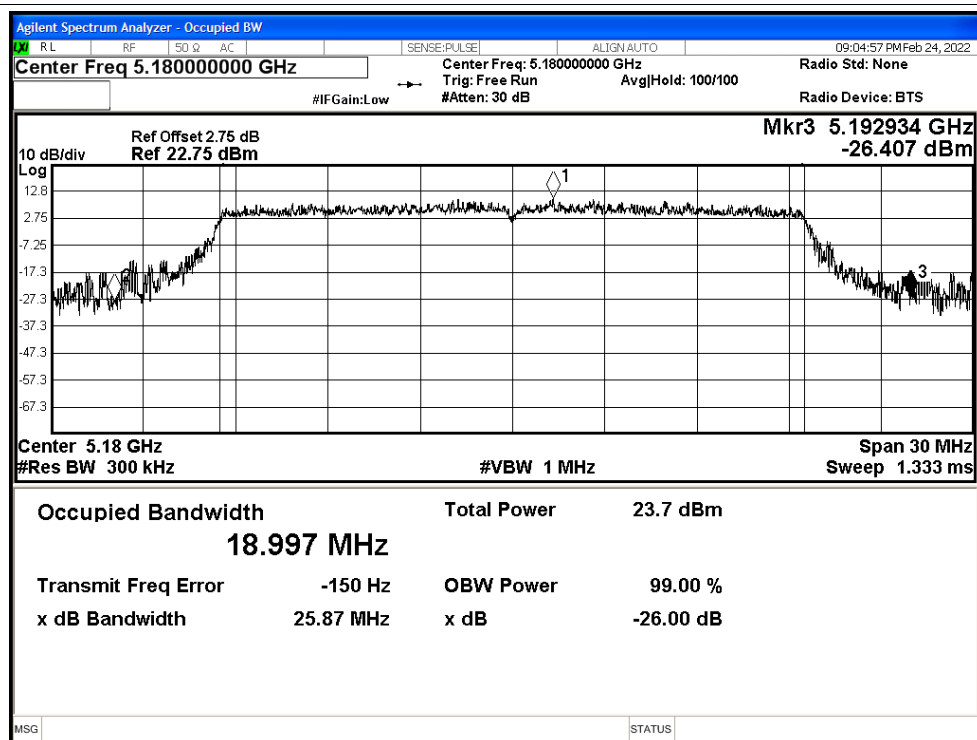


-26dB Bandwidth NVNT ax20 5200MHz Ant1

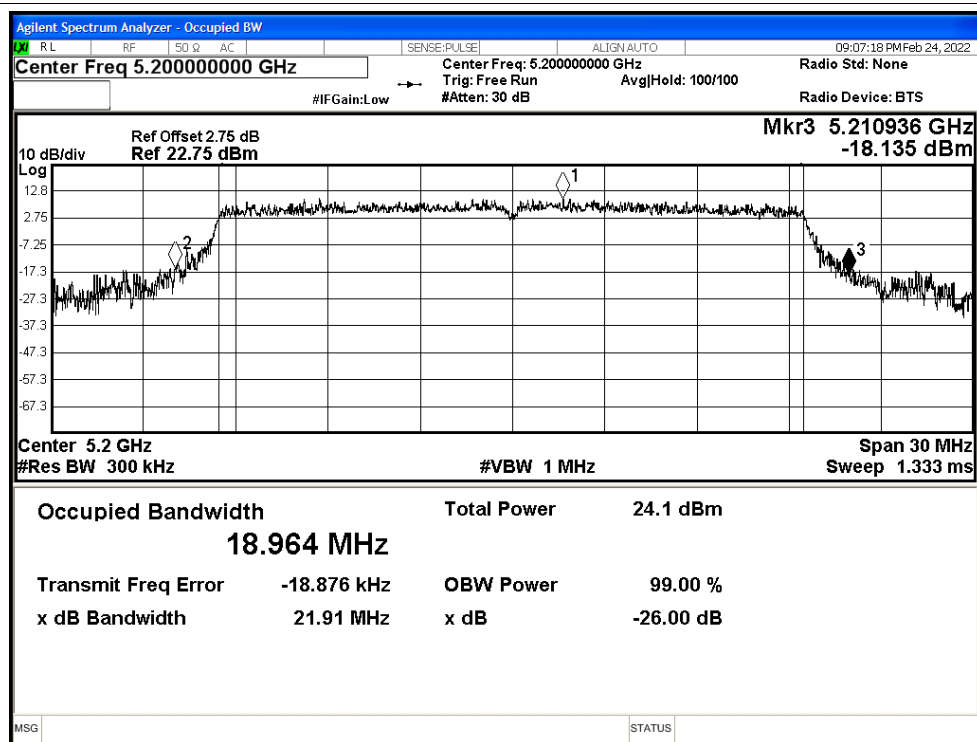




-26dB Bandwidth NVNT ax20 5240MHz Ant1

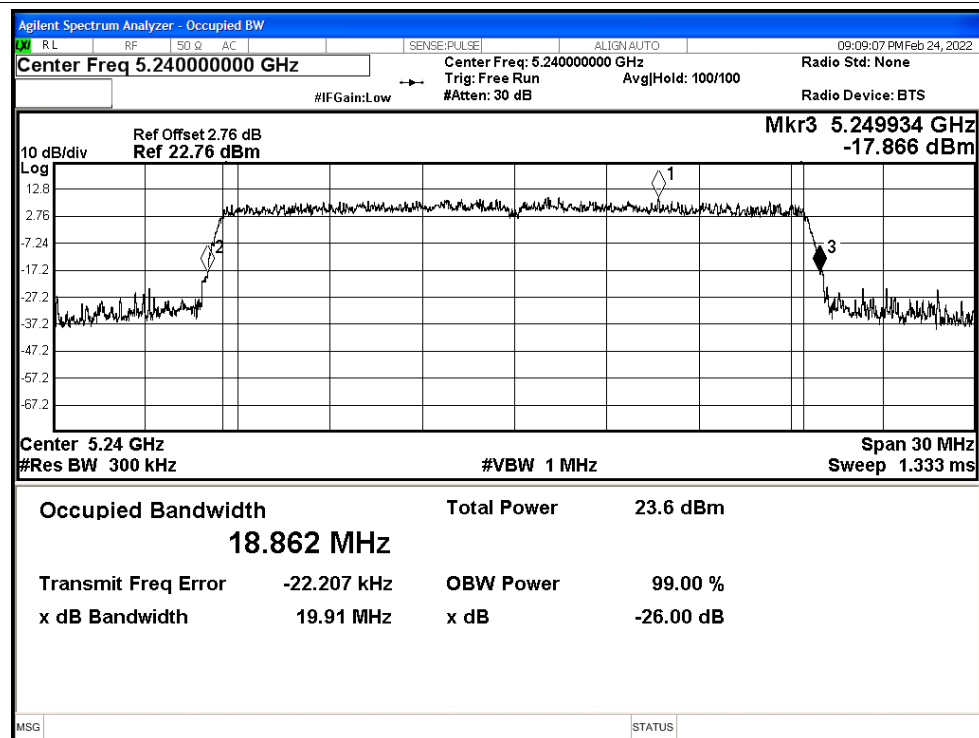


-26dB Bandwidth NVNT ax40 5190MHz Ant1

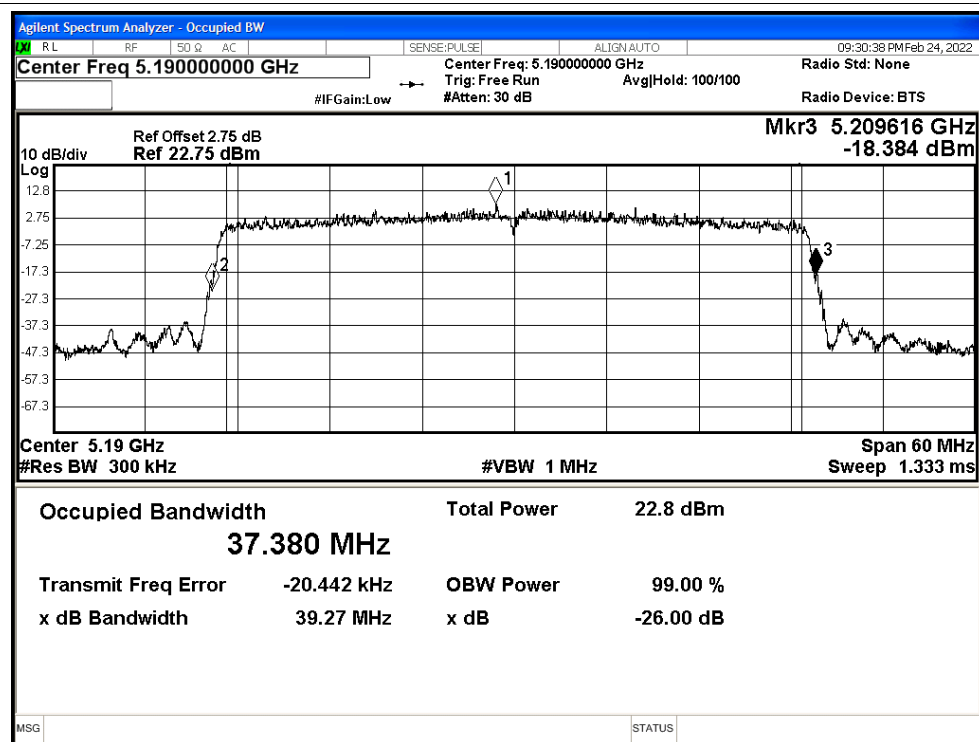




-26dB Bandwidth NVNT ax40 5230MHz Ant1

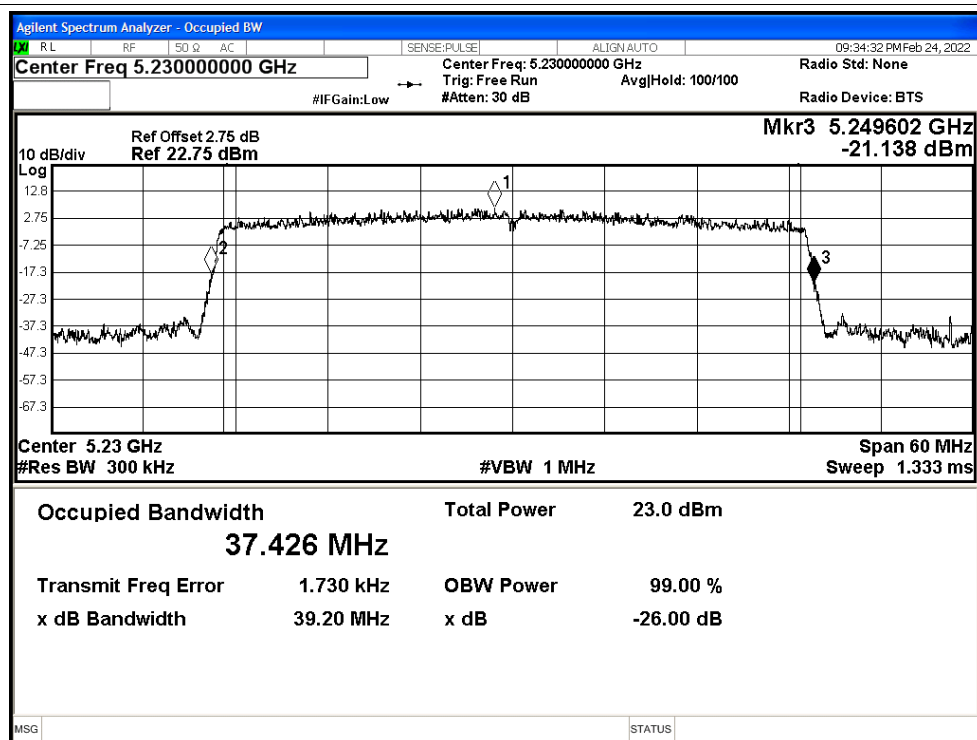

-26dB Bandwidth NVNT ax80 5210MHz Ant1

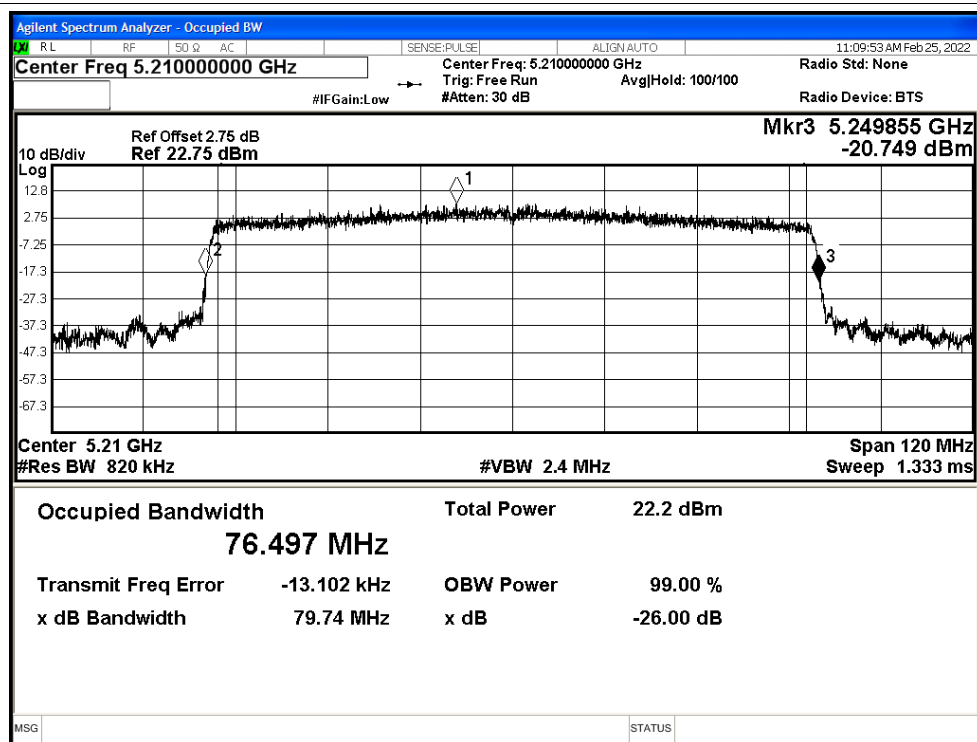



B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	17.06	0.17	17.23	24	Pass
NVNT	a	5200	Ant0	17.39	0.17	17.56	24	Pass
NVNT	a	5240	Ant0	16.71	0.18	16.89	24	Pass
NVNT	n20	5180	Ant0	17.06	0.18	17.24	24	Pass
NVNT	n20	5200	Ant0	17.37	0.18	17.55	24	Pass
NVNT	n20	5240	Ant0	16.81	0.18	16.99	24	Pass
NVNT	n40	5190	Ant0	16.98	0.35	17.33	24	Pass
NVNT	n40	5230	Ant0	16.47	0.35	16.82	24	Pass
NVNT	ac20	5180	Ant0	16.84	0.35	17.19	24	Pass
NVNT	ac20	5200	Ant0	17.2	0.35	17.55	24	Pass
NVNT	ac20	5240	Ant0	16.71	0.35	17.06	24	Pass
NVNT	ac40	5190	Ant0	15.74	0.61	16.35	24	Pass
NVNT	ac40	5230	Ant0	15.1	0.63	15.73	24	Pass
NVNT	ac80	5210	Ant0	10.94	4.32	15.26	24	Pass
NVNT	ax20	5180	Ant0	17.12	0.43	17.55	24	Pass
NVNT	ax20	5200	Ant0	17.32	0.43	17.75	24	Pass
NVNT	ax20	5240	Ant0	16.79	0.44	17.23	24	Pass
NVNT	ax40	5190	Ant0	15.14	2.19	17.33	24	Pass
NVNT	ax40	5230	Ant0	15.02	0.72	15.74	24	Pass
NVNT	ax80	5210	Ant0	11.35	4.66	16.01	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	16.97	0.48	17.45	24	Pass
NVNT	a	5200	Ant1	17.25	0.48	17.73	24	Pass
NVNT	a	5240	Ant1	16.76	0.53	17.29	24	Pass
NVNT	n20	5180	Ant1	16.75	0.52	17.27	24	Pass
NVNT	n20	5200	Ant1	16.91	0.35	17.26	24	Pass
NVNT	n20	5240	Ant1	16.6	0.3	16.90	24	Pass
NVNT	n40	5190	Ant1	14.38	1.15	15.53	24	Pass
NVNT	n40	5230	Ant1	14.91	1.15	16.06	24	Pass
NVNT	ac20	5180	Ant1	16.64	0.45	17.09	24	Pass
NVNT	ac20	5200	Ant1	16.62	0.45	17.07	24	Pass
NVNT	ac20	5240	Ant1	16.17	0.94	17.11	24	Pass
NVNT	ac40	5190	Ant1	14.83	1.79	16.62	24	Pass
NVNT	ac40	5230	Ant1	14.5	1.92	16.42	24	Pass
NVNT	ac80	5210	Ant1	13.37	2.9	16.27	24	Pass
NVNT	ax20	5180	Ant1	16.32	1.37	17.69	24	Pass
NVNT	ax20	5200	Ant1	16.7	1.04	17.74	24	Pass
NVNT	ax20	5240	Ant1	16.2	0.81	17.01	24	Pass



NVNT	ax40	5190	Ant1	14.87	1.52	16.39	24	Pass
NVNT	ax40	5230	Ant1	15.11	1.69	16.80	24	Pass
NVNT	ax80	5210	Ant1	11.11	4.67	15.78	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant 0	Ant 1	MIMO		
NVNT	n20	5180	17.24	17.27	20.27	24	Pass
NVNT	n20	5200	17.55	17.26	20.42	24	Pass
NVNT	n20	5240	16.99	16.90	19.96	24	Pass
NVNT	n40	5190	17.33	15.53	19.53	24	Pass
NVNT	n40	5230	16.82	16.06	19.47	24	Pass
NVNT	ac20	5180	17.19	17.09	20.15	24	Pass
NVNT	ac20	5200	17.55	17.07	20.33	24	Pass
NVNT	ac20	5240	17.06	17.11	20.10	24	Pass
NVNT	ac40	5190	16.35	16.62	19.50	24	Pass
NVNT	ac40	5230	15.73	16.42	19.10	24	Pass
NVNT	ac80	5210	15.26	16.27	18.80	24	Pass
NVNT	ax20	5180	17.55	17.69	20.63	24	Pass
NVNT	ax20	5200	17.75	17.74	20.76	24	Pass
NVNT	ax20	5240	17.23	17.01	20.13	24	Pass
NVNT	ax40	5190	17.33	16.39	19.90	24	Pass
NVNT	ax40	5230	15.74	16.80	19.31	24	Pass
NVNT	ax80	5210	16.01	15.78	18.91	24	Pass



B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	4.42	0.17	4.59	11	Pass
NVNT	a	5200	Ant0	3.85	0.17	4.02	11	Pass
NVNT	a	5240	Ant0	3.9	0.18	4.08	11	Pass
NVNT	n20	5180	Ant0	4.46	0.18	4.64	11	Pass
NVNT	n20	5200	Ant0	4.62	0.18	4.80	11	Pass
NVNT	n20	5240	Ant0	3.81	0.18	3.99	11	Pass
NVNT	n40	5190	Ant0	-0.11	0.35	0.24	11	Pass
NVNT	n40	5230	Ant0	-1.15	0.35	-0.80	11	Pass
NVNT	ac20	5180	Ant0	2.72	0.35	3.07	11	Pass
NVNT	ac20	5200	Ant0	2.99	0.35	3.34	11	Pass
NVNT	ac20	5240	Ant0	3.08	0.35	3.43	11	Pass
NVNT	ac40	5190	Ant0	-0.66	0.61	-0.05	11	Pass
NVNT	ac40	5230	Ant0	-5.09	0.63	-4.46	11	Pass
NVNT	ac80	5210	Ant0	-33.44	4.32	-29.12	11	Pass
NVNT	ax20	5180	Ant0	1.49	0.43	1.92	11	Pass
NVNT	ax20	5200	Ant0	1.98	0.43	2.41	11	Pass
NVNT	ax20	5240	Ant0	3.34	0.44	3.78	11	Pass
NVNT	ax40	5190	Ant0	-13.28	2.19	-11.09	11	Pass
NVNT	ax40	5230	Ant0	-7.49	0.72	-6.77	11	Pass
NVNT	ax80	5210	Ant0	-36.12	4.66	-31.46	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	1.84	0.48	2.32	11	Pass
NVNT	a	5200	Ant1	3.07	0.48	3.55	11	Pass
NVNT	a	5240	Ant1	-1.08	0.53	-0.55	11	Pass
NVNT	n20	5180	Ant1	3.44	0.52	3.96	11	Pass
NVNT	n20	5200	Ant1	2.23	0.35	2.58	11	Pass
NVNT	n20	5240	Ant1	-0.15	0.3	0.15	11	Pass
NVNT	n40	5190	Ant1	-7.53	1.15	-6.38	11	Pass
NVNT	n40	5230	Ant1	-5.72	1.15	-4.57	11	Pass
NVNT	ac20	5180	Ant1	-0.54	0.45	-0.09	11	Pass
NVNT	ac20	5200	Ant1	-1.78	0.45	-1.33	11	Pass
NVNT	ac20	5240	Ant1	-2.02	0.94	-1.08	11	Pass
NVNT	ac40	5190	Ant1	-9.51	1.79	-7.72	11	Pass
NVNT	ac40	5230	Ant1	-10.96	1.92	-9.04	11	Pass
NVNT	ac80	5210	Ant1	-20	2.9	-17.10	11	Pass
NVNT	ax20	5180	Ant1	-4.74	1.37	-3.37	11	Pass
NVNT	ax20	5200	Ant1	-3.46	1.04	-2.42	11	Pass
NVNT	ax20	5240	Ant1	-5.24	0.81	-4.43	11	Pass
NVNT	ax40	5190	Ant1	-13.55	1.52	-12.03	11	Pass
NVNT	ax40	5230	Ant1	-13.77	1.69	-12.08	11	Pass



NVNT	ax80	5210	Ant1	-35.05	4.67	-30.38	11	Pass
------	------	------	------	--------	------	--------	----	------


MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm)			Limit (dBm)	Verdict
			Ant 0	Ant 1	MIMO		
NVNT	n20	5180	4.64	3.96	7.32	11	Pass
NVNT	n20	5200	4.80	2.58	6.84	11	Pass
NVNT	n20	5240	3.99	0.15	5.49	11	Pass
NVNT	n40	5190	0.24	-6.38	1.10	11	Pass
NVNT	n40	5230	-0.80	-4.57	0.72	11	Pass
NVNT	ac20	5180	3.07	-0.09	4.78	11	Pass
NVNT	ac20	5200	3.34	-1.33	4.61	11	Pass
NVNT	ac20	5240	3.43	-1.08	4.75	11	Pass
NVNT	ac40	5190	-0.05	-7.72	0.64	11	Pass
NVNT	ac40	5230	-4.46	-9.04	-3.16	11	Pass
NVNT	ac80	5210	-29.12	-17.10	-16.84	11	Pass
NVNT	ax20	5180	1.92	-3.37	3.05	11	Pass
NVNT	ax20	5200	2.41	-2.42	3.64	11	Pass
NVNT	ax20	5240	3.78	-4.43	4.39	11	Pass
NVNT	ax40	5190	-11.09	-12.03	-8.52	11	Pass
NVNT	ax40	5230	-6.77	-12.08	-5.65	11	Pass
NVNT	ax80	5210	-31.46	-30.38	-27.88	11	Pass




Test Graphs

PSD NVNT a 5180MHz Ant0

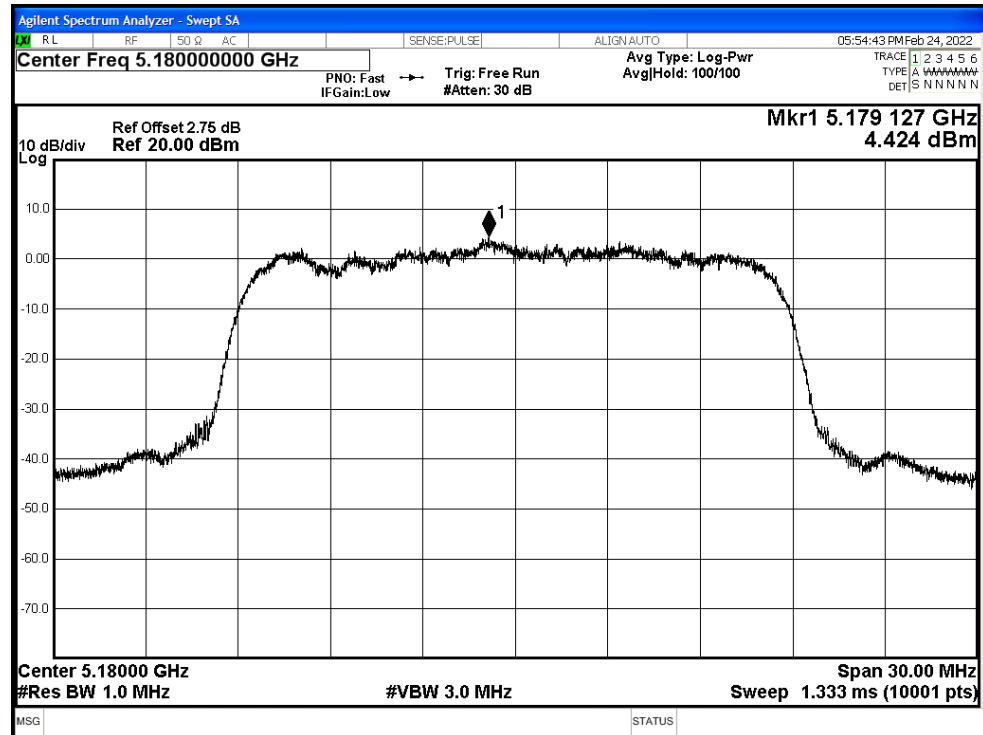


PSD NVNT a 5200MHz Ant0

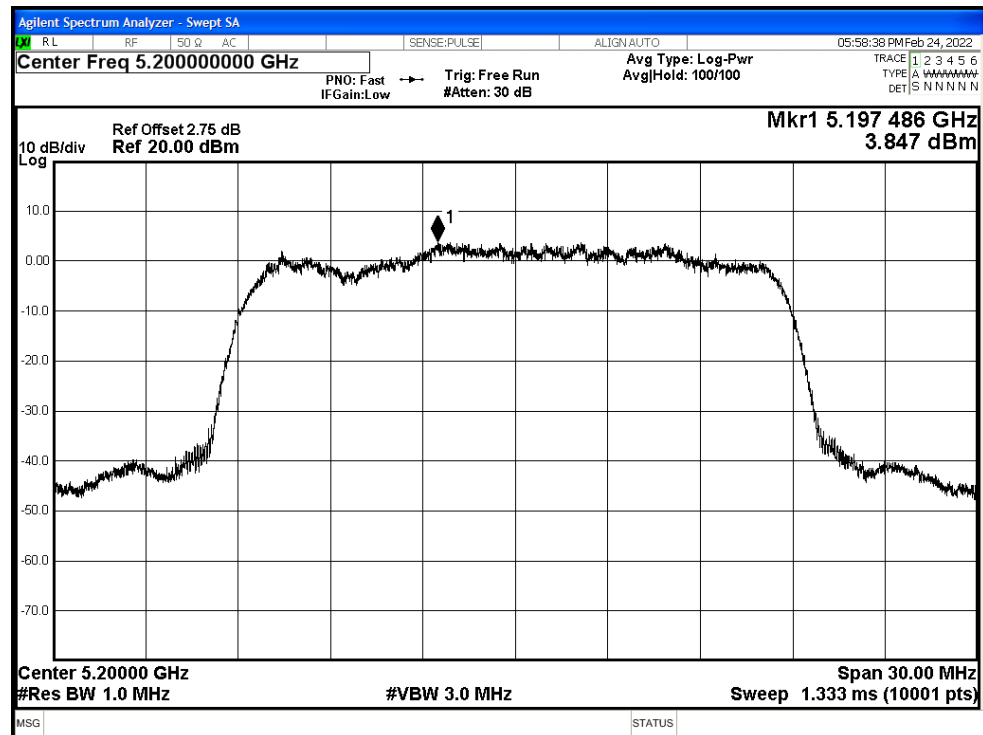




PSD NVNT a 5240MHz Ant0

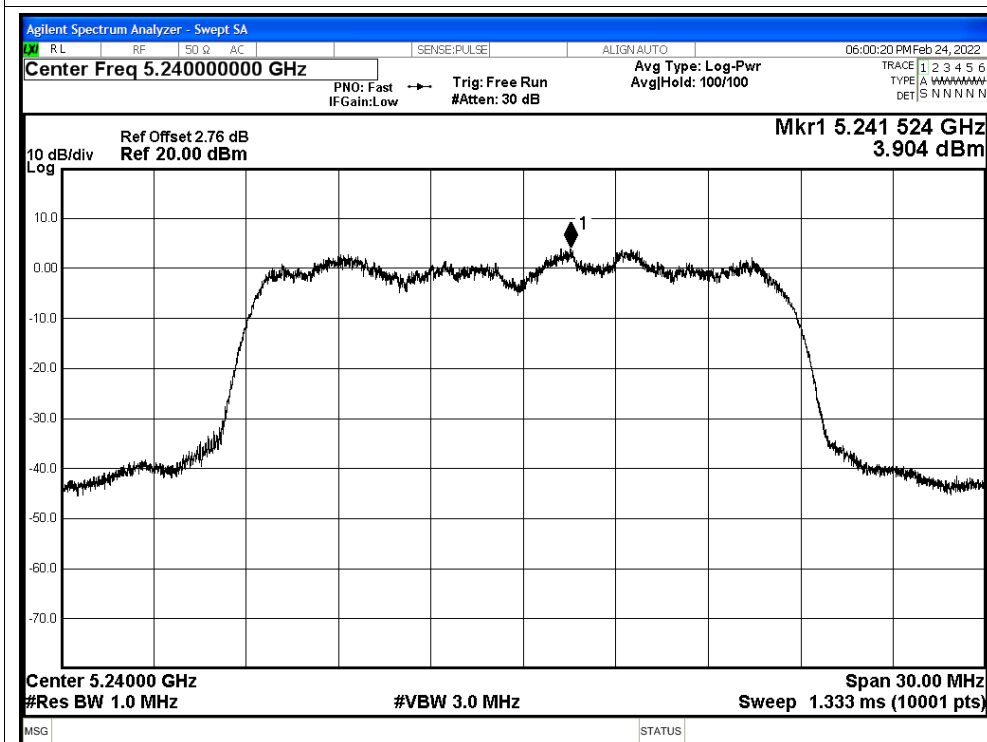


PSD NVNT n20 5180MHz Ant0

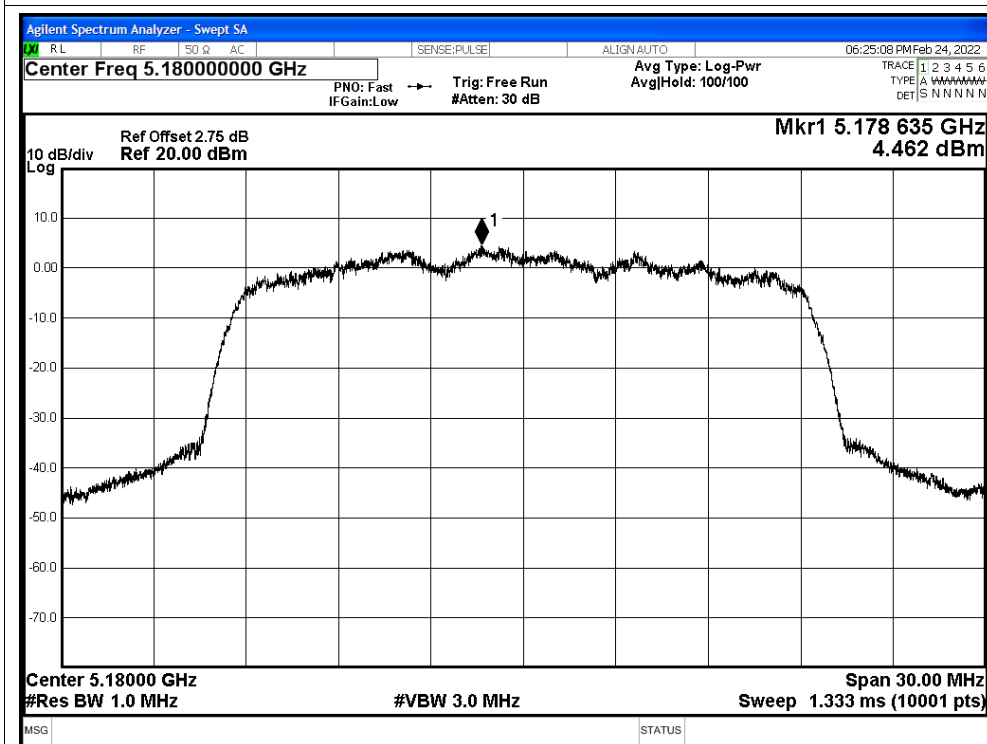







PSD NVNT n20 5200MHz Ant0

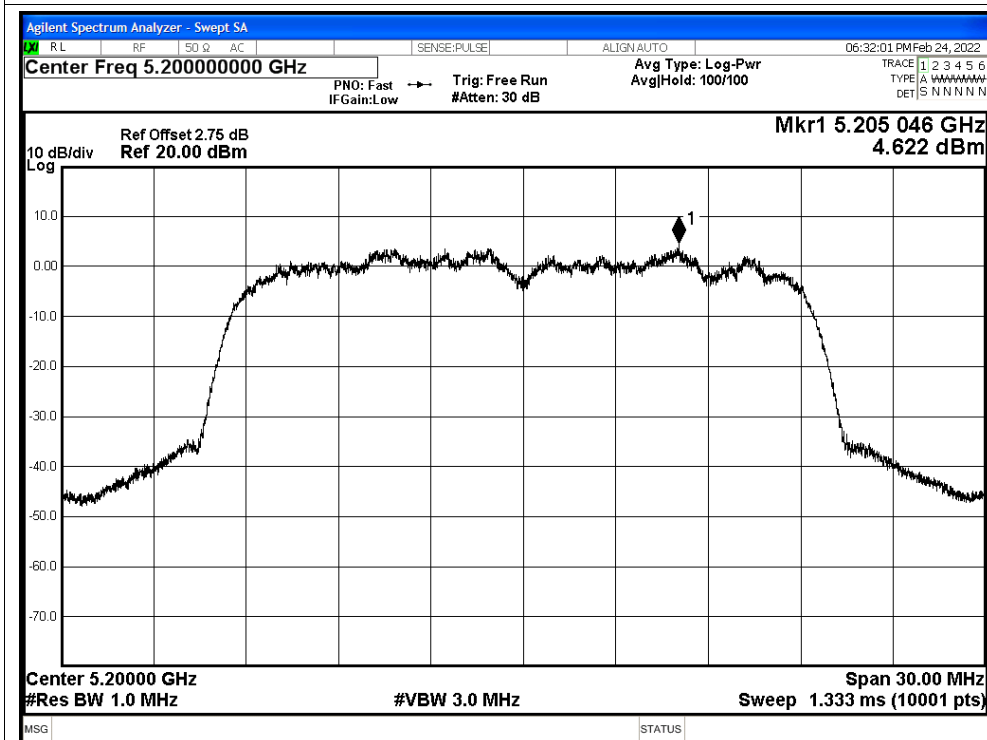

PSD NVNT n20 5240MHz Ant0

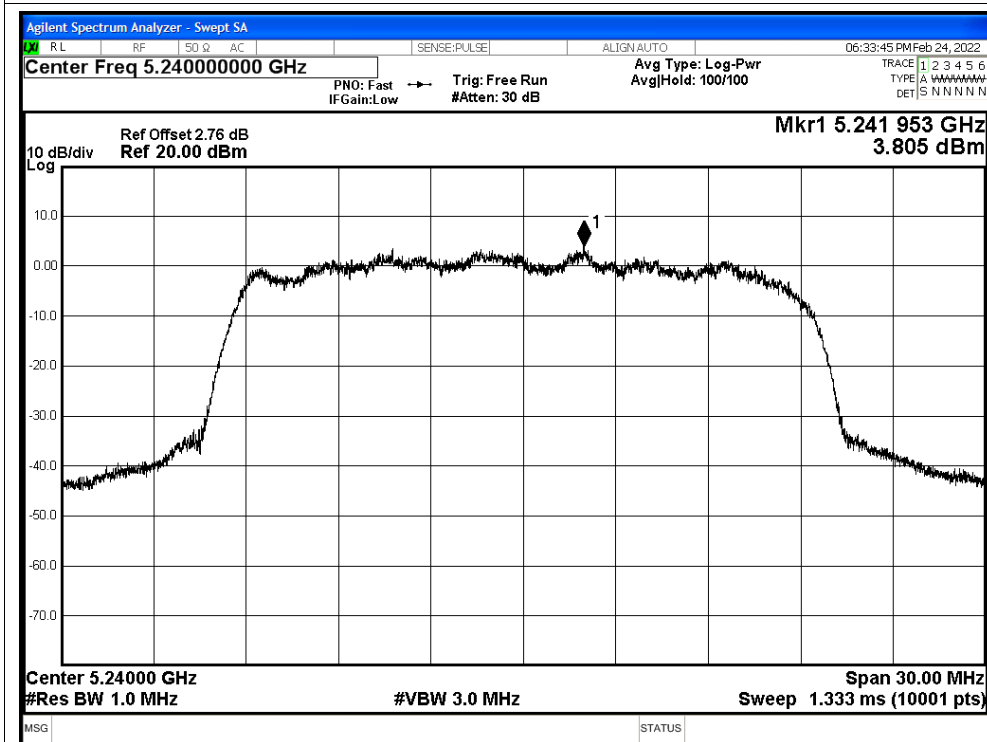


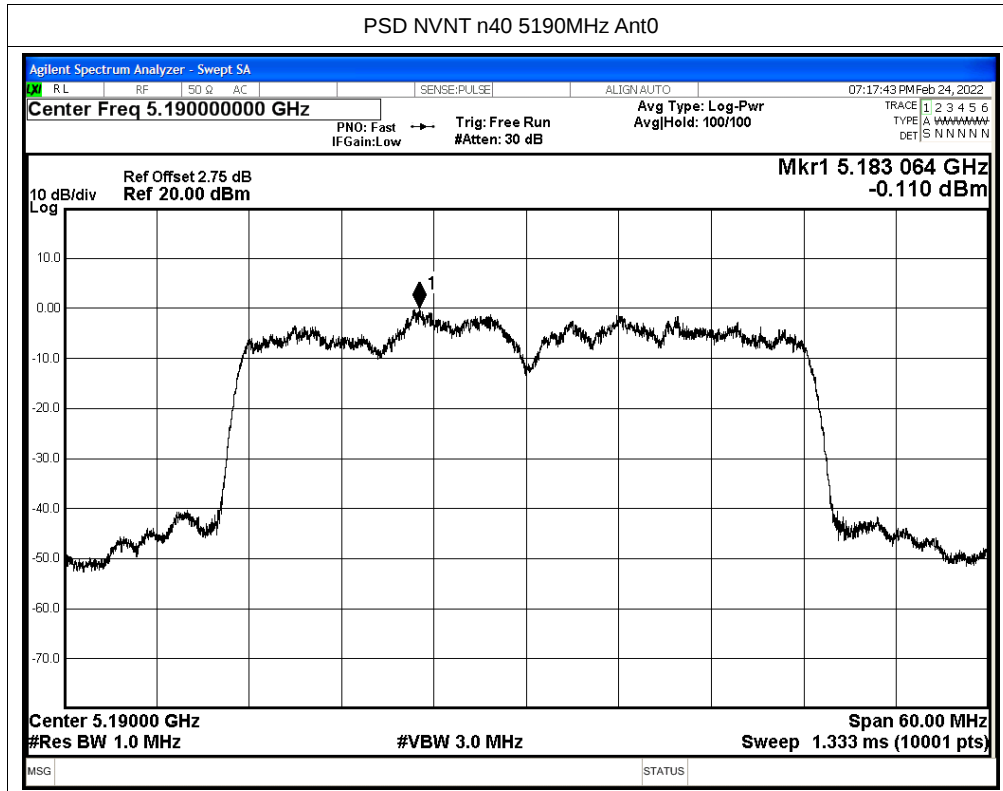

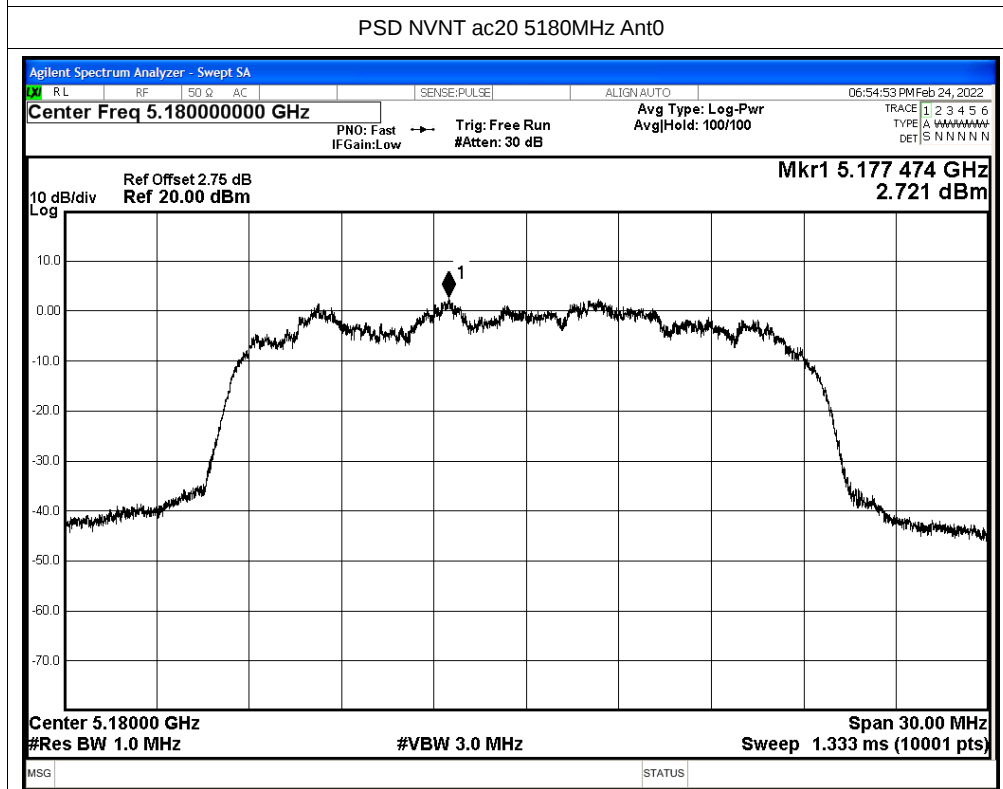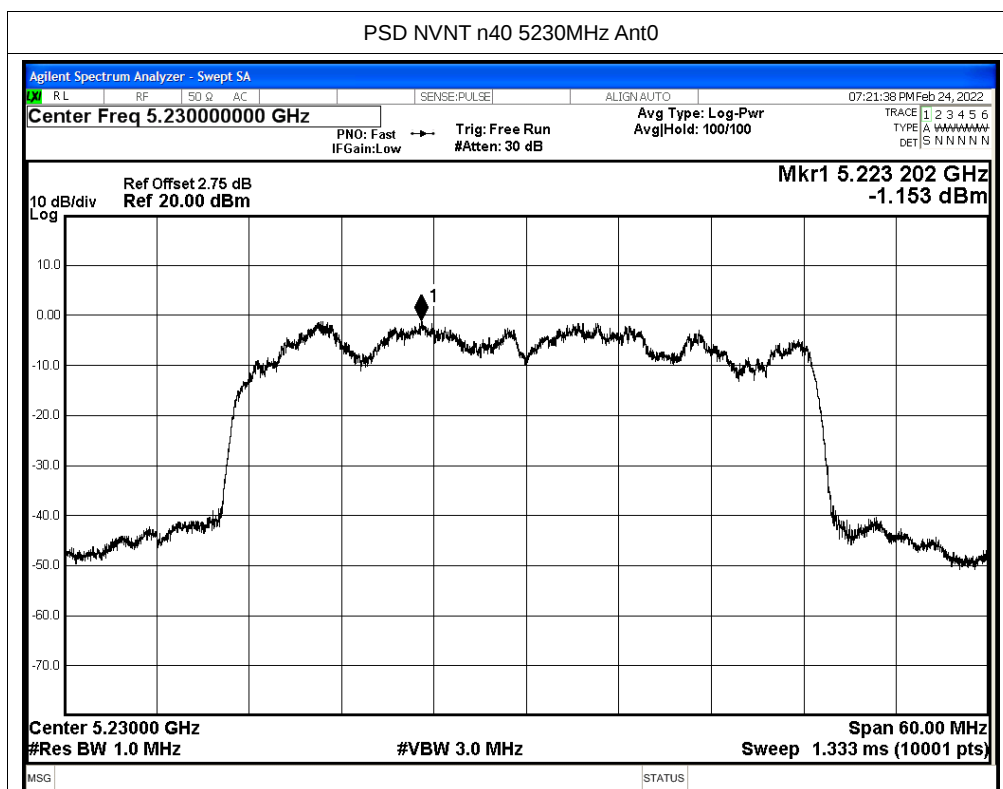




PSD NVNT ac20 5200MHz Ant0

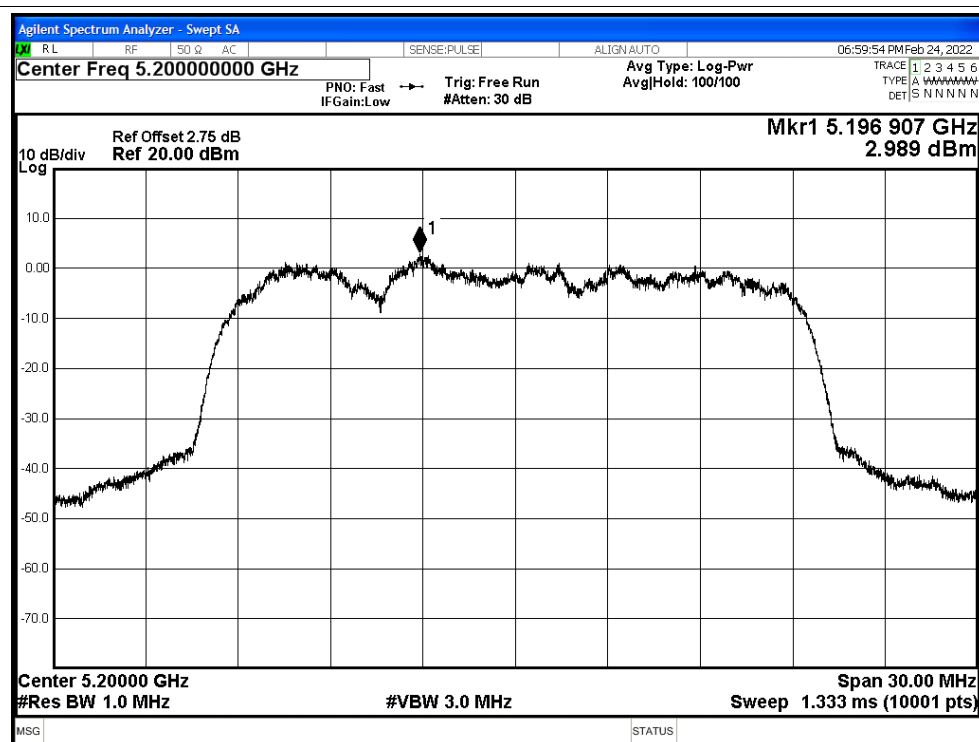


PSD NVNT ac20 5240MHz Ant0

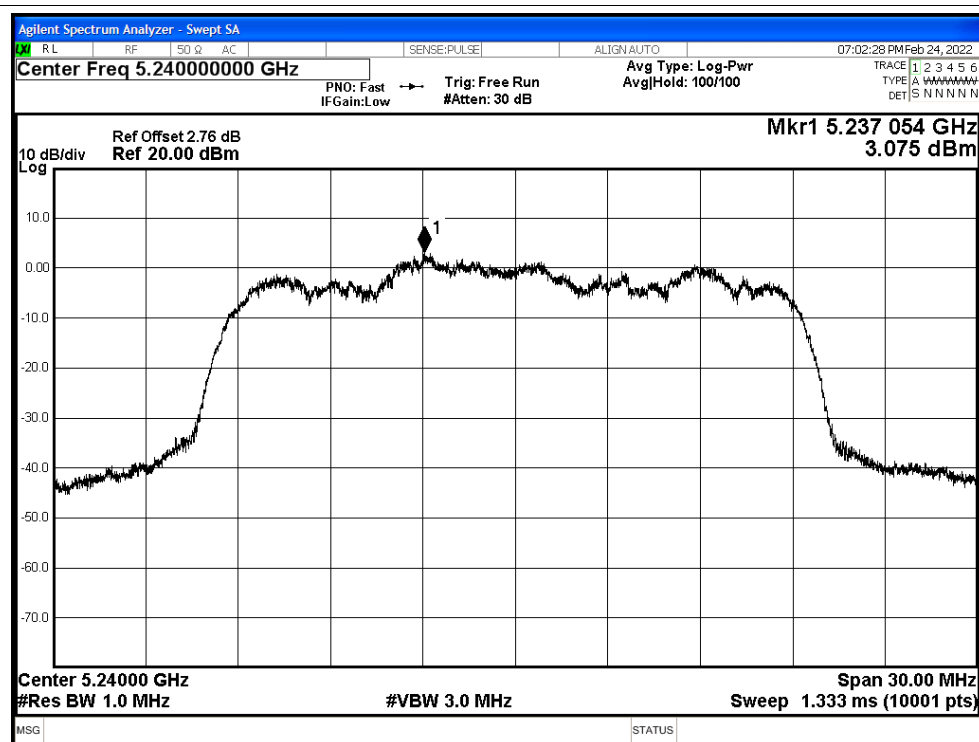





PSD NVNT ac40 5190MHz Ant0

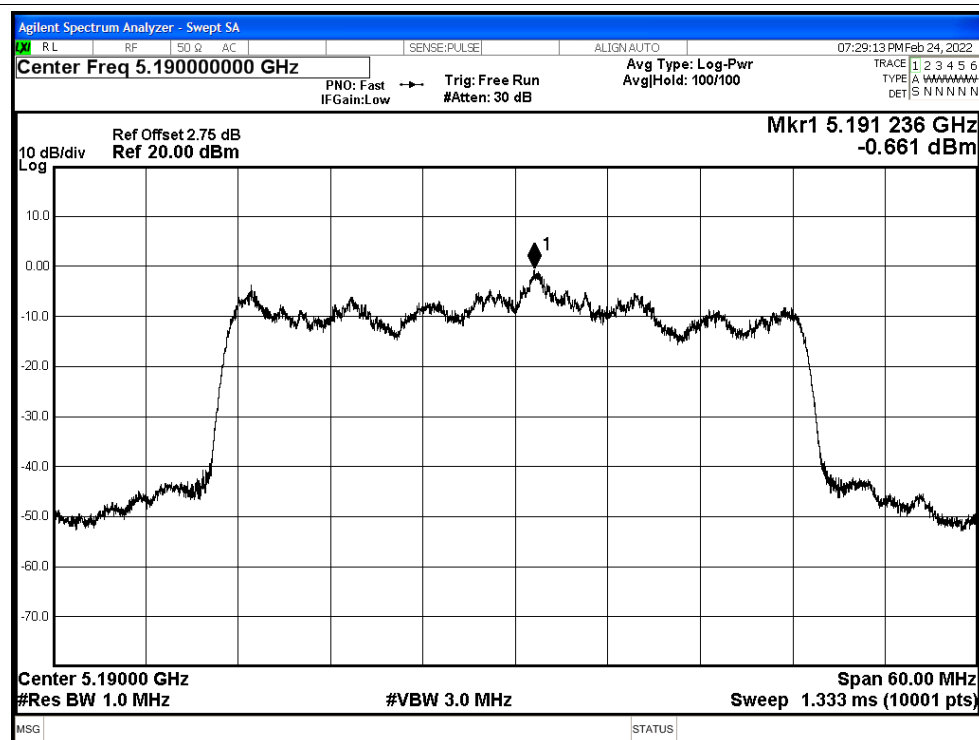


PSD NVNT ac40 5230MHz Ant0

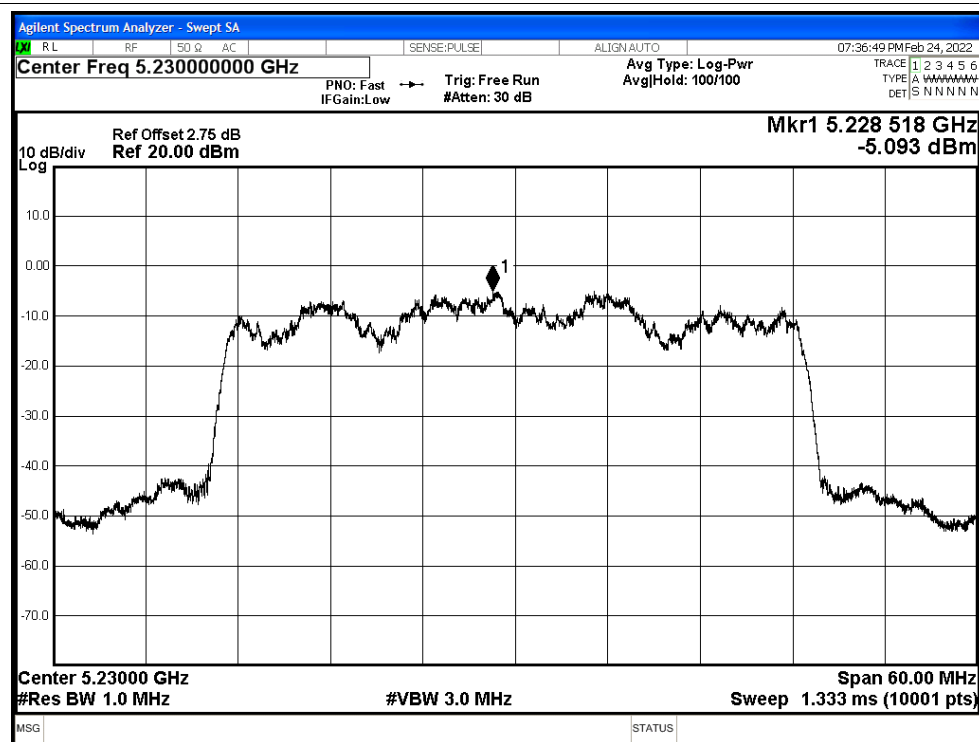

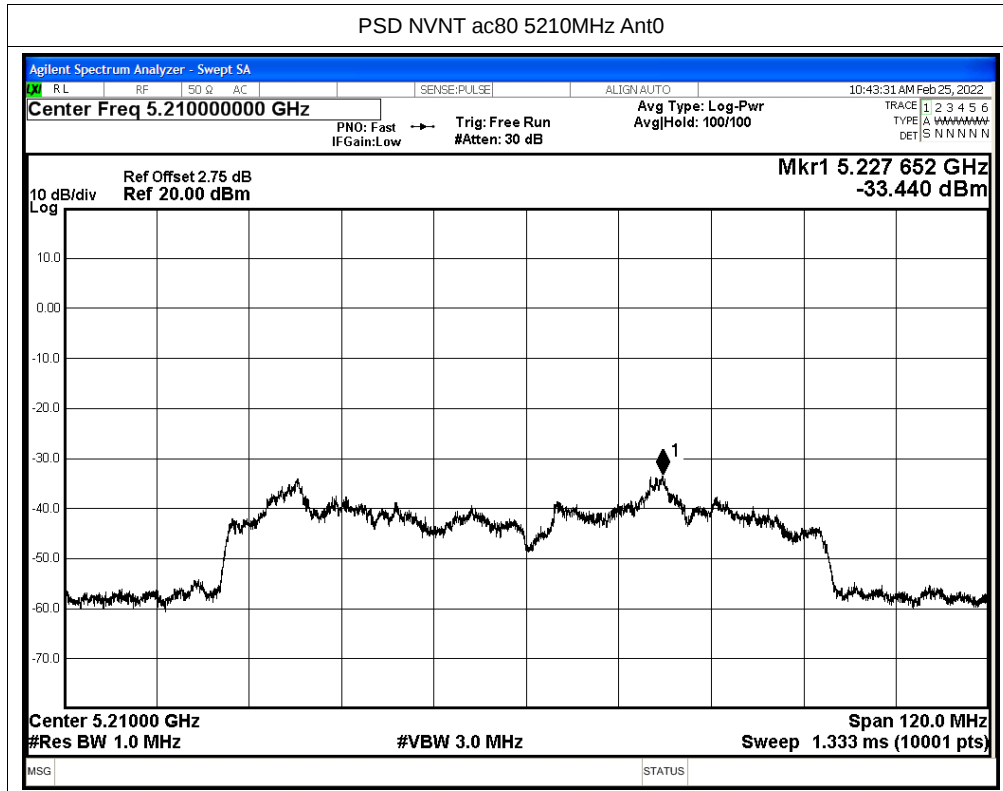




PSD NVNT ax20 5180MHz Ant0

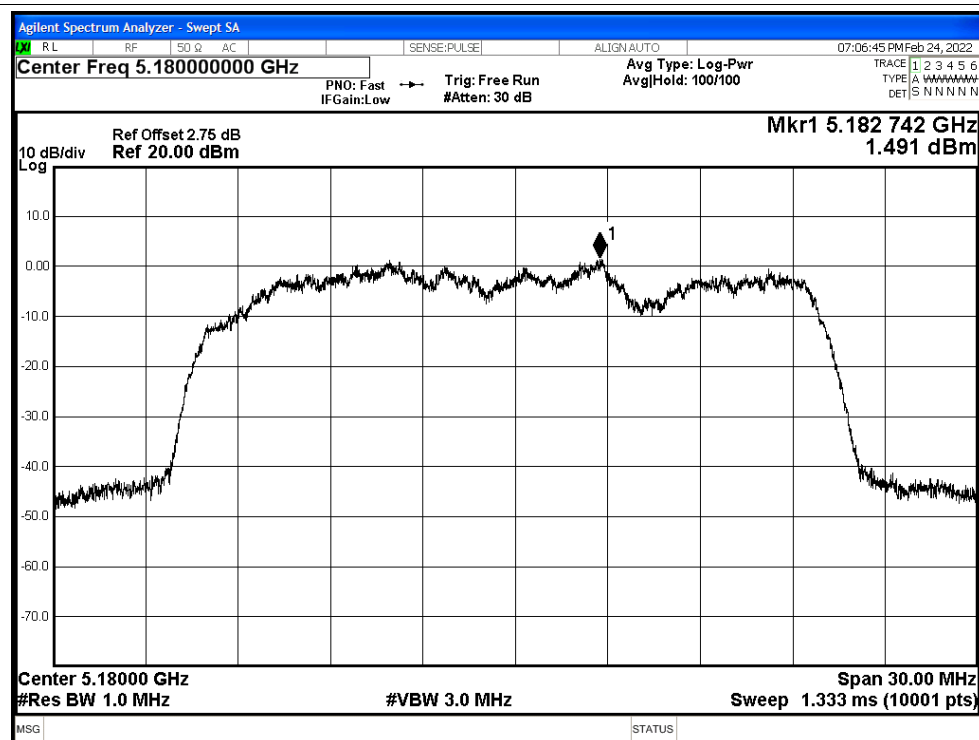


PSD NVNT ax20 5200MHz Ant0

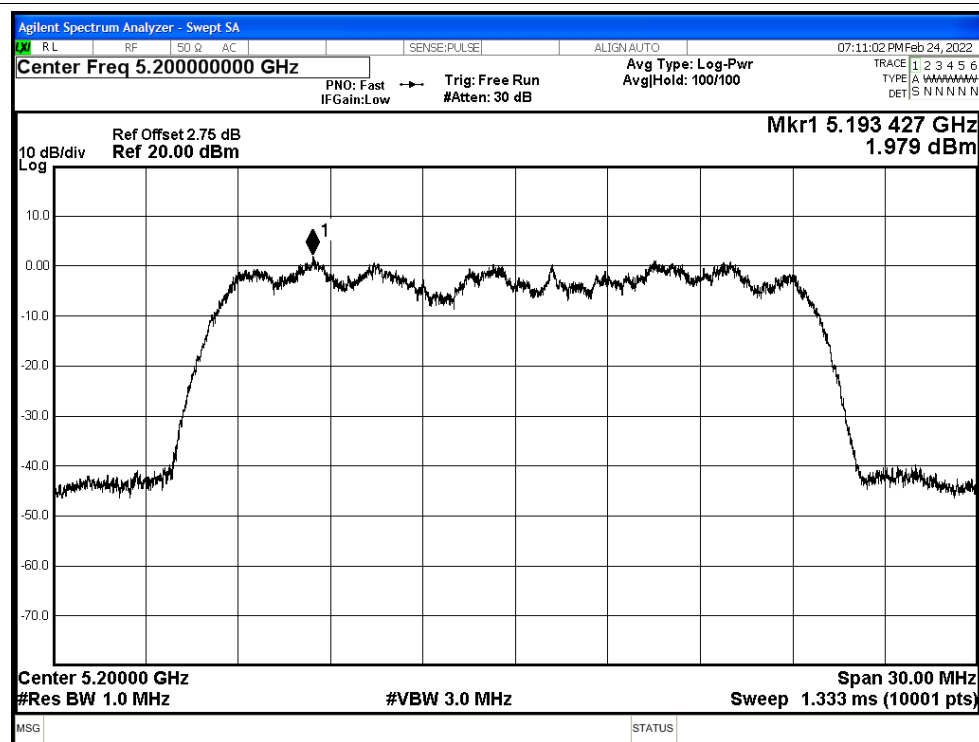




PSD NVNT ax20 5240MHz Ant0

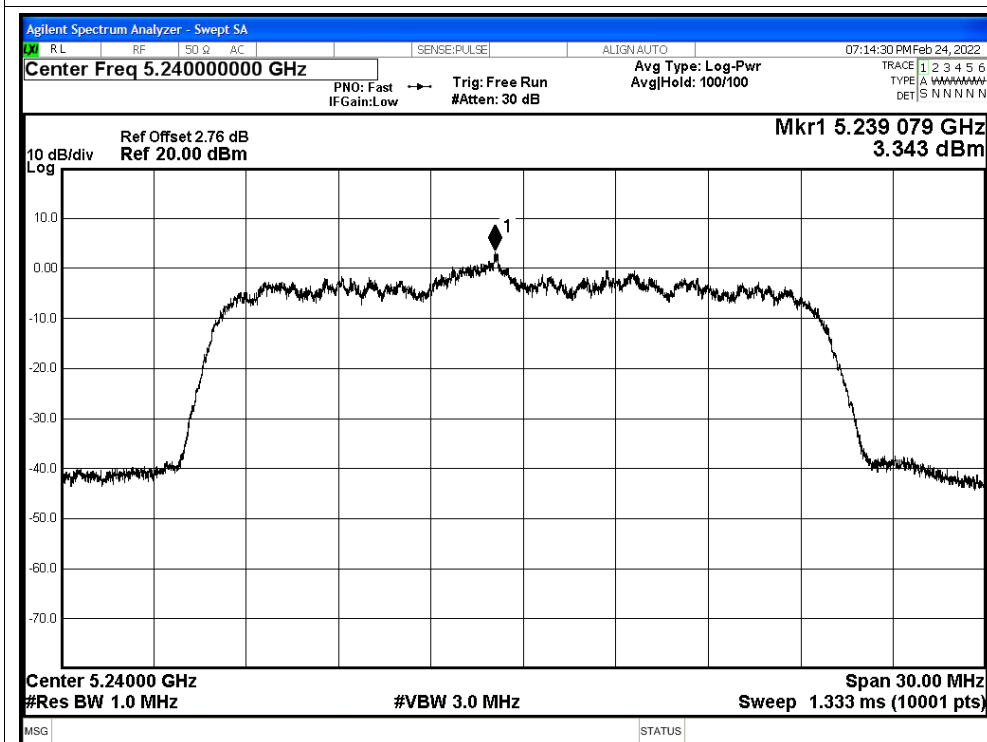


PSD NVNT ax40 5190MHz Ant0

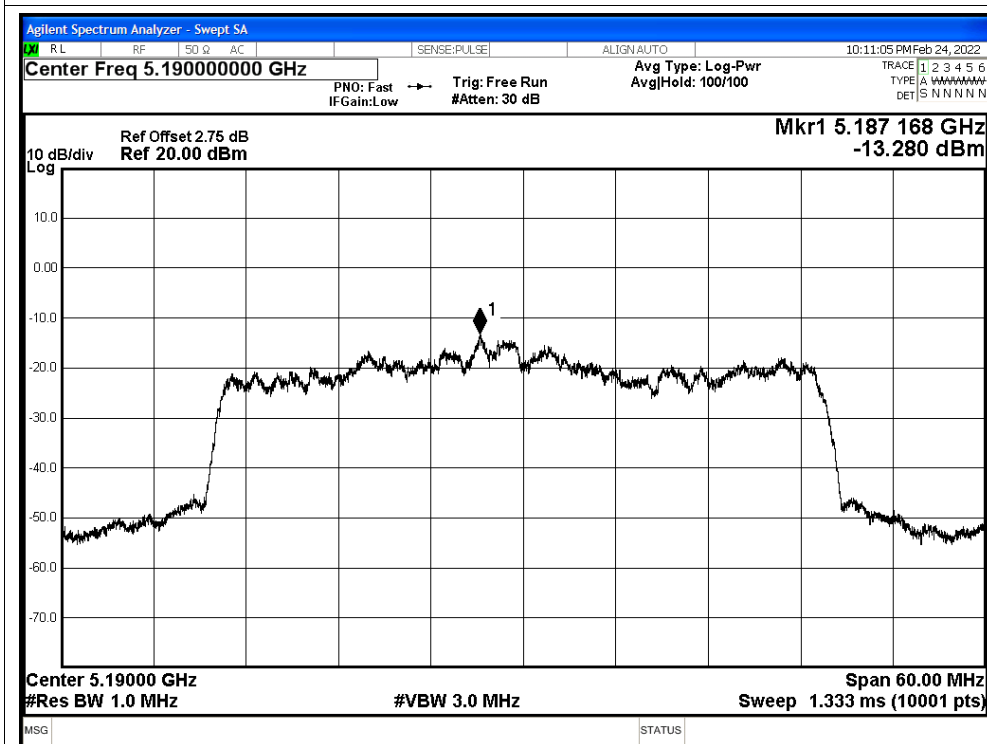




PSD NVNT ax40 5230MHz Ant0

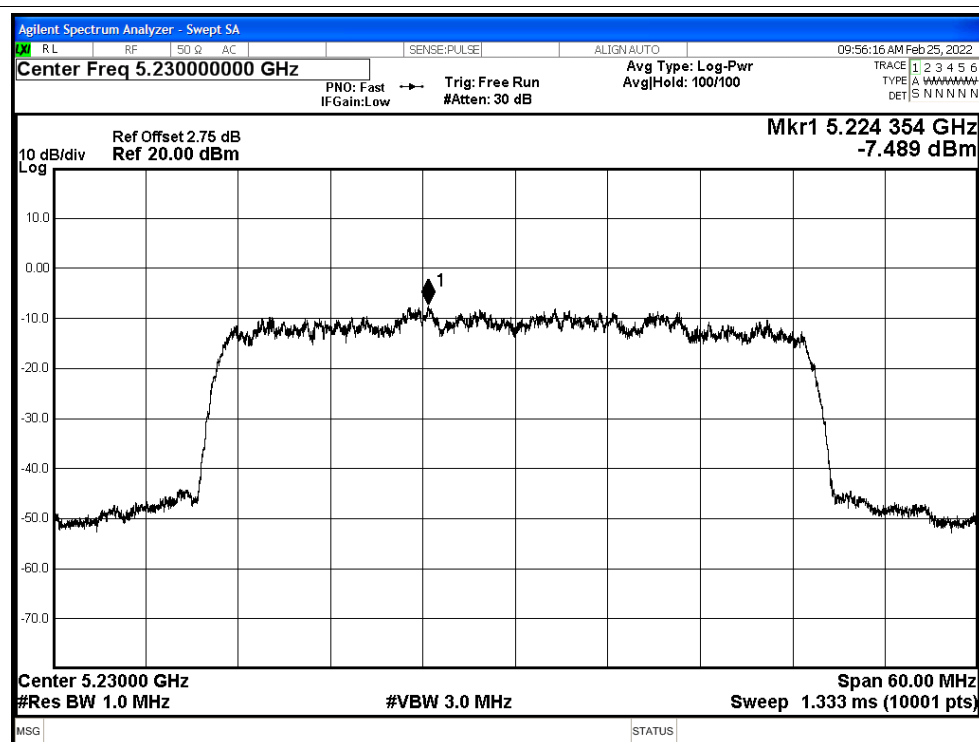


PSD NVNT ax80 5210MHz Ant0

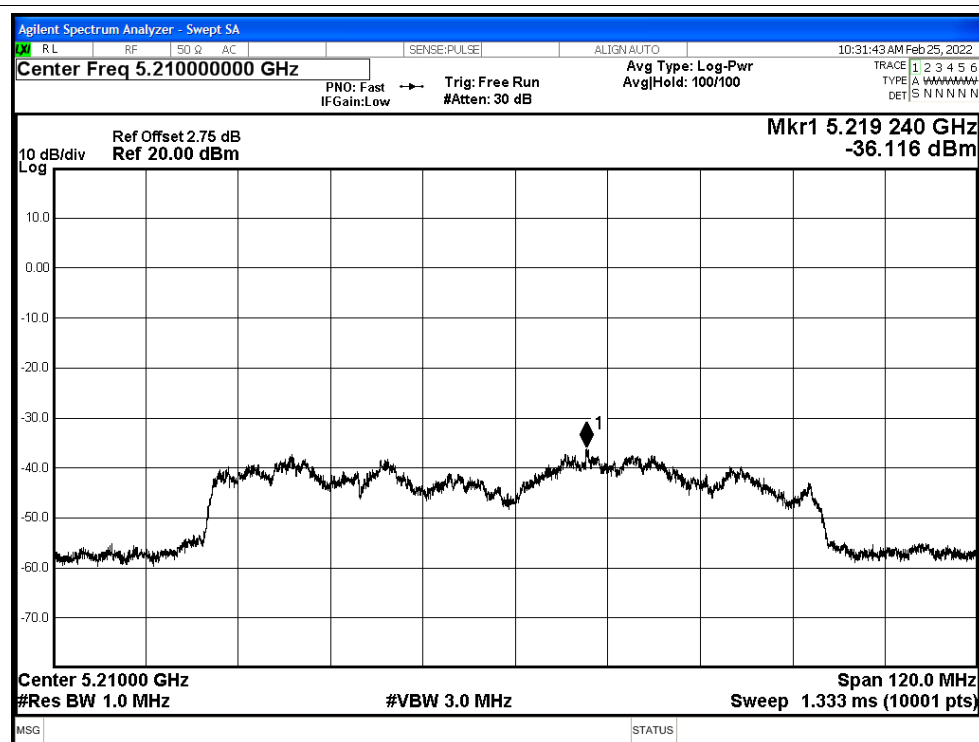




Test Graphs

PSD NVNT a 5180MHz Ant1

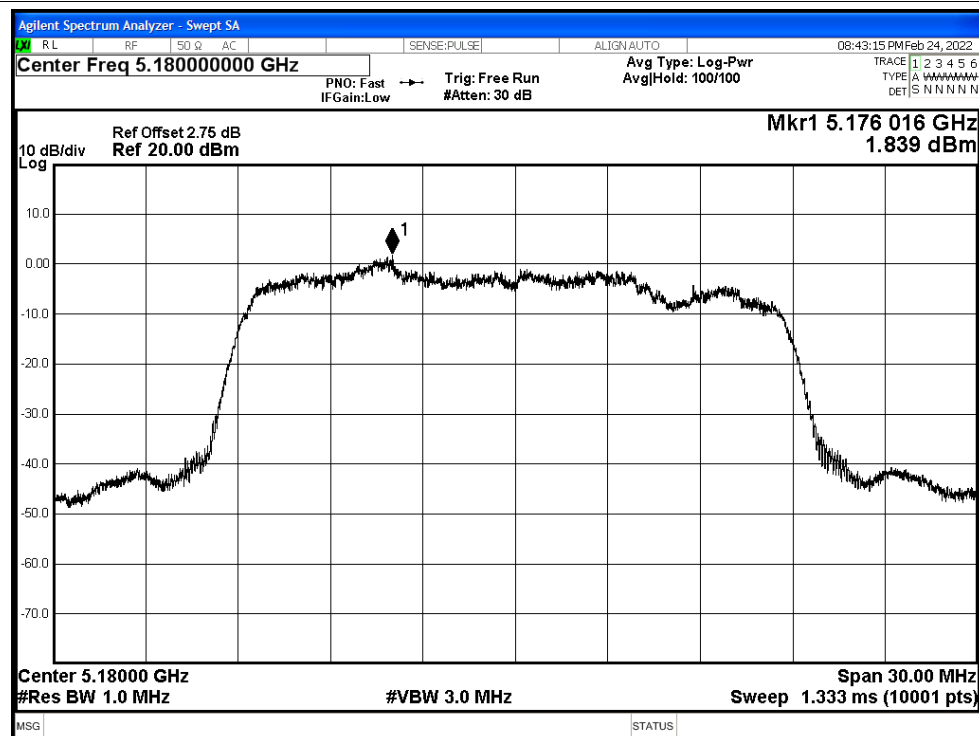


PSD NVNT a 5200MHz Ant1

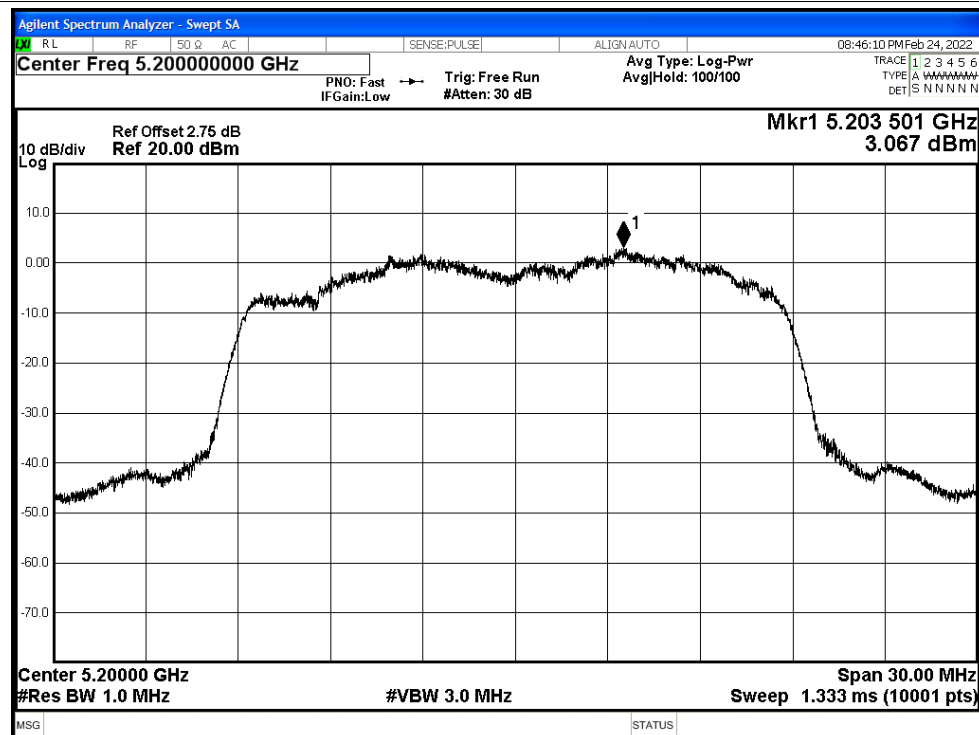




PSD NVNT a 5240MHz Ant1

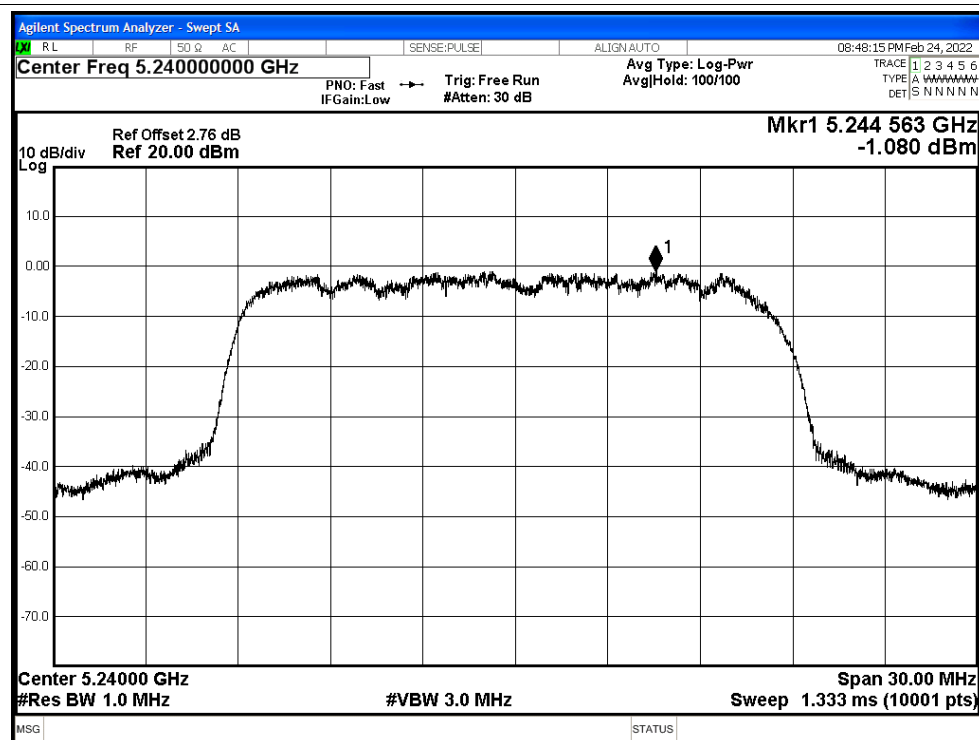


PSD NVNT n20 5180MHz Ant1

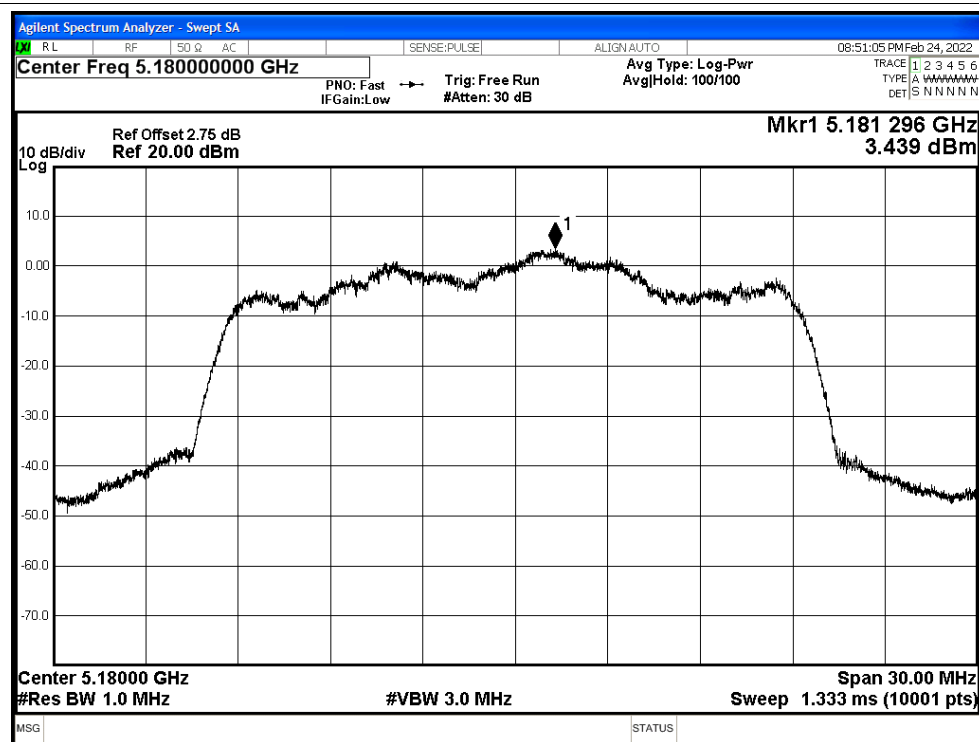






PSD NVNT n20 5200MHz Ant1

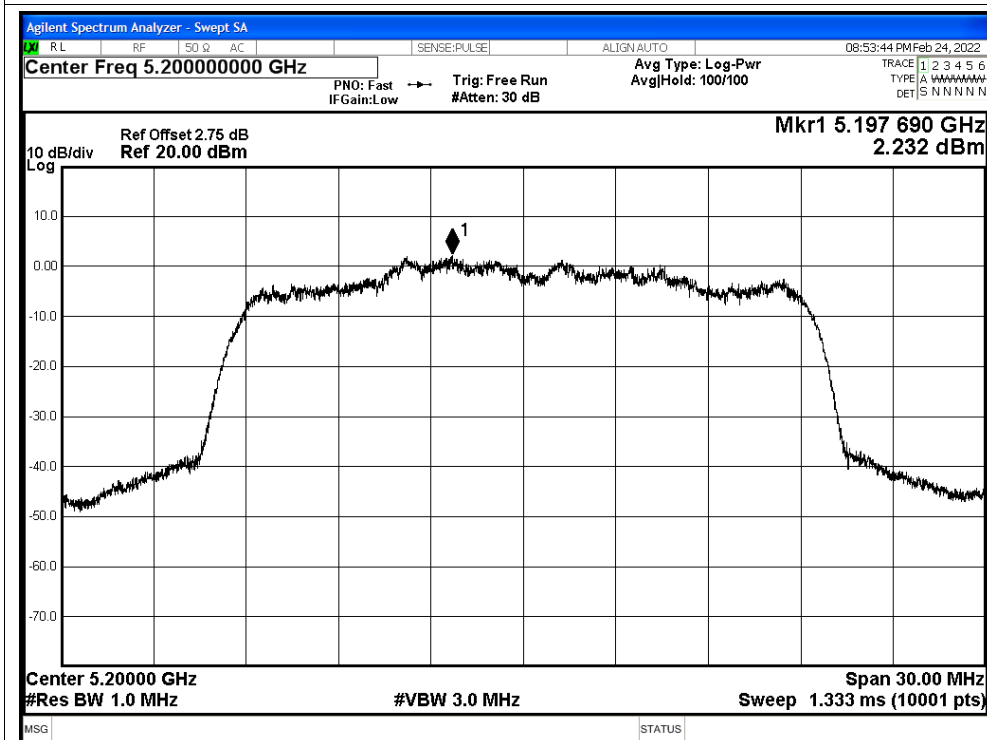


PSD NVNT n20 5240MHz Ant1

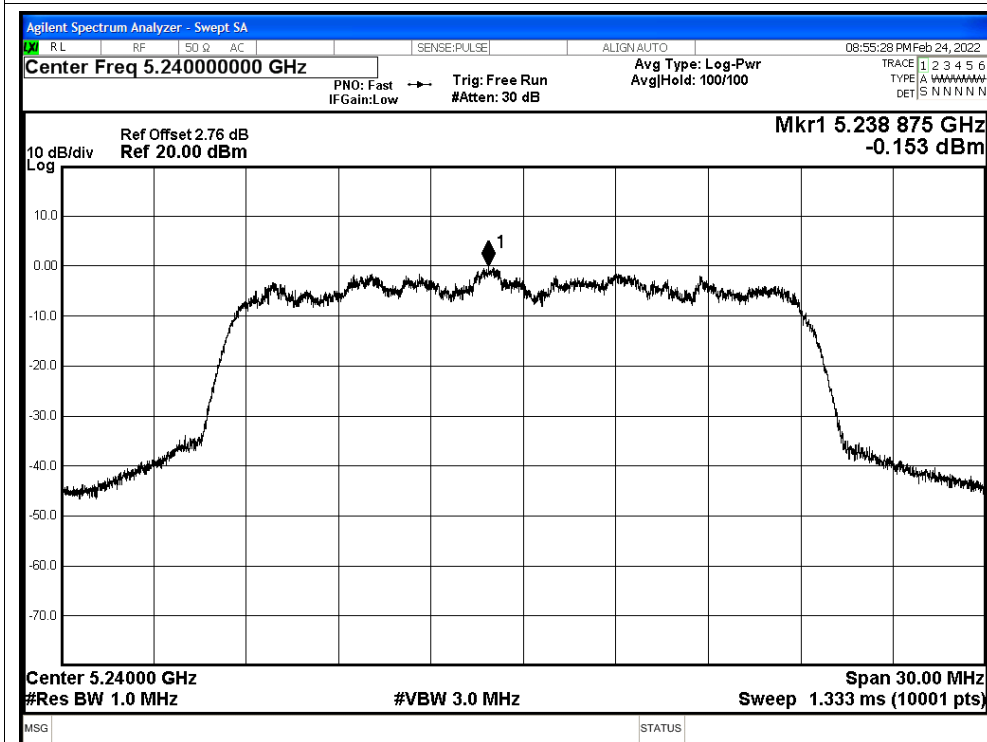

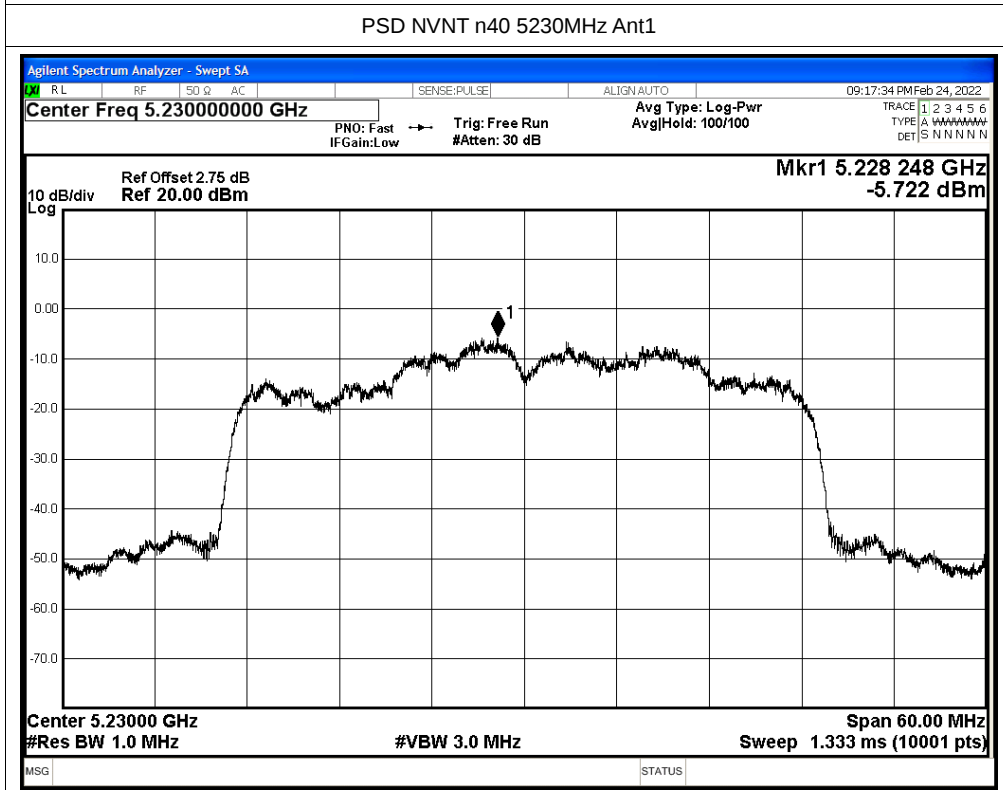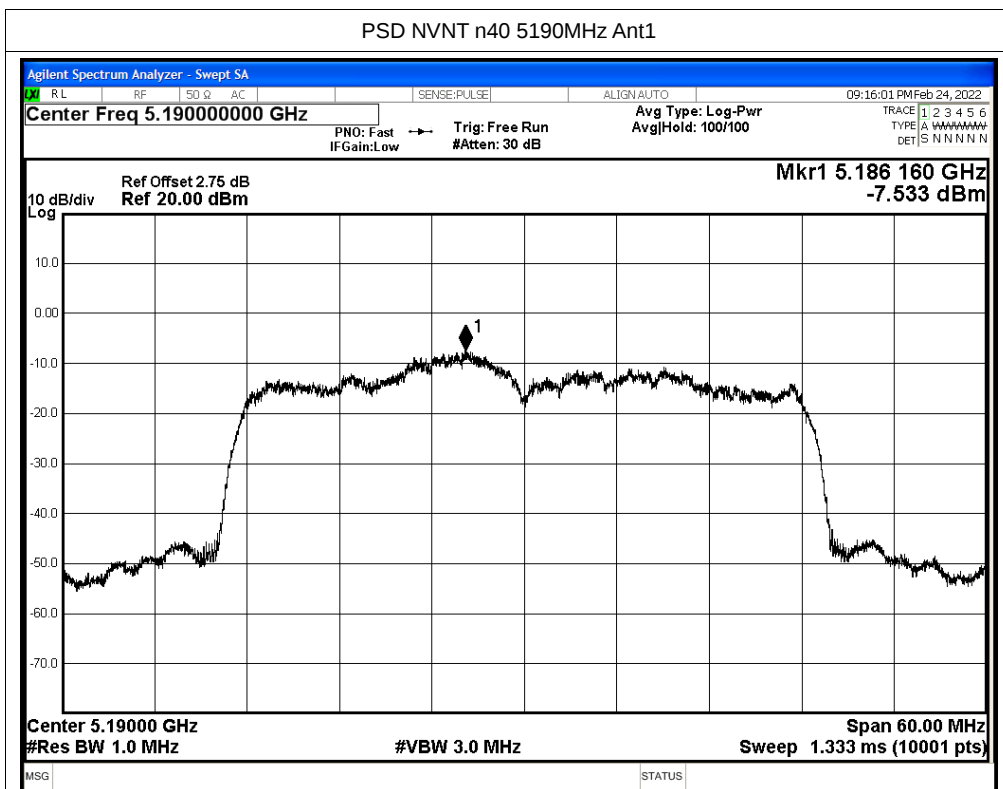




PSD NVNT ac20 5180MHz Ant1

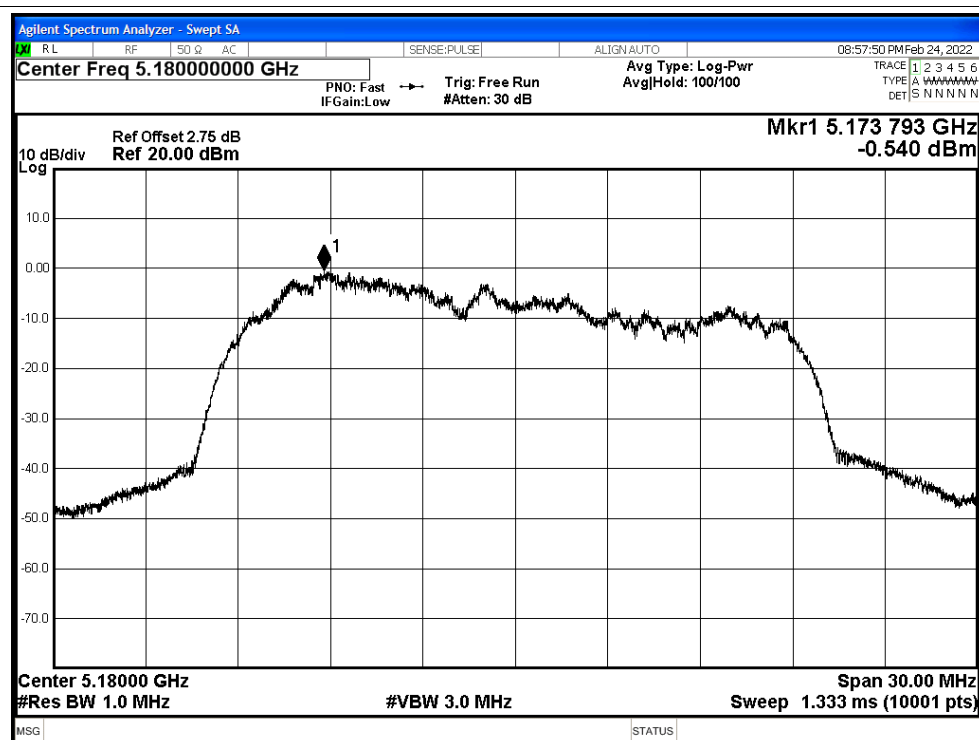


PSD NVNT ac20 5200MHz Ant1

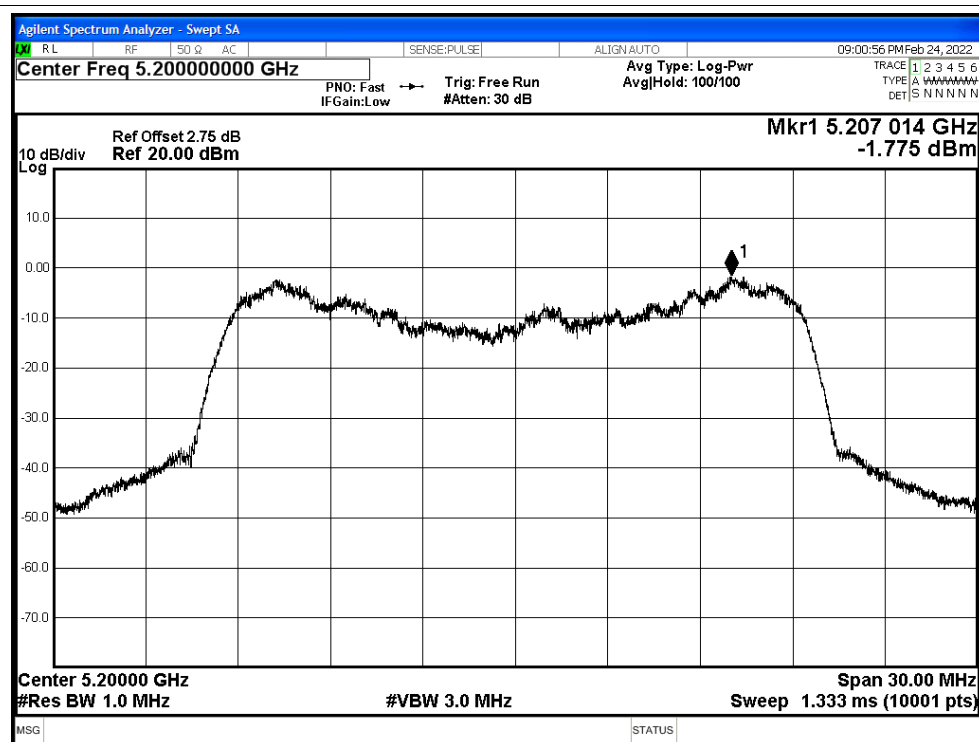




PSD NVNT ac20 5240MHz Ant1

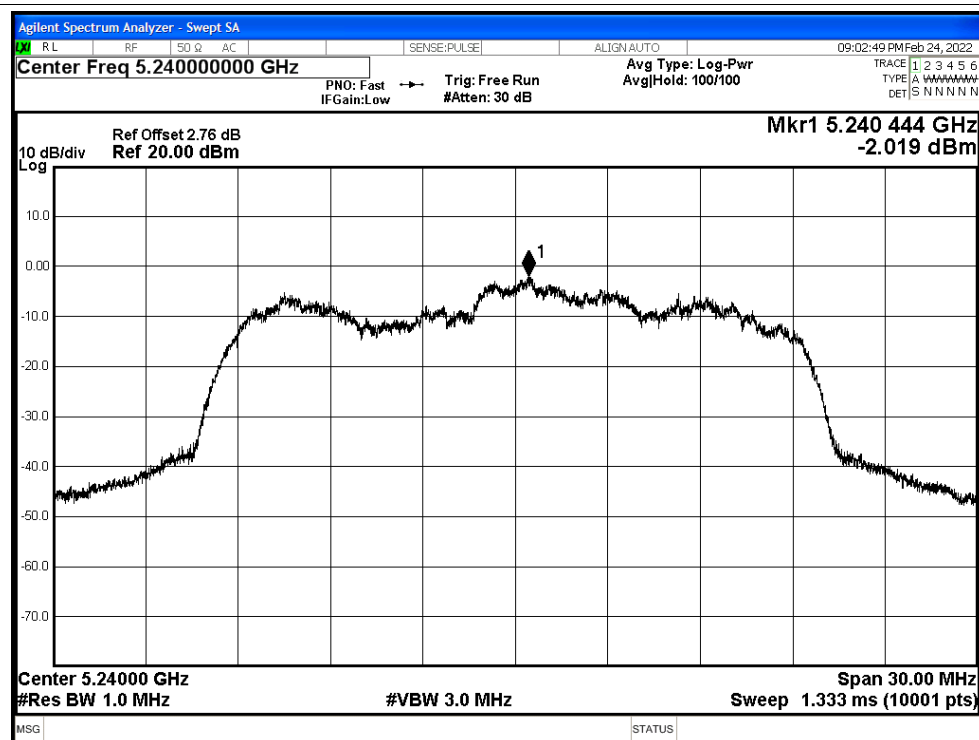


PSD NVNT ac40 5190MHz Ant1

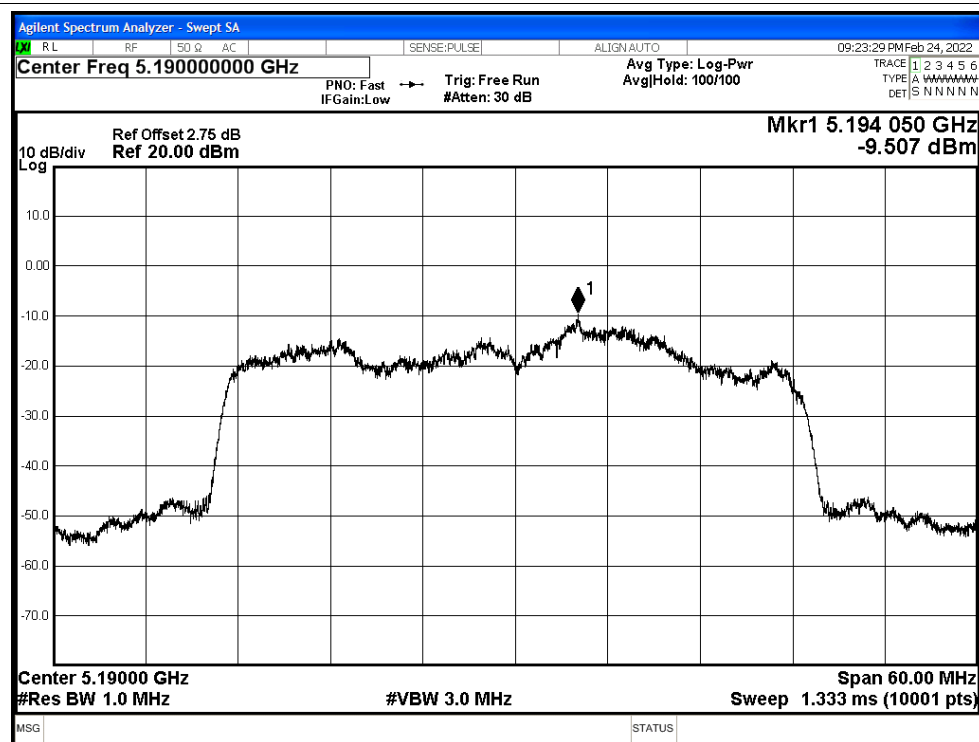



PSD NVNT ac40 5230MHz Ant1

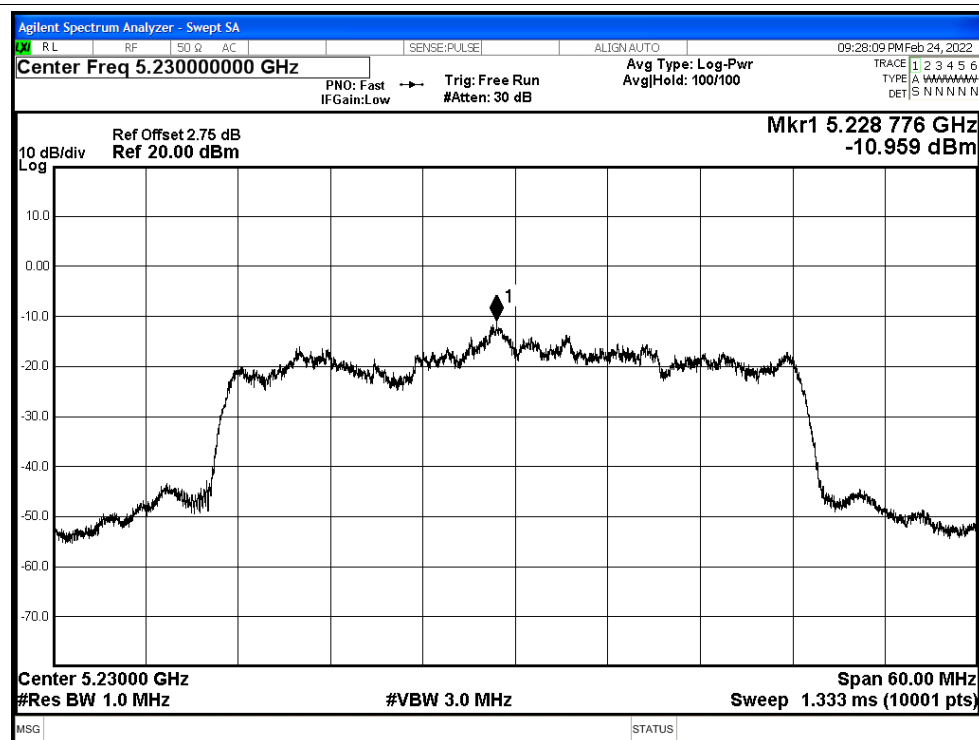


PSD NVNT ac80 5210MHz Ant1






PSD NVNT ax20 5180MHz Ant1

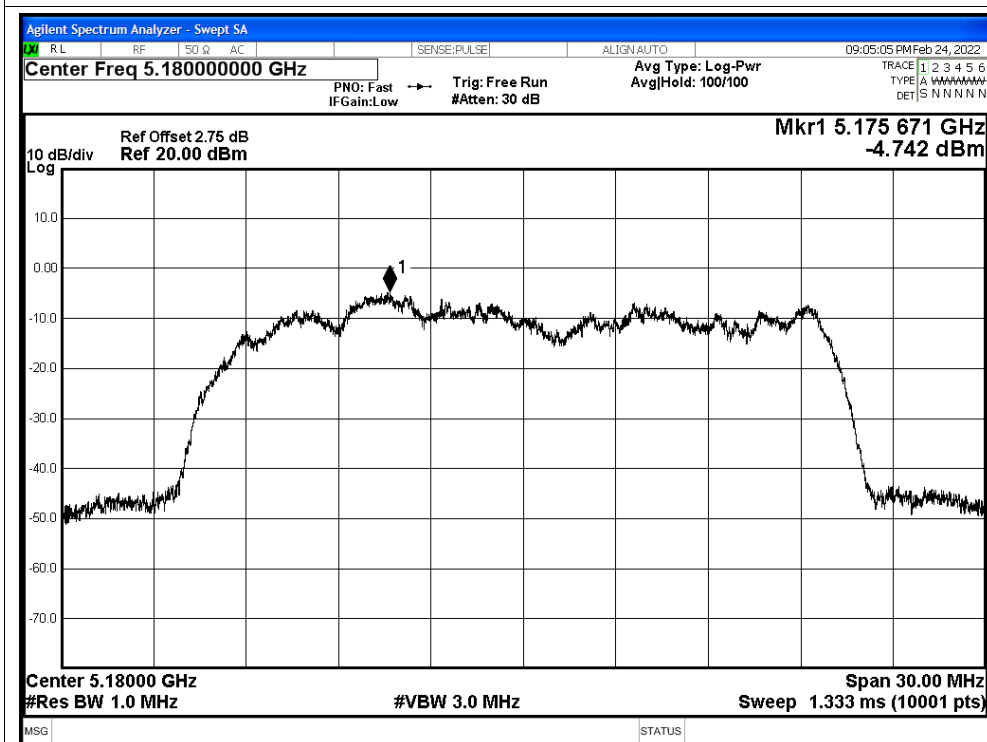


PSD NVNT ax20 5200MHz Ant1

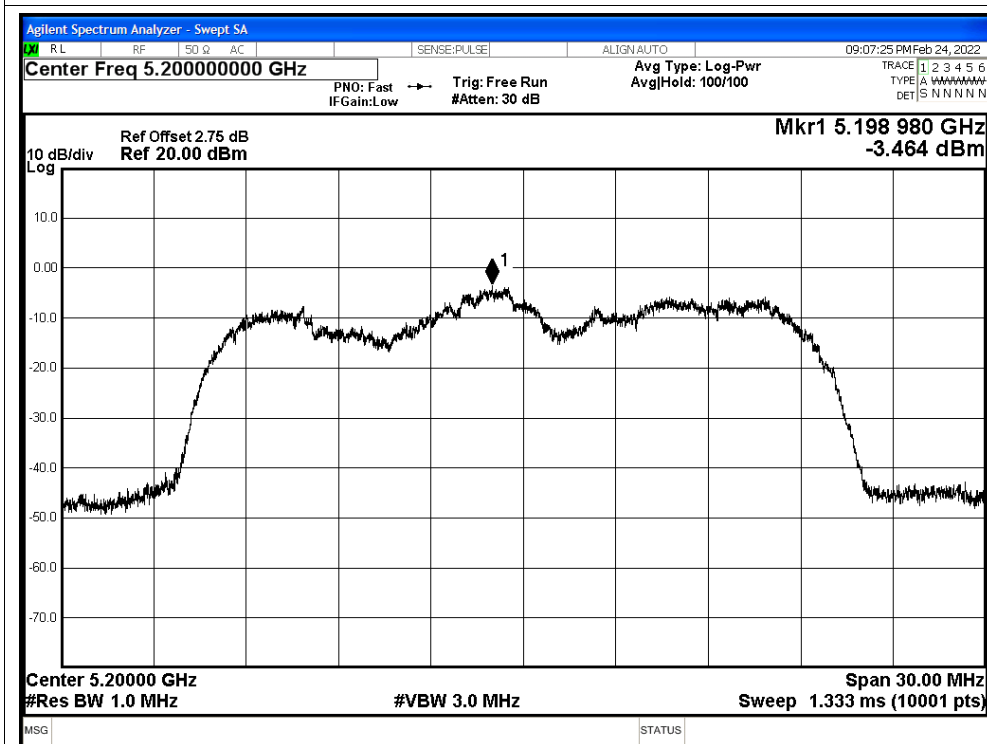




PSD NVNT ax20 5240MHz Ant1

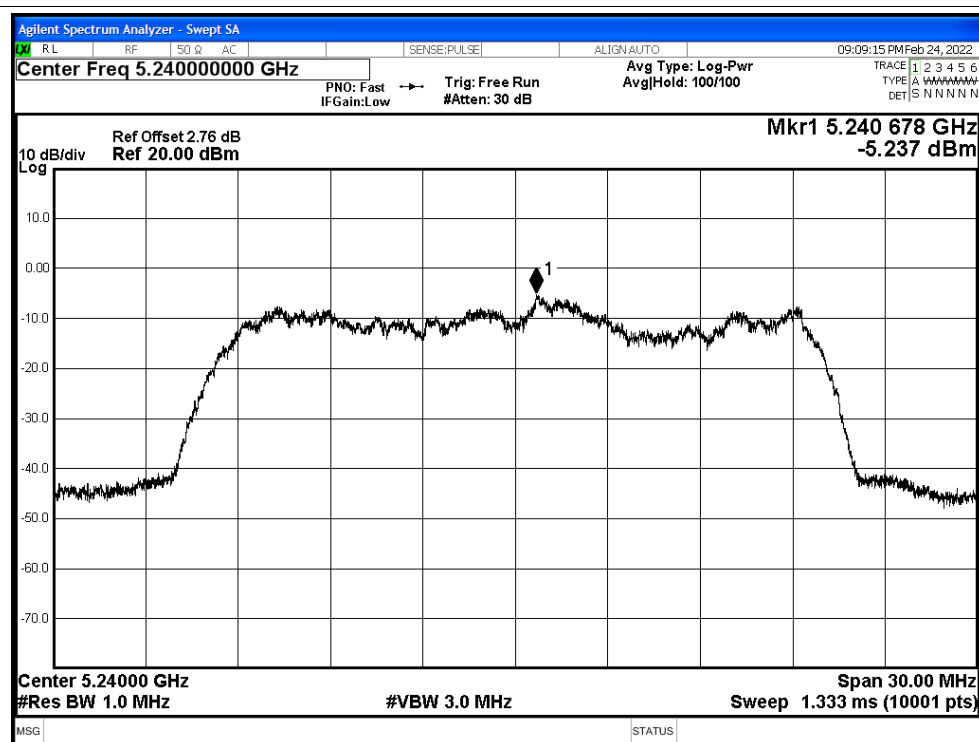


PSD NVNT ax40 5190MHz Ant1

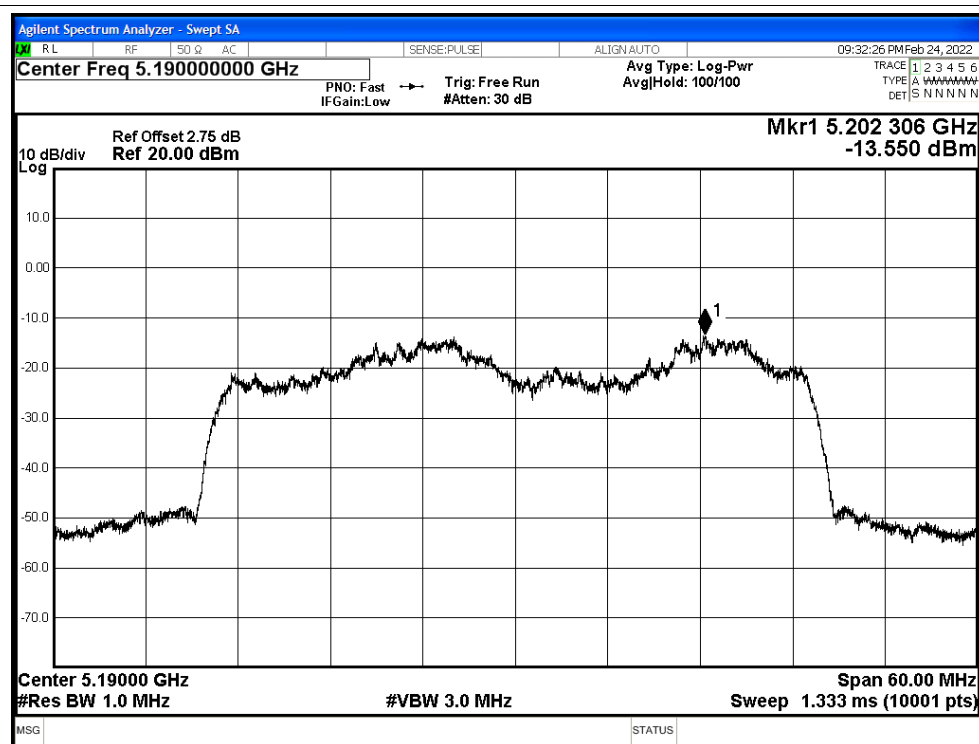



PSD NVNT ax40 5230MHz Ant1

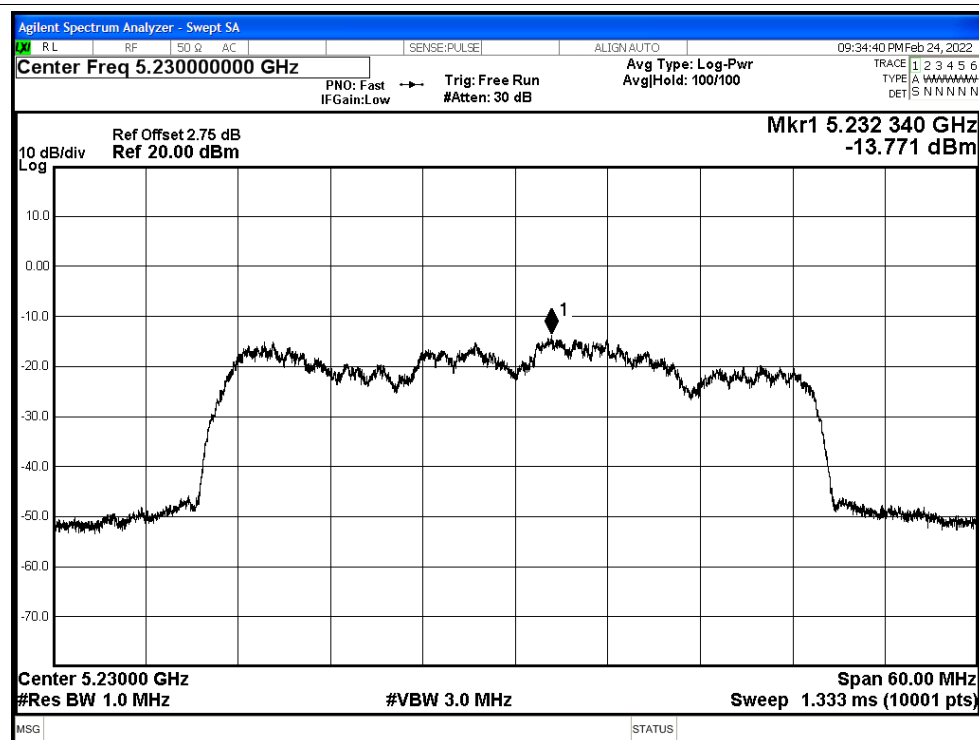

PSD NVNT ax80 5210MHz Ant1





B.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-52.19	2	45.04	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-60.7	2	36.53	Average	54	Pass
NVNT	a	5180	Ant0	5139.1	-45.01	2	52.22	Peak	68.2	Pass
NVNT	a	5180	Ant0	5148.9	-56.44	2	40.79	Average	54	Pass
NVNT	a	5180	Ant0	5150	-48.33	2	48.9	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-56.3	2	40.93	Average	54	Pass
NVNT	a	5240	Ant0	5350	-49.61	2	47.62	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-58.86	2	38.37	Average	54	Pass
NVNT	a	5240	Ant0	5392.8	-46.59	2	50.64	Peak	68.2	Pass
NVNT	a	5240	Ant0	5358.24	-58.34	2	38.89	Average	54	Pass
NVNT	a	5240	Ant0	5460	-49.57	2	47.66	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-59.4	2	37.83	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-51.62	2	45.61	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-60.8	2	36.43	Average	54	Pass
NVNT	n20	5180	Ant0	5137	-45.78	2	51.45	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5149.6	-56.03	2	41.2	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-47.41	2	49.82	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-55.72	2	41.51	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-49.84	2	47.39	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-58.78	2	38.45	Average	54	Pass
NVNT	n20	5240	Ant0	5362.56	-46.38	2	50.85	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5364.72	-58.31	2	38.92	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-50.78	2	46.45	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-59.51	2	37.72	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-51.43	2	45.8	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-60.42	2	36.81	Average	54	Pass
NVNT	n40	5190	Ant0	5149.7	-45.62	2	51.61	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5148.97	-54.89	2	42.34	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-45.24	2	51.99	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-55	2	42.23	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-49.94	2	47.29	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-58.48	2	38.75	Average	54	Pass
NVNT	n40	5230	Ant0	5393.04	-47.29	2	49.94	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5391.69	-58.14	2	39.09	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-50.96	2	46.27	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-59.33	2	37.9	Average	54	Pass
NVNT	ac20	5180	Ant0	4500	-51.55	2	45.68	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	4500	-60.48	2	36.75	Average	54	Pass
NVNT	ac20	5180	Ant0	5148.2	-45.99	2	51.24	Peak	68.2	Pass



NVNT	ac20	5180	Ant0	5149.6	-55.83	2	41.4	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-47.18	2	50.05	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-55.7	2	41.53	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-49.17	2	48.06	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-58.75	2	38.48	Average	54	Pass
NVNT	ac20	5240	Ant0	5396.88	-46.68	2	50.55	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5364.48	-58.26	2	38.97	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-50.58	2	46.65	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-59.36	2	37.87	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-49.65	2	47.58	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-60.14	2	37.09	Average	54	Pass
NVNT	ac40	5190	Ant0	5146.78	-43.43	2	53.8	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5148.97	-54.52	2	42.71	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-47.03	2	50.2	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-54.79	2	42.44	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-50.07	2	47.16	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-58.09	2	39.14	Average	54	Pass
NVNT	ac40	5230	Ant0	5394.12	-46.36	2	50.87	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5369.55	-57.9	2	39.33	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-49.85	2	47.38	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-58.92	2	38.31	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-50.4	2	46.83	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350	-57.35	2	39.88	Average	54	Pass
NVNT	ac80	5210	Ant0	5355.39	-46.65	2	50.58	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5362.98	-57.19	2	40.04	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-50.91	2	46.32	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5460	-58.93	2	38.3	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-51	2	46.23	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	4500	-59.72	2	37.51	Average	54	Pass
NVNT	ac80	5210	Ant0	5146.22	-43.24	2	53.99	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5149.38	-50.47	2	46.76	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-43.74	2	53.49	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5150	-50.86	2	46.37	Average	54	Pass
NVNT	ax20	5180	Ant0	4500	-51.19	2	46.04	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	4500	-60.42	2	36.81	Average	54	Pass
NVNT	ax20	5180	Ant0	5148.2	-45.03	2	52.2	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5148.2	-56	2	41.23	Average	54	Pass
NVNT	ax20	5180	Ant0	5150	-46.88	2	50.35	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5150	-55.97	2	41.26	Average	54	Pass
NVNT	ax20	5240	Ant0	5350	-49.47	2	47.76	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5350	-58.54	2	38.69	Average	54	Pass
NVNT	ax20	5240	Ant0	5424.24	-46.21	2	51.02	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5367.84	-57.76	2	39.47	Average	54	Pass
NVNT	ax20	5240	Ant0	5460	-49.17	2	48.06	Peak	68.2	Pass



NVNT	ax20	5240	Ant0	5460	-59.18	2	38.05	Average	54	Pass
NVNT	ax40	5190	Ant0	4500	-50.16	2	47.07	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	4500	-60.17	2	37.06	Average	54	Pass
NVNT	ax40	5190	Ant0	5148.24	-45.02	2	52.21	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5148.97	-53.93	2	43.3	Average	54	Pass
NVNT	ax40	5190	Ant0	5150	-44.95	2	52.28	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5150	-53.96	2	43.27	Average	54	Pass
NVNT	ax40	5230	Ant0	5350	-51.32	2	45.91	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5350	-58.1	2	39.13	Average	54	Pass
NVNT	ax40	5230	Ant0	5374.41	-45.93	2	51.3	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5382.51	-57.52	2	39.71	Average	54	Pass
NVNT	ax40	5230	Ant0	5460	-50.85	2	46.38	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5460	-58.78	2	38.45	Average	54	Pass
NVNT	ax80	5210	Ant0	5350	-48.87	2	48.36	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5350	-57.31	2	39.92	Average	54	Pass
NVNT	ax80	5210	Ant0	5368.92	-46.47	2	50.76	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5355.06	-57.23	2	40	Average	54	Pass
NVNT	ax80	5210	Ant0	5460	-51.88	2	45.35	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5460	-58.47	2	38.76	Average	54	Pass
NVNT	ax80	5210	Ant0	4500	-50.46	2	46.77	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	4500	-59.56	2	37.67	Average	54	Pass
NVNT	ax80	5210	Ant0	5138.32	-41.95	2	55.28	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5149.38	-50.65	2	46.58	Average	54	Pass
NVNT	ax80	5210	Ant0	5150	-42.83	2	54.4	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5150	-50.41	2	46.82	Average	54	Pass

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-51.96	2	45.27	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-60.74	2	36.49	Average	54	Pass
NVNT	a	5180	Ant1	5144.7	-46.26	2	50.97	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-56.31	2	40.92	Average	54	Pass
NVNT	a	5180	Ant1	5150	-45.62	2	51.61	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-56.06	2	41.17	Average	54	Pass
NVNT	a	5240	Ant1	5350	-46.8	2	50.43	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-58.92	2	38.31	Average	54	Pass
NVNT	a	5240	Ant1	5350.08	-46.8	2	50.43	Peak	68.2	Pass
NVNT	a	5240	Ant1	5368.08	-58.32	2	38.91	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.38	2	46.85	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-59.63	2	37.6	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-50.17	2	47.06	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-60.66	2	36.57	Average	54	Pass
NVNT	n20	5180	Ant1	5148.2	-45.64	2	51.59	Peak	68.2	Pass



NVNT	n20	5180	Ant1	5148.9	-56.06	2	41.17	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-47.3	2	49.93	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-56	2	41.23	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-48.2	2	49.03	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-58.82	2	38.41	Average	54	Pass
NVNT	n20	5240	Ant1	5359.44	-45.67	2	51.56	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5393.28	-58.4	2	38.83	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-50.72	2	46.51	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-59.6	2	37.63	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-50.11	2	47.12	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-60.3	2	36.93	Average	54	Pass
NVNT	n40	5190	Ant1	5148.97	-44.47	2	52.76	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5148.97	-54.99	2	42.24	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-45.93	2	51.3	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-54.92	2	42.31	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-48.97	2	48.26	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-58.6	2	38.63	Average	54	Pass
NVNT	n40	5230	Ant1	5408.43	-46.25	2	50.98	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5354.43	-58.19	2	39.04	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-50.7	2	46.53	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-59.3	2	37.93	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-51.76	2	45.47	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-60.5	2	36.73	Average	54	Pass
NVNT	ac20	5180	Ant1	5149.6	-45.01	2	52.22	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5148.9	-56.11	2	41.12	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-46.89	2	50.34	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-55.84	2	41.39	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-48.82	2	48.41	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-58.38	2	38.85	Average	54	Pass
NVNT	ac20	5240	Ant1	5352.96	-46.78	2	50.45	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5368.08	-58.24	2	38.99	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-50.07	2	47.16	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-59.44	2	37.79	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-52.75	2	44.48	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-60.24	2	36.99	Average	54	Pass
NVNT	ac40	5190	Ant1	5146.78	-43.55	2	53.68	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-54.41	2	42.82	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-46.68	2	50.55	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-54.22	2	43.01	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-49.6	2	47.63	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-58.65	2	38.58	Average	54	Pass
NVNT	ac40	5230	Ant1	5381.97	-47.02	2	50.21	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5354.16	-57.77	2	39.46	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-50.19	2	47.04	Peak	68.2	Pass



NVNT	ac40	5230	Ant1	5460	-59.26	2	37.97	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-49.05	2	48.18	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-57.44	2	39.79	Average	54	Pass
NVNT	ac80	5210	Ant1	5432.94	-47.8	2	49.43	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350.77	-56.95	2	40.28	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-51.02	2	46.21	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-58.05	2	39.18	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-51.13	2	46.1	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-59.17	2	38.06	Average	54	Pass
NVNT	ac80	5210	Ant1	5145.43	-41.27	2	55.96	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5149.38	-50.58	2	46.65	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-42.43	2	54.8	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-50.97	2	46.26	Average	54	Pass
NVNT	ax20	5180	Ant1	4500	-51.23	2	46	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	4500	-60.29	2	36.94	Average	54	Pass
NVNT	ax20	5180	Ant1	5144	-45.8	2	51.43	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5149.6	-55.95	2	41.28	Average	54	Pass
NVNT	ax20	5180	Ant1	5150	-45.37	2	51.86	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5150	-55.97	2	41.26	Average	54	Pass
NVNT	ax20	5240	Ant1	5350	-48.37	2	48.86	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5350	-58.66	2	38.57	Average	54	Pass
NVNT	ax20	5240	Ant1	5390.88	-46.55	2	50.68	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5384.16	-58.02	2	39.21	Average	54	Pass
NVNT	ax20	5240	Ant1	5460	-50.24	2	46.99	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5460	-59.26	2	37.97	Average	54	Pass
NVNT	ax40	5190	Ant1	4500	-51.5	2	45.73	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	4500	-60.16	2	37.07	Average	54	Pass
NVNT	ax40	5190	Ant1	5145.32	-44.03	2	53.2	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	5149.7	-53.51	2	43.72	Average	54	Pass
NVNT	ax40	5190	Ant1	5150	-44.33	2	52.9	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	5150	-54.21	2	43.02	Average	54	Pass
NVNT	ax40	5230	Ant1	5350	-49.54	2	47.69	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5350	-58.15	2	39.08	Average	54	Pass
NVNT	ax40	5230	Ant1	5358.48	-47.13	2	50.1	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5385.21	-57.55	2	39.68	Average	54	Pass
NVNT	ax40	5230	Ant1	5460	-48.64	2	48.59	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5460	-58.91	2	38.32	Average	54	Pass
NVNT	ax80	5210	Ant1	5350	-49.67	2	47.56	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5350	-57.36	2	39.87	Average	54	Pass
NVNT	ax80	5210	Ant1	5372.22	-47.62	2	49.61	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5359.35	-57.18	2	40.05	Average	54	Pass
NVNT	ax80	5210	Ant1	5460	-50.7	2	46.53	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5460	-58.67	2	38.56	Average	54	Pass
NVNT	ax80	5210	Ant1	4500	-51.92	2	45.31	Peak	68.2	Pass



NVNT	ax80	5210	Ant1	4500	-59.56	2	37.67	Average	54	Pass
NVNT	ax80	5210	Ant1	5145.43	-42.67	2	54.56	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5149.38	-50.57	2	46.66	Average	54	Pass
NVNT	ax80	5210	Ant1	5150	-43.13	2	54.1	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5150	-50.22	2	47.01	Average	54	Pass

MIMO

Condition	Mode	Spur Freq (MHz)	Power (dBm)			Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
			Ant0	Ant1	MIMO					
NVNT	n20	4500	-51.62	-50.17	-47.82	4.01	51.41	Peak	68.2	Pass
NVNT	n20	4500	-60.8	-60.66	-57.72	4.01	41.52	Average	54	Pass
NVNT	n20	5136.3	-45.78	-45.64	-42.70	4.01	56.54	Peak	68.2	Pass
NVNT	n20	5148.9	-56.03	-56.06	-53.03	4.01	46.20	Average	54	Pass
NVNT	n20	5150	-47.41	-47.3	-44.34	4.01	54.89	Peak	68.2	Pass
NVNT	n20	5150	-55.72	-56	-52.85	4.01	46.39	Average	54	Pass
NVNT	n20	5350	-49.84	-48.2	-45.93	4.01	53.30	Peak	68.2	Pass
NVNT	n20	5350	-58.78	-58.82	-55.79	4.01	43.45	Average	54	Pass
NVNT	n20	5354.16	-46.38	-45.67	-43.00	4.01	56.24	Peak	68.2	Pass
NVNT	n20	5351.52	-58.31	-58.4	-55.34	4.01	43.89	Average	54	Pass
NVNT	n20	5460	-50.78	-50.72	-47.74	4.01	51.50	Peak	68.2	Pass
NVNT	n20	5460	-59.51	-59.6	-56.54	4.01	42.69	Average	54	Pass
NVNT	n40	4500	-51.43	-50.11	-47.71	4.01	51.53	Peak	68.2	Pass
NVNT	n40	4500	-60.42	-60.3	-57.35	4.01	41.89	Average	54	Pass
NVNT	n40	5136.56	-45.62	-44.47	-42.00	4.01	57.24	Peak	68.2	Pass
NVNT	n40	5137.29	-54.89	-54.99	-51.93	4.01	47.31	Average	54	Pass
NVNT	n40	5150	-45.24	-45.93	-42.56	4.01	56.68	Peak	68.2	Pass
NVNT	n40	5150	-55	-54.92	-51.95	4.01	47.29	Average	54	Pass
NVNT	n40	5350	-49.94	-48.97	-46.42	4.01	52.82	Peak	68.2	Pass
NVNT	n40	5350	-58.48	-58.6	-55.53	4.01	43.71	Average	54	Pass
NVNT	n40	5364.15	-47.29	-46.25	-43.73	4.01	55.51	Peak	68.2	Pass
NVNT	n40	5353.89	-58.14	-58.19	-55.15	4.01	44.08	Average	54	Pass
NVNT	n40	5460	-50.96	-50.7	-47.82	4.01	51.42	Peak	68.2	Pass
NVNT	n40	5460	-59.33	-59.3	-56.30	4.01	42.93	Average	54	Pass
NVNT	ac20	4500	-51.55	-51.76	-48.64	4.01	50.59	Peak	68.2	Pass
NVNT	ac20	4500	-60.48	-60.5	-57.48	4.01	41.76	Average	54	Pass
NVNT	ac20	5137	-45.99	-45.01	-42.46	4.01	56.78	Peak	68.2	Pass
NVNT	ac20	5149.6	-55.83	-56.11	-52.96	4.01	46.28	Average	54	Pass
NVNT	ac20	5150	-47.18	-46.89	-44.02	4.01	55.22	Peak	68.2	Pass
NVNT	ac20	5150	-55.7	-55.84	-52.76	4.01	46.48	Average	54	Pass
NVNT	ac20	5350	-49.17	-48.82	-45.98	4.01	53.26	Peak	68.2	Pass
NVNT	ac20	5350	-58.75	-58.38	-55.55	4.01	43.69	Average	54	Pass



NVNT	ac20	5363.28	-46.68	-46.78	-43.72	4.01	55.52	Peak	68.2	Pass
NVNT	ac20	5351.52	-58.26	-58.24	-55.24	4.01	44.00	Average	54	Pass
NVNT	ac20	5460	-50.58	-50.07	-47.31	4.01	51.93	Peak	68.2	Pass
NVNT	ac20	5460	-59.36	-59.44	-56.39	4.01	42.85	Average	54	Pass
NVNT	ac40	4500	-49.65	-52.75	-47.92	4.01	51.32	Peak	68.2	Pass
NVNT	ac40	4500	-60.14	-60.24	-57.18	4.01	42.06	Average	54	Pass
NVNT	ac40	5137.29	-43.43	-43.55	-40.48	4.01	58.76	Peak	68.2	Pass
NVNT	ac40	5148.97	-54.52	-54.41	-51.45	4.01	47.78	Average	54	Pass
NVNT	ac40	5150	-47.03	-46.68	-43.84	4.01	55.40	Peak	68.2	Pass
NVNT	ac40	5150	-54.79	-54.22	-51.49	4.01	47.75	Average	54	Pass
NVNT	ac40	5350	-50.07	-49.6	-46.82	4.01	52.42	Peak	68.2	Pass
NVNT	ac40	5350	-58.09	-58.65	-55.35	4.01	43.89	Average	54	Pass
NVNT	ac40	5356.05	-46.36	-47.02	-43.67	4.01	55.57	Peak	68.2	Pass
NVNT	ac40	5355.78	-57.9	-57.77	-54.82	4.01	44.41	Average	54	Pass
NVNT	ac40	5460	-49.85	-50.19	-47.01	4.01	52.23	Peak	68.2	Pass
NVNT	ac40	5460	-58.92	-59.26	-56.08	4.01	43.16	Average	54	Pass
NVNT	ac80	4500	-50.4	-49.05	-46.66	4.01	52.58	Peak	68.2	Pass
NVNT	ac80	4500	-57.35	-57.44	-54.38	4.01	44.85	Average	54	Pass
NVNT	ac80	5147.01	-46.65	-47.8	-44.18	4.01	55.06	Peak	68.2	Pass
NVNT	ac80	5149.38	-57.19	-56.95	-54.06	4.01	45.18	Average	54	Pass
NVNT	ac80	5150	-50.91	-51.02	-47.95	4.01	51.28	Peak	68.2	Pass
NVNT	ac80	5150	-58.93	-58.05	-55.46	4.01	43.78	Average	54	Pass
NVNT	ac80	5350	-51	-51.13	-48.05	4.01	51.18	Peak	68.2	Pass
NVNT	ac80	5350	-59.72	-59.17	-56.43	4.01	42.81	Average	54	Pass
NVNT	ac80	5374.86	-43.24	-41.27	-39.13	4.01	60.10	Peak	68.2	Pass
NVNT	ac80	5358.36	-50.47	-50.58	-47.51	4.01	51.72	Average	54	Pass
NVNT	ac80	5460	-43.74	-42.43	-40.03	4.01	59.21	Peak	68.2	Pass
NVNT	ac80	5460	-50.86	-50.97	-47.90	4.01	51.33	Average	54	Pass
NVNT	ax20	4500	-51.19	-51.23	-48.20	4.01	51.04	Peak	68.2	Pass
NVNT	ax20	4500	-60.42	-60.29	-57.34	4.01	41.89	Average	54	Pass
NVNT	ax20	5147.5	-45.03	-45.8	-42.39	4.01	56.85	Peak	68.2	Pass
NVNT	ax20	5149.6	-56	-55.95	-52.96	4.01	46.27	Average	54	Pass
NVNT	ax20	5150	-46.88	-45.37	-43.05	4.01	56.19	Peak	68.2	Pass
NVNT	ax20	5150	-55.97	-55.97	-52.96	4.01	46.28	Average	54	Pass
NVNT	ax20	5350	-49.47	-48.37	-45.87	4.01	53.36	Peak	68.2	Pass
NVNT	ax20	5350	-58.54	-58.66	-55.59	4.01	43.65	Average	54	Pass
NVNT	ax20	5427.36	-46.21	-46.55	-43.37	4.01	55.87	Peak	68.2	Pass
NVNT	ax20	5350.8	-57.76	-58.02	-54.88	4.01	44.36	Average	54	Pass
NVNT	ax20	5460	-49.17	-50.24	-46.66	4.01	52.58	Peak	68.2	Pass
NVNT	ax20	5460	-59.18	-59.26	-56.21	4.01	43.03	Average	54	Pass
NVNT	ax40	4500	-50.16	-51.5	-47.77	4.01	51.47	Peak	68.2	Pass
NVNT	ax40	4500	-60.17	-60.16	-57.15	4.01	42.08	Average	54	Pass
NVNT	ax40	5131.45	-45.02	-44.03	-41.49	4.01	57.75	Peak	68.2	Pass
NVNT	ax40	5149.7	-53.93	-53.51	-50.70	4.01	48.53	Average	54	Pass




NVNT	ax40	5150	-44.95	-44.33	-41.62	4.01	57.62	Peak	68.2	Pass
NVNT	ax40	5150	-53.96	-54.21	-51.07	4.01	48.16	Average	54	Pass
NVNT	ax40	5350	-51.32	-49.54	-47.33	4.01	51.91	Peak	68.2	Pass
NVNT	ax40	5350	-58.1	-58.15	-55.11	4.01	44.12	Average	54	Pass
NVNT	ax40	5359.56	-45.93	-47.13	-43.48	4.01	55.76	Peak	68.2	Pass
NVNT	ax40	5351.19	-57.52	-57.55	-54.52	4.01	44.71	Average	54	Pass
NVNT	ax40	5460	-50.85	-48.64	-46.60	4.01	52.64	Peak	68.2	Pass
NVNT	ax40	5460	-58.78	-58.91	-55.83	4.01	43.40	Average	54	Pass
NVNT	ax80	4500	-48.87	-49.67	-46.24	4.01	53.00	Peak	68.2	Pass
NVNT	ax80	4500	-57.31	-57.36	-54.32	4.01	44.91	Average	54	Pass
NVNT	ax80	5146.22	-46.47	-47.62	-44.00	4.01	55.24	Peak	68.2	Pass
NVNT	ax80	5149.38	-57.23	-57.18	-54.19	4.01	45.04	Average	54	Pass
NVNT	ax80	5150	-51.88	-50.7	-48.24	4.01	51.00	Peak	68.2	Pass
NVNT	ax80	5150	-58.47	-58.67	-55.56	4.01	43.68	Average	54	Pass
NVNT	ax80	5350	-50.46	-51.92	-48.12	4.01	51.12	Peak	68.2	Pass
NVNT	ax80	5350	-59.56	-59.56	-56.55	4.01	42.69	Average	54	Pass
NVNT	ax80	5351.43	-41.95	-42.67	-39.28	4.01	59.95	Peak	68.2	Pass
NVNT	ax80	5358.03	-50.65	-50.57	-47.60	4.01	51.64	Average	54	Pass
NVNT	ax80	5460	-42.83	-43.13	-39.97	4.01	59.27	Peak	68.2	Pass
NVNT	ax80	5460	-50.41	-50.22	-47.30	4.01	51.93	Average	54	Pass




Test Graphs

Restrict Band NVNT a 5180MHz Ant0 Peak

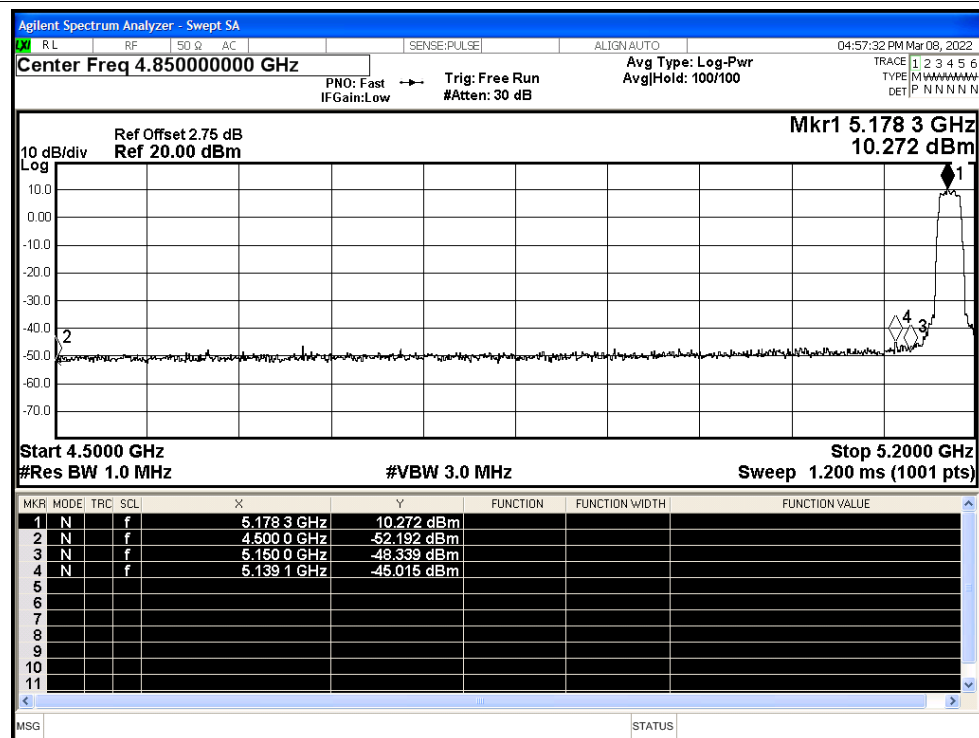


Restrict Band NVNT a 5180MHz Ant0 Average

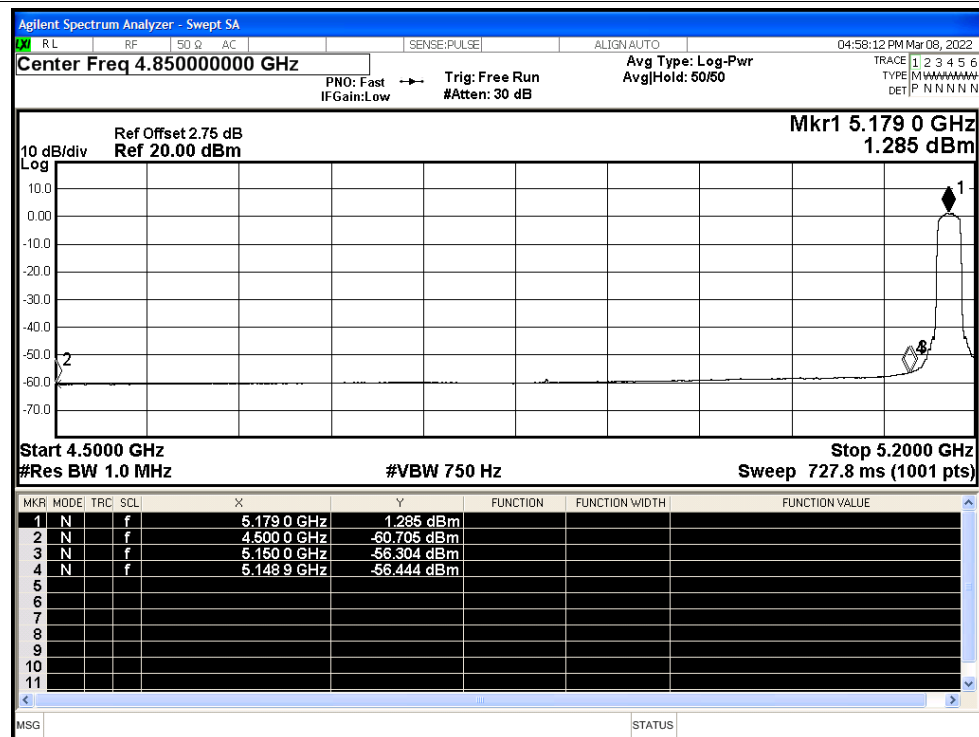




Restrict Band NVNT a 5240MHz Ant0 Peak

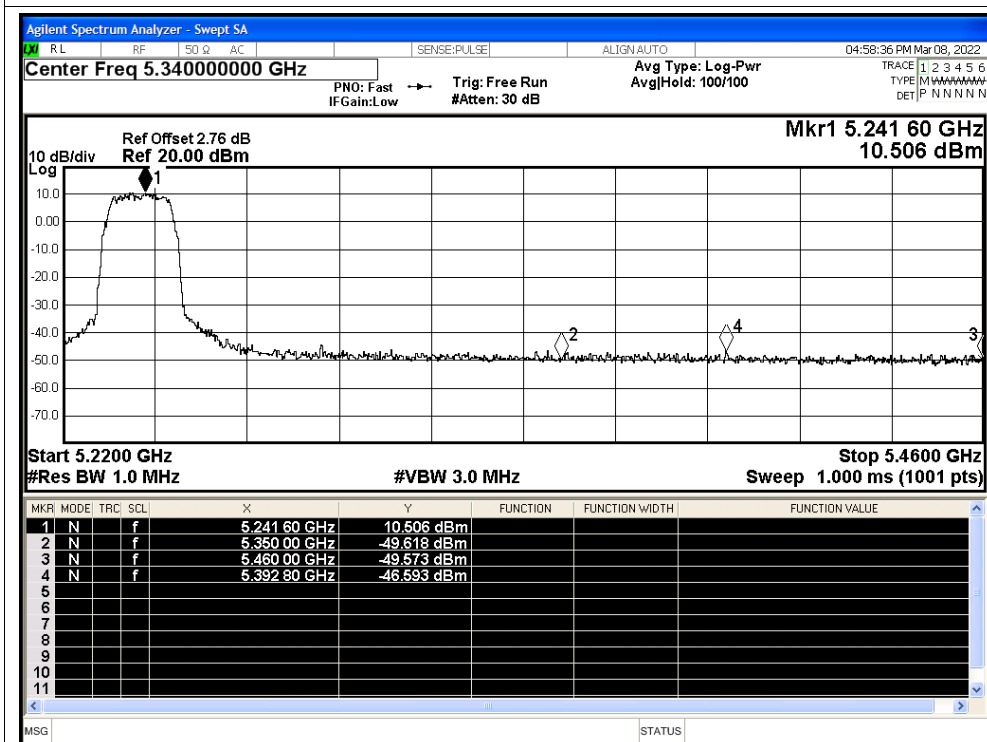


Restrict Band NVNT a 5240MHz Ant0 Average

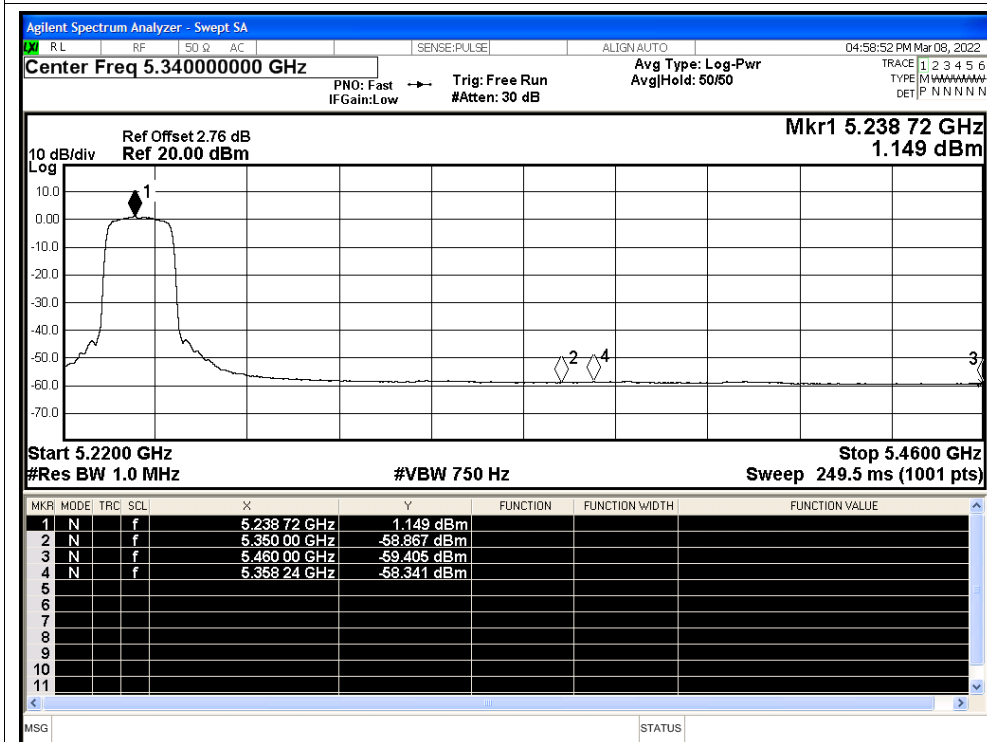




Restrict Band NVNT n20 5180MHz Ant0 Peak

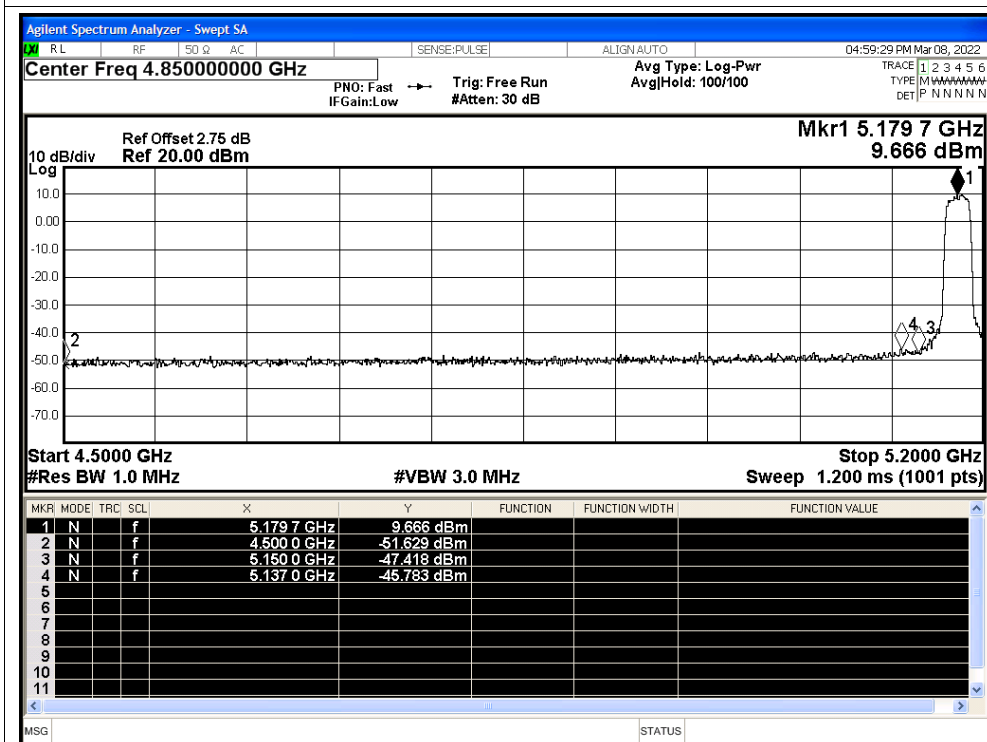


Restrict Band NVNT n20 5180MHz Ant0 Average

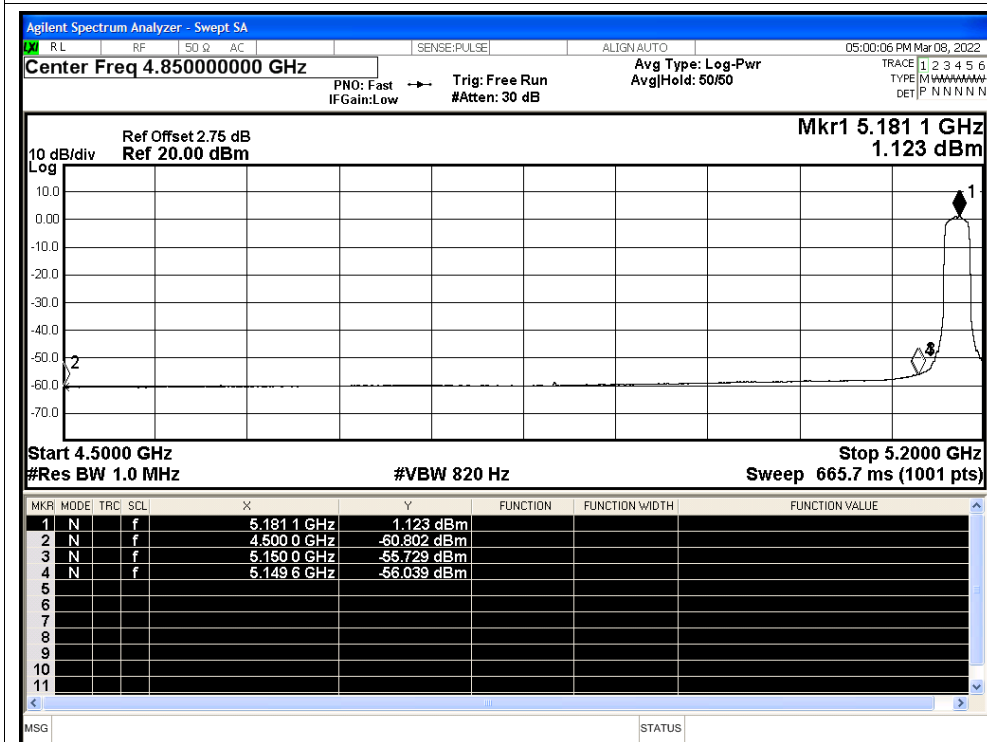




Restrict Band NVNT n20 5240MHz Ant0 Peak

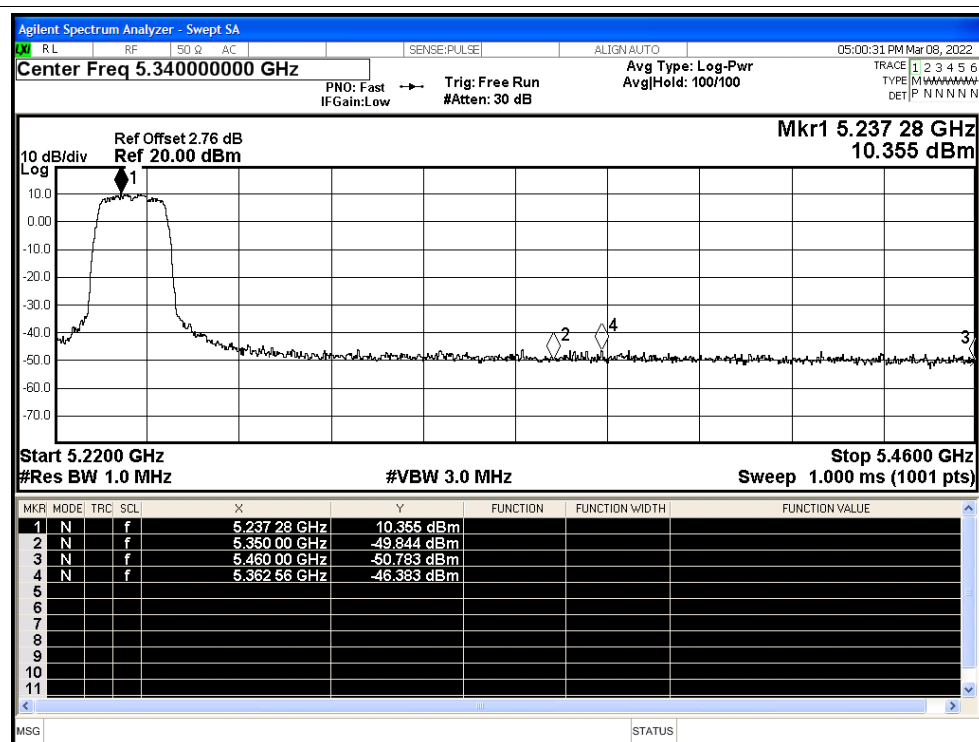


Restrict Band NVNT n20 5240MHz Ant0 Average

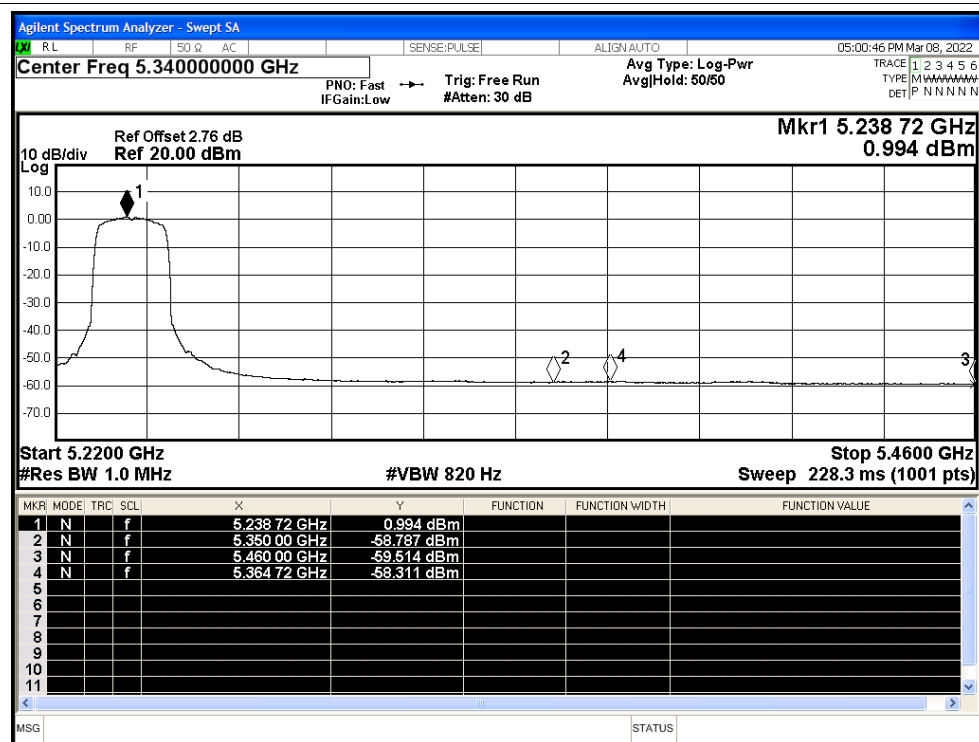




Restrict Band NVNT n40 5190MHz Ant0 Peak

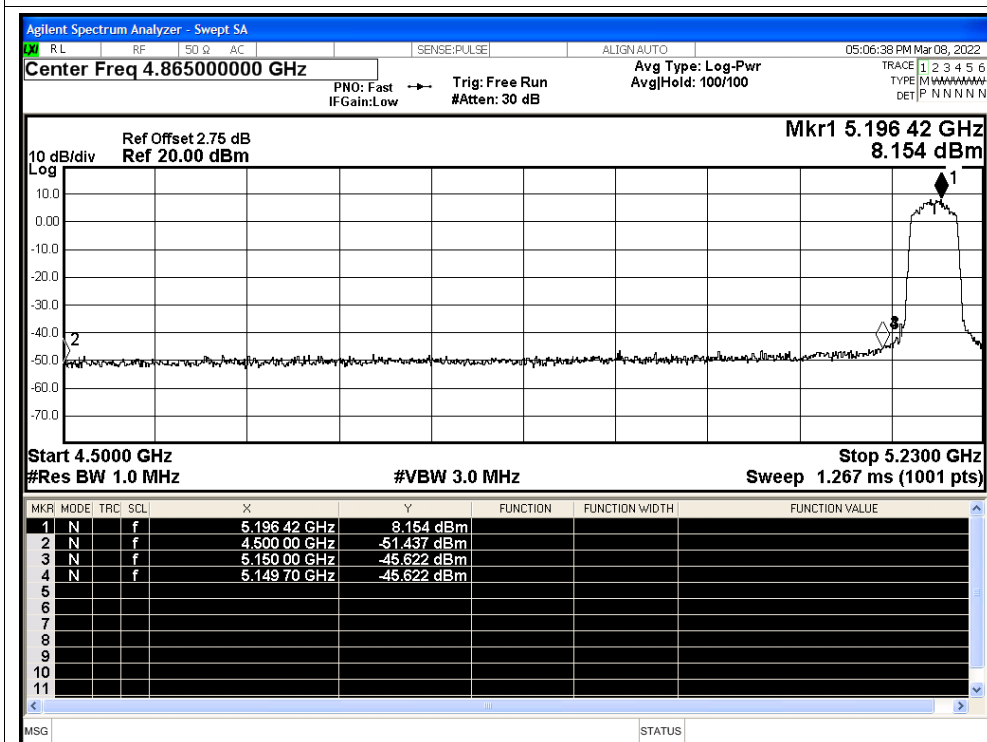


Restrict Band NVNT n40 5190MHz Ant0 Average

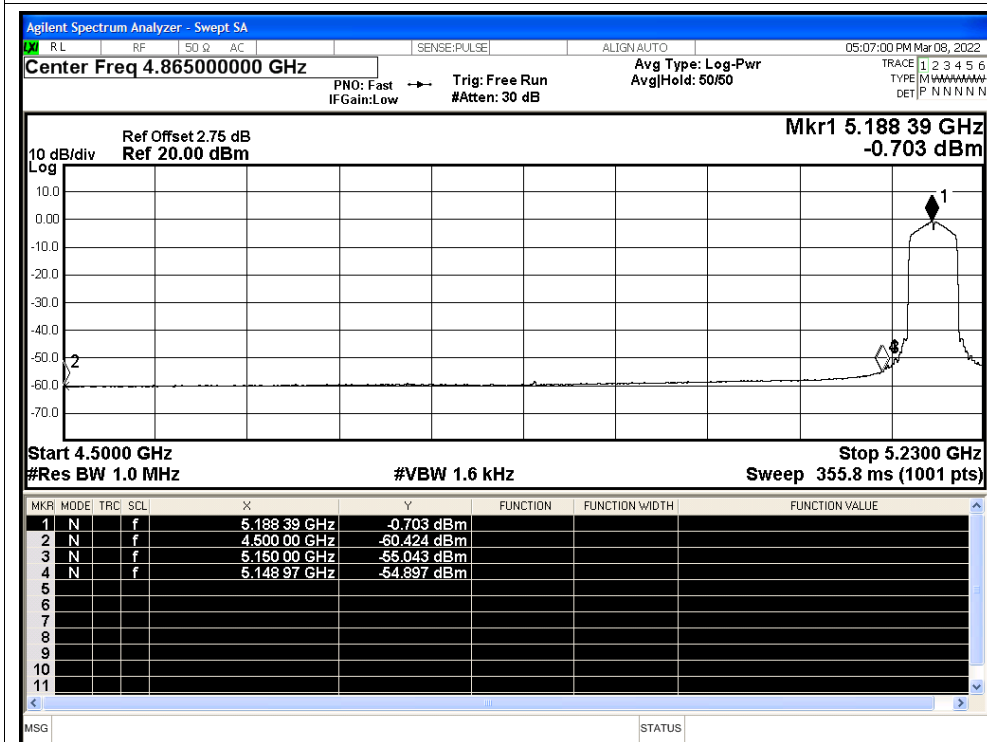




Restrict Band NVNT n40 5230MHz Ant0 Peak

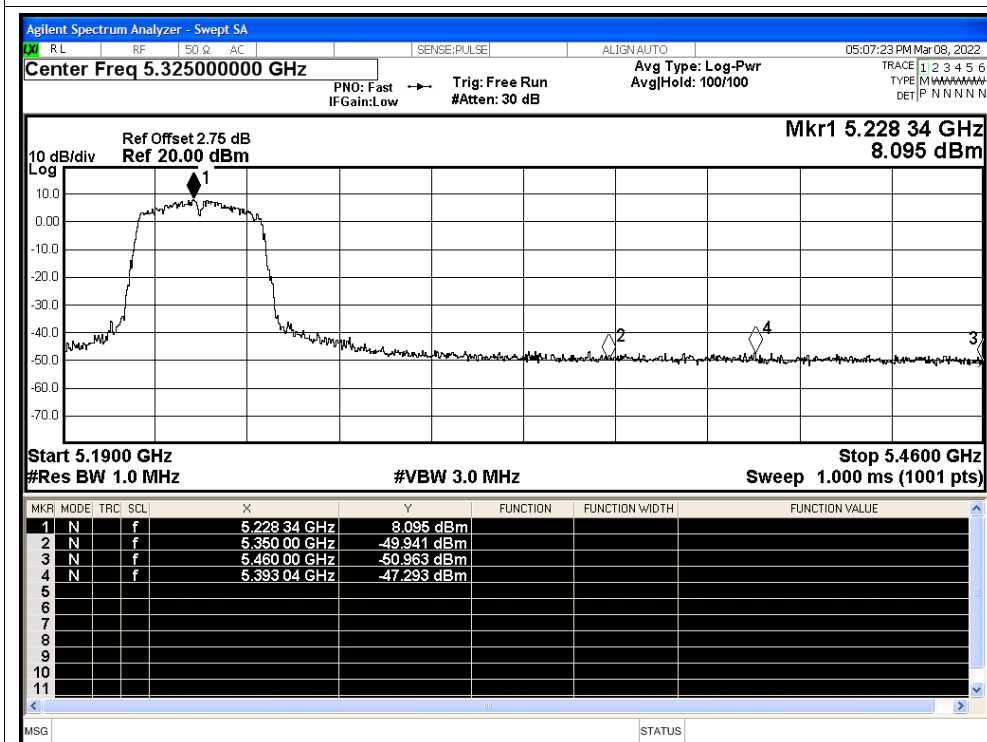


Restrict Band NVNT n40 5230MHz Ant0 Average

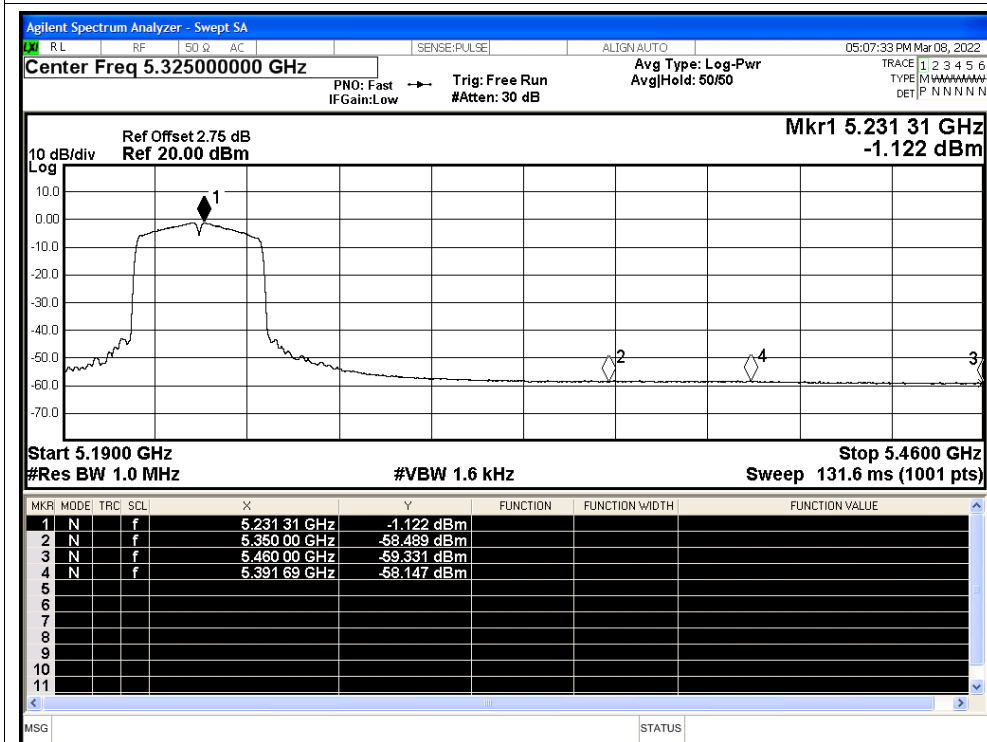




Restrict Band NVNT ac20 5180MHz Ant0 Peak

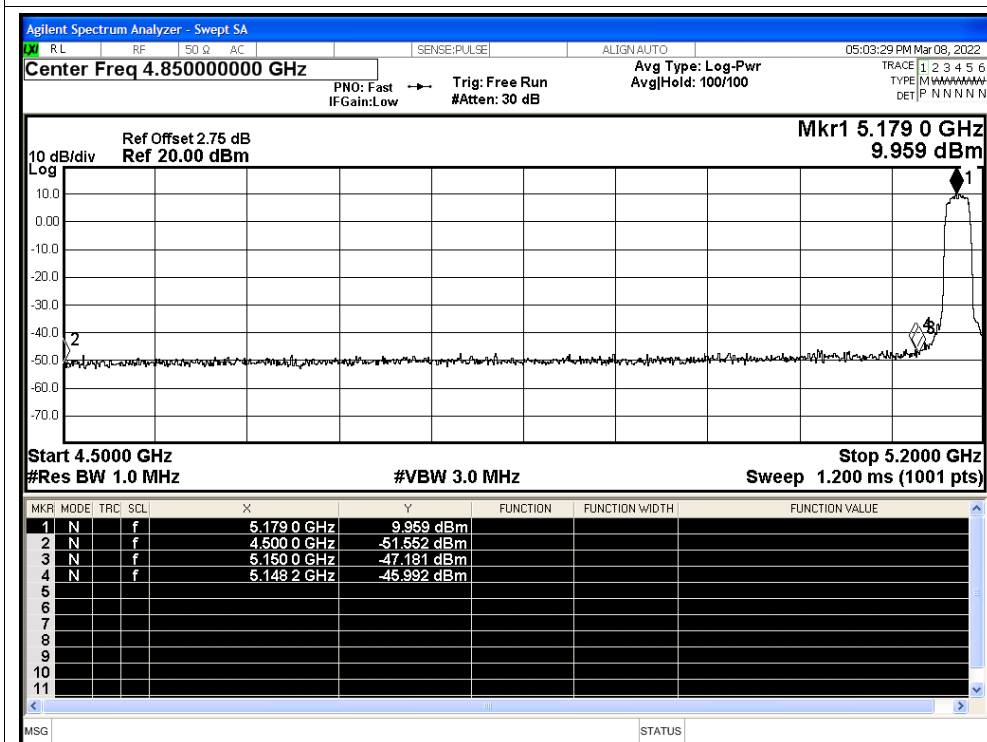


Restrict Band NVNT ac20 5180MHz Ant0 Average

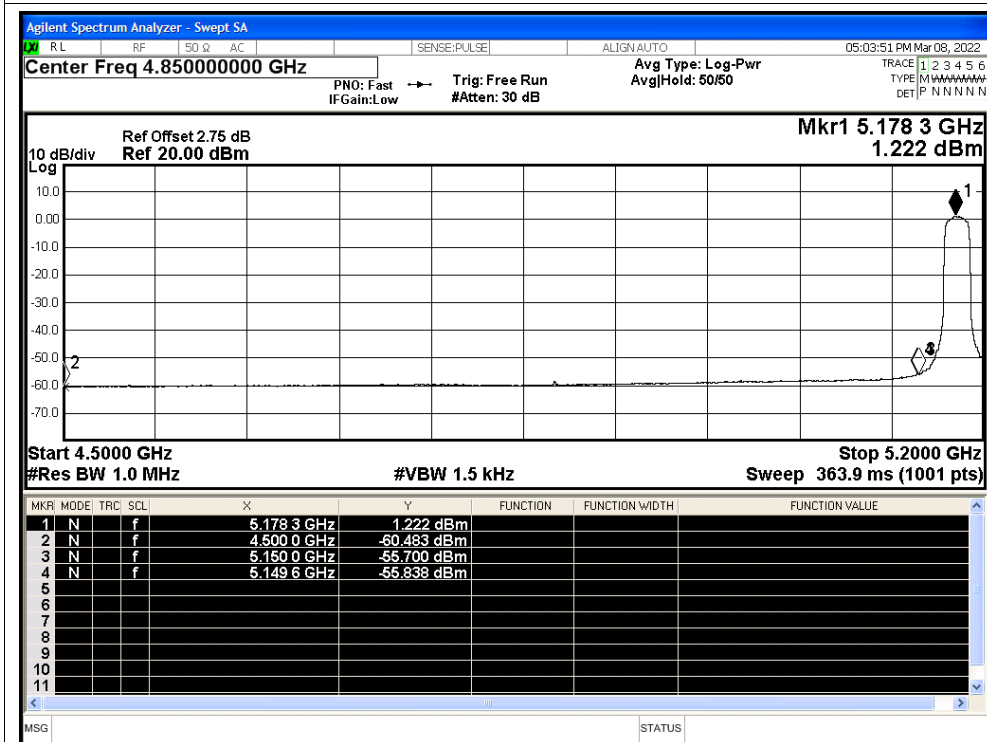




Restrict Band NVNT ac20 5240MHz Ant0 Peak

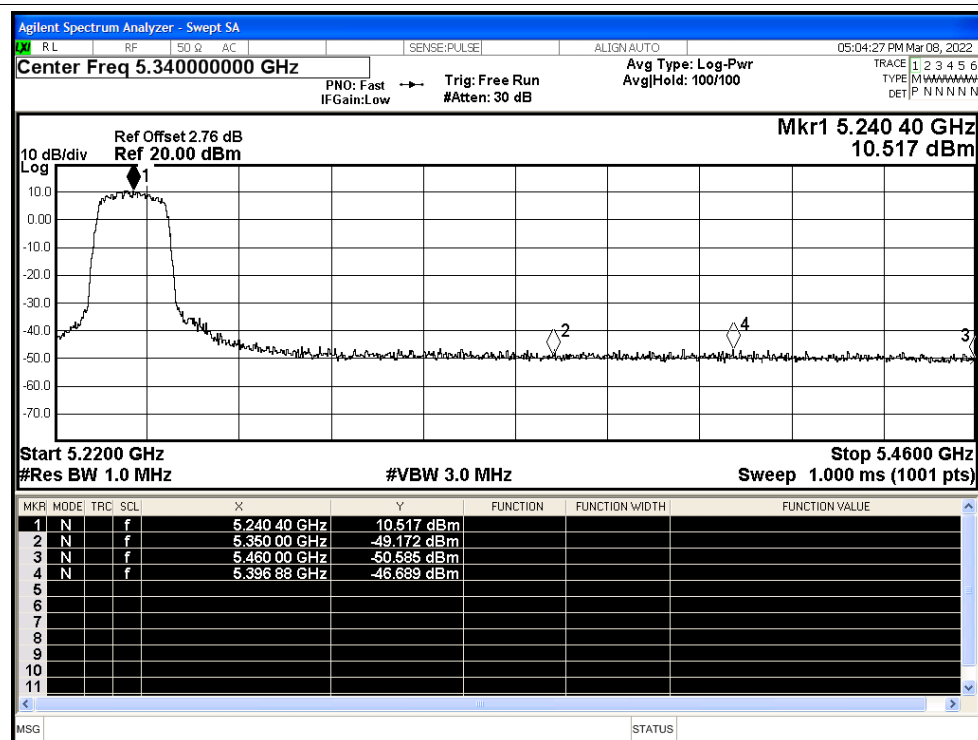


Restrict Band NVNT ac20 5240MHz Ant0 Average

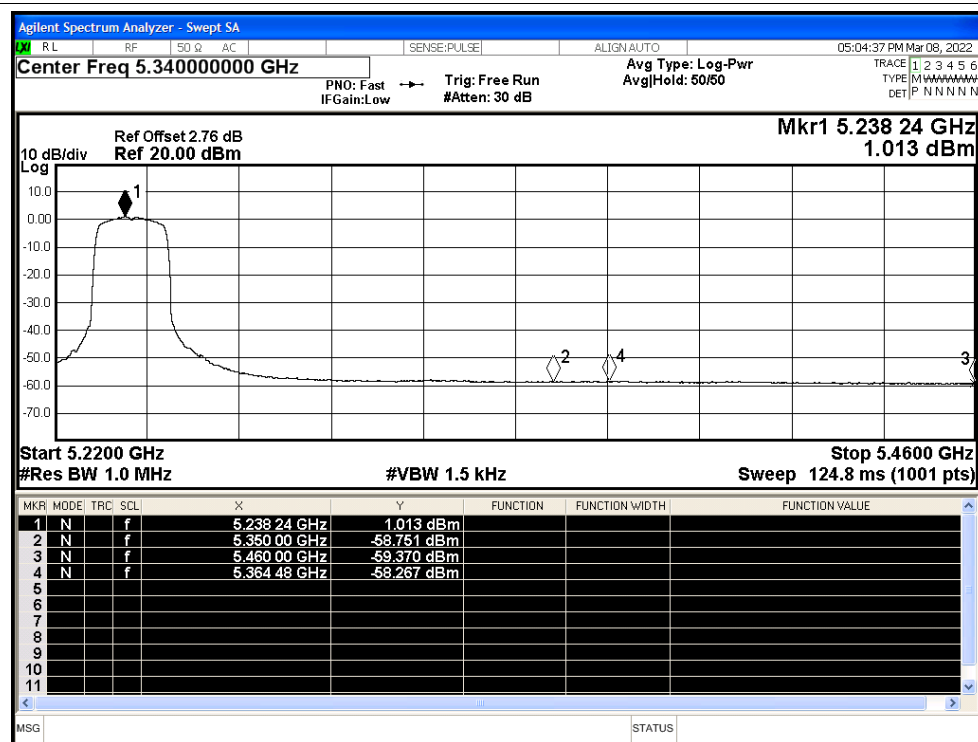




Restrict Band NVNT ac40 5190MHz Ant0 Peak

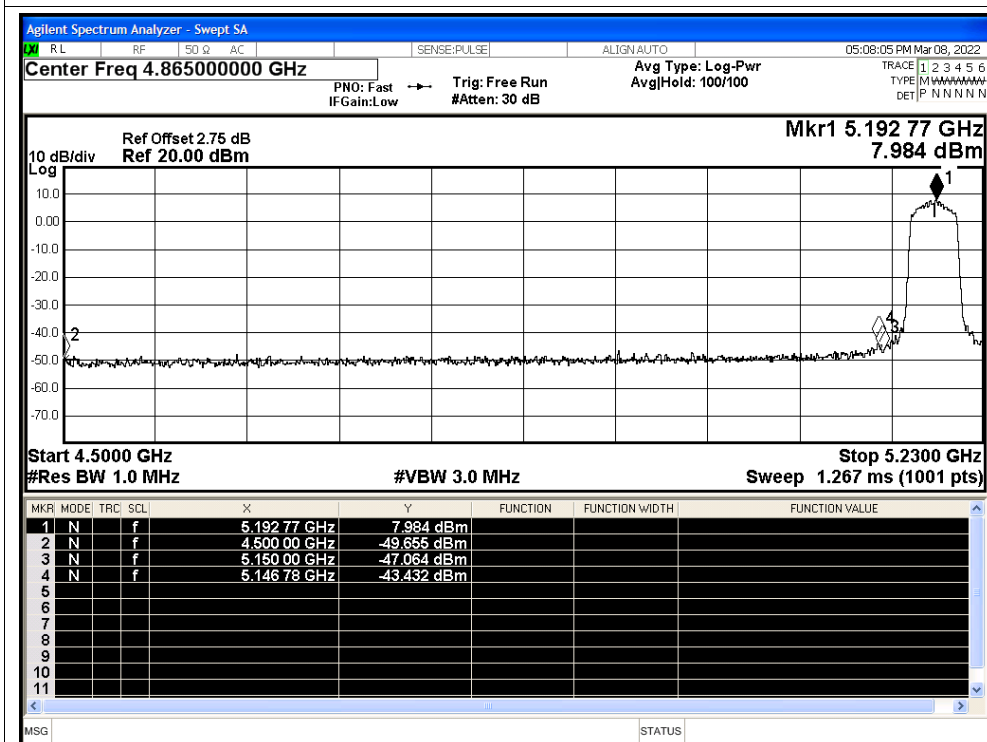


Restrict Band NVNT ac40 5190MHz Ant0 Average

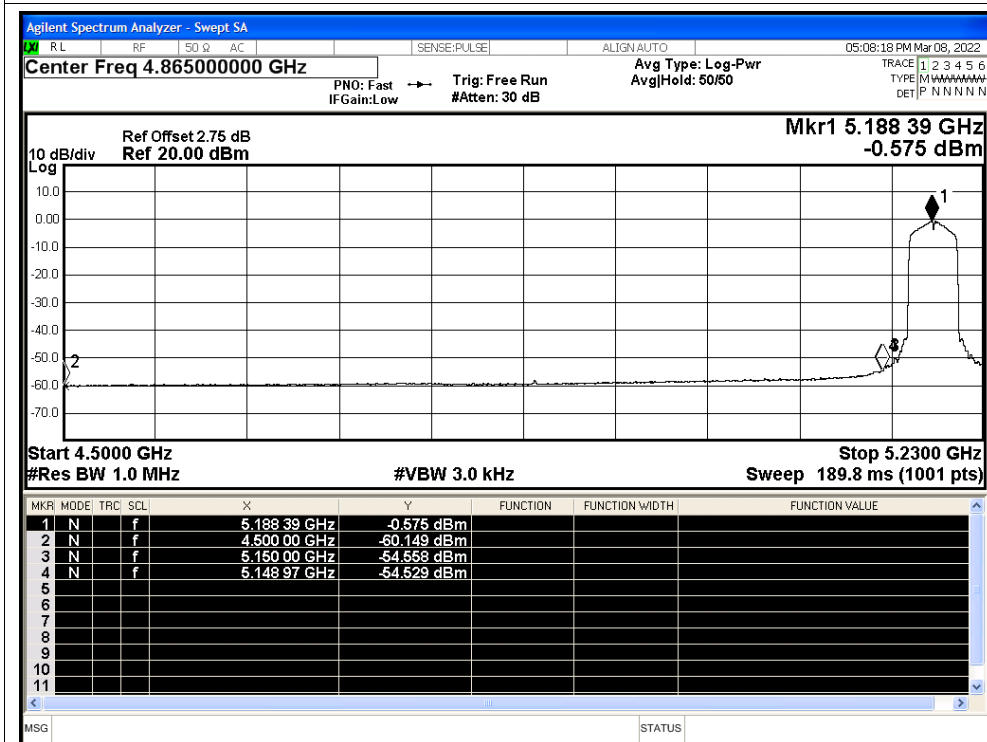




Restrict Band NVNT ac40 5230MHz Ant0 Peak

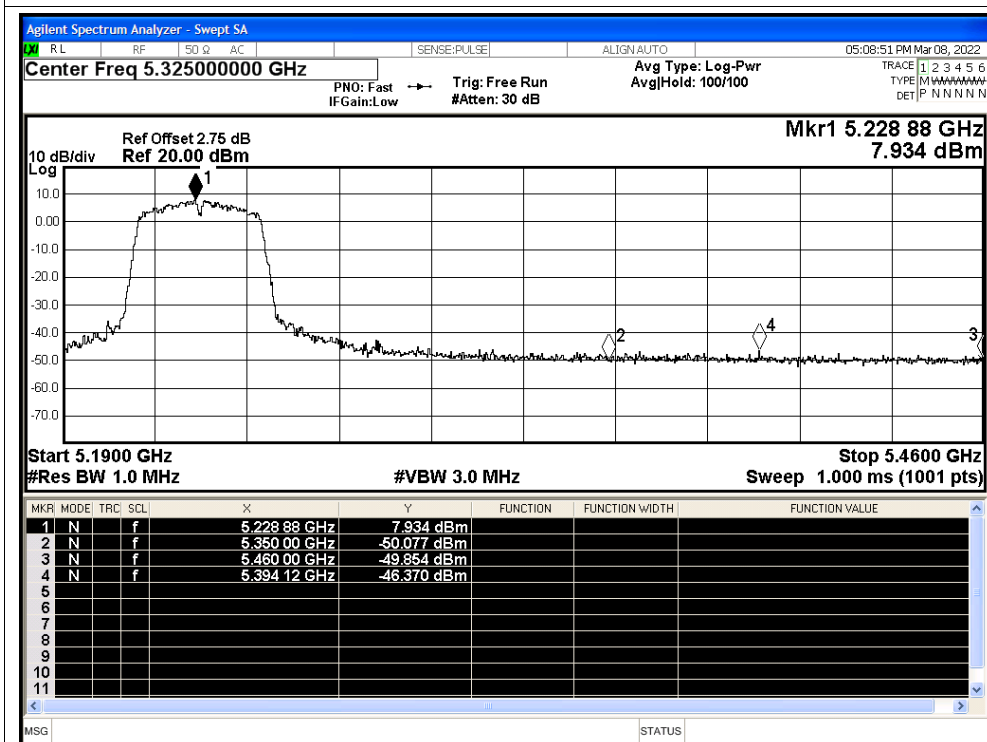


Restrict Band NVNT ac40 5230MHz Ant0 Average

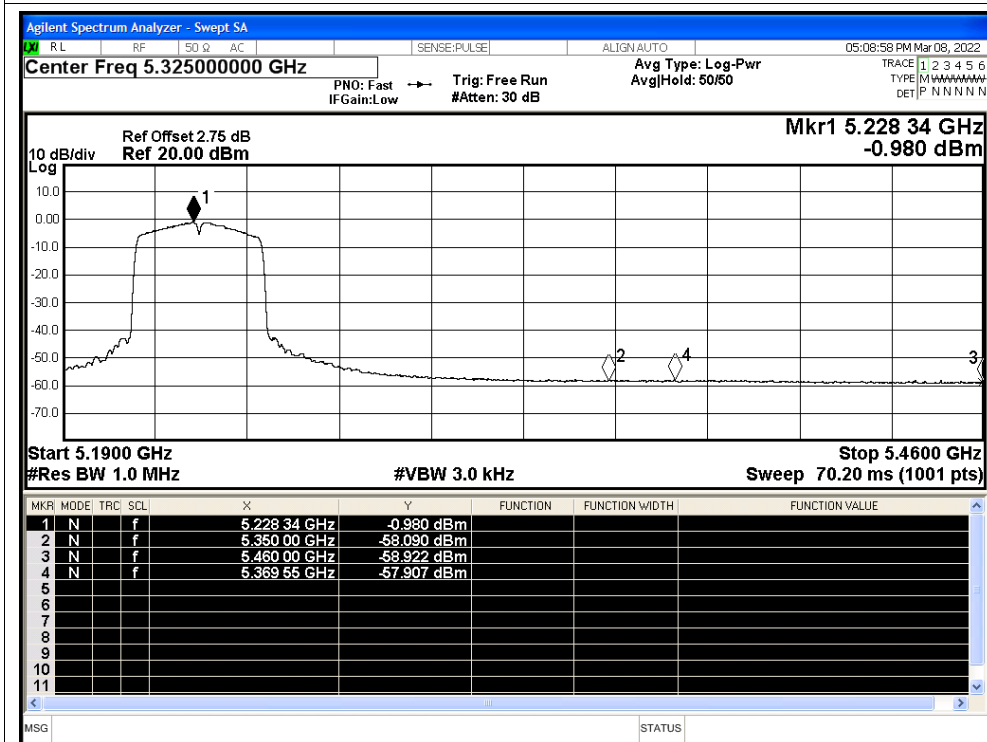




Restrict Band NVNT ac80 5210MHz Ant0 Peak

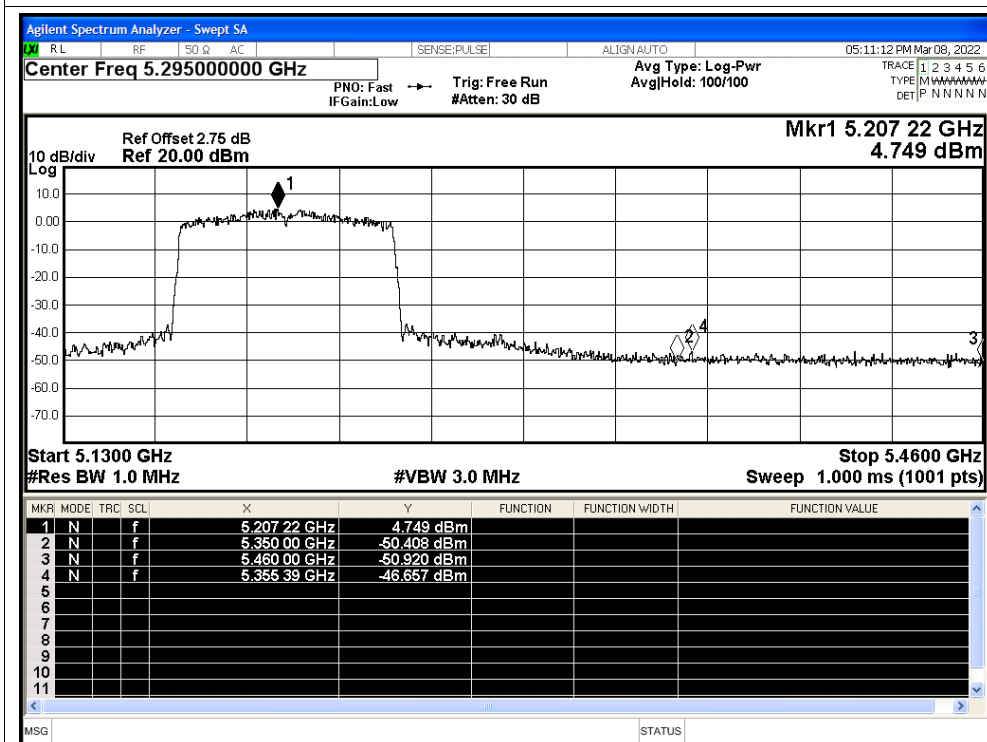


Restrict Band NVNT ac80 5210MHz Ant0 Average

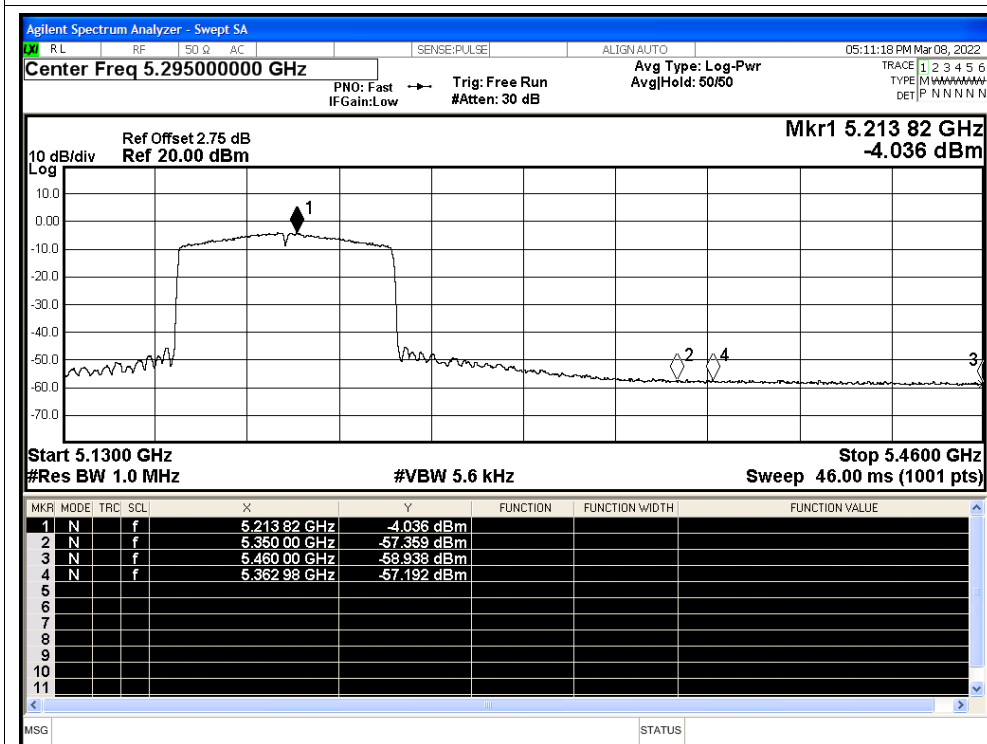




Restrict Band NVNT ac80 5210MHz Ant0 Peak

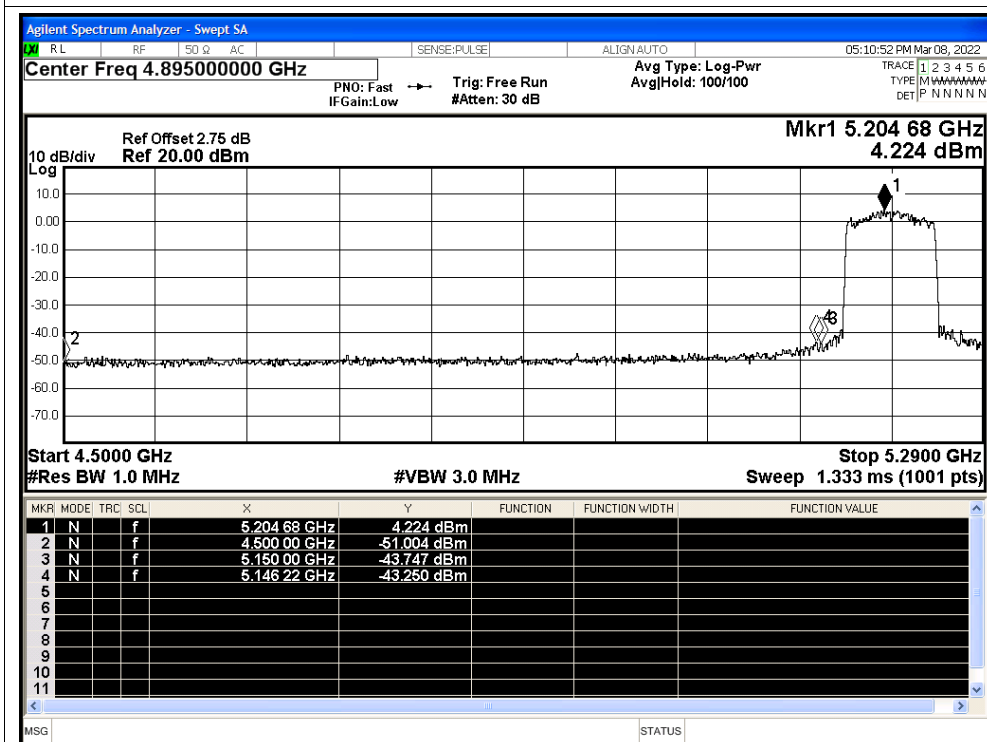


Restrict Band NVNT ac80 5210MHz Ant0 Average

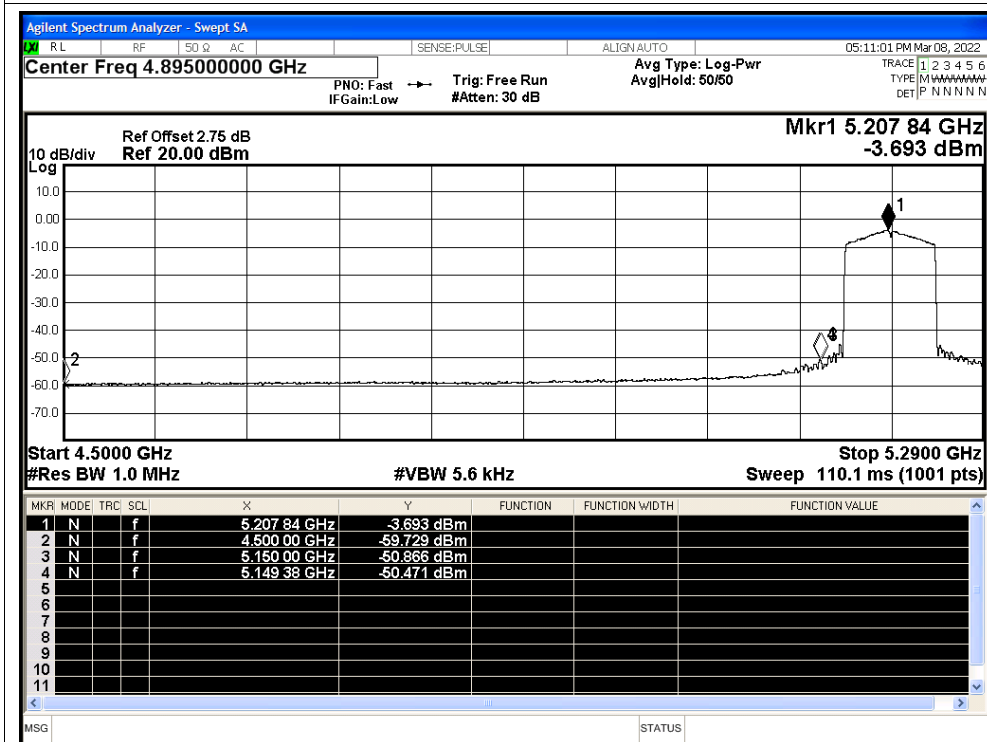




Restrict Band NVNT ax20 5180MHz Ant0 Peak

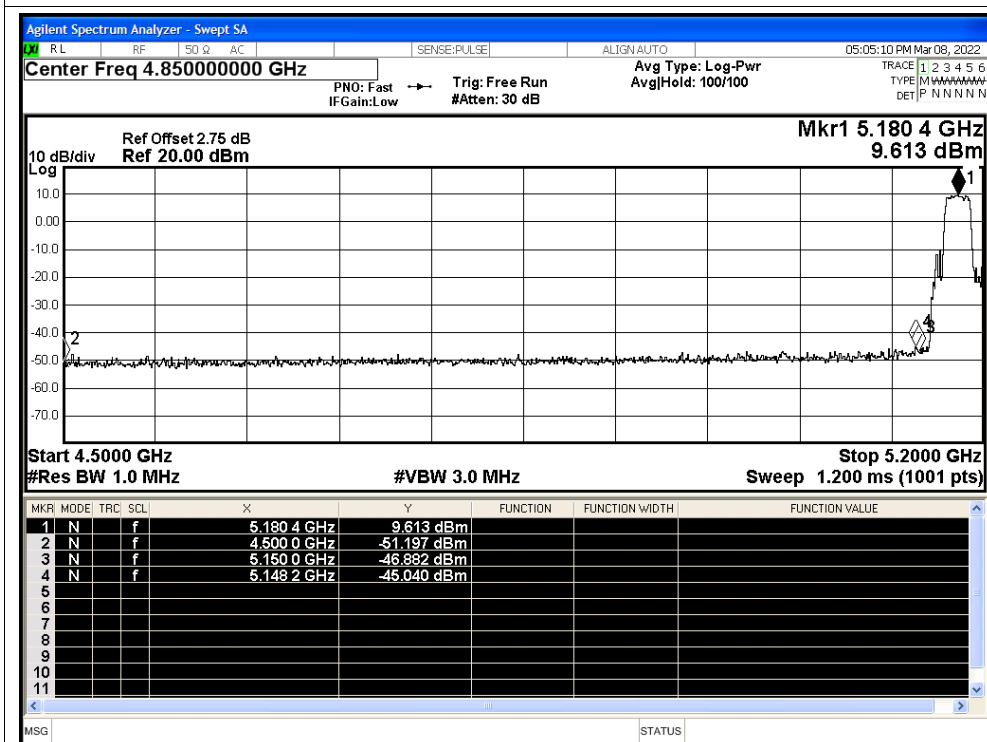


Restrict Band NVNT ax20 5180MHz Ant0 Average

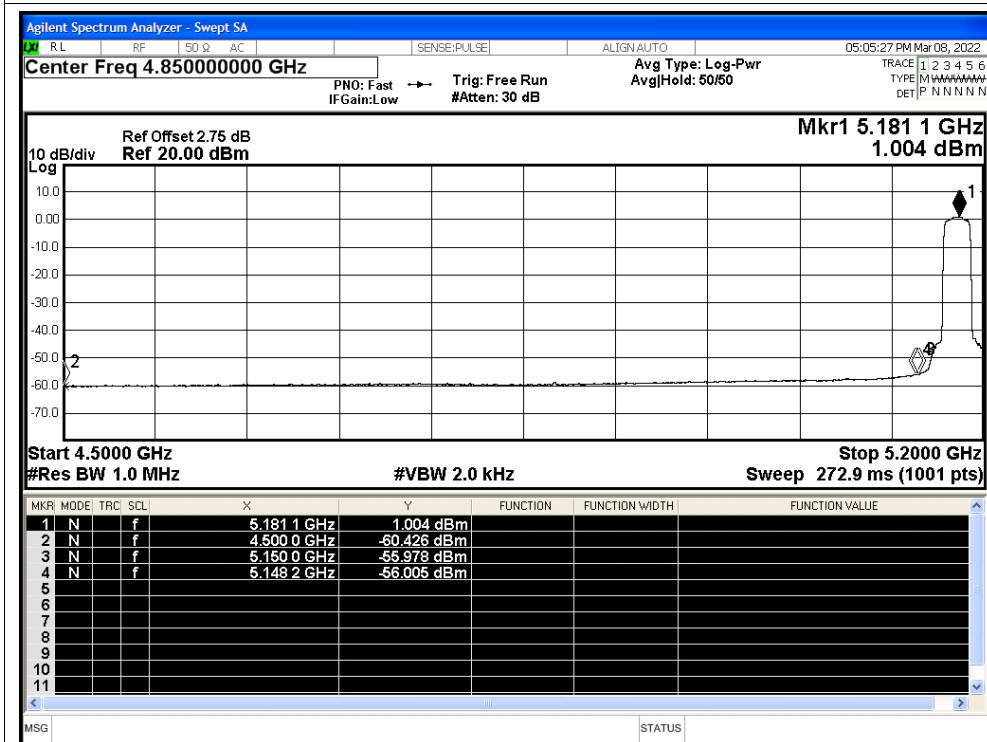




Restrict Band NVNT ax20 5240MHz Ant0 Peak

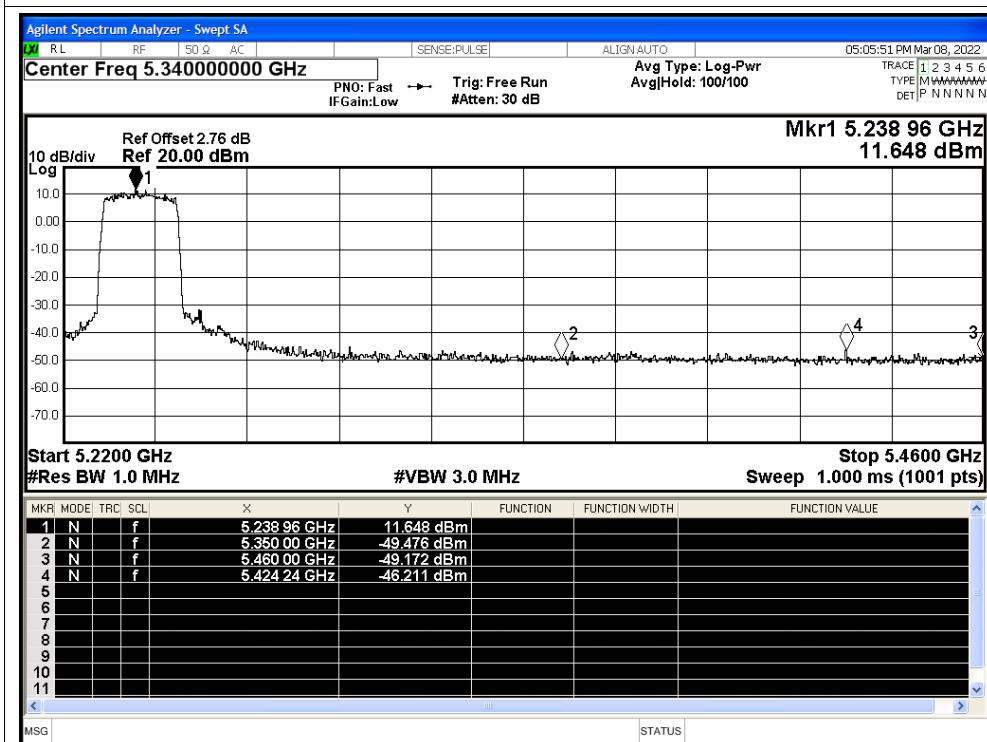


Restrict Band NVNT ax20 5240MHz Ant0 Average

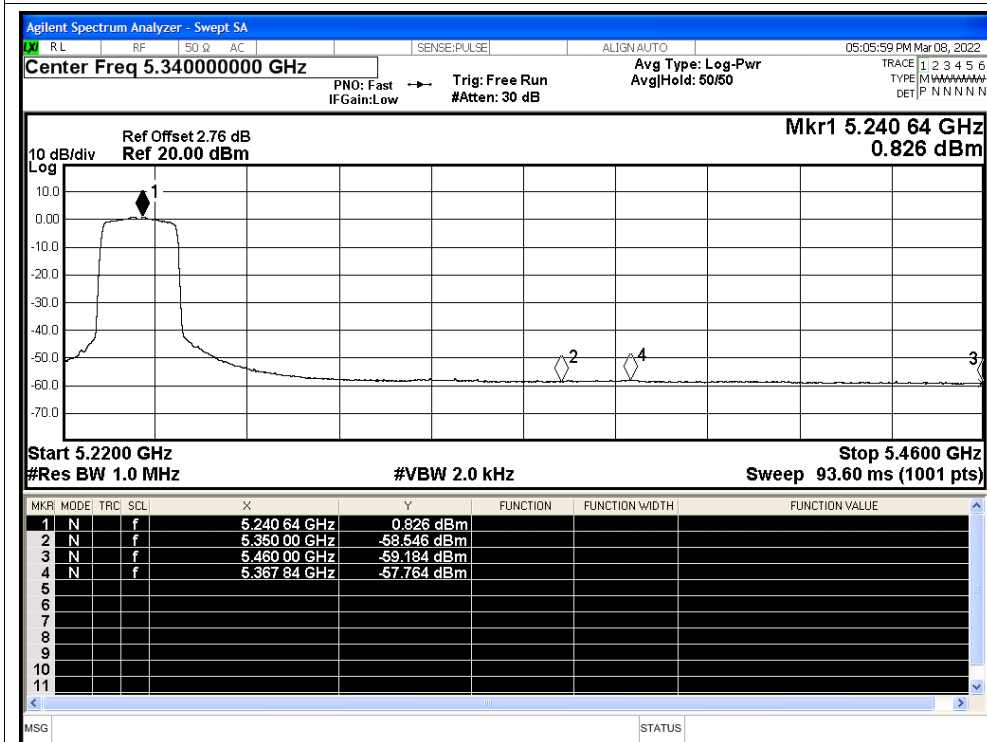




Restrict Band NVNT ax40 5190MHz Ant0 Peak

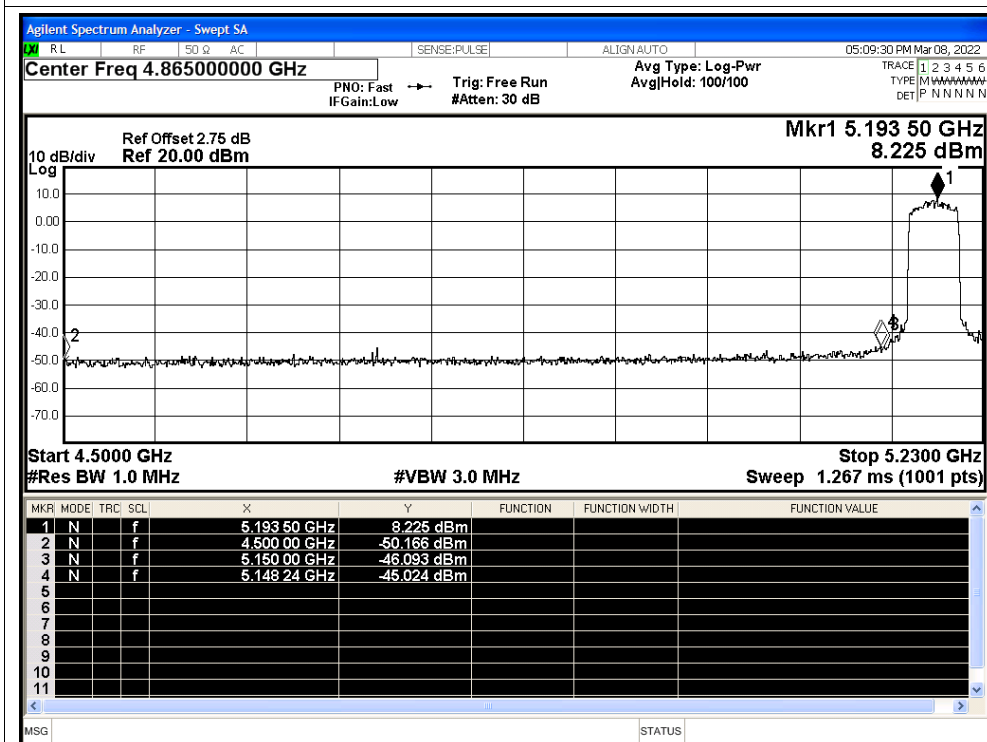


Restrict Band NVNT ax40 5190MHz Ant0 Average

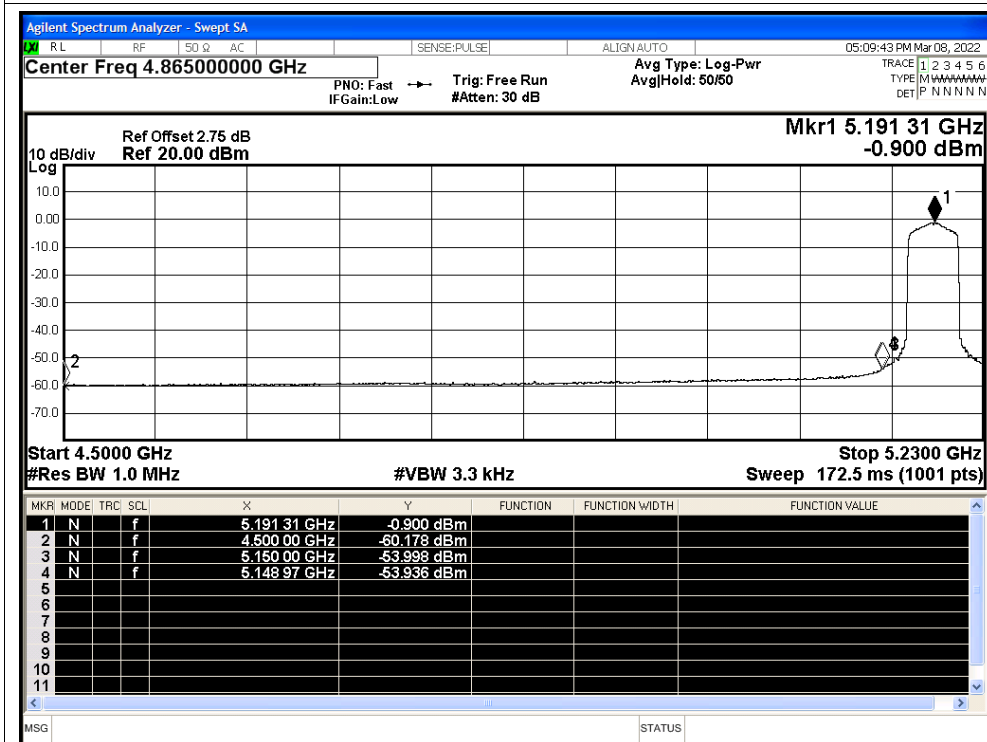




Restrict Band NVNT ax40 5230MHz Ant0 Peak

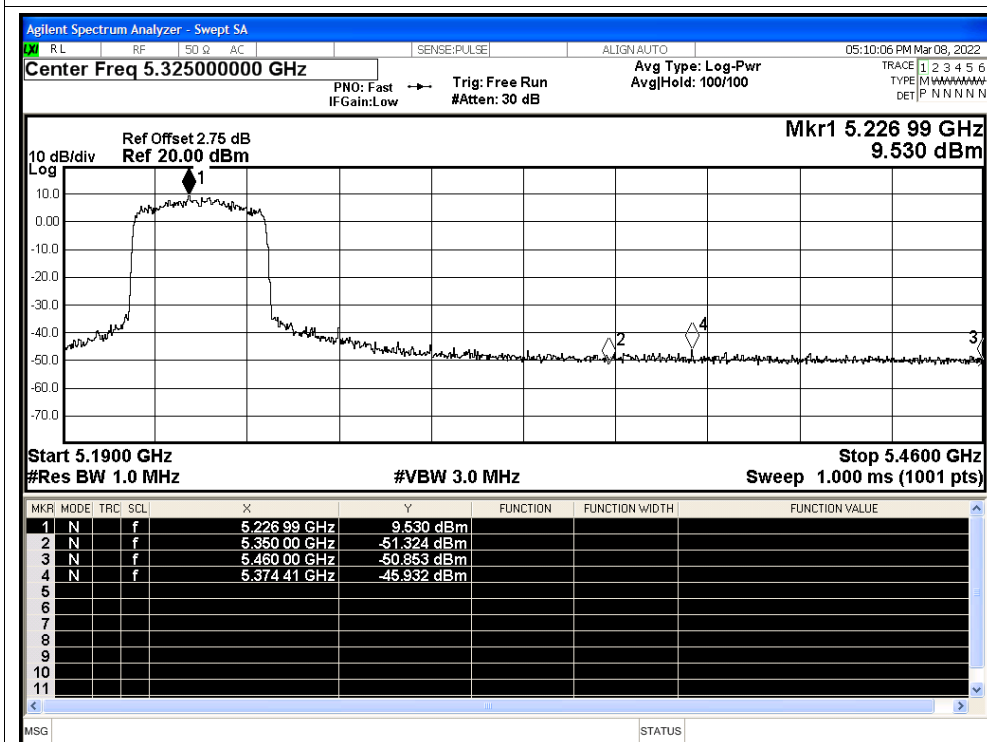


Restrict Band NVNT ax40 5230MHz Ant0 Average

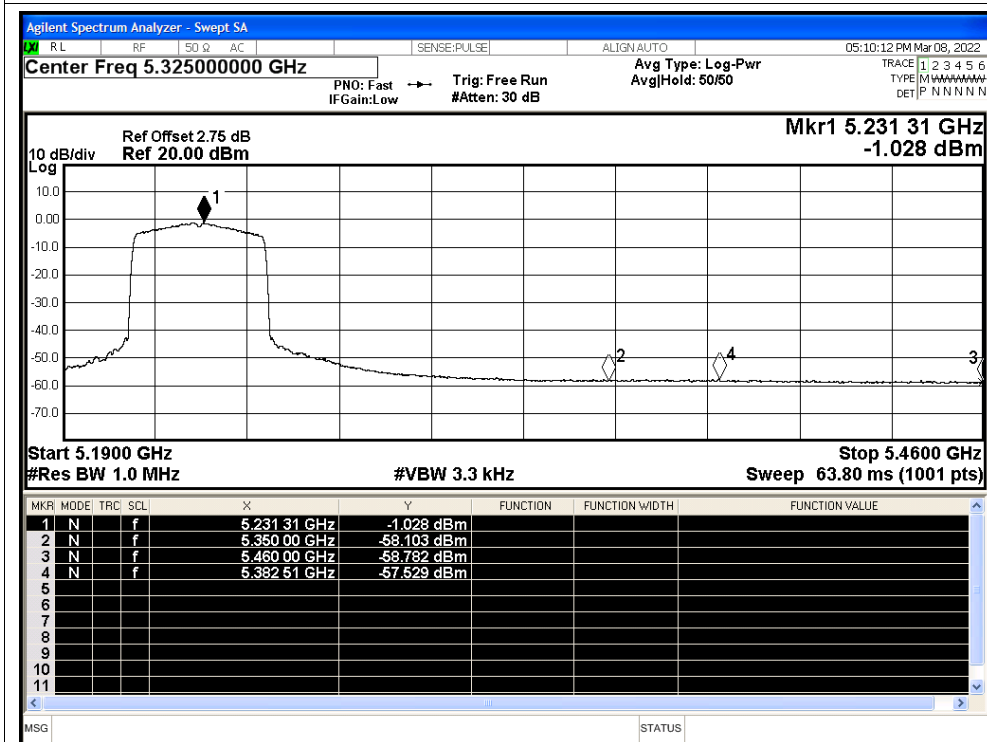




Restrict Band NVNT ax80 5210MHz Ant0 Peak

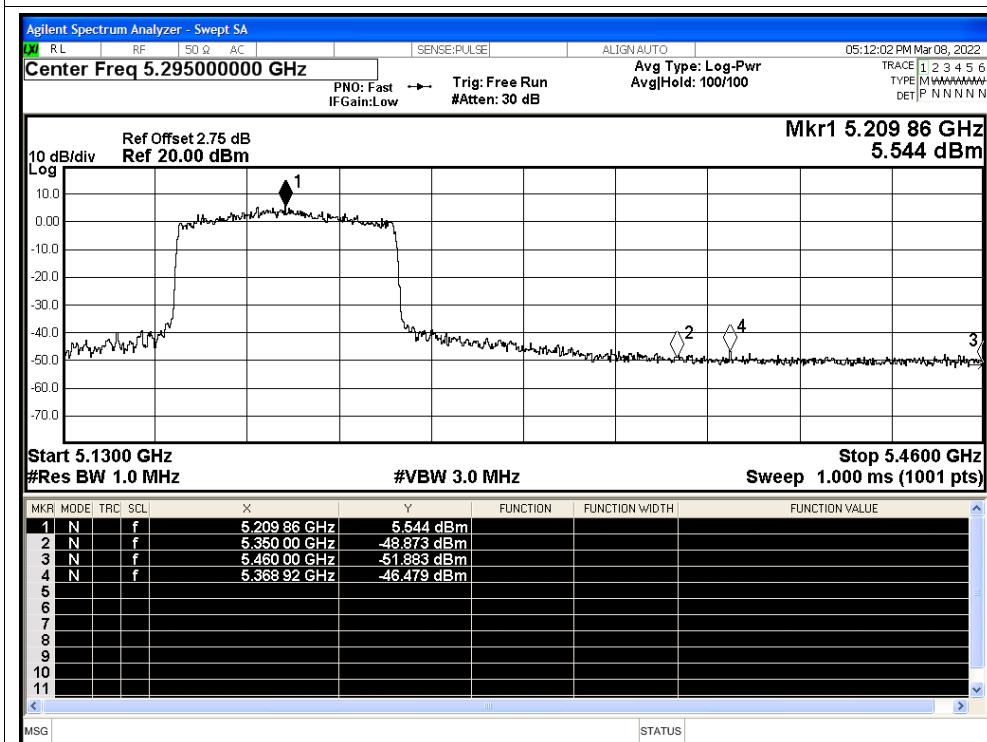


Restrict Band NVNT ax80 5210MHz Ant0 Average

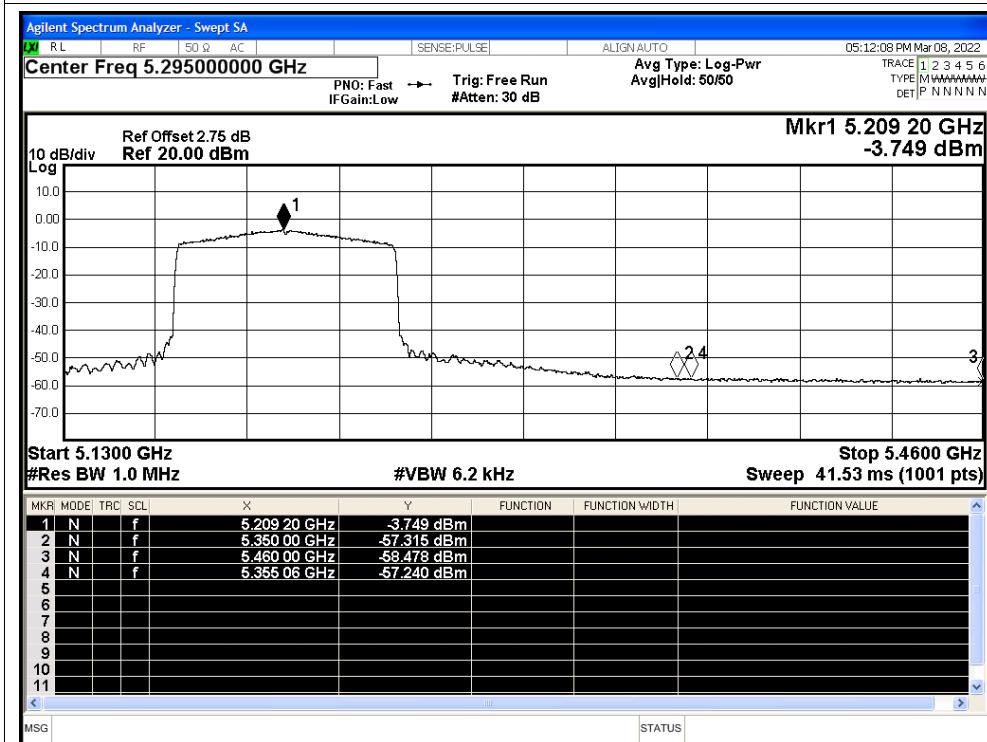




Restrict Band NVNT ax80 5210MHz Ant0 Peak

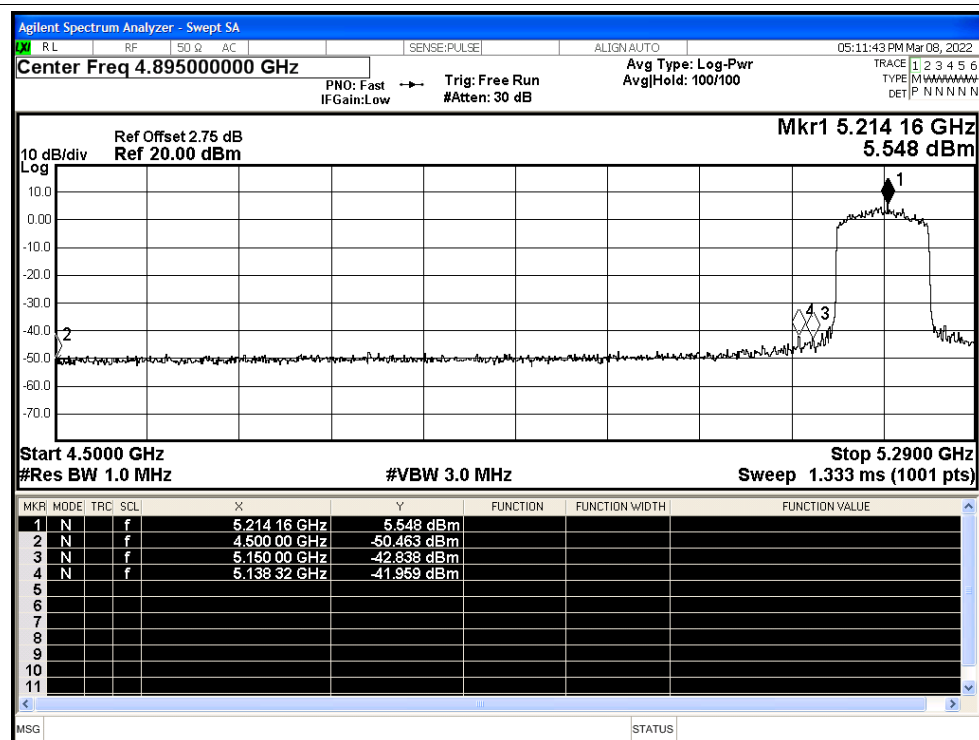


Restrict Band NVNT ax80 5210MHz Ant0 Average

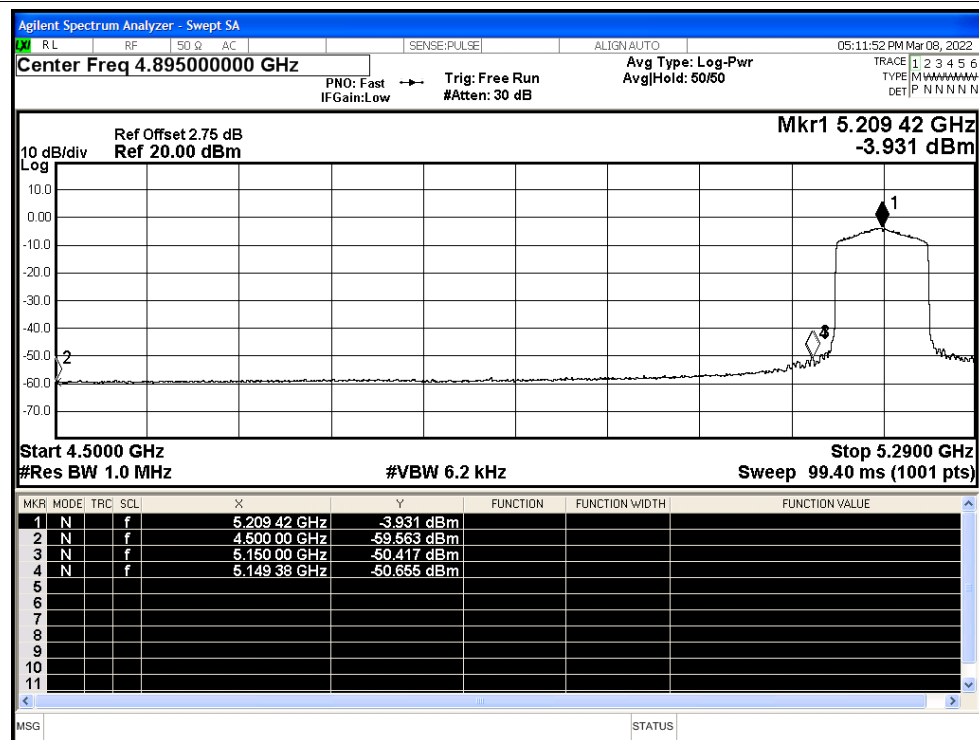




Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

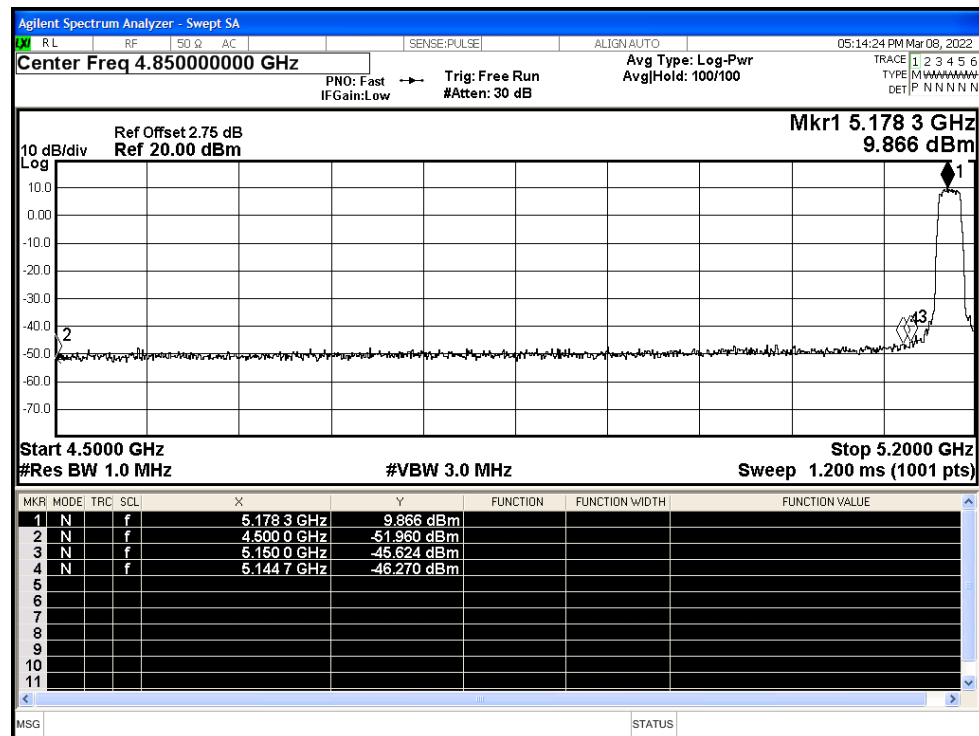


Restrict Band NVNT a 5180MHz Ant1 Average

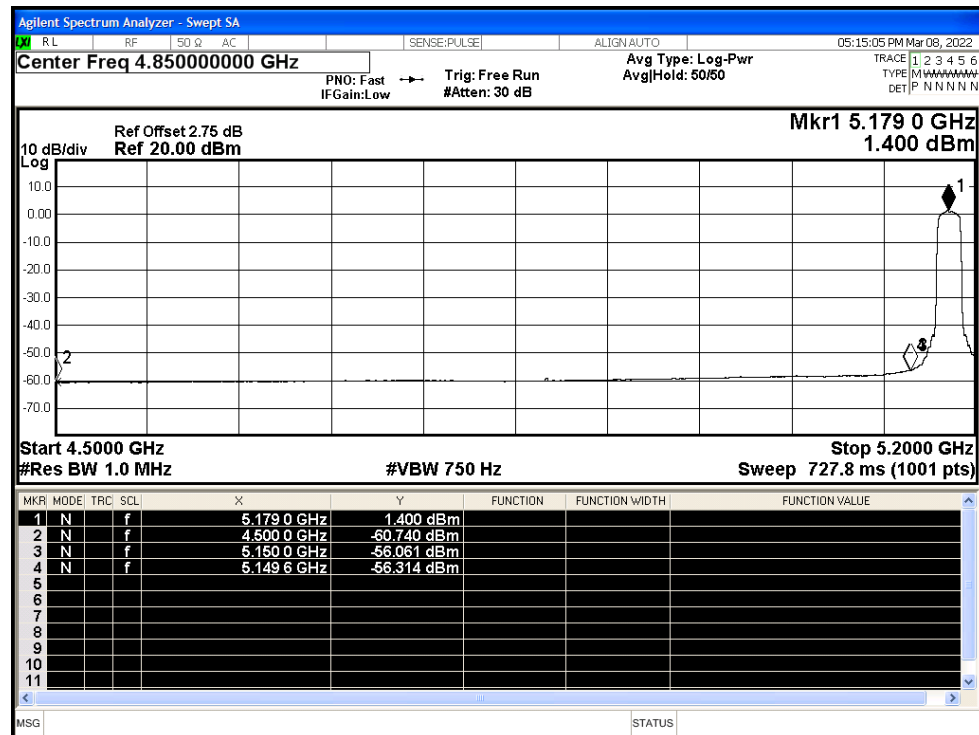




Restrict Band NVNT a 5240MHz Ant1 Peak

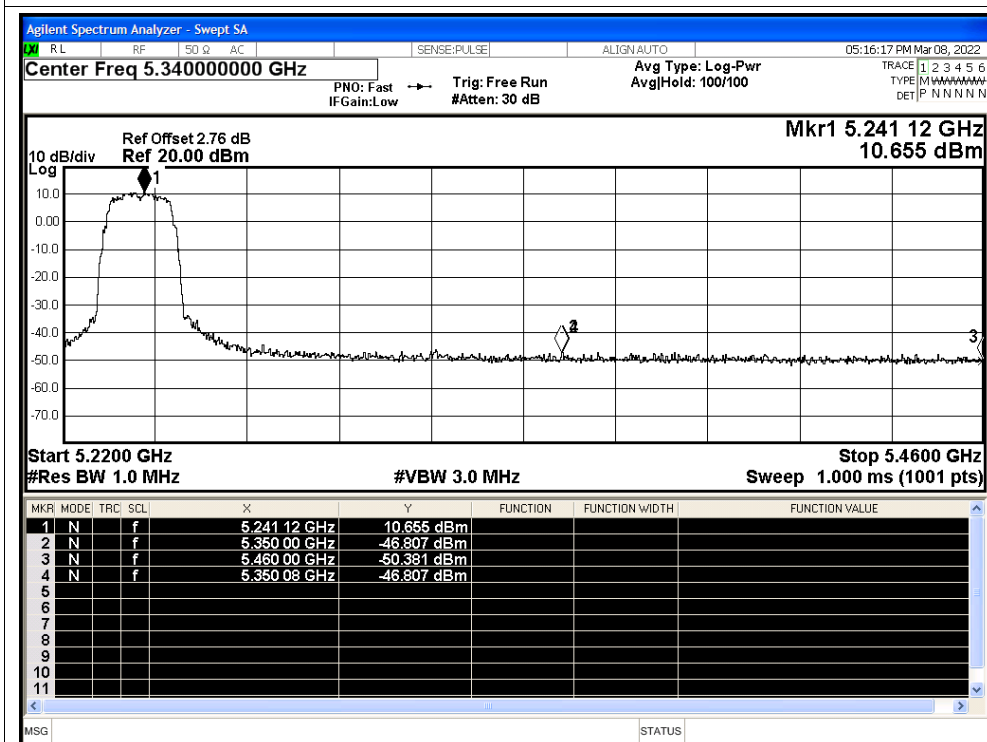


Restrict Band NVNT a 5240MHz Ant1 Average

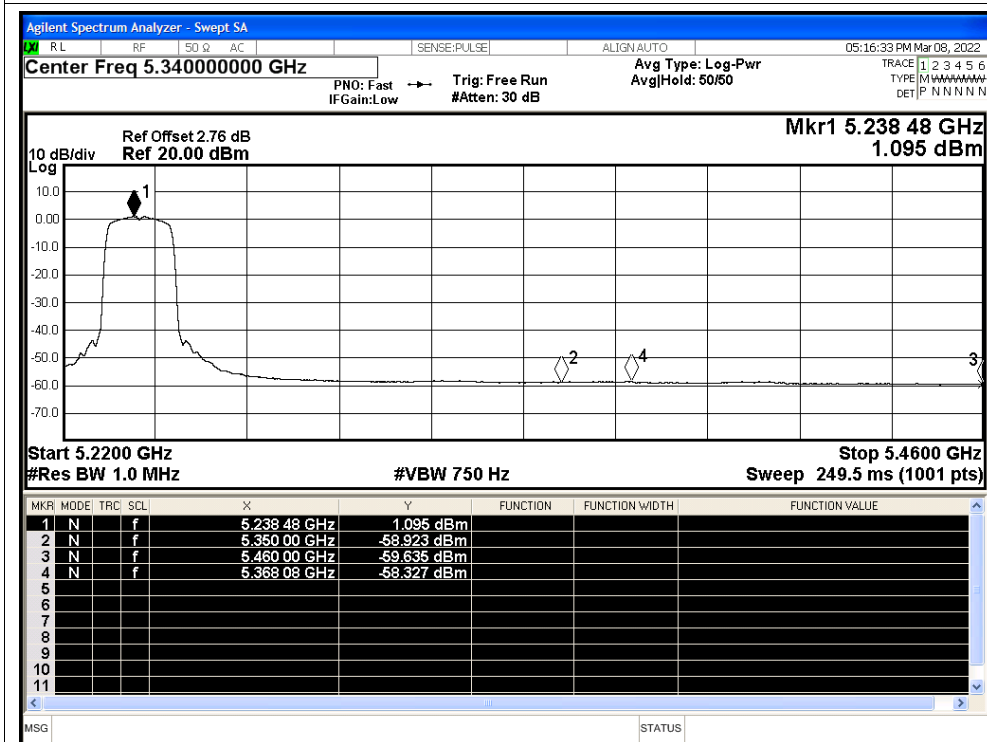




Restrict Band NVNT n20 5180MHz Ant1 Peak

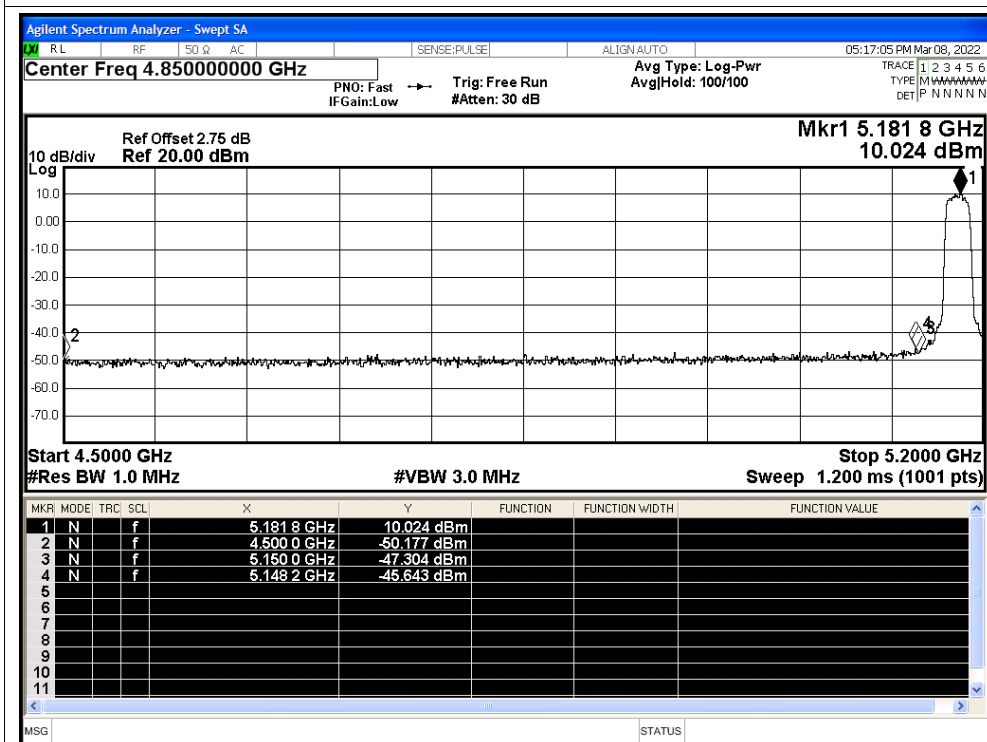


Restrict Band NVNT n20 5180MHz Ant1 Average

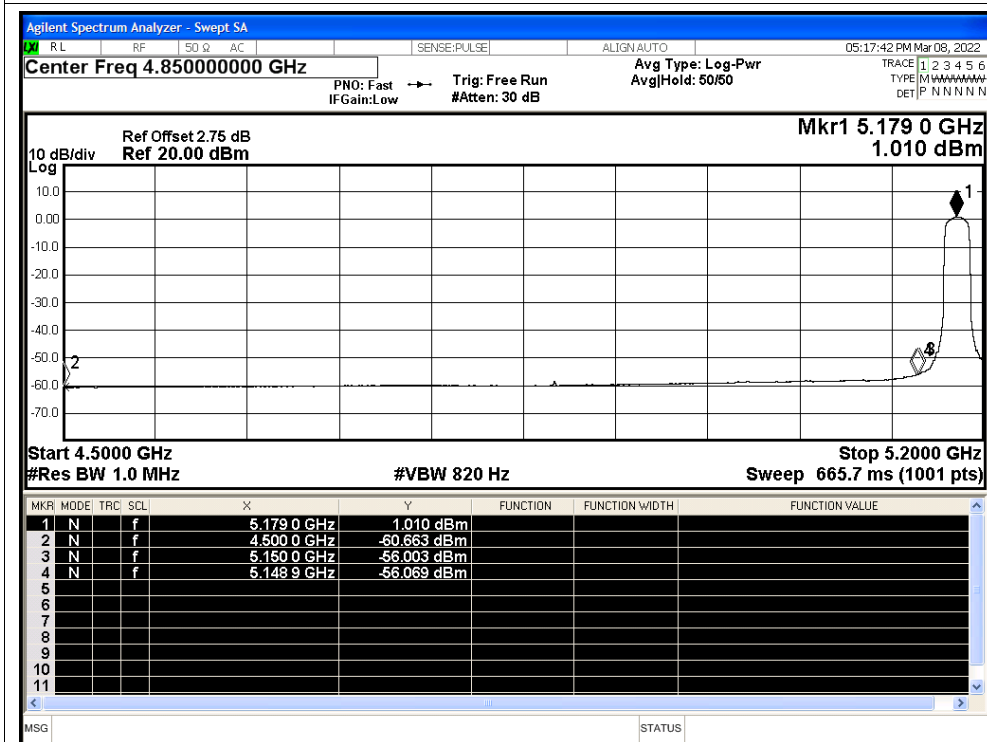




Restrict Band NVNT n20 5240MHz Ant1 Peak

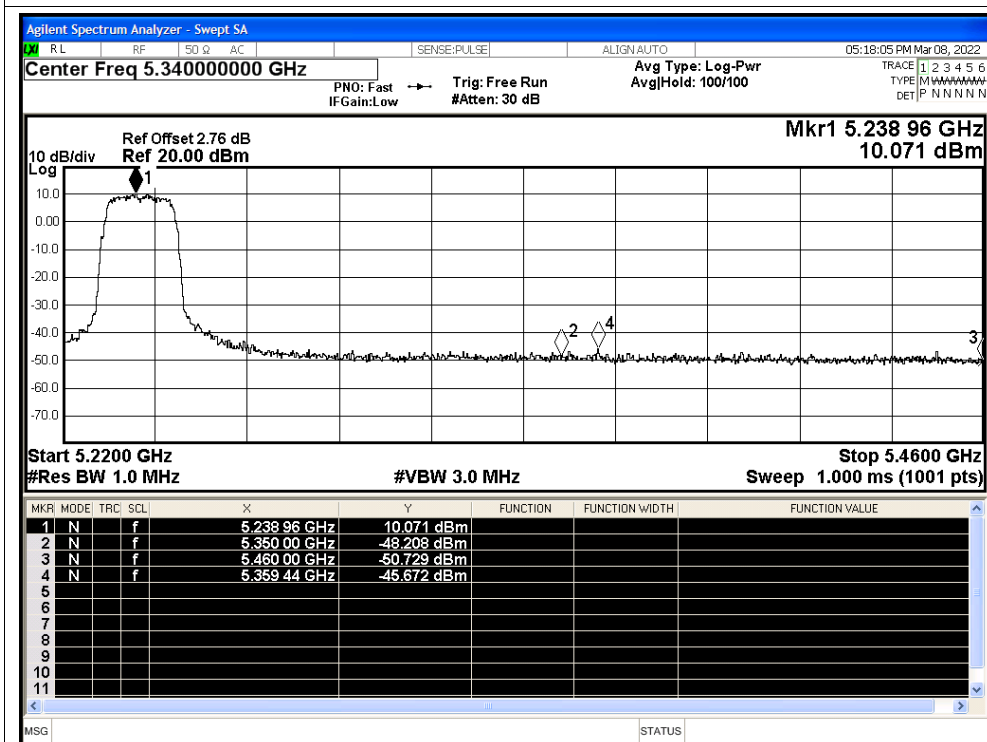


Restrict Band NVNT n20 5240MHz Ant1 Average

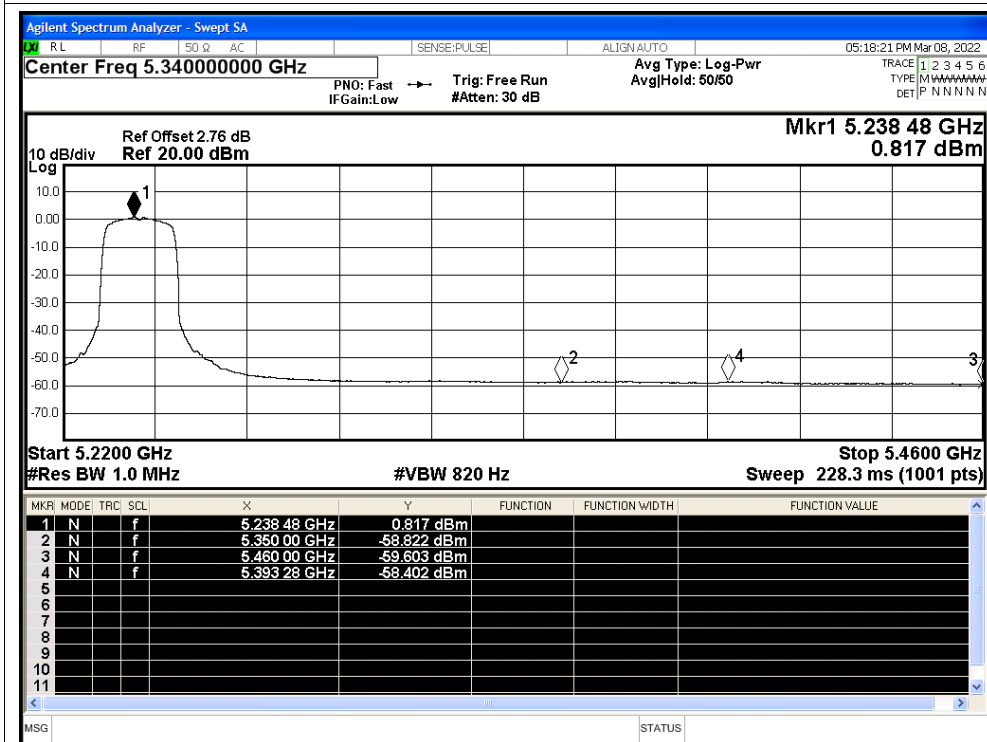




Restrict Band NVNT n40 5190MHz Ant1 Peak

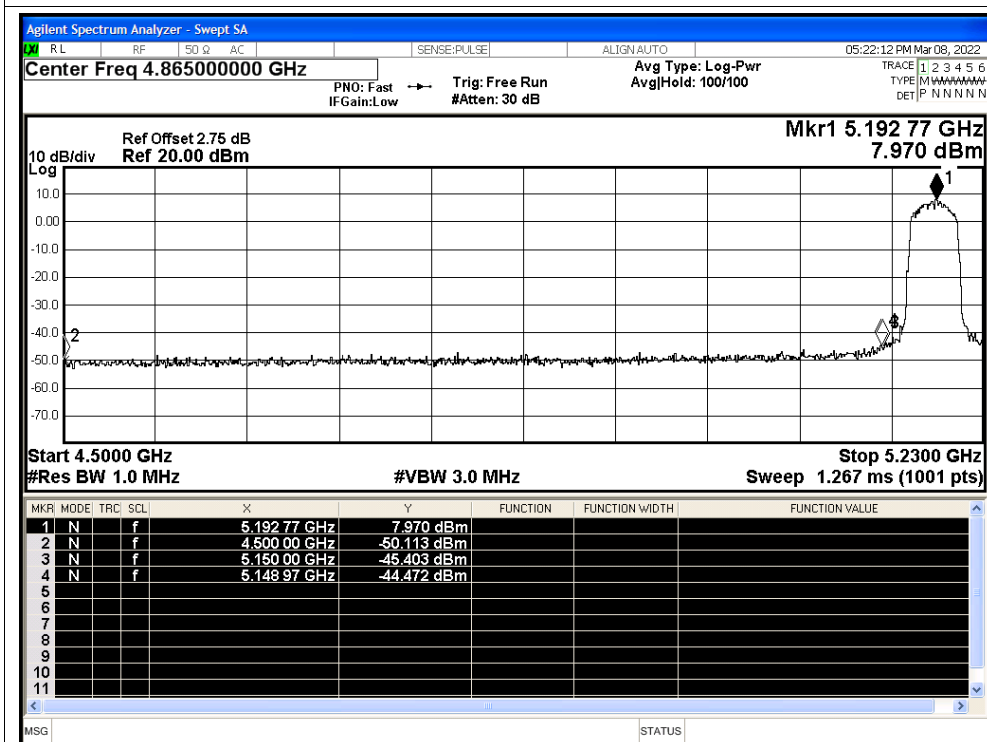


Restrict Band NVNT n40 5190MHz Ant1 Average

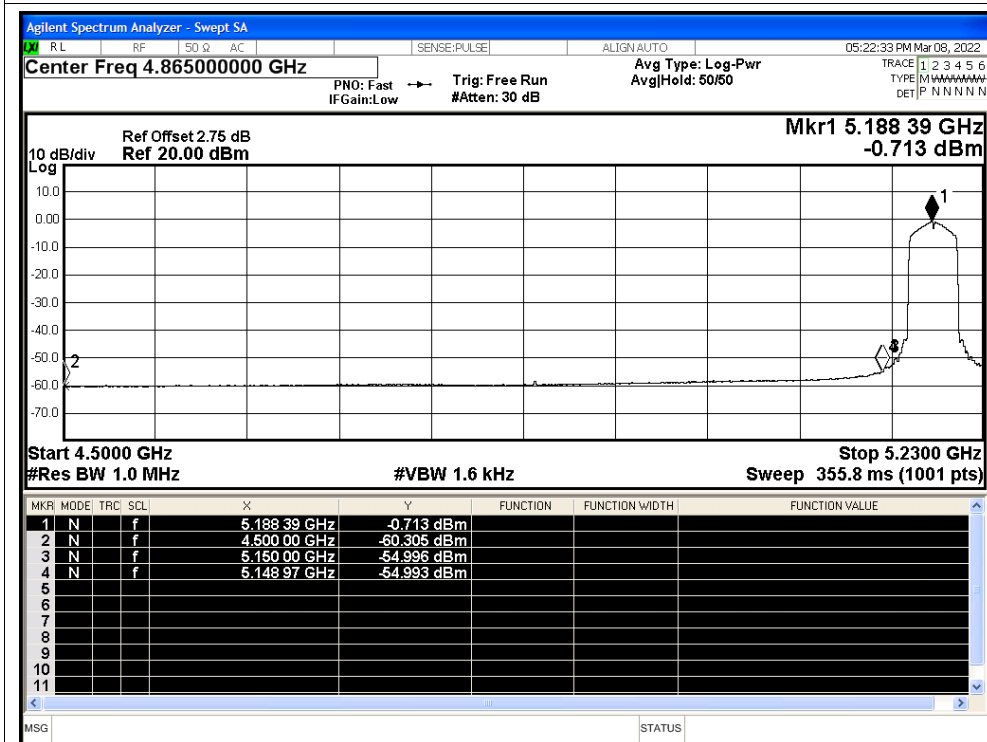




Restrict Band NVNT n40 5230MHz Ant1 Peak

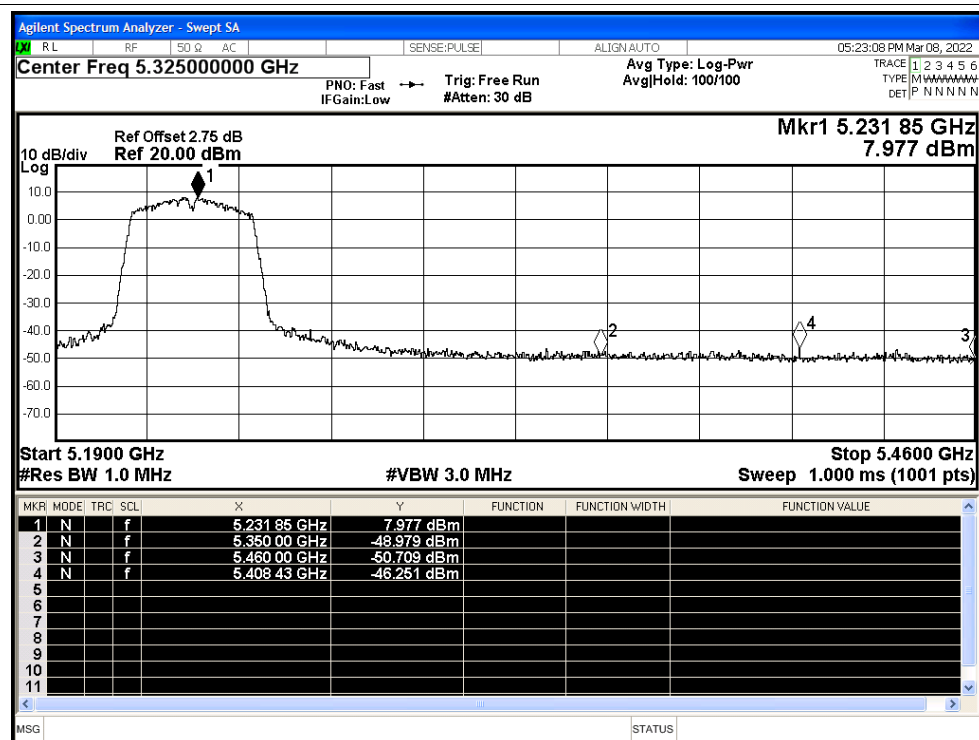


Restrict Band NVNT n40 5230MHz Ant1 Average

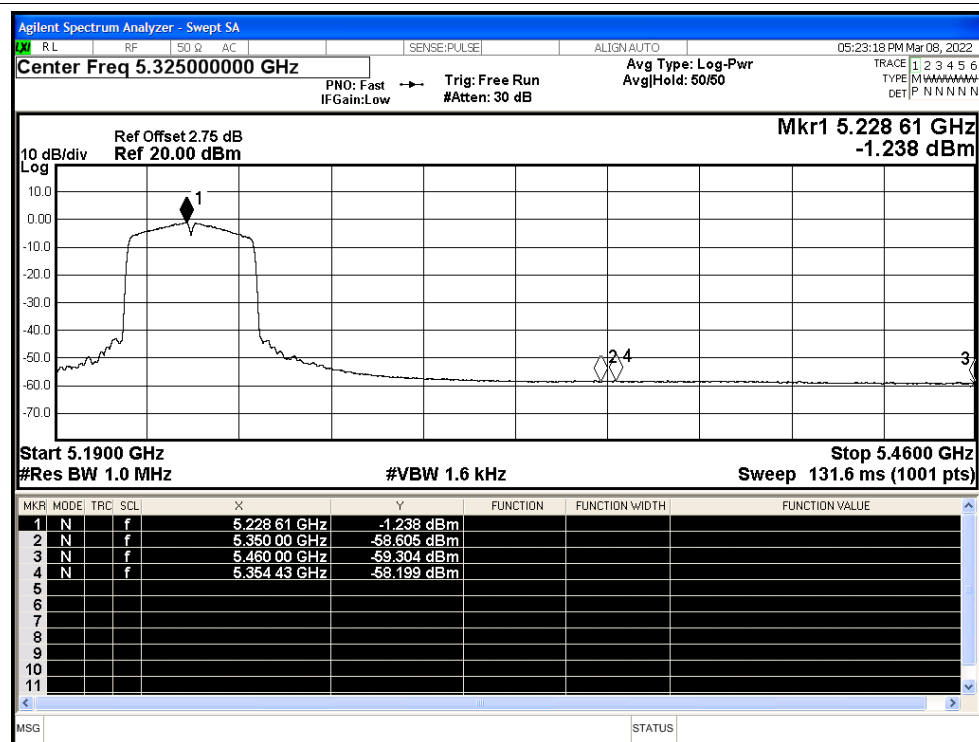




Restrict Band NVNT ac20 5180MHz Ant1 Peak

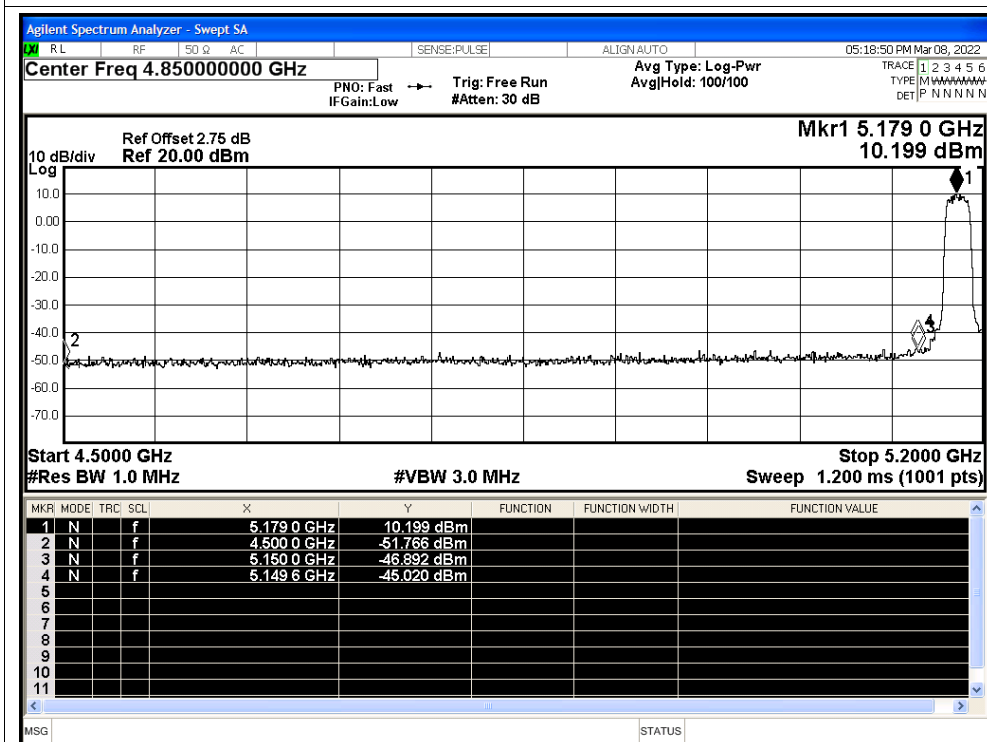


Restrict Band NVNT ac20 5180MHz Ant1 Average

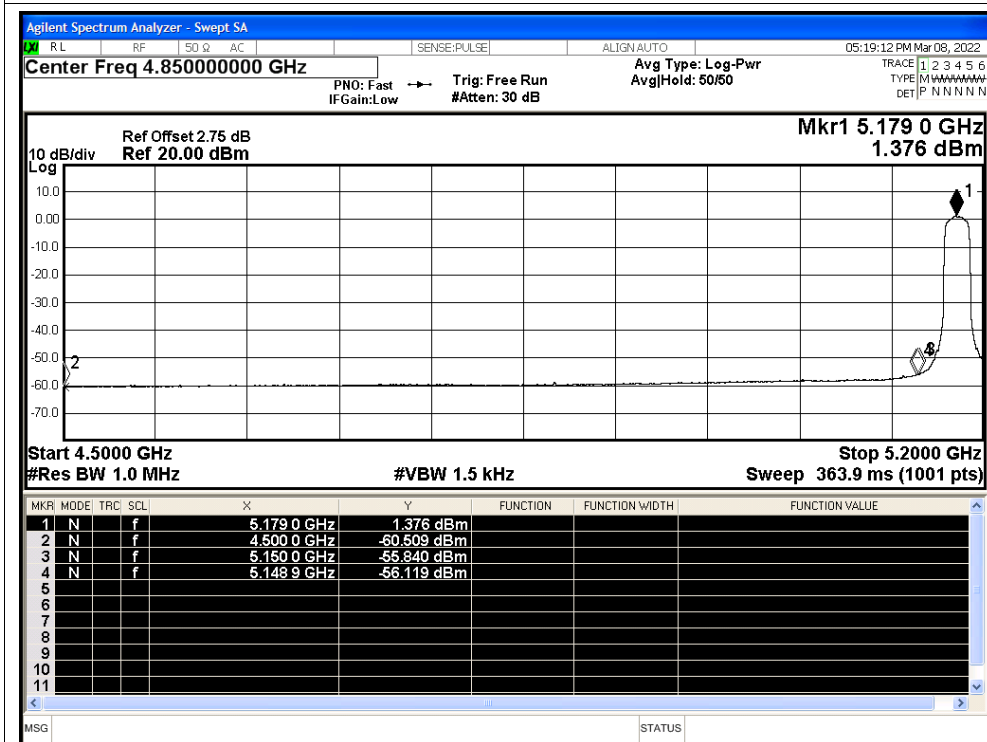



Restrict Band NVNT ac20 5240MHz Ant1 Peak

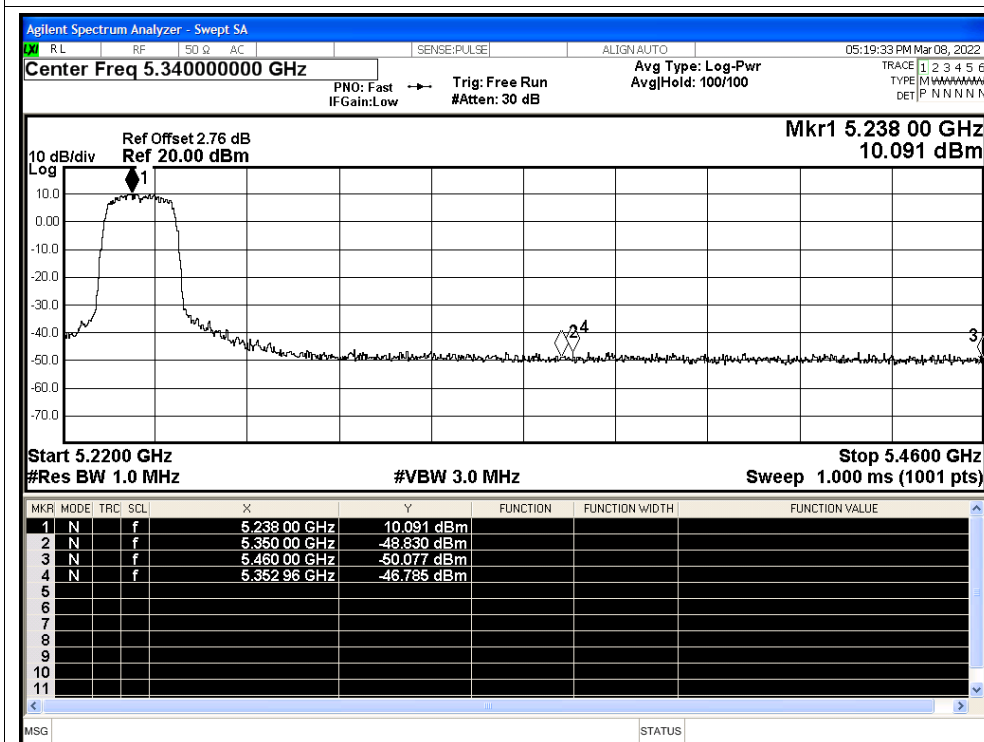

Restrict Band NVNT ac20 5240MHz Ant1 Average

