


Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

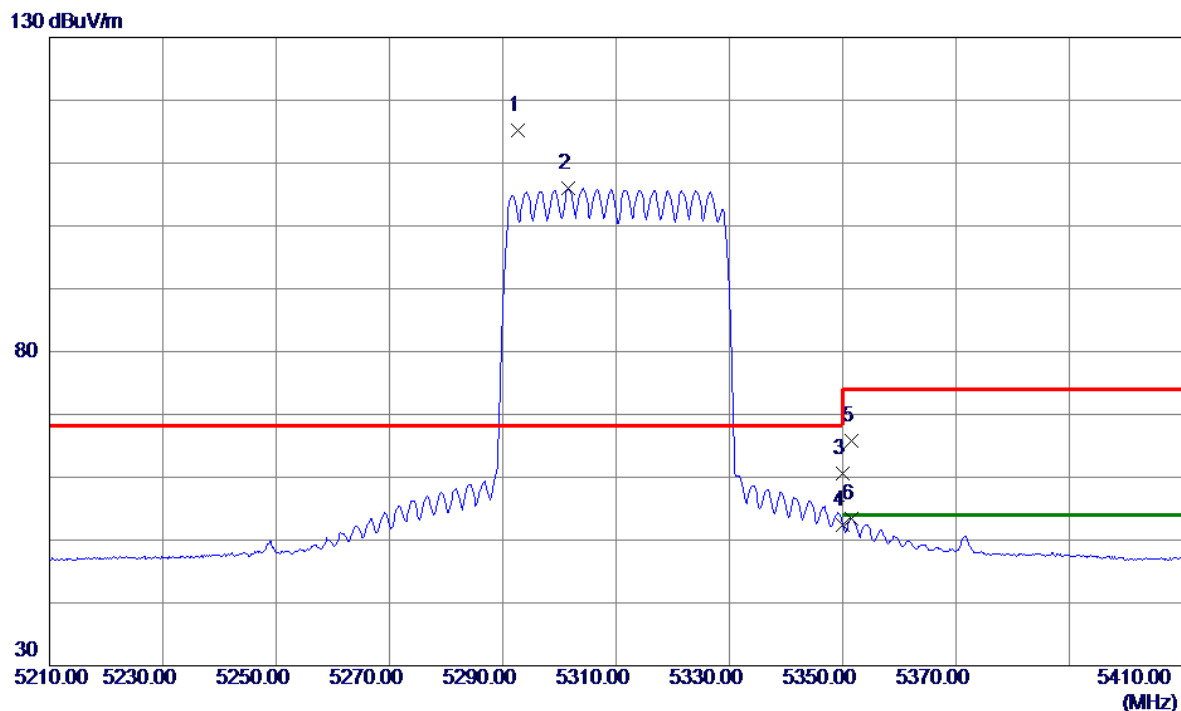


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5292.6000	100.91	14.33	115.24	68.20	47.04	Peak	No Limit
2	5301.6000	91.76	14.33	106.09	999.00	-892.91	AVG	No Limit
3	5350.0000	46.35	14.33	60.68	74.00	-13.32	Peak	
4	5350.0000	38.08	14.33	52.41	54.00	-1.59	AVG	
5	5351.6000	51.53	14.33	65.86	74.00	-8.14	Peak	
6	5351.6000	39.06	14.33	53.39	54.00	-0.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

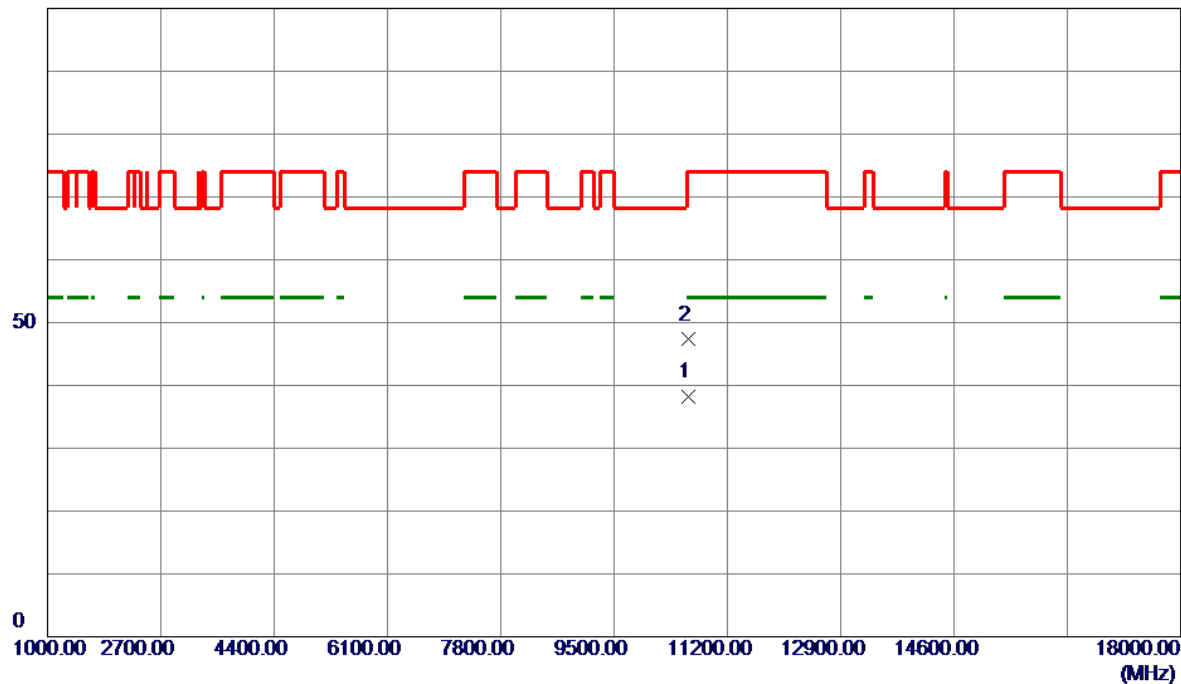


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10618.4500	27.35	10.86	38.21	54.00	-15.79	AVG	
2	10621.1500	36.43	10.87	47.30	74.00	-26.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

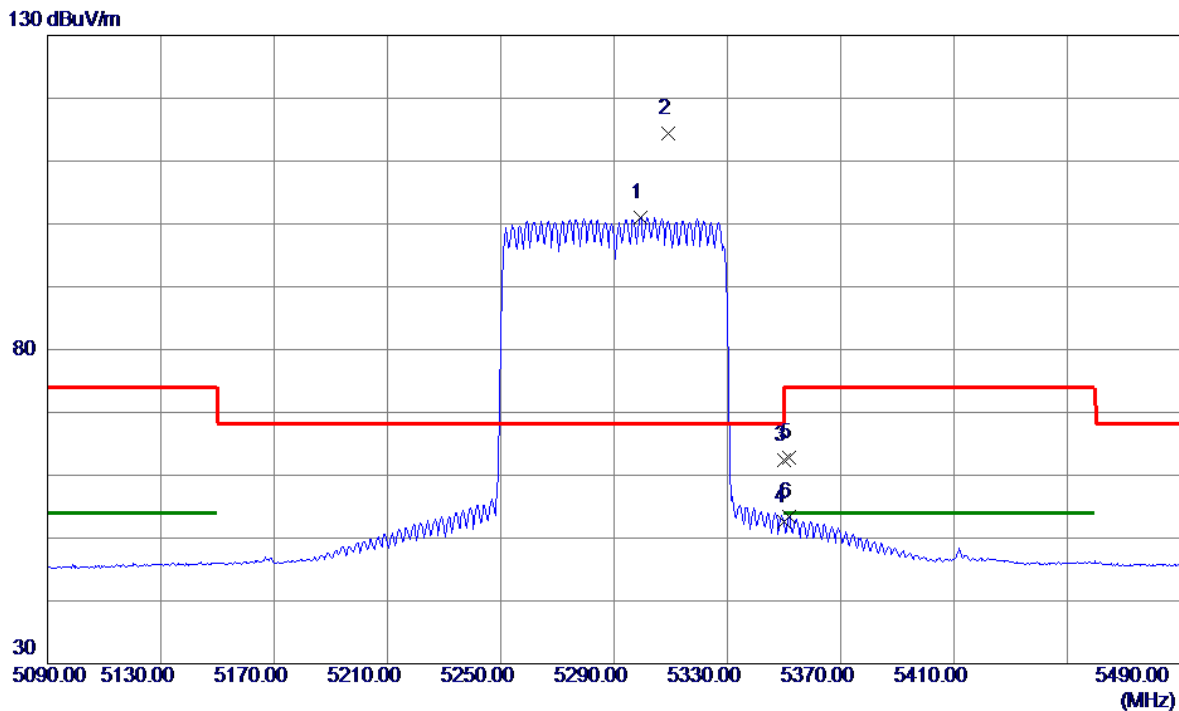


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5299.2000	86.77	14.33	101.10	999.00	-897.90	AVG	No Limit
2 *	5309.2000	100.13	14.33	114.46	68.20	46.26	Peak	No Limit
3	5350.0000	48.12	14.33	62.45	74.00	-11.55	Peak	
4	5350.0000	38.19	14.33	52.52	54.00	-1.48	AVG	
5	5351.6000	48.56	14.33	62.89	74.00	-11.11	Peak	
6	5351.6000	38.99	14.33	53.32	54.00	-0.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

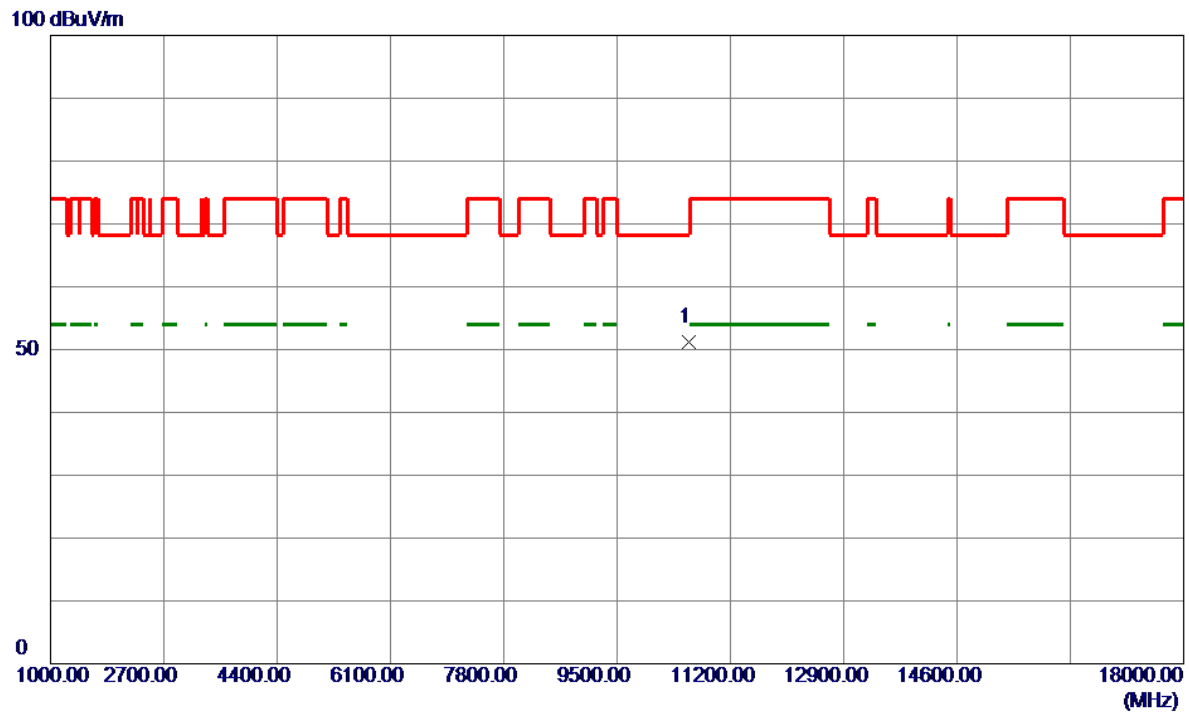


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10579.8000	40.31	10.85	51.16	68.20	-17.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

130 dBuV/m

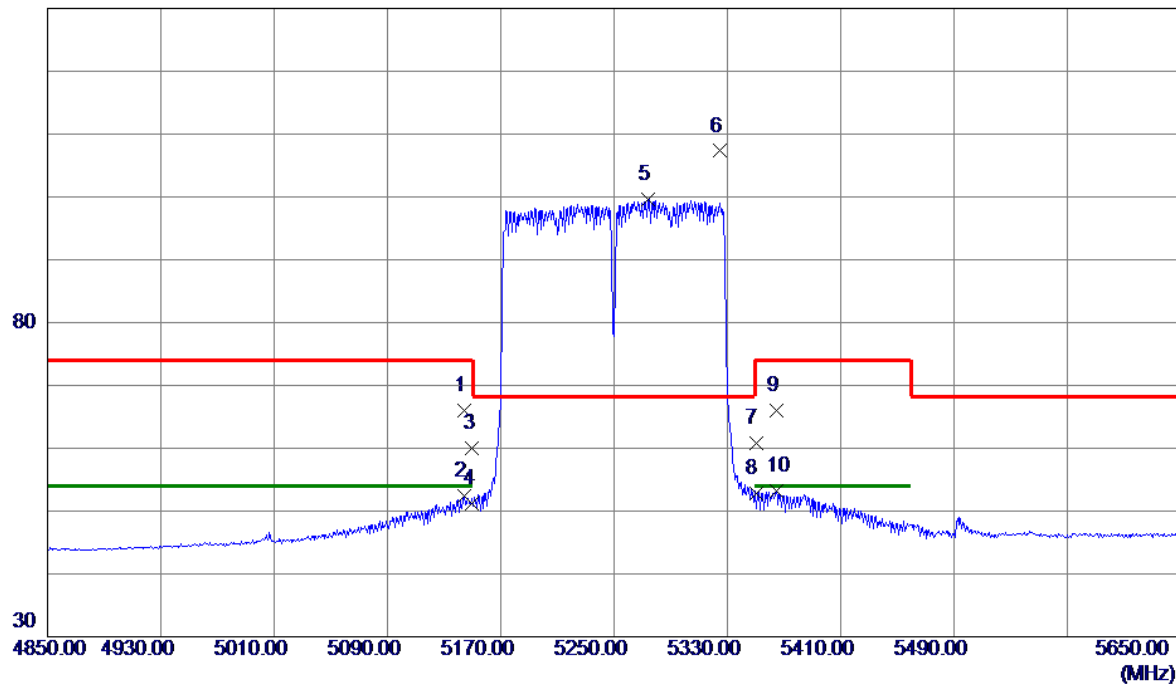


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.4000	51.61	14.33	65.94	74.00	-8.06	Peak	
2	5144.4000	38.01	14.33	52.34	54.00	-1.66	AVG	
3	5150.0000	45.73	14.33	60.06	74.00	-13.94	Peak	
4	5150.0000	36.82	14.33	51.15	54.00	-2.85	AVG	
5	5274.0000	85.34	14.33	99.67	999.00	-899.33	AVG	No Limit
6 *	5324.4000	92.97	14.33	107.30	68.20	39.10	Peak	No Limit
7	5350.0000	46.49	14.33	60.82	74.00	-13.18	Peak	
8	5350.0000	38.45	14.33	52.78	54.00	-1.22	AVG	
9	5364.4000	51.74	14.33	66.07	74.00	-7.93	Peak	
10	5364.4000	38.85	14.33	53.18	54.00	-0.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

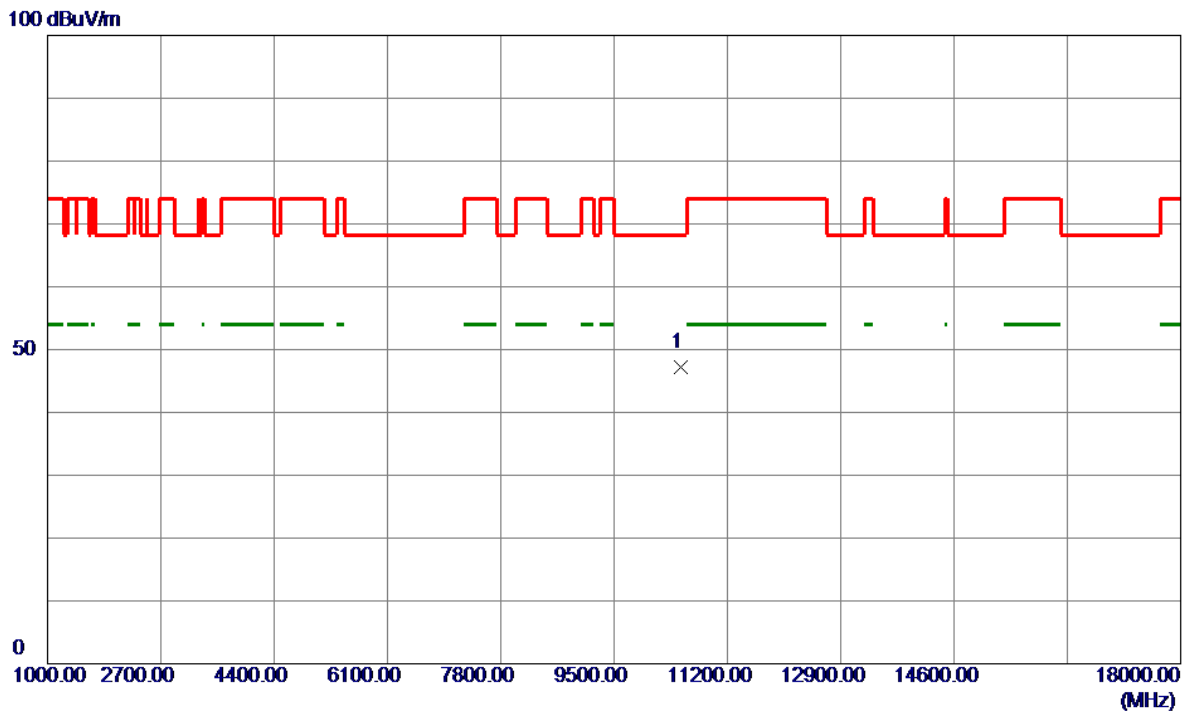


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10493.4500	36.31	10.81	47.12	68.20	-21.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

130 dBuV/m

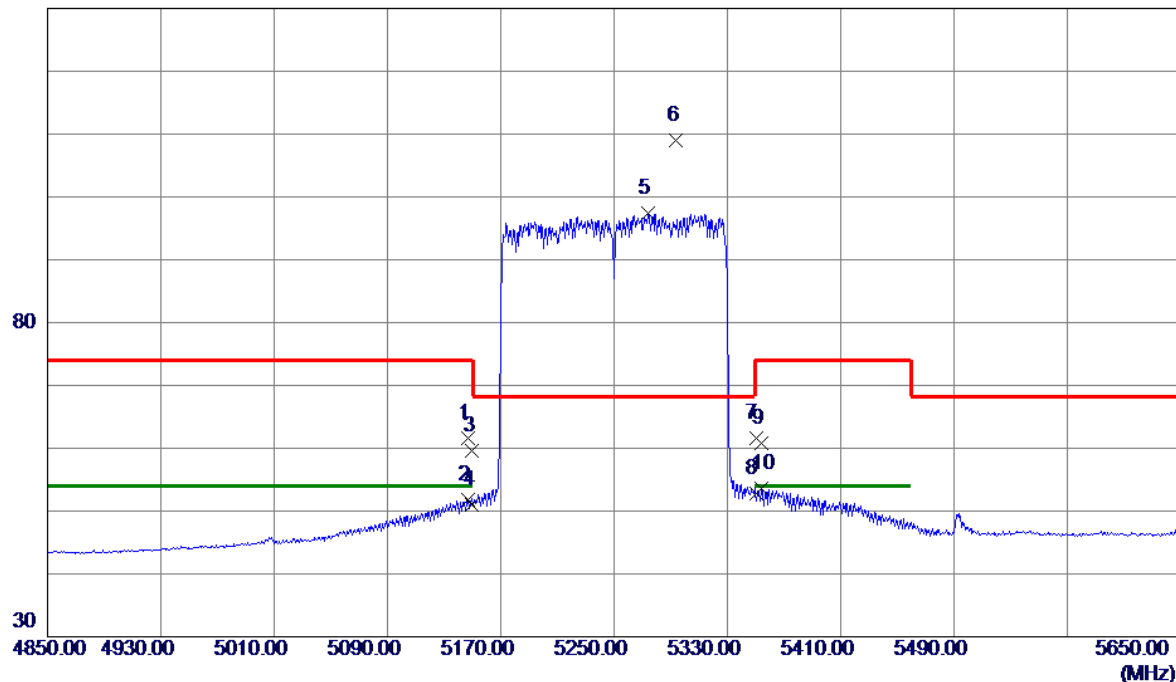


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.8000	47.30	14.33	61.63	74.00	-12.37	Peak	
2	5146.8000	37.38	14.33	51.71	54.00	-2.29	AVG	
3	5150.0000	45.34	14.33	59.67	74.00	-14.33	Peak	
4	5150.0000	36.71	14.33	51.04	54.00	-2.96	AVG	
5	5274.0000	83.02	14.33	97.35	999.00	-901.65	AVG	No Limit
6 *	5294.0000	94.65	14.33	108.98	68.20	40.78	Peak	No Limit
7	5350.0000	47.22	14.33	61.55	74.00	-12.45	Peak	
8	5350.0000	38.51	14.33	52.84	54.00	-1.16	AVG	
9	5354.0000	46.51	14.33	60.84	74.00	-13.16	Peak	
10	5354.0000	39.19	14.33	53.52	54.00	-0.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

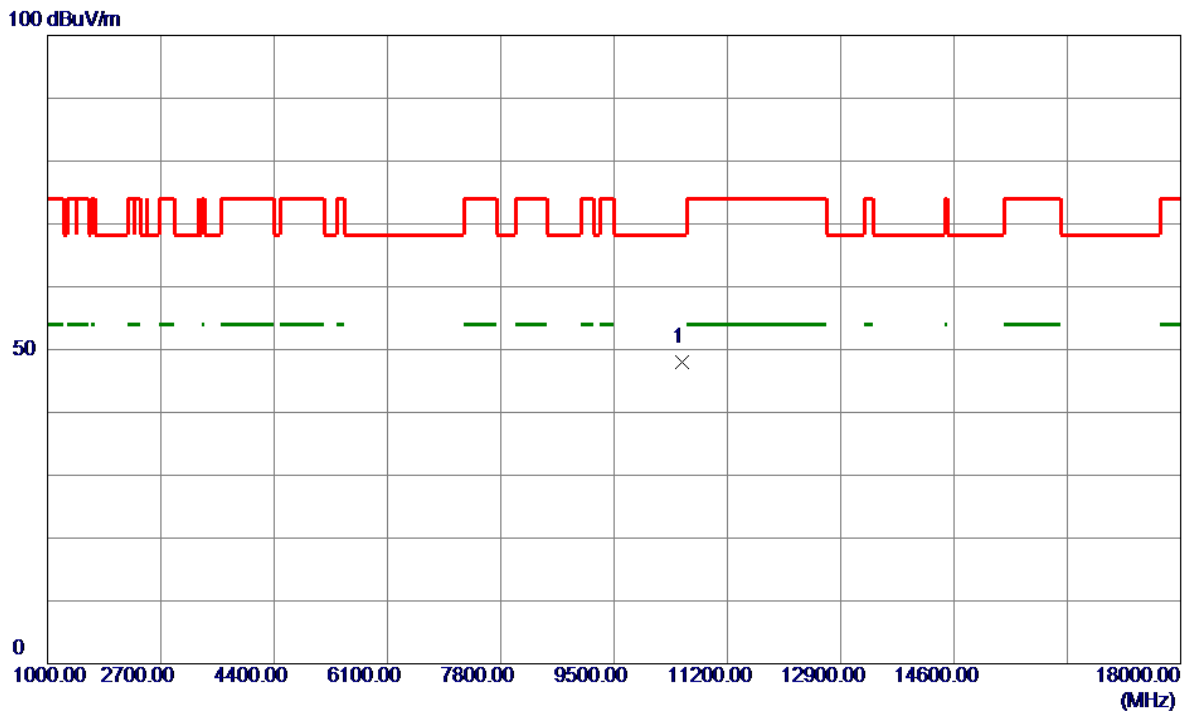


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10516.7000	37.17	10.82	47.99	68.20	-20.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

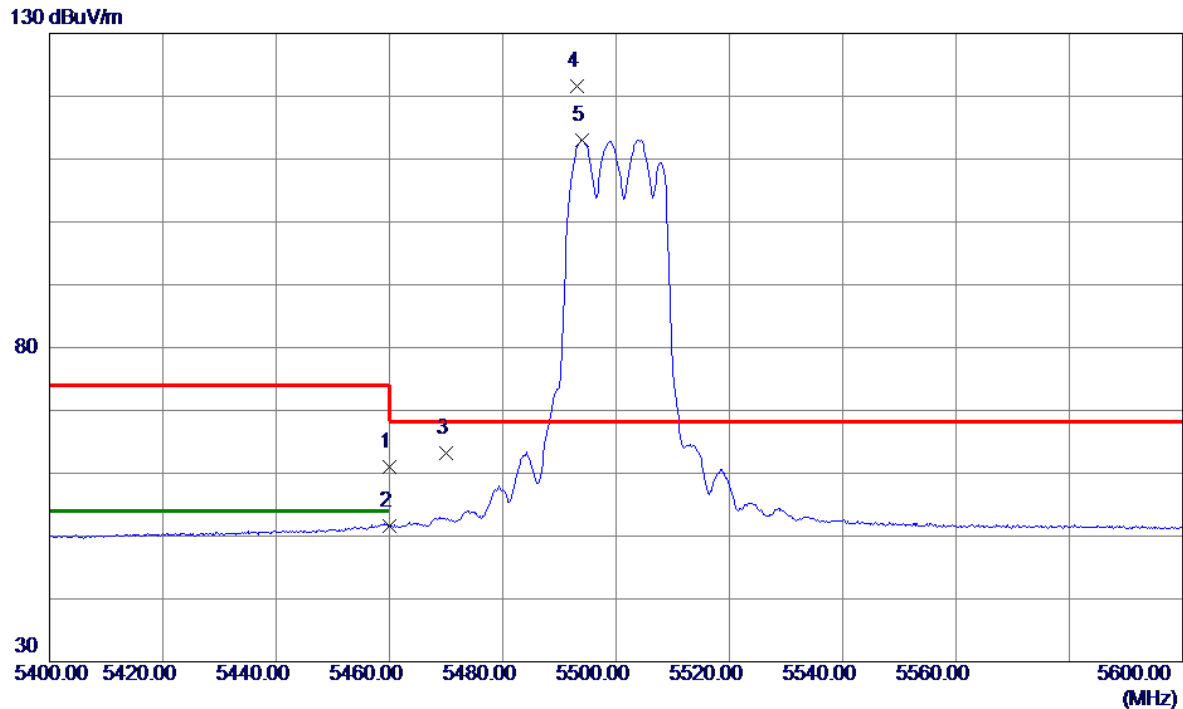


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	46.75	14.34	61.09	74.00	-12.91	Peak	
2	5460.0000	37.29	14.34	51.63	54.00	-2.37	AVG	
3	5470.0000	48.95	14.34	63.29	68.20	-4.91	Peak	
4 *	5493.2000	107.28	14.34	121.62	68.20	53.42	Peak	No Limit
5	5494.0000	98.69	14.34	113.03	999.00	-885.97	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

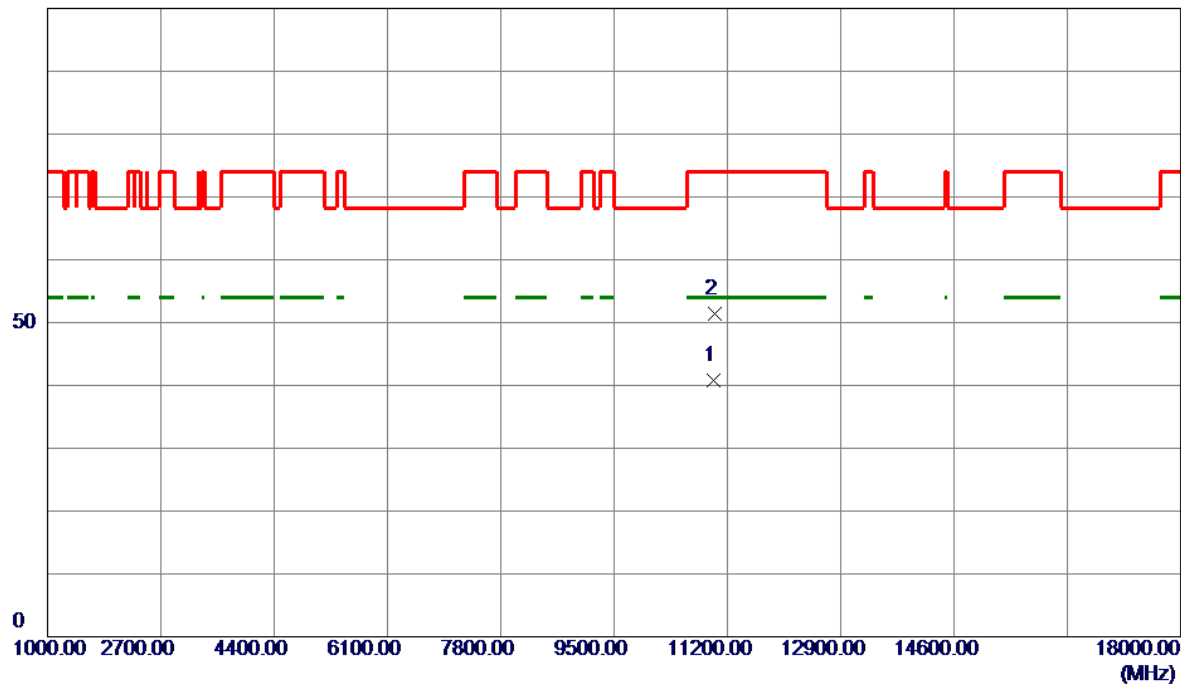


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11001.3500	29.82	11.04	40.86	54.00	-13.14	AVG	
2	11002.1000	40.34	11.04	51.38	74.00	-22.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

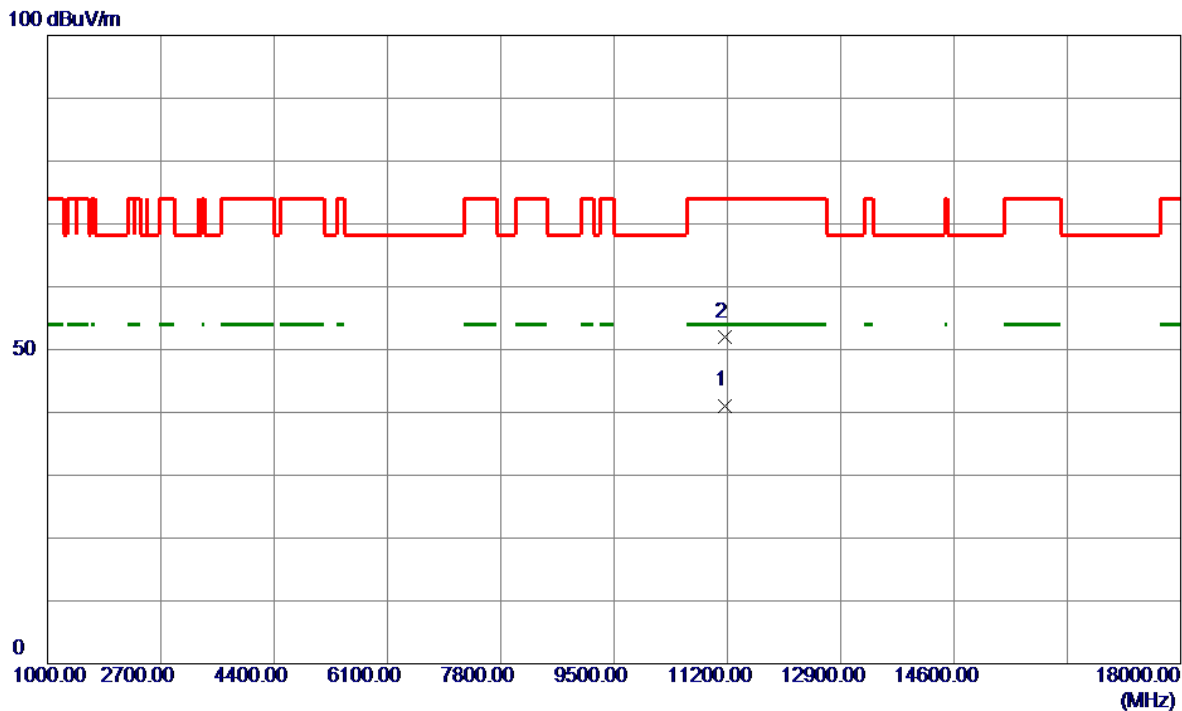


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.8000	30.01	11.09	41.10	54.00	-12.90	AVG	
2	11165.9000	40.91	11.09	52.00	74.00	-22.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

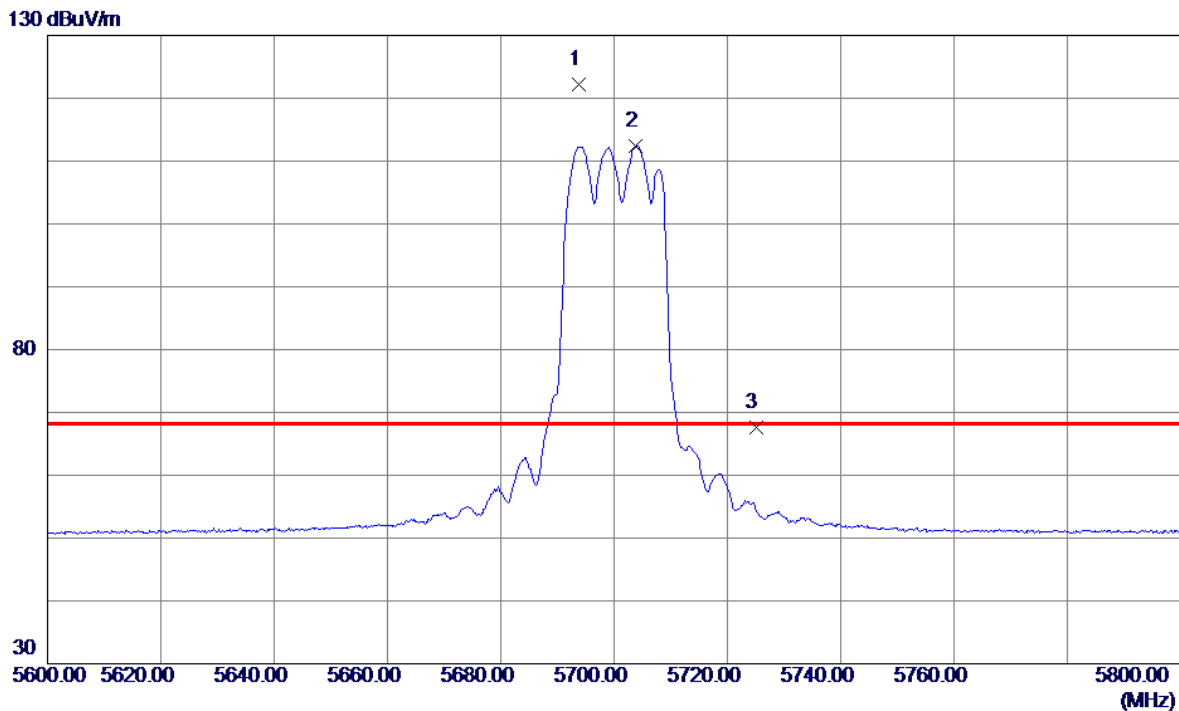


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.8000	107.49	14.79	122.28	68.20	54.08	Peak	No Limit
2	5703.8000	97.55	14.81	112.36	999.00	-886.64	AVG	No Limit
3	5725.0000	52.66	14.86	67.52	68.20	-0.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

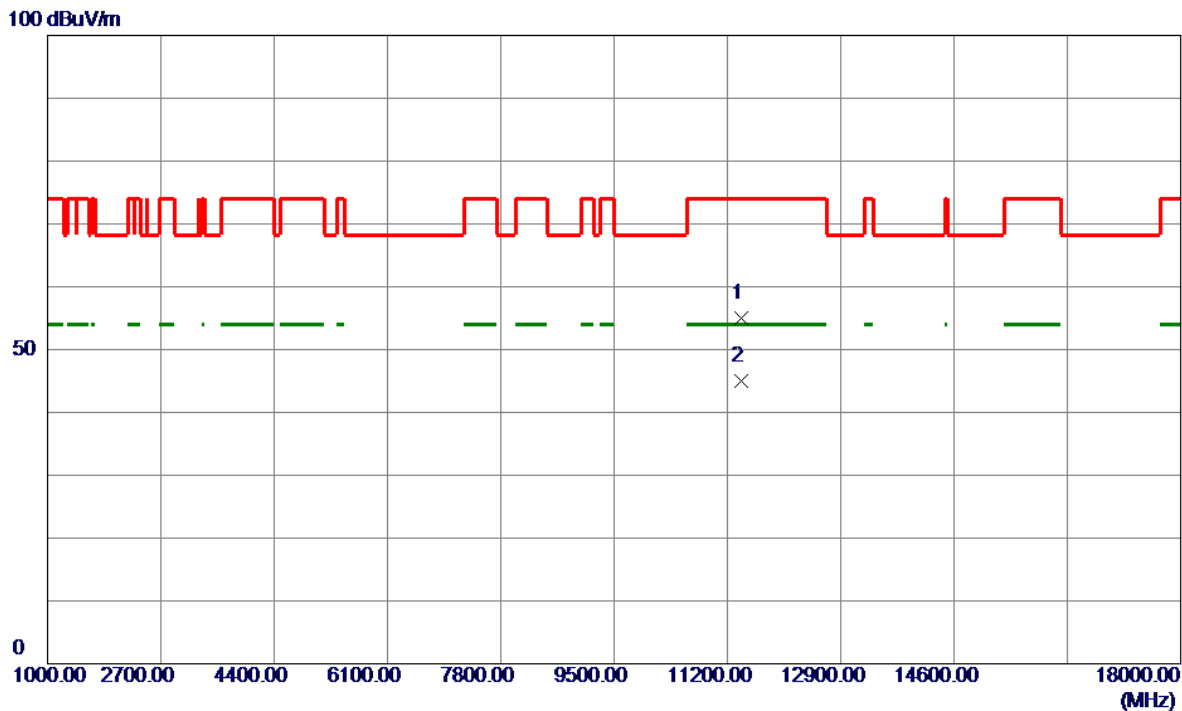


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11401.7500	43.90	11.16	55.06	74.00	-18.94	Peak	
2 *	11402.2000	33.79	11.16	44.95	54.00	-9.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

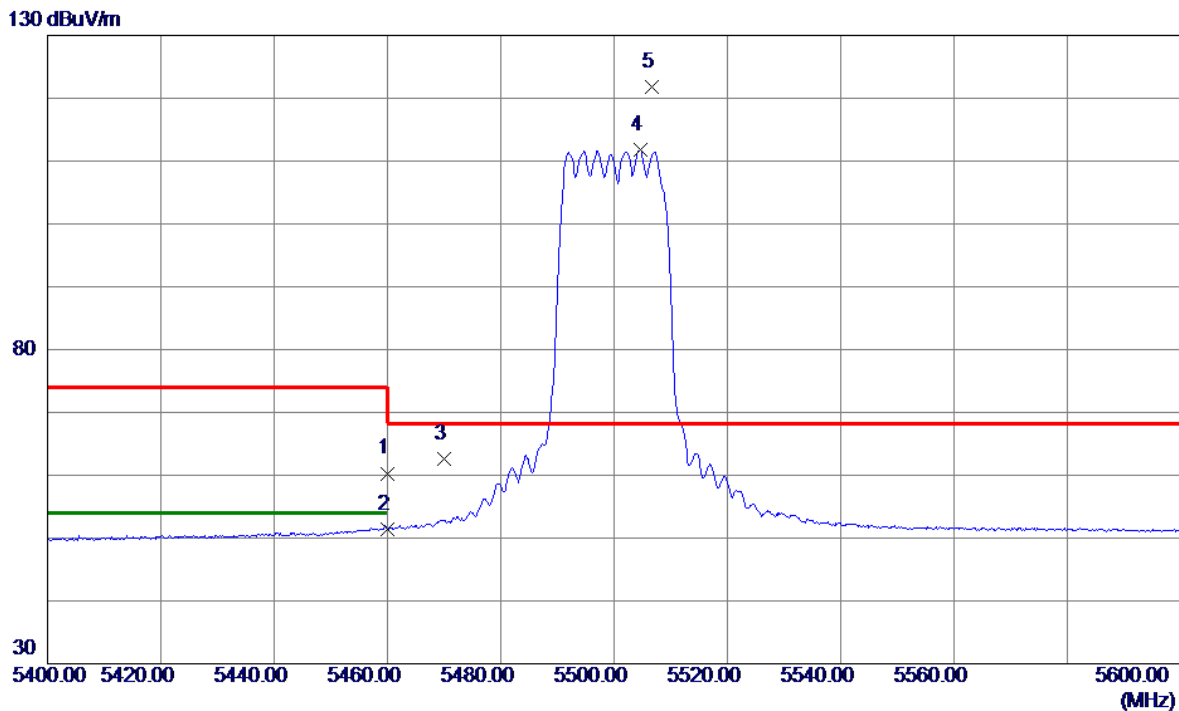


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.96	14.34	60.30	74.00	-13.70	Peak	
2	5460.0000	37.03	14.34	51.37	54.00	-2.63	AVG	
3	5470.0000	48.32	14.34	62.66	68.20	-5.54	Peak	
4	5504.6000	97.38	14.35	111.73	999.00	-887.27	AVG	No Limit
5 *	5506.6000	107.36	14.36	121.72	68.20	53.52	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

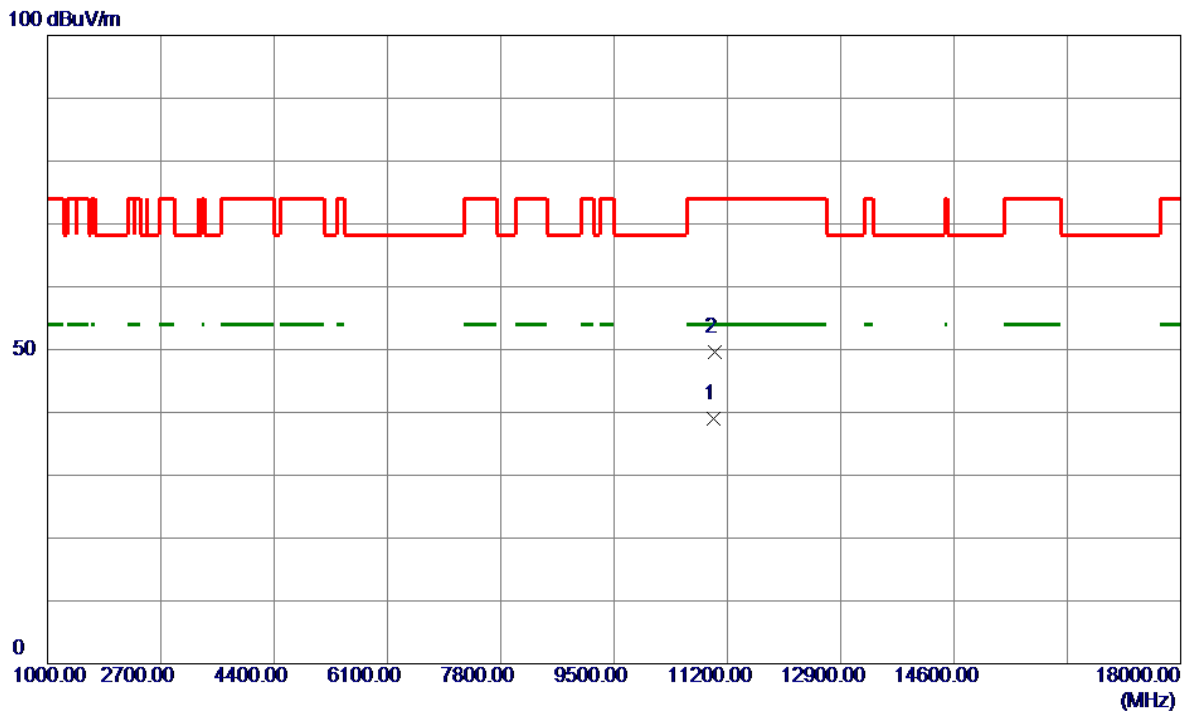


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11000.8500	28.02	11.04	39.06	54.00	-14.94	AVG	
2	11005.3000	38.59	11.04	49.63	74.00	-24.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

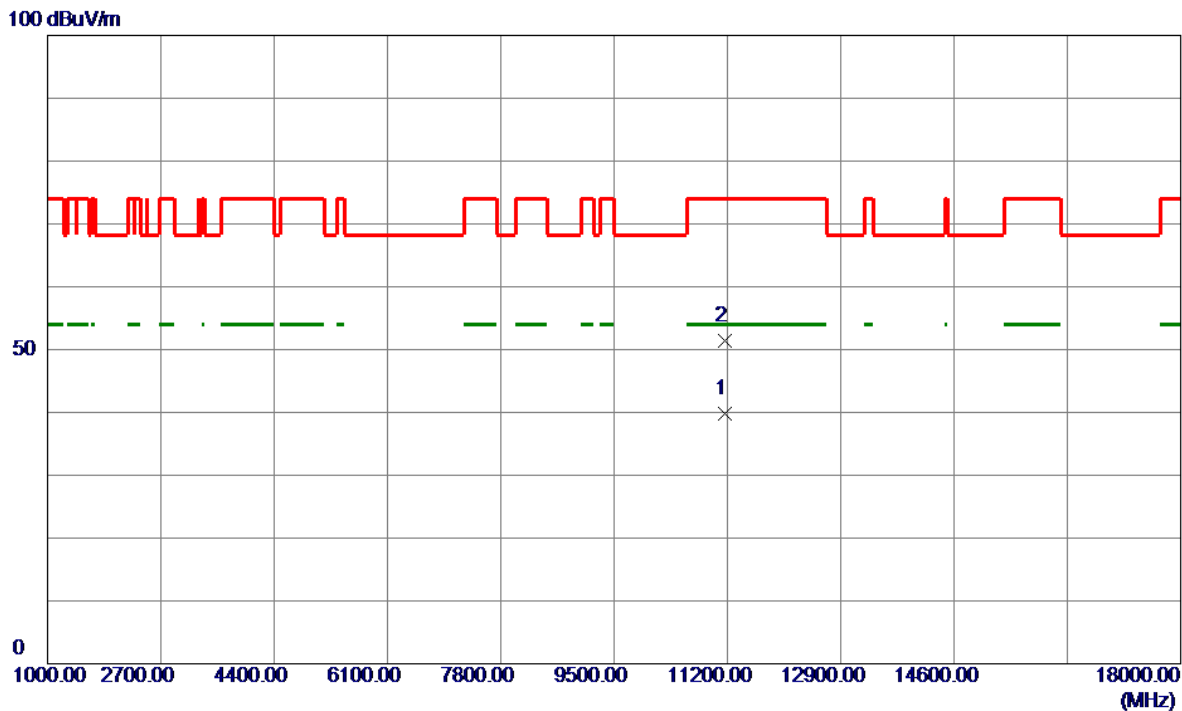


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.9500	28.79	11.09	39.88	54.00	-14.12	AVG	
2	11161.1000	40.22	11.09	51.31	74.00	-22.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

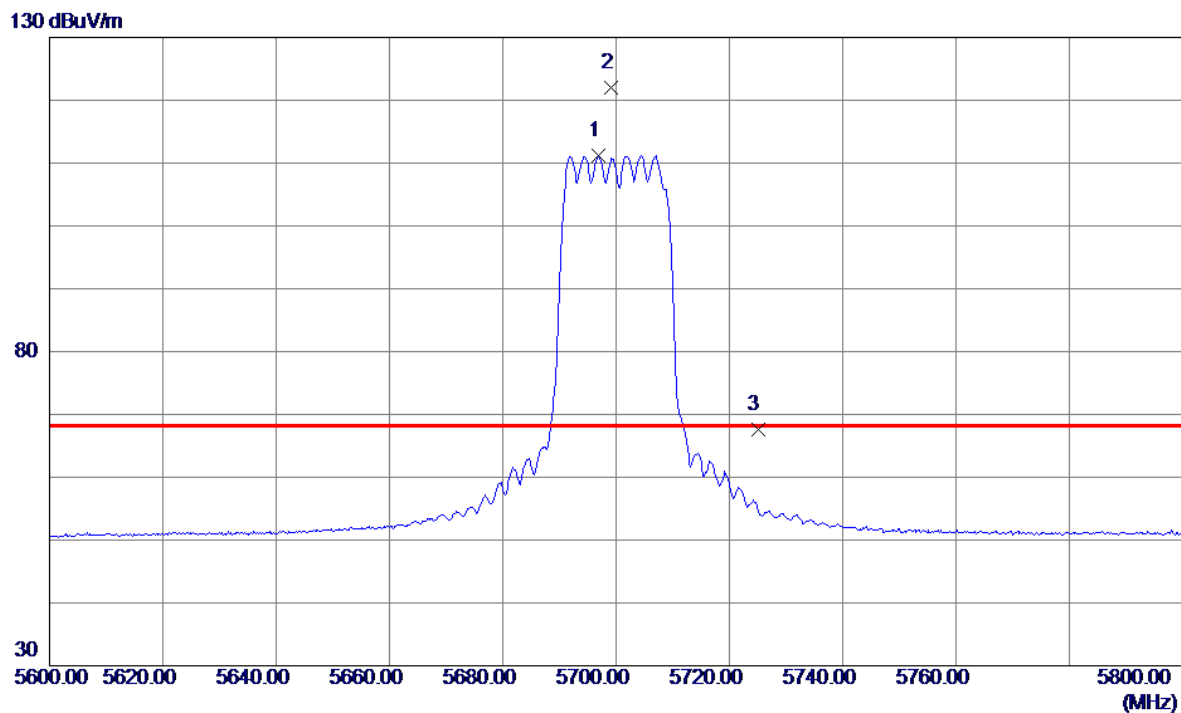


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5696.8000	96.33	14.80	111.13	999.00	-887.87	AVG	No Limit
2 *	5699.2000	107.23	14.80	122.03	68.20	53.83	Peak	No Limit
3	5725.0000	52.65	14.86	67.51	68.20	-0.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

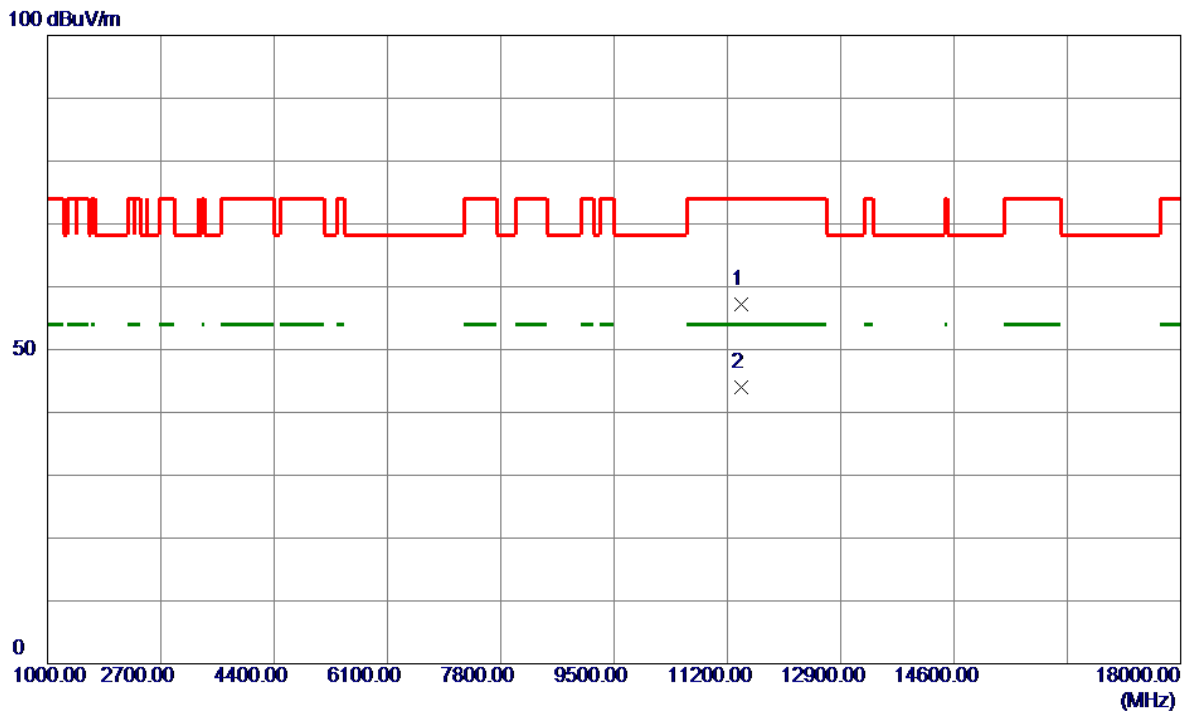


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11398.4000	45.95	11.16	57.11	74.00	-16.89	Peak	
2 *	11400.5500	32.79	11.16	43.95	54.00	-10.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

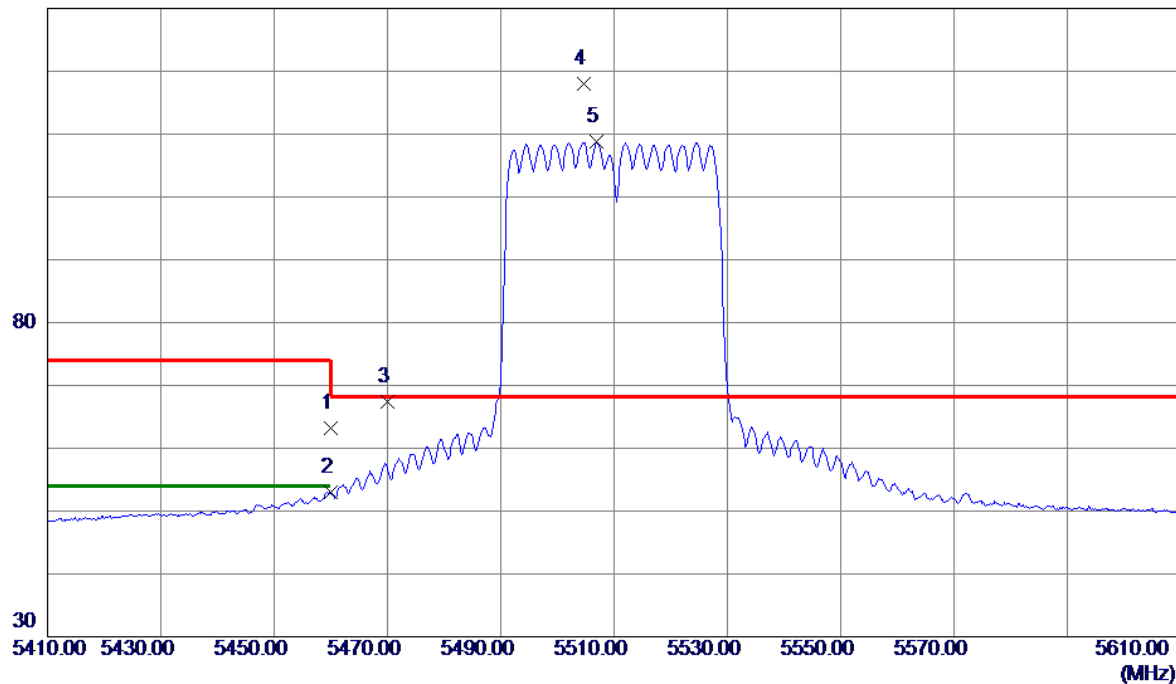


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	48.80	14.34	63.14	74.00	-10.86	Peak	
2	5460.0000	38.58	14.34	52.92	54.00	-1.08	AVG	
3	5470.0000	53.14	14.34	67.48	68.20	-0.72	Peak	
4 *	5504.6000	103.58	14.35	117.93	68.20	49.73	Peak	No Limit
5	5506.8000	94.38	14.36	108.74	999.00	-890.26	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

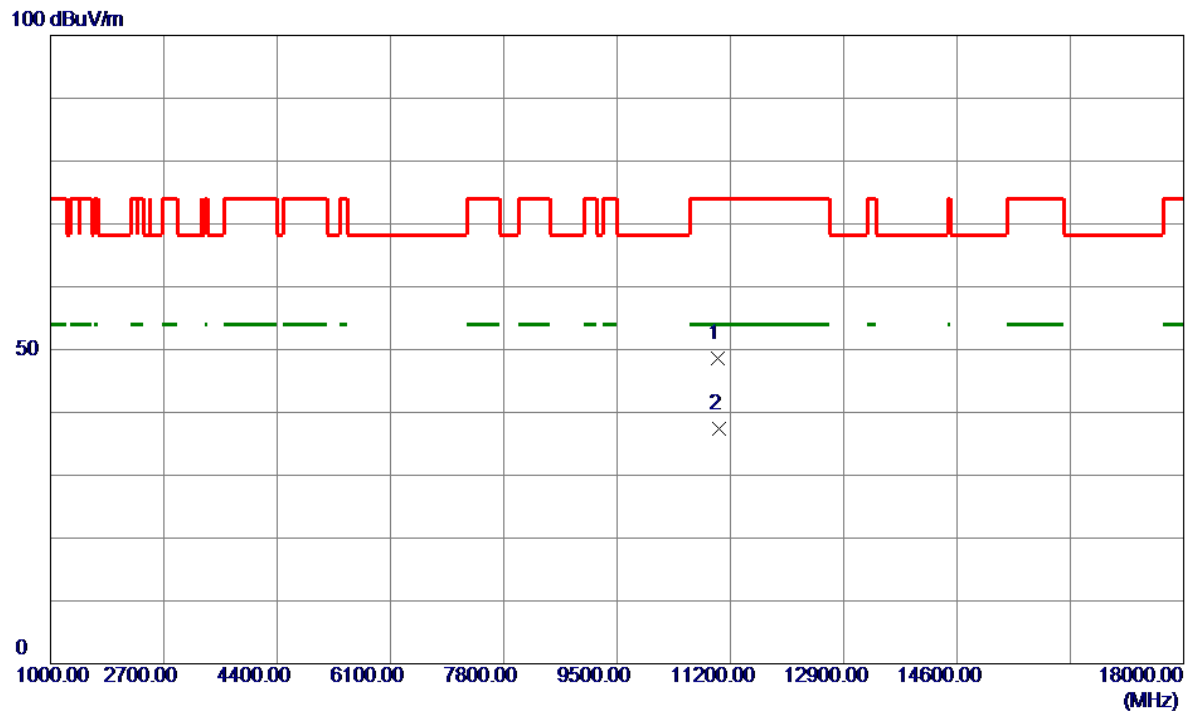


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11017.5500	37.47	11.05	48.52	74.00	-25.48	Peak	
2 *	11022.3500	26.44	11.05	37.49	54.00	-16.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

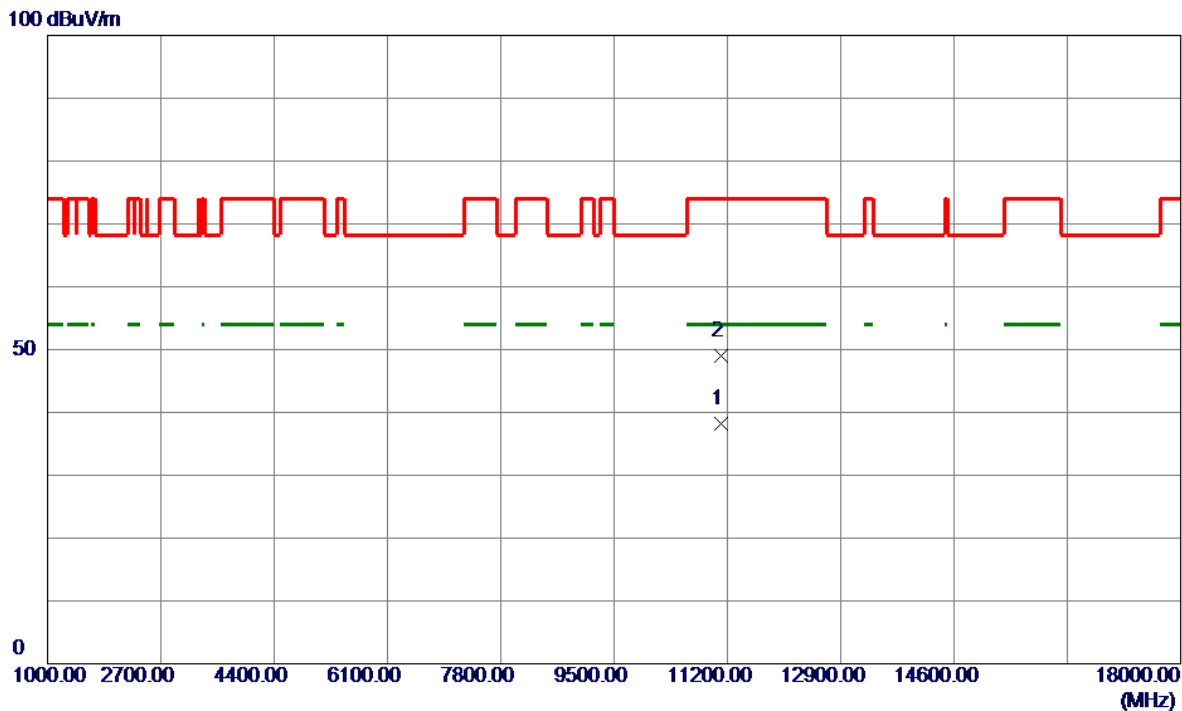


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.3000	27.18	11.07	38.25	54.00	-15.75	AVG	
2	11114.8500	37.98	11.08	49.06	74.00	-24.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

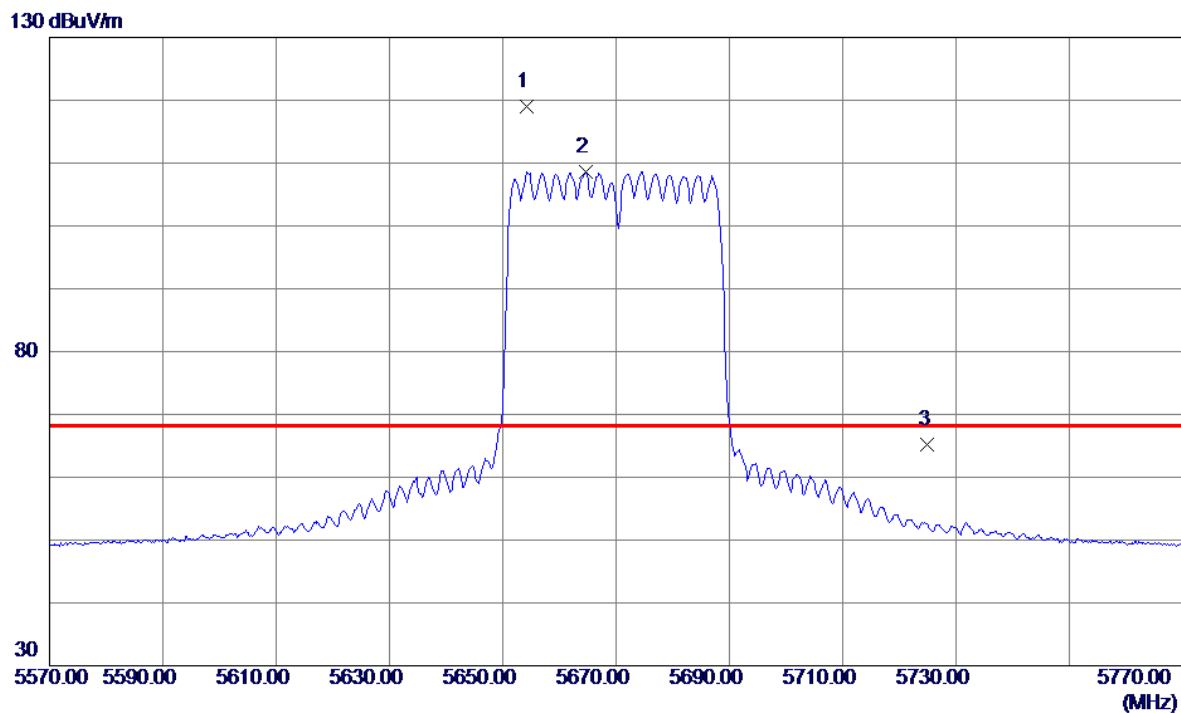


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5654.2000	104.35	14.70	119.05	68.20	50.85	Peak	No Limit
2	5664.6000	93.96	14.72	108.68	999.00	-890.32	AVG	No Limit
3	5725.0000	50.34	14.86	65.20	68.20	-3.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

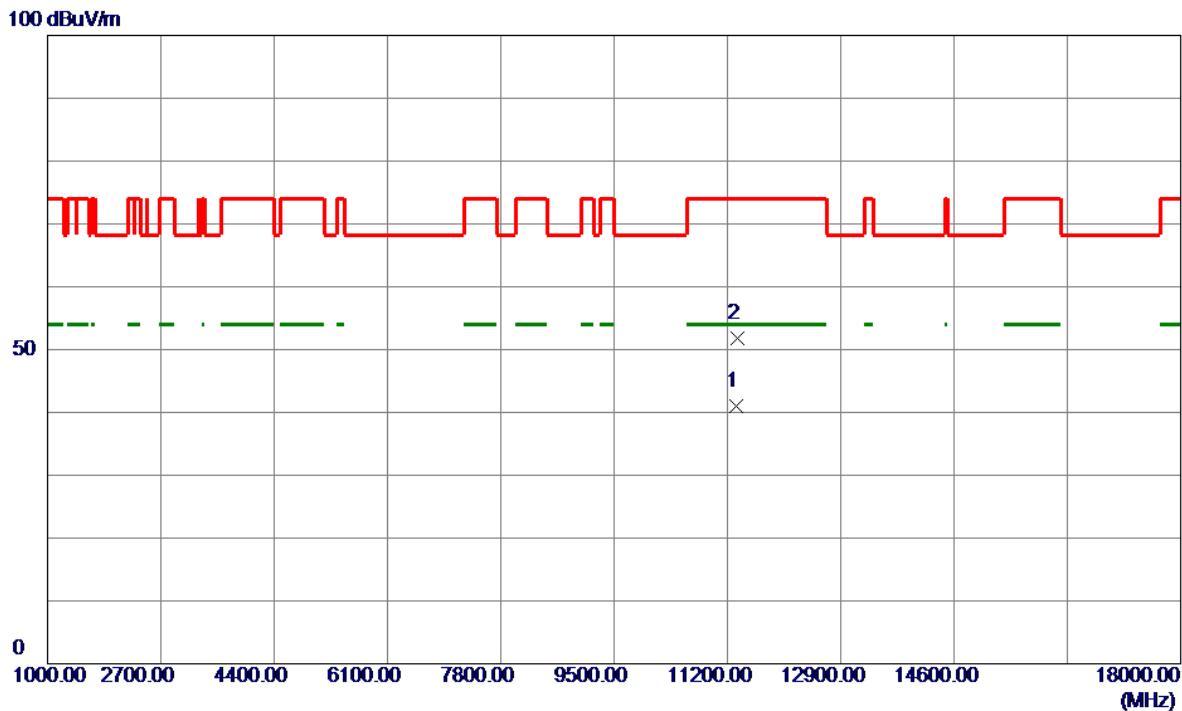


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11338.4500	29.94	11.14	41.08	54.00	-12.92	AVG	
2	11348.4500	40.56	11.15	51.71	74.00	-22.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

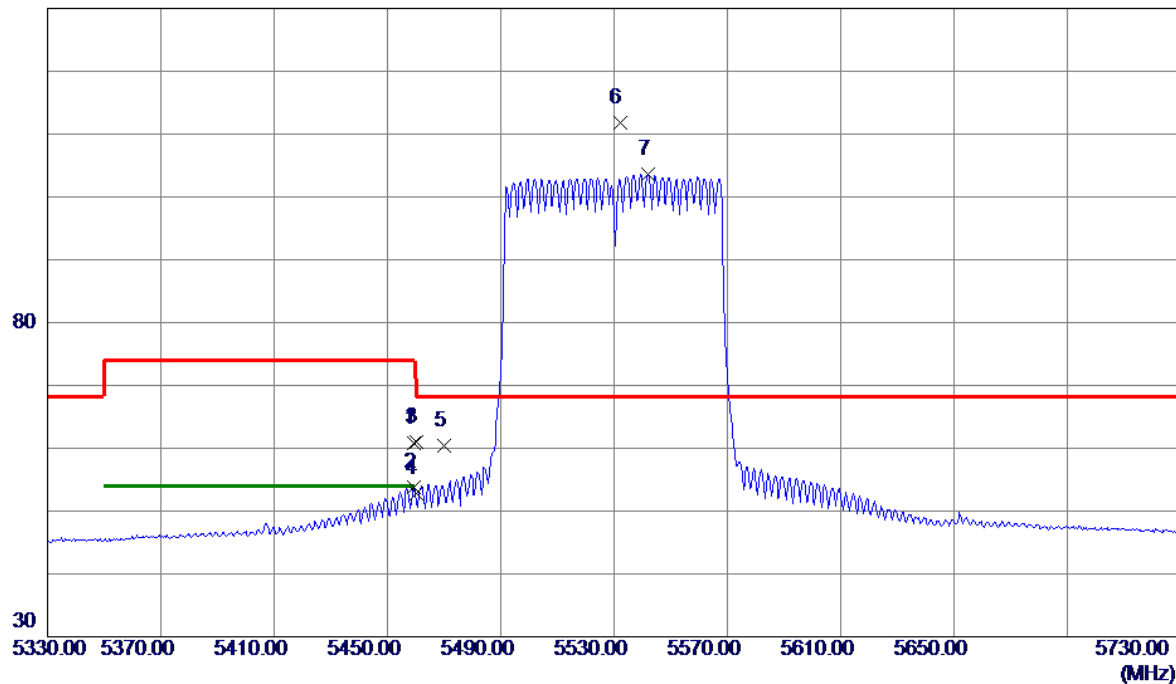


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.2000	46.47	14.34	60.81	74.00	-13.19	Peak	
2	5459.2000	39.46	14.34	53.80	54.00	-0.20	AVG	
3	5460.0000	46.62	14.34	60.96	74.00	-13.04	Peak	
4	5460.0000	38.55	14.34	52.89	54.00	-1.11	AVG	
5	5470.0000	46.07	14.34	60.41	68.20	-7.79	Peak	
6 *	5532.0000	97.30	14.41	111.71	68.20	43.51	Peak	No Limit
7	5542.0000	89.11	14.44	103.55	999.00	-895.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

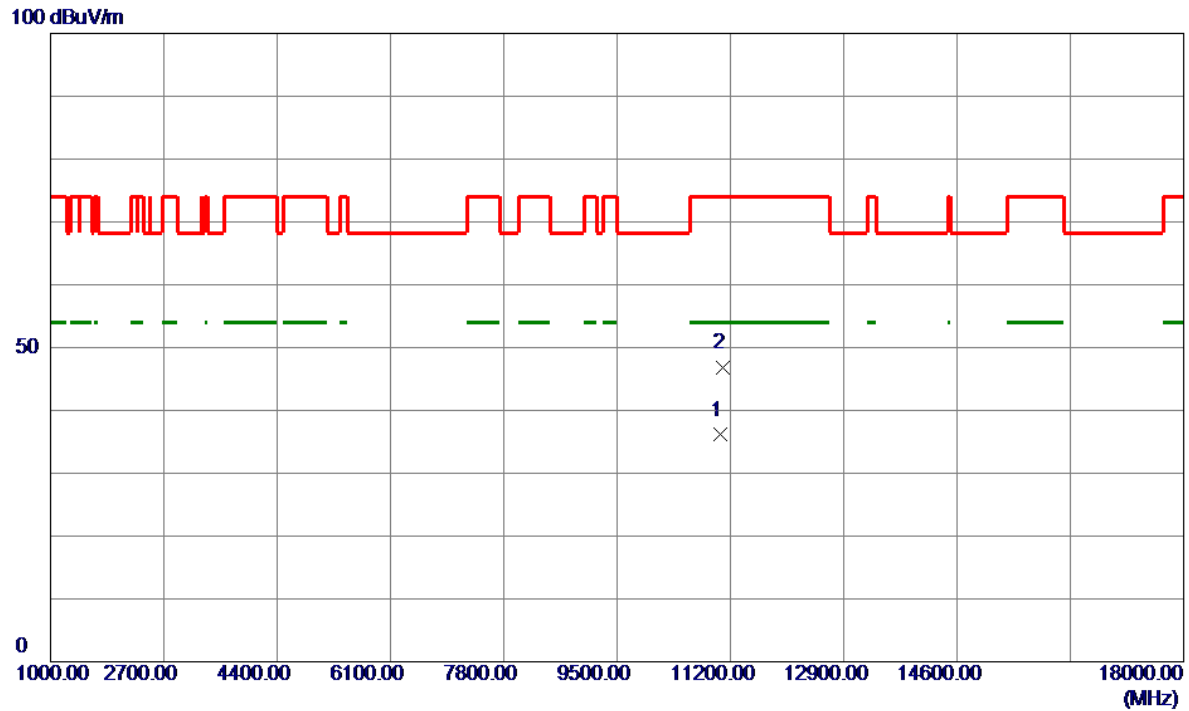


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11050.2000	25.04	11.06	36.10	54.00	-17.90	AVG	
2	11083.2500	35.77	11.07	46.84	74.00	-27.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

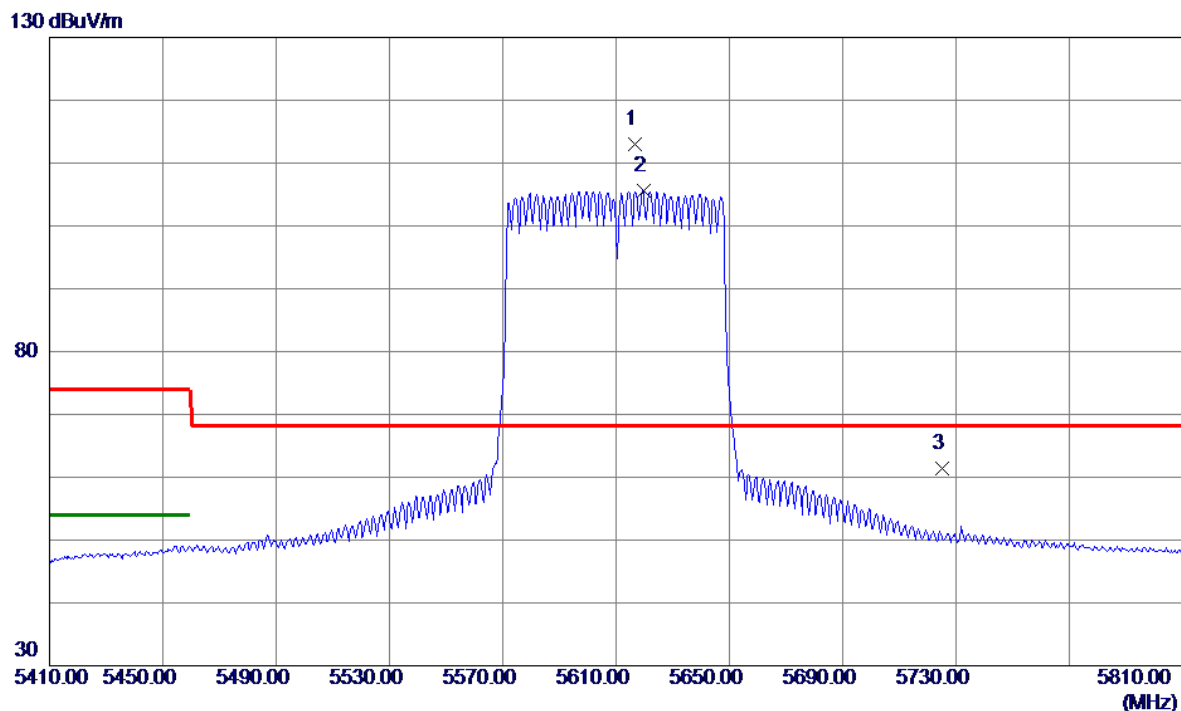


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5616.8000	98.45	14.61	113.06	68.20	44.86	Peak	No Limit
2	5619.6000	90.98	14.62	105.60	999.00	-893.40	AVG	No Limit
3	5725.0000	46.58	14.86	61.44	68.20	-6.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

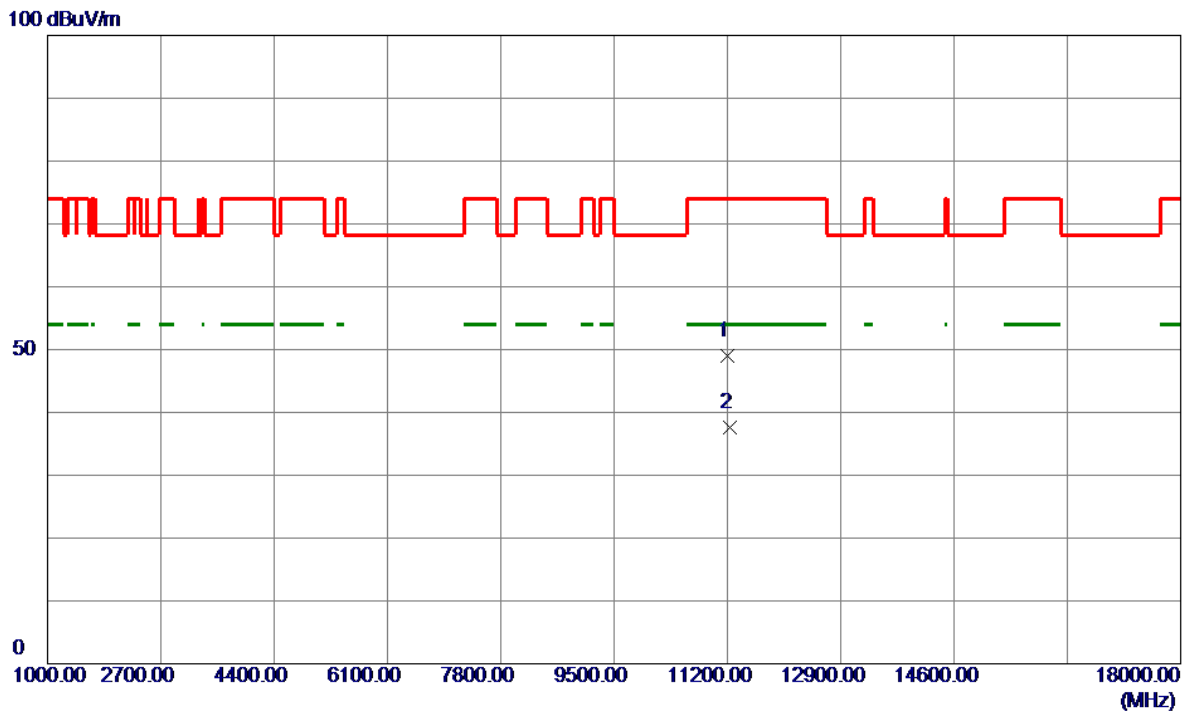


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11208.0000	37.98	11.10	49.08	74.00	-24.92	Peak	
2 *	11241.1000	26.44	11.11	37.55	54.00	-16.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

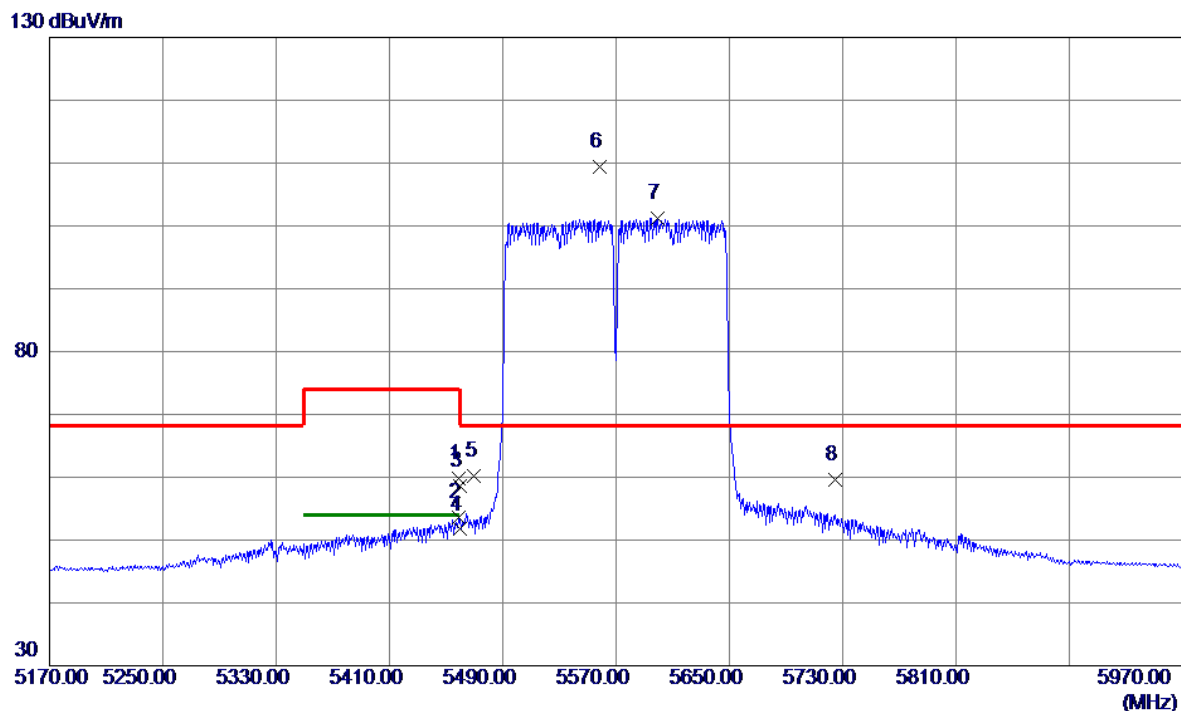


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.8000	45.40	14.34	59.74	74.00	-14.26	Peak	
2	5458.8000	39.20	14.34	53.54	54.00	-0.46	AVG	
3	5460.0000	44.31	14.34	58.65	74.00	-15.35	Peak	
4	5460.0000	37.36	14.34	51.70	54.00	-2.30	AVG	
5	5470.0000	45.89	14.34	60.23	68.20	-7.97	Peak	
6 *	5558.8000	94.83	14.48	109.31	68.20	41.11	Peak	No Limit
7	5599.6000	86.66	14.57	101.23	999.00	-897.77	AVG	No Limit
8	5725.0000	44.72	14.86	59.58	68.20	-8.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

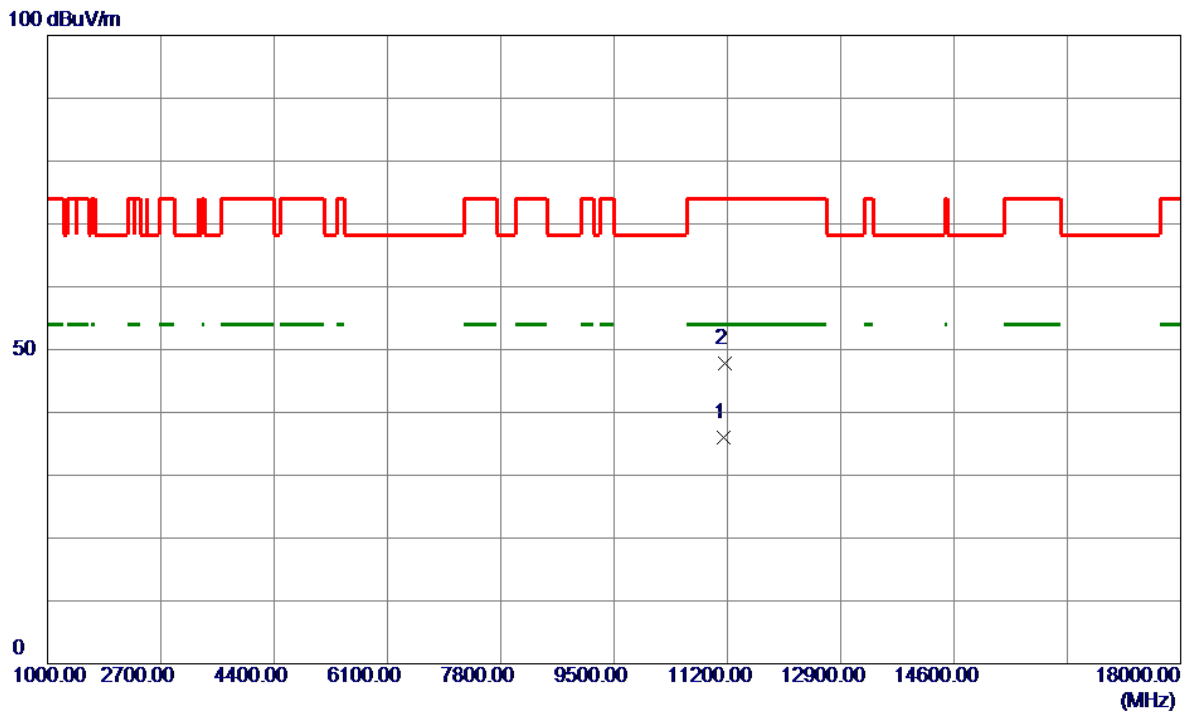


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11140.1500	24.96	11.08	36.04	54.00	-17.96	AVG	
2	11154.2000	36.80	11.09	47.89	74.00	-26.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

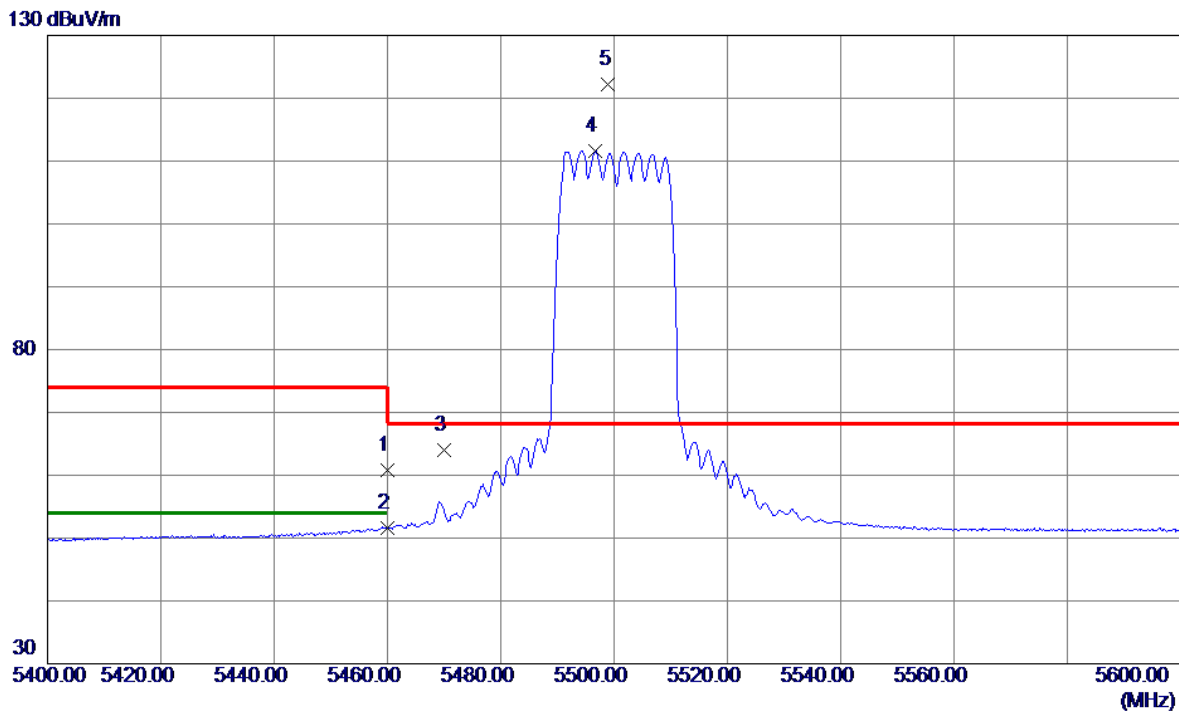


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	46.40	14.34	60.74	74.00	-13.26	Peak	
2	5460.0000	37.32	14.34	51.66	54.00	-2.34	AVG	
3	5470.0000	49.60	14.34	63.94	68.20	-4.26	Peak	
4	5496.6000	97.28	14.34	111.62	999.00	-887.38	AVG	No Limit
5 *	5499.0000	107.88	14.34	122.22	68.20	54.02	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

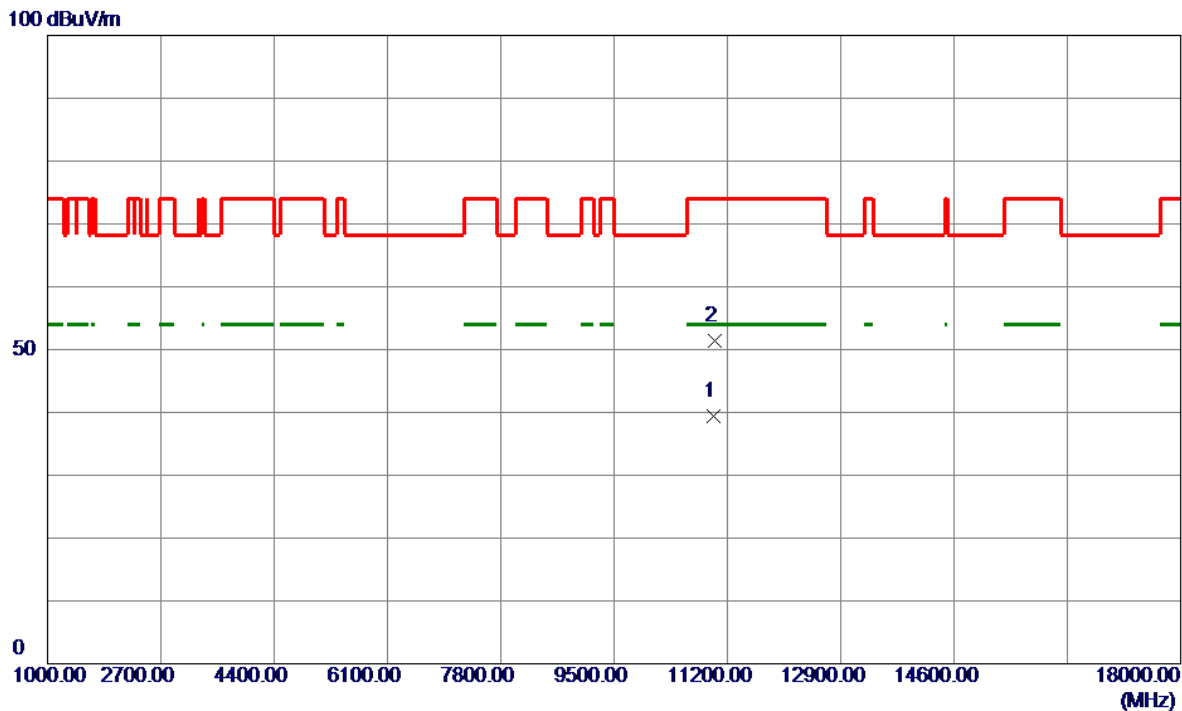


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.7000	28.30	11.04	39.34	54.00	-14.66	AVG	
2	11005.3500	40.38	11.04	51.42	74.00	-22.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

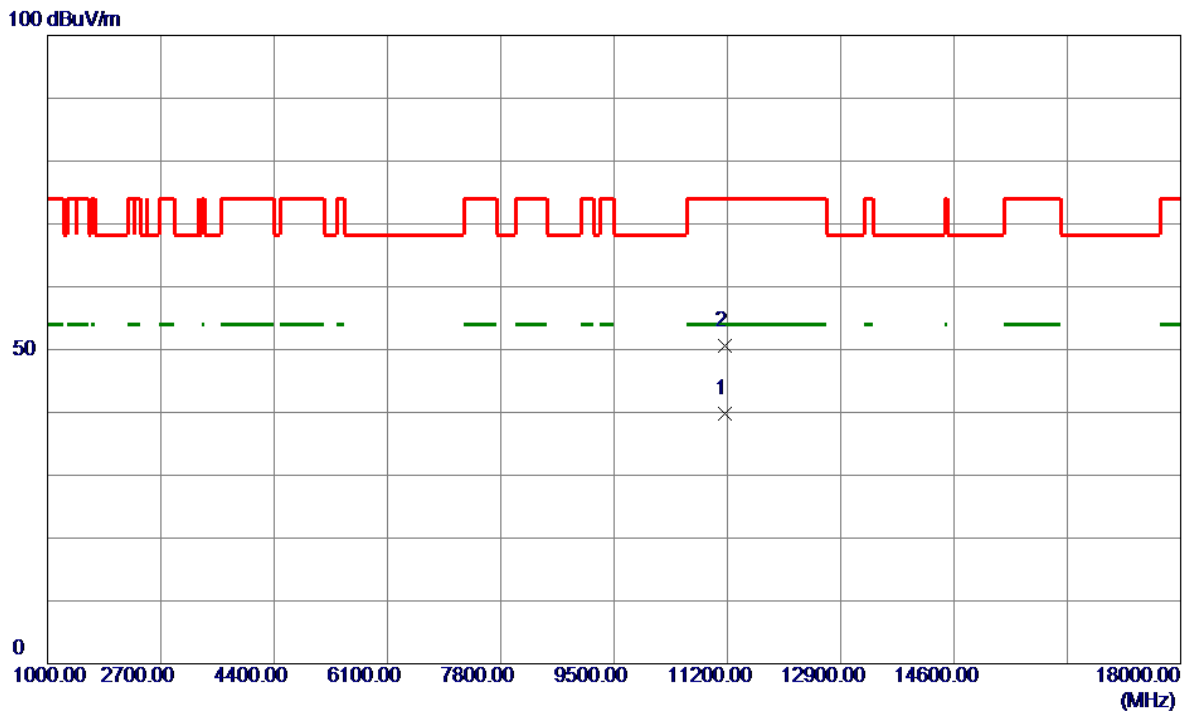


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11159.9000	28.67	11.09	39.76	54.00	-14.24	AVG	
2	11160.0500	39.50	11.09	50.59	74.00	-23.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

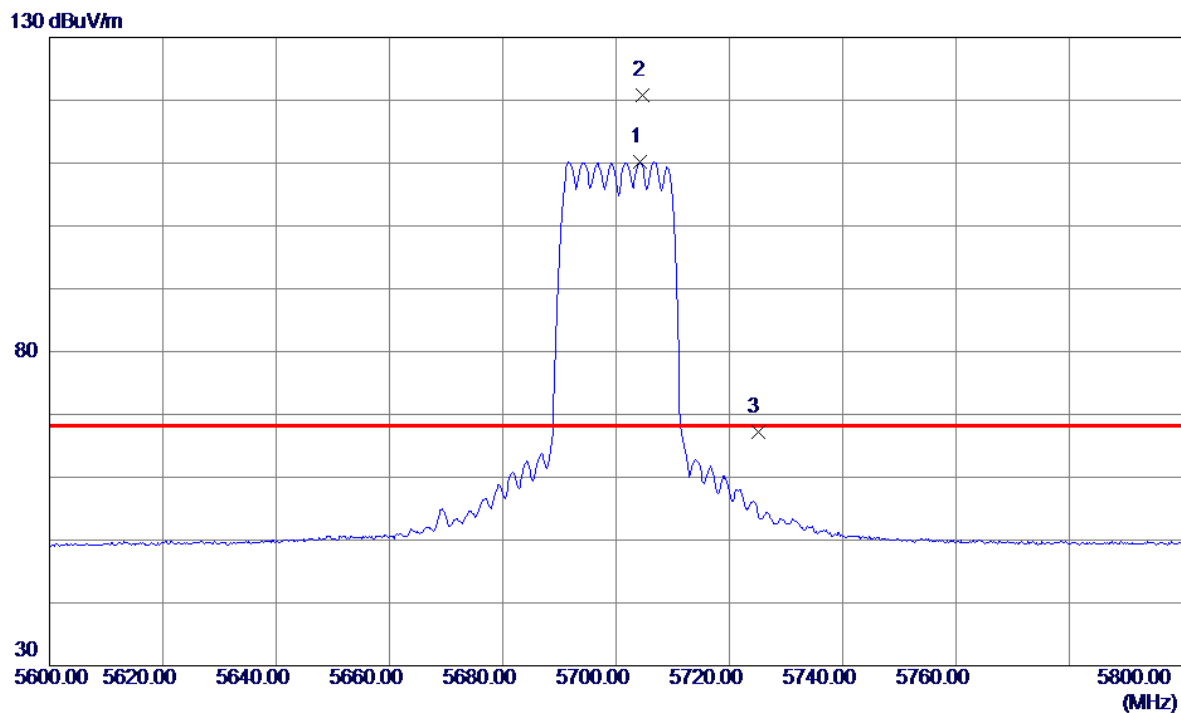


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5704.2000	95.40	14.81	110.21	999.00	-888.79	AVG	No Limit
2 *	5704.6000	106.04	14.81	120.85	68.20	52.65	Peak	No Limit
3	5725.0000	52.42	14.86	67.28	68.20	-0.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

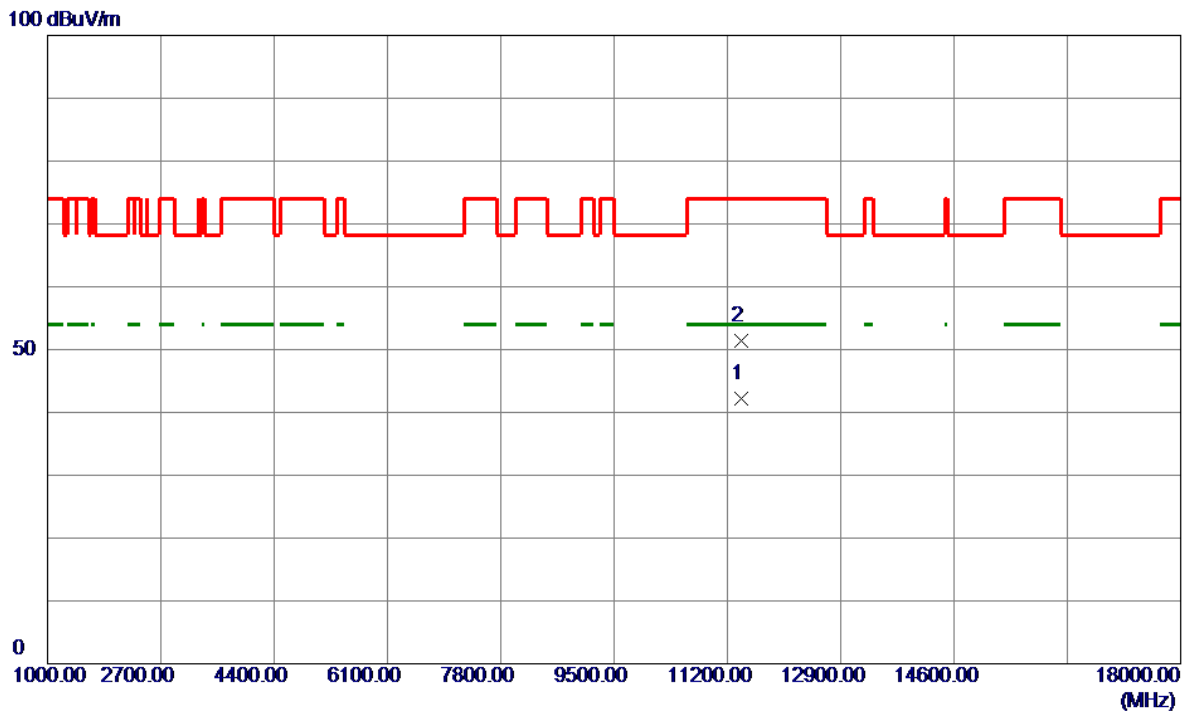


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11398.4000	31.04	11.16	42.20	54.00	-11.80	AVG	
2	11401.3500	40.30	11.16	51.46	74.00	-22.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

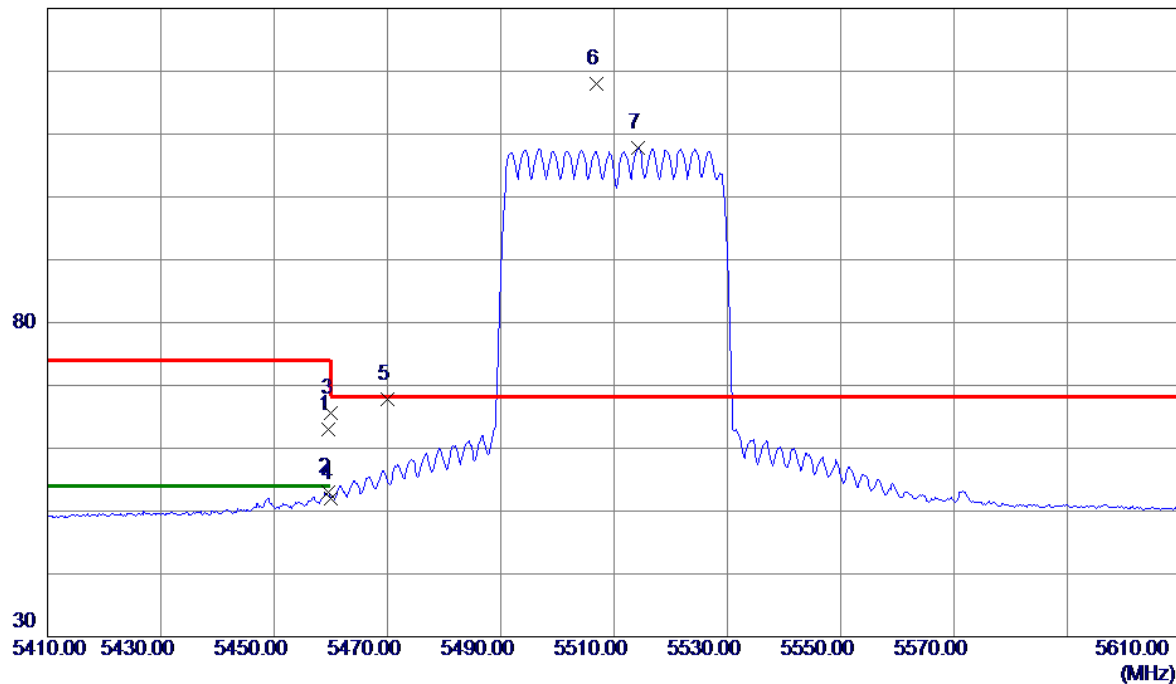


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.6000	48.59	14.34	62.93	74.00	-11.07	Peak	
2	5459.6000	38.70	14.34	53.04	54.00	-0.96	AVG	
3	5460.0000	51.34	14.34	65.68	74.00	-8.32	Peak	
4	5460.0000	37.72	14.34	52.06	54.00	-1.94	AVG	
5	5470.0000	53.39	14.34	67.73	68.20	-0.47	Peak	
6 *	5506.8000	103.62	14.36	117.98	68.20	49.78	Peak	No Limit
7	5514.2000	93.48	14.37	107.85	999.00	-891.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

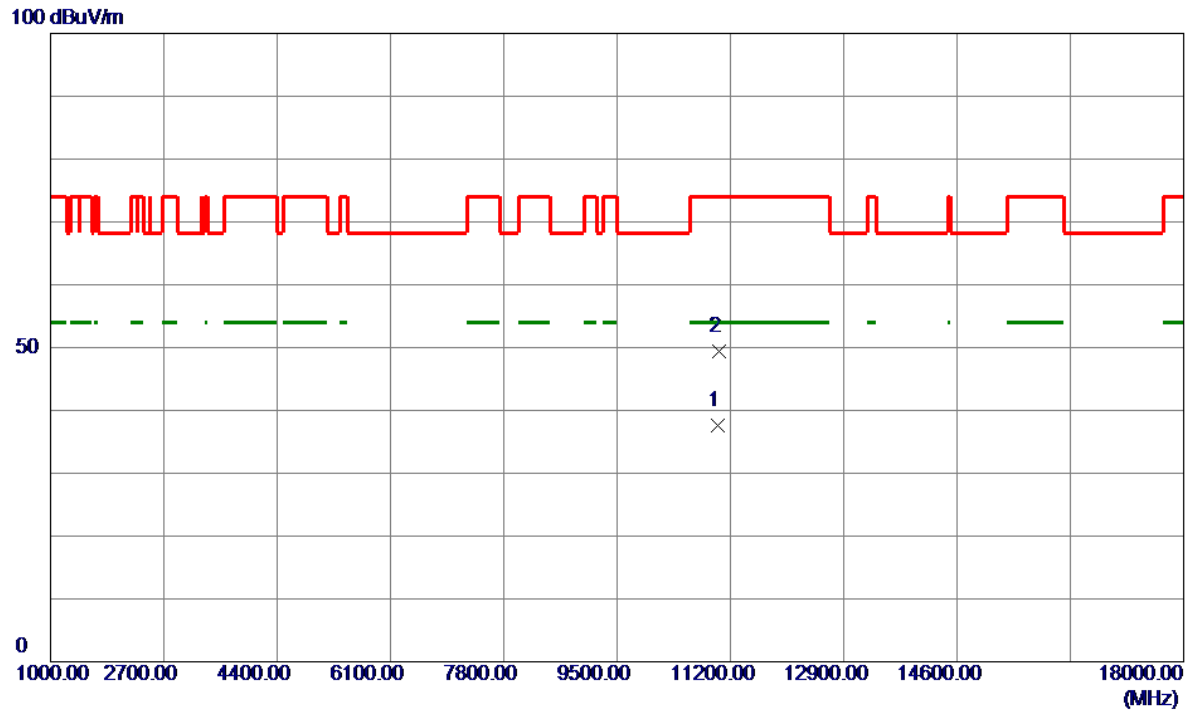


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.4000	26.55	11.05	37.60	54.00	-16.40	AVG	
2	11030.8500	38.44	11.05	49.49	74.00	-24.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

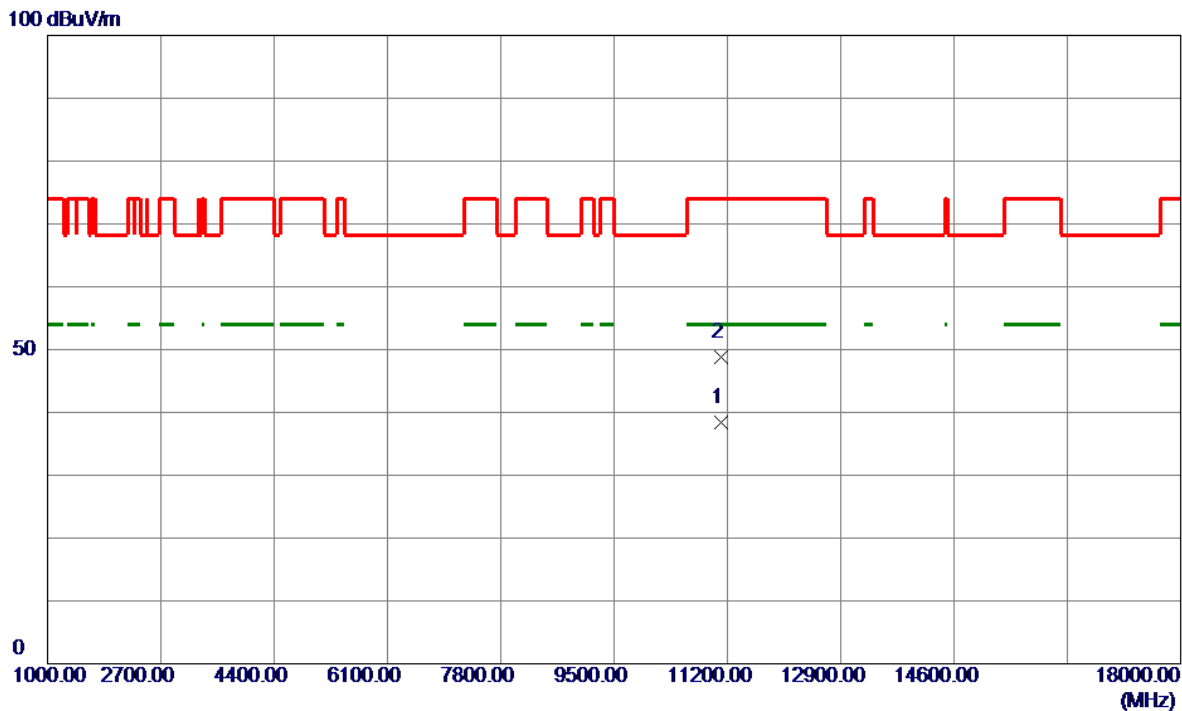


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.1000	27.27	11.07	38.34	54.00	-15.66	AVG	
2	11104.9000	37.72	11.07	48.79	74.00	-25.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

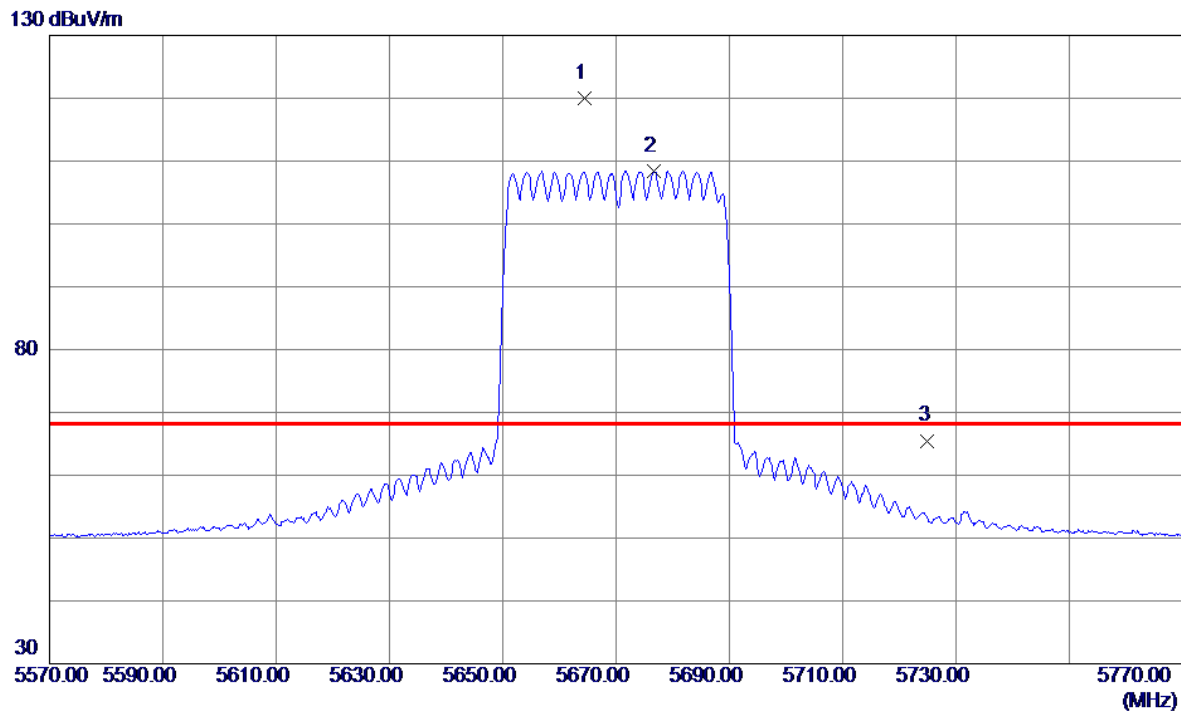


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5664.4000	105.20	14.72	119.92	68.20	51.72	Peak	No Limit
2	5676.6000	93.59	14.75	108.34	999.00	-890.66	AVG	No Limit
3	5725.0000	50.64	14.86	65.50	68.20	-2.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

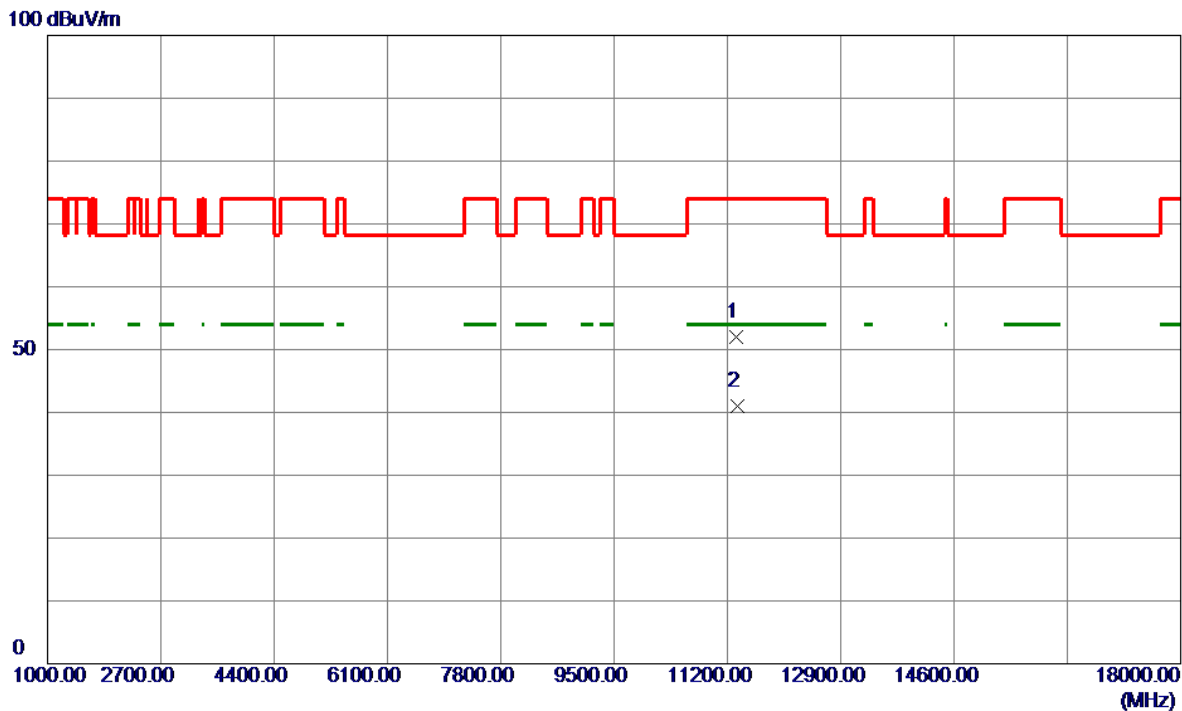


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11337.9500	40.82	11.14	51.96	74.00	-22.04	Peak	
2 *	11343.1000	29.93	11.15	41.08	54.00	-12.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

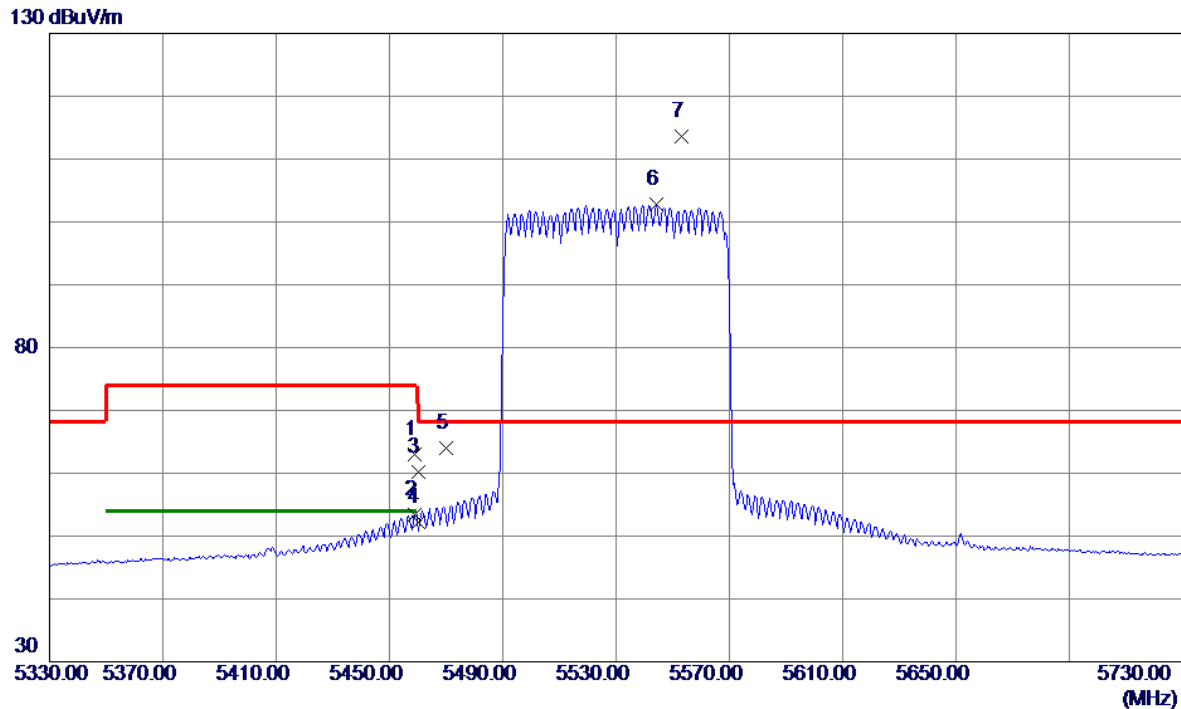


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.8000	48.68	14.34	63.02	74.00	-10.98	Peak	
2	5458.8000	39.03	14.34	53.37	54.00	-0.63	AVG	
3	5460.0000	45.77	14.34	60.11	74.00	-13.89	Peak	
4	5460.0000	37.80	14.34	52.14	54.00	-1.86	AVG	
5	5470.0000	49.59	14.34	63.93	68.20	-4.27	Peak	
6	5544.4000	88.36	14.44	102.80	999.00	-896.20	AVG	No Limit
7 *	5553.2000	99.14	14.46	113.60	68.20	45.40	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

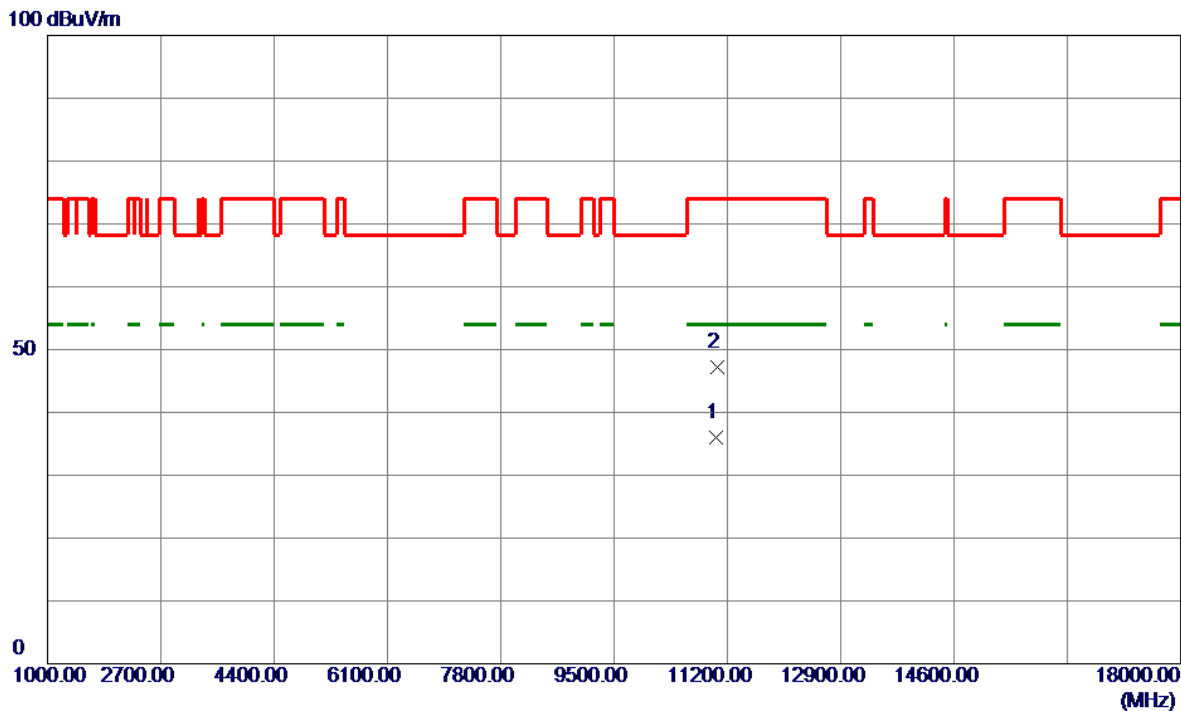


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11035.7000	24.96	11.05	36.01	54.00	-17.99	AVG	
2	11055.9000	36.16	11.06	47.22	74.00	-26.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

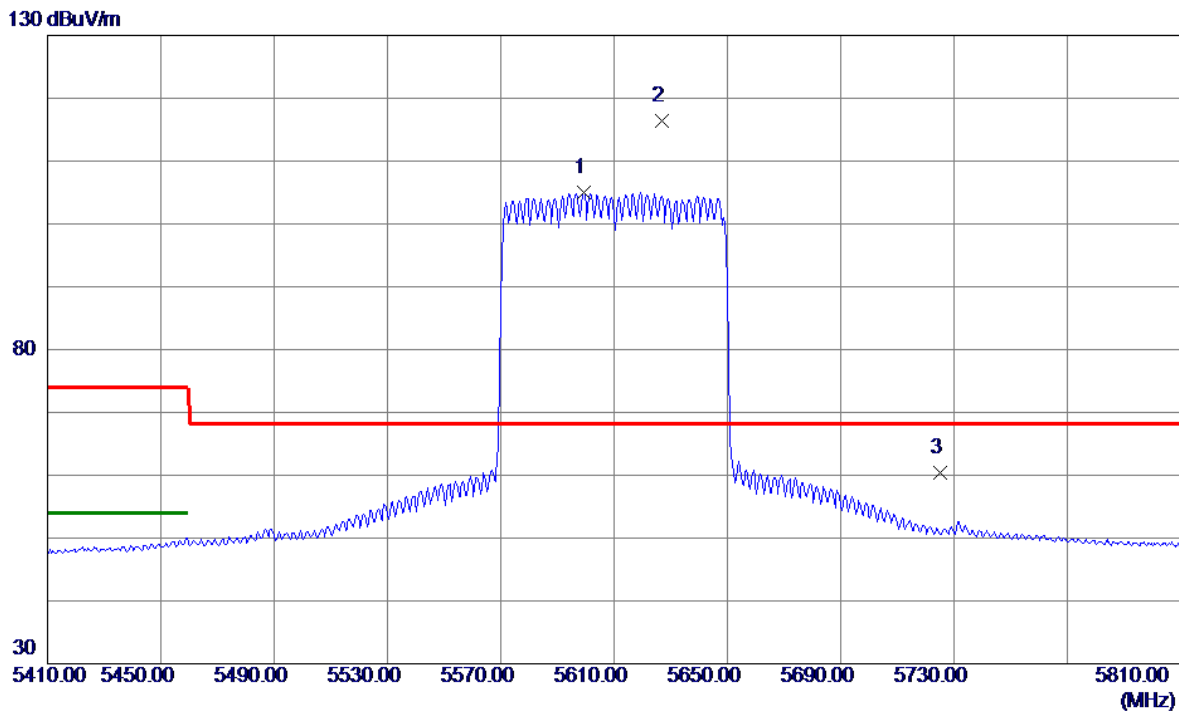


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5599.2000	90.42	14.57	104.99	999.00	-894.01	AVG	No Limit
2 *	5626.8000	101.73	14.63	116.36	68.20	48.16	Peak	No Limit
3	5725.0000	45.59	14.86	60.45	68.20	-7.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

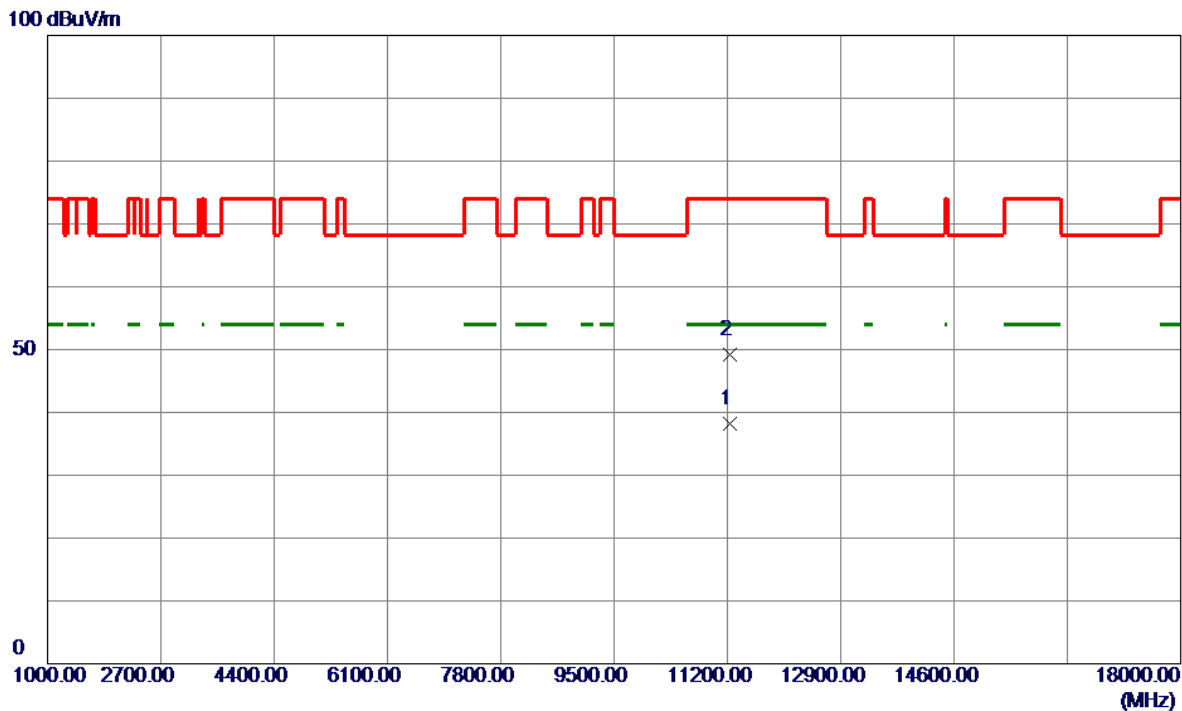


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11231.2000	27.10	11.11	38.21	54.00	-15.79	AVG	
2	11235.6000	38.09	11.11	49.20	74.00	-24.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

130 dBuV/m

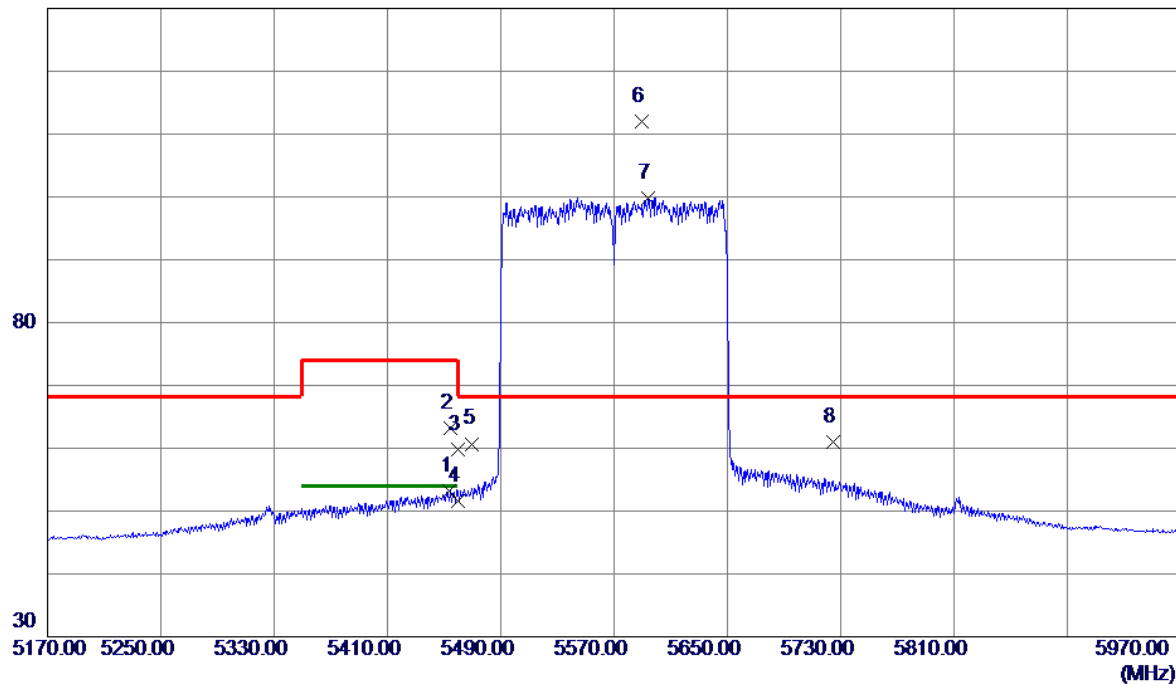


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.0000	38.77	14.34	53.11	54.00	-0.89	AVG	
2	5454.4000	48.80	14.34	63.14	74.00	-10.86	Peak	
3	5460.0000	45.44	14.34	59.78	74.00	-14.22	Peak	
4	5460.0000	37.28	14.34	51.62	54.00	-2.38	AVG	
5	5470.0000	46.36	14.34	60.70	68.20	-7.50	Peak	
6 *	5589.2000	97.38	14.55	111.93	68.20	43.73	Peak	No Limit
7	5594.0000	85.30	14.56	99.86	999.00	-899.14	AVG	No Limit
8	5725.0000	46.14	14.86	61.00	68.20	-7.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

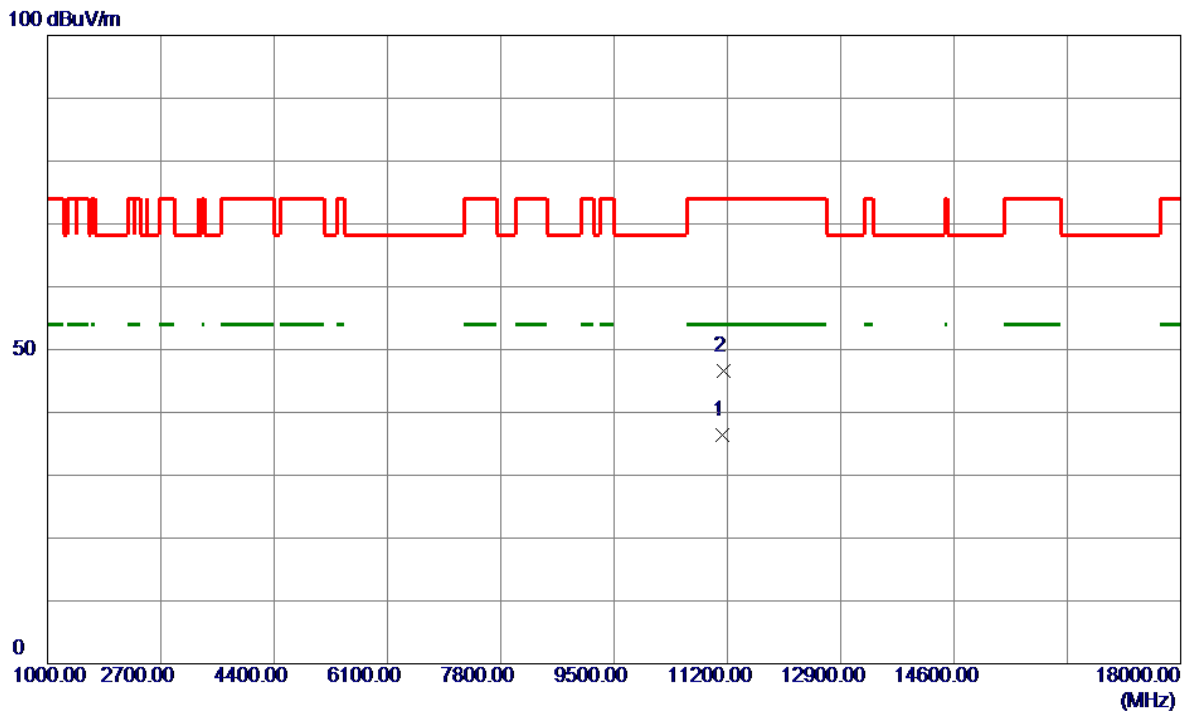


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11119.2500	25.31	11.08	36.39	54.00	-17.61	AVG	
2	11141.0500	35.45	11.08	46.53	74.00	-27.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

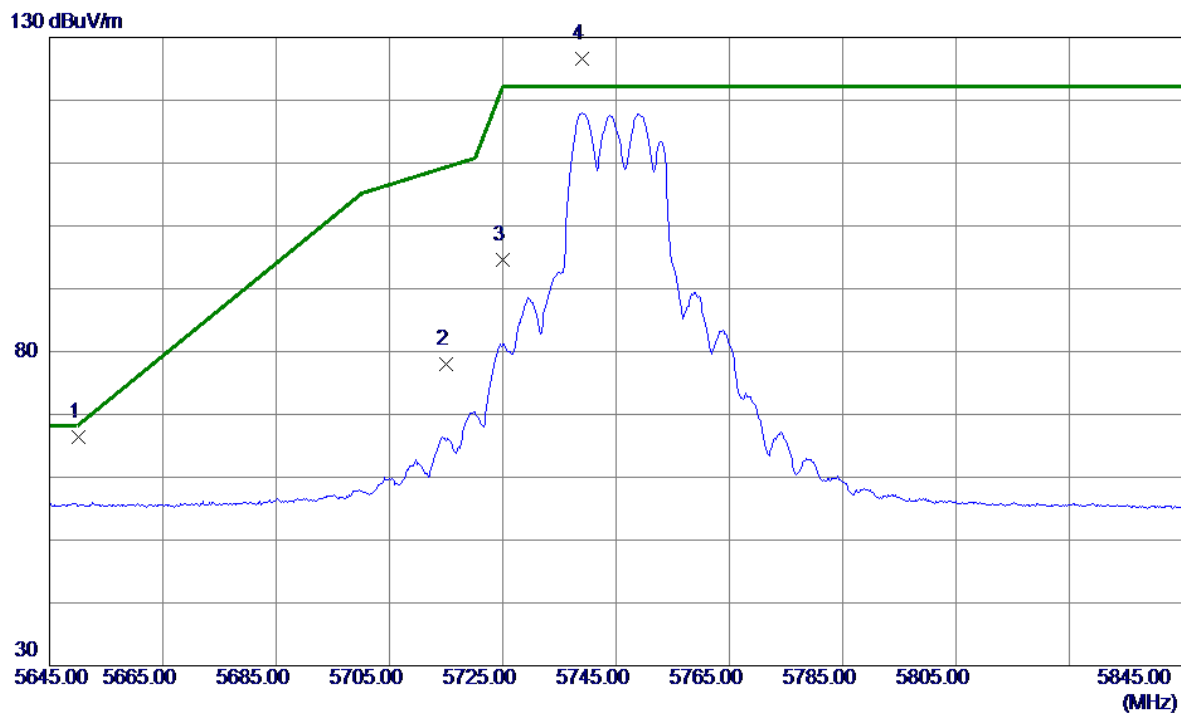


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5650.2000	51.80	14.69	66.49	68.35	-1.86	Peak	
2	5715.0000	63.22	14.84	78.06	109.40	-31.34	Peak	
3	5725.0000	79.76	14.86	94.62	122.20	-27.58	Peak	
4 *	5739.0000	111.68	14.89	126.57	122.20	4.37	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

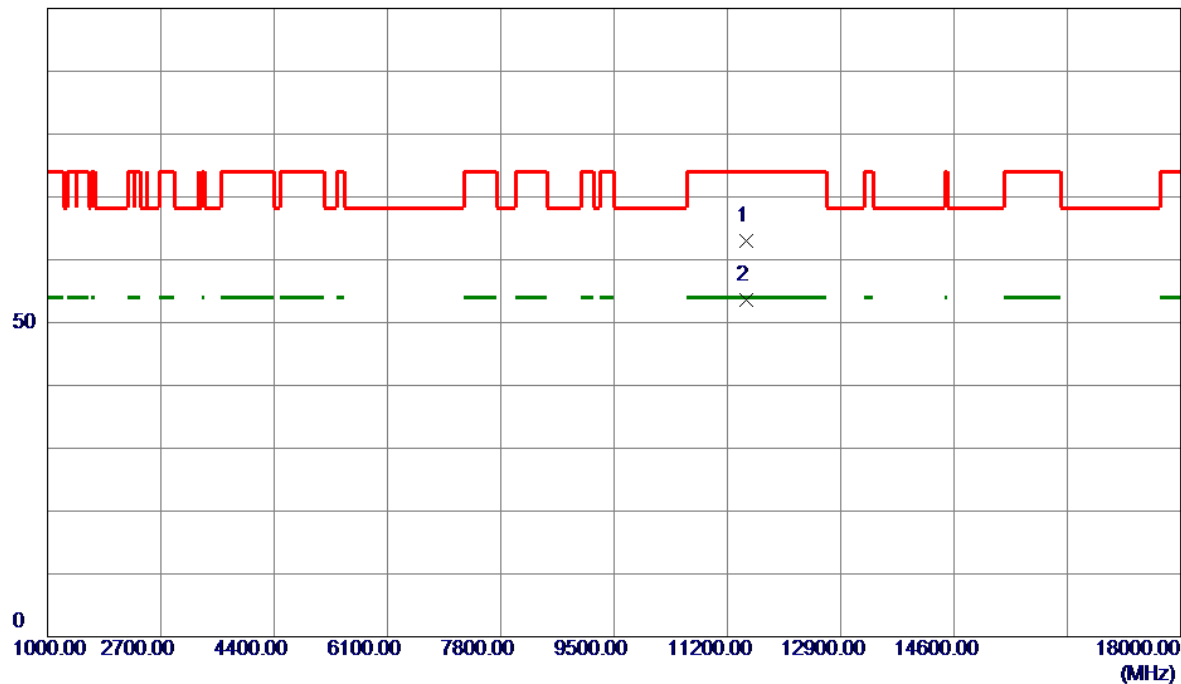


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11491.7900	51.75	11.19	62.94	74.00	-11.06	Peak	
2 *	11492.0500	42.32	11.19	53.51	54.00	-0.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

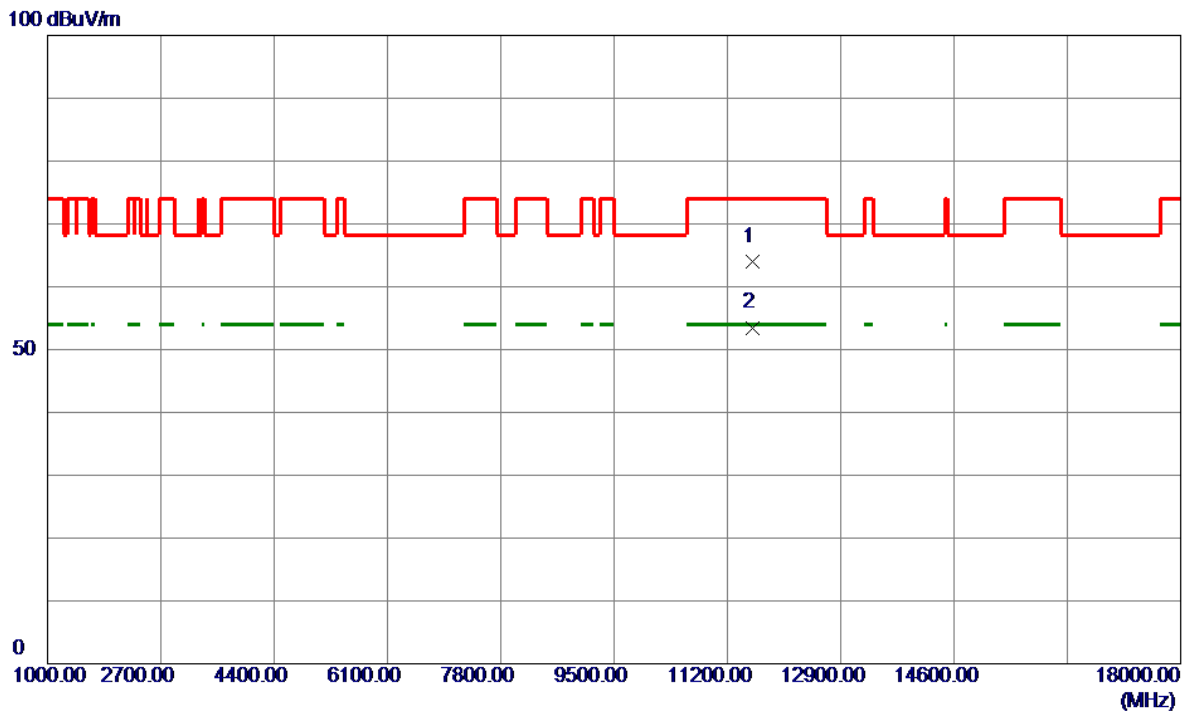


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.1000	52.89	11.17	64.06	74.00	-9.94	Peak	
2 *	11572.4500	42.33	11.17	53.50	54.00	-0.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

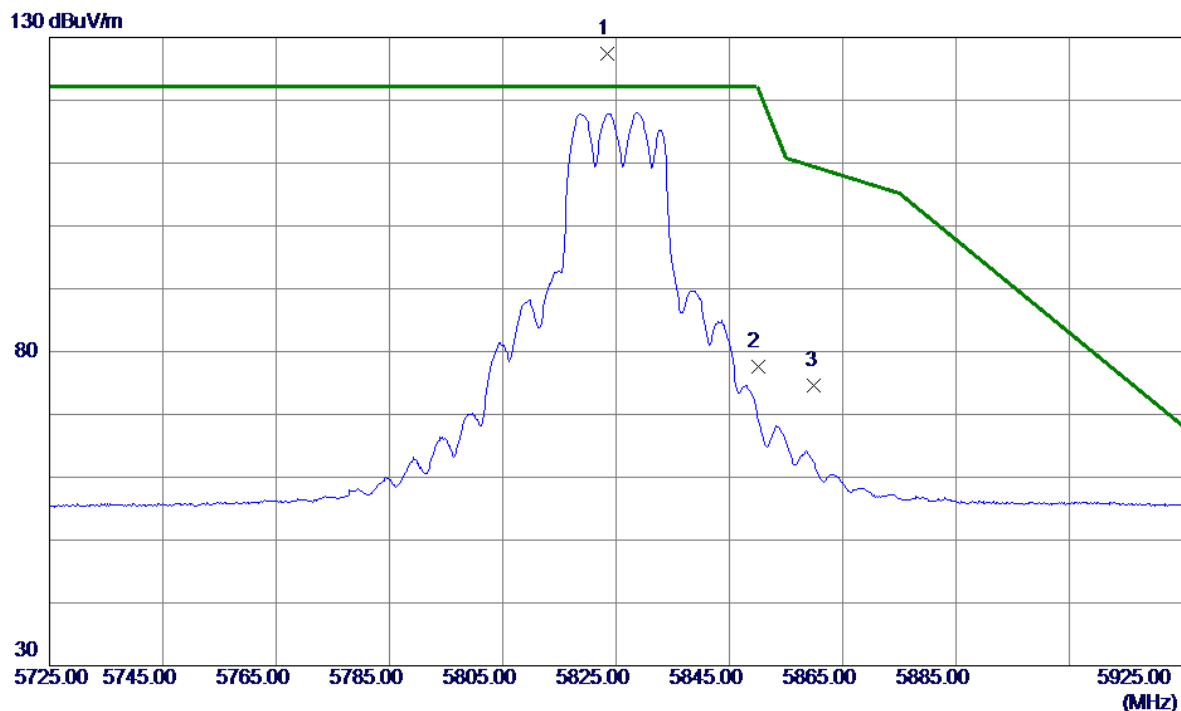


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.4000	112.29	15.09	127.38	122.20	5.18	Peak	No Limit
2	5850.0000	62.43	15.15	77.58	122.20	-44.62	Peak	
3	5860.0000	59.41	15.18	74.59	109.40	-34.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

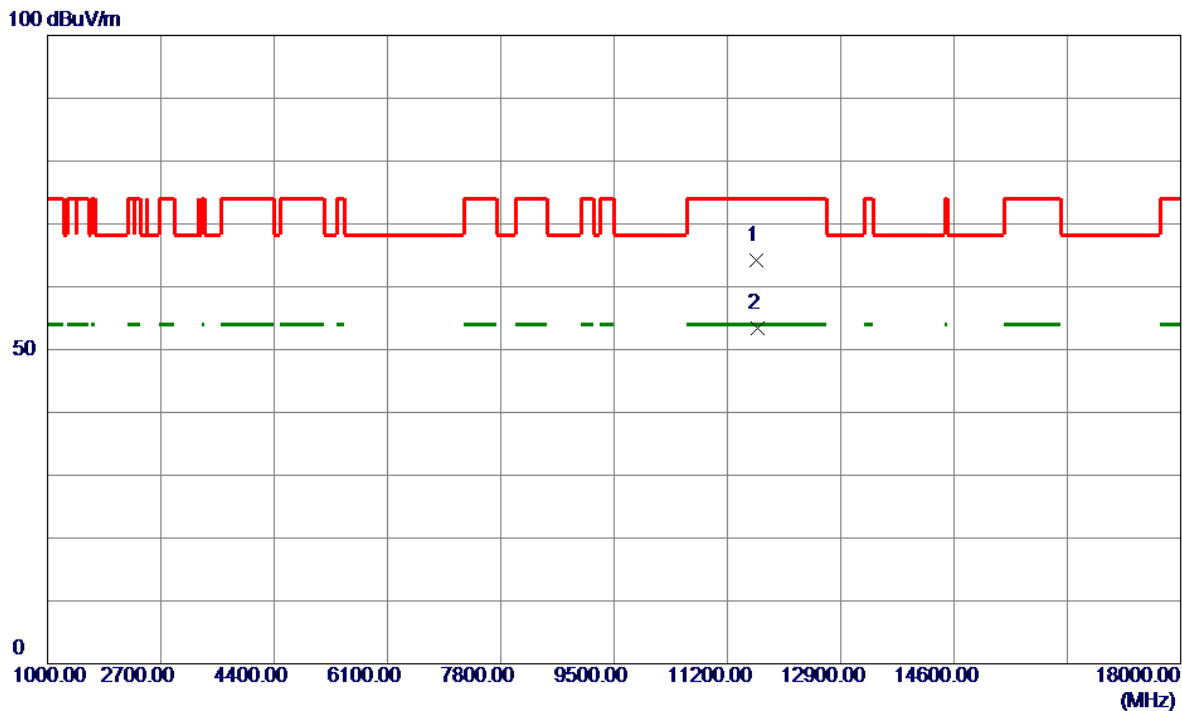


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11639.2500	53.15	11.14	64.29	74.00	-9.71	Peak	
2 *	11649.3500	42.29	11.14	53.43	54.00	-0.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

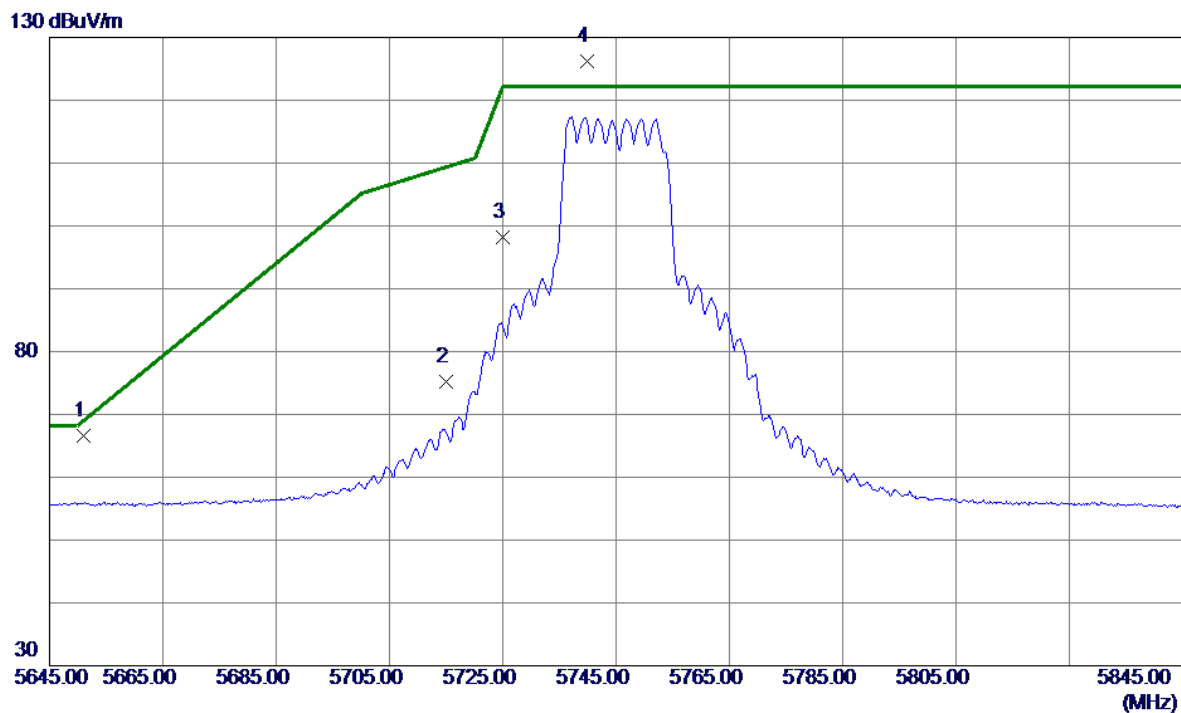


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5651.0000	51.86	14.69	66.55	68.94	-2.39	Peak	
2	5715.0000	60.31	14.84	75.15	109.40	-34.25	Peak	
3	5725.0000	83.42	14.86	98.28	122.20	-23.92	Peak	
4 *	5739.8000	111.34	14.90	126.24	122.20	4.04	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

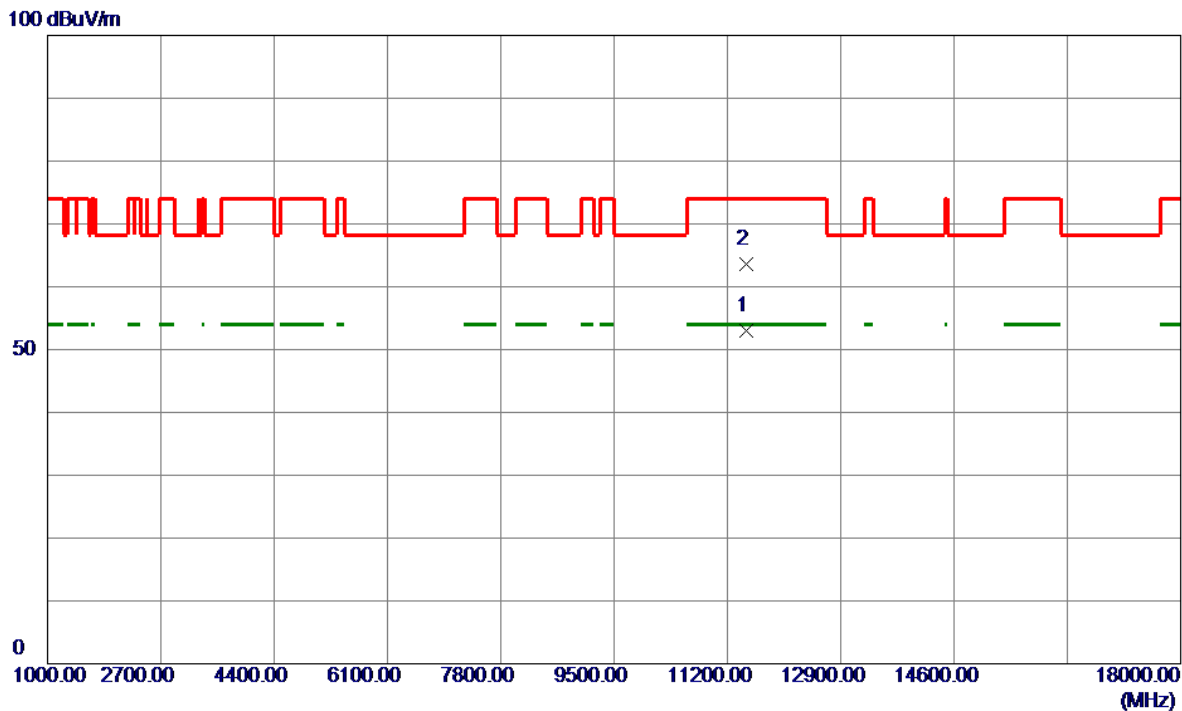


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11488.4000	41.89	11.19	53.08	54.00	-0.92	AVG	
2	11491.0000	52.45	11.19	63.64	74.00	-10.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

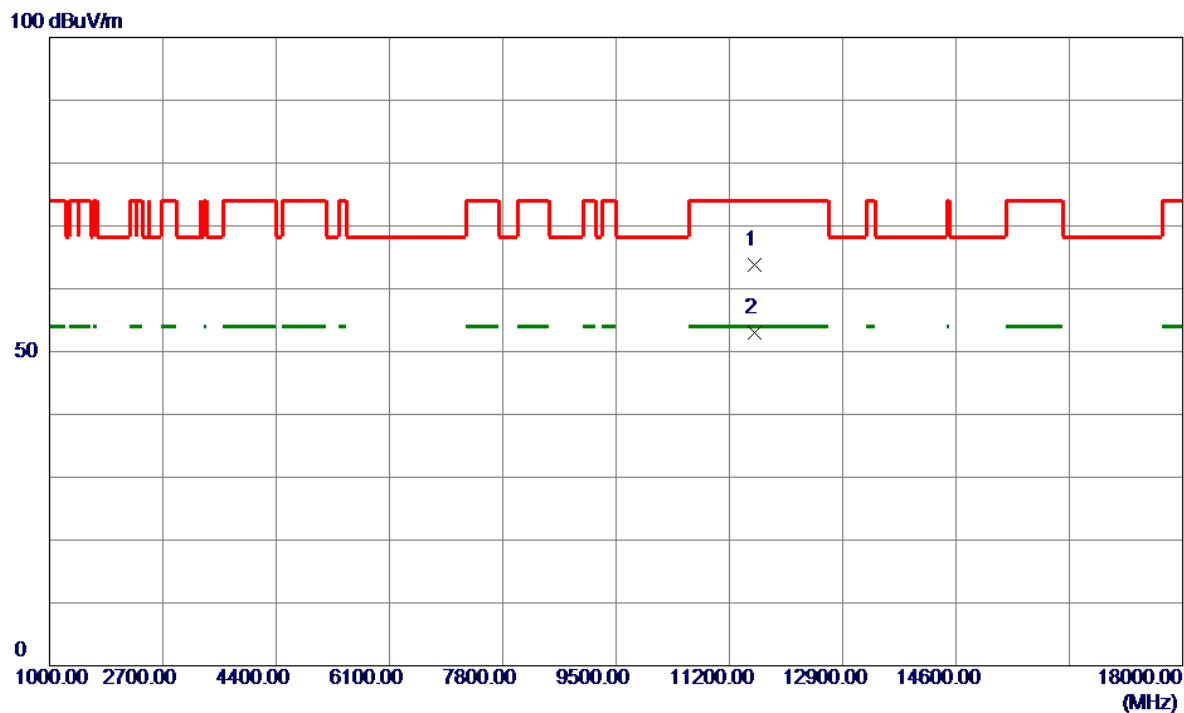


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11568.8500	52.65	11.17	63.82	74.00	-10.18	Peak	
2 *	11571.1000	41.85	11.17	53.02	54.00	-0.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

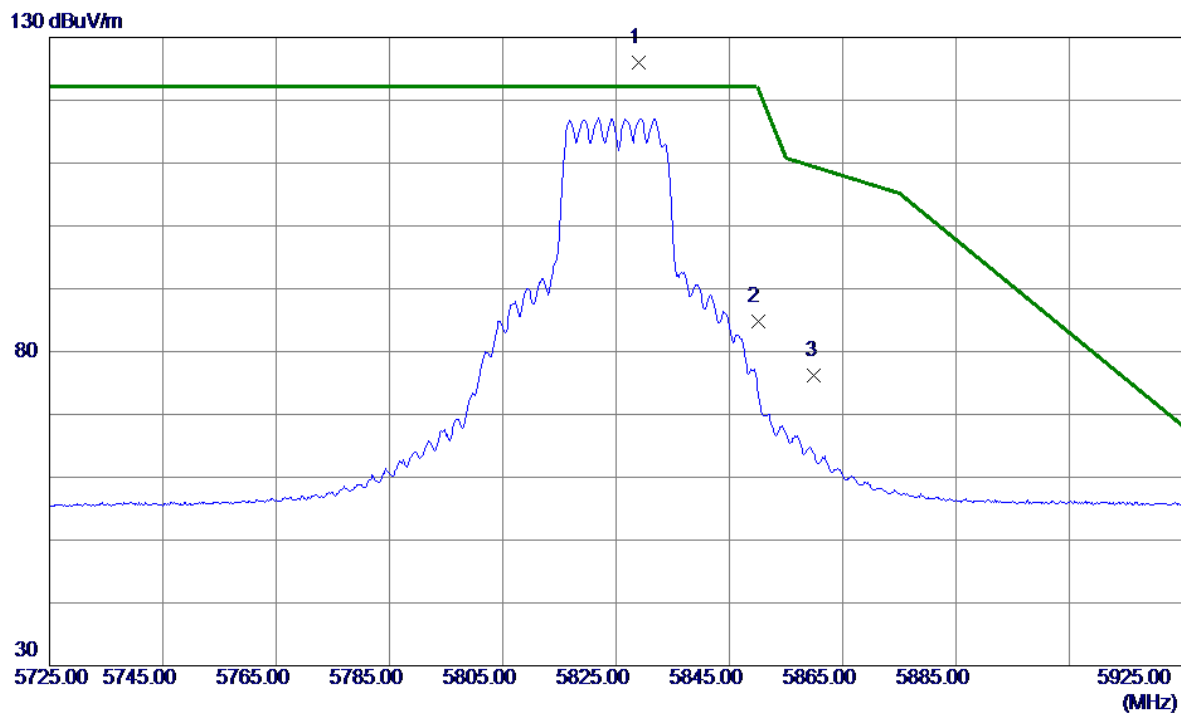


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5829.0000	110.86	15.10	125.96	122.20	3.76	Peak	No Limit
2	5850.0000	69.71	15.15	84.86	122.20	-37.34	Peak	
3	5860.0000	60.96	15.18	76.14	109.40	-33.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

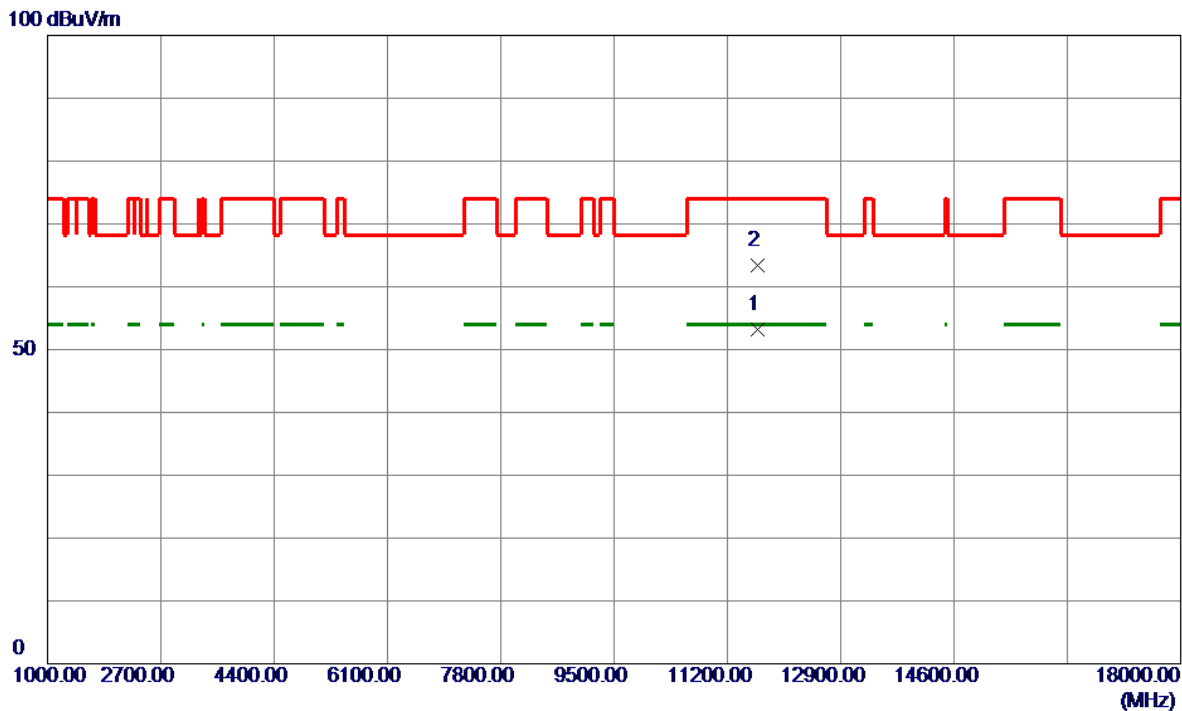


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.4500	42.13	11.14	53.27	54.00	-0.73	AVG	
2	11649.8500	52.32	11.14	63.46	74.00	-10.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

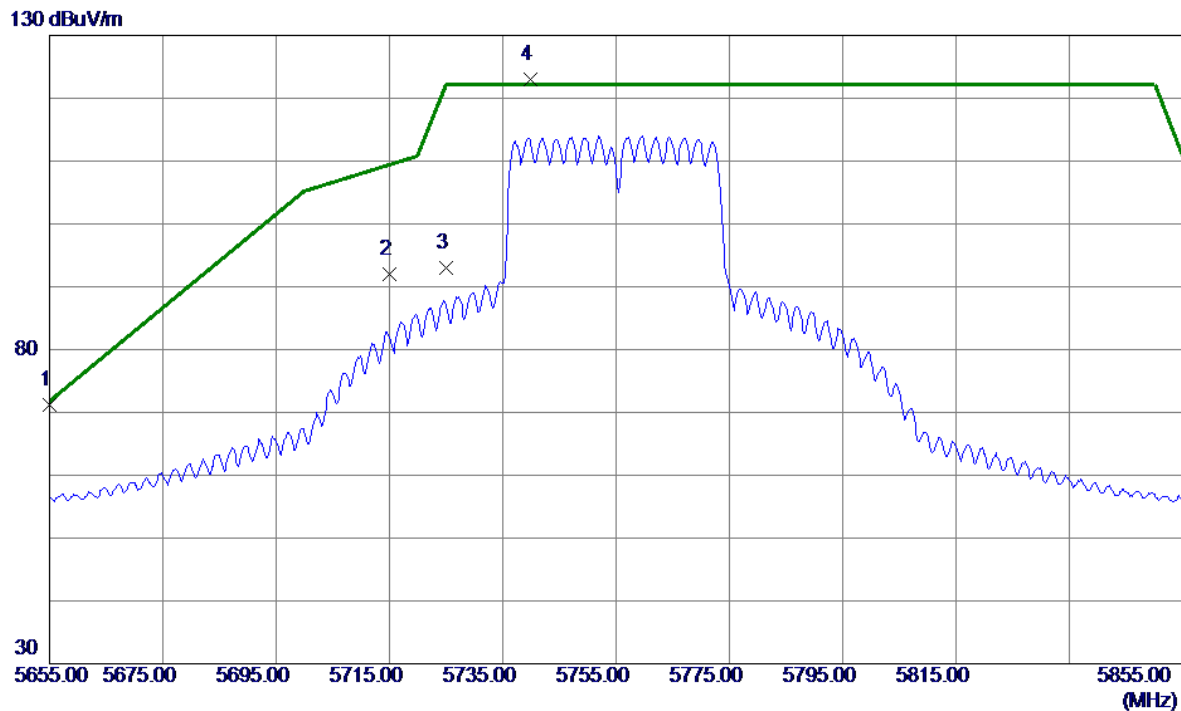


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5655.0000	56.58	14.70	71.28	71.90	-0.62	Peak	
2	5715.0000	77.24	14.84	92.08	109.40	-17.32	Peak	
3	5725.0000	78.09	14.86	92.95	122.20	-29.25	Peak	
4 *	5739.8000	108.02	14.90	122.92	122.20	0.72	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

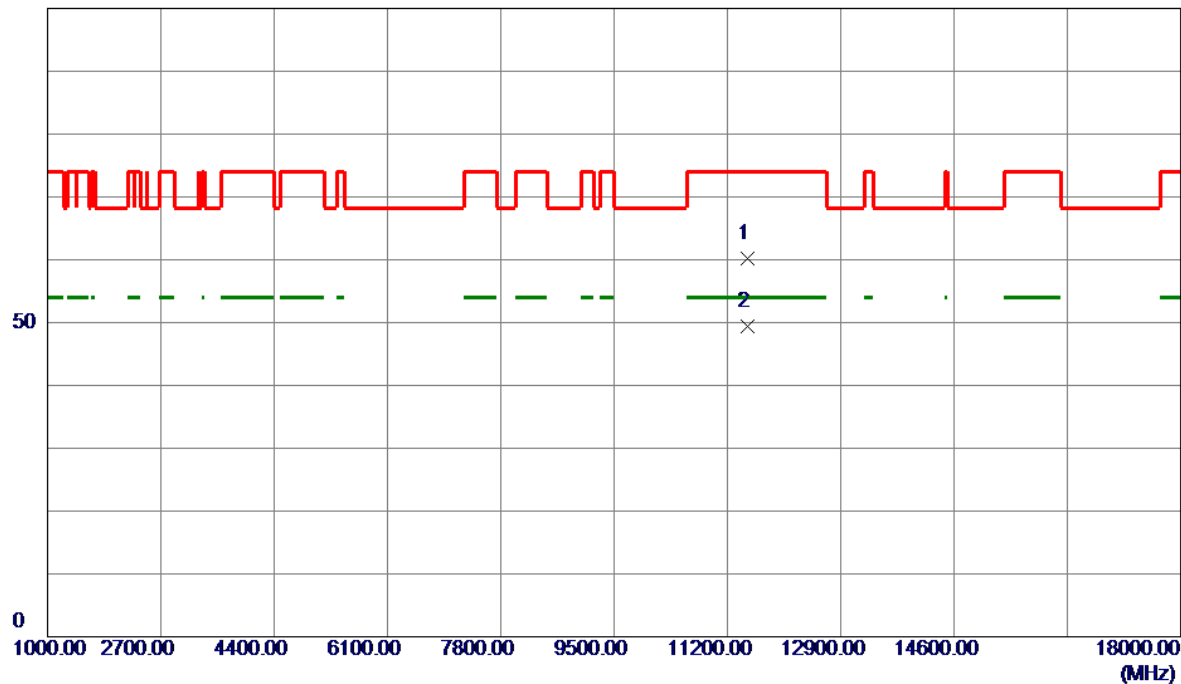


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.6500	49.03	11.19	60.22	74.00	-13.78	Peak	
2 *	11508.5000	38.15	11.19	49.34	54.00	-4.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

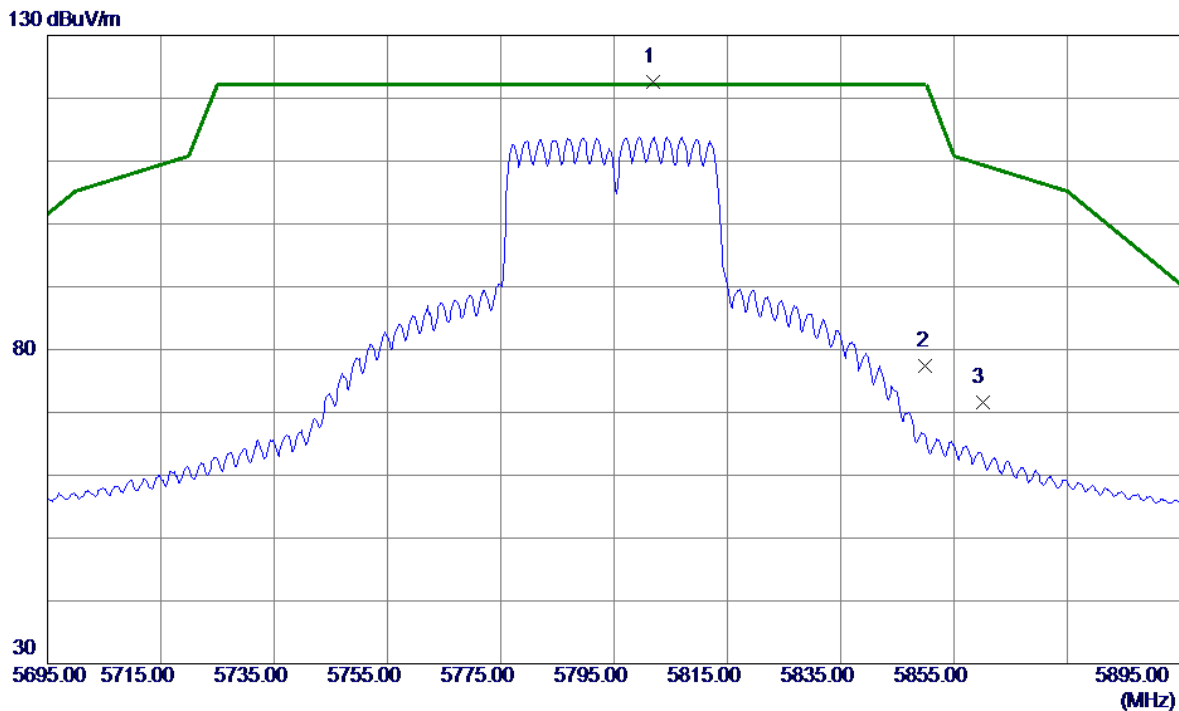


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5801.8000	107.64	15.04	122.68	122.20	0.48	Peak	No Limit
2	5850.0000	62.23	15.15	77.38	122.20	-44.82	Peak	
3	5860.0000	56.47	15.18	71.65	109.40	-37.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

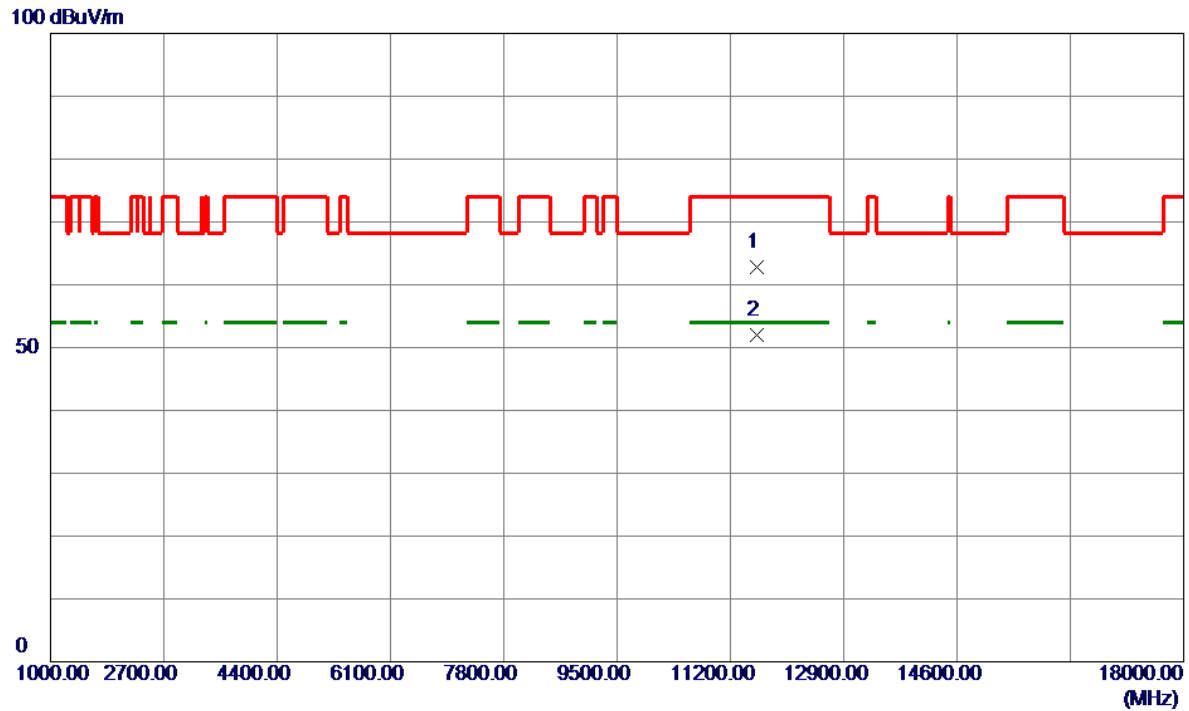


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.9000	51.66	11.16	62.82	74.00	-11.18	Peak	
2 *	11591.1500	40.86	11.16	52.02	54.00	-1.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

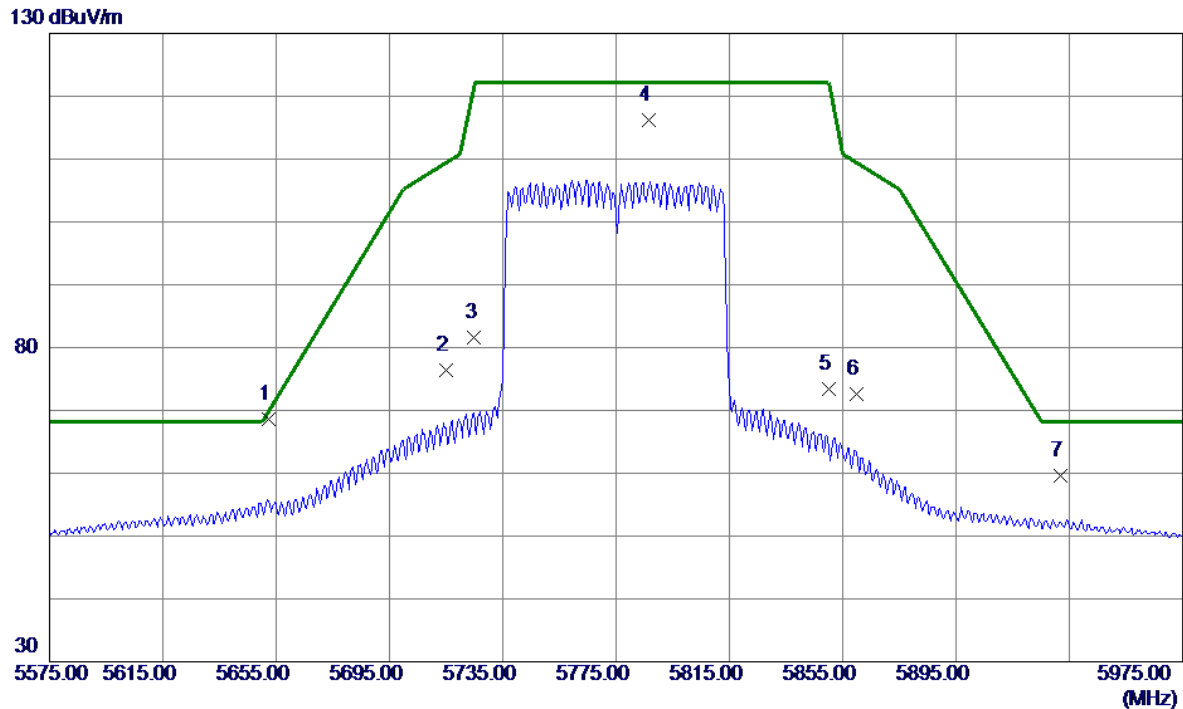


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5652.2000	53.95	14.69	68.64	69.83	-1.19	Peak	
2	5715.0000	61.64	14.84	76.48	109.40	-32.92	Peak	
3	5725.0000	66.71	14.86	81.57	122.20	-40.63	Peak	
4	5786.6000	101.30	15.00	116.30	122.20	-5.90	Peak	No Limit
5	5850.0000	58.18	15.15	73.33	122.20	-48.87	Peak	
6	5860.0000	57.34	15.18	72.52	109.40	-36.88	Peak	
7	5931.8000	44.21	15.34	59.55	68.20	-8.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

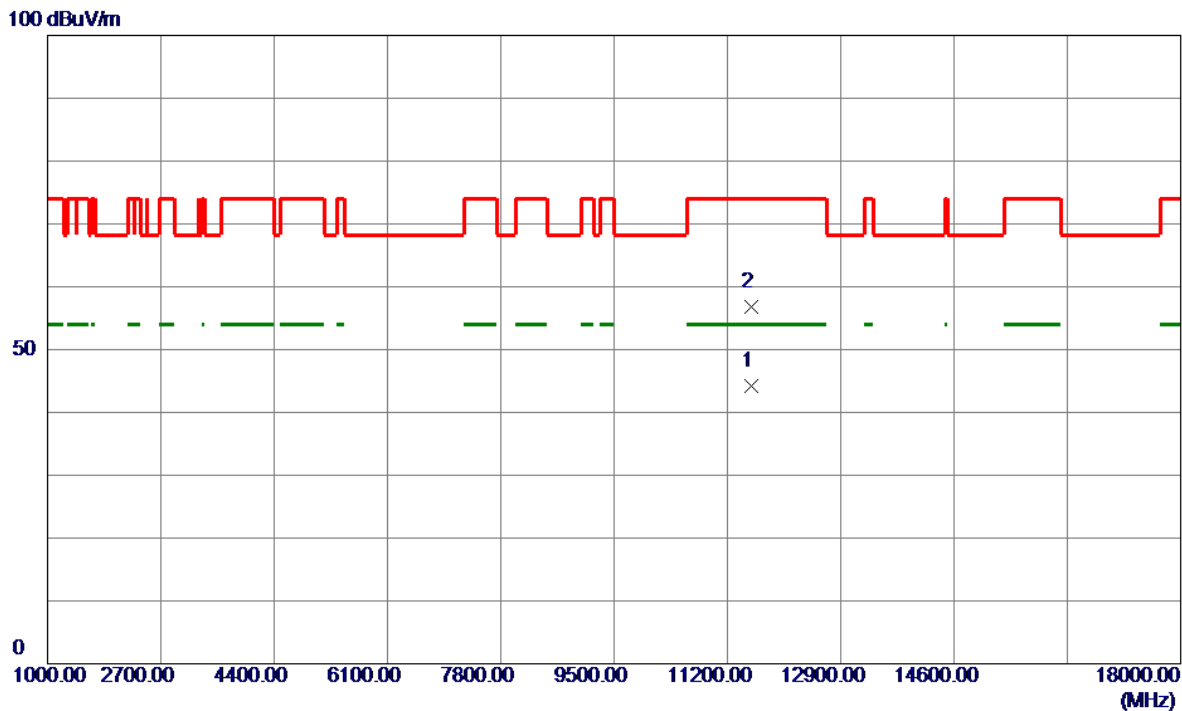


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11556.0000	33.12	11.17	44.29	54.00	-9.71	AVG	
2	11566.0500	45.68	11.17	56.85	74.00	-17.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

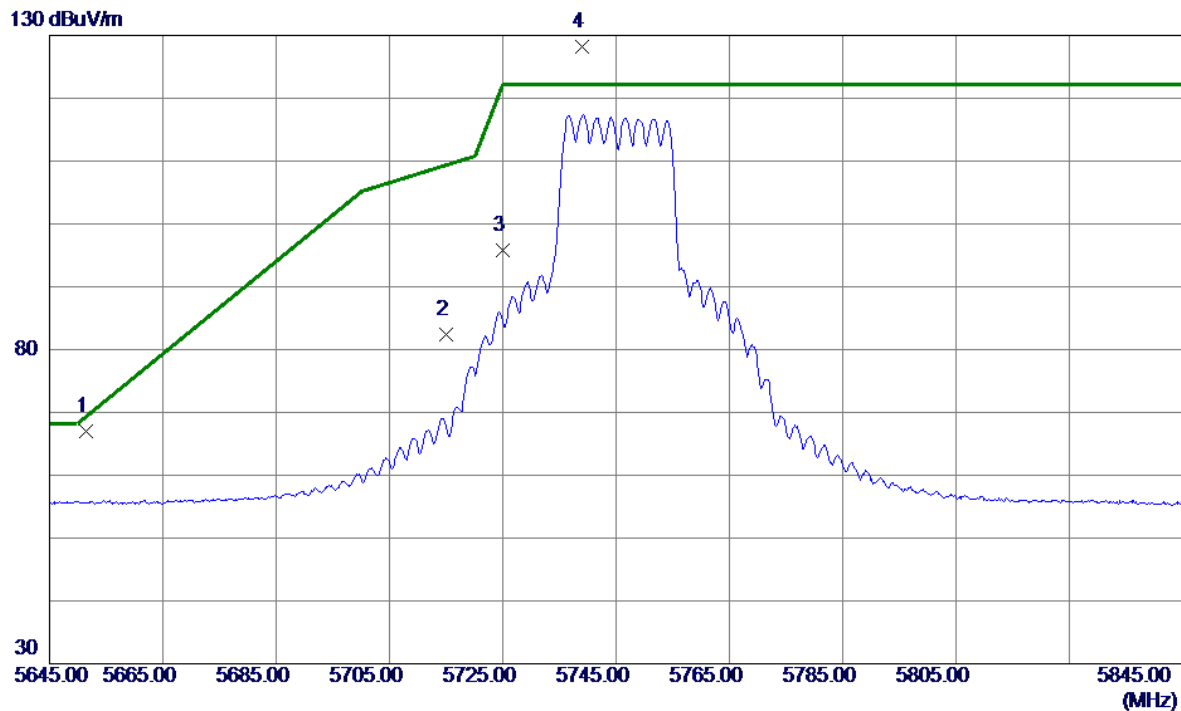


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5651.4000	52.32	14.69	67.01	69.24	-2.23	Peak	
2	5715.0000	67.50	14.84	82.34	109.40	-27.06	Peak	
3	5725.0000	80.86	14.86	95.72	122.20	-26.48	Peak	
4 *	5739.0000	113.37	14.89	128.26	122.20	6.06	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

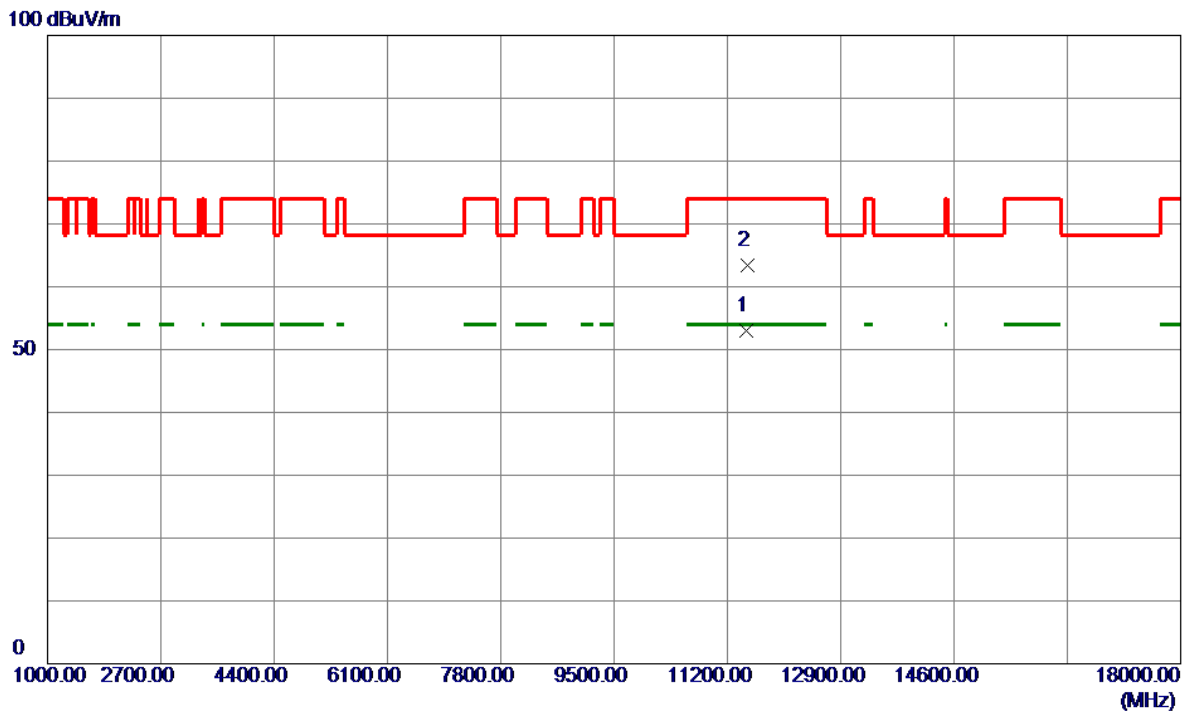


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11488.2500	41.87	11.19	53.06	54.00	-0.94	AVG	
2	11493.4000	52.18	11.19	63.37	74.00	-10.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

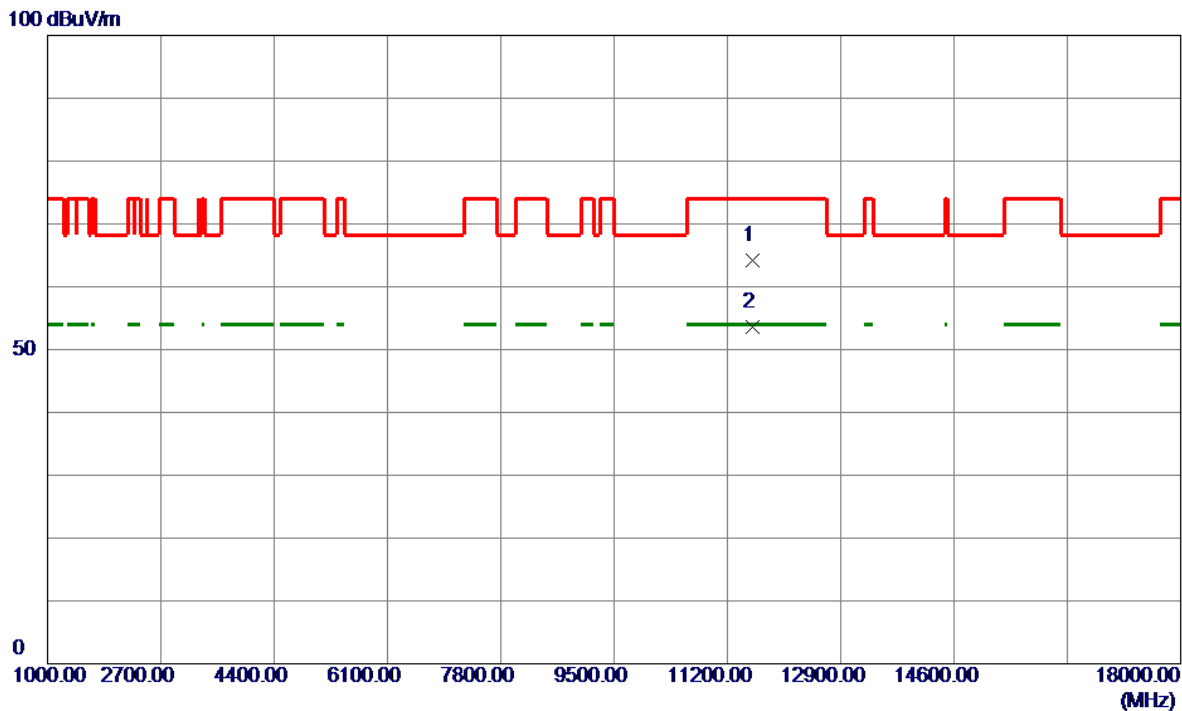


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11568.4000	53.12	11.17	64.29	74.00	-9.71	Peak	
2 *	11570.9000	42.43	11.17	53.60	54.00	-0.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

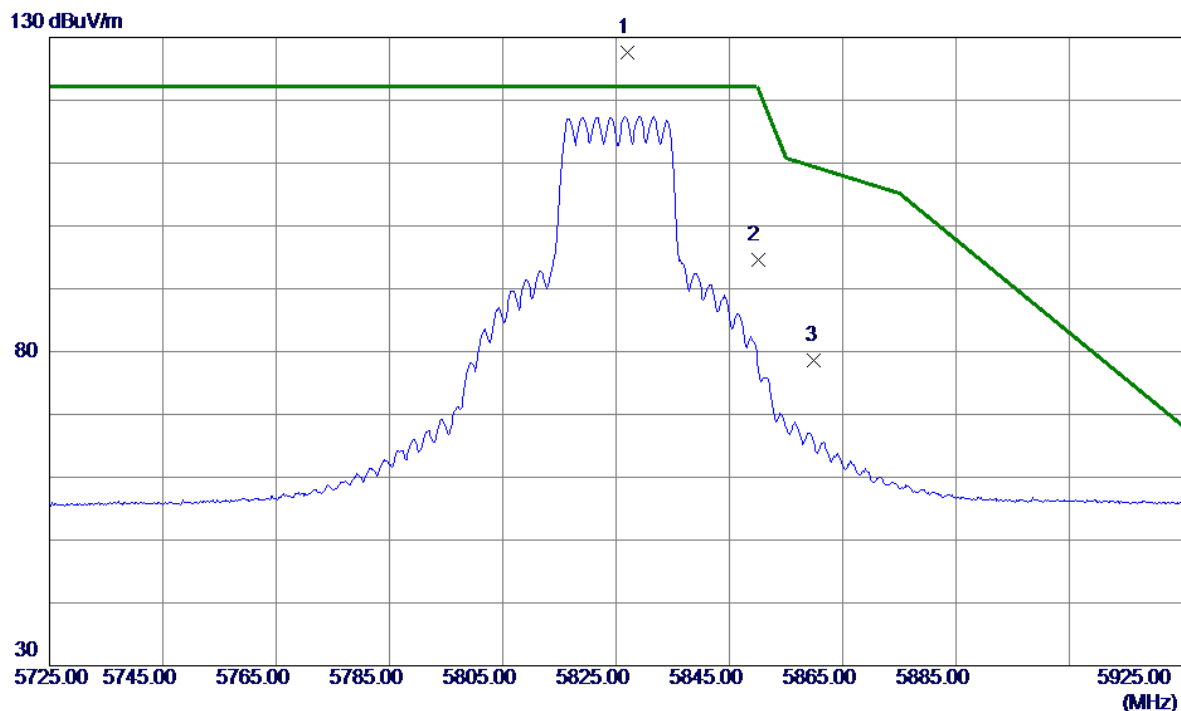


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.0000	112.43	15.10	127.53	122.20	5.33	Peak	No Limit
2	5850.0000	79.40	15.15	94.55	122.20	-27.65	Peak	
3	5860.0000	63.39	15.18	78.57	109.40	-30.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

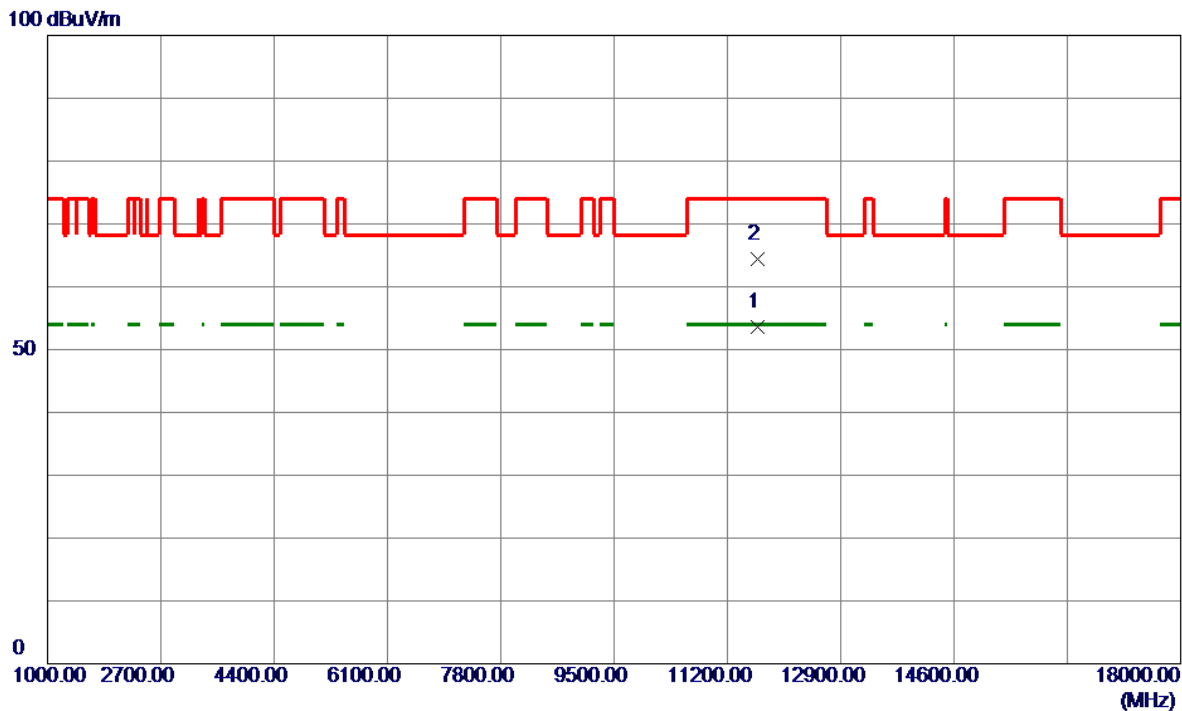


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.8500	42.39	11.14	53.53	54.00	-0.47	AVG	
2	11651.6000	53.20	11.14	64.34	74.00	-9.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

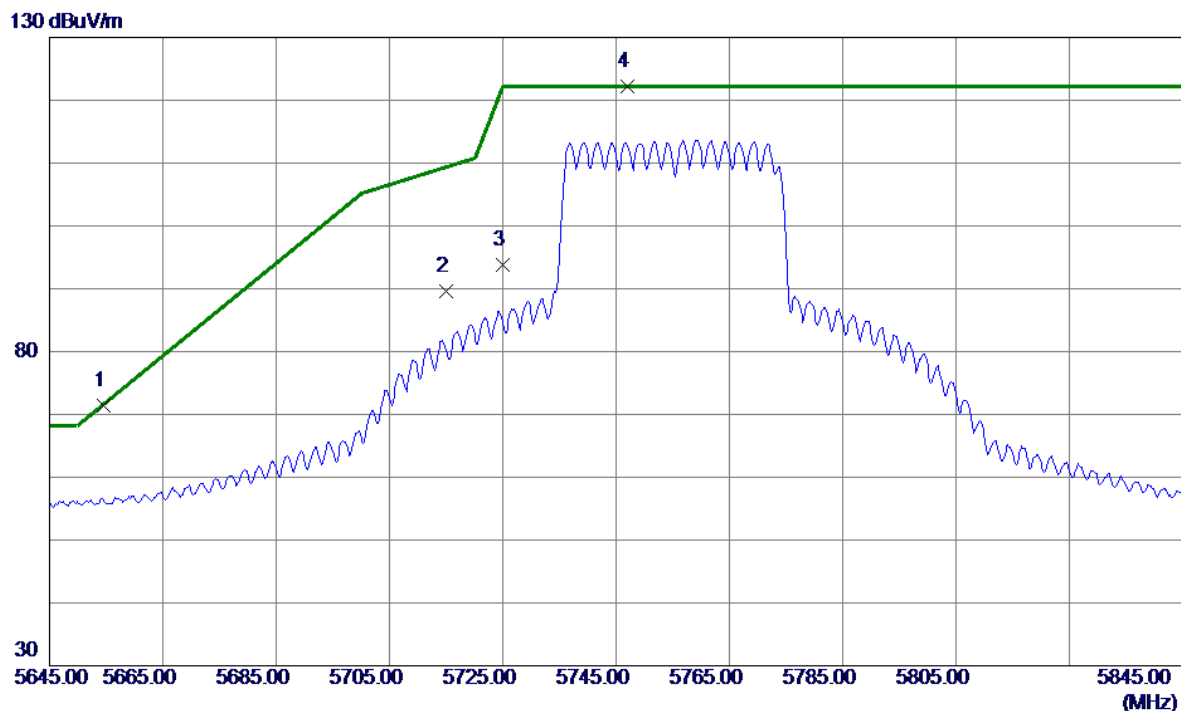


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5654.6000	56.66	14.70	71.36	71.60	-0.24	Peak	
2	5715.0000	74.81	14.84	89.65	109.40	-19.75	Peak	
3	5725.0000	78.97	14.86	93.83	122.20	-28.37	Peak	
4 *	5747.0000	107.25	14.91	122.16	122.20	-0.04	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

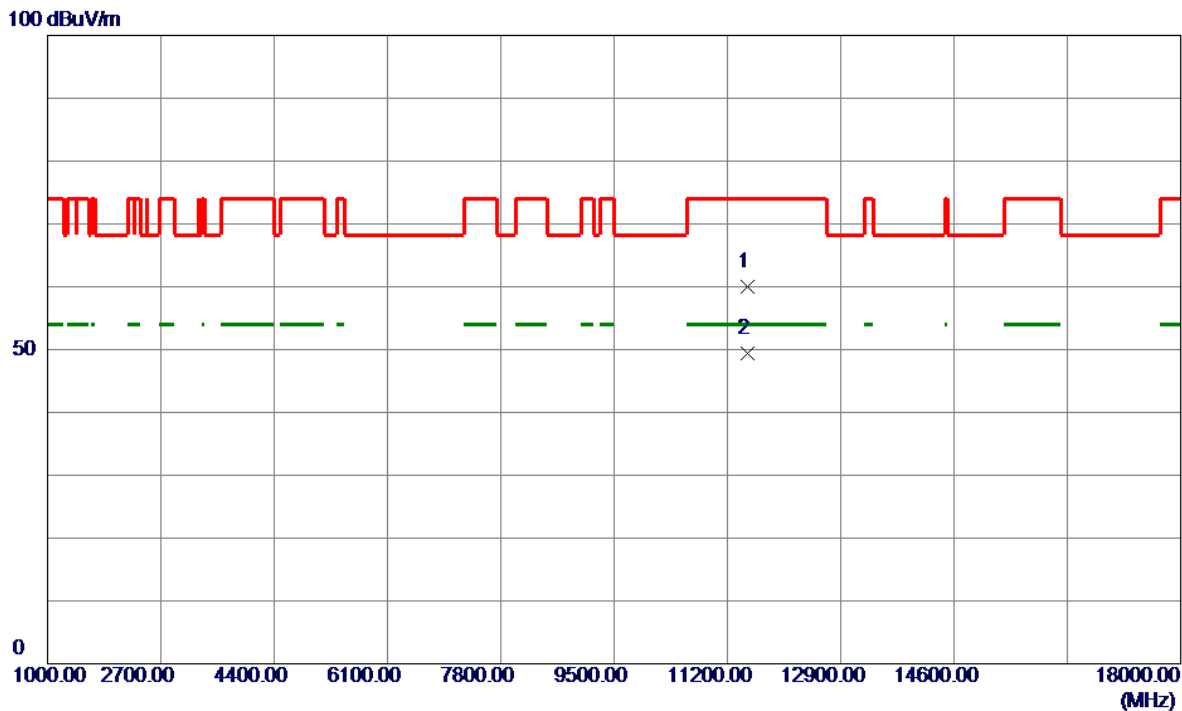


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11507.2500	48.80	11.19	59.99	74.00	-14.01	Peak	
2 *	11508.2000	38.29	11.19	49.48	54.00	-4.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

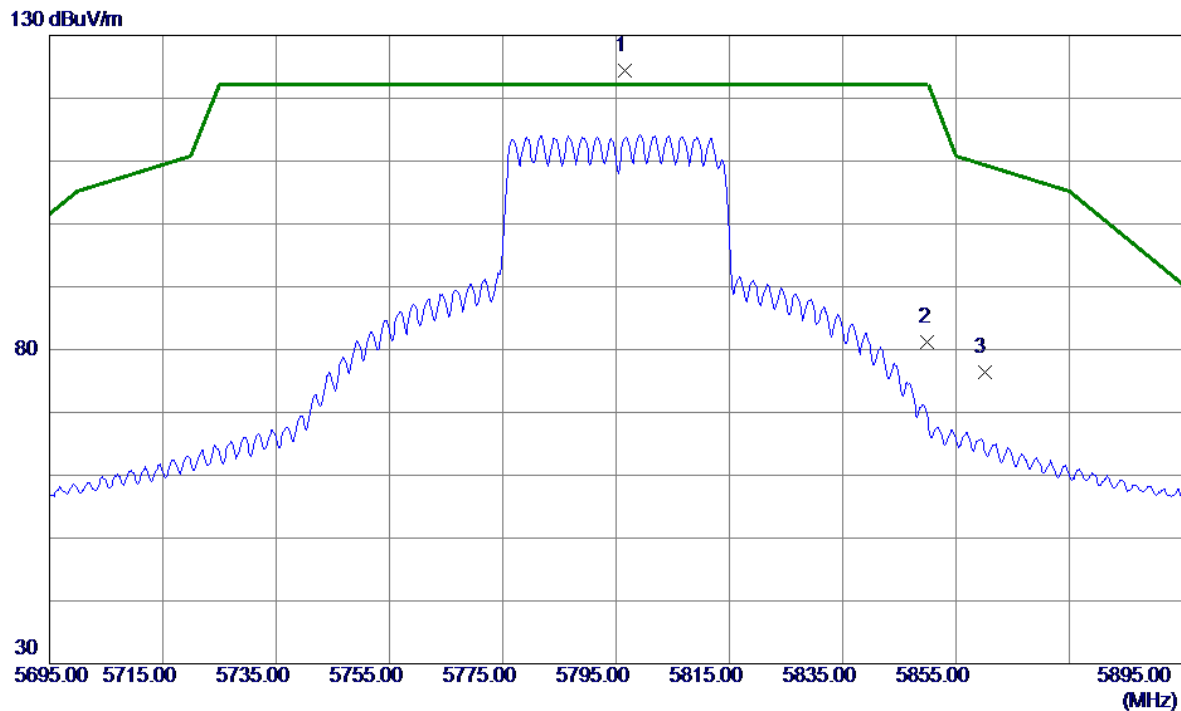


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5796.6000	109.43	15.03	124.46	122.20	2.26	Peak	No Limit
2	5850.0000	65.98	15.15	81.13	122.20	-41.07	Peak	
3	5860.0000	61.13	15.18	76.31	109.40	-33.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

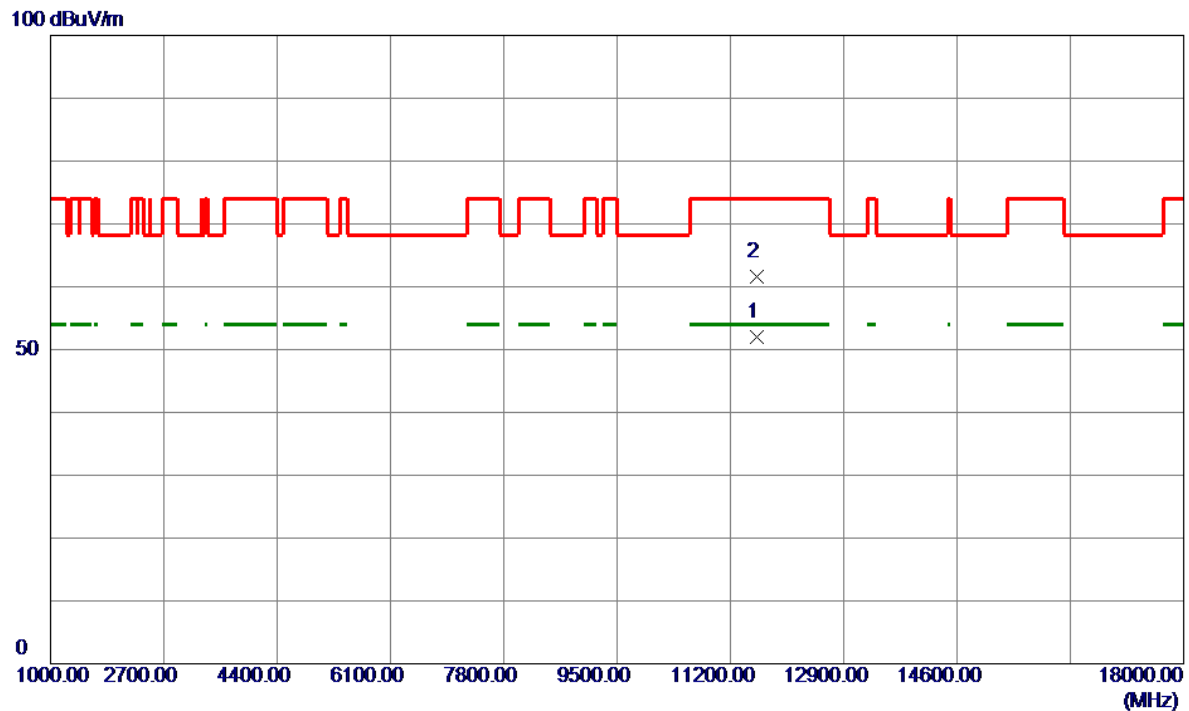


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.6500	40.82	11.16	51.98	54.00	-2.02	AVG	
2	11597.2500	50.38	11.16	61.54	74.00	-12.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

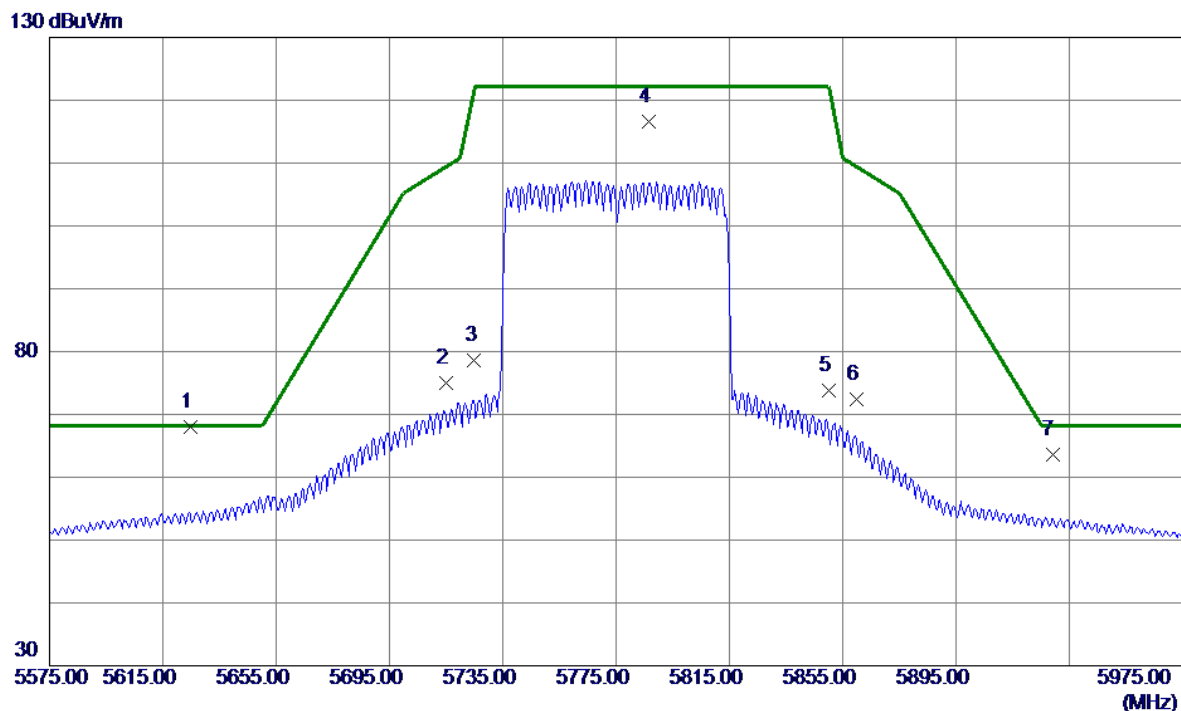


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5624.6000	53.36	14.63	67.99	68.20	-0.21	Peak	
2	5715.0000	60.25	14.84	75.09	109.40	-34.31	Peak	
3	5725.0000	63.70	14.86	78.56	122.20	-43.64	Peak	
4	5786.6000	101.64	15.00	116.64	122.20	-5.56	Peak	No Limit
5	5850.0000	58.56	15.15	73.71	122.20	-48.49	Peak	
6	5860.0000	57.28	15.18	72.46	109.40	-36.94	Peak	
7	5929.0000	48.28	15.34	63.62	68.20	-4.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

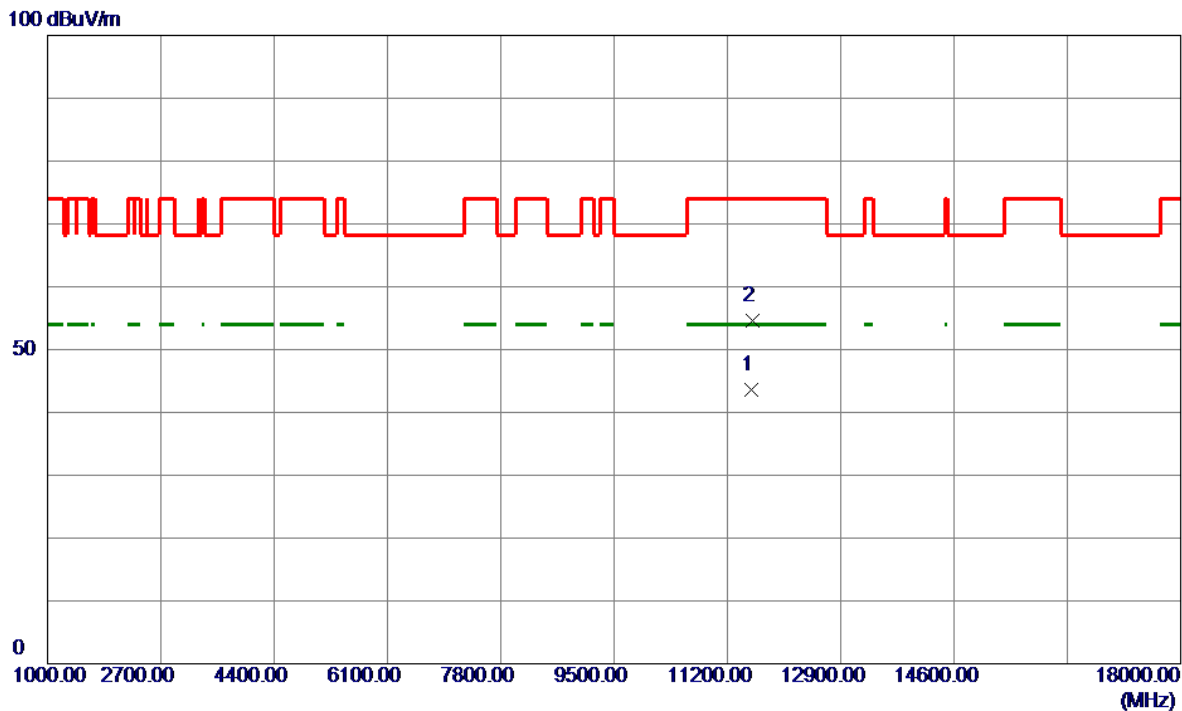


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11556.3000	32.35	11.17	43.52	54.00	-10.48	AVG	
2	11572.9500	43.39	11.17	54.56	74.00	-19.44	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode Channel 159 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

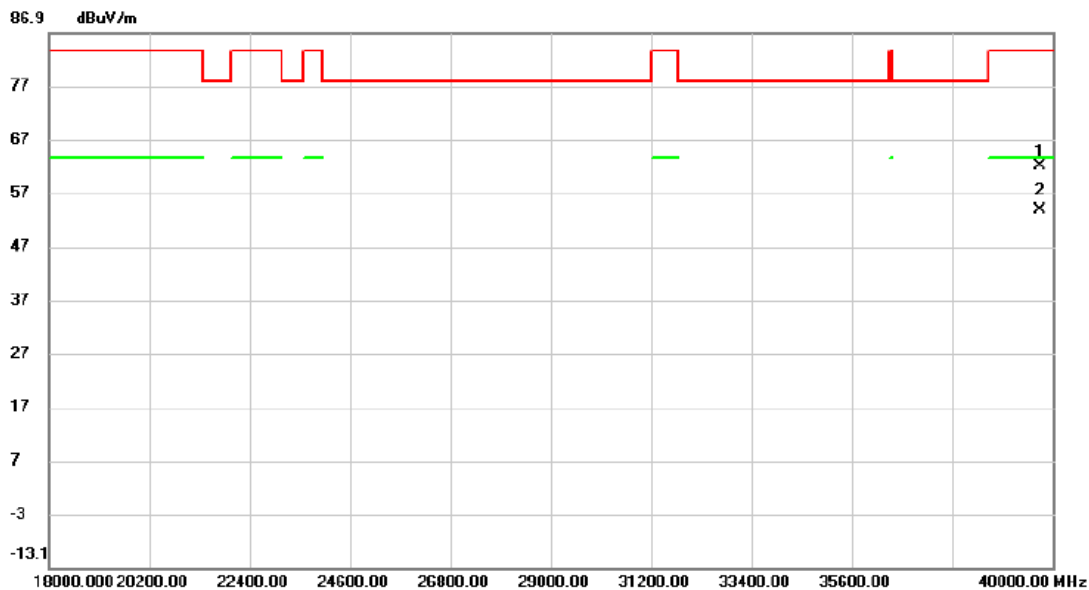

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39714.000	47.21	14.87	62.08	83.50	-21.42	peak	
2	*	39714.000	38.95	14.87	53.82	63.50	-9.68	AVG	

Test Mode	TX BE(EHT40) Mode Channel 159 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

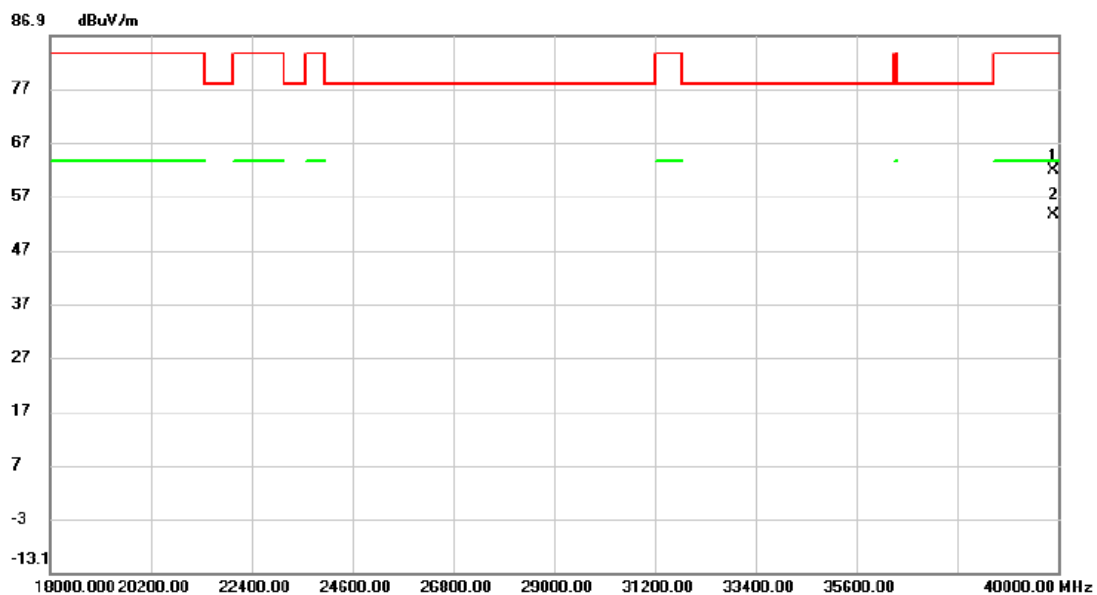


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39890.000	46.57	15.16	61.73	83.50	-21.77	peak	
2	*	39890.000	38.47	15.16	53.63	63.50	-9.87	AVG	

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.150	17.500
40	5200	25.589	17.600
48	5240	25.000	17.600

CH36

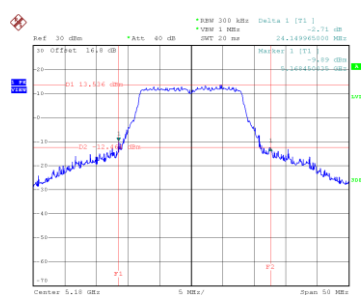


Date: 1.APR.2025 18:56:48

CH40
26 dB Bandwidth

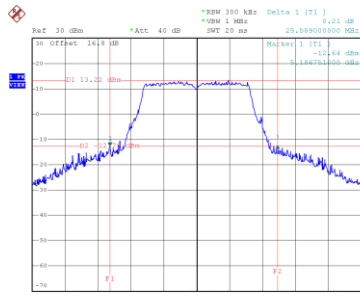


Date: 1.APR.2025 18:58:41

CH48

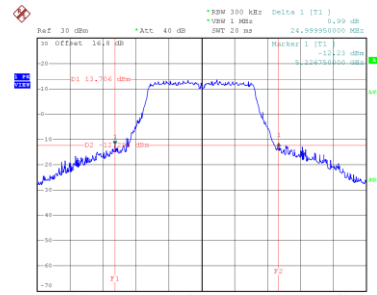


Date: 1.APR.2025 19:01:02


99 % Occupied Bandwidth



Date: 1.APR.2025 18:56:14

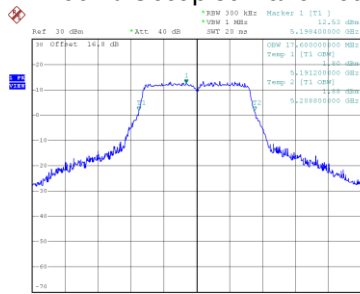

Date: 1.APR.2025 18:58:08

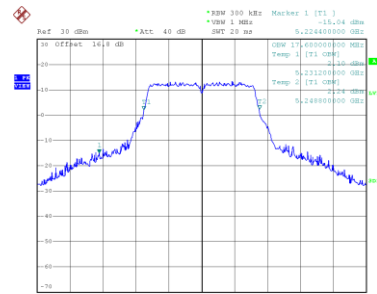


Date: 1.APR.2025 19:00:17

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	26.550	18.600
40	5200	32.150	18.700
48	5240	31.399	18.700

CH36

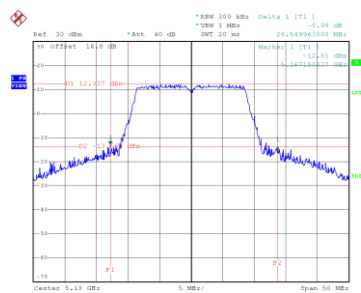


Date: 1.APR.2025 19:40:49

CH40
26 dB Bandwidth

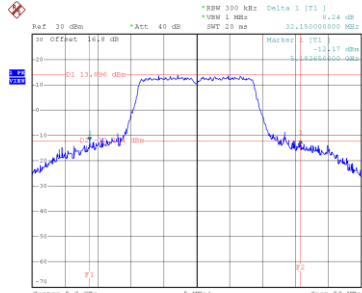


Date: 1.APR.2025 19:42:43

CH48

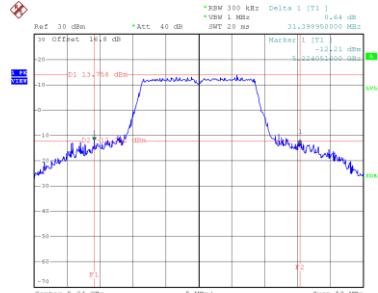


Date: 1.APR.2025 19:52:47


99 % Occupied Bandwidth

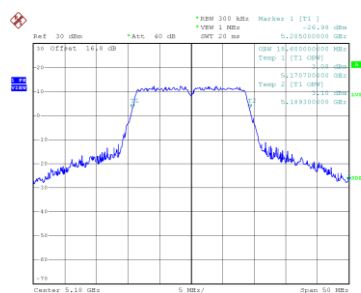

Date: 1.APR.2025 19:40:17

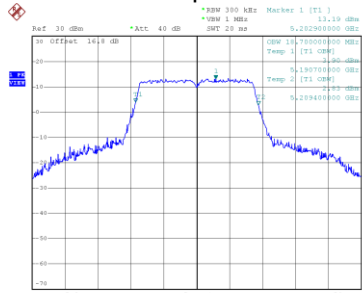

Date: 1.APR.2025 19:42:19

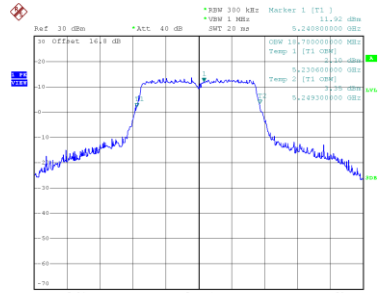


Date: 1.APR.2025 19:52:11

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	79.300	38.800
46	5230	82.790	38.600

CH38

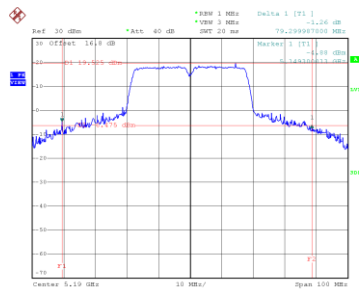


Date: 2.APR.2025 13:54:28

CH46
26 dB Bandwidth

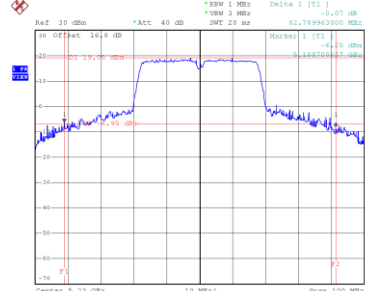


Date: 2.APR.2025 13:57:10

99 % Occupied Bandwidth

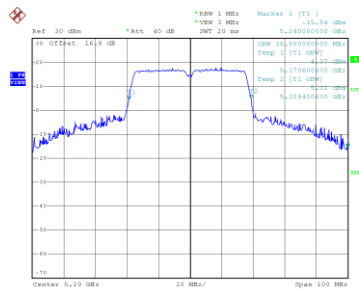

Date: 1.APR.2025 21:13:13

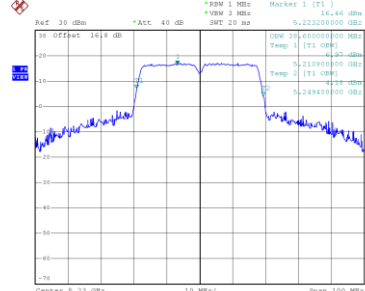


Date: 1.APR.2025 21:14:40

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	163.994	78.800

CH42 26 dB Bandwidth

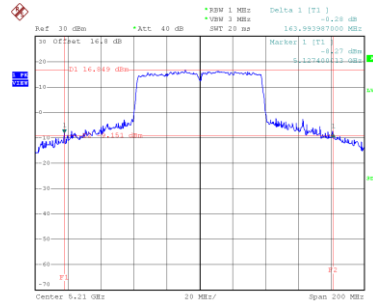

Date: 2.APR.2025 15:10:26

99 % Occupied Bandwidth

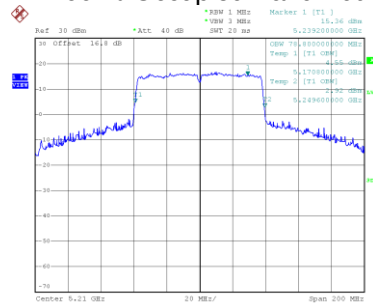


Date: 2.APR.2025 13:30:44

Test Mode	UNII-1_TX BE(EHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.350	19.300
40	5200	24.790	19.300
48	5240	24.050	19.400

CH36

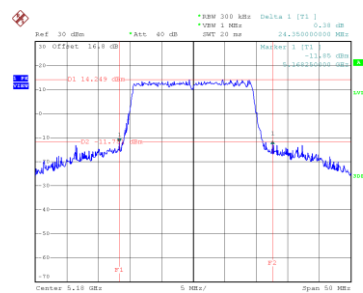


Date: 1.APR.2025 20:34:56

CH40
26 dB Bandwidth

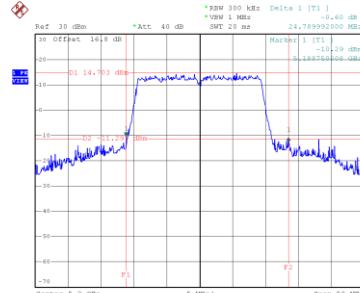


Date: 1.APR.2025 20:36:47

CH48

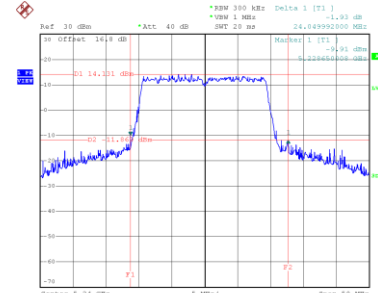


Date: 1.APR.2025 20:38:20


99 % Occupied Bandwidth

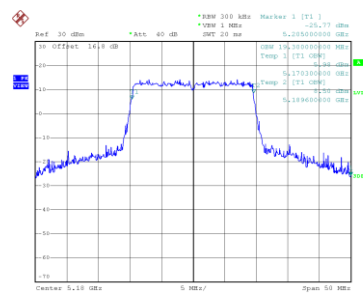

Date: 1.APR.2025 20:34:24

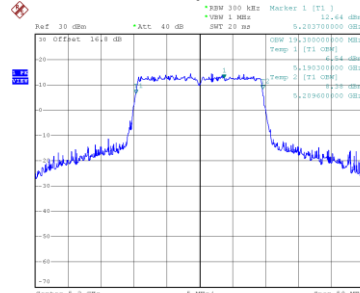

Date: 1.APR.2025 20:35:56

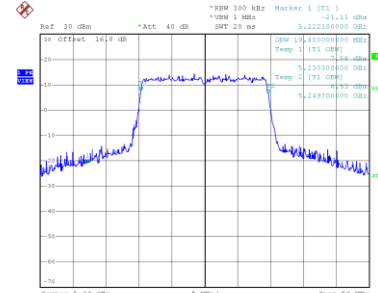


Date: 1.APR.2025 20:37:48

Test Mode	UNII-1_TX BE(EHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	83.190	39.000
46	5230	79.300	39.200

CH38

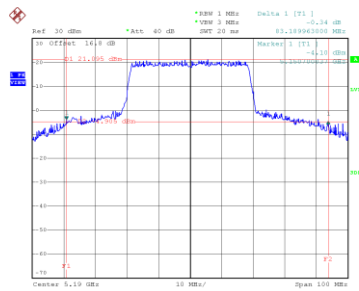


Date: 2.APR.2025 14:14:56

CH46
26 dB Bandwidth

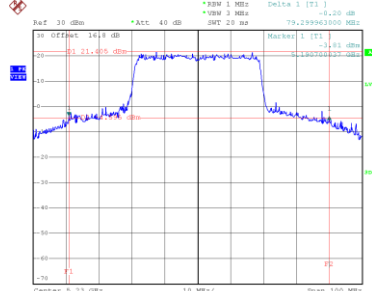


Date: 2.APR.2025 14:15:43

99 % Occupied Bandwidth

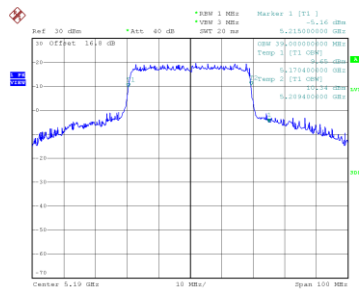

Date: 1.APR.2025 20:57:14

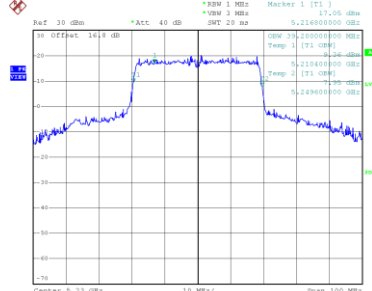


Date: 1.APR.2025 20:59:51

Test Mode	UNII-1_TX BE(EHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	169.990	79.200

CH42 26 dB Bandwidth

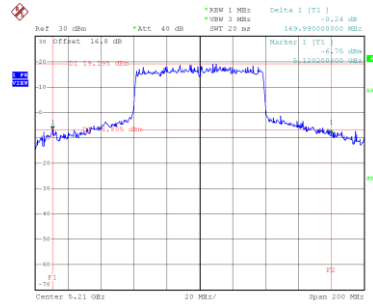

Date: 2.APR.2025 14:53:58

99 % Occupied Bandwidth

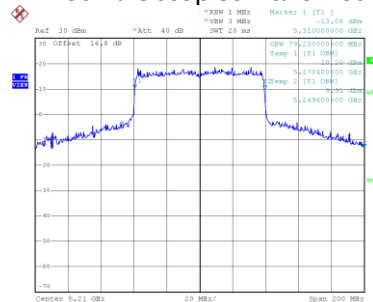


Date: 2.APR.2025 13:37:53

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.300	18.400
60	5300	22.250	18.500
64	5320	22.350	18.400

CH52

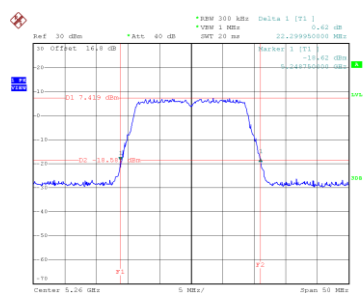


Date: 1.APR.2025 19:55:00

CH60
26 dB Bandwidth

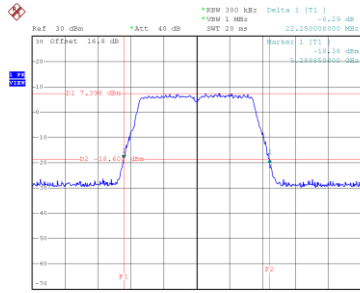


Date: 1.APR.2025 20:02:45

CH64

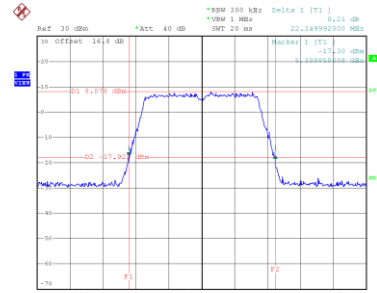


Date: 1.APR.2025 20:04:27


99 % Occupied Bandwidth



Date: 1.APR.2025 19:54:27

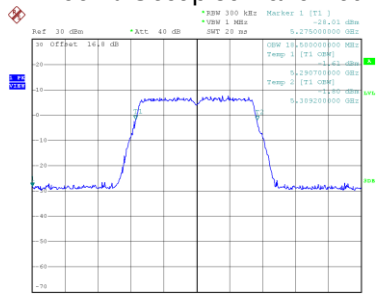

Date: 1.APR.2025 20:02:11

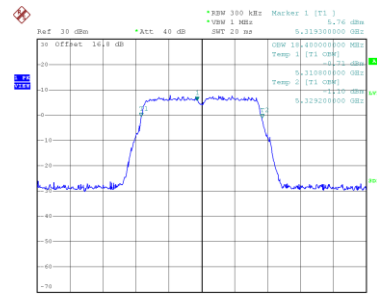


Date: 1.APR.2025 20:03:53

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	83.000	76.400

CH58 26 dB Bandwidth

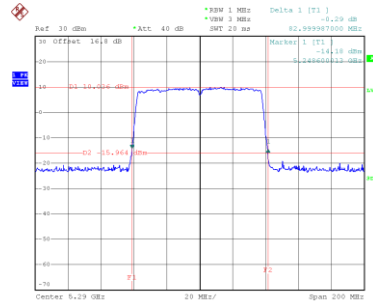

Date: 2.APR.2025 15:13:13

99 % Occupied Bandwidth

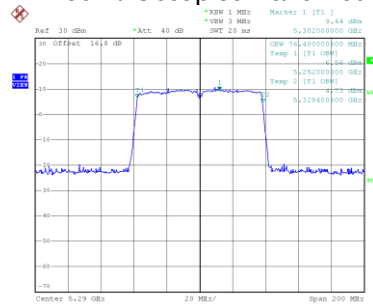


Date: 2.APR.2025 13:33:20

Test Mode	UNII-2A_TX BE(EHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.900	19.200
60	5300	22.250	19.400
64	5320	22.189	19.300

CH52

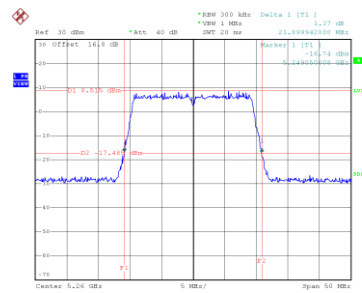


Date: 1.APR.2025 20:39:35

CH60
26 dB Bandwidth

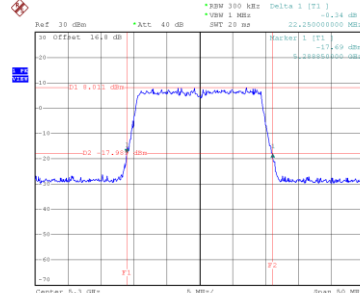


Date: 1.APR.2025 20:40:45

CH64

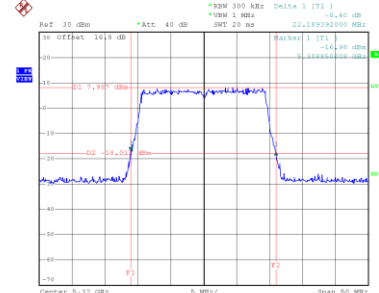


Date: 1.APR.2025 20:43:12


99 % Occupied Bandwidth

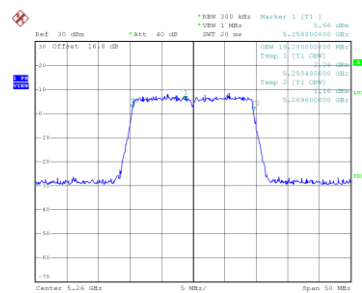

Date: 1.APR.2025 20:39:01

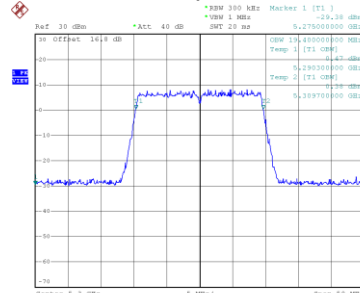

Date: 1.APR.2025 20:40:12

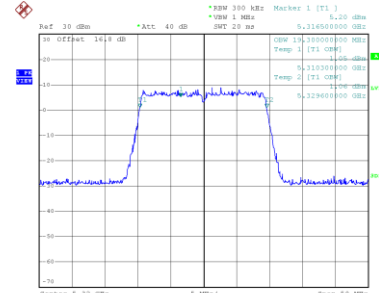


Date: 1.APR.2025 20:42:38

Test Mode	UNII-2A_TX BE(EHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	83.200	77.600

CH58 26 dB Bandwidth

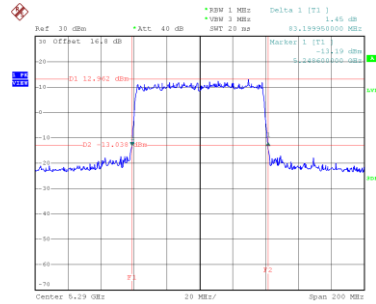

Date: 2.APR.2025 15:01:50

99 % Occupied Bandwidth

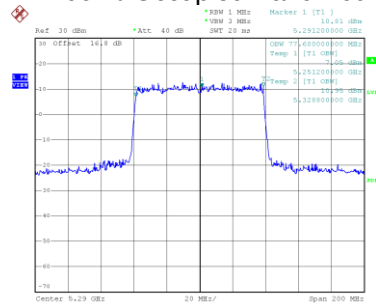


Date: 2.APR.2025 13:39:01

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	262.400	156.800

CH50 26 dB Bandwidth

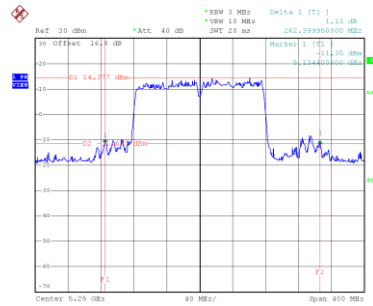

Date: 2.APR.2025 15:25:49

99 % Occupied Bandwidth

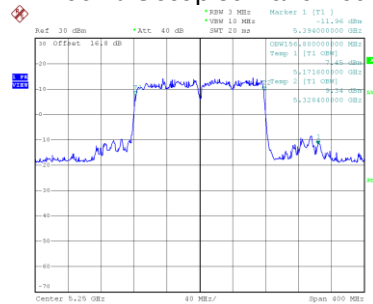


Date: 2.APR.2025 13:44:34

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	164.000	157.600

CH50 26 dB Bandwidth

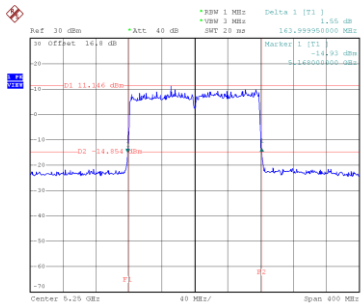

Date: 2.APR.2025 15:59:10

99 % Occupied Bandwidth

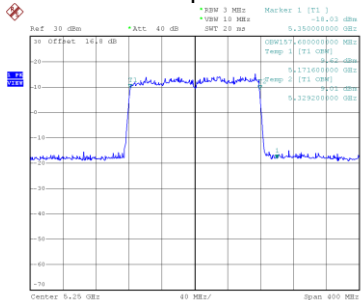


Date: 2.APR.2025 13:42:54

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	21.890	17.500
116	5580	21.950	17.500
140	5700	22.150	17.400

CH100

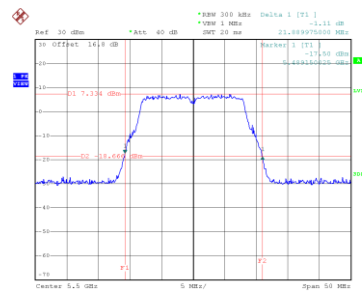


Date: 1.APR.2025 19:09:36

CH116
26 dB Bandwidth

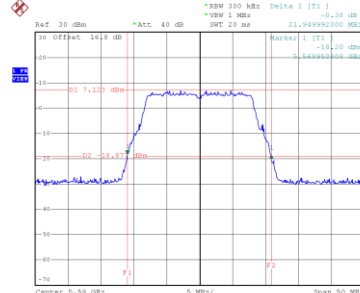


Date: 1.APR.2025 19:16:27

CH140

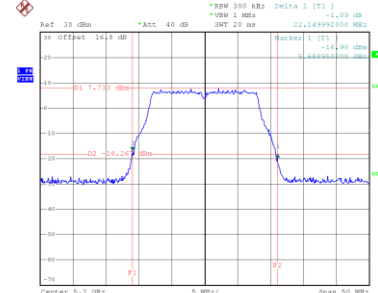


Date: 1.APR.2025 19:19:54


99 % Occupied Bandwidth

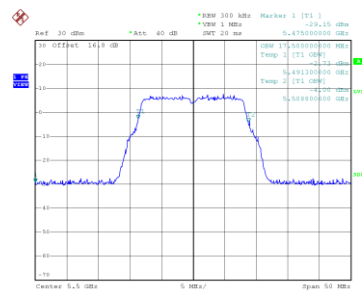

Date: 1.APR.2025 19:09:01

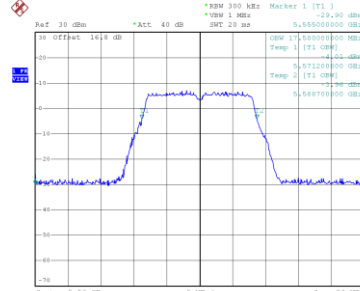

Date: 1.APR.2025 19:15:53

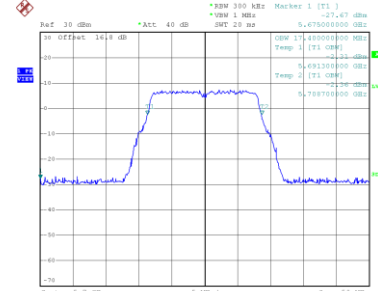


Date: 1.APR.2025 19:19:19

Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	22.350	18.400
116	5580	22.050	18.400
140	5700	22.209	18.400

CH100

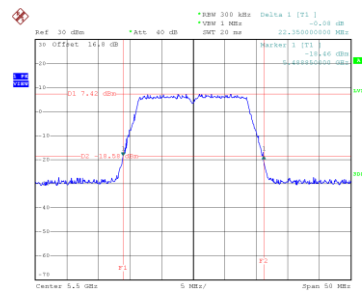


Date: 1.APR.2025 20:07:38

CH116
26 dB Bandwidth

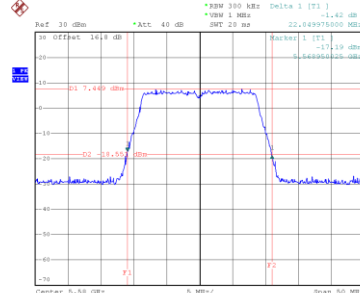


Date: 1.APR.2025 20:09:38

CH140

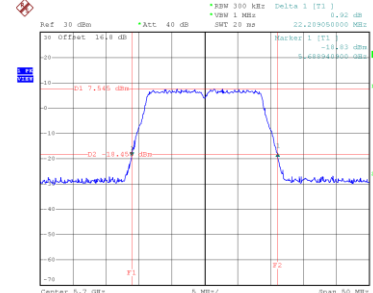


Date: 1.APR.2025 20:11:26


99 % Occupied Bandwidth

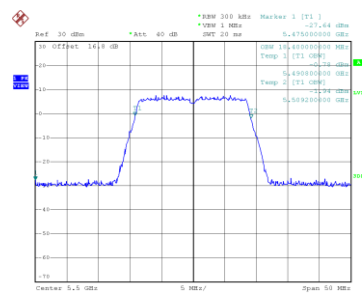

Date: 1.APR.2025 20:07:05

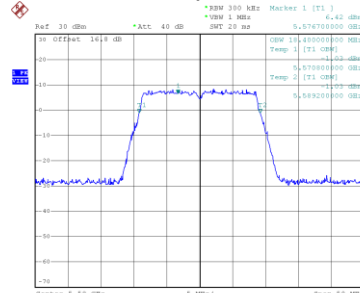

Date: 26.MAY.2025 12:07:17

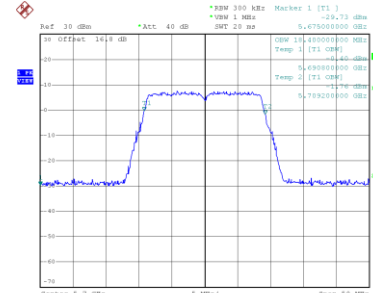


Date: 1.APR.2025 20:10:52

Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	40.200	37.200
110	5550	40.400	37.000
134	5670	40.100	37.200

CH102

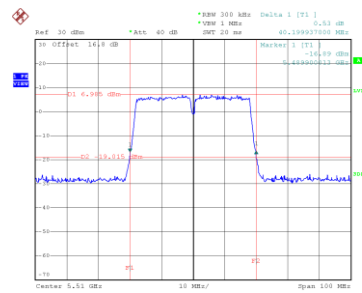


Date: 2.APR.2025 14:03:57

CH110
26 dB Bandwidth

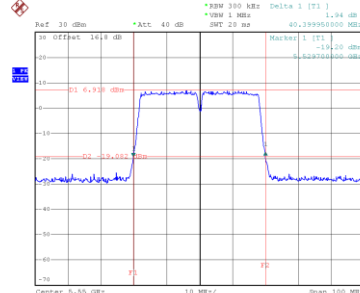


Date: 2.APR.2025 14:05:25

CH134

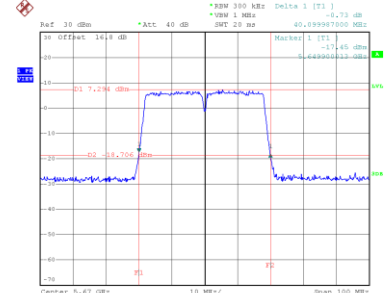


Date: 2.APR.2025 14:06:33


99 % Occupied Bandwidth

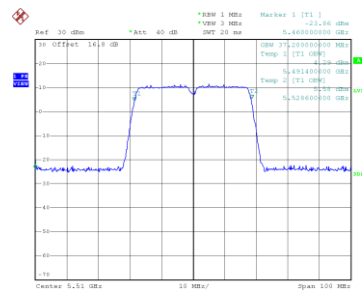

Date: 1.APR.2025 21:10:44

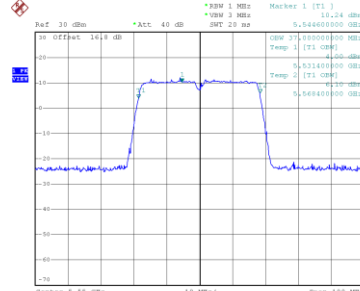

Date: 1.APR.2025 21:19:16

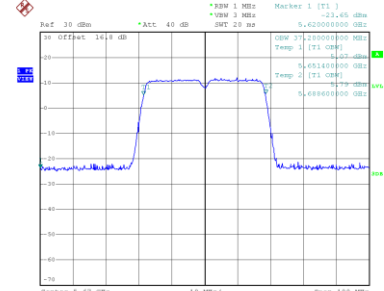

Date: 1.APR.2025 21:19:47