

SCANSTRUT

SC-CW-04G

Waterproof Wireless Mount
Active • 15W

Electrical Information
& Installation Instructions

- EN** READ THESE INSTRUCTIONS BEFORE INSTALLING THE PRODUCT
- DE** LESEN SIE DIESE ANLEITUNG DURCH, BEVOR SIE MIT DER INSTALLATION BEGINNEN
- ES** LEA ESTAS INSTRUCCIONES ANTES DE INSTALAR EL PRODUCTO
- FR** VEUILLEZ PRENDRE CONNAISSANCE DE CES INSTRUCTIONS. AVANT DE PROCÉDER À L'INSTALLATION
- IT** LEGGERE QUESTE ISTRUZIONI PRIMA DI INSTALLARE IL PRODOTTO
- SWE** LÄS DESSA INSTRUKTIONER INNAN PRODUKTEN INSTALLERAS

scanstrut.com

SCANSTRUT

For the latest tech info visit scanstrut.com

UK / EMEA / APAC
Scanstrut Ltd, 14 Dart Business Park,
Clyst St. George, Exeter, EX3 0QH

USA
Scanstrut Inc. 7 Pequot Park Rd,
#303 Westbrook, CT 06498



Rev 01 RETAIL-INST-005608

EN Warning

The product must be installed in accordance with the instructions provided. Failure to do so could result in personal injury, damage to your vessel/vehicle and/or product failure. Scanstrut recommends installation is carried out by a qualified electrician. No liability is accepted for damage and/or injury caused by incorrect installation. The end-user is entirely responsible for conditions in which their device is used. See WARRANTY section for further details.

WARNING

This product is to be connected to a 12V DC or 24V DC battery power source only.

The power supply must be switched off before installation.

An appropriate fuse or circuit breaker must be used between the battery/power source and this product. Check for correct polarity of all wiring before switching the power on.

This product may contain high voltages. Do not tamper with the product.

This product is NOT approved for use in hazardous/flammable atmospheres. Do NOT install in a hazardous/flammable atmosphere e.g. engine room.

Before drilling any holes, ensure the area behind the mounting location is clear of wires, fuel and all other hazardous objects.

Ensure any holes cut will not significantly weaken the structure of the mounting surface. If the product needs to be mounted outside, it must be mounted in a location safely above the waterline, where it is not at risk of being submerged.

CAUTION

The product is designed specifically for the charging of Qi compatible devices.

The cable must be retained and not interfere with mechanical systems.

This product contains no user serviceable components. Do NOT attempt to repair or alter the product in any way.

This product will charge through non-metallic phone cases up to ~3mm thick. phone cases may alter overall charge performance.

When used in a very high/low ambient temperature/direct or prolonged sunlight the product may temporarily shut down, this is a safety feature of the electronics.

The IP rating is only valid if correctly installed as per these instructions and on a perfectly flat, non-porous, smooth surface.

When selecting a mounting location, avoid places exposed to heat-radiating appliances and poorly ventilated areas.

EMC INSTALLATION GUIDELINES

Scanstrut products conform to Electromagnetic Compatibility (EMC) regulations, to ensure that electromagnetic interference between equipment is minimised. Ensure the product is installed as directed in these instructions.

WIRING

When extending the cable from battery/power source to the product, ensure there is consistently a minimum of 10V being provided to the product. A wire gauge of 18AWG (0.82mm²) is recommended for any length of cable extension.

ENVIRONMENTAL PROTECTION

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

IMPORTANT

Scanstrut Ltd. accepts no responsibility for any injuries or other damages arising from the use of their products in any circumstances.

WARRANTY

A 5 year, non-transferable warranty covers this Scanstrut product only and not any devices that are positioned in it or on it. No warranty is given for users' devices and users expose their devices to hazards, known or unknown, at their own risk.

Scanstrut Ltd. declares that this product is compliant with EMC CE-RED Directive (2014/53/EU) & standard EN 62368

CE certificate of conformity can be found at scanstrut.com/support/compliance

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Exposure Statement

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. During the operation of device a distance of 20 cm surrounding the device and 20 cm above the top surface of the device must be respected.


FCC ID: 2APUP-SC-CW-04G




Technical Information

IP Waterproof Rating	IPX6 front & back
Input Voltage	12/24V System 10-30V DC
Input Current Max	2A
Output Power Max	15W (12V 1.25A) (9V 1.67A)
Standby Draw	< 0.5W
Certification	Qi, CE, UKCA, FCC, ROHS, C-Tick, UN ECE R10, PSE Certified


Parts List

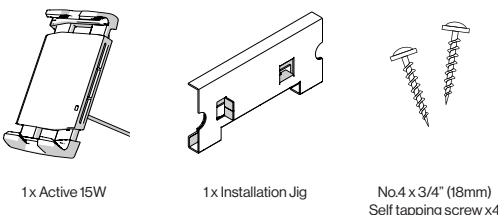

Tools Required

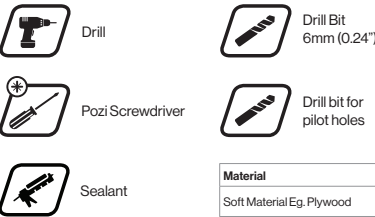


LED Indicator Key

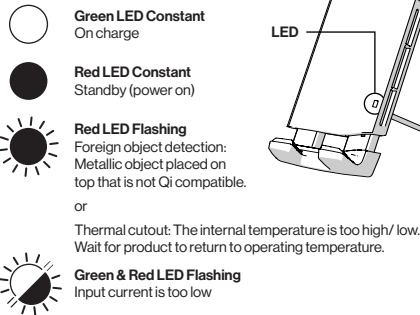


Installation

- 1** • Unbox Active and insert the installation jig.
- Ensure there is sufficient clearance to open the jaws in the chosen installation area.
 - Ensure Active is vertical and the installation area is flat.

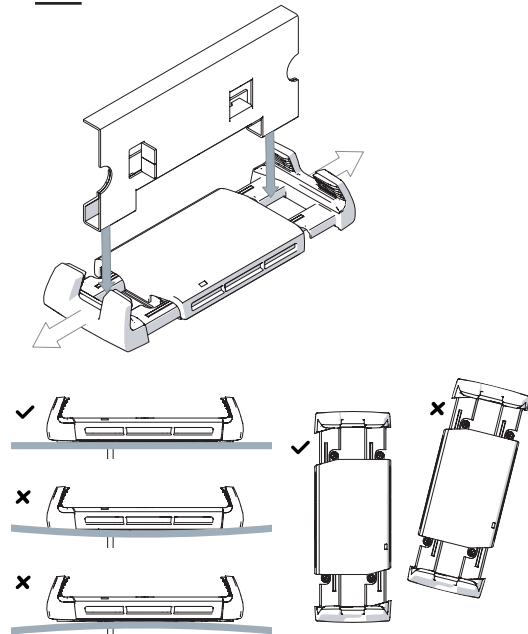


- 2** Use the drilling template provided to drill 6mm (0.24") cable hole and 4 x pilot holes (see tools required table).

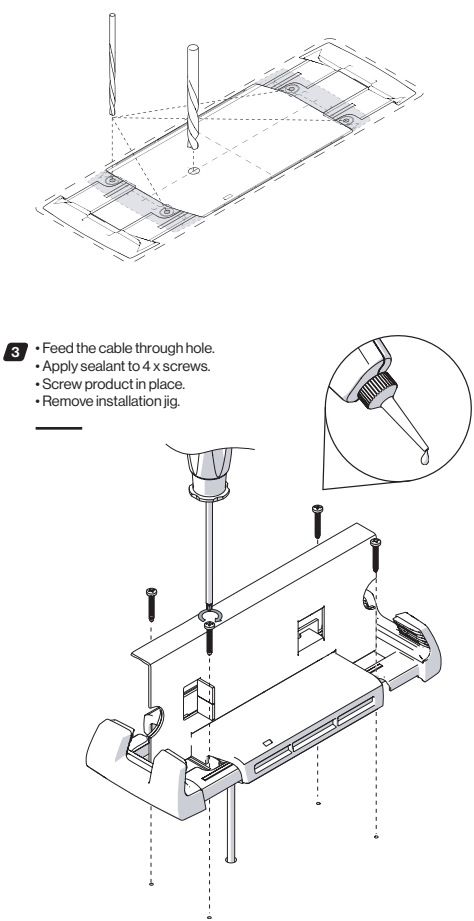



- 3** • Feed the cable through hole.
- Apply sealant to 4 x screws.
 - Screw product in place.
 - Remove installation jig.

- 4** • Connect the wires or connectors to a 12/24V supply, ensuring a waterproof connection.
- Fuse according to input voltage and current.
 - Check the LED indicator for standby power (see LED indicator key).

Note The electrical schematic is to illustrate how the product should be connected to a 12V DC or 24V DC battery/power supply.

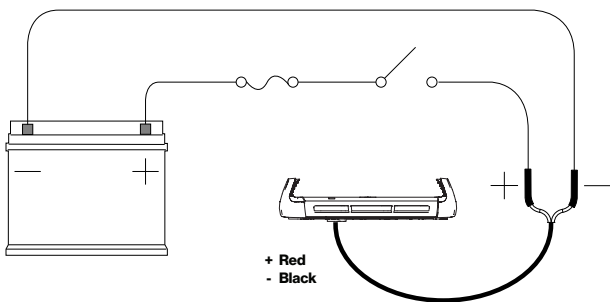

Drilling Template Scale 1:1

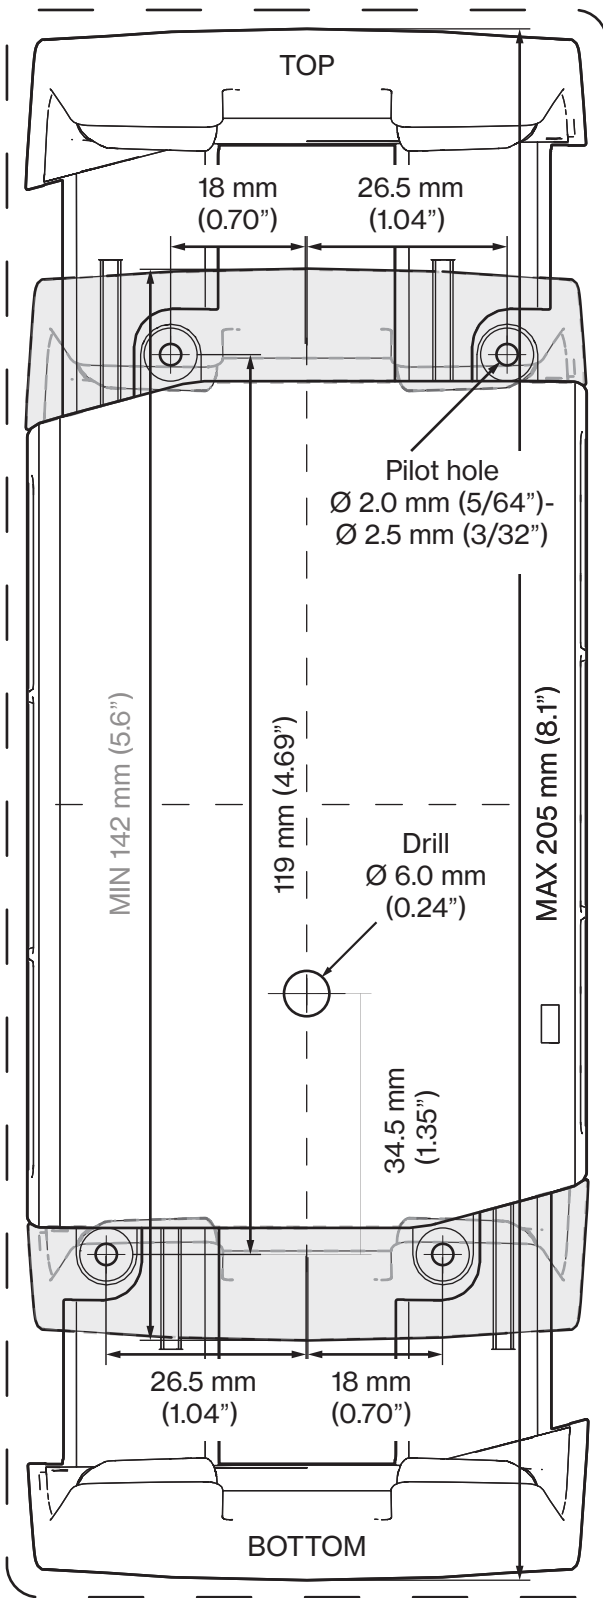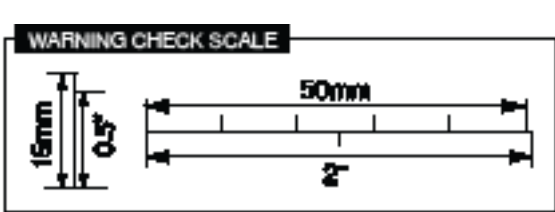

Correct Usage

