


Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5580MHz
Test By :Cyril Chen

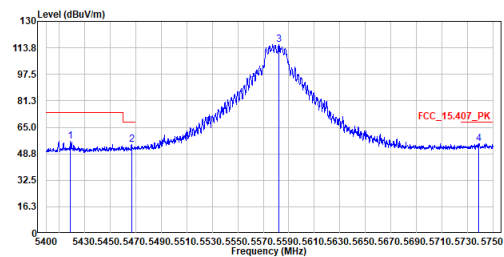


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5418.550	56.55	74.00	-17.45	34.98	21.57	Peak
2	5466.675	54.39	68.20	-13.81	32.80	21.59	Peak
3	5582.175	115.96	-----	-----	94.11	21.85	Peak
4	5738.975	54.92	68.20	-13.28	32.62	22.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5580MHz
Test By :Cyril Chen

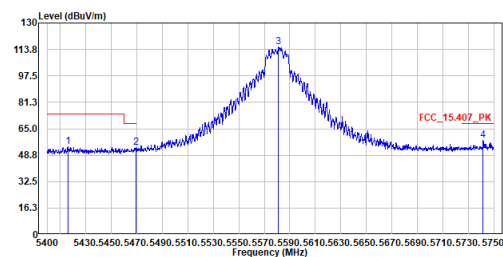


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5415.925	53.93	74.00	-20.07	32.37	21.56	Peak
2	5469.300	53.44	68.20	-14.76	31.85	21.59	Peak
3	5581.125	115.15	-----	-----	93.30	21.85	Peak
4	5741.600	57.71	68.20	-10.49	35.40	22.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ac20_TX_5580MHz
Test By :Cyril Chen

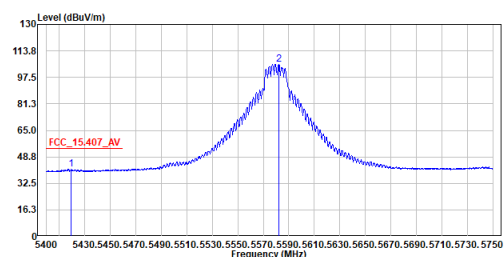


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5419.600	41.09	54.00	-12.91	19.52	21.57	Average
2	5582.175	105.63	-----	-----	83.78	21.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ac20_TX_5580MHz
Test By :Cyril Chen

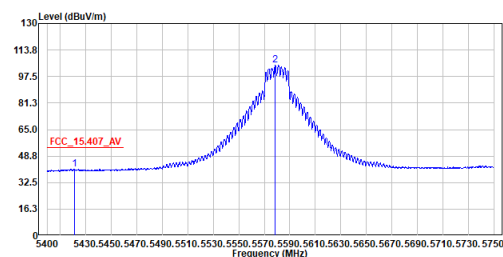


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5421.175	40.73	54.00	-13.27	19.16	21.57	Average
2	5578.500	104.48	-----	-----	82.64	21.84	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac20_TX_5580MHz
Test By :Ling Chen

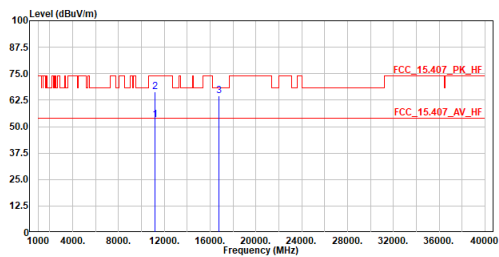


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11160.000	53.30	54.00	-0.70	60.10	-6.80	Average
2	11160.000	66.27	74.00	-7.73	73.07	-6.80	Peak
3	16740.000	64.40	68.20	-3.80	67.94	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac20_TX_5580MHz
Test By :Ling Chen

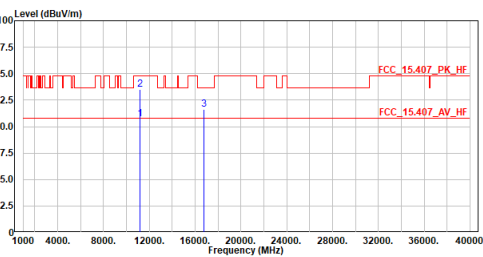


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11160.000	53.76	54.00	-0.24	60.56	-6.80	Average
2	11160.000	67.56	74.00	-6.44	74.36	-6.80	Peak
3	16740.000	58.08	68.20	-10.12	61.62	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5700MHz
Test By :Cyril Chen

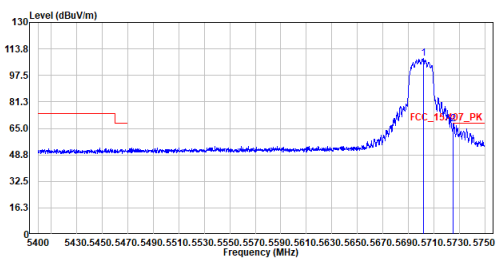


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5701.875	107.87	-----	-----	85.67	22.20	Peak
2	5725.150	67.89	68.20	-0.31	45.62	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5700MHz
Test By :Cyril Chen

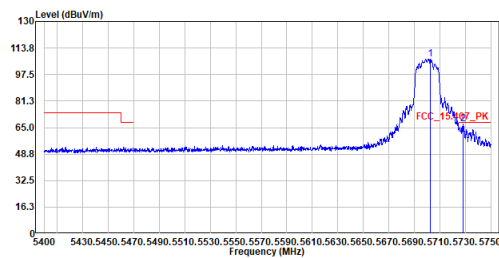


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5702.400	107.14	-----	-----	84.94	22.20	Peak
2	5727.950	67.23	68.20	-0.97	44.96	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac20_TX_5700MHz
Test By :Ling Chen

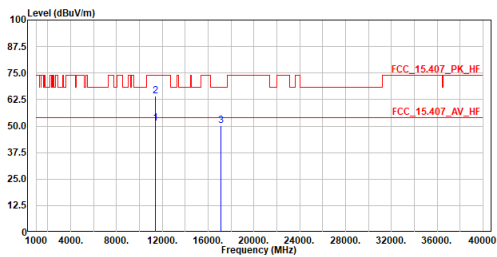


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	51.37	54.00	-2.63	57.66	-6.29	Average
2	11400.000	64.27	74.00	-9.73	70.56	-6.29	Peak
3	17100.000	50.24	68.20	-17.96	53.77	-3.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac20_TX_5700MHz
Test By :Ling Chen

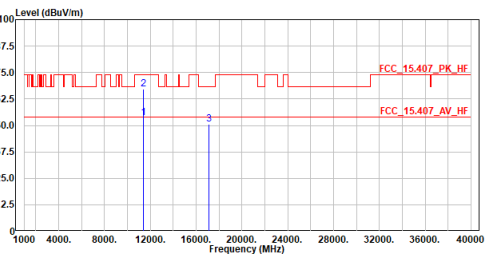


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	53.66	54.00	-0.34	59.95	-6.29	Average
2	11400.000	67.23	74.00	-6.77	73.52	-6.29	Peak
3	17100.000	50.52	68.20	-17.68	54.05	-3.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac20_TX_5720MHz
Test By :Jason Young

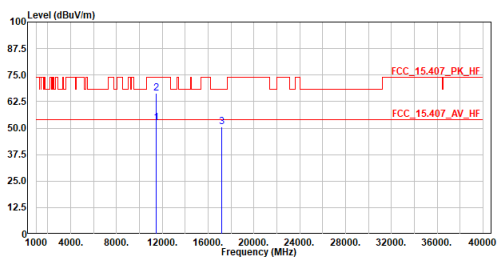


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	52.27	54.00	-1.73	58.47	-6.20	Average
2	11440.000	66.27	74.00	-7.73	72.47	-6.20	Peak
3	17160.000	50.40	68.20	-17.80	53.86	-3.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac20_TX_5720MHz
Test By :Jason Young

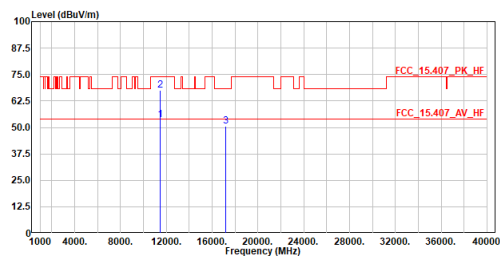


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	53.69	54.00	-0.31	59.89	-6.20	Average
2	11440.000	67.69	74.00	-6.31	73.89	-6.20	Peak
3	17160.000	50.51	68.20	-17.69	53.97	-3.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5745MHz
Test By :Cyril Chen

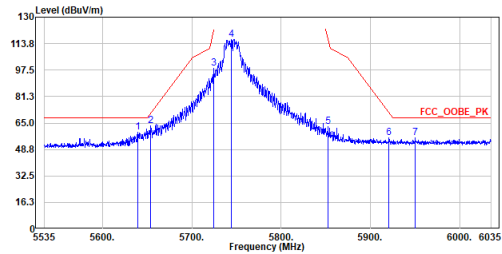


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5639.750	59.22	68.20	-8.98	37.20	22.02	Peak
2	5654.000	63.43	71.17	-7.74	41.37	22.06	Peak
3	5724.750	98.53	121.63	-23.10	76.27	22.26	Peak
4	5744.500	116.24	-----	-----	93.92	22.32	Peak
5	5852.750	62.97	115.93	-52.96	40.34	22.63	Peak
6	5921.000	55.75	71.17	-15.42	32.92	22.83	Peak
7	5950.000	55.97	68.20	-12.23	33.05	22.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5745MHz
Test By :Cyril Chen

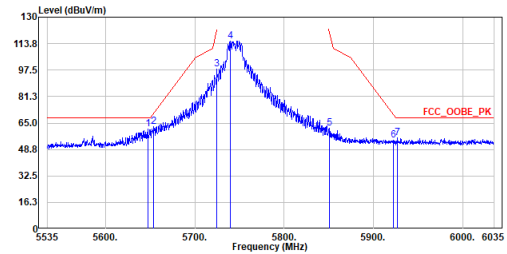


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.750	61.30	68.20	-6.90	39.26	22.04	Peak
2	5654.250	62.72	71.35	-8.63	40.66	22.06	Peak
3	5724.750	98.03	121.63	-23.60	75.77	22.26	Peak
4	5739.500	115.26	-----	-----	92.96	22.30	Peak
5	5851.000	61.66	119.92	-58.26	39.03	22.63	Peak
6	5922.000	54.62	70.43	-15.81	31.79	22.83	Peak
7	5927.250	55.69	68.20	-12.51	32.84	22.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac20_TX_5745MHz
Test By :Ling Chen

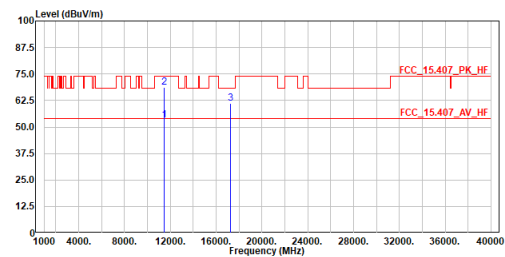


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	53.23	54.00	-0.77	59.32	-6.09	Average
2	11490.000	68.58	74.00	-5.42	74.67	-6.09	Peak
3	17235.000	61.23	68.20	-6.97	64.60	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac20_TX_5745MHz
Test By :Ling Chen

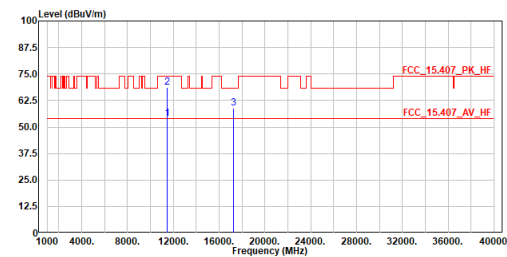


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	53.97	54.00	-0.03	60.06	-6.09	Average
2	11490.000	68.71	74.00	-5.29	74.80	-6.09	Peak
3	17235.000	58.77	68.20	-9.43	62.14	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5785MHz
Test By :Cyril Chen

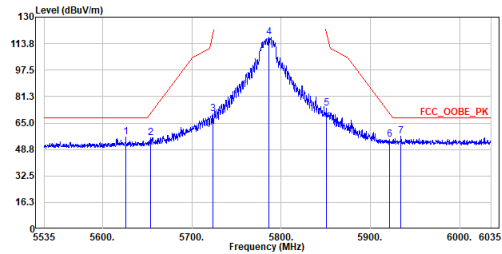


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5626.250	56.49	68.20	-11.71	34.51	21.98	Peak
2	5653.750	55.86	70.98	-15.12	33.80	22.06	Peak
3	5723.500	70.50	118.78	-48.28	48.24	22.26	Peak
4	5786.250	117.95	-----	-----	95.50	22.45	Peak
5	5850.750	73.95	120.49	-46.54	51.32	22.63	Peak
6	5921.250	54.96	70.98	-16.02	32.13	22.83	Peak
7	5934.000	57.09	68.20	-11.11	34.22	22.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5785MHz
Test By :Cyril Chen

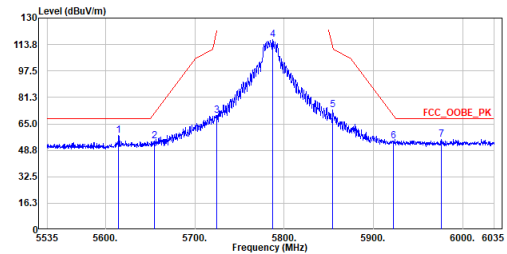


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5614.750	57.68	68.20	-10.52	35.73	21.95	Peak
2	5655.000	54.66	71.91	-17.25	32.60	22.06	Peak
3	5724.750	70.21	121.63	-51.42	47.95	22.26	Peak
4	5787.250	116.86	-----	-----	94.41	22.45	Peak
5	5854.750	73.66	111.37	-37.71	51.02	22.64	Peak
6	5922.000	54.53	70.43	-15.90	31.70	22.83	Peak
7	5976.250	55.52	68.20	-12.68	32.52	23.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac20_TX_5785MHz
Test By :Ling Chen

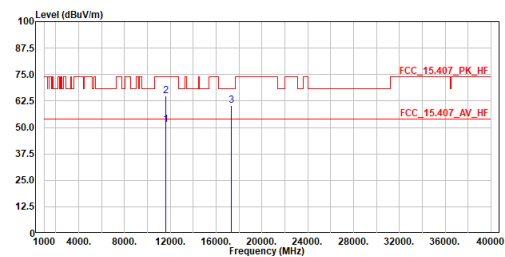


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	51.45	54.00	-2.55	57.49	-6.04	Average
2	11570.000	64.73	74.00	-9.27	70.77	-6.04	Peak
3	17355.000	60.52	68.20	-7.68	63.75	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac20_TX_5785MHz
Test By :Ling Chen

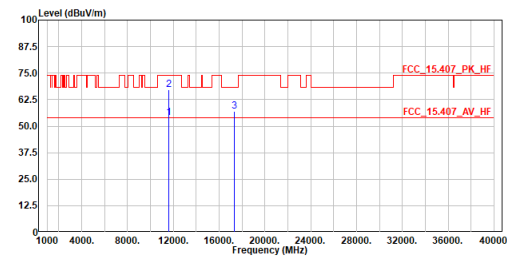


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	53.86	54.00	-0.14	59.90	-6.04	Average
2	11570.000	67.19	74.00	-6.81	73.23	-6.04	Peak
3	17355.000	56.99	68.20	-11.21	60.22	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5825MHz
Test By :Cyril Chen

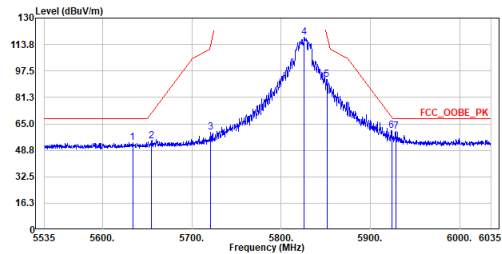


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5633.750	53.33	68.20	-14.87	31.34	21.99	Peak
2	5655.000	54.31	71.91	-17.60	32.25	22.06	Peak
3	5720.750	60.05	112.51	-52.46	37.79	22.26	Peak
4	5826.000	118.17	-----	-----	95.61	22.56	Peak
5	5851.250	92.22	119.35	-27.13	69.59	22.63	Peak
6	5923.750	61.04	69.13	-8.09	38.21	22.83	Peak
7	5928.250	60.24	68.20	-7.96	37.38	22.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac20_TX_5825MHz
Test By :Cyril Chen

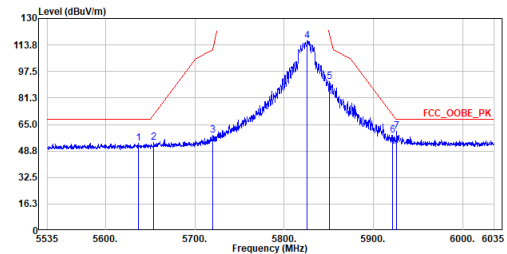


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5636.750	53.52	68.20	-14.68	31.51	22.01	Peak
2	5654.000	54.04	71.17	-17.13	31.98	22.06	Peak
3	5720.250	58.27	111.37	-53.10	36.01	22.26	Peak
4	5826.000	116.42	-----	-----	93.86	22.56	Peak
5	5850.750	91.12	120.49	-29.37	68.49	22.63	Peak
6	5921.250	58.49	70.98	-12.49	35.66	22.83	Peak
7	5926.000	60.59	68.20	-7.61	37.75	22.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac20_TX_5825MHz
Test By :Ling Chen

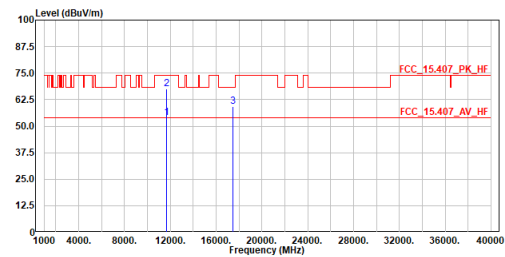


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	53.89	54.00	-0.11	59.88	-5.99	Average
2	11650.000	67.64	74.00	-6.36	73.63	-5.99	Peak
3	17475.000	59.13	68.20	-9.07	62.21	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac20_TX_5825MHz
Test By :Ling Chen

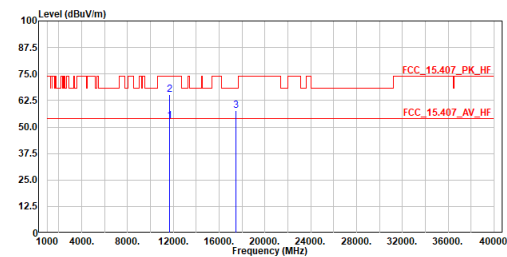


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	52.89	54.00	-1.11	58.88	-5.99	Average
2	11650.000	65.18	74.00	-8.82	71.17	-5.99	Peak
3	17475.000	57.68	68.20	-10.52	60.76	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5190MHz
Test By :Cyril Chen

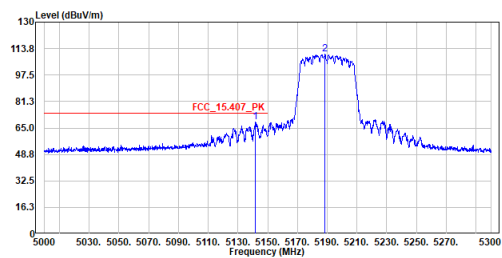


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.900	68.85	74.00	-5.15	47.43	21.42	Peak
2	5188.400	110.39	-----	-----	88.95	21.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5190MHz
Test By :Cyril Chen

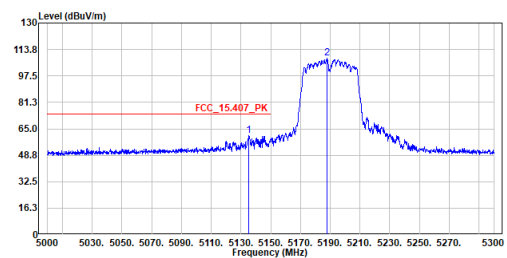


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5135.450	60.80	74.00	-13.20	39.39	21.41	Peak
2	5187.950	108.32	-----	-----	86.88	21.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5190MHz
Test By :Cyril Chen

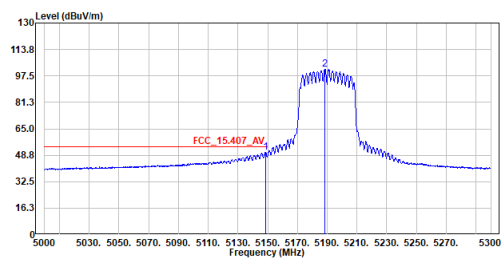


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.500	50.58	54.00	-3.42	29.16	21.42	Average
2	5188.550	101.59	-----	-----	80.15	21.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5190MHz
Test By :Cyril Chen

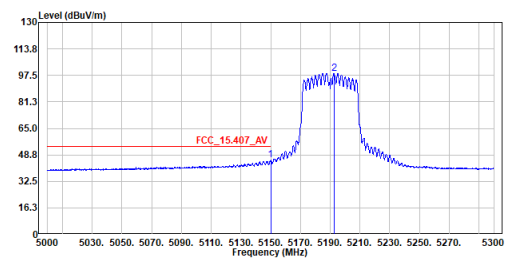


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	45.48	54.00	-8.52	24.06	21.42	Average
2	5192.600	98.69	-----	-----	77.25	21.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5190MHz
Test By :Cyril Chen

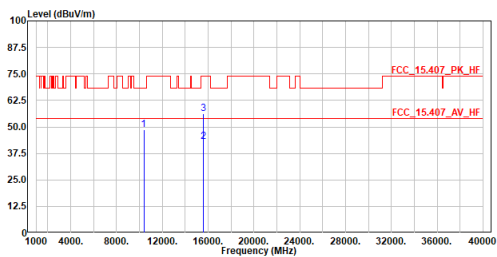


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10380.000	48.73	68.20	-19.47	56.68	-7.95	Peak
2	15570.000	42.84	54.00	-11.16	46.04	-3.20	Average
3	15570.000	56.18	74.00	-17.82	59.38	-3.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5190MHz
Test By :Cyril Chen

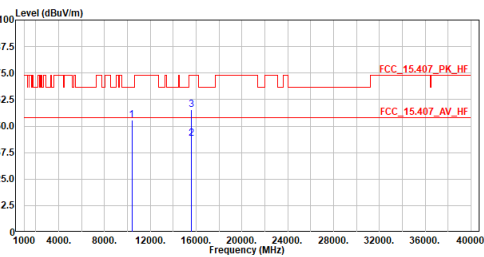


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10380.000	52.66	68.20	-15.54	60.61	-7.95	Peak
2	15570.000	44.05	54.00	-9.95	47.25	-3.20	Average
3	15570.000	57.64	74.00	-16.36	60.84	-3.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5230MHz
Test By :Cyril Chen

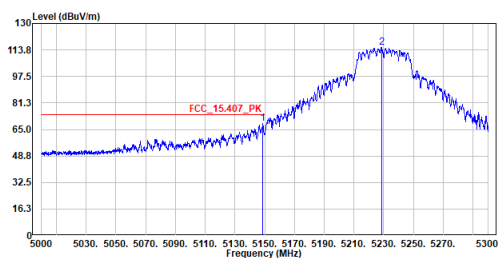


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.800	68.47	74.00	-5.53	47.05	21.42	Peak
2	5228.600	115.40	-----	-----	93.94	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5230MHz
Test By :Cyril Chen

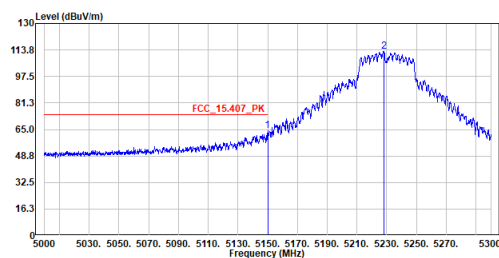


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5150.000	64.36	74.00	-9.64	42.94	21.42	Peak
2	5228.150	112.96	-----	-----	91.50	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5230MHz
Test By :Cyril Chen

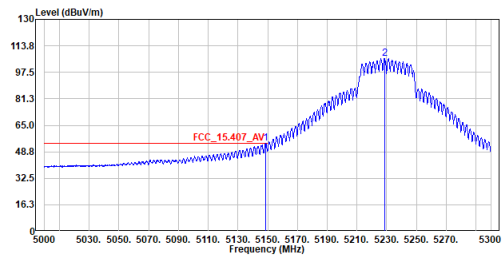


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.650	53.94	54.00	-0.06	32.52	21.42	Average
2	5228.450	106.11	-----	-----	84.65	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5230MHz
Test By :Cyril Chen

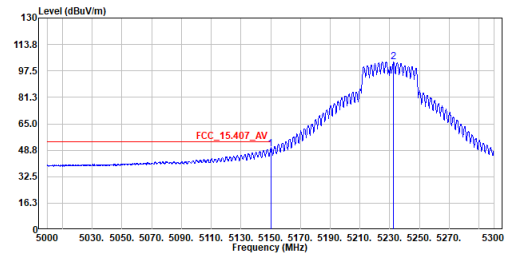


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	49.64	54.00	-4.36	28.22	21.42	Average
2	5232.500	102.90	-----	-----	81.43	21.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5230MHz
Test By :Cyril Chen

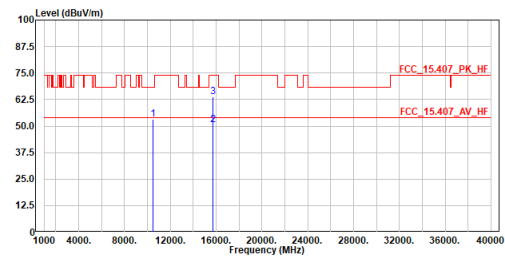


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10460.000	53.24	68.20	-14.96	61.05	-7.81	Peak
2	15690.000	50.45	54.00	-3.55	53.58	-3.13	Average
3	15690.000	63.71	74.00	-10.29	66.84	-3.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5230MHz
Test By :Cyril Chen

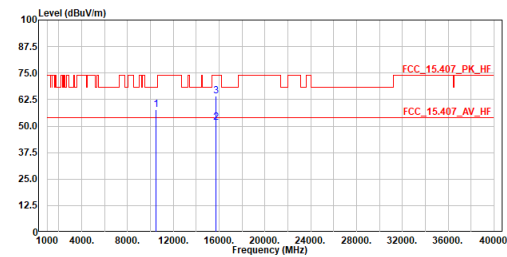


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10460.000	57.57	68.20	-10.63	65.38	-7.81	Peak
2	15690.000	51.51	54.00	-2.49	54.64	-3.13	Average
3	15690.000	64.23	74.00	-9.77	67.36	-3.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5270MHz
Test By :Cyril Chen

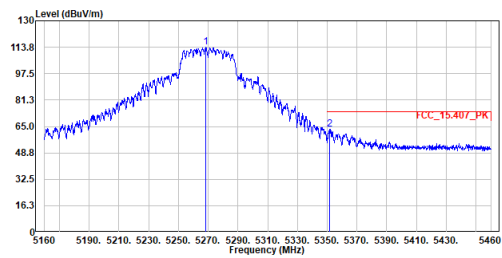


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5268.600	113.60	-----	-----	92.11	21.49	Peak
2	5351.700	63.48	74.00	-10.52	41.95	21.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5270MHz
Test By :Cyril Chen

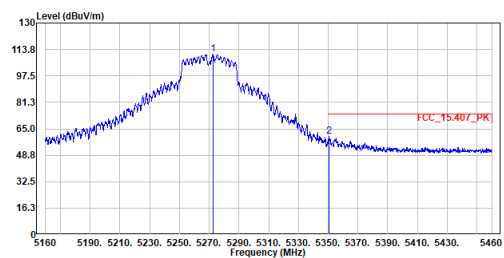


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5272.650	110.89	-----	-----	89.40	21.49	Peak
2	5350.650	60.20	74.00	-13.80	38.67	21.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5270MHz
Test By :Cyril Chen

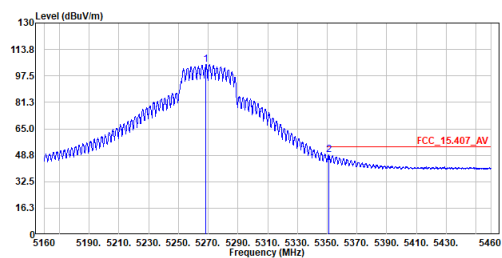


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5268.450	104.65	-----	-----	83.17	21.48	Average
2	5351.100	48.97	54.00	-5.03	27.44	21.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5270MHz
Test By :Cyril Chen

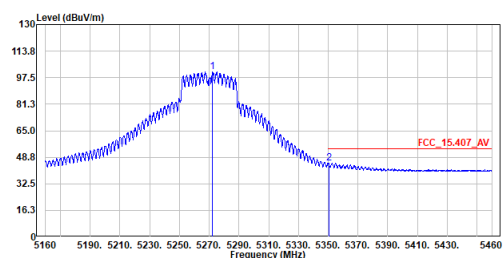


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5272.350	101.15	-----	-----	79.66	21.49	Average
2	5350.350	45.07	54.00	-8.93	23.54	21.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5270MHz
Test By :Cyril Chen

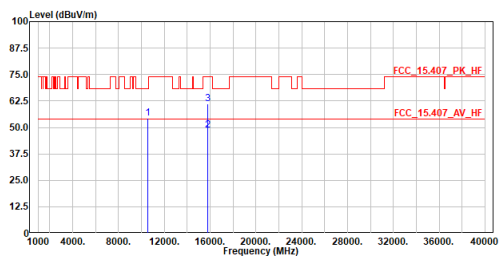


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10540.000	54.17	68.20	-14.03	61.85	-7.68	Peak
2	15810.000	48.77	54.00	-5.23	51.85	-3.08	Average
3	15810.000	61.30	74.00	-12.70	64.38	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5270MHz
Test By :Cyril Chen

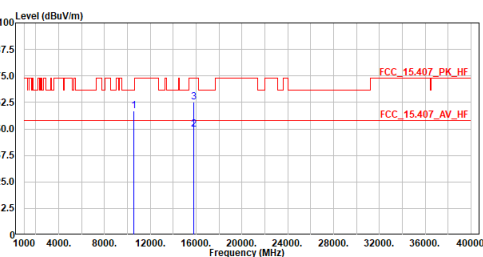


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10540.000	58.62	68.20	-9.58	66.30	-7.68	Peak
2	15810.000	49.64	54.00	-4.36	52.72	-3.08	Average
3	15810.000	62.60	74.00	-11.40	65.68	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5310MHz
Test By :Cyril Chen

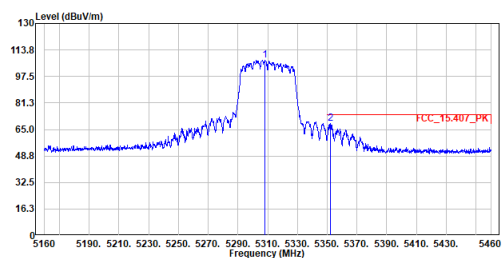


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5308.200	107.58	-----	-----	86.07	21.51	Peak
2	5352.150	68.86	74.00	-5.14	47.33	21.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5310MHz
Test By :Cyril Chen

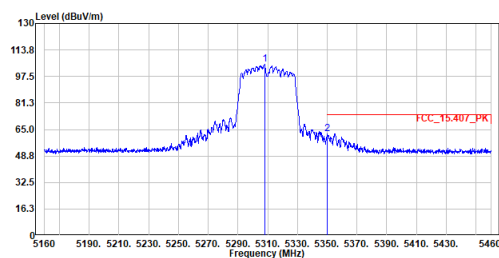


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5308.050	105.08	-----	-----	83.57	21.51	Peak
2	5350.200	62.48	74.00	-11.52	40.95	21.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5310MHz
Test By :Cyril Chen

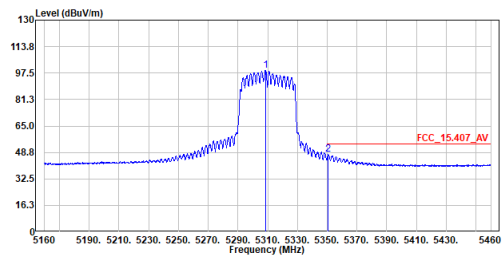


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5308.500	99.03	-----	-----	77.52	21.51	Average
2	5350.800	47.69	54.00	-6.31	26.16	21.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5310MHz
Test By :Cyril Chen

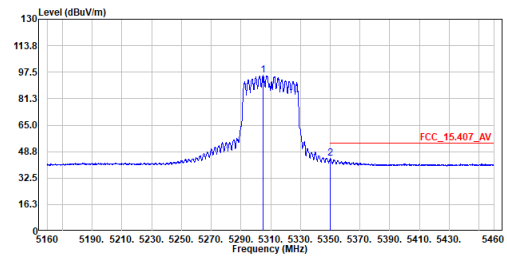


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5305.050	95.55	-----	-----	74.05	21.50	Average
2	5350.200	44.45	54.00	-9.55	22.92	21.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5310MHz
Test By :Cyril Chen

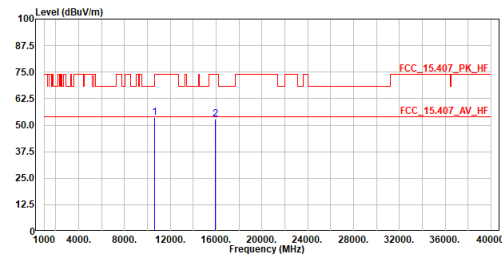


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10620.000	53.69	74.00	-20.31	61.29	-7.60	Peak
2	15930.000	52.98	74.00	-21.02	56.00	-3.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5310MHz
Test By :Cyril Chen

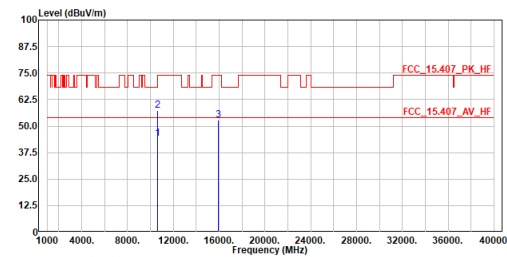


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10620.000	44.26	54.00	-9.74	51.86	-7.60	Average
2	10620.000	57.48	74.00	-16.52	65.08	-7.60	Peak
3	15930.000	52.97	74.00	-21.03	55.99	-3.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5510MHz
Test By :Cyril Chen

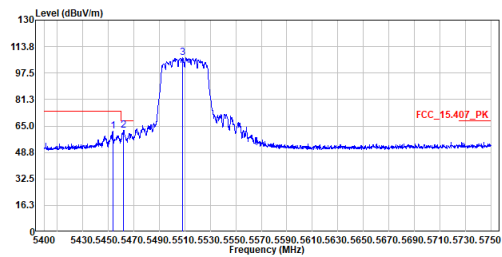


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5453.550	61.74	74.00	-12.26	48.16	21.58	Peak
2	5462.125	62.34	68.20	-5.86	48.75	21.59	Peak
3	5508.500	107.02	-----	-----	85.38	21.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5510MHz
Test By :Cyril Chen

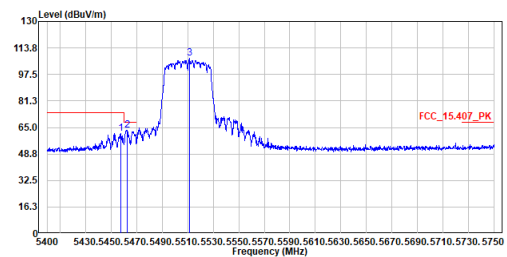


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.575	61.35	74.00	-12.65	39.76	21.59	Peak
2	5462.825	63.37	68.20	-4.83	41.78	21.59	Peak
3	5511.125	107.46	-----	-----	85.81	21.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5510MHz
Test By :Cyril Chen

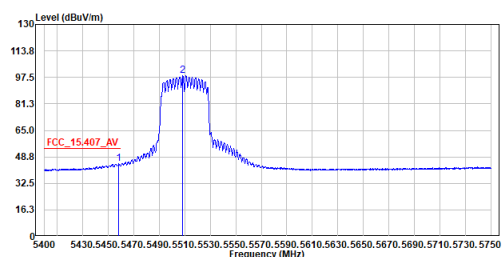


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.100	44.58	54.00	-9.42	22.99	21.59	Average
2	5508.325	98.59	-----	-----	76.96	21.63	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5510MHz
Test By :Cyril Chen

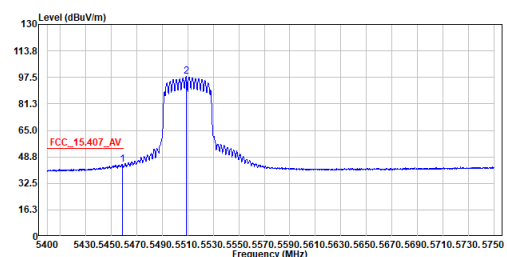


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.625	44.23	54.00	-9.77	22.64	21.59	Average
2	5508.675	97.89	-----	-----	76.25	21.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5510MHz
Test By :Ling Chen

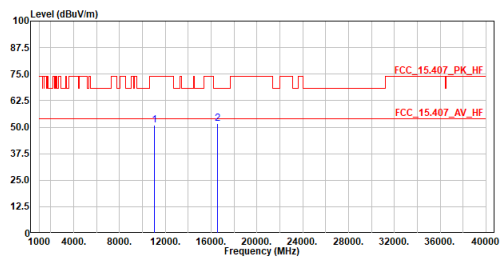


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11020.000	50.87	74.00	-23.13	57.99	-7.12	Peak
2	16530.000	51.82	68.20	-16.38	55.27	-3.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5510MHz
Test By :Ling Chen

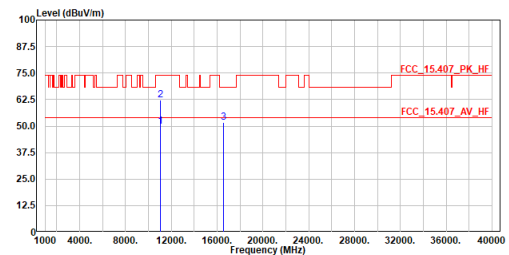


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11020.000	49.86	54.00	-4.14	56.98	-7.12	Average
2	11020.000	62.14	74.00	-11.86	69.26	-7.12	Peak
3	16530.000	51.83	68.20	-16.37	55.28	-3.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5550MHz
Test By :Cyril Chen

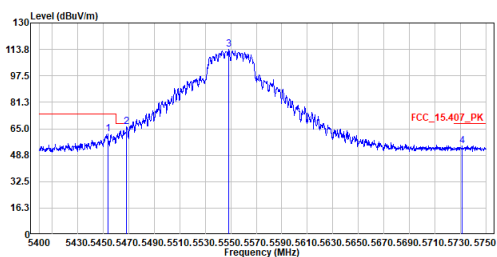


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5453.550	61.78	74.00	-12.22	40.20	21.58	Peak
2	5468.425	66.39	68.20	-1.81	44.80	21.59	Peak
3	5548.400	114.00	-----	-----	92.25	21.75	Peak
4	5731.450	54.61	68.20	-13.59	32.33	22.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5550MHz
Test By :Cyril Chen

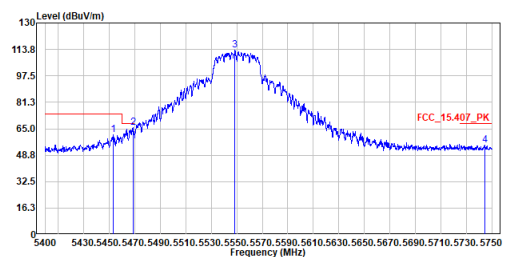


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5453.200	61.45	74.00	-12.55	39.87	21.58	Peak
2	5468.775	65.56	68.20	-2.64	43.97	21.59	Peak
3	5548.575	113.13	-----	-----	91.38	21.75	Peak
4	5744.575	54.76	68.20	-13.44	32.44	22.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5550MHz
Test By :Cyril Chen

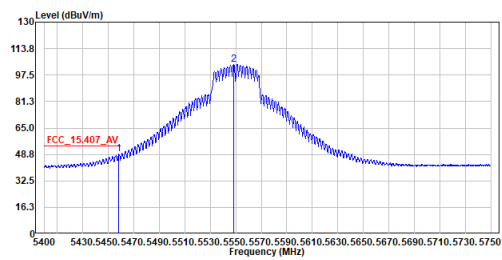


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.450	49.16	54.00	-4.84	27.57	21.59	Average
2	5548.400	104.18	-----	-----	82.43	21.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 2
Mode :ac40_TX_5550MHz
Test By :Cyril Chen

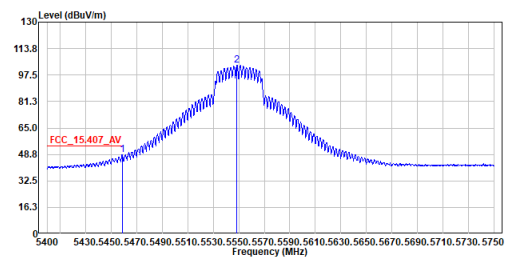


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.800	48.35	54.00	-5.65	26.76	21.59	Average
2	5548.575	103.45	-----	-----	81.70	21.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5550MHz
Test By :Ling Chen

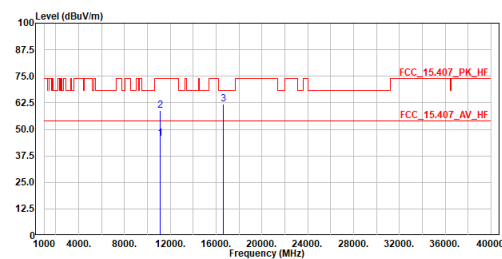


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11100.000	45.69	54.00	-8.31	52.63	-6.94	Average
2	11100.000	58.95	74.00	-15.05	65.89	-6.94	Peak
3	16650.000	61.74	68.20	-6.46	65.24	-3.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5550MHz
Test By :Ling Chen

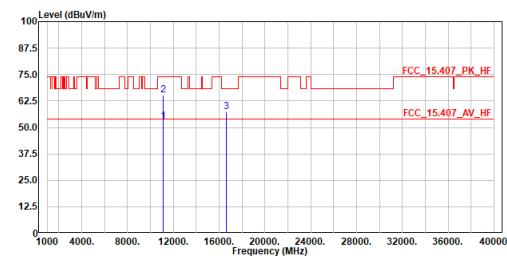


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11100.000	52.71	54.00	-1.29	59.65	-6.94	Average
2	11100.000	65.34	74.00	-8.66	72.28	-6.94	Peak
3	16650.000	57.19	68.20	-11.01	60.69	-3.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5670MHz
Test By :Cyril Chen

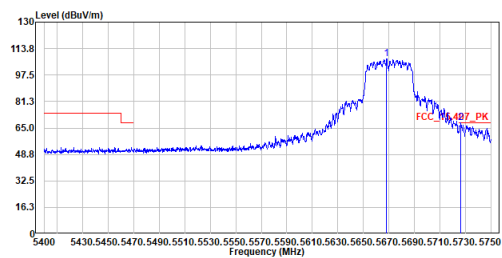


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5668.275	107.50	-----	-----	85.41	22.09	Peak
2	5726.550	68.02	68.20	-0.18	45.75	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5670MHz
Test By :Cyril Chen

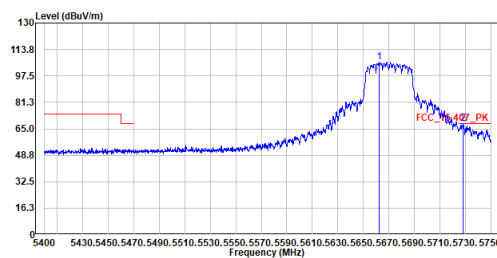


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5662.325	106.02	-----	-----	83.94	22.08	Peak
2	5728.125	68.11	68.20	-0.09	45.84	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5670MHz
Test By :Ling Chen

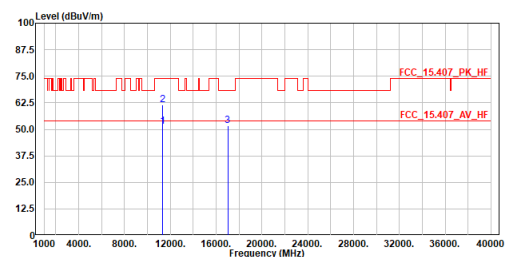


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11340.000	51.23	54.00	-2.77	57.65	-6.42	Average
2	11340.000	61.41	74.00	-12.59	67.83	-6.42	Peak
3	17010.000	51.55	68.20	-16.65	55.20	-3.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5670MHz
Test By :Ling Chen

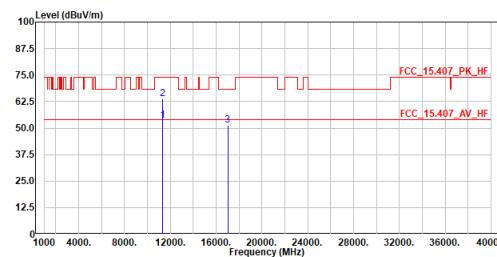


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11340.000	53.71	54.00	-0.29	60.13	-6.42	Average
2	11340.000	63.82	74.00	-10.18	70.24	-6.42	Peak
3	17010.000	51.17	68.20	-17.03	54.82	-3.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5710MHz
Test By :Jason Young

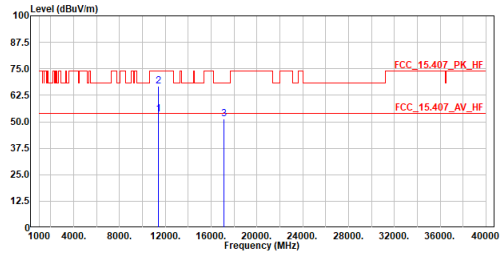


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11420.000	53.65	54.00	-0.35	59.89	-6.24	Average
2	11420.000	66.64	74.00	-7.36	72.88	-6.24	Peak
3	17130.000	51.48	68.20	-16.72	54.98	-3.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5710MHz
Test By :Jason Young

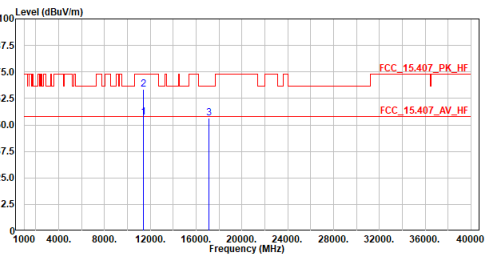


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11420.000	53.46	54.00	-0.54	59.70	-6.24	Average
2	11420.000	66.65	74.00	-7.35	72.89	-6.24	Peak
3	17130.000	53.08	68.20	-15.12	56.58	-3.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5755MHz
Test By :Cyril Chen

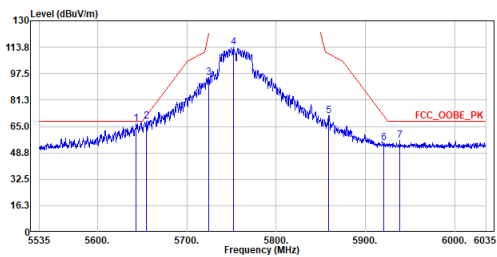


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5643.250	66.67	68.20	-1.53	44.64	22.03	Peak
2	5654.750	68.14	71.72	-3.58	46.08	22.06	Peak
3	5724.250	95.19	120.49	-25.30	72.93	22.26	Peak
4	5752.250	113.81	-----	-----	91.47	22.34	Peak
5	5859.250	71.81	109.61	-37.80	49.16	22.65	Peak
6	5920.750	54.92	71.35	-16.43	32.09	22.83	Peak
7	5938.500	56.27	68.20	-11.93	33.39	22.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5755MHz
Test By :Cyril Chen

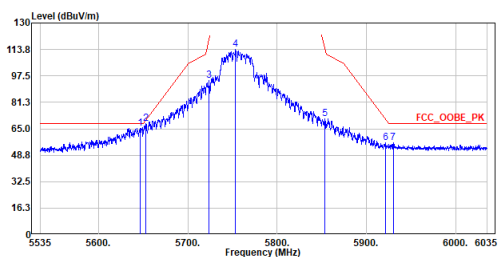


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.000	65.19	68.20	-3.01	43.16	22.03	Peak
2	5653.000	68.07	70.43	-2.36	46.02	22.05	Peak
3	5723.500	94.57	118.78	-24.21	72.31	22.26	Peak
4	5753.500	113.80	-----	-----	91.45	22.35	Peak
5	5853.750	71.21	113.65	-42.44	48.57	22.64	Peak
6	5921.500	56.65	70.80	-14.15	33.82	22.83	Peak
7	5930.000	56.19	68.20	-12.01	33.33	22.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5755MHz
Test By :Ling Chen

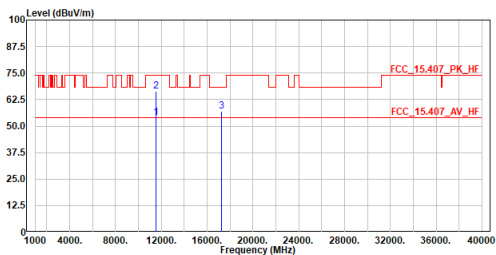


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	53.90	54.00	-0.10	59.96	-6.06	Average
2	11510.000	66.33	74.00	-7.67	72.39	-6.06	Peak
3	17265.000	57.16	68.20	-11.04	60.49	-3.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5755MHz
Test By :Ling Chen

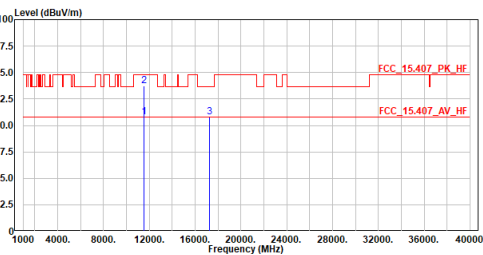


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	53.88	54.00	-0.12	59.94	-6.06	Average
2	11510.000	68.84	74.00	-5.16	74.90	-6.06	Peak
3	17265.000	54.14	68.20	-14.06	57.47	-3.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5795MHz
Test By :Cyril Chen

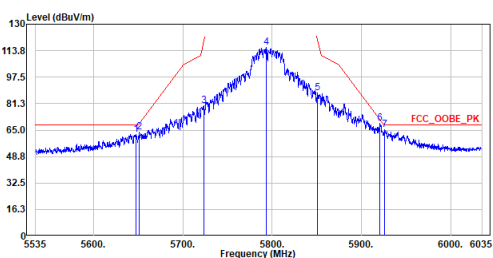


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5648.000	62.25	68.20	-5.95	40.21	22.04	Peak
2	5651.500	63.93	69.32	-5.39	41.89	22.04	Peak
3	5723.500	79.79	118.78	-38.99	57.53	22.26	Peak
4	5793.500	115.98	-----	-----	93.52	22.46	Peak
5	5850.750	87.92	120.49	-32.57	65.29	22.63	Peak
6	5920.750	68.96	71.35	-2.39	46.13	22.83	Peak
7	5926.250	65.15	68.20	-3.05	42.31	22.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_5795MHz
Test By :Cyril Chen

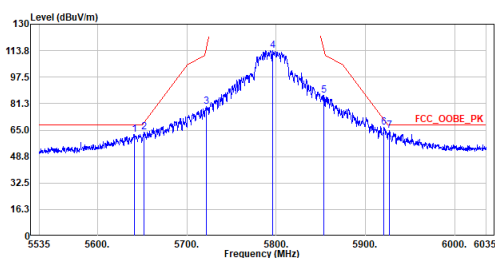


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5641.250	62.40	68.20	-5.80	40.38	22.02	Peak
2	5652.500	63.64	70.06	-6.42	41.60	22.04	Peak
3	5721.500	79.57	114.22	-34.65	57.31	22.26	Peak
4	5796.500	113.78	-----	-----	91.32	22.46	Peak
5	5853.250	86.41	114.79	-28.38	63.77	22.64	Peak
6	5920.750	66.79	71.35	-4.56	43.96	22.83	Peak
7	5927.000	64.58	68.20	-3.62	41.74	22.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5795MHz
Test By :Ling Chen

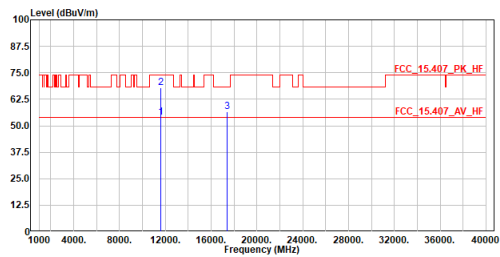


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	53.79	54.00	-0.21	59.82	-6.03	Average
2	11590.000	67.79	74.00	-6.21	73.82	-6.03	Peak
3	17385.000	56.70	68.20	-11.50	59.89	-3.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5795MHz
Test By :Ling Chen

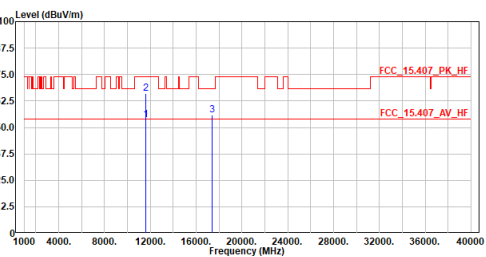


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	53.60	54.00	-0.40	59.63	-6.03	Average
2	11590.000	66.16	74.00	-7.84	72.19	-6.03	Peak
3	17385.000	56.03	68.20	-12.17	59.22	-3.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5210MHz
Test By :Cyril Chen

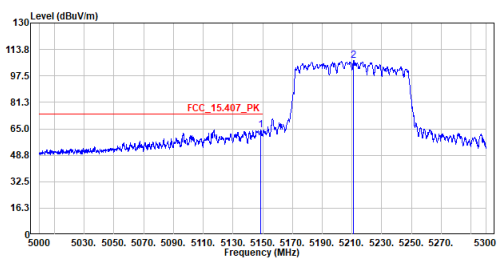


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.500	64.31	74.00	-9.69	42.89	21.42	Peak
2	5211.200	106.90	-----	-----	85.45	21.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5210MHz
Test By :Cyril Chen

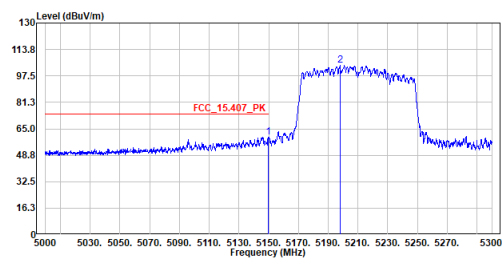


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.850	59.78	74.00	-14.22	38.36	21.42	Peak
2	5198.150	104.16	-----	-----	82.71	21.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5210MHz
Test By :Cyril Chen

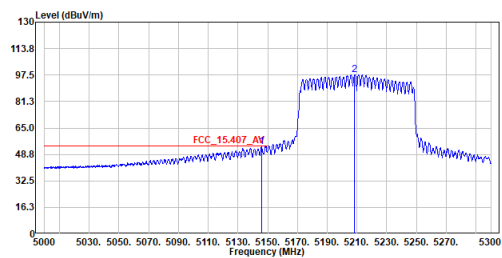


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5145.800	53.54	54.00	-0.46	32.12	21.42	Average
2	5208.500	97.75	-----	-----	76.30	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5210MHz
Test By :Cyril Chen

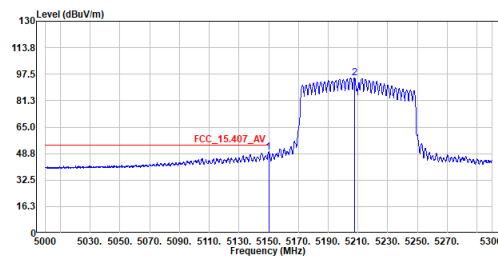


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5150.000	49.54	54.00	-4.46	28.12	21.42	Average
2	5207.600	95.38	-----	-----	73.93	21.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5210MHz
Test By :Cyril Chen

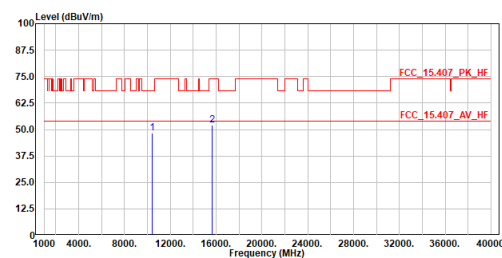


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10420.000	48.48	68.20	-19.72	56.36	-7.88	Peak
2	15630.000	52.16	74.00	-21.84	55.33	-3.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5210MHz
Test By :Cyril Chen

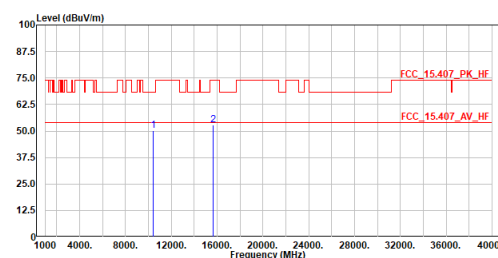


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10420.000	50.17	68.20	-18.03	58.05	-7.88	Peak
2	15630.000	52.76	74.00	-21.24	55.93	-3.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5290MHz
Test By :Cyril Chen

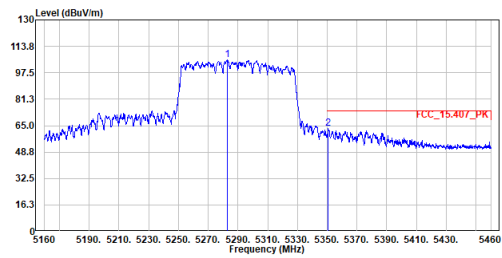


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5283.000	105.25	-----	-----	83.76	21.49	Peak
2	5350.800	63.17	74.00	-10.83	41.64	21.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5290MHz
Test By :Cyril Chen

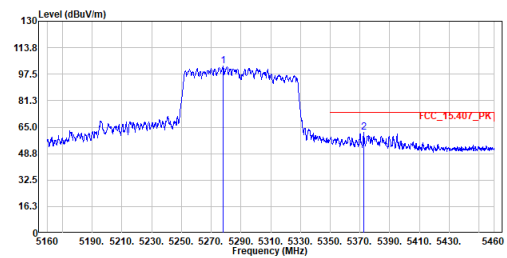


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5278.200	102.69	-----	-----	81.20	21.49	Peak
2	5372.550	61.81	74.00	-12.19	40.27	21.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5290MHz
Test By :Cyril Chen

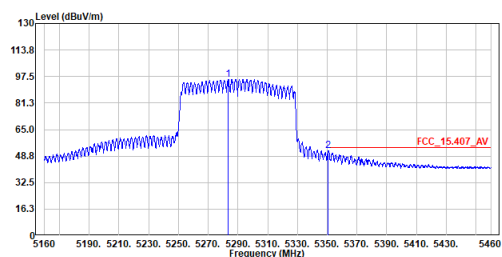


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5283.450	95.90	-----	-----	74.41	21.49	Average
2	5350.650	51.87	54.00	-2.13	30.34	21.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5290MHz
Test By :Cyril Chen

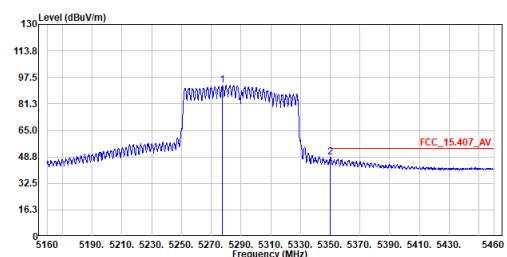


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5277.600	92.65	-----	-----	71.16	21.49	Average
2	5350.200	48.54	54.00	-5.46	27.01	21.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5290MHz
Test By :Cyril Chen

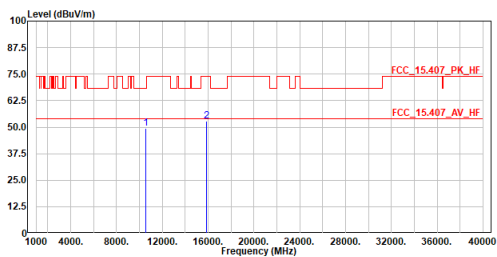


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10580.000	49.48	68.20	-18.72	57.12	-7.64	Peak
2	15870.000	52.71	74.00	-21.29	55.76	-3.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5290MHz
Test By :Cyril Chen

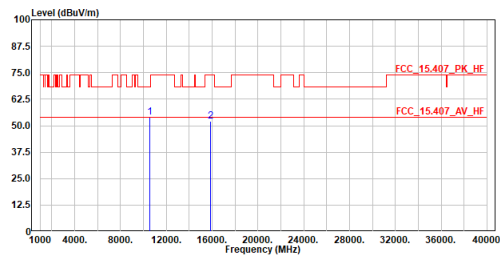


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10580.000	54.13	68.20	-14.07	61.77	-7.64	Peak
2	15870.000	52.02	74.00	-21.98	55.07	-3.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5530MHz
Test By :Cyril Chen

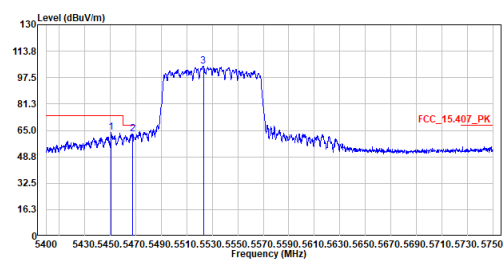


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.575	63.54	74.00	-10.46	41.96	21.58	Peak
2	5467.375	62.75	68.20	-5.45	41.16	21.59	Peak
3	5523.025	104.48	-----	-----	82.81	21.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5530MHz
Test By :Cyril Chen

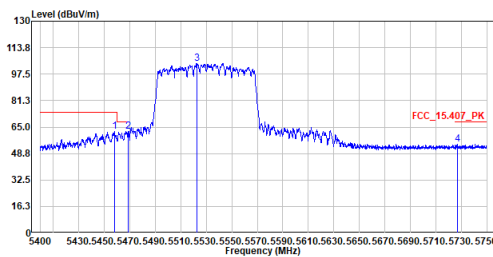


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.100	62.22	74.00	-11.78	40.63	21.59	Peak
2	5468.950	62.48	68.20	-5.72	40.89	21.59	Peak
3	5522.850	104.05	-----	-----	82.38	21.67	Peak
4	5726.725	54.45	68.20	-13.75	32.18	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5530MHz
Test By :Cyril Chen

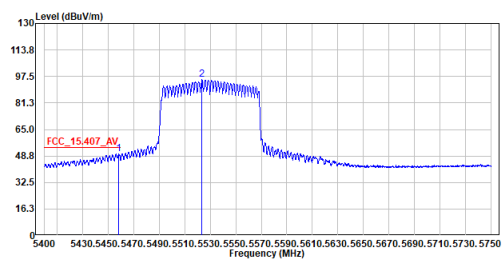


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.450	50.17	54.00	-3.83	28.58	21.59	Average
2	5523.550	95.55	-----	-----	73.88	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5530MHz
Test By :Cyril Chen

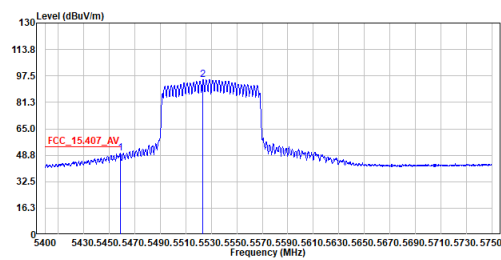


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.625	49.86	54.00	-4.14	28.27	21.59	Average
2	5523.550	95.24	-----	-----	73.57	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5530MHz
Test By :Ling Chen

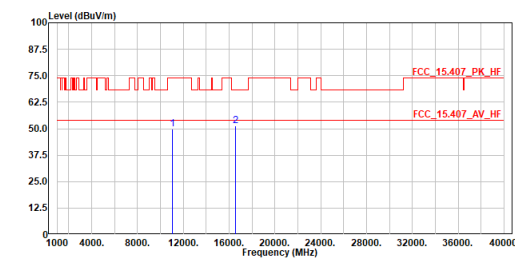


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11060.000	49.72	74.00	-24.28	56.75	-7.03	Peak
2	16590.000	51.37	68.20	-16.83	54.84	-3.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5530MHz
Test By :Ling Chen

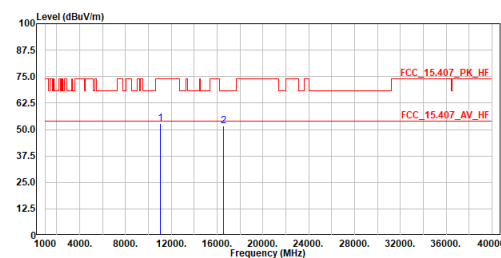


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11060.000	52.96	74.00	-21.04	59.99	-7.03	Peak
2	16590.000	51.59	68.20	-16.61	55.06	-3.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5610MHz
Test By :Cyril Chen

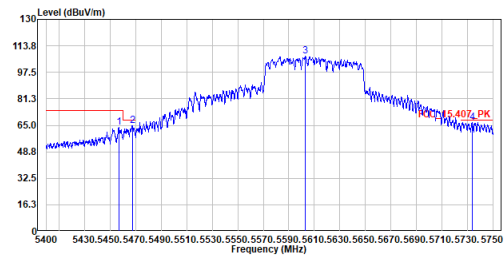


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.700	63.78	74.00	-10.22	42.19	21.59	Peak
2	5467.375	64.90	68.20	-3.30	43.31	21.59	Peak
3	5603.175	107.23	-----	-----	85.32	21.91	Peak
4	5733.550	66.66	68.20	-1.54	44.38	22.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5610MHz
Test By :Cyril Chen

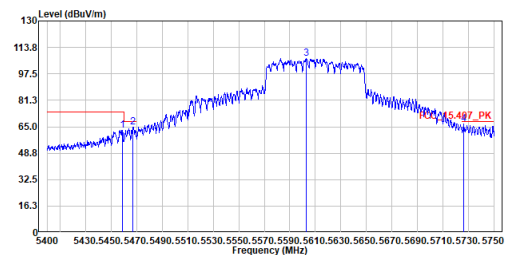


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.800	63.02	74.00	-10.98	41.43	21.59	Peak
2	5467.200	64.62	68.20	-3.58	43.03	21.59	Peak
3	5603.175	106.92	-----	-----	85.01	21.91	Peak
4	5726.375	66.56	68.20	-1.64	44.29	22.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5610MHz
Test By :Cyril Chen

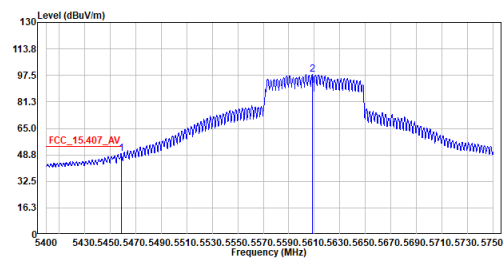


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.625	49.67	54.00	-4.33	28.08	21.59	Average
2	5608.425	98.12	-----	-----	76.19	21.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 5
Mode :ac80_TX_5610MHz
Test By :Cyril Chen

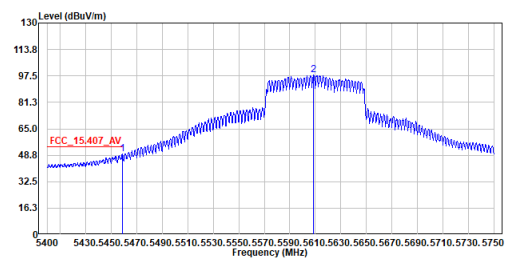


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.625	49.35	54.00	-4.65	27.76	21.59	Average
2	5608.775	97.96	-----	-----	76.03	21.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5610MHz
Test By :Ling Chen

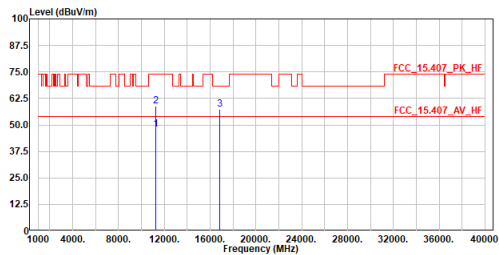


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11220.000	47.89	54.00	-6.11	54.57	-6.68	Average
2	11220.000	58.75	74.00	-15.25	65.43	-6.68	Peak
3	16830.000	57.32	68.20	-10.88	60.89	-3.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5610MHz
Test By :Ling Chen

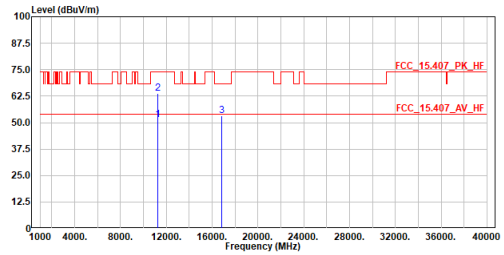


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11220.000	51.21	54.00	-2.79	57.89	-6.68	Average
2	11220.000	63.88	74.00	-10.12	70.56	-6.68	Peak
3	16830.000	53.36	68.20	-14.84	56.93	-3.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5690MHz
Test By :Jason Young

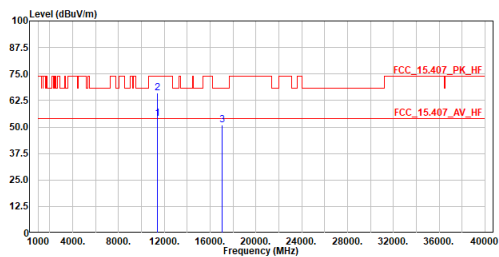


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11380.000	53.83	54.00	-0.17	60.15	-6.32	Average
2	11380.000	65.99	74.00	-8.01	72.31	-6.32	Peak
3	17070.000	51.01	68.20	-17.19	54.57	-3.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5690MHz
Test By :Jason Young

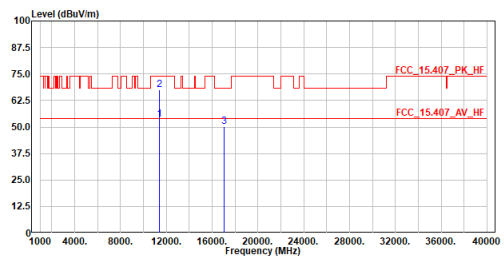


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11380.000	53.66	54.00	-0.34	59.98	-6.32	Average
2	11380.000	67.66	74.00	-6.34	73.98	-6.32	Peak
3	17070.000	50.11	68.20	-18.09	53.67	-3.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5775MHz
Test By :Cyril Chen

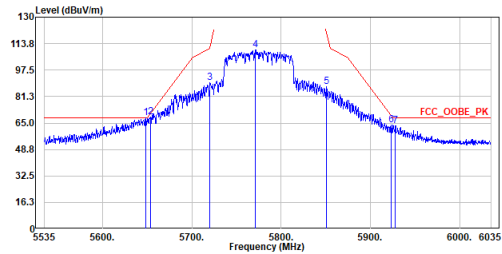


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5648.500	68.14	68.20	-0.06	46.10	22.04	Peak
2	5653.500	68.52	70.80	-2.28	46.46	22.06	Peak
3	5720.500	89.54	111.94	-22.40	67.28	22.26	Peak
4	5771.500	109.87	-----	-----	87.47	22.40	Peak
5	5850.750	87.37	120.49	-33.12	64.74	22.63	Peak
6	5923.250	63.66	69.50	-5.84	48.83	22.83	Peak
7	5927.750	63.38	68.20	-4.82	40.52	22.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac80_TX_5775MHz
Test By :Cyril Chen

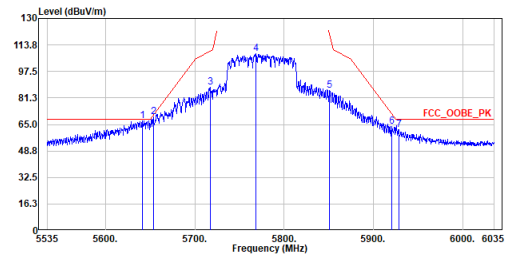


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5641.000	67.36	68.20	-0.84	45.34	22.02	Peak
2	5653.750	69.55	70.98	-1.43	47.49	22.06	Peak
3	5717.500	87.86	110.10	-22.24	65.63	22.23	Peak
4	5768.250	108.41	-----	-----	86.02	22.39	Peak
5	5851.000	85.86	119.92	-34.06	63.23	22.63	Peak
6	5921.000	63.63	71.17	-7.54	48.80	22.83	Peak
7	5928.500	62.03	68.20	-6.17	39.17	22.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5775MHz
Test By :Ling Chen

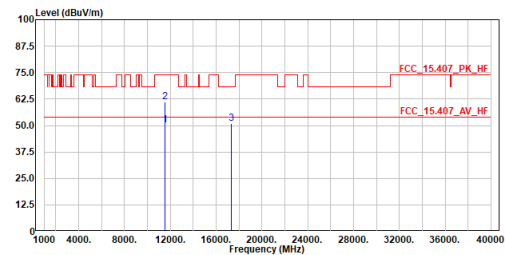


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	50.12	54.00	-3.88	56.16	-6.04	Average
2	11550.000	61.09	74.00	-12.91	67.13	-6.04	Peak
3	17325.000	50.99	68.20	-17.21	54.25	-3.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5775MHz
Test By :Ling Chen

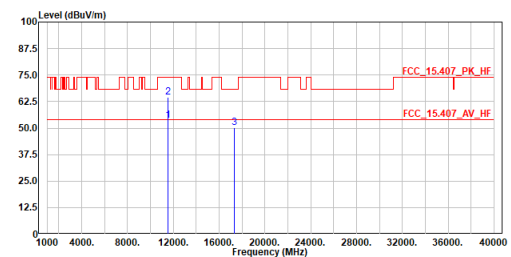

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	53.52	54.00	-0.48	59.56	-6.04	Average
2	11550.000	64.70	74.00	-9.30	70.74	-6.04	Peak
3	17325.000	50.23	68.20	-17.97	53.49	-3.26	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Appendix F. Test Result of Radiated Emissions Co-location

Bluetooth + WiFi 2.4GHz

30 MHz ~ 1 GHz:


Site :HC-CB04
Condition :3m Horizontal
Mode :Colocation_WIFI 2.4G+BLE_LF
Test By :Ling Chen

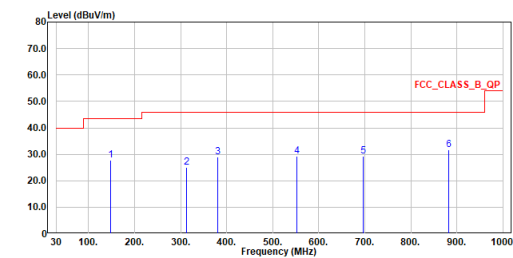

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	148.049	27.91	43.50	-15.59	31.11	-3.20	QP
2	311.979	25.05	46.00	-20.95	27.40	-2.35	QP
3	381.237	28.92	46.00	-17.08	29.47	-0.55	QP
4	552.006	29.39	46.00	-16.61	26.34	3.05	QP
5	696.002	29.19	46.00	-16.81	23.11	6.08	QP
6	883.018	31.75	46.00	-14.25	23.25	8.50	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :Colocation_WIFI 2.4G+BLE_LF
Test By :Ling Chen

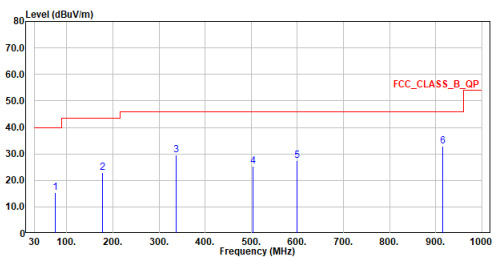


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	75.105	15.25	40.00	-24.75	21.34	-6.09	QP
2	177.537	22.79	43.50	-20.71	27.27	-4.48	QP
3	336.811	29.56	46.00	-16.44	31.21	-1.65	QP
4	503.991	25.26	46.00	-20.74	23.03	2.23	QP
5	600.021	27.59	46.00	-18.41	23.00	4.59	QP
6	914.980	32.96	46.00	-13.04	23.90	9.06	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz:


Site :HC-CB04
Condition :3m Horizontal
Mode :Colocation_WIFI 2.4G+BLE
Test By :Ling Chen

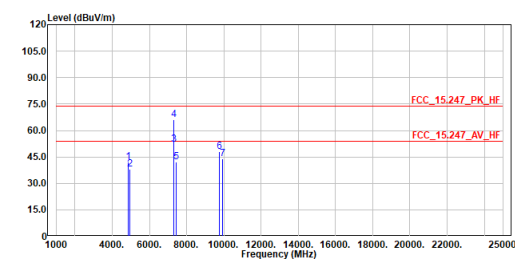

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	42.09	74.00	-31.91	59.71	-17.62	Peak
2	4960.150	37.91	74.00	-36.09	55.31	-17.40	Peak
3	7311.000	51.86	54.00	-2.14	64.52	-12.66	Average
4	7311.000	66.07	74.00	-7.93	78.73	-12.66	Peak
5	7439.600	42.02	74.00	-31.98	54.46	-12.44	Peak
6	9748.000	47.88	74.00	-26.12	56.86	-8.98	Peak
7	9919.900	43.97	74.00	-30.03	52.74	-8.77	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :Colocation_WIFI 2.4G+BLE
Test By :Ling Chen

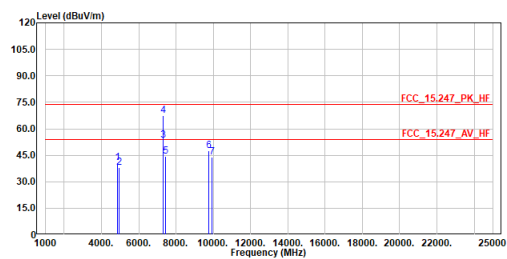


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	40.73	74.00	-33.27	58.35	-17.62	Peak
2	4960.150	38.00	74.00	-36.00	55.40	-17.40	Peak
3	7311.000	53.48	54.00	-0.52	66.14	-12.66	Average
4	7311.000	67.62	74.00	-6.38	80.28	-12.66	Peak
5	7439.600	44.42	74.00	-29.58	56.86	-12.44	Peak
6	9748.000	47.54	74.00	-26.46	56.52	-8.98	Peak
7	9919.900	43.77	74.00	-30.23	52.54	-8.77	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Bluetooth + WiFi 5GHz**30 MHz ~ 1 GHz:**


Site :HC-CB04
Condition :3m Horizontal
Mode :Colocation_WIFI 5G+BLE_LF
Test By :Ling Chen

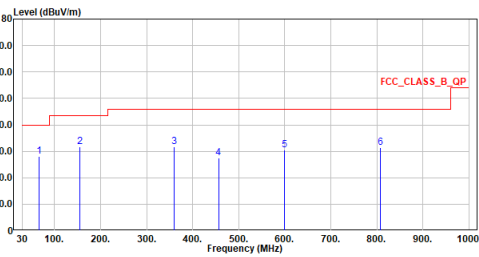

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	66.230	28.07	40.00	-11.93	32.43	-4.36	QP
2	154.888	31.59	43.50	-11.91	34.49	-2.90	QP
3	359.994	31.72	46.00	-14.28	33.19	-1.47	QP
4	455.976	27.38	46.00	-18.62	25.86	1.52	QP
5	600.021	30.39	46.00	-15.61	25.80	4.59	QP
6	808.134	31.38	46.00	-14.62	23.52	7.86	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :Colocation_WIFI 5G+BLE_LF
Test By :Ling Chen

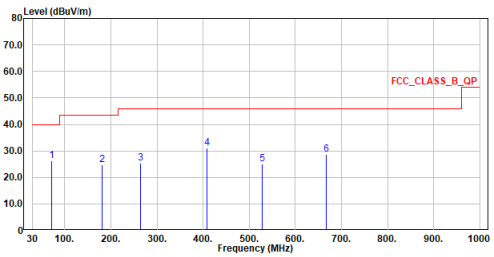


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	71.565	26.21	40.00	-13.79	31.35	-5.14	QP
2	180.981	24.80	43.50	-18.70	29.75	-4.95	QP
3	264.013	25.36	46.00	-20.64	29.36	-4.00	QP
4	408.009	30.96	46.00	-15.04	30.98	-0.02	QP
5	527.610	24.99	46.00	-21.01	22.23	2.76	QP
6	666.514	28.70	46.00	-17.30	23.10	5.60	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz:


Site :HC-CB04
Condition :3m Horizontal
Mode :Colocation_WIFI 5G+BLE
Test By :Ling Chen

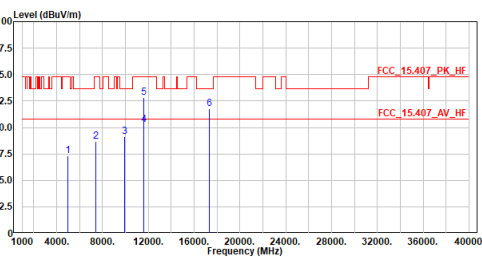

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.150	36.52	74.00	-37.48	53.92	-17.40	Peak
2	7439.600	43.56	74.00	-30.44	56.00	-12.44	Peak
3	9919.900	45.49	68.20	-22.71	54.26	-8.77	Peak
4	11570.000	51.26	54.00	-2.74	57.30	-6.04	Average
5	11570.000	64.24	74.00	-9.76	70.28	-6.04	Peak
6	17355.000	58.85	68.20	-9.35	62.08	-3.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :Colocation_WIFI 5G+BLE
Test By :Ling Chen

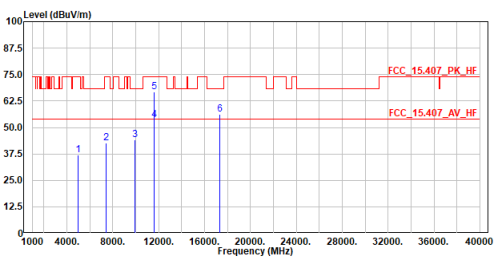

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.150	36.99	74.00	-37.01	54.39	-17.40	Peak
2	7439.600	42.62	74.00	-31.38	55.06	-12.44	Peak
3	9919.900	44.27	68.20	-23.93	53.04	-8.77	Peak
4	11570.000	53.55	54.00	-0.45	59.59	-6.04	Average
5	11570.000	66.65	74.00	-7.35	72.69	-6.04	Peak
6	17355.000	56.19	68.20	-12.01	59.42	-3.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.