



FCC RADIO TEST REPORT

FCC ID : 2AQ68T99W373PC15
Equipment : 5G WWAN Module
Brand Name : Foxconn
Model Name : T99W373
Applicant : Hon Lin Technology Co., Ltd
11F, NO.32, JIHU RD., NEIHU DIST., TAIPEI CITY 114, TAIWAN
R.O.C.
Manufacturer : Hon Lin Technology Co., Ltd
11F, NO.32, JIHU RD., NEIHU DIST., TAIPEI CITY 114, TAIWAN
R.O.C.
Standard : FCC 47 CFR Part 2, 27

The product was received on Jul. 04, 2023 and testing was performed from Jul. 04, 2023 to Aug. 31, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Items.....	11
3.1 Measuring Instruments	11
3.2 Conducted Output Power and EIRP	12
3.3 Peak-to-Average Ratio	13
3.4 Occupied Bandwidth.....	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability	17
4 Radiated Test Items	18
4.1 Measuring Instruments	18
4.2 Radiated Spurious Emission Measurement	20
5 List of Measuring Equipment.....	21
6 Uncertainty of Evaluation.....	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG262904-08M	01	Initial issue of report	Sep. 15, 2023



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)	Pass	
3.3	§27.50 (k)(4)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77) (n78)	Pass	-
3.6	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77) (n78)	Pass	-
3.7	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)	Pass	25.13 dB Under limit at 13805.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng**Report Producer: Ming Chen**

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs WCDMA/LTE/5G NR and GNSS

	Band	Brand	Model	Antenna Type	RF Exposure Max Antenna Gain(dBi)
5G NR	n77(PC1.5) (3700~3980MHz)	WHA YU	C107-511725-A	PIFA	1
	n77(PC2) (3700~3980MHz)	WHA YU	C107-511725-A	PIFA	3
	n77(PC3) (3700~3980MHz)	WHA YU	C107-511725-A	PIFA	6
	n78(PC1.5) (3700~3800MHz)	WHA YU	C107-511725-A	PIFA	1
	n78(PC2) (3700~3800MHz)	WHA YU	C107-511725-A	PIFA	3
	n78(PC3) (3700~3800MHz)	WHA YU	C107-511725-A	PIFA	6

Remark: The above EUT's information was declared by manufacturer and used for Radiated Spurious Emission test.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Jimmy Chang
Temperature	23.5~24.1 °C
Relative Humidity	48~52 %

Test Site	Sporton International Inc. Wensan Laboratory.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY (TAF Code: 3786)
Test Engineer	Jesse Fan, Tim Lee and Wilson Wu
Temperature	20~25
Relative Humidity	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168

D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Test Items	NR Band	Bandwidth (MHz)												Modulation					RB #			Test Channel			
		10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n77			v	-									v	v	v	v	v			v		v		
	n78	Covered by 5G NR n77																							
26dB and 99% Bandwidth	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v			v		v		
	n78	Covered by 5G NR n77																							
Conducted Band Edge	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v	
	n78	Covered by 5G NR n77																							
Conducted Spurious Emission	n77	v			-										v				v			v	v	v	
	n78	Covered by 5G NR n77																							
Frequency Stability	n77			v	-									v	v						v		v		
	n78	Covered by 5G NR n77																							
E.I.R.P	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	Max. Power						
	n78	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v							
Radiated Spurious Emission	n77	Worst Case																			v			v	v
	n78	Covered by 5G NR n77																							
Remark	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. 5. One representative bandwidth is selected to perform PAR and frequency stability. 6. Wider operating range bandwidth covers narrower one when the power is higher or the same. 7. 5G NR n77 MIMO mode support Antenna ANT0+ANT2, ANT0+ANT1, ANT2+ANT3, ANT1+ANT3,in conducted power are Verified, the worst case is Antenna ANT0+ANT2 test results are included in this report for Radiated is full test.																								

2.2 Connection Diagram of Test System

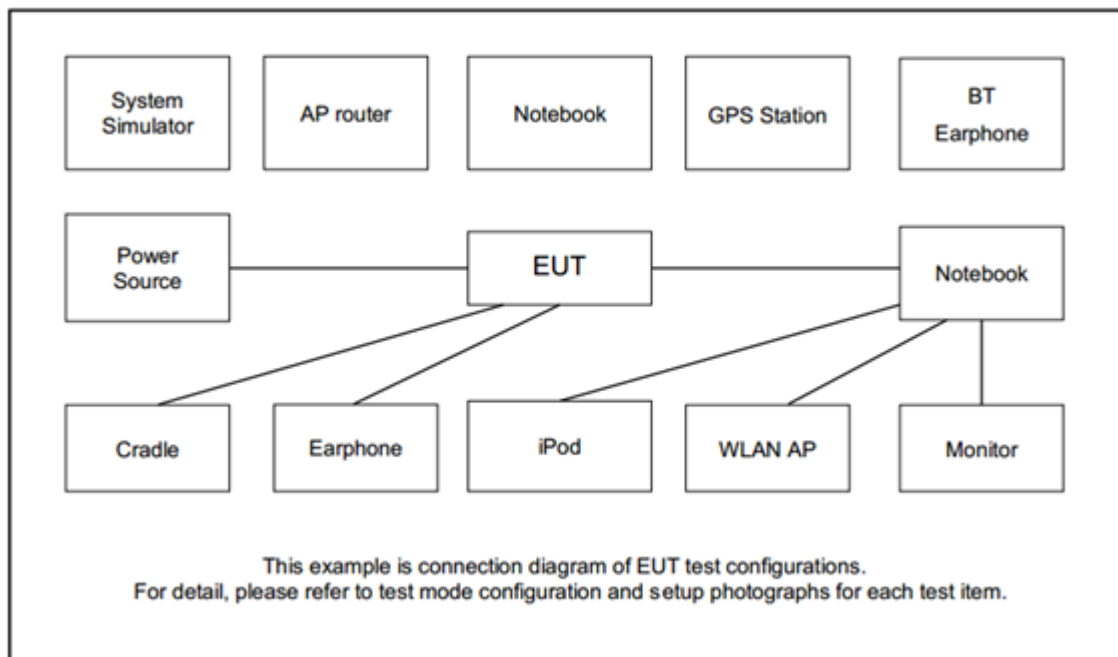

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 3400	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Fixture	Foxconn	95.2580T00	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)



2.5 Frequency List of Low/Middle/High Channels

5G NR Band n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



5G NR Band n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

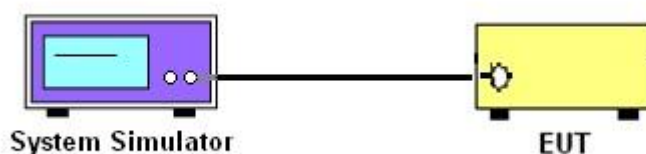

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

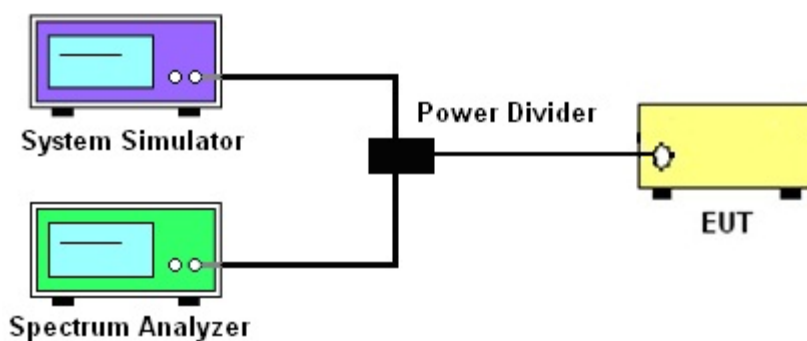

3.1.4 Frequency Stability

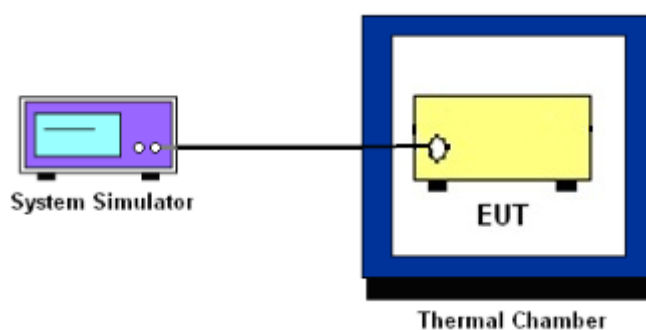

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and EIRP

3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

27.53 (I)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

8. For MIMO mode, add additional MIMO factor $10\log(NTX=2) = 3.01$ dB into the spectrum analyzer offset.



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
10. For MIMO mode, add additional MIMO factor $10\log(NTX=2) = 3.01$ dB into the spectrum analyzer offset.



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

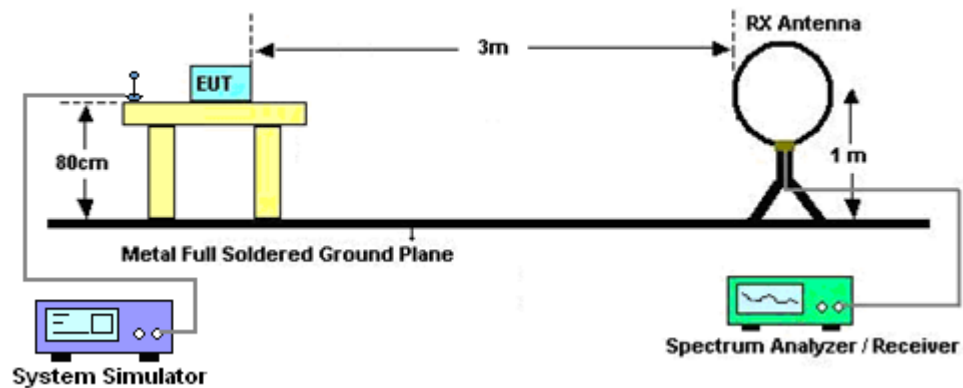


For radiated test from 30MHz to 1GHz

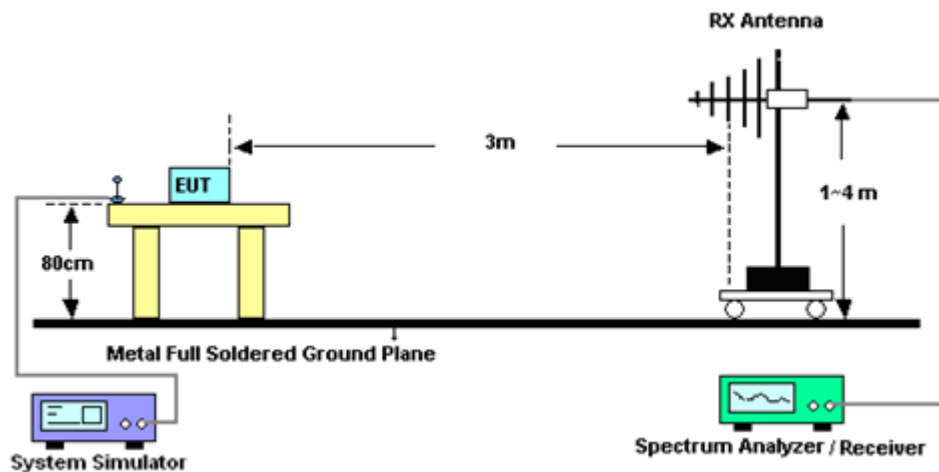

For radiated test from 1GHz to 18GHz

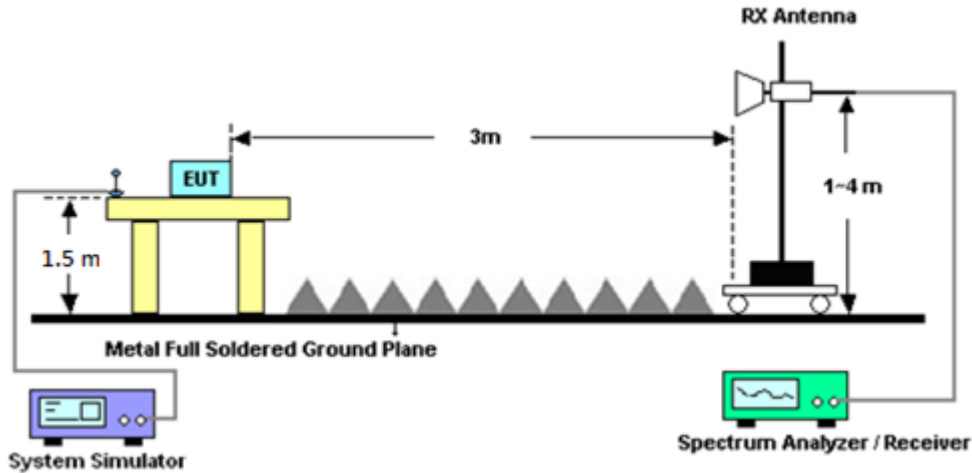

For radiated test above 18GHz

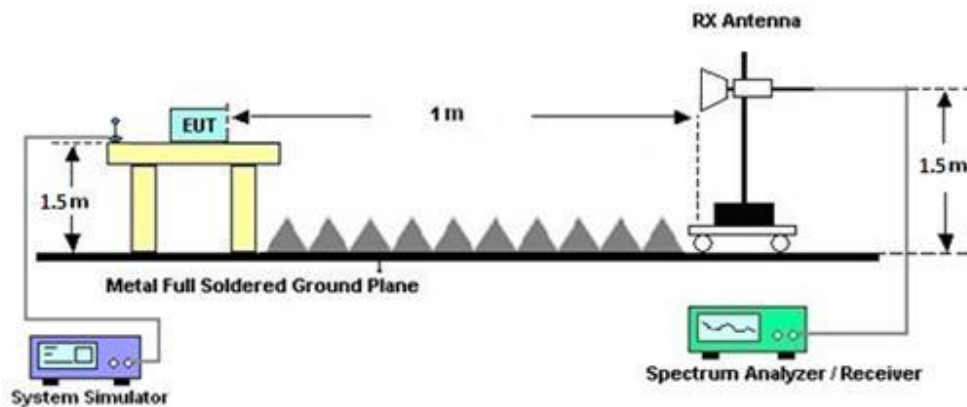

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 28, 2023	Jul. 04, 2023~ Aug. 31, 2023	Mar. 27, 2024	Conducted (TH03-HY)
Radio Communication Test Station	Anritsu	MT8000A	6272337370	N/A	Oct. 28, 2022	Jul. 04, 2023~ Aug. 31, 2023	Oct. 27, 2023	Conducted (TH03-HY)
Base Station(Measure)	Anritsu	MT8821C	6262116725	LTE FDD/TDD LTE-3CC DLCA/2CC ULCA	Oct. 13, 2022	Jul. 04, 2023~ Aug. 31, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Jul. 13, 2023~ Jul. 17, 2023	Sep. 19, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 10, 2022	Jul. 13, 2023~ Jul. 17, 2023	Nov. 09, 2023	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Aug. 09, 2022	Jul. 13, 2023~ Jul. 17, 2023	Aug. 08, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2022	Jul. 13, 2023~ Jul. 17, 2023	Nov. 23, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 03, 2022	Jul. 13, 2023~ Jul. 17, 2023	Oct. 02, 2023	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 23, 2023	Jul. 13, 2023~ Jul. 17, 2023	May 22, 2024	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz-18GHz	Dec. 21, 2022	Jul. 13, 2023~ Jul. 17, 2023	Dec. 20, 2023	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2022	Jul. 13, 2023~ Jul. 17, 2023	Dec. 06, 2023	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 10, 2023	Jul. 13, 2023~ Jul. 17, 2023	Jan. 09, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000-40ST	SN2	6.75GHz High Pass Filter	Mar. 14, 2023	Jul. 13, 2023~ Jul. 17, 2023	Mar. 13, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Jul. 13, 2023~ Jul. 17, 2023	Mar. 06, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 20, 2022	Jul. 13, 2023~ Jul. 17, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 20, 2022	Jul. 13, 2023~ Jul. 17, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 20, 2022	Jul. 13, 2023~ Jul. 17, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP210090	N/A	Oct. 03, 2022	Jul. 13, 2023~ Jul. 17, 2023	Oct. 02, 2023	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 13, 2023~ Jul. 17, 2023	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jul. 13, 2023~ Jul. 17, 2023	N/A	Radiation (03CH12-HY)
5G Wireless Test Platform	Anritsu	MT8000A	6261940327	N/A	Dec. 09, 2022	Jul. 13, 2023~ Jul. 17, 2023	Dec. 08, 2023	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jul. 13, 2023~ Jul. 17, 2023	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Jul. 13, 2023~ Jul. 17, 2023	N/A	Radiation (03CH12-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.07 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.63 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.14 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
10	1	1	BPSK	25.55	25.62	25.63	25.17	25.17	25.20	28.37	28.41	28.43	29.46	0.8831
10	1	22		25.57	25.57	25.60	25.23	25.10	25.03	28.41	28.35	28.33		
10	12	6		25.62	24.73	25.66	25.20	24.28	25.23	28.43	27.52	28.46		
10	1	0		19.54	19.50	19.68	19.12	19.16	19.23	22.35	22.34	22.47		
10	1	23		19.55	19.40	19.52	19.12	18.95	19.02	22.35	22.19	22.29		
10	24	0		24.15	24.07	24.15	23.72	23.72	23.72	26.95	26.91	26.95		
10	1	1	QPSK	25.48	25.57	25.60	25.06	25.05	25.17	28.29	28.33	28.40	29.41	0.873
10	1	22		25.58	25.54	25.58	25.12	25.14	25.12	28.37	28.35	28.37		
10	12	6		25.63	24.70	25.60	25.15	24.00	25.20	28.41	27.37	28.41		
10	1	0		19.11	18.95	19.05	18.58	18.54	18.64	21.86	21.76	21.86		
10	1	23		18.96	18.90	19.05	18.59	18.45	18.55	21.79	21.69	21.82		
10	24	0		23.67	25.50	23.65	23.22	23.23	23.24	26.46	27.52	26.46		
10	1	1	16-QAM	24.32	24.28	24.35	23.87	23.85	23.91	27.11	27.08	27.15	28.15	0.6531
10	1	1	64-QAM	22.36	22.25	22.45	21.92	21.88	22.05	25.16	25.08	25.26		
10	1	1	256-QAM	19.90	19.85	19.90	19.52	19.52	19.50	22.72	22.70	22.71		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
15	1	1	BPSK	25.86	25.75	25.75	25.51	25.36	25.35	28.70	28.57	28.56	29.71	0.9354
15	1	36		25.82	25.67	25.65	25.58	25.28	25.30	28.71	28.49	28.49		
15	18	9		25.87	25.76	25.82	25.42	25.32	25.38	28.66	28.56	28.62		
15	1	0		19.85	19.72	19.78	19.35	19.40	19.35	22.62	22.57	22.58		
15	1	37		19.84	19.62	19.57	19.40	19.23	19.22	22.64	22.44	22.41		
15	36	0		24.38	24.21	24.24	23.95	23.79	23.80	27.18	27.02	27.04		
15	1	1	QPSK	25.76	25.74	25.74	25.35	25.28	25.42	28.57	28.53	28.59	29.67	0.9268
15	1	36		25.83	25.58	25.53	25.48	25.20	25.23	28.67	28.40	28.39		
15	18	9		25.86	25.78	25.75	25.45	25.30	25.30	28.67	28.56	28.54		
15	1	0		19.27	19.22	19.25	18.85	18.77	18.85	22.08	22.01	22.06		
15	1	37		19.30	19.00	19.00	18.88	18.72	18.68	22.11	21.87	21.85		
15	36	0		23.87	23.72	23.67	23.42	23.35	23.32	26.66	26.55	26.51		
15	1	1	16-QAM	24.74	24.65	24.63	24.30	24.38	24.20	27.54	27.53	27.43	28.54	0.7145
15	1	1	64-QAM	22.67	22.65	22.57	22.28	22.35	22.16	25.49	25.51	25.38		
15	1	1	256-QAM	20.26	20.13	20.16	19.84	19.85	19.90	23.07	23.00	23.04		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	BPSK	25.52	25.65	25.63	25.44	25.50	25.53	28.53	28.59	28.59	29.63	0.9183
20	1	49		25.68	25.45	25.51	25.56	25.41	25.43	28.63	28.44	28.48		
20	25	12		25.60	25.62	25.64	25.51	25.47	25.50	28.57	28.56	28.58		
20	1	0		19.52	19.59	19.59	19.48	19.49	19.50	22.51	22.55	22.56		
20	1	50		19.69	19.42	19.48	19.53	19.33	19.40	22.62	22.39	22.45		
20	50	0		24.05	24.11	24.12	24.00	23.95	24.01	27.04	27.04	27.08		
20	1	1	QPSK	25.49	25.65	25.59	25.42	25.47	25.48	28.47	28.57	28.55	29.57	0.9057
20	1	49		25.62	25.40	25.45	25.50	25.38	25.42	28.57	28.40	28.45		
20	25	12		25.60	25.59	25.60	25.45	25.41	25.50	28.54	28.51	28.56		
20	1	0		19.05	19.13	19.05	18.88	18.94	18.96	21.98	22.05	22.02		
20	1	50		19.18	18.80	19.02	18.95	18.81	18.87	22.08	21.82	21.96		
20	50	0		23.60	23.59	23.65	23.51	23.43	23.50	26.57	26.52	26.59		
20	1	1	16-QAM	24.34	24.41	24.32	24.23	24.26	24.28	27.30	27.35	27.31	28.35	0.6839
20	1	1	64-QAM	22.36	22.51	22.40	22.26	22.35	22.35	25.32	25.44	25.39		
20	1	1	256-QAM	20.00	20.12	20.02	19.85	19.95	19.95	22.94	23.05	23.00		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	BPSK	25.74	25.82	25.77	25.66	25.62	25.55	28.71	28.73	28.67	29.73	0.9397
30	1	76		25.63	25.45	25.49	25.51	25.44	25.42	28.58	28.46	28.47		
30	36	18		25.62	25.60	25.60	25.60	25.45	25.50	28.62	28.54	28.56		
30	1	0		19.57	19.74	19.56	19.54	19.59	19.52	22.57	22.68	22.55		
30	1	77		19.61	19.41	19.50	19.45	19.40	19.36	22.54	22.42	22.44		
30	75	0		24.15	24.15	24.15	24.13	23.98	24.02	27.15	27.08	27.10		
30	1	1	QPSK	25.75	25.80	25.72	25.61	25.60	25.55	28.69	28.71	28.65	29.71	0.9354
30	1	76		25.61	25.48	25.50	25.47	25.39	25.35	28.55	28.45	28.44		
30	36	18		25.59	25.59	25.57	25.57	25.42	25.48	28.59	28.52	28.54		
30	1	0		18.99	19.76	19.06	18.90	19.59	19.00	21.96	22.69	22.04		
30	1	77		19.18	18.90	18.93	19.02	18.84	18.85	22.11	21.88	21.90		
30	75	0		23.67	23.68	23.62	23.64	23.46	23.52	26.67	26.58	26.58		
30	1	1	16-QAM	24.55	24.56	24.60	24.45	24.46	24.48	27.51	27.52	27.55	28.55	0.7161
30	1	1	64-QAM	22.65	22.62	22.65	22.47	22.41	22.56	25.57	25.53	25.62		
30	1	1	256-QAM	20.17	20.31	20.14	20.02	20.10	20.00	23.11	23.22	23.08		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	BPSK	25.85	25.97	25.73	25.65	25.70	25.65	28.76	28.85	28.70	29.85	0.9661
40	1	104		25.68	25.59	25.54	25.49	25.52	25.46	28.60	28.57	28.51		
40	50	25		25.71	25.70	25.68	25.66	25.46	25.51	28.70	28.59	28.61		
40	1	0		19.70	19.87	19.56	19.60	19.65	19.49	22.66	22.77	22.54		
40	1	105		19.58	19.56	19.56	19.43	19.46	19.44	22.52	22.52	22.51		
40	100	0		24.19	24.23	24.17	24.15	24.00	24.00	27.18	27.13	27.10		
40	1	1	QPSK	25.80	26.00	25.70	25.63	25.67	25.60	28.73	28.85	28.66	29.85	0.9661
40	1	104		25.57	25.56	25.50	25.47	25.50	25.42	28.53	28.54	28.47		
40	50	25		25.71	25.63	25.57	25.63	25.45	25.47	28.68	28.55	28.53		
40	1	0		19.21	19.37	19.08	19.00	19.16	18.97	22.12	22.28	22.04		
40	1	105		19.12	19.00	19.03	18.96	18.94	18.93	22.05	21.98	21.99		
40	100	0		23.72	23.69	23.68	23.64	23.51	23.50	26.69	26.61	26.60		
40	1	1	16-QAM	24.53	24.80	24.45	24.38	24.54	24.46	27.47	27.68	27.47	28.68	0.7379
40	1	1	64-QAM	22.67	22.72	22.43	22.54	22.42	22.39	25.62	25.58	25.42		
40	1	1	256-QAM	20.25	20.32	20.23	20.04	20.02	20.12	23.16	23.18	23.19		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	BPSK	25.57	25.77	25.54	25.45	25.60	25.42	28.52	28.70	28.49	29.71	0.9354
50	1	131		25.18	25.16	25.10	25.08	25.19	25.09	28.14	28.19	28.11		
50	64	32		25.55	25.42	26.00	25.49	25.27	25.37	28.53	28.36	28.71		
50	1	0		19.47	19.62	19.47	19.42	19.48	19.42	22.46	22.56	22.46		
50	1	132		19.15	19.20	19.10	19.05	19.13	19.03	22.11	22.18	22.08		
50	128	0		23.97	23.96	23.94	23.91	23.79	23.90	26.95	26.89	26.93		
50	1	1	QPSK	25.64	25.74	25.54	25.43	25.57	25.43	28.55	28.67	28.50	29.67	0.9268
50	1	131		25.10	25.20	25.13	25.01	25.20	25.20	28.07	28.21	28.18		
50	64	32		25.50	25.46	25.49	25.43	25.26	25.47	28.48	28.37	28.49		
50	1	0		18.87	19.07	18.90	18.85	18.92	18.90	21.87	22.01	21.91		
50	1	132		18.54	18.67	18.57	18.45	18.61	18.54	21.51	21.65	21.57		
50	128	0		23.47	23.45	23.45	23.40	23.32	23.46	26.45	26.40	26.47		
50	1	1	16-QAM	24.33	24.53	25.15	24.20	24.38	24.09	27.28	27.47	27.66	28.66	0.7345
50	1	1	64-QAM	22.40	22.58	23.43	22.27	22.43	22.28	25.35	25.52	25.90		
50	1	1	256-QAM	19.95	20.20	20.85	19.83	20.00	19.83	22.90	23.11	23.38		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
60	1	1	BPSK	25.57	25.68	25.59	25.49	25.60	25.44	28.54	28.65	28.53	29.65	0.9226
60	1	160		25.00	25.19	25.15	25.14	25.22	25.11	28.08	28.22	28.14		
60	81	40		25.54	25.40	25.46	25.40	25.40	25.34	28.48	28.41	28.41		
60	1	0		19.38	19.51	19.38	19.37	19.43	19.32	22.39	22.48	22.36		
60	1	161		19.00	19.16	19.13	19.02	19.10	19.08	22.02	22.14	22.12		
60	162	0		24.00	23.90	23.94	23.92	23.86	23.85	26.97	26.89	26.91		
60	1	1	QPSK	25.58	25.66	25.63	25.43	25.45	25.46	28.52	28.57	28.56	29.57	0.9057
60	1	160		24.97	25.07	25.12	25.15	25.05	25.05	28.07	28.07	28.10		
60	81	40		25.52	25.47	25.40	25.37	25.35	25.40	28.46	28.42	28.41		
60	1	0		18.94	18.92	19.00	18.82	18.90	18.88	21.89	21.92	21.95		
60	1	161		18.41	18.52	18.62	18.50	18.60	18.57	21.47	21.57	21.61		
60	162	0		23.48	23.40	23.40	23.41	23.38	23.40	26.46	26.40	26.41		
60	1	1	16-QAM	24.33	24.44	24.40	24.25	24.25	24.25	27.30	27.36	27.34	28.36	0.6855
60	1	1	64-QAM	22.34	22.45	22.42	22.25	22.32	22.26	25.31	25.40	25.35		
60	1	1	256-QAM	20.05	20.18	19.98	19.94	20.00	19.80	23.01	23.10	22.90		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
70	1	1	BPSK	25.52	25.56	25.60	25.36	25.46	25.38	28.45	28.52	28.50	29.52	0.8954
70	1	187		24.88	24.98	25.05	24.96	24.95	24.93	27.93	27.98	28.00		
70	90	45		25.25	25.32	25.23	25.18	25.20	25.23	28.23	28.27	28.24		
70	1	0		19.23	19.46	19.40	19.16	19.34	19.37	22.21	22.41	22.40		
70	1	188		18.84	18.92	18.87	18.90	18.80	18.90	21.88	21.87	21.90		
70	180	0		23.73	23.84	23.80	23.72	23.73	23.75	26.74	26.80	26.79		
70	1	1	QPSK	25.47	25.60	25.70	23.38	25.49	25.46	27.56	28.56	28.59	29.59	0.9099
70	1	187		24.92	24.97	25.03	24.87	24.96	24.98	27.91	27.98	28.02		
70	90	45		25.28	25.33	25.20	25.21	25.21	25.25	28.26	28.28	28.24		
70	1	0		18.70	18.80	18.89	18.60	18.82	18.81	21.66	21.82	21.86		
70	1	188		18.39	18.39	18.37	18.43	18.40	18.40	21.42	21.41	21.40		
70	180	0		23.23	23.31	23.28	23.22	23.20	23.36	26.24	26.27	26.33		
70	1	1	16-QAM	24.18	24.30	24.38	24.09	24.20	24.17	27.15	27.26	27.29	28.29	0.6745
70	1	1	64-QAM	22.32	22.33	22.45	22.21	22.21	22.20	25.28	25.28	25.34		
70	1	1	256-QAM	19.79	19.96	20.05	19.67	19.84	19.80	22.74	22.91	22.94		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
80	1	1	BPSK	25.52	25.55	25.59	25.32	25.42	25.38	28.43	28.50	28.50	29.5	0.8913
80	1	215		24.88	25.00	24.92	24.93	25.00	24.93	27.92	28.01	27.94		
80	108	54		25.30	25.34	25.19	25.25	25.18	25.20	28.29	28.27	28.21		
80	1	0		19.25	19.38	19.39	19.14	19.30	19.38	22.21	22.35	22.40		
80	1	216		18.88	18.95	18.94	18.92	18.92	18.88	21.91	21.95	21.92		
80	216	0		23.73	23.85	23.80	23.65	23.76	23.75	26.70	26.82	26.79		
80	1	1	QPSK	25.45	25.42	25.53	25.28	25.37	25.45	28.38	28.41	28.50	29.5	0.8913
80	1	215		24.90	25.00	24.93	24.88	24.91	24.90	27.90	27.97	27.93		
80	108	54		25.28	25.33	25.30	25.22	25.20	25.26	28.26	28.28	28.29		
80	1	0		18.74	18.86	18.87	18.63	18.73	18.82	21.70	21.81	21.86		
80	1	216		18.34	18.35	18.34	18.35	18.34	18.34	21.36	21.36	21.35		
80	216	0		23.25	23.34	23.28	23.16	23.20	23.26	26.22	26.28	26.28		
80	1	1	16-QAM	24.21	24.20	24.33	24.07	24.18	24.29	27.15	27.20	27.32	28.32	0.6792
80	1	1	64-QAM	22.28	22.35	22.40	22.12	22.30	22.27	25.21	25.34	25.35		
80	1	1	256-QAM	19.90	19.90	20.14	19.80	19.81	19.96	22.86	22.87	23.06		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
90	1	1	BPSK	25.54	25.62	25.75	25.36	25.38	25.48	28.46	28.51	28.63	29.63	0.9183
90	1	243		25.03	25.04	25.06	24.97	25.00	25.00	28.01	28.03	28.04		
90	120	60		25.35	25.05	25.40	25.13	24.87	25.25	28.25	27.97	28.34		
90	1	0		19.25	19.32	19.34	19.13	19.18	19.29	22.20	22.26	22.33		
90	1	244		18.90	19.05	19.00	18.92	18.90	18.93	21.92	21.99	21.98		
90	243	0		23.74	23.82	23.85	23.65	23.72	23.78	26.71	26.78	26.83		
90	1	1	QPSK	25.47	25.57	25.55	25.27	25.38	25.50	28.38	28.49	28.54	29.54	0.8995
90	1	243		25.00	25.00	25.05	24.92	24.91	25.01	27.97	27.97	28.04		
90	120	60		25.32	25.44	25.26	25.06	25.30	25.27	28.20	28.38	28.28		
90	1	0		18.75	18.80	18.85	18.60	18.65	18.81	21.69	21.74	21.84		
90	1	244		18.43	18.49	18.45	18.37	18.40	18.46	21.41	21.46	21.47		
90	243	0		23.24	23.32	23.40	23.16	23.20	23.30	26.21	26.27	26.36		
90	1	1	16-QAM	24.22	24.40	24.40	24.05	24.14	24.20	27.15	27.28	27.31	28.31	0.6776
90	1	1	64-QAM	22.27	22.41	22.34	22.08	22.23	22.35	25.19	25.33	25.36		
90	1	1	256-QAM	19.86	20.05	20.01	19.70	19.88	19.90	22.79	22.98	22.97		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
100	1	1	BPSK	-	25.58	-	-	25.45	-	-	28.53	-	29.53	0.8974
100	1	271		-	25.00	-	-	24.98	-	-	28.00	-		
100	135	67		-	25.37	-	-	25.25	-	-	28.32	-		
100	1	0		-	19.43	-	-	19.21	-	-	22.33	-		
100	1	272		-	18.94	-	-	18.88	-	-	21.92	-		
100	270	0		-	23.81	-	-	23.70	-	-	26.77	-		
100	1	1	QPSK	-	25.55	-	-	25.33	-	-	28.45	-	29.45	0.881
100	1	271		-	25.02	-	-	24.91	-	-	27.98	-		
100	135	67		-	25.31	-	-	25.18	-	-	28.26	-		
100	1	0		-	18.79	-	-	18.62	-	-	21.72	-		
100	1	272		-	18.35	-	-	18.40	-	-	21.39	-		
100	270	0		-	23.32	-	-	23.20	-	-	26.27	-		
100	1	1	16-QAM	-	24.42	-	-	24.18	-	-	27.31	-	28.31	0.6776
100	1	1	64-QAM	-	22.32	-	-	22.02	-	-	25.18	-		
100	1	1	256-QAM	-	19.98	-	-	19.75	-	-	22.88	-		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
10	1	1	BPSK	25.71	25.63	25.79	25.10	25.25	25.35	28.43	28.45	28.59	29.59	0.9099
10	1	22		25.56	25.50	25.60	25.12	25.17	25.22	28.36	28.35	28.42		
10	12	6		24.87	25.60	25.75	24.32	25.24	25.26	27.61	28.43	28.52		
10	1	0		19.66	19.62	19.70	19.29	19.25	19.24	22.49	22.45	22.49		
10	1	23		19.70	19.51	19.60	19.29	19.15	19.19	22.51	22.34	22.41		
10	24	0		24.16	24.08	24.21	23.89	23.80	23.80	27.04	26.95	27.02		
10	1	1	QPSK	25.56	25.66	25.68	25.30	25.24	25.21	28.44	28.47	28.46	29.51	0.8933
10	1	22		25.68	25.52	25.38	25.31	25.19	25.24	28.51	28.37	28.32		
10	12	6		24.65	25.60	25.57	24.28	25.27	25.25	27.48	28.45	28.42		
10	1	0		19.15	19.10	19.08	18.75	18.78	18.80	21.96	21.95	21.95		
10	1	23		19.10	19.05	18.85	18.70	18.70	18.62	21.91	21.89	21.75		
10	24	0		23.67	23.64	23.60	23.35	23.25	23.21	26.52	26.46	26.42		
10	1	1	16-QAM	24.40	24.38	24.35	24.05	24.00	24.02	27.24	27.20	27.20	28.24	0.6668
10	1	1	64-QAM	22.42	22.47	22.42	22.10	22.10	22.04	25.27	25.30	25.24		
10	1	1	256-QAM	20.13	20.20	20.13	19.70	19.80	19.71	22.93	23.01	22.94		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
15	1	1	BPSK	25.67	25.75	25.80	25.40	25.46	25.52	28.55	28.62	28.67	29.67	0.9268
15	1	36		25.80	25.52	25.70	25.46	25.48	25.36	28.64	28.51	28.54		
15	18	9		25.73	25.70	25.75	25.46	25.43	25.52	28.61	28.58	28.65		
15	1	0		19.65	19.70	19.62	19.36	19.43	19.42	22.52	22.58	22.53		
15	1	37		19.72	19.55	19.59	19.50	19.34	19.40	22.62	22.46	22.51		
15	36	0		24.30	24.25	24.27	23.96	23.90	24.00	27.14	27.09	27.15		
15	1	1	QPSK	25.68	25.70	25.69	25.39	25.45	25.42	28.55	28.59	28.57	29.61	0.9141
15	1	36		25.70	25.50	25.58	25.48	25.40	25.40	28.60	28.46	28.50		
15	18	9		25.77	25.70	25.73	25.43	25.45	25.45	28.61	28.59	28.60		
15	1	0		19.15	19.20	19.04	18.86	18.89	18.92	22.02	22.06	21.99		
15	1	37		19.20	19.00	19.00	18.80	18.83	18.80	22.01	21.93	21.91		
15	36	0		23.72	23.70	23.65	23.48	23.43	23.48	26.61	26.58	26.58		
15	1	1	16-QAM	24.50	24.54	24.54	24.25	24.30	24.29	27.39	27.43	27.43	28.43	0.6966
15	1	1	64-QAM	22.63	22.46	22.65	22.25	22.18	22.41	25.45	25.33	25.54		
15	1	1	256-QAM	20.00	20.29	20.08	19.76	19.97	19.82	22.89	23.14	22.96		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	BPSK	25.74	25.85	25.72	25.56	25.48	25.50	28.66	28.68	28.62	29.71	0.9354
20	1	49		25.83	25.58	25.54	25.56	25.42	25.44	28.71	28.51	28.50		
20	25	12		25.76	25.70	25.72	25.49	25.46	25.50	28.64	28.59	28.62		
20	1	0		19.75	19.70	19.71	19.45	19.50	19.45	22.61	22.61	22.59		
20	1	50		19.84	19.50	19.04	19.53	19.42	18.89	22.70	22.47	21.98		
20	50	0		24.27	24.30	24.27	24.00	23.90	24.00	27.15	27.11	27.15		
20	1	1	QPSK	25.69	25.75	25.76	25.51	25.45	25.53	28.61	28.61	28.66	29.7	0.9333
20	1	49		25.79	25.53	25.55	25.58	25.35	25.40	28.70	28.45	28.49		
20	25	12		25.76	25.72	25.74	25.48	25.42	25.44	28.63	28.58	28.60		
20	1	0		19.13	19.30	19.25	18.93	19.05	18.95	22.04	22.19	22.11		
20	1	50		19.32	19.02	19.04	18.95	18.85	18.85	22.15	21.95	21.96		
20	50	0		23.79	23.73	21.63	23.52	23.45	21.41	26.67	26.60	24.53		
20	1	1	16-QAM	24.50	24.57	24.55	24.29	24.32	24.40	27.41	27.46	27.49	28.49	0.7063
20	1	1	64-QAM	22.52	22.65	22.67	22.25	22.39	22.45	25.40	25.53	25.57		
20	1	1	256-QAM	20.18	20.20	20.18	19.91	19.86	20.00	23.06	23.04	23.10		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	BPSK	25.90	25.88	25.90	25.58	25.68	25.57	28.75	28.79	28.75	29.79	0.9528
30	1	76		25.67	25.57	25.63	25.44	25.30	25.41	28.57	28.45	28.53		
30	36	18		25.78	25.73	25.80	25.50	25.46	25.53	28.65	28.61	28.68		
30	1	0		19.82	19.82	19.72	19.45	19.58	19.56	22.65	22.71	22.65		
30	1	77		19.65	19.50	19.50	19.40	19.35	19.45	22.54	22.44	22.49		
30	75	0		24.33	24.24	24.25	24.05	23.90	24.03	27.20	27.08	27.15		
30	1	1	QPSK	25.86	25.84	25.84	25.64	25.52	25.58	28.76	28.69	28.72	29.76	0.9462
30	1	76		25.70	25.52	25.52	25.51	25.30	25.39	28.62	28.42	28.47		
30	36	18		25.80	25.73	25.72	25.52	25.45	25.48	28.67	28.60	28.61		
30	1	0		19.23	19.35	19.20	18.93	19.05	19.00	22.09	22.21	22.11		
30	1	77		19.21	19.00	19.05	18.87	18.87	18.80	22.05	21.95	21.94		
30	75	0		23.82	23.77	23.75	23.50	23.48	23.51	26.67	26.64	26.64		
30	1	1	16-QAM	24.66	24.77	24.82	24.42	24.40	24.50	27.55	27.60	27.67	28.67	0.7362
30	1	1	64-QAM	22.77	22.70	23.00	22.48	25.50	22.60	25.64	27.33	25.81		
30	1	1	256-QAM	20.25	20.27	20.33	19.98	20.00	20.14	23.13	23.15	23.25		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	BPSK	25.75	25.86	25.66	25.48	25.64	25.52	28.63	28.76	28.60	29.76	0.9462
40	1	104		25.57	25.49	25.50	25.34	25.41	25.32	28.47	28.46	28.42		
40	50	25		25.65	25.55	25.56	25.44	25.36	25.49	28.56	28.47	28.54		
40	1	0		19.66	19.79	19.54	19.50	19.50	19.49	22.59	22.66	22.53		
40	1	105		19.44	19.42	19.42	19.29	19.28	19.22	22.38	22.36	22.33		
40	100	0		24.15	24.12	24.08	24.03	23.93	23.96	27.10	27.04	27.03		
40	1	1	QPSK	25.74	25.85	25.64	25.50	25.60	25.50	28.63	28.74	28.58	29.74	0.9419
40	1	104		25.57	25.42	25.46	25.36	25.31	25.36	28.48	28.38	28.42		
40	50	25		25.62	25.54	25.53	25.51	25.31	25.46	28.58	28.44	28.51		
40	1	0		19.20	19.30	19.00	18.91	19.05	18.92	22.07	22.19	21.97		
40	1	105		18.96	18.90	18.94	18.80	18.84	18.80	21.89	21.88	21.88		
40	100	0		23.72	23.60	23.58	23.48	23.37	23.44	26.61	26.50	26.52		
40	1	1	16-QAM	24.53	24.75	24.42	24.22	24.41	24.50	27.39	27.59	27.47	28.59	0.7228
40	1	1	64-QAM	22.53	22.54	22.40	22.28	22.32	22.20	25.42	25.44	25.31		
40	1	1	256-QAM	20.17	20.26	20.14	19.90	20.02	19.92	23.05	23.15	23.04		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	BPSK	25.50	25.55	25.31	25.33	25.39	25.28	28.43	28.48	28.31	29.48	0.8872
50	1	131		25.11	25.20	25.15	25.08	25.10	25.04	28.11	28.16	28.11		
50	64	32		25.57	25.37	25.35	25.30	25.30	25.43	28.45	28.35	28.40		
50	1	0		19.28	19.47	19.24	19.14	19.40	19.15	22.22	22.45	22.21		
50	1	132		19.15	19.15	19.12	19.05	19.00	19.02	22.11	22.09	22.08		
50	128	0		24.00	24.00	23.82	23.80	23.74	23.80	26.91	26.88	26.82		
50	1	1	QPSK	25.49	25.51	25.42	25.25	25.31	25.25	28.38	28.42	28.35	29.42	0.875
50	1	131		25.07	25.17	25.12	25.00	25.04	25.00	28.05	28.12	28.07		
50	64	32		25.50	25.35	25.40	25.30	25.28	25.30	28.41	28.33	28.36		
50	1	0		18.80	18.91	18.74	18.61	18.80	18.60	21.72	21.87	21.68		
50	1	132		18.50	18.70	18.54	18.48	18.52	18.44	21.50	21.62	21.50		
50	128	0		23.48	23.35	23.32	23.27	23.29	23.30	26.39	26.33	26.32		
50	1	1	16-QAM	24.26	24.33	24.42	24.07	24.13	24.31	27.18	27.24	27.38	28.38	0.6887
50	1	1	64-QAM	22.30	24.33	22.13	22.11	24.12	22.04	25.22	27.24	25.10		
50	1	1	256-QAM	19.88	19.95	19.95	19.73	19.77	19.86	22.82	22.87	22.92		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
60	1	1	BPSK	25.58	25.76	25.64	25.48	25.55	25.42	28.54	28.67	28.54	29.67	0.9268
60	1	160		25.04	25.20	25.10	25.07	25.13	25.02	28.07	28.18	28.07		
60	81	40		25.57	25.50	25.35	25.49	25.42	25.34	28.54	28.47	28.36		
60	1	0		19.40	19.48	19.37	19.35	19.48	19.36	22.39	22.49	22.38		
60	1	161		19.05	19.13	19.05	19.12	19.02	19.00	22.10	22.09	22.04		
60	162	0		24.00	23.90	23.84	23.87	23.84	23.80	26.95	26.88	26.83		
60	1	1	QPSK	25.58	25.64	25.55	25.47	25.41	25.35	28.54	28.54	28.46	29.54	0.8995
60	1	160		25.01	25.15	25.10	25.03	25.10	24.95	28.03	28.14	28.04		
60	81	40		25.48	25.40	25.26	25.42	25.35	25.18	28.46	28.39	28.23		
60	1	0		18.83	18.93	18.78	18.79	18.90	18.82	21.82	21.93	21.81		
60	1	161		18.54	18.62	18.54	18.59	18.56	18.47	21.58	21.60	21.52		
60	162	0		23.42	23.41	23.33	23.39	23.40	23.30	26.42	26.42	26.33		
60	1	1	16-QAM	24.28	24.50	24.32	24.20	24.30	24.16	27.25	27.41	27.25	28.41	0.6934
60	1	1	64-QAM	22.40	22.54	22.36	22.28	22.35	22.15	25.35	25.46	25.27		
60	1	1	256-QAM	20.05	20.05	20.05	19.86	19.88	19.85	22.97	22.98	22.96		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
70	1	1	BPSK	25.50	25.64	25.68	25.25	25.52	25.41	28.39	28.59	28.56	29.59	0.9099
70	1	187		24.87	24.96	24.93	24.76	24.90	24.90	27.83	27.94	27.93		
70	90	45		25.29	25.32	25.32	25.17	25.18	25.27	28.24	28.26	28.31		
70	1	0		19.18	19.42	19.44	19.10	19.28	19.39	22.15	22.36	22.43		
70	1	188		18.80	18.95	18.93	18.74	18.88	18.86	21.78	21.93	21.91		
70	180	0		23.77	23.89	23.85	23.66	23.75	23.80	26.73	26.83	26.84		
70	1	1	QPSK	25.44	25.57	25.60	25.26	25.49	25.40	28.36	28.54	28.51	29.54	0.8995
70	1	187		24.83	25.00	25.03	24.72	24.93	24.93	27.79	27.98	27.99		
70	90	45		25.27	23.34	25.29	25.15	25.18	25.30	28.22	27.37	28.31		
70	1	0		18.64	18.92	18.90	18.54	18.78	18.86	21.60	21.86	21.89		
70	1	188		18.30	18.37	18.42	18.23	18.34	18.35	21.28	21.37	21.40		
70	180	0		23.24	23.33	23.35	23.15	23.23	23.27	26.21	26.29	26.32		
70	1	1	16-QAM	24.22	24.27	24.32	24.00	24.21	24.23	27.12	27.25	27.29	28.29	0.6745
70	1	1	64-QAM	22.26	22.38	22.38	22.08	22.27	22.24	25.18	25.34	25.32		
70	1	1	256-QAM	19.85	20.00	20.10	19.65	19.85	19.87	22.76	22.94	23.00		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
80	1	1	BPSK	25.55	25.56	25.56	25.28	25.34	25.42	28.43	28.46	28.50	29.5	0.8913
80	1	215		24.92	24.94	24.94	24.85	24.86	24.84	27.90	27.91	27.90		
80	108	54		25.34	25.35	25.27	25.15	25.09	25.13	28.26	28.23	28.21		
80	1	0		19.42	19.35	19.33	19.05	19.25	19.29	22.25	22.31	22.32		
80	1	216		18.89	18.97	18.87	18.77	18.81	18.71	21.84	21.90	21.80		
80	216	0		23.75	23.73	23.74	23.60	23.64	23.62	26.69	26.70	26.69		
80	1	1	QPSK	25.50	25.46	25.60	25.21	25.33	25.34	28.37	28.41	28.48	29.48	0.8872
80	1	215		24.85	24.93	24.95	24.82	24.82	24.81	27.85	27.89	27.89		
80	108	54		25.32	25.37	25.26	25.15	25.16	25.08	28.25	28.28	28.18		
80	1	0		18.82	18.77	18.90	18.57	18.62	18.76	21.71	21.71	21.84		
80	1	216		18.38	18.40	18.40	18.32	18.29	18.35	21.36	21.36	21.38		
80	216	0		23.28	23.35	23.25	23.08	23.15	23.20	26.19	26.26	26.24		
80	1	1	16-QAM	24.27	24.26	24.39	24.00	24.00	24.13	27.15	27.14	27.27	28.27	0.6714
80	1	1	64-QAM	22.40	18.53	22.46	22.11	18.42	22.20	25.27	21.49	25.34		
80	1	1	256-QAM	19.95	18.86	20.05	19.60	18.75	19.86	22.79	21.82	22.97		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
90	1	1	BPSK	25.47	25.53	25.51	25.36	25.27	25.43	28.43	28.41	28.48	29.48	0.8872
90	1	243		25.06	25.00	25.02	24.92	24.90	24.90	28.00	27.96	27.97		
90	120	60		25.26	25.35	25.25	25.22	25.18	25.21	28.25	28.28	28.24		
90	1	0		19.27	19.25	19.29	19.12	19.00	19.24	22.21	22.14	22.28		
90	1	244		19.02	18.90	18.90	18.85	18.82	18.86	21.95	21.87	21.89		
90	243	0		23.78	23.82	23.78	23.65	23.65	23.71	26.73	26.75	26.76		
90	1	1	QPSK	25.51	25.53	25.60	25.25	25.27	25.35	28.39	28.41	28.49	29.49	0.8892
90	1	243		24.96	24.93	24.92	24.88	24.90	24.85	27.93	27.93	27.90		
90	120	60		25.24	25.24	25.23	25.14	25.13	25.15	28.20	28.20	28.20		
90	1	0		18.70	18.70	18.85	18.63	18.61	18.66	21.68	21.67	21.77		
90	1	244		18.39	18.38	18.30	18.31	18.20	18.25	21.36	21.30	21.29		
90	243	0		23.31	23.27	23.28	23.18	23.15	23.17	26.26	26.22	26.24		
90	1	1	16-QAM	24.53	24.41	24.26	24.27	24.16	24.15	27.41	27.30	27.22	28.41	0.6934
90	1	1	64-QAM	22.27	22.18	22.35	22.03	21.95	22.18	25.16	25.08	25.28		
90	1	1	256-QAM	20.15	19.95	19.95	19.84	19.68	19.78	23.01	22.83	22.88		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = 1 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
100	1	1	BPSK	-	25.55	-	-	25.27	-	-	28.42	-	29.42	0.875
100	1	271		-	24.95	-	-	24.85	-	-	27.91	-		
100	135	67		-	25.34	-	-	25.14	-	-	28.25	-		
100	1	0		-	19.24	-	-	19.10	-	-	22.18	-		
100	1	272		-	18.83	-	-	18.77	-	-	21.81	-		
100	270	0		-	23.83	-	-	23.63	-	-	26.74	-		
100	1	1	QPSK	-	25.50	-	-	25.19	-	-	28.36	-	29.36	0.863
100	1	271		-	24.87	-	-	24.79	-	-	27.84	-		
100	135	67		-	25.30	-	-	25.12	-	-	28.22	-		
100	1	0		-	18.67	-	-	18.53	-	-	21.61	-		
100	1	272		-	18.33	-	-	18.27	-	-	21.31	-		
100	270	0		-	23.31	-	-	23.11	-	-	26.22	-		
100	1	1	16-QAM	-	24.35	-	-	24.09	-	-	27.23	-	28.23	0.6653
100	1	1	64-QAM	-	22.24	-	-	21.98	-	-	25.12	-		
100	1	1	256-QAM	-	19.95	-	-	19.59	-	-	22.78	-		
Limit	EIRP < 1W			Result									Pass	


**FR1 n77 MIMO ANT0****Peak-to-Average Ratio**

Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	3.84	4.42	5.44	5.82	PASS
Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.56				PASS




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

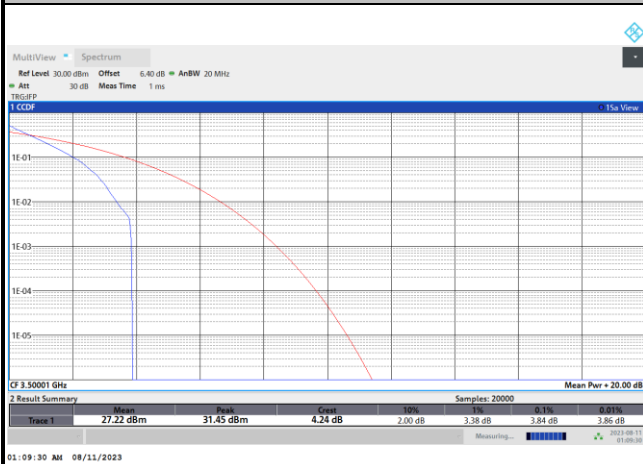


QPSK

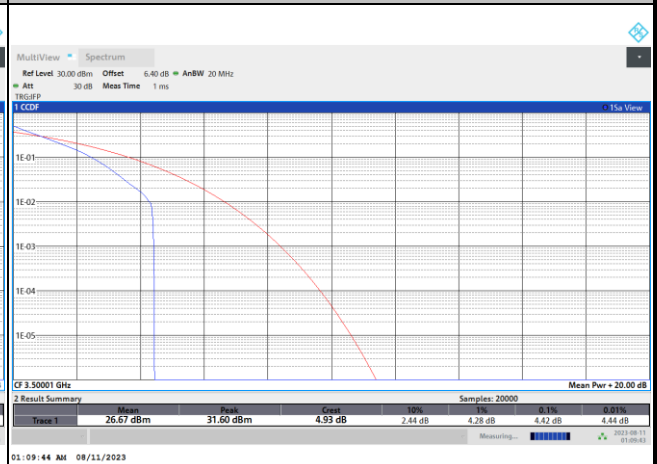


16QAM

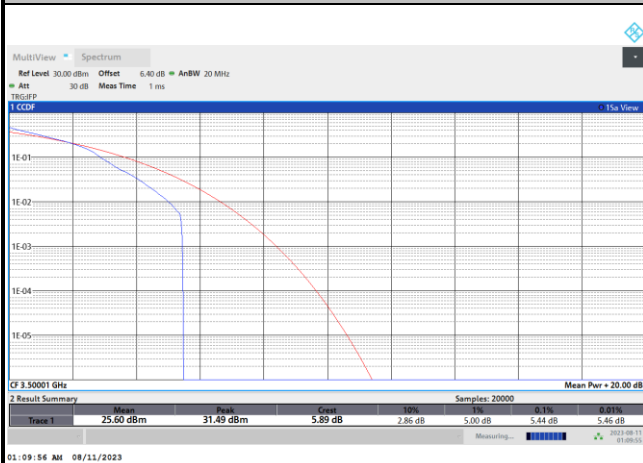

64QAM

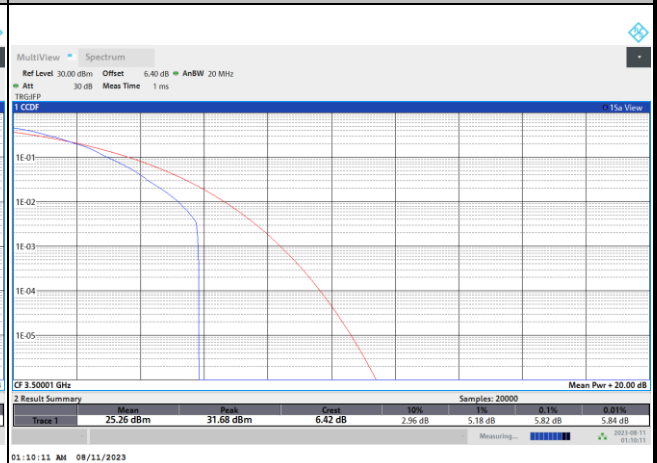

256QAM

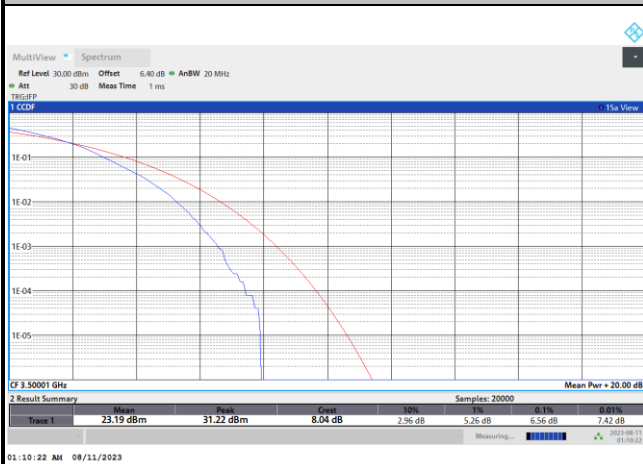

**26dB Bandwidth**


Mode	FR1 n77 : 26dB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz	30MHz	40MHz	50MHz	60MHz	70MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	9.35	14.33	18.98	28.17	38.04	48.35	60.54	67.27
BW	80MHz	90MHz	100MHz					
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK					
Middle CH	80.08	89.73	99.30					

Mode	FR1 n77 : 26dB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	9.39	9.47	14.36	14.75	19.14	19.22	28.83	29.07
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	9.27	9.43	14.45	14.63	19.42	19.50	29.25	29.07
BW	40MHz		50MHz		60MHz		70MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	40.20	40.28	50.05	49.85	60.54	60.54	70.35	70.21
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	40.28	40.36	50.05	50.15	60.54	60.42	70.07	70.35
BW	80MHz		90MHz		100MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Middle CH	80.08	80.24	90.27	90.45	100.70	100.70		
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM		
Middle CH	80.24	80.24	90.45	90.45	100.50	100.50		




FR1 n77 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

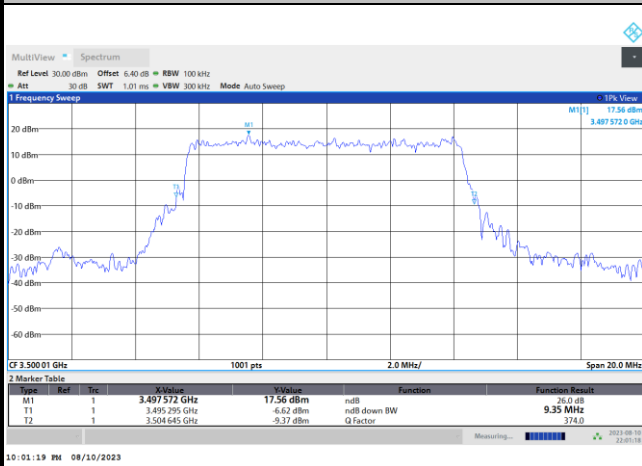


FR1 n77 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

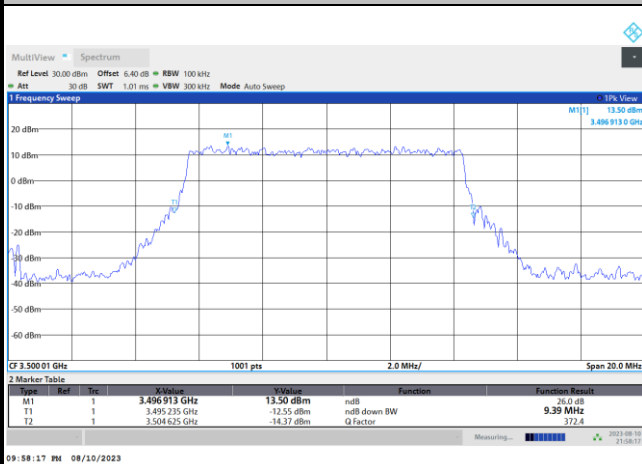


16QAM





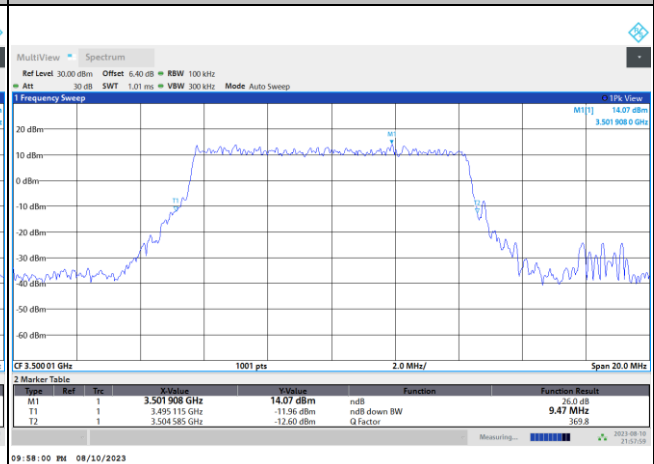


64QAM

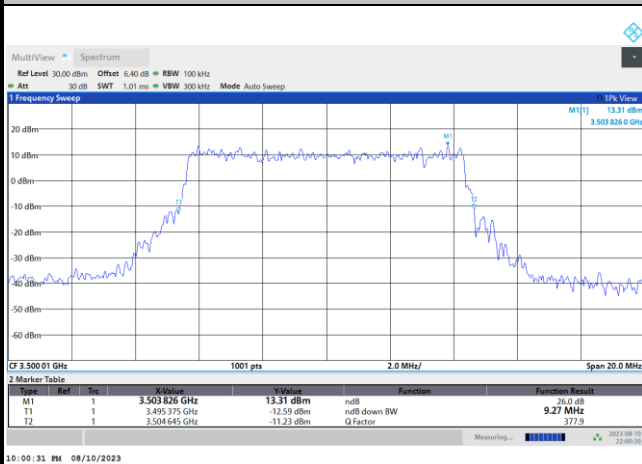

256QAM

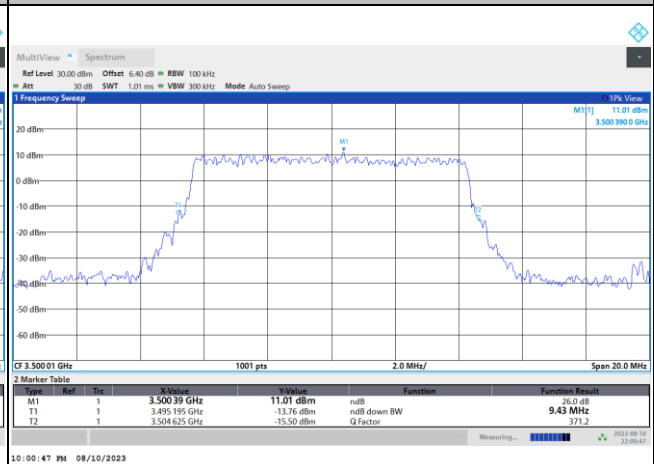


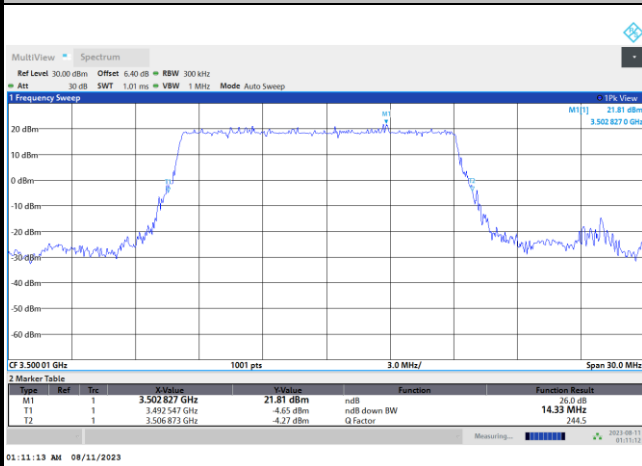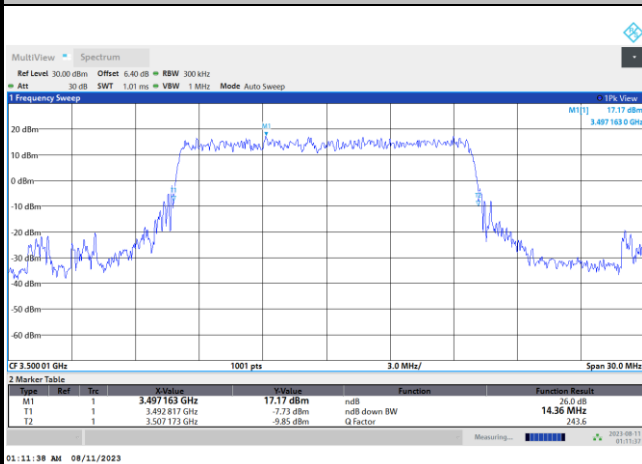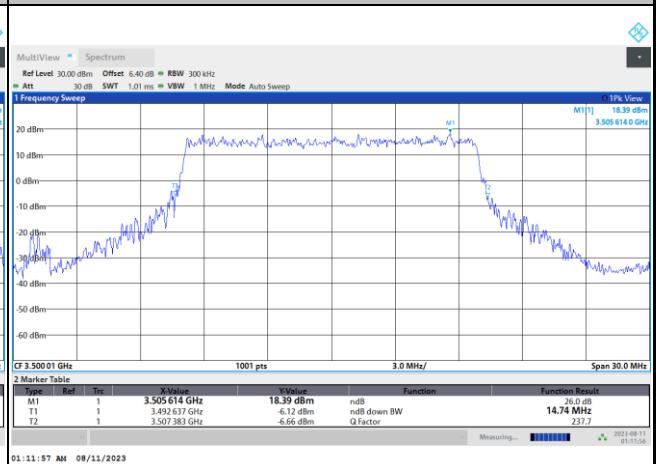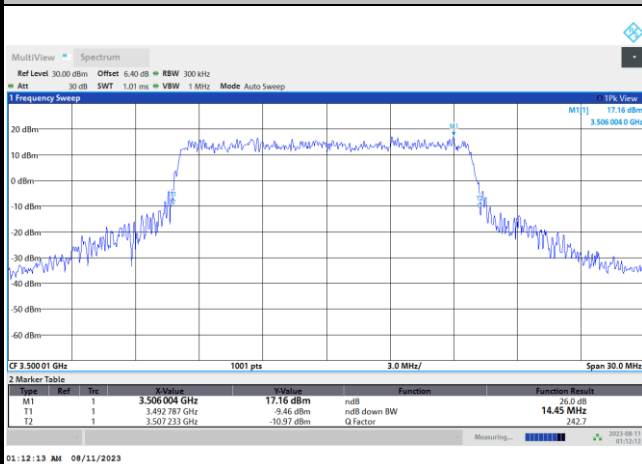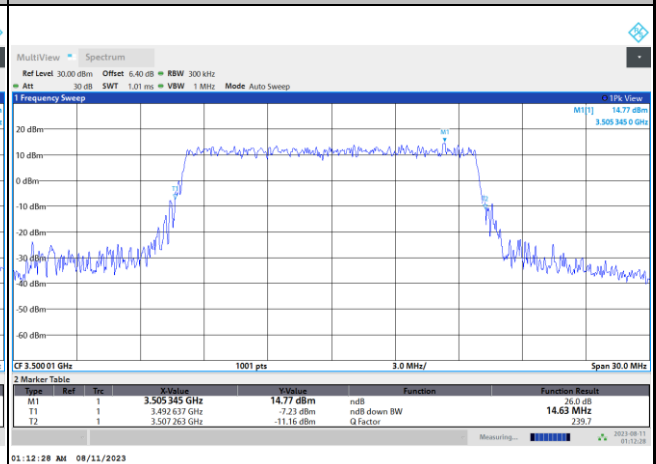FR1 n77 / 15MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

FR1 n77 / 15MHz / CP OFDM / Middle Channel / Full RB
QPSK

16QAM

64QAM

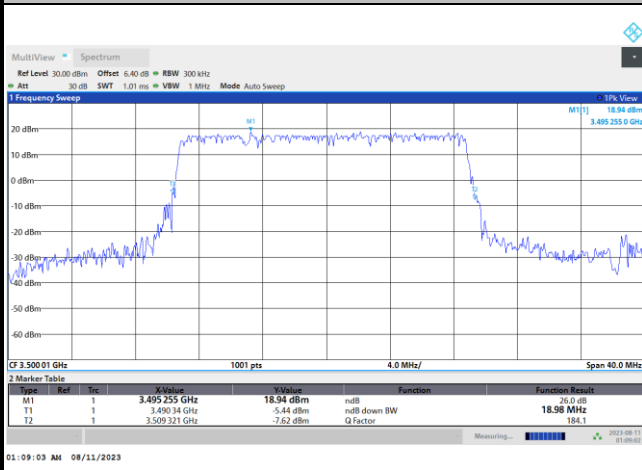256QAM




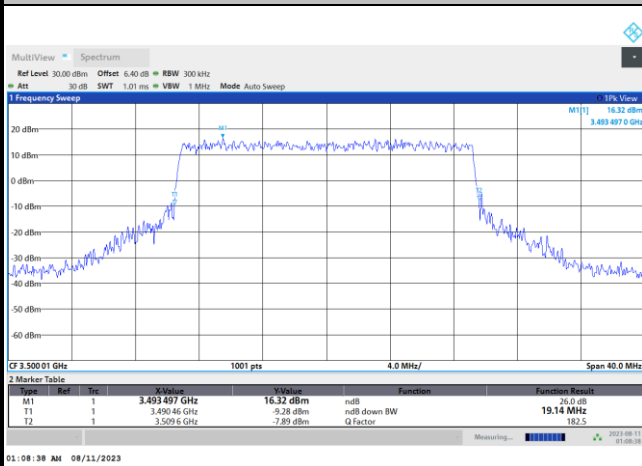
FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK




FR1 n77 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK




16QAM

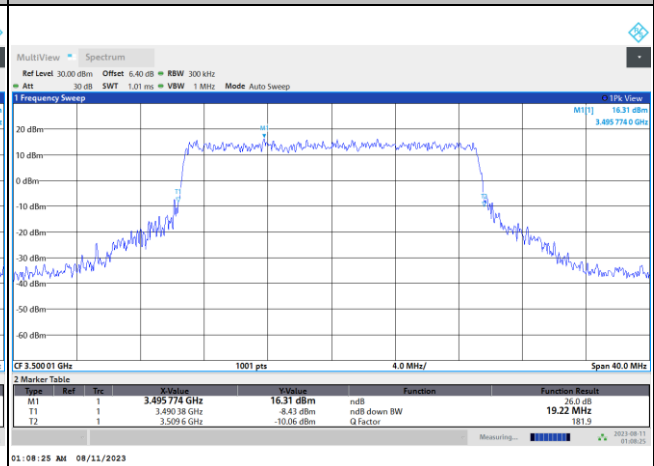

64QAM

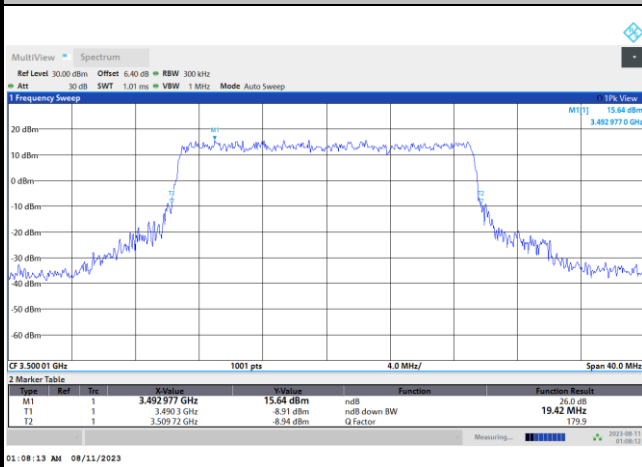


256QAM

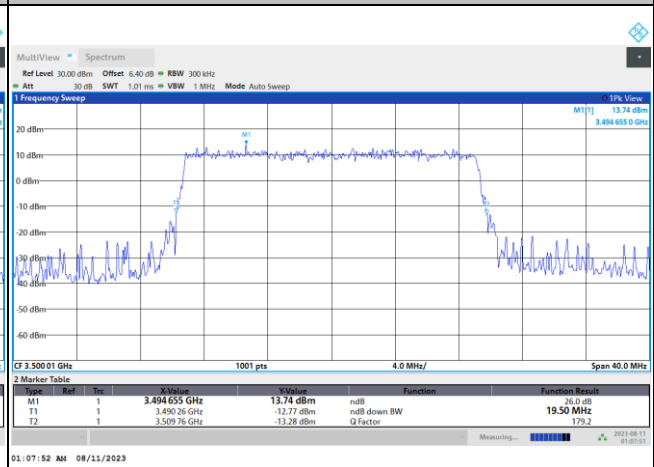




FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

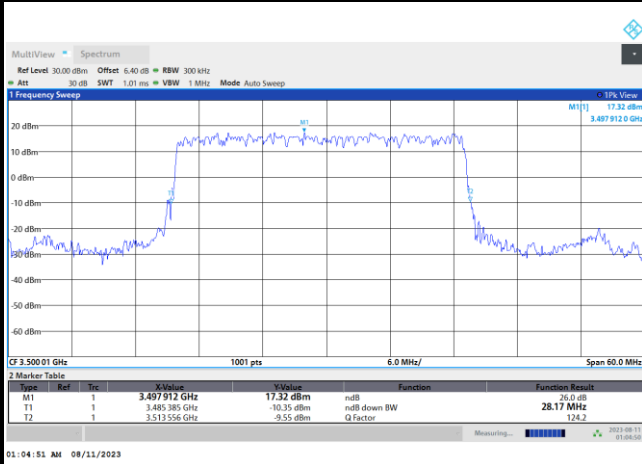


FR1 n77 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

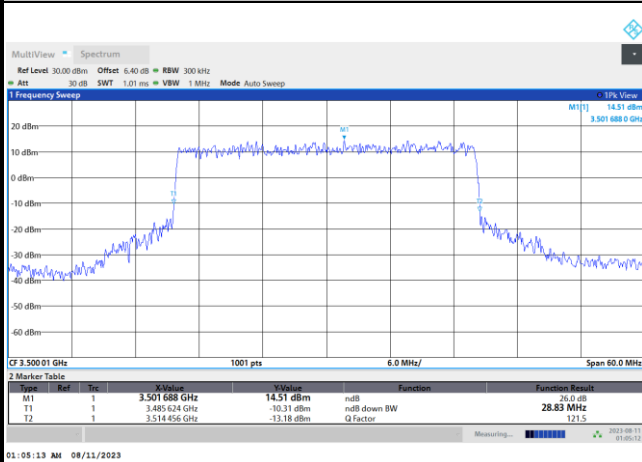


16QAM

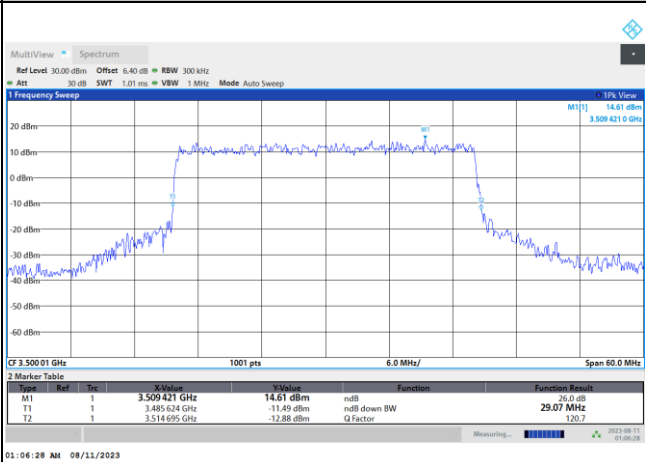

64QAM

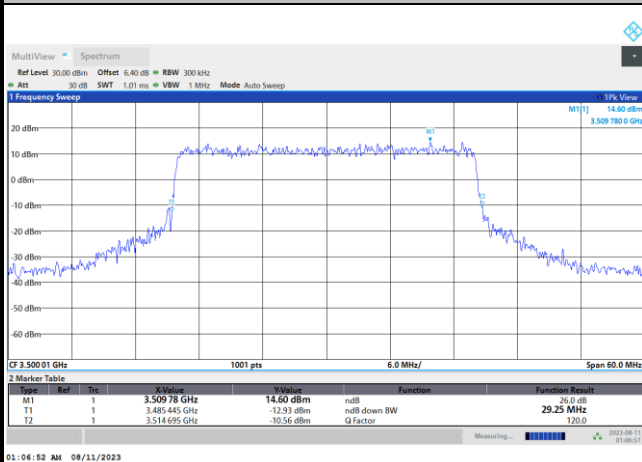


256QAM

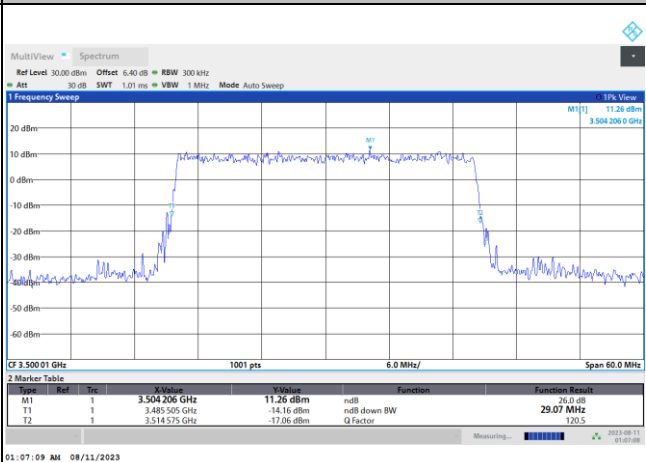




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

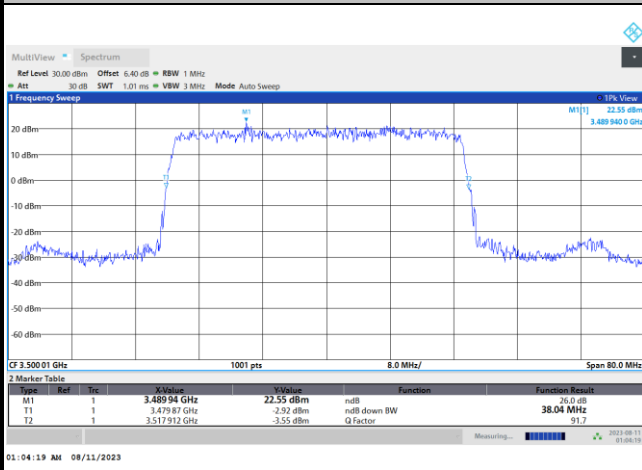


FR1 n77 / 40MHz / CP OFDM / Middle Channel / Full RB


QPSK

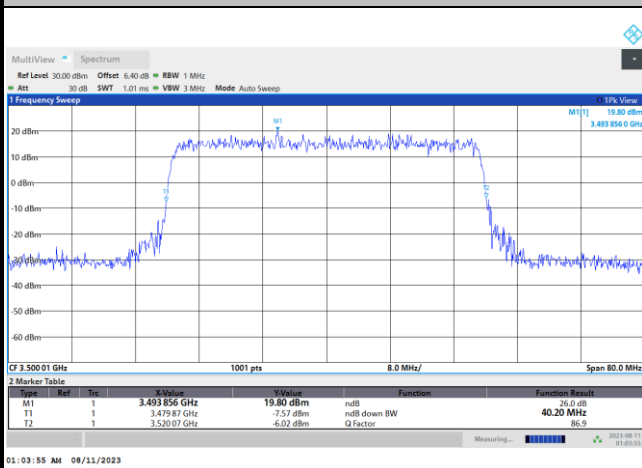


16QAM

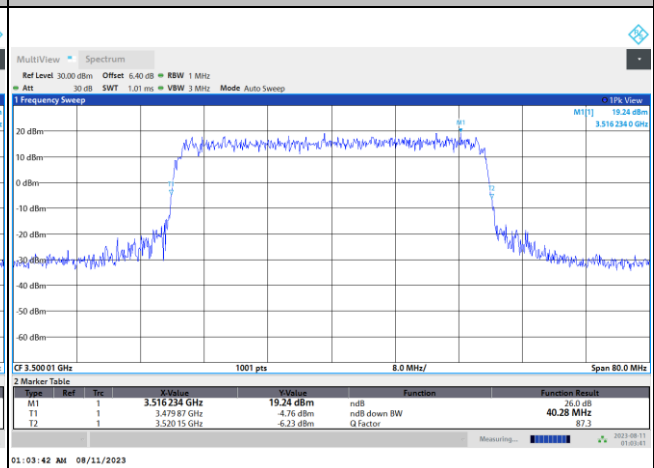

64QAM

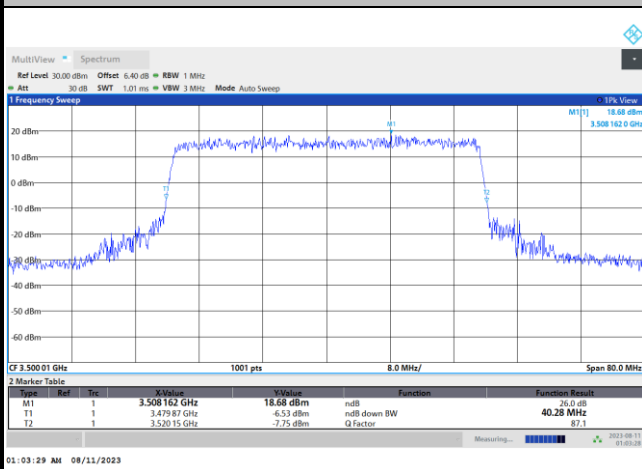


256QAM

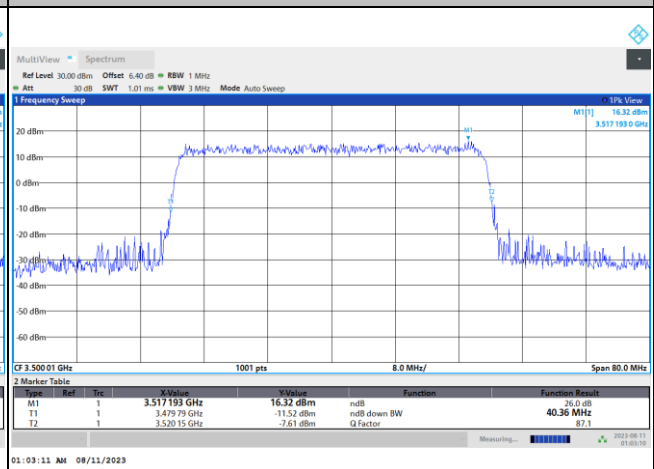




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

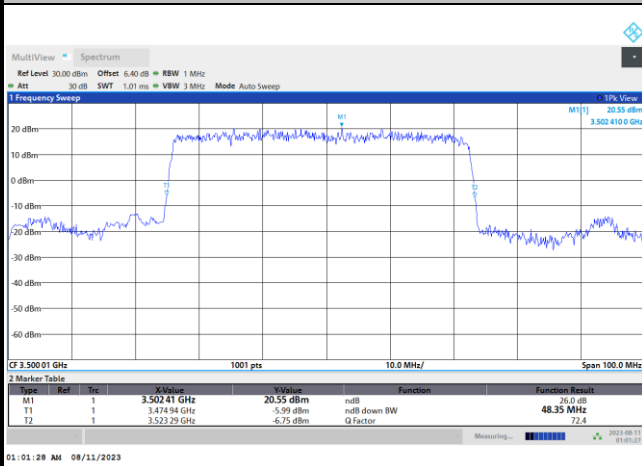


FR1 n77 / 50MHz / CP OFDM / Middle Channel / Full RB


QPSK

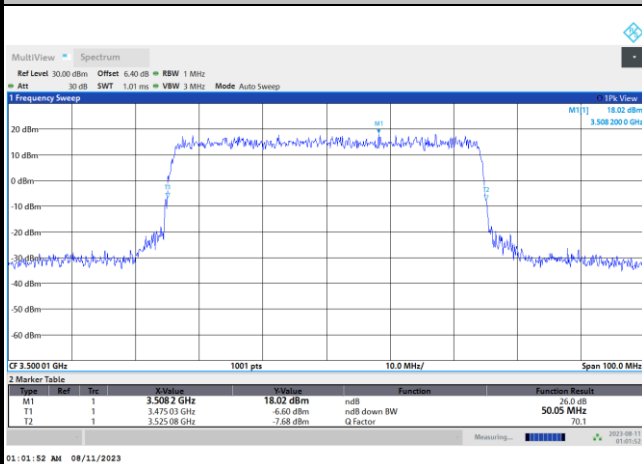


16QAM

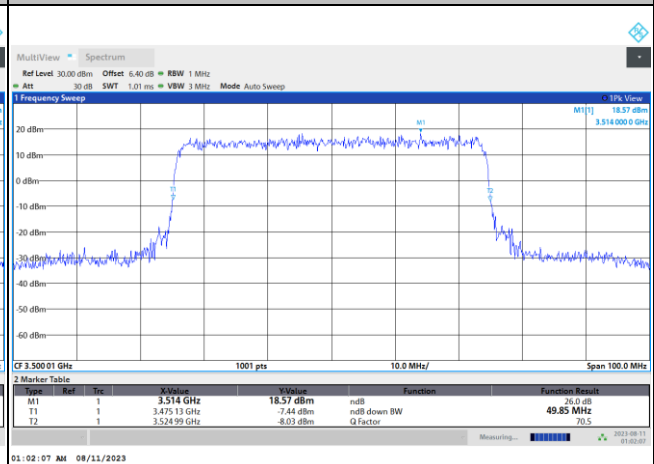

64QAM

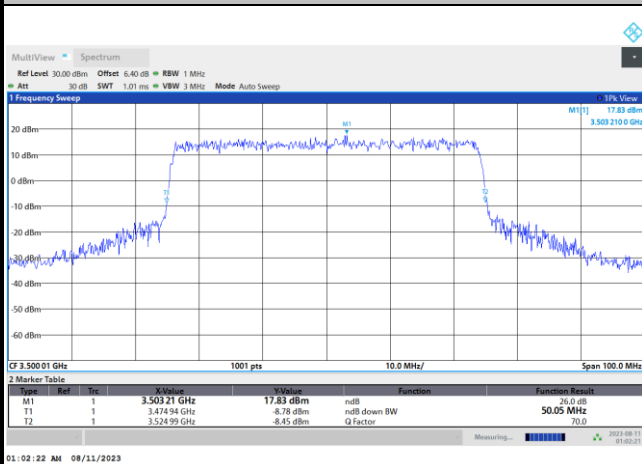


256QAM

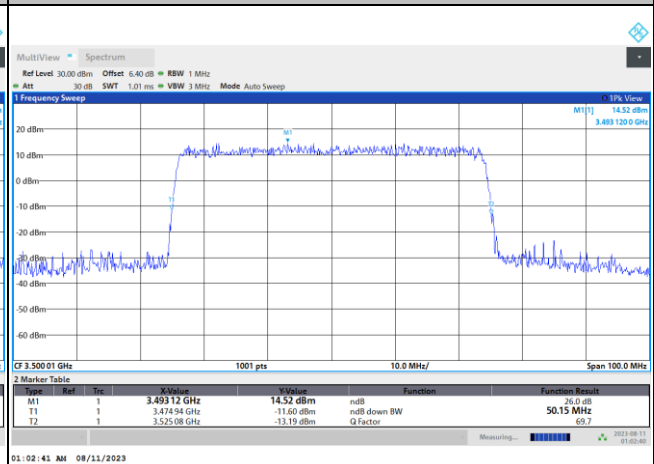




FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

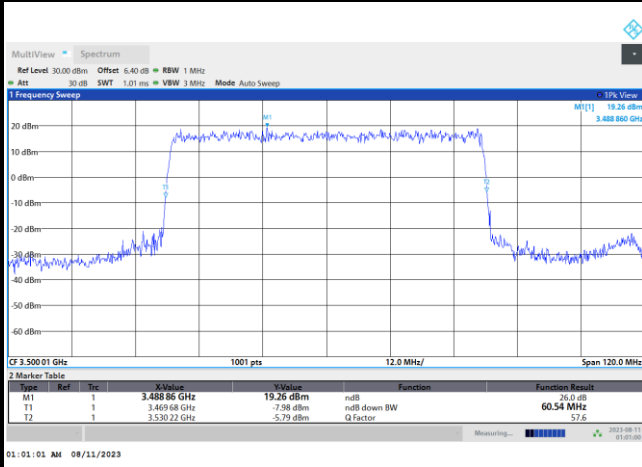


FR1 n77 / 60MHz / CP OFDM / Middle Channel / Full RB


QPSK

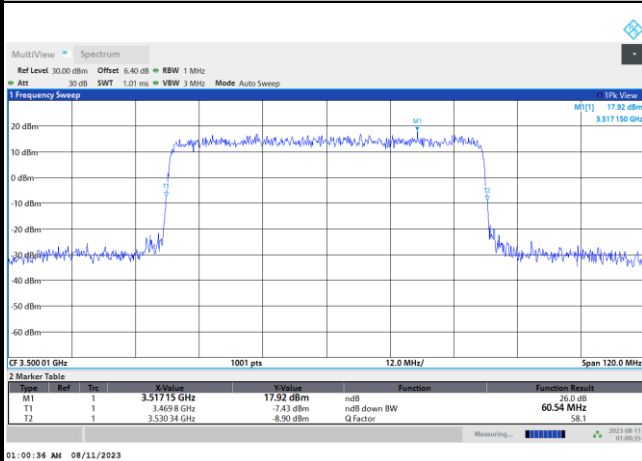


16QAM

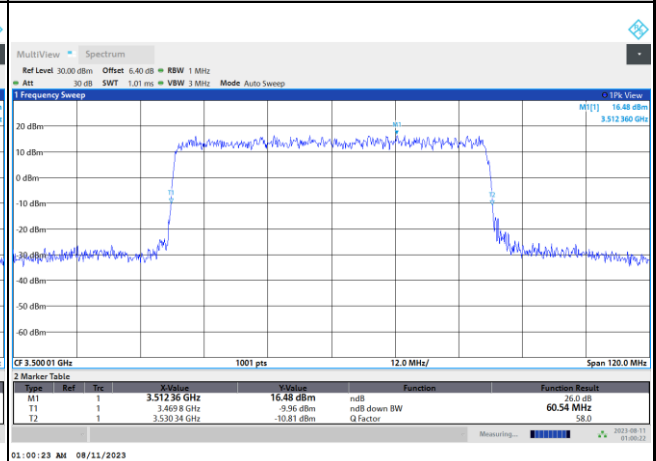

64QAM

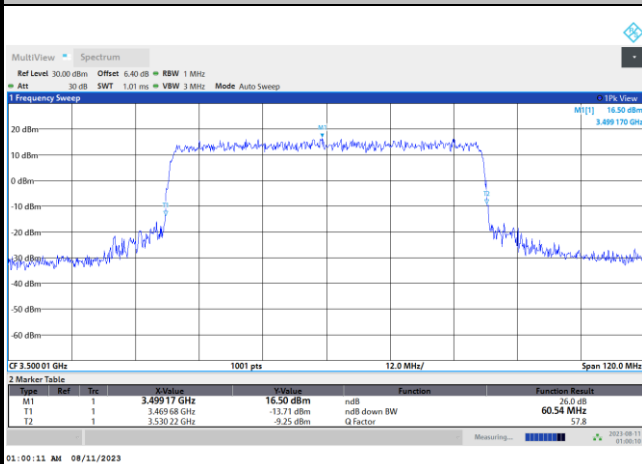


256QAM

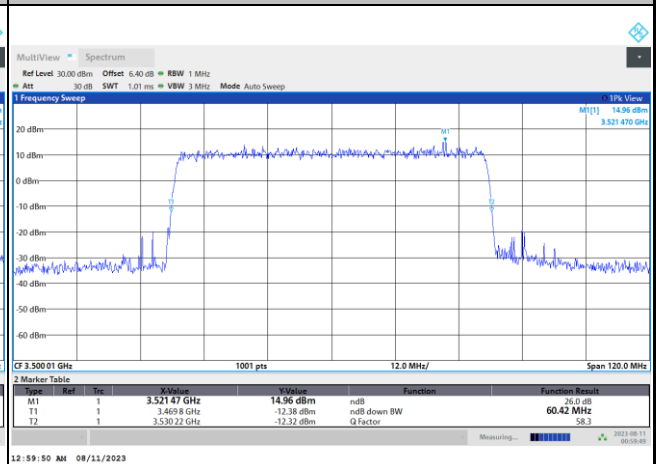


FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

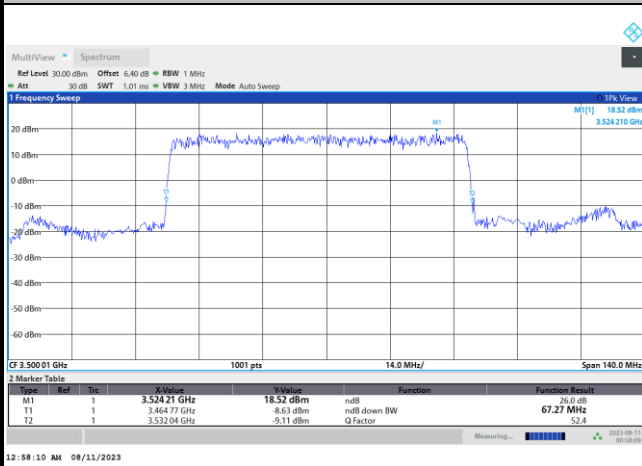


FR1 n77 / 70MHz / CP OFDM / Middle Channel / Full RB


QPSK

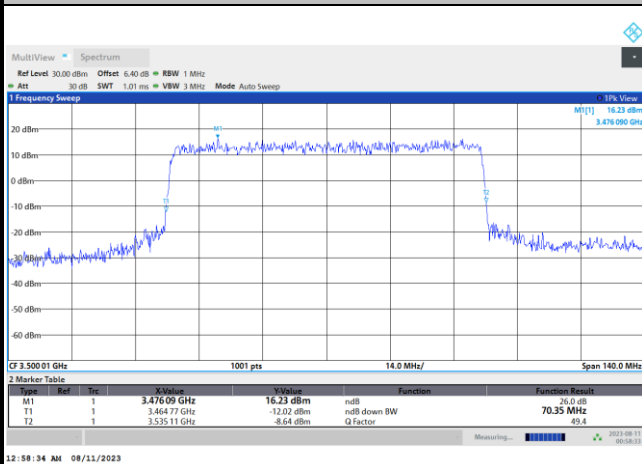


16QAM

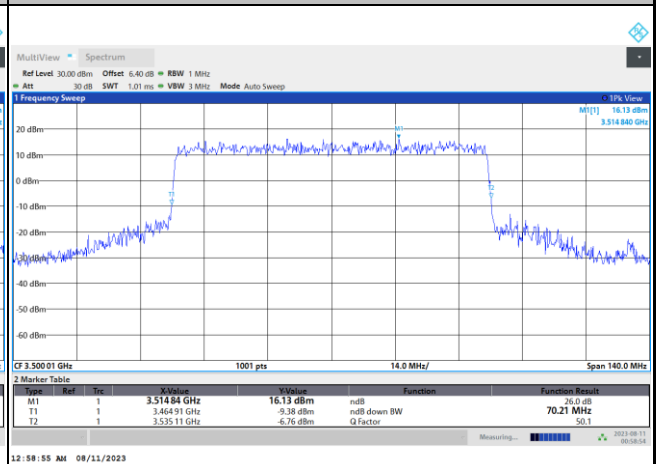

64QAM

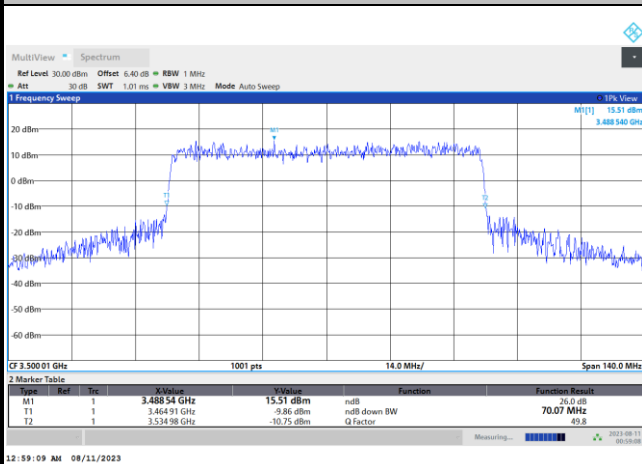


256QAM

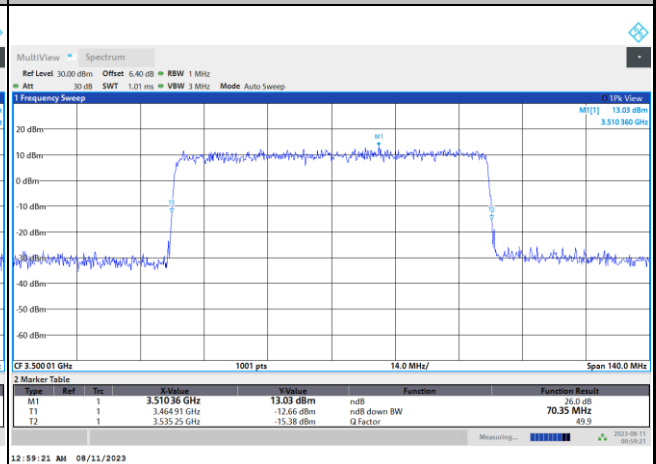




FR1 n77 / 80MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

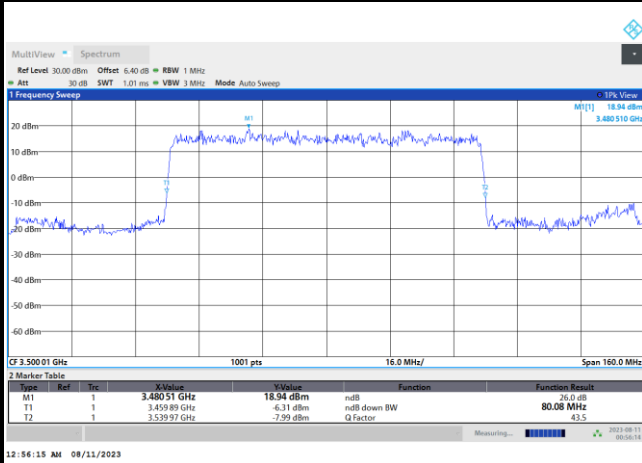


FR1 n77 / 80MHz / CP OFDM / Middle Channel / Full RB


QPSK

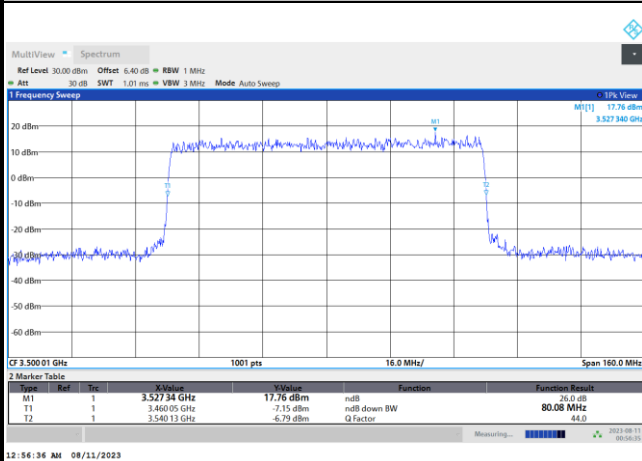


16QAM

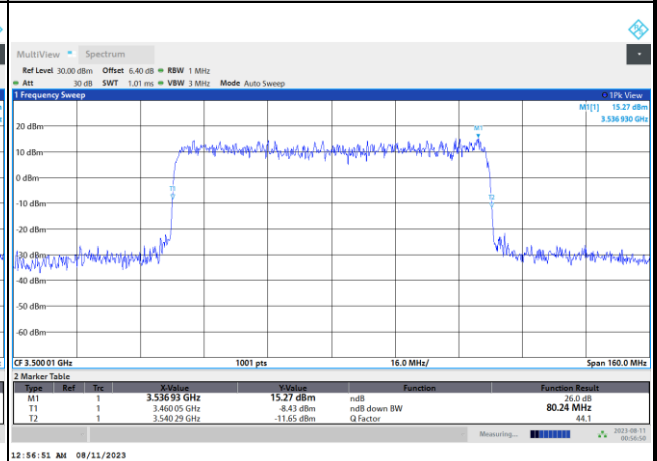

64QAM

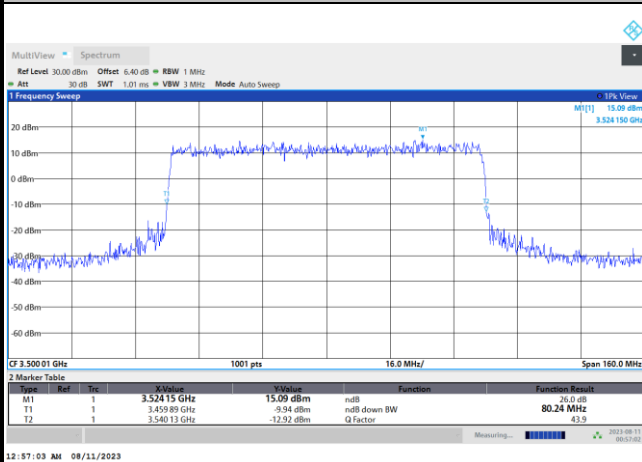


256QAM

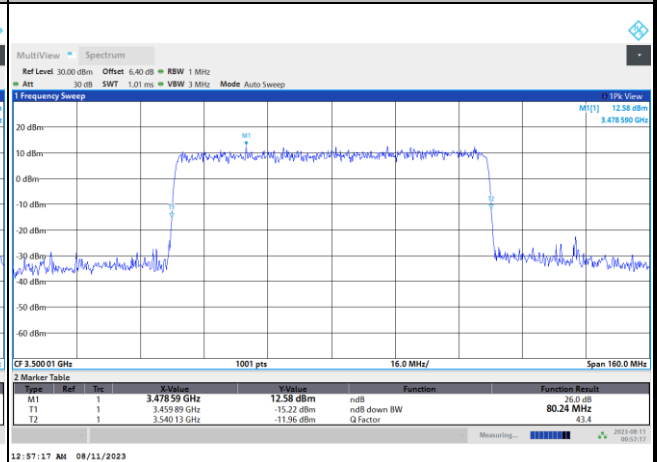




FR1 n77 / 90MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

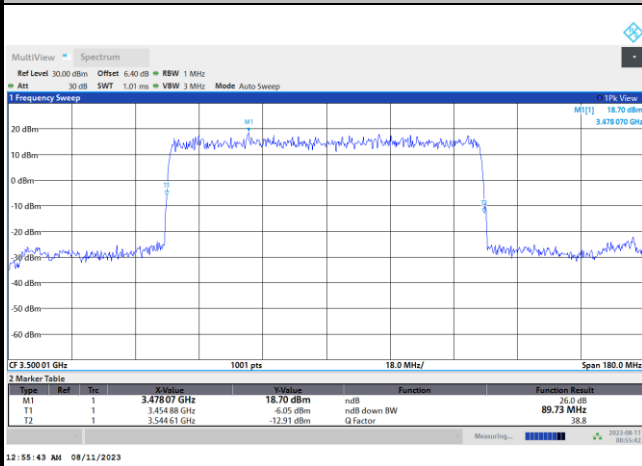


FR1 n77 / 90MHz / CP OFDM / Middle Channel / Full RB


QPSK

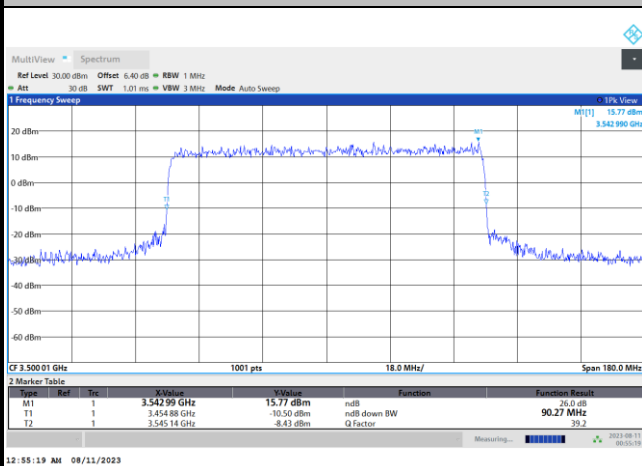


16QAM

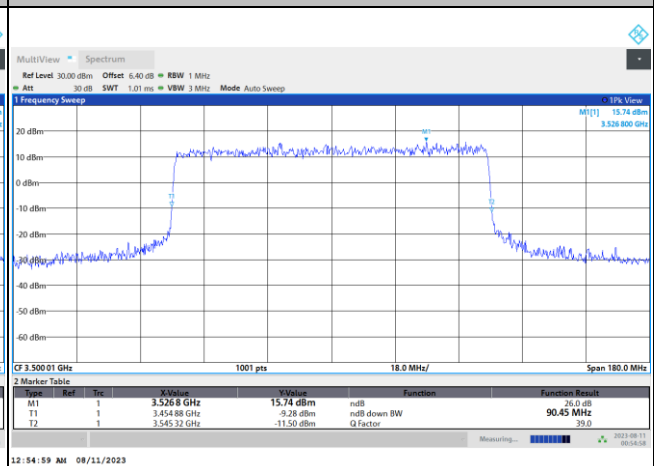

64QAM

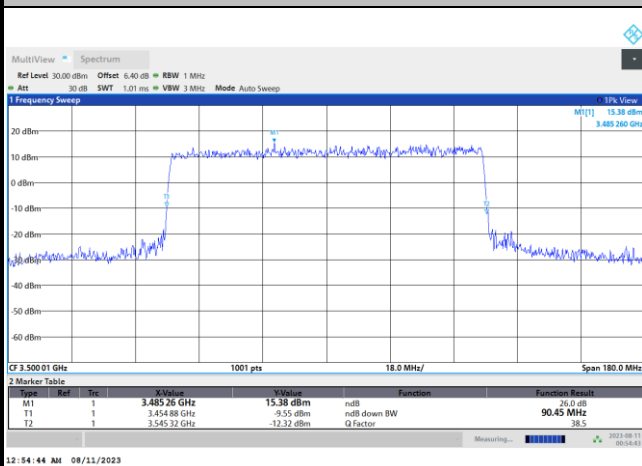


256QAM

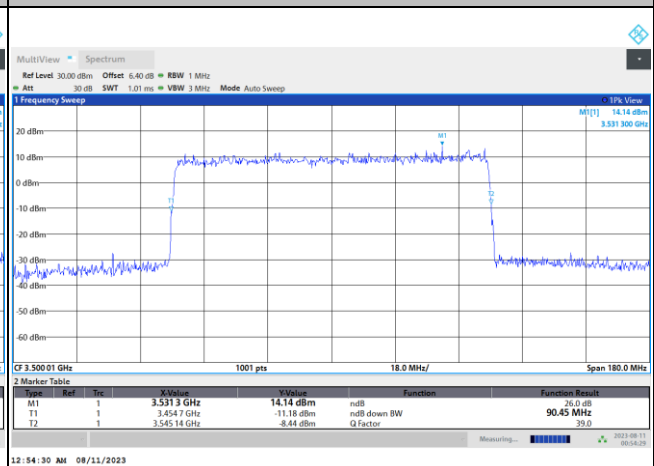




FR1 n77 / 100MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

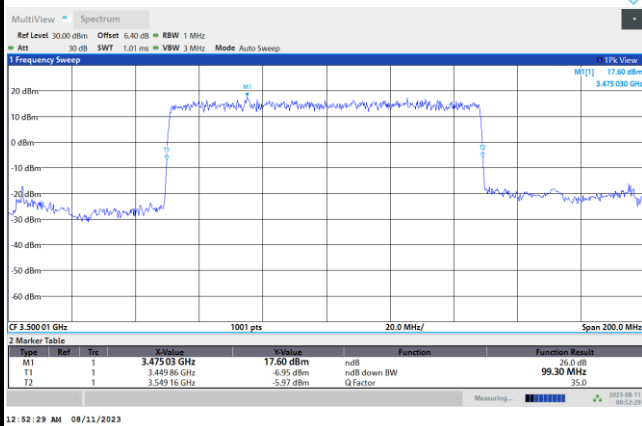


FR1 n77 / 100MHz / CP OFDM / Middle Channel / Full RB


QPSK

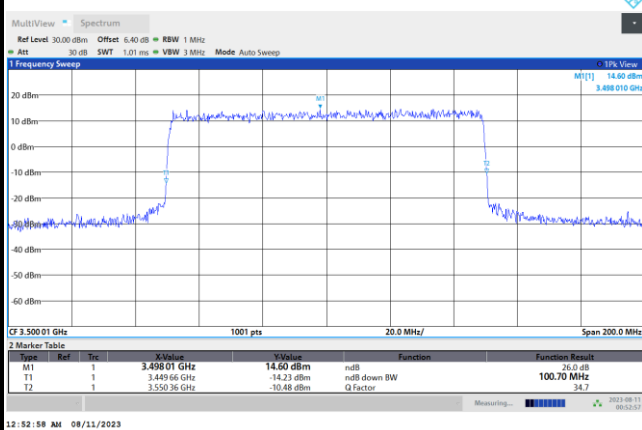


16QAM

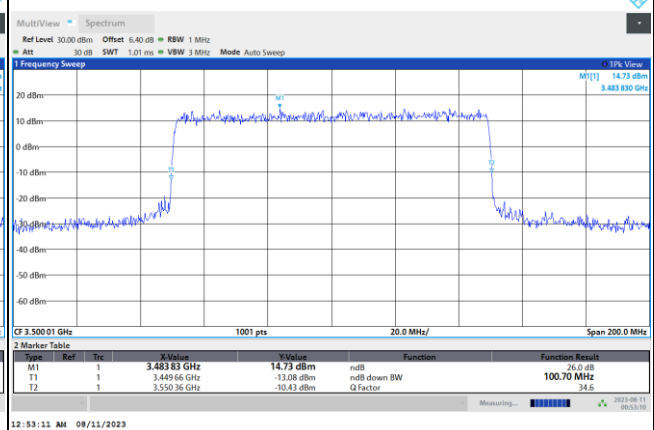

64QAM

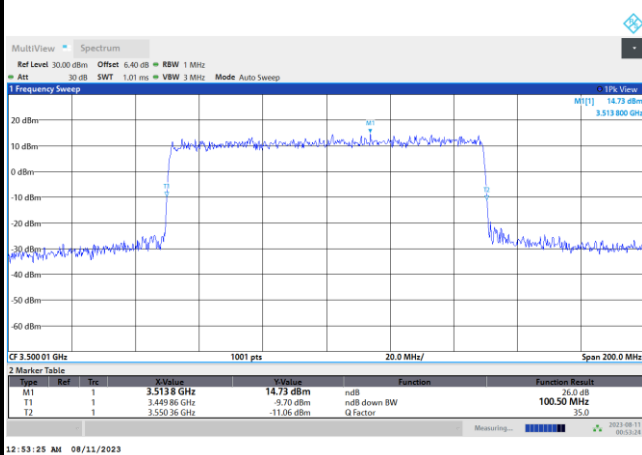

256QAM

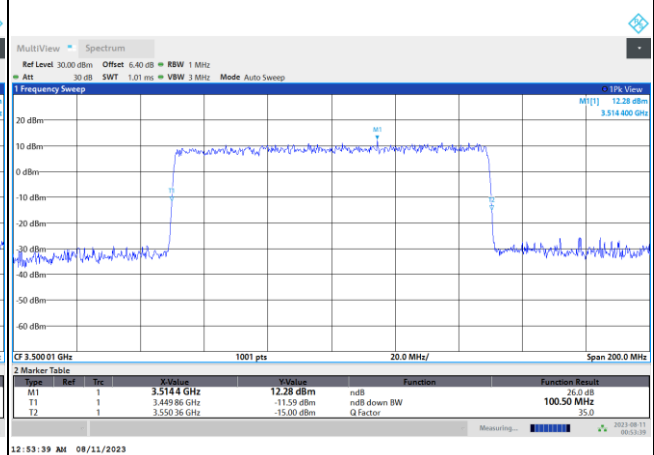

**Occupied Bandwidth**


Mode	FR1 n77 : OB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz	30MHz	40MHz	50MHz	60MHz	70MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	8.60	12.94	17.83	26.80	35.97	45.99	57.95	64.18
BW	80MHz	90MHz	100MHz					
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK					
Middle CH	77.20	86.68	96.25					

Mode	FR1 n77 : OB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	8.58	8.58	13.66	13.62	18.25	18.19	27.79	27.87
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	8.55	8.56	13.58	13.61	18.22	18.19	27.84	27.84
BW	40MHz		50MHz		60MHz		70MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	38.04	37.93	47.49	47.58	57.66	57.90	67.41	67.49
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	38.01	38.08	43.14	47.43	57.68	57.79	67.50	67.30
BW	80MHz		90MHz		100MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Middle CH	77.33	77.22	87.59	87.31	97.19	97.34		
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM		
Middle CH	77.39	77.28	87.20	87.37	97.05	97.17		




FR1 n77 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

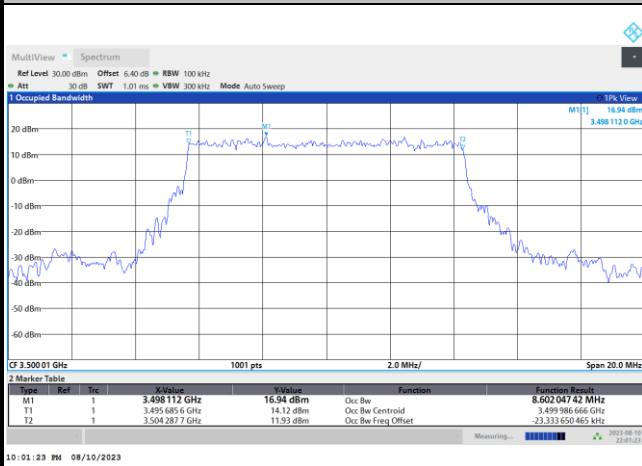


FR1 n77 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

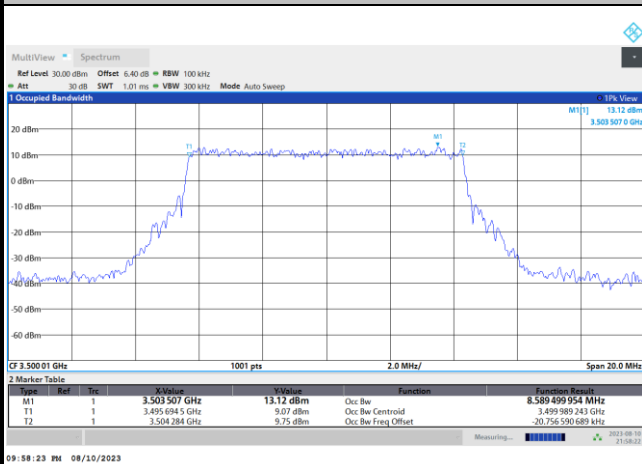


16QAM

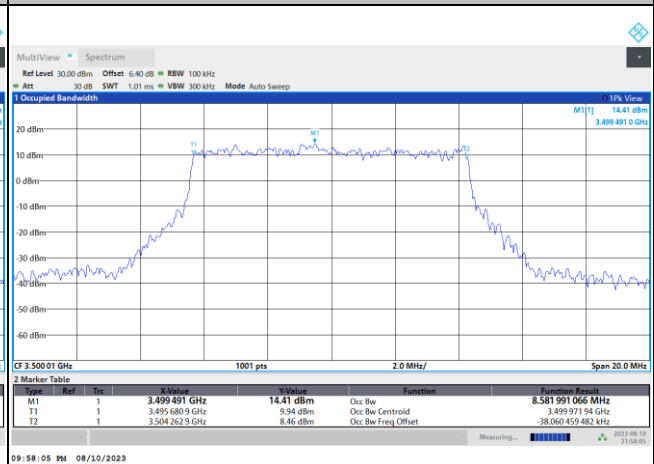

64QAM

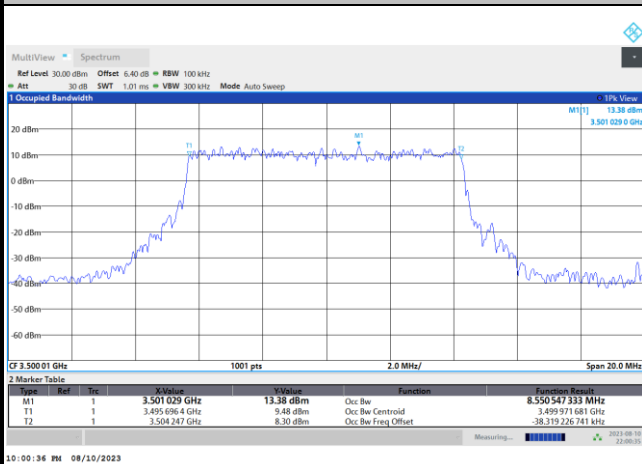


256QAM

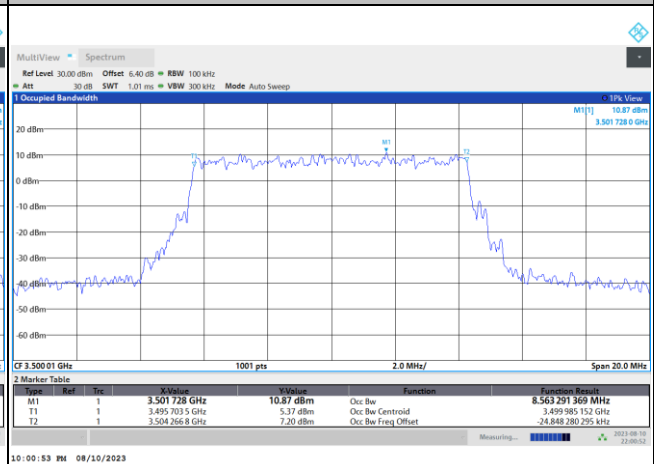


FR1 n77 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

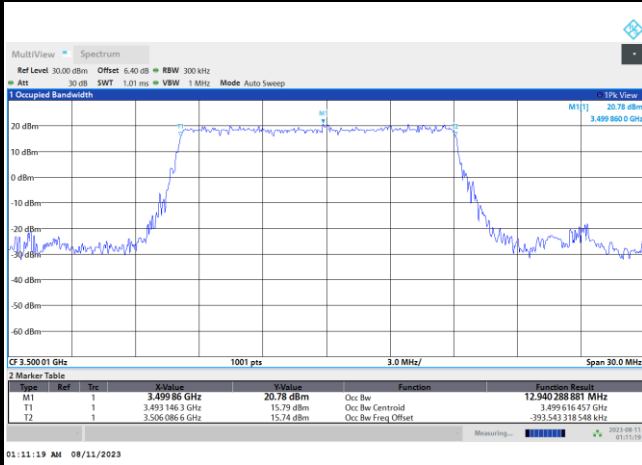


FR1 n77 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

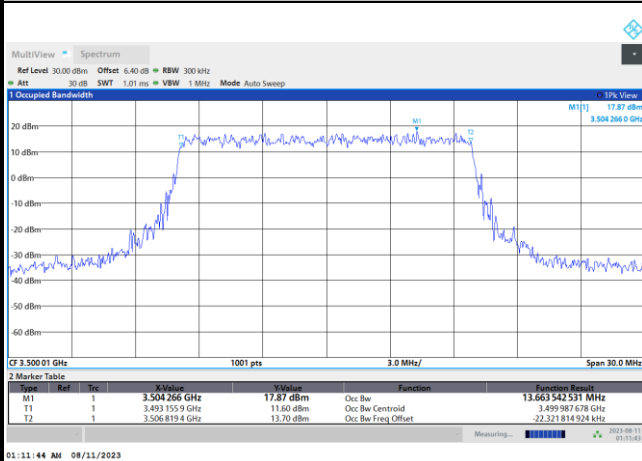


16QAM

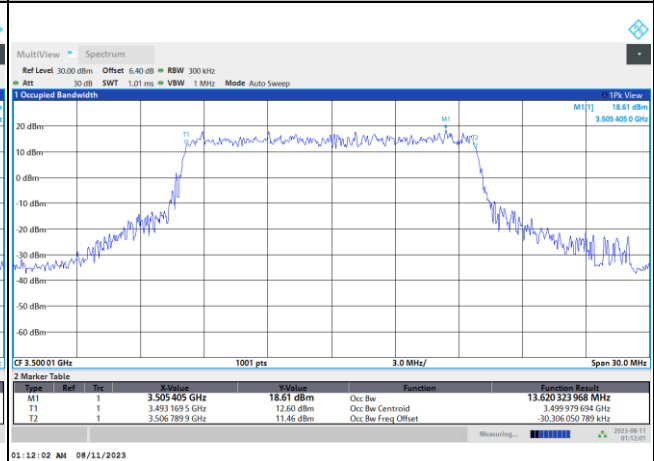

64QAM

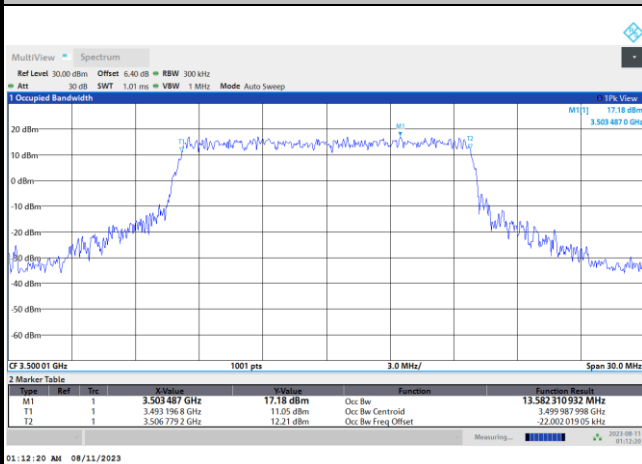


256QAM

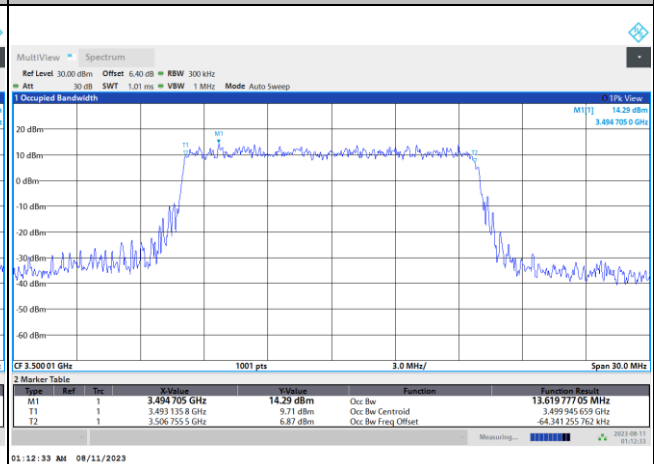




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

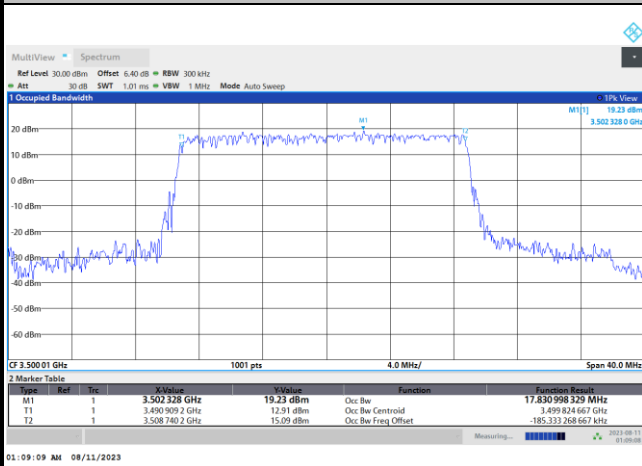


FR1 n77 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

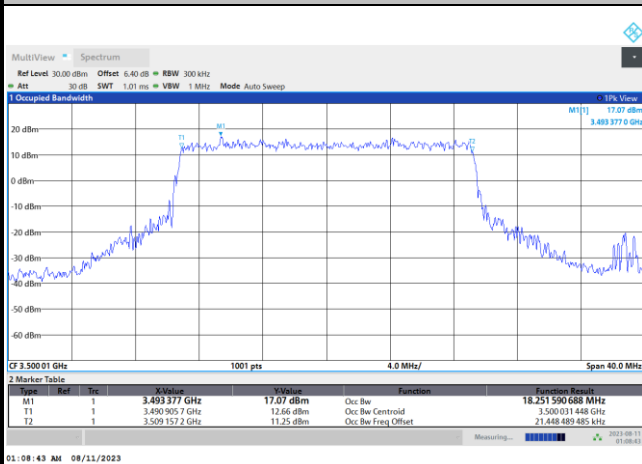


16QAM




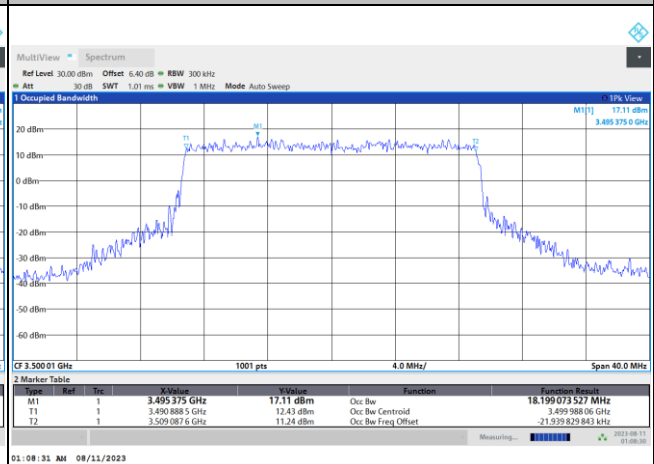


64QAM

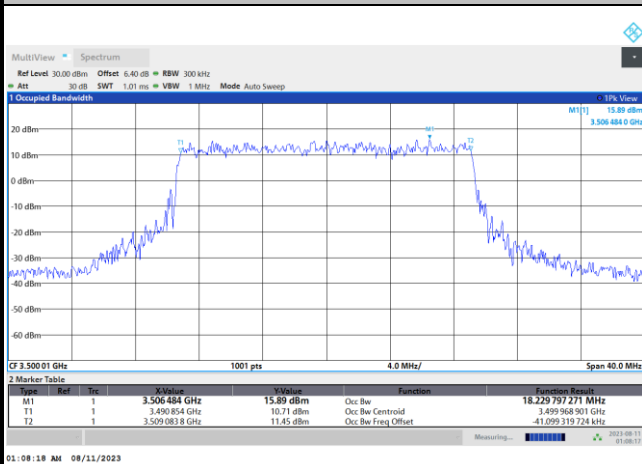

256QAM

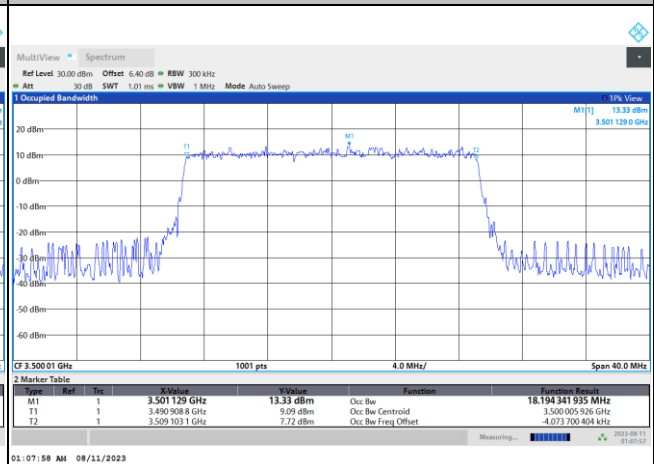

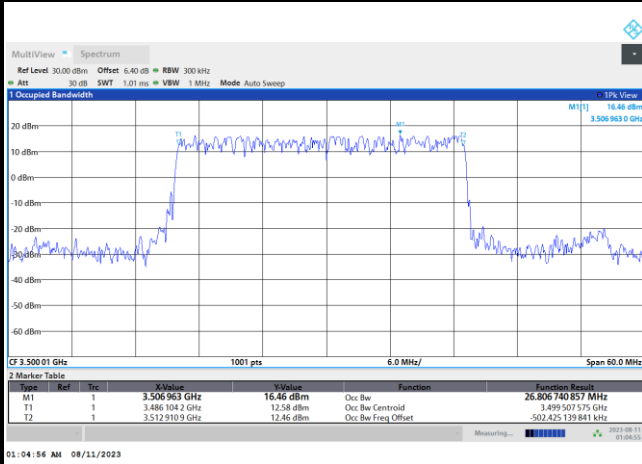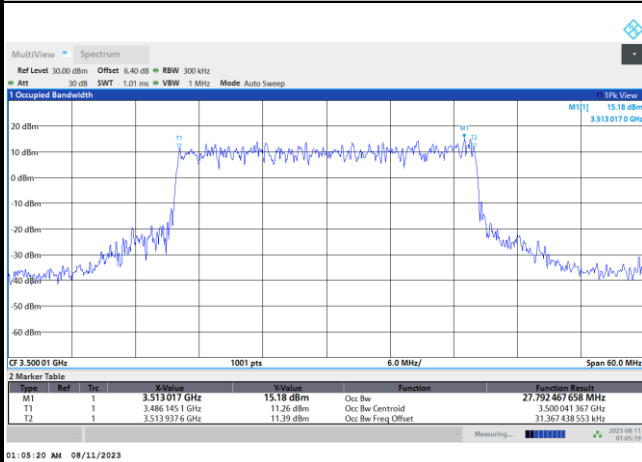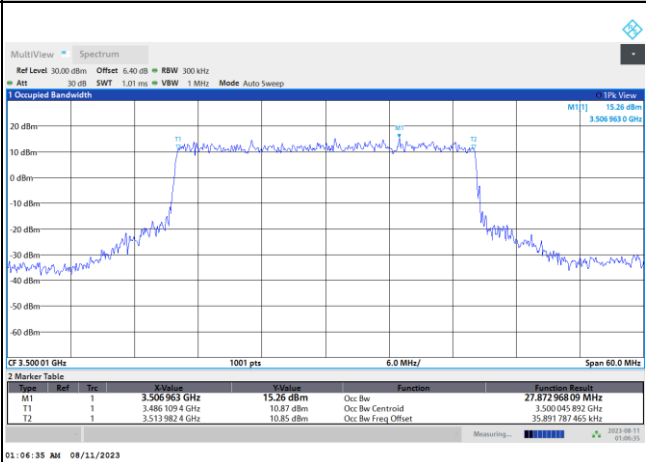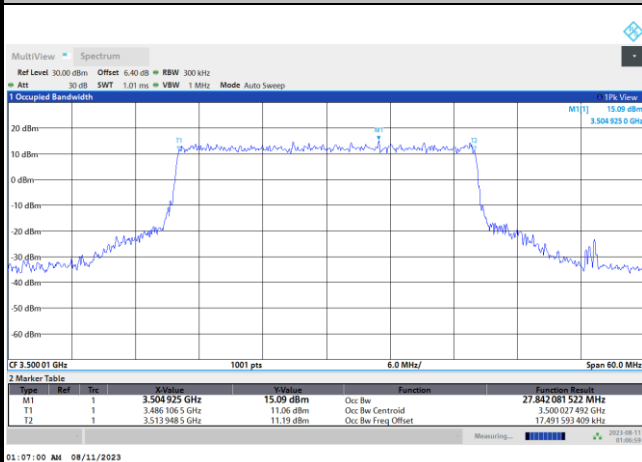FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

FR1 n77 / 30MHz / CP OFDM / Middle Channel / Full RB
QPSK

16QAM

64QAM

256QAM
