


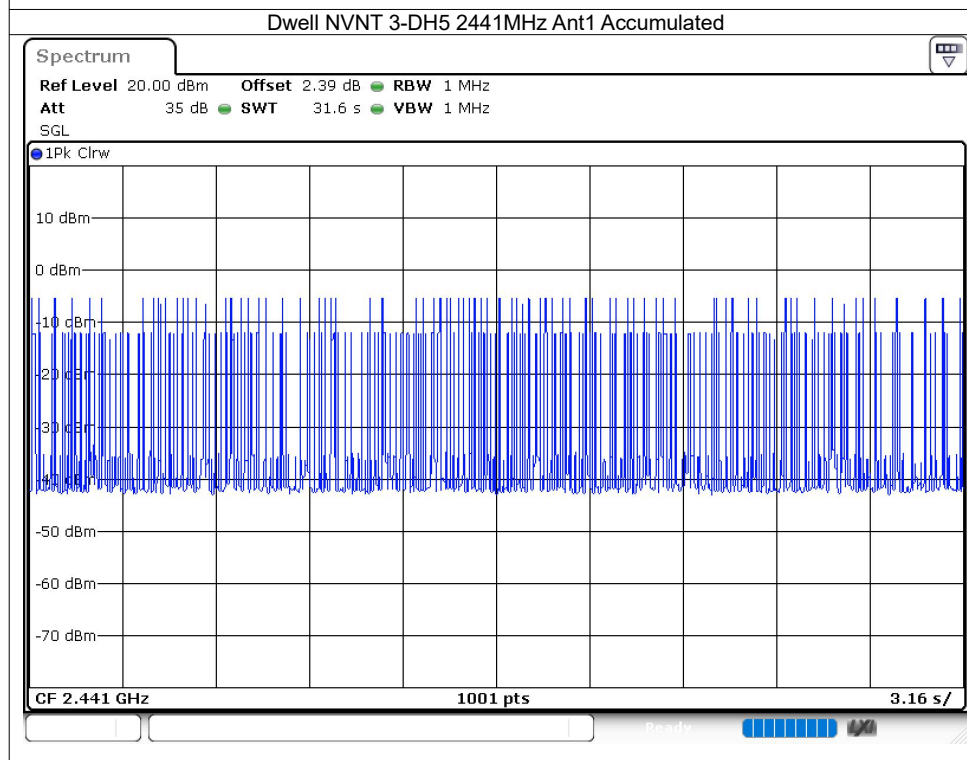
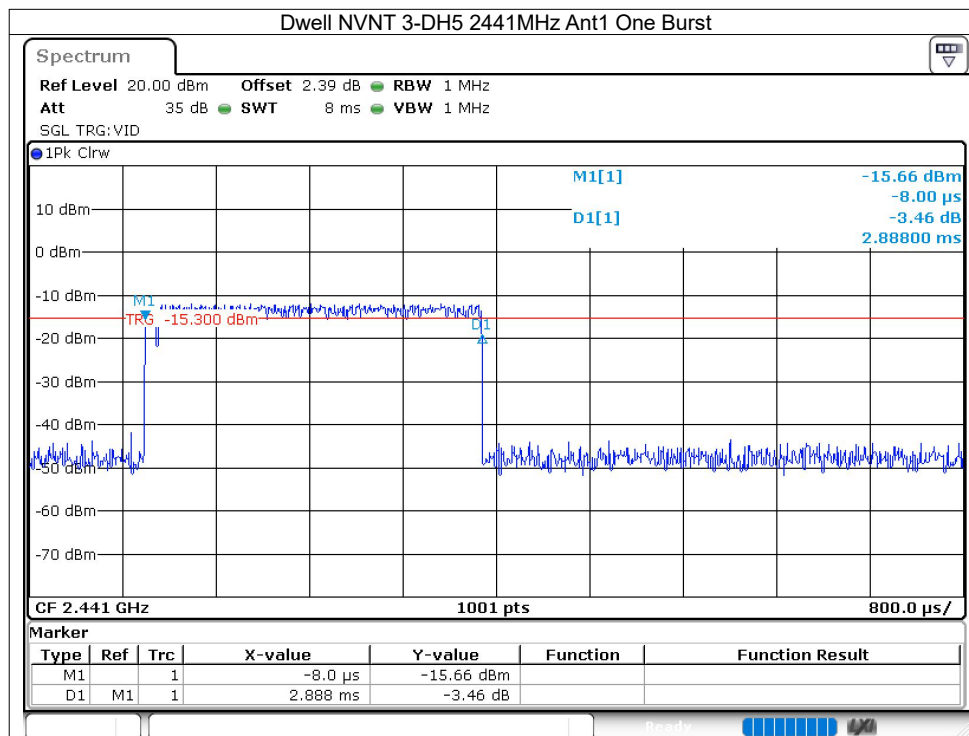



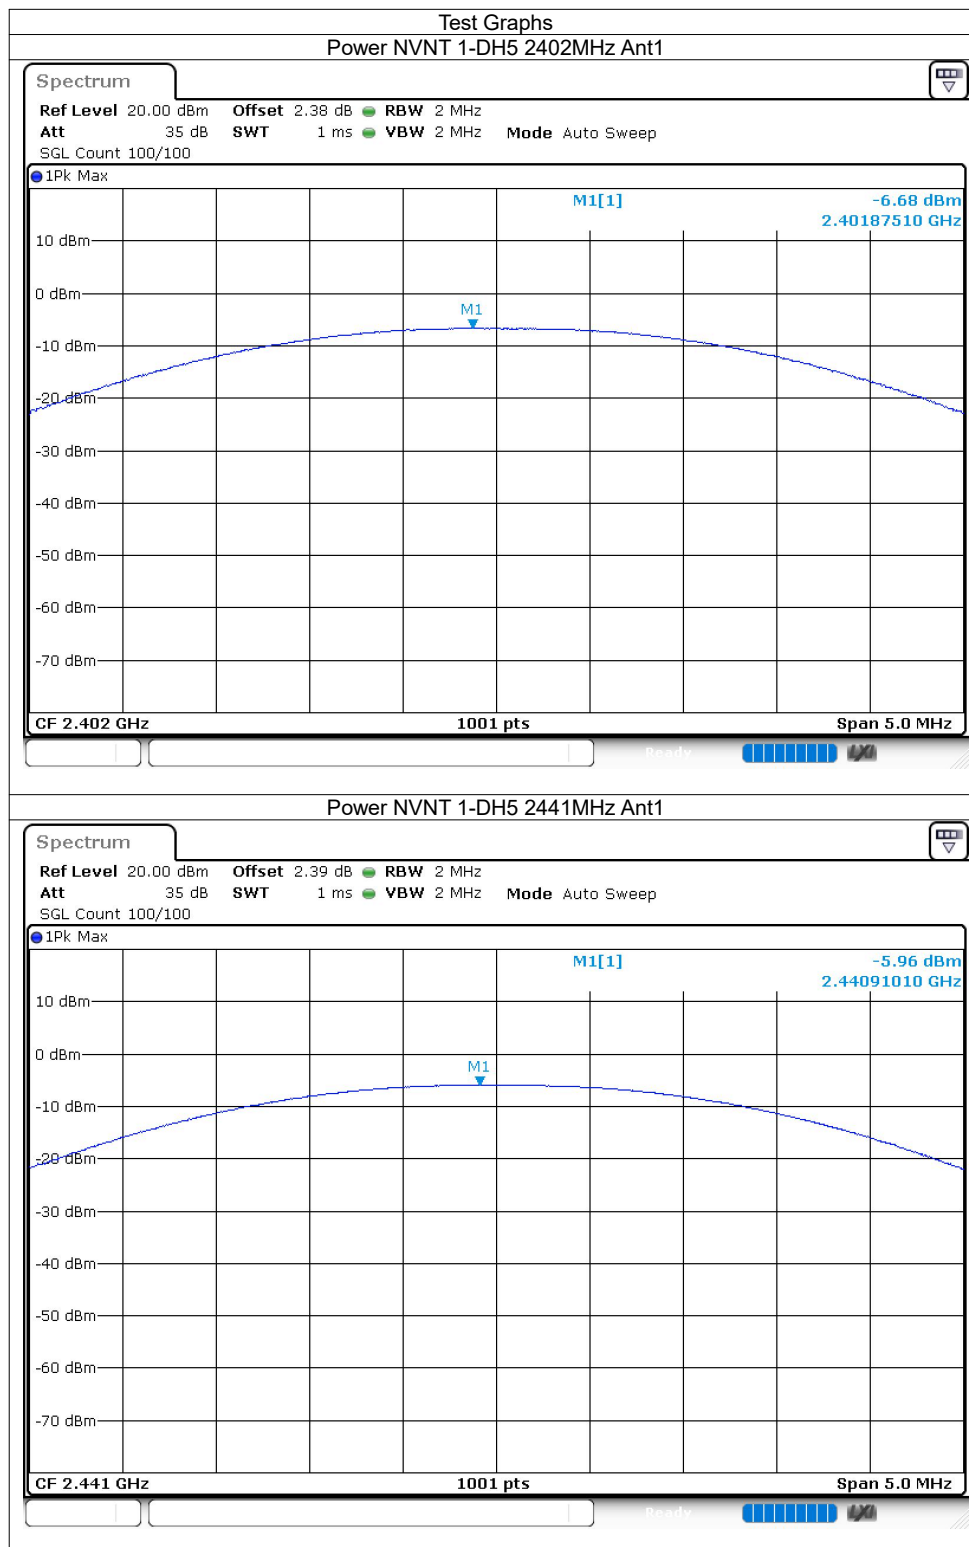




8.2 MAXIMUM CONDUCTED OUTPUT POWER


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-6.68	21	Pass
NVNT	1-DH5	2441	Ant1	-5.96	21	Pass
NVNT	1-DH5	2480	Ant1	-5.51	21	Pass
NVNT	2-DH5	2402	Ant1	-5.84	21	Pass
NVNT	2-DH5	2441	Ant1	-5.15	21	Pass
NVNT	2-DH5	2480	Ant1	-4.64	21	Pass
NVNT	3-DH5	2402	Ant1	-5.50	21	Pass
NVNT	3-DH5	2441	Ant1	-4.89	21	Pass
NVNT	3-DH5	2480	Ant1	-4.21	21	Pass

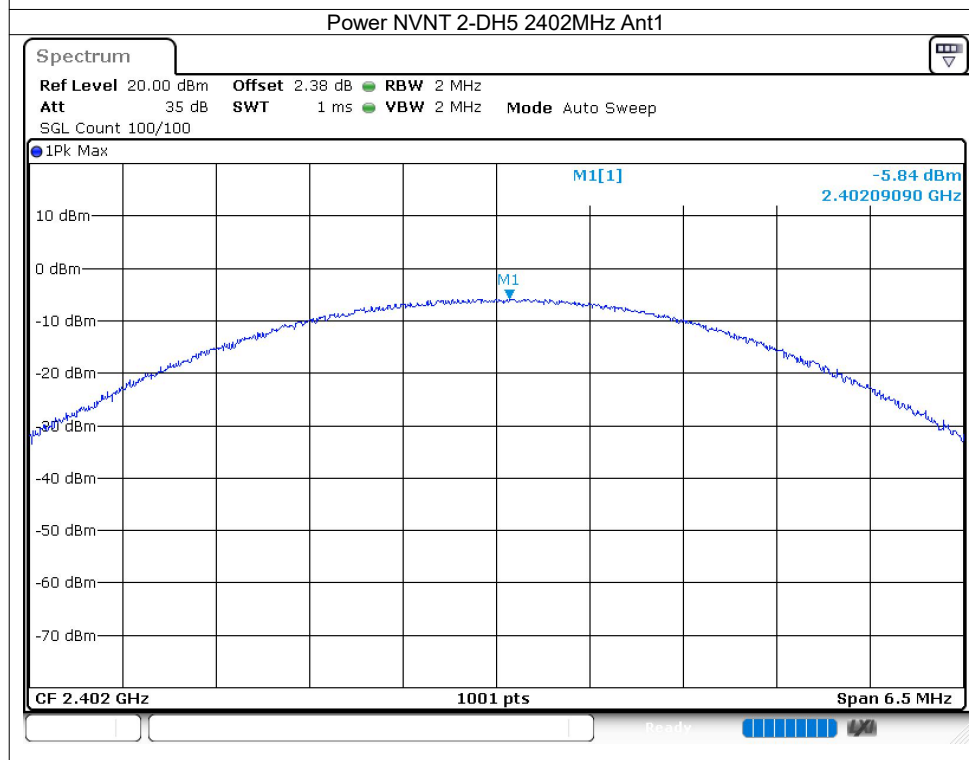

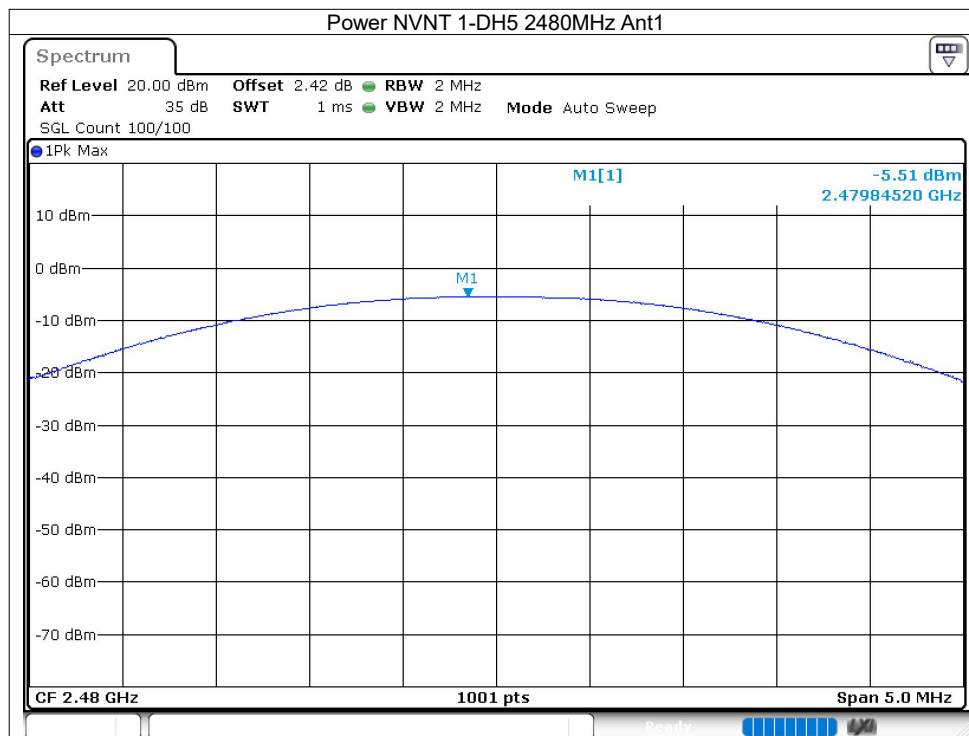

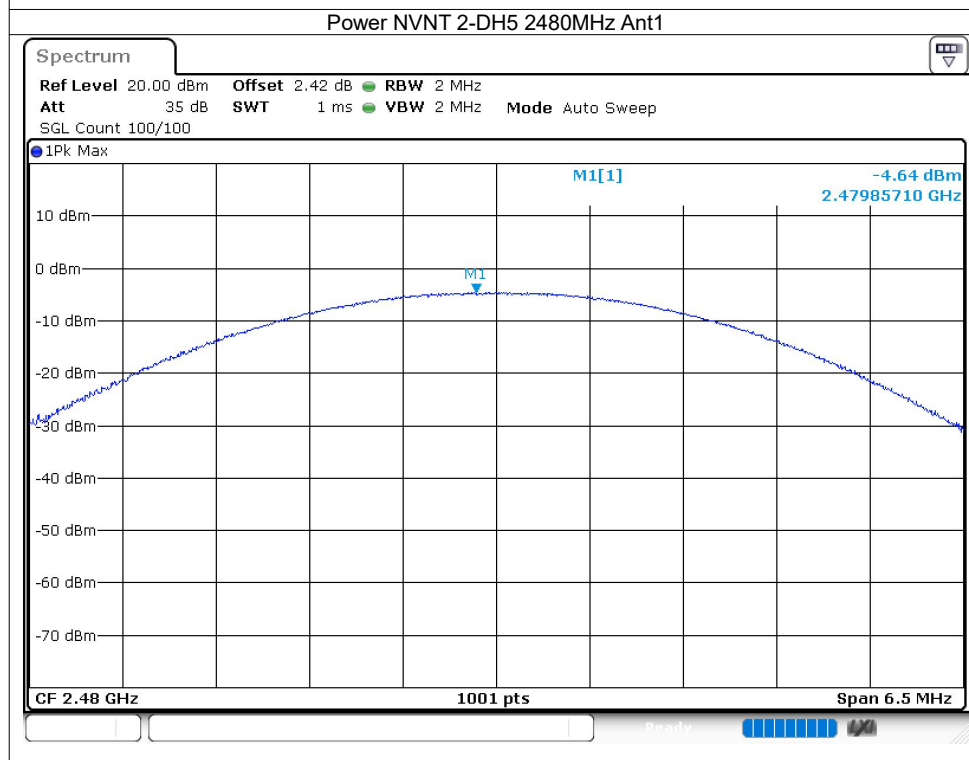
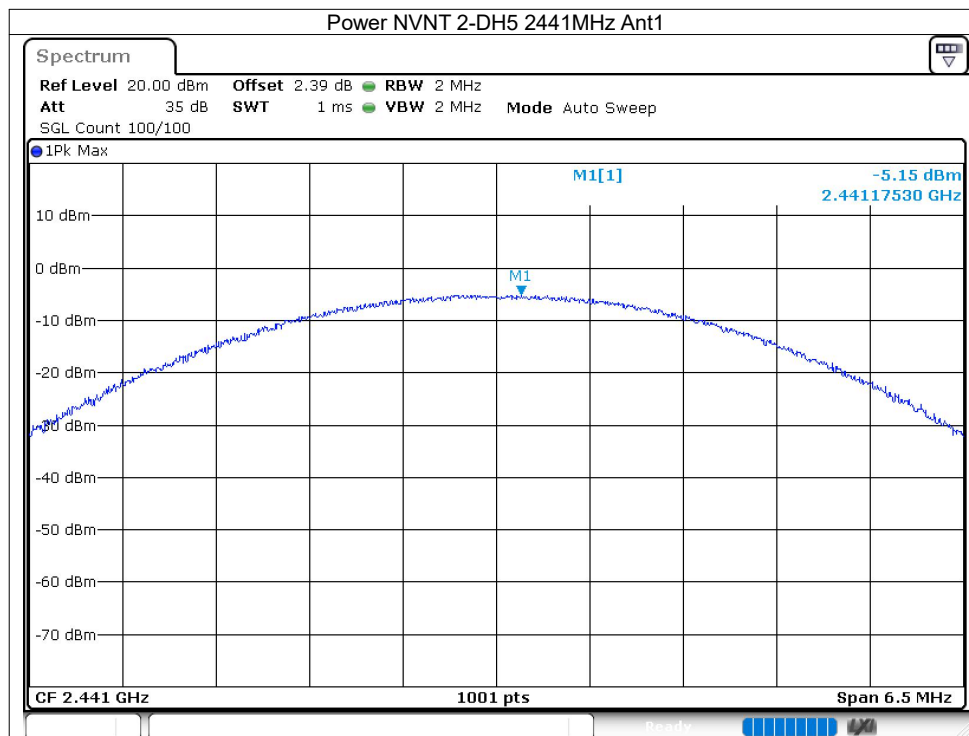


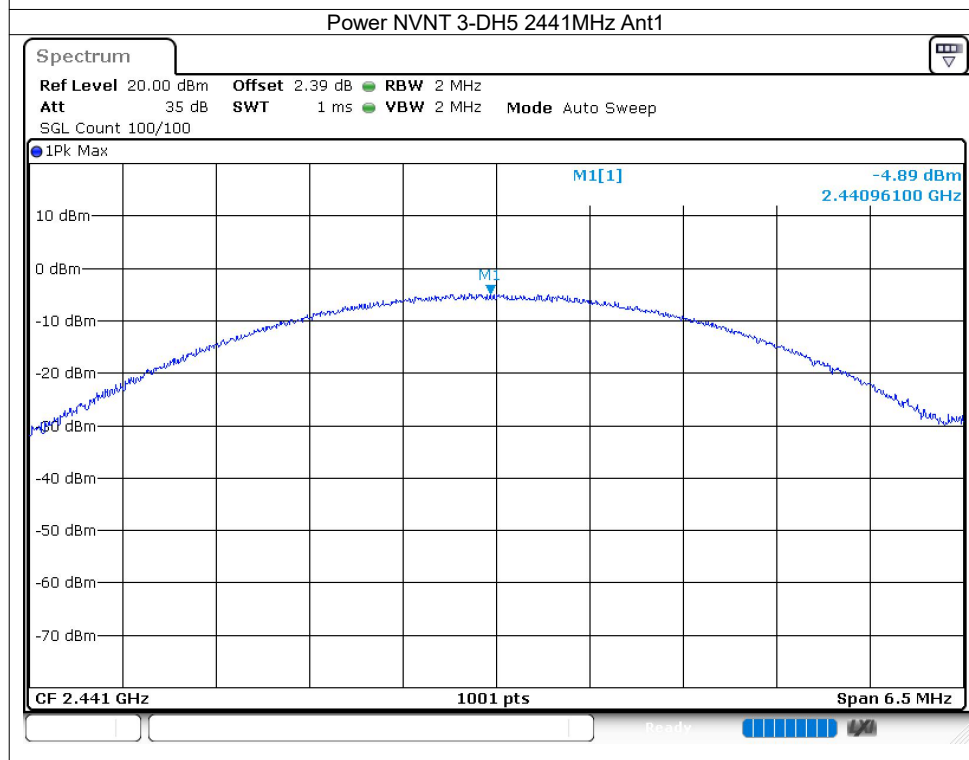
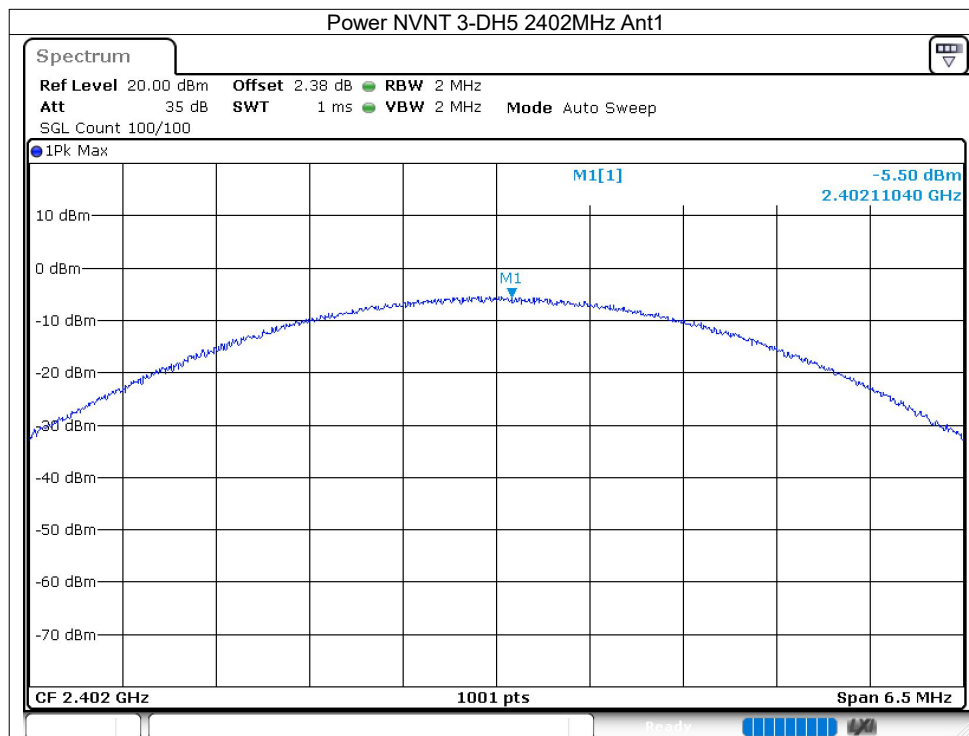



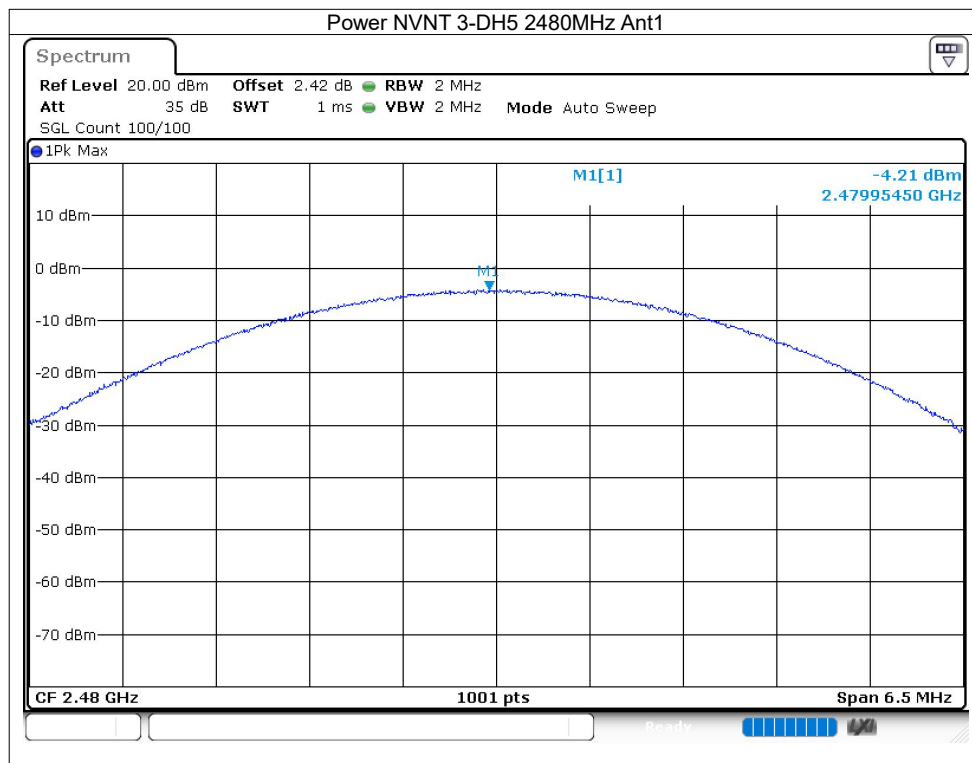




8.3 -20dB BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.948	0	Pass
NVNT	1-DH5	2441	Ant1	0.936	0	Pass
NVNT	1-DH5	2480	Ant1	0.946	0	Pass
NVNT	2-DH5	2402	Ant1	1.302	0	Pass
NVNT	2-DH5	2441	Ant1	1.260	0	Pass
NVNT	2-DH5	2480	Ant1	1.350	0	Pass
NVNT	3-DH5	2402	Ant1	1.184	0	Pass
NVNT	3-DH5	2441	Ant1	1.224	0	Pass
NVNT	3-DH5	2480	Ant1	1.298	0	Pass

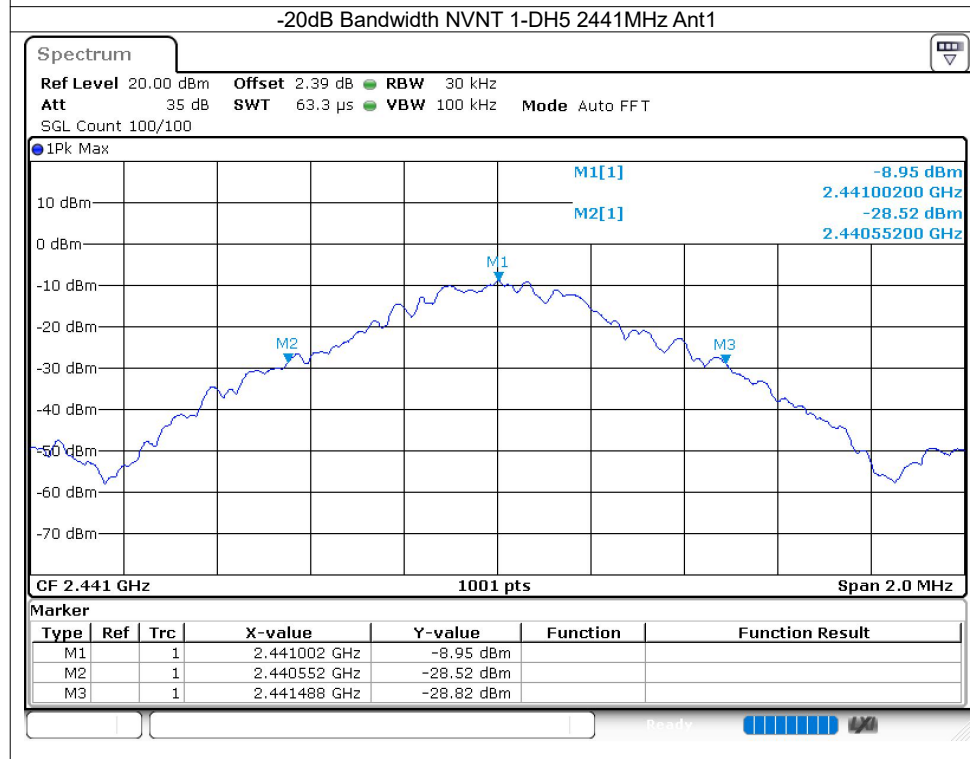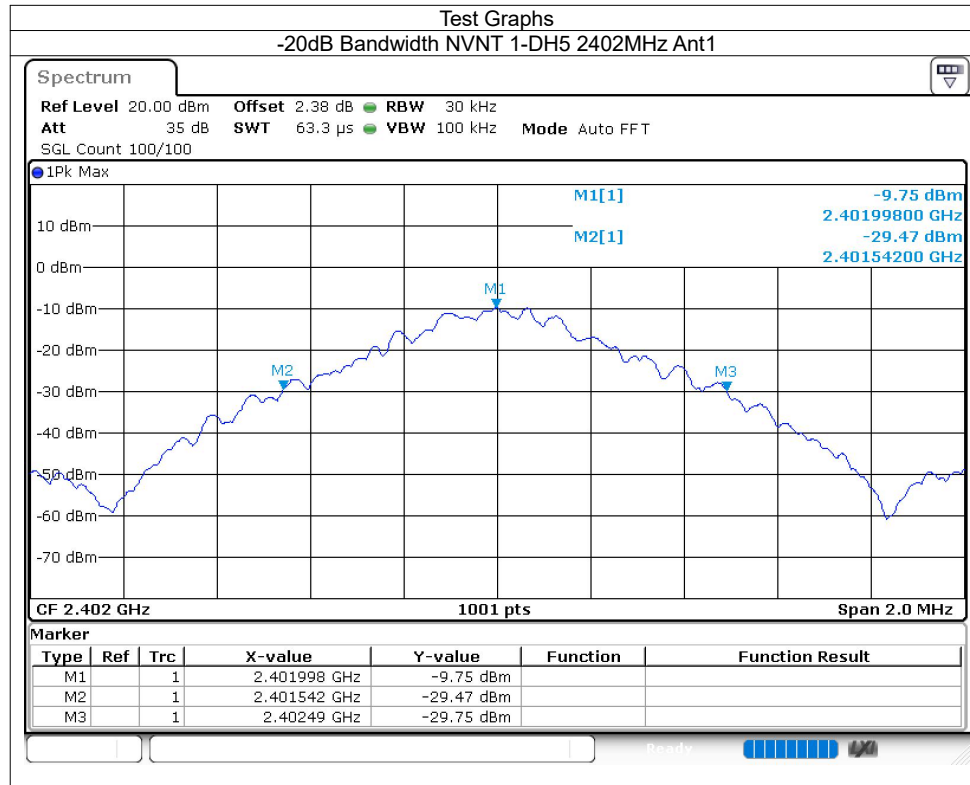

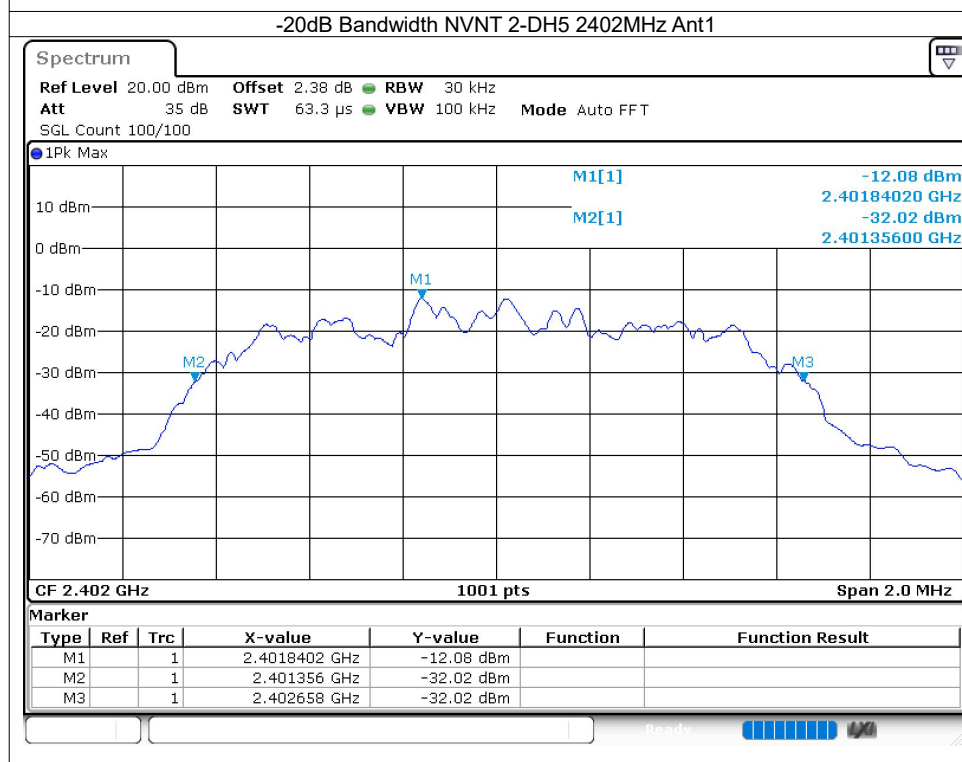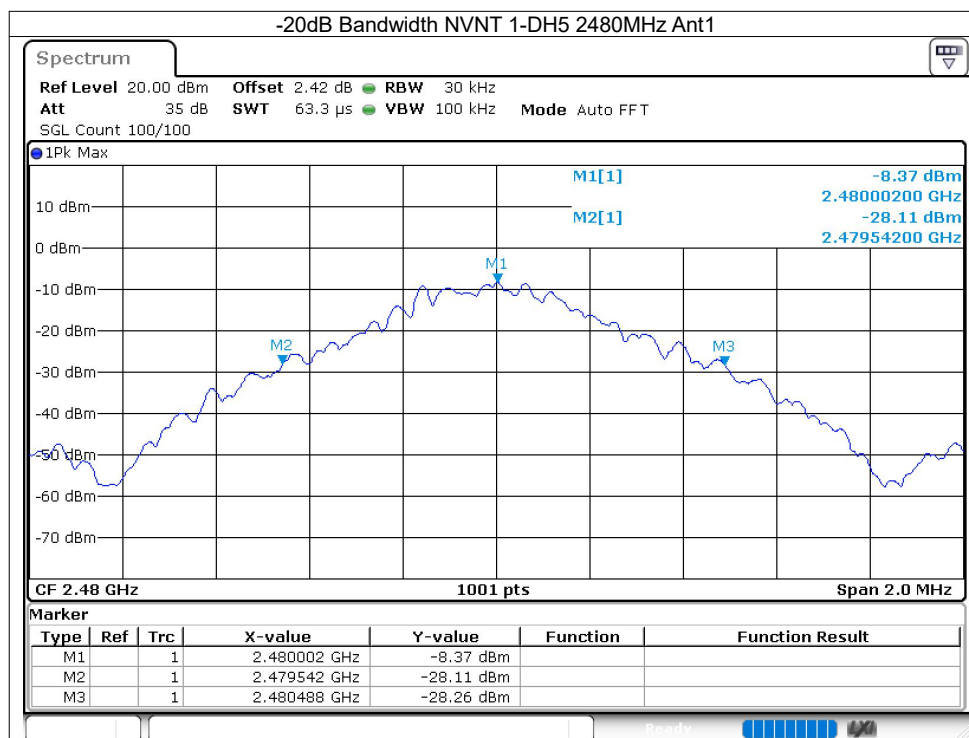

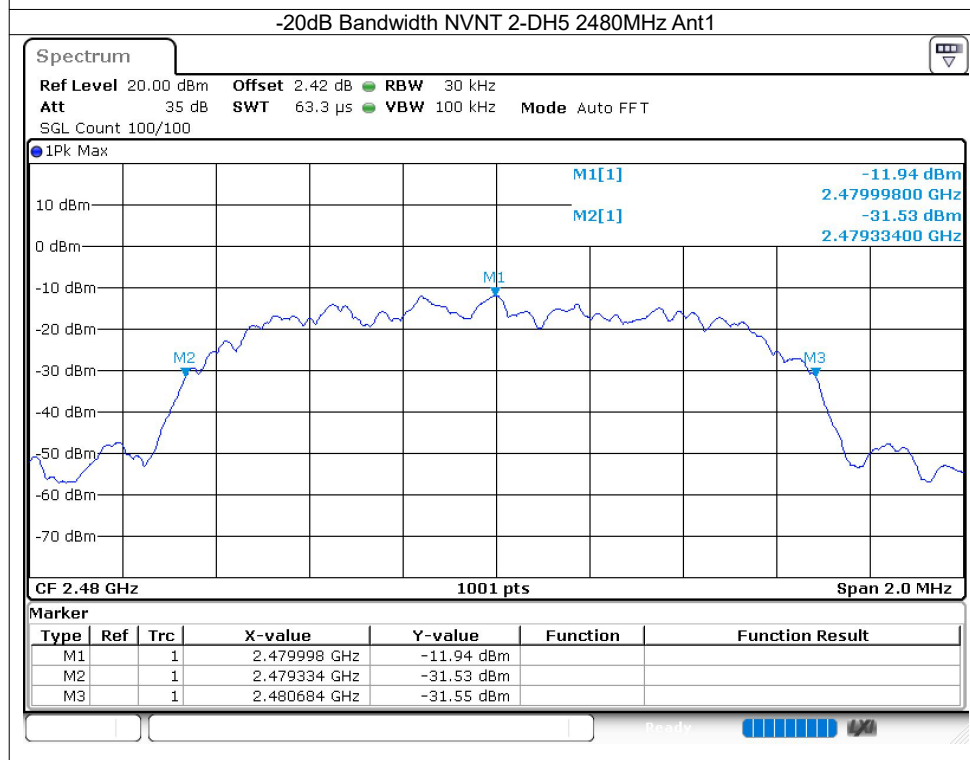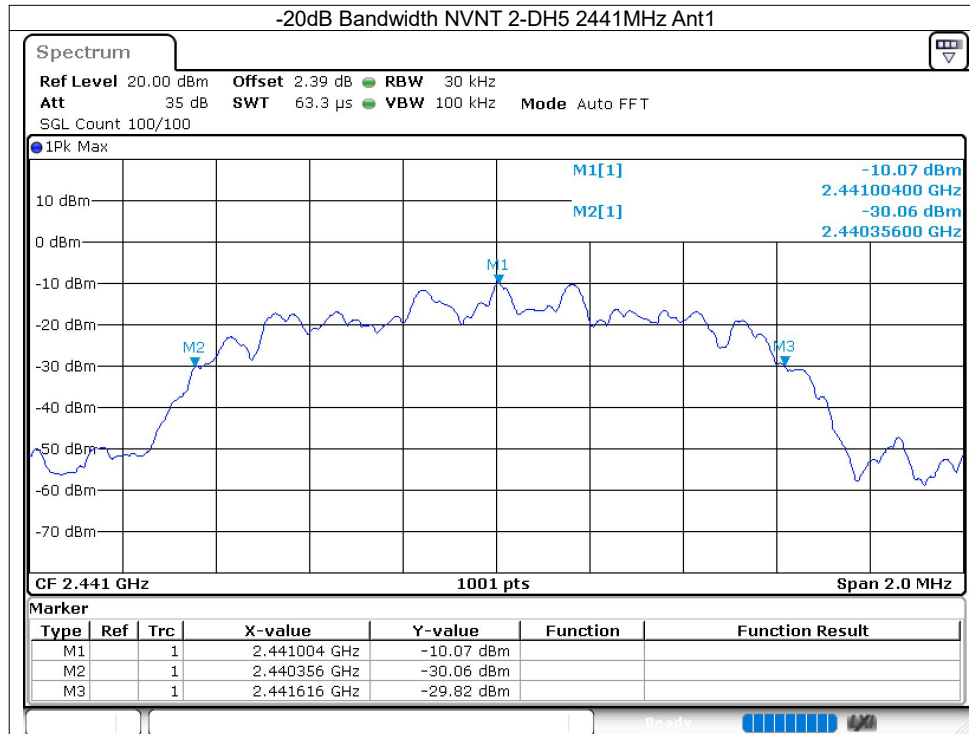


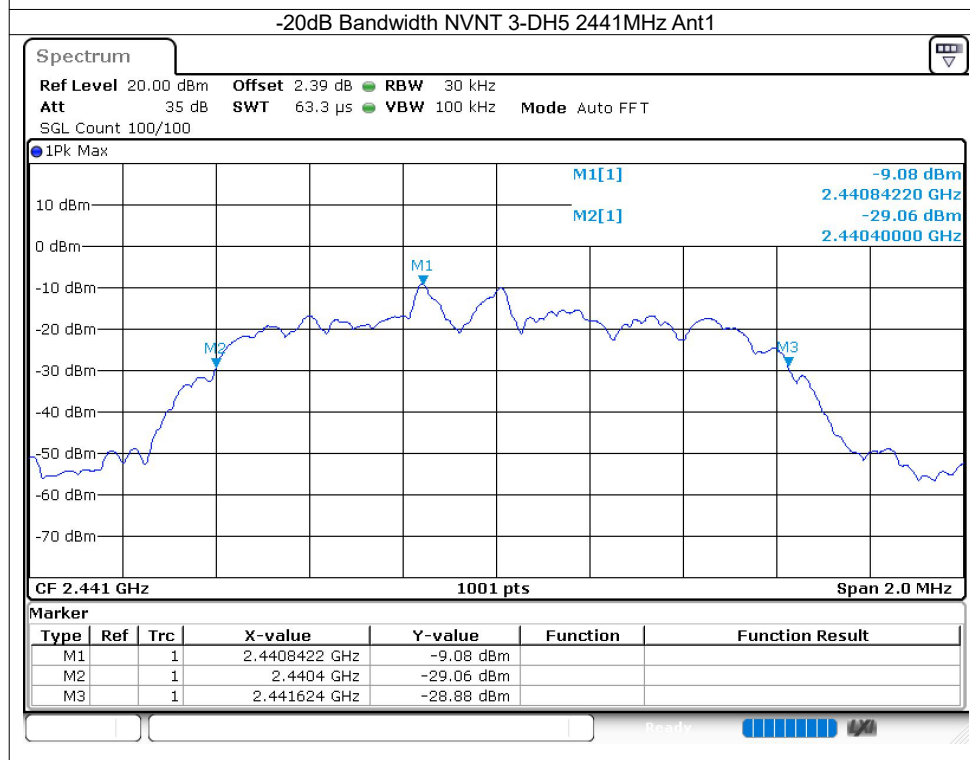
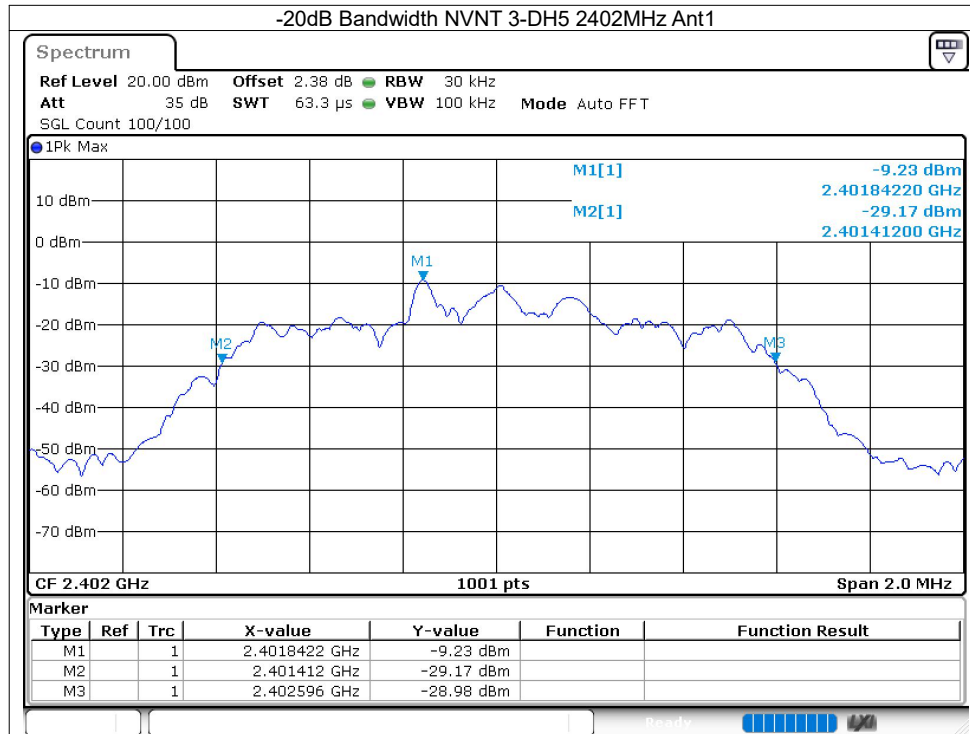



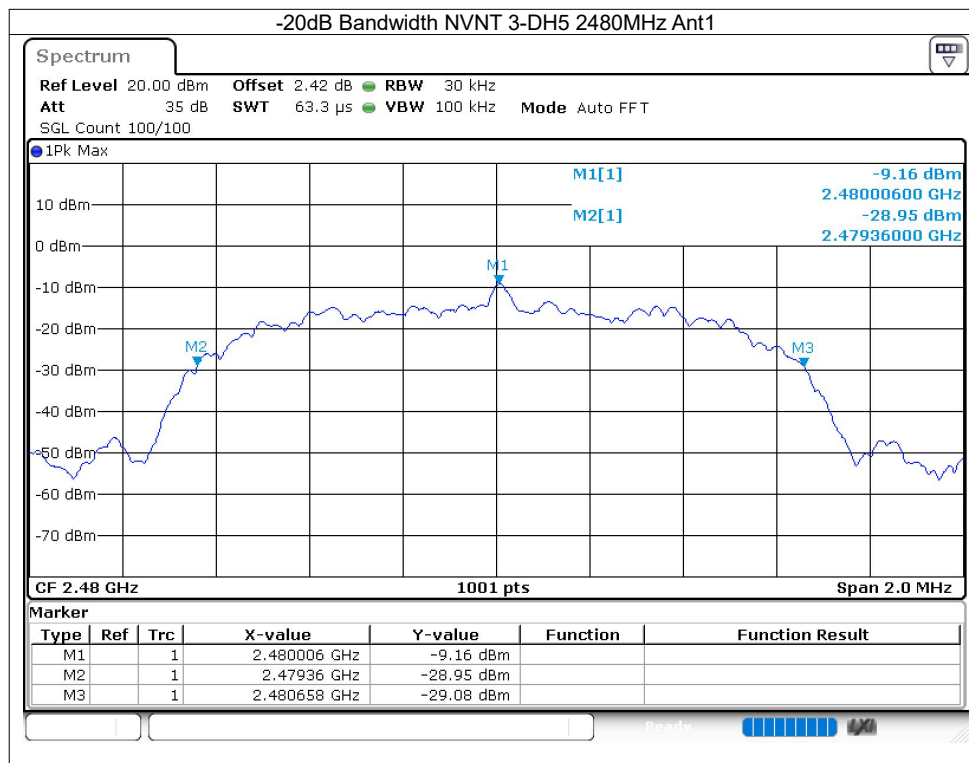



8.4 OCCUPIED CHANNEL BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.859
NVNT	1-DH5	2441	Ant1	0.877
NVNT	1-DH5	2480	Ant1	0.829
NVNT	2-DH5	2402	Ant1	1.165
NVNT	2-DH5	2441	Ant1	1.161
NVNT	2-DH5	2480	Ant1	1.167
NVNT	3-DH5	2402	Ant1	1.149
NVNT	3-DH5	2441	Ant1	1.147
NVNT	3-DH5	2480	Ant1	1.177

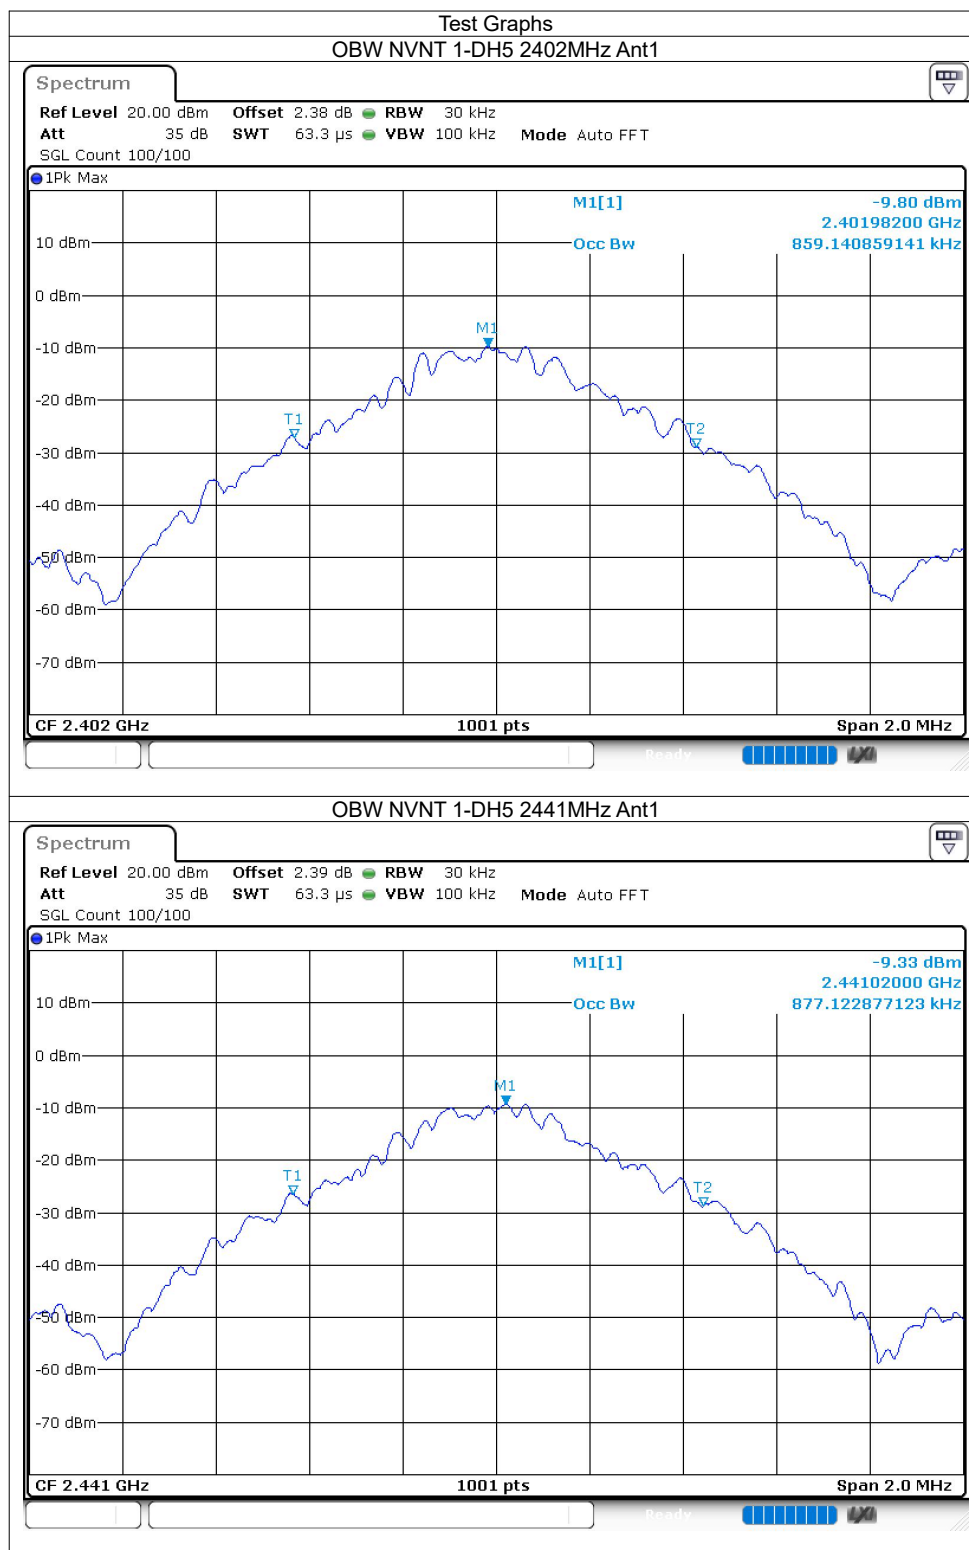

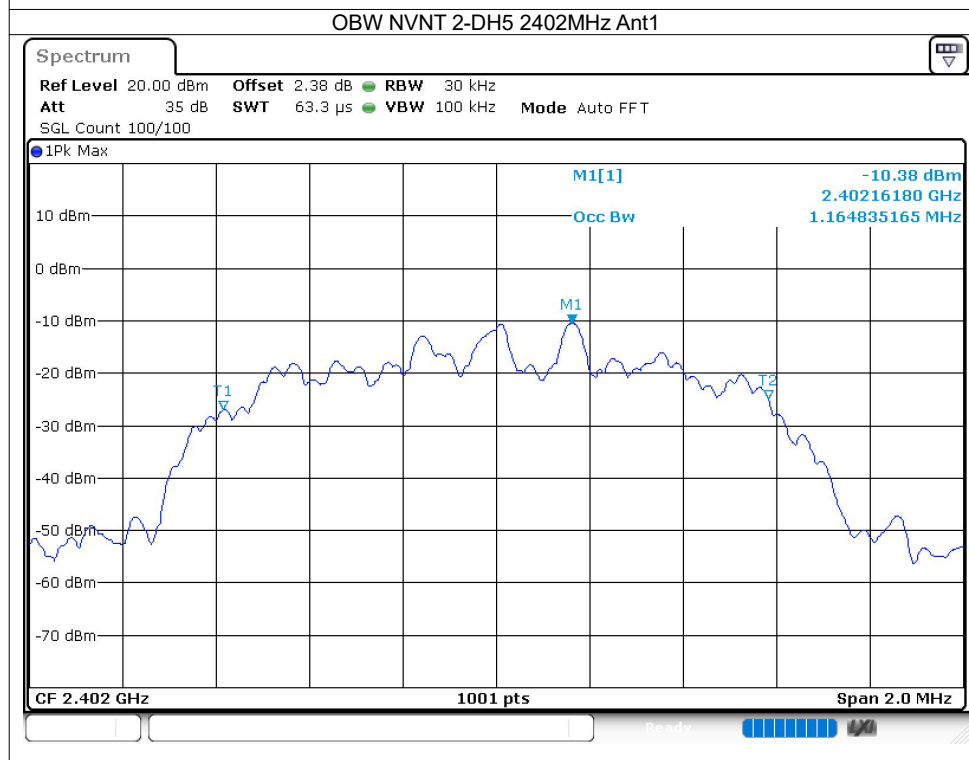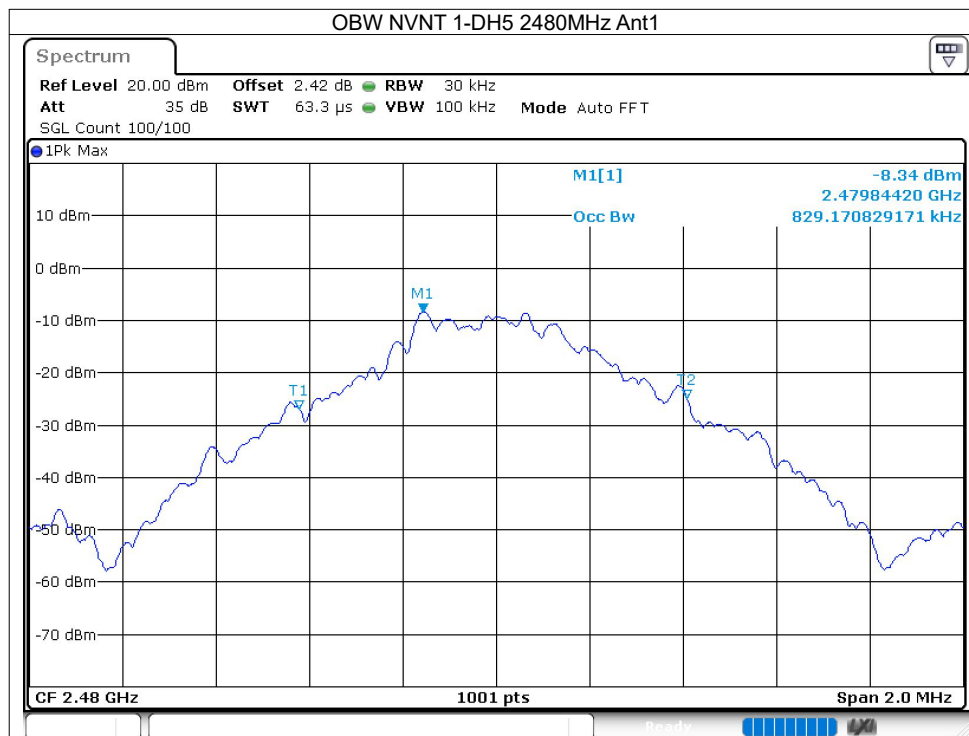

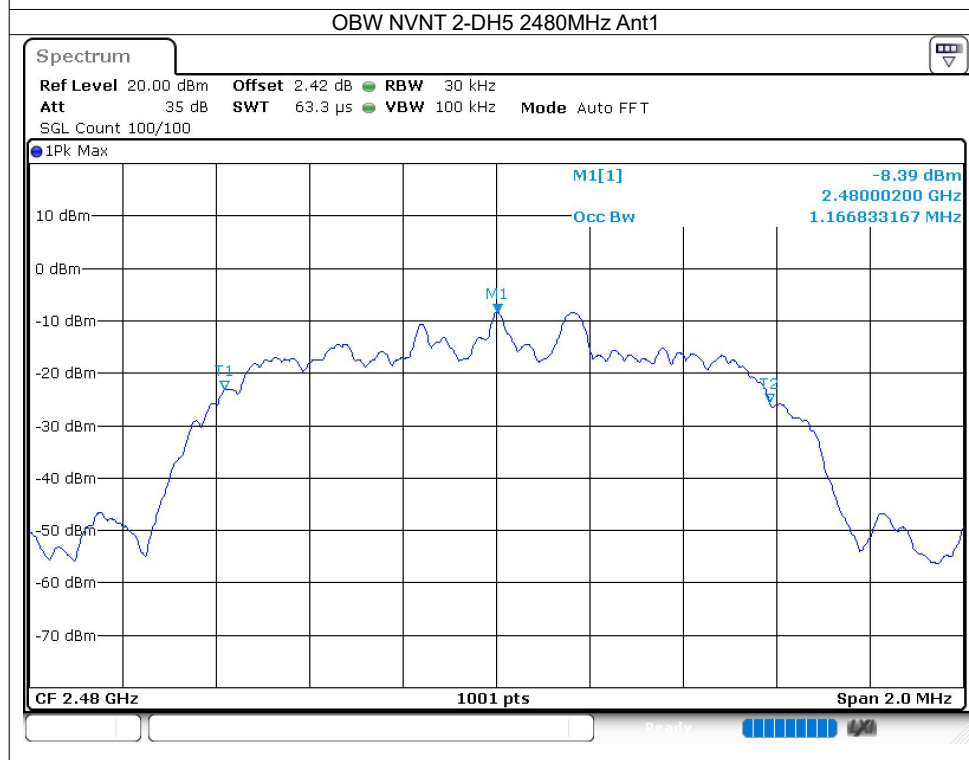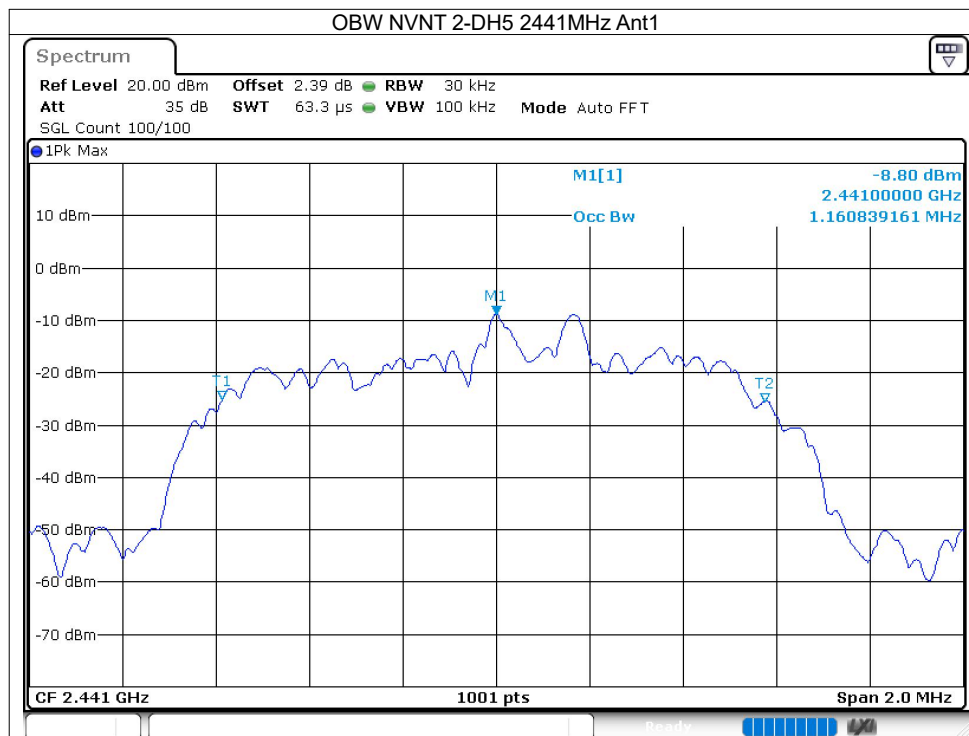

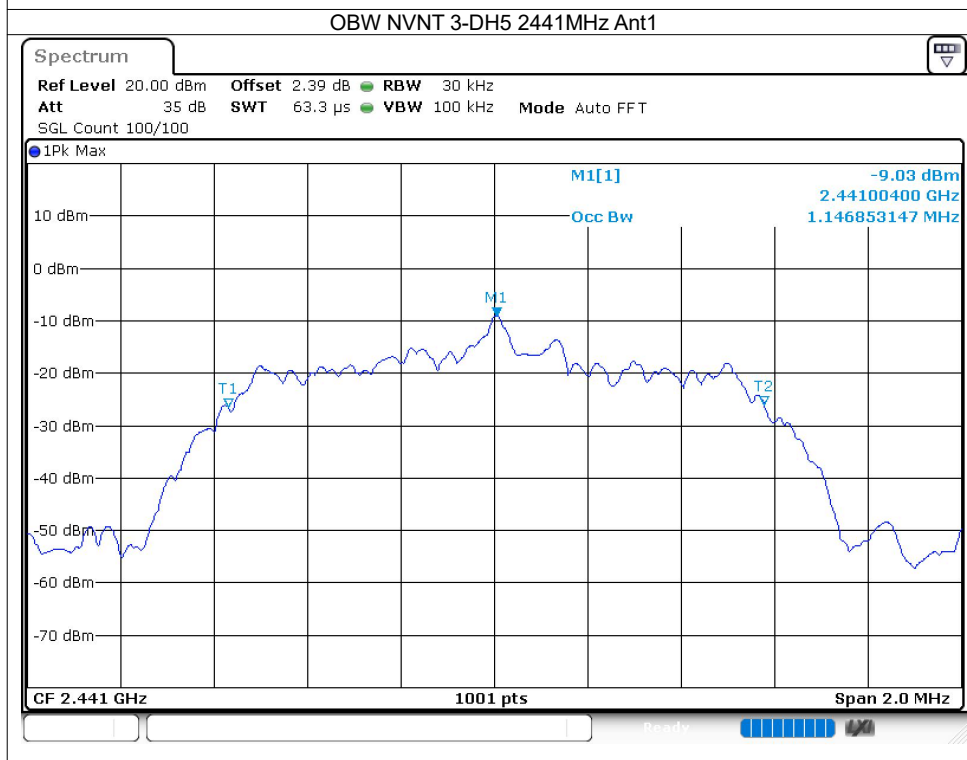

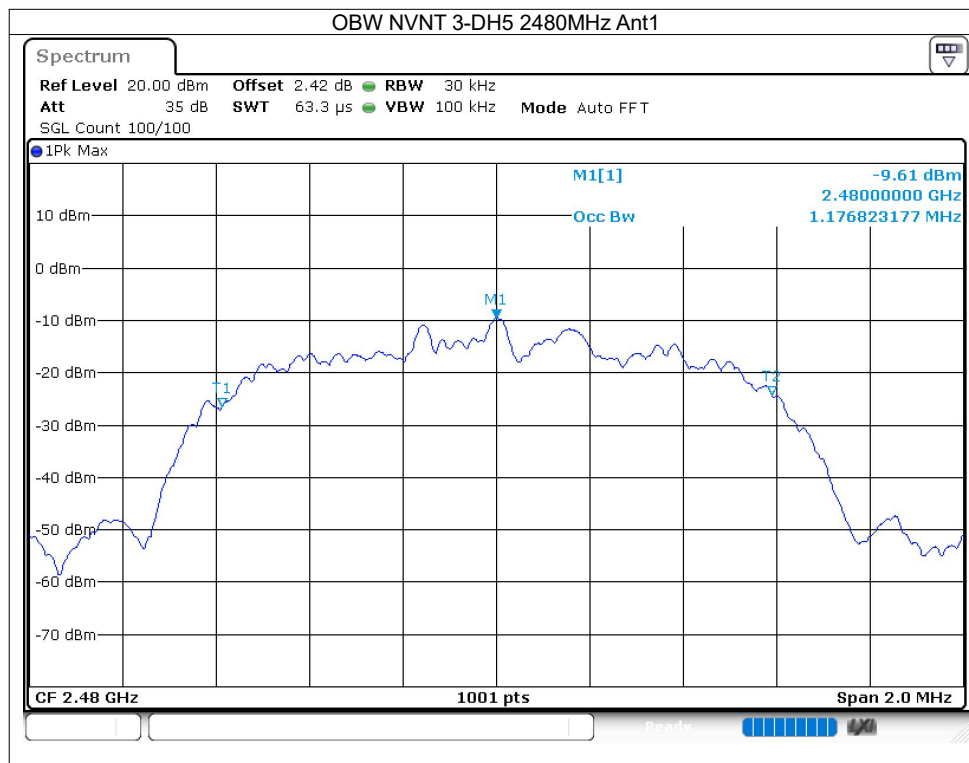

8.5 CARRIER FREQUENCIES SEPARATION

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.02	2403.062	1.042	0.632	Pass
NVNT	1-DH5	Ant1	2441.062	2442.064	1.002	0.624	Pass
NVNT	1-DH5	Ant1	2478.982	2480.062	1.080	0.631	Pass
NVNT	2-DH5	Ant1	2401.996	2403.004	1.008	0.868	Pass
NVNT	2-DH5	Ant1	2441.017	2442.083	1.066	0.840	Pass
NVNT	2-DH5	Ant1	2478.998	2480.017	1.019	0.900	Pass
NVNT	3-DH5	Ant1	2401.998	2402.998	1.000	0.789	Pass
NVNT	3-DH5	Ant1	2440.913	2441.917	1.004	0.816	Pass
NVNT	3-DH5	Ant1	2479.002	2480.004	1.002	0.865	Pass

