


Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

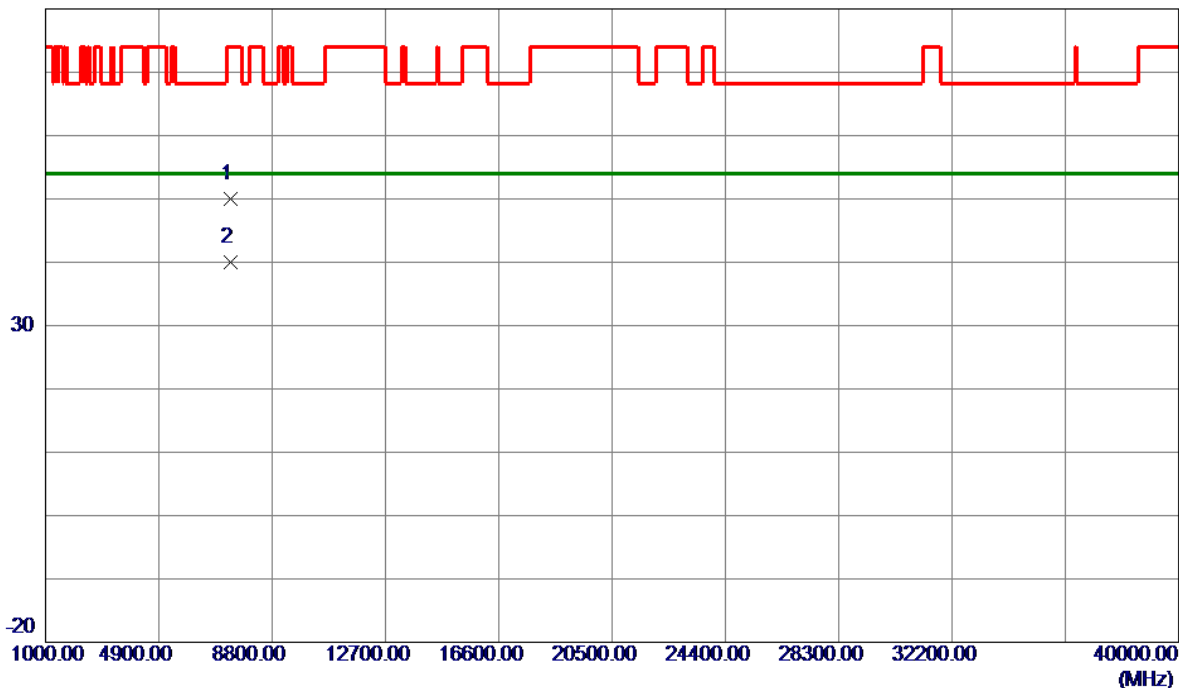


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7373.5550	39.31	10.78	50.09	74.00	-23.91	Peak	
2 *	7373.8350	29.31	10.78	40.09	54.00	-13.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

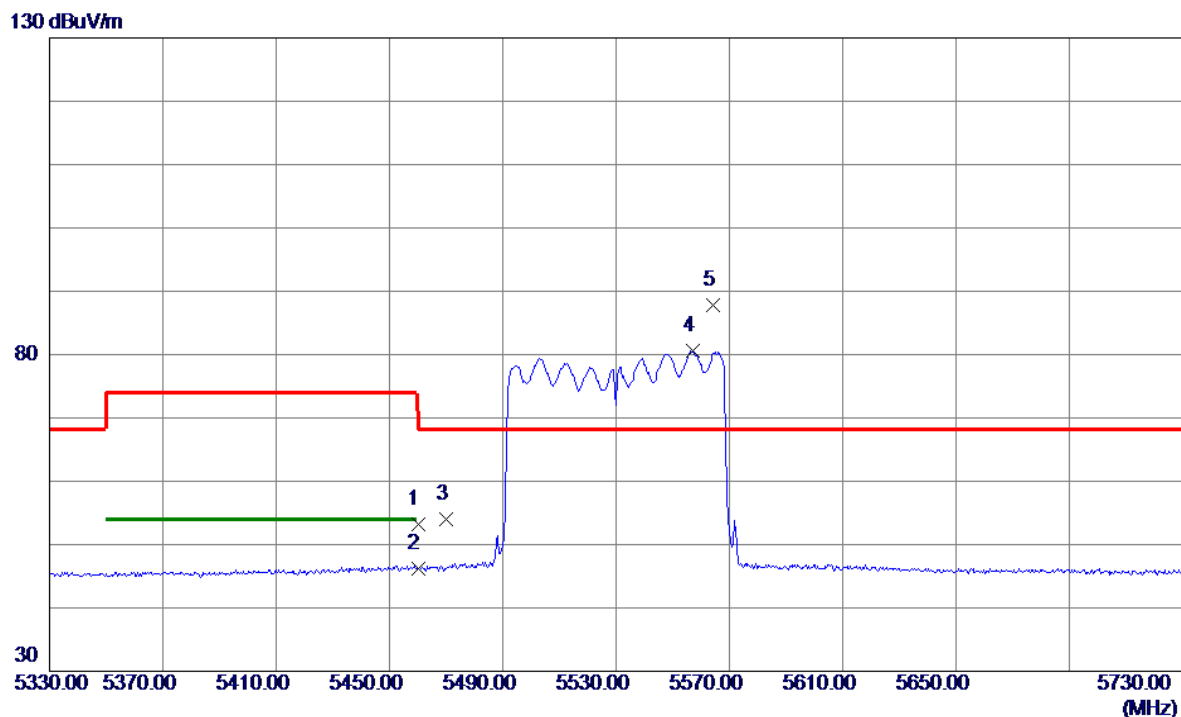


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.49	16.62	53.11	74.00	-20.89	Peak	
2	5460.0000	29.64	16.62	46.26	54.00	-7.74	AVG	
3	5470.0000	37.40	16.63	54.03	68.20	-14.17	Peak	
4	5557.2000	63.86	16.70	80.56	999.00	-918.44	AVG	No Limit
5 *	5564.4000	71.07	16.70	87.77	68.20	19.57	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

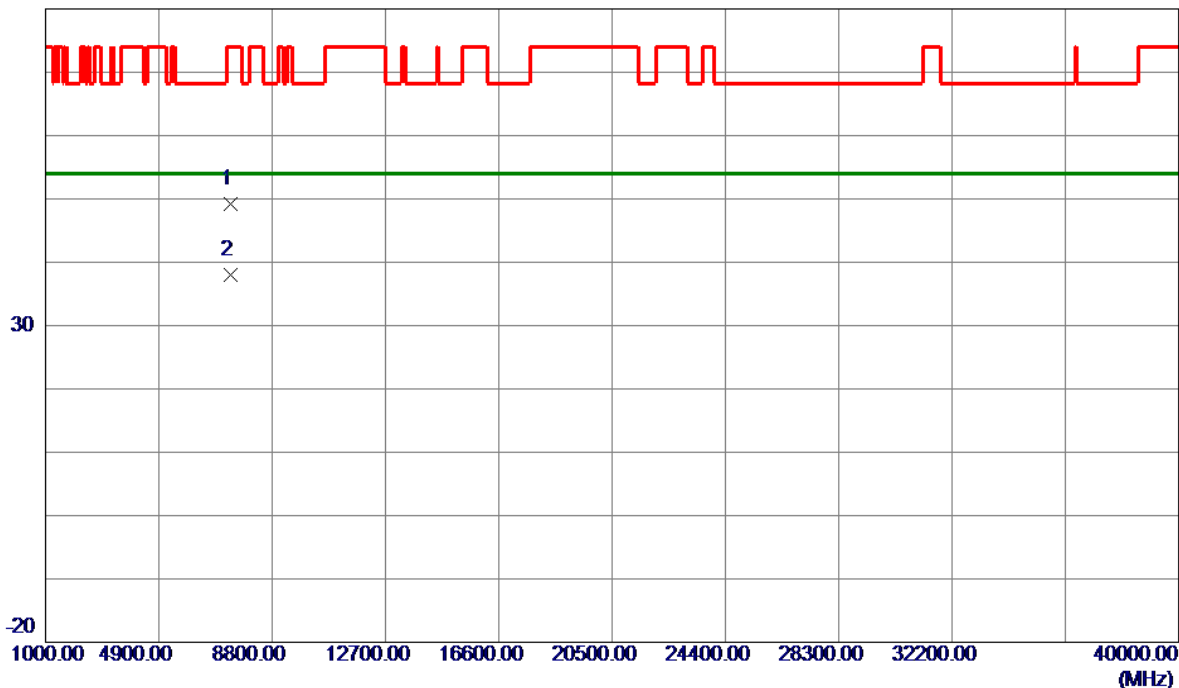


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7373.9750	38.43	10.78	49.21	74.00	-24.79	Peak	
2 *	7374.5000	27.31	10.78	38.09	54.00	-15.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

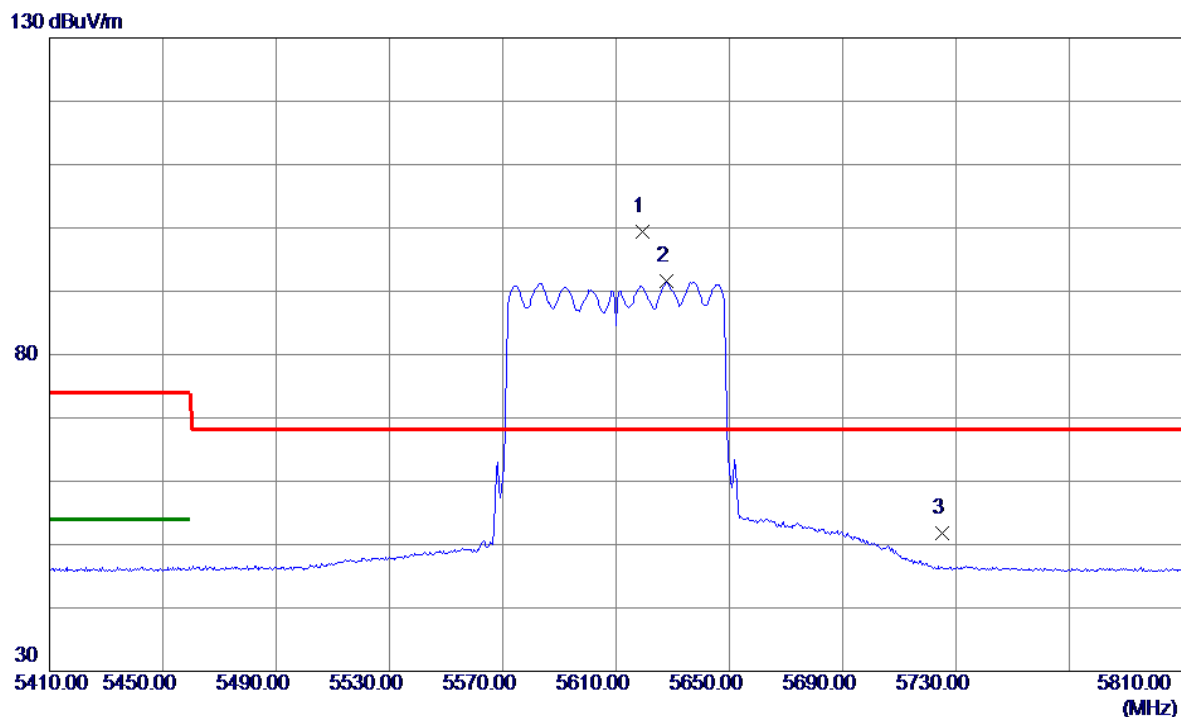


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5619.2000	82.59	16.74	99.33	68.20	31.13	Peak	No Limit
2	5627.6000	74.83	16.74	91.57	999.00	-907.43	AVG	No Limit
3	5725.0000	34.98	16.80	51.78	68.20	-16.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

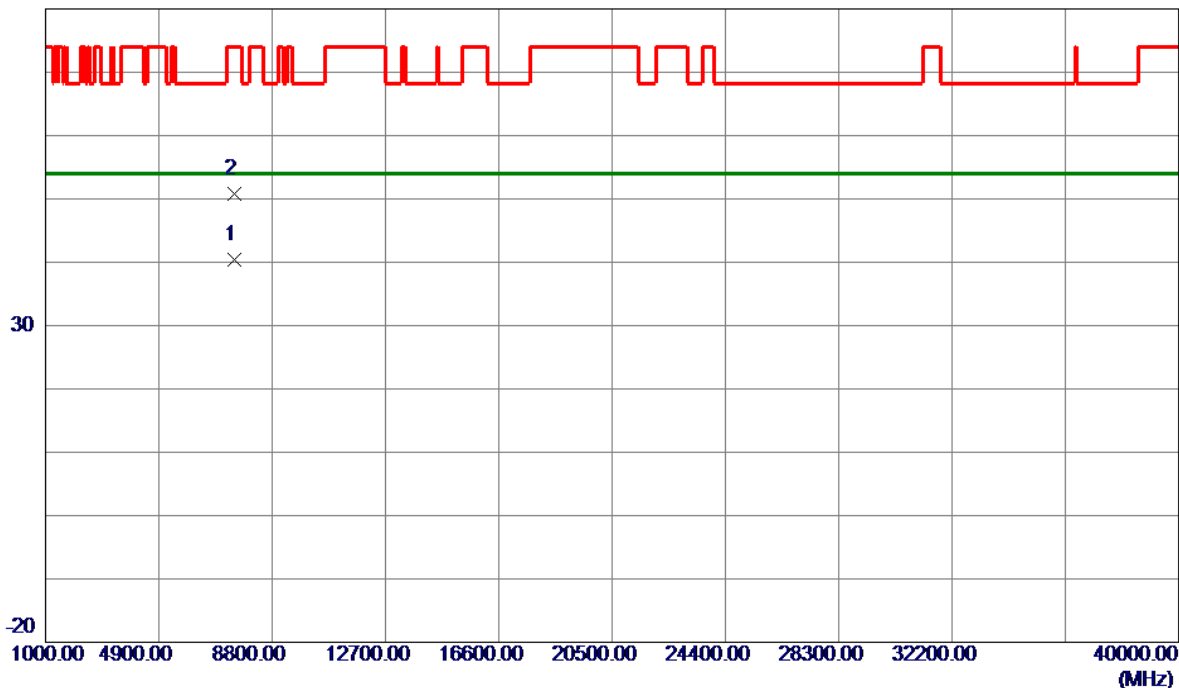


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7479.8700	29.55	10.91	40.46	54.00	-13.54	AVG	
2	7480.9250	39.89	10.92	50.81	74.00	-23.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

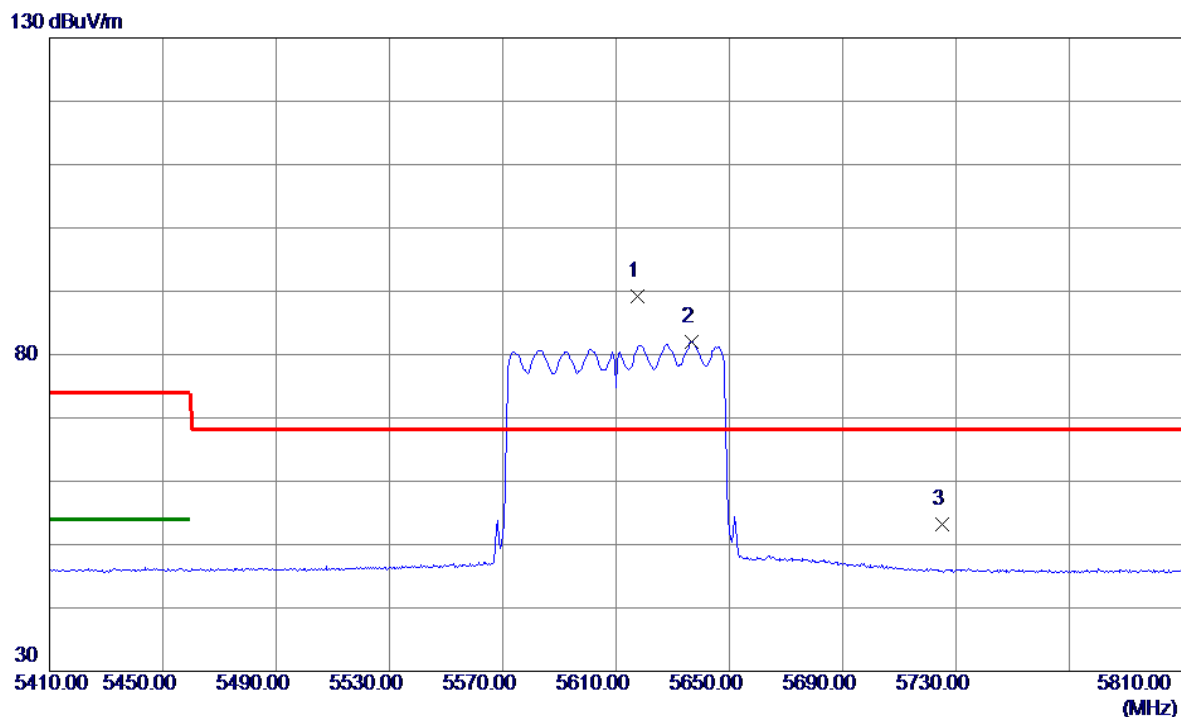


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5617.6000	72.41	16.73	89.14	68.20	20.94	Peak	No Limit
2	5636.8000	65.30	16.75	82.05	999.00	-916.95	AVG	No Limit
3	5725.0000	36.43	16.80	53.23	68.20	-14.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

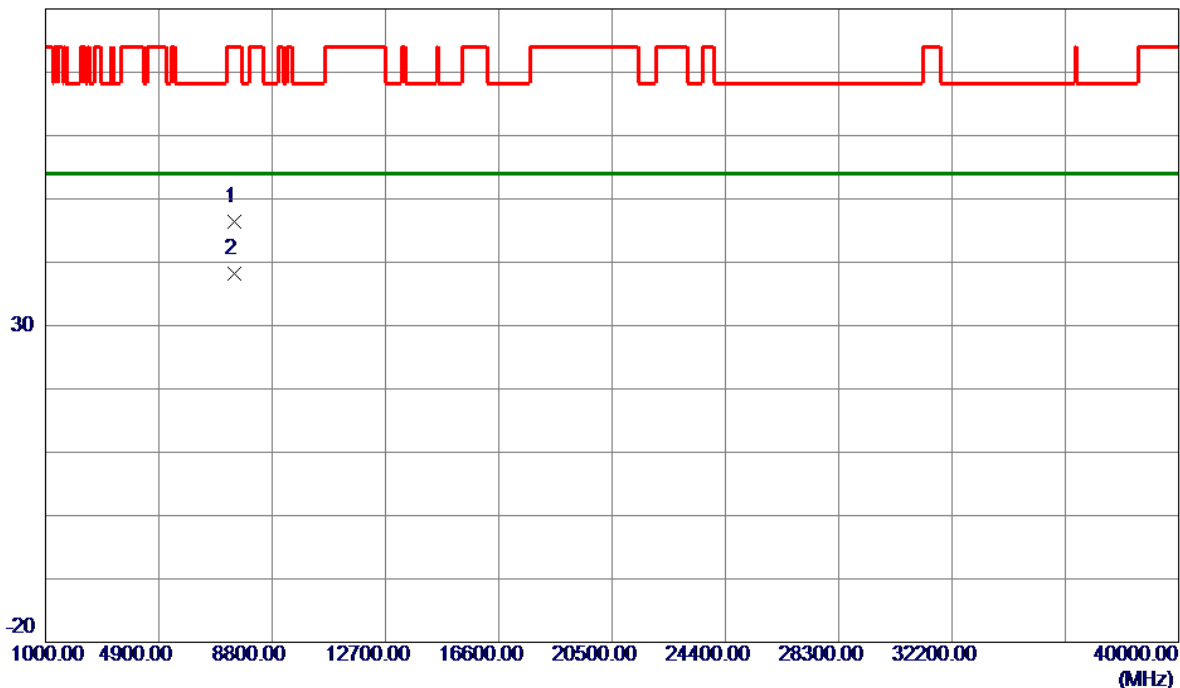


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7478.6400	35.56	10.91	46.47	74.00	-27.53	Peak	
2 *	7480.4150	27.20	10.91	38.11	54.00	-15.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

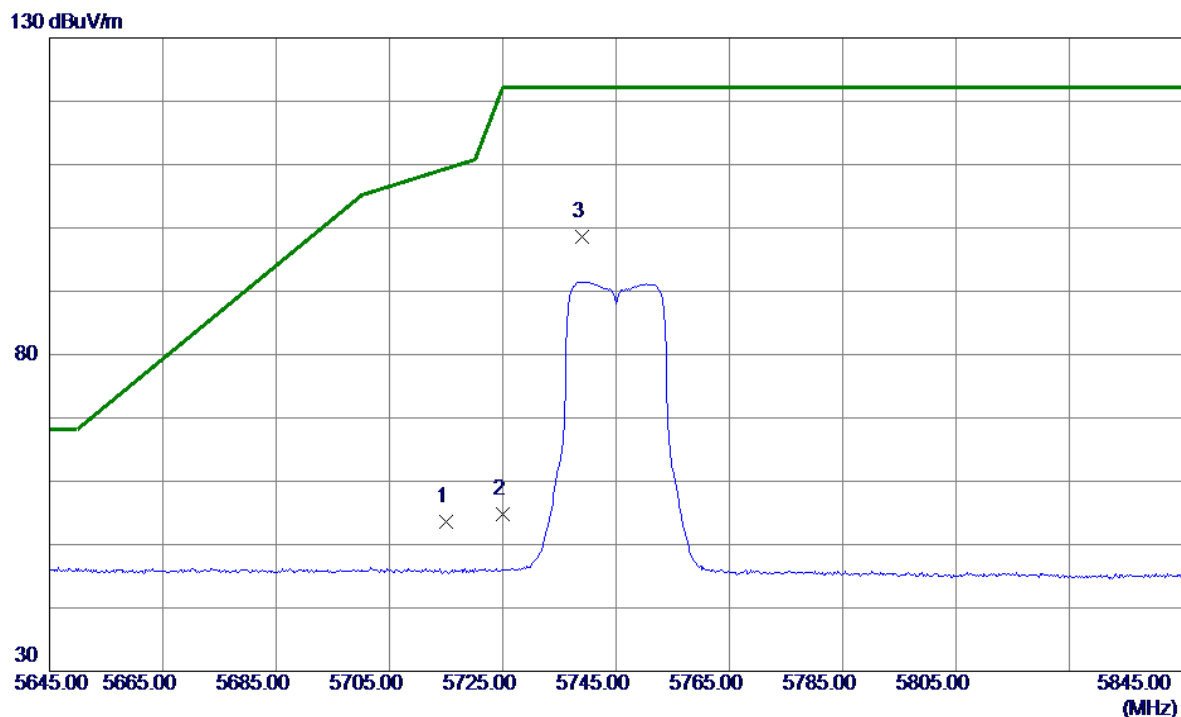


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.78	16.79	53.57	109.40	-55.83	Peak	
2	5725.0000	38.00	16.80	54.80	122.20	-67.40	Peak	
3 *	5739.0000	81.70	16.81	98.51	122.20	-23.69	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

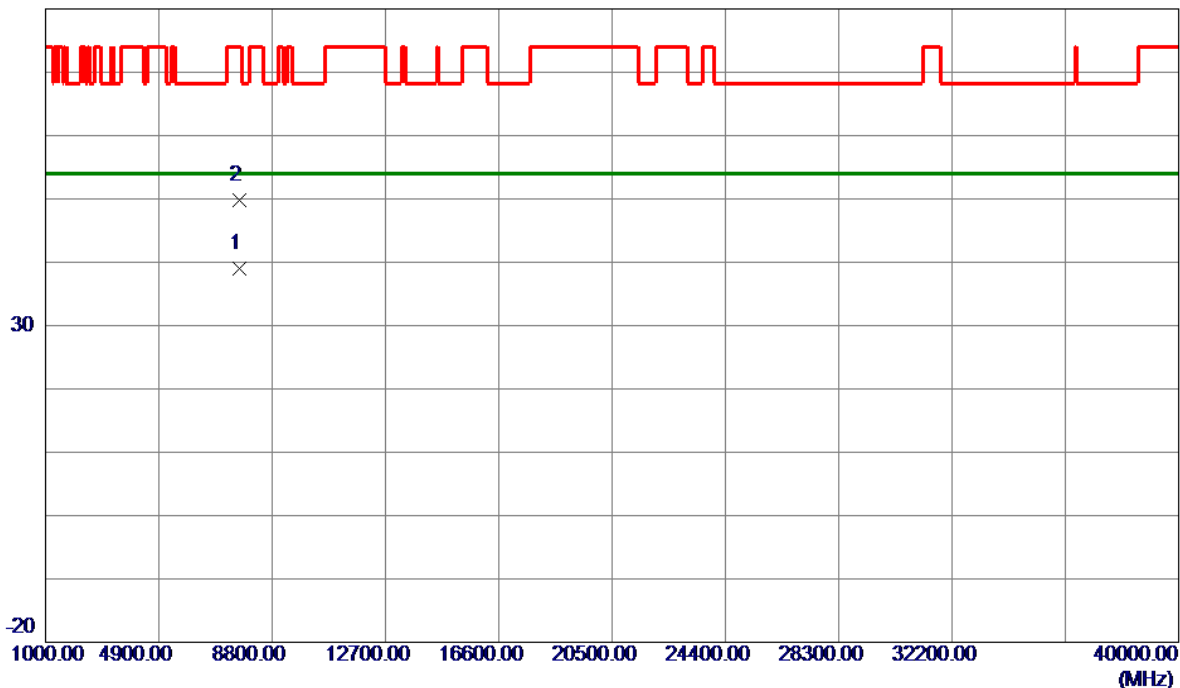


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7660.9300	28.10	10.89	38.99	54.00	-15.01	AVG	
2	7660.9450	38.90	10.89	49.79	74.00	-24.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

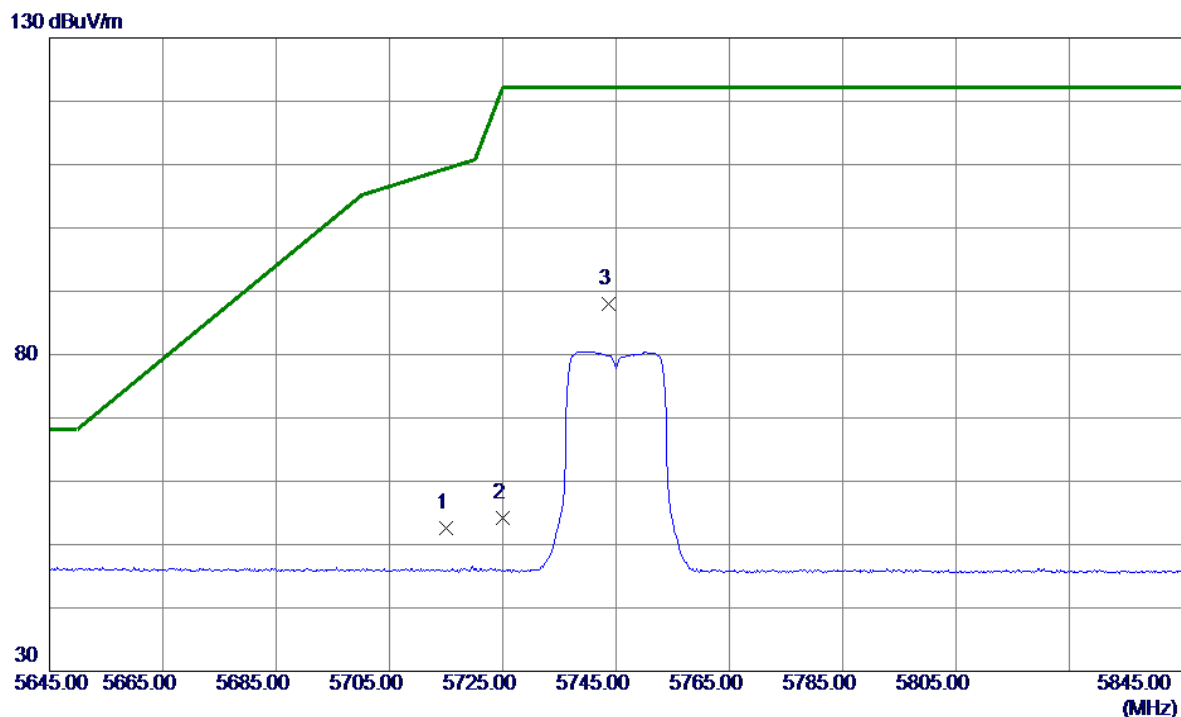


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.79	16.79	52.58	109.40	-56.82	Peak	
2	5725.0000	37.46	16.80	54.26	122.20	-67.94	Peak	
3 *	5743.6000	71.10	16.81	87.91	122.20	-34.29	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

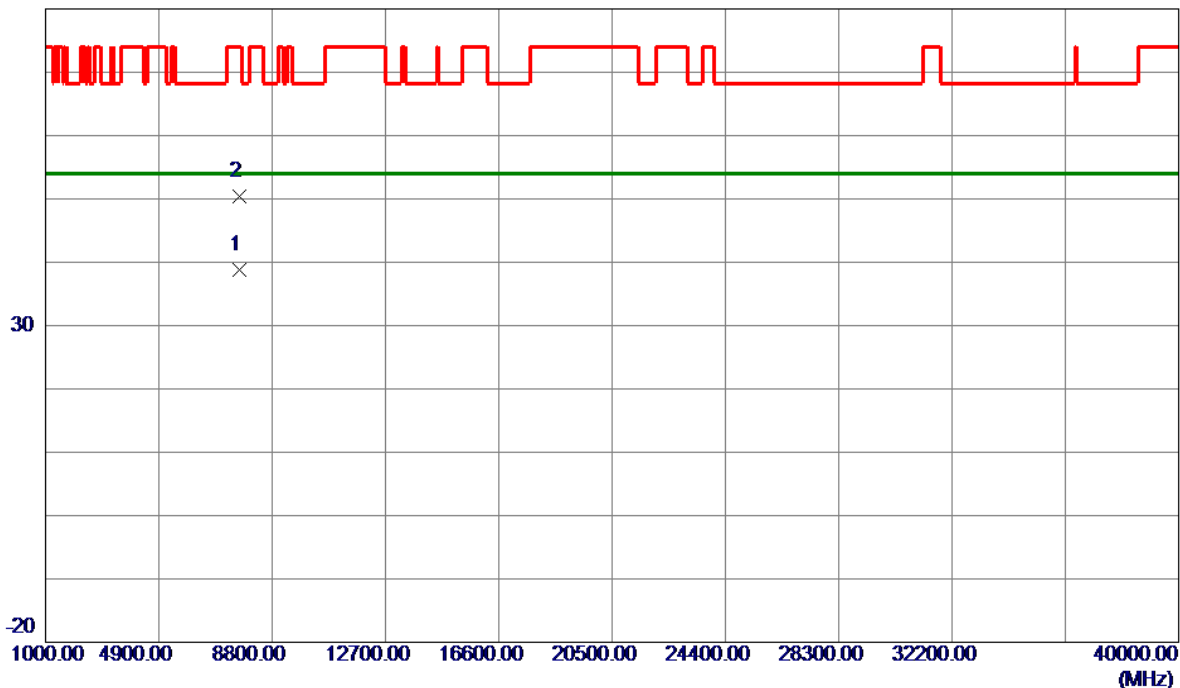


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7657.6800	27.83	10.89	38.72	54.00	-15.28	AVG	
2	7659.6600	39.59	10.89	50.48	74.00	-23.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

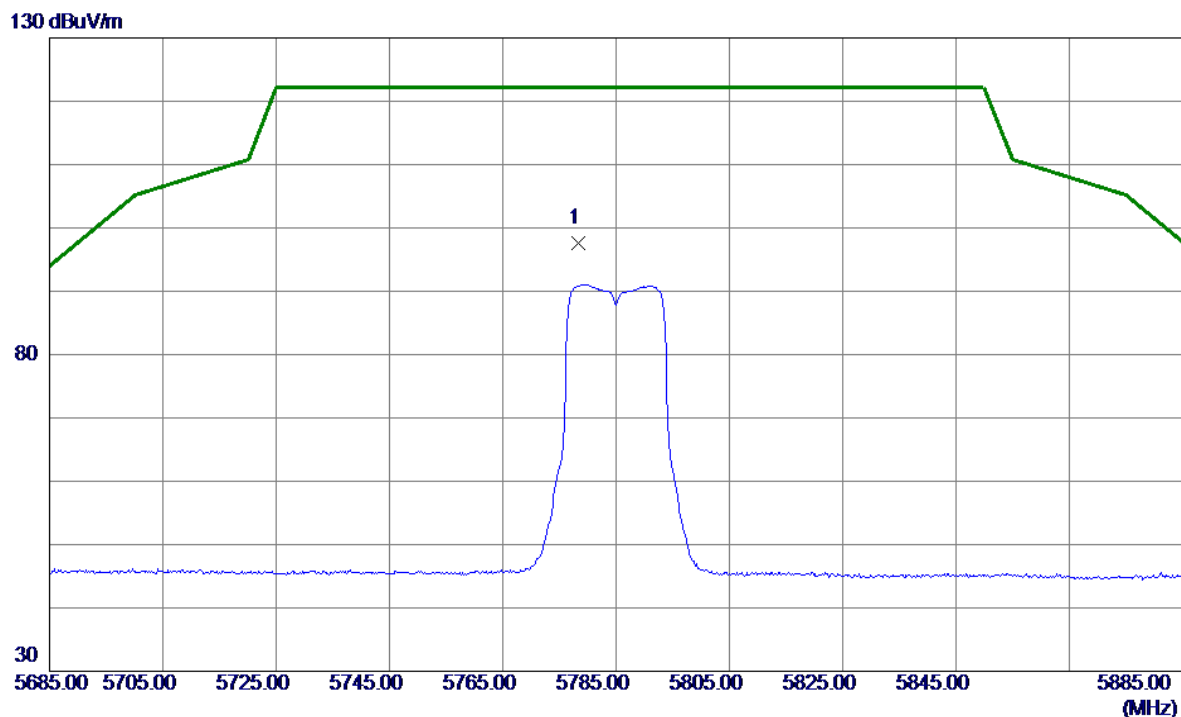


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5778.4000	80.80	16.83	97.63	122.20	-24.57	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

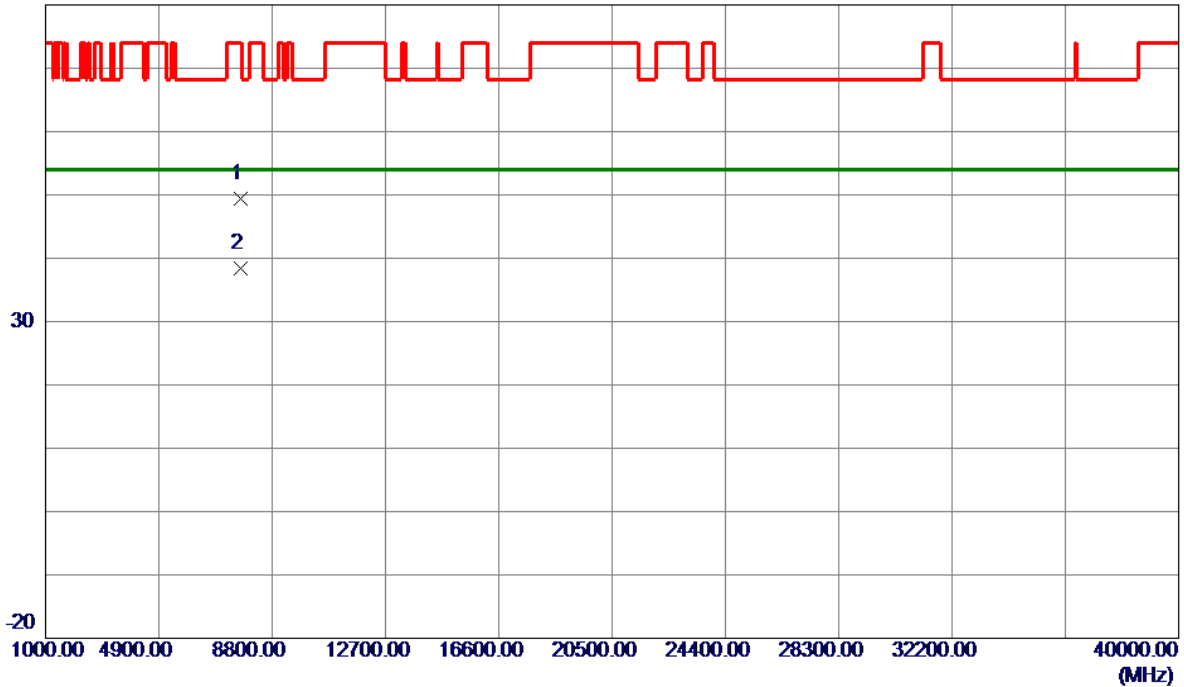


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7711.8750	38.47	10.87	49.34	74.00	-24.66	Peak	
2 *	7715.0400	27.58	10.87	38.45	54.00	-15.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

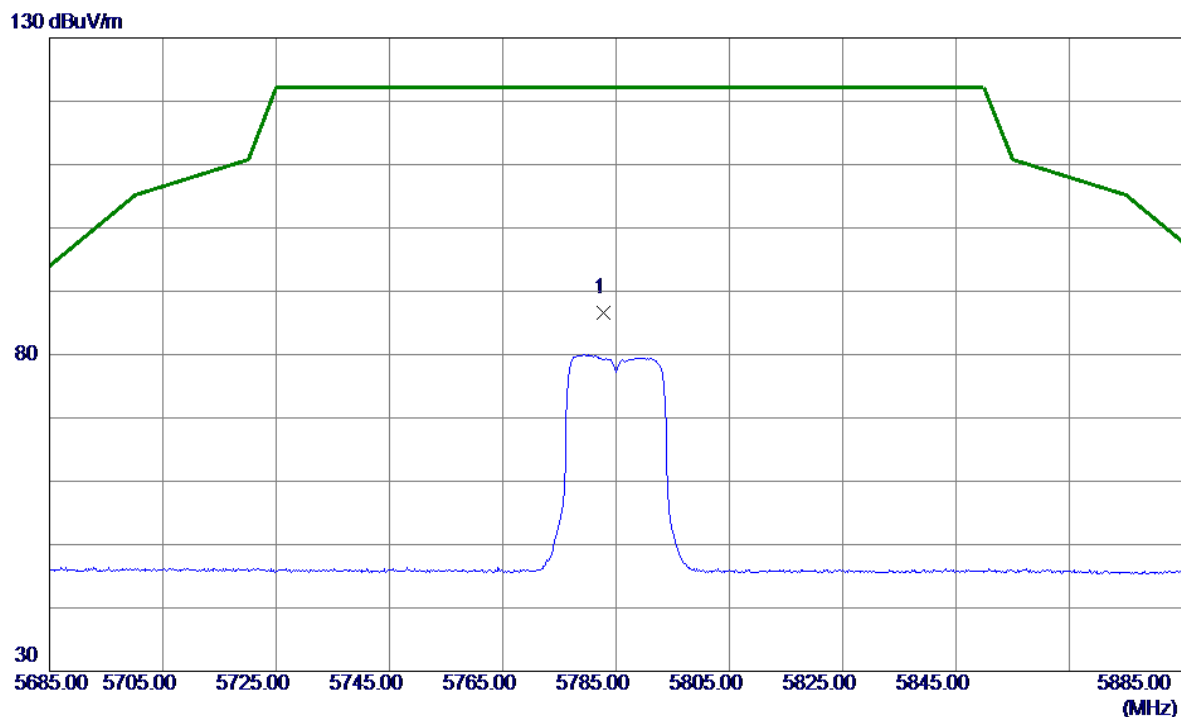


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.8000	69.85	16.83	86.68	122.20	-35.52	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

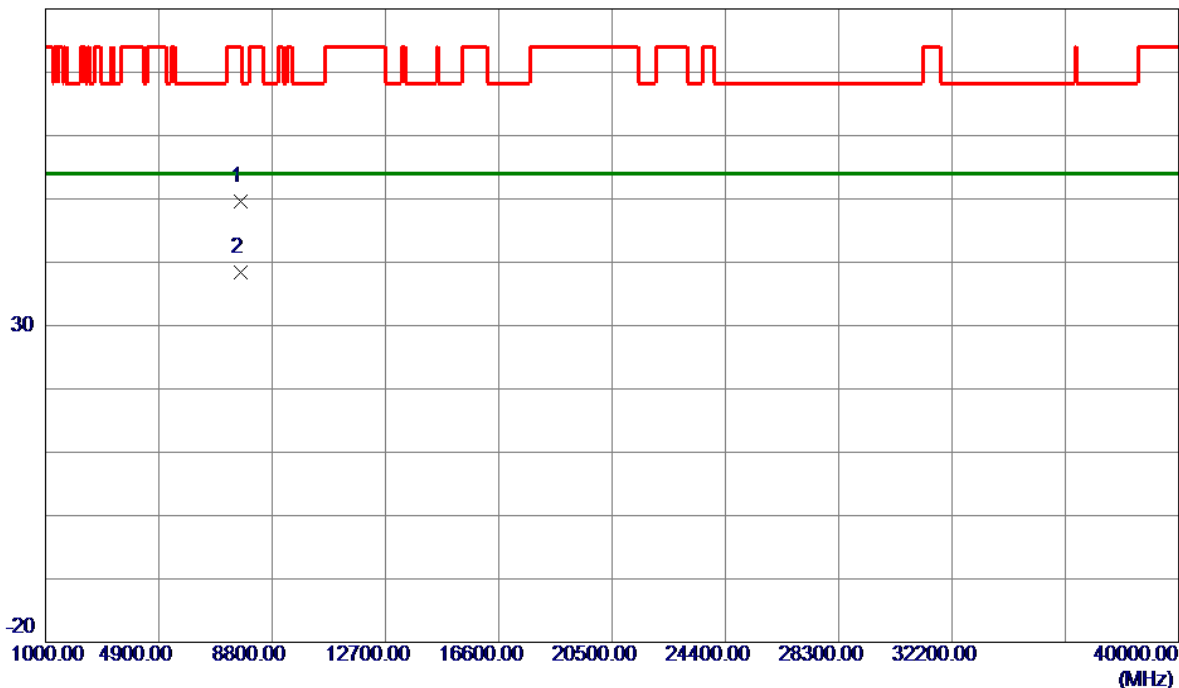


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7715.2900	38.79	10.87	49.66	74.00	-24.34	Peak	
2 *	7715.7950	27.61	10.87	38.48	54.00	-15.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

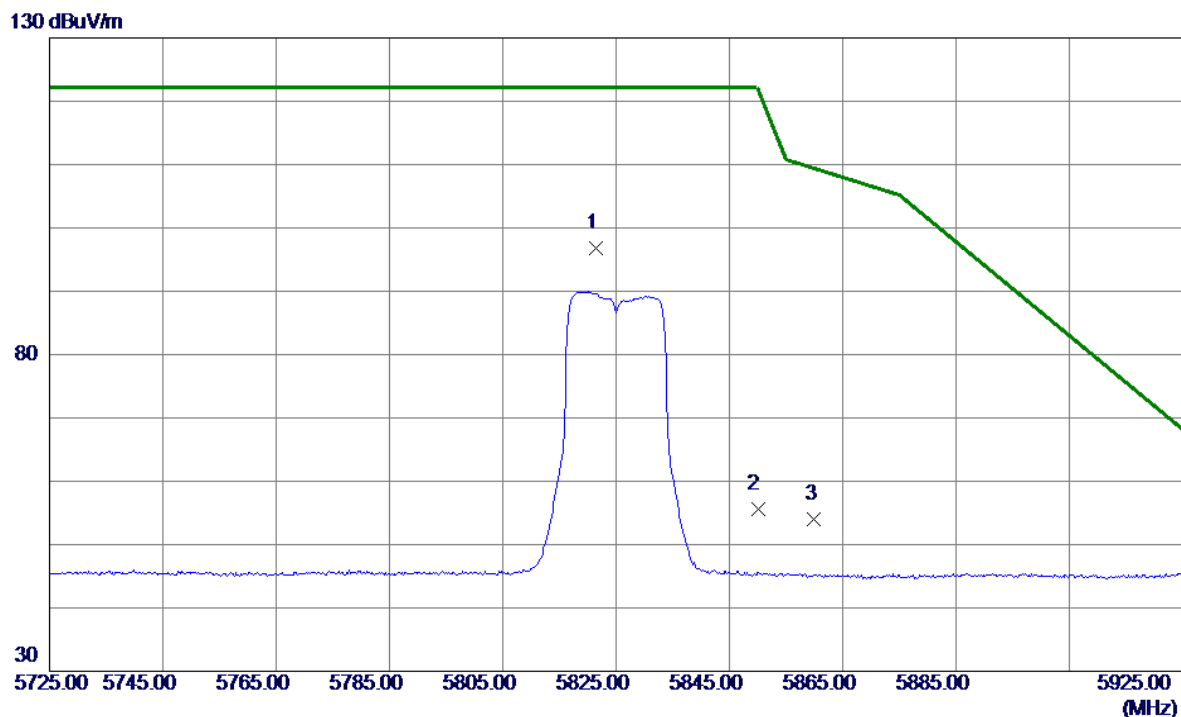


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.4000	79.93	16.85	96.78	122.20	-25.42	Peak	No Limit
2	5850.0000	38.77	16.87	55.64	122.20	-66.56	Peak	
3	5860.0000	37.16	16.88	54.04	109.40	-55.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

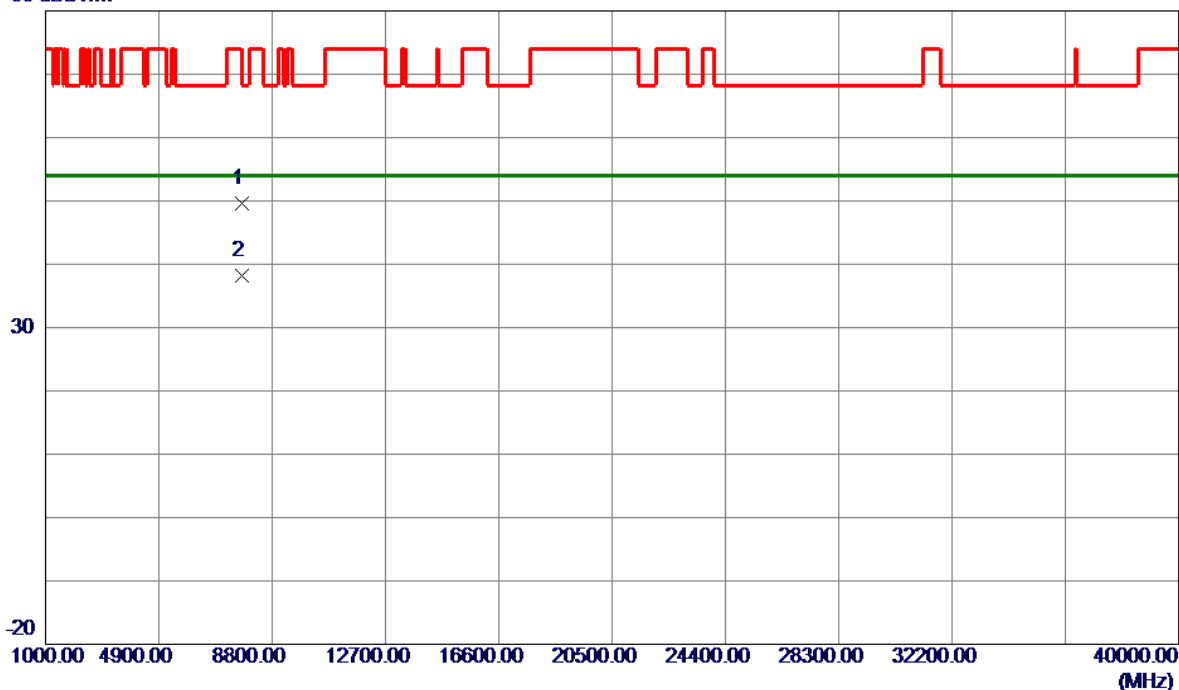


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7765.5100	38.76	10.85	49.61	68.20	-18.59	Peak	
2 *	7768.5500	27.40	10.85	38.25	54.00	-15.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

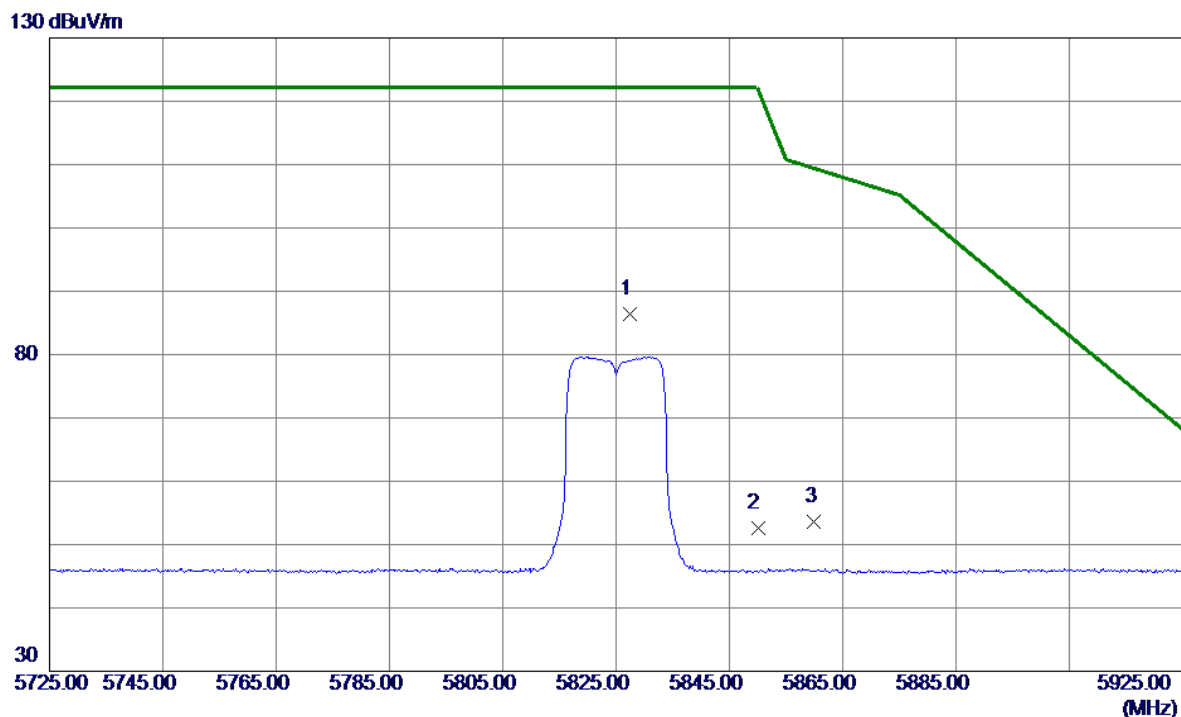


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.4000	69.63	16.86	86.49	122.20	-35.71	Peak	No Limit
2	5850.0000	35.77	16.87	52.64	122.20	-69.56	Peak	
3	5860.0000	36.76	16.88	53.64	109.40	-55.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

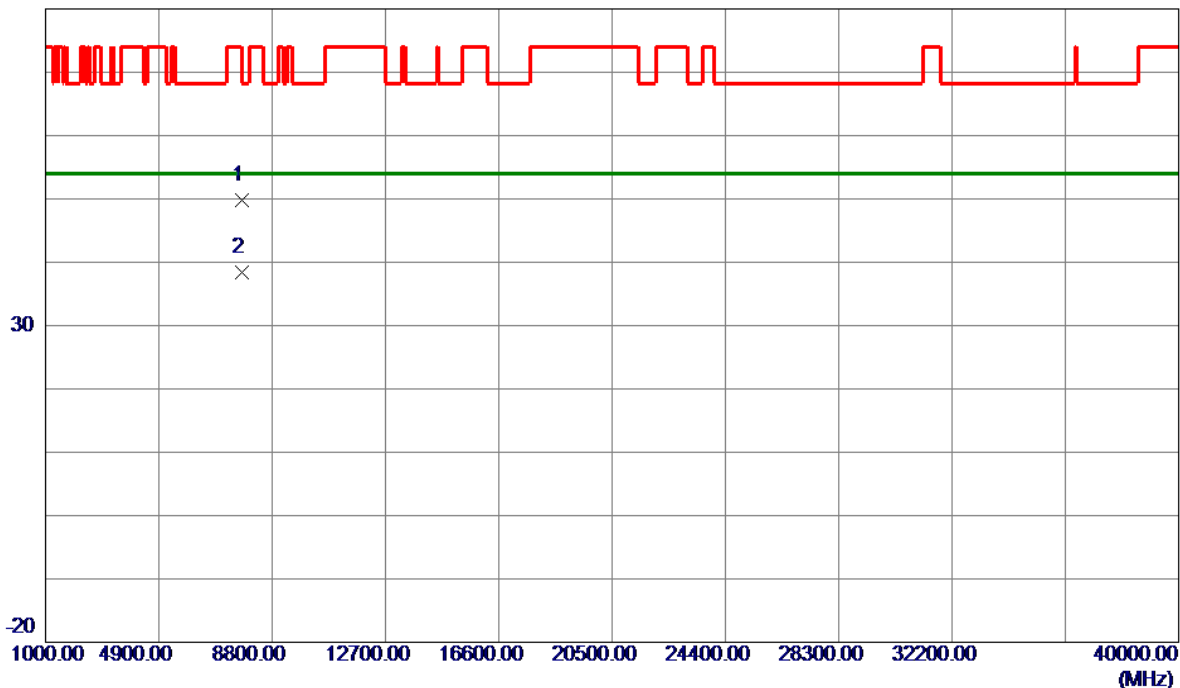


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7764.4750	38.88	10.86	49.74	68.20	-18.46	Peak	
2 *	7765.4450	27.58	10.86	38.44	54.00	-15.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

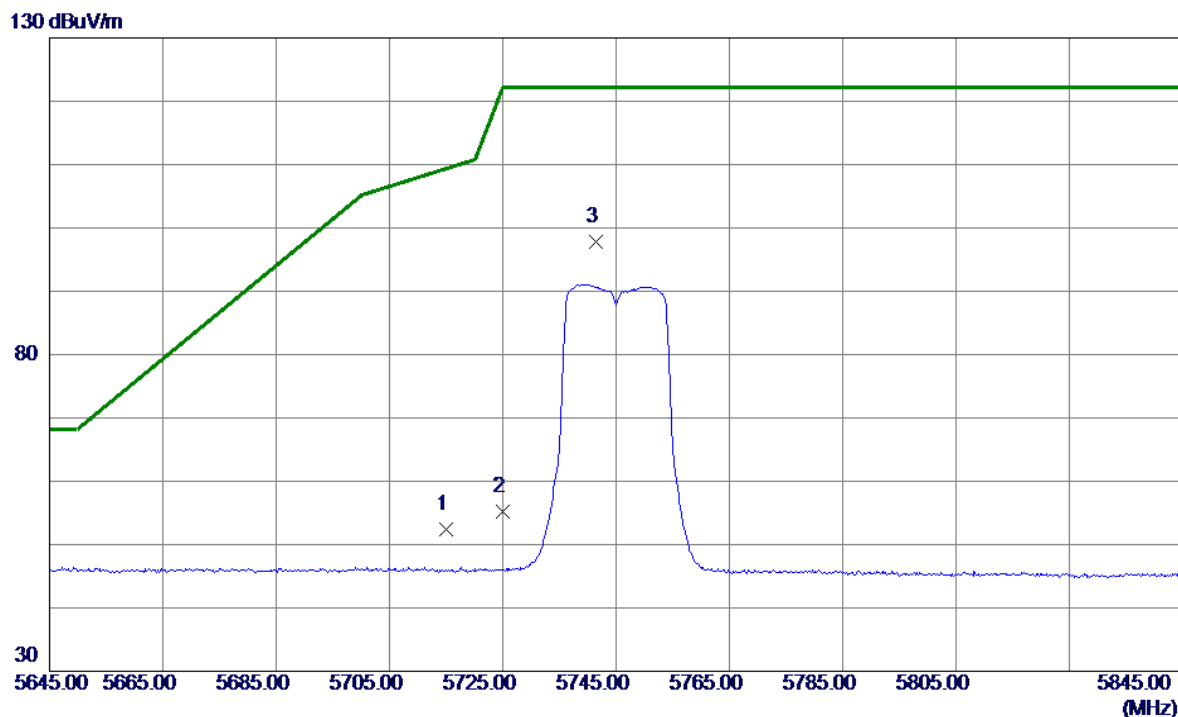


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.56	16.79	52.35	109.40	-57.05	Peak	
2	5725.0000	38.35	16.80	55.15	122.20	-67.05	Peak	
3 *	5741.4000	81.05	16.81	97.86	122.20	-24.34	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

80 dBuV/m

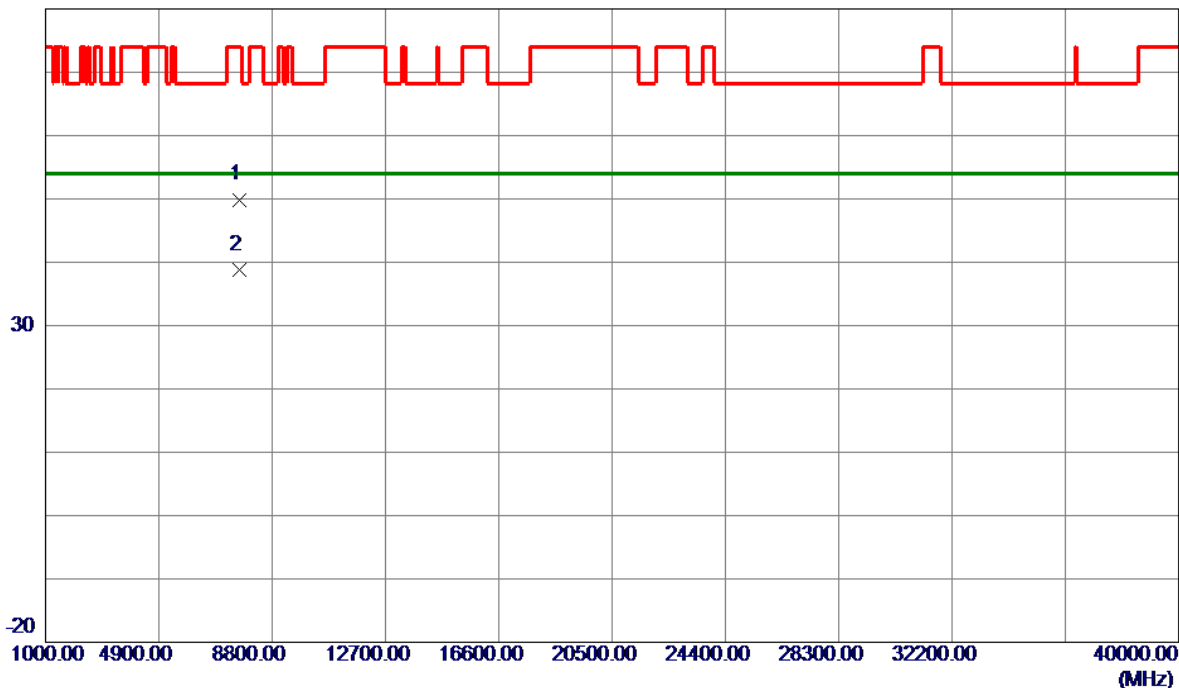


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7659.7600	39.01	10.89	49.90	74.00	-24.10	Peak	
2 *	7661.7800	27.89	10.89	38.78	54.00	-15.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

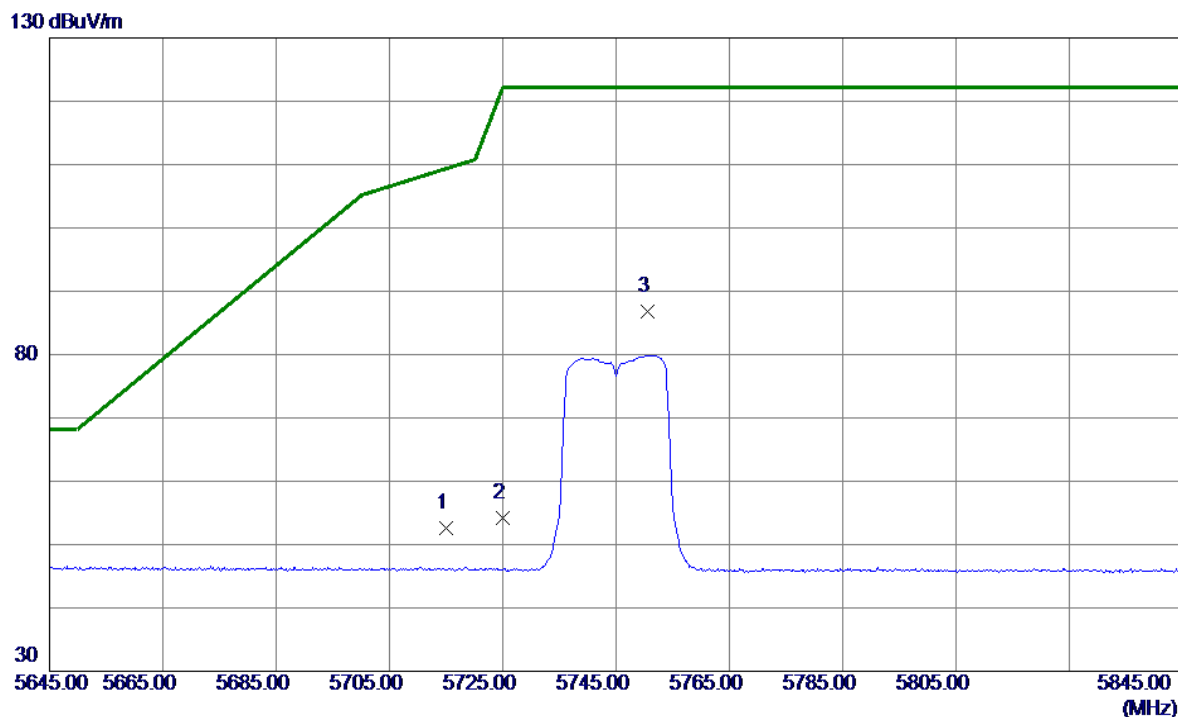


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.86	16.79	52.65	109.40	-56.75	Peak	
2	5725.0000	37.40	16.80	54.20	122.20	-68.00	Peak	
3 *	5750.6000	70.01	16.81	86.82	122.20	-35.38	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

80 dBuV/m

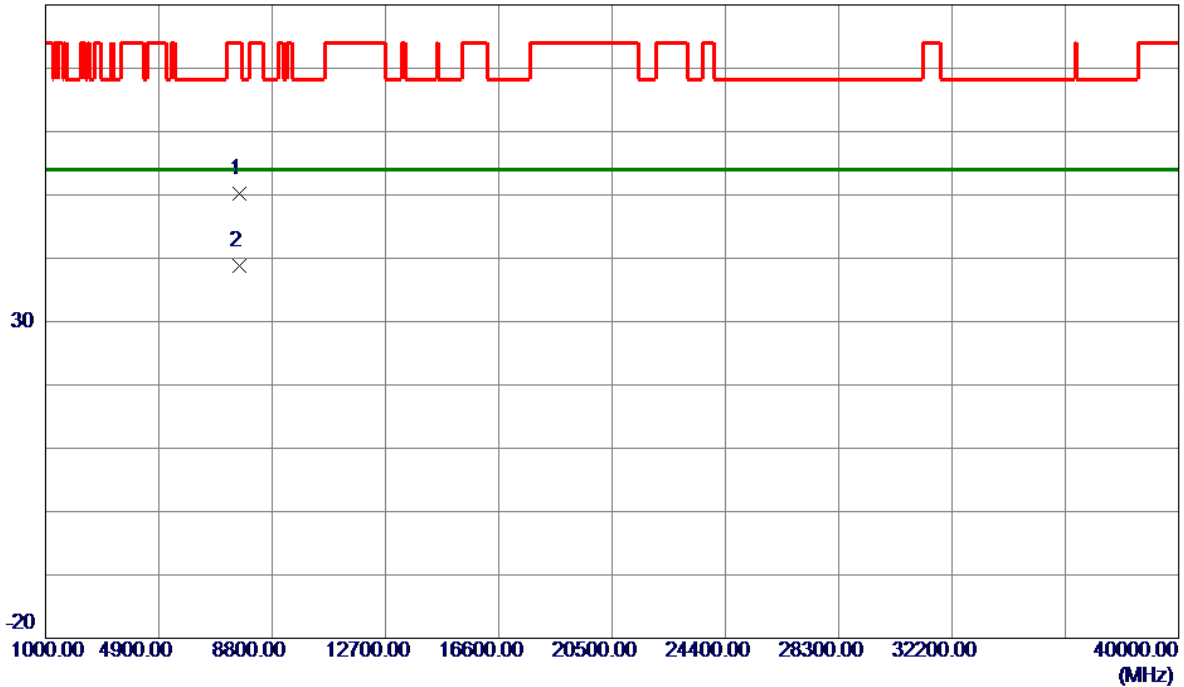


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7660.8550	39.40	10.89	50.29	74.00	-23.71	Peak	
2 *	7662.3650	27.91	10.89	38.80	54.00	-15.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

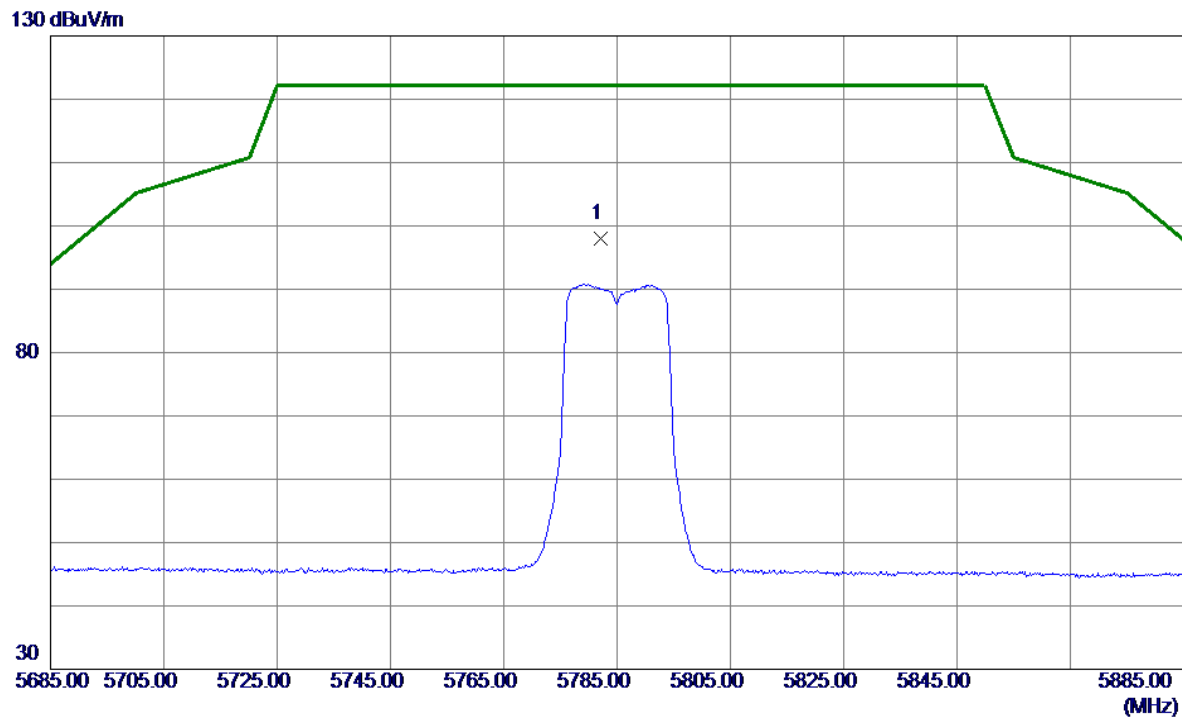


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.2000	81.16	16.83	97.99	122.20	-24.21	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

80 dBuV/m

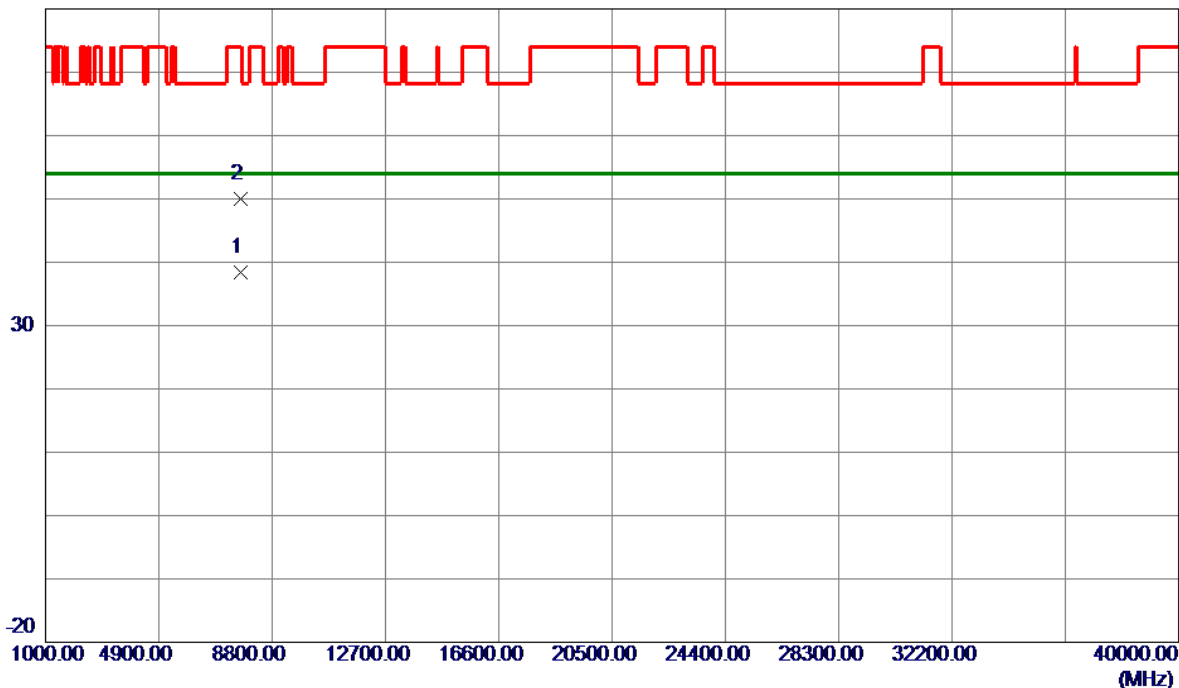


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.0750	27.55	10.87	38.42	54.00	-15.58	AVG	
2	7715.4450	39.05	10.87	49.92	74.00	-24.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

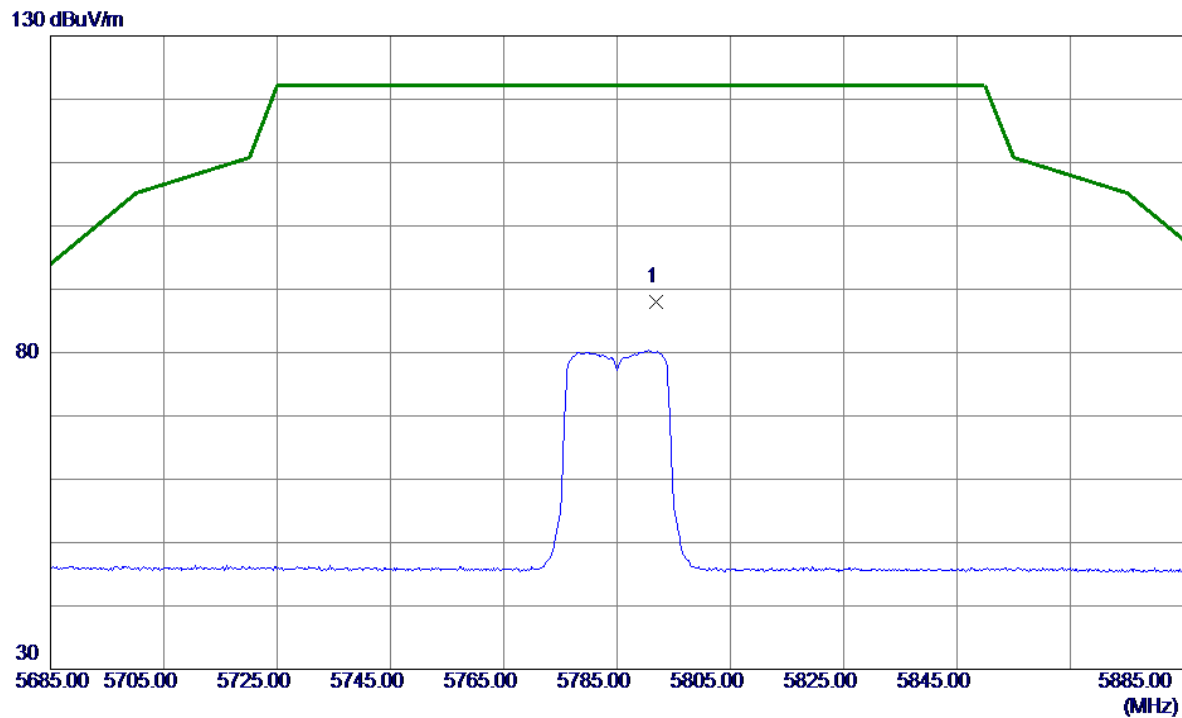


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.8000	71.16	16.84	88.00	122.20	-34.20	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

80 dBuV/m

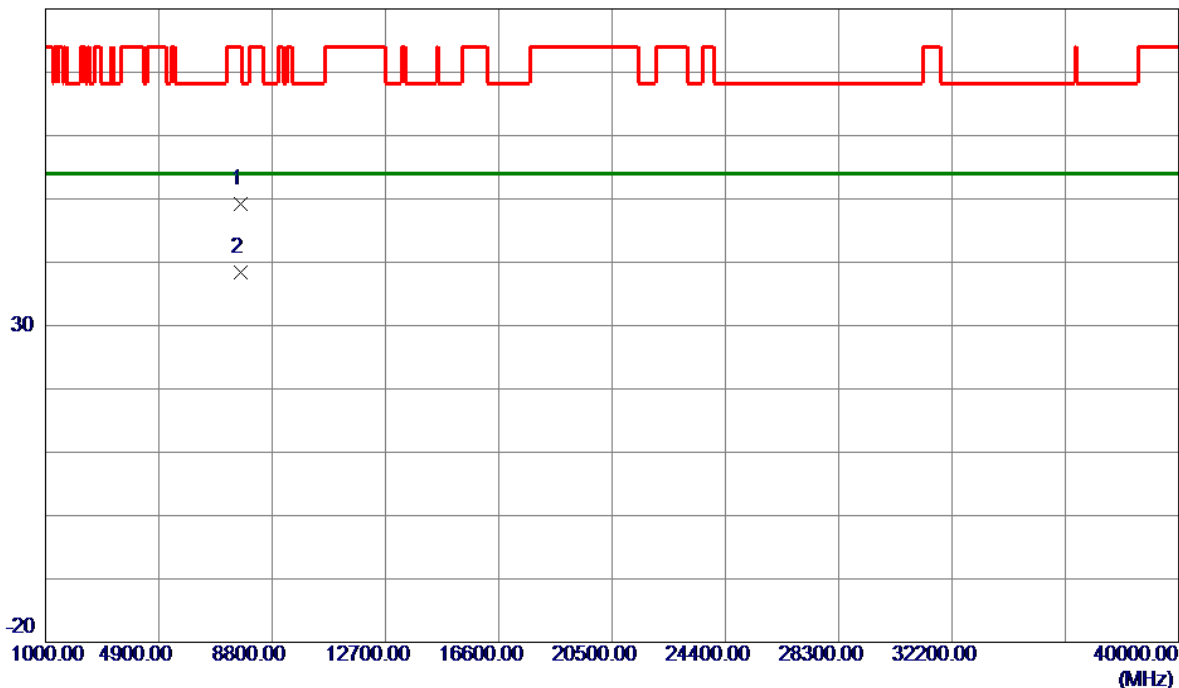


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7713.4250	38.33	10.87	49.20	74.00	-24.80	Peak	
2 *	7714.5250	27.50	10.87	38.37	54.00	-15.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

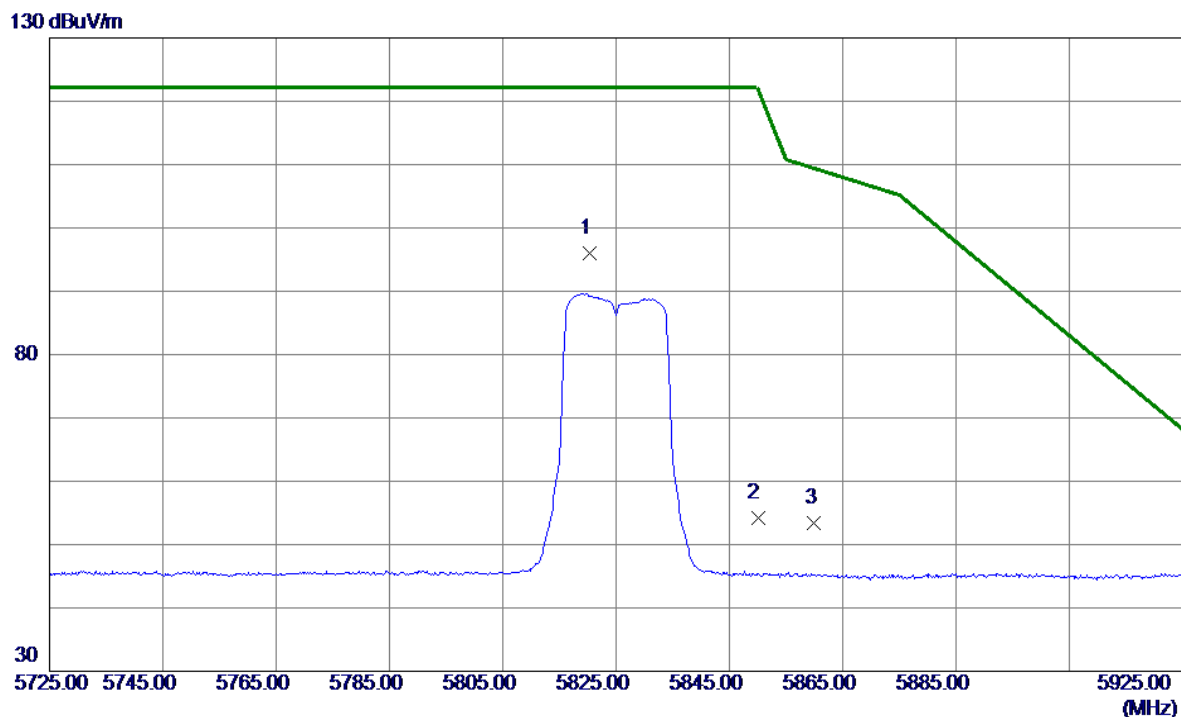


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.4000	79.17	16.85	96.02	122.20	-26.18	Peak	No Limit
2	5850.0000	37.34	16.87	54.21	122.20	-67.99	Peak	
3	5860.0000	36.60	16.88	53.48	109.40	-55.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

80 dBuV/m

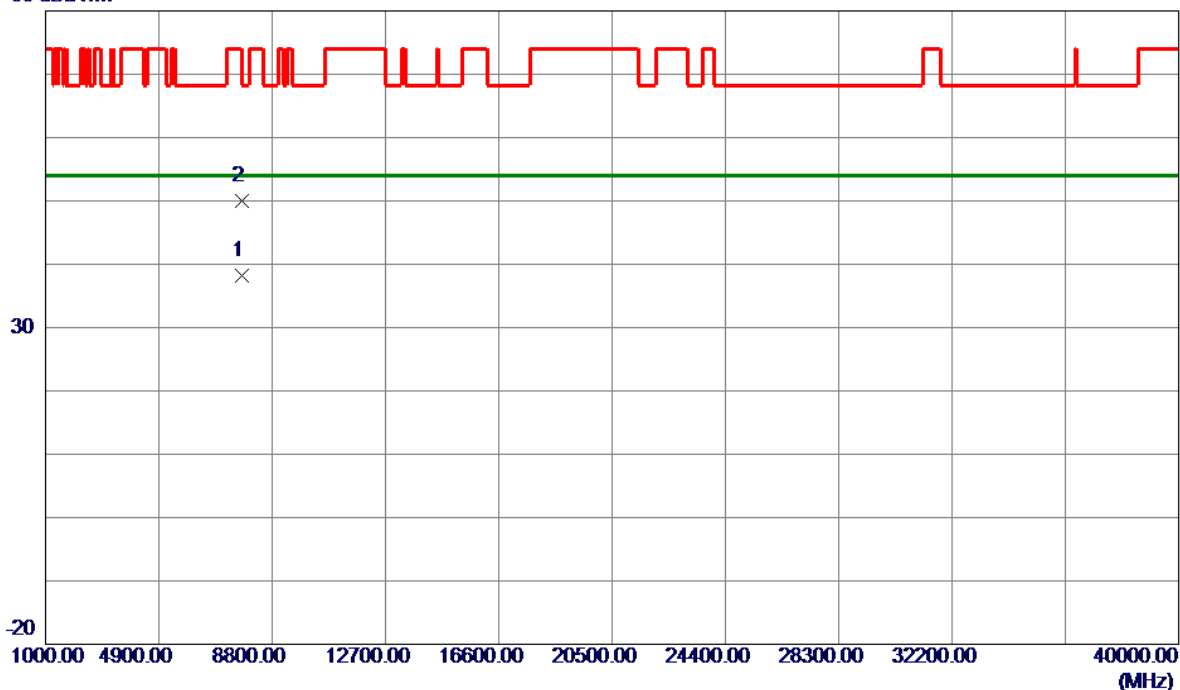


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.6150	27.37	10.85	38.22	54.00	-15.78	AVG	
2	7766.9300	39.14	10.85	49.99	68.20	-18.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

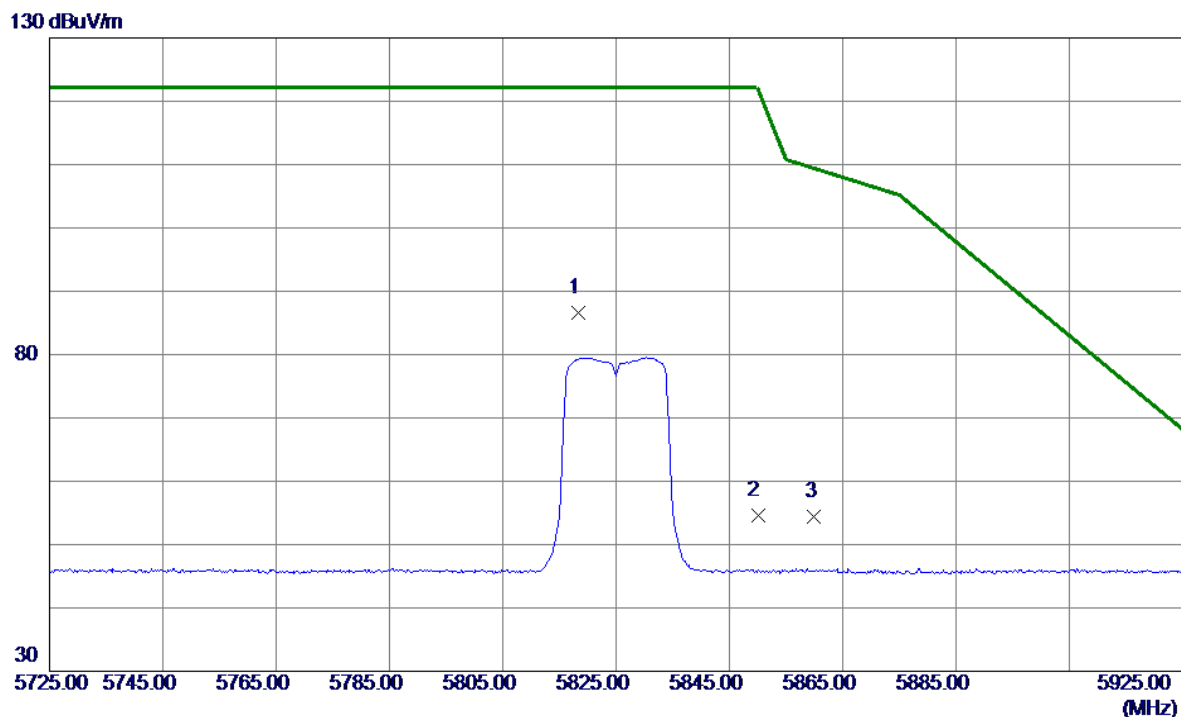


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.4000	69.68	16.85	86.53	122.20	-35.67	Peak	No Limit
2	5850.0000	37.66	16.87	54.53	122.20	-67.67	Peak	
3	5860.0000	37.48	16.88	54.36	109.40	-55.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

80 dBuV/m

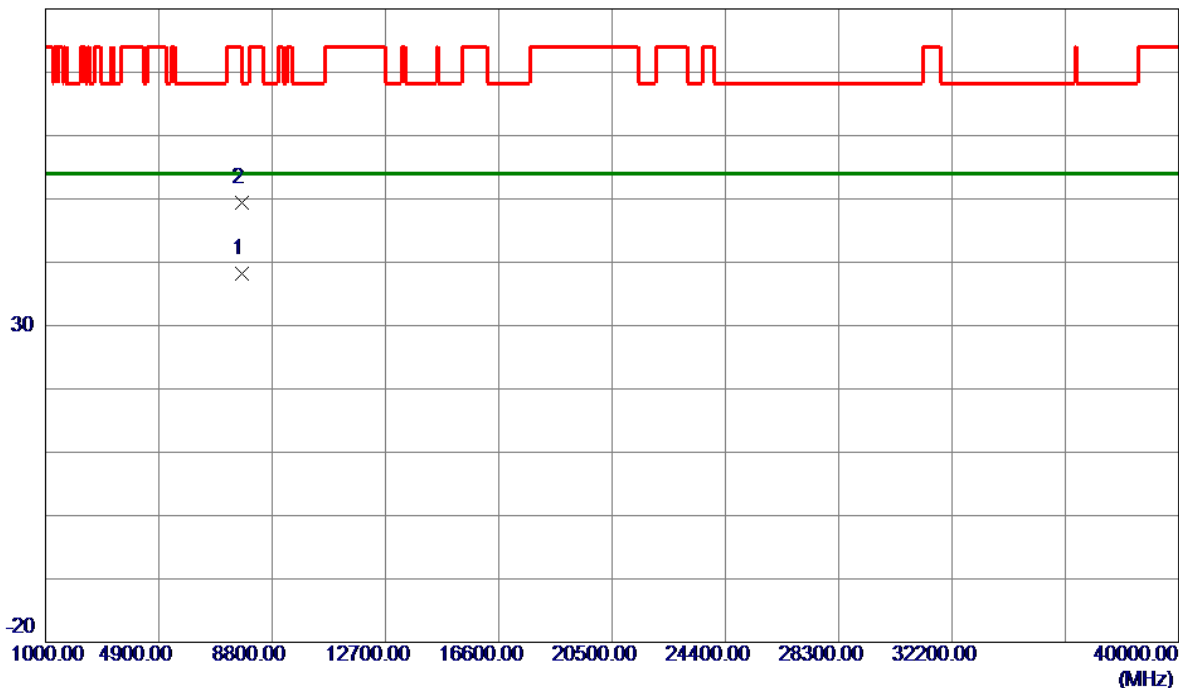


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7765.5950	27.30	10.85	38.15	54.00	-15.85	AVG	
2	7768.7400	38.59	10.85	49.44	68.20	-18.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

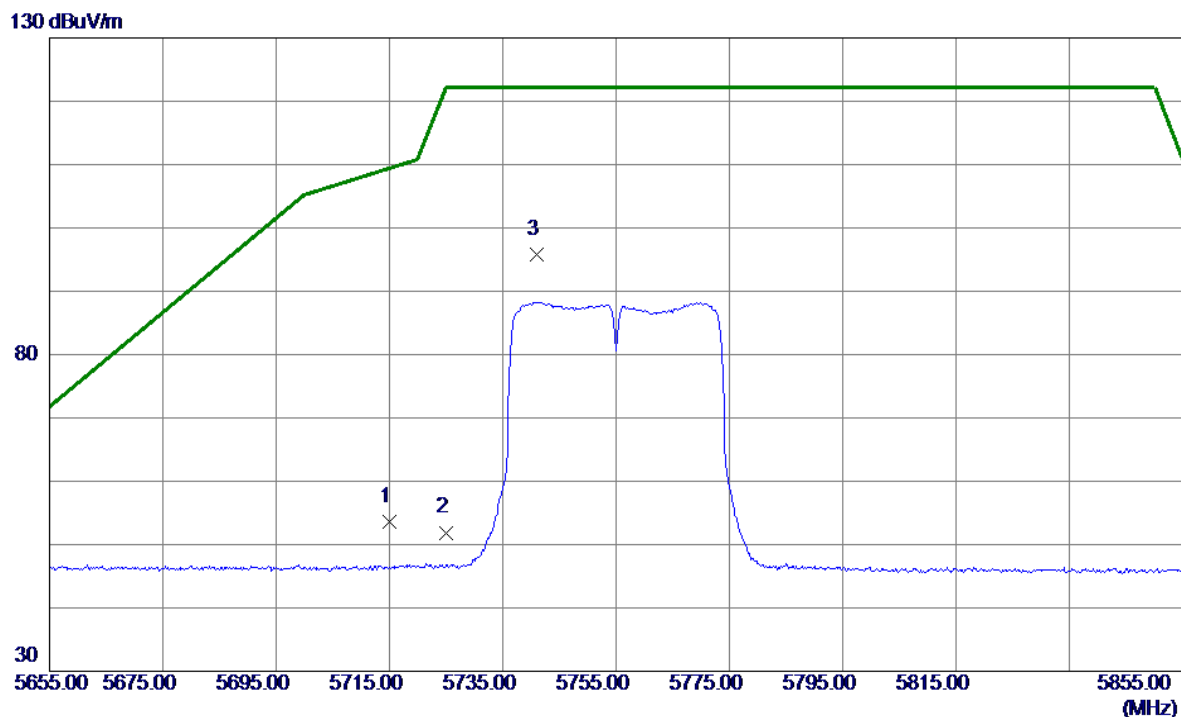


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.90	16.79	53.69	109.40	-55.71	Peak	
2	5725.0000	35.10	16.80	51.90	122.20	-70.30	Peak	
3 *	5741.0000	78.98	16.81	95.79	122.20	-26.41	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

80 dBuV/m

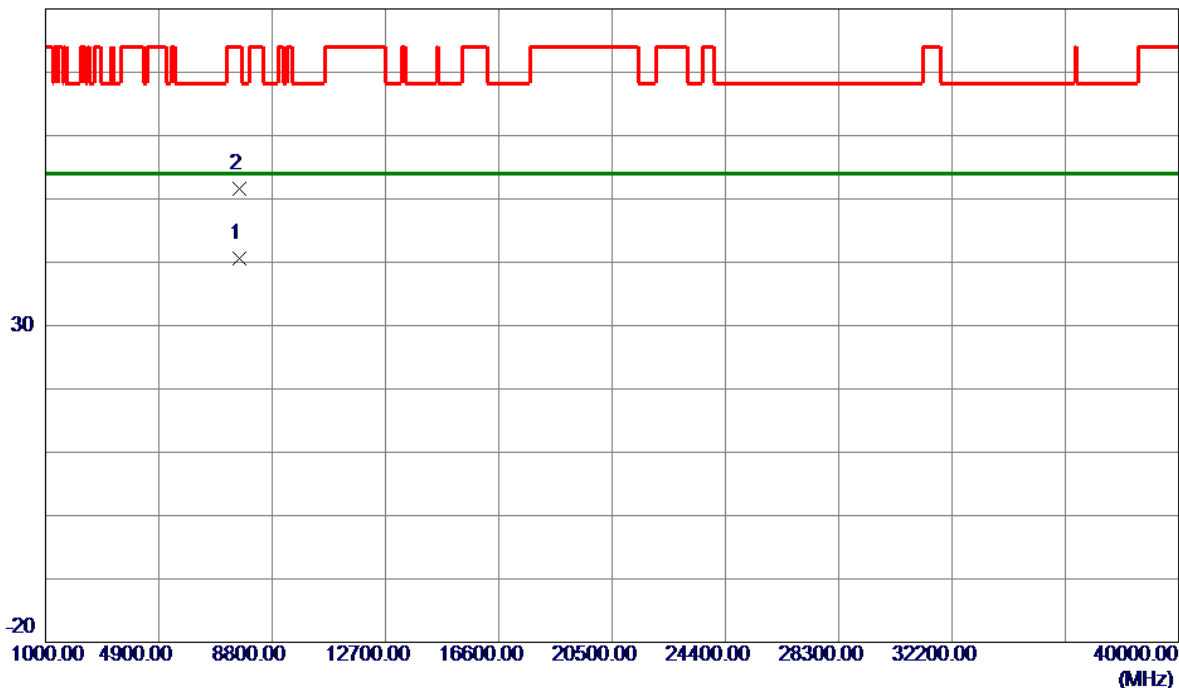


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7674.0750	29.77	10.88	40.65	54.00	-13.35	AVG	
2	7674.8450	40.78	10.88	51.66	74.00	-22.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

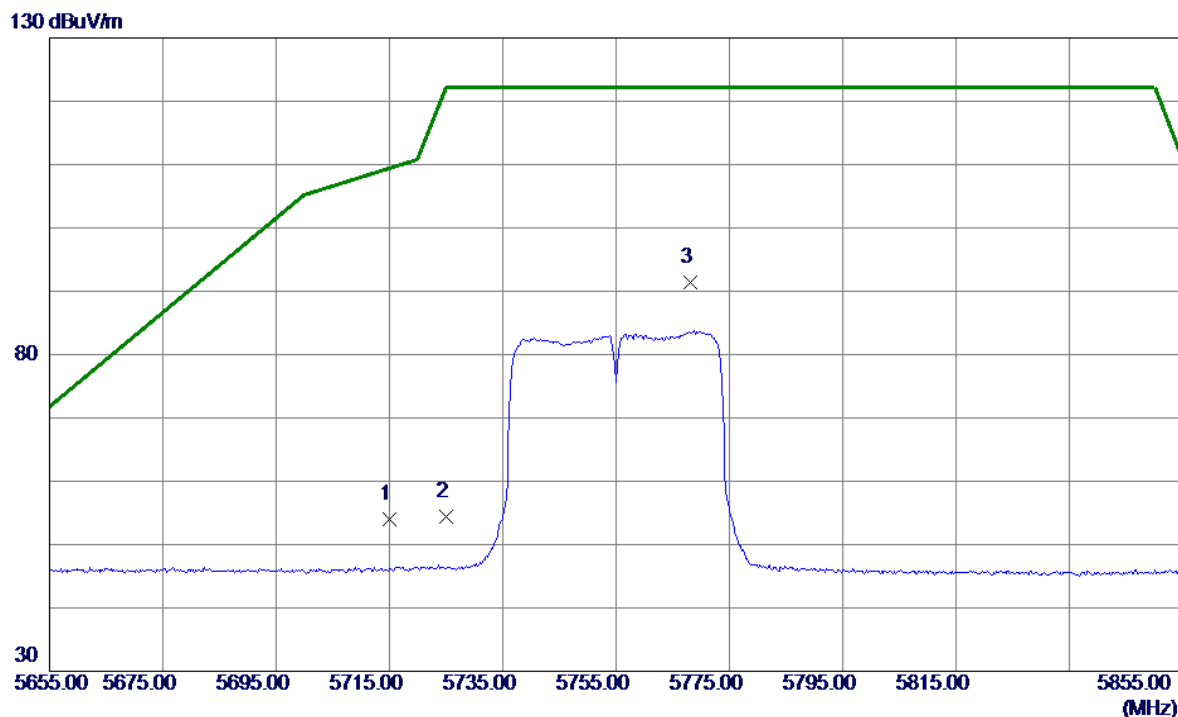


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.21	16.79	54.00	109.40	-55.40	Peak	
2	5725.0000	37.59	16.80	54.39	122.20	-67.81	Peak	
3 *	5768.2000	74.59	16.82	91.41	122.20	-30.79	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

80 dBuV/m

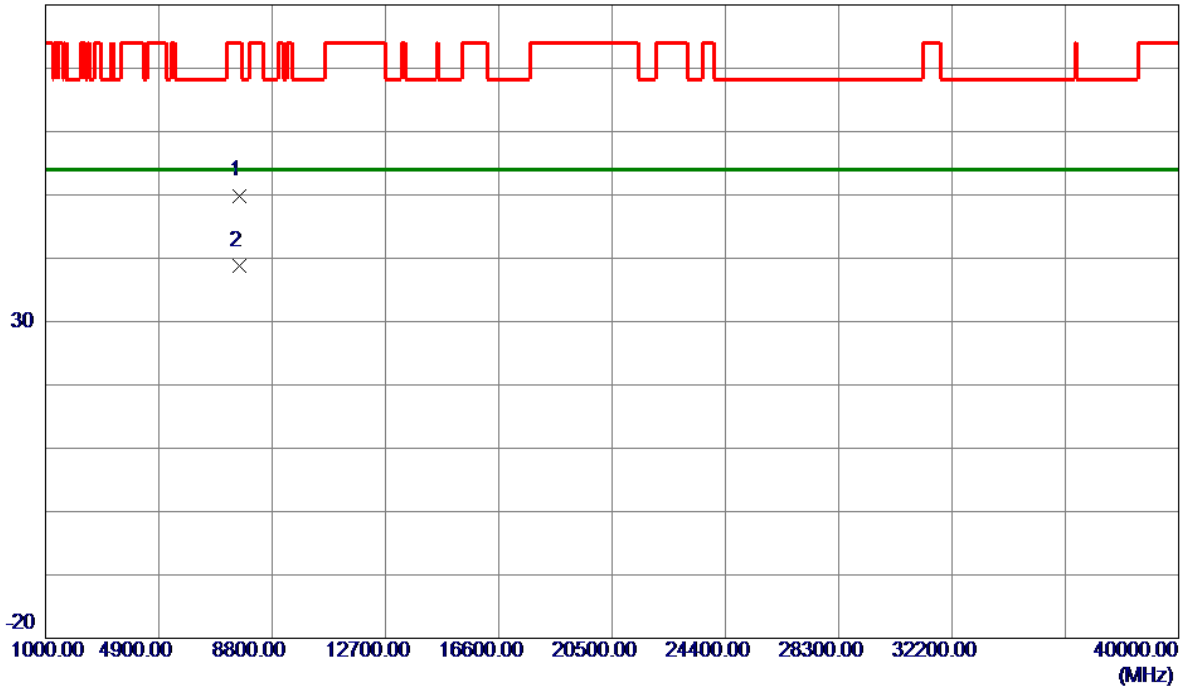


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7671.1400	39.01	10.89	49.90	74.00	-24.10	Peak	
2 *	7672.1400	27.92	10.88	38.80	54.00	-15.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

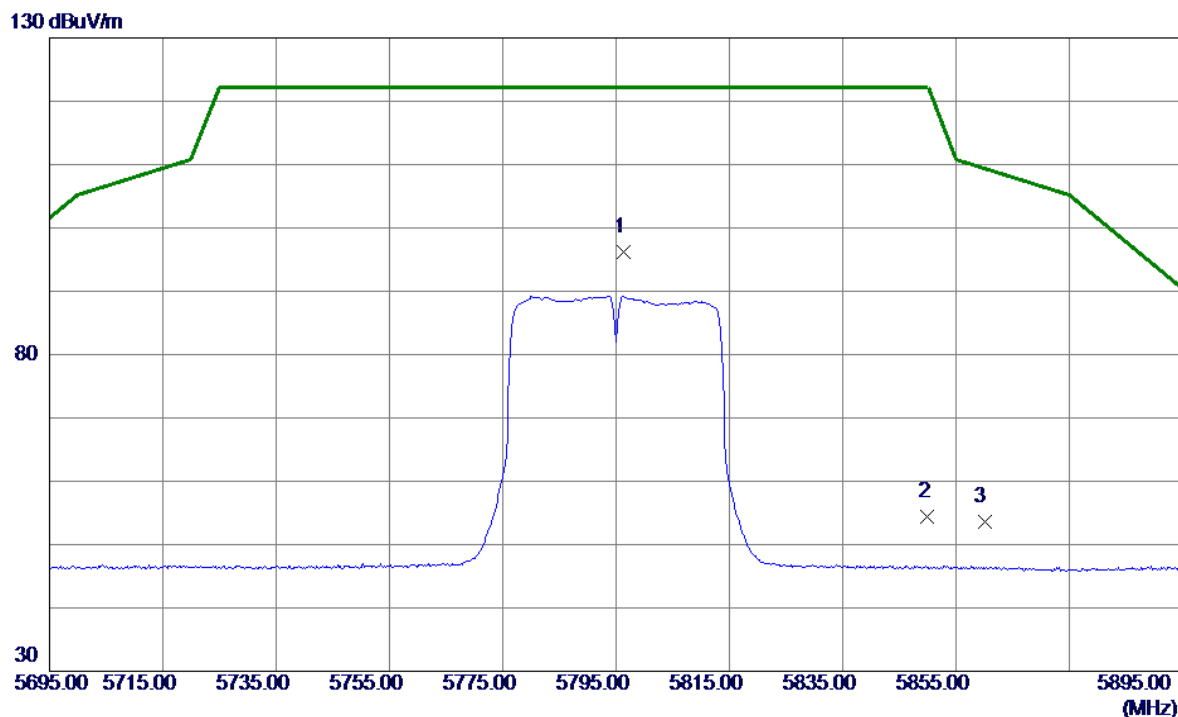


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5796.4000	79.30	16.84	96.14	122.20	-26.06	Peak	No Limit
2	5850.0000	37.58	16.87	54.45	122.20	-67.75	Peak	
3	5860.0000	36.63	16.88	53.51	109.40	-55.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

80 dBuV/m

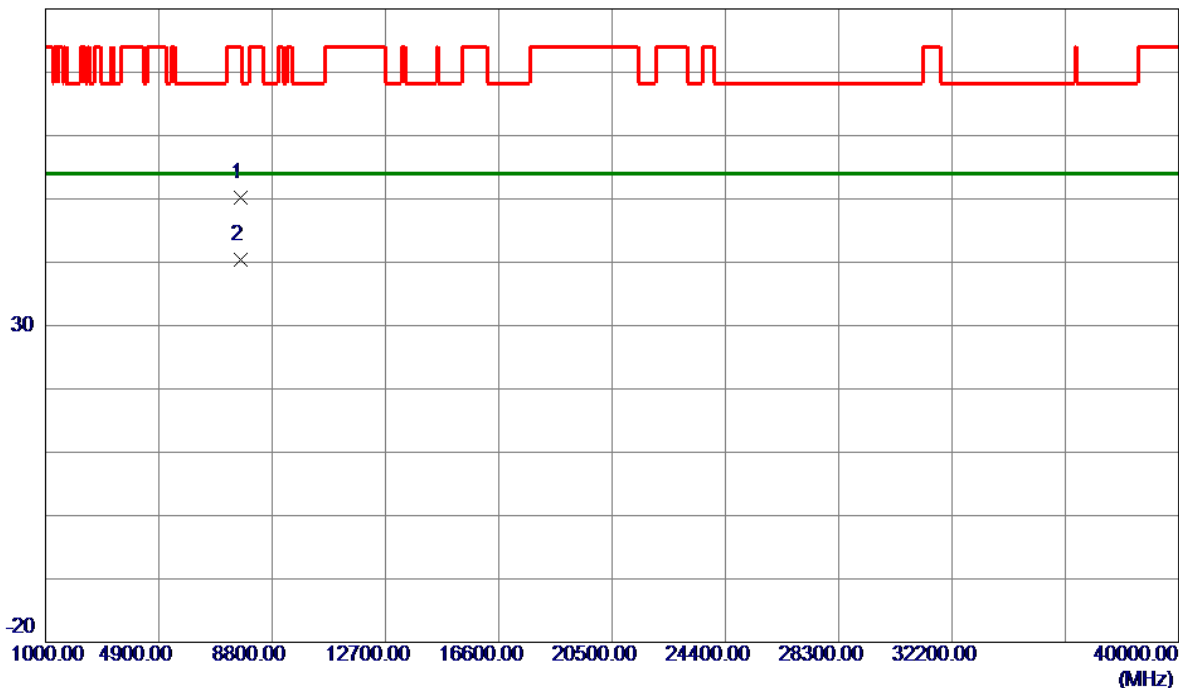


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7724.7900	39.37	10.87	50.24	74.00	-23.76	Peak	
2 *	7726.5400	29.56	10.87	40.43	54.00	-13.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

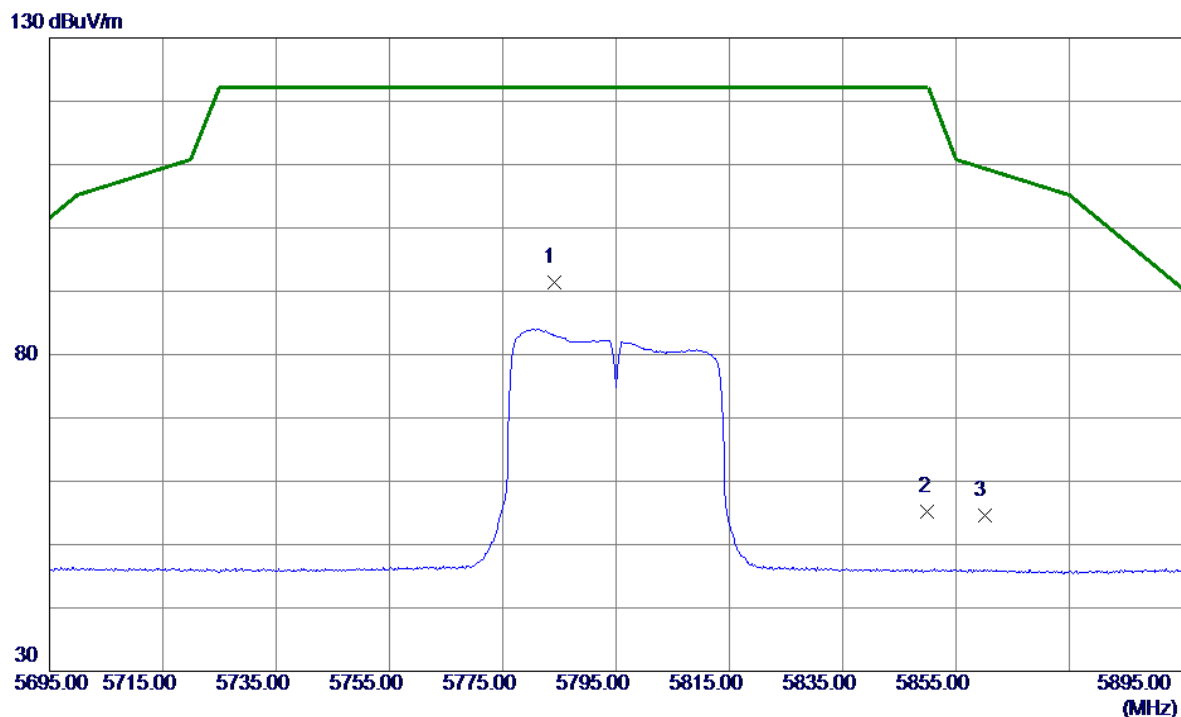


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.0000	74.49	16.83	91.32	122.20	-30.88	Peak	No Limit
2	5850.0000	38.30	16.87	55.17	122.20	-67.03	Peak	
3	5860.0000	37.74	16.88	54.62	109.40	-54.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

80 dBuV/m

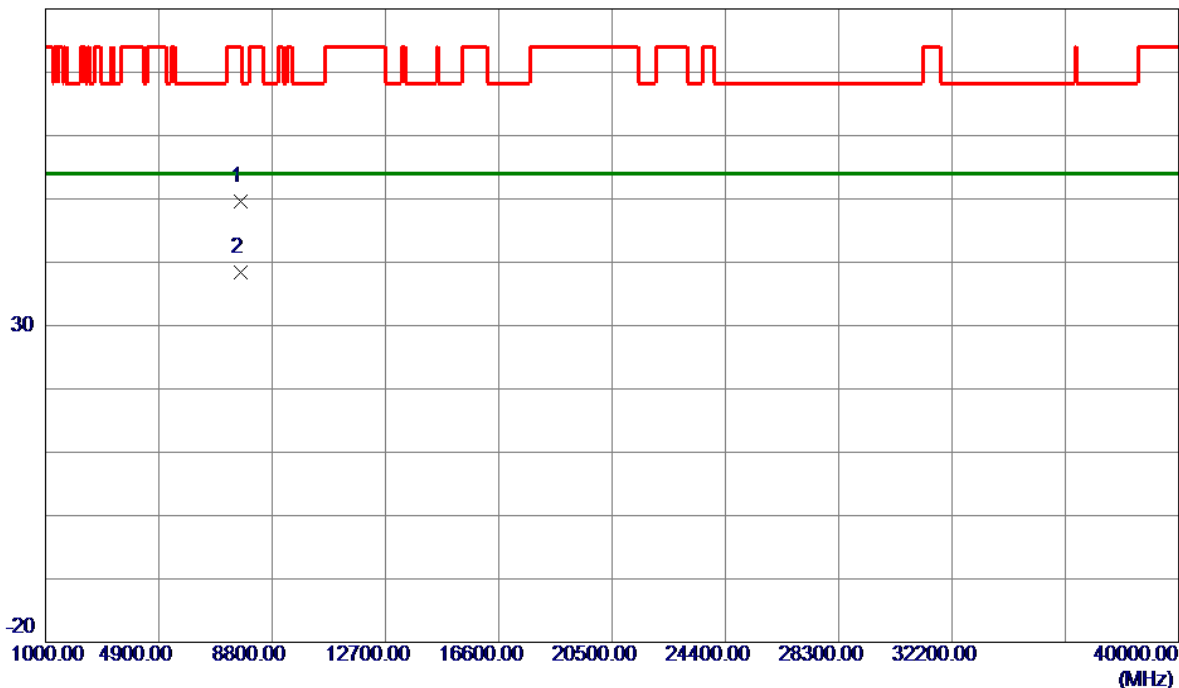


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7728.4000	38.72	10.87	49.59	74.00	-24.41	Peak	
2 *	7728.6900	27.45	10.87	38.32	54.00	-15.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

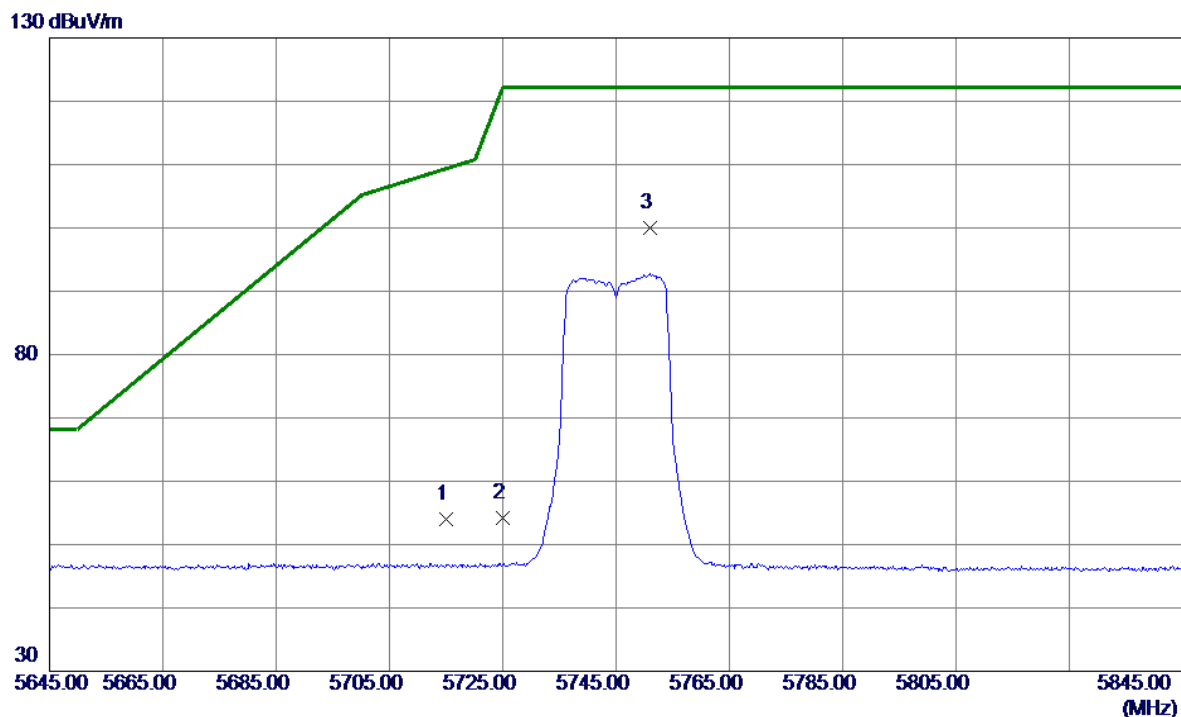


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.18	16.79	53.97	109.40	-55.43	Peak	
2	5725.0000	37.40	16.80	54.20	122.20	-68.00	Peak	
3 *	5751.0000	83.29	16.81	100.10	122.20	-22.10	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

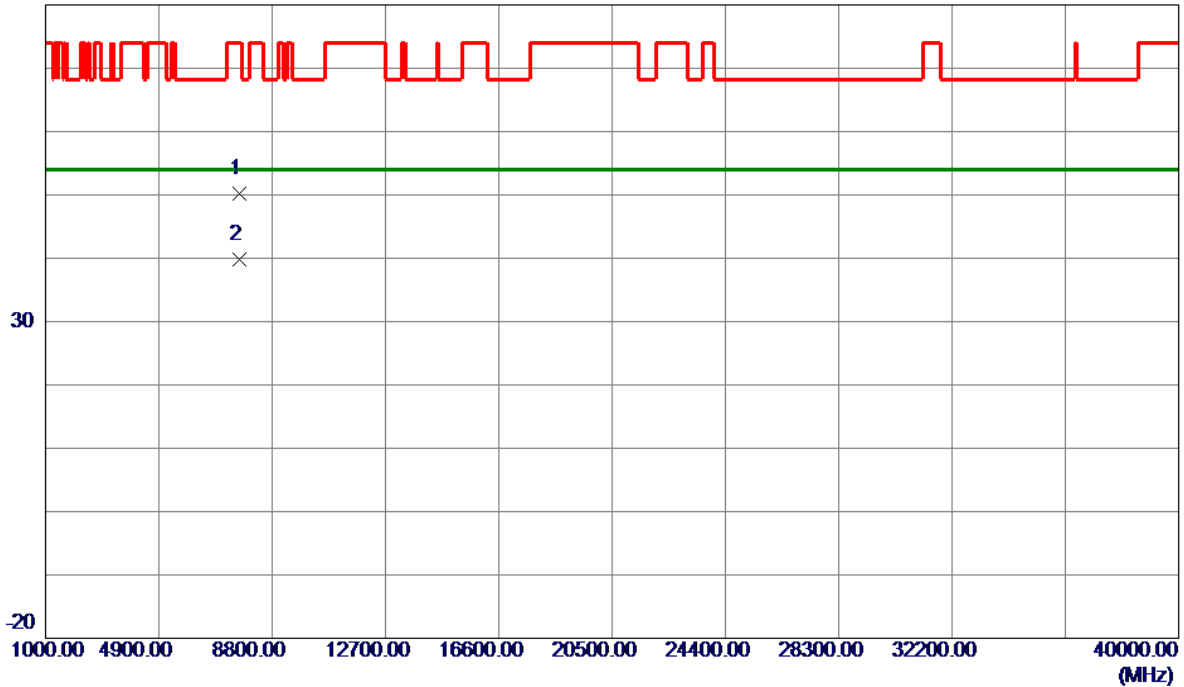


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7661.2250	39.27	10.89	50.16	74.00	-23.84	Peak	
2 *	7662.4450	28.92	10.89	39.81	54.00	-14.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

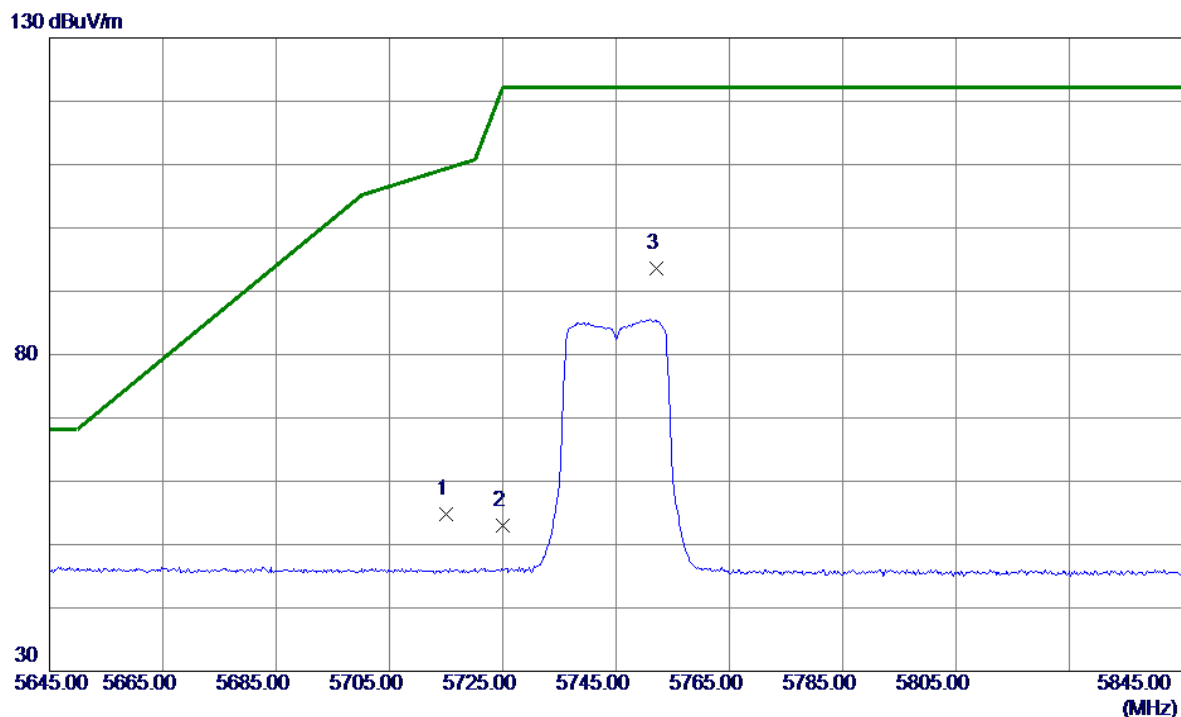


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.97	16.79	54.76	109.40	-54.64	Peak	
2	5725.0000	36.22	16.80	53.02	122.20	-69.18	Peak	
3 *	5752.2000	76.73	16.81	93.54	122.20	-28.66	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

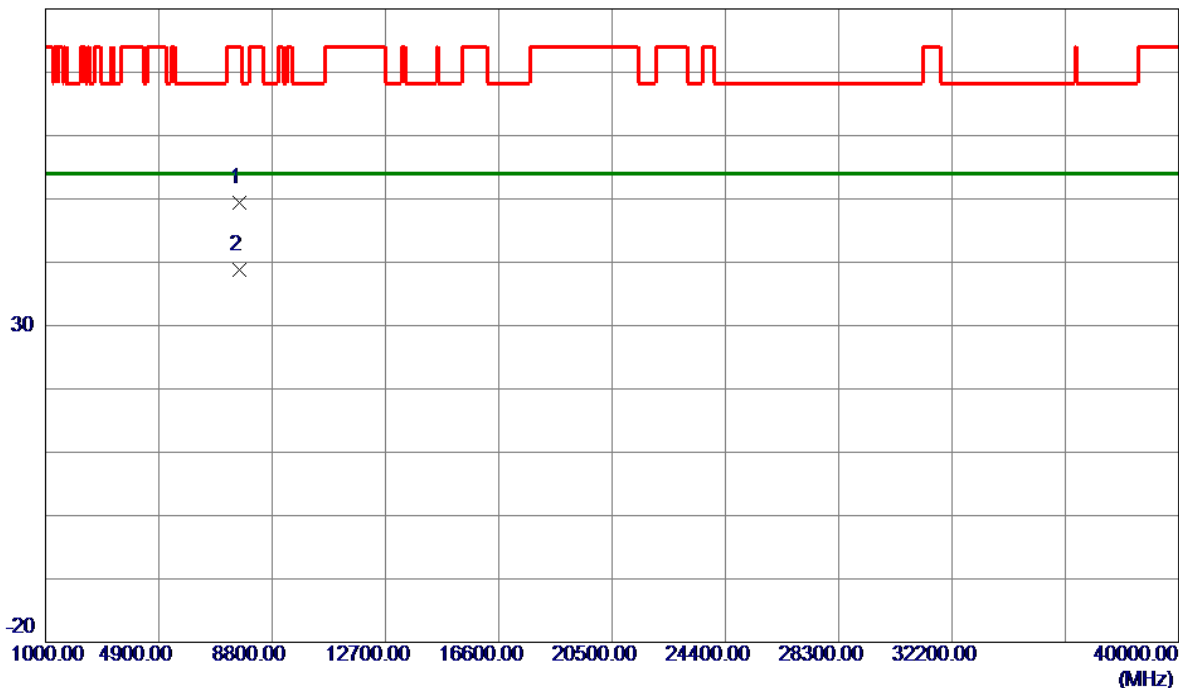


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7658.2650	38.44	10.89	49.33	74.00	-24.67	Peak	
2 *	7661.6800	27.90	10.89	38.79	54.00	-15.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

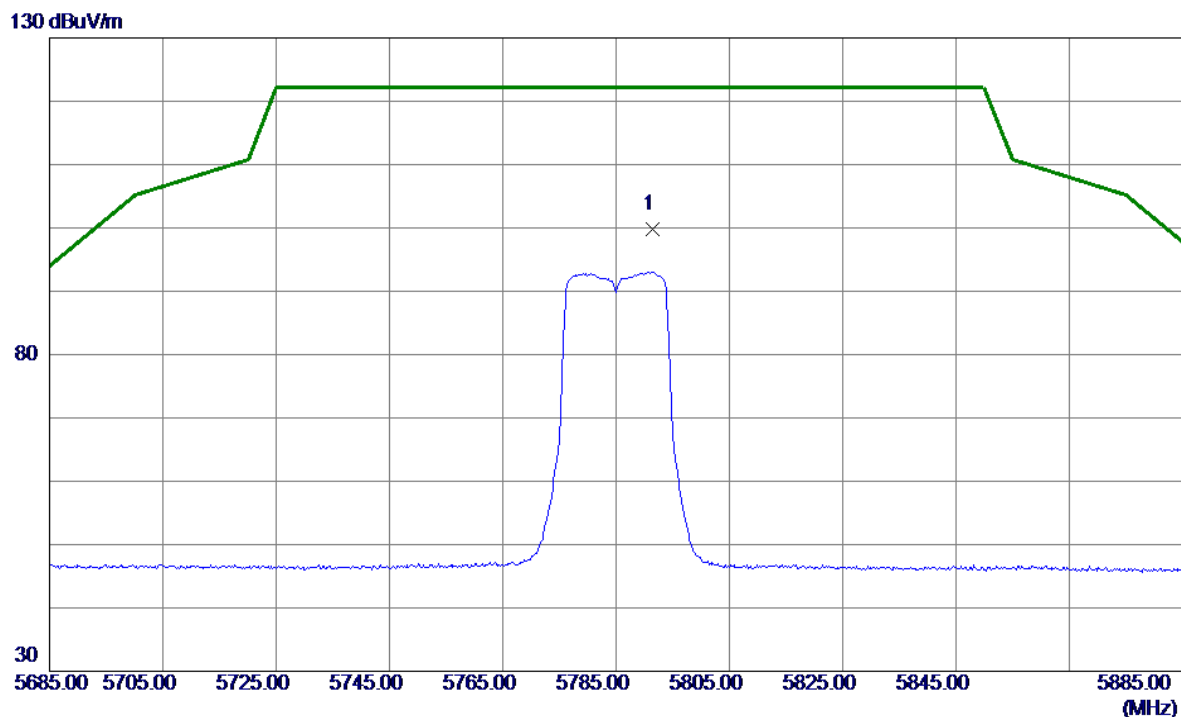


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.4000	82.99	16.84	99.83	122.20	-22.37	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

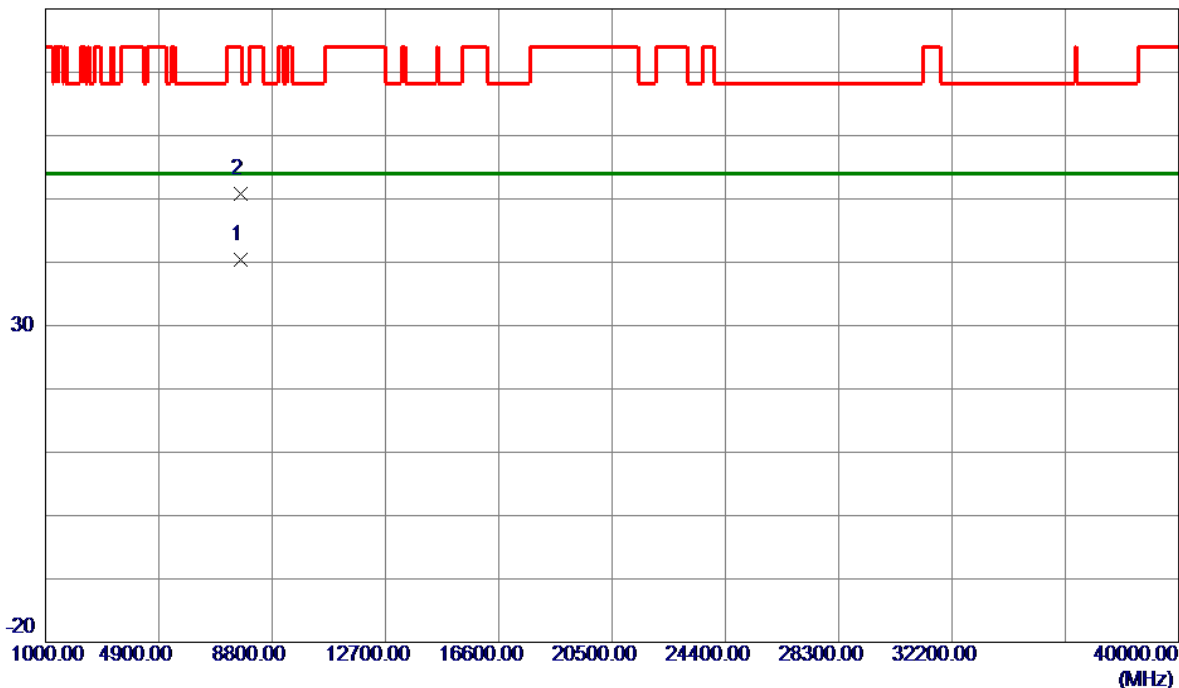


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7711.7650	29.49	10.87	40.36	54.00	-13.64	AVG	
2	7714.2150	39.90	10.87	50.77	74.00	-23.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

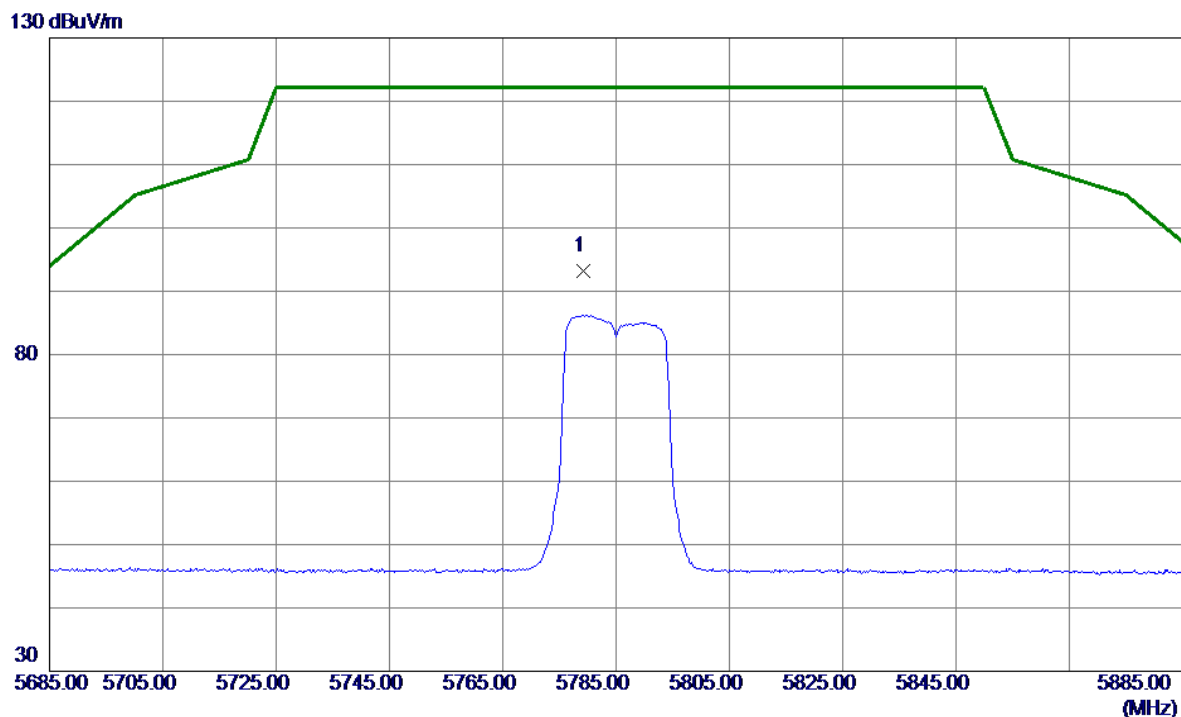


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.2000	76.30	16.83	93.13	122.20	-29.07	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

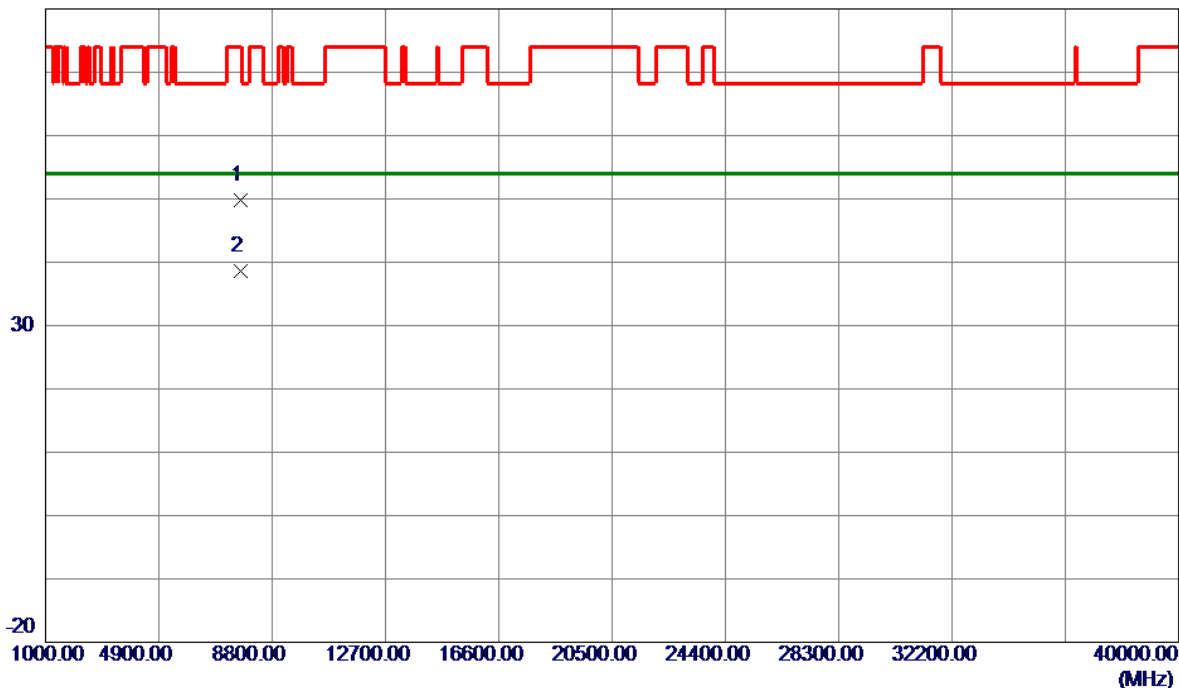


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7712.6800	38.90	10.87	49.77	74.00	-24.23	Peak	
2 *	7715.2050	27.66	10.87	38.53	54.00	-15.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

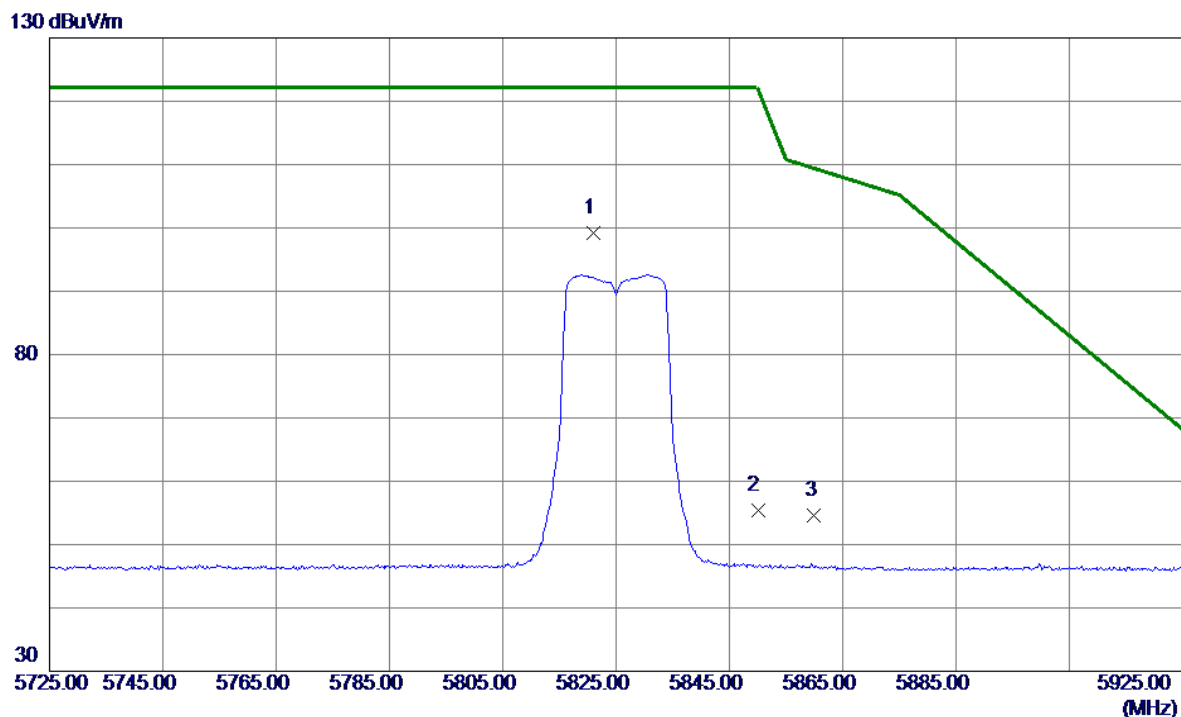


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.0000	82.43	16.85	99.28	122.20	-22.92	Peak	No Limit
2	5850.0000	38.54	16.87	55.41	122.20	-66.79	Peak	
3	5860.0000	37.70	16.88	54.58	109.40	-54.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

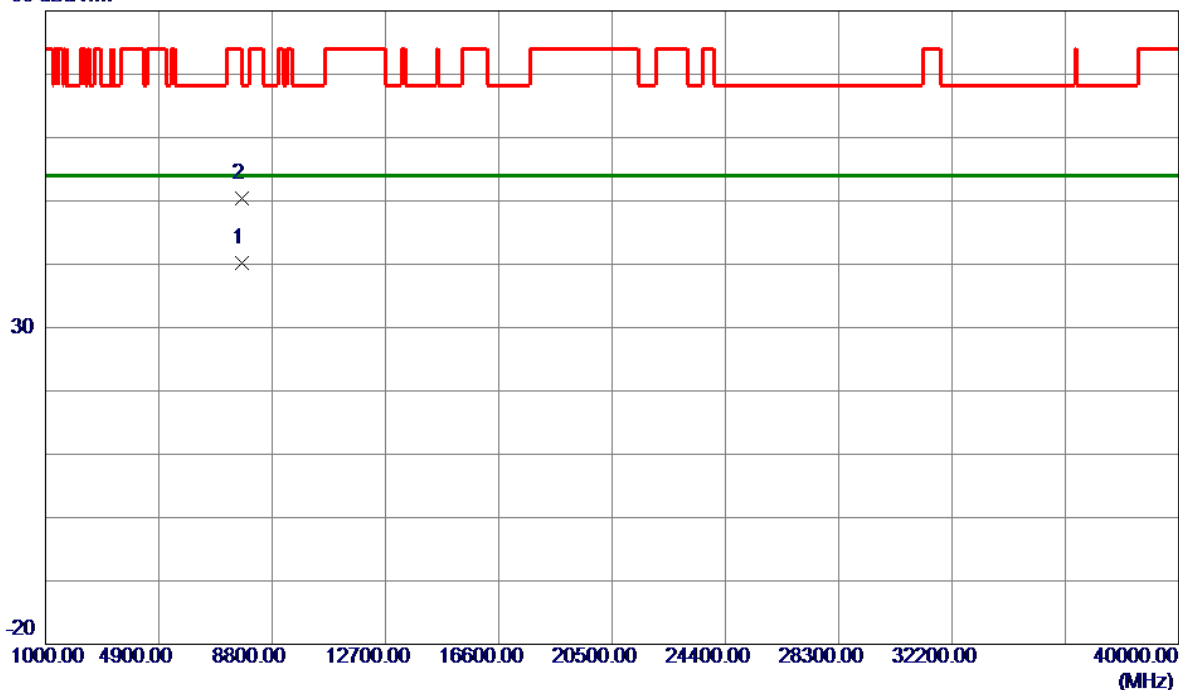


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7765.3000	29.30	10.86	40.16	54.00	-13.84	AVG	
2	7767.0600	39.57	10.85	50.42	68.20	-17.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

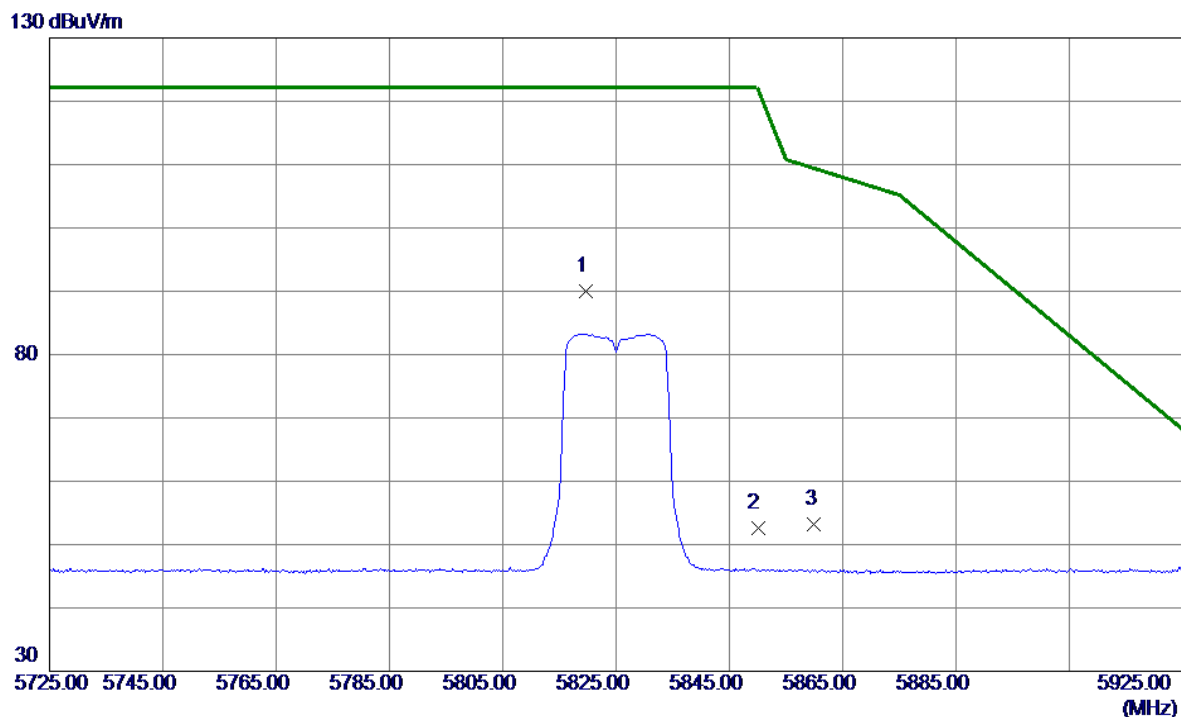


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.6000	73.08	16.85	89.93	122.20	-32.27	Peak	No Limit
2	5850.0000	35.67	16.87	52.54	122.20	-69.66	Peak	
3	5860.0000	36.34	16.88	53.22	109.40	-56.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

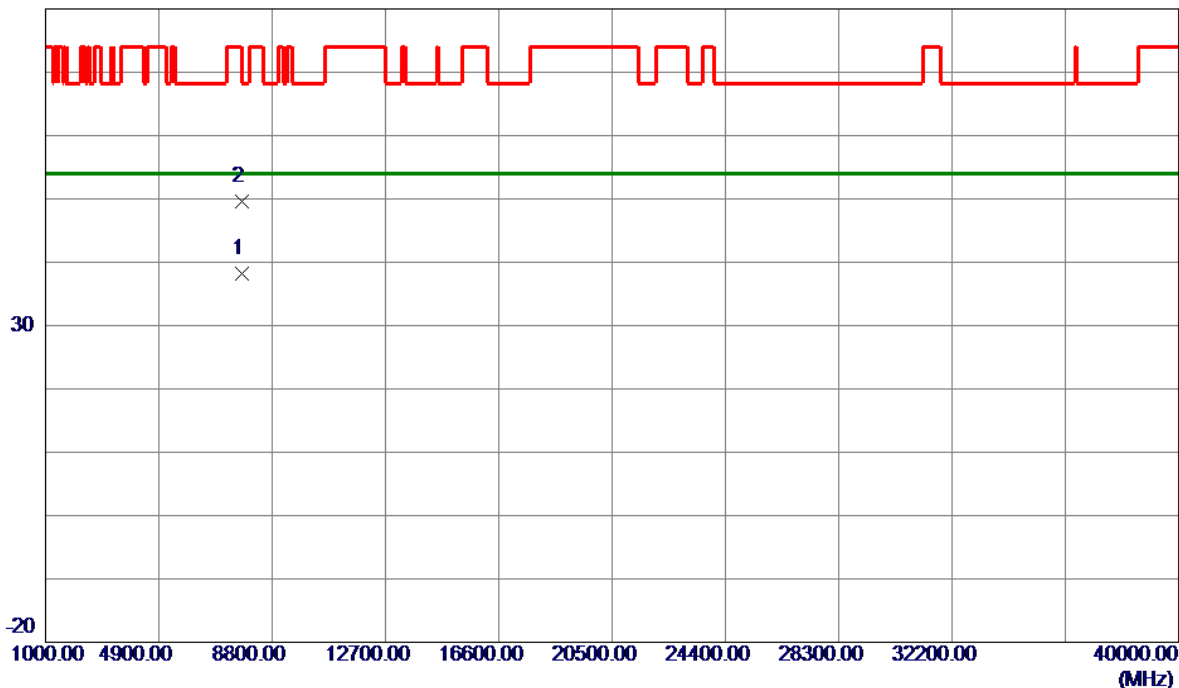


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7767.9100	27.41	10.85	38.26	54.00	-15.74	AVG	
2	7768.4100	38.78	10.85	49.63	68.20	-18.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

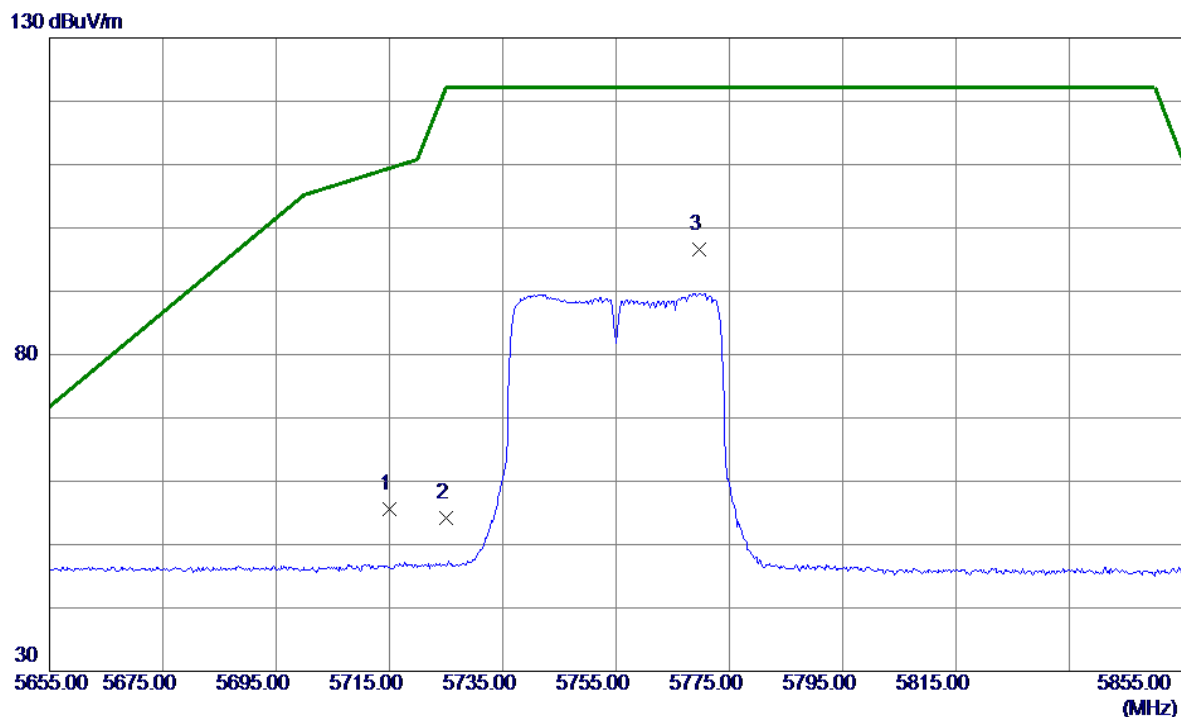


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.82	16.79	55.61	109.40	-53.79	Peak	
2	5725.0000	37.39	16.80	54.19	122.20	-68.01	Peak	
3 *	5769.6000	79.76	16.82	96.58	122.20	-25.62	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

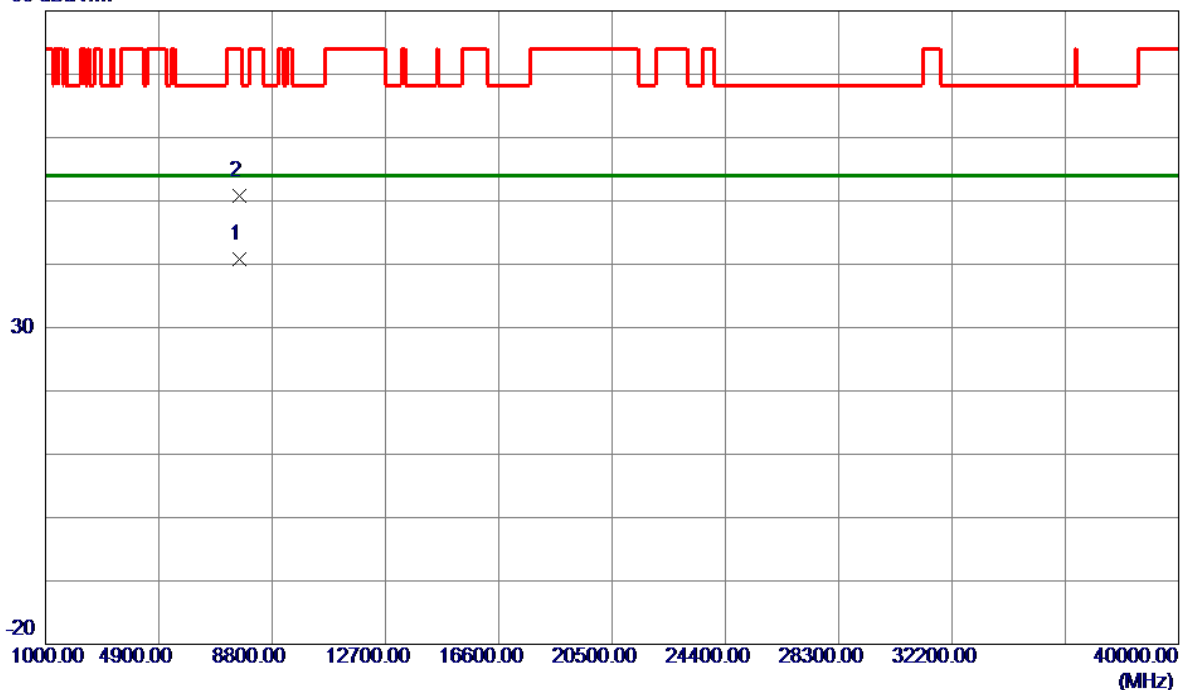


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7674.3900	29.88	10.88	40.76	54.00	-13.24	AVG	
2	7675.4900	39.94	10.88	50.82	74.00	-23.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

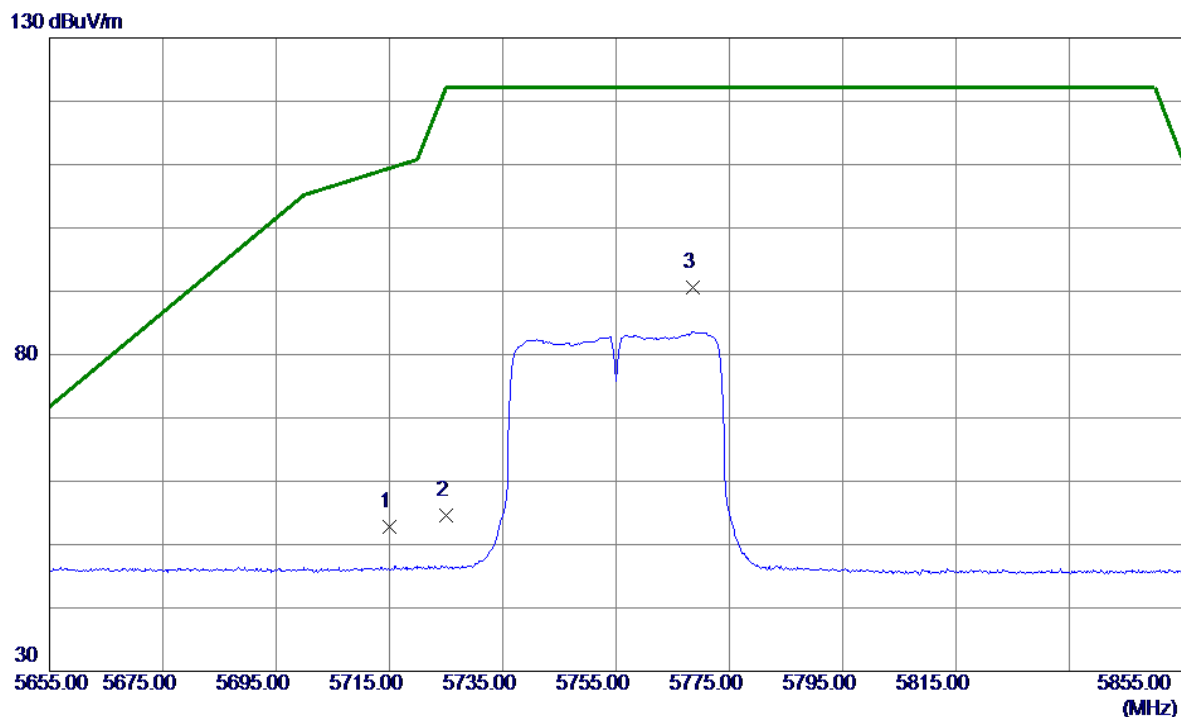


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.95	16.79	52.74	109.40	-56.66	Peak	
2	5725.0000	37.72	16.80	54.52	122.20	-67.68	Peak	
3 *	5768.6000	73.78	16.82	90.60	122.20	-31.60	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

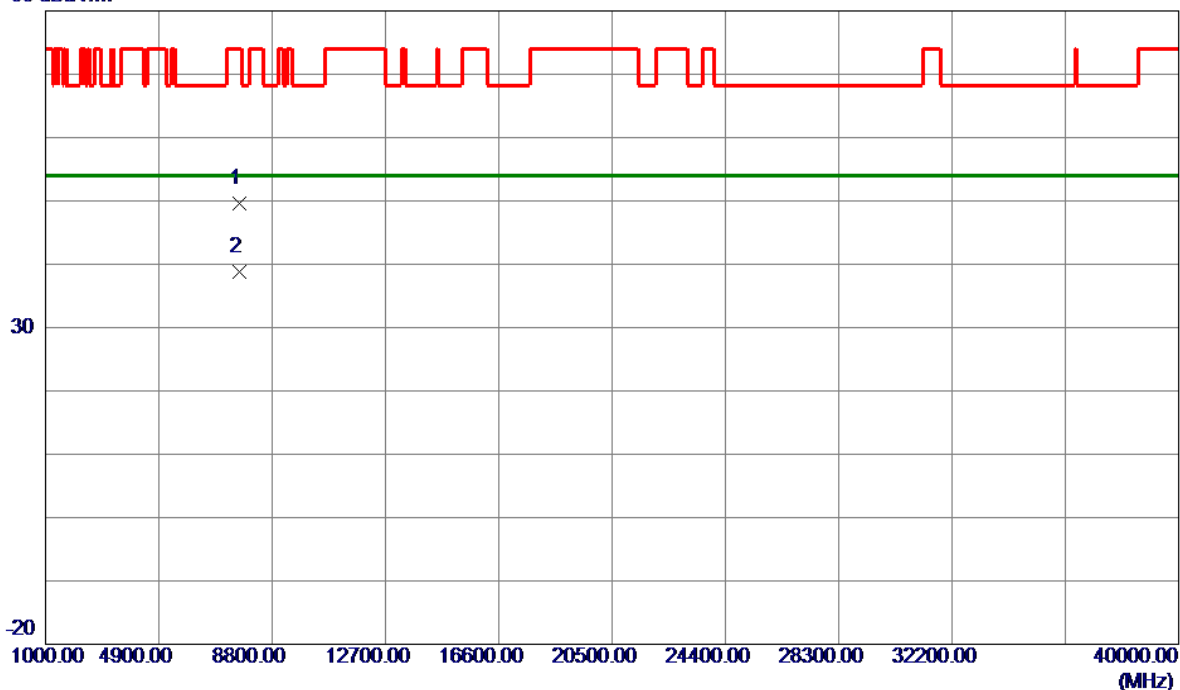


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7675.5600	38.63	10.88	49.51	74.00	-24.49	Peak	
2 *	7677.6200	27.91	10.88	38.79	54.00	-15.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

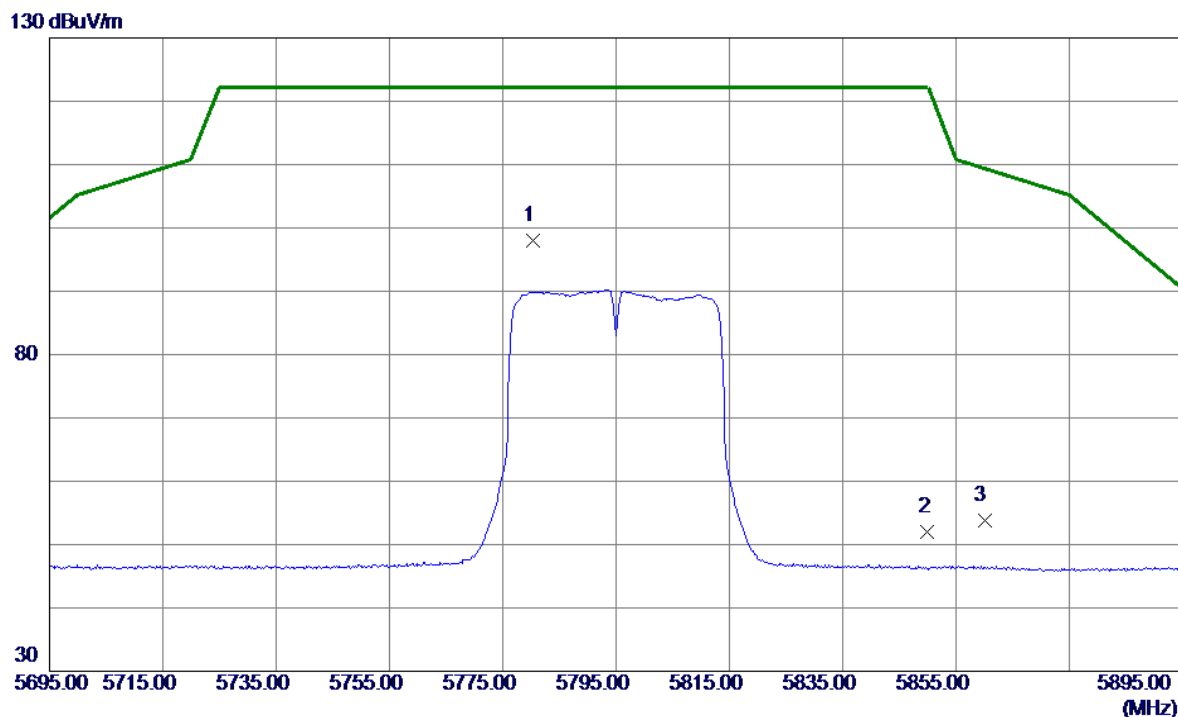


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5780.4000	81.08	16.83	97.91	122.20	-24.29	Peak	No Limit
2	5850.0000	35.21	16.87	52.08	122.20	-70.12	Peak	
3	5860.0000	37.01	16.88	53.89	109.40	-55.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

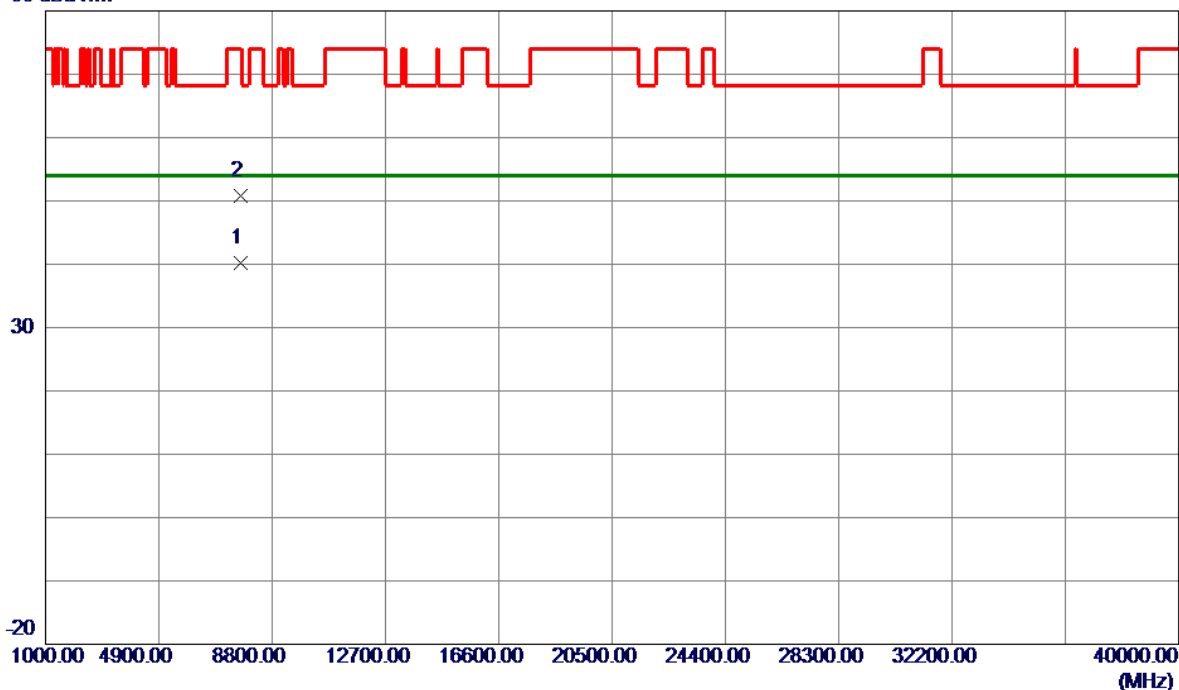


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7727.8250	29.41	10.87	40.28	54.00	-13.72	AVG	
2	7728.4550	39.89	10.87	50.76	74.00	-23.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

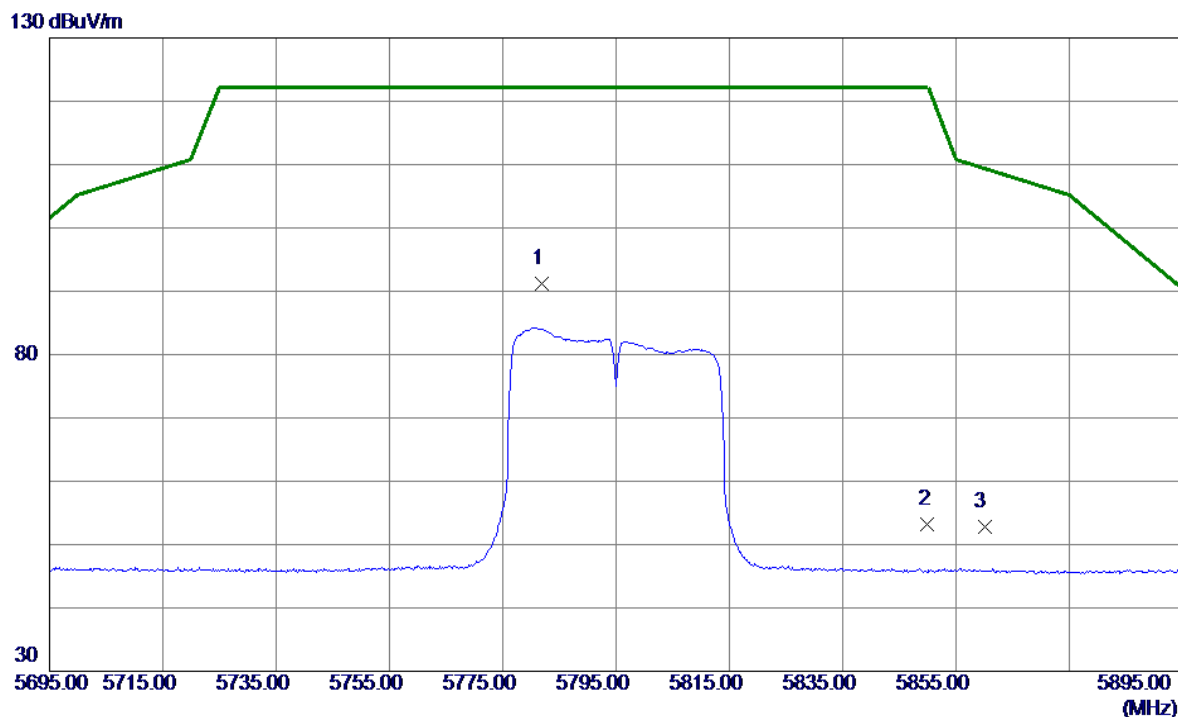


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5781.8000	74.31	16.83	91.14	122.20	-31.06	Peak	No Limit
2	5850.0000	36.29	16.87	53.16	122.20	-69.04	Peak	
3	5860.0000	35.85	16.88	52.73	109.40	-56.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

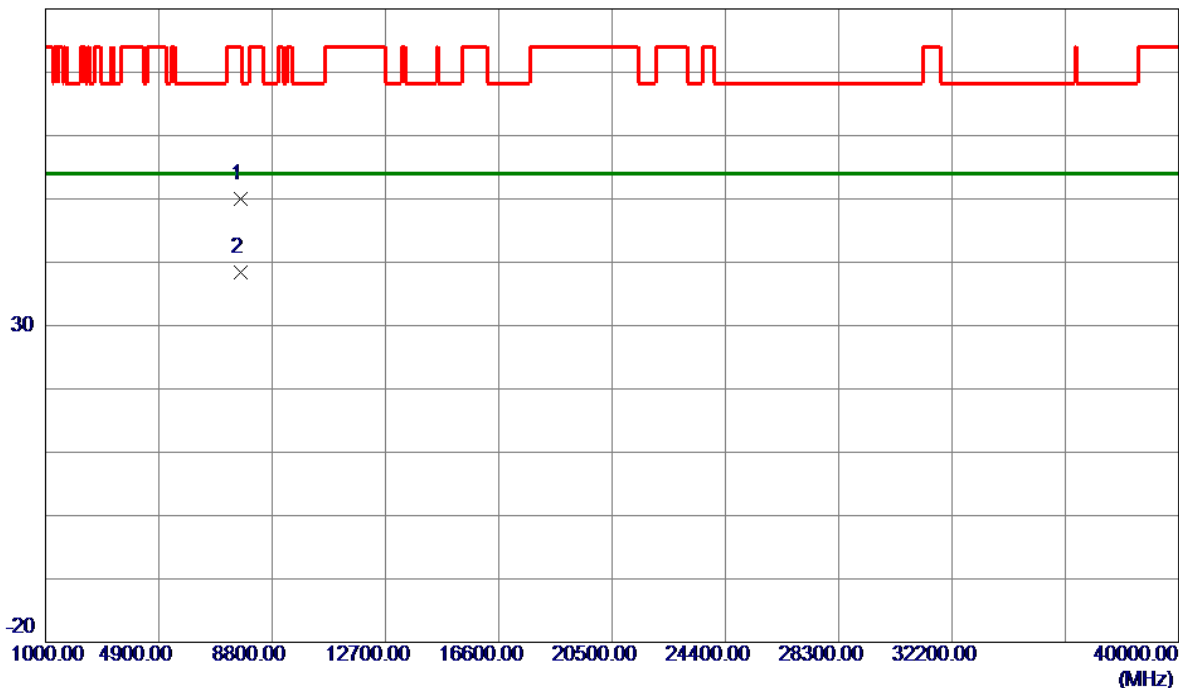


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7724.8450	39.15	10.87	50.02	74.00	-23.98	Peak	
2 *	7727.5550	27.45	10.87	38.32	54.00	-15.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

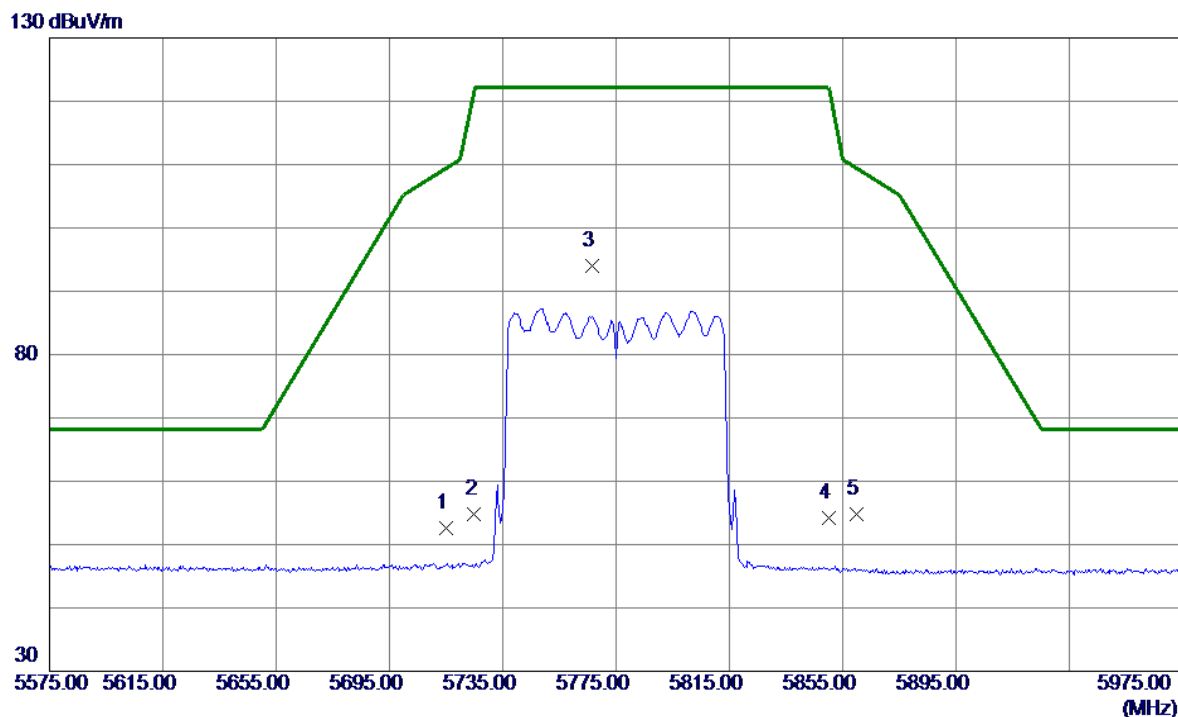


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.73	16.79	52.52	109.40	-56.88	Peak	
2	5725.0000	37.98	16.80	54.78	122.20	-67.42	Peak	
3 *	5766.6000	77.27	16.82	94.09	122.20	-28.11	Peak	No Limit
4	5850.0000	37.38	16.87	54.25	122.20	-67.95	Peak	
5	5860.0000	38.01	16.88	54.89	109.40	-54.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

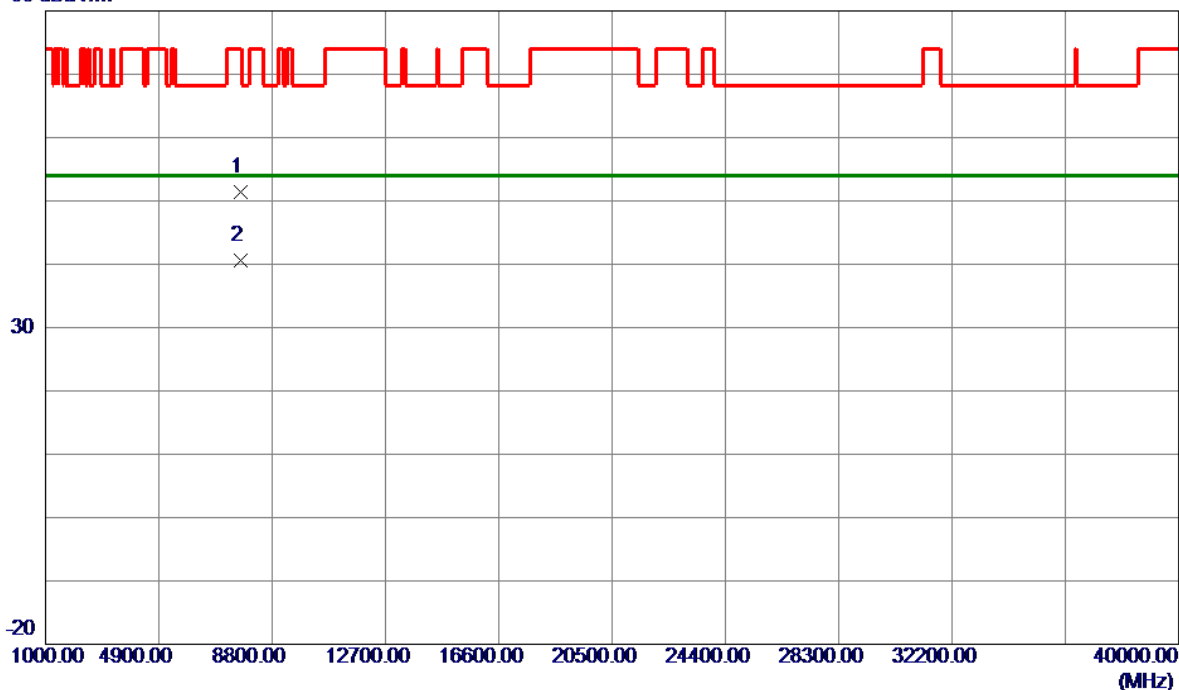


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7701.7350	40.58	10.88	51.46	74.00	-22.54	Peak	
2 *	7702.4800	29.72	10.88	40.60	54.00	-13.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

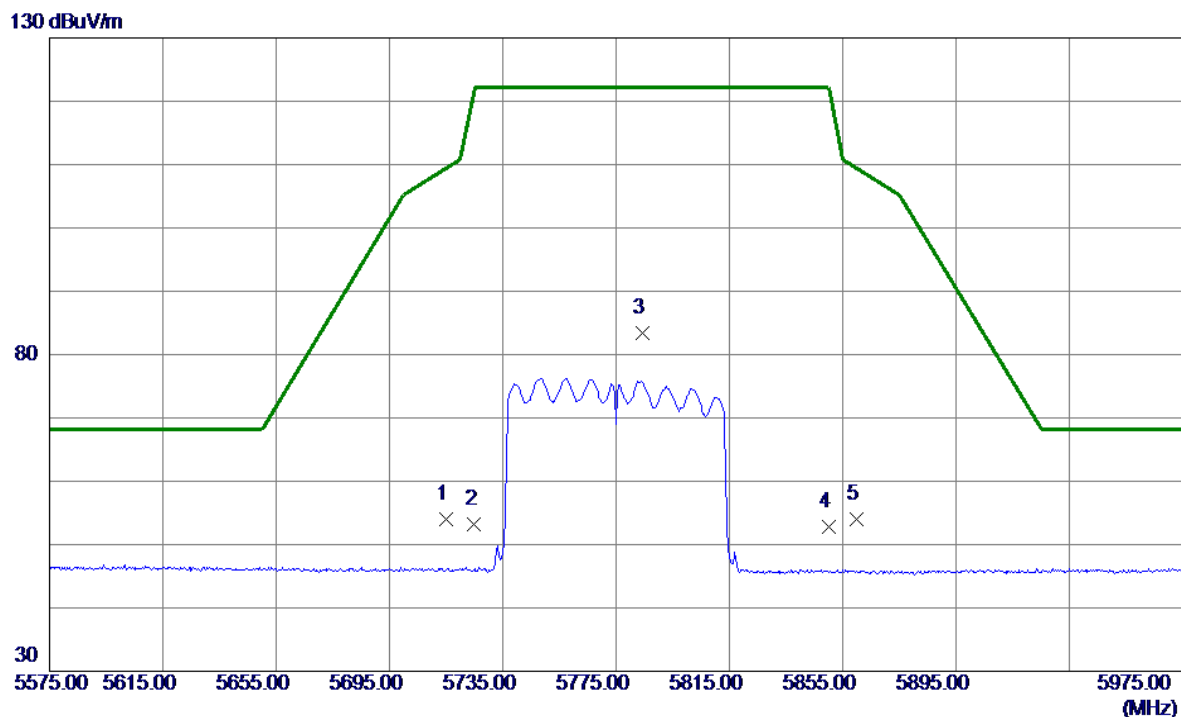


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.16	16.79	53.95	109.40	-55.45	Peak	
2	5725.0000	36.43	16.80	53.23	122.20	-68.97	Peak	
3 *	5784.2000	66.54	16.83	83.37	122.20	-38.83	Peak	No Limit
4	5850.0000	35.93	16.87	52.80	122.20	-69.40	Peak	
5	5860.0000	37.10	16.88	53.98	109.40	-55.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

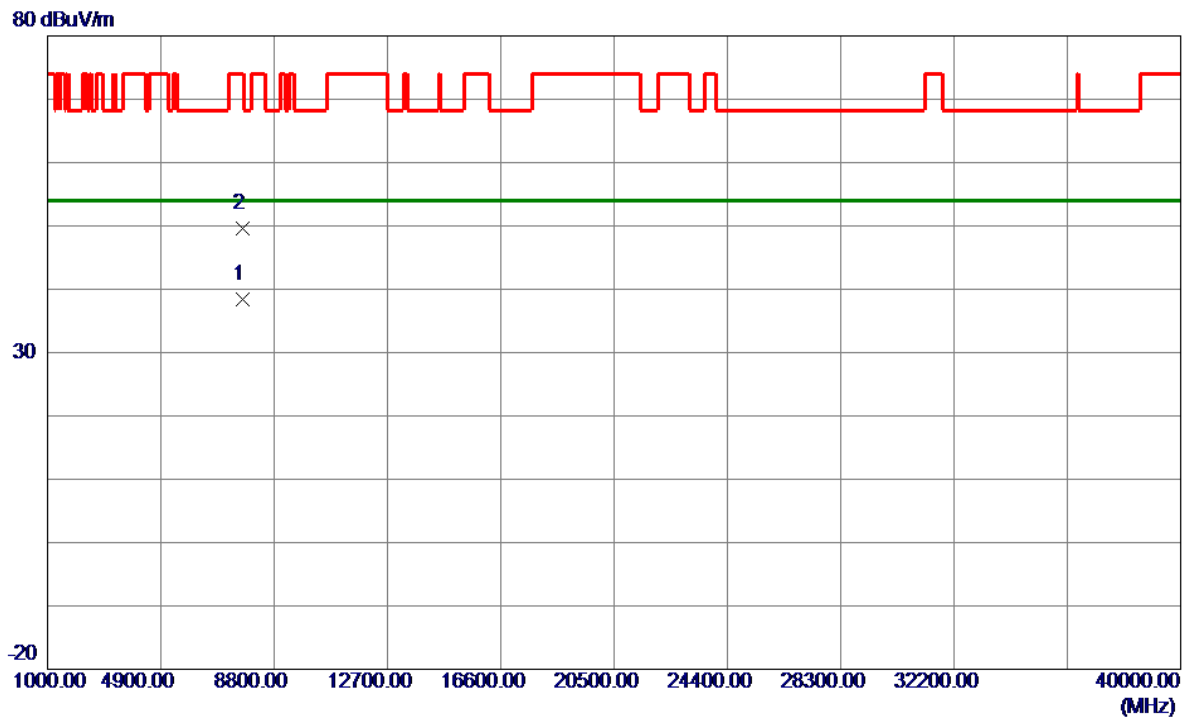

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7700.3100	27.57	10.88	38.45	54.00	-15.55	AVG	
2	7703.8850	38.66	10.87	49.53	74.00	-24.47	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.790	17.000
40	5200	21.800	16.900
48	5240	22.250	17.200

CH36

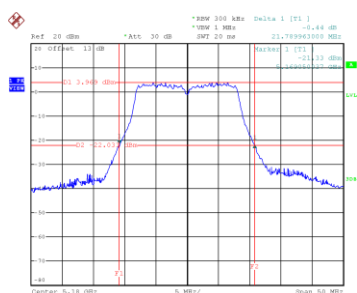


Date: 25.DEC.2021 16:53:08

CH40
26 dB Bandwidth

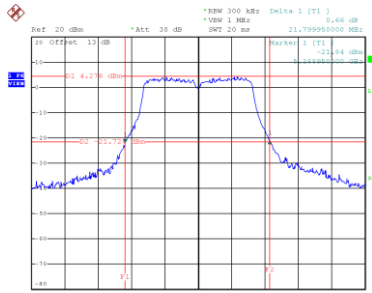


Date: 25.DEC.2021 16:54:19

CH48

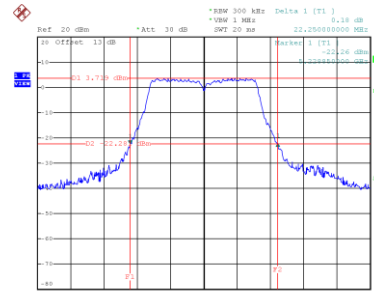


Date: 25.DEC.2021 16:55:29


99 % Occupied Bandwidth

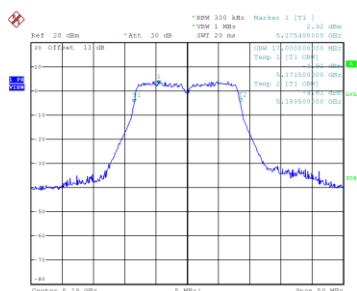

Date: 25.DEC.2021 16:53:27

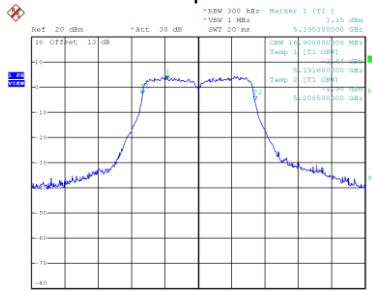

Date: 25.DEC.2021 16:53:39

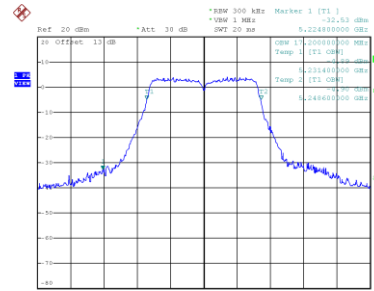


Date: 25.DEC.2021 16:54:51

Test Mode	UNII-1_TX N(HT20) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.989	18.100
40	5200	21.990	17.900
48	5240	22.089	18.100

CH36

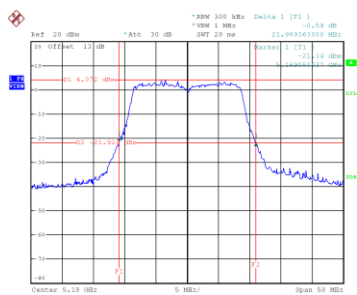


Date: 25.DEC.2021 17:17:39

CH40
26 dB Bandwidth

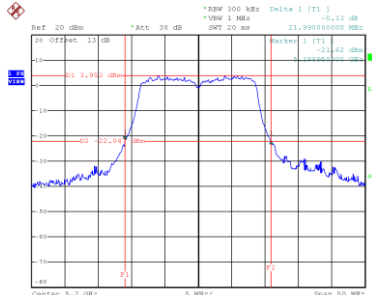


Date: 25.DEC.2021 17:18:57

CH48

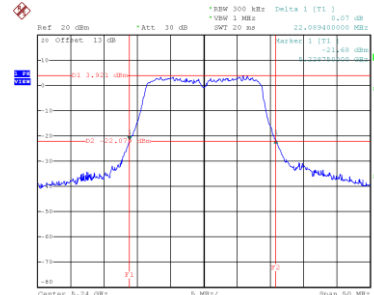


Date: 25.DEC.2021 17:20:11


99 % Occupied Bandwidth

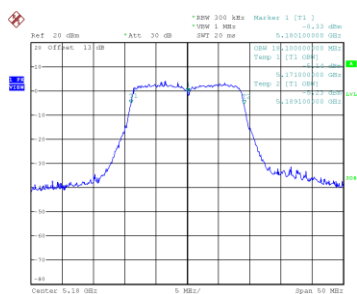

Date: 25.DEC.2021 17:16:59

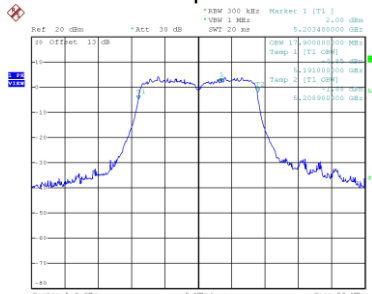

Date: 25.DEC.2021 17:18:18

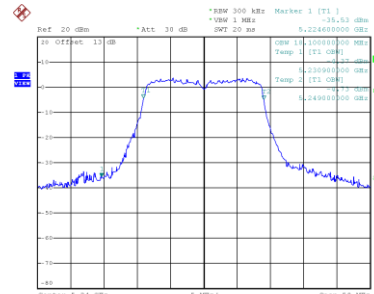


Date: 25.DEC.2021 17:19:32

Test Mode	UNII-1_TX N(HT40) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.598	37.000
46	5230	41.790	36.800

CH38

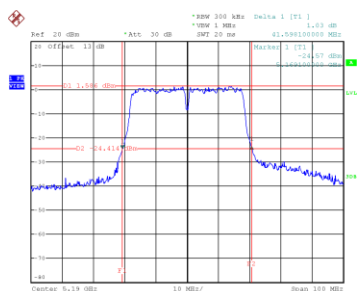


Date: 11.JAN.2022 15:08:10

CH46
26 dB Bandwidth

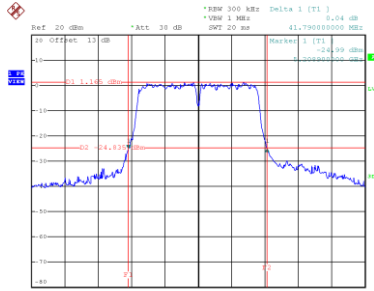


Date: 11.JAN.2022 15:09:46

99 % Occupied Bandwidth

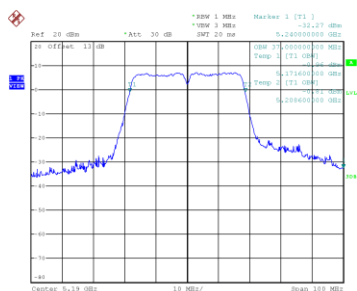

Date: 11.JAN.2022 15:07:16

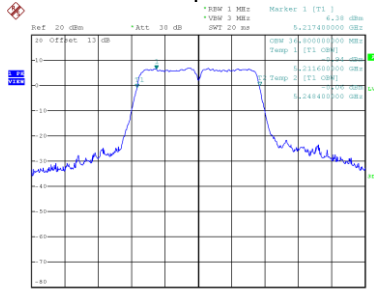


Date: 11.JAN.2022 15:09:07

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.689	17.800
40	5200	21.789	17.800
48	5240	21.800	17.900

CH36

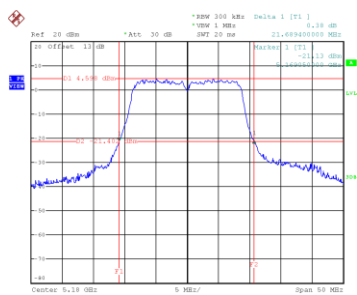


Date: 11.JAN.2022 14:04:30

CH40
26 dB Bandwidth

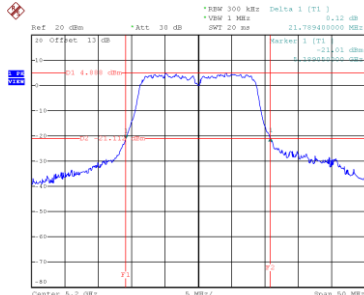


Date: 11.JAN.2022 14:05:46

CH48

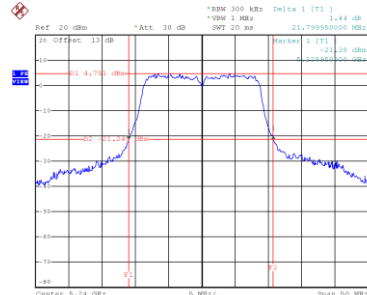


Date: 11.JAN.2022 14:07:05


99 % Occupied Bandwidth

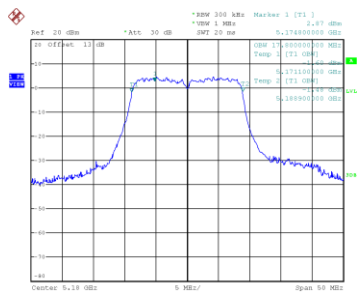

Date: 11.JAN.2022 14:05:51

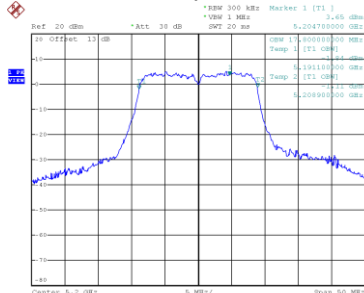

Date: 11.JAN.2022 14:05:07

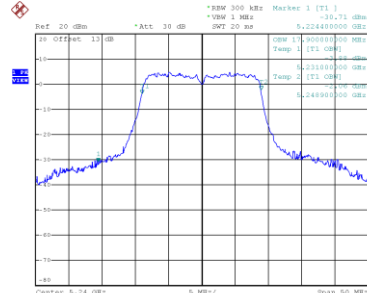


Date: 11.JAN.2022 14:06:25

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.300	37.000
46	5230	41.698	36.800

CH38

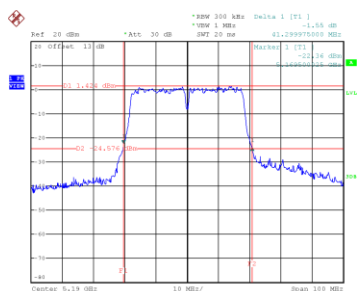


Date: 11.JAN.2022 14:24:08

CH46
26 dB Bandwidth

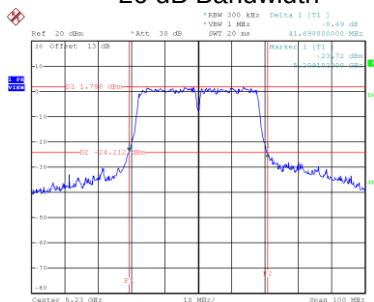


Date: 11.JAN.2022 14:25:32

99 % Occupied Bandwidth

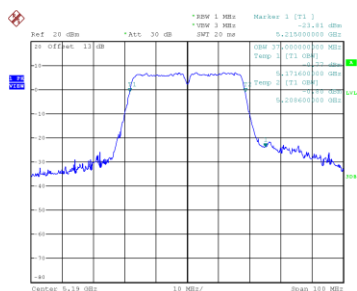

Date: 11.JAN.2022 14:23:12

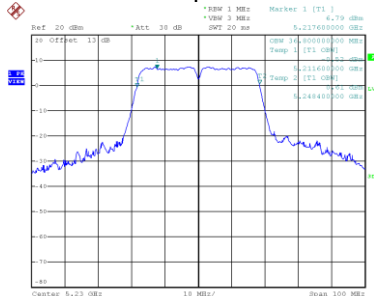


Date: 11.JAN.2022 14:24:51

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	82.600	76.000

CH42 26 dB Bandwidth

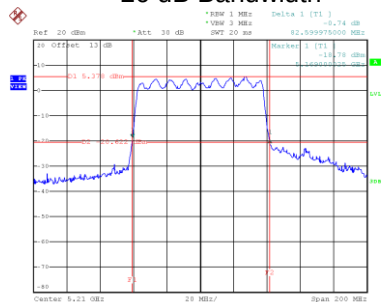

Date: 11.JAN.2022 14:46:28

99 % Occupied Bandwidth

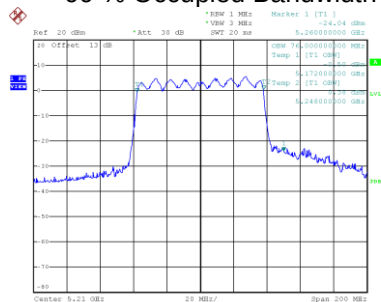


Date: 11.JAN.2022 14:47:34

Test Mode	UNII-2A_TX N(HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.199	18.100
60	5300	21.958	17.900
64	5320	22.090	18.000

CH52

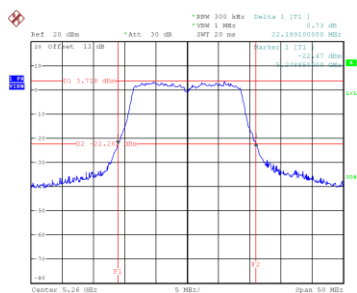


Date: 25.DEC.2021 17:21:21

CH60
26 dB Bandwidth

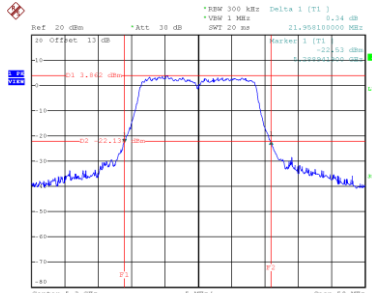


Date: 25.DEC.2021 17:22:32

CH64

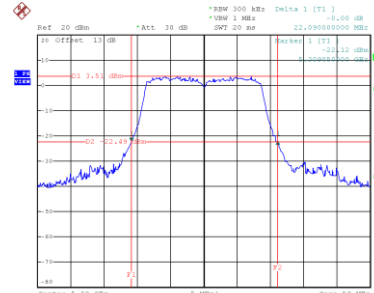


Date: 25.DEC.2021 17:23:49


99 % Occupied Bandwidth

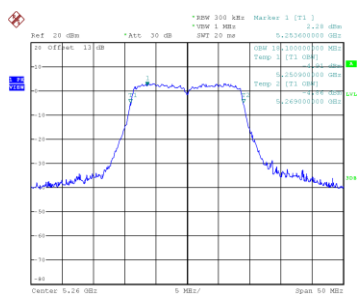

Date: 25.DEC.2021 17:20:42

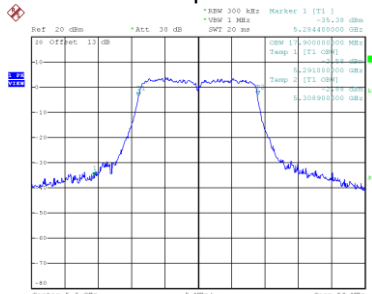

Date: 25.DEC.2021 17:21:54

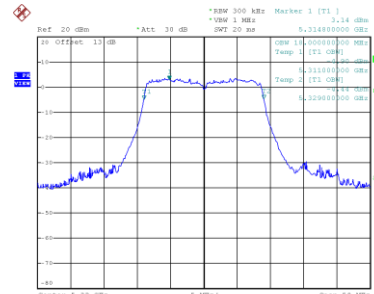


Date: 25.DEC.2021 17:23:11

Test Mode	UNII-2A_TX N(HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.308	36.800
62	5310	41.700	37.000

CH54

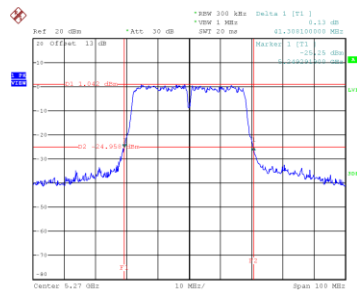


Date: 11.JAN.2022 15:11:29

CH62
26 dB Bandwidth

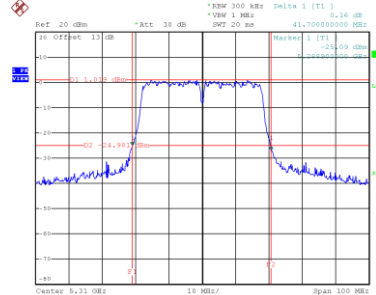


Date: 11.JAN.2022 15:13:00

99 % Occupied Bandwidth

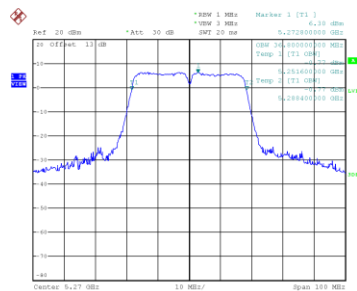

Date: 11.JAN.2022 15:10:34

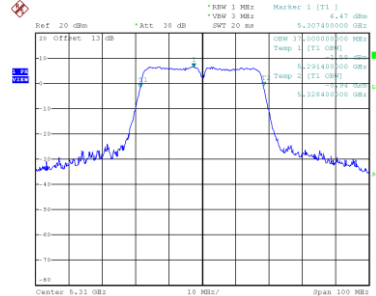


Date: 11.JAN.2022 15:12:10

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.890	17.900
60	5300	21.689	17.900
64	5320	21.699	17.900

CH52

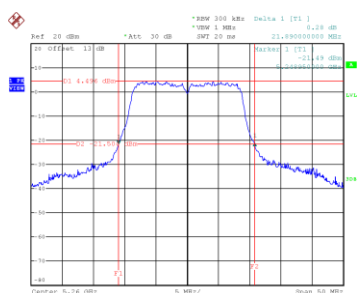


Date: 11.JAN.2022 14:08:21

CH60
26 dB Bandwidth

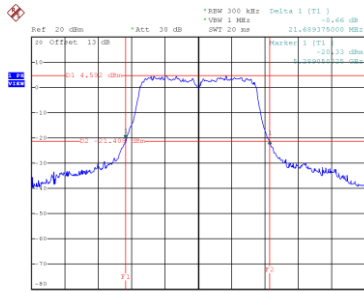


Date: 11.JAN.2022 14:09:55

CH64

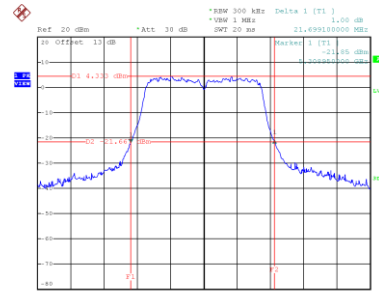


Date: 11.JAN.2022 14:11:04


99 % Occupied Bandwidth

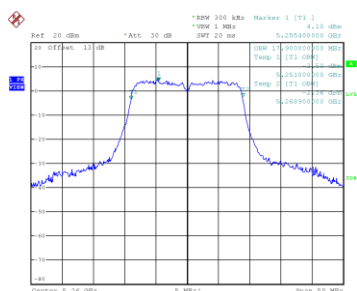

Date: 11.JAN.2022 14:07:42

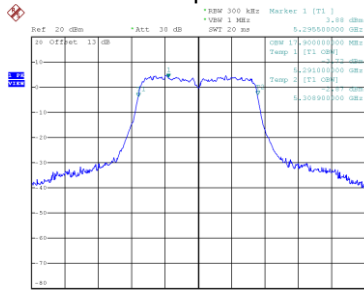

Date: 11.JAN.2022 14:09:16

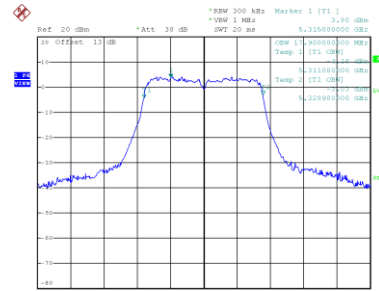


Date: 11.JAN.2022 14:10:25

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.809	37.000
62	5310	41.806	37.000

CH54

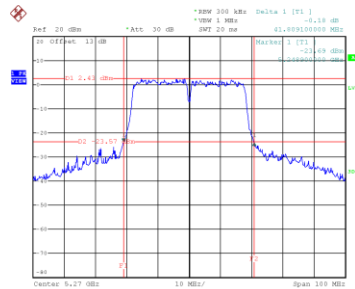


Date: 11.JAN.2022 14:27:06

CH62
26 dB Bandwidth

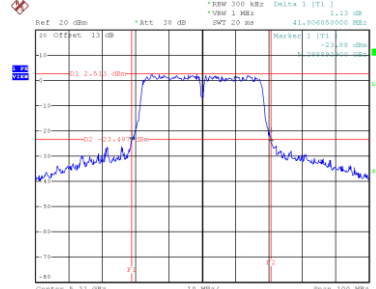


Date: 11.JAN.2022 14:28:45

99 % Occupied Bandwidth

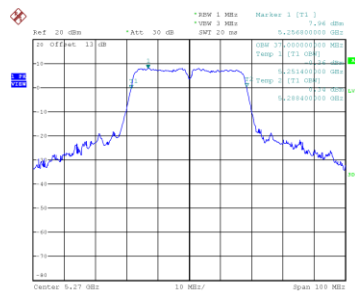

Date: 11.JAN.2022 14:26:13

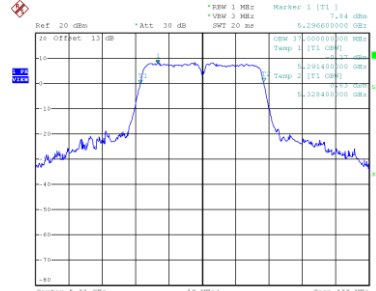


Date: 11.JAN.2022 14:27:54

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	83.190	76.000

CH58 26 dB Bandwidth

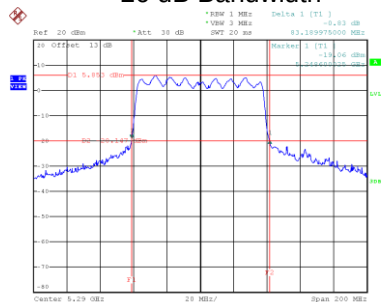

Date: 11.JAN.2022 14:50:15

99 % Occupied Bandwidth

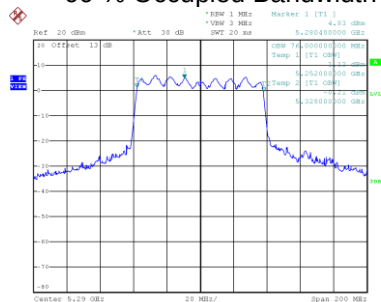


Date: 11.JAN.2022 14:49:18

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	21.489	17.000
116	5580	21.490	16.900
140	5700	21.350	17.000

CH100

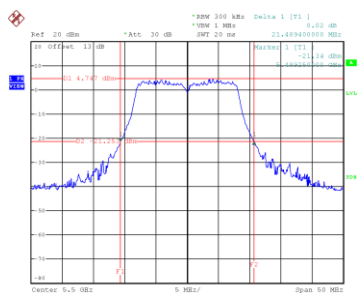


Date: 25.DEC.2021 17:00:04

CH116
26 dB Bandwidth

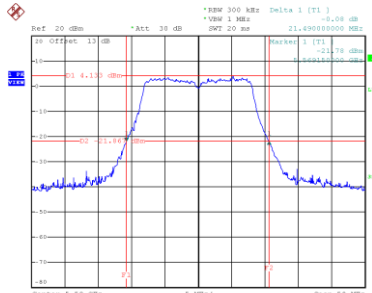


Date: 25.DEC.2021 17:01:18

CH140

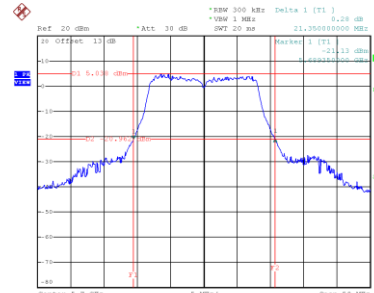


Date: 25.DEC.2021 17:02:33


99 % Occupied Bandwidth

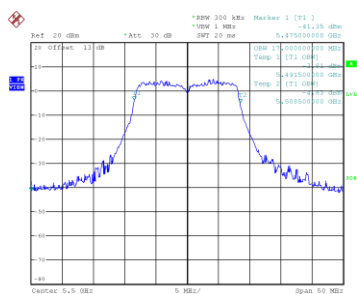

Date: 25.DEC.2021 16:59:24

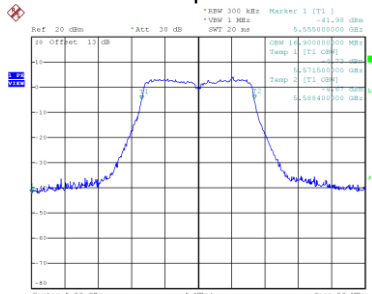

Date: 25.DEC.2021 17:00:39

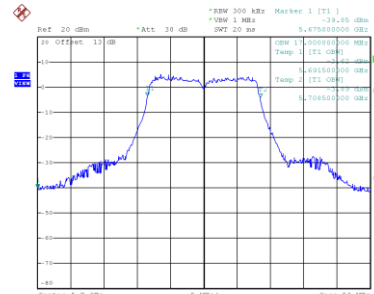


Date: 25.DEC.2021 17:01:54

Test Mode	UNII-2C_TX N(HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	22.649	18.200
116	5580	22.290	17.900
140	5700	22.250	18.000

CH100

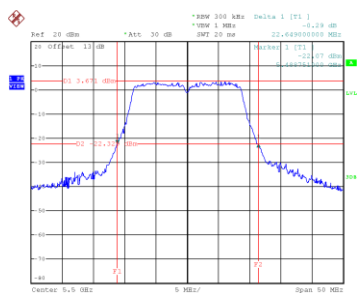


Date: 25.DEC.2021 17:25:08

CH116
26 dB Bandwidth

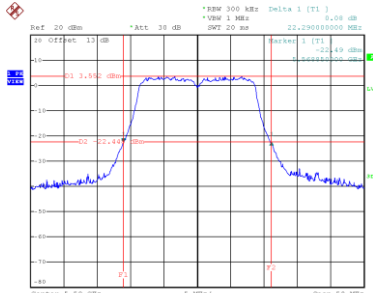


Date: 25.DEC.2021 17:12:6130

CH140

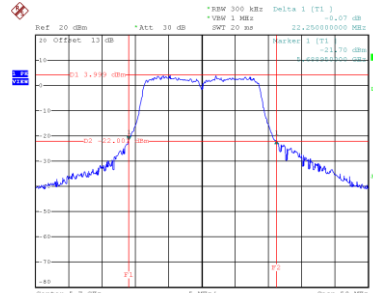


Date: 25.DEC.2021 17:12:8134


99 % Occupied Bandwidth

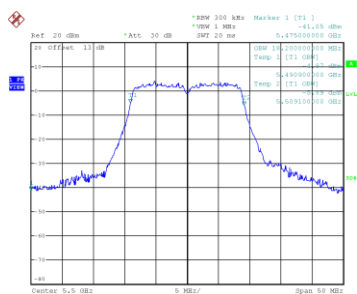

Date: 25.DEC.2021 17:12:4130

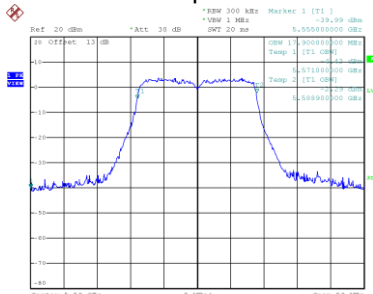

Date: 25.DEC.2021 17:12:5151

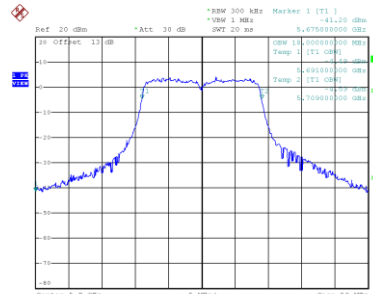


Date: 25.DEC.2021 17:12:7156

Test Mode	UNII-2C_TX N(HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	41.390	36.800
110	5550	41.700	36.800
134	5670	41.600	36.800

CH102

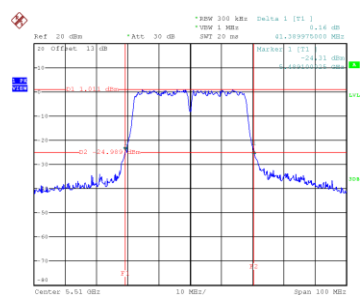


Date: 11.JAN.2022 15:14:41

CH110
26 dB Bandwidth

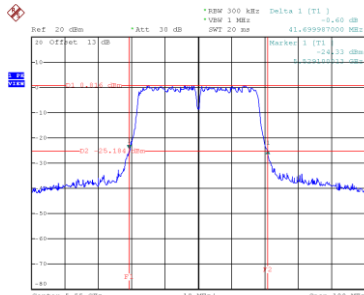


Date: 11.JAN.2022 15:16:09

CH134

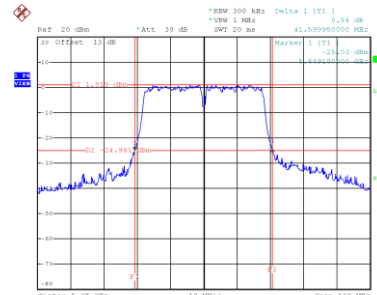


Date: 11.JAN.2022 15:17:44


99 % Occupied Bandwidth

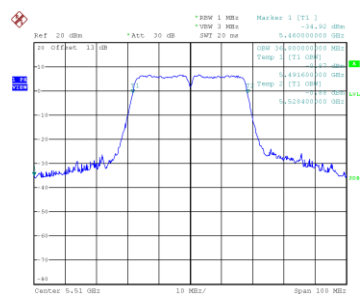

Date: 11.JAN.2022 15:13:44

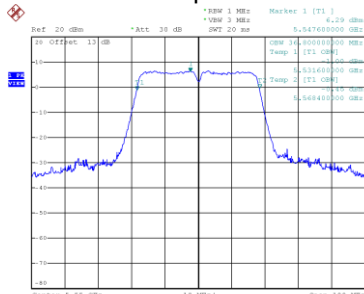

Date: 11.JAN.2022 15:15:16

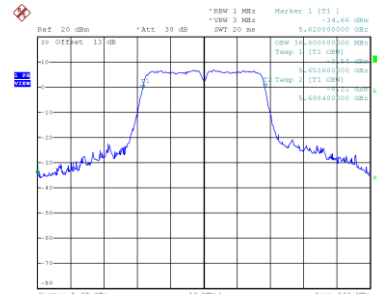


Date: 11.JAN.2022 15:16:49

Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	21.649	17.900
116	5580	21.790	17.900
140	5700	21.800	17.900

CH100

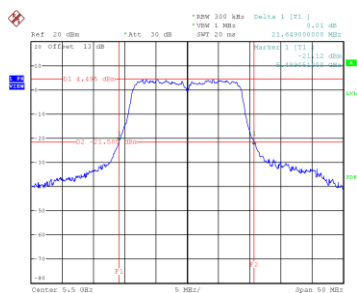


Date: 11.JAN.2022 1412:30

CH116
26 dB Bandwidth

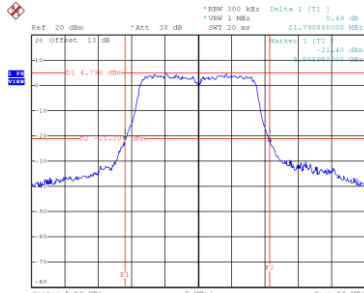


Date: 11.JAN.2022 1411:11

CH140

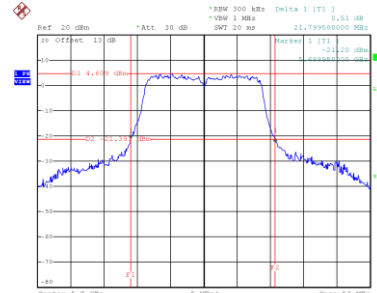


Date: 11.JAN.2022 1415:51


99 % Occupied Bandwidth

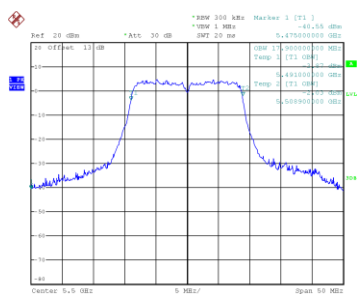

Date: 11.JAN.2022 1411:51

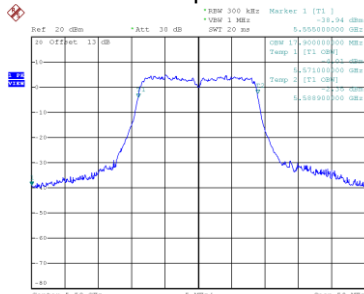

Date: 11.JAN.2022 1411:32

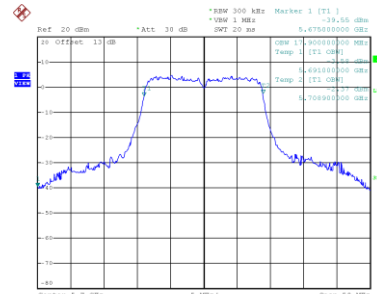


Date: 11.JAN.2022 1415:12

Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	41.700	36.800
110	5550	41.809	36.800
134	5670	43.008	37.000

CH102

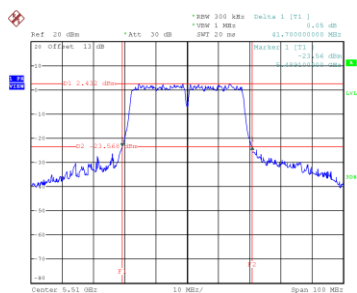


Date: 11.JAN.2022 14:30:48

CH110
26 dB Bandwidth

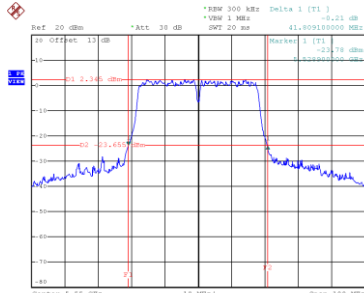


Date: 11.JAN.2022 14:32:42

CH134

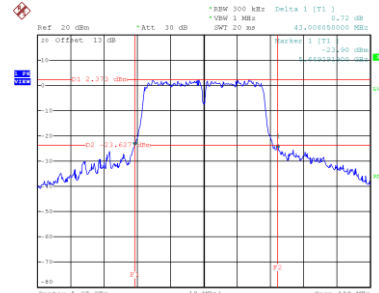


Date: 11.JAN.2022 14:34:45


99 % Occupied Bandwidth

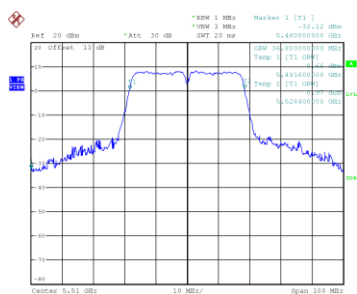

Date: 11.JAN.2022 14:29:54

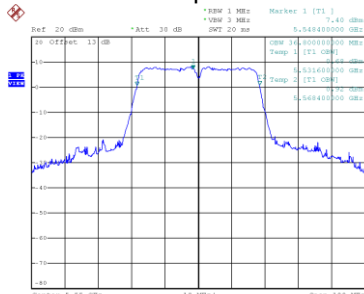

Date: 11.JAN.2022 14:31:51

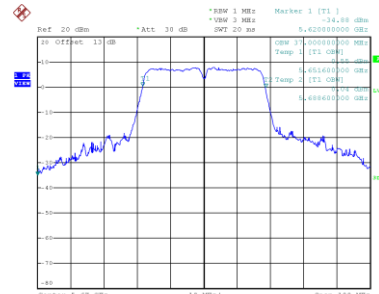


Date: 11.JAN.2022 14:33:52

Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	83.400	76.000
122	5610	82.806	76.000

CH106

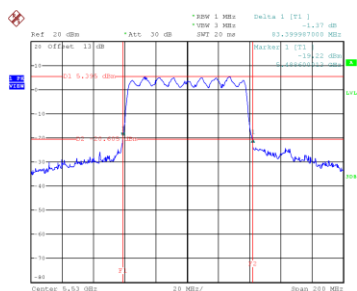


Date: 11.JAN.2022 14:52:13

CH122
26 dB Bandwidth

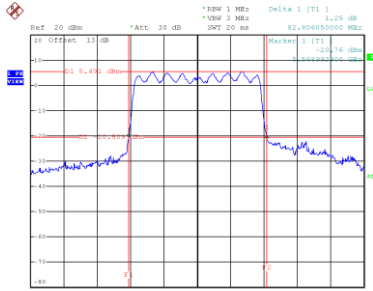


Date: 11.JAN.2022 14:54:16

99 % Occupied Bandwidth

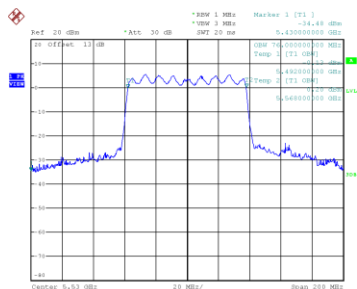

Date: 11.JAN.2022 14:55:21

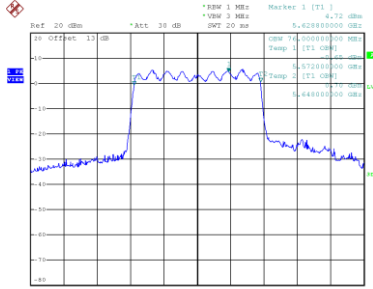


Date: 11.JAN.2022 14:55:17


Test Mode	UNII-3_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	16.389	17.000	0.5	Complies
157	5785	16.450	17.100	0.5	Complies
165	5825	16.450	17.000	0.5	Complies

CH149

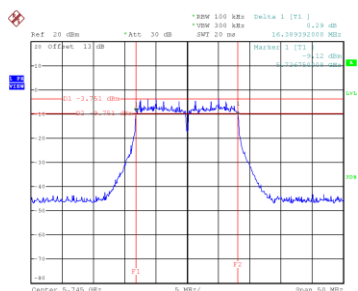


Date: 25.DEC.2021 17:03:55

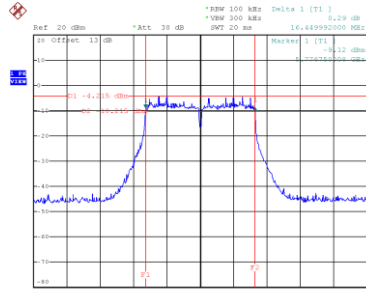CH157
6 dB Bandwidth


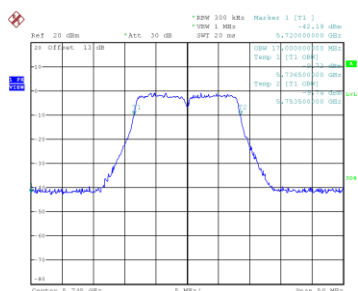
Date: 25.DEC.2021 17:05:11

CH165

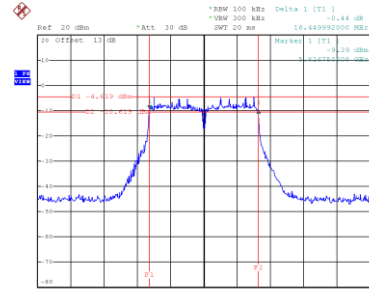


Date: 25.DEC.2021 17:06:24


99 % Occupied Bandwidth



Date: 25.DEC.2021 17:03:10

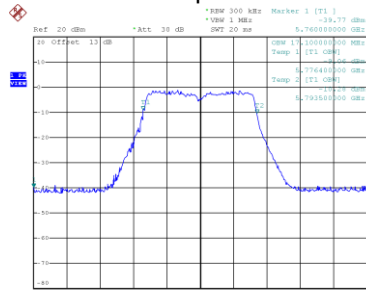

Date: 25.DEC.2021 17:04:26

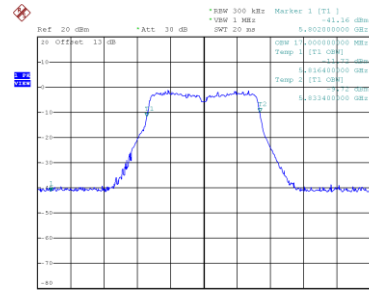

Date: 25.DEC.2021 17:05:39