

FCC - TEST REPORT

Report Number : **68.950.19.0648.01** Date of Issue: **Oct 25, 2019**

Model : **NFC7YWW01161024, NFC5YWW018512**

Product Type : Notebook

Applicant : Zhangzhou Wanlida Technology Co., Ltd.

Address : Nanjing Wanlida Industrial Zone, Zhang Zhou, Fujian, China

Manufacturer : Zhangzhou Wanlida Technology Co., Ltd.

Address : Nanjing Wanlida Industrial Zone, Zhang Zhou, Fujian, China

Test Result : **Positive** **Negative**

Total pages including Appendices : **134**

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

| | | |
|-----|---|-----|
| 1 | Table of Contents | 2 |
| 2 | Details about the Test Laboratory | 3 |
| 3 | Description of the Equipment Under Test | 4 |
| 4 | Summary of Test Standards | 5 |
| 5 | Summary of Test Results | 6 |
| 6 | General Remarks | 7 |
| 7 | Test setups | 8 |
| 8 | Systems test configuration | 9 |
| 9 | Technical Requirements | 10 |
| 9.1 | Conducted Emission AC Power Port | 10 |
| 9.2 | Emission bandwidth | 13 |
| 9.3 | Maximum Conducted Output Power | 19 |
| 9.4 | Peak Power Spectral Density | 23 |
| 9.5 | Unwanted Emissions | 27 |
| 9.6 | Duty Cycle | 122 |
| 9.7 | Frequency Stability | 124 |
| 9.8 | Dynamic Frequency Selection (DFS) | 127 |
| 10 | Test Equipment List | 133 |
| 11 | System Measurement Uncertainty | 134 |



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Registration Number: 502708

FCC Registration No.: 514049

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment Under Test

Description of the Equipment Under Test

| | |
|----------------------------|--|
| Product: | Notebook |
| Model no.: | NFC7YWW01161024, NFC5YWW018512 |
| FCC ID: | 2ARB5-ULTRAONE |
| Rating: | 7.6VDC, 6000mAh, (Supplied by Rechargeable Lithium-ion Battery) or 20VDC (Supplied by external adapter for Charging rechargeable battery) Adapter Model: FSP060-A1UR Input:100-240VAC 50/60Hz, 1.5A, Output:5VDC,2A or 9V 2A or 12V 2A or 15V 3A or 20V 3A Manufacturer: FSP GROUP INC |
| RF Transmission Frequency: | 5.150GHz~5.250GHz; 5.250GHz~5.350GHz; 5.470GHz~5.725GHz; 5.725GHz~5.850GHz |
| Modulation: | 802.11a: BPSK, QPSK, 16QAM, 64QAM 802.11n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM |
| Antenna Type: | Integral Antenna |
| Antenna Gain: | ANT1: 3.6dBi max for 5GHz ANT2: 1.8dBi max for 5GHz |
| Description of the EUT: | The Equipment Under Test (EUT) is a Notebook supports 2.4GHz Bluetooth/WIFI, 5GHz WIFI functions. |



4 Summary of Test Standards

| Test Standards | |
|--|---|
| FCC Part 15 Subpart E, 10-1-2018 Edition | PART 15 - RADIO FREQUENCY DEVICES Subpart E - Unlicensed National Information Infrastructure Devices |
| FCC Part 15 Subpart C 10-1-2018 Edition | PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators |

Test Method:

- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices
- KDB 662911 D01 Multiple Transmitter Output v02r01

5 Summary of Test Results

| Technical Requirements | | | |
|---|-------------------------------------|--------------------------|--------------------------|
| FCC Part 15 Subpart E, FCC Part 15 Subpart C | | | |
| Test Condition | Test Result | | |
| | Pass | Fail | N/A |
| 15.207 Conducted Emission AC Power Port | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.403(a)(5) Emission bandwidth | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.407(a)(1) 15.407(a)(3) Maximum Conducted Output Power | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.407(a)(1) 15.407(a)(3) Peak Power Spectral Density | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.407(b)(1) 15.407(b)(4) 15.407(b)(6) 15.407(b)(7) 15.209 Unwanted Emissions | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Duty Cycle | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.407(g) Frequencies Stability | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.407(h) Dynamic Frequency Selection (DFS). ^a | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

NOTE 1^a: This result include in this report is only the DFS client without radar detection Mode part of the product.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ARB5-ULTRAONE, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C.

The Model: NFC7YWW01161024 supports 2.4GHz Bluetooth/WIFI, 5GHz WIFI function. The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHzWIFI, 5180MHz – 5320MHz, 5500MHz – 5700MHz, 5745MHz – 5825MHz for 5GHzWIFI.

NFC5YWW018512 is identical with model: NFC7YWW01161024 except model name, CPU, internal storage and SSD, unless otherwise Specification the model NFC7YWW01161024 was choose as representative model to perform all test items, and model: NFC5YWW018512 was deemed to fulfil relevant requirements without further testing.

| Model | CPU | internal storage | SSD |
|-----------------|----------|------------------|--------|
| NFC5YWW018512 | i5-8200Y | 8G | 512GB |
| NFC7YWW01161024 | i7-8500Y | 16G | 1024GB |

This report is for the 5GHz WIFI part.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: June 26, 2019

Testing Start Date: June 26, 2019

Testing End Date: Oct 22, 2019

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –

Reviewed by:

Prepared by:

Tested by:







John Zhi
Project Manager

Joe Gu
Project Engineer


Tree Zhan
Test Engineer

7 Test setups


7.1 AC Power Line Conducted Emission test setups

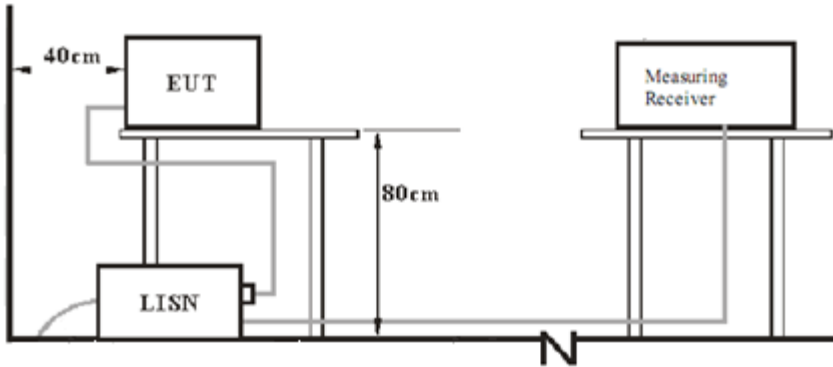


7.2 Radiated test setups Below 1GHz

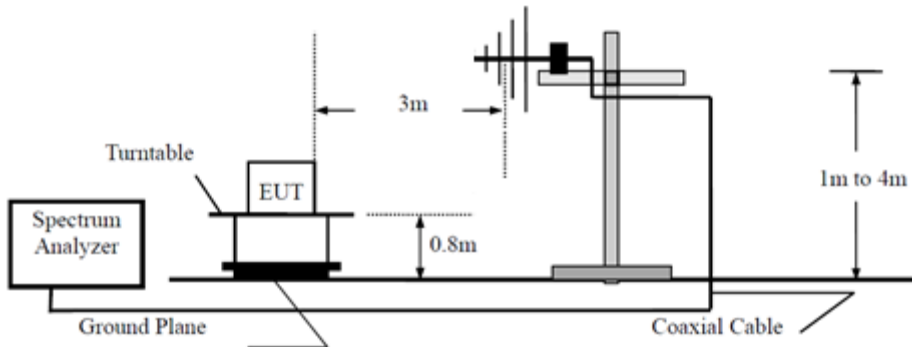

Above 1GHz

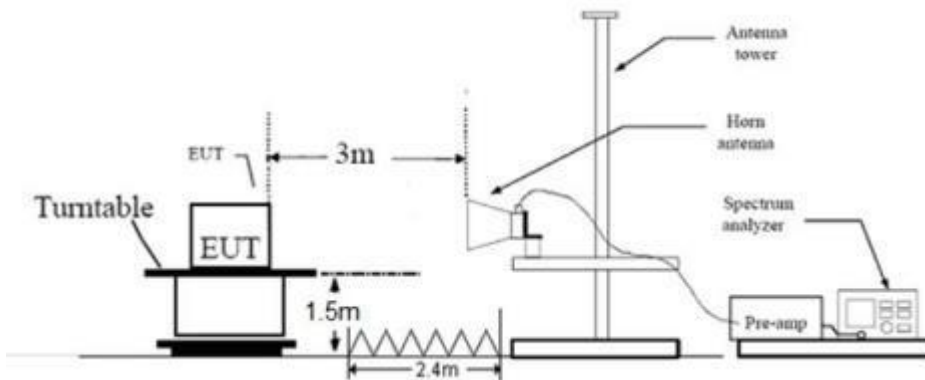

7.3 Conducted RF test setups



8. Systems test configuration

Auxiliary Equipment Used during Test:

| DESCRIPTION | MANUFACTURE R | MODEL NO.(SHIELD) | S/N(LENGTH) |
|-------------|------------------|-------------------|-------------|
| --- | --- | --- | --- |

In order to find the worst case condition, pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

| Band | Data Rate |
|---------------|--------------------|
| 802.11a | 11g 6 Mbps |
| 802.11n HT20 | MCS0 6.5 Mbps |
| 802.11n HT40 | MCS0 13.5 Mbps |
| 802.11ac HT20 | 11ac NGI 6.5 Mbps |
| 802.11ac HT40 | 11ac NGI 13.5 Mbps |
| 802.11ac HT80 | 11ac NGI 29.3 Mbps |

The system was configured to the following channels

| Modulation | Channel | Frequency (MHz) |
|-------------------------------------|---------|-----------------|
| 802.11a / 802.11n20 / 802.11ac20 | 36 | 5180 |
| | 44 | 5200 |
| | 48 | 5240 |
| | 52 | 5260 |
| | 56 | 5280 |
| | 64 | 5320 |
| | 100 | 5500 |
| | 116 | 5580 |
| | 140 | 5700 |
| | 144 | 5720 |
| | 149 | 5745 |
| | 157 | 5785 |
| | 165 | 5825 |
| 802.11n40 / 802.11ac40 | 38 | 5190 |
| | 46 | 5230 |
| | 54 | 5270 |
| | 62 | 5310 |
| | 102 | 5510 |
| | 110 | 5550 |
| | 134 | 5670 |
| | 142 | 5710 |
| | 151 | 5755 |
| 159 | 5795 | |
| 802.11ac80 | 42 | 5210 |
| | 58 | 5290 |
| | 106 | 5530 |
| | 138 | 5690 |
| | 155 | 5775 |

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207 & RSS-GEN 8.8, conducted emissions limit as below:

| Frequency MHz | QP Limit dB μ V | AV Limit dB μ V |
|------------------|------------------------|------------------------|
| 0.150-0.500 | 66-56* | 56-46* |
| 0.500-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Remark: “*” Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Notebook
 M/N : NFC7YWW01161024
 Operating Condition : Charging + TX
 Test Specification : Line
 Comment : AC 120V/60Hz

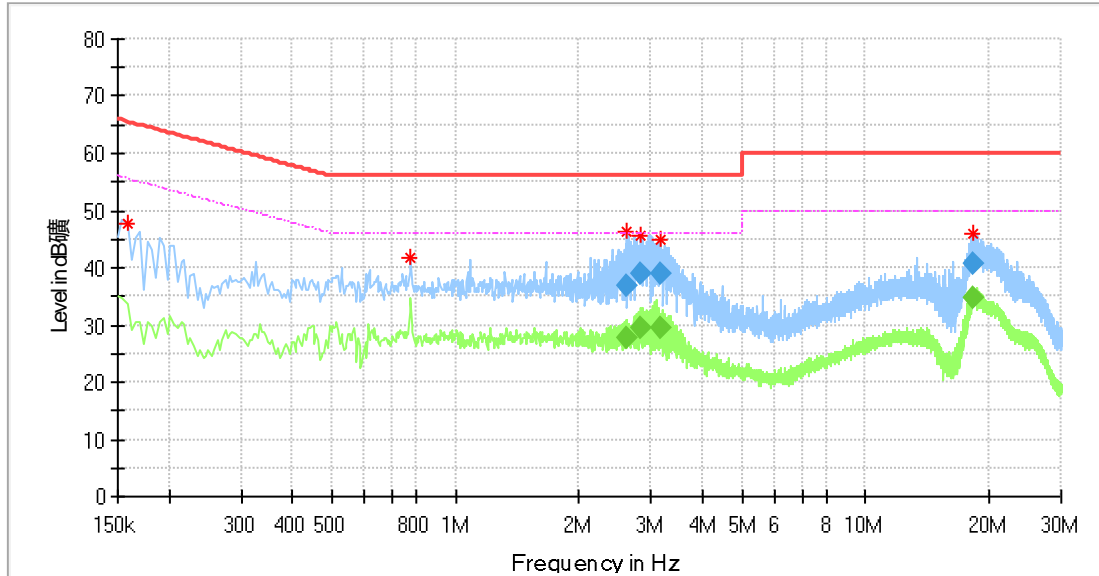

Critical Freqs

| Frequency (MHz) | MaxPeak* (dBµV) | Average* (dBµV) | Limit (dBµV) | Margin (dB) | Line | Corr.** (dB) |
|-----------------|-----------------|-----------------|--------------|-------------|------|--------------|
| 0.158000 | 47.87 | --- | 65.57 | 17.70 | L1 | 10.2 |
| 0.778000 | 41.77 | --- | 56.00 | 14.23 | L1 | 10.3 |
| 2.605500 | 46.45 | --- | 56.00 | 9.55 | L1 | 10.3 |
| 2.834500 | 45.74 | --- | 56.00 | 10.26 | L1 | 10.3 |
| 3.161500 | 45.05 | --- | 56.00 | 10.95 | L1 | 10.4 |
| 18.261500 | 46.02 | --- | 60.00 | 13.98 | L1 | 10.9 |

Final Result

| Frequency (MHz) | QuasiPeak* (dBµV) | Average* (dBµV) | Limit (dBµV) | Margin (dB) | Line | Corr.** (dB) |
|-----------------|-------------------|-----------------|--------------|-------------|------|--------------|
| 2.605500 | --- | 27.83 | 46.00 | 18.17 | L1 | 10.3 |
| 2.605500 | 36.90 | --- | 56.00 | 19.10 | L1 | 10.3 |
| 2.834500 | --- | 29.35 | 46.00 | 16.65 | L1 | 10.3 |
| 2.834500 | 38.97 | --- | 56.00 | 17.03 | L1 | 10.3 |
| 3.161500 | --- | 29.61 | 46.00 | 16.39 | L1 | 10.4 |
| 3.161500 | 38.83 | --- | 56.00 | 17.17 | L1 | 10.4 |
| 18.261500 | --- | 34.72 | 50.00 | 15.28 | L1 | 10.9 |
| 18.261500 | 40.59 | --- | 60.00 | 19.41 | L1 | 10.9 |

Remark :


*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Notebook
 M/N : NFC7YWW01161024
 Operating Condition : Charging + TX
 Test Specification : Neutral
 Comment : AC 120V/60Hz

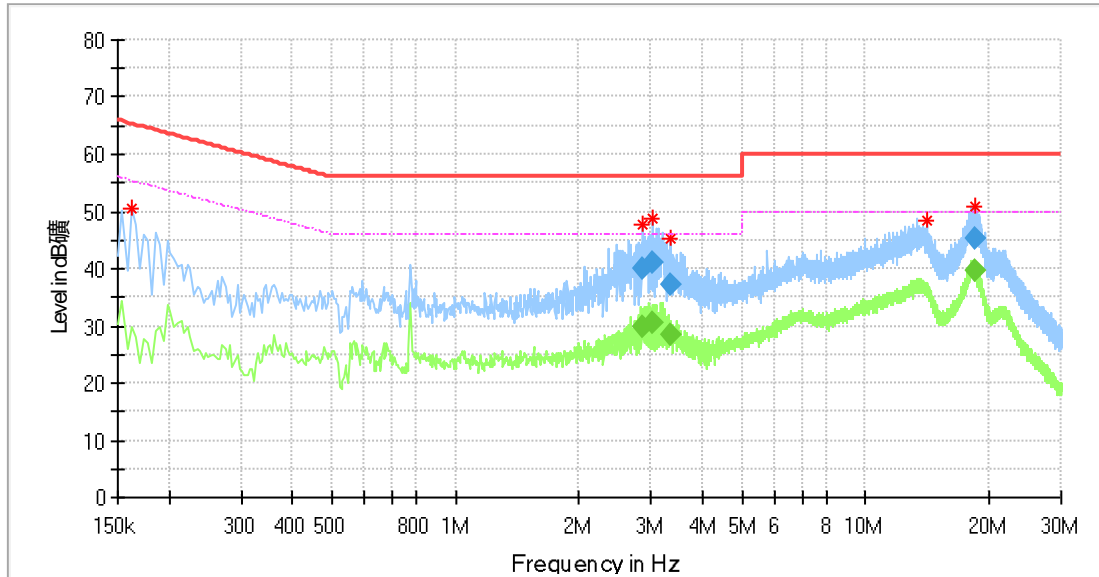

Critical_Freqs

| Frequency (MHz) | MaxPeak* (dBµV) | Average* (dBµV) | Limit (dBµV) | Margin (dB) | Line | Corr.** (dB) |
|-----------------|-----------------|-----------------|--------------|-------------|------|--------------|
| 0.162000 | 50.55 | --- | 65.36 | 14.81 | N | 10.2 |
| 2.869500 | 47.61 | --- | 56.00 | 8.39 | N | 10.4 |
| 3.009500 | 48.74 | --- | 56.00 | 7.26 | N | 10.4 |
| 3.334500 | 45.12 | --- | 56.00 | 10.88 | N | 10.4 |
| 14.066000 | 48.27 | --- | 60.00 | 11.73 | N | 10.8 |
| 18.393500 | 50.81 | --- | 60.00 | 9.19 | N | 11.1 |

Final_Result

| Frequency (MHz) | QuasiPeak* (dBµV) | Average* (dBµV) | Limit (dBµV) | Margin (dB) | Line | Corr.** (dB) |
|-----------------|-------------------|-----------------|--------------|-------------|------|--------------|
| 2.869500 | --- | 29.70 | 46.00 | 16.30 | N | 10.4 |
| 2.869500 | 39.85 | --- | 56.00 | 16.15 | N | 10.4 |
| 3.009500 | --- | 30.40 | 46.00 | 15.60 | N | 10.4 |
| 3.009500 | 40.97 | --- | 56.00 | 15.03 | N | 10.4 |
| 3.334500 | --- | 28.31 | 46.00 | 17.69 | N | 10.4 |
| 3.334500 | 37.26 | --- | 56.00 | 18.74 | N | 10.4 |
| 18.393500 | --- | 39.57 | 50.00 | 10.43 | N | 11.1 |
| 18.393500 | 45.36 | --- | 60.00 | 14.64 | N | 11.1 |

Remark :

*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Emission bandwidth

1、 Test Method of 26dB Bandwidth

According to KDB789033 D02

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Limit: No limit

2、 Test Method of 6dB Bandwidth

According to KDB789033 D02

- a) Set RBW = 100KHz
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Limit: ≥ 500 KHz

3、 Test Method of 99% Bandwidth

According to KDB789033 D02

- a) Set center frequency to the nominal EUT channel center frequency
- b) Set span = 1.5 times to 5.0 times the OBW.
- c) Set RBW = 1 % to 5 % of the OBW
- d) Set VBW $\geq 3 \cdot$ RBW
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99 % power bandwidth function of the instrument (if available).
- g) If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Limit: No limit

Test result as below table:

26dB Bandwidth Test result:

| Test Mode | Antenna | Channel | 26db EBW [MHz] | FL[MHz] | FH[MHz] | Limit [MHz] | Verdict |
|-------------|-----------|--------------|----------------|----------|----------|-------------|---------|
| 11A | Ant1 | 5180 | 22.240 | 5169.240 | 5191.480 | --- | PASS |
| | Ant2 | 5180 | 22.920 | 5168.920 | 5191.840 | --- | PASS |
| | Ant1 | 5200 | 23.600 | 5188.040 | 5211.640 | --- | PASS |
| | Ant2 | 5200 | 23.240 | 5188.440 | 5211.680 | --- | PASS |
| | Ant1 | 5240 | 23.000 | 5228.320 | 5251.320 | --- | PASS |
| | Ant2 | 5240 | 23.080 | 5228.360 | 5251.440 | --- | PASS |
| | Ant1 | 5260 | 23.320 | 5248.320 | 5271.640 | --- | PASS |
| | Ant2 | 5260 | 23.560 | 5248.280 | 5271.840 | --- | PASS |
| | Ant1 | 5280 | 22.360 | 5268.320 | 5290.680 | --- | PASS |
| | Ant2 | 5280 | 24.240 | 5267.440 | 5291.680 | --- | PASS |
| | Ant1 | 5320 | 22.600 | 5308.440 | 5331.040 | --- | PASS |
| | Ant2 | 5320 | 26.280 | 5305.440 | 5331.720 | --- | PASS |
| | Ant1 | 5500 | 25.520 | 5487.360 | 5512.880 | --- | PASS |
| | Ant2 | 5500 | 26.400 | 5486.480 | 5512.880 | --- | PASS |
| | Ant1 | 5580 | 24.160 | 5568.280 | 5592.440 | --- | PASS |
| | Ant2 | 5580 | 26.480 | 5567.000 | 5593.480 | --- | PASS |
| | Ant1 | 5700 | 25.800 | 5687.120 | 5712.920 | --- | PASS |
| | Ant2 | 5700 | 26.520 | 5686.600 | 5713.120 | --- | PASS |
| | Ant1 | 5720 | 22.840 | 5708.360 | 5731.200 | --- | PASS |
| | Ant2 | 5720 | 27.720 | 5706.120 | 5733.840 | --- | PASS |
| | Ant1 | 5720_UNII-2C | 16.64 | 5708.360 | 5725 | --- | PASS |
| | Ant2 | 5720_UNII-2C | 18.88 | 5706.120 | 5725 | --- | PASS |
| | Ant1 | 5720_UNII-3 | 6.2 | 5725 | 5731.200 | --- | PASS |
| | Ant2 | 5720_UNII-3 | 8.84 | 5725 | 5733.840 | --- | PASS |
| | Ant1 | 5745 | 23.440 | 5733.280 | 5756.720 | --- | PASS |
| | Ant2 | 5745 | 26.640 | 5731.560 | 5758.200 | --- | PASS |
| | Ant1 | 5785 | 25.120 | 5772.640 | 5797.760 | --- | PASS |
| | Ant2 | 5785 | 24.680 | 5772.000 | 5796.680 | --- | PASS |
| Ant1 | 5825 | 25.880 | 5812.080 | 5837.960 | --- | PASS | |
| Ant2 | 5825 | 23.760 | 5813.000 | 5836.760 | --- | PASS | |
| 11N20MIMO | Ant1+ANT2 | 5180 | 17.982 | 5171.329 | 5189.311 | --- | PASS |
| | | 5200 | 18.462 | 5190.849 | 5209.311 | --- | PASS |
| | | 5240 | 17.782 | 5231.169 | 5248.951 | --- | PASS |
| | | 5260 | 18.382 | 5250.809 | 5269.191 | --- | PASS |
| | | 5280 | 18.422 | 5270.889 | 5289.311 | --- | PASS |
| | | 5320 | 18.661 | 5310.410 | 5329.071 | --- | PASS |
| | | 5500 | 16.863 | 5491.449 | 5508.312 | --- | PASS |
| | | 5580 | 18.541 | 5570.849 | 5589.391 | --- | PASS |
| | | 5700 | 18.422 | 5690.769 | 5709.191 | --- | PASS |
| | | 5720 | 18.422 | 5710.849 | 5729.271 | --- | PASS |
| | | 5720_UNII-2C | 14.151 | 5710.849 | 5725 | --- | PASS |
| | | 5720_UNII-3 | 4.271 | 5725 | 5729.271 | --- | PASS |
| | | 5745 | 19.9 | 5734.730 | 5754.630 | --- | PASS |
| | | 5785 | 18.501 | 5775.729 | 5794.231 | --- | PASS |
| 5825 | 16.703 | 5816.648 | 5833.352 | --- | PASS | | |
| 11N40 MIMO | Ant1+ANT2 | 5190 | 36.603 | 5171.778 | 5208.382 | --- | PASS |
| | | 5230 | 36.444 | 5211.858 | 5248.302 | --- | PASS |
| | | 5270 | 36.523 | 5251.938 | 5288.462 | --- | PASS |
| | | 5310 | 36.364 | 5291.618 | 5327.982 | --- | PASS |
| | | 5510 | 37.003 | 5491.219 | 5528.222 | --- | PASS |
| | | 5550 | 36.843 | 5531.938 | 5568.781 | --- | PASS |
| | | 5670 | 36.284 | 5652.018 | 5688.302 | --- | PASS |
| | | 5710 | 36.683 | 5691.778 | 5728.462 | --- | PASS |
| | | 5710_UNII-2C | 33.222 | 5691.778 | 5725 | --- | PASS |
| 5710_UNII-3 | 3.462 | 5725 | 5728.462 | --- | PASS | | |



| | | | | | | | | | |
|----------------|-----------|----------------|-----------|----------|----------|----------|----------|-----|------|
| | | 5755 | 36.923 | 5736.299 | 5773.222 | --- | PASS | | |
| | | 5795 | 36.923 | 5776.778 | 5813.701 | --- | PASS | | |
| 11AC20 MIMO | Ant1+ANT2 | 5180 | 20.360 | 5169.760 | 5190.120 | --- | PASS | | |
| | | 5200 | 25.040 | 5189.200 | 5214.240 | --- | PASS | | |
| | | 5240 | 20.560 | 5229.520 | 5250.080 | --- | PASS | | |
| | | 5260 | 22.400 | 5248.960 | 5271.360 | --- | PASS | | |
| | | 5280 | 21.800 | 5269.520 | 5291.320 | --- | PASS | | |
| | | 5320 | 21.560 | 5308.600 | 5330.160 | --- | PASS | | |
| | | 5500 | 20.480 | 5489.160 | 5509.640 | --- | PASS | | |
| | | 5580 | 21.480 | 5569.480 | 5590.960 | --- | PASS | | |
| | | 5700 | 20.880 | 5689.520 | 5710.400 | --- | PASS | | |
| | | 5720 | 21.160 | 5709.360 | 5730.520 | --- | PASS | | |
| | | 5720_UNII-2C | 15.64 | 5709.360 | 5725 | --- | PASS | | |
| | | 5720_UNII-3 | 5.52 | 5725 | 5730.520 | --- | PASS | | |
| | | 5745 | 22.080 | 5733.280 | 5755.360 | --- | PASS | | |
| | | 5785 | 22.520 | 5773.600 | 5796.120 | --- | PASS | | |
| | | 5825 | 21.760 | 5814.480 | 5836.240 | --- | PASS | | |
| 11AC40 MIMO | Ant1+ANT2 | 5190 | 46.720 | 5166.880 | 5213.600 | --- | PASS | | |
| | | 5230 | 43.760 | 5208.400 | 5252.160 | --- | PASS | | |
| | | 5270 | 44.960 | 5247.680 | 5292.640 | --- | PASS | | |
| | | 5310 | 42.160 | 5288.160 | 5330.320 | --- | PASS | | |
| | | 5510 | 44.720 | 5486.640 | 5531.360 | --- | PASS | | |
| | | 5550 | 46.960 | 5528.240 | 5575.200 | --- | PASS | | |
| | | 5670 | 46.720 | 5647.840 | 5694.560 | --- | PASS | | |
| | | 5710 | 45.520 | 5687.600 | 5733.120 | --- | PASS | | |
| | | 5710_UNII-2C | 37.4 | 5687.600 | 5725 | --- | PASS | | |
| | | 5710_UNII-3 | 8.12 | 5725 | 5733.120 | --- | PASS | | |
| | | 5755 | 46.080 | 5731.800 | 5777.880 | --- | PASS | | |
| | | 5795 | 46.560 | 5772.440 | 5819.000 | --- | PASS | | |
| | | 11AC80 MIMO | Ant1+ANT2 | 5210 | 79.200 | 5170.640 | 5249.840 | --- | PASS |
| | | | | 5290 | 80.320 | 5249.840 | 5330.160 | --- | PASS |
| | | | | 5530 | 94.880 | 5485.520 | 5580.400 | --- | PASS |
| 5690 | 88.640 | | | 5648.080 | 5736.720 | --- | PASS | | |
| 5690_UNII-2C | 76.92 | | | 5648.080 | 5725 | --- | PASS | | |
| 5690_UNII-3 | 11.72 | | | 5725 | 5736.720 | --- | PASS | | |
| 5775 | 88.800 | | | 5731.000 | 5819.800 | --- | PASS | | |



99% Bandwidth Test Result

| Test Mode | Antenna | Channel | OCB [MHz] | FL[MHz] | FH[MHz] | Limit [MHz] | Verdict |
|------------|-----------|--------------|-----------|----------|----------|-------------|---------|
| 11A | Ant1 | 5180 | 17.263 | 5171.409 | 5188.671 | --- | PASS |
| | Ant2 | 5180 | 17.223 | 5171.449 | 5188.671 | --- | PASS |
| | Ant1 | 5200 | 17.862 | 5191.089 | 5208.951 | --- | PASS |
| | Ant2 | 5200 | 17.502 | 5191.289 | 5208.791 | --- | PASS |
| | Ant1 | 5240 | 17.303 | 5231.369 | 5248.671 | --- | PASS |
| | Ant2 | 5240 | 17.502 | 5231.289 | 5248.791 | --- | PASS |
| | Ant1 | 5260 | 17.343 | 5251.329 | 5268.671 | --- | PASS |
| | Ant2 | 5260 | 17.502 | 5251.249 | 5268.751 | --- | PASS |
| | Ant1 | 5280 | 17.423 | 5271.249 | 5288.671 | --- | PASS |
| | Ant2 | 5280 | 17.463 | 5271.249 | 5288.711 | --- | PASS |
| | Ant1 | 5320 | 17.383 | 5311.249 | 5328.631 | --- | PASS |
| | Ant2 | 5320 | 17.622 | 5311.129 | 5328.751 | --- | PASS |
| | Ant1 | 5500 | 17.742 | 5491.129 | 5508.871 | --- | PASS |
| | Ant2 | 5500 | 18.581 | 5490.689 | 5509.271 | --- | PASS |
| | Ant1 | 5580 | 17.702 | 5571.209 | 5588.911 | --- | PASS |
| | Ant2 | 5580 | 18.382 | 5570.889 | 5589.271 | --- | PASS |
| | Ant1 | 5700 | 17.942 | 5691.009 | 5708.951 | --- | PASS |
| | Ant2 | 5700 | 19.221 | 5690.490 | 5709.710 | --- | PASS |
| | Ant1 | 5720 | 17.463 | 5711.209 | 5728.671 | --- | PASS |
| | Ant2 | 5720 | 18.022 | 5710.969 | 5728.991 | --- | PASS |
| | Ant1 | 5720_UNII-2C | 13.791 | 5711.209 | 5725 | --- | PASS |
| | Ant2 | 5720_UNII-2C | 14.031 | 5710.969 | 5725 | --- | PASS |
| | Ant1 | 5720_UNII-3 | 3.671 | 5725 | 5728.671 | --- | PASS |
| | Ant2 | 5720_UNII-3 | 3.991 | 5725 | 5728.991 | --- | PASS |
| | Ant1 | 5745 | 17.463 | 5736.249 | 5753.711 | --- | PASS |
| | Ant2 | 5745 | 17.822 | 5736.009 | 5753.831 | --- | PASS |
| | Ant1 | 5785 | 17.702 | 5776.049 | 5793.751 | --- | PASS |
| | Ant2 | 5785 | 17.862 | 5775.929 | 5793.791 | --- | PASS |
| Ant1 | 5825 | 17.902 | 5816.049 | 5833.951 | --- | PASS | |
| Ant2 | 5825 | 17.942 | 5815.969 | 5833.911 | --- | PASS | |
| 11N20 MIMO | Ant1+ANT2 | 5180 | 17.982 | 5171.329 | 5189.311 | --- | PASS |
| | | 5200 | 18.462 | 5190.849 | 5209.311 | --- | PASS |
| | | 5240 | 17.782 | 5231.169 | 5248.951 | --- | PASS |
| | | 5260 | 18.382 | 5250.809 | 5269.191 | --- | PASS |
| | | 5280 | 18.422 | 5270.889 | 5289.311 | --- | PASS |
| | | 5320 | 18.661 | 5310.410 | 5329.071 | --- | PASS |
| | | 5500 | 16.863 | 5491.449 | 5508.312 | --- | PASS |
| | | 5580 | 18.541 | 5570.849 | 5589.391 | --- | PASS |
| | | 5700 | 18.422 | 5690.769 | 5709.191 | --- | PASS |
| | | 5720 | 18.422 | 5710.849 | 5729.271 | --- | PASS |
| | | 5720_UNII-2C | 14.151 | 5710.849 | 5725 | --- | PASS |
| | | 5720_UNII-3 | 4.271 | 5725 | 5729.271 | --- | PASS |
| | | 5745 | 19.9 | 5734.730 | 5754.630 | --- | PASS |
| | | 5785 | 18.501 | 5775.729 | 5794.231 | --- | PASS |
| | | 5825 | 16.703 | 5816.648 | 5833.352 | --- | PASS |
| 11N40 MIMO | Ant1+ANT2 | 5190 | 36.603 | 5171.778 | 5208.382 | --- | PASS |
| | | 5230 | 36.444 | 5211.858 | 5248.302 | --- | PASS |
| | | 5270 | 36.523 | 5251.938 | 5288.462 | --- | PASS |
| | | 5310 | 36.364 | 5291.618 | 5327.982 | --- | PASS |
| | | 5510 | 37.003 | 5491.219 | 5528.222 | --- | PASS |
| | | 5550 | 36.843 | 5531.938 | 5568.781 | --- | PASS |
| | | 5670 | 36.284 | 5652.018 | 5688.302 | --- | PASS |
| 5710 | 36.683 | 5691.778 | 5728.462 | --- | PASS | | |



| | | | | | | | |
|-------------|-----------|--------------|----------|----------|----------|-----|------|
| | | 5710_UNII-2C | 33.222 | 5691.778 | 5725 | --- | PASS |
| | | 5710_UNII-3 | 3.462 | 5725 | 5728.462 | --- | PASS |
| | | 5755 | 36.923 | 5736.299 | 5773.222 | --- | PASS |
| | | 5795 | 36.923 | 5776.778 | 5813.701 | --- | PASS |
| 11AC20 MIMO | Ant1+ANT2 | 5180 | 18.102 | 5170.929 | 5189.031 | --- | PASS |
| | | 5200 | 18.262 | 5190.929 | 5209.191 | --- | PASS |
| | | 5240 | 18.142 | 5230.929 | 5249.071 | --- | PASS |
| | | 5260 | 18.182 | 5250.969 | 5269.151 | --- | PASS |
| | | 5280 | 18.062 | 5271.049 | 5289.111 | --- | PASS |
| | | 5320 | 18.222 | 5310.729 | 5328.951 | --- | PASS |
| | | 5500 | 18.182 | 5490.729 | 5508.911 | --- | PASS |
| | | 5580 | 18.022 | 5571.049 | 5589.071 | --- | PASS |
| | | 5700 | 18.062 | 5690.969 | 5709.031 | --- | PASS |
| | | 5720 | 18.102 | 5710.969 | 5729.071 | --- | PASS |
| | | 5720_UNII-2C | 14.031 | 5710.969 | 5725 | --- | PASS |
| | | 5720_UNII-3 | 4.071 | 5725 | 5729.071 | --- | PASS |
| | | 5745 | 18.302 | 5735.689 | 5753.991 | --- | PASS |
| | | 5785 | 18.262 | 5775.929 | 5794.191 | --- | PASS |
| | | 5825 | 18.062 | 5815.969 | 5834.031 | --- | PASS |
| 11AC40 MIMO | Ant1+ANT2 | 5190 | 36.523 | 5171.858 | 5208.382 | --- | PASS |
| | | 5230 | 36.284 | 5211.938 | 5248.222 | --- | PASS |
| | | 5270 | 36.523 | 5251.858 | 5288.382 | --- | PASS |
| | | 5310 | 36.284 | 5291.618 | 5327.902 | --- | PASS |
| | | 5510 | 36.603 | 5491.379 | 5527.982 | --- | PASS |
| | | 5550 | 36.683 | 5531.938 | 5568.621 | --- | PASS |
| | | 5670 | 36.444 | 5651.938 | 5688.382 | --- | PASS |
| | | 5710 | 36.523 | 5691.778 | 5728.302 | --- | PASS |
| | | 5710_UNII-2C | 33.222 | 5691.778 | 5725 | --- | PASS |
| | | 5710_UNII-3 | 3.302 | 5725 | 5728.302 | --- | PASS |
| | | 5755 | 36.683 | 5736.379 | 5773.062 | --- | PASS |
| | | 5795 | 36.843 | 5776.778 | 5813.621 | --- | PASS |
| | | 5210 | 75.285 | 5172.597 | 5247.882 | --- | PASS |
| | | 5290 | 74.006 | 5252.757 | 5326.763 | --- | PASS |
| | | 5530 | 76.563 | 5491.798 | 5568.362 | --- | PASS |
| 5690 | 75.285 | 5652.597 | 5727.882 | --- | PASS | | |
| 11AC80 MIMO | Ant1+ANT2 | 5690_UNII-2C | 72.403 | 5652.597 | 5725 | --- | PASS |
| | | 5690_UNII-3 | 2.882 | 5725 | 5727.882 | --- | PASS |
| | | 5775 | 75.924 | 5736.958 | 5812.882 | --- | PASS |

6dB Bandwidth Test Result

| Test Mode | Antenna | Channel | 6db EBW [MHz] | FL[MHz] | FH[MHz] | Limit [MHz] | Verdict |
|----------------|-----------|---------|---------------|----------|----------|-------------|---------|
| 11A | Ant1 | 5745 | 15.200 | 5737.360 | 5752.560 | ≥0.5 | PASS |
| | Ant2 | 5745 | 15.200 | 5737.360 | 5752.560 | ≥0.5 | PASS |
| | Ant1 | 5785 | 15.160 | 5777.360 | 5792.520 | ≥0.5 | PASS |
| | Ant2 | 5785 | 15.400 | 5777.160 | 5792.560 | ≥0.5 | PASS |
| | Ant1 | 5825 | 15.200 | 5817.360 | 5832.560 | ≥0.5 | PASS |
| | Ant2 | 5825 | 15.400 | 5817.160 | 5832.560 | ≥0.5 | PASS |
| 11N20 MIMO | Ant1+ANT2 | 5745 | 13.640 | 5737.040 | 5750.680 | ≥0.5 | PASS |
| | | 5785 | 14.760 | 5777.760 | 5792.520 | ≥0.5 | PASS |
| | | 5825 | 15.200 | 5817.360 | 5832.560 | ≥0.5 | PASS |
| 11N40 MIMO | Ant1+ANT2 | 5755 | 35.200 | 5737.320 | 5772.520 | ≥0.5 | PASS |
| | | 5795 | 35.280 | 5777.400 | 5812.680 | ≥0.5 | PASS |
| 11AC20 MIMO | Ant1+ANT2 | 5745 | 11.480 | 5738.600 | 5750.080 | ≥0.5 | PASS |
| | | 5785 | 13.920 | 5778.600 | 5792.520 | ≥0.5 | PASS |
| | | 5825 | 15.200 | 5817.360 | 5832.560 | ≥0.5 | PASS |
| 11AC40 MIMO | Ant1+ANT2 | 5755 | 35.200 | 5737.320 | 5772.520 | ≥0.5 | PASS |
| | | 5795 | 35.280 | 5777.400 | 5812.680 | ≥0.5 | PASS |
| 11AC80 MIMO | Ant1+ANT2 | 5775 | 71.680 | 5738.520 | 5810.200 | ≥0.5 | PASS |

9.3 Maximum conducted output power

Test Method

According to KDB789033 D02

Limits: For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Note:

1. Maximum Conducted Output Power=Conducted Output Power + Correction Factor

Test result as below table

IEEE 802.11a_SISO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum Conducted Output Power (dBm) | | Power Limit (dBm) |
|----------|---------|-------------------------|--------------------------------------|-------|-------------------|
| | | | Ant1 | Ant2 | |
| U-NII-1 | Low | 5180 | 17.80 | 15.26 | 24.00 |
| | Middle | 5200 | 19.20 | 16.40 | 24.00 |
| | High | 5240 | 18.51 | 16.22 | 24.00 |
| U-NII-2A | Low | 5260 | 18.76 | 17.11 | 24.00 |
| | Middle | 5280 | 18.66 | 17.12 | 24.00 |
| | High | 5320 | 17.11 | 16.62 | 24.00 |
| U-NII-2C | Low | 5500 | 17.61 | 16.63 | 24.00 |
| | Middle | 5580 | 18.54 | 17.22 | 24.00 |
| | High | 5700 | 17.62 | 17.34 | 24.00 |
| | | 5720 | 17.56 | 17.28 | 24.00 |
| U-NII-3 | Low | 5745 | 17.67 | 17.27 | 30.00 |
| | Middle | 5785 | 19.01 | 18.07 | 30.00 |
| | High | 5825 | 19.04 | 18.33 | 30.00 |

IEEE 802.11n-HT20_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum Conducted Output Power (dBm) | | | Power Limit (dBm) |
|----------|---------|-------------------------|--------------------------------------|-------|-------|-------------------|
| | | | Ant1 | Ant2 | SUM | |
| U-NII-1 | Low | 5180 | 15.59 | 14.48 | 18.95 | 24.00 |
| | Middle | 5200 | 17.11 | 15.92 | 20.30 | 24.00 |
| | High | 5240 | 17.20 | 15.40 | 19.97 | 24.00 |
| U-NII-2A | Low | 5260 | 17.17 | 16.27 | 20.03 | 24.00 |
| | Middle | 5280 | 16.79 | 16.47 | 20.02 | 24.00 |
| | High | 5320 | 17.06 | 16.31 | 20.03 | 24.00 |
| U-NII-2C | Low | 5500 | 15.92 | 15.19 | 19.01 | 24.00 |
| | Middle | 5580 | 16.84 | 16.06 | 20.15 | 24.00 |
| | High | 5700 | 16.96 | 16.19 | 20.76 | 24.00 |
| | | 5720 | 16.10 | 15.32 | 19.49 | 24.00 |
| U-NII-3 | Low | 5745 | 17.18 | 16.36 | 20.58 | 30.00 |
| | Middle | 5785 | 17.91 | 16.84 | 21.50 | 30.00 |
| | High | 5825 | 18.82 | 17.92 | 21.80 | 30.00 |

IEEE 802.11n-HT40_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum Conducted Output Power (dBm) | | | Power Limit (dBm) |
|----------|---------|-------------------------|--------------------------------------|-------|-------|-------------------|
| | | | Ant1 | Ant2 | SUM | |
| U-NII-1 | Low | 5190 | 15.15 | 14.67 | 18.55 | 24.00 |
| | High | 5230 | 16.10 | 15.05 | 19.67 | 24.00 |
| U-NII-2A | Low | 5270 | 16.02 | 15.12 | 19.50 | 24.00 |
| | High | 5310 | 15.24 | 14.95 | 18.58 | 24.00 |
| U-NII-2C | Low | 5510 | 16.43 | 15.32 | 19.25 | 24.00 |
| | Middle | 5550 | 15.64 | 14.46 | 19.06 | 24.00 |
| | High | 5670 | 13.99 | 13.11 | 17.72 | 24.00 |
| | | 5710 | 15.98 | 15.41 | 19.10 | 24.00 |
| U-NII-3 | Low | 5755 | 16.85 | 15.98 | 20.11 | 30.00 |
| | High | 5795 | 17.95 | 17.23 | 21.03 | 30.00 |

IEEE 802.11ac-VHT20_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum Conducted Output Power (dBm) | | | Power Limit (dBm) |
|----------|---------|-------------------------|--------------------------------------|-------|-------|-------------------|
| | | | Ant1 | Ant2 | SUM | |
| U-NII-1 | Low | 5180 | 14.98 | 14.11 | 18.45 | 24.00 |
| | Middle | 5200 | 16.22 | 15.01 | 19.91 | 24.00 |
| | High | 5240 | 16.03 | 15.23 | 19.58 | 24.00 |
| U-NII-2A | Low | 5260 | 16.21 | 15.33 | 19.65 | 24.00 |
| | Middle | 5280 | 15.79 | 14.12 | 19.57 | 24.00 |
| | High | 5320 | 16.96 | 16.54 | 20.01 | 24.00 |
| U-NII-2C | Low | 5500 | 14.94 | 13.98 | 18.26 | 24.00 |
| | Middle | 5580 | 16.10 | 15.09 | 19.56 | 24.00 |
| | High | 5700 | 15.90 | 15.28 | 19.04 | 24.00 |
| | | 5720 | 16.21 | 15.18 | 19.05 | 24.00 |
| U-NII-3 | Low | 5745 | 16.29 | 16.04 | 19.99 | 30.00 |
| | Middle | 5785 | 17.80 | 17.93 | 21.13 | 30.00 |
| | High | 5825 | 17.81 | 17.13 | 21.45 | 30.00 |

IEEE 802.11ac-VHT40_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum Conducted Output Power (dBm) | | | Power Limit (dBm) |
|----------|---------|-------------------------|--------------------------------------|-------|-------|-------------------|
| | | | Ant1 | Ant2 | SUM | |
| U-NII-1 | Low | 5190 | 16.43 | 16.03 | 19.59 | 24.00 |
| | High | 5230 | 15.84 | 15.17 | 19.75 | 24.00 |
| U-NII-2A | Low | 5270 | 15.92 | 15.06 | 19.54 | 24.00 |
| | High | 5310 | 15.14 | 15.43 | 18.62 | 24.00 |
| U-NII-2C | Low | 5510 | 16.43 | 16.54 | 19.72 | 24.00 |
| | Middle | 5550 | 15.84 | 14.88 | 19.04 | 24.00 |
| | High | 5670 | 16.91 | 16.19 | 20.51 | 24.00 |
| | | 5710 | 15.95 | 15.20 | 19.20 | 24.00 |
| U-NII-3 | Low | 5755 | 16.85 | 16.20 | 20.27 | 30.00 |
| | High | 5795 | 18.06 | 16.89 | 21.14 | 30.00 |

IEEE 802.11ac-VHT80_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum Conducted Output Power (dBm) | | | Power Limit (dBm) |
|----------|---------|-------------------------|--------------------------------------|-------|-------|-------------------|
| | | | Ant1 | Ant2 | SUM | |
| U-NII-1 | 42 | 5210 | 8.94 | 7.84 | 12.50 | 24.00 |
| U-NII-2A | 58 | 5290 | 6.92 | 6.88 | 10.58 | 24.00 |
| U-NII-2C | Low | 5530 | 16.94 | 16.40 | 19.72 | 24.00 |
| | High | 5690 | 16.97 | 15.77 | 20.21 | 24.00 |
| U-NII-3 | 155 | 5755 | 16.88 | 15.99 | 20.18 | 30.00 |

Remark: the 11 dBm + 10 log B is greater than 250mW.

9.4 Maximum power spectral density

Test Method

According to KDB789033 D02

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

Limit: The maximum power spectral density shall not exceed 11dBm for the 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725 GHz Band and 30dBm for the 5.8GHz Band in any 1 megahertz band.

IEEE 802.11a_SISO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum PSD (dBm/MHz) | | PSD Limit (dBm/MHz) |
|----------|---------|-------------------------|-----------------------|------|---------------------|
| | | | Ant1 | Ant2 | |
| U-NII-1 | Low | 5180 | 5.16 | 5.29 | 11.00 |
| | Middle | 5200 | 7.15 | 7.08 | 11.00 |
| | High | 5240 | 5.91 | 6.79 | 11.00 |
| U-NII-2A | Low | 5260 | 5.96 | 6.86 | 11.00 |
| | Middle | 5280 | 8.06 | 6.95 | 11.00 |
| | High | 5320 | 5.57 | 6.88 | 11.00 |
| U-NII-2C | Low | 5500 | 5.53 | 6.79 | 11.00 |
| | Middle | 5580 | 5.71 | 6.19 | 11.00 |
| | High | 5700 | 5.34 | 5.86 | 11.00 |
| | | 5720_UNII-2C | 5.44 | 6.3 | 11.00 |
| U-NII-3 | | 5720_UNII-3 | 2.14 | 3.5 | 30.00 |
| | Low | 5745 | 3.48 | 4.31 | 30.00 |
| | Middle | 5785 | 3.74 | 3.96 | 30.00 |
| | High | 5825 | 4.3 | 4.68 | 30.00 |

IEEE 802.11n-HT20_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum PSD (dBm/MHz) | PSD Limit (dBm/MHz) |
|----------|---------|-------------------------|-----------------------|---------------------|
| U-NII-1 | Low | 5180 | 6.23 | 11.00 |
| | Middle | 5200 | 9.9 | 11.00 |
| | High | 5240 | 8.04 | 11.00 |
| U-NII-2A | Low | 5260 | 9.53 | 11.00 |
| | Middle | 5280 | 10.64 | 11.00 |
| | High | 5320 | 10.52 | 11.00 |
| U-NII-2C | Low | 5500 | 7.21 | 11.00 |
| | Middle | 5580 | 10.66 | 11.00 |
| | High | 5700 | 7.75 | 11.00 |
| | | 5720_UNII-2C | 10.58 | 11.00 |
| U-NII-3 | | 5720_UNII-3 | 6.99 | 11.00 |
| | Low | 5745 | 9.58 | 30.00 |
| | Middle | 5785 | 8.09 | 30.00 |
| | High | 5825 | 8.74 | 30.00 |

IEEE 802.11n-HT40_MIMO modulation Test Result

| Band | Channel | Frequency (MHz) | Maximum PSD (dBm/MHz) | PSD Limit (dBm/MHz) |
|--------------|---------|-----------------|-----------------------|---------------------|
| U-NII-1 | Low | 5190 | 6.45 | 11.00 |
| | High | 5230 | 8.75 | 11.00 |
| U-NII-2A | Low | 5270 | 7.82 | 11.00 |
| | High | 5310 | 7.7 | 11.00 |
| U-NII-2C | Low | 5510 | 5.34 | 11.00 |
| | Middle | 5550 | 6.8 | 11.00 |
| | High | 5670 | 5.04 | 11.00 |
| 5710_UNII-2C | | 4.56 | 11.00 | |
| U-NII-3 | Low | 5710_UNII-3 | -1.4 | 11.00 |
| | | 5755 | 3.75 | 30.00 |
| | High | 5795 | 3.27 | 30.00 |

IEEE 802.11ac-VHT20_MIMO modulation Test Result

| Band | Channel | Channel Frequency (MHz) | Maximum PSD (dBm/MHz) | PSD Limit (dBm/MHz) |
|----------|---------|-------------------------|-----------------------|---------------------|
| U-NII-1 | Low | 5180 | 8.33 | 11.00 |
| | Middle | 5200 | 9.95 | 11.00 |
| | High | 5240 | 9.55 | 11.00 |
| U-NII-2A | Low | 5260 | 9.32 | 11.00 |
| | Middle | 5280 | 10.1 | 11.00 |
| | High | 5320 | 10.08 | 11.00 |
| U-NII-2C | Low | 5500 | 9.51 | 11.00 |
| | Middle | 5580 | 10.48 | 11.00 |
| | High | 5700 | 5.37 | 11.00 |
| | | 5720_UNII-2C | 9.7 | 11.00 |
| U-NII-3 | | 5720_UNII-3 | 7.8 | 11.00 |
| | Low | 5745 | 9.52 | 30.00 |
| | Middle | 5785 | 7.54 | 30.00 |
| | High | 5825 | 11.45 | 30.00 |

IEEE 802.11ac-VHT40_MIMO modulation Test Result

| Band | Channel | Frequency (MHz) | Maximum PSD (dBm/MHz) | PSD Limit (dBm/MHz) |
|----------|---------|-----------------|-----------------------|---------------------|
| U-NII-1 | Low | 5190 | 5.55 | 11.00 |
| | High | 5230 | 8.14 | 11.00 |
| U-NII-2A | Low | 5270 | 6.83 | 11.00 |
| | High | 5310 | 7.00 | 11.00 |
| U-NII-2C | Low | 5510 | 9.45 | 11.00 |
| | Middle | 5550 | 5.86 | 11.00 |
| | High | 5670 | 6.44 | 11.00 |
| | | 5710_UNII-2C | 6.07 | 11.00 |
| U-NII-3 | Low | 5710_UNII-3 | 0.42 | 11.00 |
| | | 5755 | 5.31 | 30.00 |
| | High | 5795 | 5.72 | 30.00 |

IEEE 802.11ac-VHT80_MIMO modulation Test Result

| Band | Channel | Frequency (MHz) | Maximum PSD (dBm/MHz) | PSD Limit (dBm/MHz) |
|----------|---------|-----------------|-----------------------|---------------------|
| U-NII-1 | 42 | 5210 | -1.61 | 11.00 |
| U-NII-2A | 58 | 5290 | -2.30 | 11.00 |
| U-NII-2C | Low | 5530 | 3.98 | 11.00 |
| | High | 5690_UNII-2C | 4.78 | 11.00 |
| | | 5690_UNII-3 | 0.18 | 11.00 |
| U-NII-3 | 155 | 5775 | -1.23 | 30.00 |

NOTE: According to the test results of output power, Ant1 is considered to have the highest power, so PSD for Multiple mode are performed with this antenna and add 3dBi factor, this factor has been compensated in the test.

9.5 Unwanted emissions

Test Method

According to KBD789033 D02

Limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


The provisions of §15.205 apply to intentional radiators operating under this section.


Test Data as below:

Transmitting spurious emission test result as below (Conducted Mode):

NOTE: According to the test results of output power, Ant1 is considered to have the highest power, so conducted emission for Multiple mode are performed with this antenna and add 3dBi factor, this factor has been compensated in the test.


IEEE 802.11a modulation Test Result

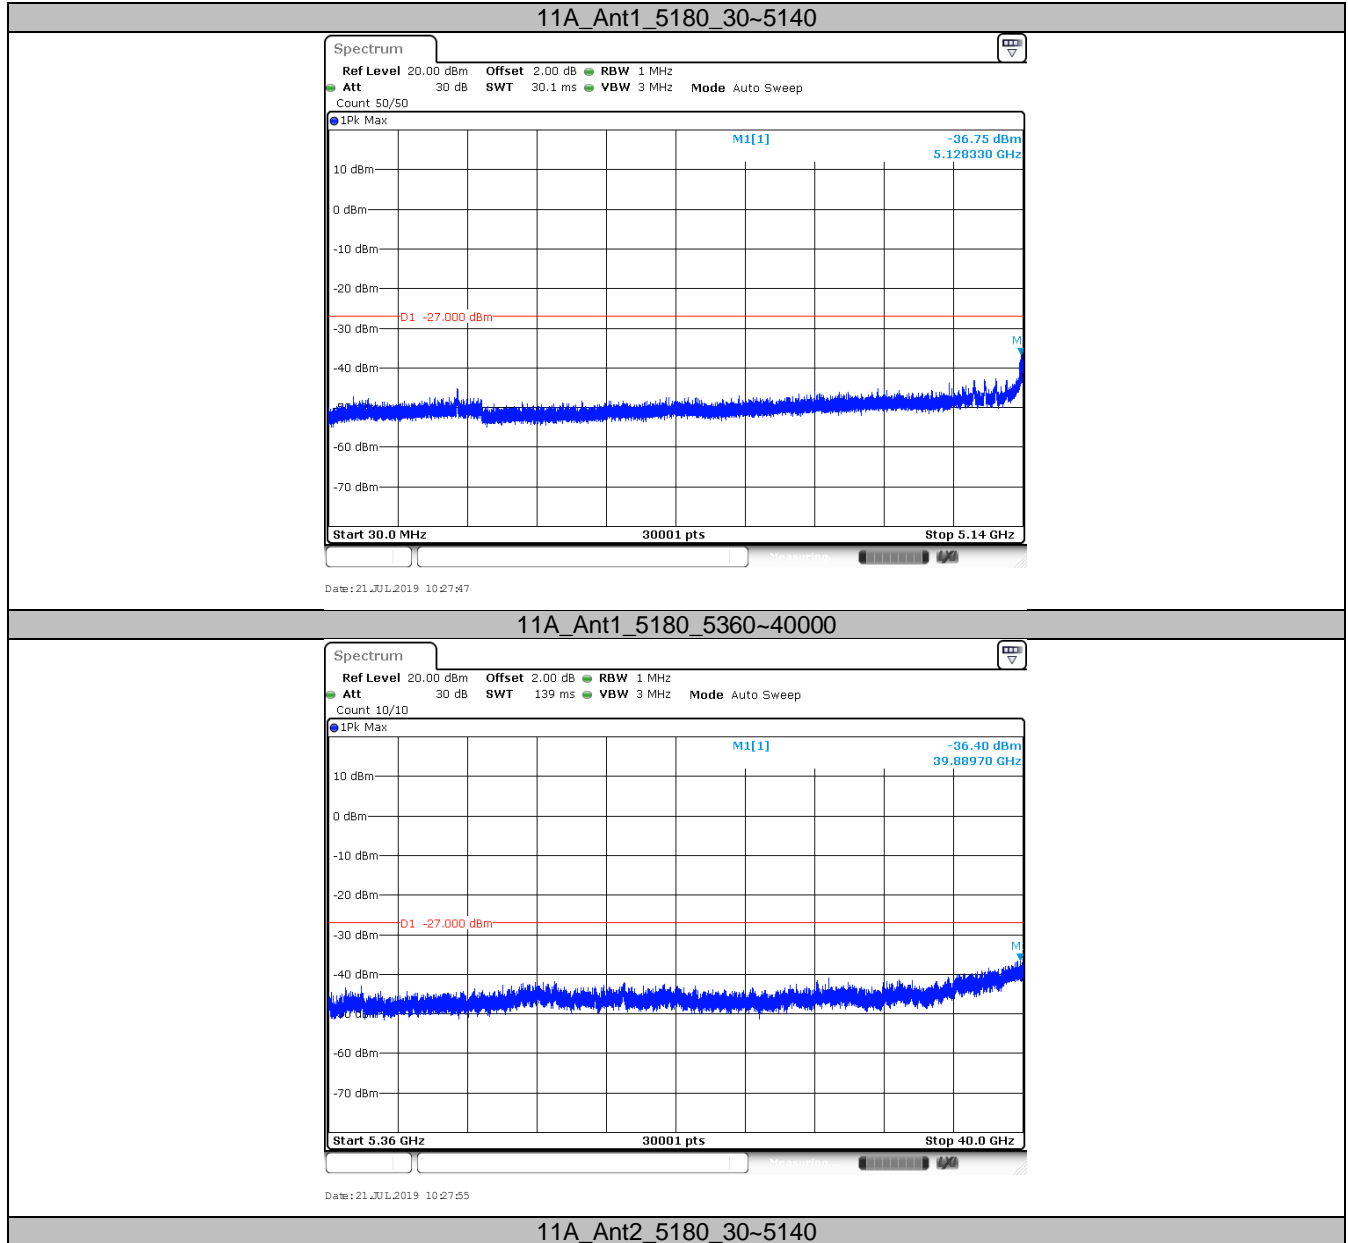

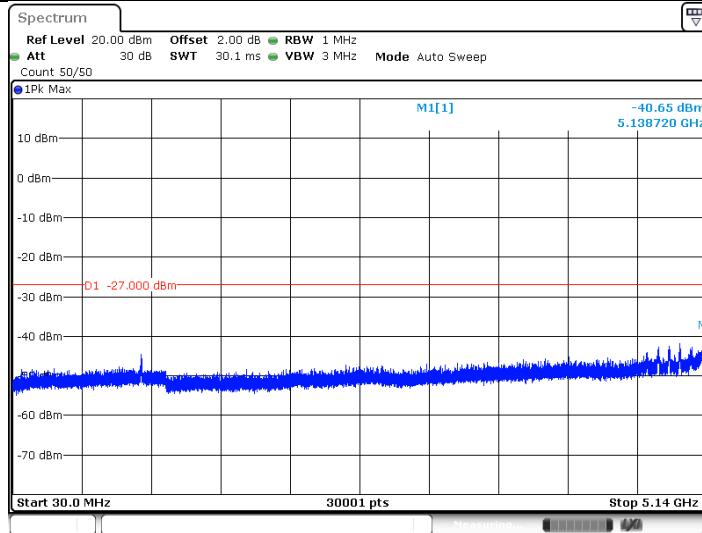


Date: 21 JUL 2019 11:56:09

11A_Ant2_5180_5360~40000

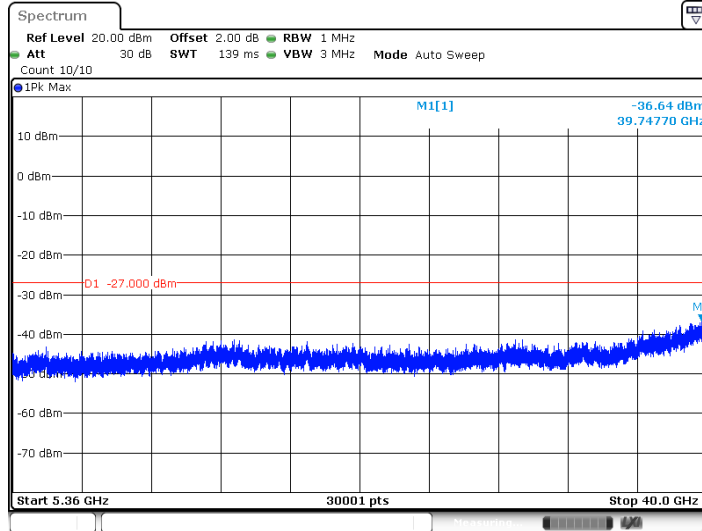


Date: 21 JUL 2019 11:56:18

11A_Ant1_5200_30~5140

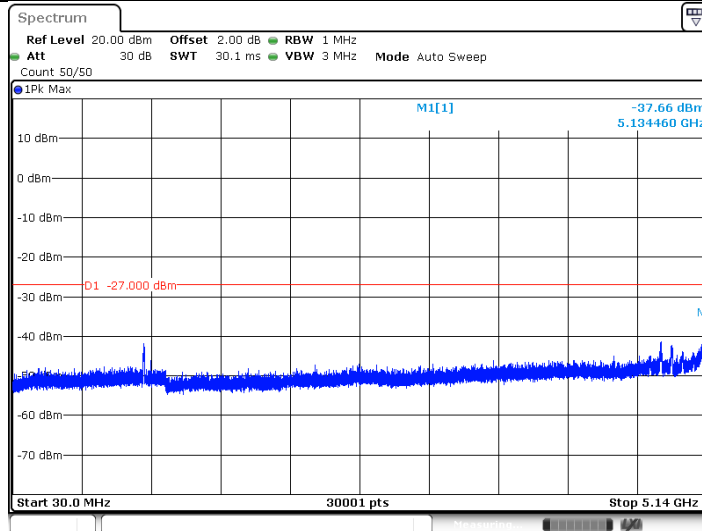


Date: 21 JUL 2019 10:29:48

11A_Ant1_5200_5360~40000

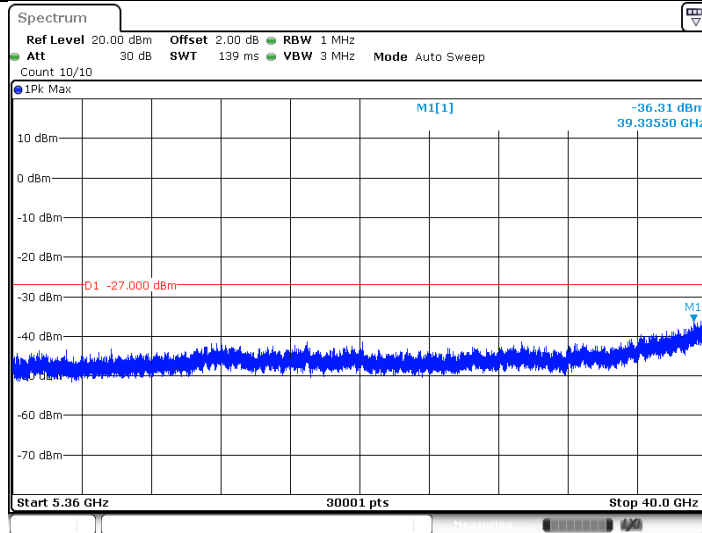


Date: 21 JUL 2019 10:29:56

11A_Ant2_5200_30-5140

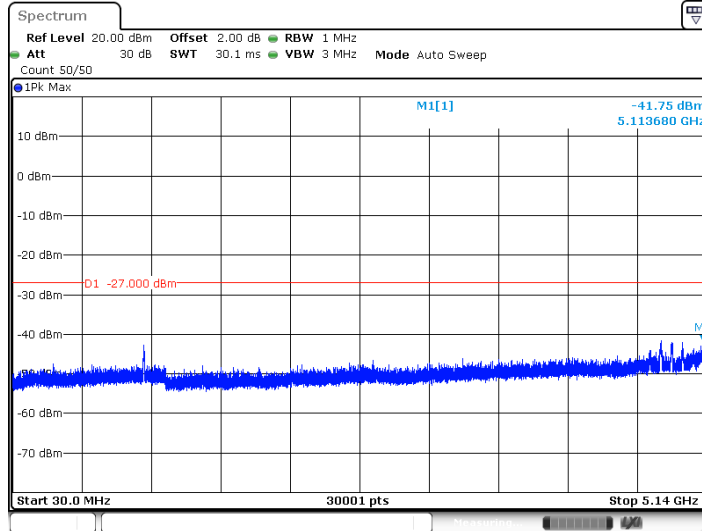


Date: 21 JUL 2019 11:58:39

11A_Ant2_5200_5360-40000

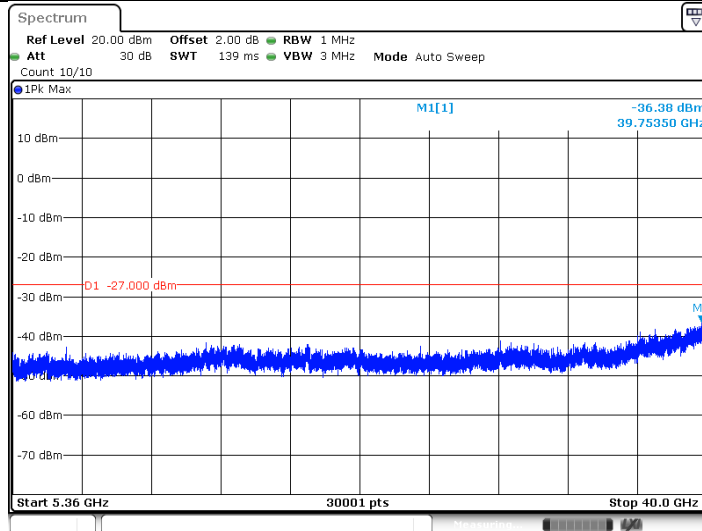


Date: 21 JUL 2019 11:58:48

11A_Ant1_5240_30-5140

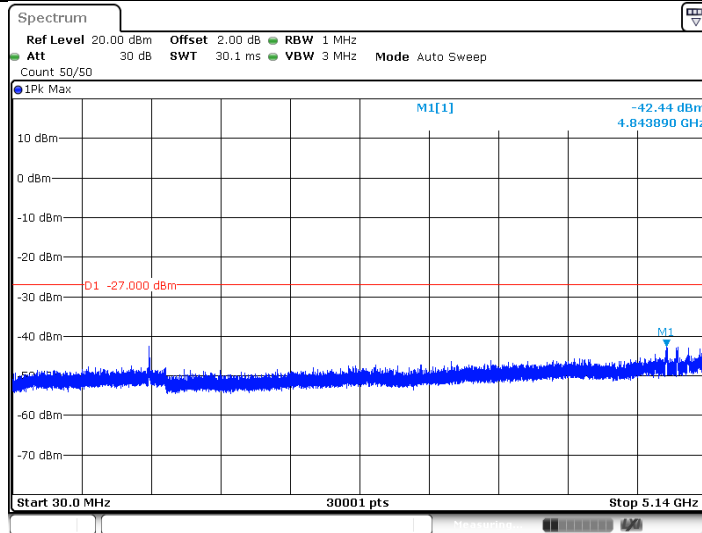


Date: 21 JUL 2019 10:31:11

11A_Ant1_5240_5360~40000

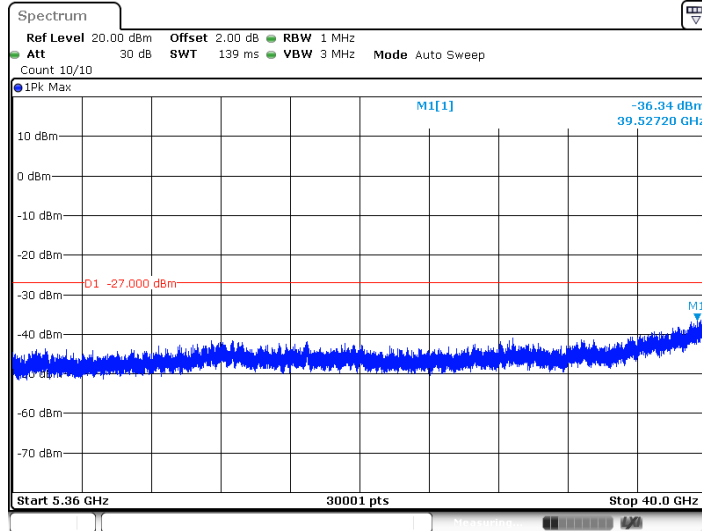


Date: 21 JUL 2019 10:31:19

11A_Ant2_5240_30~5140

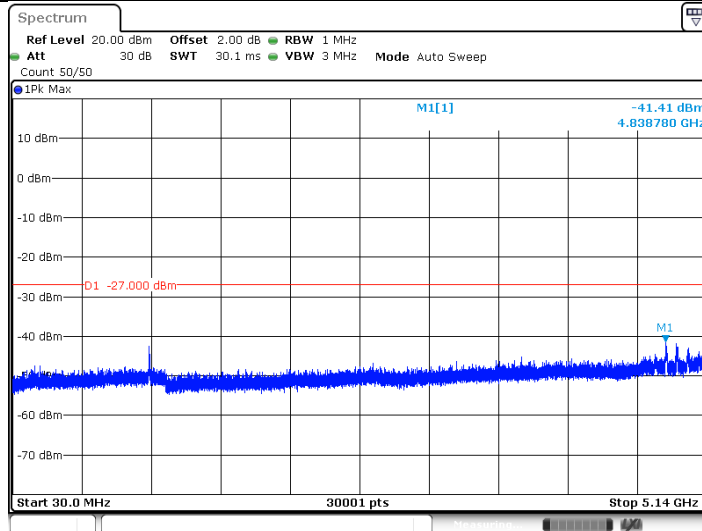


Date: 21 JUL 2019 12:00:03

11A_Ant2_5240_5360~40000

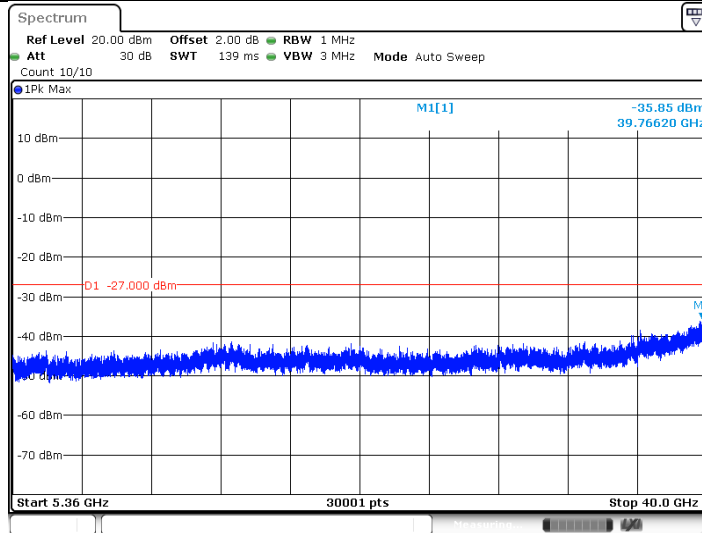


Date: 21 JUL 2019 12:00:12

11A_Ant1_5260_30-5140

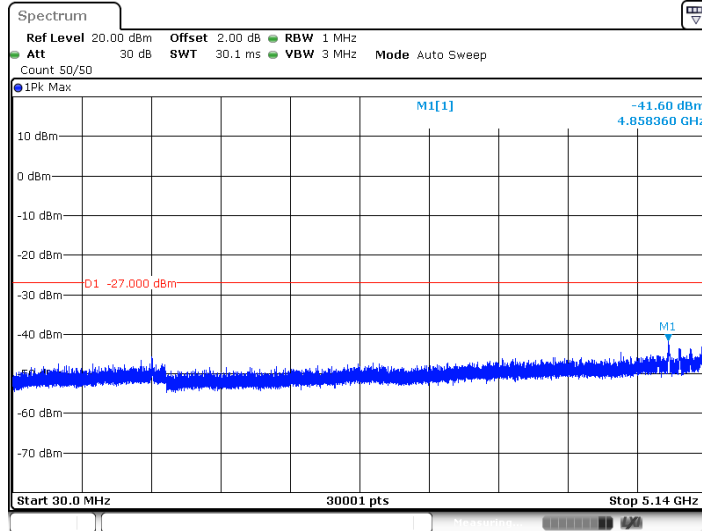


Date: 21 JUL 2019 10:32:35

11A_Ant1_5260_5360-40000

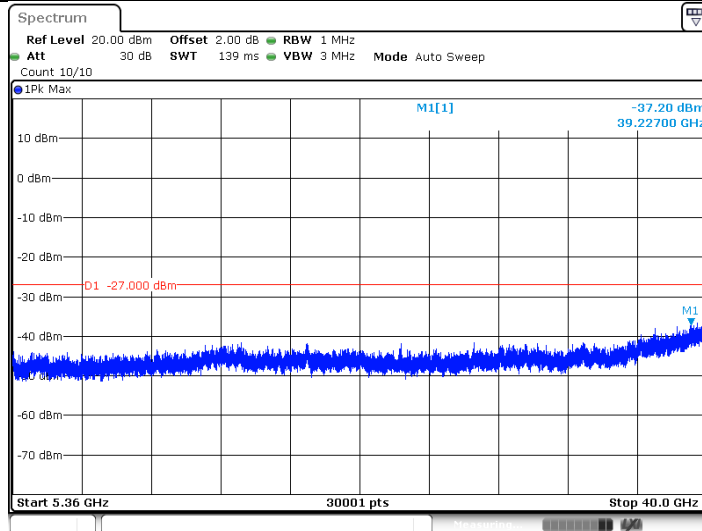


Date: 21 JUL 2019 10:32:43

11A_Ant2_5260_30-5140

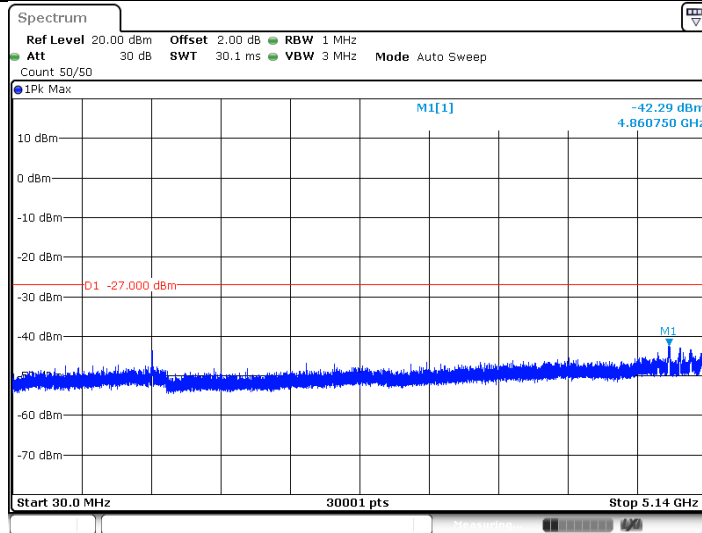


Date: 21 JUL 2019 12:01:30

11A_Ant2_5260_5360~40000

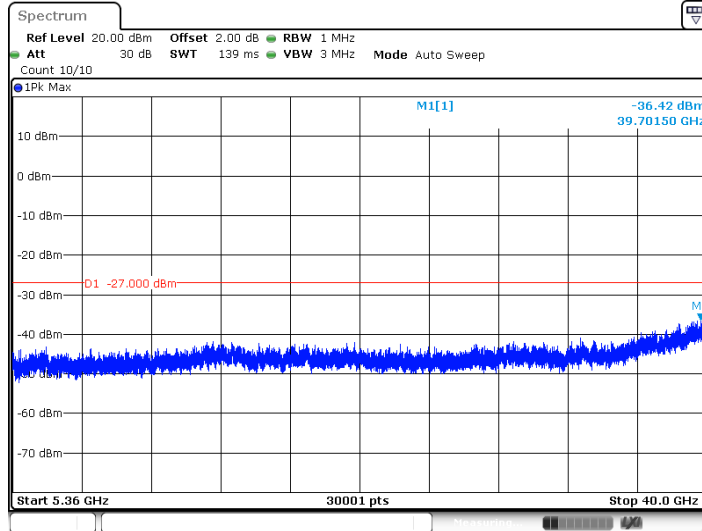


Date: 21 JUL 2019 12:01:39

11A_Ant1_5280_30~5140

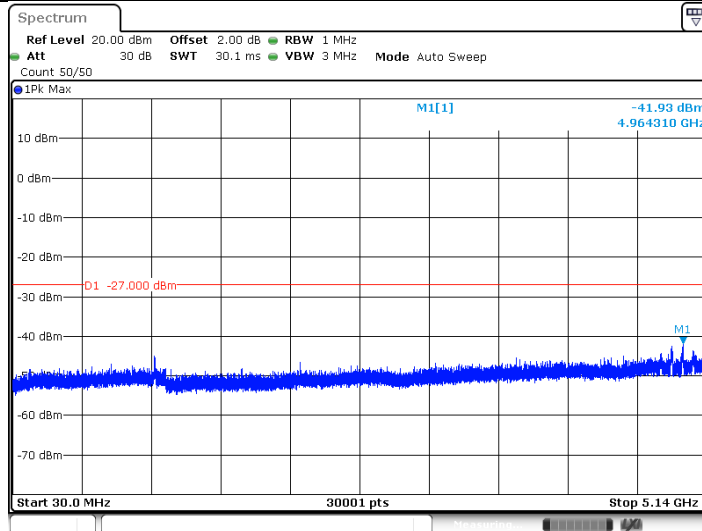


Date: 21 JUL 2019 10:34:03

11A_Ant1_5280_5360~40000

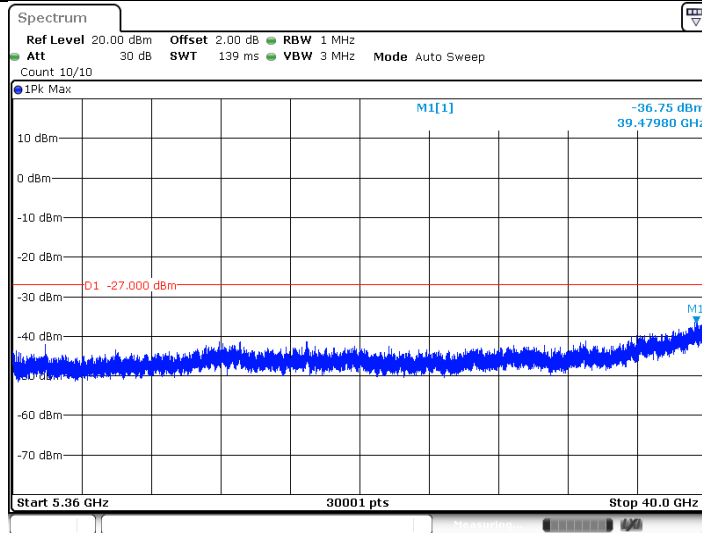


Date: 21 JUL 2019 10:34:11

11A_Ant2_5280_30-5140

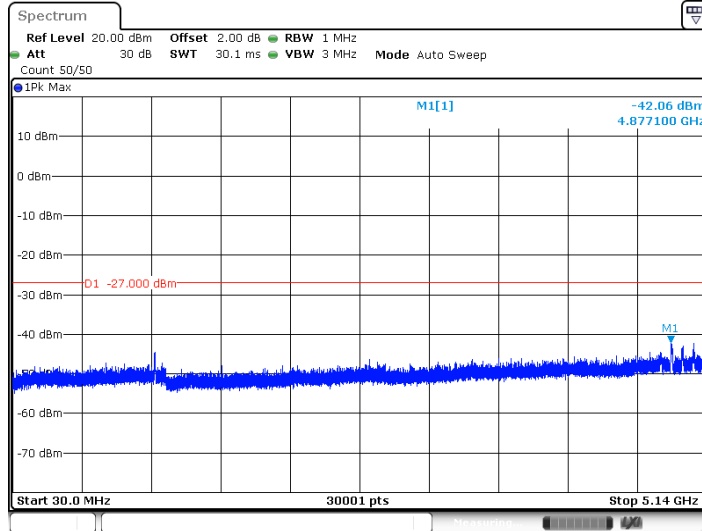


Date: 21 JUL 2019 12:03:05

11A_Ant2_5280_5360-40000

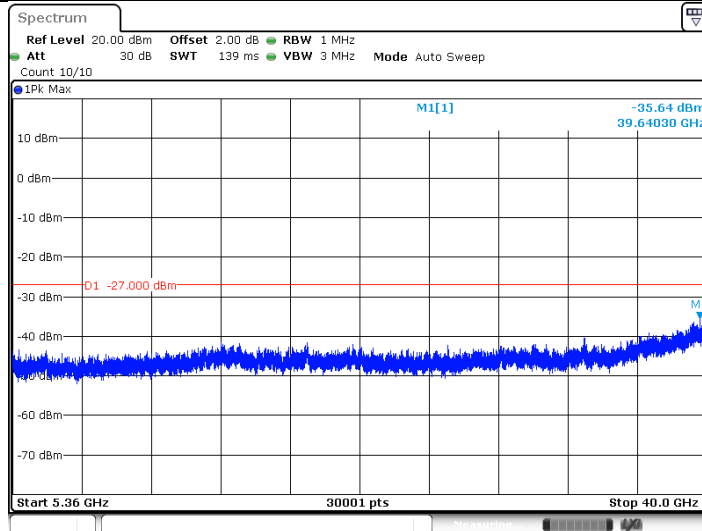


Date: 21 JUL 2019 12:03:14

11A_Ant1_5320_30-5140

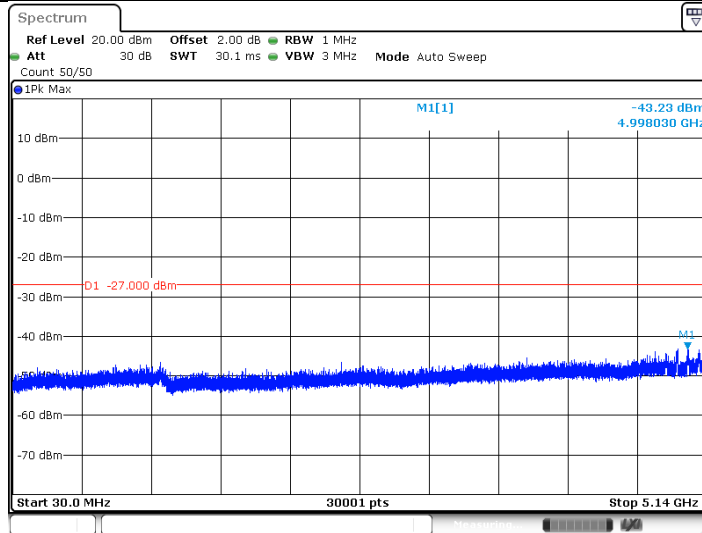


Date: 21 JUL 2019 10:36:09

11A_Ant1_5320_5360~40000

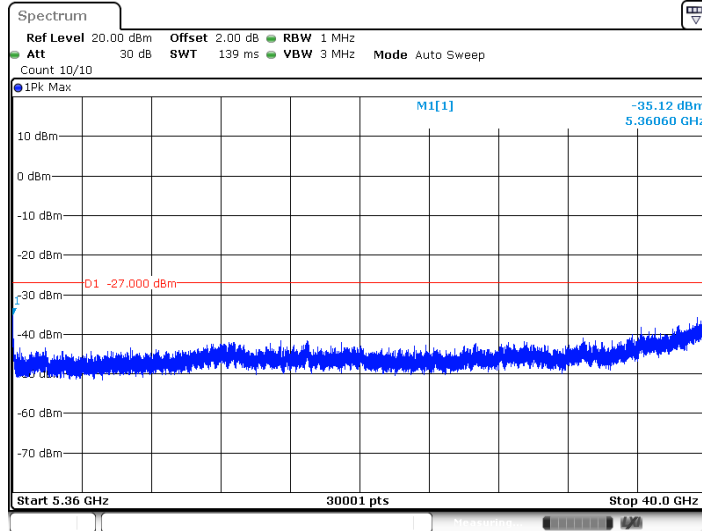


Date: 21 JUL 2019 10:36:18

11A_Ant2_5320_30~5140

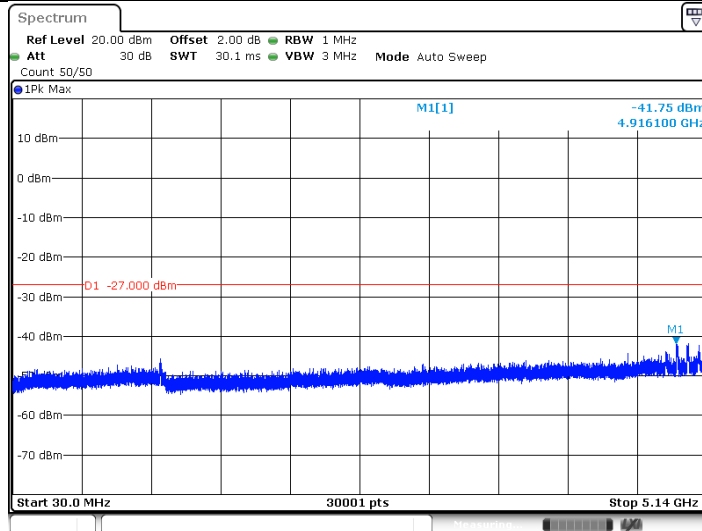


Date: 21 JUL 2019 12:05:32

11A_Ant2_5320_5360~40000

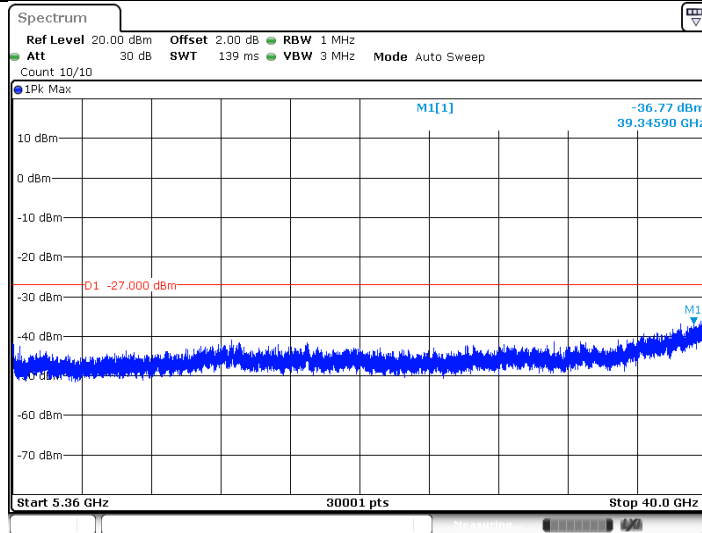


Date: 21 JUL 2019 12:05:40

11A_Ant1_5500_30-5460

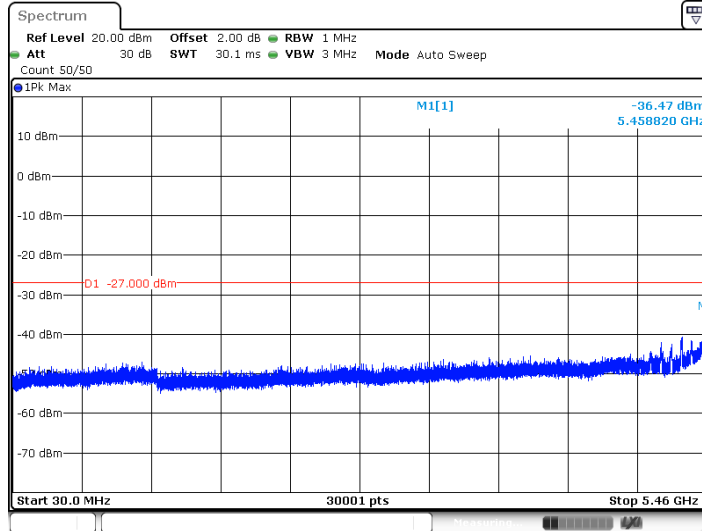


Date: 21 JUL 2019 10:45:48

11A_Ant1_5500_5735-40000

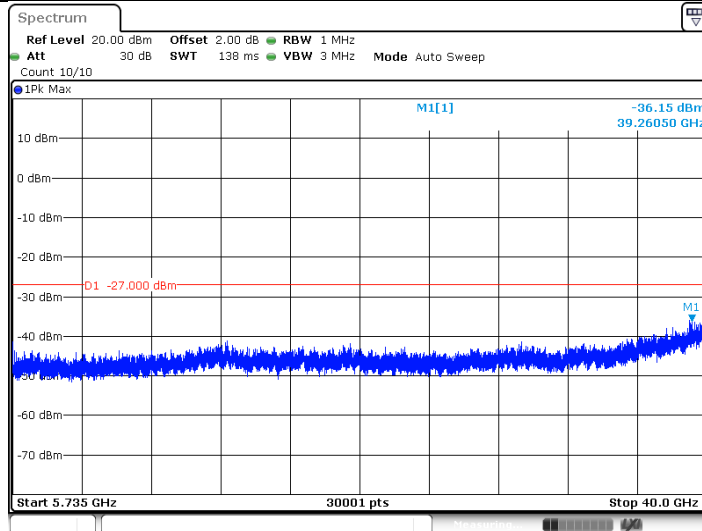


Date: 21 JUL 2019 10:45:57

11A_Ant2_5500_30-5460

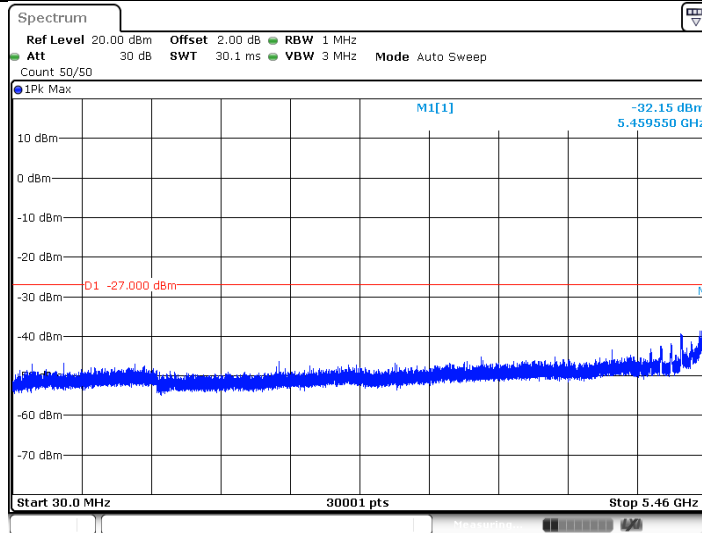


Date: 21 JUL 2019 12:08:05

11A_Ant2_5500_5735~40000

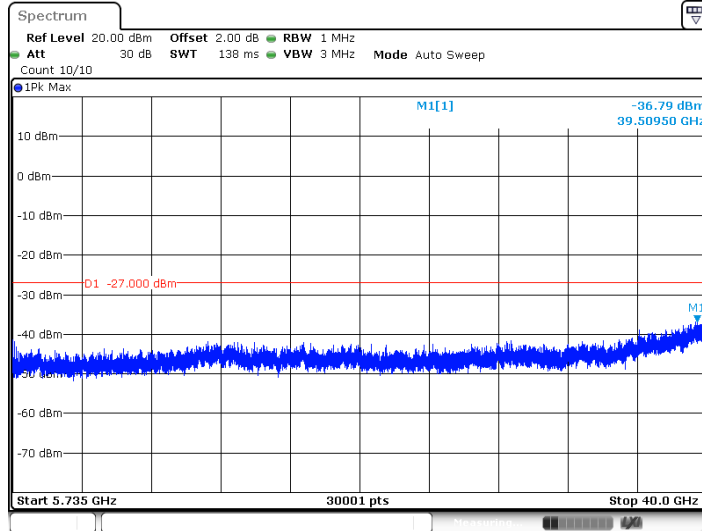


Date: 21 JUL 2019 12:08:14

11A_Ant1_5580_30~5460

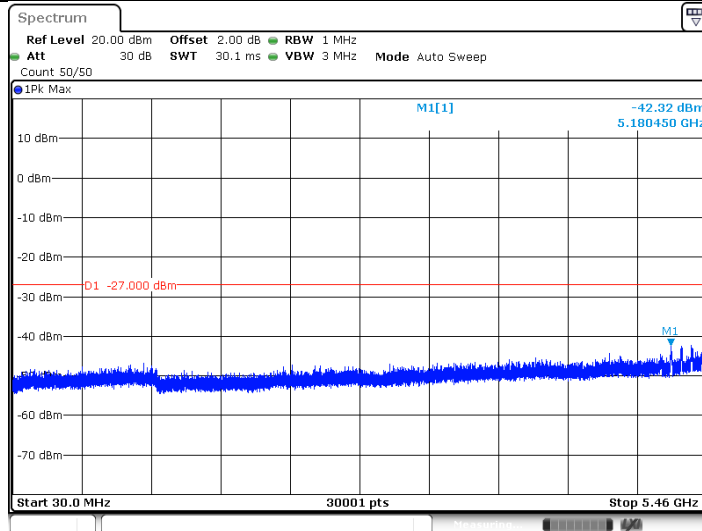


Date: 21 JUL 2019 10:47:19

11A_Ant1_5580_5735~40000

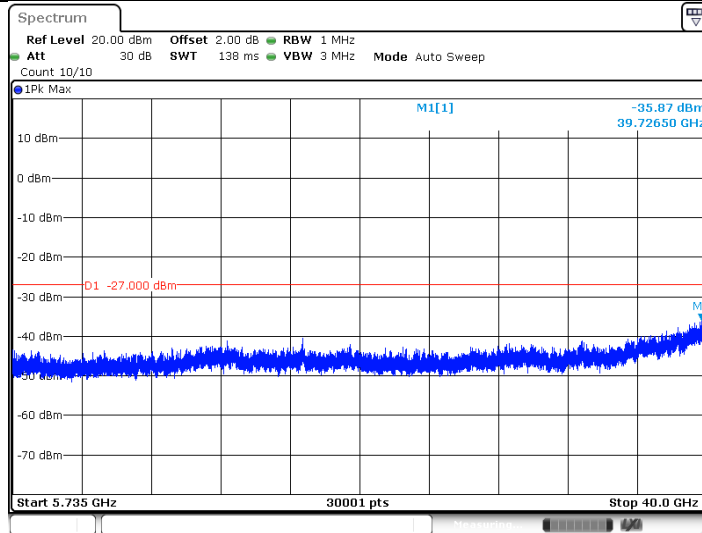


Date: 21 JUL 2019 10:47:28

11A_Ant2_5580_30-5460

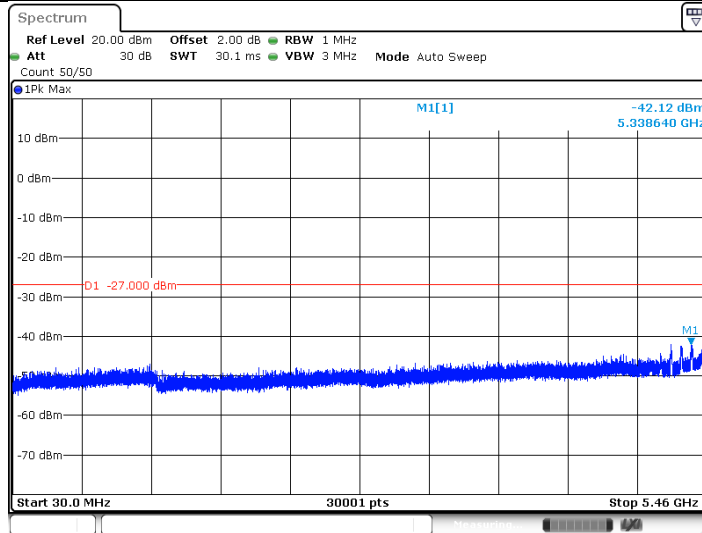


Date: 21 JUL 2019 12:09:31

11A_Ant2_5580_5735-40000

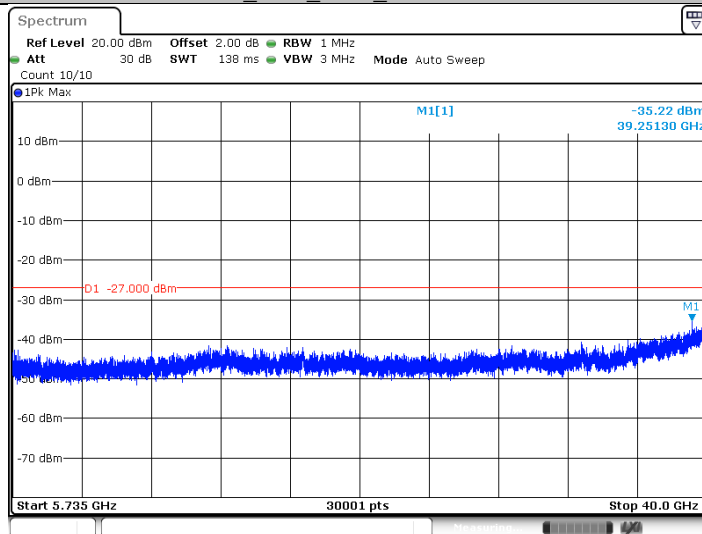


Date: 21 JUL 2019 12:09:40

11A_Ant1_5700_30-5460

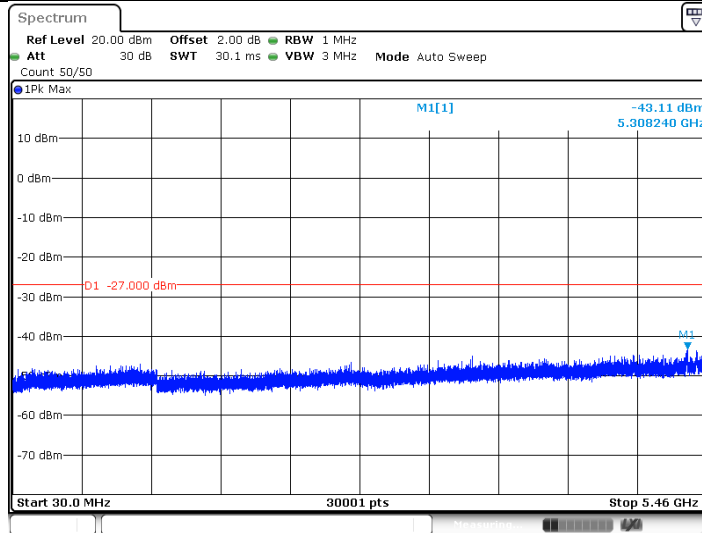


Date: 21 JUL 2019 10:49:59

11A_Ant1_5700_5735~40000

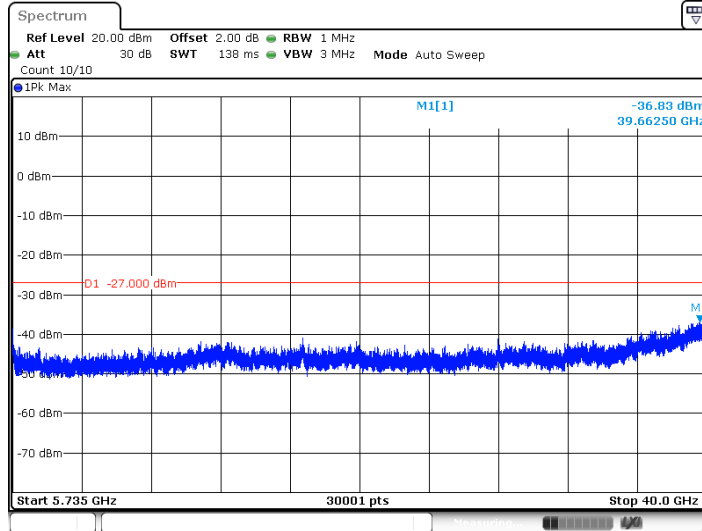


Date: 21 JUL 2019 10:50:07

11A_Ant2_5700_30~5460

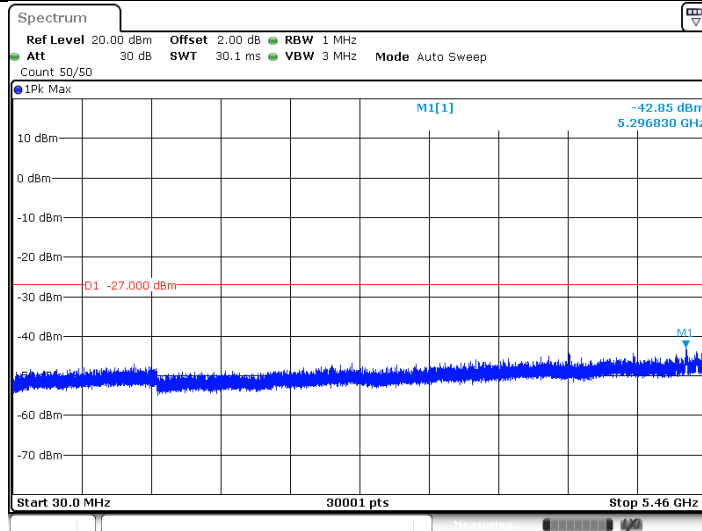


Date: 21 JUL 2019 12:11:24

11A_Ant2_5700_5735~40000

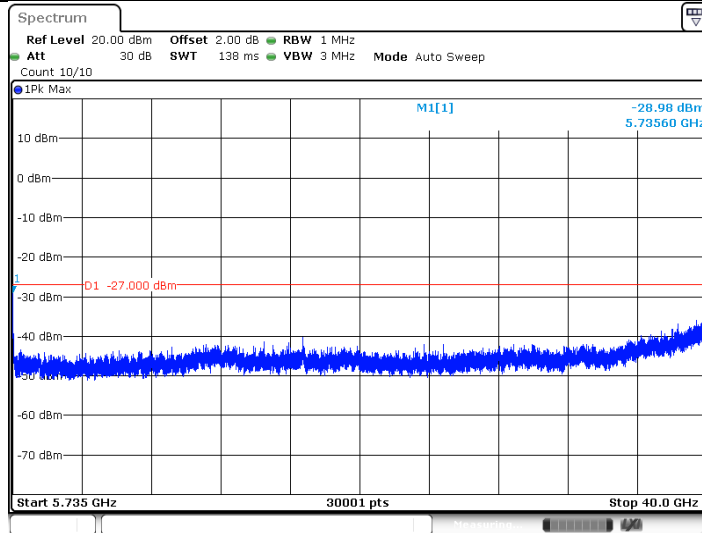


Date: 21 JUL 2019 12:11:33

11A_Ant1_5720_30~5460

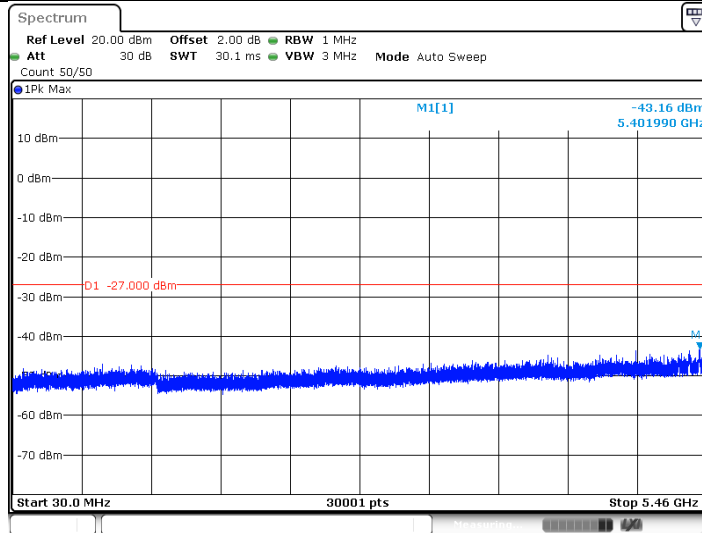


Date: 21 JUL 2019 10:52:06

11A_Ant1_5720_5925~40000

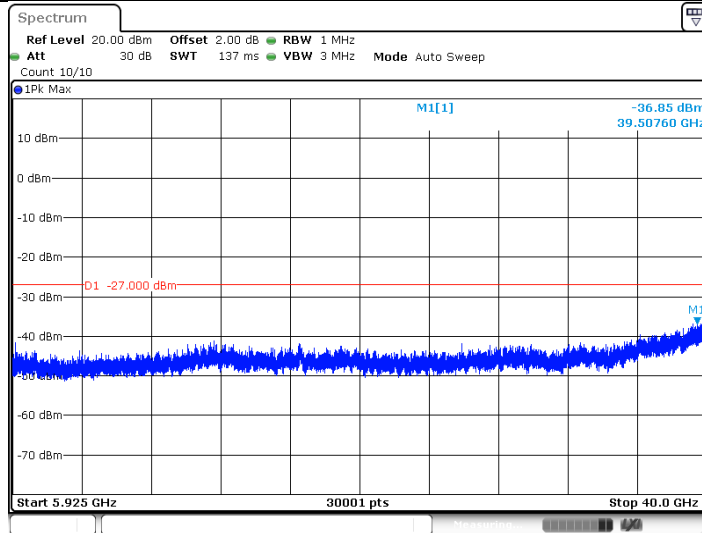


Date: 21 JUL 2019 10:52:15

11A_Ant2_5720_30~5460

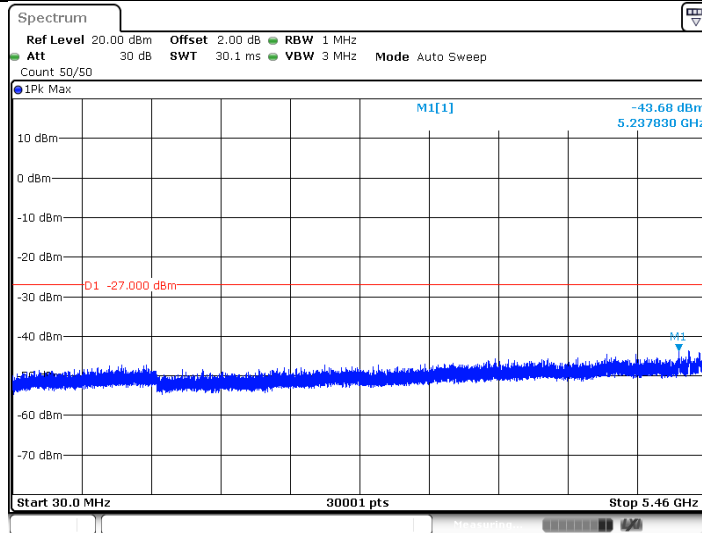


Date: 21 JUL 2019 12:13:56

11A_Ant2_5720_5925~40000

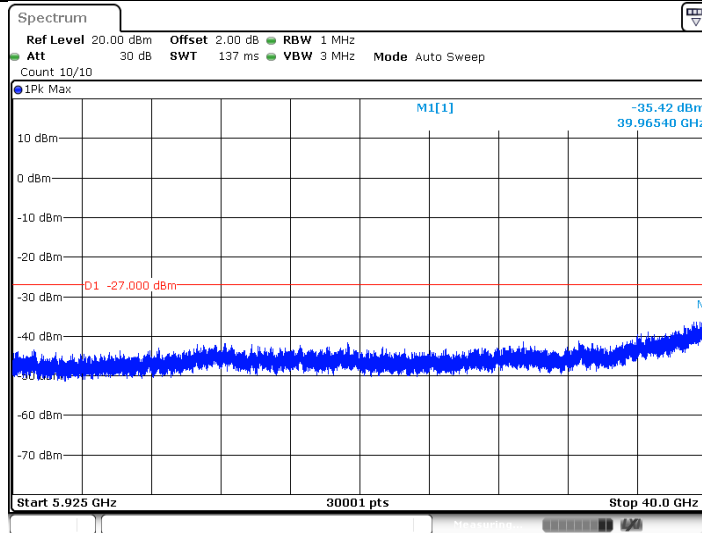


Date: 21 JUL 2019 12:14:04

11A_Ant1_5745_30~5650

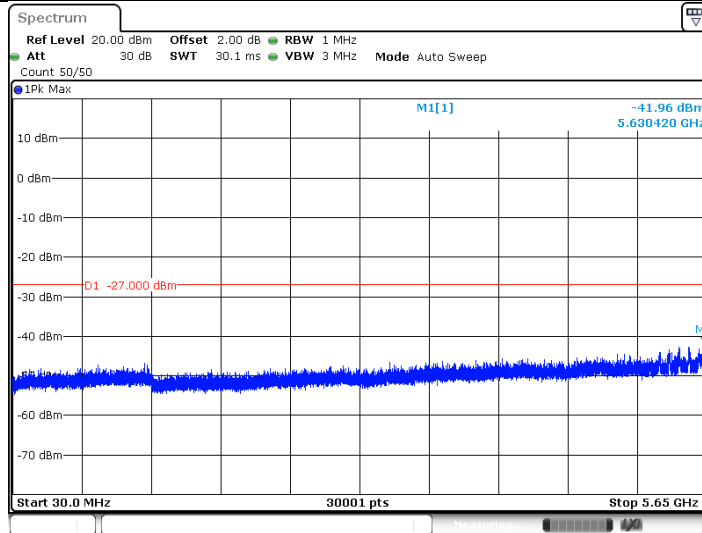


Date: 21 JUL 2019 10:53:55

11A_Ant1_5745_5925~40000

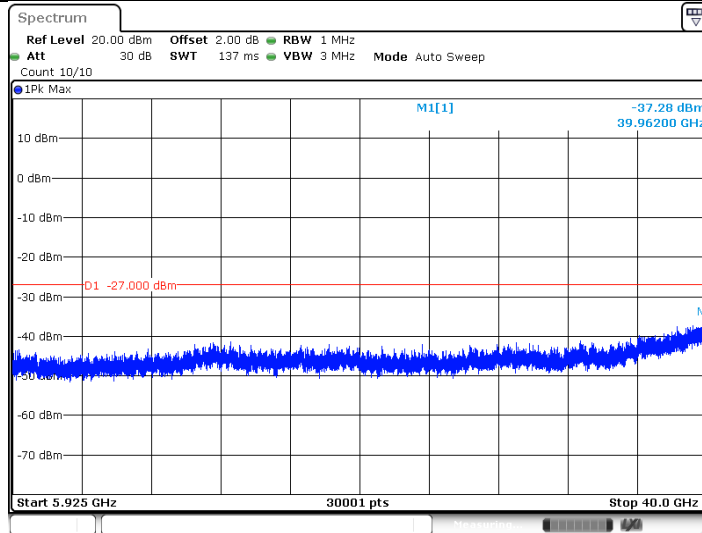


Date: 21 JUL 2019 10:54:04

11A_Ant2_5745_30-5650

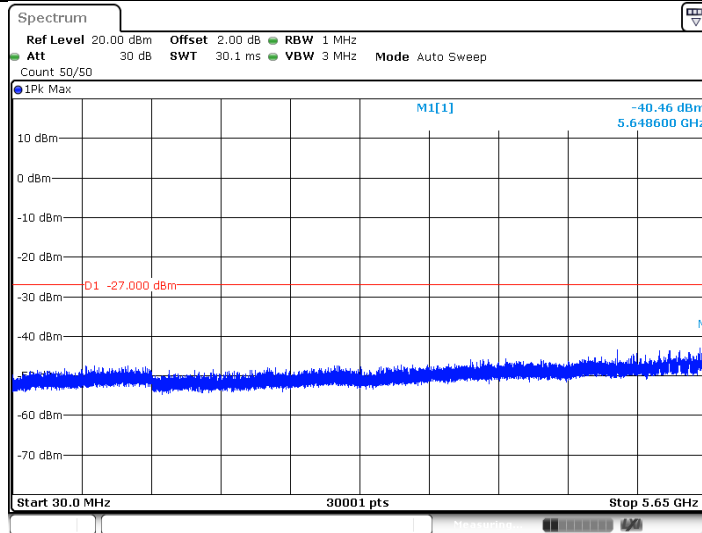


Date: 21 JUL 2019 12:15:40

11A_Ant2_5745_5925-40000

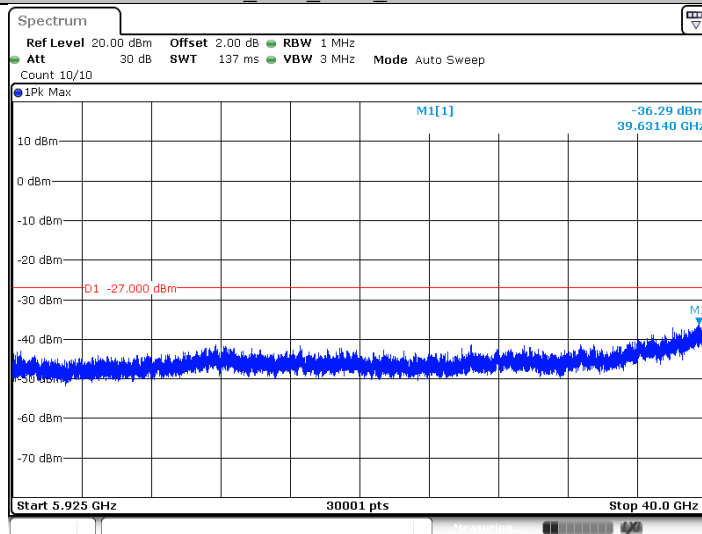


Date: 21 JUL 2019 12:15:49

11A_Ant1_5785_30-5650

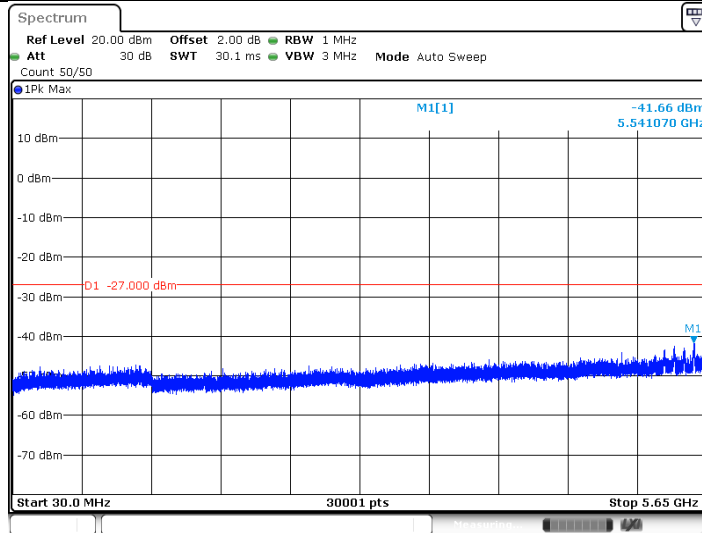


Date: 21 JUL 2019 10:55:28

11A_Ant1_5785_5925~40000

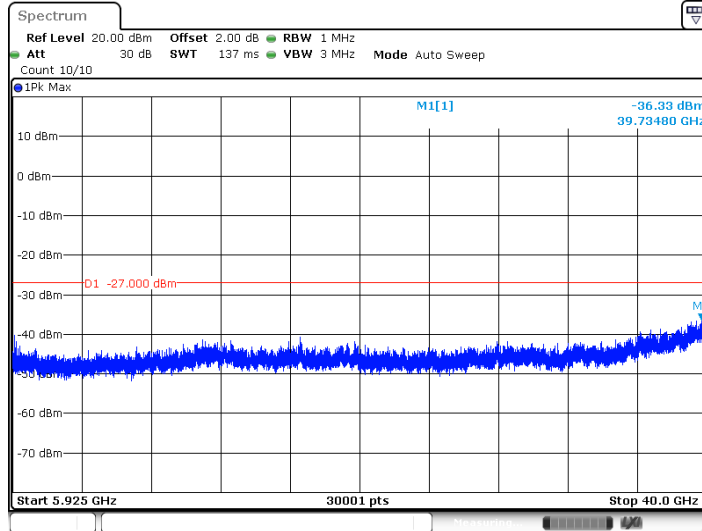


Date: 21 JUL 2019 10:55:37

11A_Ant2_5785_30~5650

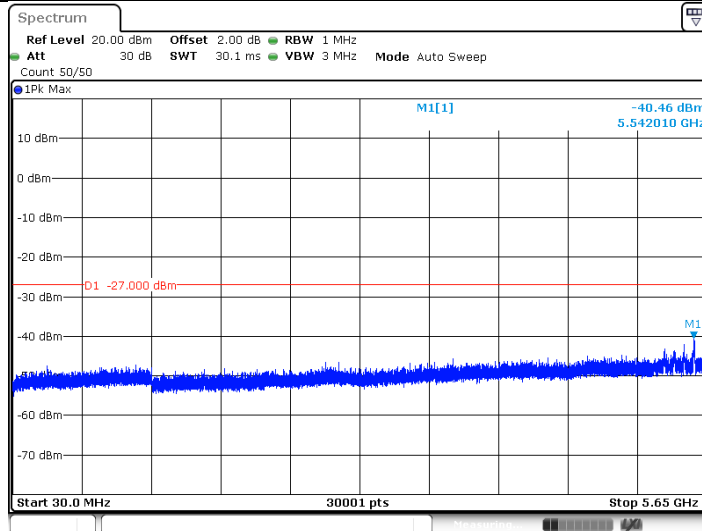


Date: 21 JUL 2019 12:17:23

11A_Ant2_5785_5925~40000

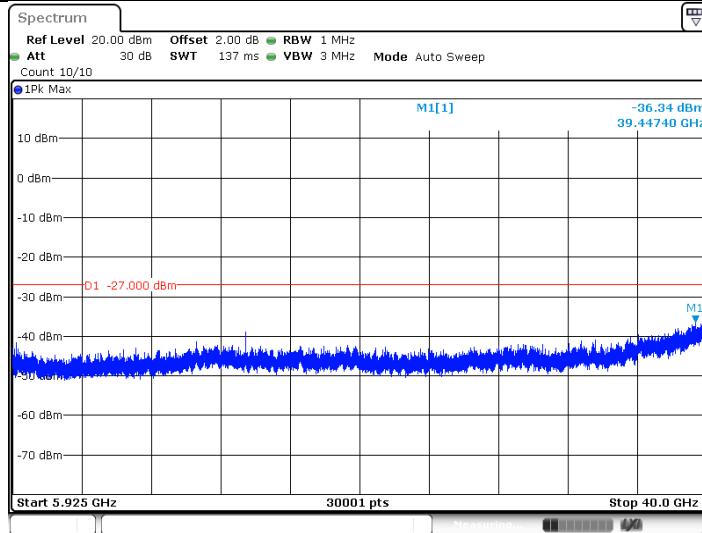


Date: 21 JUL 2019 12:17:32

11A_Ant1_5825_30-5650

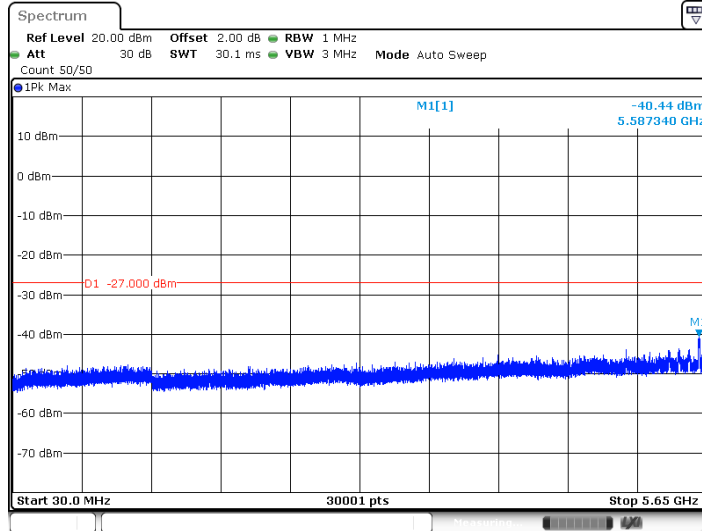


Date: 21 JUL 2019 10:57:09

11A_Ant1_5825_5925-40000

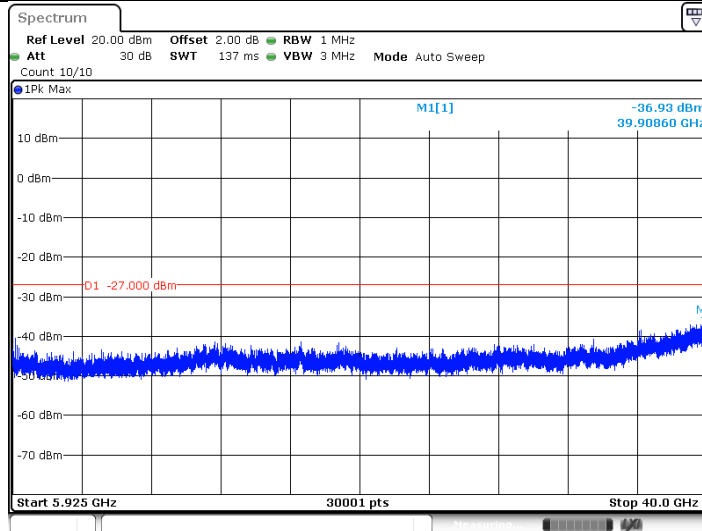


Date: 21 JUL 2019 10:57:17

11A_Ant2_5825_30-5650

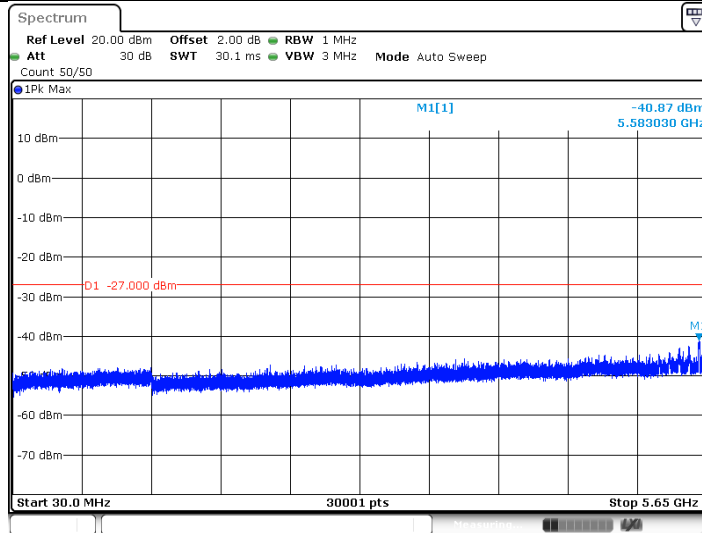


Date: 21 JUL 2019 12:19:01


11A_Ant2_5825_5925~40000

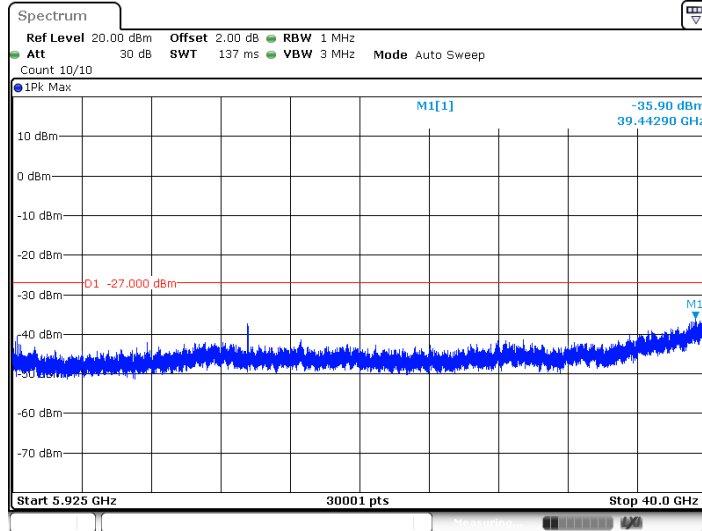

Date: 21 JUL 2019 12:19:10


IEEE 802.11n_MIMO modulation Test Result

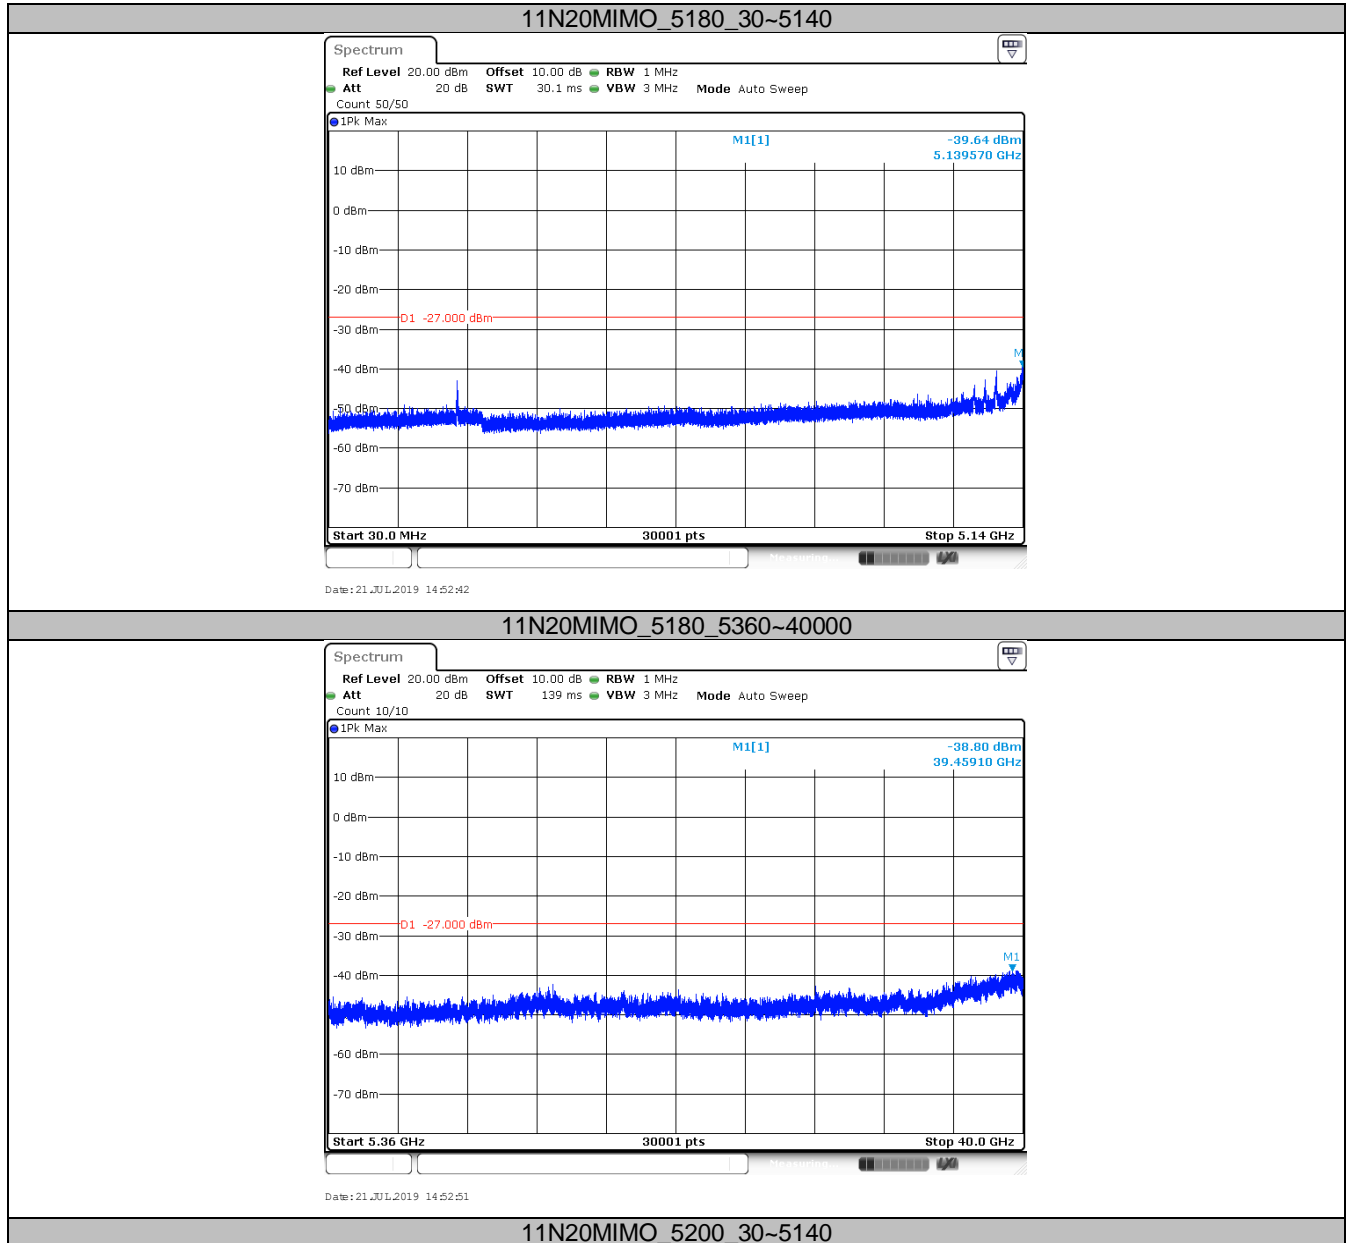

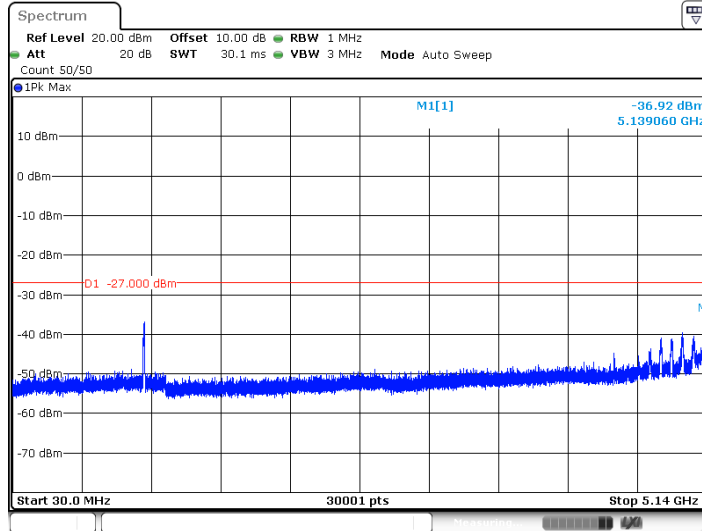


Date: 21 JUL 2019 14:54:16

11N20MIMO_5200_5360~40000

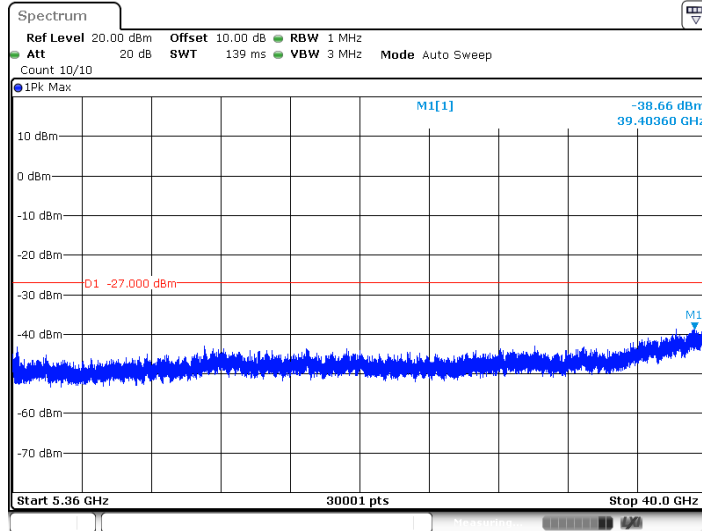


Date: 21 JUL 2019 14:54:25

11N20MIMO_5240_30~5140

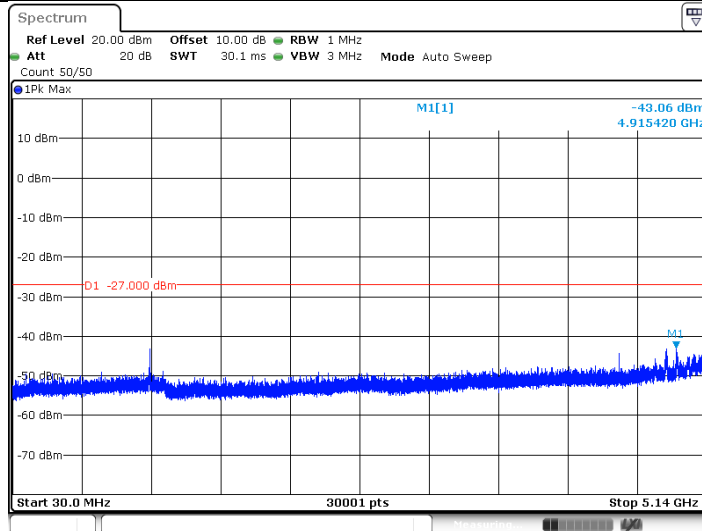


Date: 21 JUL 2019 14:55:47

11N20MIMO_5240_5360~40000

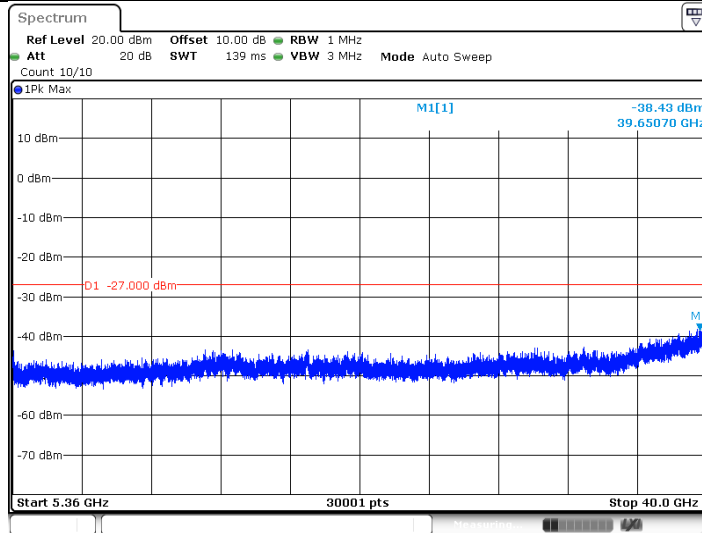


Date: 21 JUL 2019 14:55:55

11N20MIMO_5260_30~5140

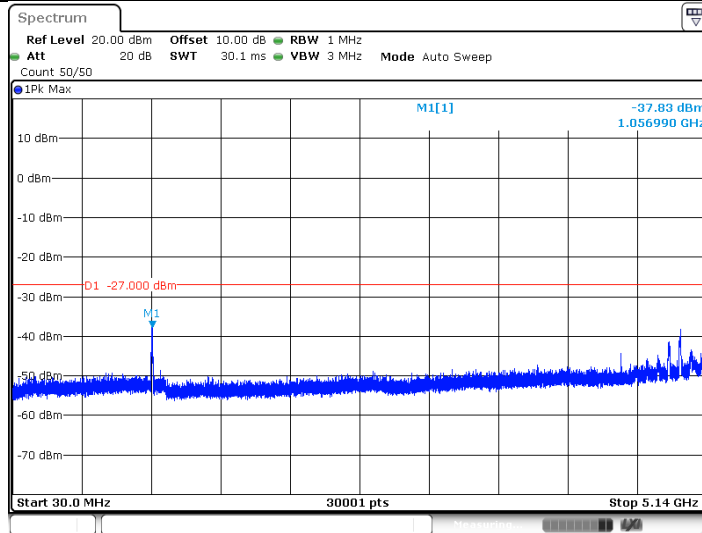


Date: 21 JUL 2019 14:57:07

11N20MIMO_5260_5360~40000

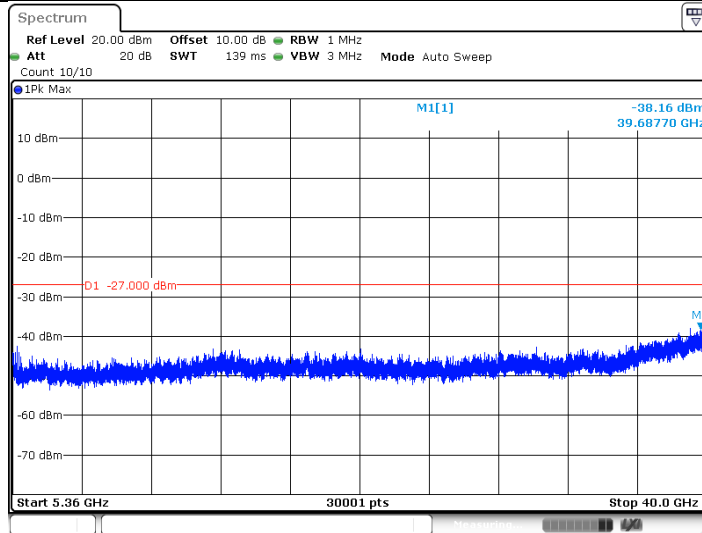


Date: 21 JUL 2019 14:57:16

11N20MIMO_5280_30~5140

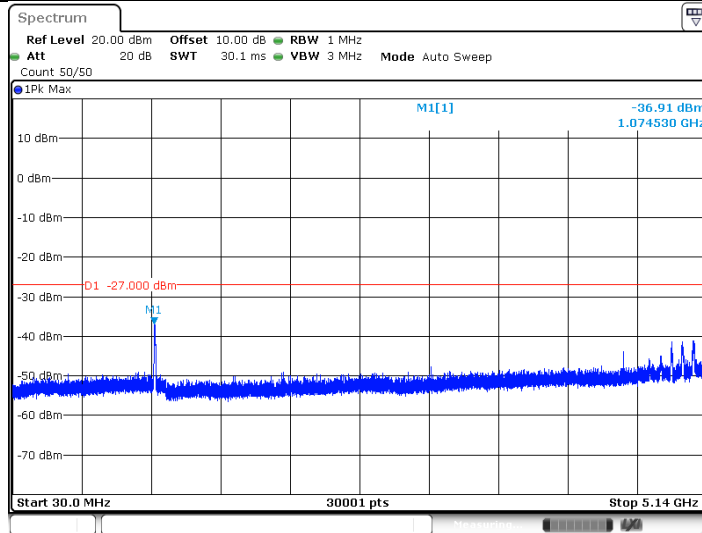


Date: 21 JUL 2019 14:58:27

11N20MIMO_5280_5360~40000

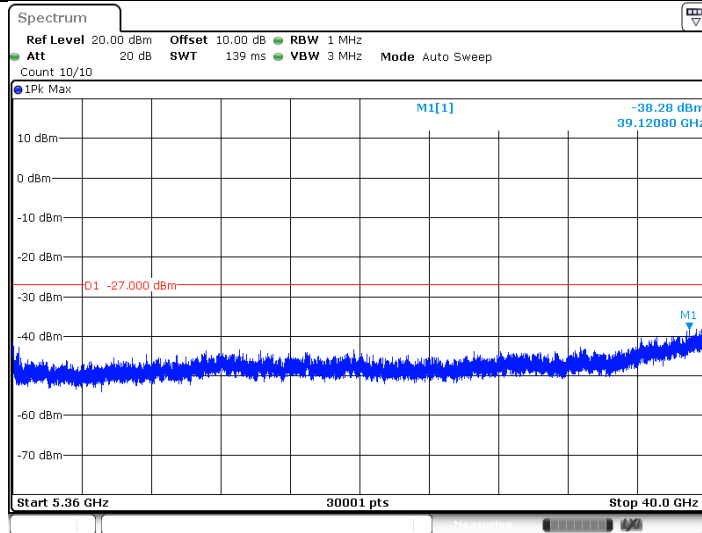


Date: 21 JUL 2019 14:58:36

11N20MIMO_5320_30~5140

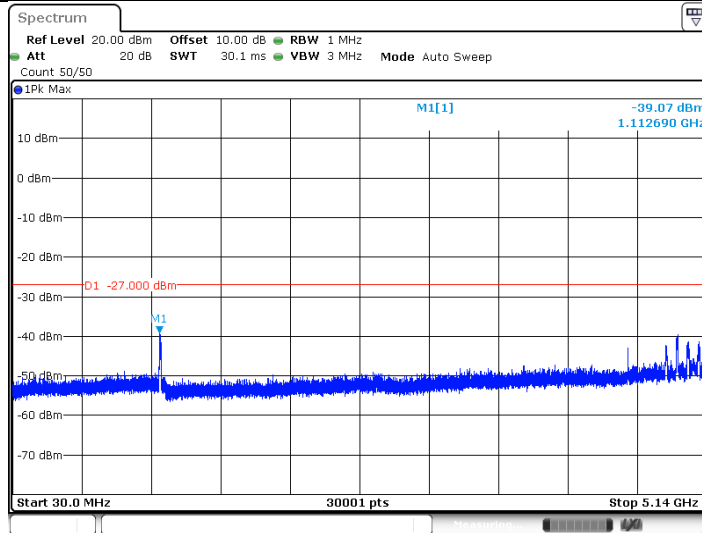


Date: 21 JUL 2019 15:00:28

11N20MIMO_5320_5360~40000

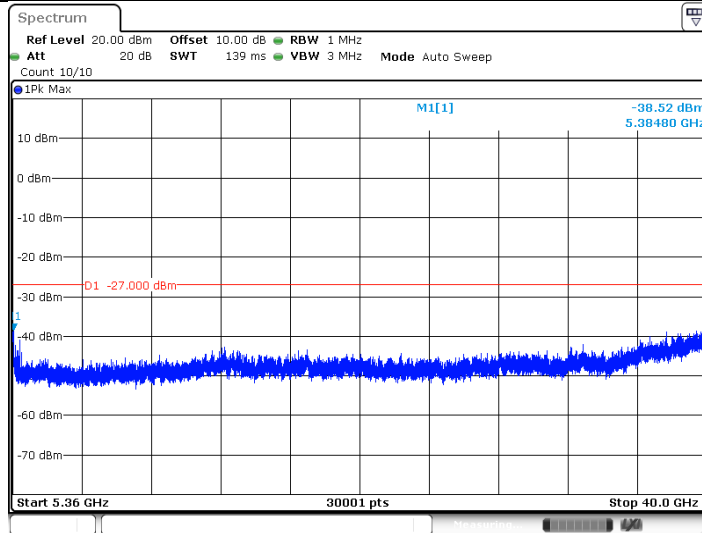


Date: 21 JUL 2019 15:00:37

11N20MIMO_5500_30-5460

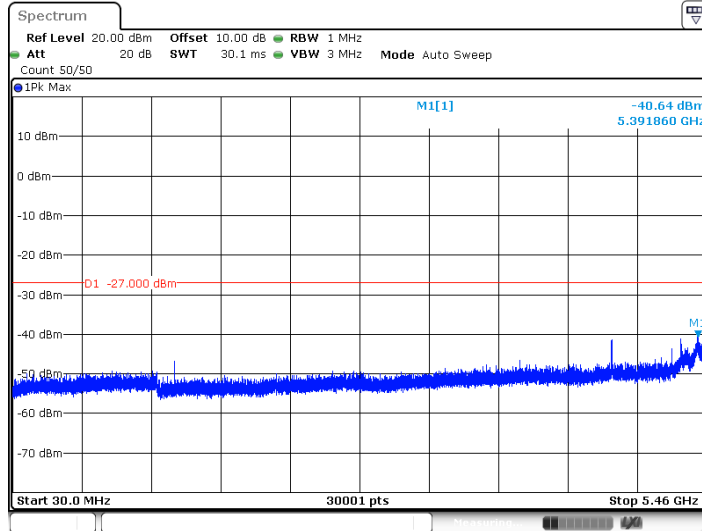


Date: 21 JUL 2019 15:02:04

11N20MIMO_5500_5735-40000

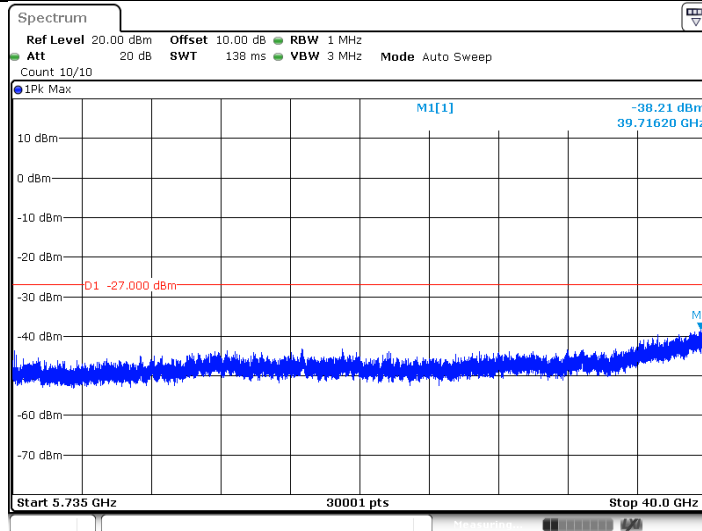


Date: 21 JUL 2019 15:02:12

11N20MIMO_5580_30-5460

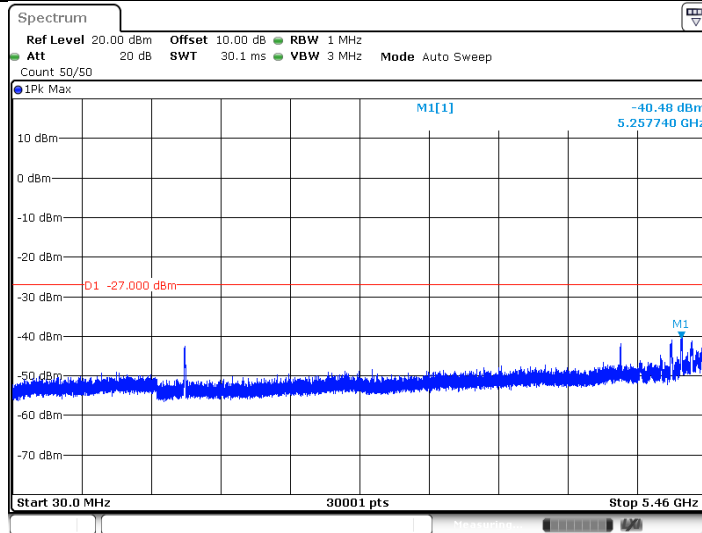


Date: 21 JUL 2019 15:03:59

11N20MIMO_5580_5735~40000

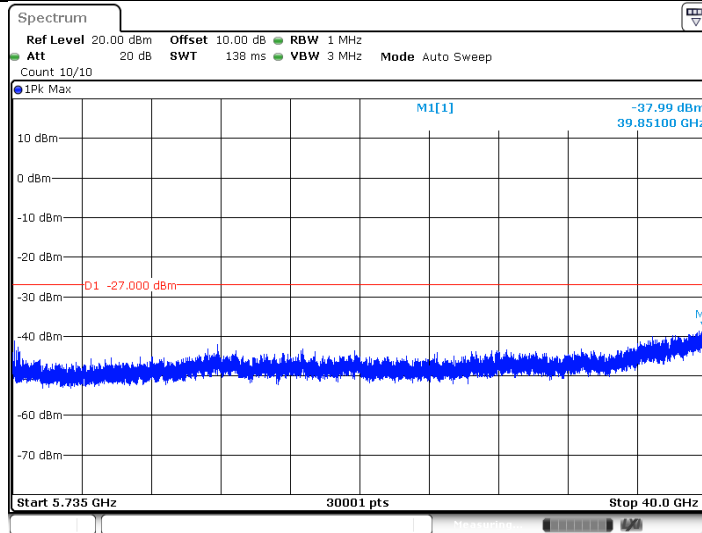


Date: 21 JUL 2019 15:04:08

11N20MIMO_5700_30~5460

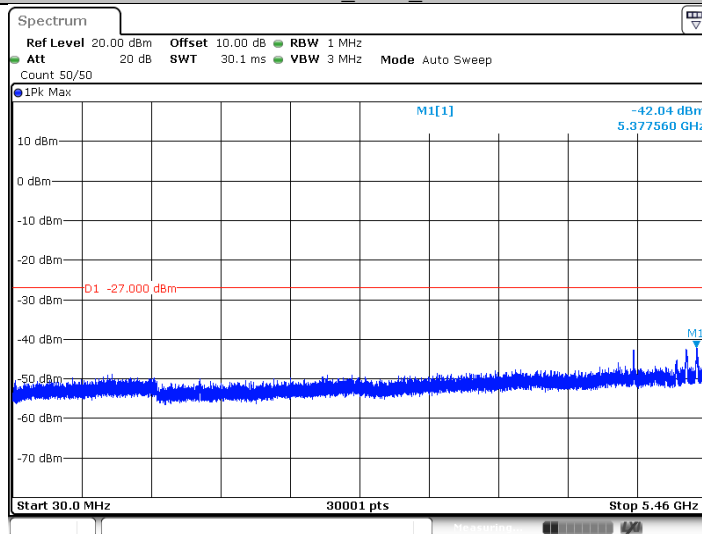


Date: 21 JUL 2019 15:06:40

11N20MIMO_5700_5735~40000

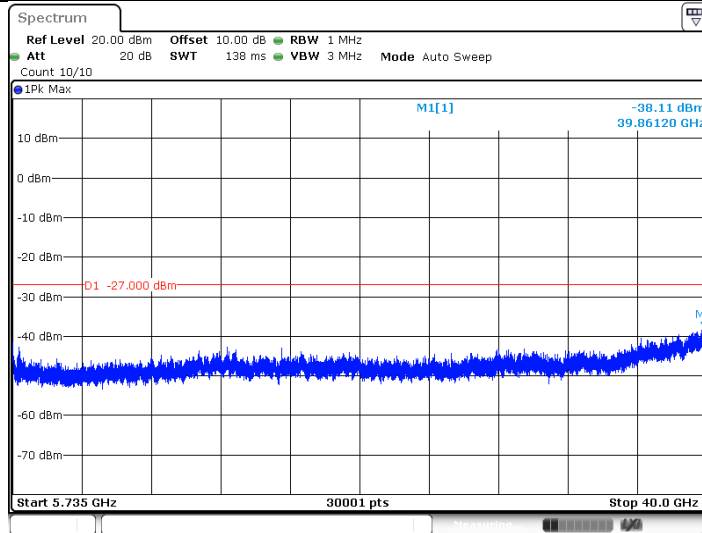


Date: 21 JUL 2019 15:06:49

11N20MIMO_5720_30-5460

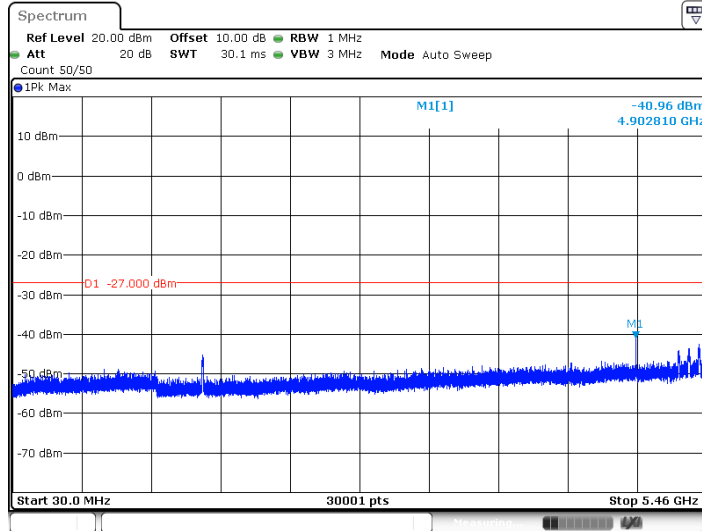


Date: 21 JUL 2019 15:09:24

11N20MIMO_5720_5925-40000

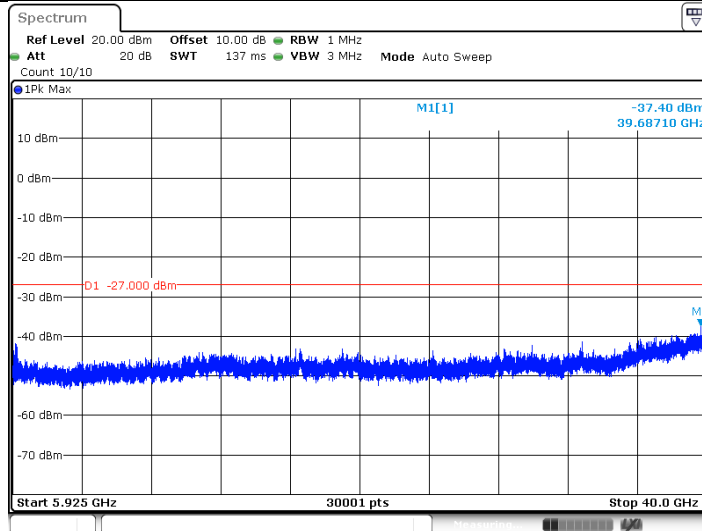


Date: 21 JUL 2019 15:09:33

11N20MIMO_5745_30-5650

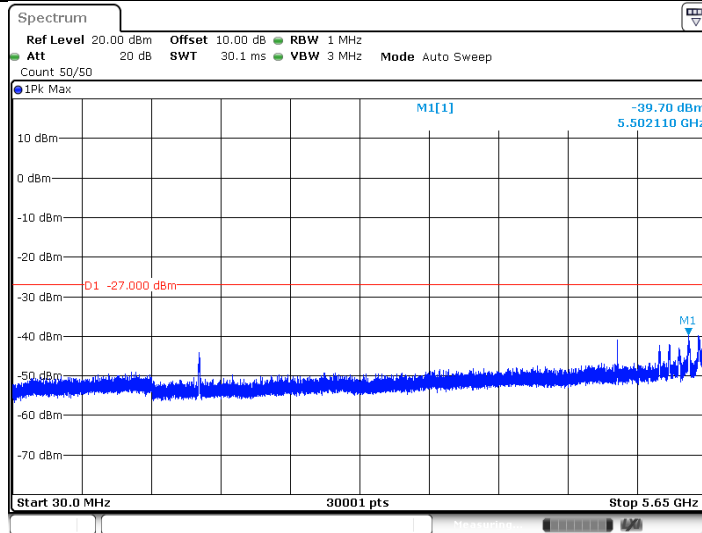


Date: 21 JUL 2019 15:11:08

11N20MIMO_5745_5925~40000

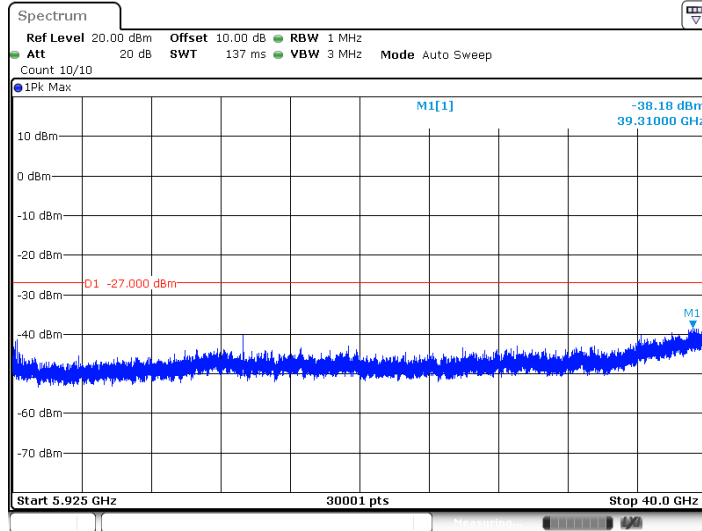


Date: 21 JUL 2019 15:11:17

11N20MIMO_5785_30~5650

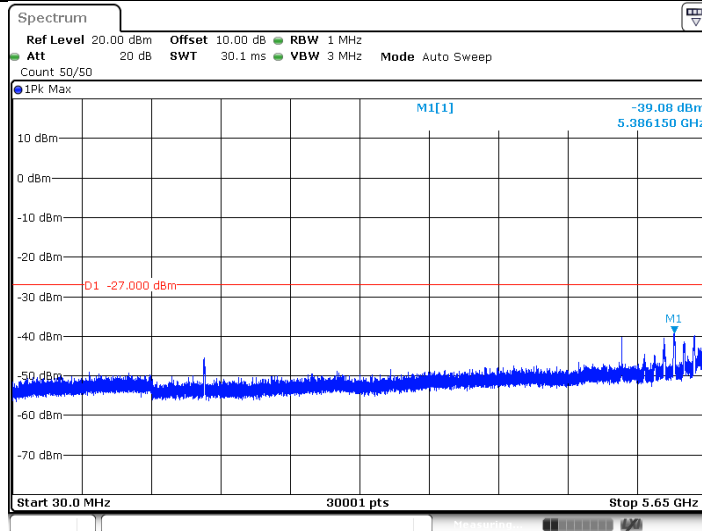


Date: 21 JUL 2019 15:12:32

11N20MIMO_5785_5925~40000

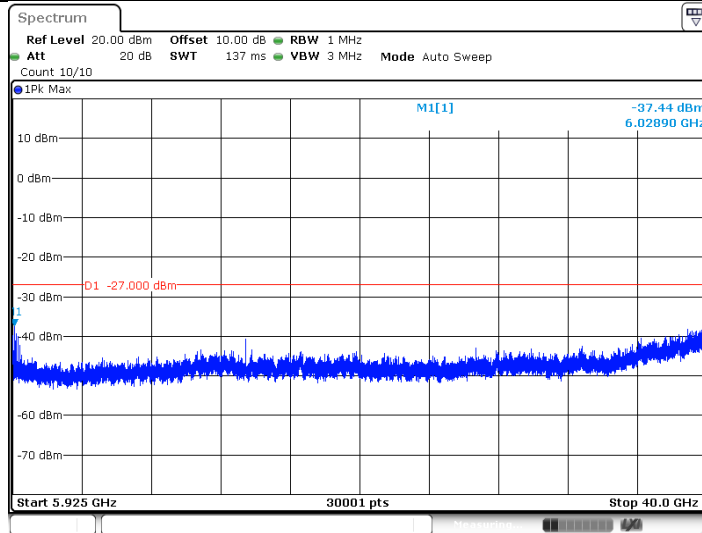


Date: 21 JUL 2019 15:12:41

11N20MIMO_5825_30~5650

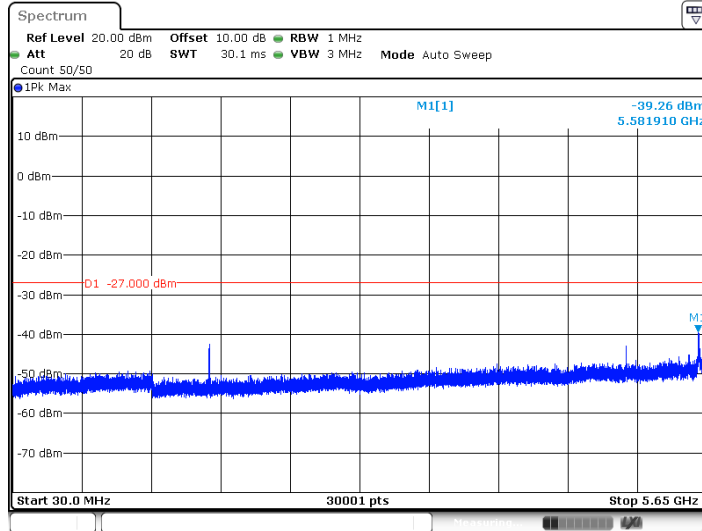


Date: 21 JUL 2019 15:14:13

11N20MIMO_5825_5925~40000

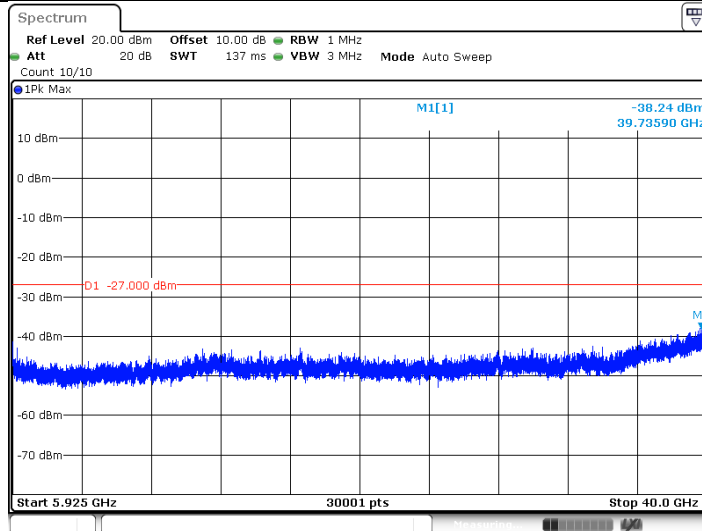


Date: 21 JUL 2019 15:14:21

11N40MIMO_5190_30~5140

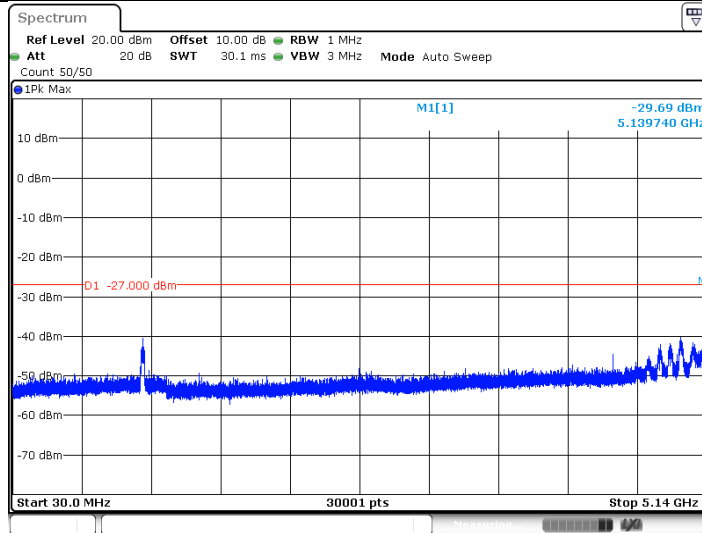


Date: 21 JUL 2019 15:16:25

11N40MIMO_5190_5360~40000

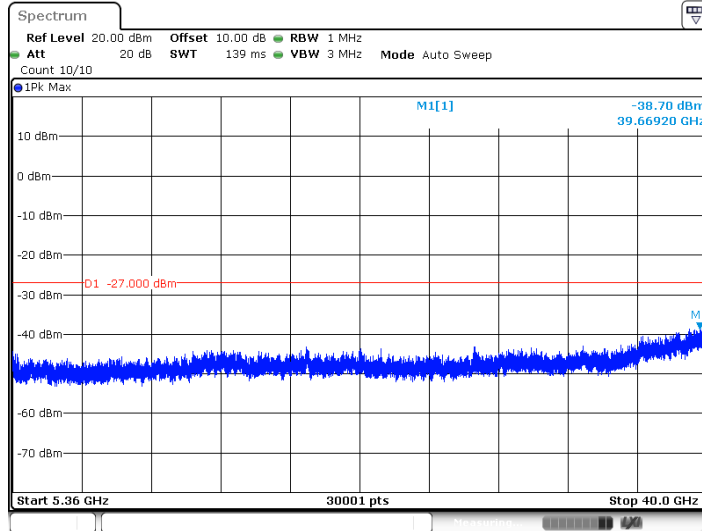


Date: 21 JUL 2019 15:16:34

11N40MIMO_5230_30~5140

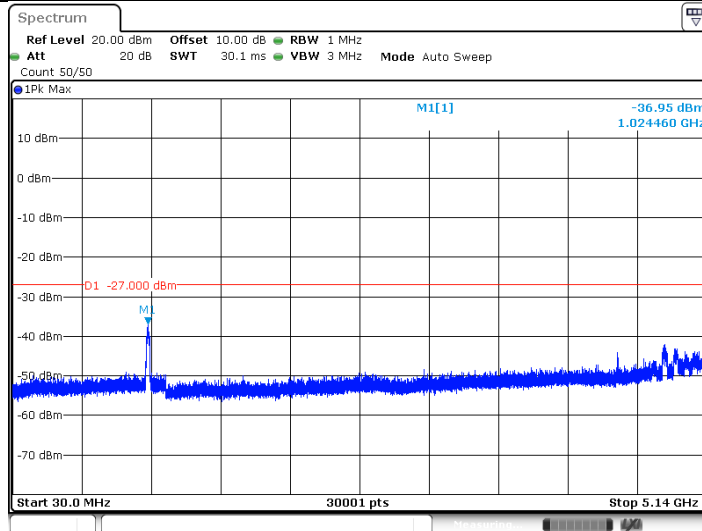


Date: 21 JUL 2019 15:18:04

11N40MIMO_5230_5360~40000

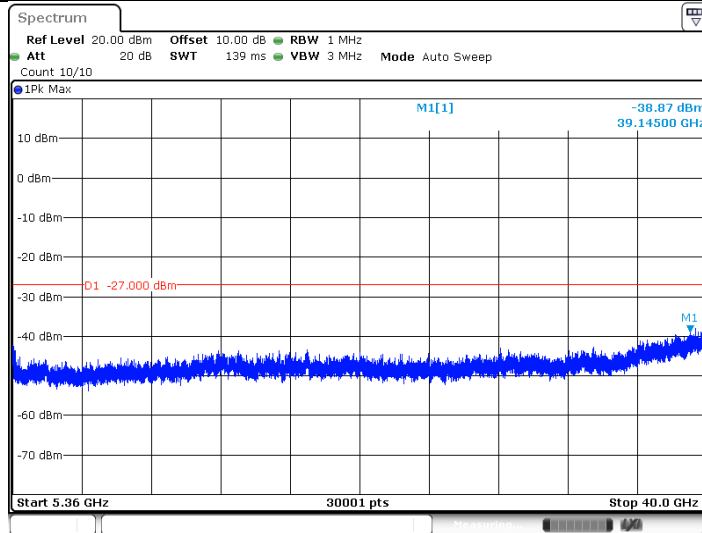


Date: 21 JUL 2019 15:18:13

11N40MIMO_5270_30-5140

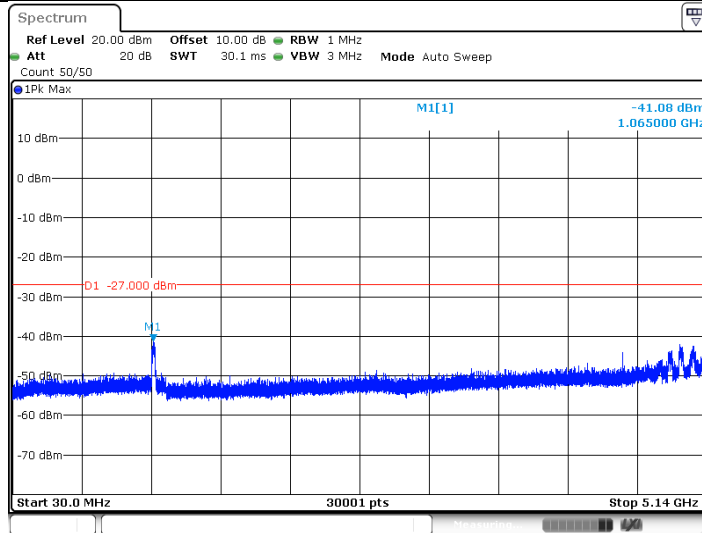


Date: 21 JUL 2019 15:19:28

11N40MIMO_5270_5360-40000

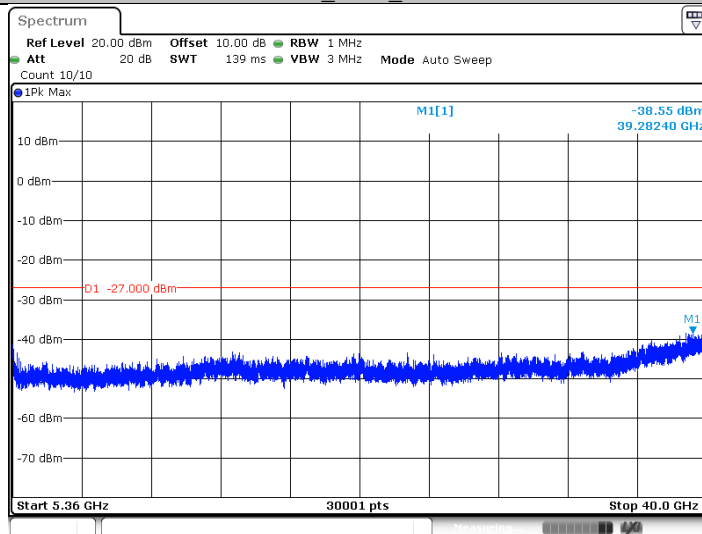


Date: 21 JUL 2019 15:19:37

11N40MIMO_5310_30-5140

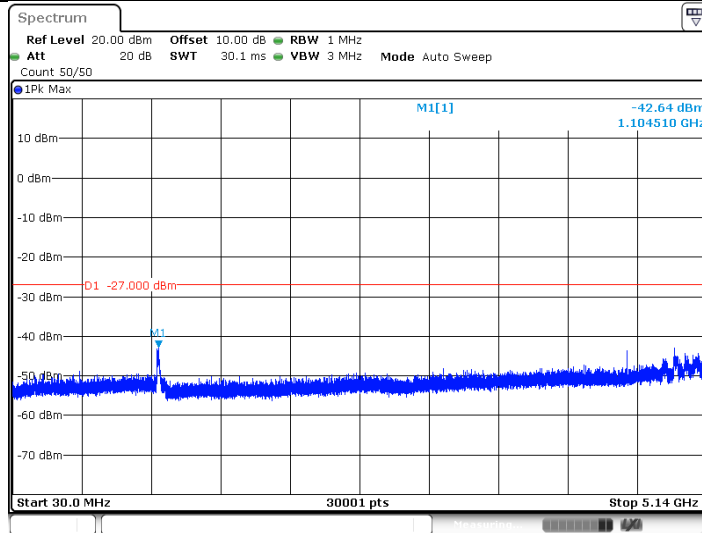


Date: 21 JUL 2019 15:21:13

11N40MIMO_5310_5360~40000

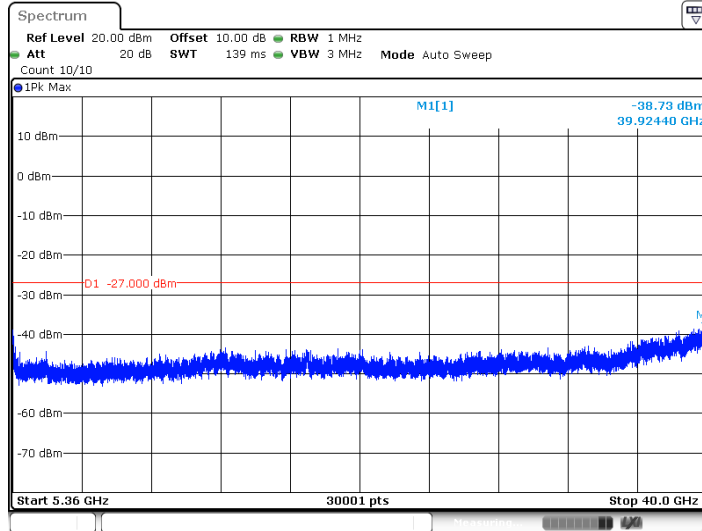


Date: 21 JUL 2019 15:21:21

11N40MIMO_5510_30~5460

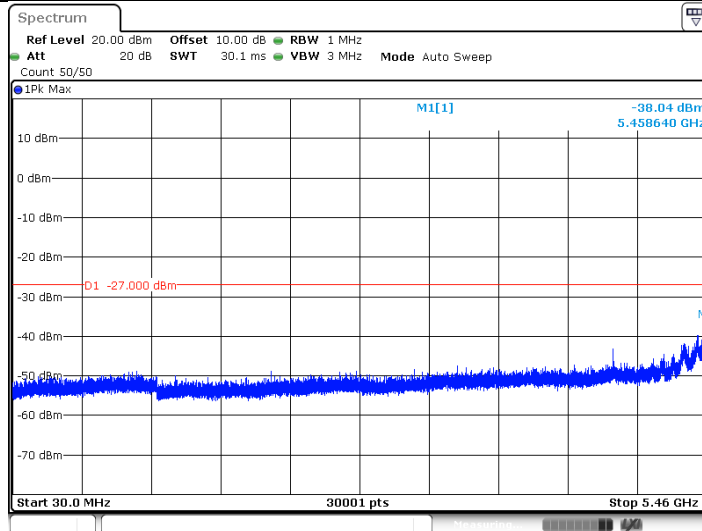


Date: 21 JUL 2019 15:23:12

11N40MIMO_5510_5735~40000

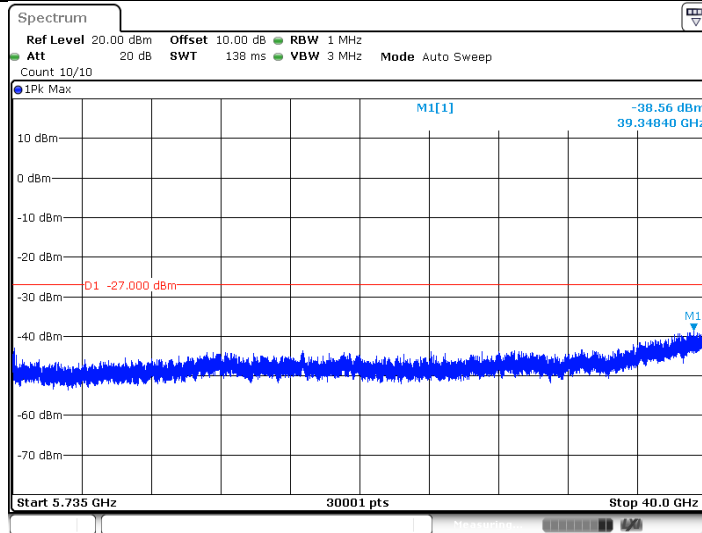


Date: 21 JUL 2019 15:23:21

11N40MIMO_5550_30-5460

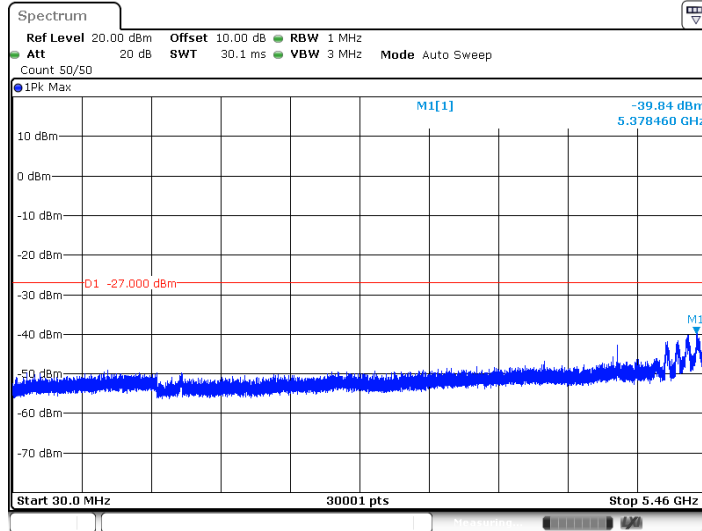


Date: 21 JUL 2019 15:24:39

11N40MIMO_5550_5735-40000

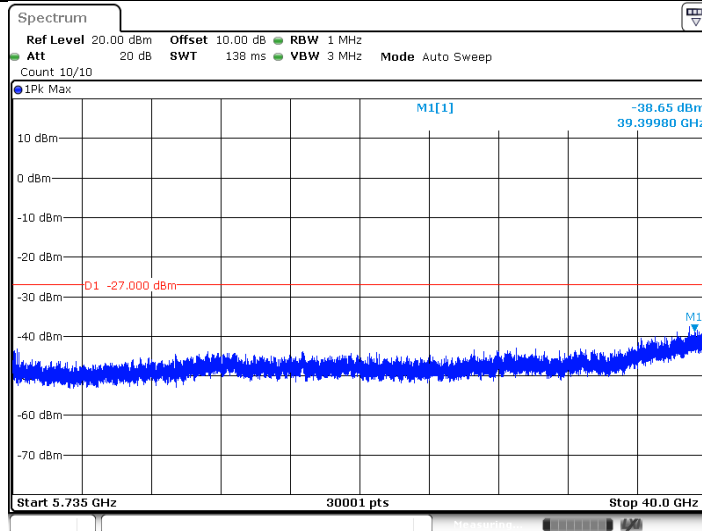


Date: 21 JUL 2019 15:24:47

11N40MIMO_5670_30-5460

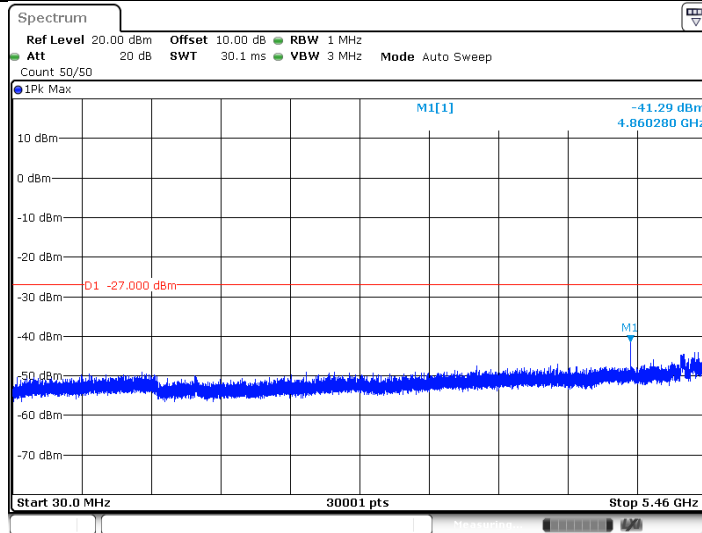


Date: 21 JUL 2019 15:26:19

11N40MIMO_5670_5735~40000

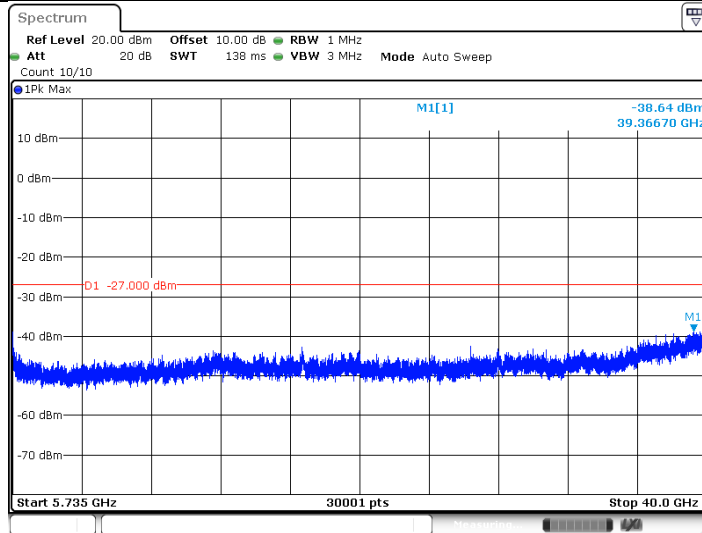


Date: 21 JUL 2019 15:26:27

11N40MIMO_5710_30~5460

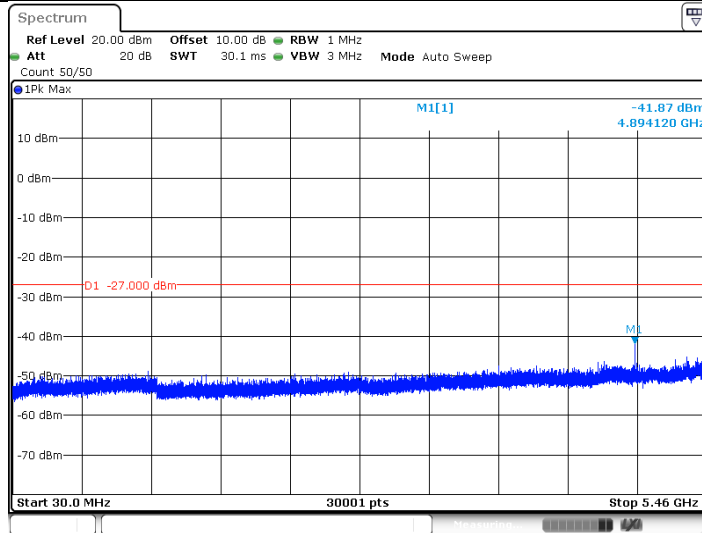


Date: 21 JUL 2019 15:28:24

11N40MIMO_5710_5925~40000

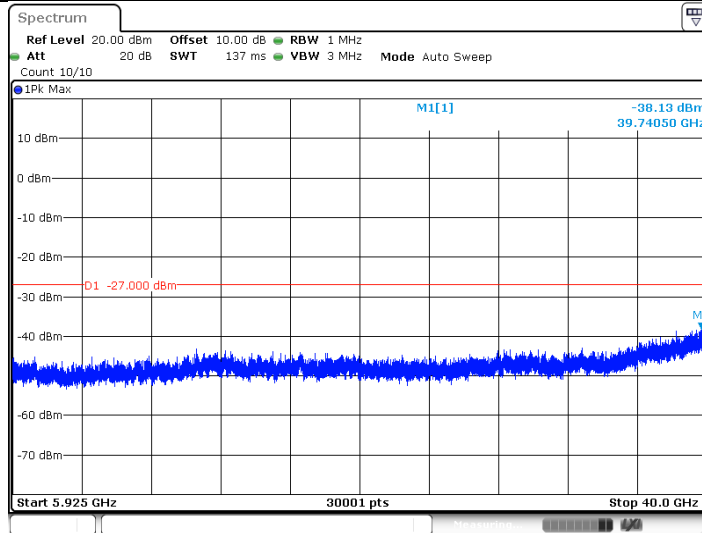


Date: 21 JUL 2019 15:28:32

11N40MIMO_5755_30-5650

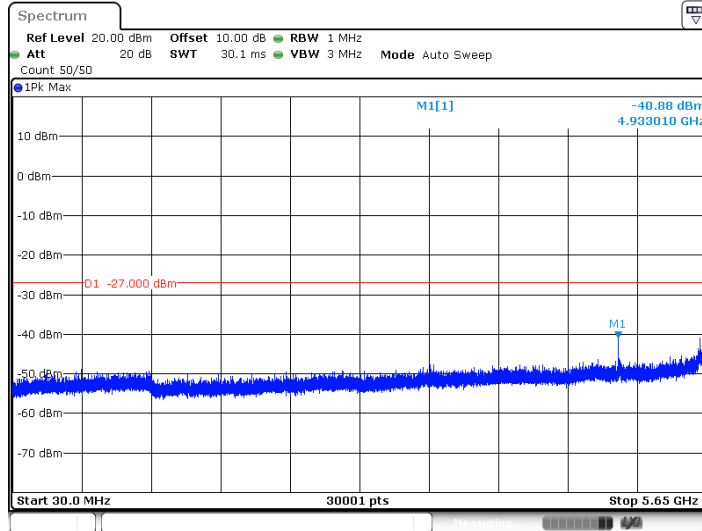


Date: 21 JUL 2019 15:30:05

11N40MIMO_5755_5925-40000

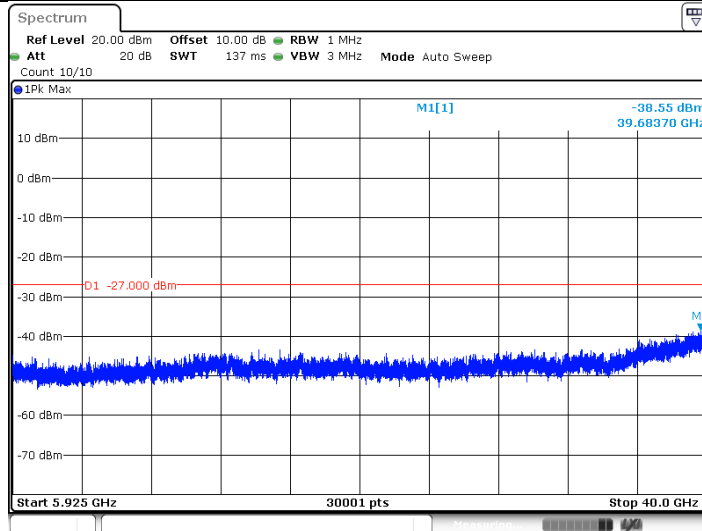


Date: 21 JUL 2019 15:30:13

11N40MIMO_5795_30-5650

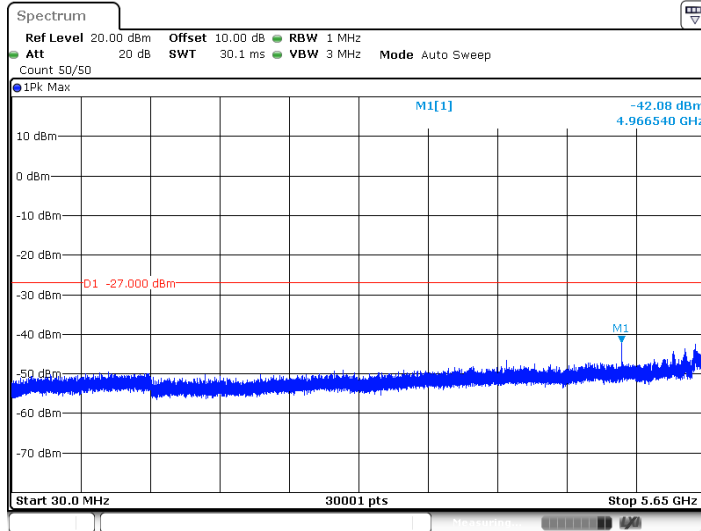


Date: 21 JUL 2019 15:31:43


11N40MIMO_5795_5925~40000

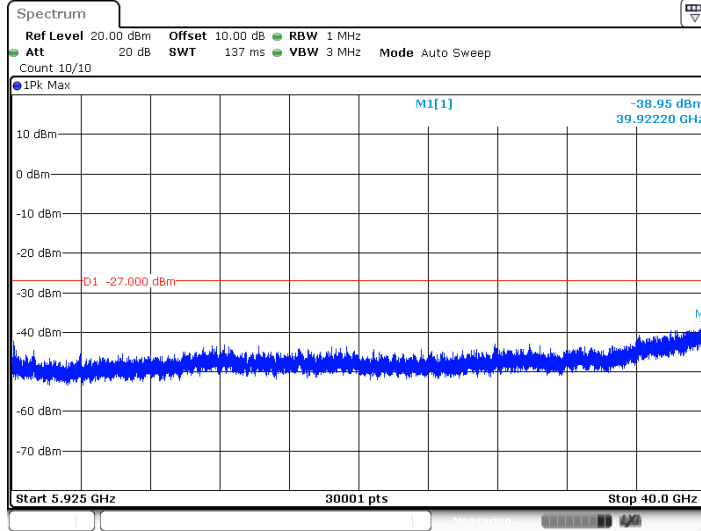

Date: 21 JUL 2019 15:31:52


IEEE 802.11ac_MIMO modulation Test Result

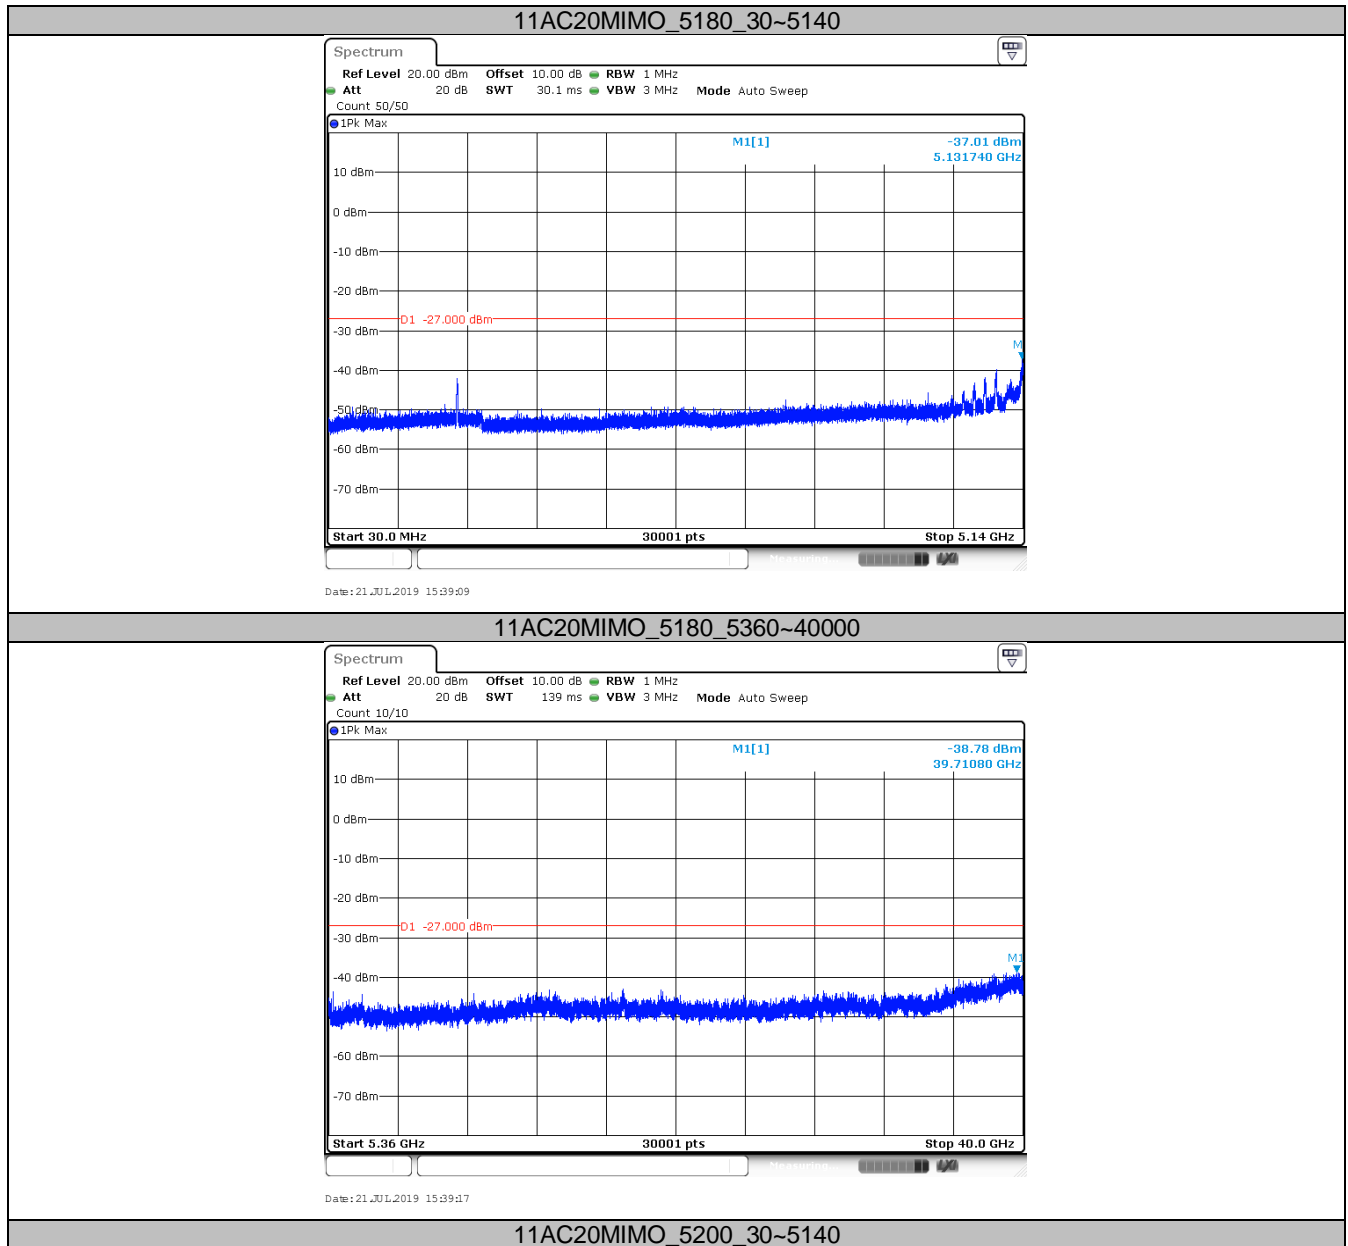

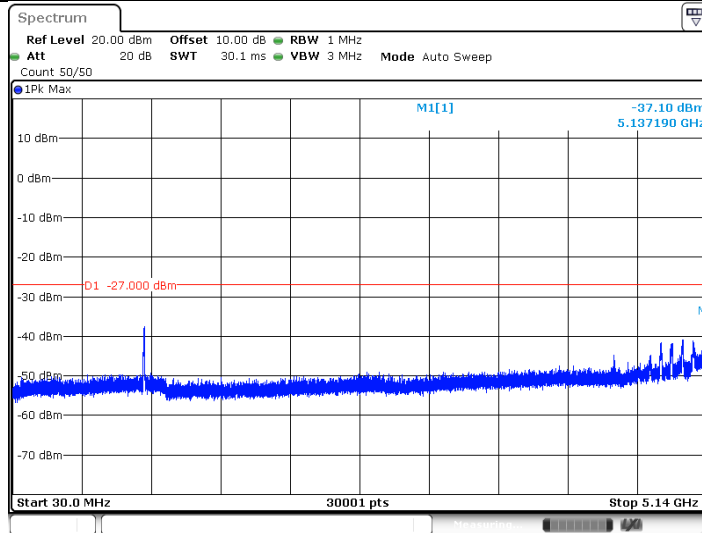


Date: 21 JUL 2019 15:40:34

11AC20MIMO_5200_5360-40000

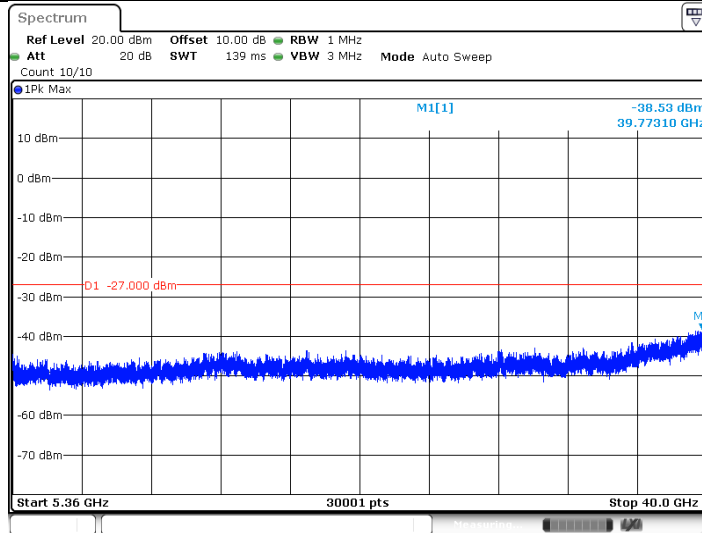


Date: 21 JUL 2019 15:40:43

11AC20MIMO_5240_30-5140

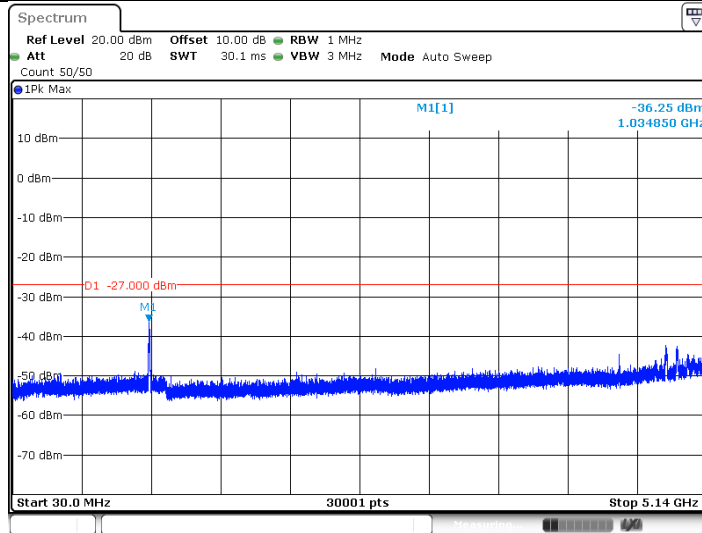


Date: 21 JUL 2019 15:42:16

11AC20MIMO_5240_5360-40000

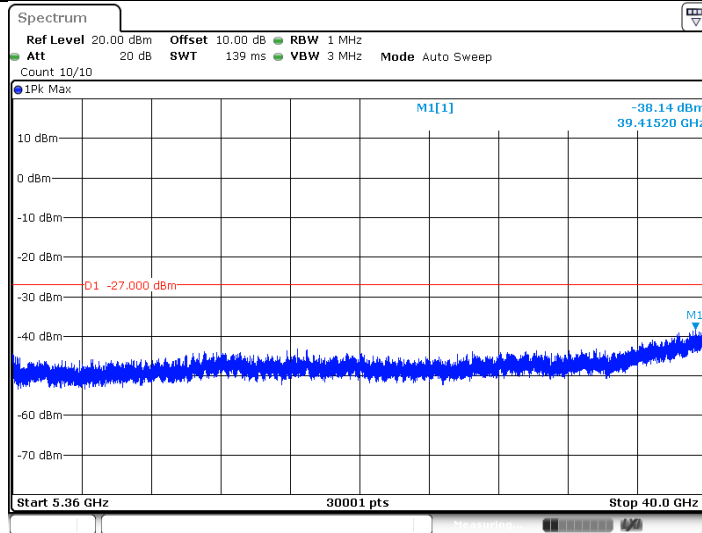


Date: 21 JUL 2019 15:42:25

11AC20MIMO_5260_30~5140

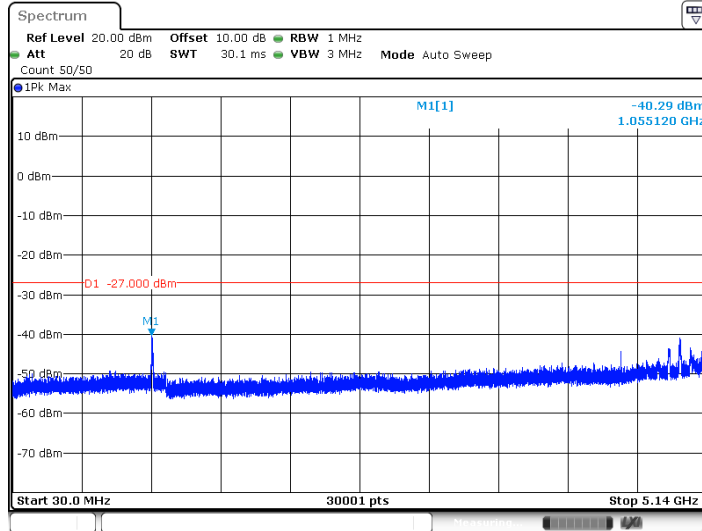


Date: 21 JUL 2019 15:43:51

11AC20MIMO_5260_5360~40000

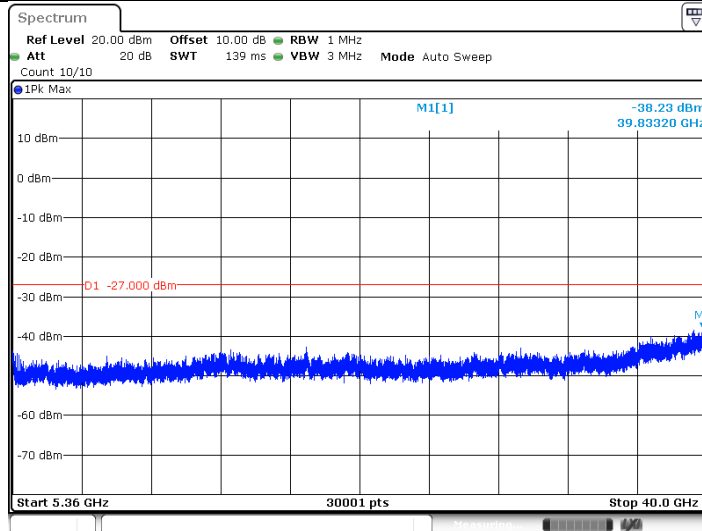


Date: 21 JUL 2019 15:43:59

11AC20MIMO_5280_30~5140

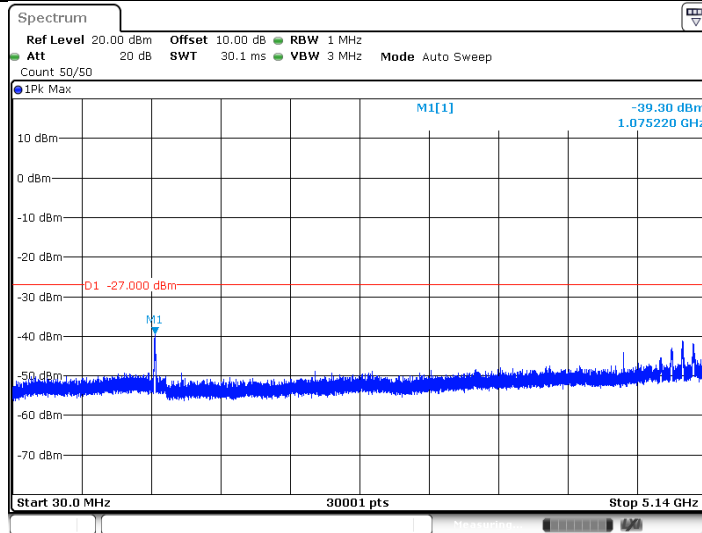


Date: 21 JUL 2019 15:45:11

11AC20MIMO_5280_5360-40000

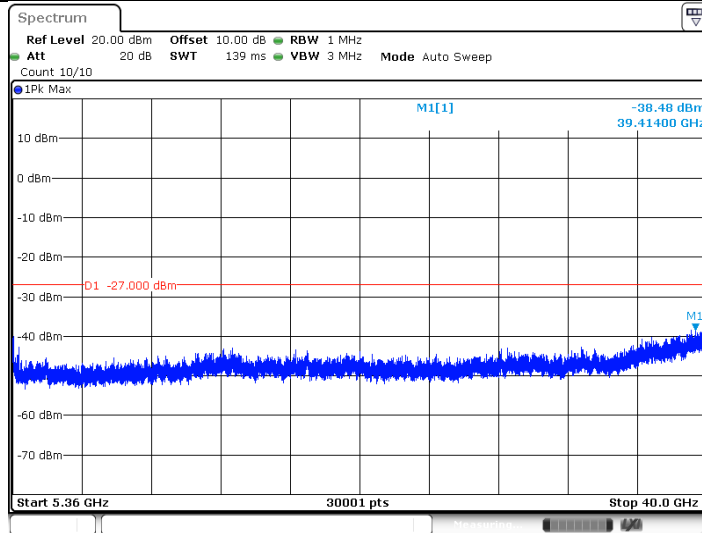


Date: 21 JUL 2019 15:45:20

11AC20MIMO_5320_30-5140

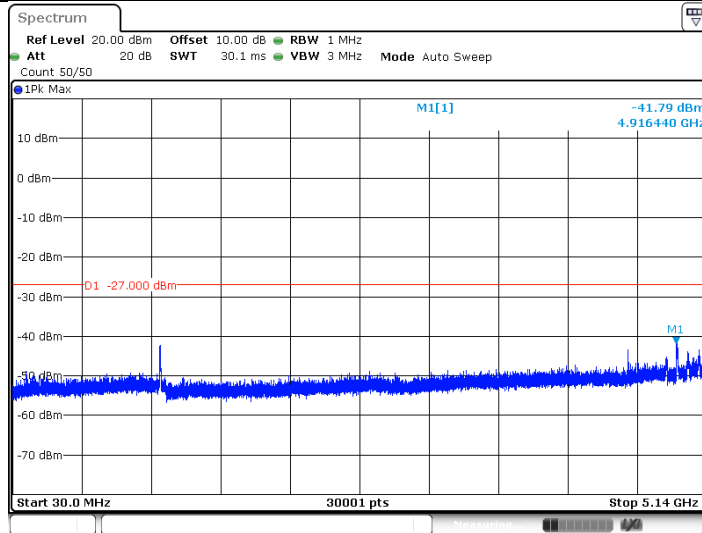


Date: 21 JUL 2019 15:47:01

11AC20MIMO_5320_5360-40000

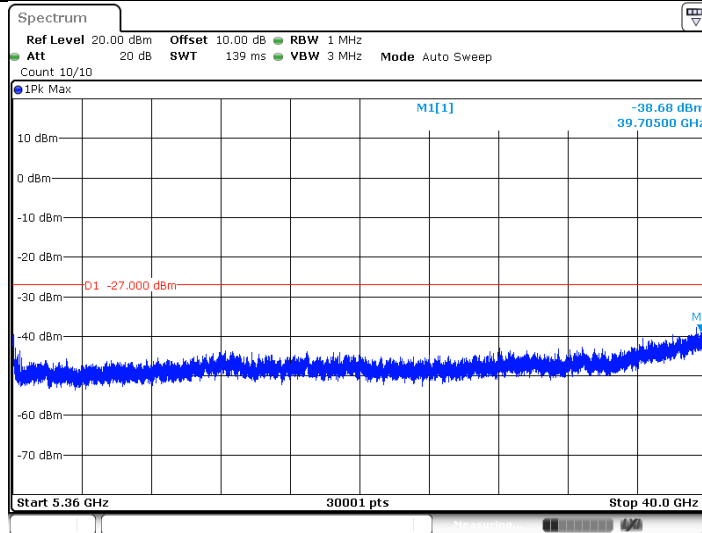


Date: 21 JUL 2019 15:47:10

11AC20MIMO_5500_30~5460

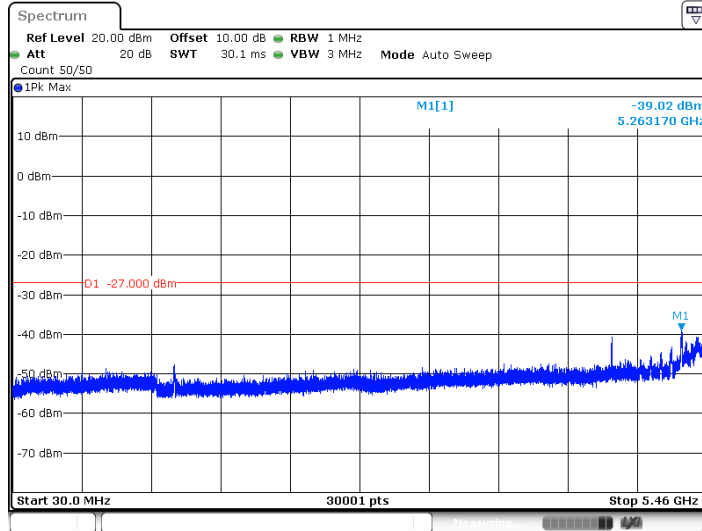


Date: 21 JUL 2019 15:48:38

11AC20MIMO_5500_5735~40000

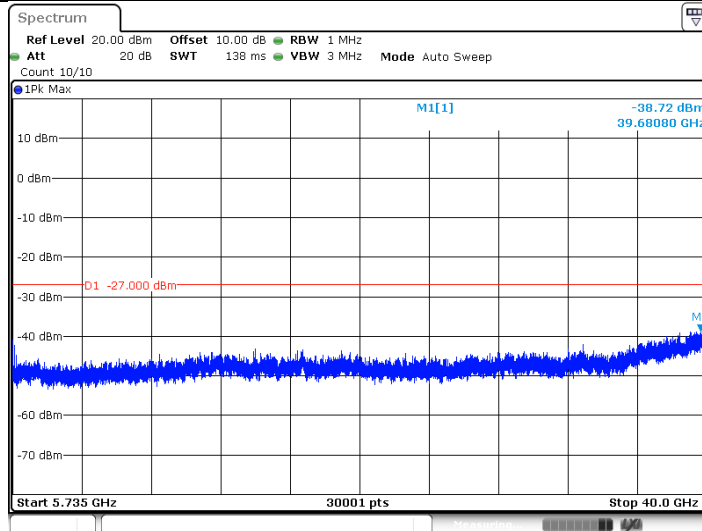


Date: 21 JUL 2019 15:48:47

11AC20MIMO_5580_30~5460

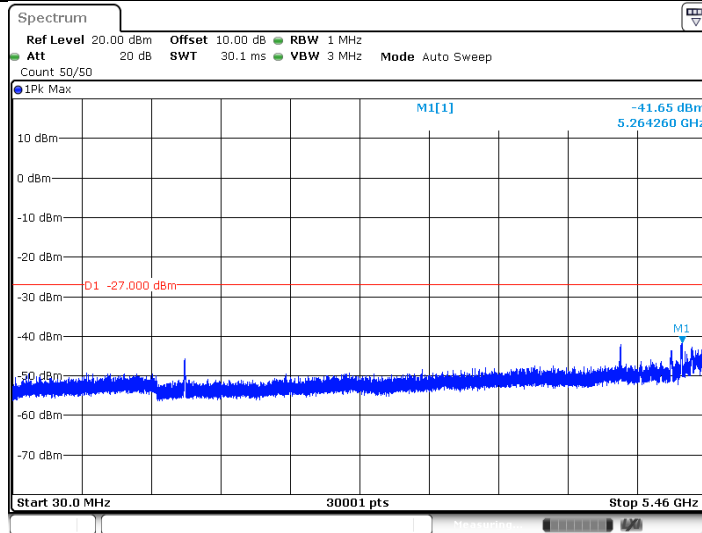


Date: 21 JUL 2019 15:50:01

11AC20MIMO_5580_5735-40000

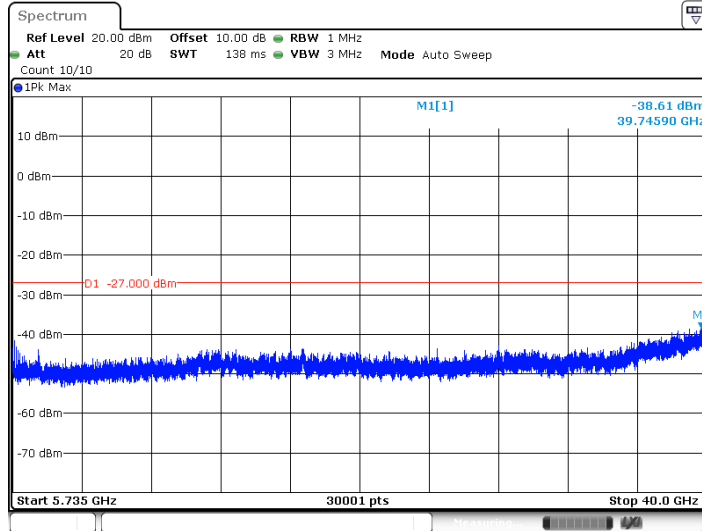


Date: 21 JUL 2019 15:50:10

11AC20MIMO_5700_30-5460

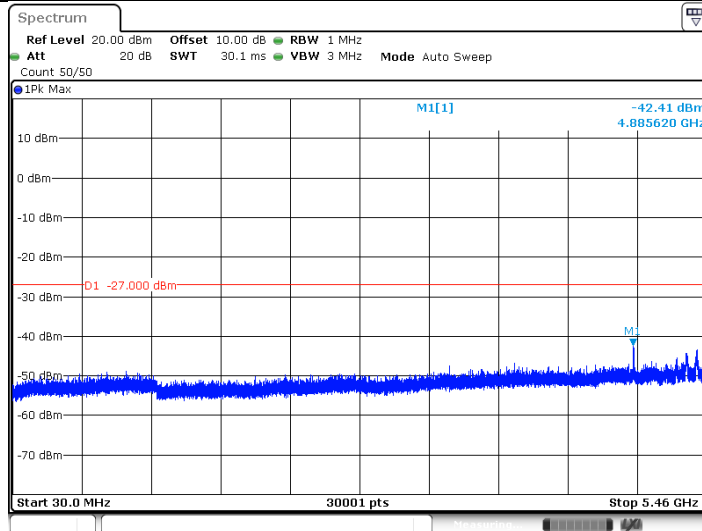


Date: 21 JUL 2019 15:51:51

11AC20MIMO_5700_5735-40000

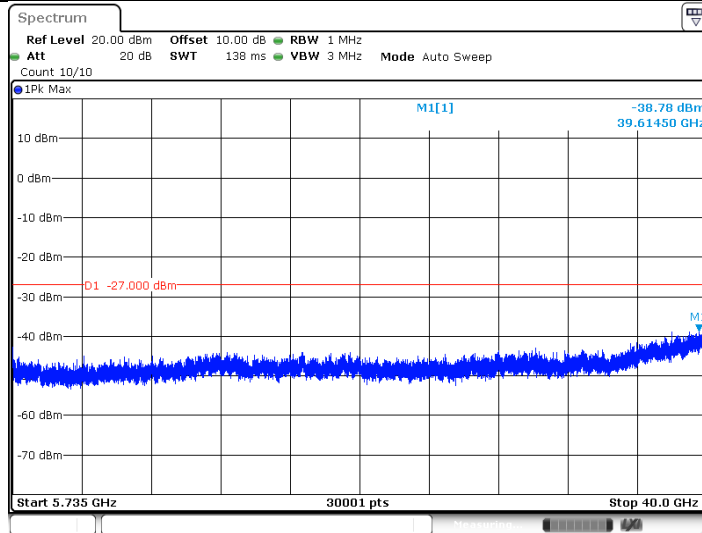


Date: 21 JUL 2019 15:51:59

11AC20MIMO_5720_30~5460

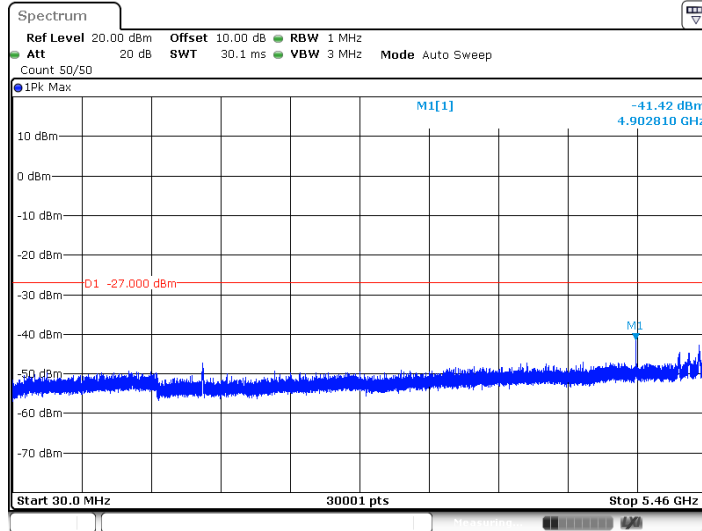


Date: 21 JUL 2019 15:53:50

11AC20MIMO_5720_5925~40000

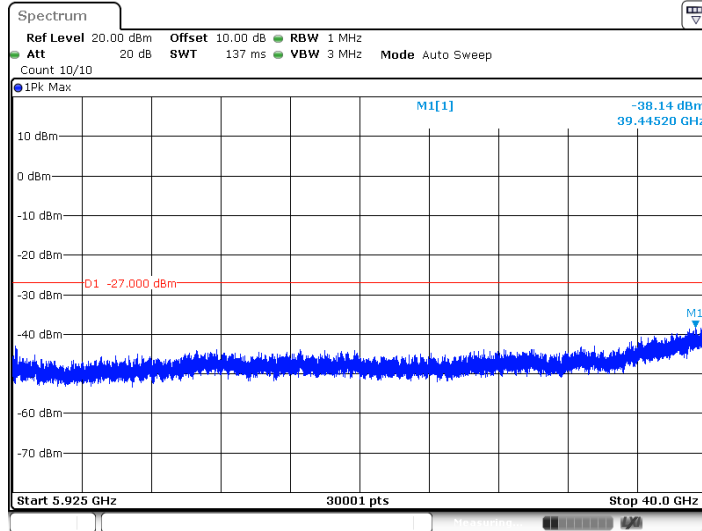


Date: 21 JUL 2019 15:53:59

11AC20MIMO_5745_30~5650

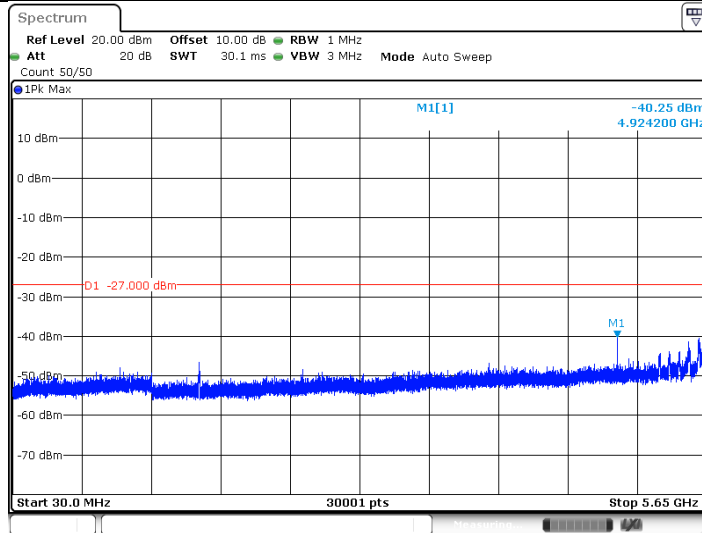


Date: 21 JUL 2019 15:55:28

11AC20MIMO_5745_5925-40000

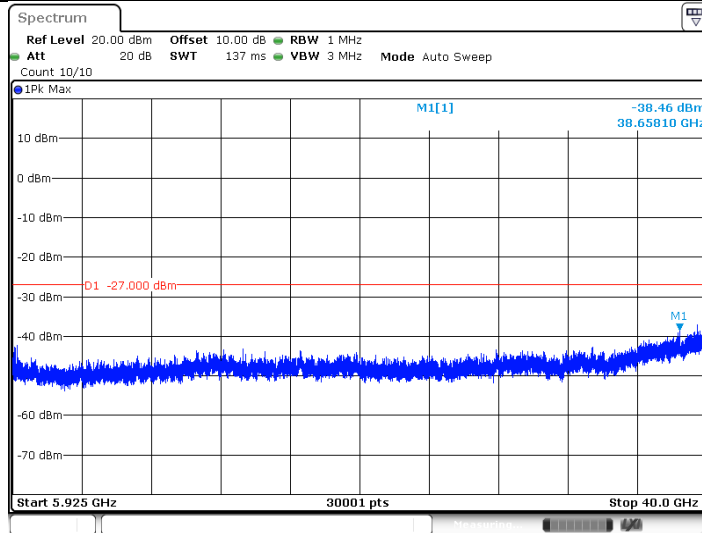


Date: 21 JUL 2019 15:55:36

11AC20MIMO_5785_30-5650

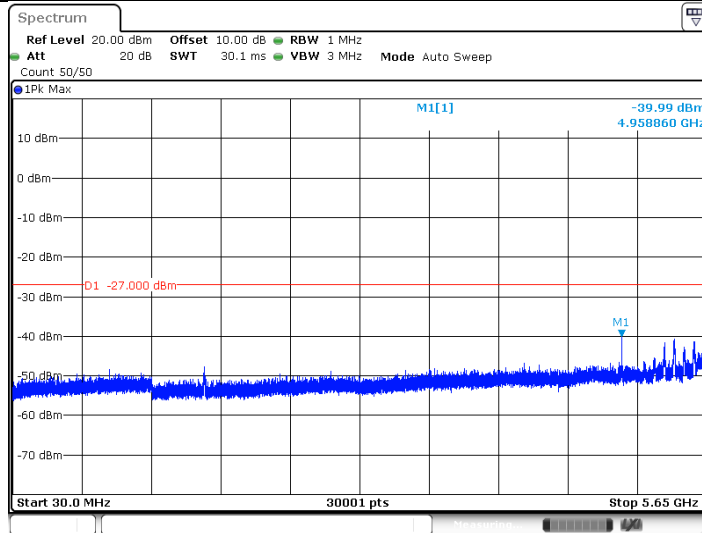


Date: 21 JUL 2019 15:56:47

11AC20MIMO_5785_5925-40000

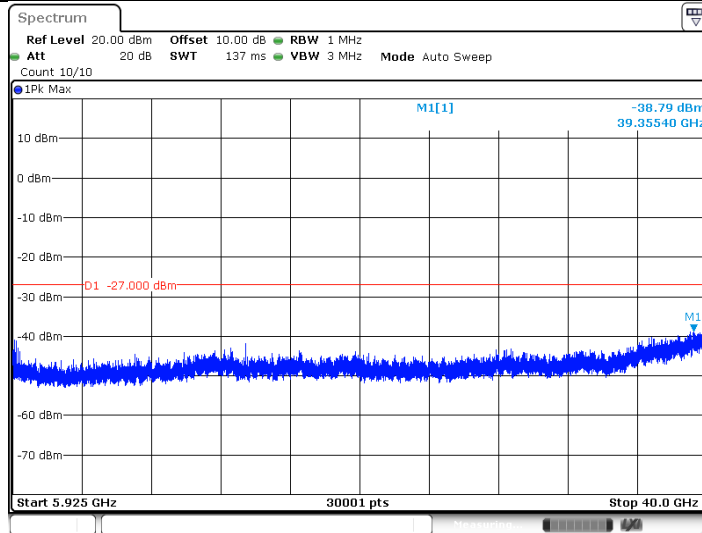


Date: 21 JUL 2019 15:56:56

11AC20MIMO_5825_30~5650

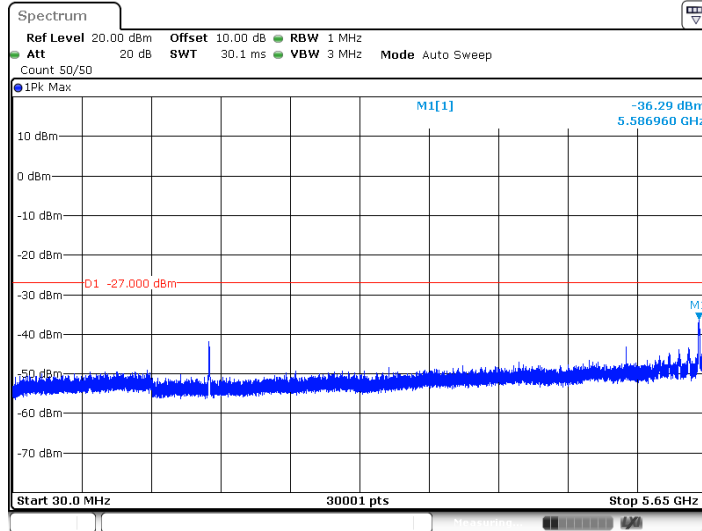


Date: 21 JUL 2019 15:58:34

11AC20MIMO_5825_5925~40000

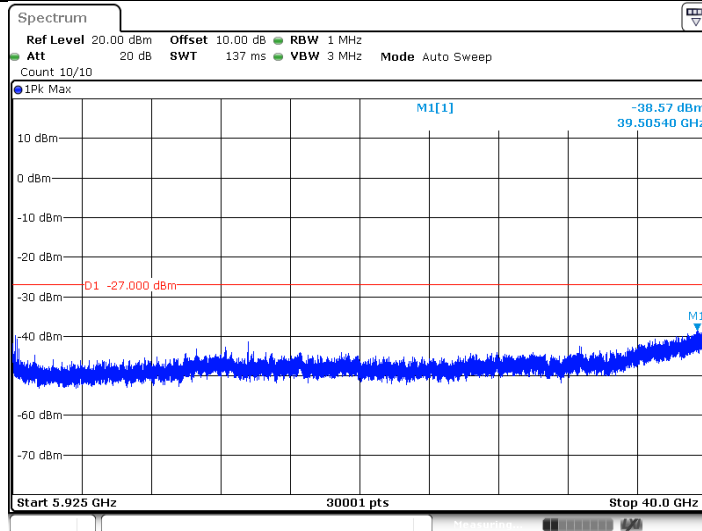


Date: 21 JUL 2019 15:58:43

11AC40MIMO_5190_30~5140

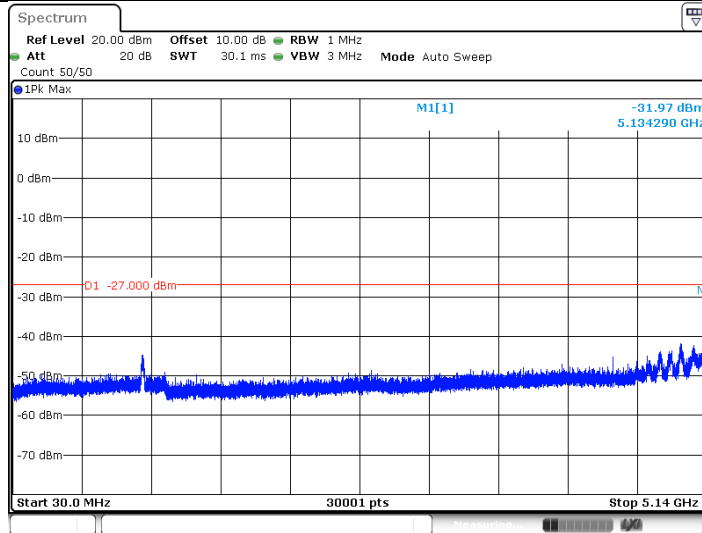


Date: 21 JUL 2019 16:00:26

11AC40MIMO_5190_5360-40000

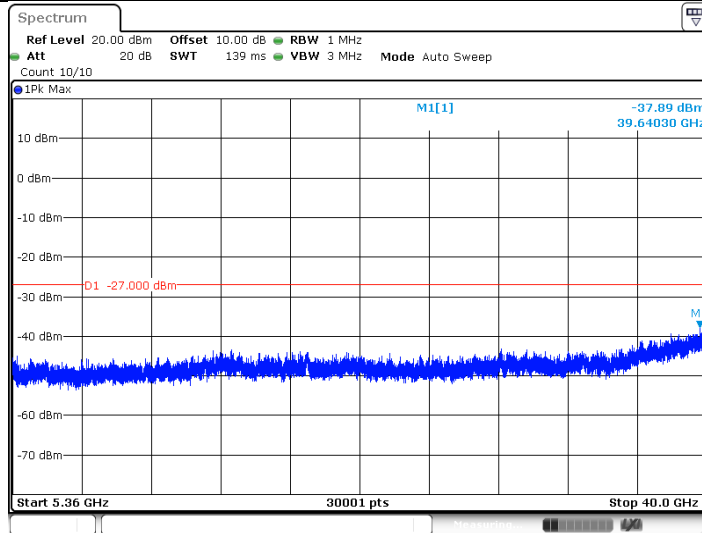


Date: 21 JUL 2019 16:00:34

11AC40MIMO_5230_30-5140

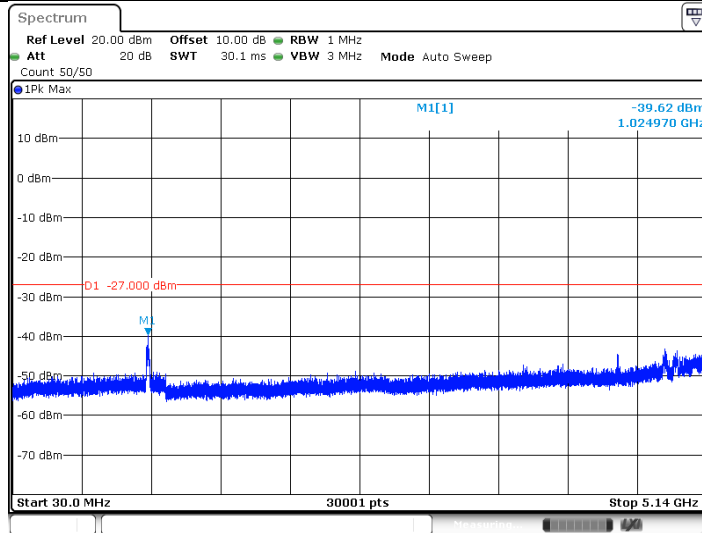


Date: 21 JUL 2019 16:01:57

11AC40MIMO_5230_5360-40000

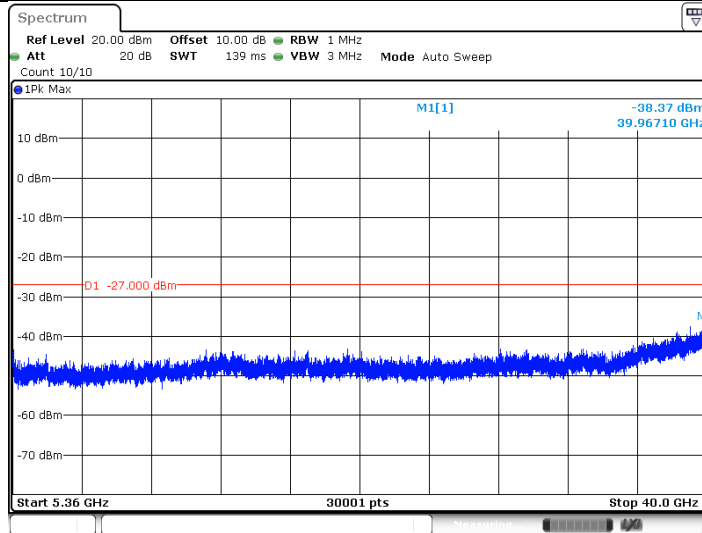


Date: 21 JUL 2019 16:02:05

11AC40MIMO_5270_30~5140

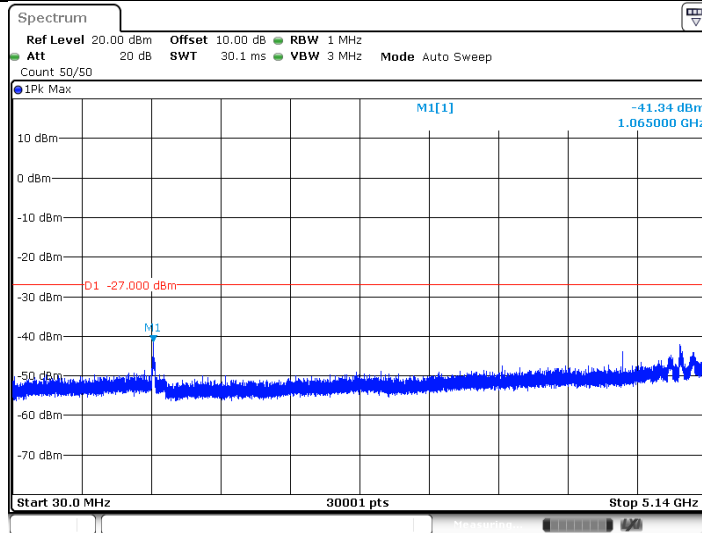


Date: 21 JUL 2019 16:03:30

11AC40MIMO_5270_5360~40000

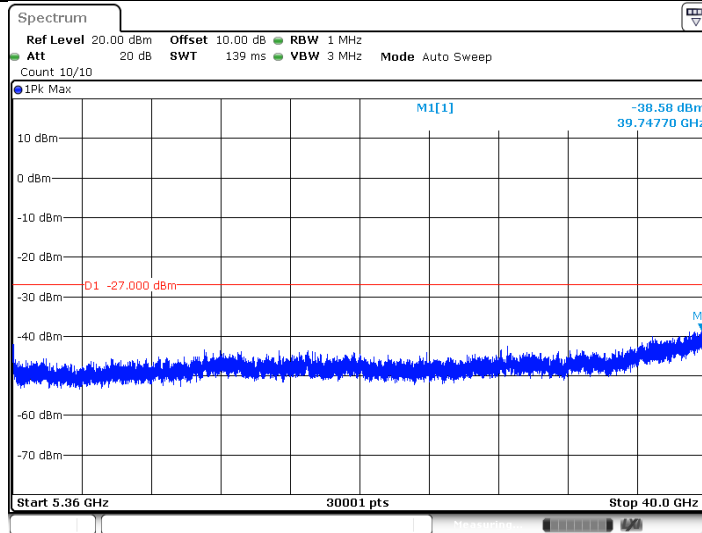


Date: 21 JUL 2019 16:03:39

11AC40MIMO_5310_30~5140

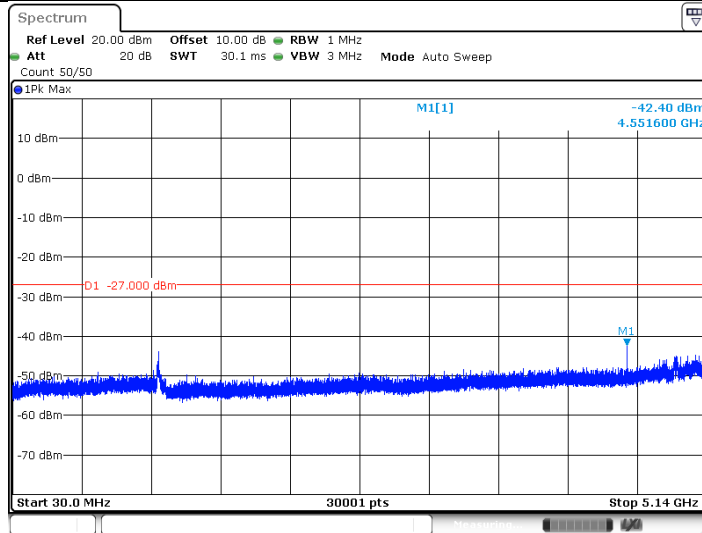


Date: 21 JUL 2019 16:05:22

11AC40MIMO_5310_5360-40000

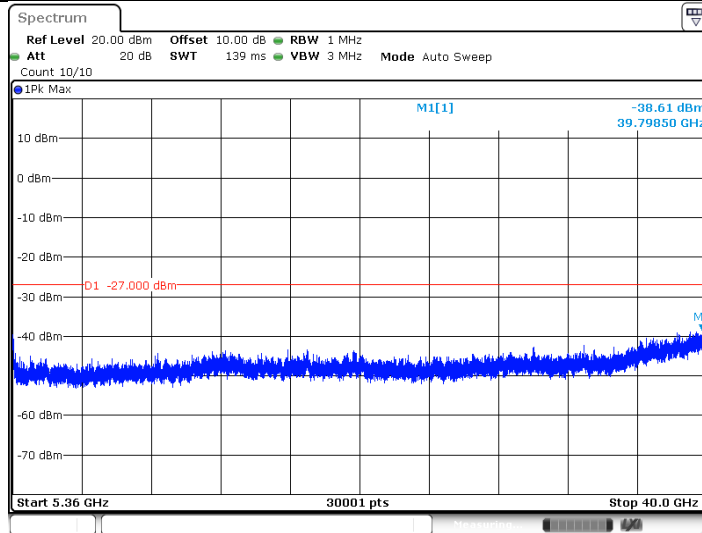


Date: 21 JUL 2019 16:05:30

11AC40MIMO_5510_30-5460

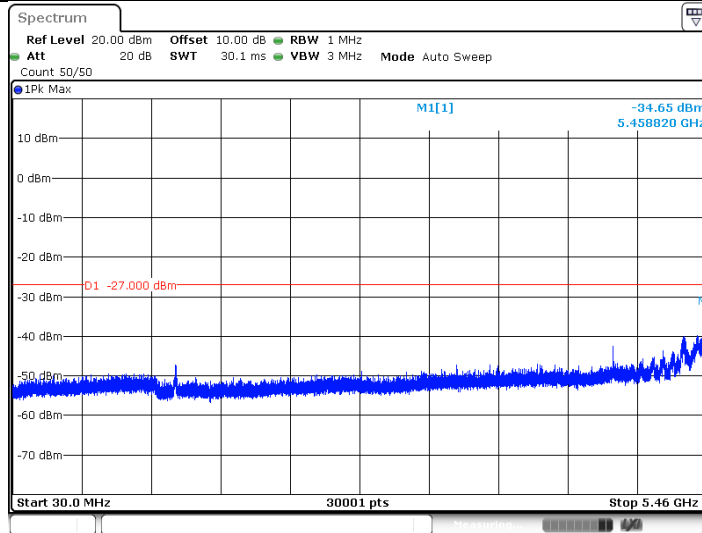


Date: 21 JUL 2019 16:07:12

11AC40MIMO_5510_5735-40000

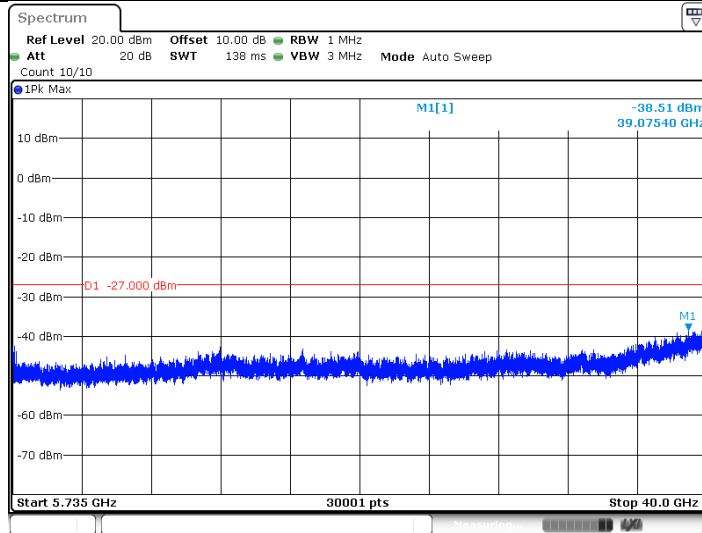


Date: 21 JUL 2019 16:07:21

11AC40MIMO_5550_30~5460

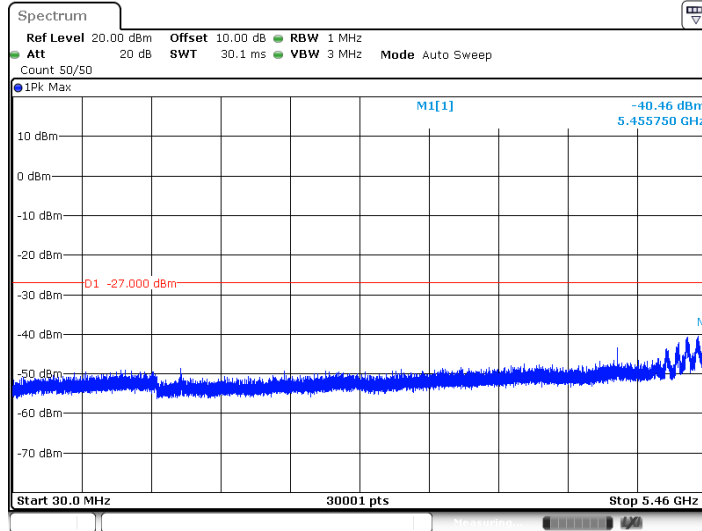


Date: 21 JUL 2019 16:11:30

11AC40MIMO_5550_5735~40000

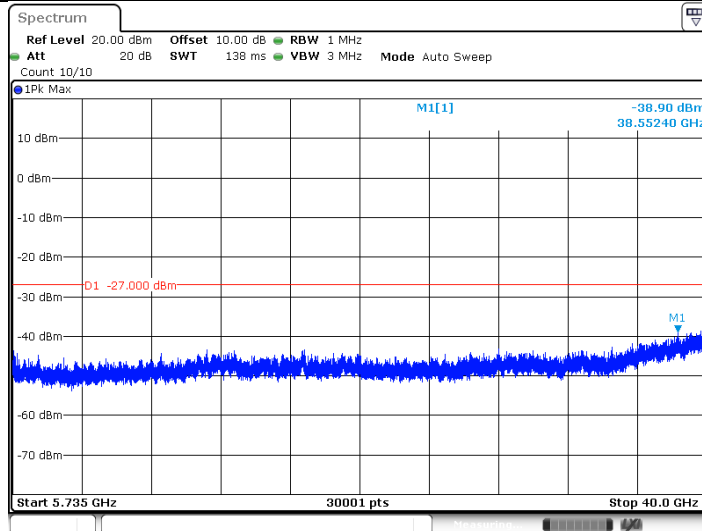


Date: 21 JUL 2019 16:11:38

11AC40MIMO_5670_30~5460

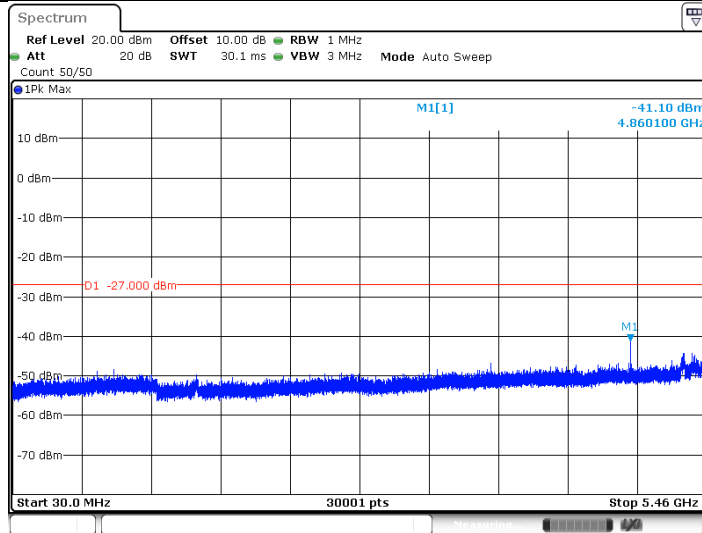


Date: 21 JUL 2019 16:13:59

11AC40MIMO_5670_5735-40000

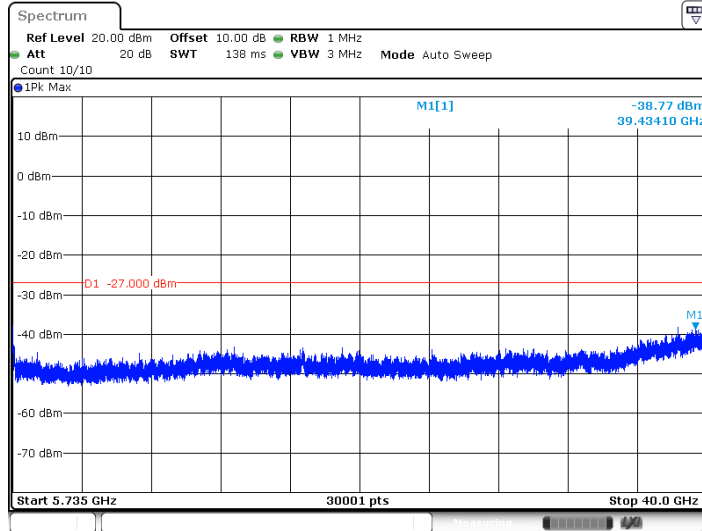


Date: 21 JUL 2019 16:14:07

11AC40MIMO_5710_30-5460

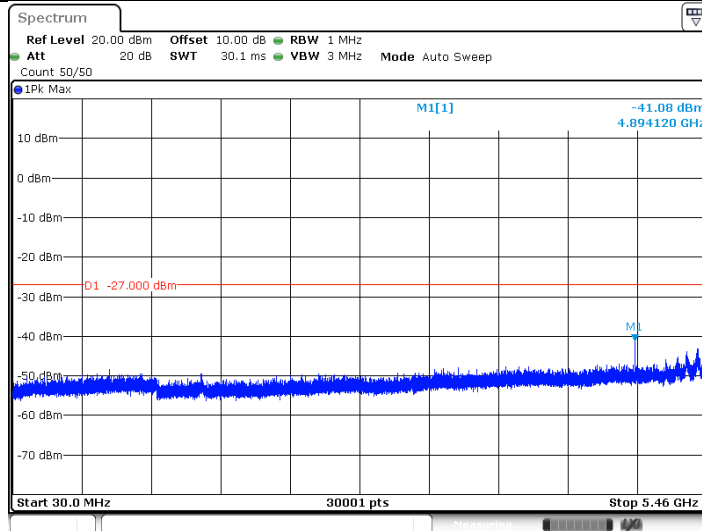


Date: 21 JUL 2019 16:15:59

11AC40MIMO_5710_5925-40000

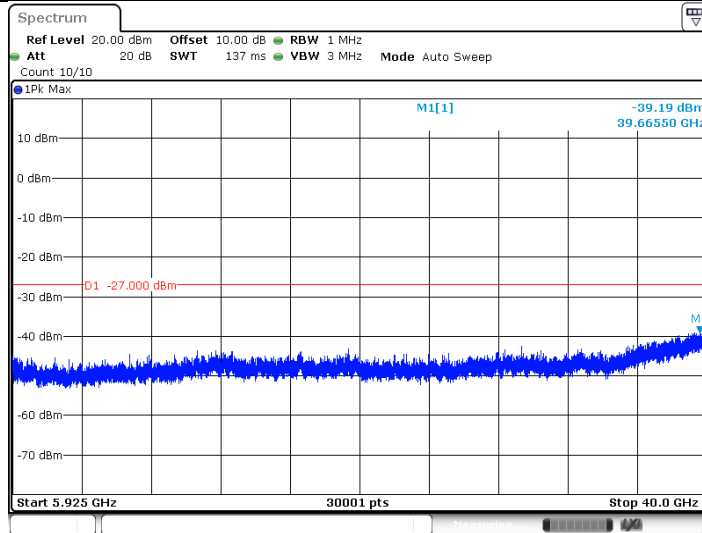


Date: 21 JUL 2019 16:16:08

11AC40MIMO_5755_30~5650

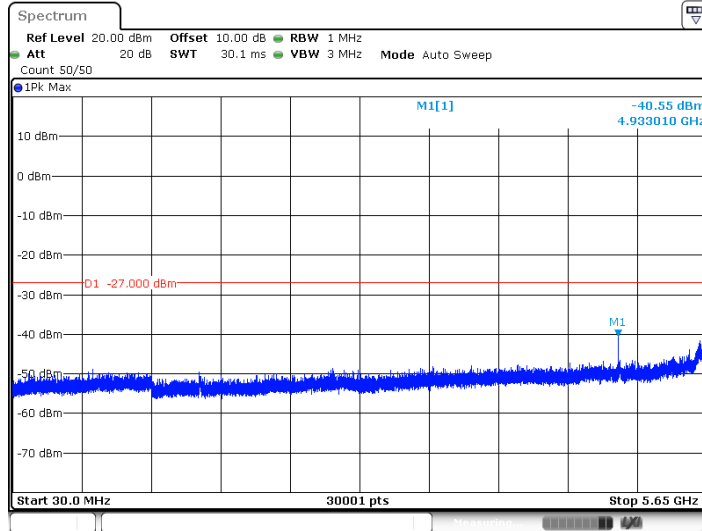


Date: 21 JUL 2019 16:17:49

11AC40MIMO_5755_5925~40000

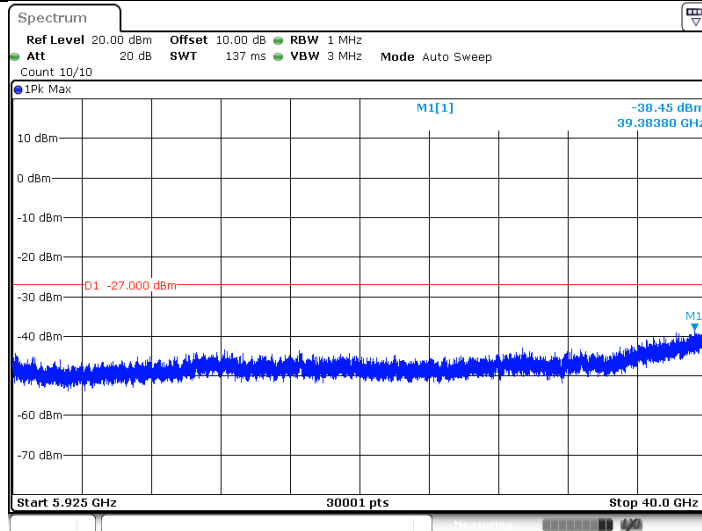


Date: 21 JUL 2019 16:17:57

11AC40MIMO_5795_30~5650

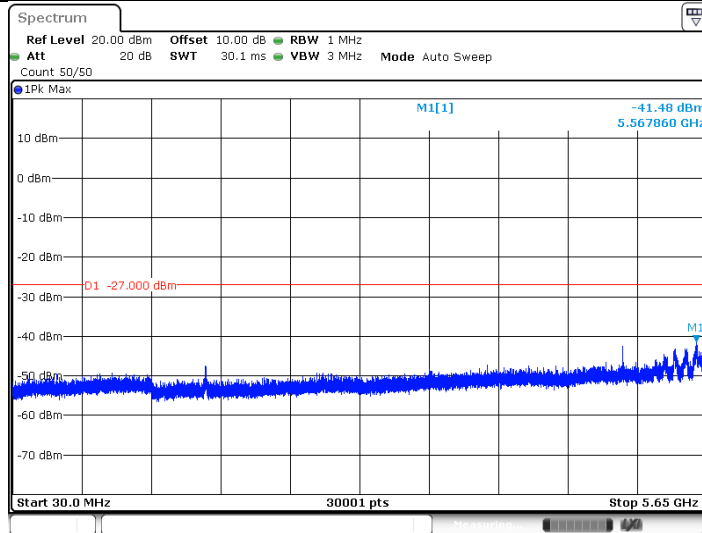


Date: 21 JUL 2019 16:19:27

11AC40MIMO_5795_5925~40000

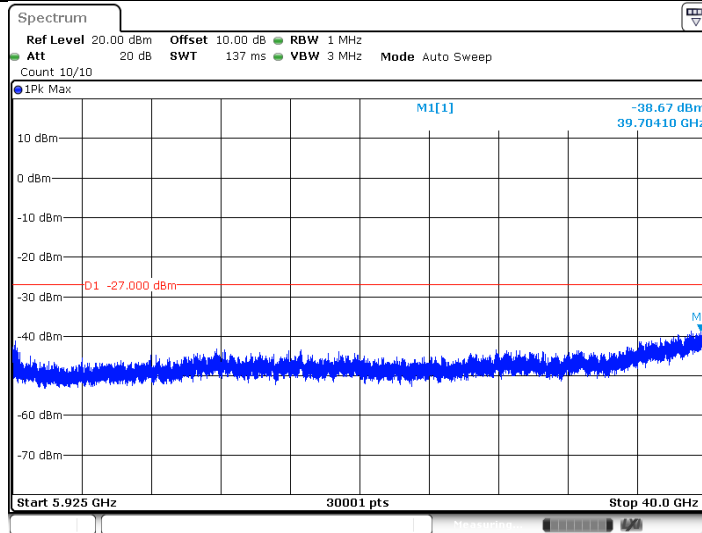


Date: 21 JUL 2019 16:19:36

11AC80MIMO_5210_30~5140

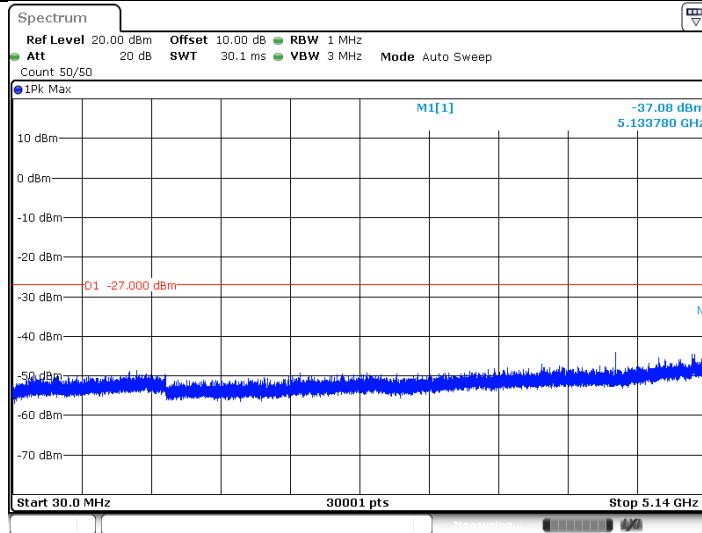


Date: 21 JUL 2019 16:21:21

11AC80MIMO_5210_5360~40000

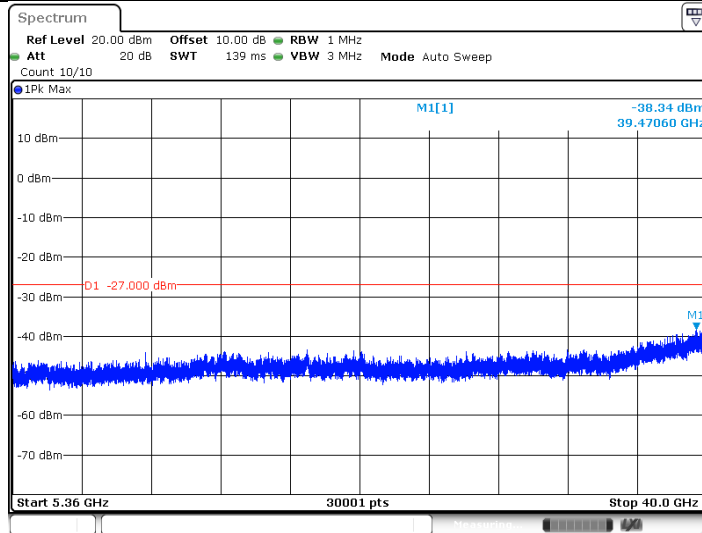


Date: 21 JUL 2019 16:21:29

11AC80MIMO_5290_30~5140

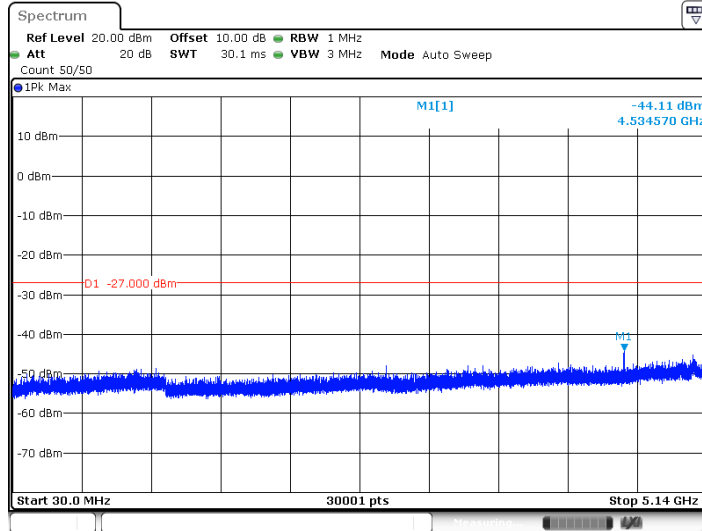


Date: 21 JUL 2019 16:23:18

11AC80MIMO_5290_5360~40000

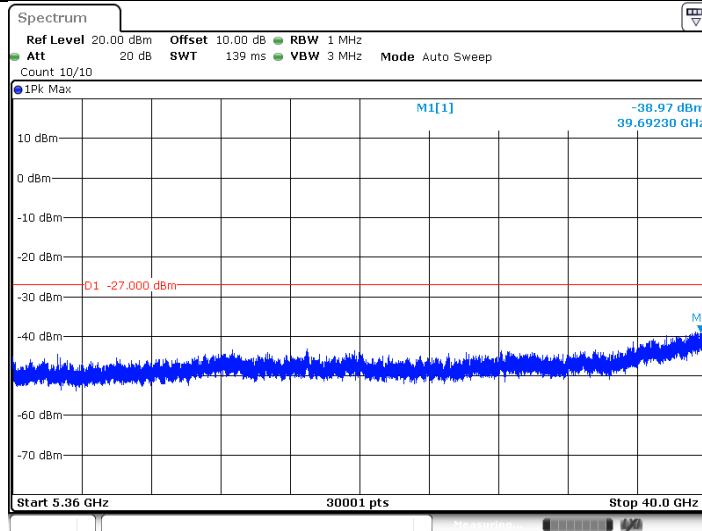


Date: 21 JUL 2019 16:23:27

11AC80MIMO_5530_30~5460

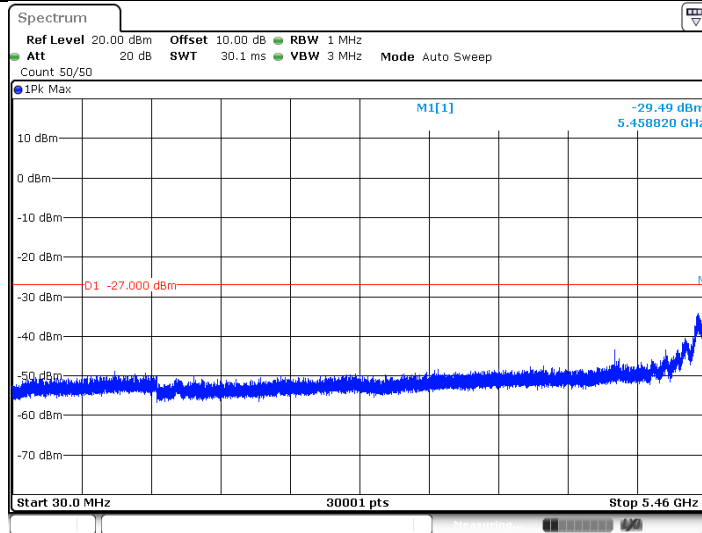


Date: 21 JUL 2019 16:34:29

11AC80MIMO_5530_5735~40000

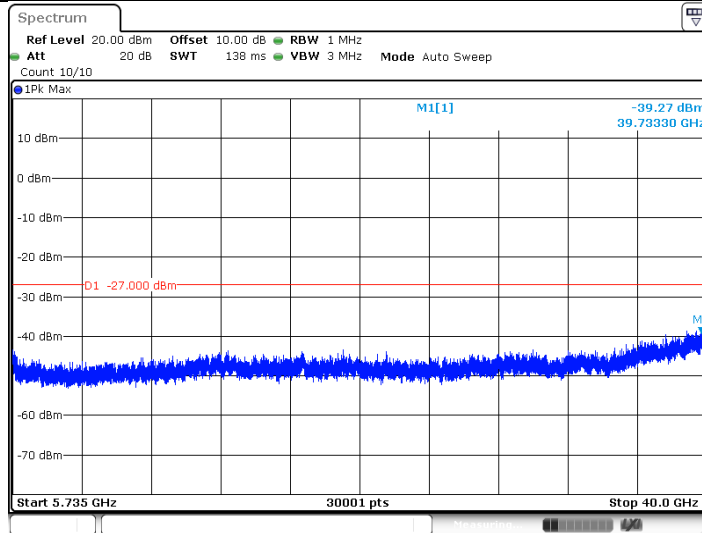


Date: 21 JUL 2019 16:34:38

11AC80MIMO_5610_30~5460

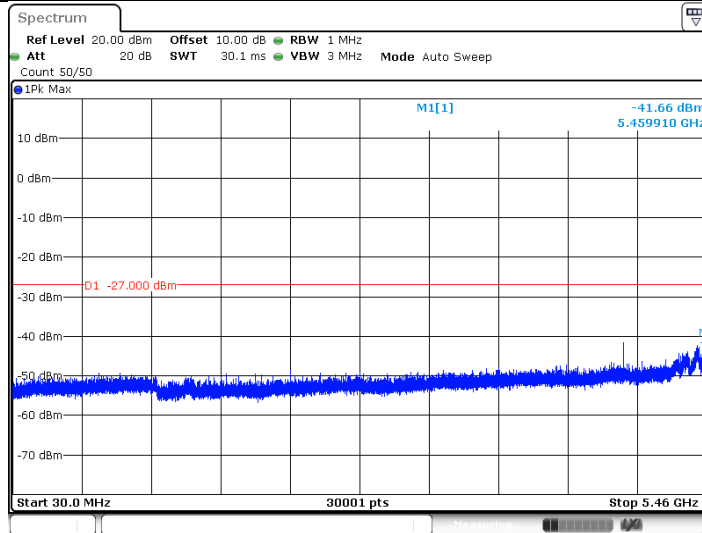


Date: 21 JUL 2019 16:29:25

11AC80MIMO_5610_5735~40000

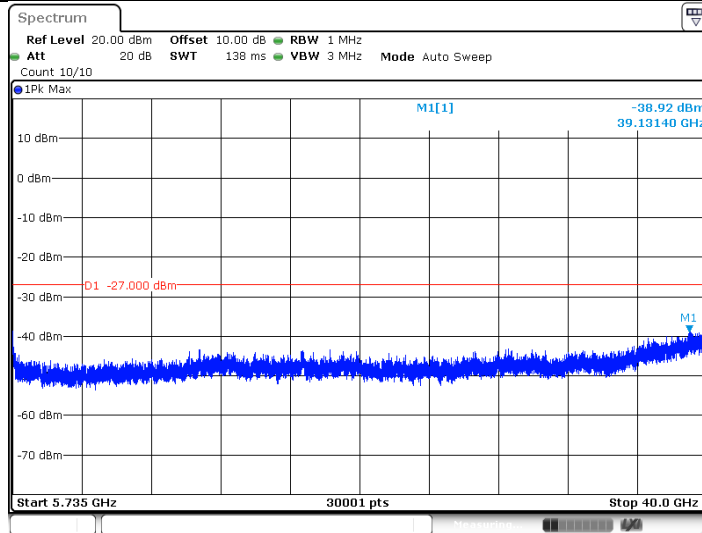


Date: 21 JUL 2019 16:29:34

11AC80MIMO_5690_30~5460

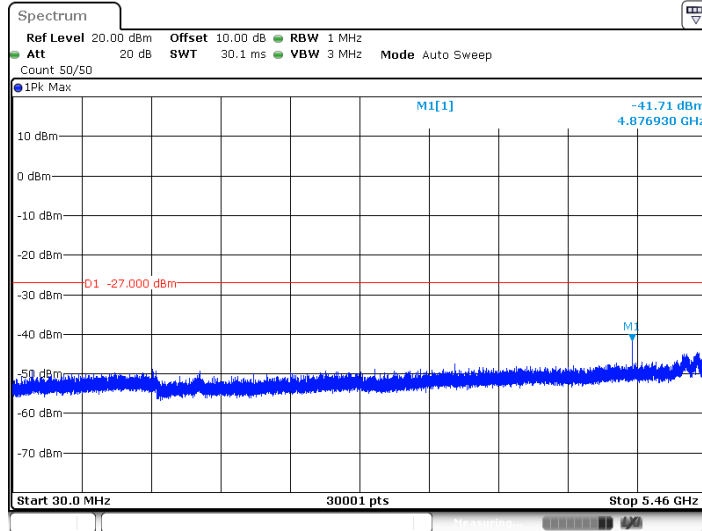


Date: 21 JUL 2019 16:31:33

11AC80MIMO_5690_5925~40000

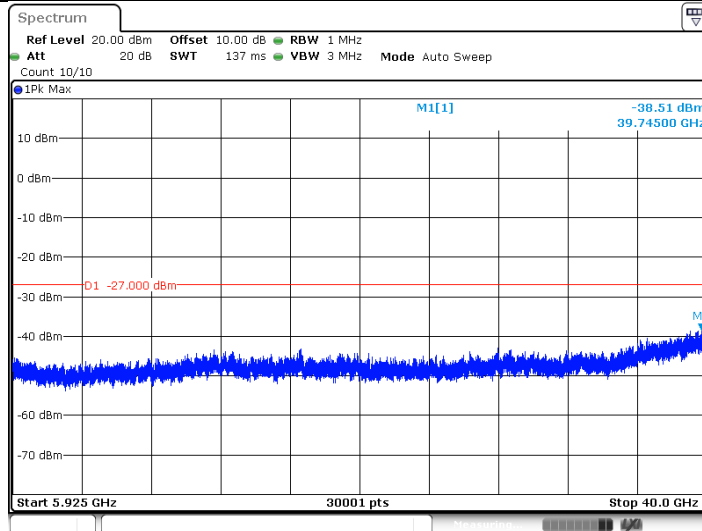


Date: 21 JUL 2019 16:31:41

11AC80MIMO_5775_30~5650

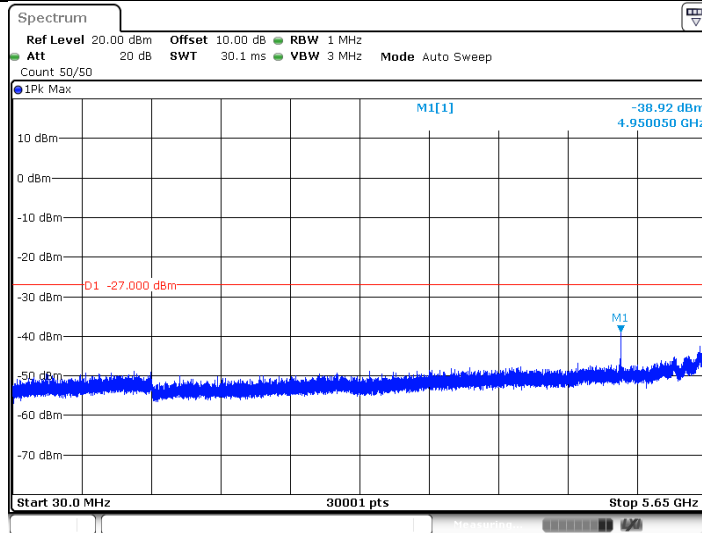

Date: 21 JUL 2019 16:33:26

11AC80MIMO_5775_5925~40000

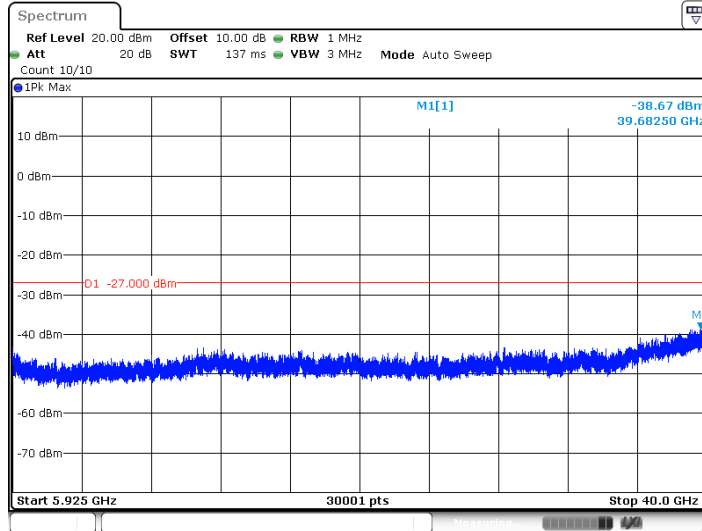



Date: 21 JUL 2019 16:33:35

Transmitting spurious emission test result as below (Band edge measurements):

NOTE: According to the test results of output power, Ant0 is considered to have the highest power, so band edge testing for Multiple mode are performed with this antenna and add 3dBi factor, this factor has been compensated in the test.


IEEE 802.11a modulation Test Result

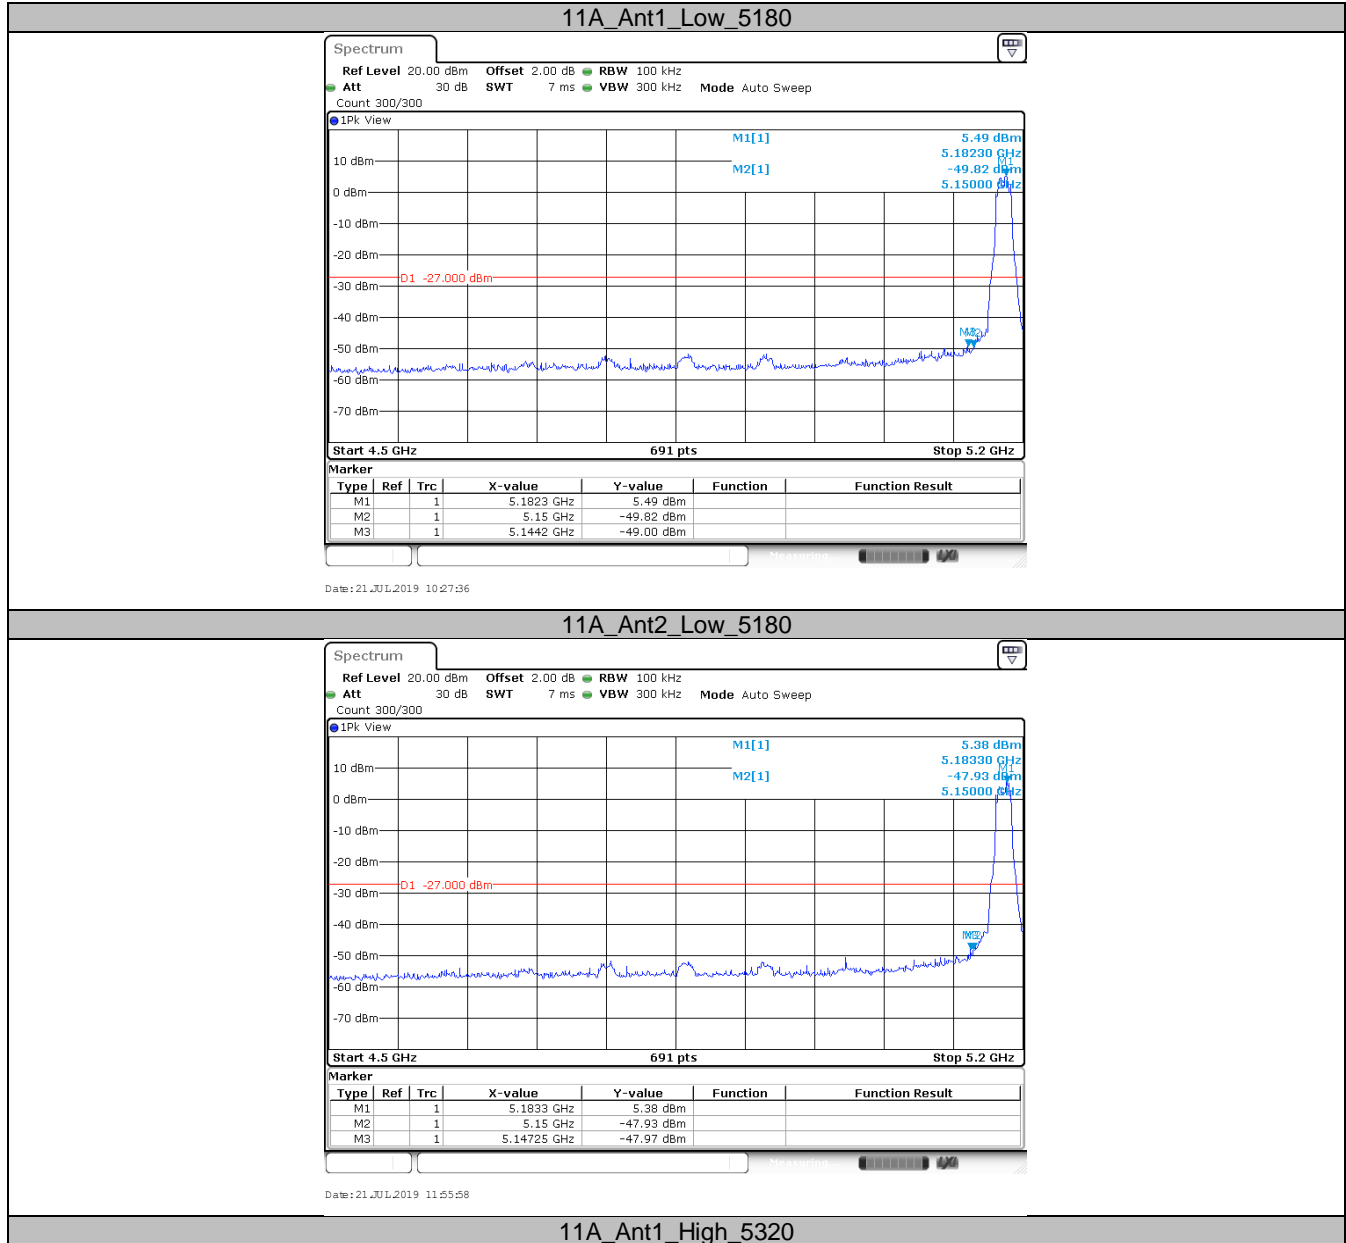

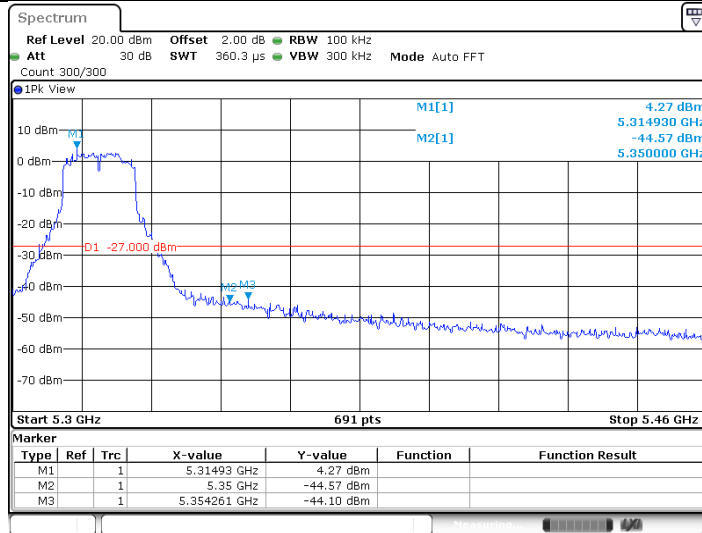


Date: 21 JUL 2019 10:35:58

11A_Ant2_High_5320

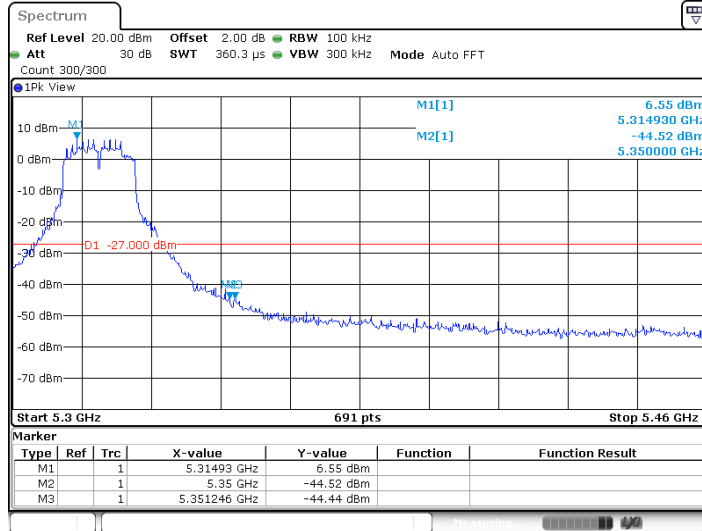


Date: 21 JUL 2019 12:05:21

11A_Ant1_Low_5500

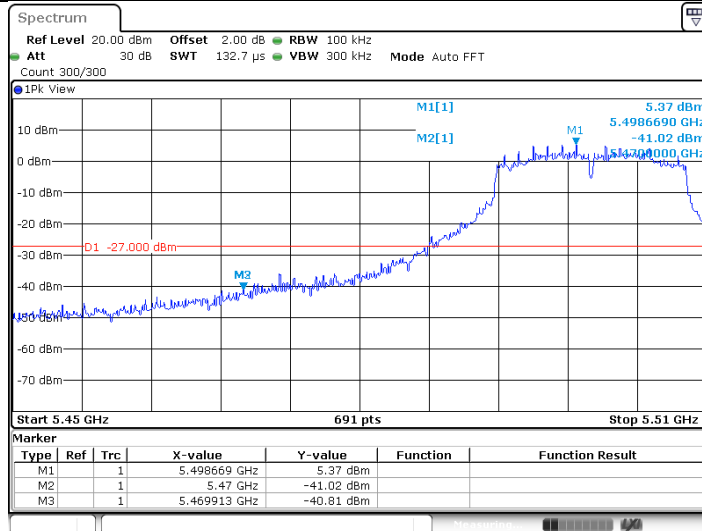


Date: 21 JUL 2019 10:45:37

11A_Ant2_Low_5500

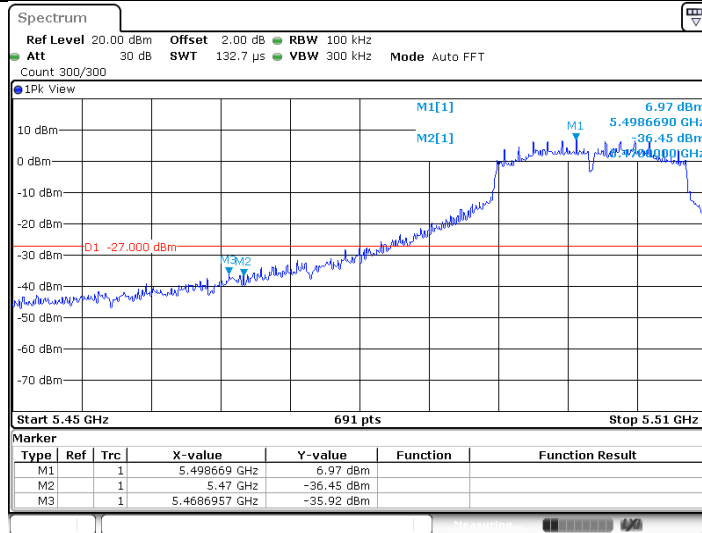


Date: 21 JUL 2019 12:07:55

11A_Ant1_High_5700

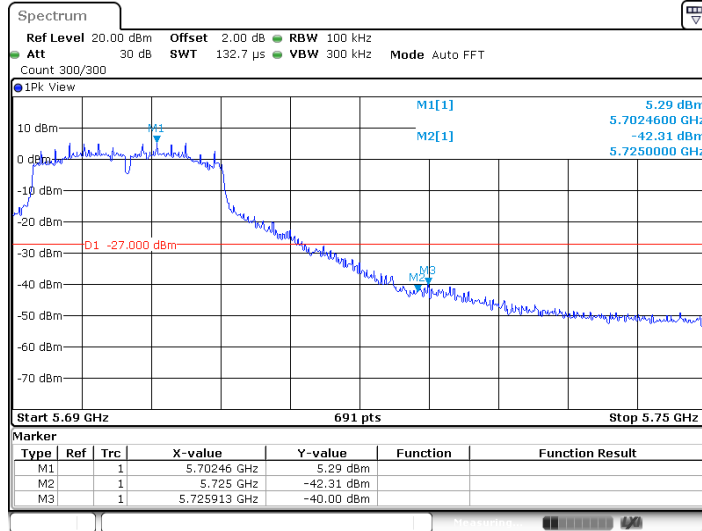


Date: 21 JUL 2019 10:49:48

11A_Ant2_High_5700

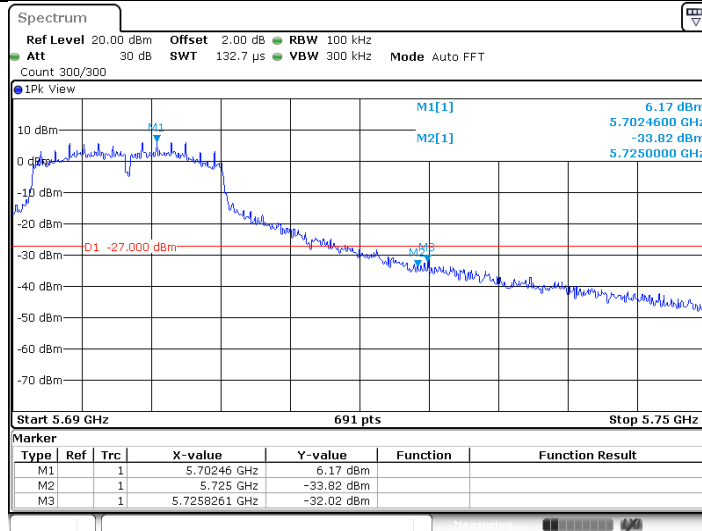


Date: 21 JUL 2019 12:11:13

11A_Ant1_Low_5720

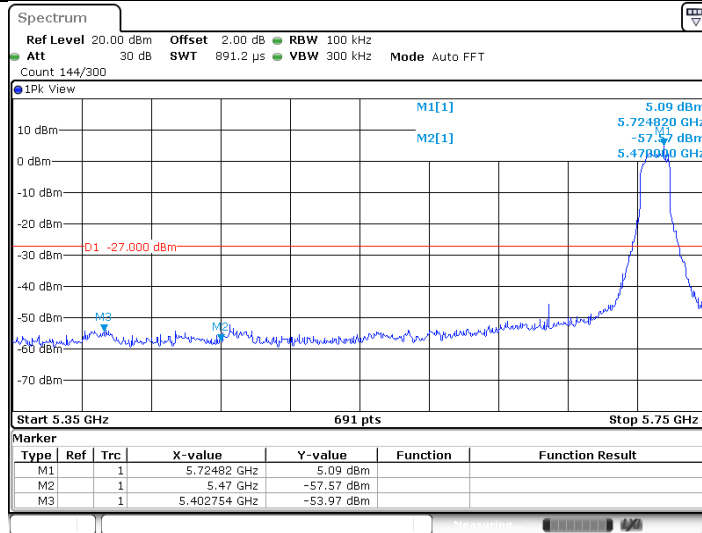


Date: 21 JUL 2019 10:51:42

11A_Ant2_Low_5720

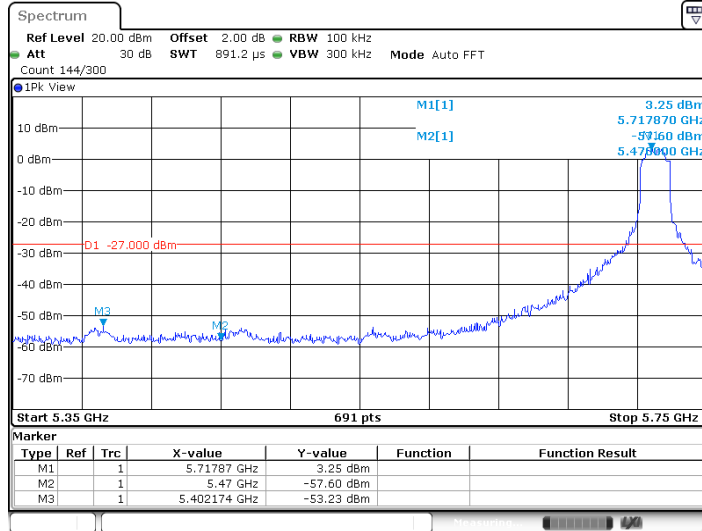


Date: 21 JUL 2019 12:13:31

11A_Ant1_High_5720

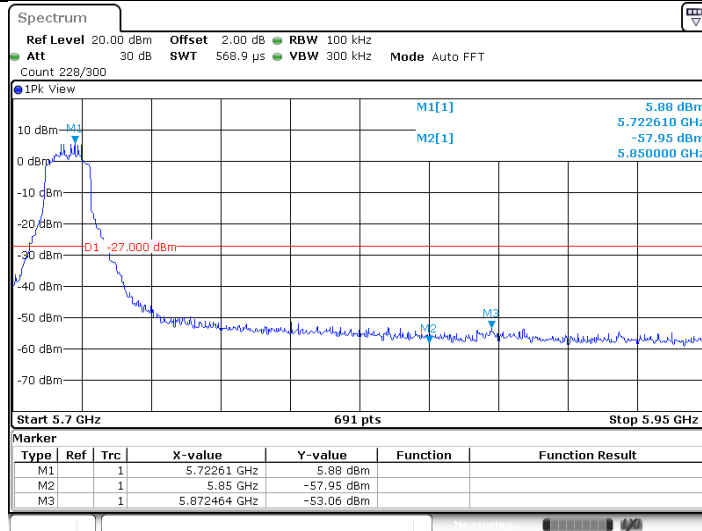


Date: 21 JUL 2019 10:51:55

11A_Ant2_High_5720

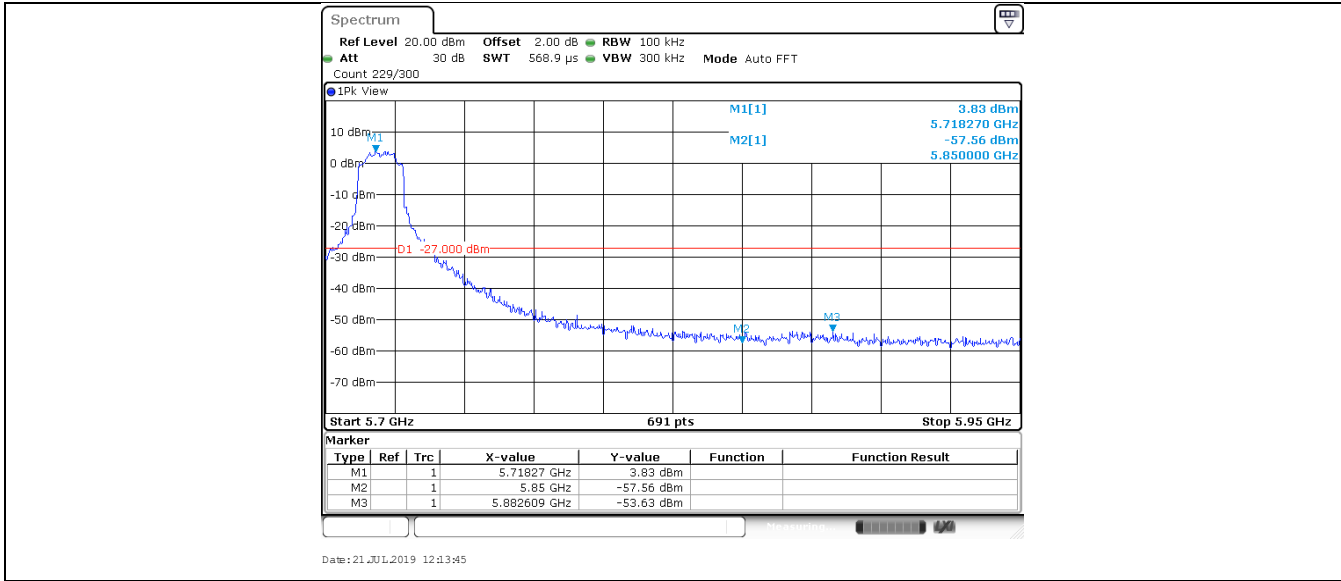


11A_Ant1_Low_5745

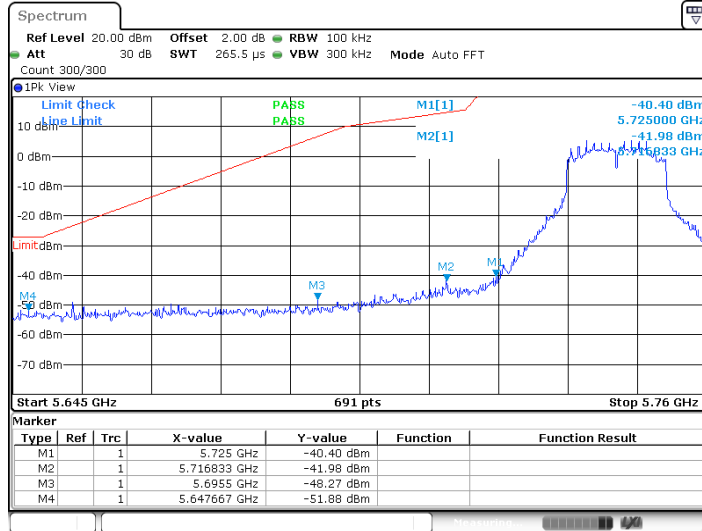


Date: 21 JUL 2019 10:53:43

11A_Ant1_Low_5745

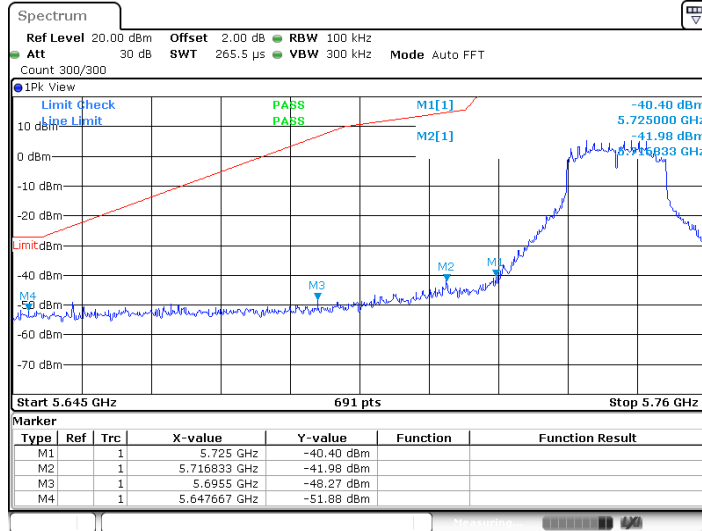


Date: 21 JUL 2019 10:53:43

11A_Ant1_Low_5745

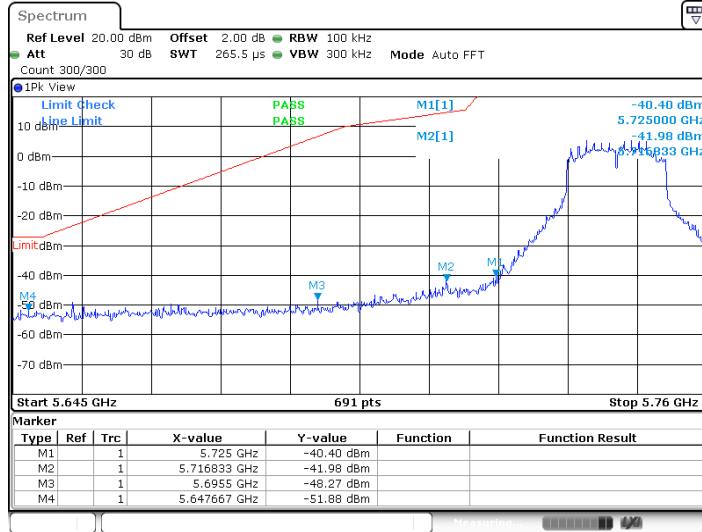


Date: 21 JUL 2019 10:53:43

11A_Ant1_Low_5745

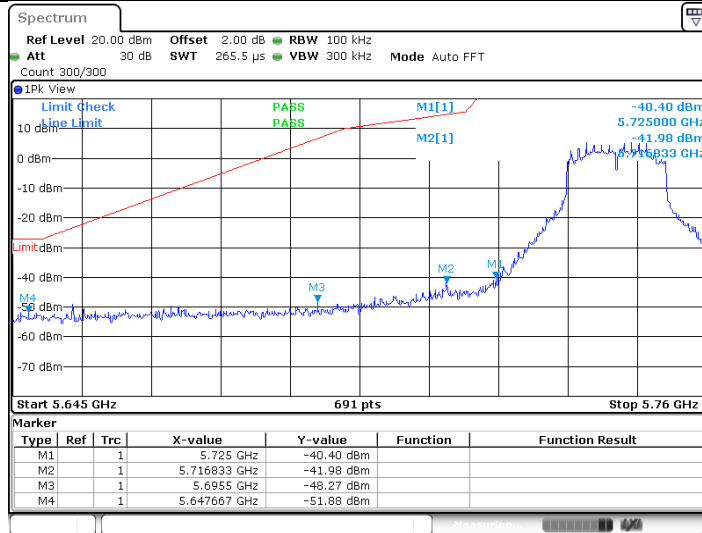


Date: 21 JUL 2019 10:53:43

11A_Ant2_Low_5745

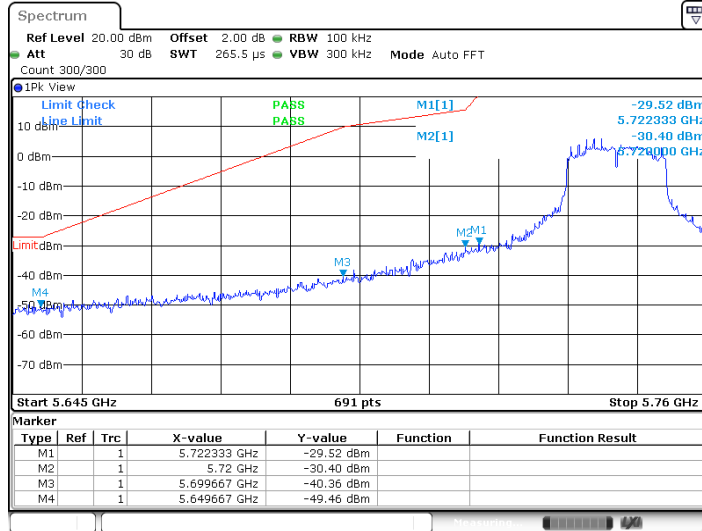


Date: 21 JUL 2019 12:15:28

11A_Ant2_Low_5745

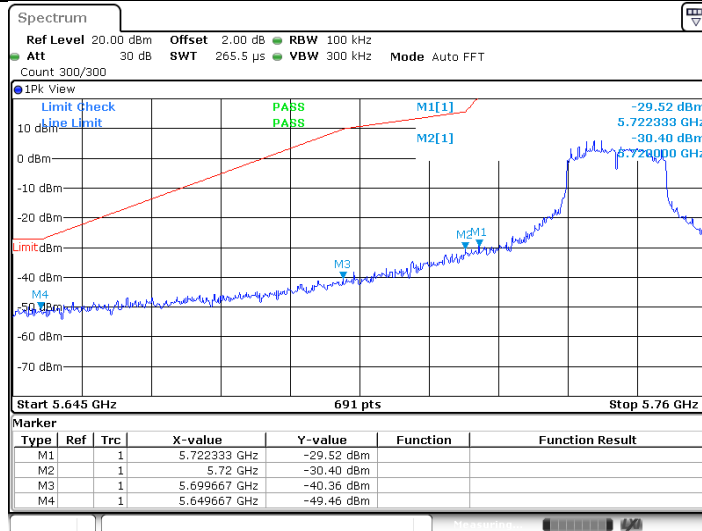


Date: 21 JUL 2019 12:15:28

11A_Ant2_Low_5745

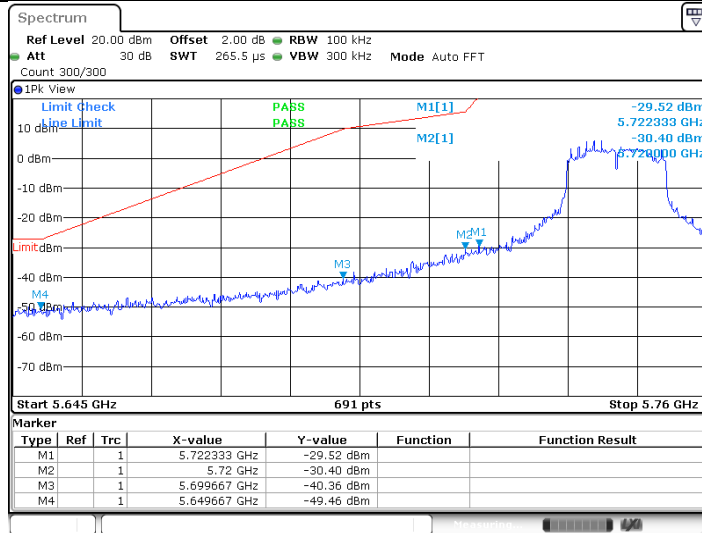


Date: 21 JUL 2019 12:15:28

11A_Ant2_Low_5745

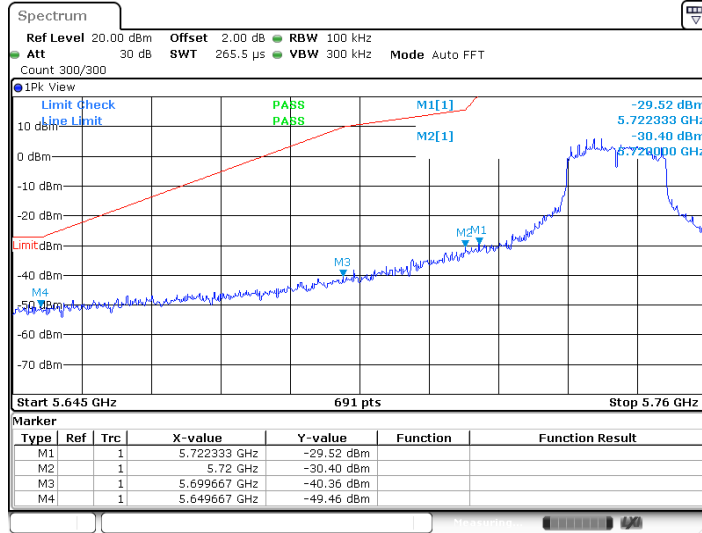


Date: 21 JUL 2019 12:15:28

11A_Ant1_High_5825

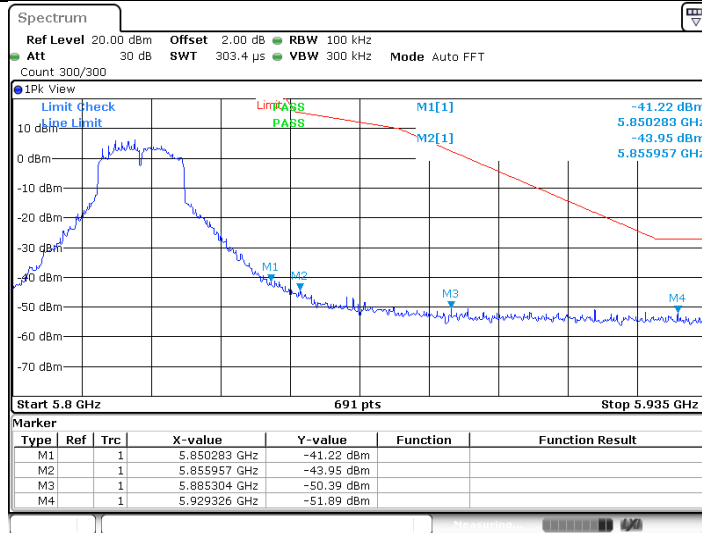


Date: 21 JUL 2019 10:56:56

11A_Ant1_High_5825

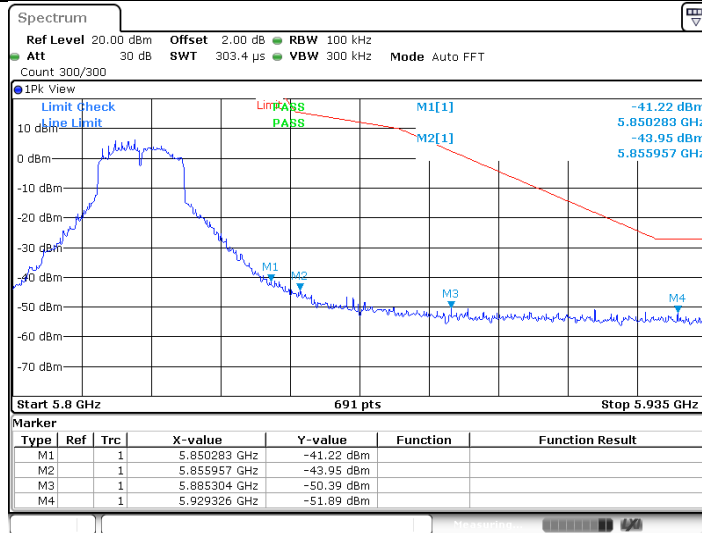


Date: 21 JUL 2019 10:56:56

11A_Ant1_High_5825

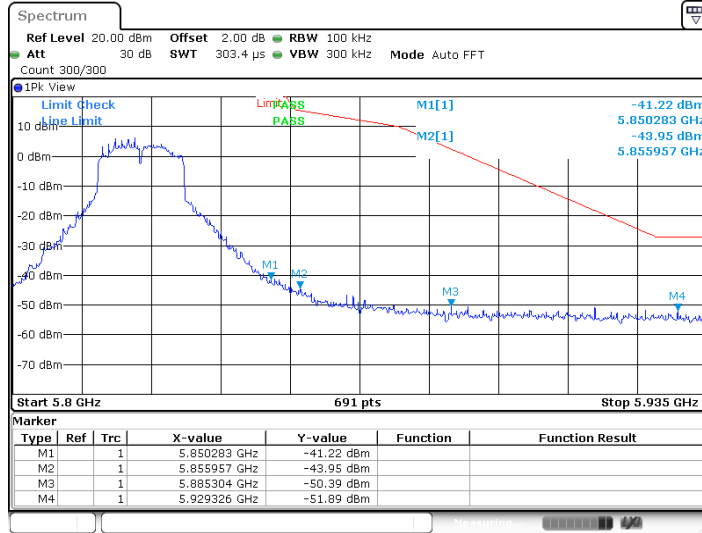


Date: 21 JUL 2019 10:56:56

11A_Ant1_High_5825

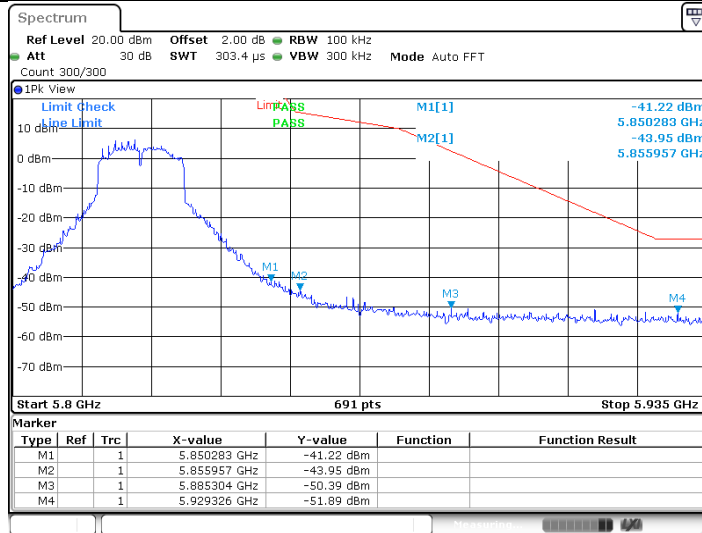


Date: 21 JUL 2019 10:56:56

11A_Ant2_High_5825

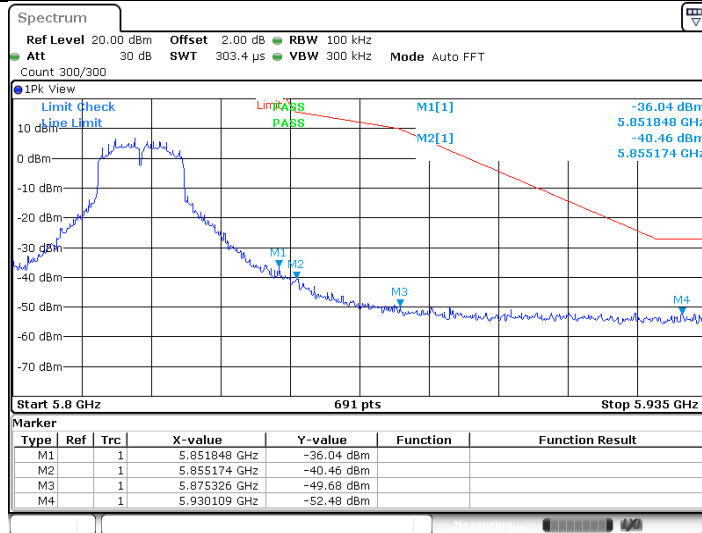


Date: 21 JUL 2019 12:18:48

11A_Ant2_High_5825

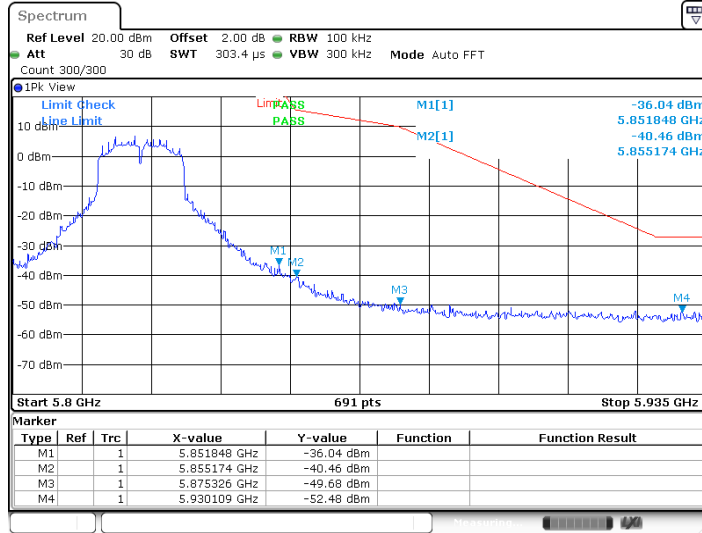


Date: 21 JUL 2019 12:18:48

11A_Ant2_High_5825

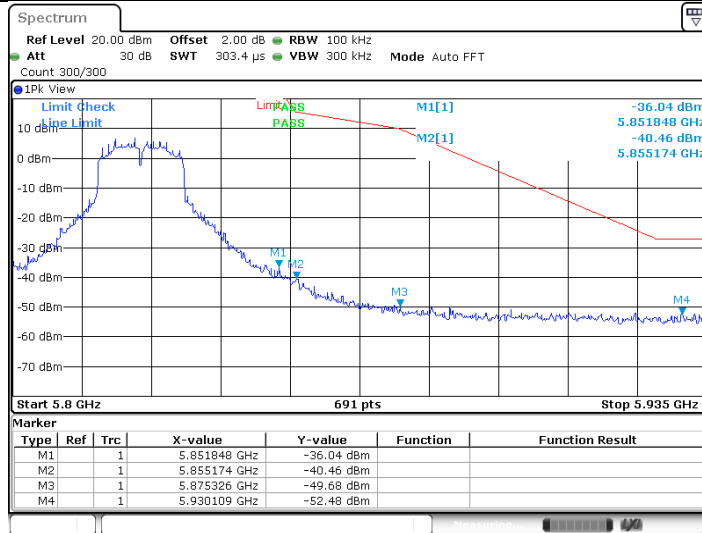


Date: 21 JUL 2019 12:18:48


11A_Ant2_High_5825

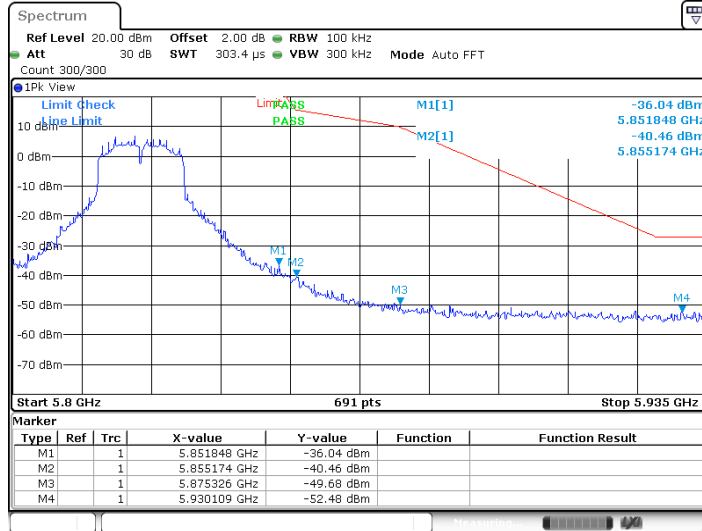

Date: 21 JUL 2019 12:18:48


IEEE 802.11n_MIMO modulation Test Result

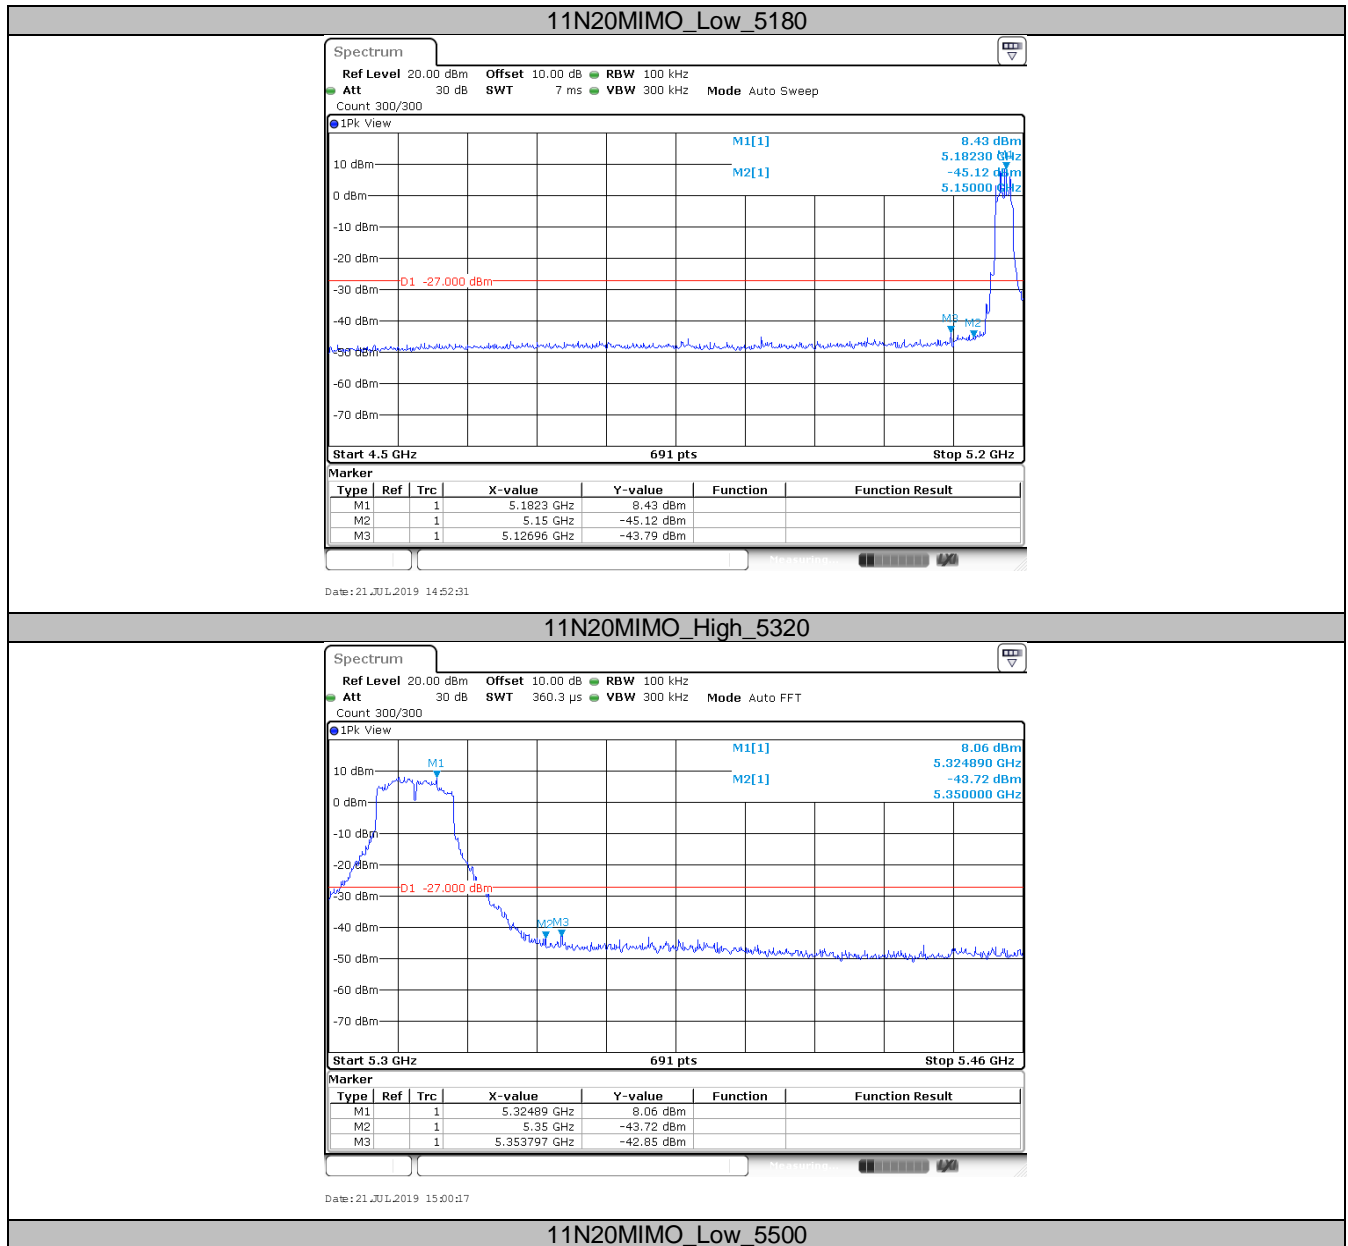

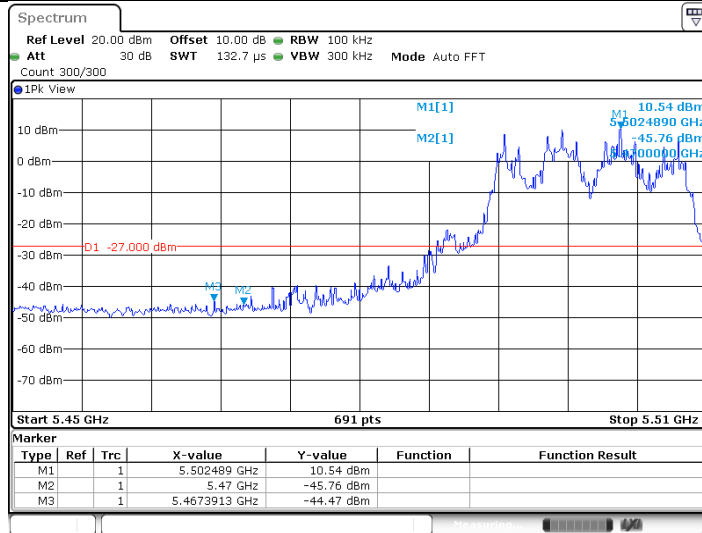


Date: 21 JUL 2019 15:01:53

11N20MIMO_High_5700

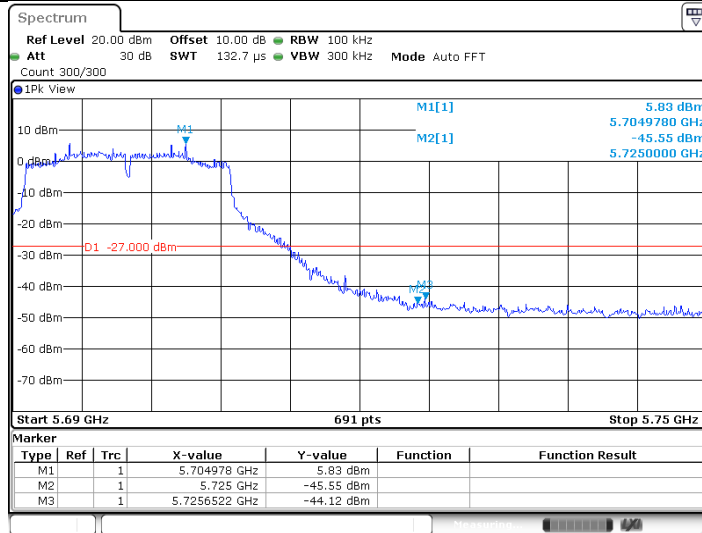


Date: 21 JUL 2019 15:06:29

11N20MIMO_Low_5720

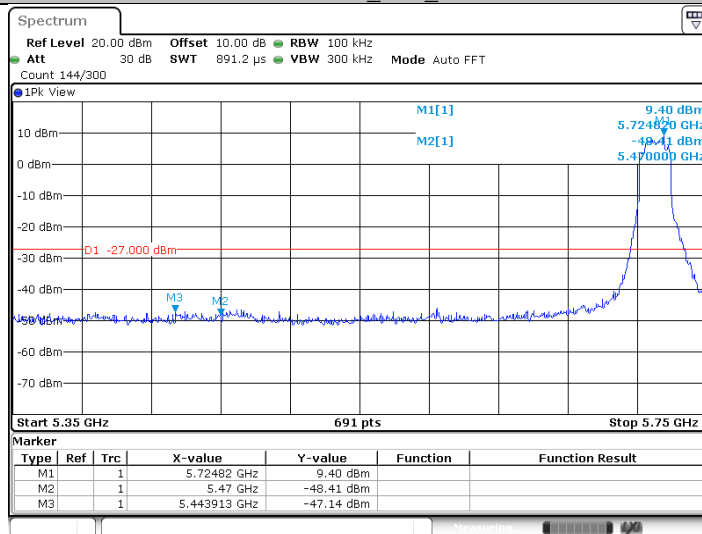


Date: 21 JUL 2019 15:09:00

11N20MIMO_High_5720

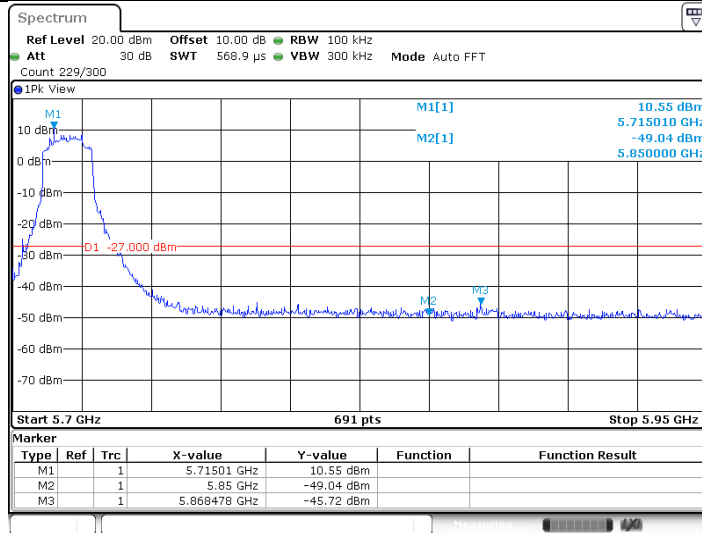


Date: 21 JUL 2019 15:09:13

11N40MIMO_Low_5190

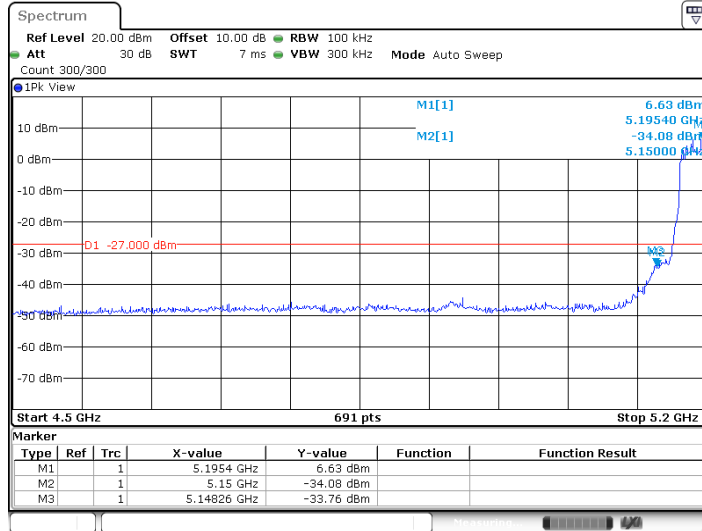

Date: 21 JUL 2019 15:16:14

11N40MIMO_High_5310

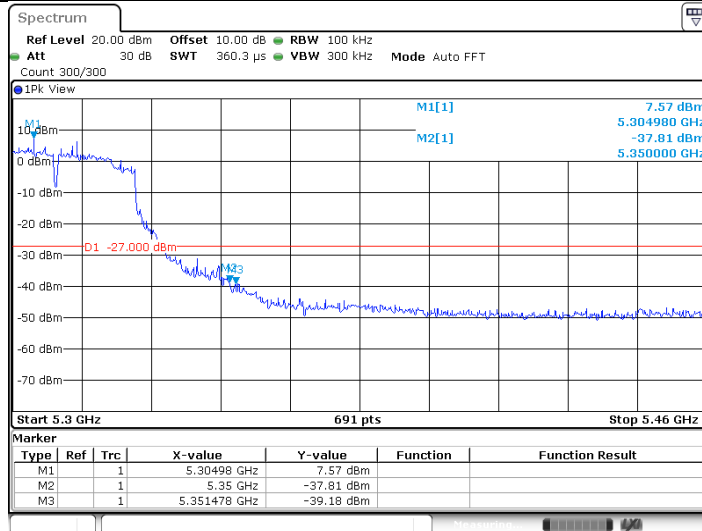


Date: 21 JUL 2019 15:21:02

11N40MIMO_Low_5510




Date: 21 JUL 2019 15:23:01

11N40MIMO_High_5670

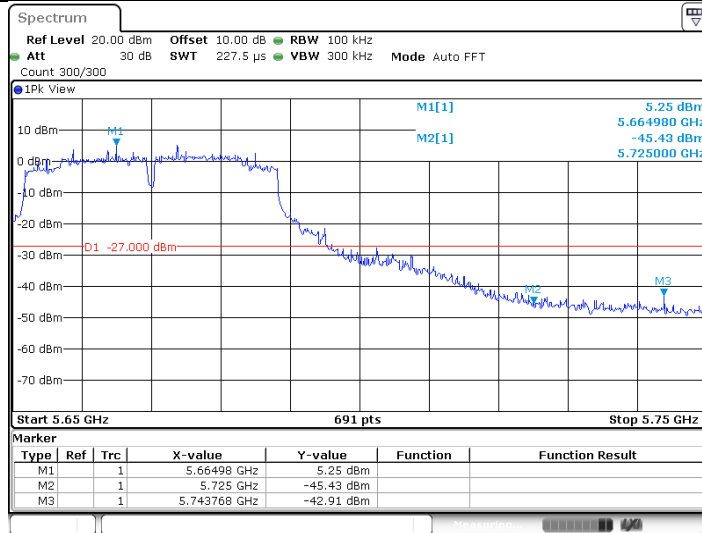




Date: 21 JUL 2019 15:26:08

11N40MIMO_Low_5710

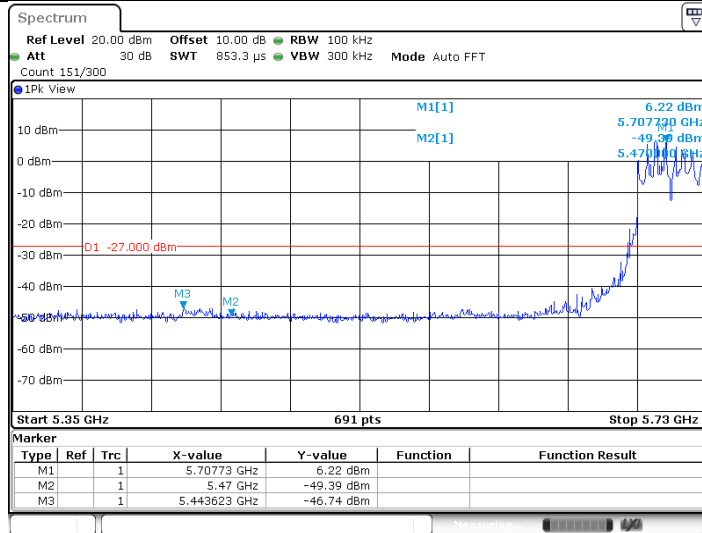


Date: 21 JUL 2019 15:27:59

11N40MIMO_High_5710

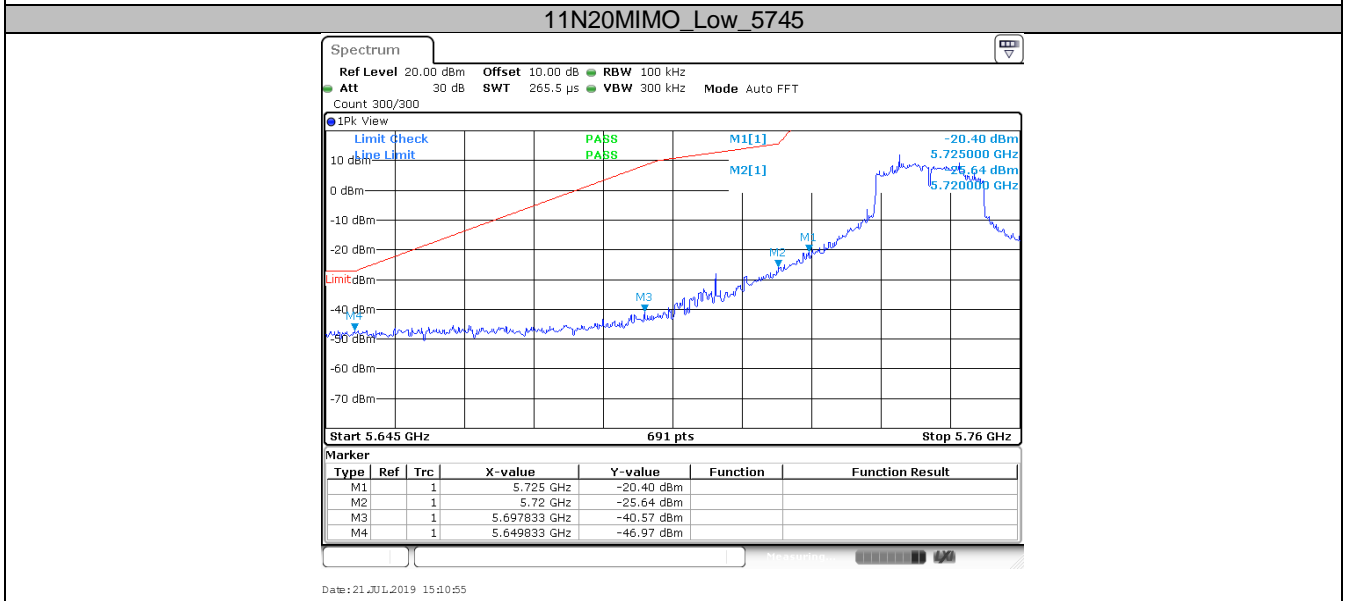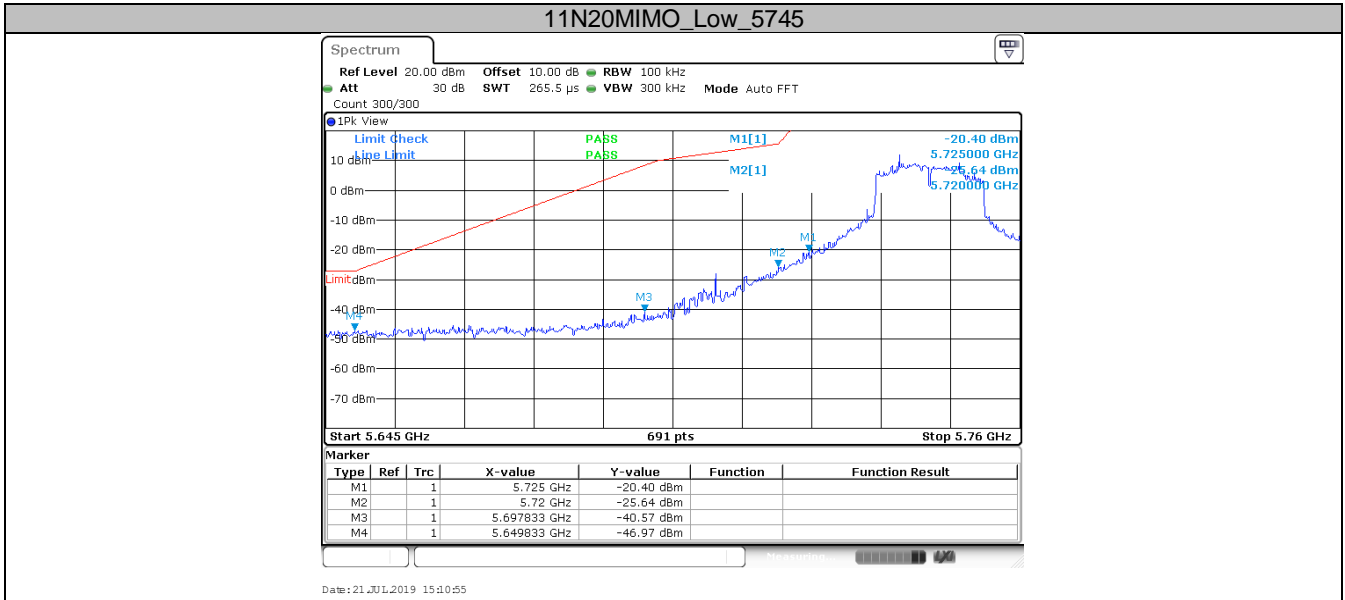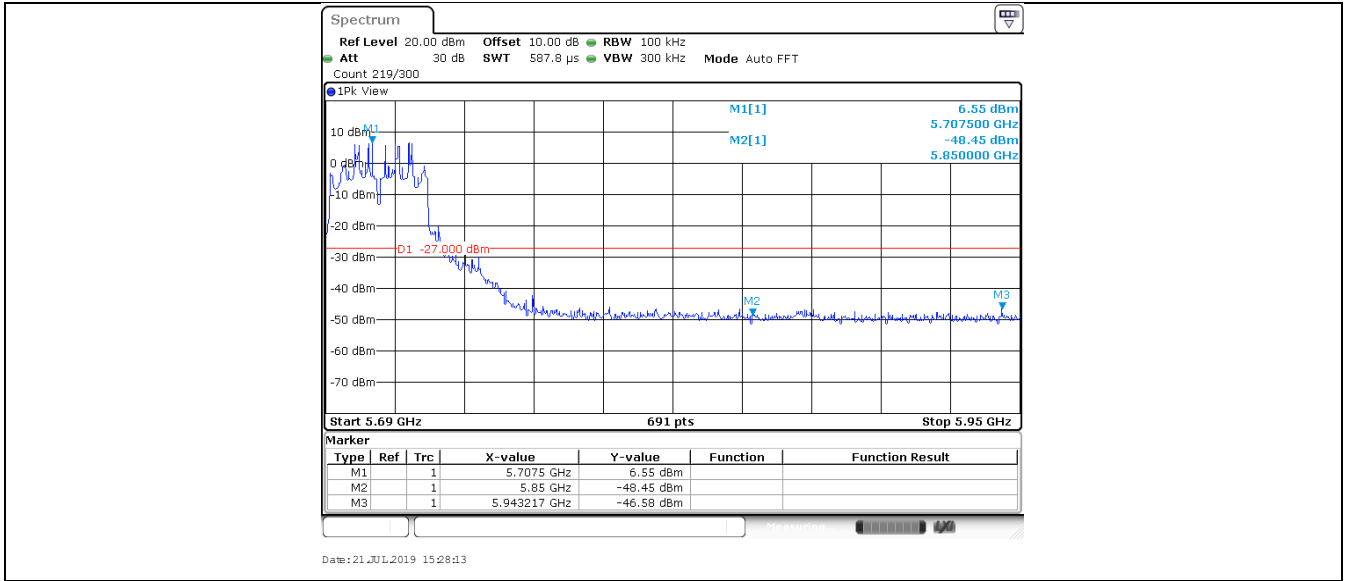


11N20MIMO_Low_5745

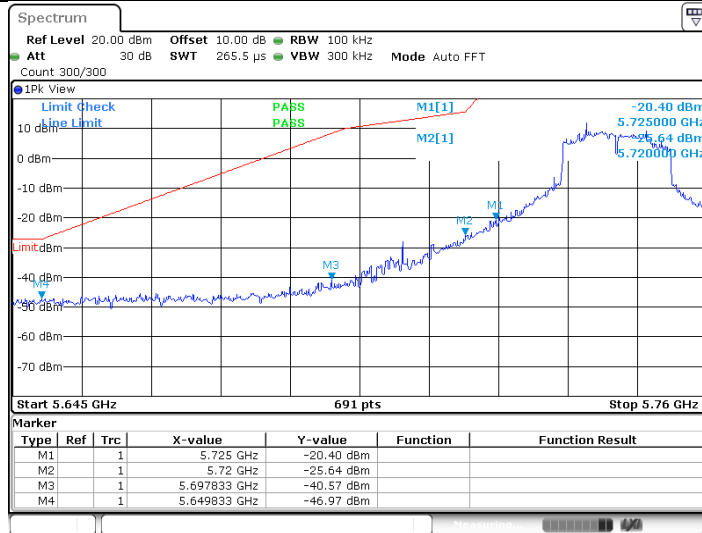

Date: 21 JUL 2019 15:10:55

11N20MIMO_Low_5745

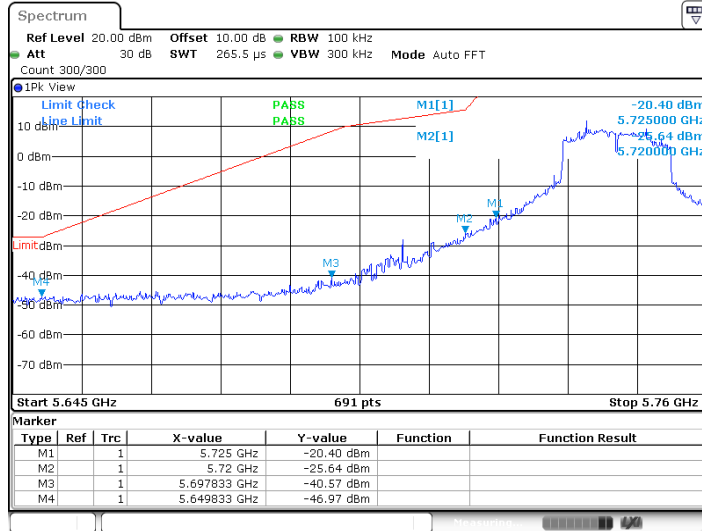

Date: 21 JUL 2019 15:10:55

11N20MIMO_High_5825



Date: 21 JUL 2019 15:14:00

11N20MIMO_High_5825



Date: 21 JUL 2019 15:14:00

11N20MIMO_High_5825




Date: 21 JUL 2019 15:14:00

11N20MIMO_High_5825




Date: 21 JUL 2019 15:14:00

11N40MIMO_Low_5755

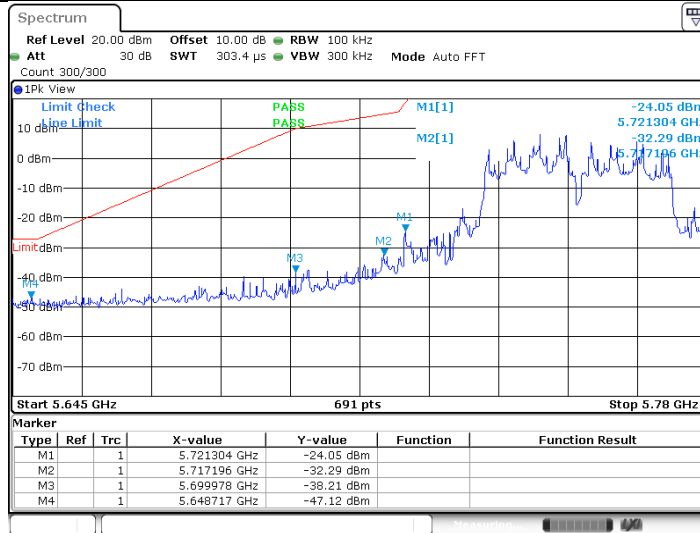


Date: 21 JUL 2019 15:29:52

11N40MIMO_Low_5755

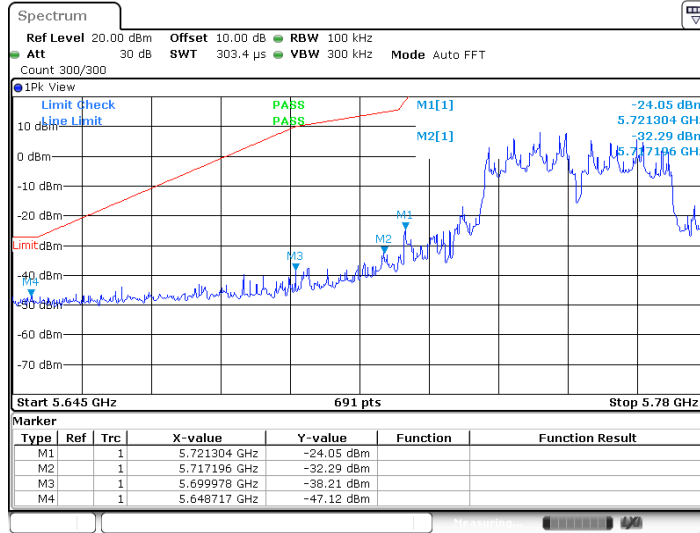


Date: 21 JUL 2019 15:29:52

11N40MIMO_Low_5755

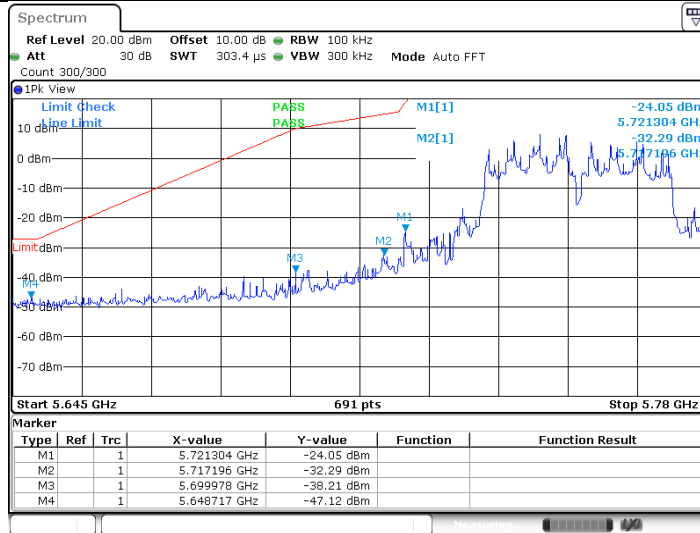


Date: 21 JUL 2019 15:29:52

11N40MIMO_Low_5755

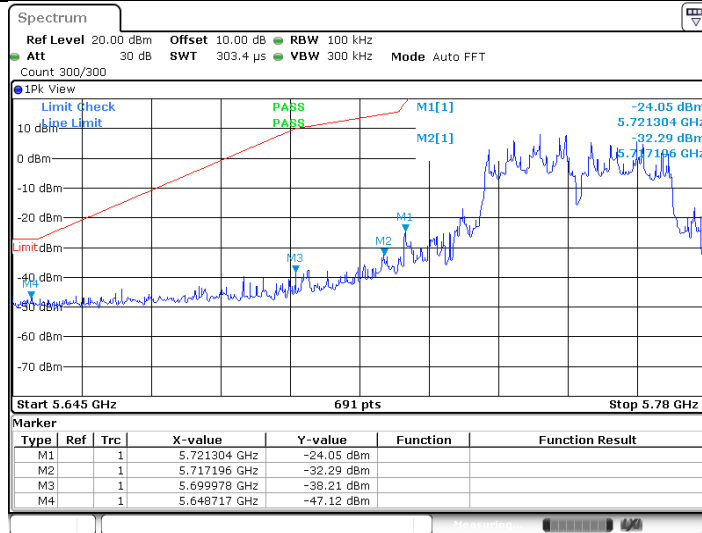


Date: 21 JUL 2019 15:29:52

11N40MIMO High_5795

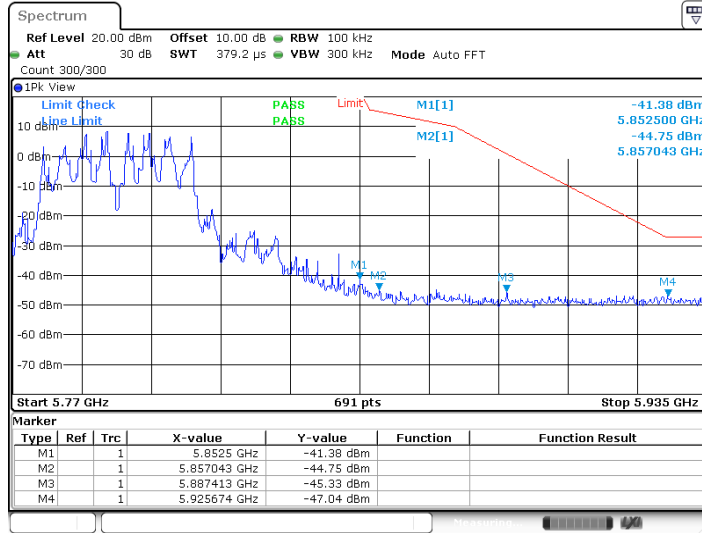


Date: 21 JUL 2019 15:31:31

11N40MIMO High_5795

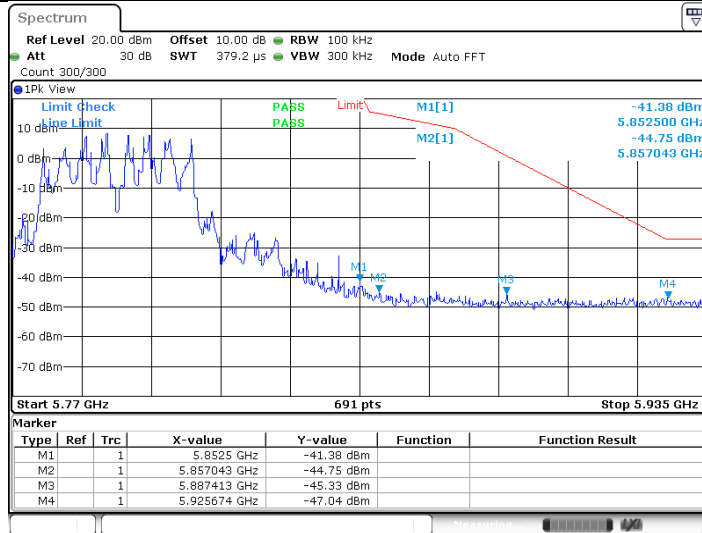


Date: 21 JUL 2019 15:31:31

11N40MIMO High_5795

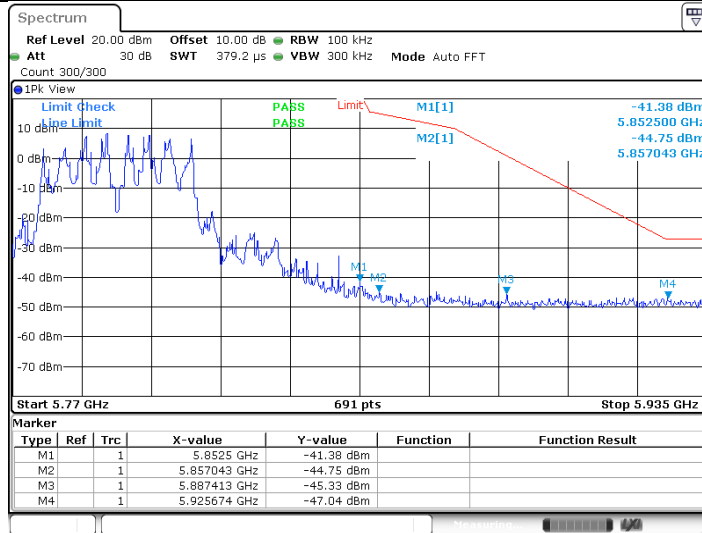



Date: 21 JUL 2019 15:31:31

11N40MIMO_High_5795

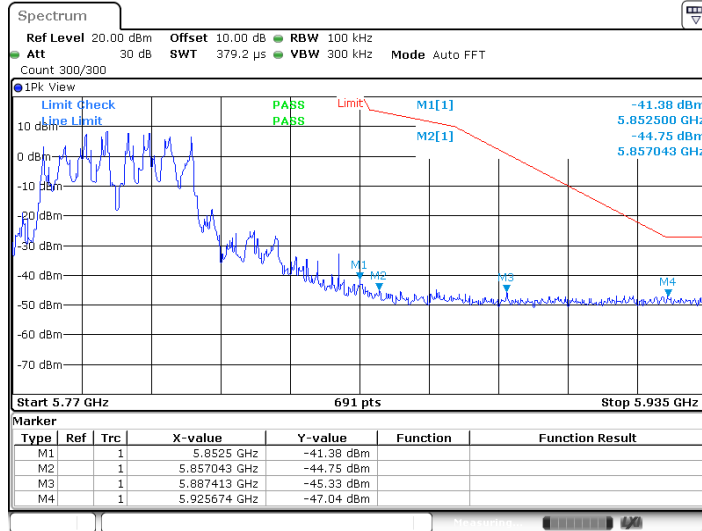


Date: 21 JUL 2019 15:31:31

IEEE 802.11ac_MIMO modulation Test Result

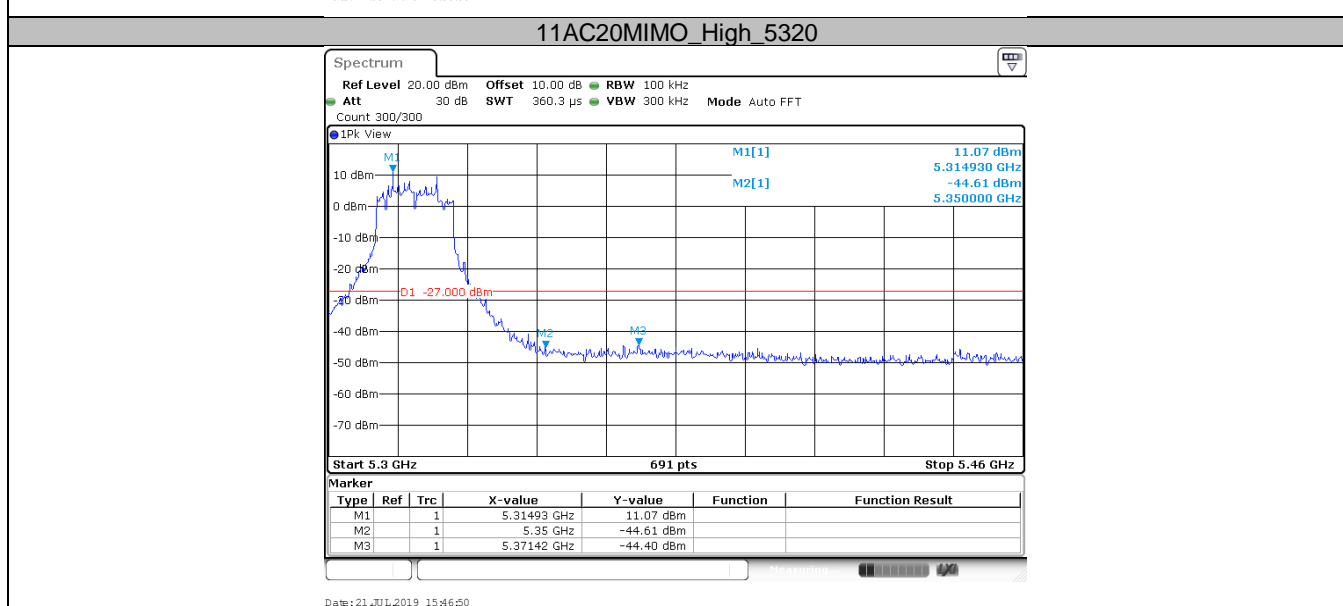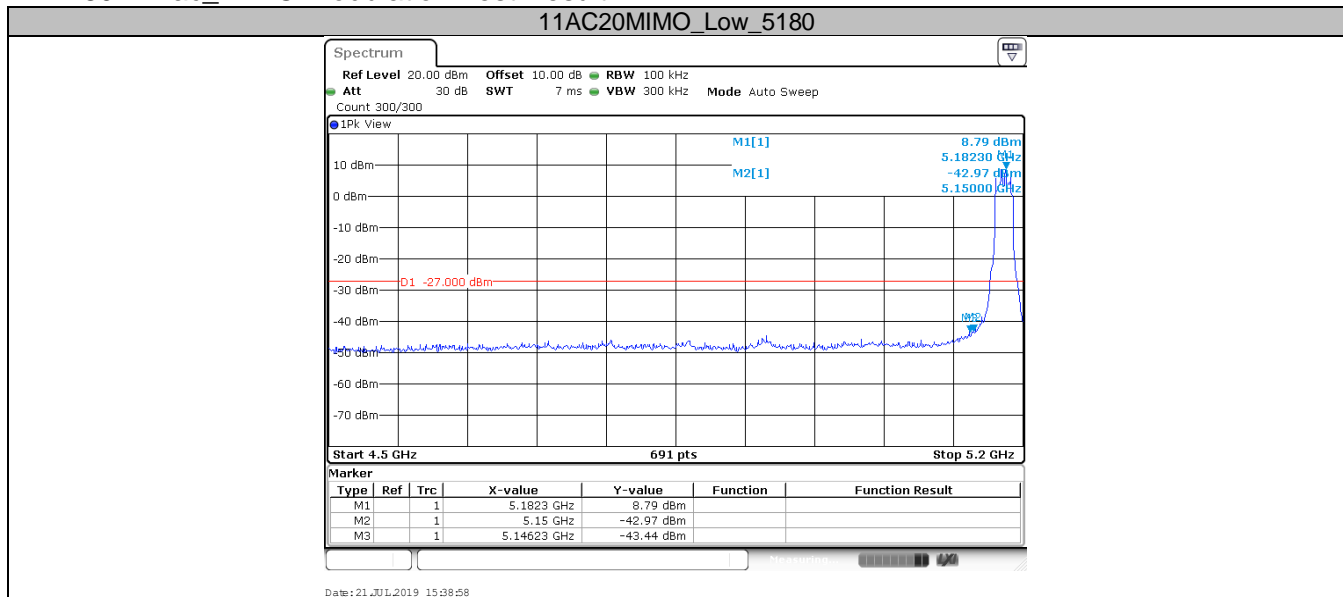


11AC20MIMO_Low_5500

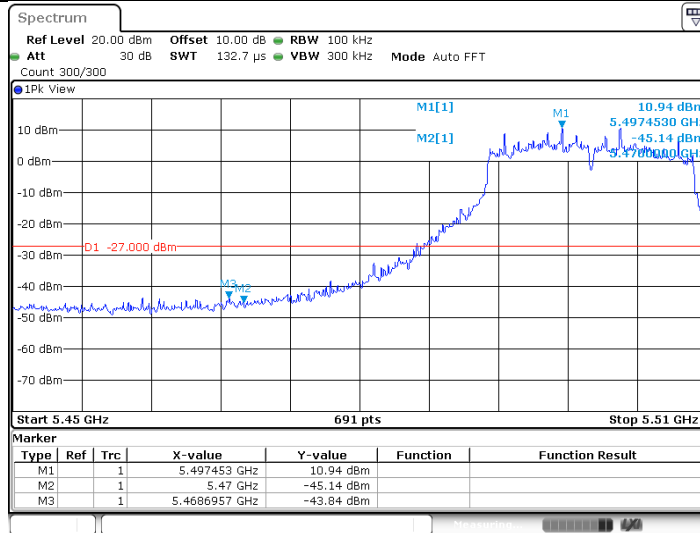


Date: 21 JUL 2019 15:48:27

11AC20MIMO_High_5700

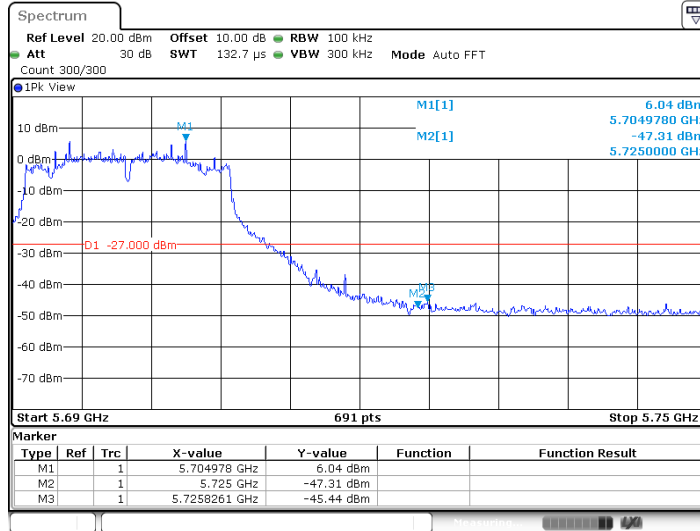


Date: 21 JUL 2019 15:51:40

11AC20MIMO_Low_5720

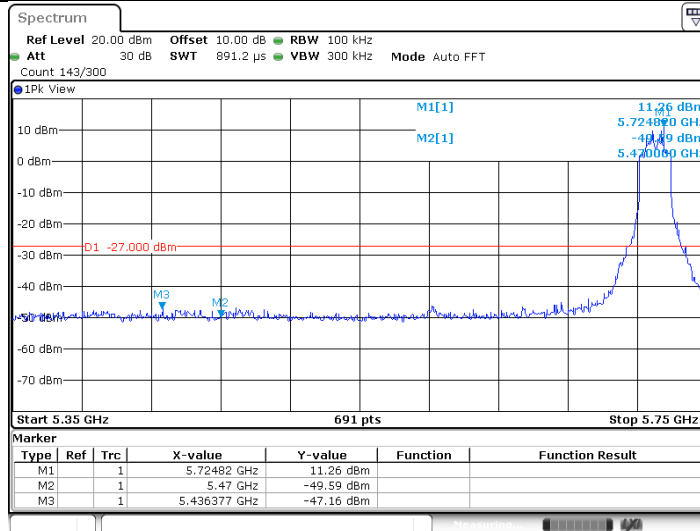


Date: 21 JUL 2019 15:53:26

11AC20MIMO_High_5720

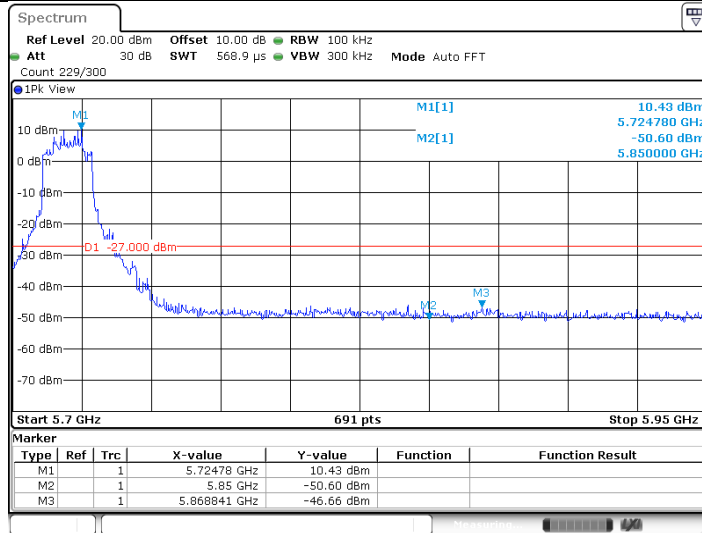


Date: 21 JUL 2019 15:53:39

11AC40MIMO_Low_5190

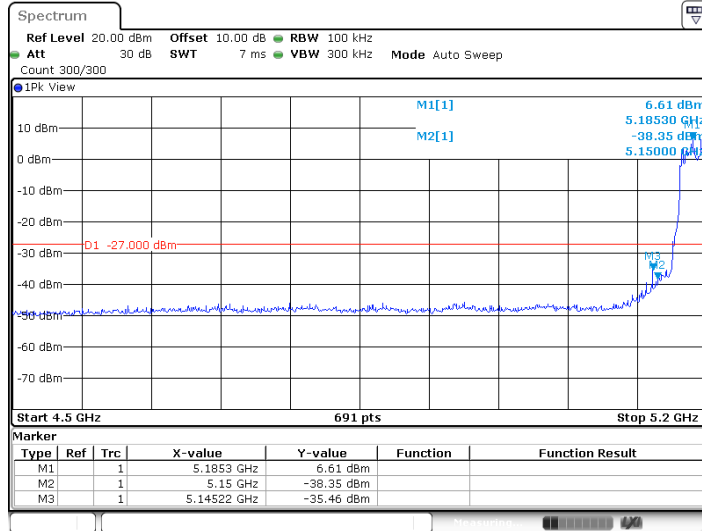

Date: 21 JUL 2019 16:00:15

11AC40MIMO_High_5310

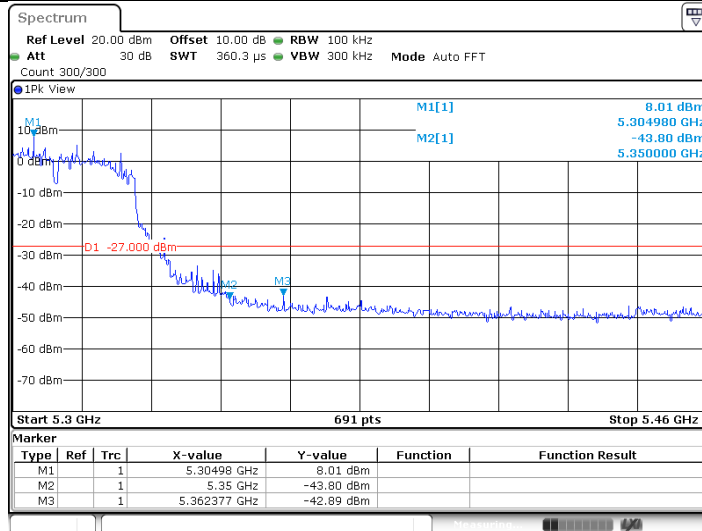


Date: 21 JUL 2019 16:05:11

11AC40MIMO_Low_5510




Date: 21 JUL 2019 16:07:01

11AC40MIMO_High_5670

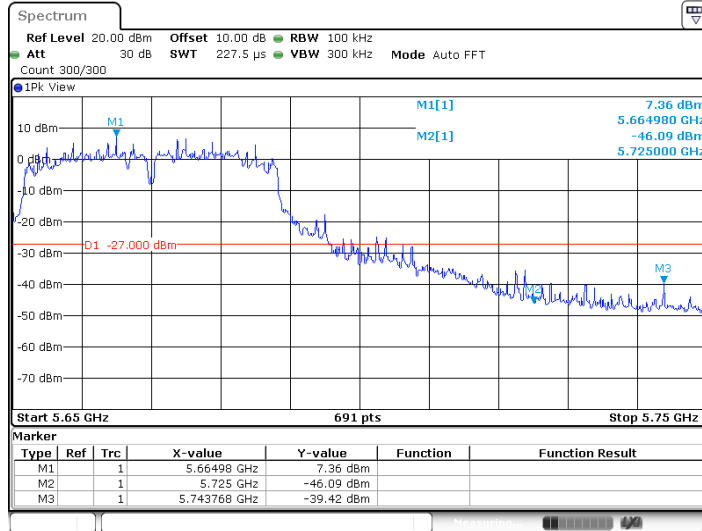


Date: 21 JUL 2019 16:13:48

11AC40MIMO_Low_5710

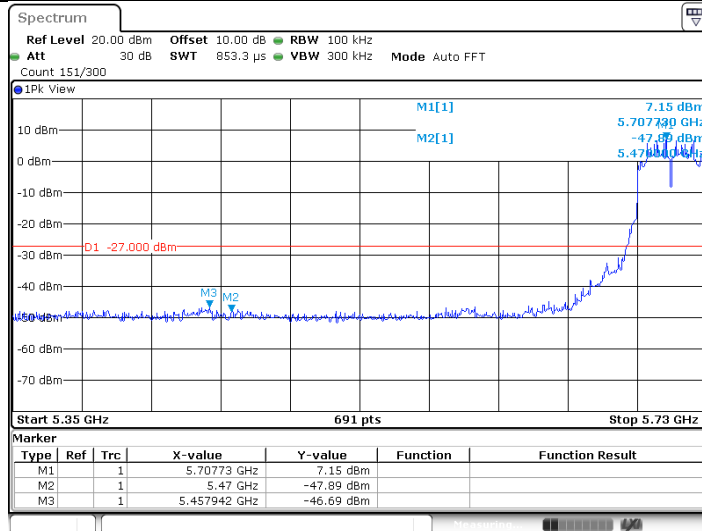


Date: 21 JUL 2019 16:15:35

11AC40MIMO_High_5710

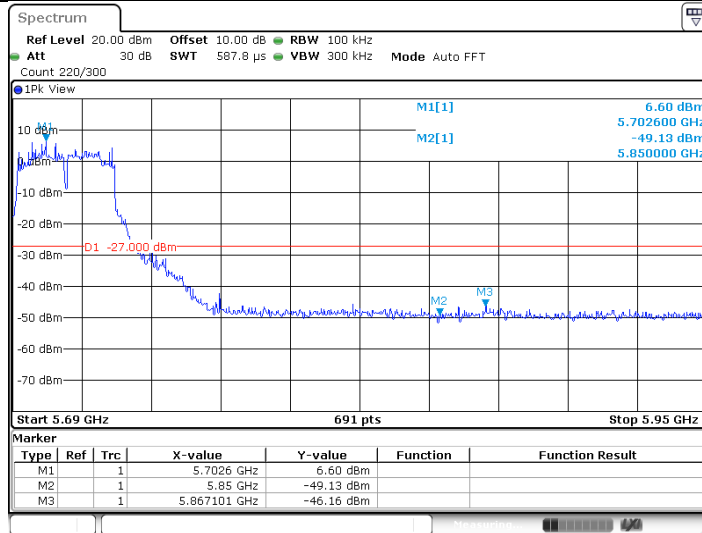


Date: 21 JUL 2019 16:15:48

11AC80MIMO_Low_5210

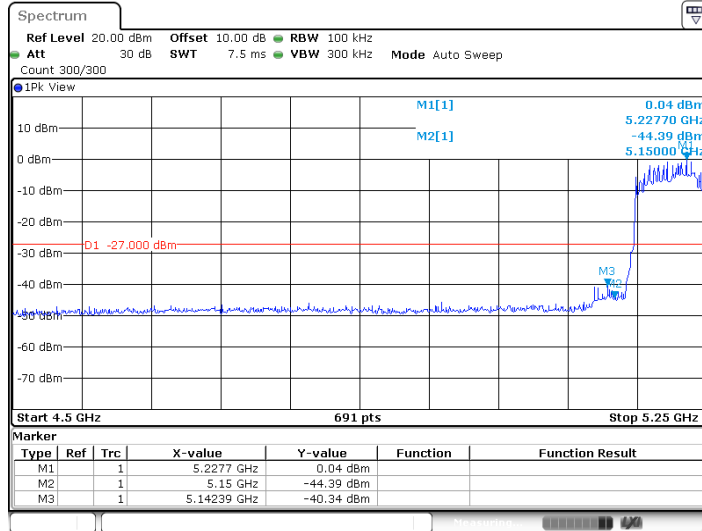


Date: 21 JUL 2019 16:21:10

11AC80MIMO_High_5290

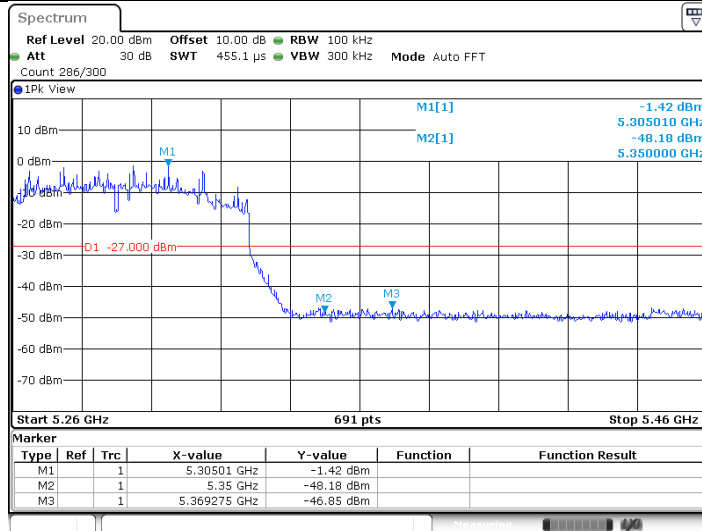


Date: 21 JUL 2019 16:23:07

11AC80MIMO_Low_5530

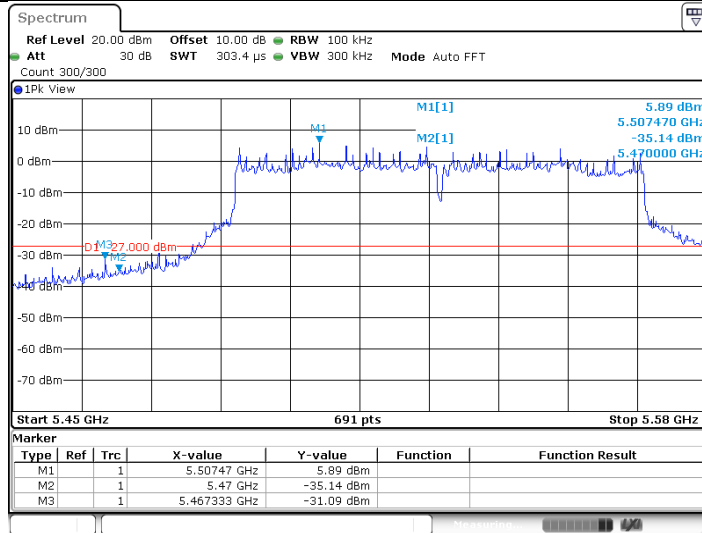


Date: 21 JUL 2019 16:25:06

11AC80MIMO_High_5610

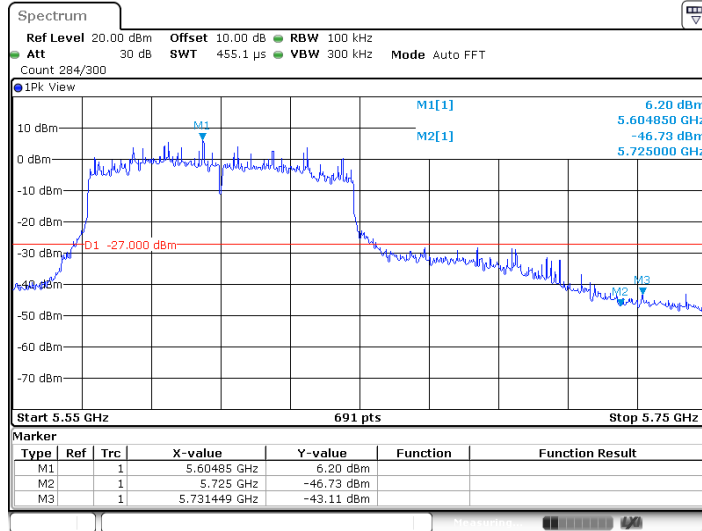


Date: 21 JUL 2019 16:29:15

11AC80MIMO_Low_5690

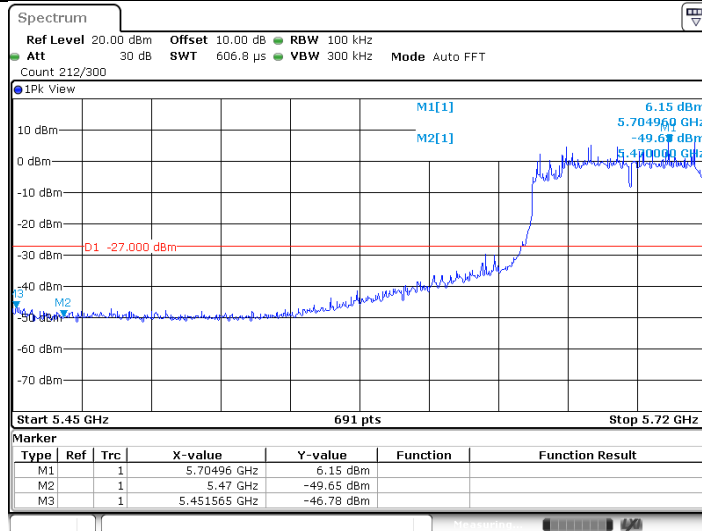


Date: 21 JUL 2019 16:31:08

11AC80MIMO_High_5690

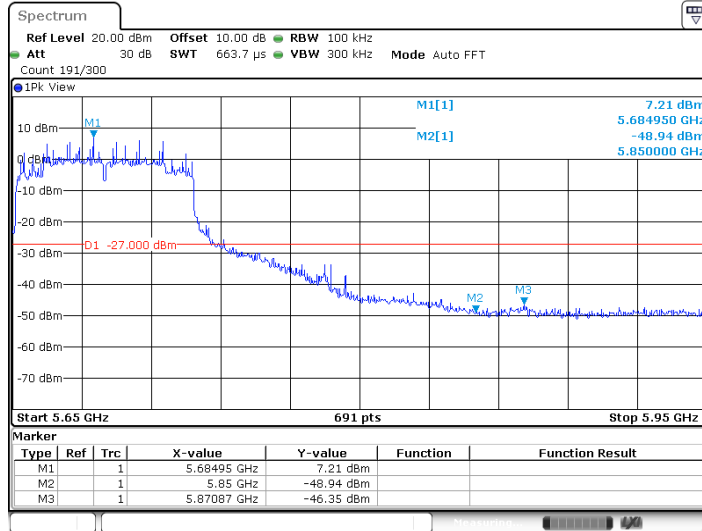


Date: 21 JUL 2019 16:31:22

11AC20MIMO_Low_5745

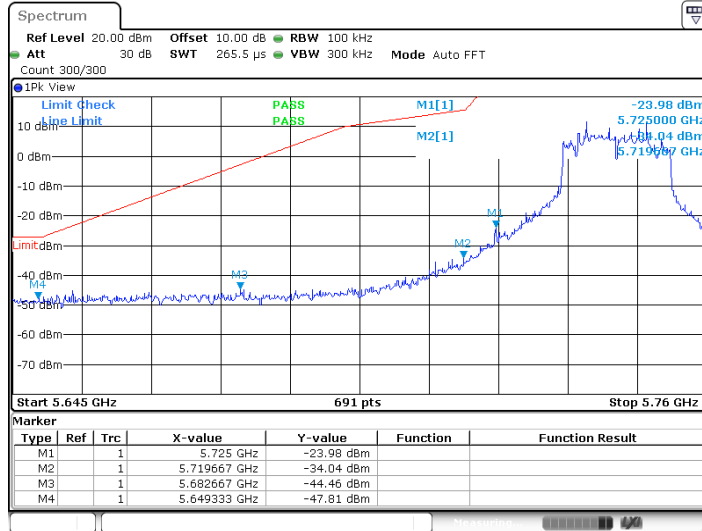


Date: 21 JUL 2019 15:55:15

11AC20MIMO_Low_5745

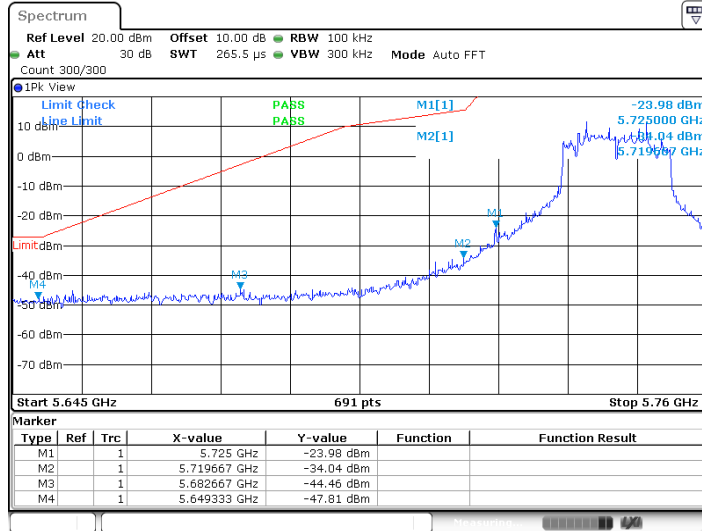


Date: 21 JUL 2019 15:55:15

11AC20MIMO_Low_5745

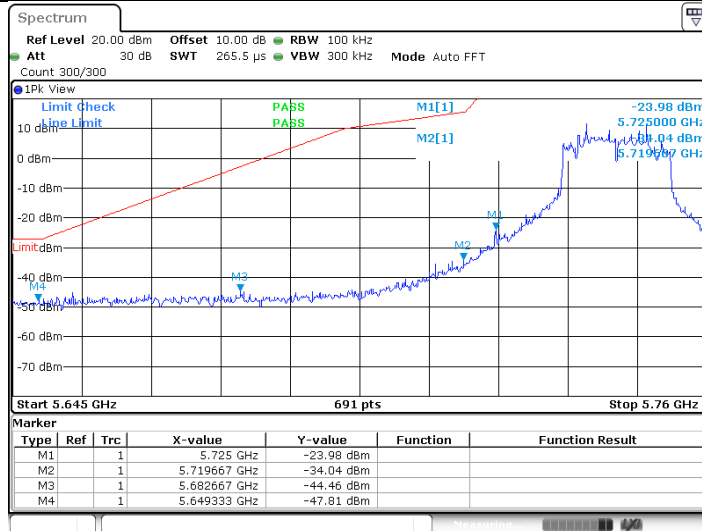

Date: 21 JUL 2019 15:55:15

11AC20MIMO_Low_5745

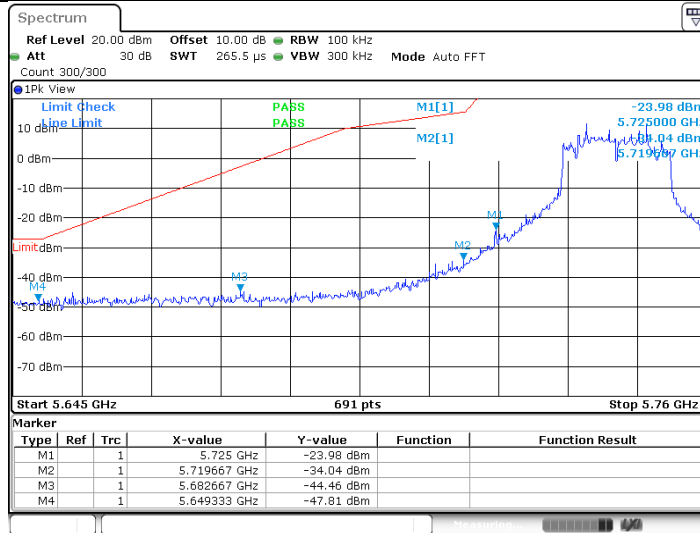


Date: 21 JUL 2019 15:55:15

11AC20MIMO_High_5825



Date: 21 JUL 2019 15:58:21

11AC20MIMO_High_5825

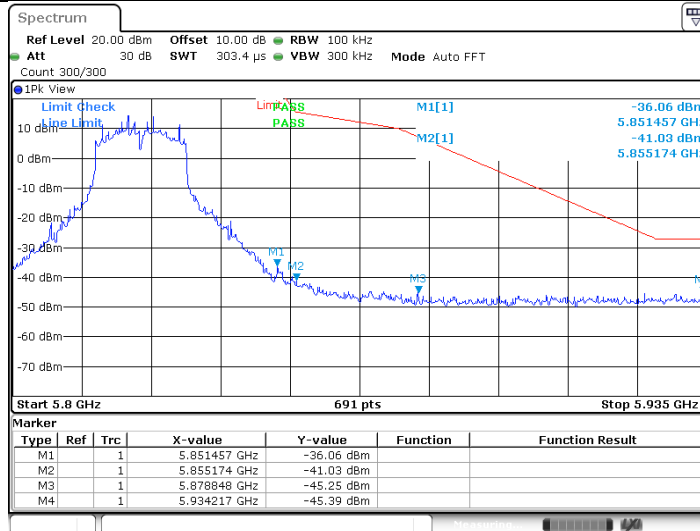

Date: 21 JUL 2019 15:58:21

11AC20MIMO_High_5825




Date: 21 JUL 2019 15:58:21

11AC20MIMO_High_5825



Date: 21 JUL 2019 15:58:21

11AC40MIMO_Low_5755

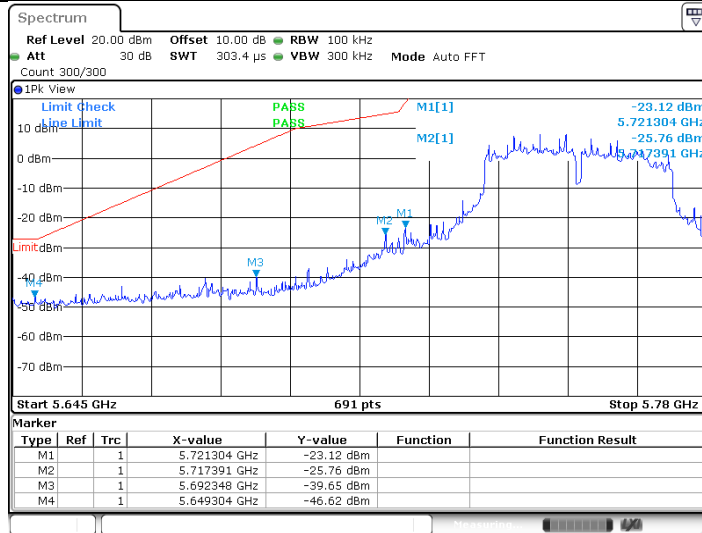

Date: 21 JUL 2019 16:17:36

11AC40MIMO_Low_5755




Date: 21 JUL 2019 16:17:36

11AC40MIMO_Low_5755



Date: 21 JUL 2019 16:17:36

11AC40MIMO_Low_5755

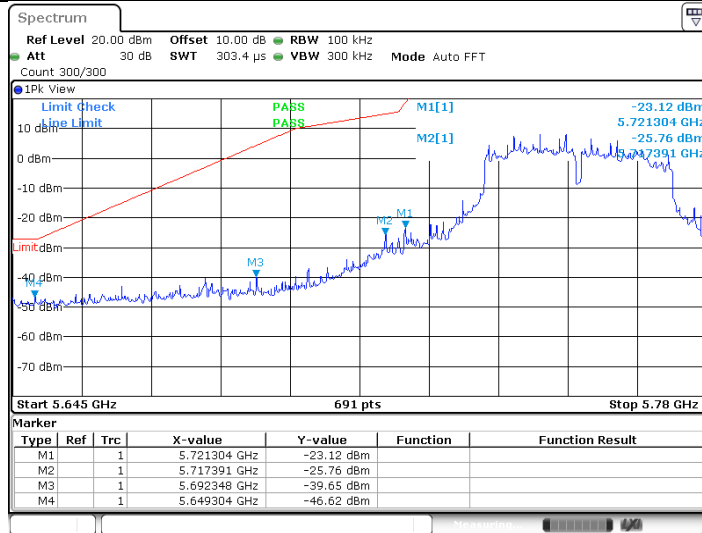

Date: 21 JUL 2019 16:17:36

11AC40MIMO_High_5795




Date: 21 JUL 2019 16:19:15

11AC40MIMO_High_5795




Date: 21 JUL 2019 16:19:15

11AC40MIMO_High_5795

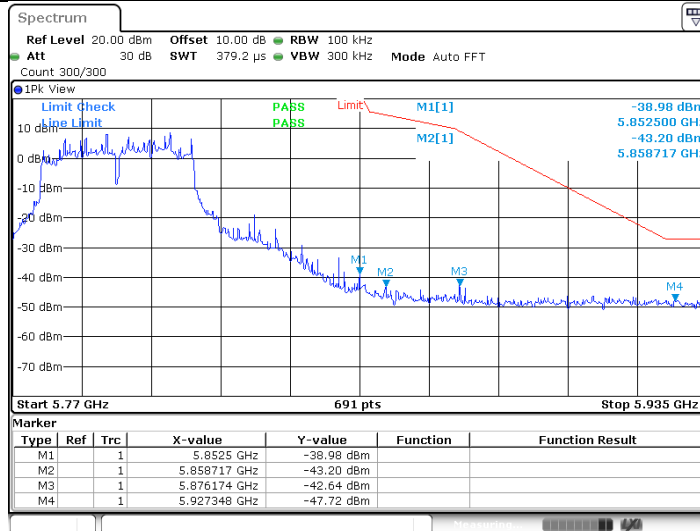

Date: 21 JUL 2019 16:19:15

11AC40MIMO_High_5795

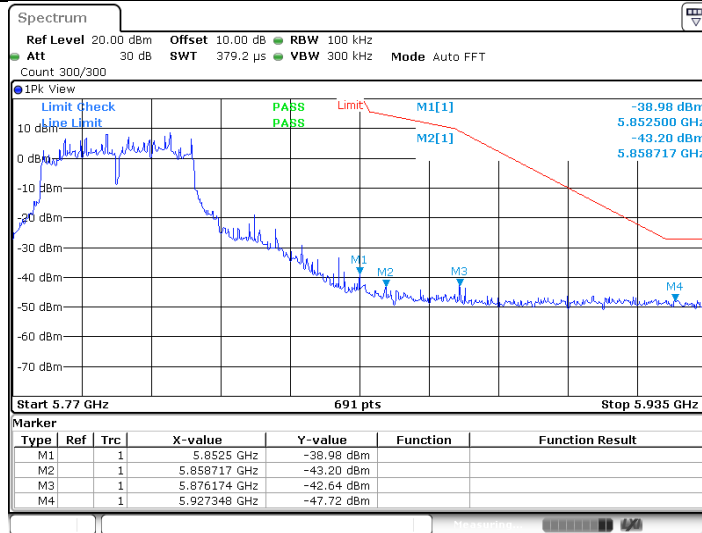


Date: 21 JUL 2019 16:19:15

11AC80MIMO_Low_5775




Date: 21 JUL 2019 16:32:58

11AC80MIMO_Low_5775

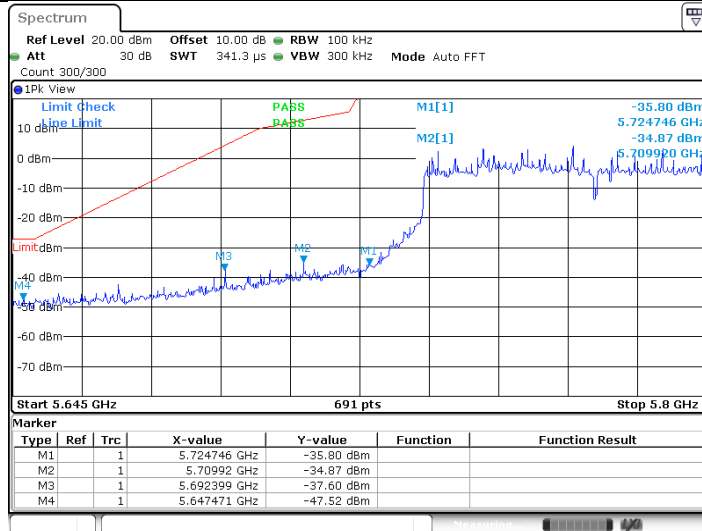


Date: 21 JUL 2019 16:32:58

11AC80MIMO_Low_5775

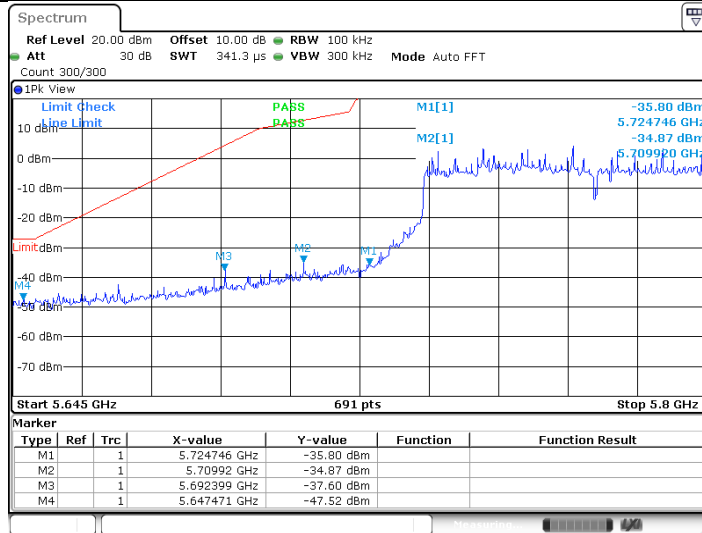


Date: 21 JUL 2019 16:32:58

11AC80MIMO_Low_5775

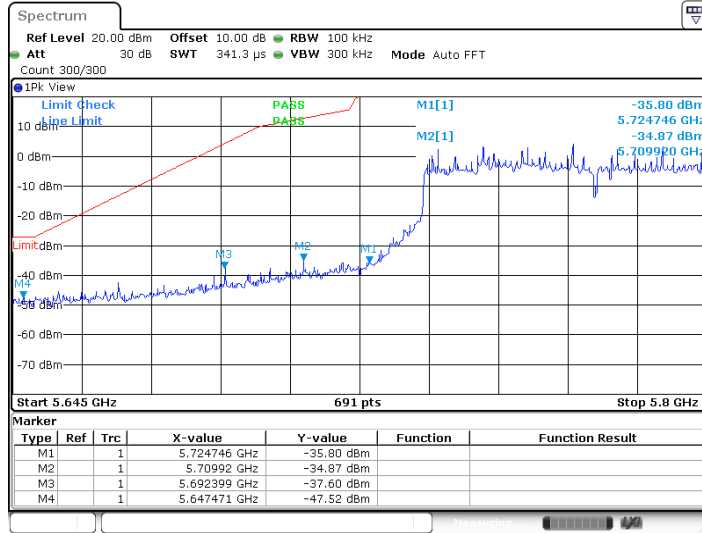


Date: 21 JUL 2019 16:32:58

11AC80MIMO_High_5775

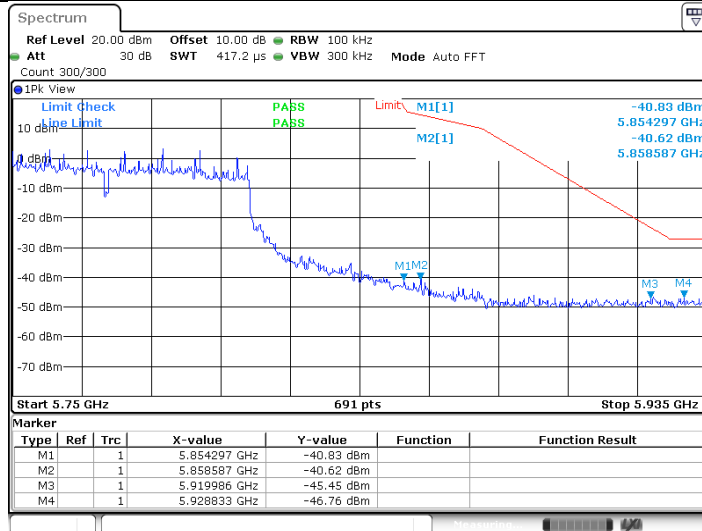


Date: 21 JUL 2019 16:33:14

11AC80MIMO_High_5775

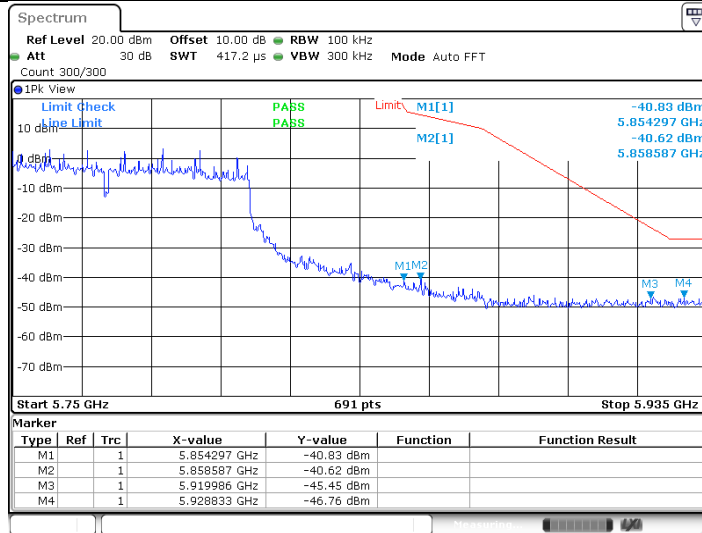


Date: 21 JUL 2019 16:33:14

11AC80MIMO_High_5775

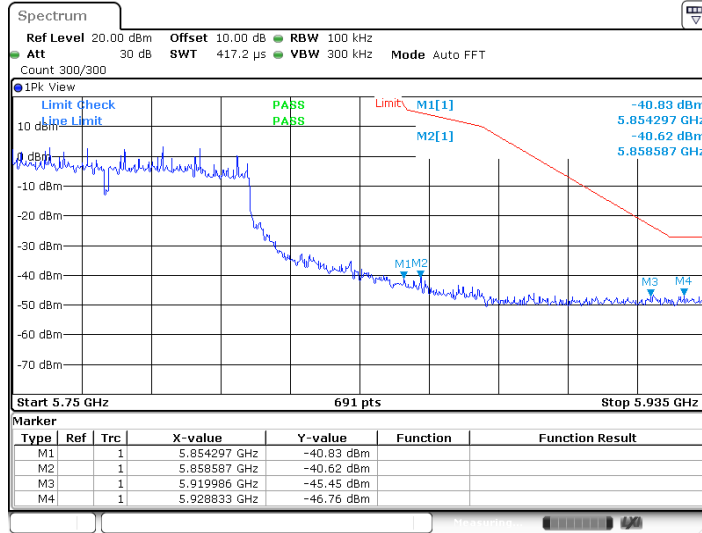

Date: 21 JUL 2019 16:33:14

11AC80MIMO_High_5775

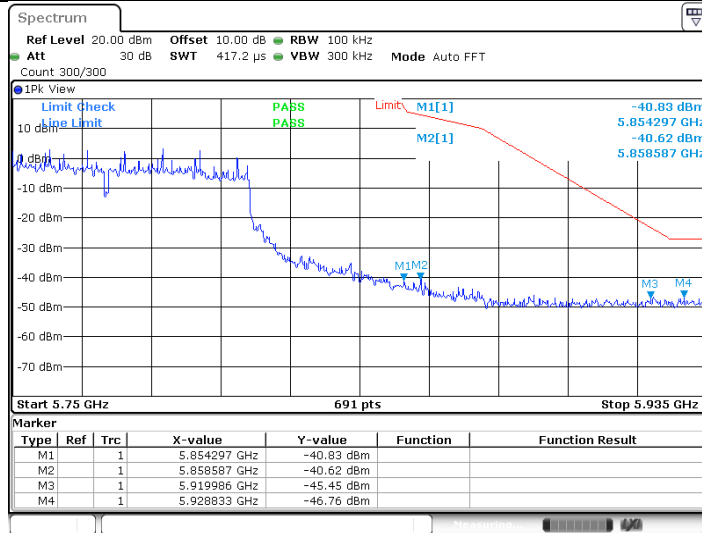

Date: 21 JUL 2019 16:33:14

Transmitting spurious emission test result as below (Radiated Mode):

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned
5. Use the following spectrum analyzer settings According to C63.10:
For Above 1GHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.
For Below 1GHz
Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($20\log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

According to part 15.247(d), the radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

| Frequency MHz | Field Strength uV/m | Field Strength dB μ V/m | Detector |
|------------------|------------------------|--------------------------------|----------|
| 30-88 | 100 | 40 | QP |
| 88-216 | 150 | 43.5 | QP |
| 216-960 | 200 | 46 | QP |
| 960-1000 | 500 | 54 | QP |
| Above 1000 | 500 | 54 | AV |
| Above 1000 | 5000 | 74 | PK |

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (802.11ac20_ MIMO modulation) test result is listed in the report.

Transmitting spurious emission test result as below:

802.11ac20_ MIMO modulation 5180MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Margin | Corr. Factor | Detector | Result |
|-----------|----------------|--------------|--------|--------|--------------|----------|--------|
| MHz | dBuV/m | | dBuV/m | dB | dB | | |
| 420.21 | 25.72 | Horizontal | 46.00 | 20.28 | -23.5 | QP | Pass |
| 869.59 | 33.43 | Horizontal | 46.00 | 12.57 | -16.1 | QP | Pass |
| 752.33 | 28.88 | Vertical | 46.00 | 17.12 | -17.4 | QP | Pass |
| 943.26 | 34.87 | Vertical | 46.00 | 11.13 | -15.3 | QP | Pass |
| 11746.16* | 41.48 | Horizontal | 74.00 | 32.52 | 9.4 | PK | Pass |
| 15832.31* | 48.54 | Horizontal | 74.00 | 25.46 | 18.2 | PK | Pass |
| 17801.31* | 49.87 | Horizontal | 74.00 | 24.13 | 21.3 | PK | Pass |
| 10715.25* | 39.36 | Vertical | 74.00 | 34.64 | 8.5 | PK | Pass |
| 12981.59 | 43.03 | Vertical | 74.00 | 30.97 | 13.4 | PK | Pass |
| 17580.63 | 49.08 | Vertical | 74.00 | 24.92 | 21.2 | PK | Pass |

802.11ac20_ MIMO modulation 5320MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Margin | Corr. Factor | Detector | Result |
|-----------|----------------|--------------|--------|--------|--------------|----------|--------|
| MHz | dBuV/m | | dBuV/m | dB | dB | | |
| 10698.41* | 39.34 | Horizontal | 74 | 34.66 | 8.5 | PK | Pass |
| 13198.50 | 43.07 | Horizontal | 74 | 30.93 | 14.0 | PK | Pass |
| 17611.56 | 48.76 | Horizontal | 74 | 25.24 | 21.2 | PK | Pass |
| 10135.34 | 40.17 | Vertical | 74 | 33.83 | 8.6 | PK | Pass |
| 13162.41 | 42.83 | Vertical | 74 | 31.17 | 13.9 | PK | Pass |
| 17065.69 | 49.04 | Vertical | 74 | 24.96 | 20.2 | PK | Pass |

802.11ac20_ MIMO modulation 5500MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Margin | Corr. Factor | Detector | Result |
|-----------|----------------|--------------|--------|--------|--------------|----------|--------|
| MHz | dBuV/m | | dBuV/m | dB | dB | | |
| 10135.00 | 40.02 | Horizontal | 74 | 33.98 | 8.6 | PK | Pass |
| 13119.43 | 44.93 | Horizontal | 74 | 29.07 | 13.8 | PK | Pass |
| 17704.03* | 49.24 | Horizontal | 74 | 24.76 | 21.3 | PK | Pass |
| 10773.00* | 39.85 | Vertical | 74 | 34.15 | 8.3 | PK | Pass |
| 13826.53 | 41.72 | Vertical | 74 | 32.28 | 13.1 | PK | Pass |
| 17683.06 | 48.57 | Vertical | 74 | 25.43 | 21.3 | PK | Pass |

802.11ac20_ MIMO modulation 5700MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Margin | Corr. Factor | Detector | Result |
|-----------|----------------|--------------|--------|--------|--------------|----------|--------|
| MHz | dBuV/m | | dBμV/m | dB | dB | | |
| 10636.18* | 39.24 | Horizontal | 74 | 34.76 | 8.5 | PK | Pass |
| 13151.06 | 42.71 | Horizontal | 74 | 31.29 | 13.9 | PK | Pass |
| 17815.75* | 49.28 | Horizontal | 74 | 24.72 | 21.4 | PK | Pass |
| 10694.62* | 39.22 | Vertical | 74 | 34.78 | 8.5 | PK | Pass |
| 14457.61 | 44.63 | Vertical | 74 | 29.37 | 15.7 | PK | Pass |
| 17497.43 | 49.08 | Vertical | 74 | 24.92 | 21.0 | PK | Pass |

802.11ac20_ MIMO modulation 5825MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Margin | Corr. Factor | Detector | Result |
|-----------|----------------|--------------|--------|--------|--------------|----------|--------|
| MHz | dBuV/m | | dBμV/m | dB | dB | | |
| 11107.13* | 39.53 | Horizontal | 74 | 34.47 | 8.0 | PK | Pass |
| 14404.03 | 44.89 | Horizontal | 74 | 29.11 | 15.4 | PK | Pass |
| 17780.00* | 48.73 | Horizontal | 74 | 25.27 | 21.3 | PK | Pass |
| 11881.59* | 40.92 | Vertical | 74 | 33.08 | 10.4 | PK | Pass |
| 13153.47 | 43.93 | Vertical | 74 | 30.07 | 13.9 | PK | Pass |
| 17715.72* | 49.38 | Vertical | 74 | 24.62 | 21.3 | PK | Pass |

Remark:

- (1) Corrected Amplitude = Read level + Corrector factor
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)
- (2) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) We test all modes and only the worst case (802.11ac20_ MIMO modulation) recorded in the report.

9.6 Duty Cycle

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
Span = 0, RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Mark the OFF time and ON time. and the duty cycle is $T_{on} / T_{on} + T_{off}$
4. Repeat above procedures until all frequencies measured were complete.

| TestMode | Antenna | Channel | Duty Cycle [%] | |
|-----------|------------|---------|----------------|-------|
| 11A | Ant1 | 5180 | 94.64 | |
| | Ant2 | 5180 | 94.65 | |
| | Ant1 | 5200 | 94.64 | |
| | Ant2 | 5200 | 94.59 | |
| | Ant1 | 5240 | 94.64 | |
| | Ant2 | 5240 | 94.65 | |
| | Ant1 | 5260 | 94.64 | |
| | Ant2 | 5260 | 94.64 | |
| | Ant1 | 5280 | 94.64 | |
| | Ant2 | 5280 | 94.65 | |
| | Ant1 | 5320 | 94.59 | |
| | Ant2 | 5320 | 94.65 | |
| | Ant1 | 5500 | 94.64 | |
| | Ant2 | 5500 | 94.65 | |
| | Ant1 | 5580 | 94.59 | |
| | Ant2 | 5580 | 94.64 | |
| | Ant1 | 5700 | 94.64 | |
| | Ant2 | 5700 | 94.64 | |
| | Ant1 | 5720 | 94.70 | |
| | Ant2 | 5720 | 94.64 | |
| 11N20MIMO | Ant1+ Ant2 | 5745 | 94.64 | |
| | | Ant2 | 5745 | 94.64 |
| | | Ant1 | 5785 | 94.64 |
| | | Ant2 | 5785 | 94.64 |
| | | Ant1 | 5825 | 94.64 |
| | | Ant2 | 5825 | 94.65 |
| | | 5180 | 95.40 | |
| | | 5200 | 95.34 | |
| | | 5240 | 95.34 | |
| | | 5260 | 95.40 | |
| | | 5280 | 95.40 | |
| | | 5320 | 95.34 | |
| 5500 | 95.34 | | | |
| 5580 | 95.34 | | | |
| 5700 | 95.40 | | | |
| 5720 | 95.34 | | | |
| 5745 | 95.34 | | | |
| 5785 | 95.34 | | | |
| 5825 | 95.34 | | | |
| 11N40MIMO | Ant1+ Ant2 | 5190 | 84.03 | |
| | | 5230 | 84.05 | |
| | | 5270 | 83.94 | |
| | | 5310 | 83.94 | |
| | | 5510 | 83.94 | |
| | | 5550 | 84.03 | |
| 5670 | 83.94 | | | |

| | | | |
|------------|------------|------|-------|
| | | 5710 | 84.14 |
| | | 5755 | 84.03 |
| | | 5795 | 83.94 |
| 11AC20MIMO | Ant1+ Ant2 | 5180 | 84.05 |
| | | 5200 | 84.14 |
| | | 5240 | 84.16 |
| | | 5260 | 84.16 |
| | | 5280 | 84.25 |
| | | 5320 | 84.14 |
| | | 5500 | 84.14 |
| | | 5580 | 84.14 |
| | | 5700 | 84.25 |
| | | 5720 | 84.14 |
| | | 5745 | 84.14 |
| | | 5785 | 84.25 |
| 5825 | 84.14 | | |
| 11AC40MIMO | Ant1+ Ant2 | 5190 | 83.26 |
| | | 5230 | 83.05 |
| | | 5270 | 83.26 |
| | | 5310 | 83.23 |
| | | 5510 | 50.00 |
| | | 5550 | 83.23 |
| | | 5670 | 83.26 |
| | | 5710 | 83.26 |
| | | 5755 | 83.26 |
| | | 5795 | 83.23 |
| 11AC80MIMO | Ant1+ Ant2 | 5210 | 81.38 |
| | | 5290 | 81.71 |
| | | 5530 | 81.38 |
| | | 5610 | 81.71 |
| | | 5690 | 81.78 |
| | | 5775 | 81.45 |

9.7 Frequencies Stability

Test Method

1. Connect the UUT to the spectrum analyzer
2. Set Centre Frequency of the channel under test.
3. Set Detector PEAK
4. Set RBW: 10KHz, VBW: 3RBW
5. Set Span: Encompass the entire emissions bandwidth (EBW) of the signal.
6. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

User manual temperature is 5°C to 30°C

Limit: 20ppm

Test Results (All conditions and all modes were performed, only list Worst-Case in the report)

| TestMode | Antenna | Channel | Voltage | | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|----------------|---------------|---------|---------------|------------------|----------------|-----------------|-------------|---------|
| | | | Voltage [Vdc] | Temperature (°C) | | | | |
| 11AC40MI MO | Ant1+ANT 2 | 5190 | NV | NT | -37000 | -7.129094 | 20 | PASS |
| | | 5190 | LV | NT | -36000 | -6.936416 | 20 | PASS |
| | | 5190 | HV | NT | -36000 | -6.936416 | 20 | PASS |
| | | 5230 | NV | NT | -34000 | -6.500956 | 20 | PASS |
| | | 5230 | LV | NT | -34000 | -6.500956 | 20 | PASS |
| | | 5230 | HV | NT | -33000 | -6.309751 | 20 | PASS |
| | | 5270 | NV | NT | -32000 | -6.072106 | 20 | PASS |
| | | 5270 | LV | NT | -33000 | -6.26186 | 20 | PASS |
| | | 5270 | HV | NT | -33000 | -6.26186 | 20 | PASS |
| | | 5310 | NV | NT | -33000 | -6.214689 | 20 | PASS |
| | | 5310 | LV | NT | -33000 | -6.214689 | 20 | PASS |
| | | 5310 | HV | NT | -33000 | -6.214689 | 20 | PASS |
| | | 5510 | NV | NT | -34000 | -6.170599 | 20 | PASS |
| | | 5510 | LV | NT | -34000 | -6.170599 | 20 | PASS |
| | | 5510 | HV | NT | -34000 | -6.170599 | 20 | PASS |
| | | 5550 | NV | NT | -34000 | -6.126126 | 20 | PASS |
| | | 5550 | LV | NT | -34000 | -6.126126 | 20 | PASS |
| | | 5550 | HV | NT | -34000 | -6.126126 | 20 | PASS |
| | | 5670 | NV | NT | -34000 | -5.996473 | 20 | PASS |
| | | 5670 | LV | NT | -34000 | -5.996473 | 20 | PASS |
| | | 5670 | HV | NT | -35000 | -6.17284 | 20 | PASS |
| | | 5710 | NV | NT | -35000 | -6.129597 | 20 | PASS |
| | | 5710 | LV | NT | -35000 | -6.129597 | 20 | PASS |
| | | 5710 | HV | NT | -35000 | -6.129597 | 20 | PASS |
| 5755 | NV | NT | -35000 | -6.081668 | 20 | PASS | | |
| 5755 | LV | NT | -35000 | -6.081668 | 20 | PASS | | |
| 5755 | HV | NT | -35000 | -6.081668 | 20 | PASS | | |
| 5795 | NV | NT | -35000 | -6.039689 | 20 | PASS | | |
| 5795 | LV | NT | -36000 | -6.212252 | 20 | PASS | | |
| 5795 | HV | NT | -35000 | -6.039689 | 20 | PASS | | |
| 11AC80MI MO | Ant1+ANT 2 | 5210 | NV | NT | -31000 | -5.950096 | 20 | PASS |
| | | 5210 | LV | NT | -32000 | -6.142035 | 20 | PASS |
| | | 5210 | HV | NT | -32000 | -6.142035 | 20 | PASS |
| | | 5290 | NV | NT | -32000 | -6.049149 | 20 | PASS |
| | | 5290 | LV | NT | -32000 | -6.049149 | 20 | PASS |
| | | 5290 | HV | NT | -32000 | -6.049149 | 20 | PASS |
| | | 5530 | NV | NT | -33000 | -5.96745 | 20 | PASS |



| | | | | | | | | |
|--|--|------|----|----|--------|-----------|----|------|
| | | 5530 | LV | NT | -34000 | -6.148282 | 20 | PASS |
| | | 5530 | HV | NT | -34000 | -6.148282 | 20 | PASS |
| | | 5610 | NV | NT | -34000 | -6.060606 | 20 | PASS |
| | | 5610 | LV | NT | -34000 | -6.060606 | 20 | PASS |
| | | 5610 | HV | NT | -34000 | -6.060606 | 20 | PASS |
| | | 5690 | NV | NT | -35000 | -6.151142 | 20 | PASS |
| | | 5690 | LV | NT | -35000 | -6.151142 | 20 | PASS |
| | | 5690 | HV | NT | -35000 | -6.151142 | 20 | PASS |
| | | 5775 | NV | NT | -35000 | -6.060606 | 20 | PASS |
| | | 5775 | LV | NT | -35000 | -6.060606 | 20 | PASS |
| | | 5775 | HV | NT | -35000 | -6.060606 | 20 | PASS |

| Temperature | | | | | | | | |
|-------------|------------|---------|---------------|------------------|----------------|-----------------|-------------|---------|
| TestMode | Antenna | Channel | Voltage [Vdc] | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
| 11AC40MI MO | Ant1+ANT 2 | 5190 | NV | 5 | -35000 | -6.743738 | 20 | PASS |
| | | 5190 | NV | 15 | -35000 | -6.743738 | 20 | PASS |
| | | 5190 | NV | 25 | -35000 | -6.743738 | 20 | PASS |
| | | 5190 | NV | 30 | -34000 | -6.55106 | 20 | PASS |
| | | 5230 | NV | 5 | -34000 | -6.500956 | 20 | PASS |
| | | 5230 | NV | 15 | -33000 | -6.309751 | 20 | PASS |
| | | 5230 | NV | 25 | -33000 | -6.309751 | 20 | PASS |
| | | 5230 | NV | 30 | -34000 | -6.500956 | 20 | PASS |
| | | 5270 | NV | 5 | -33000 | -6.26186 | 20 | PASS |
| | | 5270 | NV | 15 | -33000 | -6.26186 | 20 | PASS |
| | | 5270 | NV | 25 | -33000 | -6.26186 | 20 | PASS |
| | | 5270 | NV | 30 | -33000 | -6.26186 | 20 | PASS |
| | | 5310 | NV | 5 | -33000 | -6.214689 | 20 | PASS |
| | | 5310 | NV | 15 | -33000 | -6.214689 | 20 | PASS |
| | | 5310 | NV | 25 | -33000 | -6.214689 | 20 | PASS |
| | | 5310 | NV | 30 | -33000 | -6.214689 | 20 | PASS |
| | | 5510 | NV | 5 | -34000 | -6.170599 | 20 | PASS |
| | | 5510 | NV | 15 | -34000 | -6.170599 | 20 | PASS |
| | | 5510 | NV | 25 | -34000 | -6.170599 | 20 | PASS |
| | | 5510 | NV | 30 | -34000 | -6.170599 | 20 | PASS |
| | | 5550 | NV | 5 | -34000 | -6.126126 | 20 | PASS |
| | | 5550 | NV | 15 | -34000 | -6.126126 | 20 | PASS |
| | | 5550 | NV | 25 | -34000 | -6.126126 | 20 | PASS |
| | | 5550 | NV | 30 | -34000 | -6.126126 | 20 | PASS |
| | | 5670 | NV | 5 | -35000 | -6.17284 | 20 | PASS |
| | | 5670 | NV | 15 | -35000 | -6.17284 | 20 | PASS |
| | | 5670 | NV | 25 | -35000 | -6.17284 | 20 | PASS |
| | | 5670 | NV | 30 | -35000 | -6.17284 | 20 | PASS |
| | | 5710 | NV | 5 | -35000 | -6.129597 | 20 | PASS |
| | | 5710 | NV | 15 | -35000 | -6.129597 | 20 | PASS |
| | | 5710 | NV | 25 | -35000 | -6.129597 | 20 | PASS |
| | | 5710 | NV | 30 | -35000 | -6.129597 | 20 | PASS |
| 5755 | NV | 5 | -35000 | -6.081668 | 20 | PASS | | |
| 5755 | NV | 15 | -35000 | -6.081668 | 20 | PASS | | |
| 5755 | NV | 25 | -35000 | -6.081668 | 20 | PASS | | |
| 5755 | NV | 30 | -35000 | -6.081668 | 20 | PASS | | |
| 5795 | NV | 5 | -35000 | -6.039689 | 20 | PASS | | |
| 5795 | NV | 15 | -35000 | -6.039689 | 20 | PASS | | |
| 5795 | NV | 25 | -35000 | -6.039689 | 20 | PASS | | |
| 5795 | NV | 30 | -35000 | -6.039689 | 20 | PASS | | |
| 11AC80MI MO | Ant1+ANT 2 | 5210 | NV | 5 | -32000 | -6.142035 | 20 | PASS |
| | | 5210 | NV | 15 | -32000 | -6.142035 | 20 | PASS |
| | | 5210 | NV | 25 | -32000 | -6.142035 | 20 | PASS |
| | | 5210 | NV | 30 | -32000 | -6.142035 | 20 | PASS |
| | | 5290 | NV | 5 | -32000 | -6.049149 | 20 | PASS |
| | | 5290 | NV | 15 | -32000 | -6.049149 | 20 | PASS |
| | | 5290 | NV | 25 | -32000 | -6.049149 | 20 | PASS |
| | | 5290 | NV | 30 | -32000 | -6.049149 | 20 | PASS |

| | | | | | | | | |
|--|--|------|----|----|--------|-----------|----|------|
| | | 5530 | NV | 5 | -34000 | -6.148282 | 20 | PASS |
| | | 5530 | NV | 15 | -34000 | -6.148282 | 20 | PASS |
| | | 5530 | NV | 25 | -34000 | -6.148282 | 20 | PASS |
| | | 5530 | NV | 30 | -34000 | -6.148282 | 20 | PASS |
| | | 5610 | NV | 5 | -34000 | -6.060606 | 20 | PASS |
| | | 5610 | NV | 15 | -34000 | -6.060606 | 20 | PASS |
| | | 5610 | NV | 25 | -34000 | -6.060606 | 20 | PASS |
| | | 5610 | NV | 30 | -34000 | -6.060606 | 20 | PASS |
| | | 5690 | NV | 5 | -35000 | -6.151142 | 20 | PASS |
| | | 5690 | NV | 15 | -35000 | -6.151142 | 20 | PASS |
| | | 5690 | NV | 25 | -35000 | -6.151142 | 20 | PASS |
| | | 5690 | NV | 30 | -35000 | -6.151142 | 20 | PASS |
| | | 5775 | NV | 5 | -35000 | -6.060606 | 20 | PASS |
| | | 5775 | NV | 15 | -36000 | -6.233766 | 20 | PASS |
| | | 5775 | NV | 25 | -35000 | -6.060606 | 20 | PASS |
| | | 5775 | NV | 30 | -35000 | -6.060606 | 20 | PASS |

9.8 Dynamic Frequency Selection (DFS)

1、 General Test Condition

| Parameters of EUT | |
|--------------------|-----------------------------------|
| Frequency | 5250 – 5350 MHz & 5470 – 5725 MHz |
| Operational Mode | Slave |
| Modulation: | OFDM |
| Channel Bandwidth: | 20 MHz , 40 MHz. 80 MHz |

Note: This device was functioned as a Slave device during the DFS

2、 Test requirement

The manufacturer shall whether the EUT is capable of operating as a master and a client. If the EUT is capable of operating in more than one operating mode then each operating mode shall be tested separately.

DFS Applicability

| Requirement | Operational Mode | | |
|---------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| Uniform Spreading | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

DFS Applicability During Normal Operation

| Requirement | Operational Mode | | |
|---------------------------------|------------------|--------------------------------|-----------------|
| | Master | Client Without Radar Detection | Radar Detection |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Yes | Not required |
| Uniform Spreading | Yes | Yes | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

3、 Test Limited


According to KDB 905462 D02 Table 4 DFS Response Requirement Values

| Parameter | Value |
|--|---|
| <i>Non-occupancy period</i> | Minimum 30 minutes |
| <i>Channel Availability Check Time</i> | 60 seconds |
| <i>Channel Move Time</i> | 10 seconds See Note 1. |
| <i>Channel Closing Transmission Time</i> | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i> | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3. |
| <p>Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> | |

4、 Calibration of Radar Waveform

- (1) A 50ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master.
- (2) The interference Radar Detection Threshold Level is $-62\text{dBm}+3.7\text{dB}+1.5\text{dB}=-55.8\text{dBm}$ that had been taken into account the output power range and antenna gain.
- (3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz. The spectrum analyzer had offset -1.5dB to compensate RF cable loss 1.5dB.
- (4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm}+3.7\text{dB}+1.5\text{dB}=-55.8\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup:

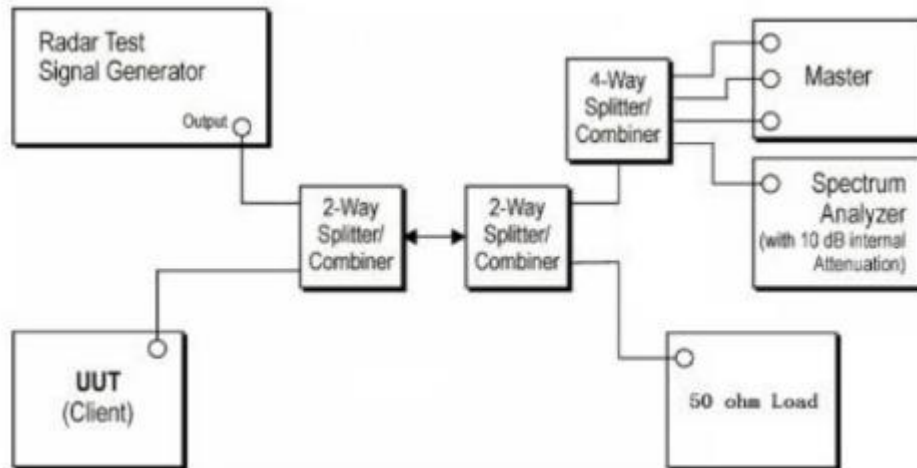
**Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period.**

Block Diagram of test setup test procedure.

- (1) The Radar Pulse generator is setup to provide a pulse at frequency that the master and client are operating, A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- (2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -55.8dBm at the antenna of the master device.
- (3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- (4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using test software in order to properly load the network for the entire period of the test.
- (5) When radar burst with a Level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection threshold +1dB.
- (6) Observer the transmissions of the EUT at the end of the radar Burst on the Operating channel. Measure and record the transmissions from the UUT during The observation time (channel move time). One 15 seconds plot is reported for the short pulse radar type 0. The plot for the short pulse radar burst. The channel move time will be calculated based on the zoom in 600ms plot of the short pulse radar type.
- (7) Measurement of the aggregate duration of the channel closed transmission time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell(3.0) = S(12000ms) / B(4000)$; where dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of channel closing transmission time is calculated by: $C(ms) = N \times Dwell(0.3ms)$; where C is the closing time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and dwell is the dwell time per bin.
- (8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Test Setup:



Setup for client with injection at the master.

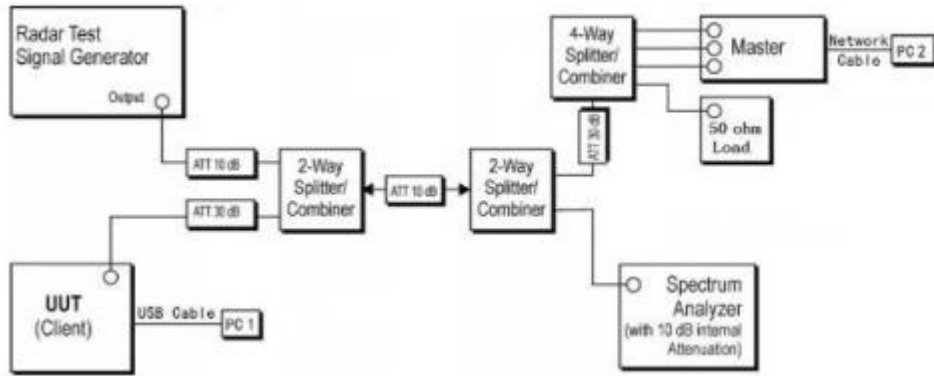


5、 Test Result

| Clause | Test Parameter | Remarks | Pass/Fail |
|--------|-----------------------------------|---------------|-----------|
| 15.407 | DFS Detection Threshold | No Applicable | N/A |
| 15.407 | Channel Availability Check time | No Applicable | N/A |
| 15.407 | Channel Move time | Applicable | Pass |
| 15.407 | Channel Closing Transmission Time | Applicable | Pass |
| 15.407 | Non-Occupancy Period | Applicable | Pass |
| 15.407 | Uniform Spreading | No Applicable | N/A |
| 15.407 | U-NII Detection Bandwidth | No Applicable | N/A |


| TestMode | Channel | CCT[ms] | Limit[ms] | CMT[ms] | Limit[ms] | Verdict |
|------------|---------|---------|-----------|---------|-----------|---------|
| 11AC80MIMO | 5290 | 9.03 | 60 | 448.06 | 10000 | PASS |
| | 5530 | 30.1 | 60 | 452.79 | 10000 | PASS |

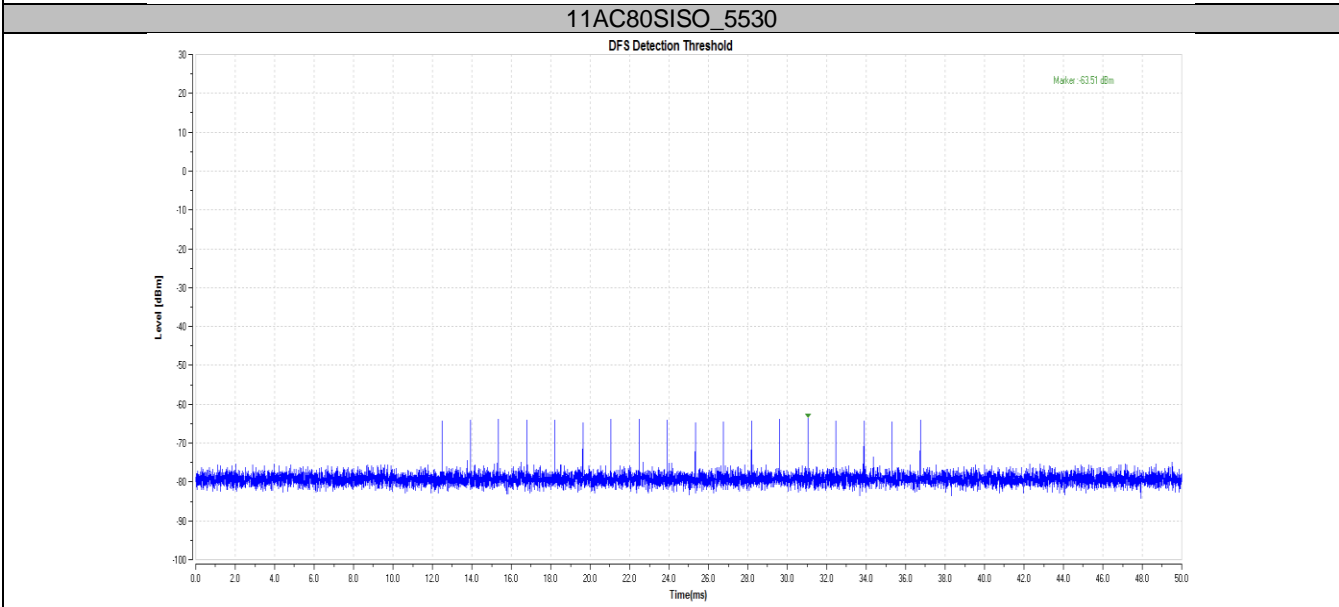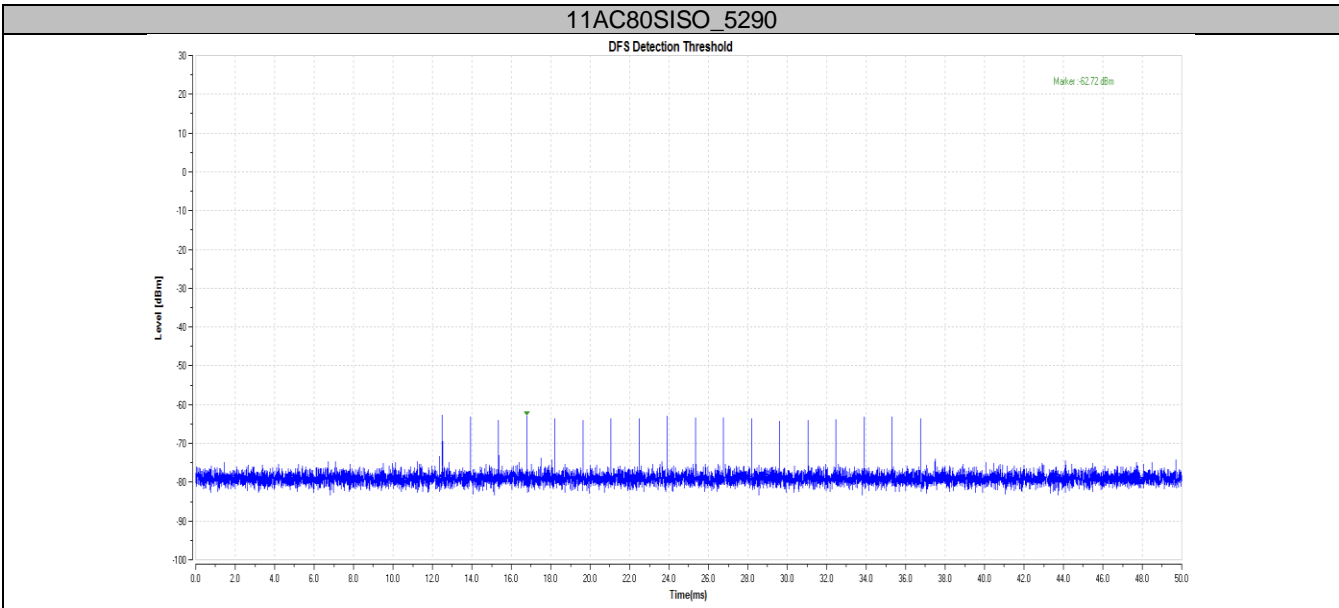

11AC80SISO_5290

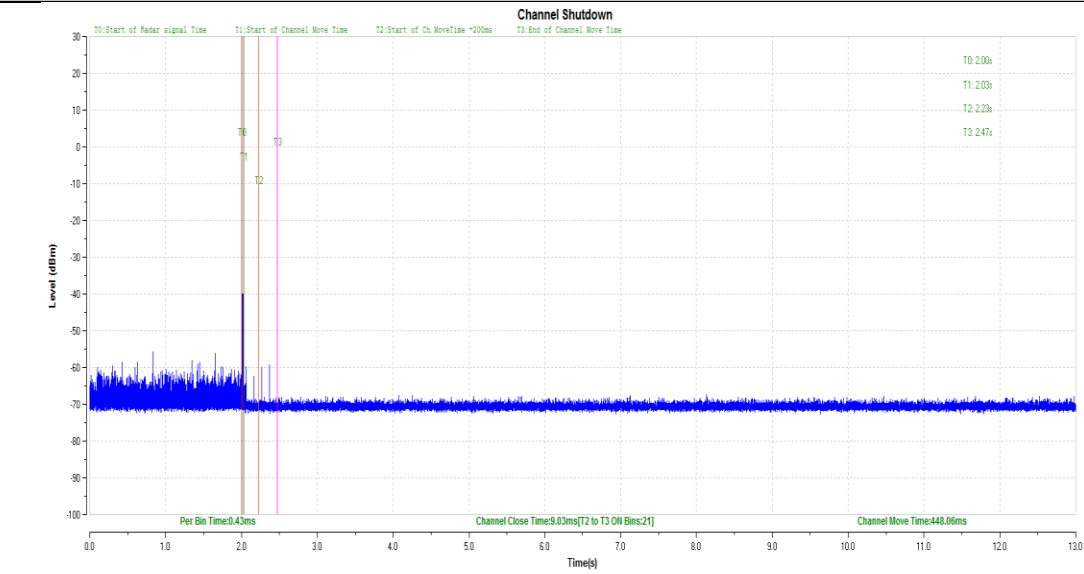

11AC80SISO_5530

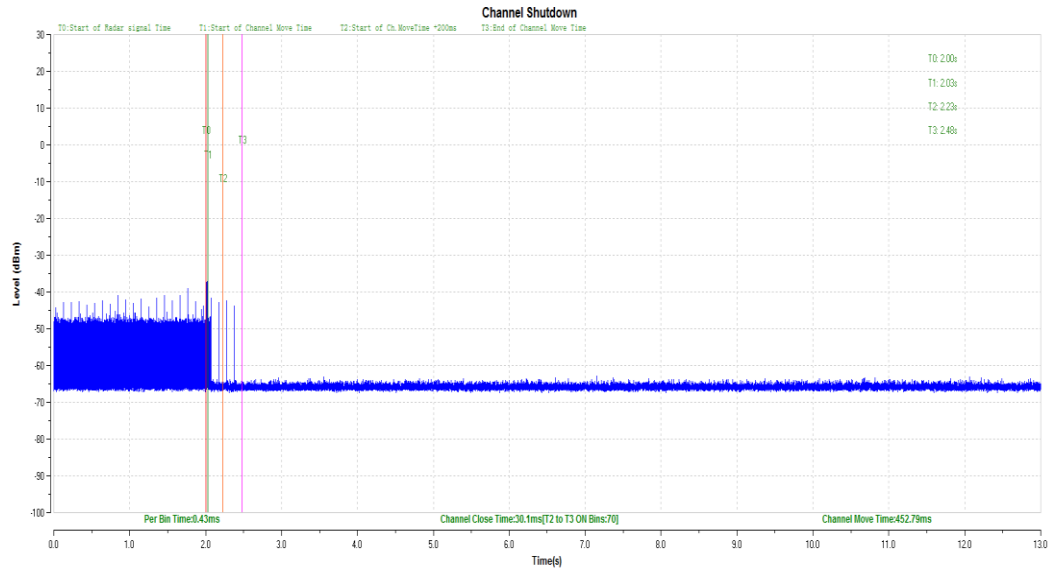

10 Test Equipment List

Conducted Emission Test

| Description | Manufacturer | Model no. | Serial no. | cal. due date |
|-------------------|-------------------|-----------|----------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 3 | 101782 | 2020-6-28 |
| LISN | Rohde & Schwarz | ENV4200 | 100249 | 2020-6-28 |
| Attenuator | Shanghai Huaxiang | TS2-26-3 | 080928189 | 2020-6-28 |
| Test software | Rohde & Schwarz | EMC32 | Version9.15.00 | N/A |

Radiated Emission Test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------------------|-----------------|-------------------|-----------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 26 | 101269 | 2020-6-28 |
| Trilog Super Broadband Test Antenna | Schwarzbeck | VULB 9163 | 707 | 2020-6-29 |
| Horn Antenna | Rohde & Schwarz | HF907 | 102295 | 2020-6-22 |
| Wideband Horn Antenna | Q-PAR | QWH-SL-18-40-K-SG | 12827 | 2020-7-12 |
| Pre-amplifier | Rohde & Schwarz | SCU 18 | 102230 | 2020-6-28 |
| Attenuator | Agilent | 8491A | MY39264334 | 2020-6-28 |
| 3m Semi-anechoic chamber | TDK | 9X6X6 | ---- | 2020-7-7 |
| Test software | Rohde & Schwarz | EMC32 | Version 9.15.00 | N/A |

RF conducted test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|------------------|-----------------|--------------------|---------------|---------------|
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101030 | 2020-6-28 |
| RF Switch Module | Rohde & Schwarz | OSP120/OSP-B157 | 101226/100851 | 2020-6-28 |
| Power Splitter | Weinschel | 1580 | SC319 | 2020-7-7 |
| Test software | Tonscend | System for BT/WIFI | Version 2.6 | N/A |

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------|-----------------|--------------------|------------------|---------------|
| Vector Signal Generator | Rohde & Schwarz | SMBV100A | 262825 | 2020-7-6 |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101030 | 2020-6-28 |
| RF Switch Module | Rohde & Schwarz | OSP120/OSP-B157 | 101226/100851 | 2020-6-28 |
| Power Splitter | Weinschel | 1580 | SC319 | 2020-7-7 |
| 10dB Attenuator | Weinschel | 4M-10 | 43152 | 2020-7-6 |
| 10dB Attenuator | R&S | DNF | DNF-001 | 2020-7-6 |
| 10dB Attenuator | R&S | DNF | DNF-002 | 2020-7-6 |
| 10dB Attenuator | R&S | DNF | DNF-003 | 2020-7-6 |
| 10dB Attenuator | R&S | DNF | DNF-004 | 2020-7-6 |
| Test software | Rohde & Schwarz | EMC32 | Version 10.38.00 | N/A |
| Test software | Tonscend | System for BT/WIFI | Version 2.6 | N/A |

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| System Measurement Uncertainty | |
|---|--|
| Test Items | Extended Uncertainty |
| Uncertainty for Conducted Emission 150kHz-30MHz | 3.21dB |
| Uncertainty for Radiated Emission 25MHz-3000MHz | Horizontal: 4.81dB; Vertical: 4.89dB; |
| Uncertainty for Radiated Emission 3000MHz-18000MHz | Horizontal: 4.69dB; Vertical: 4.68dB; |
| Uncertainty for Radiated Emission 18000MHz-40000MHz | Horizontal: 4.89dB; Vertical: 4.87dB; |
| Uncertainty for Conducted RF test with TS 8997 | Power level test involved: 1.16dB Frequency test involved: 0.6×10^{-7} |

---THE END OF REPORT---