

www.lexin-moto.com 1 (800) 380-8248


Table of Contents

Introduction · · · · · · 1-3

service@lexinmotorcycle.com

LEXIN®

LEXIN ET COM Bluetooth headset

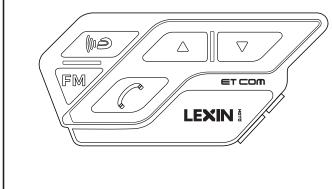

Introduction

User Guide

```
Package Contents -----4
Installation Instructions ----- 5-9
General Operation Instructions .....10-18
Maintenance and Care .....19
Warranty -----20
Waiver and General Release ----- 20-21
Certification and Safety Approvals ----- 21-25
User Manuals Online ------26
Instruction Videos Online .....27
```

Volume Up / Volume Down / FM Station Up **FM Station Down** ∇ **LEXIN** Phone Button FM Radio Button Intercom Button ව[ි]ව ([])) 2-Way Connection Conference Intercom Waterproof Battery Life

The LEXIN ET COM features an 800 mAh battery, that provides the unit with 15 hours of music or 12 hours of intercom and

(The LEXIN ET COM operates in the following order of priority:)

Note: A lower-priority function is always interrupted by a

- Built-in DSP noise reduction most Bluetooth Intercom - Wireless intercom between - Automatic answering of 2 LEXIN ET COM devices with

Features of the LEXIN ET COM

a range of up to 1200 meters (0.8 miles) market. Speakers

- Bluetooth 5.0

assistants

- Hands-free calling

- Plays music or radio

- Support Siri and other voice

incoming calls, last phone call number redial The LEXIN ET COM is compliant with Bluetooth Specification V5.0 supporting the following profiles: Headset Profile (HSP), Hands-Free Profile (HFP), and Advanced Audio Distribution Profile (A2DP). It supports universal pairing with most Bluetooth headsets on the HD 36MM stereo helmet speakers and headset(s) included. These

- Five additional decorative shells of

Microphone Holder

3M Double

- Type C USB Quick charge

voice announcement

- Support voice prompts, power

· Supports universal pairing with

capability

speakers. This headset also provides the industry's best combination of wind and ambient noise reduction with the included microphone(s). 2

are designed for installation into most open face, modular, and full-face style helmets. Superior audio fidelity has been achieved with our high quality, non-ported, and ultra-slim helmet HD

Package Contents - Mounting Bracket - LEXIN ET COM Main Unit - 36MM HD Ultra-Slim Speakers - Metal Clamp Plate - Type C USB Cable - Speaker Spacer - Allen Wrench - Metal Pin Installation Screws - Boom Microphone Holder - User Manual/Quick Start Guide

higher-priority function. For example, stereo music will be interrupted by an Intercom call, Intercom talk is interrupted by an incoming phone call. Please read this User Manual carefully before using this product.

Battery

with one week of standby time.

Function Priority:

3.Music/FM Radio/GPS

1. Mobile Phone

2.Intercom Talk

With Screws

shell of the helmet;

by using the included allen wrench.

Installing Speakers

helmet's inner padding;

Security Information

WARNING: PLEASE CHECK ALL LOCAL LAWS AND REGULATIONS REGARDING THE USE OF IN-HELMET SPEAKERS WHILE OPERATING MOTORIZED VEHICLES.

Installation Instructions

Mount the bracket between the internal padding and external

Tighten the two screws between the bracket and clamp plate

Note: The speaker with the shorter wire is for the left ear and the speaker with the longer wire is for the right ear. Step 1: Place the one half of the speakers velcro pad into the

Step 2: Push the speakers firmly against the Velcro pads. If the helmet has deep ear pockets, you can use the provided

spacers to place the speakers closer;

Installing Bracket for LEXIN ET COM to a Helmet

3

FT4 PRO Main Unit Allen Wrench Button Microphone/Boom Boom

Mounting Bracket Speaker Pad X2 Metal Pin

- Boom/Button Microphones

- 3M Tape for Mounting Bracket

Manual Charging Cable Start Guide

Step 3: Hide the wires between the helmet liner and shell. (2) (1)

Installing Microphone

6

and what fits best in the helmet(s) Full Face Helmet/Button Microphone Step 1: Locate an area in the center of the nose section of the helmet to install and adhere half of the microphone Velcro pad; Step 2: Attach the button microphone to the attached Velcro; Step 3: Connect it to the headphone connector from the left.

Note: The button microphone and boom microphone can be

interchanged between full face or open face helmet.

Choosing between the two is based on your preference

Mounting the LEXIN ET COM Unit to Bracket


Mount the LEXIN ET COM main unit on the bracket. Press the spring


button on the right side of the mounting bracket, and then insert the main unit into the mounting bracket from bottom to top, release the spring button, and the main unit will be fixed on the mounting bracket.

Open Face Helmet/Boom Microphone Step 1: Adhere one half of the Velcro pad to the base of the microphone and the other half to inside of he helmet under padding; Step 2: Adjust the direction of the microphone so that the

triangular mark on the microphone is pointing towards


Step 3: Use the boom microphone holder for additional support to the microphone if necessary.

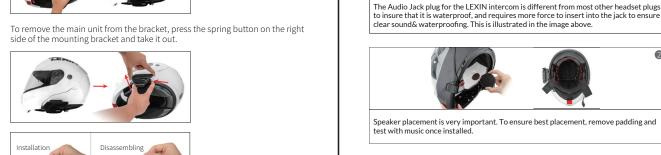

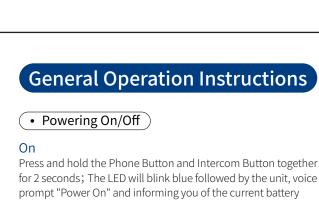

There is a small hole in the upper right corner of the LEXIN ET COM host. Use

hole, and then replace the decorative shell you want.

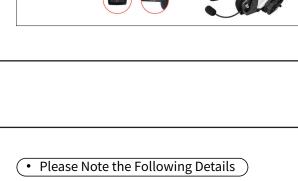

Fully insert the jack

9

11

13


15

Blue light flashes slowly

Unit One and Unit Two

(Unit One and Unit Two

17

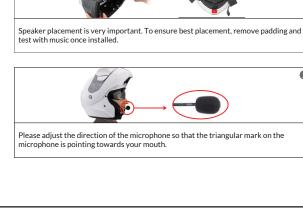

Long pressing the Phone Button and the Volume Down Button at the same time will prompt the remaining battery power.

 Pairing LEXIN ET COM with Bluetooth Devices Note: A single LEXIN ET COM can be connected with up to two

Step 1: With power on, press and hold the Phone Button for 3

Step 1: With power on, press and hold the Phone Button for 3

Step 2: Turn on the audio source device and prepare Stereo

Short press the Volume Up Button for previous song, short press

Short press the Phone Button to answer when phone call is

Answer the incoming call automatically within 7 seconds when

With power on, press and hold the FM Radio Button and the Volume Down Button by 3 seconds. The blue light will stay on

for one second, indicating that it is on, or the red light stays on

Note: It is default preset off, if you'd like to turn on this feature,

Step 3: LEXIN ET COM device entre Bluetooth pairing mode;

seconds until the LED flashes blue and red. Follow the

different Bluetooth devices at once; LEXIN ET COM Bluetooth

will automatically connect with the your phone once you

Remaining Battery Reminder

turn on the next time.

Pairing Stereo Bluetooth Adaptor

device's instructions to connect;

Bluetooth Adaptor for pairing;

the Volume Down Button for the next song.

Preset On/Off Automatic Answering

please follow the above operation.

Short press the Phone Button to end the call.

for one second, indicating that it is off.

Pairing Phone

Change Song

Answer Call

Auto Answer

End Call

phone call is coming.

Phone Calls

Press and hold the Phone Button and Intercom Button together nds until the LED flashes blue and red. Follow the device's instructions to connect; for 2 seconds; The LED will turn to red, then off, voice prompt Step 2: Go to Bluetooth settings on your phone. Select the "Power Off", indicating the device has powered down. Bluetooth "LEXIN ET COM"; Charging/Battery life - The device charges through a Type C to Step 3: Click on the name to connect; USB cable. It takes 2.5 hours to fully charge the device. While Step 4: Your phone should confirm when pairing is complete. charging the LED turns red. When fully charged the LED turns blue; Note: The LED will blink blue on device indicating a connection is complete. Low Battery Alert The device will notify you when the battery life drops low

Battery Life Prompt Every time you turn on the unit, it will automatically report the current battery life.

(below 20%). It will remind you every 2 minutes with a voice

alert until the device powers off. This indicates around 1-1.5h

Pairing Bluetooth GPS Navigation

To Clear Pairing History

maximum and minimum.

from your phone list to dial.

• FM Radio

Open FM Radio

have voice prompting.

Turn Off FM Radio

FM Radio Station Search

(Unit One

(Unit One

End The Intercom Talk

Unit One or Unit Two

Battery Conservation

not need to talk.

Button again to resume playing.

Pause/Play

12

Off

Step 4: The audio source will automatically start playing through the LEXIN ET COM when pairing is complete.

Step 1: With power on, press and hold the Phone Button for 3 seconds until the LED flashes blue and red. Follow the device's instructions to connect; Step 2: Follow pairing instructions for your GPS Navigation to connect to LEXIN ET COM device. Note: You will be able to listen to Bluetooth voice instructions from Bluetooth GPS navigation once paired.

the same time for 2 seconds, and the light changes to flash purple at the same time, you can clear the product connection history. Volume and Music Controls Volume Up/Down Long press the Volume Up and Volume Down Button, there will

Short Press the Phone button to pause a song, press the Phone

have a prompt sound, it will prompt both when volume

Press the Volume Up Button and the Volume Down Button at

Long press the Phone Button to reject the call. When in standby mode, press the Phone and Volume Up Button at the same time, the last phone call will redial.

When device is in phone bluetooth connecting mode, double-click

the Phone Button to activate Siri or S-Voice. Simply speak the name

Short press FM Button to enter radio function, the device will

When in radio opening state, short press the FM Button again

to turn off radio function, the device will have voice prompting.

Turn up: Short press the Volume Up Button, the voice prompt

Turn down: Short press the Volume Down Button, and the voice

Pairing and Intercom Between Two LEXIN ET COM)

After turning on the two units, press the Intercom Button of the first one for 2s, then press the Intercom Button of the second

Hold 2S

Red and blue lights flash quickly

Unit Two

(Unit Two

Blue Light Flashes

Unit One and Unit Two

Pair the First Device with the Second Device

will adjust the radio station upwards.

Decline Call

prompt will adjust the radio station downward. Universal Pairing

Step 1: Power on the LEXIN ET COM device, long press the

Intercom Button to enter pairing mode until the LED

Intercom Button to enter the intercom mode(The light

begins flashing blue and red alternately; Step 2: Follow other units Bluetooth pairing instructions to enter Step 3: Press the Intercom Button again to connect the product, and the LED begins flashing blue when the connection is successful; Step 4: When the products are successfully paired, press the

changes to flash purple).

To Enter Pairing Mode

Intercom Connection Bluetooth Intercom Connection for 2 Units LEXIN ET COM devices can be paired with up to two devices. Intercom allows you to quickly speak to another rider in your group who has a paired device. Note: Clear any existing connection before connecting devices Press the Volume Up and Volume Down Buttons simultaneously for 1 second.

Then short press one of these two unit's Intercom Button,

it will search automatically, and the blue light flashes quickly during the search, after the pairing is completed, the blue

lights of those two unit will flash slowly at the same time.

After the pairing is successful, short press the Intercom Button

on one of the two devices to connect to the intercom function.

The light changes to flash purple



16

In the internal intercom state, short press the Intercom Button of one of the two devices to disconnect the intercom. After disconnecting, the LED lights of the two devices flash blue.

Device Range: If one intercom rider goes out of range during an

intercom talk, there may be static and eventually the intercom

will disconnect. In this case, the LEXIN ET COM automatically tries

beep until the connection is re-established.

to reconnect the intercom rider and you will hear high tone double

To save battery power, disconnect the intercom units if you do

18

Warranty

LEXIN warrants that this product shall conform to and perform

in accordance with published technical specifications and the

accompanying written materials and shall be free of defects in

materials and workmanship, for a period of one (1) years from

the date of purchase by the first consumer purchaser of the

consumer purchaser of the Product and is not assignable or

This warranty is limited to the repair and/or replacement, at

LEXIN's discretion, of defective or non-conforming Product,

and LEXIN shall not be responsible for the failure of the Product

to perform specified functions, or any other non-conformance

caused by or attributable to: (a) any misapplication or misuse

of the Product; (b) failure of Customer to adhere to any of LEXIN'

accident to, the Product; or (d) any associated or complementary

s specifications or instructions; (c) neglect of, abuse of, or

infringe upon your abilities to do so in a safe manner. You

confirm that you are at least eighteen (18) years of age and that you have been advised of the risks associated with the use of the Product. You further confirm that you will not consume any

alcohol that may affect your alertness or any mind-altering

You fully acknowledge our

warnings and understand that:

A. Risks and dangers exist in using the Product while in traffic,

including but not limited to injury or illness, strains, fractures,

partial and/or total paralysis, death or other ailments that could

B. These risks and dangers may be caused by the negligence of

the manufacturers or its agents or any third party involved in

before or during the use of the Product.

cause serious disability;

RF Exposure Warning Statements:

uncontrolled environment.

substance, and will not carry, use or consume these substances

equipment or software not furnished by LEXIN.

20

Product. The limited warranty extends only to the original

transferable to any subsequent purchaser/end-user.

At this time, the light changes to flash purple, which means that it has entered the intercom state.

Click

Unit One or Unit Two

Start an Intercom Talk

(Unit One or Unit Two

power charger.

19

You confirm that you are physically capable to use the Product By using the Product, you confirm that you have read this and that you have no medical conditions or needs that may

designing or manufacturing the Product; C. These risks and dangers may arise from foreseeable or unforeseeable causes. You hereby assume all risks and dangers and all responsibility for any losses and/ or damages, whether caused in whole or in part by the negligence or other conduct of others, including LEXIN. 22 This device complies with Part 15 of the FCC Rules. Operation is subject to the (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an $\,$

Statement for IC

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

(2) This device must accept any interference, including interference that may cause

Operation is subject to the following two conditions: This device may not cause interference.

conjunction with any other antenna or transmitter.

undesired operation of the device.

conforme aux CNR d' Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) L' appareil ne doit pas produire de brouillage; (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est

This EUT is compliance with SAR for general population/uncontrolled exposure limits in IC RSS-102 and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528 and IEC 62209. This equipment should be installed and operated with minimum distance 10mm between the radiator and

your body. This device and its antenna(s)must not be co-located or operating in

User Manual, and select "LEXIN ET COM". Fran ais - Pour obtenir un mode d'emploi en Anglais, Espagnol, Allemand, Italien, Fran ais, Japonais en ligne...Accédez à lexin-moto.com, et trouvez-les sur Support - User Manual, puis sélectionnez "LEXIN ET COM".

Download User Manuals Online:

English - For Online User Manual in English, Spanish, German,

Italian, French, Japanese...Visit lexin-moto.com, Go to Support -

Alemán, Italiano, Francés, Japonés...Visite lexin-moto.com, vaya al Soporte - Manual de Usuario, y seleccione "LEXIN ET COM". 26

Waivers and General Release By using the Product, you will waive substantial legal rights including, the right to use. Please read the following carefully before using the device. By using the Product, you agree to this agreement and forfeit the right to pursue legal action. By using the Product, you are irrevocably releasing, indemnifying from any liability, loss, claim and expense (including attorney's fees) and holding LEXIN harmless for any bodily injuries, harm or death as well as losses or damages in goods, to any vehicles including your own, or to any property or asset that belong to you or to third parties, any of which may result from using the Product under any circumstances or conditions and irrespective of jurisdiction. You, your heirs, legal representatives, successors or assigns, hereby voluntarily and forever release, discharge, indemnify and hold harmless LEXIN from any and all litigation, claims, debts, demands, actions and liability which may arise, directly or indirectly, from using the Product for any distress, pain, suffering, discomfort, loss, injury, death, damages to or in respect to any person or property however caused, WHETHER ARISING FROM THE NEGLIGENCE OR OTHERWISE, and which may hereafter accrue to you on some future date as a result of said use, to the fullest extent permitted by law. 13 You fully understand and assume the risks in using the Product, including risk of negligent acts or omissions by others. All risks for operating the Product are assumed solely by the

23

Watch Instruction Videos Online:

Español - Regístrese nuestro Youtube channel @lexinmoto, y encuentre videos "LEXIN ET COM Instruction" Finden Sie das Video "LEXIN ET COM Instruction".

les vidéos "LEXIN ET COM Instruction". Italiano - Iscriviti al nostro canale Youtube @lexinmoto, e trova i video di "LEXIN ET COM Instruction". **Deutsch** - Abonnieren Sie unseren YouTube-Kanal @lexinmoto und suchen Sie das Video "LEXIN ET COM Instruction".

Follow the suggestions below for optimal care of your LEXIN-ET COM device and to maintain warranty protection. - Do not use or store the device in dusty or dirty environments. Moving parts and electronic components can be damaged. Do not store the device in high heat areas. High temperatures can shorten the life of electronic devices, damage batteries, - Do not store the device in cold temperature areas. When the device returns to its normal temperature, moisture can form inside the device and damage electronic circuit boards. - Do not attempt to open the LEXIN ET COM case. - Do not drop or knock the device. Rough handling can break internal circuit boards and fine mechanics. - Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device. Do not paint the device. Paint can clog the moving parts and prevent proper operation. These suggestions apply equally to the headset main unit, speaker-microphone clamp unit, and

Maintenance and Care

release of liability and fully understand and accept its terms and conditions. **Certification and** Safety Approvals

NOTE: This equipment has been tested and found to comply with the limits for a

Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential

installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that

interference will not occur in a particular installation. If this equipment does cause

harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the

-Connect the equipment into an outlet on a circuit different from that to which the

modifications not expressly approved by the party responsible for compliance could

-Consult the dealer or an experienced radio/TV technician for help Changes or

English - Subscribe to our Youtube channel @lexinmoto, and find "LEXIN ET COM Instruction" videos. **Français** - Suivez notre chaîne Youtube @lexinmoto,Et trouvez

27

25

and warp or melt certain plastics.

user of the Product.

FCC Statement BT&RF

interference by one or more of the following measures:

- Increase the separation between the equipment and receiver.

Reorient or relocate the receiving antenna

Cet appareil est conforme aux limites d'exposition DAS incontrôlée pour la population érale de la norme CNR-102 d'Industrie Canada et a été testé en conformité avec les méthodes de mesure et procédures spécifiées dans IEEE 1528 et IEC 62209. Cet appareil doit être installé et utilisé avec une distance minimale de 10mm entre i'émetteur et votre corps. Cet appareil et sa ou ses antennes ne doivent pas être co-localisés ou fonctionner en conjonction avec tout autre antenne ou transmetteur.

Italiano - Per il Manuale Utente Online in Englese, Spagnolo, Tedesco, Italiano, Francese, Jiapponese ... Visita lexin-moto.com, vai su Support - User Manual, e seleziona "LEXIN ET COM". **Deutsch** - Online Bedienungsanweisung auf Englisch, Spanisch,

lexin-moto.com, gehen Sie zur Unterstützung -

Bedienungsanweisung, dann wählen Sie "LEXIN ET COM" Español - Para el Manual del Usuario en Línea en Inglés, Español,

Deutsch, Italienisch, Französisch, Japanisch usw, besuchen Sie